

Attachment 7. – Power reduction verification

Power reduction Verification

Per the May 2017 TCBC Workshop notes, demonstration of proper functioning of the power reduction mechanism is required to support the corresponding SAR Configurations.

1. Power Reduction Verification for Main Ant 1

This device utilizes a power reduction mechanism for some wireless modes and bands for SAR compliance under hotspot conditions and under some conditions when the device is being used in close proximity to the user's hand for Main Ant1

The Hotspot power reduction applied to this product has a higher priority than the proximity sensor, so these two conditions do not work simultaneously. and In both cases, powers were reduced to the same Power level.

All Hotspot SAR evaluations for this device were performed at the maximum allowed output Power when Hotspot is activated. FCC KDB Publication 616217D04v01r02 section 6 was used as a guideline for selection SAR test distances for this device when being used in phablet use conditions. For detailed measurement conducted power results, please refer to the Section .11

The verification process was divided into two parts:

- 1). Evaluation of output power levels for individual triggering mechanism
- 2) Evaluation of the triggering distances for proximity-based sensors.

1.1. Power Verification Procedure for Main Ant 1

The Power verification was performed according to the following procedure:

1. A base station simulator was used to establish a conducted RF connection and output power was monitored. The Power measurements were conformed to be within expected tolerances for all states before and after a power reduction mechanism was triggered.
2. Step 1 was repeated for all relevant modes and frequency bands for the mechanism being investigated.
3. Step 1 and 2 were repeated for all individual power reduction mechanism and combinations thereof. For the combination cases, one mechanism was switched to a "triggered" state at a time; powers were conformed to be within tolerance after each additional mechanism was activated.

Power Reduction Verification for Main Bands

Mechanism(s)	Mode/Band	Conducted Power (dBm)		
		Un-triggered (Max Power)	Triggered (Reduced Power)	Triggered (Reduced Power)
Grip	WCDMA 4	23.93	20.95	
Grip	LTE Band 4	23.29	19.39	
Grip	LTE Band 66	23.42	19.46	
Hotspot On	GSM1900 /Voice	29.53	27.43	
Hotspot On	GSM1900 /GPRS 1Tx	29.53	27.42	
Hotspot On	GSM1900 /GPRS 2Tx	27.73	24.71	
Hotspot On	GSM1900 /GPRS 3Tx	27.19	23.98	
Hotspot On	GSM1900 /GPRS 4Tx	26.05	22.54	
Hotspot On	WCDMA B5	24.37	22.35	
Hotspot On	WCDMA B4	23.93	20.86	
Hotspot On	WCDMA B2	23.45	20.38	
Hotspot On	LTE Band 2	23.34	20.62	
Hotspot On	LTE Band 4	23.29	19.73	
Hotspot On	LTE Band 66	23.42	19.67	
Hotspot On, Then Grip	WCDMA 4	23.93	20.86	20.86
Hotspot On, Then Grip	LTE Band 4	23.29	19.73	19.73
Hotspot On, Then Grip	LTE Band 66	23.42	19.67	19.67
Grip, then Hotspot On	WCDMA 4	23.93	20.95	20.86
Grip, then Hotspot On	LTE Band 4	23.29	19.39	19.73
Grip, then Hotspot On	LTE Band 66	23.42	19.46	19.67

1.2. Procedures for determining proximity sensor triggering distances

(KDB 616217 D04v01r02 §6.2)

The distance verification procedure was performed according to the following procedure:

1. A base station simulator was used to establish an RF connection and to monitor the power levels. The device being tested was placed below the relevant section of the phantom with the relevant side or edge of the device facing toward the phantom.
2. The device was moved toward and away from the phantom to determine the distance at which the mechanism triggers and the output power is reduced, per KDB Publication 616217 D04v01r02 .Each applicable test position was evaluated. The distance were conformed to be the same or larger (more conservative) than the minimum distances provided by the manufacturer.
3. Step 1 and 2 were repeated for the relevant modes, as appropriate
4. Steps1 through 3 were repeated for all distance-based power reduction mechanisms.

For detailed measurement conducted power results, please refer to the Section .11



Proximity Sensor Trigger Distance Assessment KDB 616217 D04 §6.2 (Rear /Bottom)

LEGEND

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point

Tissue simulating liquid	Trigger distance - Rear		Trigger distance - Bottom	
	Moving toward phantom [mm]	Moving toward phantom [mm]	Moving toward phantom [mm]	Moving from phantom [mm]
1750MHz Muscle	11	12	7	8
1900Mhz Muscle	11	12	7	8

Distance Measurement verification for Proximity sensor

Rear side – EUT Moving toward (trigger) to the Phantom

Mode	Distance to DUT Output power (dBm)									
	16[mm]	15[mm]	14[mm]	13[mm]	12[mm]	11[mm]	10[mm]	9[mm]	8[mm]	7[mm]
WCDMA 4	23.77	23.77	23.78	23.77	23.93	20.88	20.93	20.9	20.86	20.89
LTE Band 4	23.16	23.2	23.1	23.27	23.25	19.28	19.23	19.22	19.39	19.33
LTE Band 66	23.4	23.28	23.3	23.23	23.27	19.27	19.38	19.35	19.25	19.35

Rear side – EUT Moving away (Release) from the Phantom

Mode	Distance to DUT Output power (dBm)									
	8[mm]	9[mm]	10[mm]	11[mm]	12[mm]	13[mm]	14[mm]	15[mm]	16[mm]	17[mm]
WCDMA 4	20.9	20.8	20.86	20.75	20.86	23.79	23.86	23.8	23.94	23.85
LTE Band 4	19.3	19.22	19.24	19.33	19.31	23.29	23.15	23.16	23.17	23.21
LTE Band 66	19.25	19.42	19.31	19.36	19.35	23.41	23.22	23.23	23.27	23.27

Based on the most conservative measured triggering distance of 11mm, additional Phablet SAR measurements were required at 10mm from rear side for the above modes

Bottom side – EUT Moving toward (trigger) to the Phantom

Mode	Distance to DUT Output power (dBm)									
	12[mm]	11[mm]	10[mm]	9[mm]	8[mm]	7[mm]	6[mm]	5[mm]	4[mm]	3[mm]
WCDMA 4	23.82	23.91	23.77	23.81	23.74	20.84	20.89	20.88	20.77	20.81
LTE Band 4	23.23	23.3	23.14	23.18	23.25	19.25	19.36	19.34	19.21	19.24
LTE Band 66	23.24	23.4	23.38	23.4	23.32	19.34	19.38	19.3	19.41	19.36

Bottom side – EUT Moving away (Release) from the Phantom

Mode	Distance to DUT Output power (dBm)									
	4[mm]	5[mm]	6[mm]	7[mm]	8[mm]	9[mm]	10[mm]	11[mm]	12[mm]	13[mm]
WCDMA 4	20.87	20.87	20.88	20.91	20.8	23.9	23.85	23.73	23.88	23.74
LTE Band 4	19.25	19.26	19.36	19.28	19.39	23.13	23.17	23.19	23.3	23.21
LTE Band 66	19.39	19.29	19.38	19.27	19.38	23.4	23.31	23.28	23.26	23.31

Based on the most conservative measured triggering distance of 7mm, additional Phablet SAR measurements were required at 6mm from Bottom side for the above modes

1.3 Proximity Sensor Coverage for SAR measurements


(KDB 616217 D04v01r02 §6.3)

As there is no spatial offset between the antenna and the proximity sensor element, proximity sensor coverage did not need to be assessed.

1.4 Proximity Sensor Tilt Angle Assessment

(KDB 616217 D04v01r02 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Bottom side parallel to the base of the flat phantom for each band. The EUT was rotated about Bottom side for angles up to $\pm 45^\circ$. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to $\pm 45^\circ$.

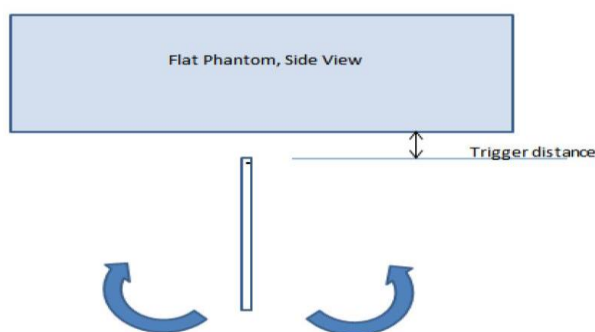

Proximity sensor tilt angle assessment (Bottom side) KDB 616217 §6.4

Summary of Tablet Tilt Angle influence to Proximity Sensor Triggering (Bottom side)

Band (MHz)	Minimum distance at which power reduction was maintained over-45°	Power reduction status											
		-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°	
1750 MHz Muscle	7 mm	On	On	On	On	On	On	On	On	On	On	On	On
1900 MHz Muscle	7 mm	On	On	On	On	On	On	On	On	On	On	On	On

1.5 Resulting test positions for Phablet SAR measurements

Wireless technologies	Position	§6.2 Triggering Distance [mm]	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for Phablet SAR [mm]
WWAN (WCDMA B4 /LTE B4 /B66)	Rear	11	N/A	N/A	10
	Bottom	7	N/A	N/A	6

Note: FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device when being used in phablet use conditions

2. Power Reduction Verification for Main Ant 2 (LTE B41)

This device utilizes a power reduction mechanism for LTE B41 for SAR compliance under hotspot conditions and under some conditions when the device is being used in close proximity to the user's hand for Main Ant2 and also uses a power reduction mechanism for SAR compliance for LTE B41 during voice or VoIP held to ear scenarios.

When a user makes or receives a VOLTE voice or VOIP call for LTE B41 the audio of the call is sent through the Receiver at the top of the device will trigger the Power reduction for Main Ant 2(LTE B41) (i.e. reducing output power for Head SAR compliance)

Power Measurement Verification of LTE B41 Main Ant2 for RCV-ON (Voice call)

Condition For Power reduction	Wireless Technologies	Conducted Power [dBm]	
		Un-Triggered (Max Power)	Triggered (Reduced Power)
RCV-on (Voice call)	LTE Band 41	22.76	20.65

This device utilizes a power reduction mechanism for LTE B41 for SAR compliance under hotspot conditions and under some conditions when the device is being used in close proximity to the user's hand for Main Ant2

The Hotspot power reduction applied to this product has a higher priority than the proximity sensor, so these two conditions do not work simultaneously. and In both cases, powers were reduced to the same Power level.

Power Measurement Verification of LTE B41 Main Ant 2

Mechanism(s)	Mode/Band	Conducted Power (dBm)		
		Un-triggered (Max Power)	Triggered (Reduced Power)	Triggered (Reduced Power)
Grip	LTE Band 41	22.76	16.85	
Hotspot On	LTE Band 41	22.76	16.71	
Hotspot On, Then Grip	LTE Band 41	22.76	16.71	16.71
Grip, then Hotspot On	LTE Band 41	22.76	16.85	16.71

For detailed measurement conducted power results, please refer to the Section .11

2.1. Procedures for determining proximity sensor triggering distances

(KDB 616217 D04v01r02 §6.2)

The distance verification procedure was performed according to the following procedure:

5. A base station simulator was used to establish an RF connection and to monitor the power levels. The device being tested was placed below the relevant section of the phantom with the relevant side or edge of the device facing toward the phantom.
6. The device was moved toward and away from the phantom to determine the distance at which the mechanism triggers and the output power is reduced, per KDB Publication 616217 D04v01r02 .Each applicable test position was evaluated. The distance were conformed to be the same or larger (more conservative) than the minimum distances provided by the manufacturer.
7. Step 1 and 2 were repeated for the relevant modes, as appropriate
8. Steps1 through 3 were repeated for all distance-based power reduction mechanisms.

For detailed measurement conducted power results, please refer to the Section 11



Proximity Sensor Trigger Distance Assessment KDB 616217 D04 §6.2 (Rear /Left Side)

LEGEND

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point

Tissue simulating liquid	Trigger distance - Rear		Trigger distance – Left Side	
	Moving toward phantom [mm]	Moving toward phantom [mm]	Moving toward phantom [mm]	Moving from phantom [mm]
2600MHz Muscle	11	12	8	9

Distance Measurement verification for Proximity sensor

Rear side – EUT Moving toward (trigger) to the Phantom

Mode	Distance to DUT Output power (dBm)									
	16[mm]	15[mm]	14[mm]	13[mm]	12[mm]	11[mm]	10[mm]	9[mm]	8[mm]	7[mm]
LTE Band 41	22.69	22.67	22.65	22.74	22.7	16.6	16.71	16.76	16.72	16.66

Rear side – EUT Moving away (Release) from the Phantom

Mode	Distance to DUT Output power (dBm)									
	8[mm]	9[mm]	10[mm]	11[mm]	12[mm]	13[mm]	14[mm]	15[mm]	16[mm]	17[mm]
LTE Band 41	16.81	16.61	16.64	16.76	16.66	22.65	22.63	22.75	22.68	22.76

Based on the most conservative measured triggering distance of 11mm, additional Phablet SAR measurements were required at 10mm from rear side for the above modes

Left side – EUT Moving toward (trigger) to the Phantom

Mode	Distance to DUT Output power (dBm)									
	13[mm]	12[mm]	11[mm]	10[mm]	9[mm]	8[mm]	7[mm]	6[mm]	5[mm]	4[mm]
LTE Band 41	22.65	22.66	22.75	22.73	22.6	16.76	16.64	16.69	16.72	16.62

Left side – EUT Moving away (Release) from the Phantom

Mode	Distance to DUT Output power (dBm)									
	5[mm]	6[mm]	7[mm]	8[mm]	9[mm]	10[mm]	11[mm]	12[mm]	13[mm]	14[mm]
LTE Band 41	16.79	16.63	16.73	16.63	16.6	22.73	22.57	22.59	22.61	22.54

Based on the most conservative measured triggering distance of 8mm, additional Phablet SAR measurements were required at 7mm from Left side for the above modes

2.2 Proximity Sensor Coverage for SAR measurements


(KDB 616217 D04v01r02 §6.3)

As there is no spatial offset between the antenna and the proximity sensor element, proximity sensor coverage did not need to be assessed.

2.3 Proximity Sensor Tilt Angle Assessment

(KDB 616217 D04v01r02 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Bottom side parallel to the base of the flat phantom for each band. The EUT was rotated about Bottom side for angles up to $\pm 45^\circ$. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to $\pm 45^\circ$.

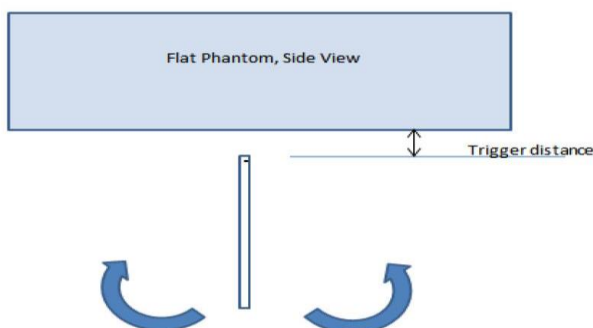

Proximity sensor tilt angle assessment (Bottom side) KDB 616217 §6.4

Summary of Tablet Tilt Angle influence to Proximity Sensor Triggering (Left side)

Band (MHz)	Minimum distance at which power reduction was maintained over-45°	Power reduction status											
		-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°	
2600MHz Muscle	8 mm	On	On	On	On	On	On	On	On	On	On	On	On

2.4 Resulting test positions for Phablet SAR measurements

Wireless technologies	Position	§6.2 Triggering Distance [mm]	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for Phablet SAR [mm]
WWAN	Rear	11	N/A	N/A	10
LTE B41	Left Side	8	N/A	N/A	7

Note: FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device when being used in phablet use conditions

3. Power reduction Verification for WLAN Ant

This device uses a power reduction mechanism for SAR compliance for WLAN operations during voice or VoIP held to ear scenarios.

When a user makes or receives a WLAN voice or WLAN VOIP call for WLAN Ant the audio of the call is sent through the Receiver at the top of the device will trigger the Power reduction for WLAN Ant (i.e. reducing output power for Head SAR compliance)

Detailed descriptions of the power reduction mechanism are included in the Main operational description document

Power Measurement Verification for WLAN Ant

Condition For Power reduction	Wireless Technologies	Conducted Power[dBm]	
		Un-Triggered (Max Power)	Triggered (Reduced Power)
RCV-on (Voice call)	2.4GHz 802.11b (Exclude 12,13ch)	18.72	13.88
RCV-on (Voice call)	2.4GHz 802.11g (Exclude 11~13ch)	16.29	13.84
RCV-on (Voice call)	2.4GHz 802.11n (Exclude 11~13ch)	16.78	13.80
RCV-on (Voice call)	5GHz 802.11a (Exclude 100ch)	16.08	12.71
RCV-on (Voice call)	5GHz 802.11n 20MHz (Exclude 100ch)	15.61	12.38
RCV-on (Voice call)	5GHz 802.11n 40MHz (Exclude 102ch)	14.69	12.68
RCV-on (Voice call)	5GHz 802.11ac 20MHz (Exclude 100ch)	15.55	12.44
RCV-on (Voice call)	5GHz 802.11ac 40MHz (Exclude 102ch)	14.78	12.52
RCV-on (Voice call)	5GHz 802.11ac 80MHz (Exclude 108ch)	13.91	11.88