

FCC DTS REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: December 11, 2020
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Test Site/Location: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
	Report No.: HCT-RF-2012-FC006

FCC ID:	A3LSMA326B
APPLICANT:	SAMSUNG Electronics Co., Ltd.
Model:	SM-A326B/DS
Additional Model:	SM-A326B
EUT Type:	Mobile Phone
Average Output Power:	802.11b : 18.72 dBm / 802.11g : 16.95 dBm / 802.11n(HT20) : 16.91 dBm
Frequency Range:	2 412 MHz ~ 2 472 MHz
Modulation type:	CCK/DSSS/OFDM
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2012-FC006

REVIEWED BY



Report prepared by : Jeong Ho Kim
Engineer of Telecommunication Testing Center

Report approved by : Kwon Jeong
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2012-FC006	December 11, 2020	- First Approval Report

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	6
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS.....	9
8. SUMMARY TEST OF RESULTS	24
9. TEST RESULT	25
9.1 DUTY CYCLE.....	25
9.2 6dB BANDWIDTH.....	28
9.3 OUTPUT POWER	31
9.4 POWER SPECTRAL DENSITY	37
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	40
9.6 RADIATED SPURIOUS EMISSIONS	54
9.7 RADIATED RESTRICTED BAND EDGES	65
9.8 POWERLINE CONDUCTED EMISSIONS	73
10. LIST OF TEST EQUIPMENT	77
11. ANNEX A_ TEST SETUP PHOTO	79

1. EUT DESCRIPTION

Model	SM-A326B/DS	
Additional Model	SM-A326B	
EUT Type	Mobile Phone	
Power Supply	DC 3.86 V	
Frequency Range	2 412 MHz ~ 2 472 MHz	
Max. RF Output Power	<u>Peak Power</u> (For information only)	802.11b : 20.99 dBm 802.11g : 25.67 dBm 802.11n(HT20) : 25.73 dBm
	<u>Average Power</u>	802.11b : 18.72 dBm 802.11g : 16.95 dBm 802.11n(HT20) : 16.91 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n	
Number of Channels	13 Channels	
Antenna Specification	Antenna type: LDS Peak Gain: -3.37 dBi	
Date(s) of Tests	November 04, 2020 ~ December 08, 2020	

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

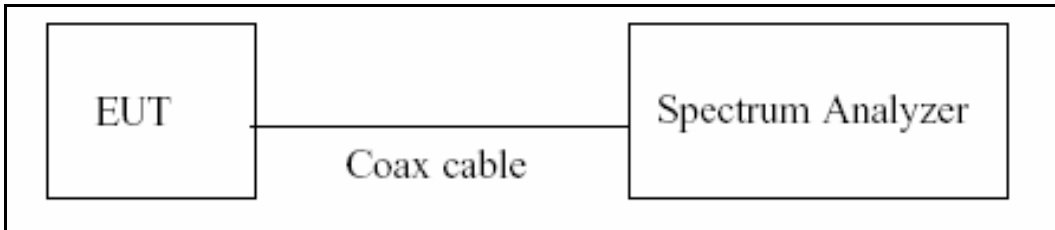

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98%

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	10.09
100	10.12
200	10.17
300	10.22
400	10.25
500	10.26
600	10.26
700	10.28
800	10.29
900	10.31
1000	10.32
2000	10.46
2400	10.50
2480	10.52
2500	10.52
3000	10.57
4000	10.65
5000	10.76
5150	10.76
5850	10.78
6000	10.78
7000	10.85
8000	10.90
9000	10.96
10000	11.02
11000	11.07
12000	11.15
13000	11.24
14000	11.21
15000	11.26
16000	11.27
17000	11.30
18000	11.35
19000	11.37
20000	11.41
21000	11.53
22000	11.60
23000	11.60
24000	11.64
25000	11.73
26000	11.74

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

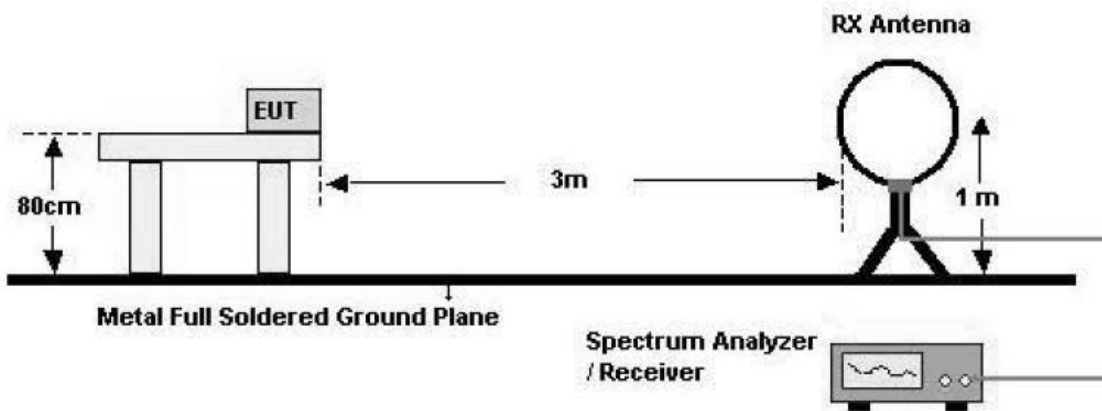

30 MHz - 1 GHz

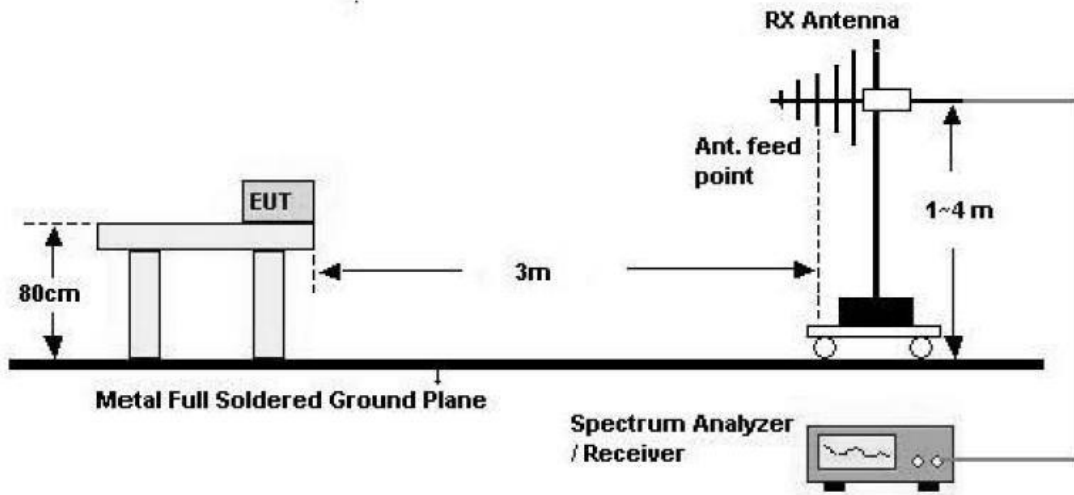

Above 1 GHz

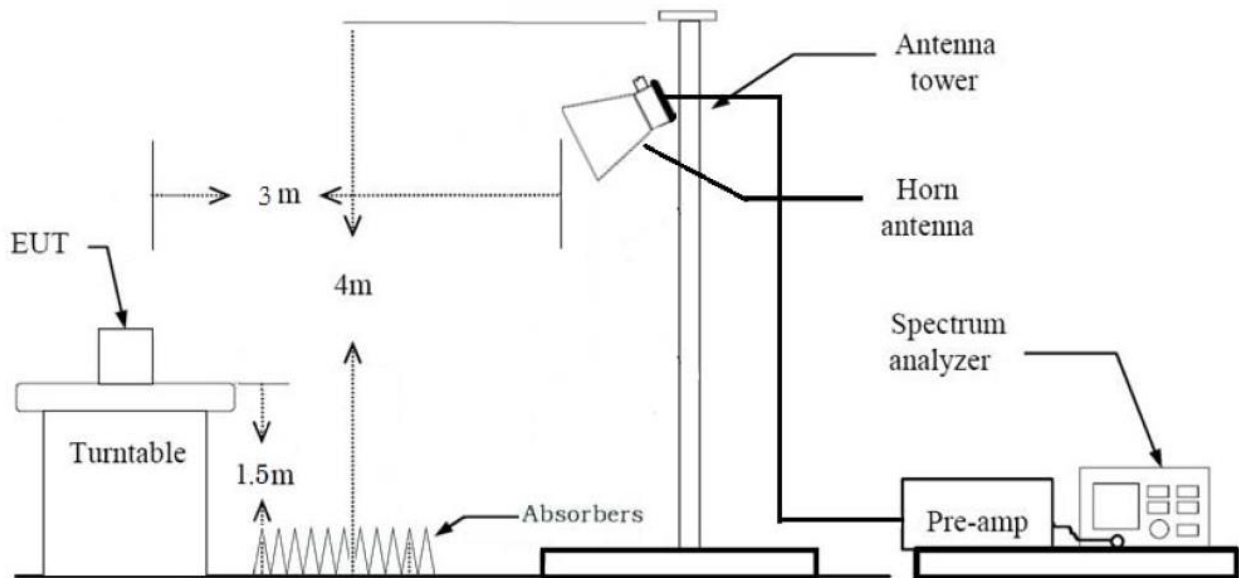

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※ In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak

- Trace = Maxhold

- RBW = 1 MHz

- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz

- Detector = RMS

- Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz

- VBW $\geq 3 \times$ RBW

- Sweep time = auto.

- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz

- Detector = RMS

- Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz

- VBW $\geq 3 \times$ RBW

- Sweep time = auto.

- Trace mode = average (at least 100 traces).

- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $< 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98%,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Attenuator
+ Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Attenuator
+ Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Attenuator
+ Distance Factor(D.F) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X,Y
 - Radiated Restricted Band Edge : X
3. Duty cycle factor applies only 802.11g/n (Duty cycle < 98%).
4. All data rate of operation were investigated and the test results are worst case in lowest datarate of each mode.
 - 802.11b : 1 Mbps
 - 802.11g : 6 Mbps
 - 802.11n_HT20 : MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
6. SM-A326B/DS, SM-A326B were tested and the worst case results are reported.
(Worst case : SM-A326B/DS)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter,
Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter
2. SM-A326B/DS, SM-A326B were tested and the worst case results are reported.
(Worst case : SM-A326B/DS)

Conducted test

1. The EUT was configured with data rate of highest power.
2. SM-A326B/DS, SM-A326B were tested and the worst case results are reported.
(Worst case : SM-A326B/DS)

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.388	8.429	0.995	0.021
	2	4.278	4.319	0.991	0.041
	5.5	1.682	1.728	0.973	0.117
	11	0.932	0.973	0.958	0.185
802.11g	6	1.390	1.436	0.968	0.141
	9	0.932	0.978	0.953	0.209
	12	0.705	0.748	0.943	0.257
	18	0.480	0.525	0.914	0.393
	24	0.364	0.409	0.889	0.512
	36	0.252	0.298	0.846	0.727
	48	0.193	0.238	0.812	0.906
	54	0.175	0.221	0.792	1.012
802.11n (HT20)	6.5 (MCS0)	1.296	1.343	0.965	0.155
	13 (MCS1)	0.669	0.713	0.938	0.277
	19.5 (MCS2)	0.460	0.505	0.911	0.405
	26 (MCS3)	0.353	0.398	0.887	0.523
	39 (MCS4)	0.248	0.293	0.846	0.726
	52 (MCS5)	0.196	0.241	0.814	0.895
	58.5 (MCS6)	0.180	0.225	0.800	0.967
	65 (MCS7)	0.164	0.209	0.785	1.049

Test Plots


Duty cycle plot (802.11b(1Mbps))

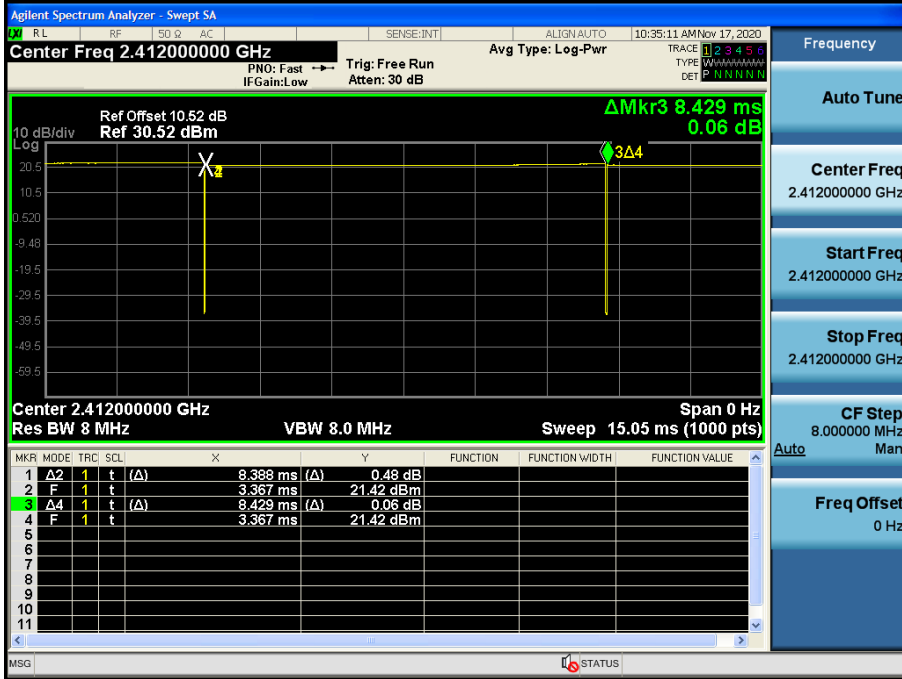

Duty cycle plot (802.11g(6Mbps))

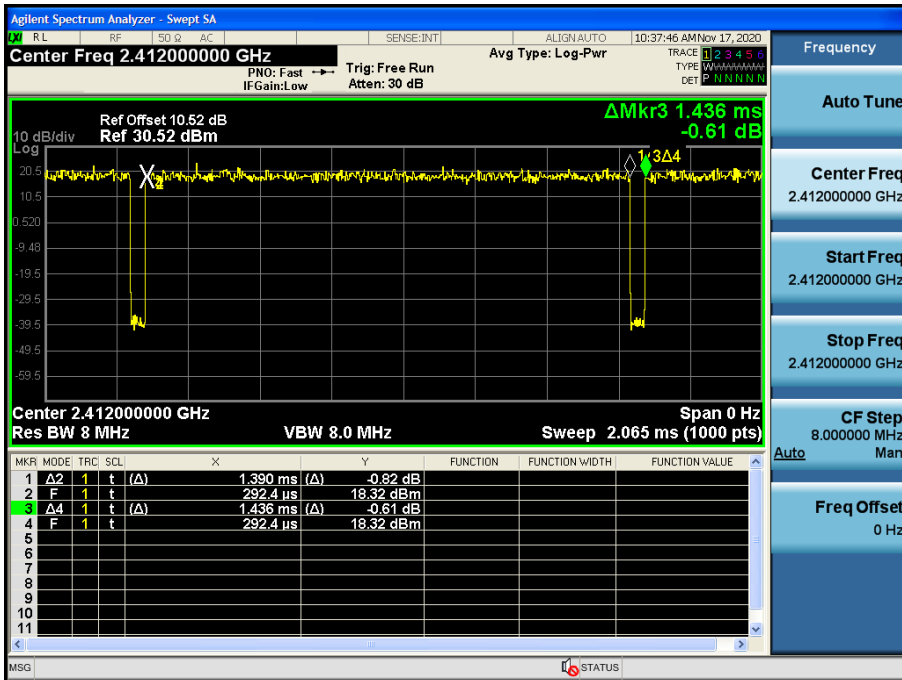

Duty cycle plot (802.11n(MCS0))

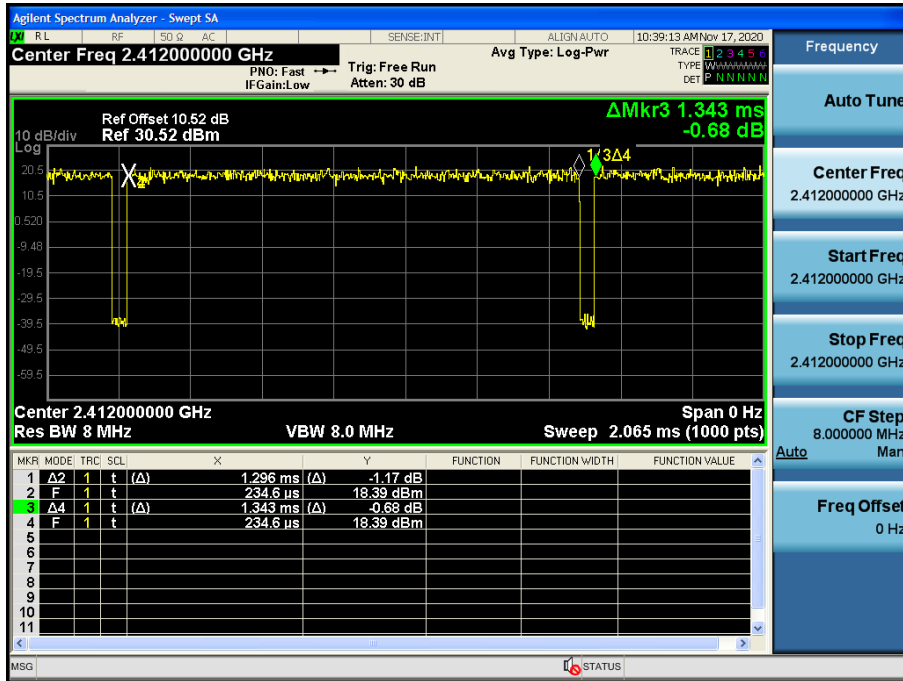

Note:

In order to simplify the report, attached plots were only the most lowest data rate.

9.2 6dB BANDWIDTH


802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	8.097	0.5
2437	6	8.105	
2462	11	8.100	
2467	12	8.073	
2472	13	7.602	

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.16	0.5
2437	6	15.16	
2462	11	15.36	
2467	12	15.16	
2472	13	15.08	


802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.13	0.5
2437	6	15.36	
2462	11	15.49	
2467	12	15.95	
2472	13	15.14	

☐ Test Plots


6dB Bandwidth plot (802.11b-CH 13)

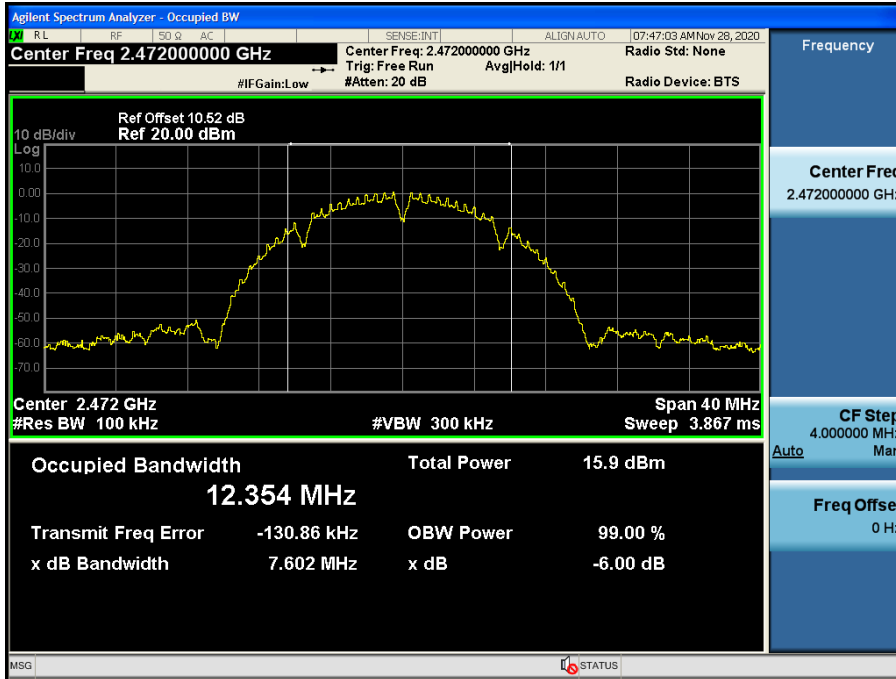

6dB Bandwidth plot (802.11g-CH 13)

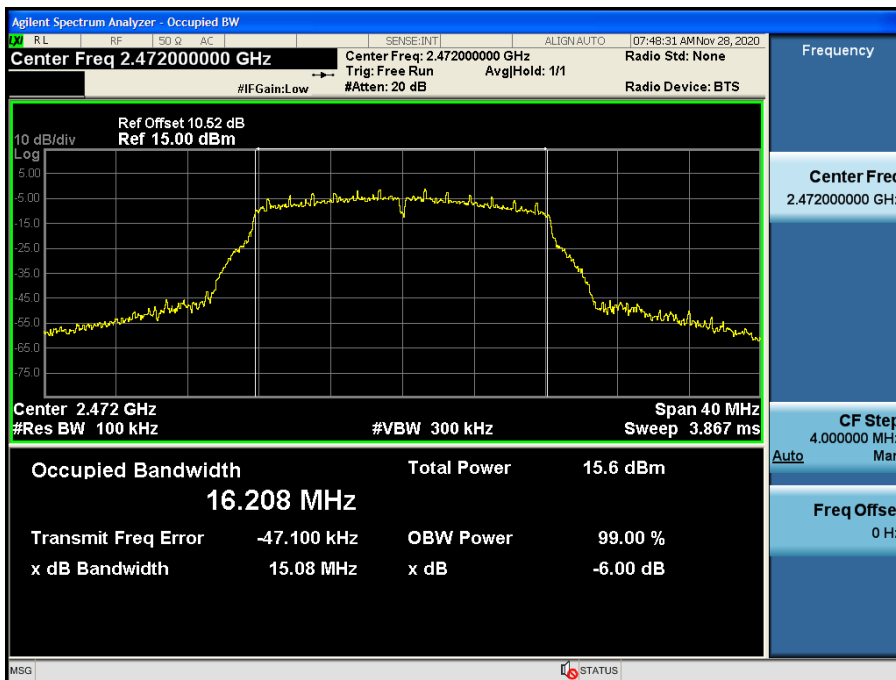

6dB Bandwidth plot (802.11n_HT20-CH 1)

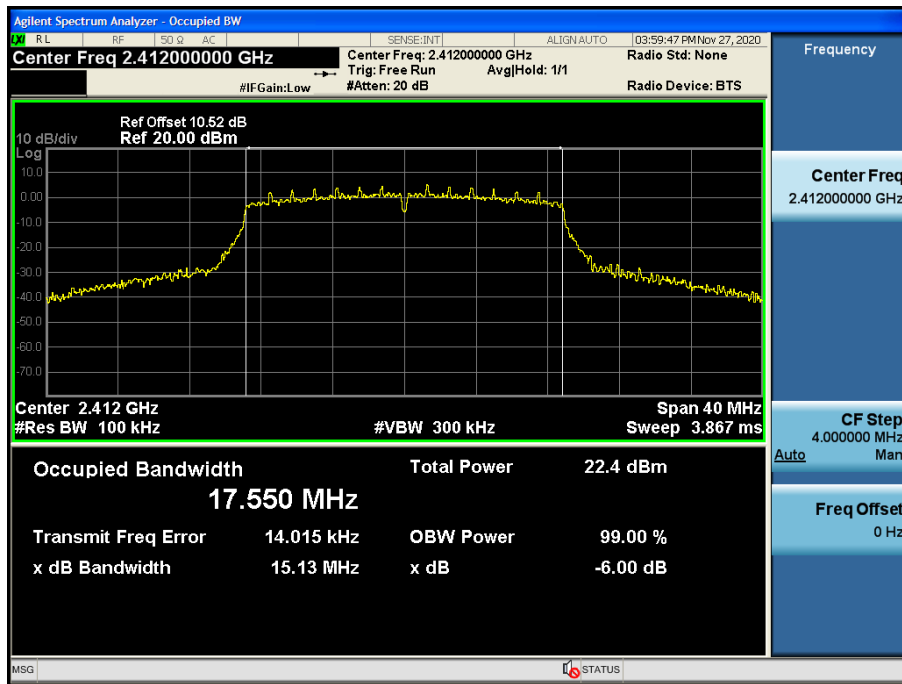

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 10.52 dB is offset for 2.4 GHz Band

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	1	20.65	30	18
		2	20.63	30	
		5.5	20.66	30	
		11	20.59	30	
2437	6	1	20.99	30	
		2	20.97	30	
		5.5	20.54	30	
		11	20.91	30	
2462	11	1	20.66	30	
		2	20.65	30	
		5.5	20.67	30	
		11	20.70	30	
2467	12	1	13.53	30	11
		2	14.04	30	
		5.5	14.03	30	
		11	14.00	30	
2472	13	1	11.24	30	9
		2	11.23	30	
		5.5	11.20	30	
		11	11.28	30	

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	6	25.46	30	15
		9	25.27	30	
		12	25.44	30	
		18	25.40	30	
		24	25.39	30	
		36	25.37	30	
		48	25.61	30	
		54	25.67	30	
2437	6	6	25.05	30	16
		9	25.06	30	
		12	24.99	30	
		18	24.95	30	
		24	25.02	30	
		36	24.94	30	
		48	25.14	30	
		54	25.12	30	
2462	11	6	24.42	30	14
		9	24.98	30	
		12	23.78	30	
		18	24.29	30	
		24	24.14	30	
		36	24.21	30	
		48	24.93	30	
		54	24.88	30	
2467	12	6	21.53	30	11
		9	22.45	30	
		12	20.97	30	
		18	21.50	30	
		24	21.42	30	
		36	21.26	30	
		48	22.08	30	
		54	22.37	30	
2472	13	6	19.87	30	9
		9	20.03	30	
		12	19.61	30	
		18	19.23	30	
		24	19.59	30	
		36	19.54	30	
		48	19.90	30	
		54	19.49	30	

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	0	25.68	30	15
		1	25.28	30	
		2	25.36	30	
		3	25.34	30	
		4	25.25	30	
		5	25.61	30	
		6	25.60	30	
		7	25.43	30	
2437	6	0	25.73	30	16
		1	25.49	30	
		2	25.60	30	
		3	25.56	30	
		4	25.49	30	
		5	25.67	30	
		6	25.69	30	
		7	25.68	30	
2462	11	0	24.97	30	14
		1	24.52	30	
		2	24.58	30	
		3	24.78	30	
		4	24.72	30	
		5	24.86	30	
		6	25.01	30	
		7	24.91	30	
2467	12	0	22.35	30	11
		1	21.47	30	
		2	21.36	30	
		3	21.56	30	
		4	21.58	30	
		5	22.14	30	
		6	22.44	30	
		7	21.64	30	
2472	13	0	20.32	30	9
		1	19.29	30	
		2	19.87	30	
		3	19.58	30	
		4	19.16	30	
		5	19.43	30	
		6	19.62	30	
		7	19.19	30	

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 10.52 dB is offset for 2.4 GHz Band.

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting	
Frequency [MHz]	Channel No.							
2412	1	1	18.07	0.021	18.09	30	18	
		2	17.98	0.041	18.02	30		
		5.5	17.95	0.117	18.07	30		
		11	17.89	0.185	18.07	30		
2437	6	1	18.46	0.021	18.48	30		
		2	18.51	0.041	18.55	30		
		5.5	18.60	0.117	18.72	30		
		11	18.48	0.185	18.66	30		
2462	11	1	18.13	0.021	18.15	30		
		2	18.12	0.041	18.16	30		
		5.5	18.14	0.117	18.26	30		
		11	17.98	0.185	18.16	30		
2467	12	1	10.74	0.021	10.76	30		11
		2	10.76	0.041	10.80	30		
		5.5	10.72	0.117	10.84	30		
		11	10.62	0.185	10.80	30		
2472	13	1	8.39	0.021	8.41	30		9
		2	8.41	0.041	8.45	30		
		5.5	8.36	0.117	8.48	30		
		11	8.26	0.185	8.44	30		

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	15.29	0.141	15.43	30	15
		9	15.27	0.209	15.48	30	
		12	15.15	0.257	15.41	30	
		18	15.05	0.393	15.44	30	
		24	14.94	0.512	15.45	30	
		36	14.71	0.727	15.44	30	
		48	14.70	0.906	15.61	30	
2437	6	6	16.45	0.141	16.59	30	16
		9	16.43	0.209	16.64	30	
		12	16.35	0.257	16.61	30	
		18	16.24	0.393	16.63	30	
		24	16.13	0.512	16.64	30	
		36	15.91	0.727	16.64	30	
		48	16.01	0.906	16.92	30	
2462	11	6	14.04	0.141	14.18	30	14
		9	13.99	0.209	14.20	30	
		12	13.94	0.257	14.20	30	
		18	13.80	0.393	14.19	30	
		24	13.70	0.512	14.21	30	
		36	13.48	0.727	14.21	30	
		48	13.45	0.906	14.36	30	
2467	12	6	10.83	0.141	10.97	30	11
		9	10.74	0.209	10.95	30	
		12	10.69	0.257	10.95	30	
		18	10.60	0.393	10.99	30	
		24	10.45	0.512	10.96	30	
		36	10.22	0.727	10.95	30	
		48	10.15	0.906	11.06	30	
2472	13	6	8.46	0.141	8.60	30	9
		9	8.40	0.209	8.61	30	
		12	8.37	0.257	8.63	30	
		18	8.26	0.393	8.65	30	
		24	8.10	0.512	8.61	30	
		36	7.96	0.727	8.69	30	
		48	7.77	0.906	8.68	30	
54	7.71	1.012	8.72	30			

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	0	15.18	0.155	15.33	30	15
		1	15.04	0.277	15.32	30	
		2	14.87	0.405	15.28	30	
		3	14.79	0.523	15.31	30	
		4	14.59	0.726	15.32	30	
		5	14.54	0.895	15.44	30	
		6	14.45	0.967	15.42	30	
2437	6	7	14.36	1.049	15.41	30	16
		0	16.56	0.155	16.71	30	
		1	16.41	0.277	16.69	30	
		2	16.32	0.405	16.73	30	
		3	16.18	0.523	16.70	30	
		4	15.99	0.726	16.72	30	
		5	16.00	0.895	16.90	30	
2462	11	6	15.94	0.967	16.91	30	14
		7	15.81	1.049	16.86	30	
		0	14.01	0.155	14.16	30	
		1	13.77	0.277	14.05	30	
		2	13.66	0.405	14.07	30	
		3	13.52	0.523	14.04	30	
		4	13.37	0.726	14.10	30	
2467	12	5	13.35	0.895	14.25	30	11
		6	13.27	0.967	14.24	30	
		7	13.20	1.049	14.25	30	
		0	10.64	0.155	10.79	30	
		1	10.56	0.277	10.84	30	
		2	10.39	0.405	10.80	30	
		3	10.32	0.523	10.84	30	
2472	13	4	10.09	0.726	10.82	30	9
		5	10.05	0.895	10.95	30	
		6	9.95	0.967	10.92	30	
		7	9.89	1.049	10.94	30	
		0	8.29	0.155	8.44	30	
		1	8.22	0.277	8.50	30	
		2	8.07	0.405	8.48	30	
2472	13	3	7.89	0.523	8.41	30	9
		4	7.73	0.726	8.46	30	
		5	7.67	0.895	8.57	30	
		6	7.59	0.967	8.56	30	
		7	7.54	1.049	8.59	30	

9.4 POWER SPECTRAL DENSITY

Mode	Frequency (MHz)	Channel No.	Test Result			Limit (dBm)
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	
802.11b	2412	1	1.250	0.102	1.352	8
	2437	6	1.677	0.102	1.779	
	2462	11	0.760	0.102	0.862	
	2467	12	-6.203	0.102	-6.101	
	2472	13	-8.704	0.102	-8.602	
802.11g	2412	1	-3.940	0.709	-3.231	
	2437	6	-1.999	0.898	-1.101	
	2462	11	-5.117	0.984	-4.133	
	2467	12	-8.526	0.984	-7.542	
	2472	13	-10.372	0.388	-9.984	
802.11n	2412	1	-2.876	0.722	-2.154	
	2437	6	-2.318	0.882	-1.436	
	2462	11	-4.186	1.041	-3.145	
	2467	12	-6.995	0.882	-6.113	
	2472	13	-10.145	0.509	-9.636	

Note :

1. Spectrum reading values are not plot data.


The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(10 dB) + Cable loss


3. 10.52 dB is offset for 2.4 GHz Band.

▣ Test Plots


Power Spectral Density (802.11b-CH 6)

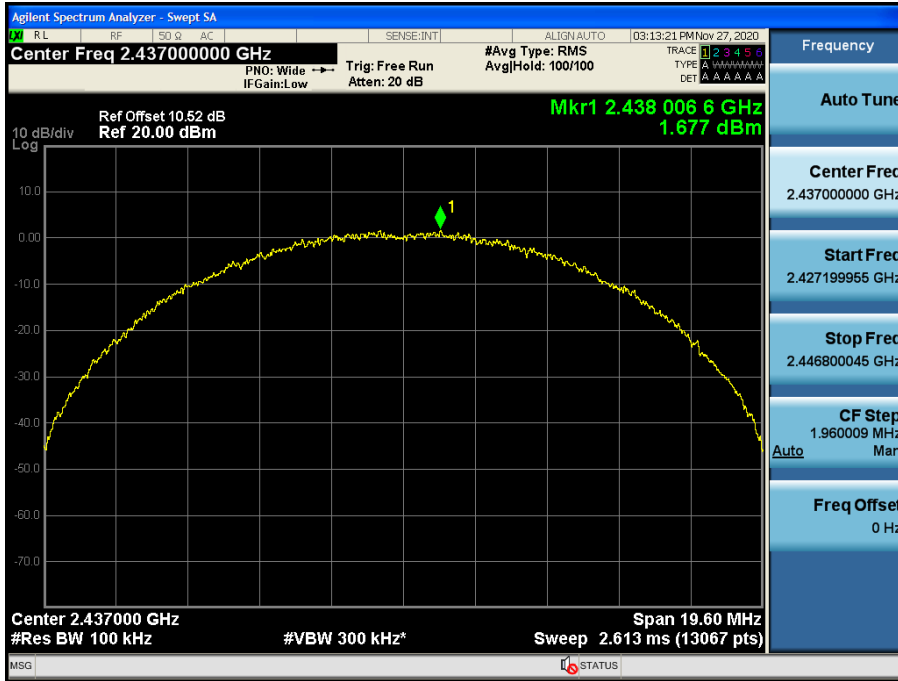

Power Spectral Density (802.11g-CH 6)

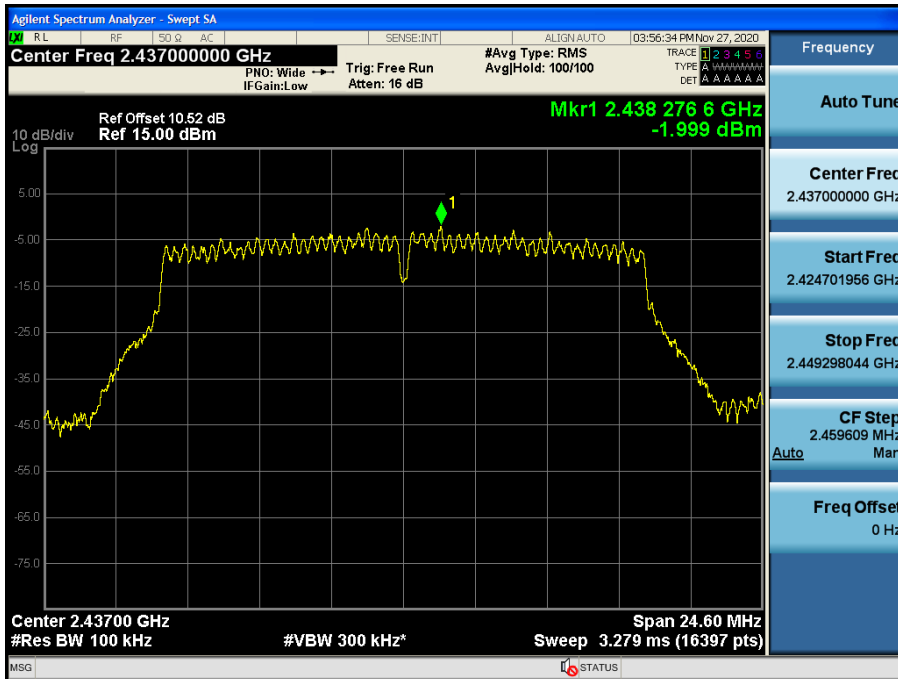

Power Spectral Density (802.11n_HT20 -CH 6)

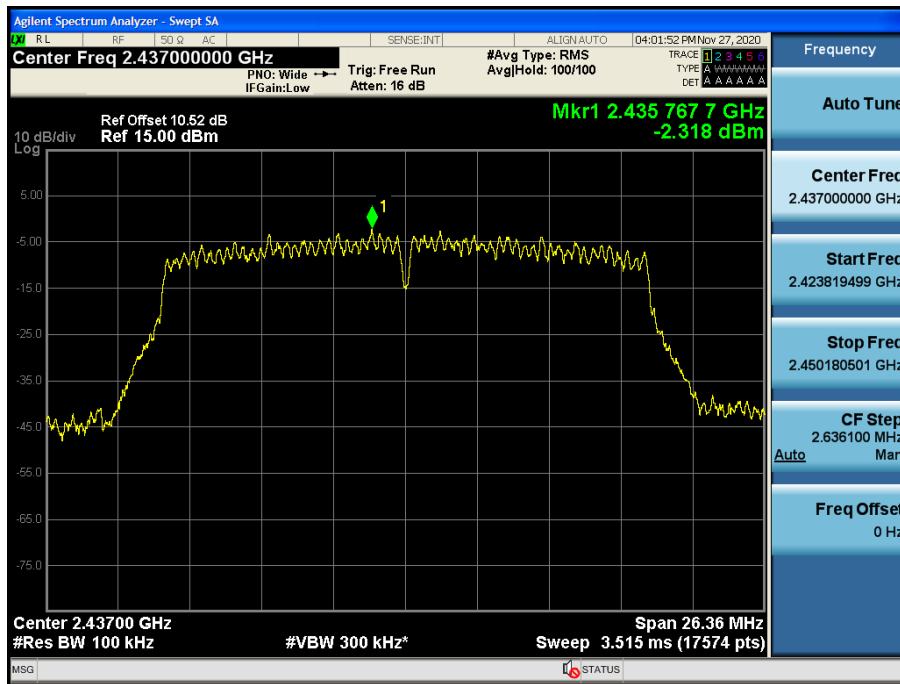

Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.


9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

▣ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

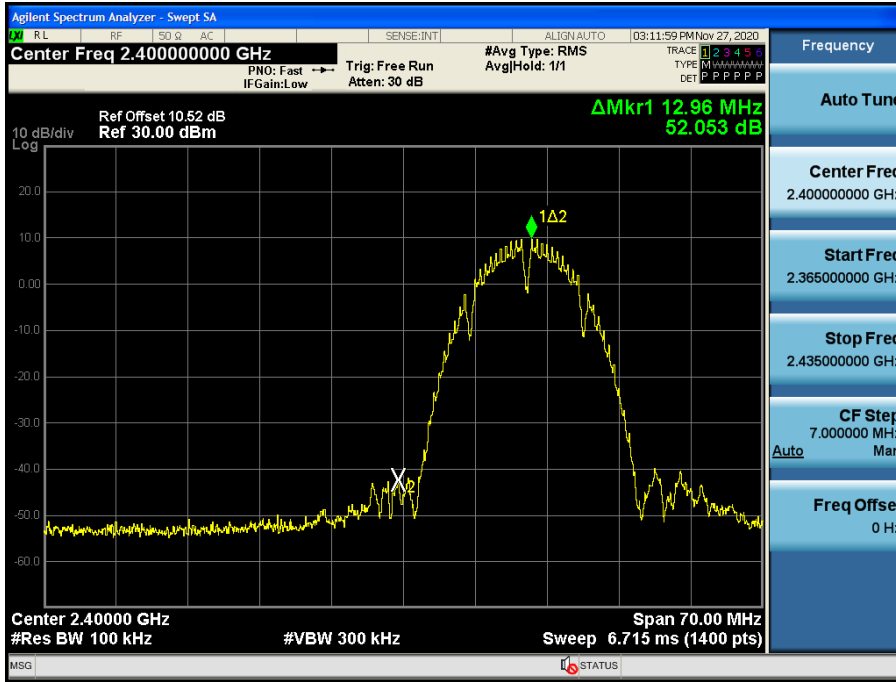


Band Edge (802.11b-CH11)

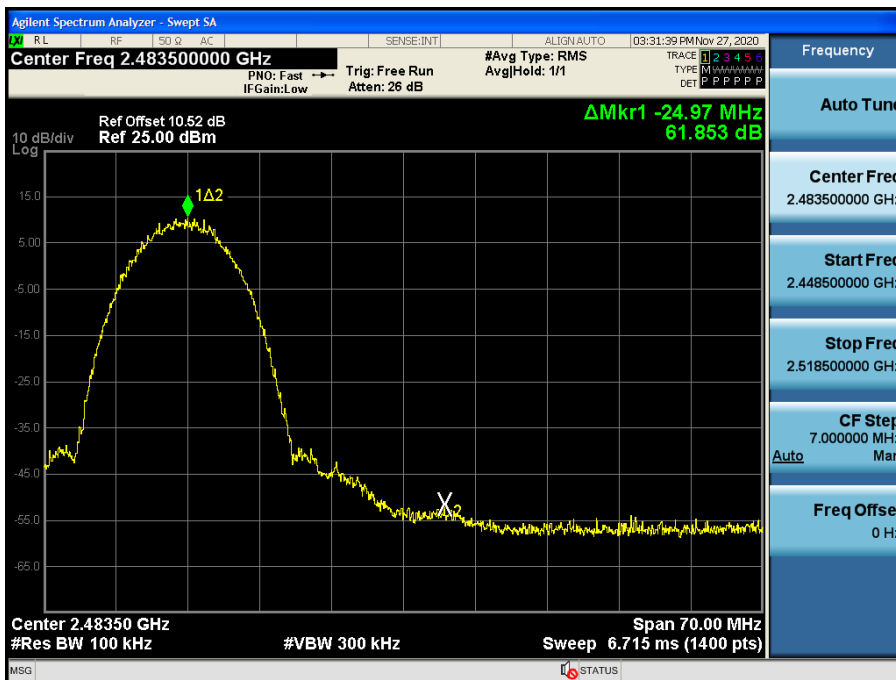


Band Edge (802.11b-CH12)

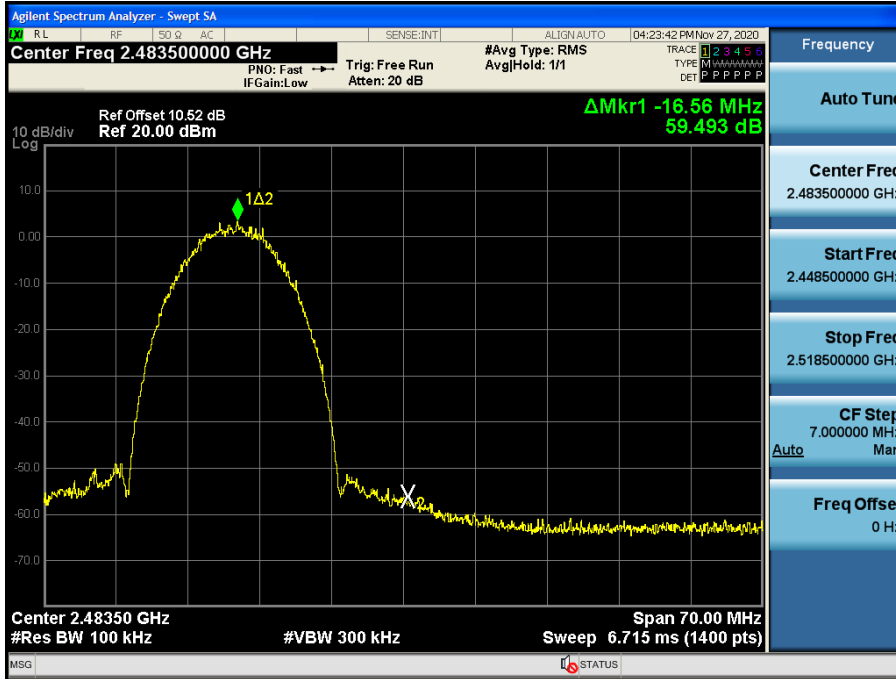


Band Edge (802.11b-CH13)

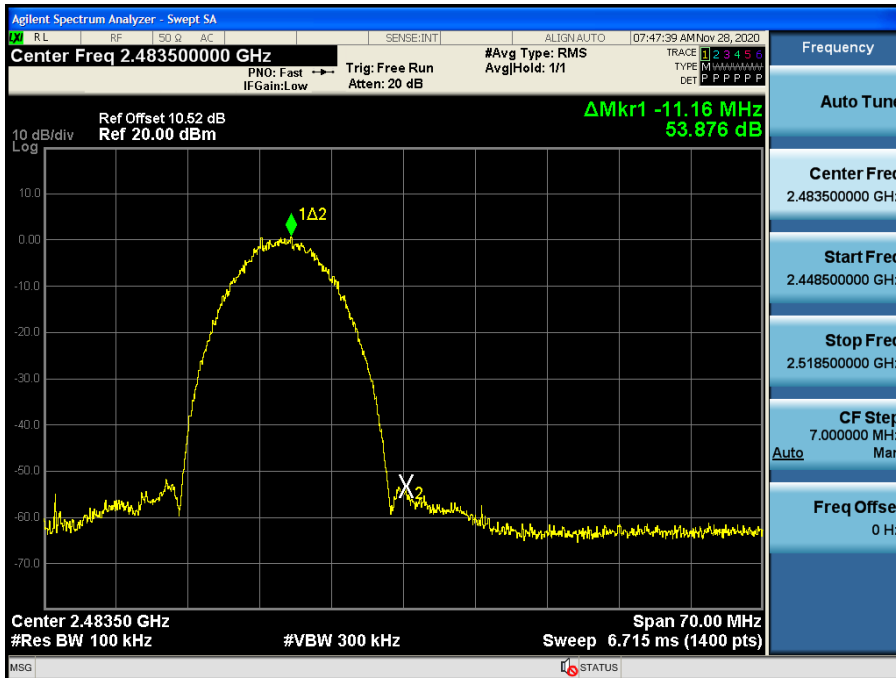


Band Edge (802.11g-CH1)

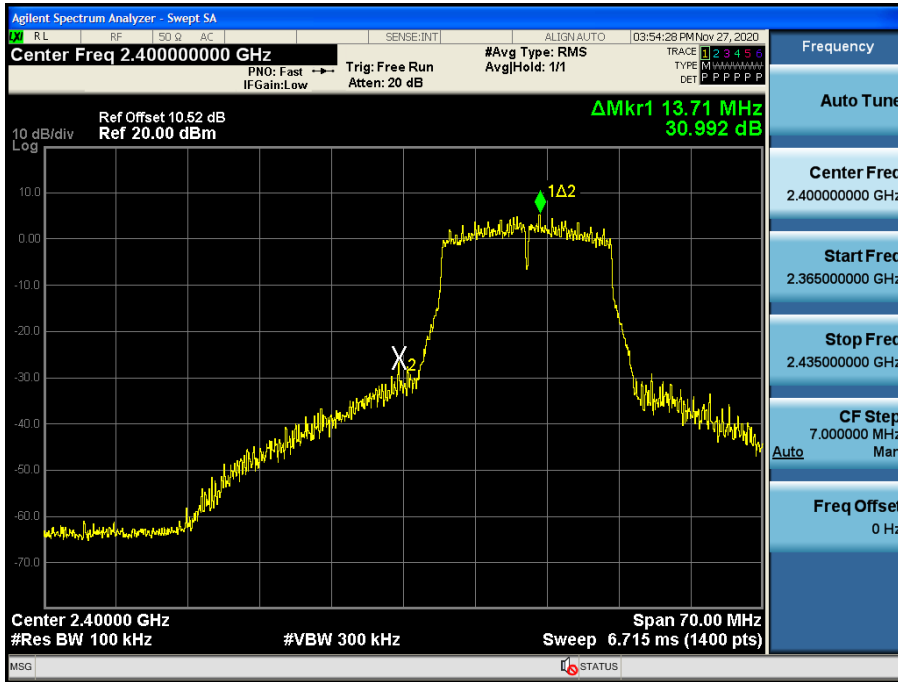


Band Edge (802.11g-CH11)

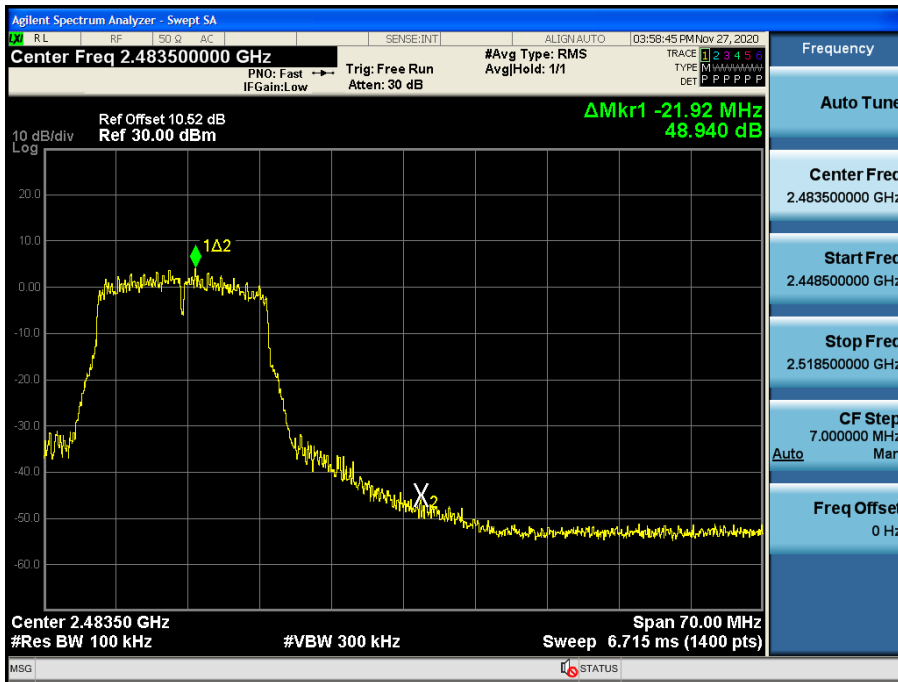


Band Edge (802.11g-CH12)

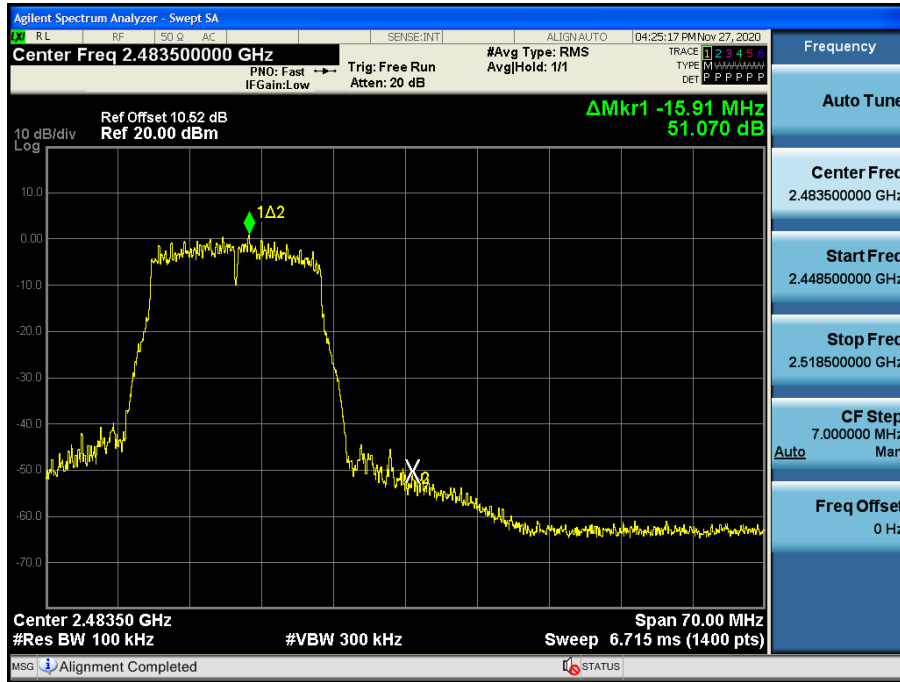


Band Edge (802.11g-CH13)

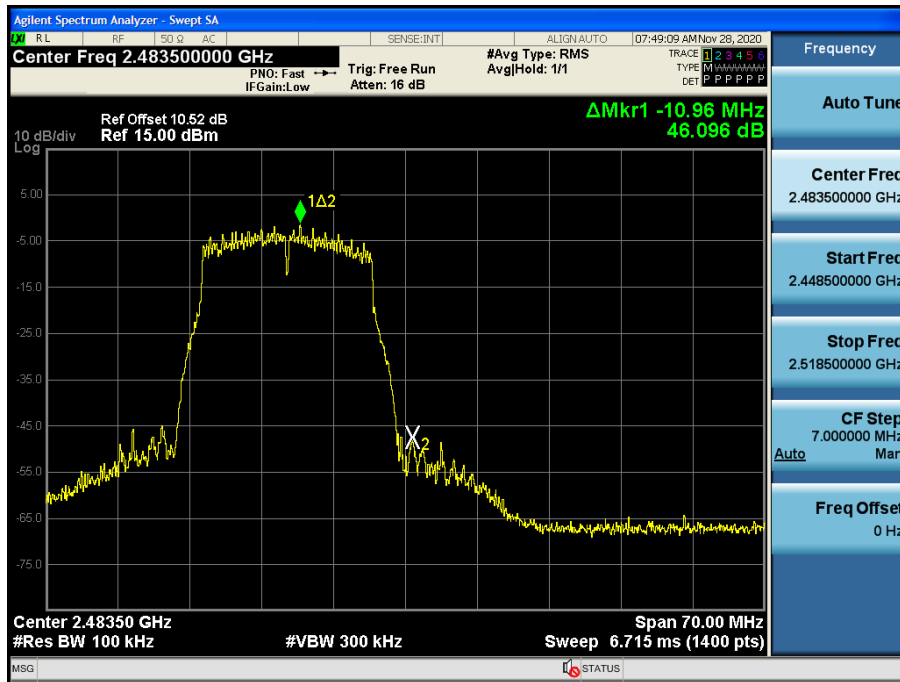


Band Edge (802.11n_HT20 -CH1)

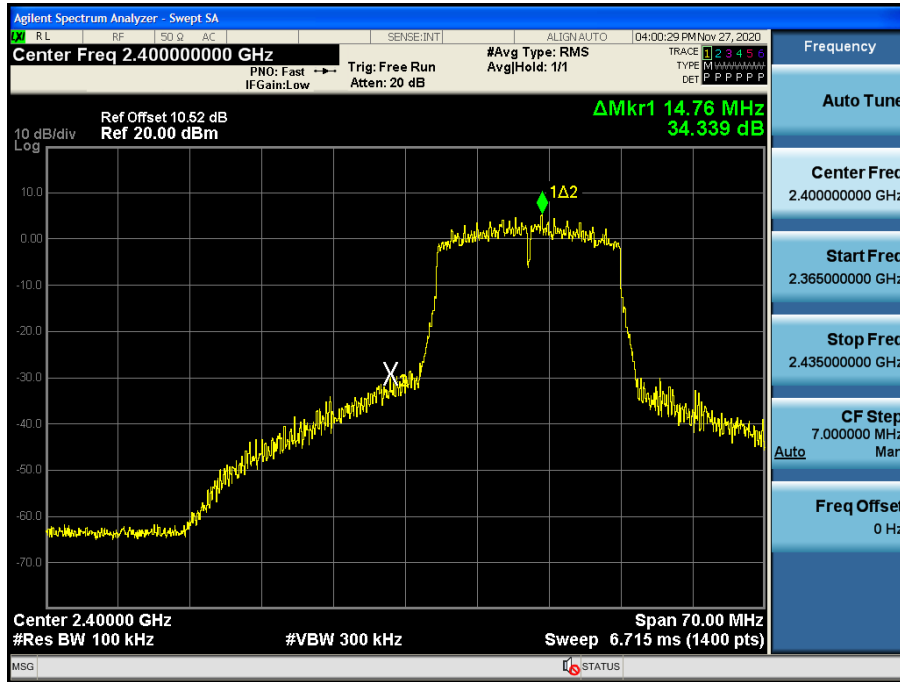


Band Edge (802.11n_HT20 -CH11)

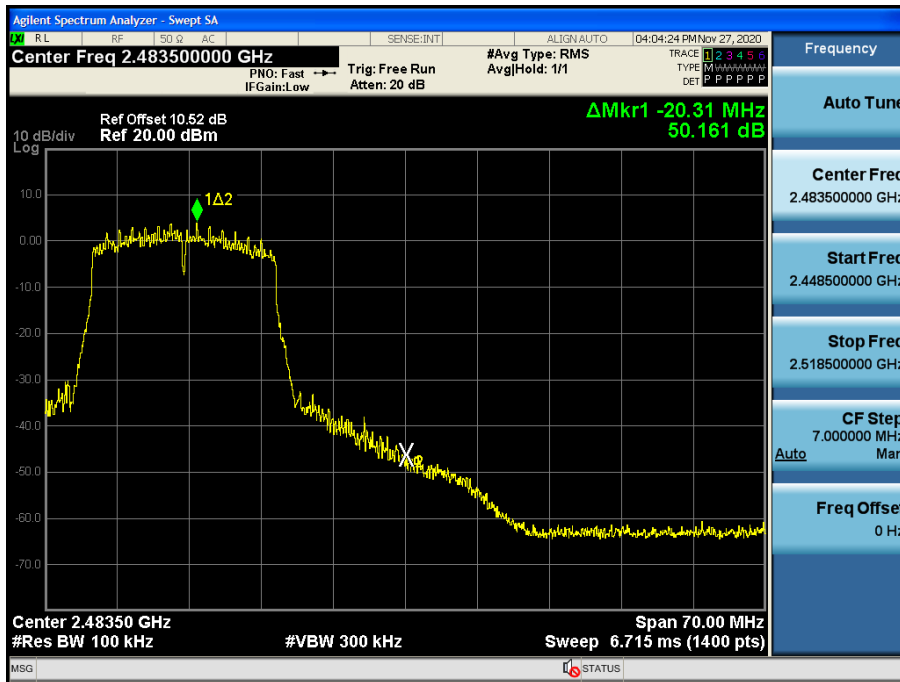

Band Edge (802.11n_HT20 -CH12)

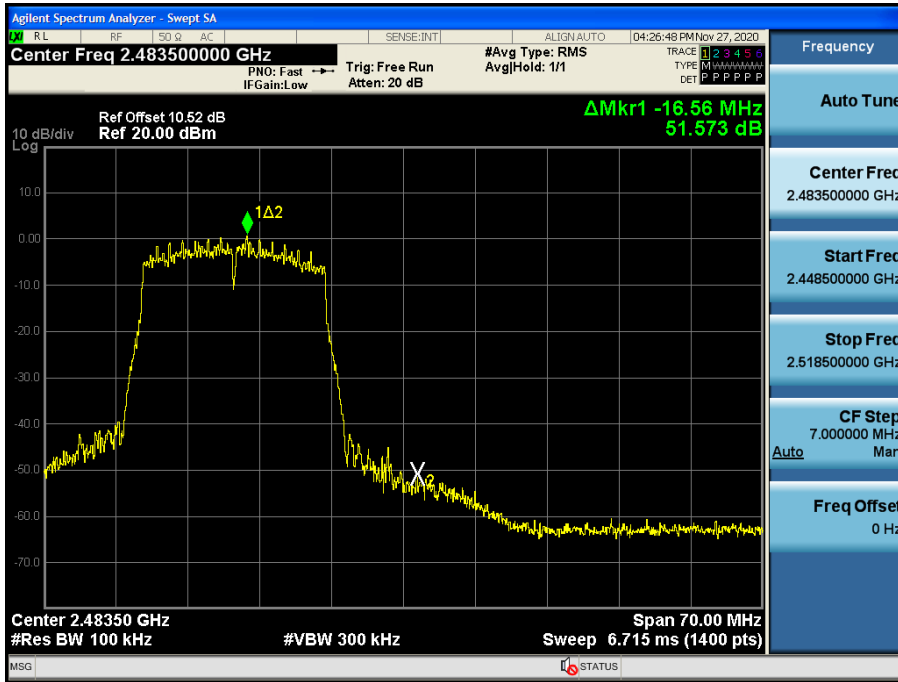


Band Edge (802.11n_HT20 -CH13)

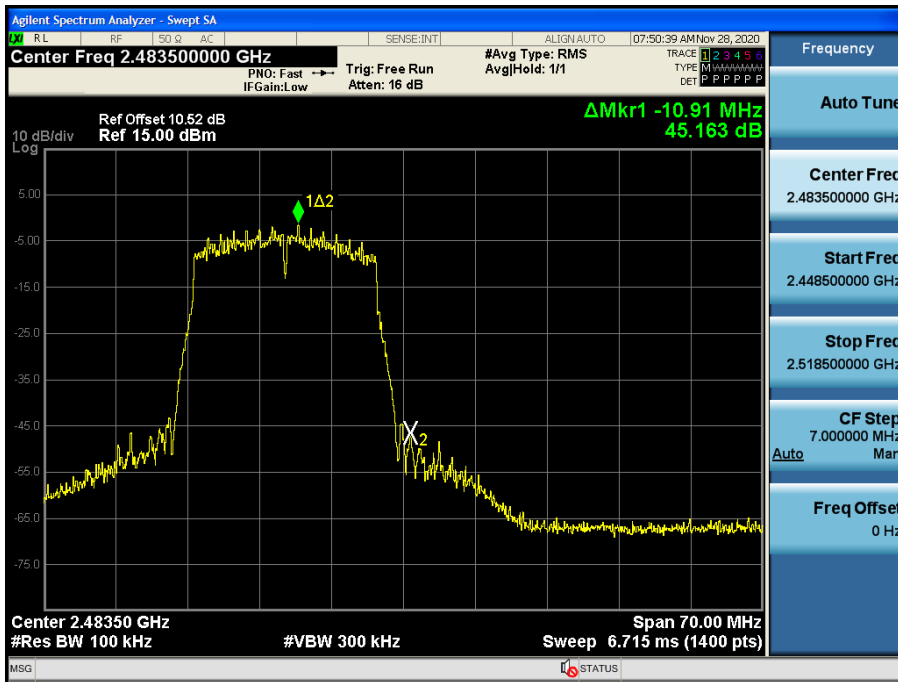

Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

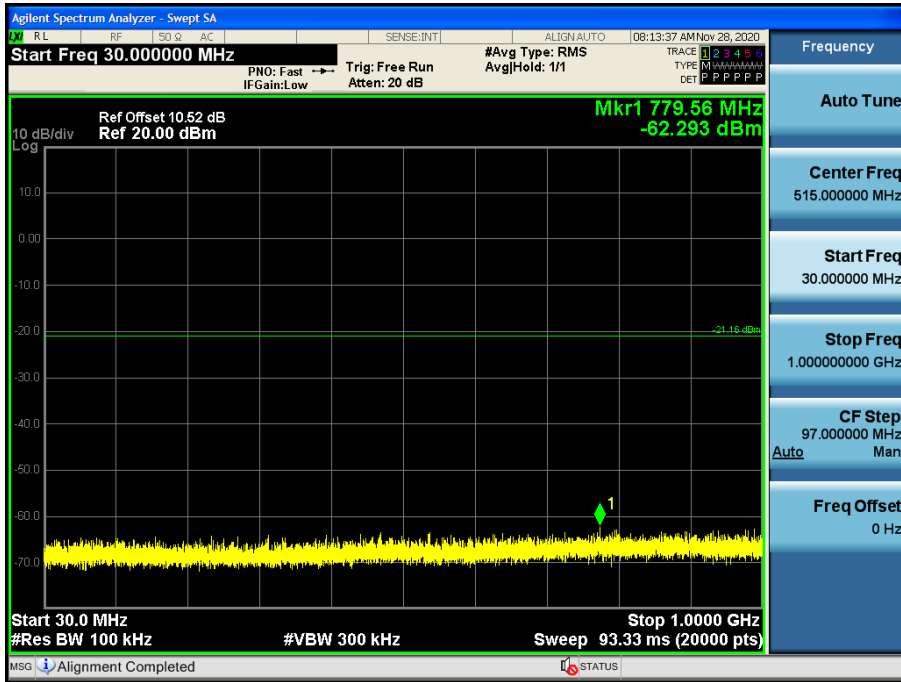


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

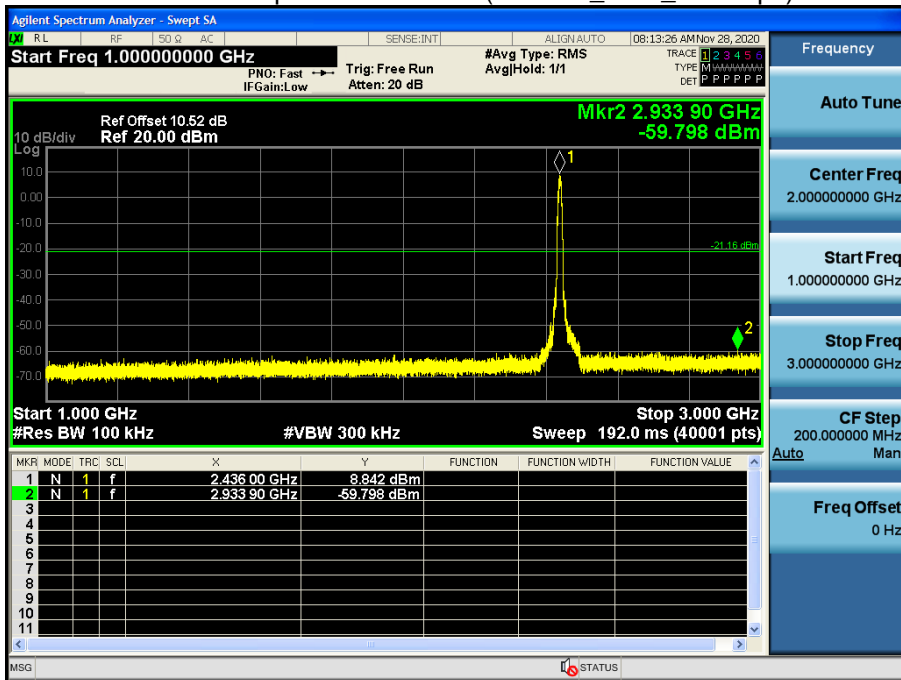


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

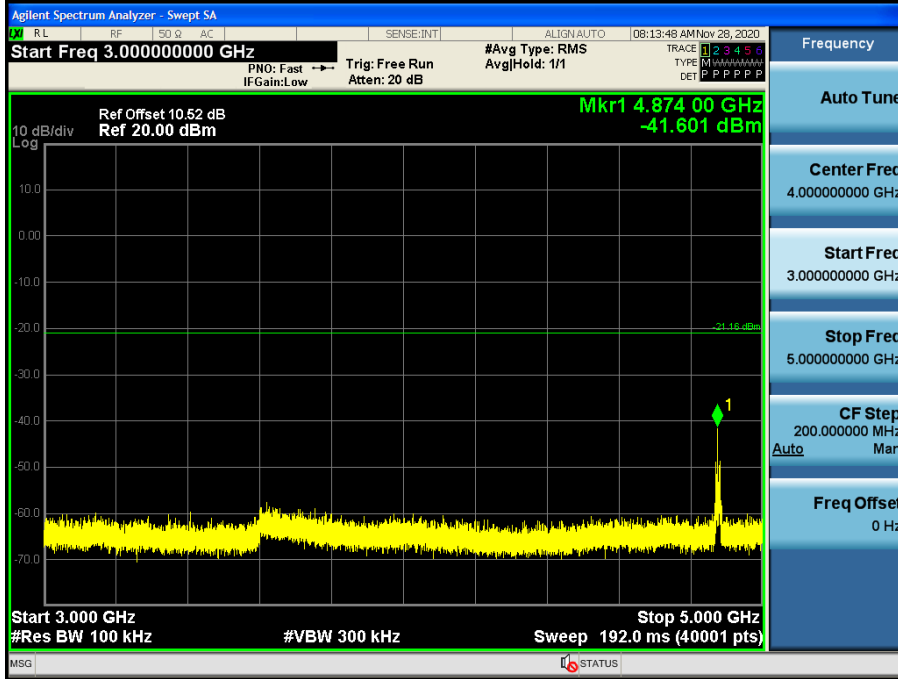


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

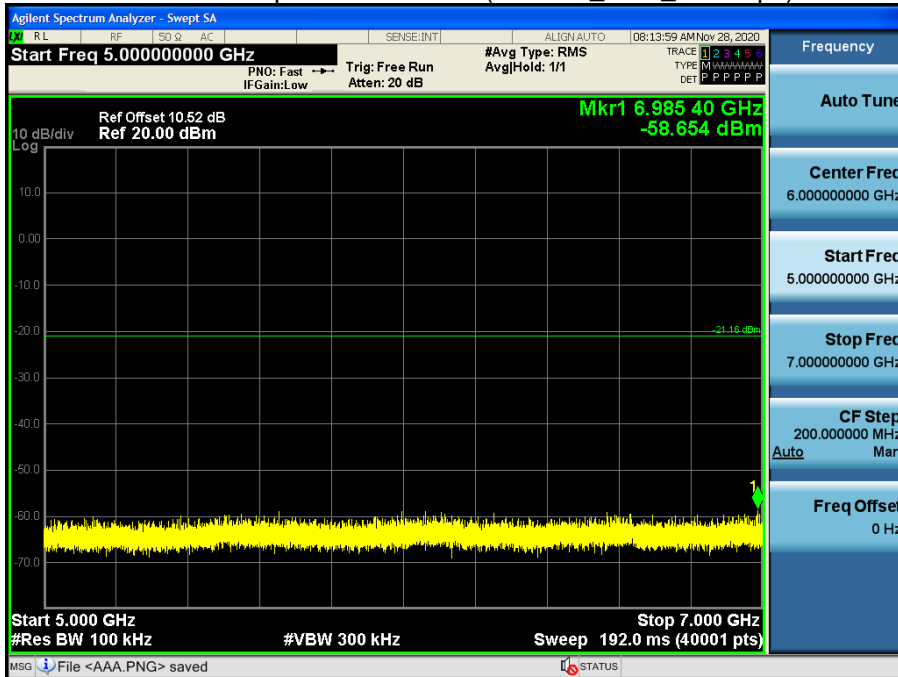


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

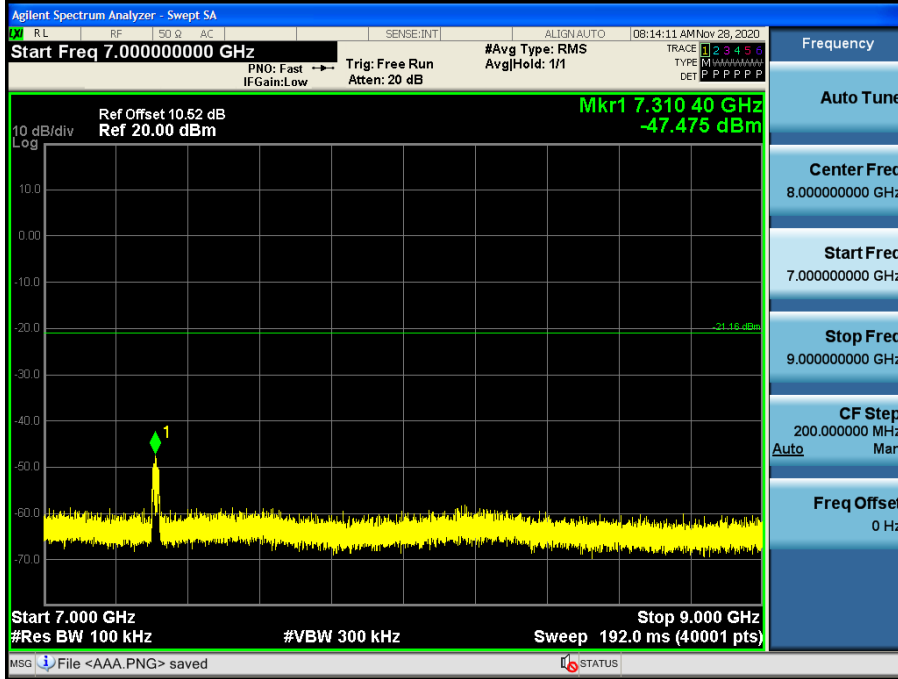


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

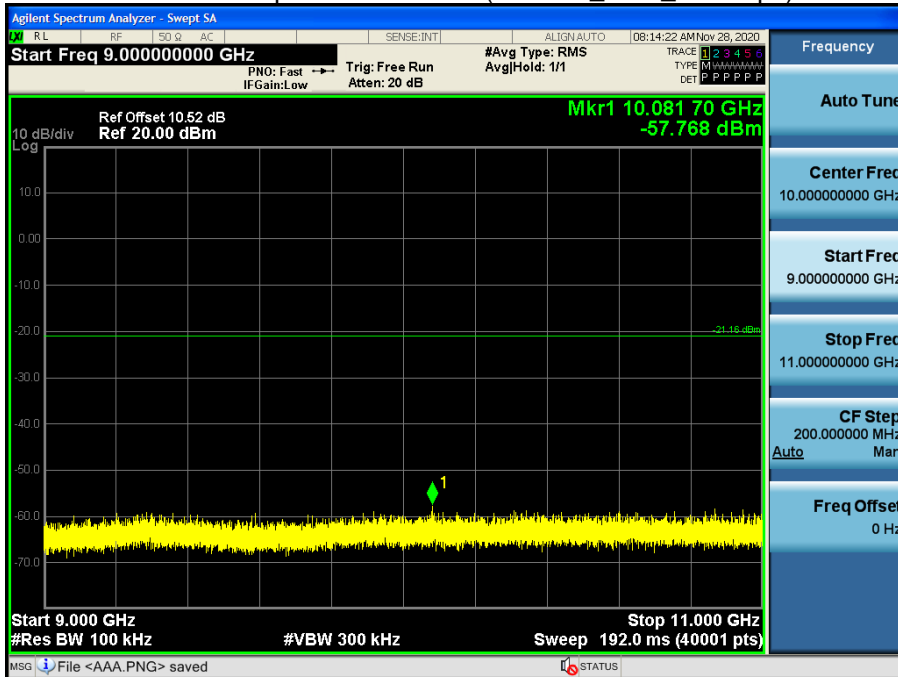


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

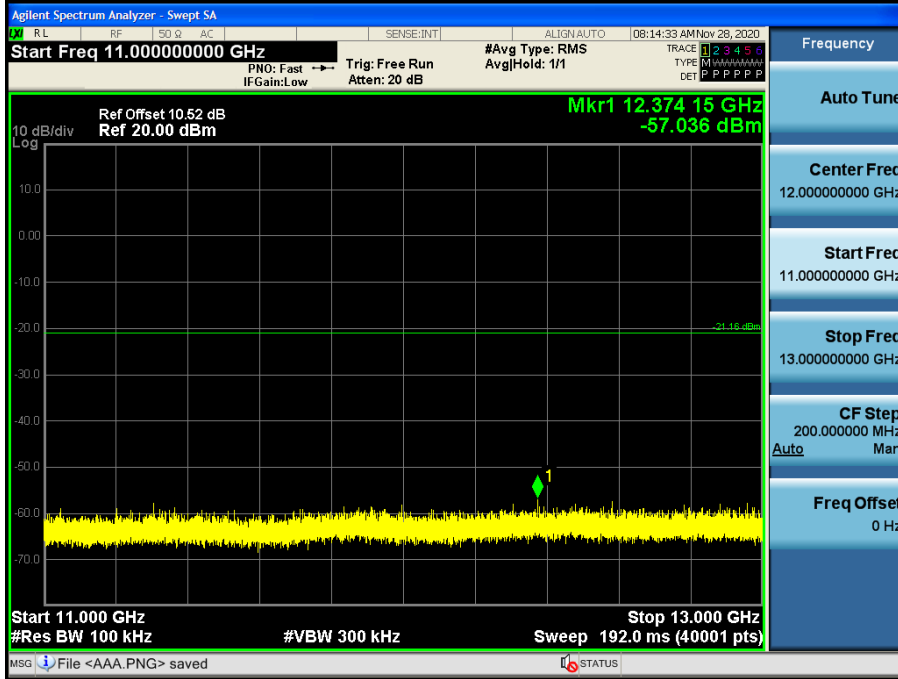


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

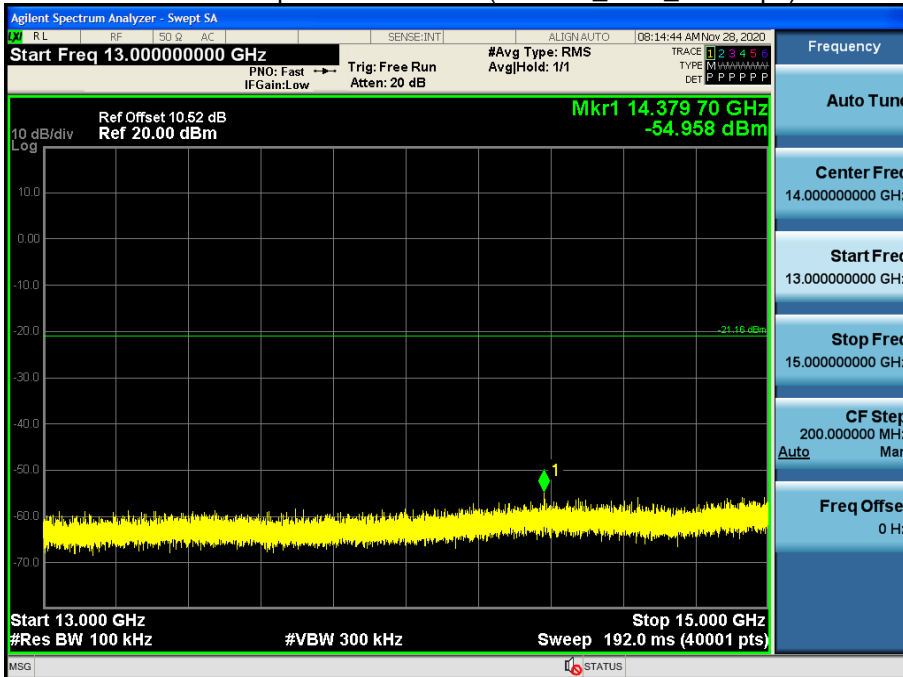


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

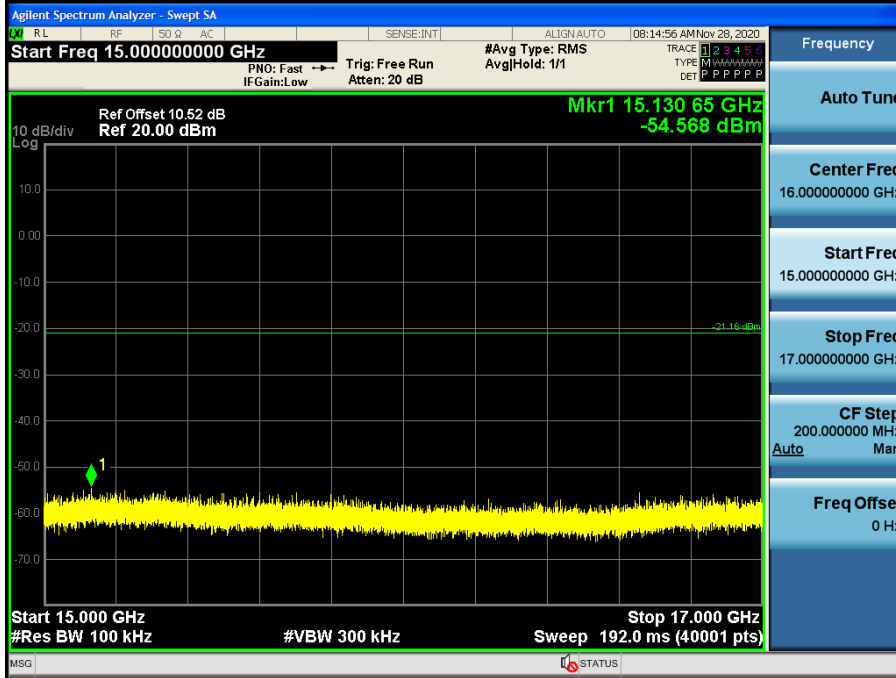


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

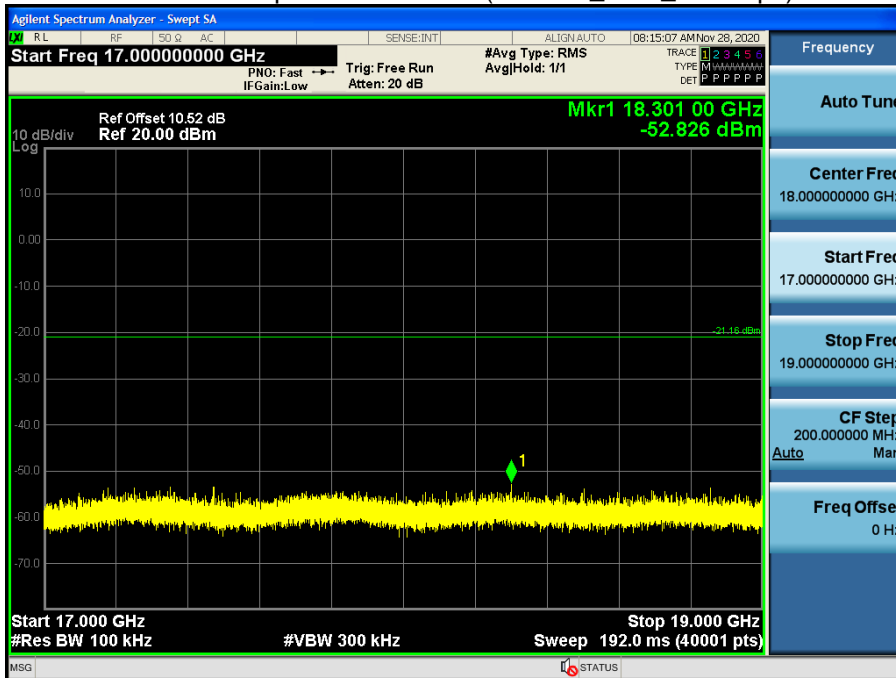


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

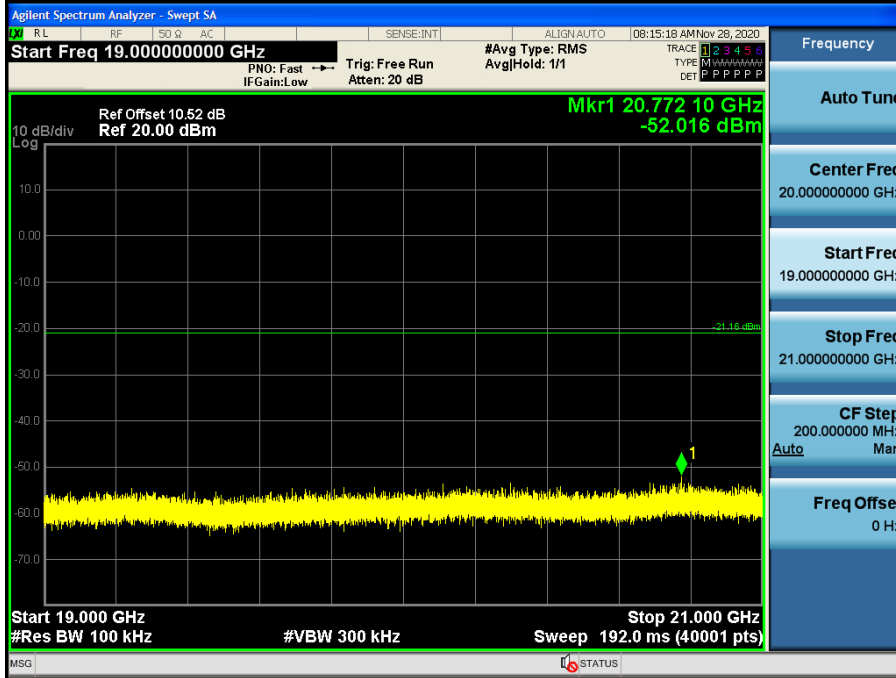


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

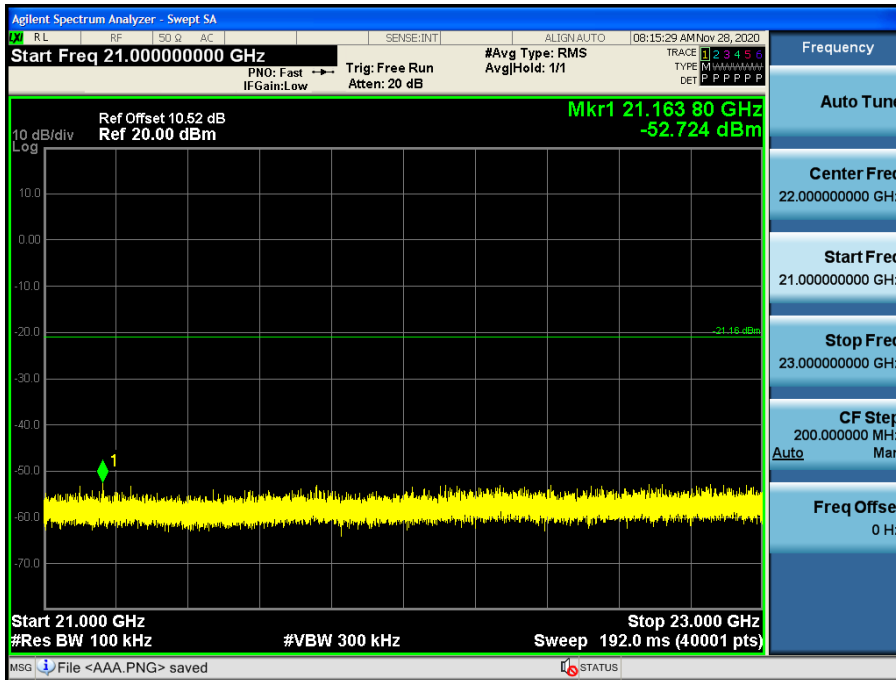

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

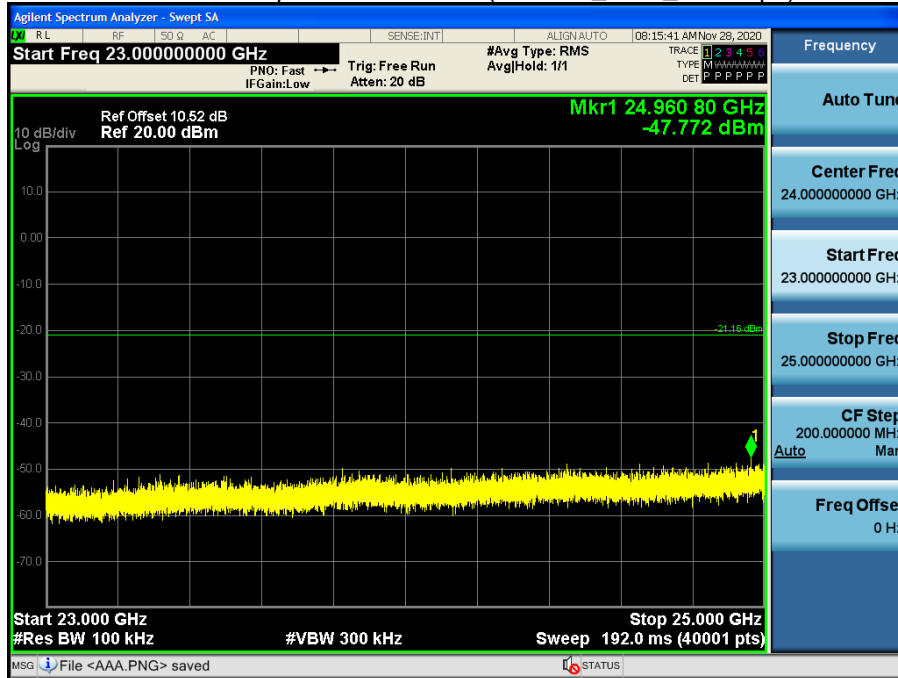

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	45.57	4.31	V	49.88	73.98	24.10	PK
4824	38.91	4.31	V	43.22	53.98	10.76	AV
7236	41.51	12.35	V	53.86	73.98	20.12	PK
7236	31.31	12.35	V	43.66	53.98	10.32	AV
4824	45.87	4.31	H	50.18	73.98	23.80	PK
4824	38.67	4.31	H	42.98	53.98	11.00	AV
7236	42.21	12.35	H	54.56	73.98	19.42	PK
7236	33.87	12.35	H	46.22	53.98	7.76	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	47.43	4.40	V	51.83	73.98	22.15	PK
4874	42.31	4.40	V	46.71	53.98	7.27	AV
7311	43.38	12.37	V	55.75	73.98	18.23	PK
7311	34.76	12.37	V	47.13	53.98	6.85	AV
4874	47.48	4.40	H	51.88	73.98	22.10	PK
4874	42.48	4.40	H	46.88	53.98	7.10	AV
7311	44.87	12.37	H	57.24	73.98	16.74	PK
7311	37.08	12.37	H	49.45	53.98	4.53	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	44.25	4.51	V	48.76	73.98	25.22	PK
4924	37.63	4.51	V	42.14	53.98	11.84	AV
7386	40.52	12.31	V	52.83	73.98	21.15	PK
7386	30.38	12.31	V	42.69	53.98	11.29	AV
4924	45.66	4.51	H	50.17	73.98	23.81	PK
4924	38.91	4.51	H	43.42	53.98	10.56	AV
7386	41.17	12.31	H	53.48	73.98	20.50	PK
7386	31.21	12.31	H	43.52	53.98	10.46	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2467
 Channel No.: 12 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	42.28	4.52	V	46.80	73.98	27.18	PK
4934	31.19	4.52	V	35.71	53.98	18.27	AV
7401	38.74	12.45	V	51.19	73.98	22.79	PK
7401	26.66	12.45	V	39.11	53.98	14.87	AV
4934	42.37	4.52	H	46.89	73.98	27.09	PK
4934	32.46	4.52	H	36.98	53.98	17.00	AV
7401	39.27	12.45	H	51.72	73.98	22.26	PK
7401	26.74	12.45	H	39.19	53.98	14.79	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2472
 Channel No.: 13 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	41.65	4.53	V	46.18	73.98	27.80	PK
4944	30.05	4.53	V	34.58	53.98	19.40	AV
7416	37.93	12.39	V	50.32	73.98	23.66	PK
7416	26.54	12.39	V	38.93	53.98	15.05	AV
4944	41.99	4.53	H	46.52	73.98	27.46	PK
4944	31.02	4.53	H	35.55	53.98	18.43	AV
7416	38.36	12.39	H	50.75	73.98	23.23	PK
7416	26.58	12.39	H	38.97	53.98	15.01	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	42.03	0.00	4.31	V	46.34	73.98	27.64	PK
4824	29.48	0.14	4.31	V	33.93	53.98	20.05	AV
7236	45.70	0.00	12.35	V	58.05	73.98	15.93	PK
7236	27.90	0.14	12.35	V	40.39	53.98	13.59	AV
4824	41.73	0.00	4.31	H	46.04	73.98	27.94	PK
4824	29.36	0.14	4.31	H	33.81	53.98	20.17	AV
7236	48.41	0.00	12.35	H	60.76	73.98	13.22	PK
7236	28.89	0.14	12.35	H	41.38	53.98	12.60	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	44.95	0.00	4.40	V	49.35	73.98	24.63	PK
4874	32.39	0.14	4.40	V	36.93	53.98	17.05	AV
7311	44.69	0.00	12.37	V	57.06	73.98	16.92	PK
7311	32.32	0.14	12.37	V	44.83	53.98	9.15	AV
4874	44.52	0.00	4.40	H	48.92	73.98	25.06	PK
4874	31.42	0.14	4.40	H	35.96	53.98	18.02	AV
7311	44.38	0.00	12.37	H	56.75	73.98	17.23	PK
7311	32.04	0.14	12.37	H	44.55	53.98	9.43	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	43.05	0.00	4.51	V	47.56	73.98	26.42	PK
4924	30.11	0.14	4.51	V	34.76	53.98	19.22	AV
7386	40.56	0.00	12.31	V	52.87	73.98	21.11	PK
7386	26.58	0.14	12.31	V	39.03	53.98	14.95	AV
4924	41.95	0.00	4.51	H	46.46	73.98	27.52	PK
4924	29.92	0.14	4.51	H	34.57	53.98	19.41	AV
7386	39.86	0.00	12.31	H	52.17	73.98	21.81	PK
7386	25.91	0.14	12.31	H	38.36	53.98	15.62	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2467
 Channel No.: 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	40.58	0.00	4.52	V	45.10	73.98	28.88	PK
4934	29.02	0.14	4.52	V	33.68	53.98	20.30	AV
7401	38.20	0.00	12.45	V	50.65	73.98	23.33	PK
7401	25.88	0.14	12.45	V	38.47	53.98	15.51	AV
4934	41.61	0.00	4.52	H	46.13	73.98	27.85	PK
4934	29.31	0.14	4.52	H	33.97	53.98	20.01	AV
7401	38.67	0.00	12.45	H	51.12	73.98	22.86	PK
7401	26.57	0.14	12.45	H	39.16	53.98	14.82	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2472
 Channel No.: 13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4944	41.84	0.00	4.53	V	46.37	73.98	27.61	PK
4944	29.20	0.14	4.53	V	33.87	53.98	20.11	AV
7416	38.09	0.00	12.39	V	50.48	73.98	23.50	PK
7416	25.67	0.14	12.39	V	38.20	53.98	15.78	AV
4944	42.02	0.00	4.53	H	46.55	73.98	27.43	PK
4944	29.60	0.14	4.53	H	34.27	53.98	19.71	AV
7416	38.63	0.00	12.39	H	51.02	73.98	22.96	PK
7416	26.43	0.14	12.39	H	38.96	53.98	15.02	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	42.63	0.00	4.31	V	46.94	73.98	27.04	PK
4824	29.99	0.16	4.31	V	34.46	53.98	19.53	AV
7236	45.81	0.00	12.35	V	58.16	73.98	15.82	PK
7236	27.46	0.16	12.35	V	39.97	53.98	14.02	AV
4824	41.72	0.00	4.31	H	46.03	73.98	27.95	PK
4824	29.51	0.16	4.31	H	33.98	53.98	20.01	AV
7236	46.77	0.00	12.35	H	59.12	73.98	14.86	PK
7236	28.72	0.16	12.35	H	41.23	53.98	12.76	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	44.95	0.00	4.40	V	49.35	73.98	24.63	PK
4874	32.27	0.16	4.40	V	36.83	53.98	17.16	AV
7311	44.89	0.00	12.37	V	57.26	73.98	16.72	PK
7311	32.11	0.16	12.37	V	44.64	53.98	9.35	AV
4874	43.48	0.00	4.40	H	47.88	73.98	26.10	PK
4874	31.26	0.16	4.40	H	35.82	53.98	18.17	AV
7311	44.42	0.00	12.37	H	56.79	73.98	17.19	PK
7311	31.86	0.16	12.37	H	44.39	53.98	9.60	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	42.42	0.00	4.51	V	46.93	73.98	27.05	PK
4924	29.94	0.16	4.51	V	34.61	53.98	19.38	AV
7386	40.06	0.00	12.31	V	52.37	73.98	21.61	PK
7386	26.51	0.16	12.31	V	38.98	53.98	15.01	AV
4924	41.40	0.00	4.51	H	45.91	73.98	28.07	PK
4924	29.91	0.16	4.51	H	34.58	53.98	19.41	AV
7386	39.77	0.00	12.31	H	52.08	73.98	21.90	PK
7386	26.05	0.16	12.31	H	38.52	53.98	15.47	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2467
 Channel No.: 12 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	42.34	0.00	4.52	V	46.86	73.98	27.12	PK
4934	28.69	0.16	4.52	V	33.37	53.98	20.62	AV
7401	38.15	0.00	12.45	V	50.60	73.98	23.38	PK
7401	25.46	0.16	12.45	V	38.07	53.98	15.92	AV
4934	42.70	0.00	4.52	H	47.22	73.98	26.76	PK
4934	29.31	0.16	4.52	H	33.99	53.98	20.00	AV
7401	38.63	0.00	12.45	H	51.08	73.98	22.90	PK
7401	26.52	0.16	12.45	H	39.13	53.98	14.86	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2472
 Channel No.: 13 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G + D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4944	41.51	0.00	4.53	V	46.04	73.98	27.94	PK
4944	29.23	0.16	4.53	V	33.92	53.98	20.07	AV
7416	38.52	0.00	12.39	V	50.91	73.98	23.07	PK
7416	26.39	0.16	12.39	V	38.94	53.98	15.05	AV
4944	41.68	0.00	4.53	H	46.21	73.98	27.77	PK
4944	29.54	0.16	4.53	H	34.23	53.98	19.76	AV
7416	38.65	0.00	12.39	H	51.04	73.98	22.94	PK
7416	26.46	0.16	12.39	H	39.01	53.98	14.98	AV

Test Plots (Worst case : Y-H)

Radiated Spurious Emissions plot – Average Reading (802.11b_1 Mbps, Ch.6 3rd Harmonic)

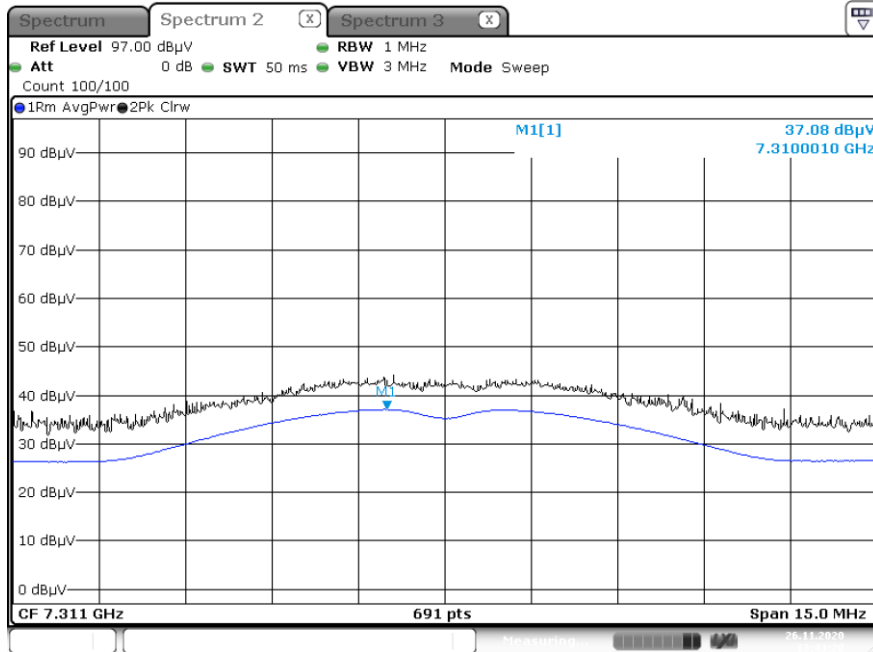

Radiated Spurious Emissions plot – Peak Reading (802.11b_1 Mbps, Ch.6 3rd Harmonic)

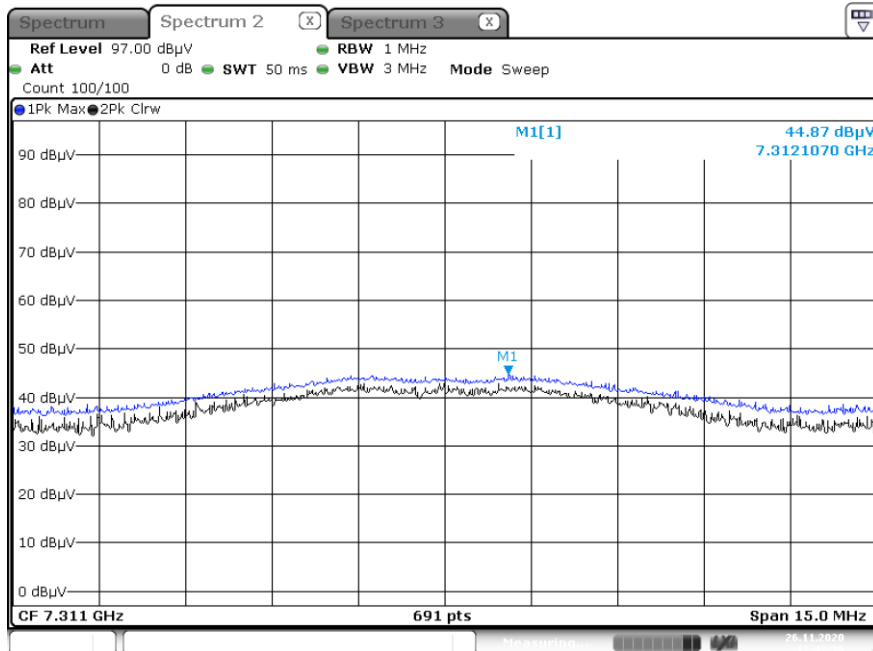

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	51.51	2.61	H	54.12	73.98	19.86	PK
2390.0	39.73	2.61	H	42.34	53.98	11.64	AV
2390.0	50.36	2.61	V	52.97	73.98	21.01	PK
2390.0	39.24	2.61	V	41.85	53.98	12.13	AV
2483.5	51.24	3.13	H	54.37	73.98	19.61	PK
2483.5	40.87	3.13	H	44.00	53.98	9.98	AV
2483.5	52.38	3.13	V	55.51	73.98	18.47	PK
2483.5	41.23	3.13	V	44.36	53.98	9.62	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2467 MHz
 Channel No. 12 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	51.36	3.13	H	54.49	73.98	19.49	PK
2483.5	39.65	3.13	H	42.78	53.98	11.20	AV
2483.5	51.70	3.13	V	54.83	73.98	19.15	PK
2483.5	39.42	3.13	V	42.55	53.98	11.43	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2472 MHz
 Channel No. 13 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	51.87	3.13	H	55.00	73.98	18.98	PK
2483.5	40.71	3.13	H	43.84	53.98	10.14	AV
2483.5	52.09	3.13	V	55.22	73.98	18.76	PK
2483.5	40.34	3.13	V	43.47	53.98	10.51	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	55.29	0.00	2.61	H	57.90	73.98	16.08	PK
2390.0	39.87	0.14	2.61	H	42.62	53.98	11.36	AV
2390.0	53.34	0.00	2.61	V	55.95	73.98	18.03	PK
2390.0	39.41	0.14	2.61	V	42.16	53.98	11.82	AV
2483.5	57.03	0.00	3.13	H	60.16	73.98	13.82	PK
2483.5	40.91	0.14	3.13	H	44.18	53.98	9.80	AV
2483.5	56.35	0.00	3.13	V	59.48	73.98	14.50	PK
2483.5	40.73	0.14	3.13	V	44.00	53.98	9.98	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2417 MHz
 Channel No. 2 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	55.68	0.00	2.61	H	58.29	73.98	15.69	PK
2390.0	39.69	0.14	2.61	H	42.44	53.98	11.54	AV
2390.0	54.78	0.00	2.61	V	57.39	73.98	16.59	PK
2390.0	39.57	0.14	2.61	V	42.32	53.98	11.66	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2457 MHz
 Channel No. 10 Ch,

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	57.84	0.00	3.13	H	60.97	73.98	13.01	PK
2483.5	41.28	0.14	3.13	H	44.55	53.98	9.43	AV
2483.5	59.69	0.00	3.13	V	62.82	73.98	11.16	PK
2483.5	42.46	0.14	3.13	V	45.73	53.98	8.25	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2467 MHz
 Channel No.: 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	64.72	0.00	3.13	H	67.85	73.98	6.13	PK
2483.5	44.08	0.14	3.13	H	47.35	53.98	6.63	AV
2483.5	66.54	0.00	3.13	V	69.67	73.98	4.31	PK
2483.5	44.43	0.14	3.13	V	47.70	53.98	6.28	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2472 MHz
 Channel No.: 13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	63.72	0.00	3.13	H	66.85	73.98	7.13	PK
2483.5	45.13	0.14	3.13	H	48.40	53.98	5.58	AV
2483.5	65.69	0.00	3.13	V	68.82	73.98	5.16	PK
2483.5	45.61	0.14	3.13	V	48.88	53.98	5.10	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	67.72	0.00	2.61	H	70.33	73.98	3.65	PK
2390.0	46.49	0.16	2.61	H	49.26	53.98	4.72	AV
2390.0	66.53	0.00	2.61	V	69.14	73.98	4.84	PK
2390.0	46.21	0.16	2.61	V	48.98	53.98	5.01	AV
2483.5	66.45	0.00	3.13	H	69.58	73.98	4.40	PK
2483.5	45.20	0.16	3.13	H	48.49	53.98	5.49	AV
2483.5	67.02	0.00	3.13	V	70.15	73.98	3.83	PK
2483.5	45.43	0.16	3.13	V	48.72	53.98	5.26	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2417 MHz
 Channel No.: 2 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	64.47	0.00	2.61	H	67.08	73.98	6.90	PK
2390.0	41.93	0.16	2.61	H	44.70	53.98	9.29	AV
2390.0	63.28	0.00	2.61	V	65.89	73.98	8.09	PK
2390.0	41.36	0.16	2.61	V	44.13	53.98	9.86	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2457 MHz
 Channel No.: 10 Ch,

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	61.23	0.00	3.13	H	64.36	73.98	9.62	PK
2483.5	42.94	0.16	3.13	H	46.23	53.98	7.76	AV
2483.5	62.35	0.00	3.13	V	65.48	73.98	8.50	PK
2483.5	43.30	0.16	3.13	V	46.59	53.98	7.40	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2467 MHz
 Channel No.: 12 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	65.54	0.00	3.13	H	68.67	73.98	5.31	PK
2483.5	44.97	0.16	3.13	H	48.26	53.98	5.72	AV
2483.5	66.71	0.00	3.13	V	69.84	73.98	4.14	PK
2483.5	45.20	0.16	3.13	V	48.49	53.98	5.49	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2472 MHz
 Channel No.: 13 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+ C.L-A.G +ATT+ D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	64.26	0.00	3.13	H	67.39	73.98	6.59	PK
2483.5	47.05	0.16	3.13	H	50.34	53.98	3.65	AV
2483.5	65.68	0.00	3.13	V	68.81	73.98	5.17	PK
2483.5	47.40	0.16	3.13	V	50.69	53.98	3.29	AV

■ **Test Plots (Worst case : Z-V)**

Radiated Restricted Band Edges plot – Average Reading (802.11n (HT20)_MCS0 Ch.13)

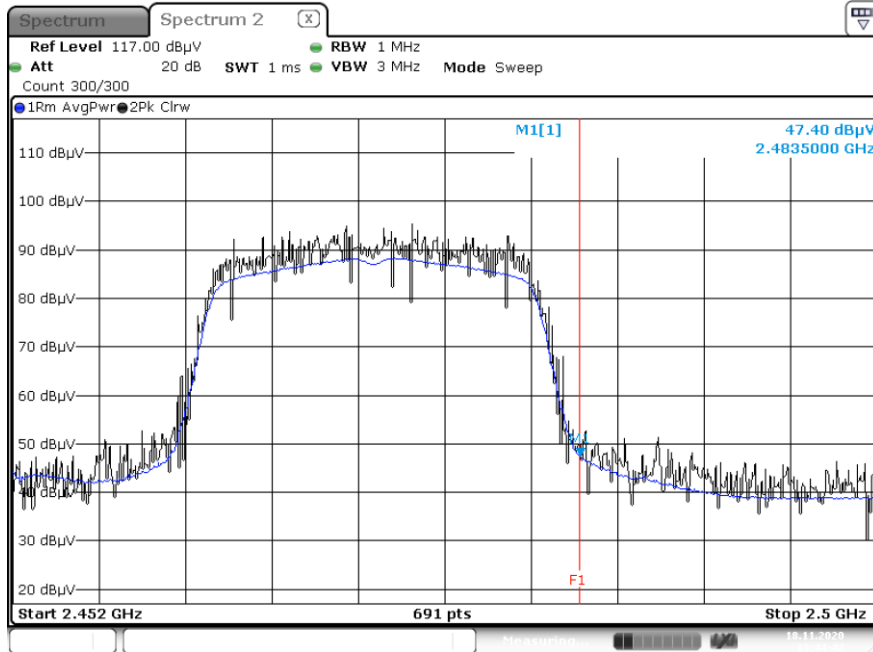

Radiated Restricted Band Edges plot – Peak Reading (802.11n (HT20)_ MCS0 Ch.13)

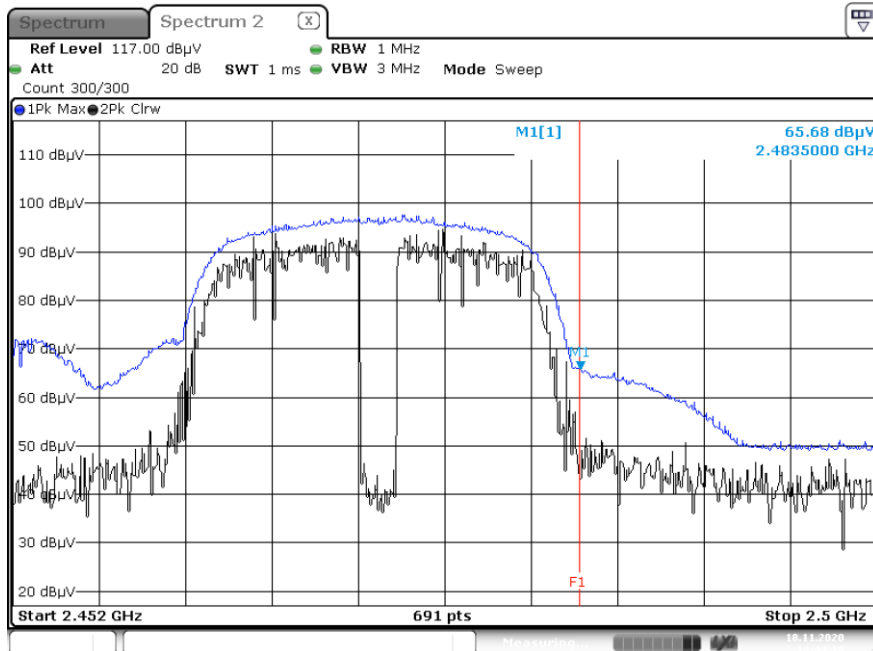

Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

Test


1 / 2

HCT TEST Report

Common Information

EUT: SM-A326B/DS
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN 2.4G MODE_L1

FCC CLASS B_Exten Cable

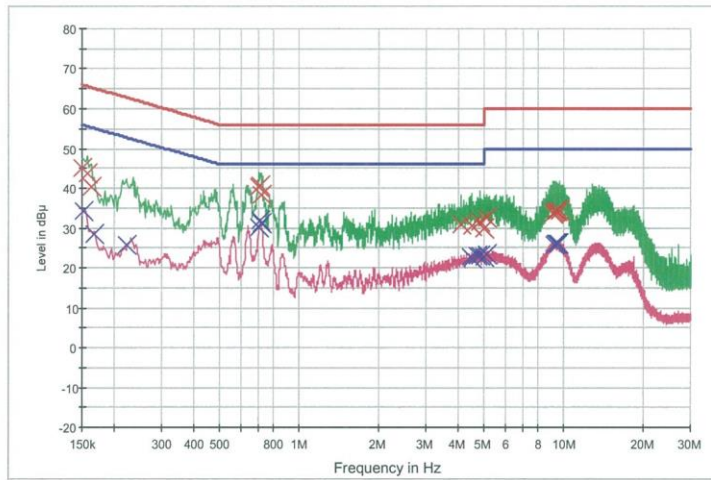

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG X Final Result 1-QPK X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	45.2	9.000	Off	L1	9.8	20.8	66.0
0.158000	43.7	9.000	Off	L1	9.8	21.9	65.6
0.162000	40.4	9.000	Off	L1	9.8	24.9	65.4
0.700000	40.4	9.000	Off	L1	9.8	15.6	56.0
0.706000	40.8	9.000	Off	L1	9.8	15.2	56.0
0.714000	38.4	9.000	Off	L1	9.8	17.6	56.0
4.078000	30.8	9.000	Off	L1	10.0	25.2	56.0
4.488000	30.4	9.000	Off	L1	10.0	25.6	56.0
4.804000	31.4	9.000	Off	L1	10.0	24.6	56.0
4.818000	31.4	9.000	Off	L1	10.0	24.6	56.0
4.984000	29.9	9.000	Off	L1	10.0	26.1	56.0
5.098000	32.5	9.000	Off	L1	10.0	27.5	60.0
9.030000	33.5	9.000	Off	L1	10.2	26.5	60.0
9.140000	33.8	9.000	Off	L1	10.2	26.2	60.0
9.228000	34.2	9.000	Off	L1	10.2	25.8	60.0
9.358000	34.3	9.000	Off	L1	10.2	25.7	60.0
9.568000	34.2	9.000	Off	L1	10.2	25.8	60.0
9.582000	34.2	9.000	Off	L1	10.2	25.8	60.0

2020-11-19

오후 2:36:34

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	34.2	9.000	Off	L1	9.8	21.7	55.9
0.166000	28.6	9.000	Off	L1	9.8	26.5	55.2
0.222000	25.7	9.000	Off	L1	9.8	27.0	52.7
0.700000	30.2	9.000	Off	L1	9.8	15.8	46.0
0.708000	31.8	9.000	Off	L1	9.8	14.2	46.0
0.712000	31.2	9.000	Off	L1	9.8	14.8	46.0
4.398000	22.6	9.000	Off	L1	10.0	23.4	46.0
4.488000	22.3	9.000	Off	L1	10.0	23.7	46.0
4.710000	22.9	9.000	Off	L1	10.0	23.1	46.0
4.804000	23.1	9.000	Off	L1	10.0	22.9	46.0
4.984000	22.7	9.000	Off	L1	10.0	23.3	46.0
5.100000	23.3	9.000	Off	L1	10.0	26.7	50.0
9.140000	25.8	9.000	Off	L1	10.2	24.2	50.0
9.228000	26.0	9.000	Off	L1	10.2	24.0	50.0
9.302000	26.0	9.000	Off	L1	10.2	24.0	50.0
9.316000	26.1	9.000	Off	L1	10.2	23.9	50.0
9.358000	26.0	9.000	Off	L1	10.2	24.0	50.0
9.450000	26.0	9.000	Off	L1	10.2	24.0	50.0

2020-11-19

오후 2:36:34

Conducted Emissions (Line 2)

Test


1 / 2

HCT TEST Report

Common Information

EUT: SM-A326B/DS
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN 2.4G MODE_N

FCC CLASS B_Exten Cable

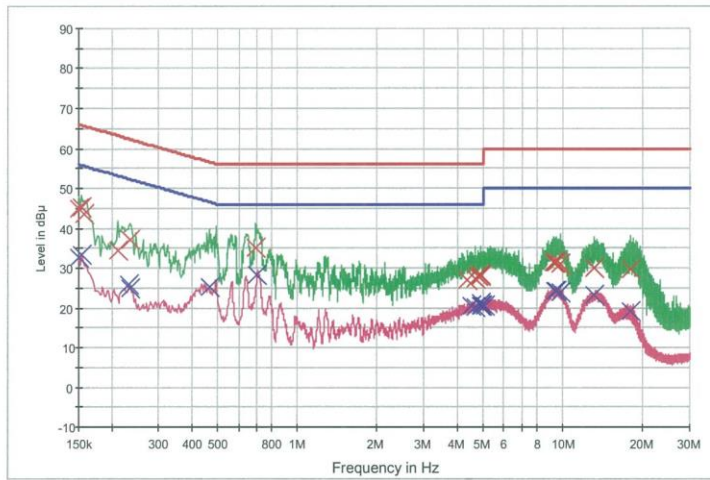

— FCC CLASS B_OP — FCC CLASS B_AV — Preview Result 1-PK+
— Preview Result 2-AVG x Final Result 1-QPK x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	45.1	9.000	Off	N	9.8	20.9	66.0
0.154000	45.1	9.000	Off	N	9.8	20.6	65.8
0.158000	43.5	9.000	Off	N	9.8	22.0	65.6
0.210000	34.4	9.000	Off	N	9.8	28.8	63.2
0.234000	37.1	9.000	Off	N	9.8	25.2	62.3
0.698000	35.2	9.000	Off	N	9.8	20.8	56.0
4.374000	27.0	9.000	Off	N	10.0	29.0	56.0
4.672000	27.3	9.000	Off	N	10.0	28.7	56.0
4.782000	28.1	9.000	Off	N	10.0	27.9	56.0
4.806000	27.9	9.000	Off	N	10.0	28.1	56.0
4.888000	28.1	9.000	Off	N	10.0	27.9	56.0
4.920000	28.2	9.000	Off	N	10.0	27.8	56.0
9.190000	31.3	9.000	Off	N	10.2	28.7	60.0
9.290000	31.3	9.000	Off	N	10.2	28.7	60.0
9.414000	31.4	9.000	Off	N	10.2	28.6	60.0
9.710000	31.0	9.000	Off	N	10.2	29.0	60.0
13.102000	30.1	9.000	Off	N	10.4	29.9	60.0
18.022000	29.5	9.000	Off	N	10.6	30.5	60.0

2020-11-19

오후 2:28:07

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	32.8	9.000	Off	N	9.8	23.2	56.0
0.154000	33.5	9.000	Off	N	9.8	22.3	55.8
0.230000	25.8	9.000	Off	N	9.8	26.6	52.4
0.234000	25.0	9.000	Off	N	9.8	27.3	52.3
0.464000	25.2	9.000	Off	N	9.8	21.4	46.6
0.706000	28.4	9.000	Off	N	9.8	17.6	46.0
4.536000	20.4	9.000	Off	N	10.0	25.6	46.0
4.672000	20.3	9.000	Off	N	10.0	25.7	46.0
4.888000	21.0	9.000	Off	N	10.0	25.0	46.0
4.920000	20.6	9.000	Off	N	10.0	25.4	46.0
4.942000	20.6	9.000	Off	N	10.0	25.4	46.0
5.044000	20.7	9.000	Off	N	10.0	29.3	50.0
9.290000	24.1	9.000	Off	N	10.2	25.9	50.0
9.414000	24.3	9.000	Off	N	10.2	25.7	50.0
9.710000	23.9	9.000	Off	N	10.2	26.1	50.0
9.718000	23.9	9.000	Off	N	10.2	26.1	50.0
13.102000	23.2	9.000	Off	N	10.4	26.8	50.0
18.022000	19.2	9.000	Off	N	10.6	30.8	50.0

2020-11-19

오후 2:28:07

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/10/2020	Annual	100584
ESPEC	SU-642 / Temperature Chamber	07/30/2020	Annual	0093000718
Agilent	N9020A / Signal Analyzer	05/11/2020	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	03/23/2020	Annual	MY49432108
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45100523
Agilent	N1921A / Power Sensor	06/08/2020	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/10/2020	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	02/14/2020	Annual	10545
HP	E3632A / DC Power Supply	09/16/2020	Annual	MY40004427
HP	8493C / Attenuator(10 dB)(DC-26.5 GHz)	06/26/2020	Annual	07560
HP	8493C / Attenuator(10 dB)(DC-26.5 GHz)	07/03/2020	Annual	08285
Rohde & Schwarz	18N-20dB / Attenuator(20 dB)	03/23/2020	Annual	8
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
TNM system	FBSM-01B / Amp & Filter Bank Switch Controller	N/A	N/A	N/A
Schwarzbeck	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/02/2019	Biennial	01039
Schwarzbeck	BBHA 9120D / Horn Antenna	06/28/2019	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/29/2019	Biennial	BBHA9170342
Rohde & Schwarz	FSP(10 Hz ~ 40 GHz) / Spectrum Analyzer	05/13/2020	Annual	101055
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/21/2020	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TNM system	FBSM-05B / HPF(3~18GHz) + LNA1(1~18GHz)	01/21/2020	Annual	F6
TNM system	FBSM-05B / ATT(10dB) + LNA1(1~18GHz)	01/21/2020	Annual	None
TNM system	FBSM-05B / ATT(3dB) + LNA1(1~18GHz)	01/21/2020	Annual	None
TNM system	FBSM-05B / LNA1(1~18GHz)	01/21/2020	Annual	25540
TNM system	FBSM-05B / HPF(7~18GHz) + LNA2(6~18GHz)	01/21/2020	Annual	28550
TNM system	FBSM-05B / Thru(30MHz ~ 18GHz)	01/21/2020	Annual	None
Weinschel	2-3 / Attenuator (3 dB)	10/07/2020	Annual	BR0617
H+S	5910-N-50-010 / Attenuator(10 dB)	10/28/2020	Annual	None

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2012-FC006-P