

EMI TEST REPORT

FCC CERTIFICATION

Applicant:

SAMSUNG Electronics Co., Ltd.
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Korea

Date of Issue: December 16, 2020**Test Report No. HCT-EM-2012-FC004-R1****Test Site: HCT CO., LTD.****FCC ID :****A3LSMA326J**

Rule Part(s) / Standard(s) : 47 CFR PART 15 Subpart B Class B
ANSI C63.4-2014

Product Name : Mobile Phone

Model Name : SCG08

Date of Test : December 09, 2020 to December 14, 2020

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denial the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By

Na-Eun Song
Test Engineer
EMC Team
Certification Division

Reviewed

Gu-Cheol Yoon
Technical Manager
EMC Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



REVISION HISTORY

The revision history for this document is shown in table.

Report No.	Issue Date	Information About Changes
0	December 14, 2020	Initial Release
1	December 16, 2020	Added the frequency in clause 4

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation), which signed the ILAC-MRA.

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Description of EUT	4
1.2 Tested System Details	4
1.3 Cable Description.....	5
1.4 Noise Suppression Parts on Cable. (I/O Cable)	5
1.5 Test Facility	6
1.6 Calibration of Measuring Instrument	6
1.7 Measurement Uncertainty	6
2. LIST OF TEST EQUIPMENT	7
3. DESCRIPTION OF TEST.....	8
3.1 Measurement of Conducted Emission.....	8
3.2 Measurement of Radiated Emission.....	9
4. PRELIMINARY TEST.....	11
4.1 Conducted Emission.....	11
4.2 Rediated Emission.....	11
5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY.....	12
5.1 Conducted Emission.....	12
5.2 Radiated Emission.....	13
6. CONCLUSION	19
7. APPENDIX A. TEST SETUP PHOTO	20



1. GENERAL INFORMATION

1.1 Description of EUT

FCC ID	A3LSMA326J	
Model Name	SCG08	
Product Name	Mobile Phone	
Frequency Band	GSM 850/1900, WCDMA B5, LTE B12/41, BT, WLAN a/b/g/n/ac(SISO), NFC	
Power Voltage	Travel adaptor	Input: AC (100 to 240) V, (50 to 60) Hz, 0.5 A, 27-35 VA Output: DC 5.0 V, 2.0 A or DC 9.0 V, 1.67 A
	Battery	Low:3.65 V, Normal: 3.86 V, High: 4.38 V

1.2 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Serial Number	Manufacturer
EUT	SCG08	-	SAMSUNG
TA	EP-TA200	-	DONGYANG E&P
Data Cable	EP-DR140AWE	-	RF-TECH
Earphone	EHS64AVFWE	-	CRESYN
Micro SD Card	-	-	SAMSUNG



1.3 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	USB Type C	Y	N/A	(P) 0.8
	Earphone	N/A	N	(D) 1.3

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.4 Noise Suppression Parts on Cable. (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	USB Type C	N	N/A	Y	Both End
	Earphone	N	N/A	Y	EUT End



1.5 Test Facility

Test site is located at 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014. The Normalized site attenuations (30 MHz to 1 GHz) and Site validation (1 GHz to 18 GHz) were performed in accordance with the standard in ANSI C63.4-2014. Our laboratories are accredited and designated in accordance with the provisions of Radio Waves ACT and International Standard ISO/IEC 17025:2017. (National Radio Research Agency, Designation No. KR0032)

1.6 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5:2017

1.7 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Emission (0.15 MHz to 30 MHz)	1.58 dB
Radiated Emissions (30 MHz to 1 GHz)	4.86 dB
Radiated Emissions (1 GHz to 18 GHz)	4.58 dB
Radiated Emissions (18 GHz to 40 GHz)	5.54 dB



2. LIST OF TEST EQUIPMENT

<u>Type</u>	<u>Model Name</u>	<u>Manufacturer</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>Calibration Date</u>
<u>Conducted Emission (Not applicable)</u>					
<input type="checkbox"/> EMI Test Receiver	ESCI	Rohde & Schwarz	100584	1 year	06.10.2020
<input type="checkbox"/> LISN	ENV216	Rohde & Schwarz	102245	1 year	09.04.2020
<input type="checkbox"/> LISN	ENV216	Rohde & Schwarz	100073	1 year	04.27.2020
<input type="checkbox"/> Radio communication analyzer	MT8820C	ANRITSU	6201138643	1 year	08.19.2020
<input type="checkbox"/> Antenna (for Communication)	USLP9142	Schwarzbeck	USLP 9142-200	-	-
<input type="checkbox"/> Software	EMC32	Rohde & Schwarz	-	-	-
<u>Radiated Emission</u>					
-For measurement below 1 GHz					
<input checked="" type="checkbox"/> EMI Test Receiver	ESU40	Rohde & Schwarz	100524	1 year	05.12.2020
<input checked="" type="checkbox"/> Bi-Log Antenna	VULB 9168	Schwarzbeck	255	2 year	03.26.2019
<input checked="" type="checkbox"/> Antenna master	MA4640-XP-ET	INNCO Systems	-	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	CO3000	INNCO Systems	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/> Turn Table	1060	INNCO Systems	-	N/A	-
<input checked="" type="checkbox"/> Turn Table controller	CO2000	INNCO Systems	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/> Radio communication analyzer	MT8820C	ANRITSU	6201138643	1 year	08.19.2020
<input checked="" type="checkbox"/> Antenna (for Communication)	USLP9142	Schwarzbeck	USLP 9142-200	-	-
<input type="checkbox"/> UXM 5G Wireless Test Platform	E7515B	KEYSIGHT	MY58300756	1 year	01.07.2020
<input type="checkbox"/> Antenna (for Communication)	USLP9142	Schwarzbeck	USLP 9142-201	-	-
<input checked="" type="checkbox"/> Software	EMC32	Rohde & Schwarz	-	-	-
-For measurement above 1 GHz					
<input checked="" type="checkbox"/> EMI Test Receiver	ESU40	Rohde & Schwarz	100524	1 year	05.12.2020
<input checked="" type="checkbox"/> Antenna master	MA4640-XP-ET	INNCO Systems	-	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	CO3000	INNCO Systems	CO3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/> Turn Table	1060	INNCO Systems	-	N/A	-
<input checked="" type="checkbox"/> Turn Table controller	CO2000	INNCO Systems	CO2000/095/ 7590304/L	N/A	-
<input checked="" type="checkbox"/> Low Noise Amplifier	TK-PA18H	TESTEK	170034-L	1 year	03.03.2020
<input checked="" type="checkbox"/> Low Noise Amplifier	TK-PA1840H	TESTEK	170030-L	1 year	02.13.2020
<input checked="" type="checkbox"/> Horn Antenna	BBHA 9120D	Schwarzbeck	01836	1 year	07.23.2020
<input checked="" type="checkbox"/> Horn Antenna	BBHA 9170	Schwarzbeck	BBHA 9170#786	1 year	11.18.2020
<input checked="" type="checkbox"/> Radio communication analyzer	MT8820C	ANRITSU	6201138643	1 year	08.19.2020
<input checked="" type="checkbox"/> Antenna (for Communication)	USLP9142	Schwarzbeck	USLP 9142-200	-	-
<input type="checkbox"/> UXM 5G Wireless Test Platform	E7515B	KEYSIGHT	MY58300756	1 year	01.07.2020
<input type="checkbox"/> Antenna (for Communication)	USLP9142	Schwarzbeck	USLP 9142-201	-	-
<input checked="" type="checkbox"/> Software	EMC32	Rohde & Schwarz	-	-	-



3. DESCRIPTION OF TEST

3.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

[Conducted Emission Limits]

Frequency (MHz)	Resolution Bandwidth (kHz)	Quasi-Peak (dB(μV))	Average (dB(μV))
0.15 to 0.5	9	66 to 56*	56 to 46*
0.5 to 5	9	56	46
5 to 30	9	60	50

**Decreases with the logarithm of the frequency.*



3.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.(1 GHz to 40 GHz)

[Radiated Emission Limits]

Frequency (MHz)	Antenna Distance (m)	Field Strength ($\mu\text{V}/\text{m}$)	Quasi-Peak ($\text{dB}(\mu\text{V}/\text{m})$)
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Peak ($\text{dB}(\mu\text{V}/\text{m})$)	Average ($\text{dB}(\mu\text{V}/\text{m})$)
Above 1 000	3	74	54




3.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

3.3 Configuration of Tested System

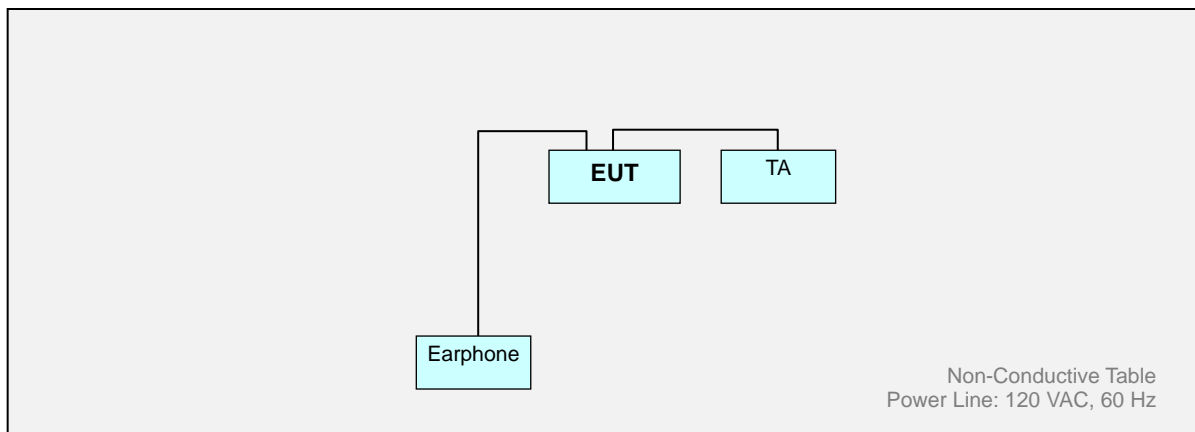



4. PRELIMINARY TEST

During preliminary tests, the following operating mode was investigated.

Receiver mode(GSM 850 Low/Middle/High ch Idle)
Receiver mode(WCDMA B5 Low/Middle/High ch Idle)
Receiver mode(LTE B12 Low/Middle/High ch Idle)

NOTE.

1. The worst band is tested.
2. GSM 850 Rx Frequency : 869 MHz to 894 MHz
3. WCDMA B5 Rx Frequency : 869 MHz to 894 MHz
4. LTE B12 Rx Frequency : 729 MHz to 746 MHz

4.1 Conducted Emission (Not applicable)

It was tested the following operating mode, after connecting all peripheral devices.

Operating Mode: Not Applicable

NOTE.

Compliance with Part 15B requirement for the conducted emissions is covered by SAMSUNG test report.

4.2 Radiated Emission

It was tested the following operating mode, after connecting all peripheral devices.

Operating Mode:

For measurement below 1 GHz

LTE B12 Low ch Idle
LTE B12 Middle ch Idle*
LTE B12 High ch Idle
WCDMA B5 Low ch Idle
WCDMA B5 Middle ch Idle*
WCDMA B5 High ch Idle

For measurement above 1 GHz

LTE B12 Middle ch Idle*

NOTE.

1. Three orientations have been investigated and the worst case orientation (x-axis: The display of EUT placed on the table is facing upwards) is reported.
2. The worst case of operating mode is reported. [*].



5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

5.1 Conducted Emission(Not applicable)

The test results of conducted emission at mains ports provide the following information:

Rule Part / Standard	47 CFR PART 15 Subpart B Class B ANSI C63.4-2014
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Operating Mode	Not applicable
Kind of Test Site	Shielded Room
Temperature	- °C
Relative Humidity	- %
Test Date	-



5.2 Radiated Emission

5.2.1 For Measurement Below 1 GHz

The test results of radiated emission provide the following information:


Applicable Standards	47 CFR PART 15 Subpart B Class B ANSI C63.4-2014
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Worst Case of Operating Mode	LTE B12 Middle ch Idle WCDMA B5 Middle ch Idle
Kind of Test Site	3 m semi anechoic chamber
Temperature	21.3 / 23.1 °C
Relative Humidity	45.4 / 46.1 %
Test Date	December 10 / December 14, 2020

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak



Figure 1: Radiated Emission (30 MHz to 1 GHz), LTE B12 Middle ch Idle

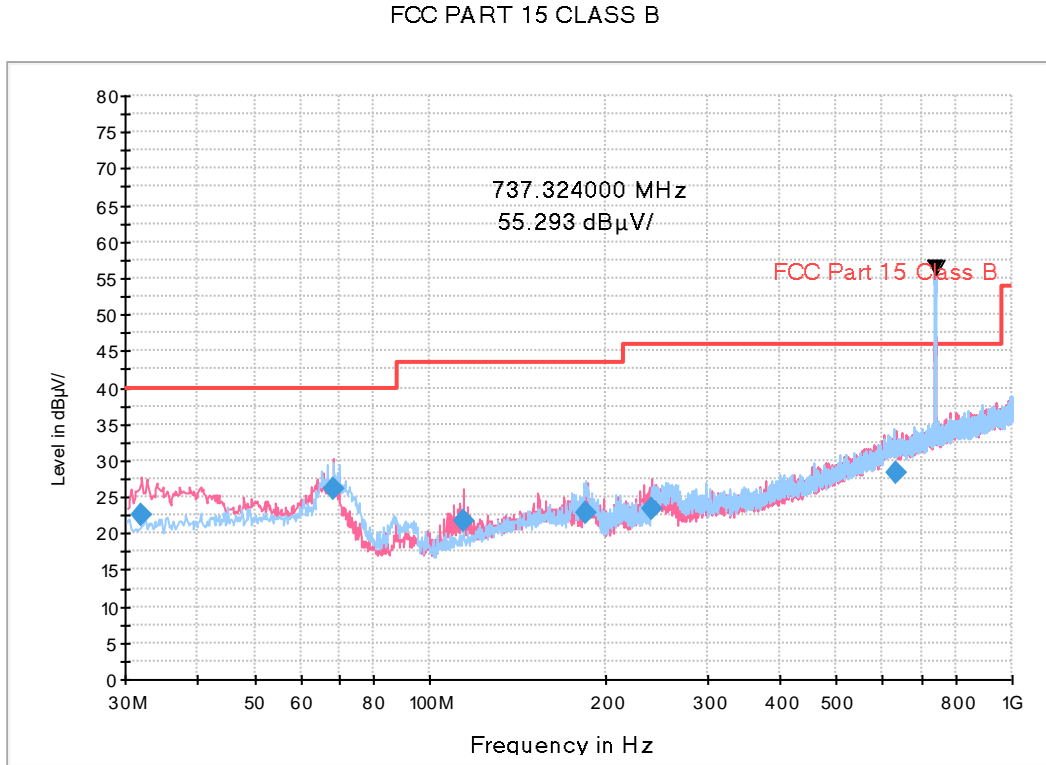


NOTE. 1. Carrier Frequency: RX 737.324 MHz
 2. These are signals for fundamental frequency from the base station

Frequency (MHz)	Quasi Peak (dBµV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
32.022560	22.6	100.0	V	183.0	18.4	17.4	40.0
68.458600	26.0	100.0	V	260.0	18.2	14.0	40.0
114.528000	21.8	125.0	V	46.0	16.8	21.7	43.5
185.963000	22.9	100.0	V	138.0	17.8	20.6	43.5
241.051920	23.5	100.0	V	70.0	18.3	22.5	46.0
629.536880	28.4	292.8	V	7.0	27.8	17.6	46.0



Figure 2: Radiated Emission (30 MHz to 1 GHz), WCDMA B5 Middle ch Idle

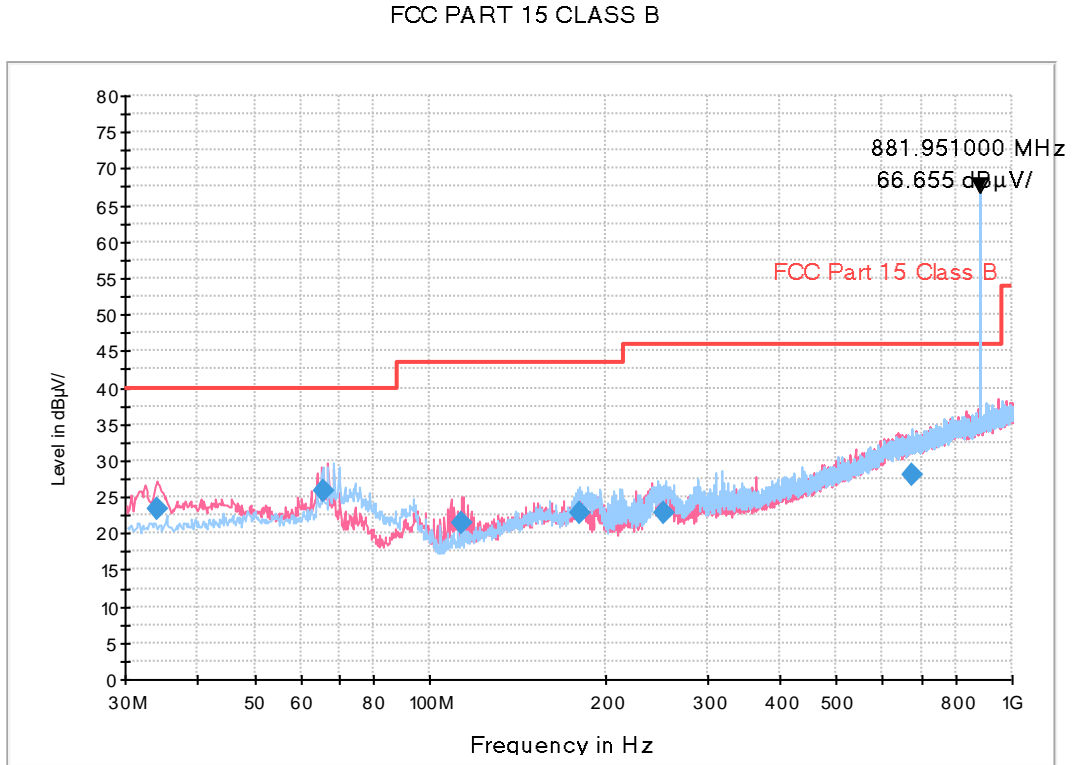

NOTE. 1. Carrier Frequency: RX 881.951 MHz
 2. These are signals for fundamental frequency from the base station

Frequency (MHz)	Quasi Peak (dBµV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
34.035600	23.3	100.0	V	74.0	18.6	16.7	40.0
65.535080	25.8	117.9	V	0.0	18.6	14.2	40.0
113.083440	21.5	117.9	V	84.0	16.6	22.0	43.5
180.623680	22.9	221.8	H	16.0	18.2	20.6	43.5
251.560760	22.8	100.0	H	53.0	18.7	23.2	46.0
672.076200	28.0	174.9	H	355.0	28.3	18.0	46.0



5.2.2 For Measurement Above 1 GHz

The test results of radiated emission provide the following information:

Applicable Standards	47 CFR PART 15 Subpart B Class B ANSI C63.4-2014
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Frequency	5 825 MHz
Tested Frequency Range	1 GHz to 30 GHz
Worst Case of Operating Mode	LTE B12 Middle ch Idle
Kind of Test Site	3 m semi anechoic chamber
Temperature	22.4 °C
Relative Humidity	44.8 %
Test Date	December 09, 2020



- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage



Figure 3: Radiated Emission (1 GHz to 30 GHz), LTE B12 Middle ch Idle

Tilting of GHz FCC PART 15 CLASS B

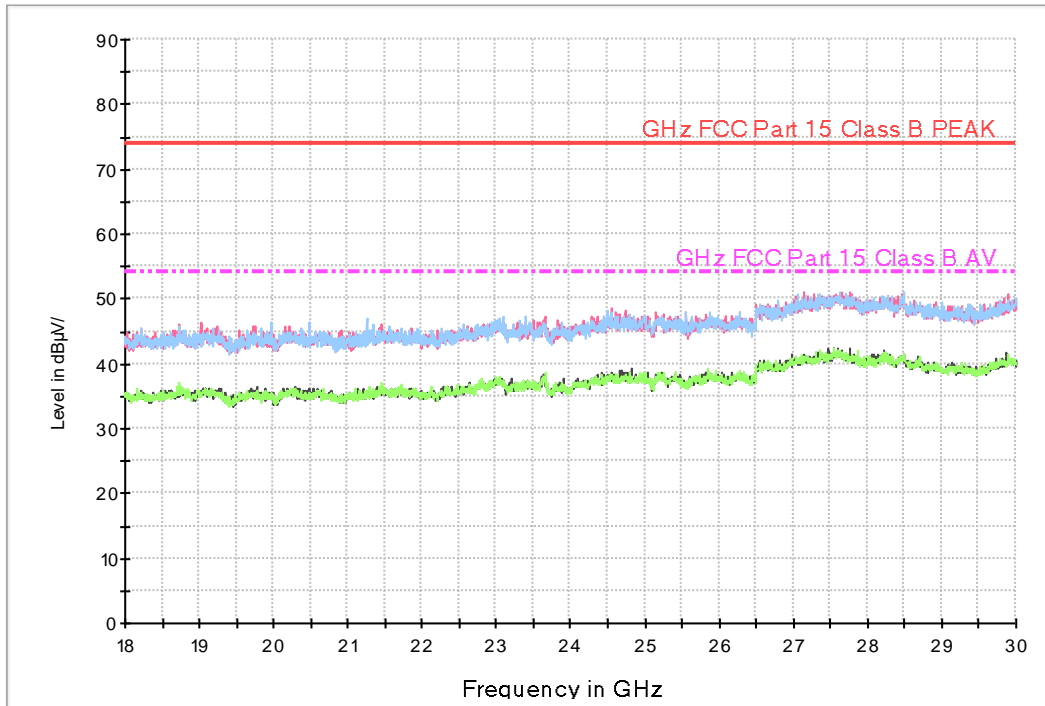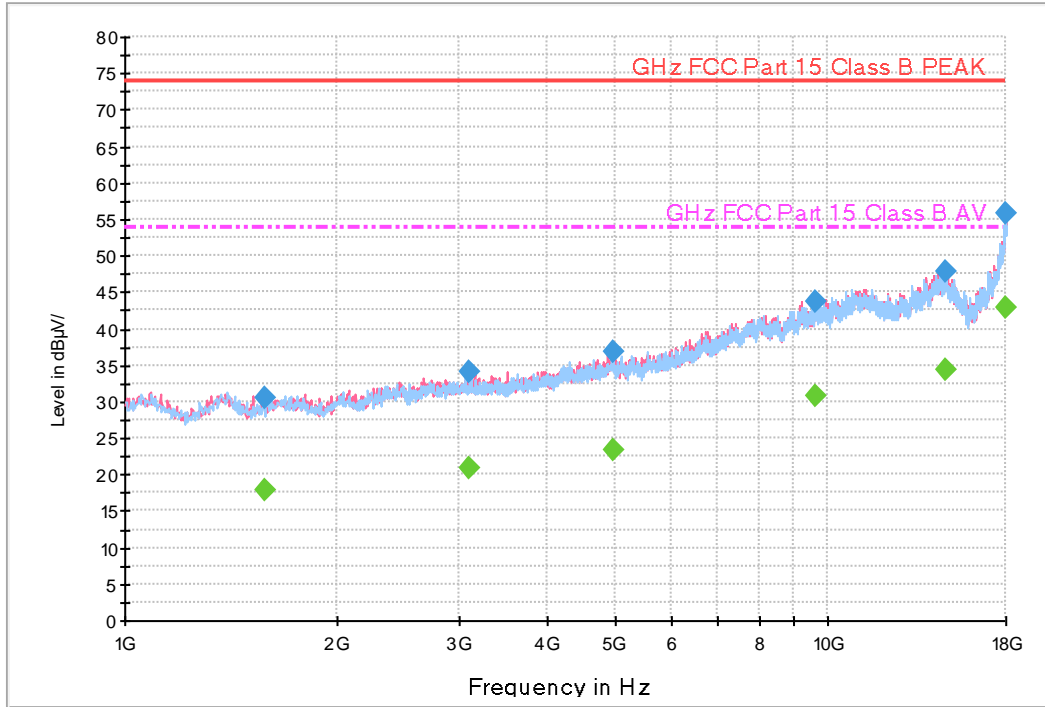



Frequency (MHz)	Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
1579.635000	30.5	199.4	V	106.0	-27.4	43.5	74.0
3105.010000	34.2	199.5	V	213.0	-22.4	39.8	74.0
4958.985000	36.8	149.5	V	310.0	-17.8	37.2	74.0
9644.990000	43.8	150.0	V	90.0	-9.2	30.2	74.0
14735.115000	47.8	150.0	H	194.0	-0.7	26.2	74.0
17979.530000	55.9	261.6	H	267.0	9.3	18.1	74.0

Frequency (MHz)	CAverage (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
1579.635000	17.8	199.4	V	106.0	-27.4	36.2	54.0
3105.010000	20.8	199.5	V	213.0	-22.4	33.2	54.0
4958.985000	23.4	149.5	V	310.0	-17.8	30.6	54.0
9644.990000	30.7	150.0	V	90.0	-9.2	23.3	54.0
14735.115000	34.3	150.0	H	194.0	-0.7	19.7	54.0
17979.530000	43.0	261.6	H	267.0	9.3	11.0	54.0



6. CONCLUSION

The data collected shows that the **Product Name: Mobile Phone and Model Name: SCG08** complies with §15.107 and §15.109 of the FCC rules.



7. APPENDIX A. TEST SETUP PHOTO

Please refer to EMI Test Setup Photo and test setup photo file no. as follows;

Rev. No.	Issue Date	File No.
0	December 14, 2020	HCT-EM-2012-FC004-P

End of report