

Appendix B. – SAR Test Plots

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.8 °C
 Ambient Temperature: 22.0 °C
 Test Date: 01/06/2021
 Plot No.: 1

DUT: SM-A326U; Type: Bar;


Communication System: UID 0, CDMA BC10 (FCC) (0); Frequency: 820 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 820 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.919$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.96, 6.96, 6.96) @ 820 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

CDMA BC10 Head Right Touch CDMA S055 RC3 560ch/Area Scan (8x14x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.217 W/kg

CDMA BC10 Head Right Touch CDMA S055 RC3 560ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid:
 $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.090 V/m; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 0.216 W/kg
SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.161 W/kg
 Maximum value of SAR (measured) = 0.210 W/kg

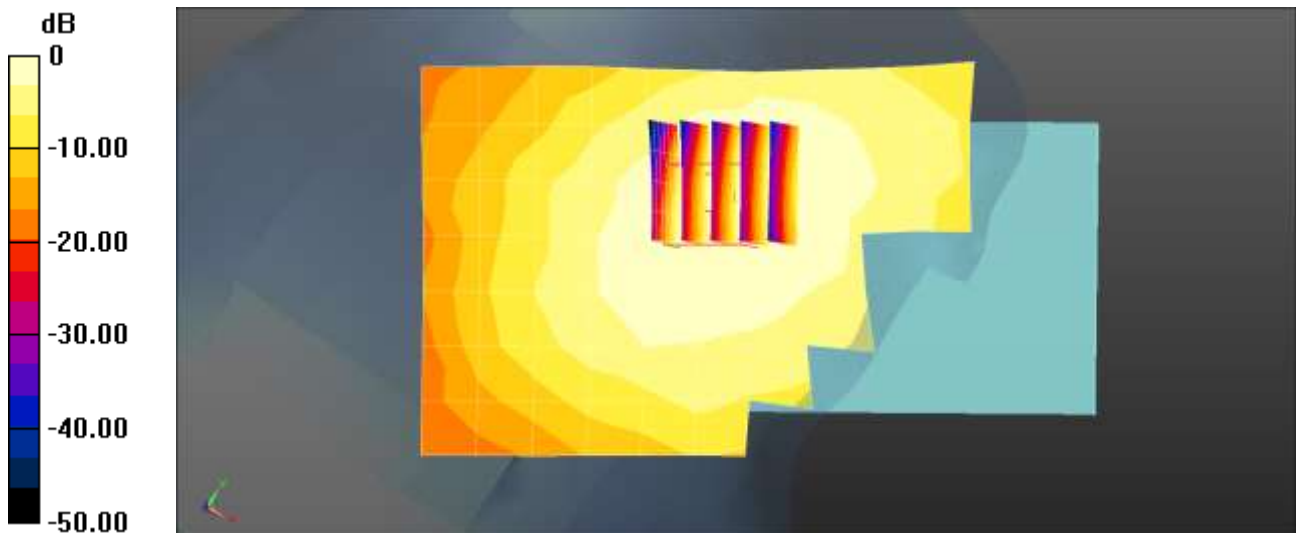

$0 \text{ dB} = 0.217 \text{ W/kg} = -6.63 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.9 °C
Ambient Temperature: 22.0 °C
Test Date: 01/07/2021
Plot No.: 2

DUT: SM-A326U; Type: Bar;


Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.71$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.96, 6.96, 6.96) @ 836.52 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

CDMA BC0 Head Right Touch EVDO Rev.A 384ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.127 W/kg

CDMA BC0 Head Right Touch EVDO Rev.A 384ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.569 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 0.124 W/kg
SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.092 W/kg
Maximum value of SAR (measured) = 0.120 W/kg

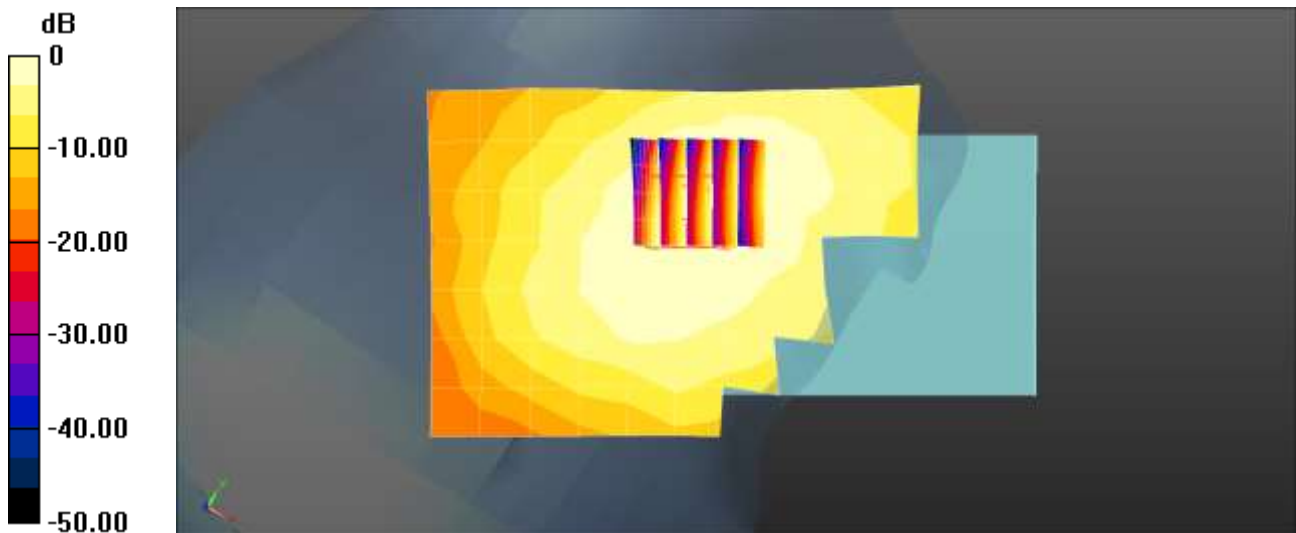

0 dB = 0.127 W/kg = -8.95 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.3 °C
 Ambient Temperature: 20.4 °C
 Test Date: 12/31/2020
 Plot No.: 3
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, CDMA BC1(1900MHz) (0); Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.418 \text{ S/m}$; $\epsilon_r = 39.343$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(8.78, 8.78, 8.78) @ 1880 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

CDMA BC1 Head Left Touch SO55 RC3 600ch/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.247 W/kg

CDMA BC1 Head Left Touch SO55 RC3 600ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.226 V/m; Power Drift = -0.18 dB
 Peak SAR (extrapolated) = 0.307 W/kg
SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.122 W/kg
 Maximum value of SAR (measured) = 0.262 W/kg

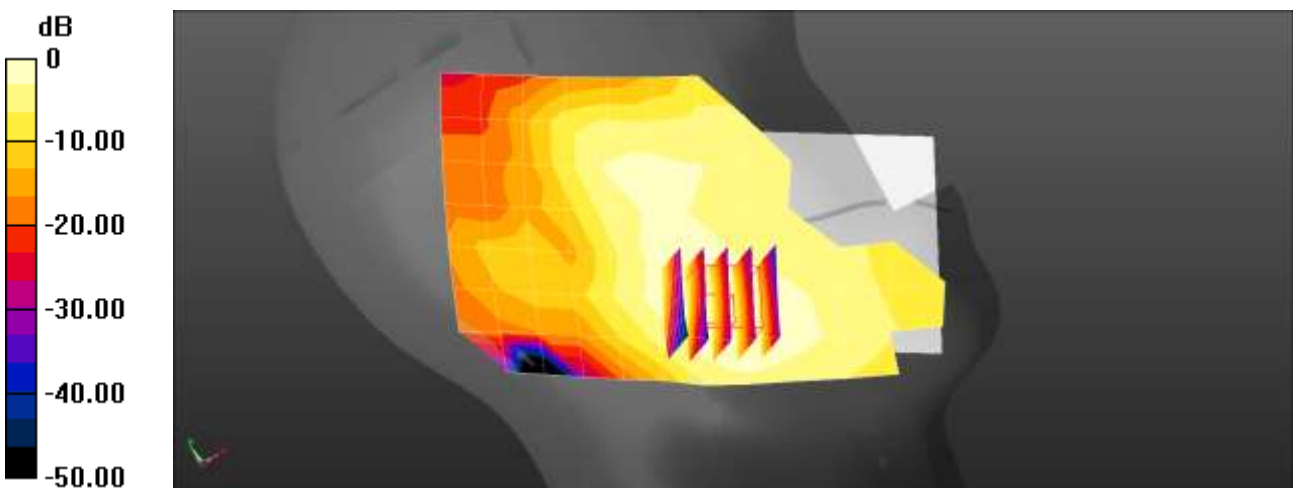

$0 \text{ dB} = 0.247 \text{ W/kg} = -6.07 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 18.9 °C
Ambient Temperature: 19.1 °C
Test Date: 01/04/2021
Plot No.: 4

DUT: SM-A326U; Type: Bar;


Communication System: UID 0, GSM850 GPRS 4TX (0); Frequency: 836.6 MHz;Duty Cycle: 1:2.07491
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.768$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.61, 9.61, 9.61) @ 836.6 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4)

GSM 850 Head Right Touch 4Tx 190ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.444 W/kg

GSM 850 Head Right Touch 4Tx 190ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.119 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 0.497 W/kg
SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.279 W/kg
Smallest distance from peaks to all points 3 dB below = 22 mm
Maximum value of SAR (measured) = 0.458 W/kg

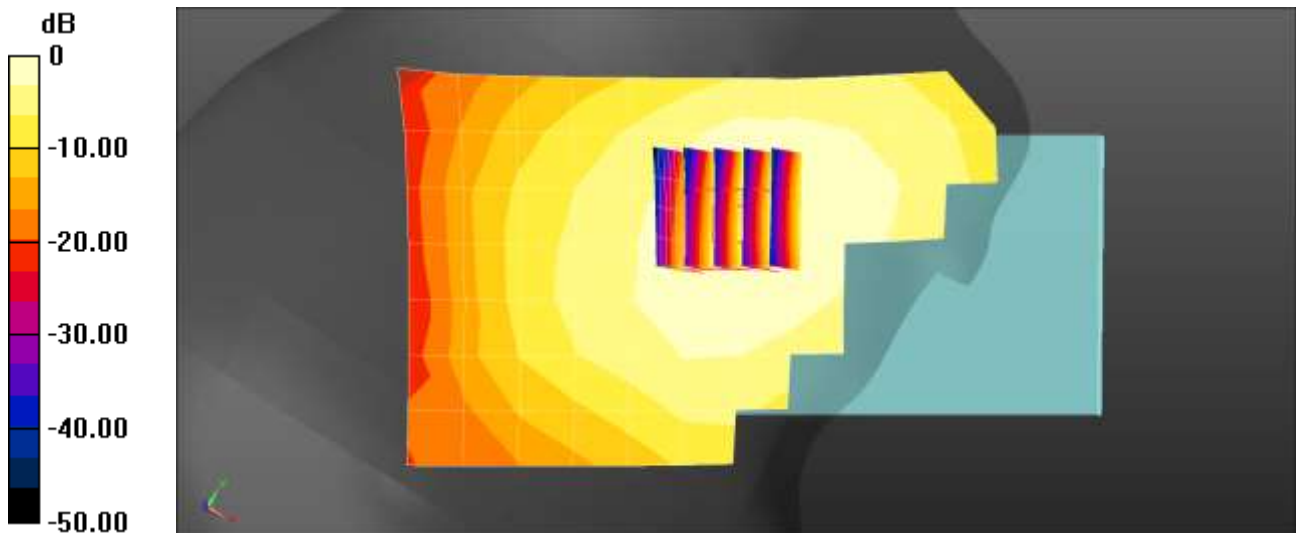

$$0 \text{ dB} = 0.444 \text{ W/kg} = -3.52 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.9 °C
Ambient Temperature: 22.0 °C
Test Date: 01/04/2021
Plot No.: 5

DUT: SM-A326U; Type: Bar;


Communication System: UID 0, GSM 1900 4TX (0); Frequency: 1880 MHz;Duty Cycle: 1:2.07491
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 39.221$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.63, 5.63, 5.63) @ 1880 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

GSM1900 Head Left Touch 4Tx 190ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.137 W/kg

GSM1900 Head Left Touch 4Tx 190ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.945 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.152 W/kg
SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.084 W/kg
Smallest distance from peaks to all points 3 dB below = 17.6 mm
Maximum value of SAR (measured) = 0.136 W/kg

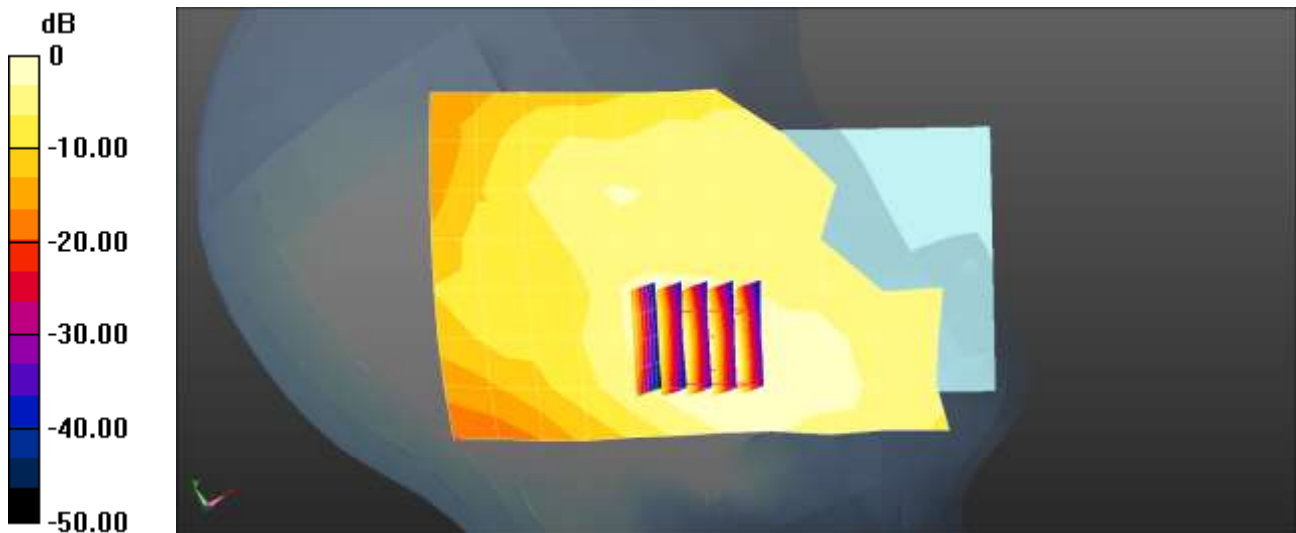

$$0 \text{ dB} = 0.137 \text{ W/kg} = -8.64 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 22.0 °C
Ambient Temperature: 22.2 °C
Test Date: 12/31/2020
Plot No.: 6
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, WCDMA850 (0); Frequency: 826.4 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 42.845$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.61, 9.61, 9.61) @ 826.4 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4)

WCDMA Band 5 Head Right Touch 4132ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.315 W/kg

WCDMA Band 5 Head Right Touch 4132ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.261 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.365 W/kg
SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.203 W/kg
Smallest distance from peaks to all points 3 dB below = 22.8 mm
Maximum value of SAR (measured) = 0.329 W/kg

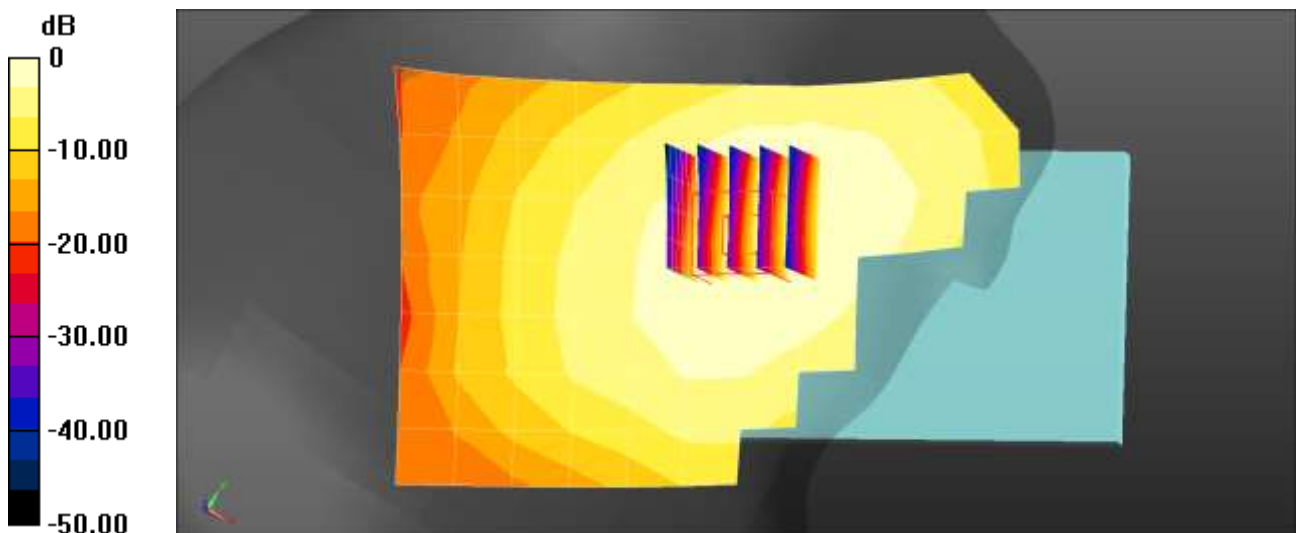

$$0 \text{ dB} = 0.315 \text{ W/kg} = -5.02 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.9 °C
Ambient Temperature: 22.0 °C
Test Date: 01/27/2021
Plot No.: 7
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.011$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(8.62, 8.62, 8.62) @ 1732.4 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

WCDMA4 Head Right Touch 1412ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.245 W/kg

WCDMA4 Head Right Touch 1412ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.848 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.309 W/kg
SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.134 W/kg
Maximum value of SAR (measured) = 0.261 W/kg

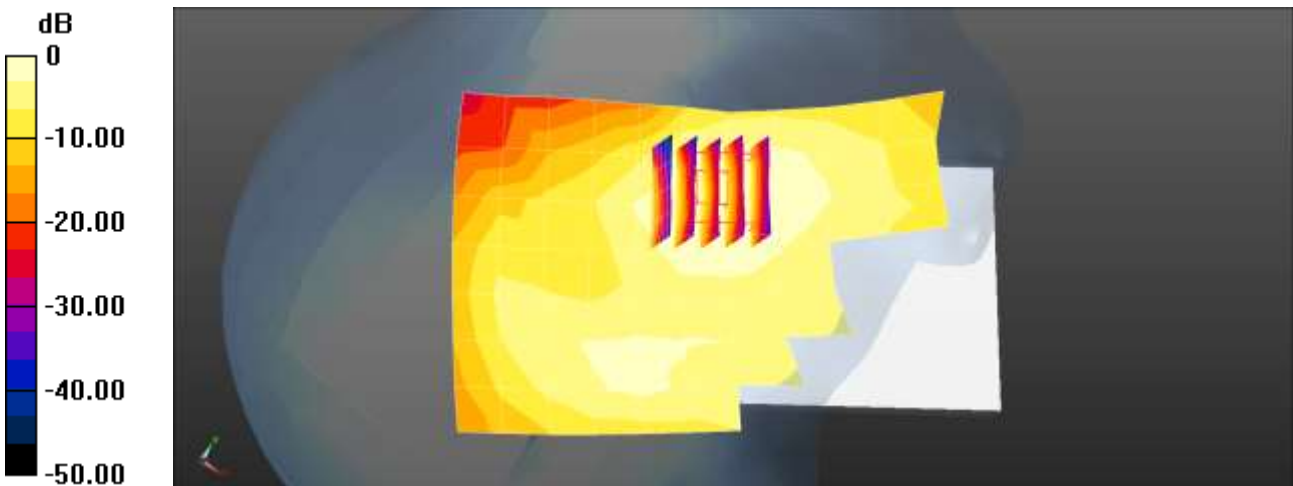

$$0 \text{ dB} = 0.245 \text{ W/kg} = -6.12 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 20.9 °C
Ambient Temperature: 21.0 °C
Test Date: 01/05/2021
Plot No.: 8
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.433$ S/m; $\epsilon_r = 39.716$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.63, 5.63, 5.63) @ 1880 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

WCDMA2 Head Left Touch 9400ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.201 W/kg

WCDMA2 Head Left Touch 9400ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.075 V/m; Power Drift = 0.16 dB
Peak SAR (extrapolated) = 0.219 W/kg
SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.125 W/kg
Maximum value of SAR (measured) = 0.199 W/kg



$0 \text{ dB} = 0.201 \text{ W/kg} = -6.96 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: 02/04/2021
Plot No.: 9
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band7 (0); Frequency: 2560 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 39.932$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2560 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 7 Head Right Tilt QPSK 20MHz 1RB 49offset 21350ch/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.668 W/kg

LTE Band 7 Head Right Tilt QPSK 20MHz 1RB 49offset 21350ch/Zoom Scan (7x7x7)/Cube 0:
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 8.345 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.949 W/kg
SAR(1 g) = 0.459 W/kg; SAR(10 g) = 0.218 W/kg
Maximum value of SAR (measured) = 0.764 W/kg

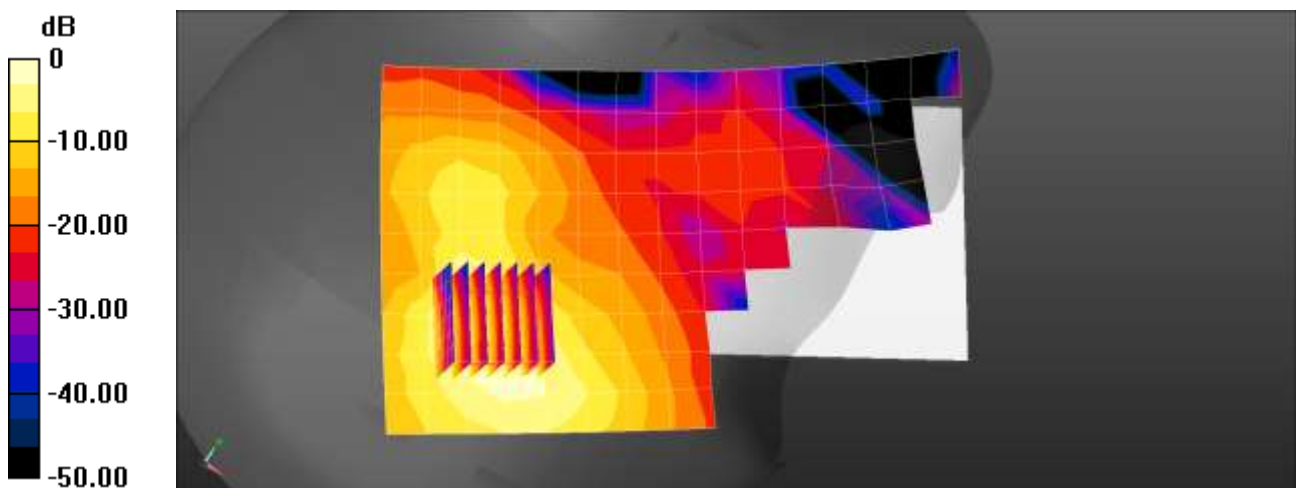

0 dB = 0.668 W/kg = -1.75 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.4 °C
 Ambient Temperature: 20.5 °C
 Test Date: 01/12/2021
 Plot No.: 10
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.904 \text{ S/m}$; $\epsilon_r = 42.867$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4);

LTE Band 12 Head Right Touch QPSK 10MHz 1RB 0offset 23095ch/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.322 W/kg

LTE Band 12 Head Right Touch QPSK 10MHz 1RB 0offset 23095ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.059 V/m; Power Drift = 0.18 dB
 Peak SAR (extrapolated) = 0.300 W/kg
SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.247 W/kg
 Maximum value of SAR (measured) = 0.300 W/kg

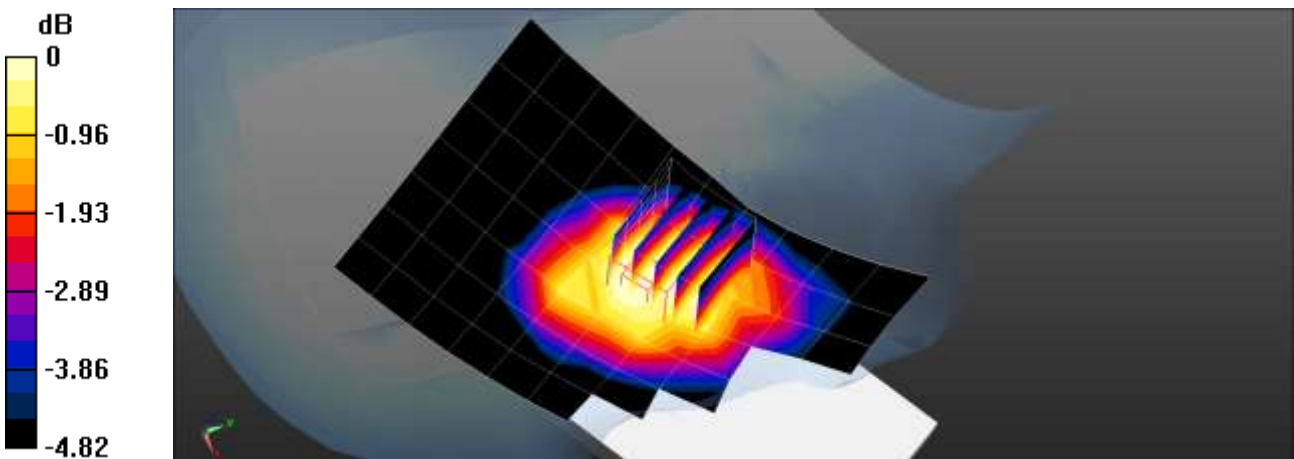

$0 \text{ dB} = 0.300 \text{ W/kg} = -5.23 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 20.9 °C
Ambient Temperature: 21.0 °C
Test Date: 01/13/2021
Plot No.: 11
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 782$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 41.914$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(7.22, 7.22, 7.22) @ 782 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 13 Head Right Touch QPSK 10MHz 1RB 0offset 23230ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.386 W/kg

LTE Band 13 Head Right Touch QPSK 10MHz 1RB 0offset 23230ch/Zoom Scan (5x5x7)/Cube 0:
Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.420 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.346 W/kg
SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.277 W/kg
Maximum value of SAR (measured) = 0.346 W/kg

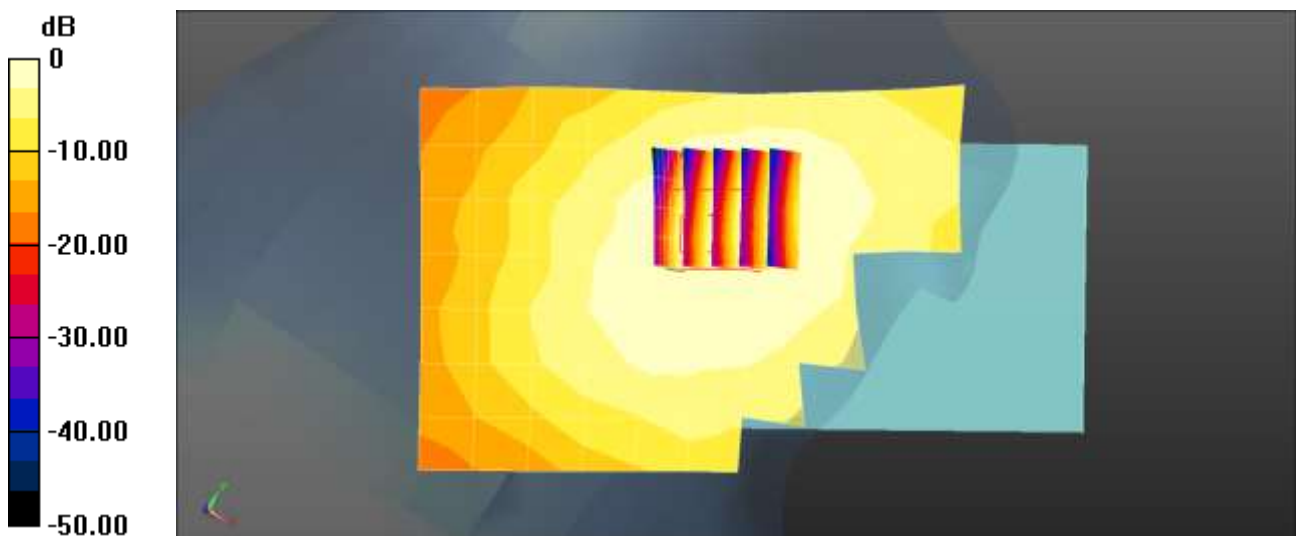

0 dB = 0.386 W/kg = -4.13 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.9 °C
 Ambient Temperature: 21.0 °C
 Test Date: 01/13/2021
 Plot No.: 12
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 793 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.674$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:


- Probe: ET3DV6 - SN1630; ConvF(7.22, 7.22, 7.22) @ 793 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 14 Head Right Touch QPSK 10MHz 1RB 24offset 23330ch/Area Scan (8x14x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.270 W/kg

LTE Band 14 Head Right Touch QPSK 10MHz 1RB 24offset 23330ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.544 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.252 W/kg
SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.201 W/kg
 Maximum value of SAR (measured) = 0.250 W/kg

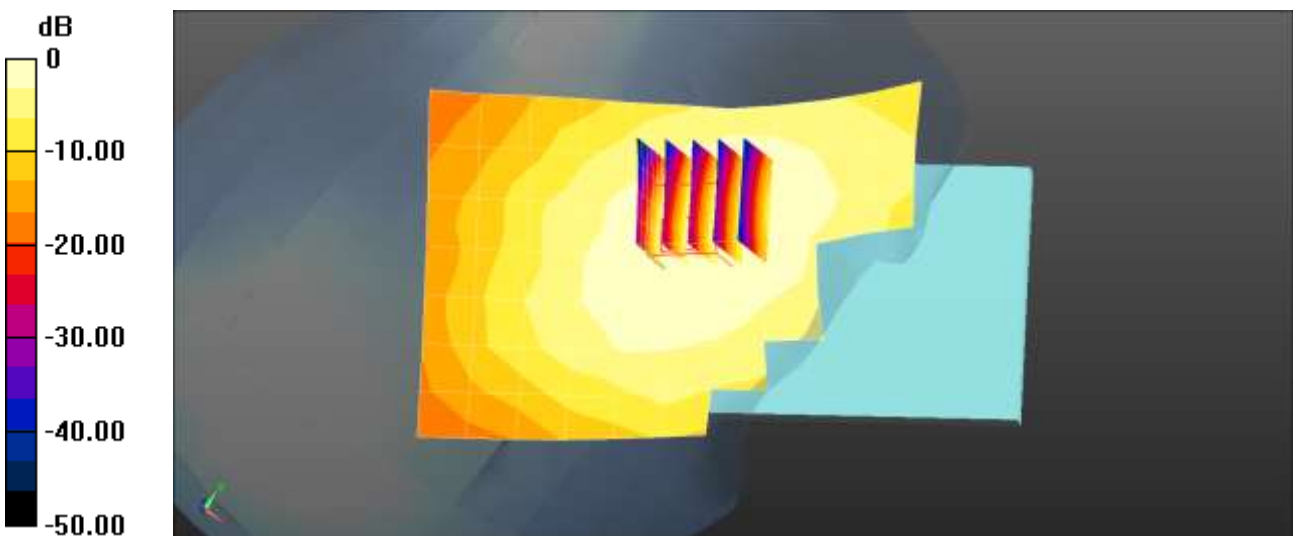

$$0 \text{ dB} = 0.270 \text{ W/kg} = -5.69 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 22.3 °C
Ambient Temperature: 22.5 °C
Test Date: 01/06/2021
Plot No.: 13
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 25 (0); Frequency: 1905 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.446$ S/m; $\epsilon_r = 39.145$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(8.78, 8.78, 8.78) @ 1905 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band25 Head Left Touch QPSK 20MHz 50RB 0offset 26590ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.215 W/kg

LTE Band25 Head Left Touch QPSK 20MHz 50RB 0offset 26590ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.133 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.108 W/kg

Maximum value of SAR (measured) = 0.228 W/kg

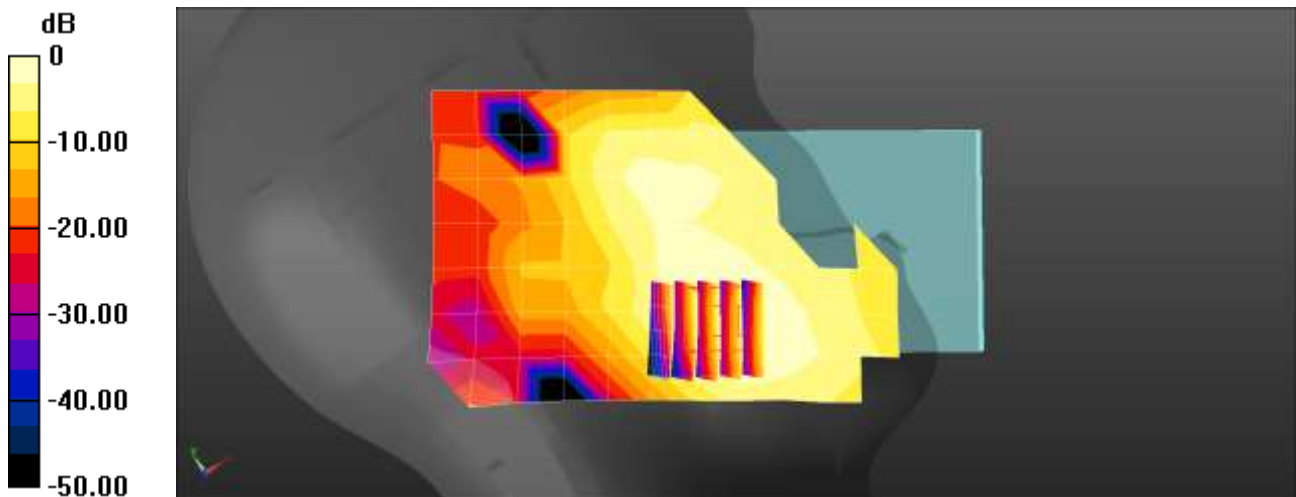

0 dB = 0.215 W/kg = -6.67 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.4 °C
 Ambient Temperature: 20.5 °C
 Test Date: 01/14/2021
 Plot No.: 14
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 41.192$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.96, 6.96, 6.96) @ 831.5 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 26 Head Right Touch QPSK 15MHz 1RB 0offset 26865ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.264 W/kg

LTE Band 26 Head Right Touch QPSK 15MHz 1RB 0offset 26865ch/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 4.579 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.251 W/kg
SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.195 W/kg
 Maximum value of SAR (measured) = 0.249 W/kg

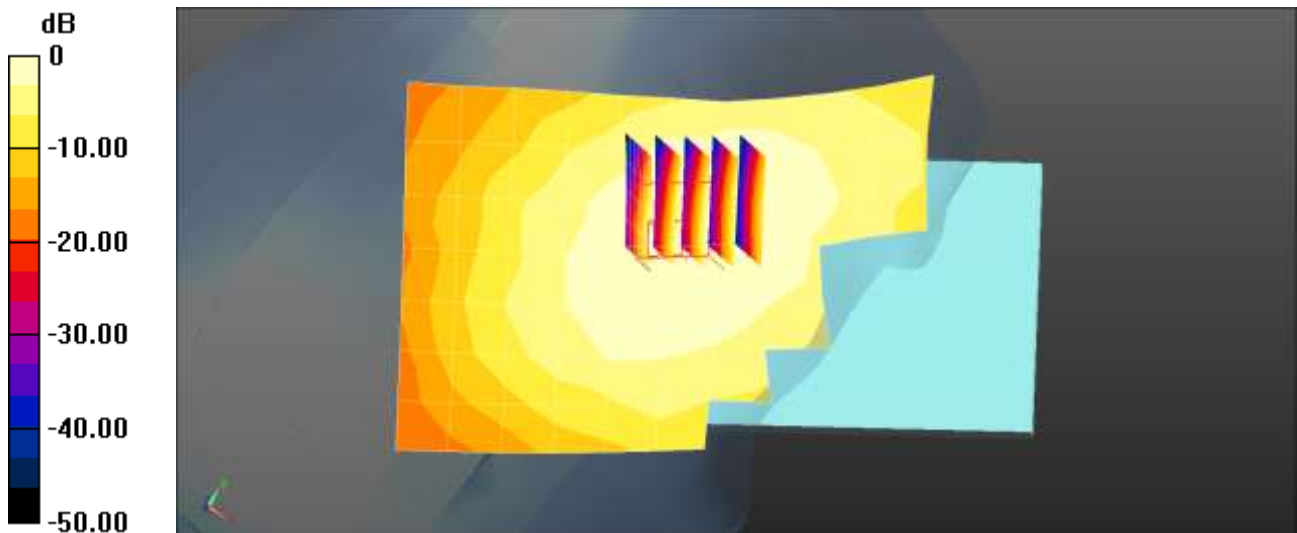

0 dB = 0.264 W/kg = -5.79 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 22.2 °C
Ambient Temperature: 22.0 °C
Test Date: 02/06/2021
Plot No.: 15
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 30 (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.668$ S/m; $\epsilon_r = 40.115$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2310 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 30 Head Right Touch QPSK 10MHz 1RB 24offset 27710ch/Area Scan (10x17x1):

Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.673 W/kg

LTE Band 30 Head Right Touch QPSK 10MHz 1RB 24offset 27710ch/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 8.275 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.963 W/kg
SAR(1 g) = 0.449 W/kg; SAR(10 g) = 0.224 W/kg
Maximum value of SAR (measured) = 0.750 W/kg

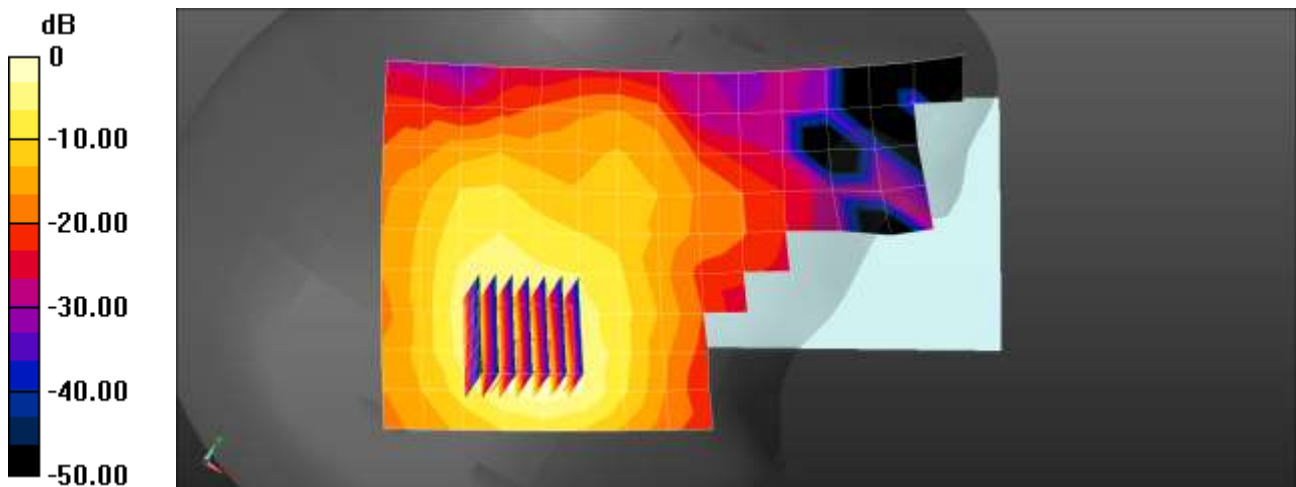

0 dB = 0.673 W/kg = -1.72 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.2 °C
 Ambient Temperature: 22.0 °C
 Test Date: 02/06/2021
 Plot No.: 16
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 30 (0); Frequency: 2310 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.668$ S/m; $\epsilon_r = 40.115$; $\rho = 1000$ kg/m³
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2310 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 30 Head Right Touch QPSK 10MHz 25RB 12offset 27710ch/Area Scan (10x17x1):

Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.657 W/kg

LTE Band 30 Head Right Touch QPSK 10MHz 25RB 12offset 27710ch/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 8.041 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.962 W/kg
SAR(1 g) = 0.446 W/kg; SAR(10 g) = 0.222 W/kg
 Maximum value of SAR (measured) = 0.750 W/kg

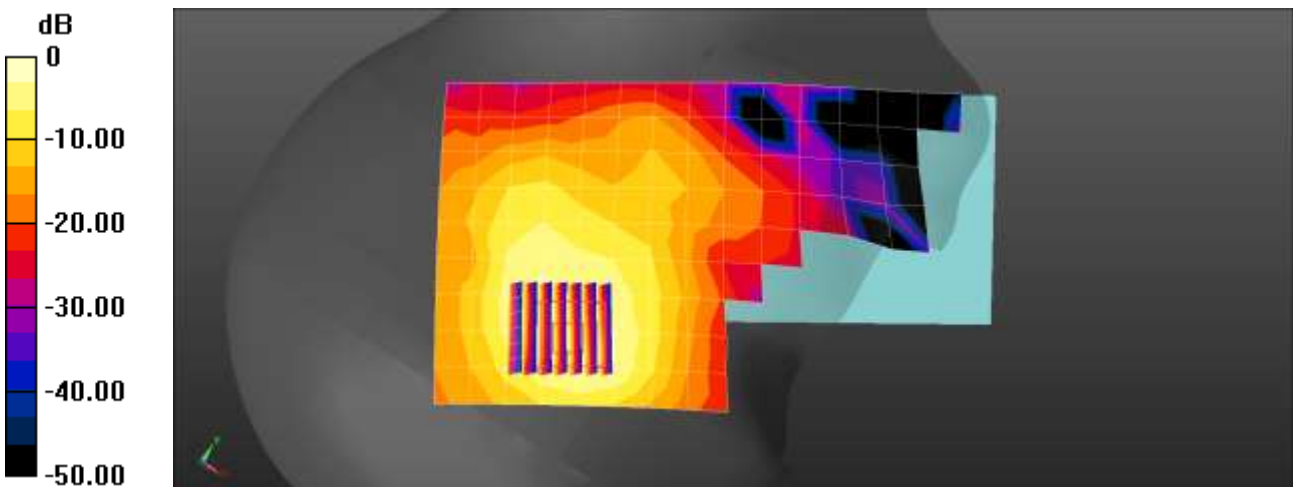

0 dB = 0.657 W/kg = -1.83 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 20.5 °C
Ambient Temperature: 20.7 °C
Test Date: 01/19/2021
Plot No.: 17
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 40 (0); Frequency: 2310 MHz;Duty Cycle: 1:1.58125
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.644$ S/m; $\epsilon_r = 40.806$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2310 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 40 Head Right Touch QPSK 10MHz 25RB 24offset 38750ch/Area Scan (10x17x1):

Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0461 W/kg

LTE Band 40 Head Right Touch QPSK 10MHz 25RB 24offset 38750ch/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.256 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.0650 W/kg
SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.012 W/kg
Maximum value of SAR (measured) = 0.0489 W/kg

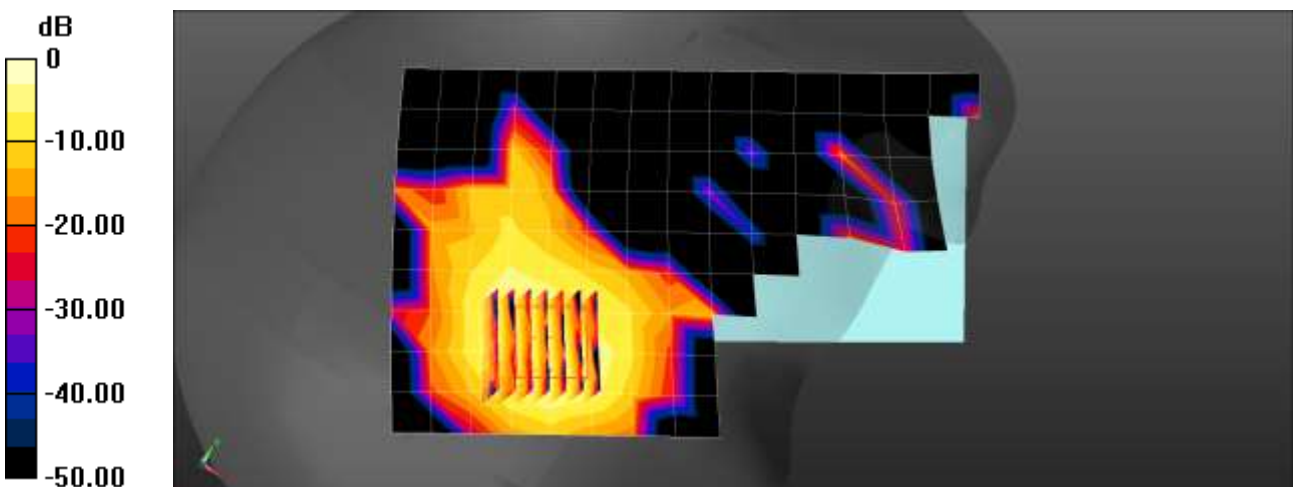

0 dB = 0.0461 W/kg = -13.37 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 20.5 °C
Ambient Temperature: 20.7 °C
Test Date: 01/19/2021
Plot No.: 18
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 40 (0); Frequency: 2355 MHz;Duty Cycle: 1:1.58125
Medium parameters used (interpolated): $f = 2355$ MHz; $\sigma = 1.694$ S/m; $\epsilon_r = 40.622$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2355 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 40 Head Right Touch QPSK 10MHz 25RB 0offset 39200ch/Area Scan (10x17x1):

Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0535 W/kg

LTE Band 40 Head Right Touch QPSK 10MHz 25RB 0offset 39200ch/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.9520 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.0750 W/kg
SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.014 W/kg
Maximum value of SAR (measured) = 0.0559 W/kg

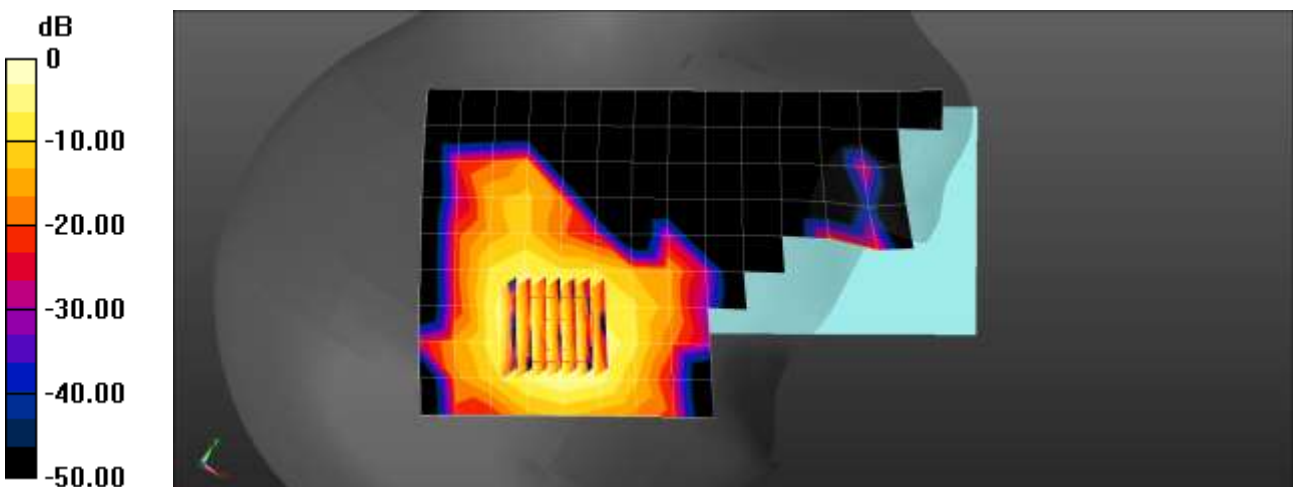

0 dB = 0.0535 W/kg = -12.71 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.5 °C
 Ambient Temperature: 22.7 °C
 Test Date: 02/03/2021
 Plot No.: 19
 DUT: SM-A326U; Type: Bar;
 Communication System: UID 0, LTE Band41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58016
 Medium parameters used (interpolated): $f = 2593 \text{ MHz}$; $\sigma = 1.997 \text{ S/m}$; $\epsilon_r = 39.873$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2593 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 41 Head Right Touch QPSK 20MHz 50RB 0offset 40620ch/Area Scan (10x17x1):

Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.481 W/kg

LTE Band 41 Head Right Touch QPSK 20MHz 50RB 0offset 40620ch/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.485 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 0.740 W/kg
SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.152 W/kg
 Maximum value of SAR (measured) = 0.560 W/kg

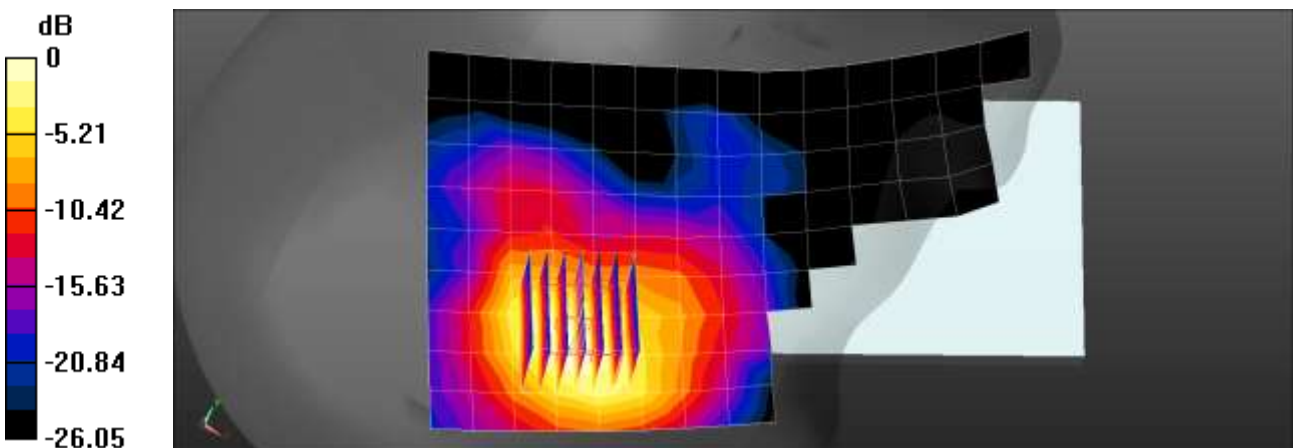

$0 \text{ dB} = 0.560 \text{ W/kg} = -2.52 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.3 °C
 Ambient Temperature: 22.5 °C
 Test Date: 01/26/2021
 Plot No.: 20

DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE bands (0); Frequency: 3560 MHz; Duty Cycle: 1:1.58016
 Medium parameters used: $f = 3560 \text{ MHz}$; $\sigma = 3.012 \text{ S/m}$; $\epsilon_r = 37.981$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(6.87, 6.87, 6.87) @ 3560 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 48 Head Right Tilt Qpsk 20MHz 1RB 0offset 55340ch/Area Scan (12x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.749 W/kg

LTE Band 48 Head Right Tilt Qpsk 20MHz 1RB 0offset 55340ch/Zoom Scan (7x7x8)/Cube 0:
 Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=4\text{mm}$
 Reference Value = 2.882 V/m; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 1.08 W/kg
SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.133 W/kg
 Maximum value of SAR (measured) = 0.796 W/kg

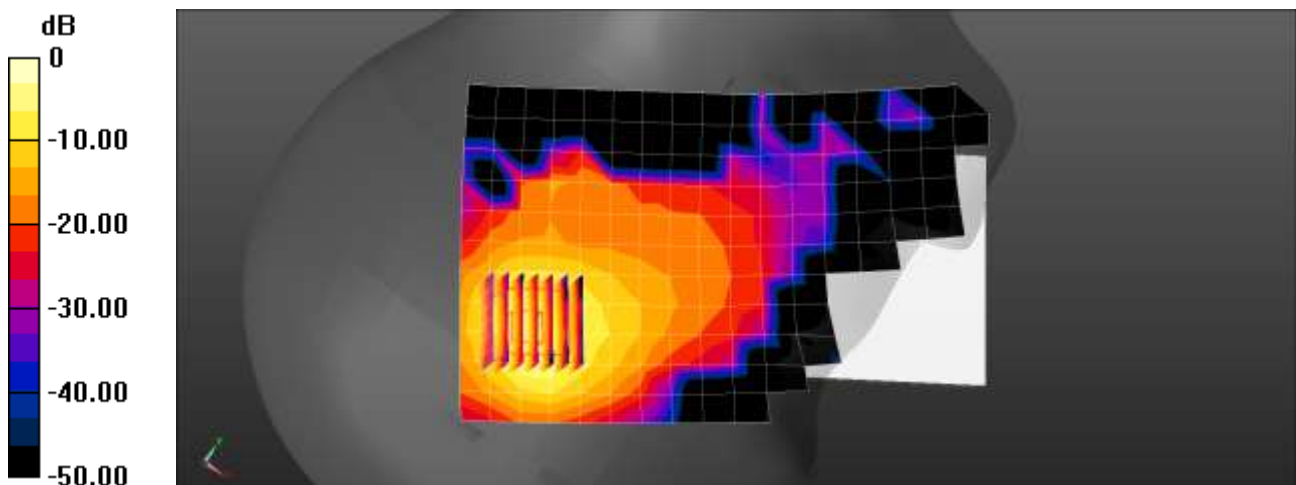

$0 \text{ dB} = 0.749 \text{ W/kg} = -1.26 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 19.6 °C
Ambient Temperature: 19.7 °C
Test Date: 01/07/2021
Plot No.: 21
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE 66 (0); Frequency: 1770 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1770$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.909$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7622; ConvF(9.12, 9.12, 9.12) @ 1770 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band66 Head Right Touch QPSK 20MHz 1RB 99offset 132572ch/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.186 W/kg

LTE Band66 Head Right Touch QPSK 20MHz 1RB 99offset 132572ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.757 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.233 W/kg
SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.098 W/kg
Maximum value of SAR (measured) = 0.193 W/kg

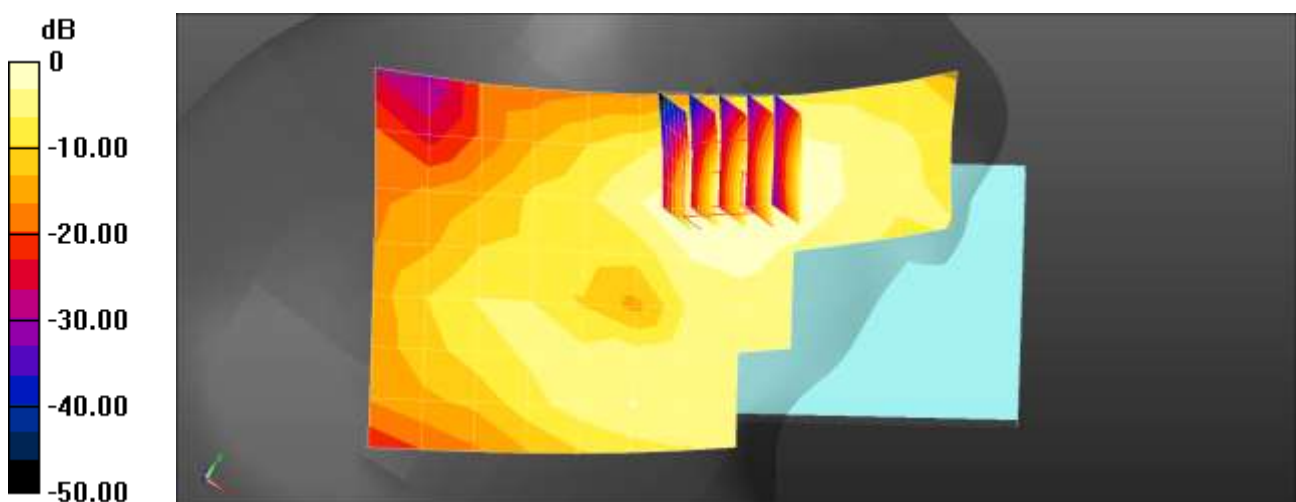

$0 \text{ dB} = 0.186 \text{ W/kg} = -7.31 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.4 °C
 Ambient Temperature: 20.5 °C
 Test Date: 01/12/2021
 Plot No.: 22
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 71 (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 680.5 \text{ MHz}$; $\sigma = 0.868 \text{ S/m}$; $\epsilon_r = 43.215$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:


- Probe: ET3DV6 - SN1630; ConvF(7.22, 7.22, 7.22) @ 680.5 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 71 Head Right Touch QPSK 20MHz 1RB 0offset 133297ch/Area Scan (8x14x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.222 W/kg

LTE Band 71 Head Right Touch QPSK 20MHz 1RB 0offset 133297ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.205 V/m; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 0.206 W/kg
SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.170 W/kg
 Maximum value of SAR (measured) = 0.205 W/kg

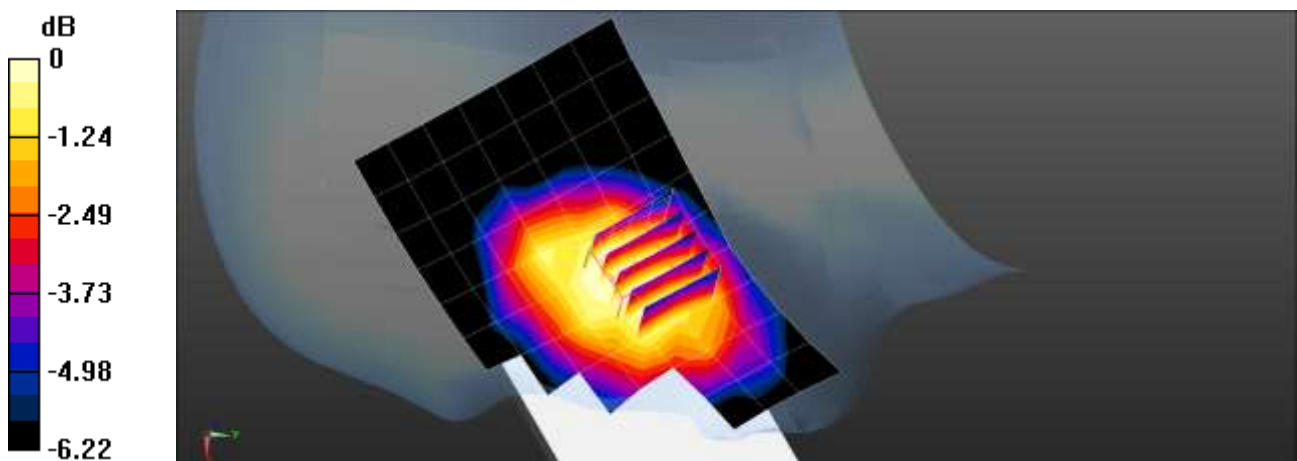

$0 \text{ dB} = 0.205 \text{ W/kg} = -6.88 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.9 °C
 Ambient Temperature: 22.1 °C
 Test Date: 01/19/2021
 Plot No.: 23
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 41.887$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3968; ConvF(9.55, 9.55, 9.55) @ 836.5 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n5 Head Right Touch DFT-s QPSK 20MHz 1RB 1offset 167300ch/Area Scan (8x14x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.288 W/kg

NR Band n5 Head Right Touch DFT-s QPSK 20MHz 1RB 1offset 167300ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.837 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.325 W/kg
SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.169 W/kg
 Maximum value of SAR (measured) = 0.289 W/kg

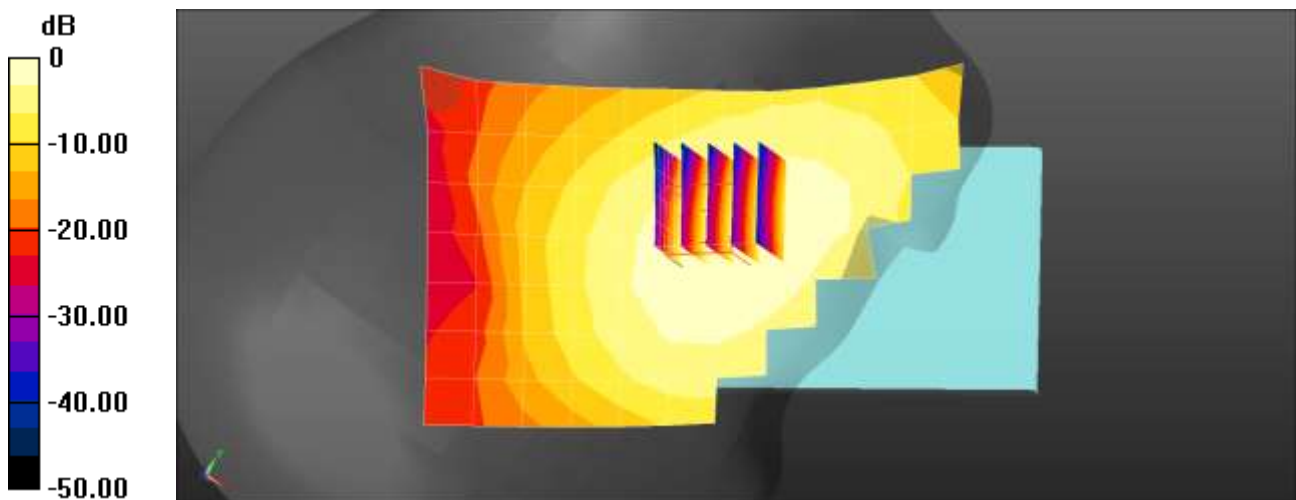

0 dB = 0.288 W/kg = -5.40 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.9 °C
 Ambient Temperature: 22.1 °C
 Test Date: 01/19/2021
 Plot No.: 24
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 41.887$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3968; ConvF(9.55, 9.55, 9.55) @ 836.5 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n5 Head Right Touch DFT-s QPSK 20MHz 50RB 28offset 167300ch/Area Scan (8x14x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.285 W/kg

NR Band n5 Head Right Touch DFT-s QPSK 20MHz 50RB 28offset 167300ch/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.946 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.320 W/kg
SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.168 W/kg
 Maximum value of SAR (measured) = 0.286 W/kg

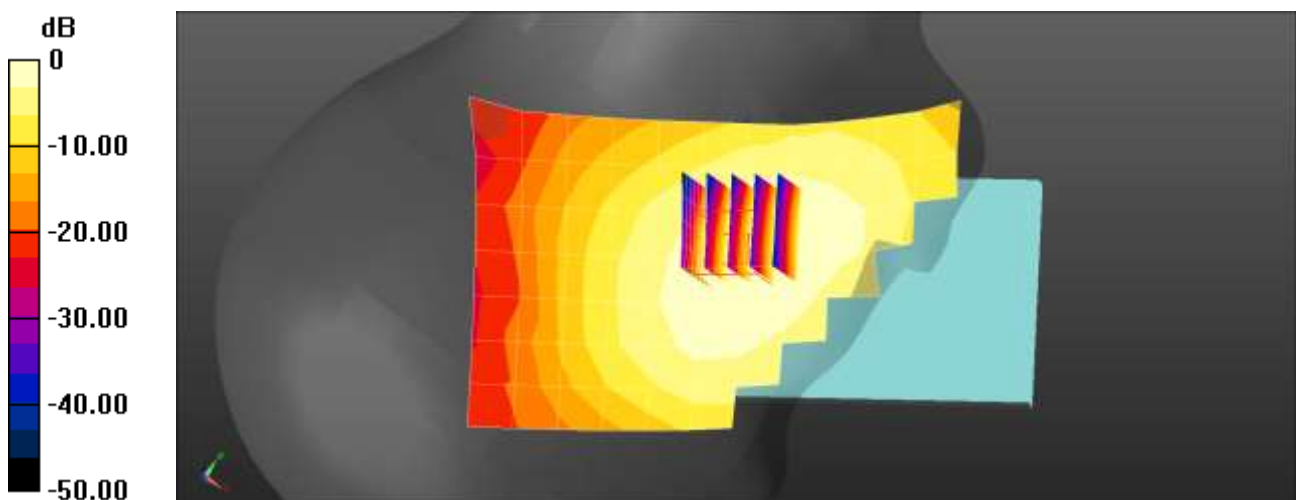

$0 \text{ dB} = 0.285 \text{ W/kg} = -5.45 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 20.5 °C
Ambient Temperature: 20.6 °C
Test Date: 01/20/2021
Plot No.: 25
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR Band 2,25 (0); Frequency: 1905 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 40.917$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:


- Probe: ES3DV3 - SN3076; ConvF(5.08, 5.08, 5.08) @ 1905 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n25 Head Left Touch DFT-s QPSK 20MHz 1RB 53offset 381000ch/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.314 W/kg

NR Band n25 Head Left Touch DFT-s QPSK 20MHz 1RB 53offset 381000ch/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.659 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.482 W/kg
SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.180 W/kg
Maximum value of SAR (measured) = 0.359 W/kg

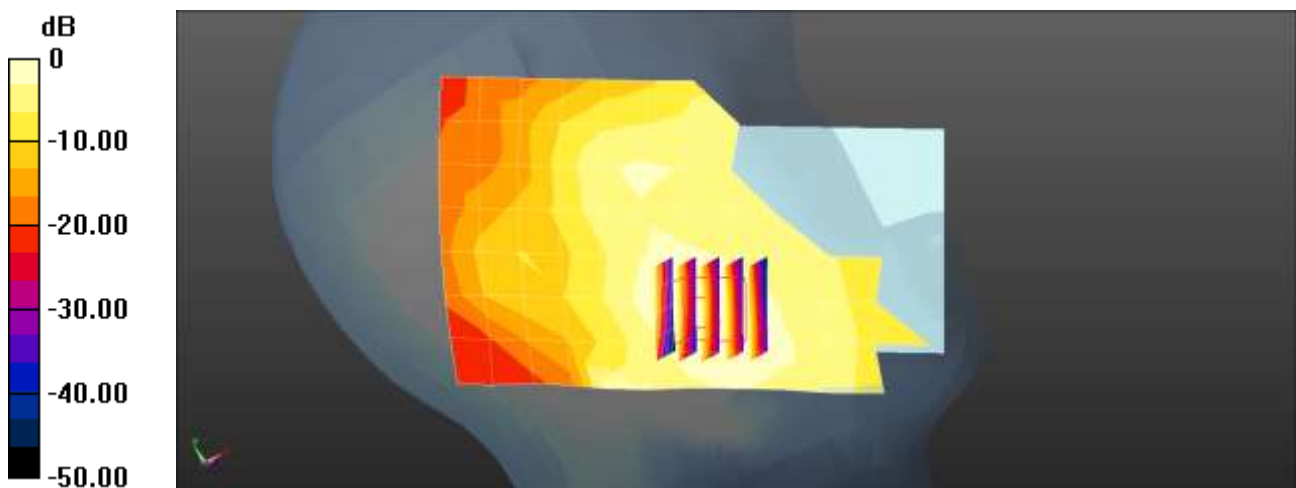

0 dB = 0.314 W/kg = -5.03 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.3 °C
Test Date: 01/28/2021
Plot No.: 26
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 2.028$ S/m; $\epsilon_r = 40.275$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3968; ConvF(7.34, 7.34, 7.34) @ 2592.99 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n41 Head Right Touch DFT-s QPSK 100MHz 1RB 137offset 518598ch/Area Scan (9x18x1):

Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.683 W/kg

NR Band n41 Head Right Touch DFT-s QPSK 100MHz 1RB 137offset 518598ch/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.704 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.956 W/kg
SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.197 W/kg
Maximum value of SAR (measured) = 0.724 W/kg

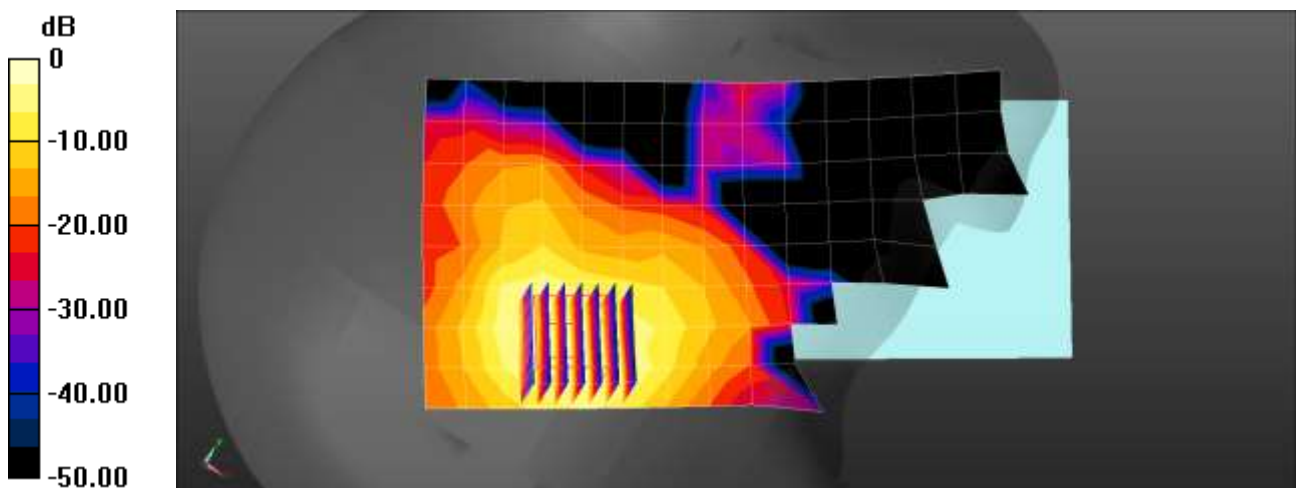

0 dB = 0.683 W/kg = -1.66 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: 01/22/2021
Plot No.: 27
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 41.622$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:


- Probe: ES3DV3 - SN3076; ConvF(5.24, 5.24, 5.24) @ 1745 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n66 Head Left Touch DFT-s QPSK 40MHz 1RB 108offset 349000ch/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.222 W/kg

NR Band n66 Head Left Touch DFT-s QPSK 40MHz 1RB 108offset 349000ch/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.607 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.322 W/kg
SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.139 W/kg
Maximum value of SAR (measured) = 0.248 W/kg

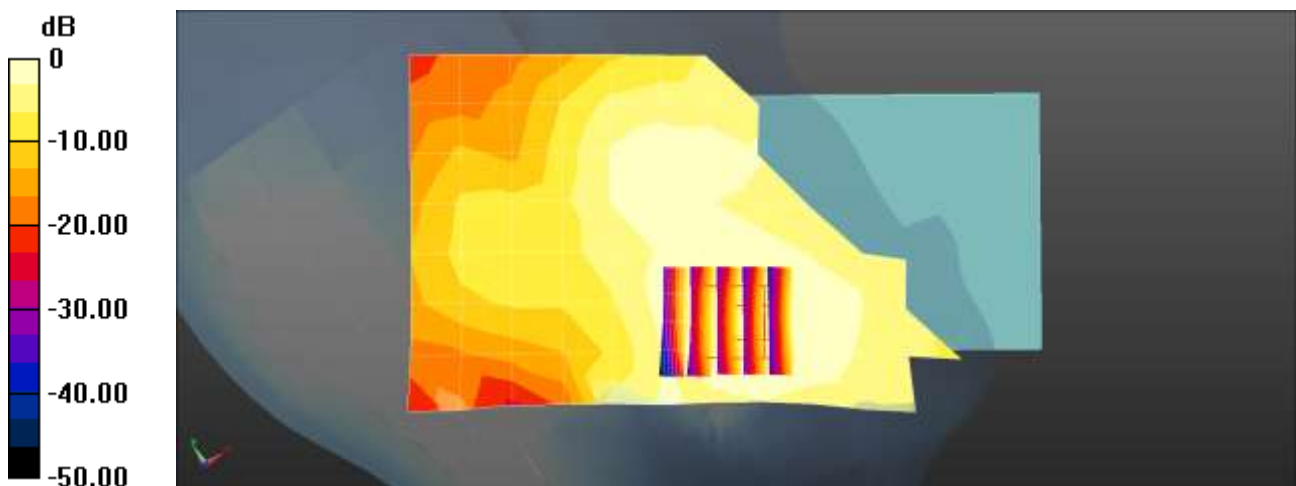

0 dB = 0.222 W/kg = -6.53 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 22.3 °C
Ambient Temperature: 22.5 °C
Test Date: 01/21/2021
Plot No.: 28
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, 5G NR (0); Frequency: 680.5 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 680.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.315$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3968; ConvF(9.94, 9.94, 9.94) @ 680.5 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n71 Head Right Touch DFT-s QPSK 20MHz 1RB 104offset 136100ch/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.237 W/kg

NR Band n71 Head Right Touch DFT-s QPSK 20MHz 1RB 104offset 136100ch/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.448 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 0.267 W/kg
SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.144 W/kg
Maximum value of SAR (measured) = 0.240 W/kg

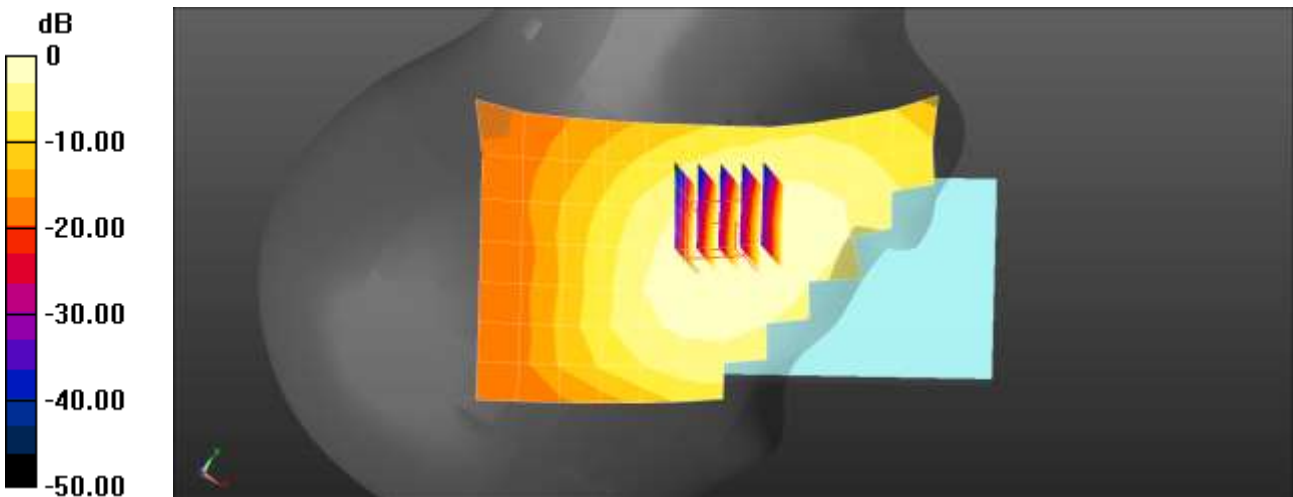

0 dB = 0.237 W/kg = -6.25 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.7 °C
 Ambient Temperature: 20.7 °C
 Test Date: 01/27/2021
 Plot No.: 29
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR n77 Duty100% (0); Frequency: 3750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 3750 \text{ MHz}$; $\sigma = 3.199 \text{ S/m}$; $\epsilon_r = 37.619$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7622; ConvF(7.15, 7.15, 7.15) @ 3750 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n77 Head Right Touch DFT-s QPSK 100MHz 135RB 69offset 650000ch/Area Scan (11x20x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 0.671 W/kg

NR Band n77 Head Right Touch DFT-s QPSK 100MHz 135RB 69offset 650000ch/Zoom Scan

(7x7x8)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=4\text{mm}$
 Reference Value = 1.039 V/m; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.102 W/kg
 Maximum value of SAR (measured) = 0.825 W/kg

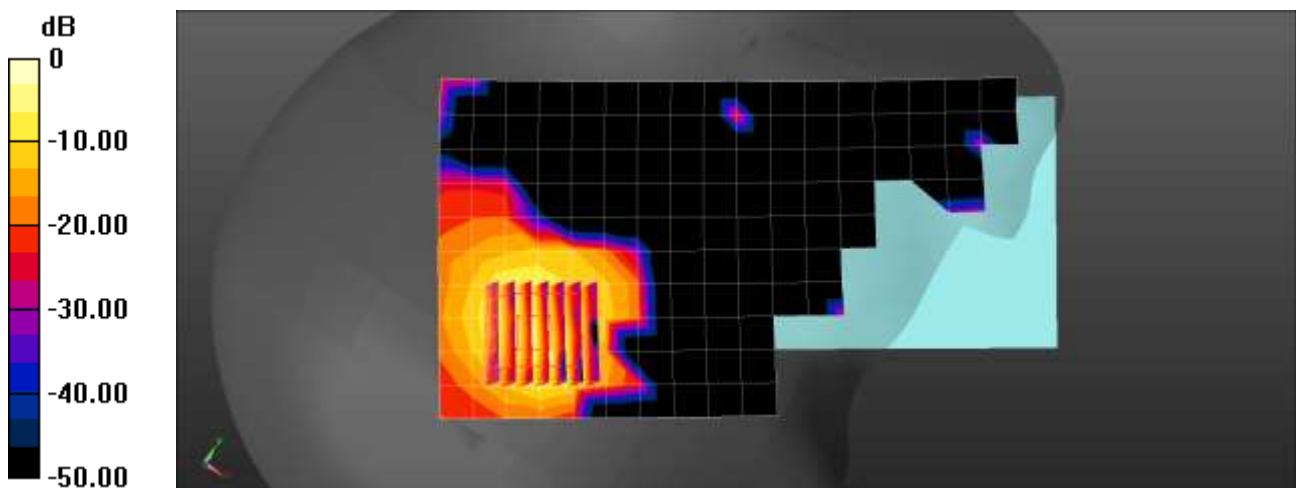

$0 \text{ dB} = 0.671 \text{ W/kg} = -1.73 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.4 °C
Ambient Temperature: 21.6 °C
Test Date: 02/06/2021
Plot No.: 30
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, 2450MHz (0); Frequency: 2412 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 40.887$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.47, 7.47, 7.47) @ 2412 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

802.11b Head Right Touch 1Mbps 1ch/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.274 W/kg

802.11b Head Right Touch 1Mbps 1ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.523 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 0.359 W/kg
SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.094 W/kg
Maximum value of SAR (measured) = 0.291 W/kg

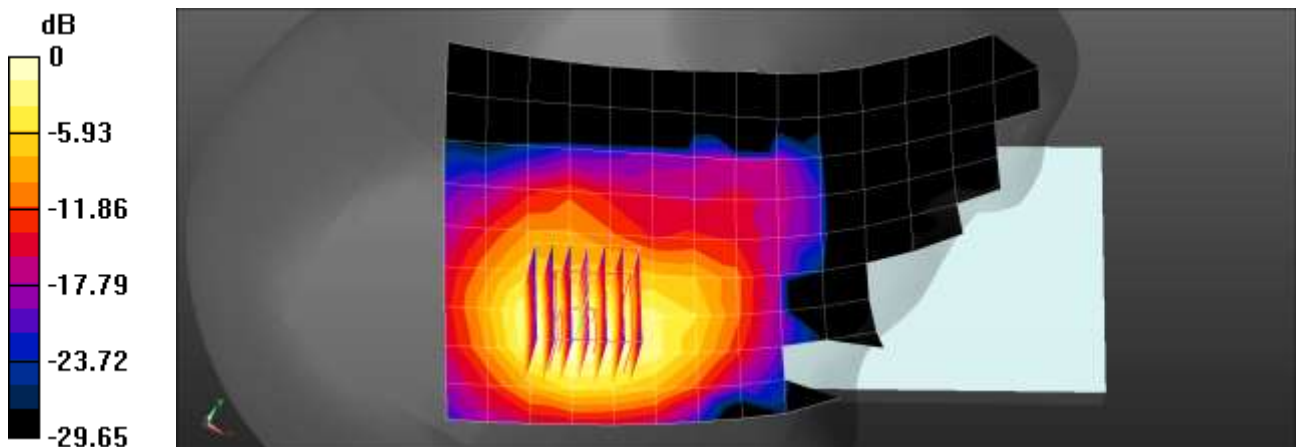

0 dB = 0.291 W/kg = -5.36 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.8 °C
Ambient Temperature: 22.0 °C
Test Date: 02/03/2021
Plot No.: 31
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, WIFI 5GHz UNII2C (0); Frequency: 5530 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5530$ MHz; $\sigma = 5.1$ S/m; $\epsilon_r = 36.69$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(4.78, 4.78, 4.78) @ 5530 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

802.11ac80 Head Right Touch MCSO 106ch/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.677 W/kg

802.11ac80 Head Right Touch MCSO 106ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 2.348 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 1.15 W/kg
SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.077 W/kg
Maximum value of SAR (measured) = 0.713 W/kg

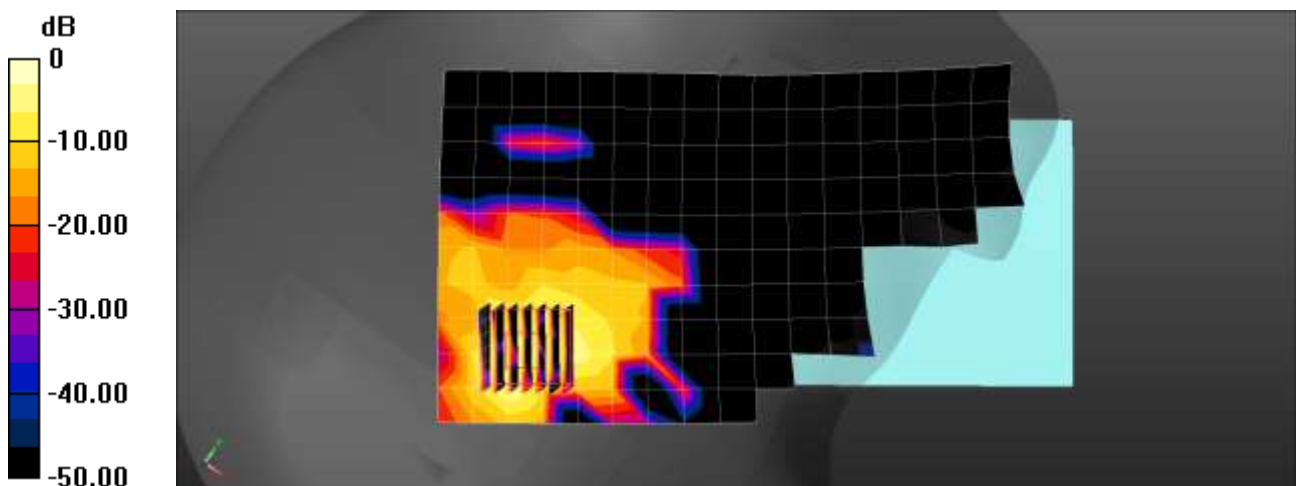

0 dB = 0.677 W/kg = -1.69 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.5 °C
Ambient Temperature: 21.8 °C
Test Date: 01/21/2021
Plot No.: 32
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.302
Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.736$ S/m; $\epsilon_r = 38.572$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.34, 7.34, 7.34) @ 2402 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

Bluetooth Head Right Touch DH5 0ch/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0696 W/kg

Bluetooth Head Right Touch DH5 0ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.076 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.0960 W/kg
SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.020 W/kg
Maximum value of SAR (measured) = 0.0715 W/kg

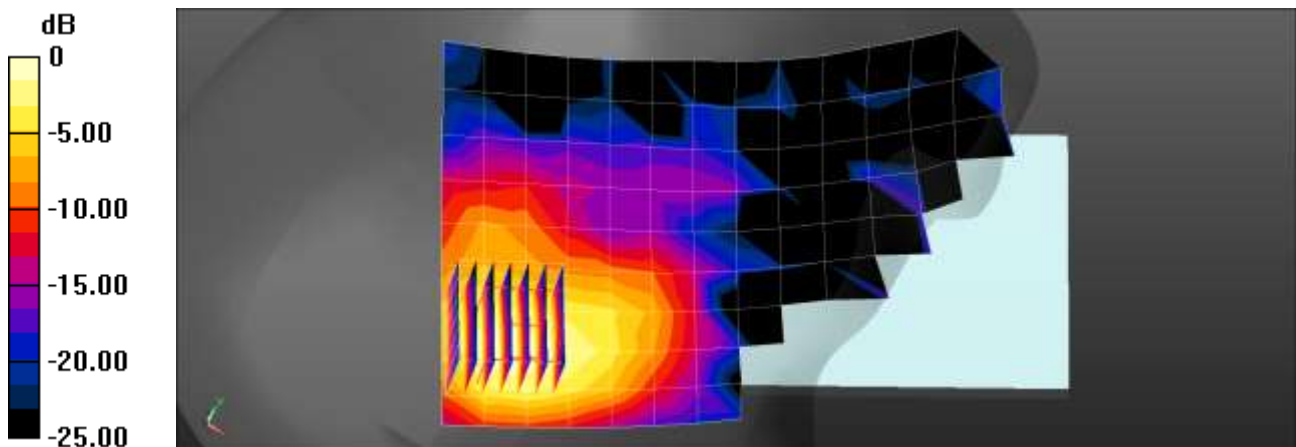

$$0 \text{ dB} = 0.0715 \text{ W/kg} = -11.46 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.8 °C
 Ambient Temperature: 22.0 °C
 Test Date: 01/06/2021
 Plot No.: 33
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, CDMA BC10 (FCC) (0); Frequency: 820 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 820 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.919$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.96, 6.96, 6.96) @ 820 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

CDMA BC10 Body Rear TDSO SO32 RC3 560ch/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.267 W/kg


CDMA BC10 Body Rear TDSO SO32 RC3 560ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.51 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.238 W/kg

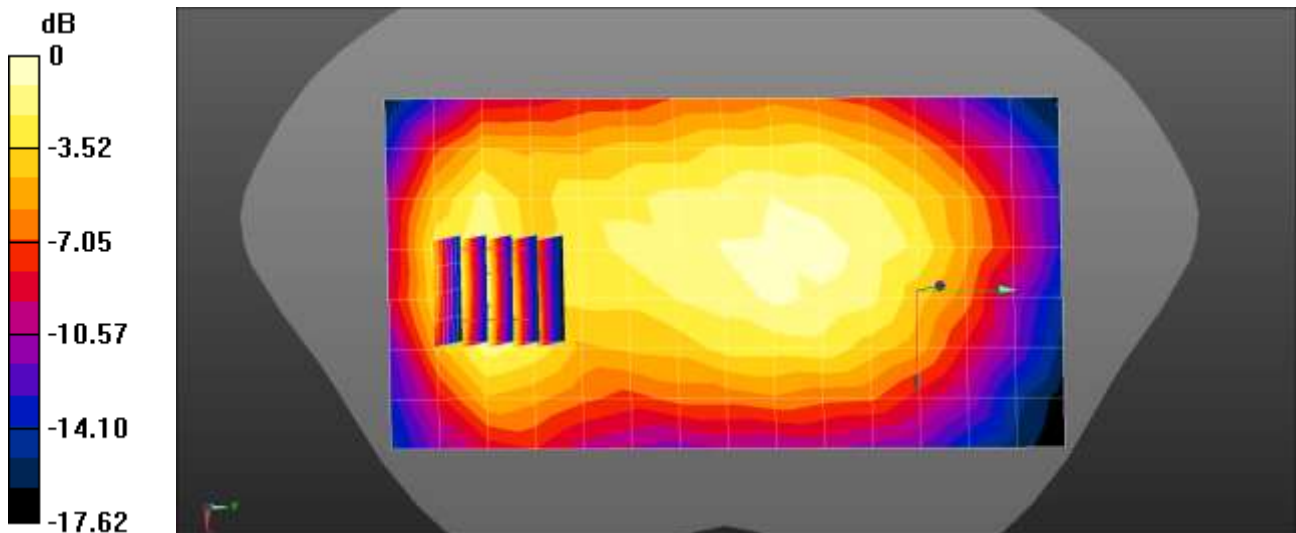

$$0 \text{ dB} = 0.267 \text{ W/kg} = -5.74 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.9 °C
 Ambient Temperature: 22.0 °C
 Test Date: 01/07/2021
 Plot No.: 34
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.71$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.96, 6.96, 6.96) @ 836.52 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

CDMA BC0 Body Rear TDSO SO32 RC3 384ch/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.254 W/kg

CDMA BC0 Body Rear TDSO SO32 RC3 384ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 13.20 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 0.273 W/kg
SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.138 W/kg
 Maximum value of SAR (measured) = 0.240 W/kg

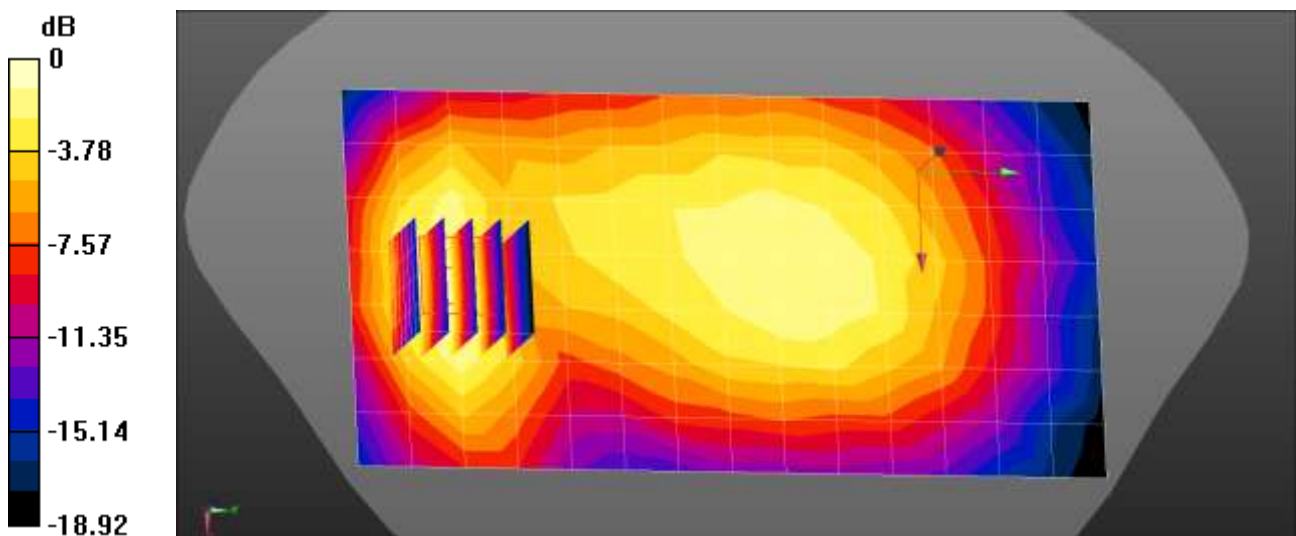

0 dB = 0.254 W/kg = -5.94 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.2 °C
 Ambient Temperature: 22.4 °C
 Test Date: 02/01/2021
 Plot No.: 35
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, CDMA BC1 (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.417 \text{ S/m}$; $\epsilon_r = 41.103$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(8.19, 8.19, 8.19) @ 1880 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

CDMA BC1 Body worn Rear EVDO Rev.A 600ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.699 W/kg

CDMA BC1 Body worn Rear EVDO Rev.A 600ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 15.12 V/m; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 0.840 W/kg
SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.296 W/kg
 Maximum value of SAR (measured) = 0.705 W/kg

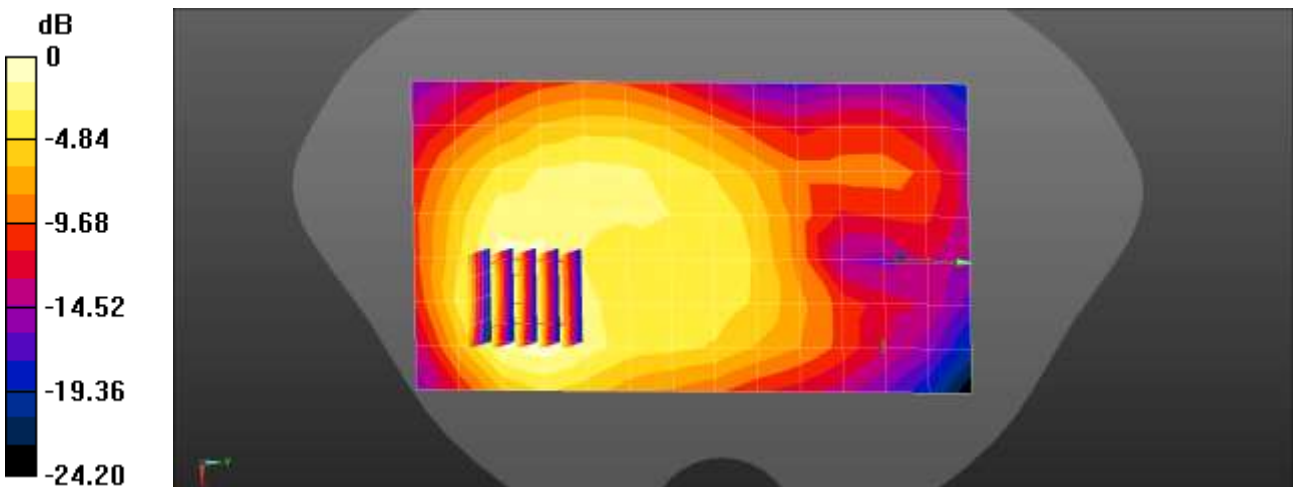

0 dB = 0.699 W/kg = -1.55 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 18.9 °C
 Ambient Temperature: 19.1 °C
 Test Date: 01/04/2021
 Plot No.: 36
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, GSM850 GPRS 4TX (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.07491
 Medium parameters used (interpolated): $f = 836.6 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 42.768$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.61, 9.61, 9.61) @ 836.6 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4)

GSM 850 Body Worn Rear 4Tx 190ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.531 W/kg

GSM 850 Body Worn Rear 4Tx 190ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 22.51 V/m; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.635 W/kg
SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.239 W/kg
 Maximum value of SAR (measured) = 0.544 W/kg

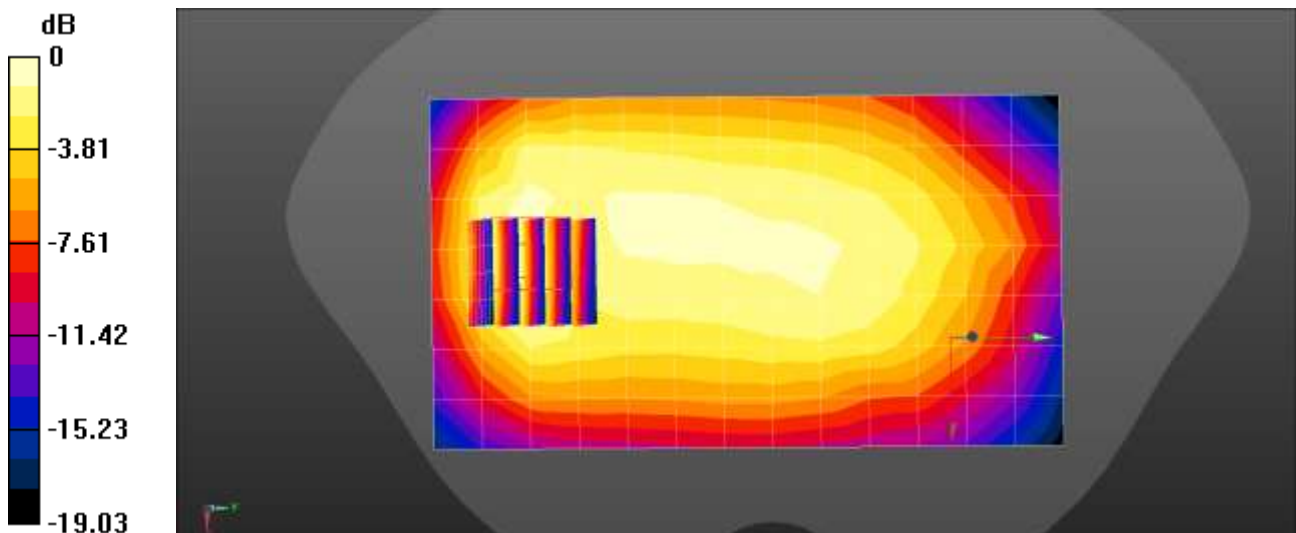

0 dB = 0.531 W/kg = -2.75 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.9 °C
Ambient Temperature: 22.0 °C
Test Date: 01/04/2021
Plot No.: 37
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, GSM 1900 4TX (0); Frequency: 1880 MHz;Duty Cycle: 1:2.07491
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.436$ S/m; $\epsilon_r = 39.221$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.63, 5.63, 5.63) @ 1880 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

GSM1900 Body Rear 4Tx 190ch/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.295 W/kg

GSM1900 Body Rear 4Tx 190ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.566 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.310 W/kg
SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.164 W/kg
Maximum value of SAR (measured) = 0.271 W/kg

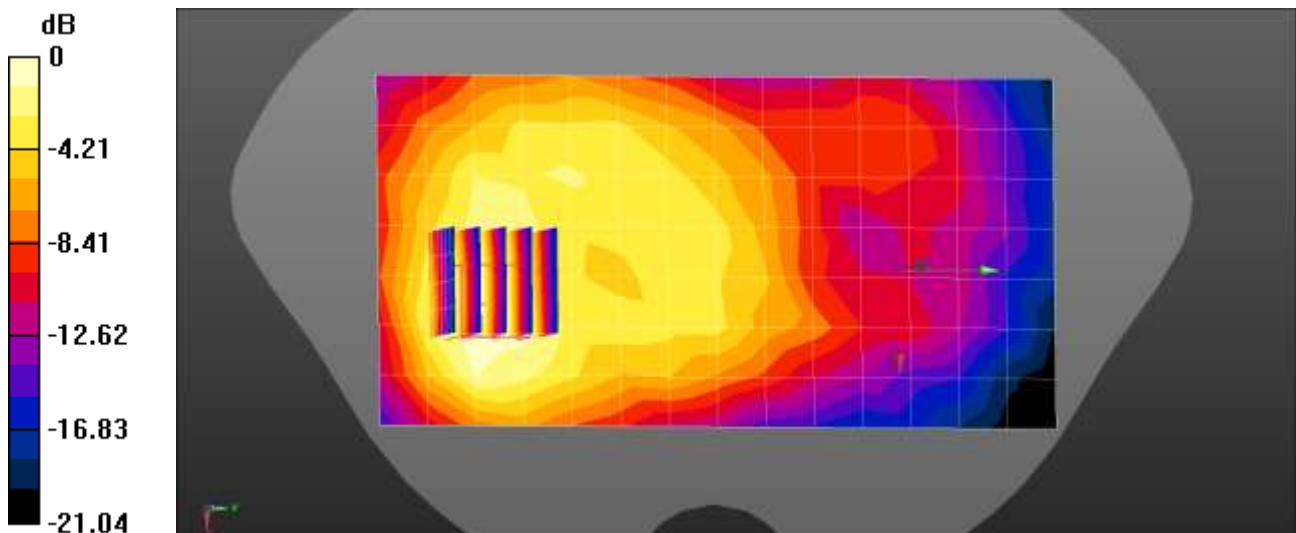

$0 \text{ dB} = 0.295 \text{ W/kg} = -5.30 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.0 °C
 Ambient Temperature: 22.2 °C
 Test Date: 12/31/2020
 Plot No.: 38
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, WCDMA850 (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4 \text{ MHz}$; $\sigma = 0.908 \text{ S/m}$; $\epsilon_r = 42.845$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.61, 9.61, 9.61) @ 826.4 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4)

WCDMA Band5 Body Worn Rear 4132ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.339 W/kg

WCDMA Band5 Body Worn Rear 4132ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 20.17 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.361 W/kg
SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.227 W/kg
 Maximum value of SAR (measured) = 0.342 W/kg

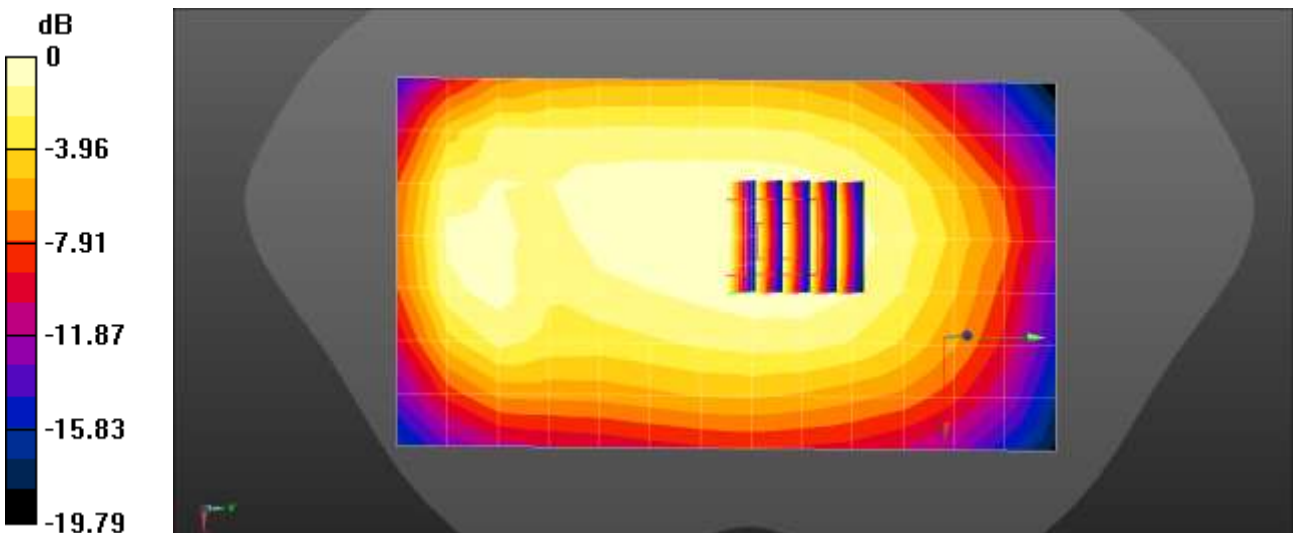

0 dB = 0.339 W/kg = -4.70 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.9 °C
 Ambient Temperature: 22.0 °C
 Test Date: 01/27/2021
 Plot No.: 39
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1732.4 \text{ MHz}$; $\sigma = 1.33 \text{ S/m}$; $\epsilon_r = 40.011$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(8.62, 8.62, 8.62) @ 1732.4 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

WCDMA4 Bodyworn Rear 1412ch/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.346 W/kg

WCDMA4 Bodyworn Rear 1412ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 11.37 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.407 W/kg
SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.164 W/kg
 Maximum value of SAR (measured) = 0.351 W/kg

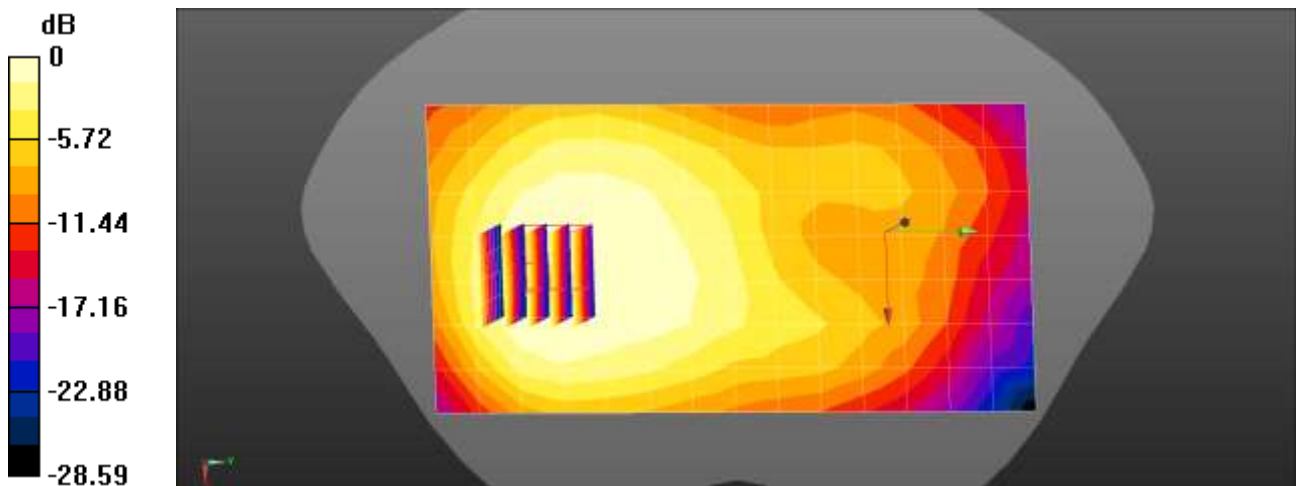

$0 \text{ dB} = 0.346 \text{ W/kg} = -4.60 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.9 °C
 Ambient Temperature: 21.0 °C
 Test Date: 01/05/2021
 Plot No.: 40
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.433 \text{ S/m}$; $\epsilon_r = 39.716$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.63, 5.63, 5.63) @ 1880 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

WCDMA2 Body Rear 9400ch/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.430 W/kg

WCDMA2 Body Rear 9400ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 10.52 V/m; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.432 W/kg
SAR(1 g) = 0.365 W/kg; SAR(10 g) = 0.243 W/kg
 Maximum value of SAR (measured) = 0.387 W/kg

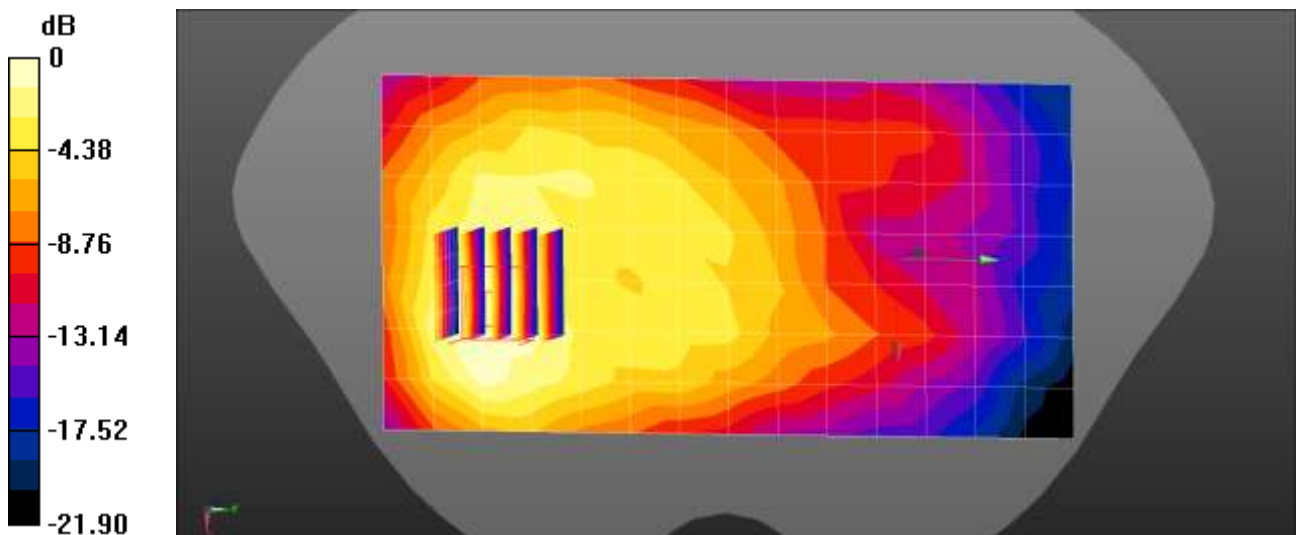

$0 \text{ dB} = 0.430 \text{ W/kg} = -3.66 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.2 °C
 Ambient Temperature: 21.4 °C
 Test Date: 02/04/2021
 Plot No.: 41
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band7 (0); Frequency: 2560 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 39.932$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2560 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 7 Body Worn Rear QPSK 20MHz 1RB 49offset 21350ch/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 1.04 W/kg

LTE Band 7 Body Worn Rear QPSK 20MHz 1RB 49offset 21350ch/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.874 V/m; Power Drift = -0.19 dB
 Peak SAR (extrapolated) = 1.39 W/kg
SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.325 W/kg
 Maximum value of SAR (measured) = 1.10 W/kg

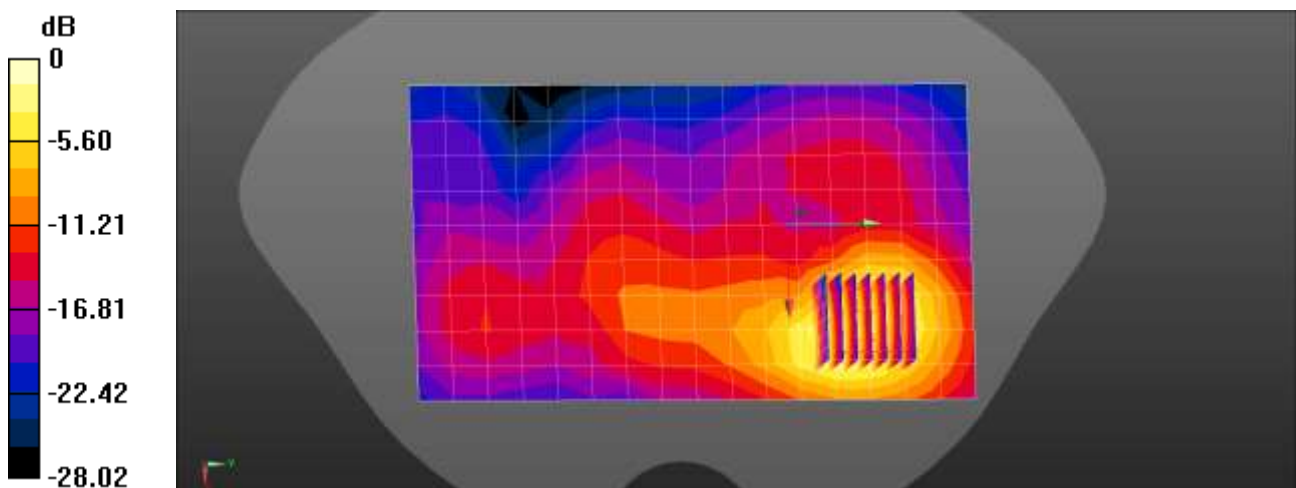

0 dB = 1.04 W/kg = 0.18 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 18.5 °C
 Ambient Temperature: 18.7 °C
 Test Date: 01/05/2021
 Plot No.: 42
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.862 \text{ S/m}$; $\epsilon_r = 43.25$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.86, 9.86, 9.86) @ 707.5 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 12 Body Worn Rear 10MHz QPSK 1RB 0offset 23095ch/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.453 W/kg

LTE Band 12 Body Worn Rear 10MHz QPSK 1RB 0offset 23095ch/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 24.32 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.479 W/kg
SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.326 W/kg
 Maximum value of SAR (measured) = 0.461 W/kg

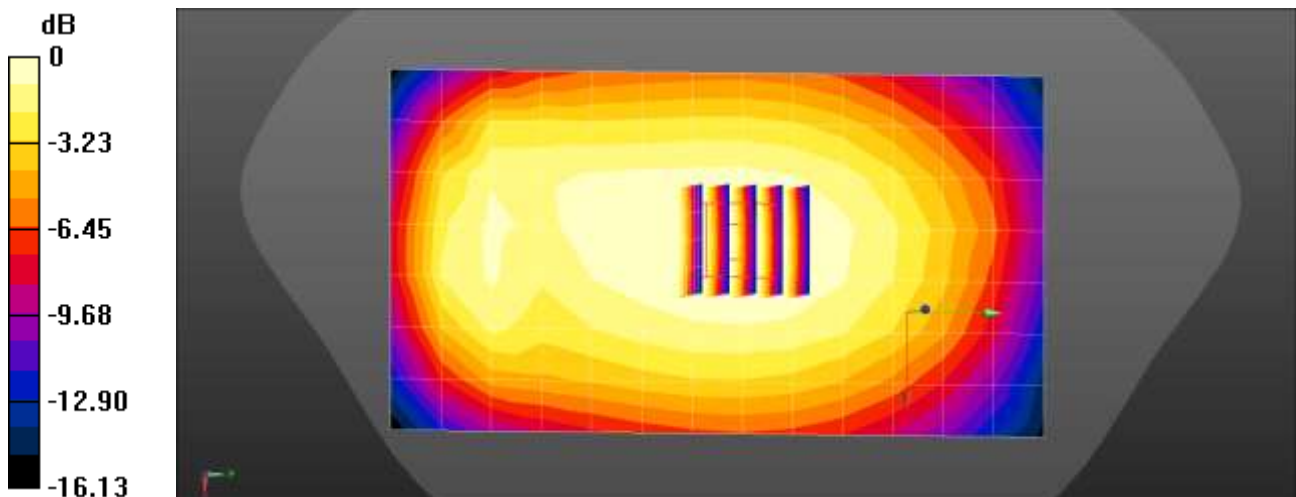

$0 \text{ dB} = 0.453 \text{ W/kg} = -3.43 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.9 °C
 Ambient Temperature: 22.0 °C
 Test Date: 01/29/2021
 Plot No.: 43
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE 13 (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 0.879 \text{ S/m}$; $\epsilon_r = 41.951$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(9.94, 9.94, 9.94) @ 782 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 13 Body Rear Qpsk 10MHz 1RB 0offset 23230ch/Area Scan (8x14x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.482 W/kg

LTE Band 13 Body Rear Qpsk 10MHz 1RB 0offset 23230ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 24.85 V/m; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 0.539 W/kg
SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.307 W/kg
 Maximum value of SAR (measured) = 0.492 W/kg

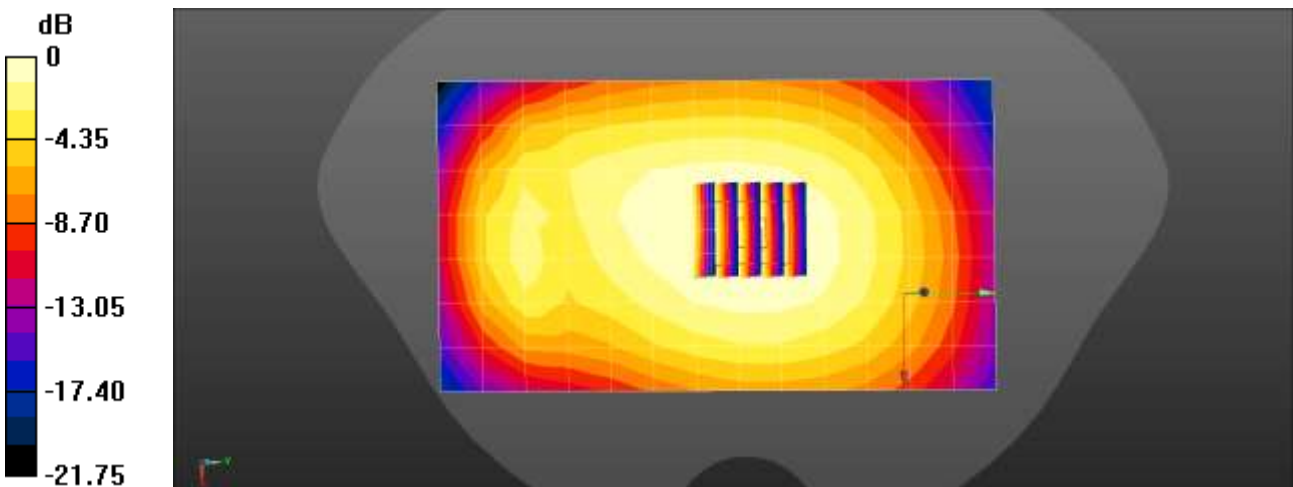

$0 \text{ dB} = 0.482 \text{ W/kg} = -3.17 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.9 °C
 Ambient Temperature: 22.0 °C
 Test Date: 01/29/2021
 Plot No.: 44
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE 14 (0); Frequency: 793 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 793 \text{ MHz}$; $\sigma = 0.889 \text{ S/m}$; $\epsilon_r = 41.771$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(9.94, 9.94, 9.94) @ 793 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 14 Body Rear Qpsk 10MHz 1RB 24offset 23330ch/Area Scan (8x14x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.393 W/kg

LTE Band 14 Body Rear Qpsk 10MHz 1RB 24offset 23330ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 22.22 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.439 W/kg
SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.250 W/kg
 Maximum value of SAR (measured) = 0.400 W/kg

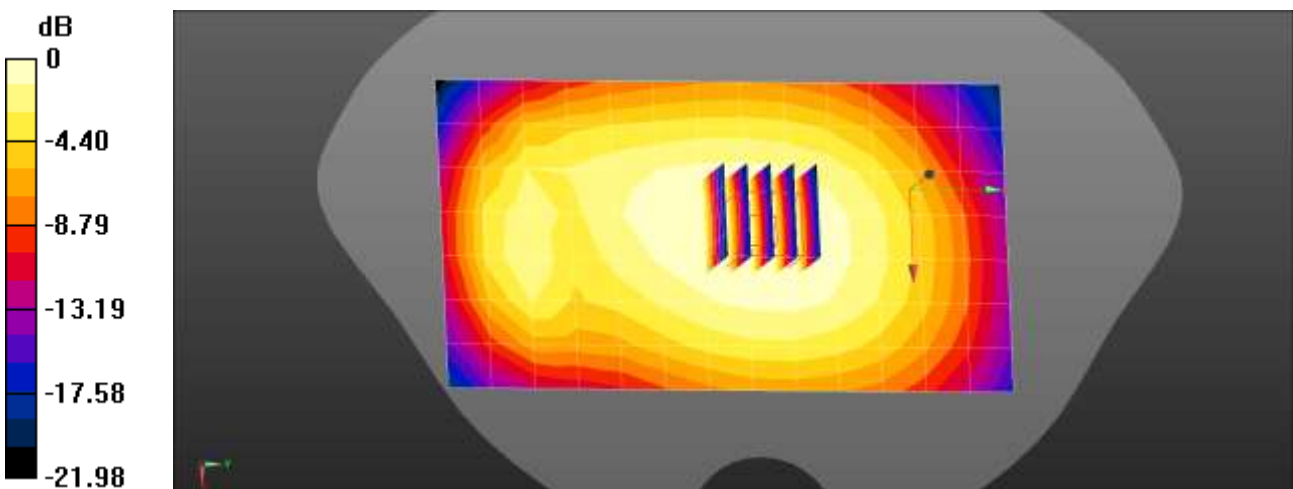

$0 \text{ dB} = 0.393 \text{ W/kg} = -4.06 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 19.0 °C
 Ambient Temperature: 19.1 °C
 Test Date: 01/25/2021
 Plot No.: 45
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 25 (0); Frequency: 1860 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1860 \text{ MHz}$; $\sigma = 1.396 \text{ S/m}$; $\epsilon_r = 39.307$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(8.78, 8.78, 8.78) @ 1860 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band25 Body Worn Rear QPSK 20MHz 1RB 49offset 26140ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.539 W/kg³

LTE Band25 Body Worn Rear QPSK 20MHz 1RB 49offset 26140ch/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.85 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.676 W/kg

SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.239 W/kg

Maximum value of SAR (measured) = 0.551 W/kg

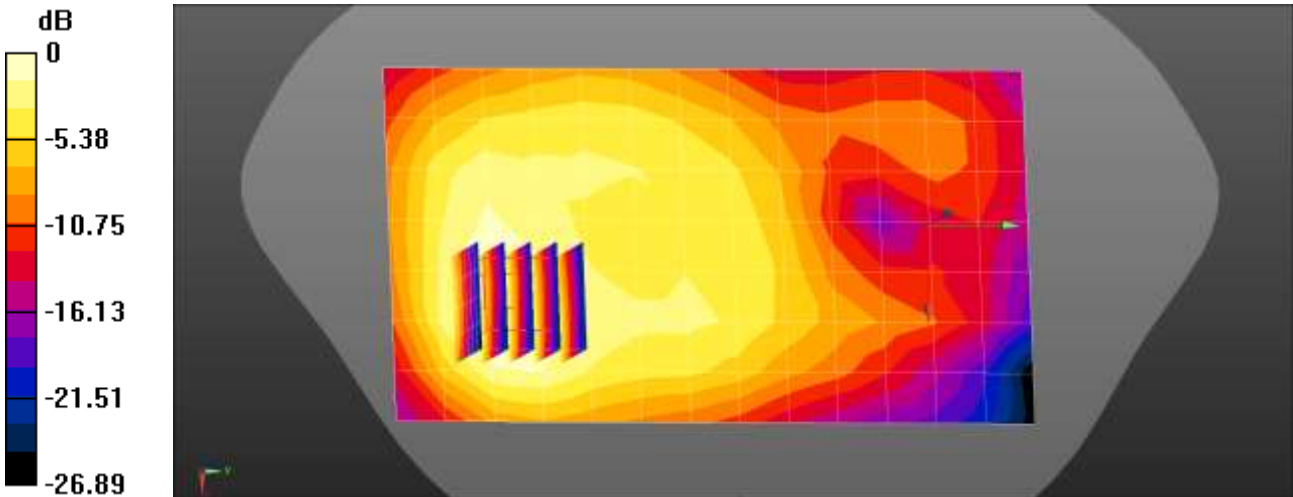

$0 \text{ dB} = 0.539 \text{ W/kg} = -2.68 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.4 °C
 Ambient Temperature: 20.5 °C
 Test Date: 01/14/2021
 Plot No.: 46
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 831.5 \text{ MHz}$; $\sigma = 0.932 \text{ S/m}$; $\epsilon_r = 41.192$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.96, 6.96, 6.96) @ 831.5 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 26 Body Rear QPSK 15MHz 1RB 0offset 26865ch/Area Scan (8x15x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.374 W/kg

LTE Band 26 Body Rear QPSK 15MHz 1RB 0offset 26865ch/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.29 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.382 W/kg

SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.334 W/kg

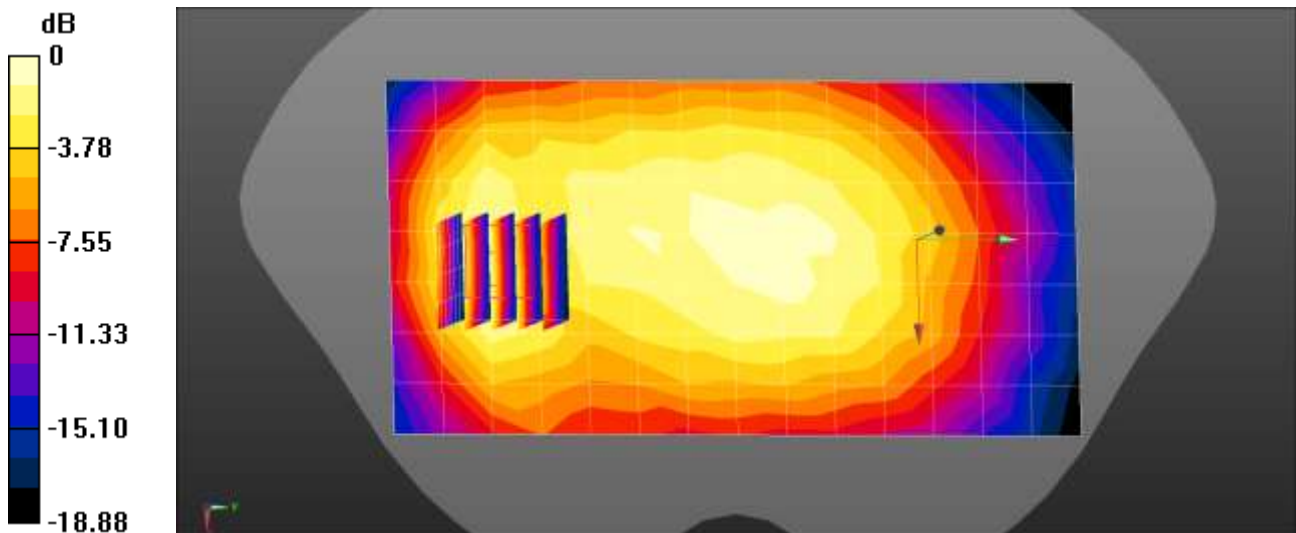

$0 \text{ dB} = 0.374 \text{ W/kg} = -4.27 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.0 °C
 Ambient Temperature: 22.2 °C
 Test Date: 02/06/2021
 Plot No.: 47
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band 30 (0); Frequency: 2310 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2310 \text{ MHz}$; $\sigma = 1.668 \text{ S/m}$; $\epsilon_r = 40.115$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2310 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 30 Body Worn Rear QPSK 10MHz 1RB 24offset 27710ch/Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.771 W/kg

LTE Band 30 Body Worn Rear QPSK 10MHz 1RB 24offset 27710ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 5.734 V/m; Power Drift = -0.15 dB
 Peak SAR (extrapolated) = 0.997 W/kg
SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.252 W/kg
 Maximum value of SAR (measured) = 0.806 W/kg

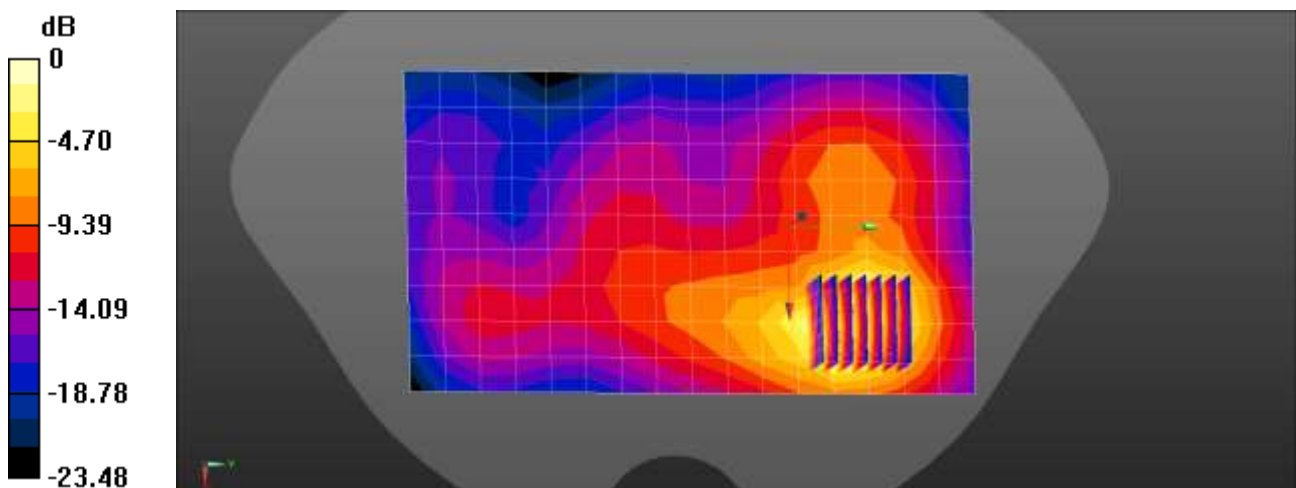

$$0 \text{ dB} = 0.771 \text{ W/kg} = -1.13 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.1 °C
Ambient Temperature: 21.2 °C
Test Date: 01/20/2021
Plot No.: 48
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 40 (0); Frequency: 2310 MHz;Duty Cycle: 1:1.58125
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.671$ S/m; $\epsilon_r = 40.813$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2310 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 40 Body worn Rear QPSK 10MHz 25RB 24offset 38750ch/Area Scan (10x17x1):

Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0272 W/kg

LTE Band 40 Body worn Rear QPSK 10MHz 25RB 24offset 38750ch/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.5620 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 0.0410 W/kg
SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00846 W/kg
Maximum value of SAR (measured) = 0.0325 W/kg

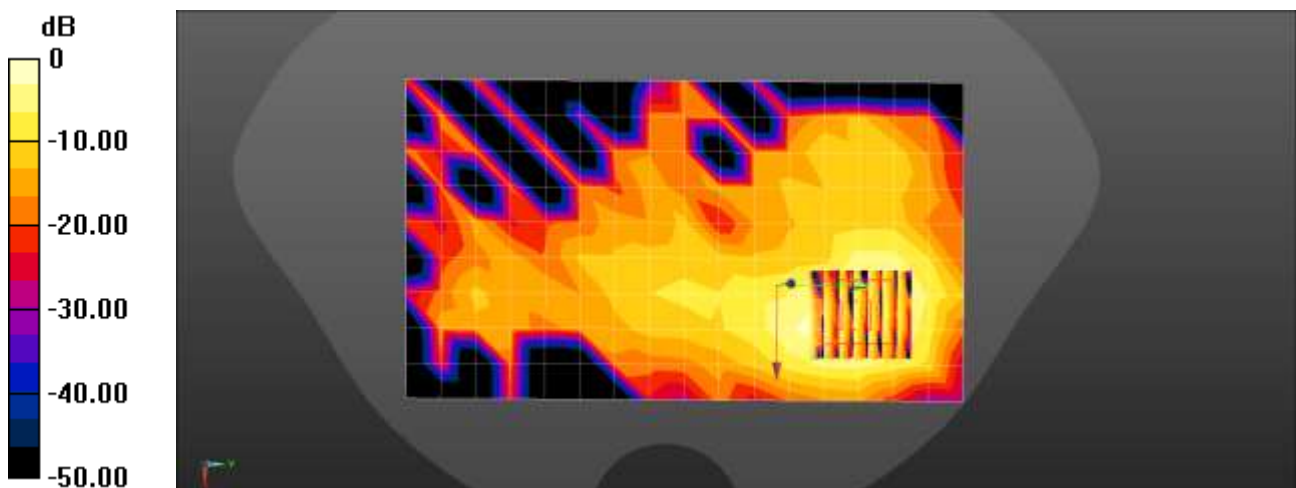

0 dB = 0.0272 W/kg = -15.65 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.1 °C
 Ambient Temperature: 21.2 °C
 Test Date: 01/20/2021
 Plot No.: 49
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band 40 (0); Frequency: 2355 MHz; Duty Cycle: 1:1.58125
 Medium parameters used (interpolated): $f = 2355$ MHz; $\sigma = 1.721$ S/m; $\epsilon_r = 40.669$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2355 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 40 Body worn Rear QPSK 10MHz 1RB 0offset 39200ch/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.0362 W/kg

LTE Band 40 Body worn Rear QPSK 10MHz 1RB 0offset 39200ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 0.3360 V/m; Power Drift = 0.19 dB
 Peak SAR (extrapolated) = 0.0530 W/kg
SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.011 W/kg
 Maximum value of SAR (measured) = 0.0406 W/kg

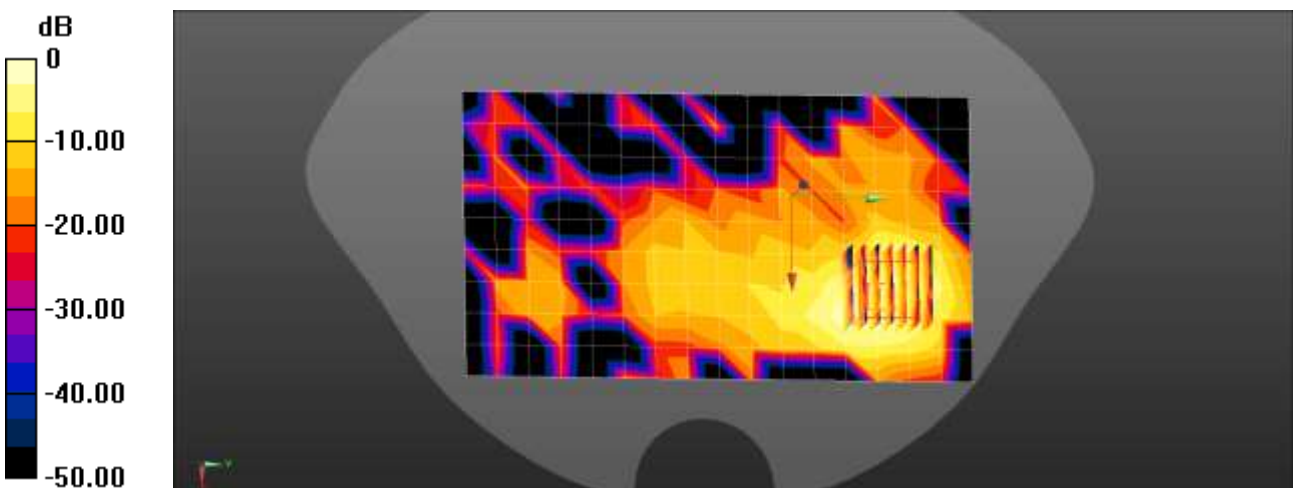

0 dB = 0.0362 W/kg = -14.41 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.6 °C
 Ambient Temperature: 21.8 °C
 Test Date: 02/08/2021
 Plot No.: 50


DUT: SM-A326U; Type: Bar;
 Communication System: UID 0, LTE Band41 (0); Frequency: 2593 MHz; Duty Cycle: 1:2.31
 Medium parameters used (interpolated): $f = 2593 \text{ MHz}$; $\sigma = 2.013 \text{ S/m}$; $\epsilon_r = 39.942$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2593 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 41 Body Worn Rear QPSK 20MHz 1RB 0offset 40620ch/Area Scan (9x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 1.50 W/kg

LTE Band 41 Body Worn Rear QPSK 20MHz 1RB 0offset 40620ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.235 V/m; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 2.17 W/kg
SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.508 W/kg
 Maximum value of SAR (measured) = 1.73 W/kg

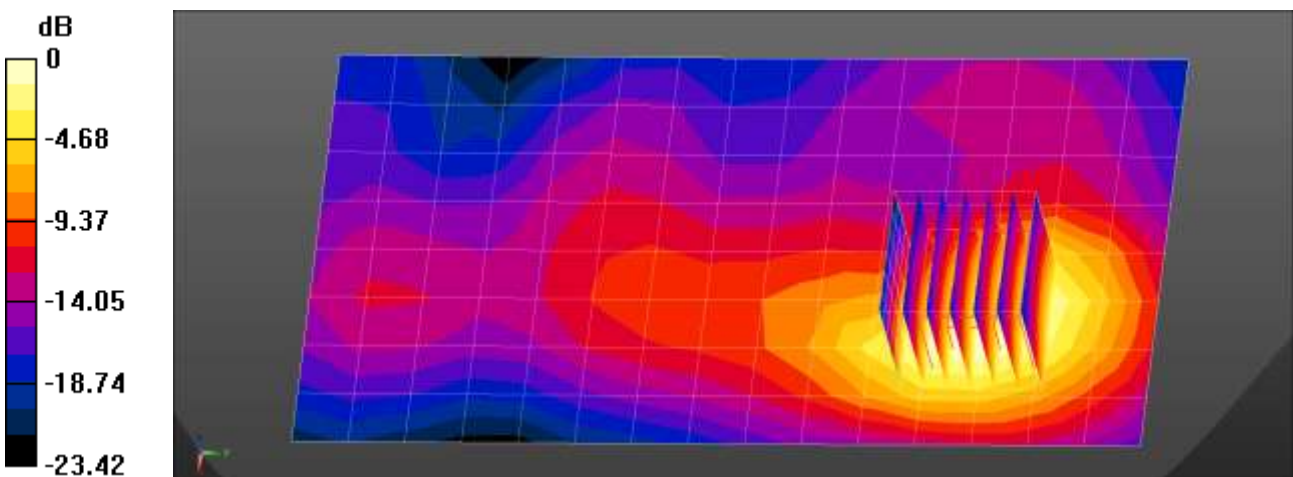

$0 \text{ dB} = 1.50 \text{ W/kg} = 1.75 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 22.3 °C
Ambient Temperature: 22.5 °C
Test Date: 01/26/2021
Plot No.: 51
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE bands (0); Frequency: 3560 MHz;Duty Cycle: 1:1.58016
Medium parameters used: $f = 3560$ MHz; $\sigma = 3.012$ S/m; $\epsilon_r = 37.981$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(6.87, 6.87, 6.87) @ 3560 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 48 Body Rear QPSK 20MHz 1RB 0offset 55340ch/Area Scan (11x20x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.468 W/kg

LTE Band 48 Body Rear QPSK 20MHz 1RB 0offset 55340ch/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm
Reference Value = 0.6060 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.632 W/kg
SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.122 W/kg
Maximum value of SAR (measured) = 0.480 W/kg

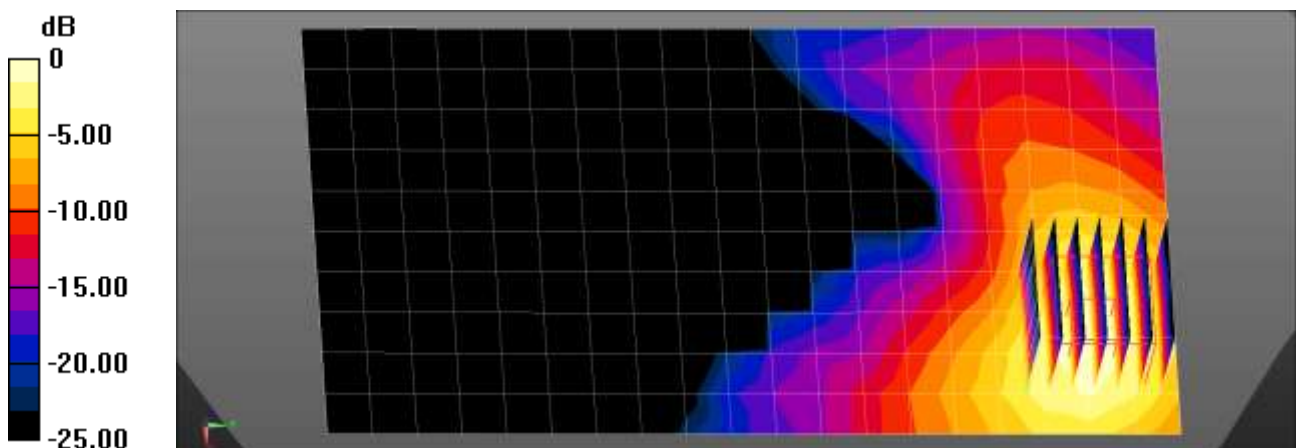

0 dB = 0.480 W/kg = -3.19 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 19.6 °C
 Ambient Temperature: 19.7 °C
 Test Date: 01/07/2021
 Plot No.: 52
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE 66 (0); Frequency: 1770 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 40.909$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(9.12, 9.12, 9.12) @ 1770 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band66 Body Worn Rear QPSK 20MHz 1RB 99offset 132572ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.449 W/kg

LTE Band66 Body Worn Rear QPSK 20MHz 1RB 99offset 132572ch/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 11.32 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.588 W/kg
SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.203 W/kg
 Maximum value of SAR (measured) = 0.472 W/kg

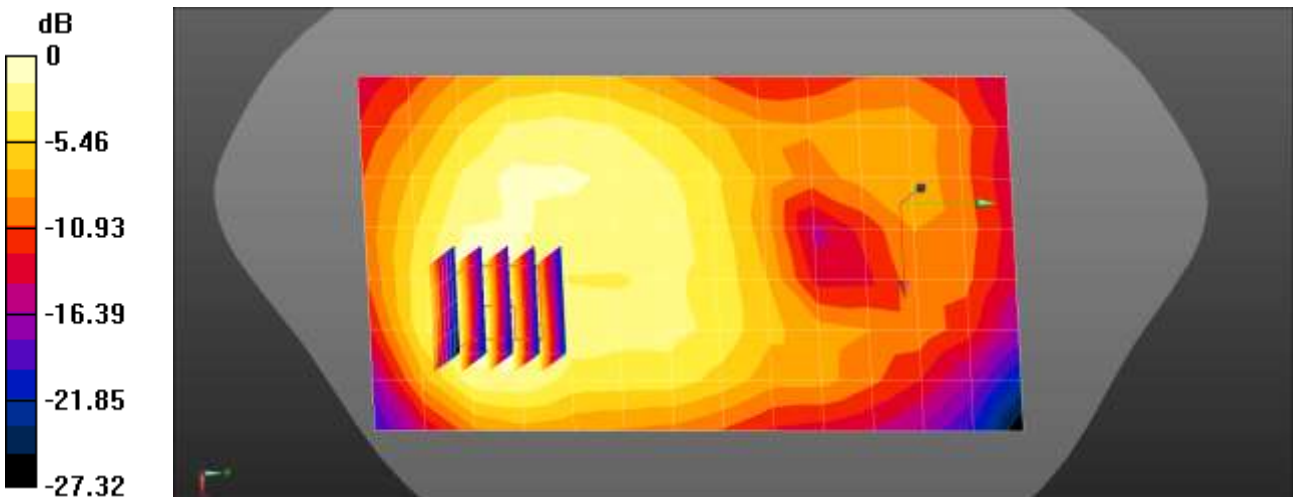

0 dB = 0.449 W/kg = -3.48 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 18.5 °C
 Ambient Temperature: 18.6 °C
 Test Date: 01/08/2021
 Plot No.: 53

DUT: SM-A326U; Type: Bar


Communication System: UID 0, LTE 71 (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 680.5 \text{ MHz}$; $\sigma = 0.854 \text{ S/m}$; $\epsilon_r = 41.179$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.86, 9.86, 9.86) @ 680.5 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4);

LTE Band 71 Body Worn Rear 20MHz QPSK 1RB 0offset 133297ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.398 W/kg

LTE Band 71 Body Worn Rear 20MHz QPSK 1RB 0offset 133297ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 22.42 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 0.437 W/kg
SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.286 W/kg
 Maximum value of SAR (measured) = 0.402 W/kg

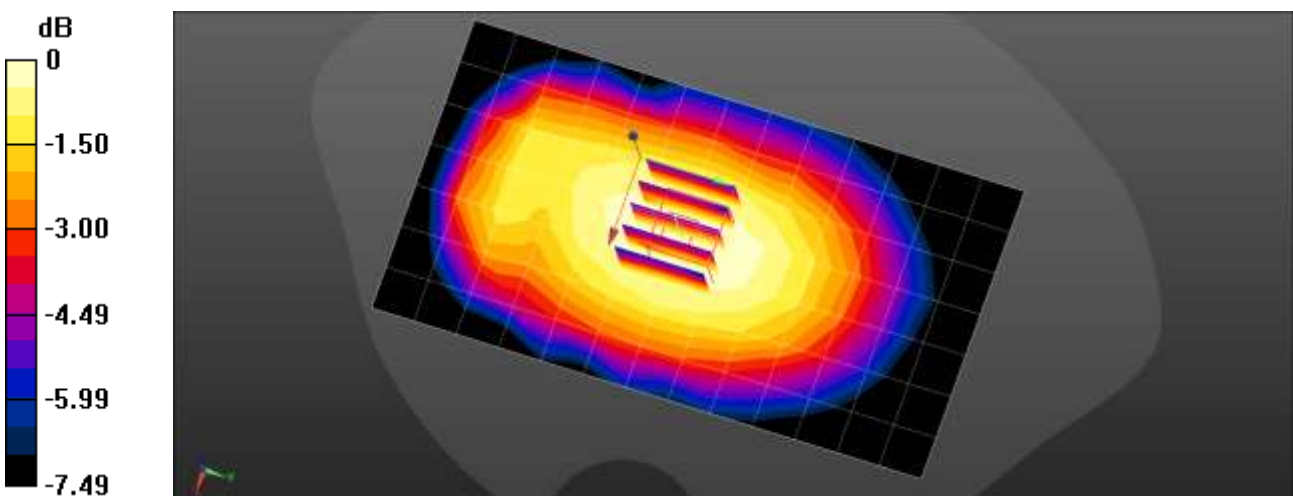

$0 \text{ dB} = 0.402 \text{ W/kg} = -3.96 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.9 °C
 Ambient Temperature: 22.1 °C
 Test Date: 01/19/2021
 Plot No.: 54
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 41.887$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3968; ConvF(9.55, 9.55, 9.55) @ 836.5 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n5 Body-worn Rear DFT-s QPSK 20MHz 50RB 28offset 167300ch/Area Scan (8x14x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.368 W/kg

NR Band n5 Body-worn Rear DFT-s QPSK 20MHz 50RB 28offset 167300ch/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 21.17 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.418 W/kg
SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.217 W/kg
 Maximum value of SAR (measured) = 0.375 W/kg

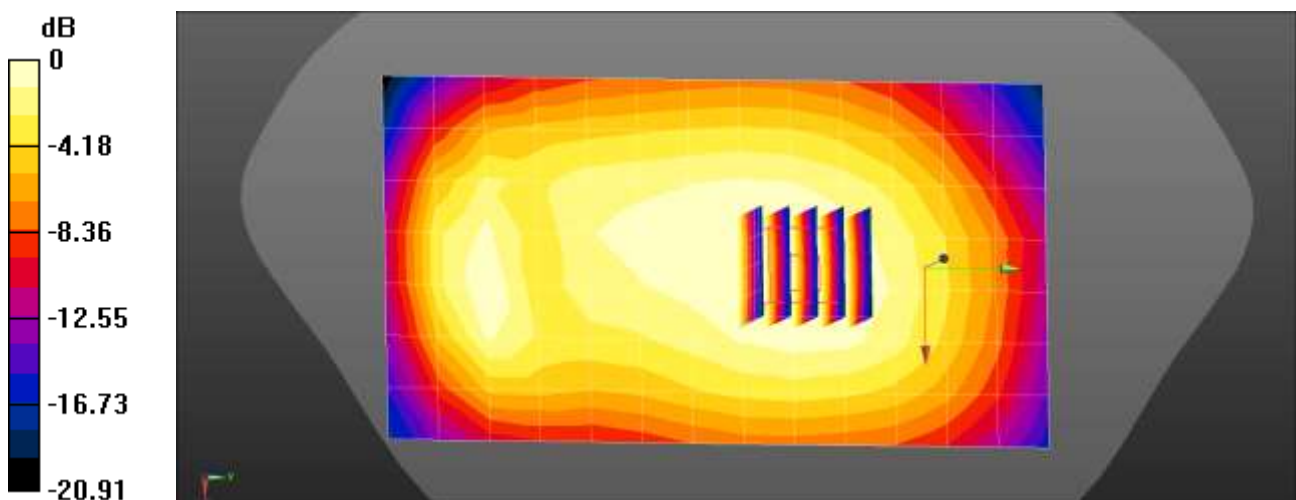

$0 \text{ dB} = 0.368 \text{ W/kg} = -4.34 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 20.5 °C
Ambient Temperature: 20.6 °C
Test Date: 01/20/2021
Plot No.: 55
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR Band 2,25 (0); Frequency: 1905 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 40.917$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: ES3DV3 - SN3076; ConvF(5.08, 5.08, 5.08) @ 1905 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n25 Body-worn Rear DFT-s QPSK 20MHz 50RB 28offset 381000ch/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.655 W/kg

NR Band n25 Body-worn Rear DFT-s QPSK 20MHz 50RB 28offset 381000ch/Zoom Scan (5x5x7)/Cube

0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.16 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 0.972 W/kg
SAR(1 g) = 0.546 W/kg; SAR(10 g) = 0.314 W/kg
Maximum value of SAR (measured) = 0.667 W/kg

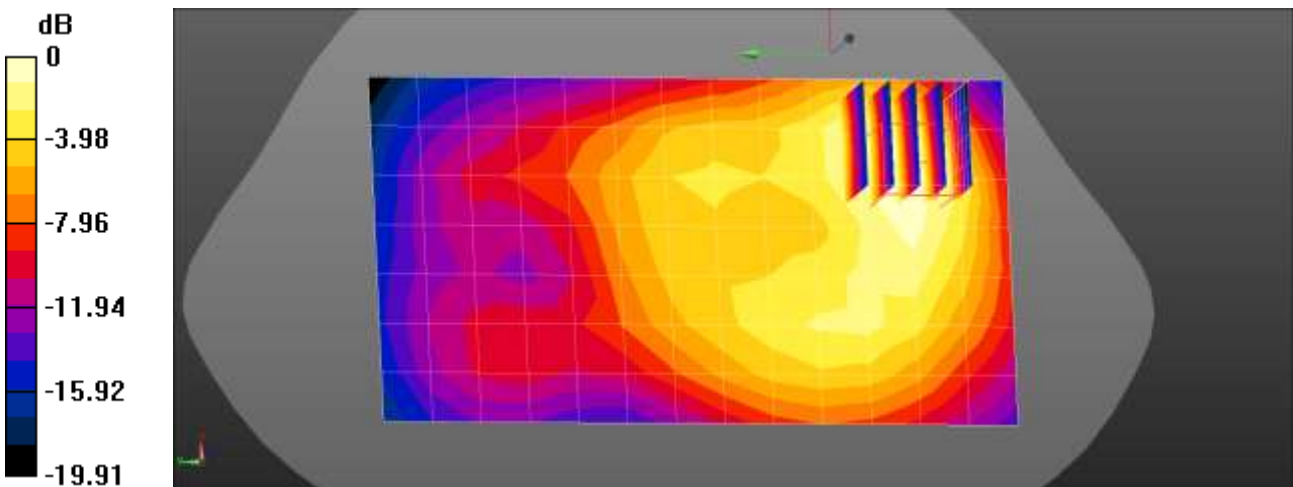

0 dB = 0.655 W/kg = -1.84 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.2 °C
 Ambient Temperature: 21.3 °C
 Test Date: 01/28/2021
 Plot No.: 56
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 2.028$ S/m; $\epsilon_r = 40.275$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3968; ConvF(7.34, 7.34, 7.34) @ 2592.99 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n41 Body-worn Rear DFT-s QPSK 20MHz 1RB 137offset 518598ch/Area Scan (10x16x1):

Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.938 W/kg

NR Band n41 Body-worn Rear DFT-s QPSK 20MHz 1RB 137offset 518598ch/Zoom Scan (7x7x7)/Cube

0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.692 V/m; Power Drift = -0.11 dB
 Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.308 W/kg
 Maximum value of SAR (measured) = 0.999 W/kg

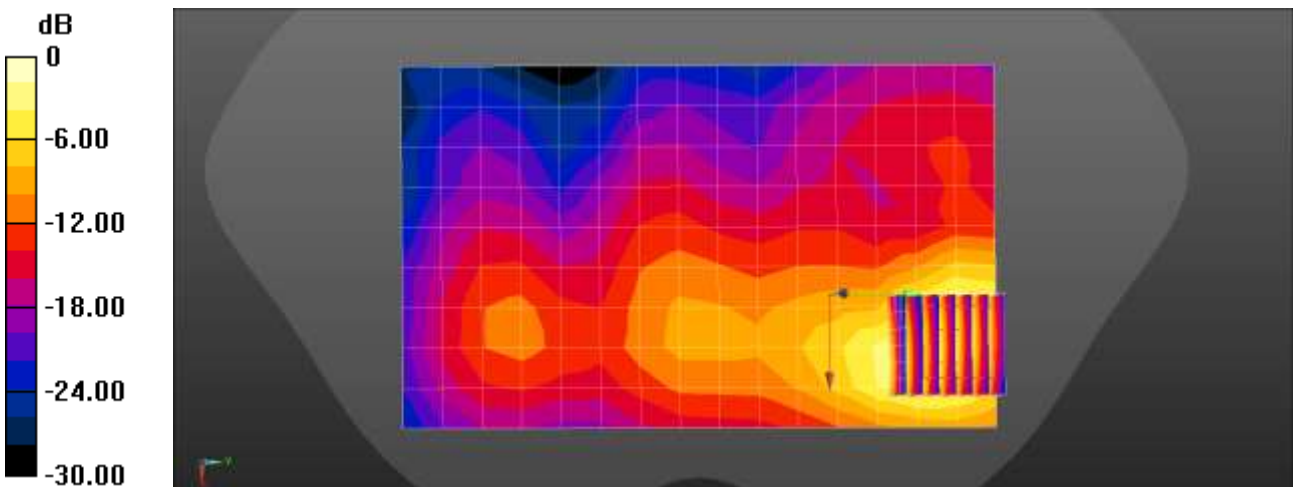

0 dB = 0.938 W/kg = -0.28 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.3 °C
 Ambient Temperature: 21.5 °C
 Test Date: 01/22/2021
 Plot No.: 57
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR Band 66 (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1745 \text{ MHz}$; $\sigma = 1.372 \text{ S/m}$; $\epsilon_r = 41.622$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: ES3DV3 - SN3076; ConvF(5.24, 5.24, 5.24) @ 1745 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n66 Body-worn Rear DFT-s QPSK 40MHz 1RB 108offset 349000ch/Area Scan (8x14x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.492 W/kg

NR Band n66 Body-worn Rear DFT-s QPSK 40MHz 1RB 108offset 349000ch/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 10.97 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.689 W/kg
SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.255 W/kg
 Maximum value of SAR (measured) = 0.492 W/kg

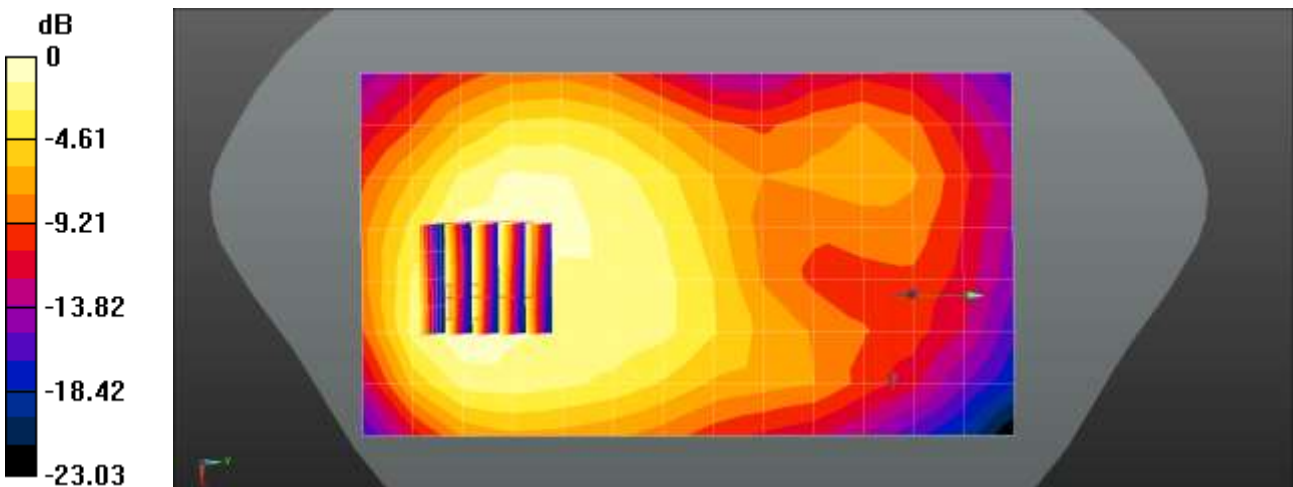

$0 \text{ dB} = 0.492 \text{ W/kg} = -3.08 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.3 °C
 Ambient Temperature: 22.5 °C
 Test Date: 01/21/2021
 Plot No.: 58
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, 5G NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 680.5 \text{ MHz}$; $\sigma = 0.912 \text{ S/m}$; $\epsilon_r = 42.315$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3968; ConvF(9.94, 9.94, 9.94) @ 680.5 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n71 Body-worn Rear DFT-s QPSK 20MHz 50RB 28offset 136100ch/Area Scan (8x14x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.368 W/kg

NR Band n71 Body-worn Rear DFT-s QPSK 20MHz 50RB 28offset 136100ch/Zoom Scan (5x5x7)/Cube

0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 20.83 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.416 W/kg
SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.222 W/kg
 Maximum value of SAR (measured) = 0.375 W/kg

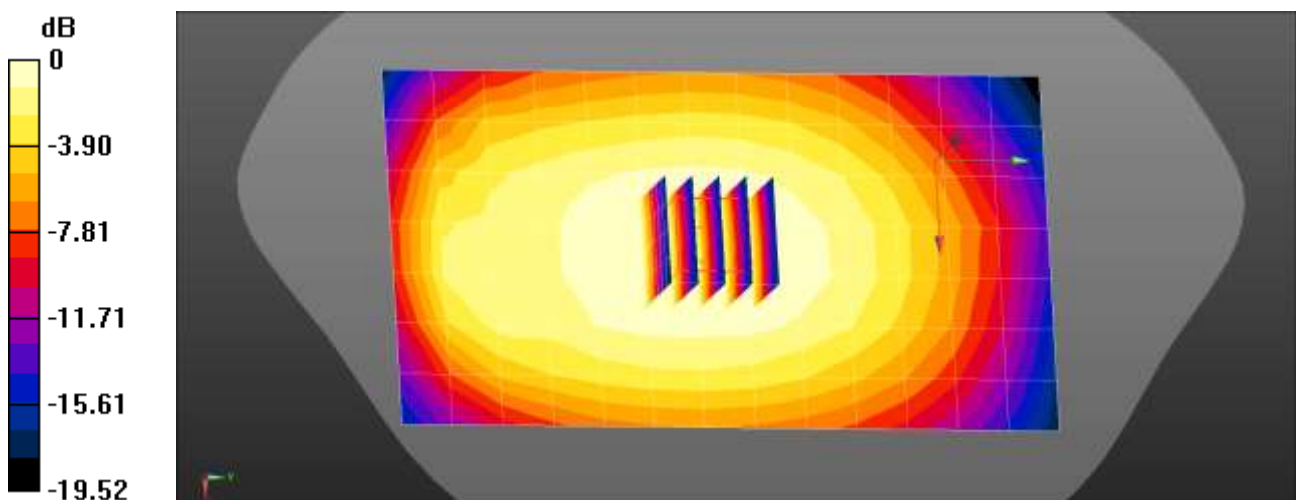

$0 \text{ dB} = 0.368 \text{ W/kg} = -4.34 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 20.7 °C
Ambient Temperature: 20.7 °C
Test Date: 01/27/2021
Plot No.: 59
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR n77 Duty100% (0); Frequency: 3750 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 3750$ MHz; $\sigma = 3.199$ S/m; $\epsilon_r = 37.619$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(7.15, 7.15, 7.15) @ 3750 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n77 Body Worn Rear DFT-s QPSK 100MHz 135RB 69offset 650000ch/Area Scan (11x20x1):

Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.623 W/kg

NR Band n77 Body Worn Rear DFT-s QPSK 100MHz 135RB 69offset 650000ch/Zoom Scan


(7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 0 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.864 W/kg

SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.618 W/kg

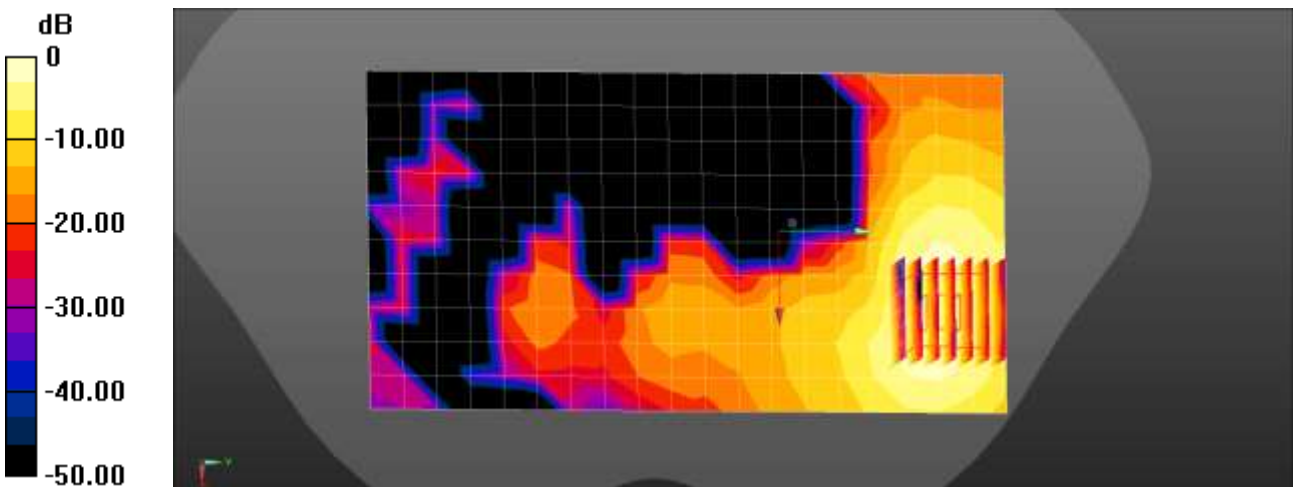

0 dB = 0.623 W/kg = -2.06 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.4 °C
Ambient Temperature: 21.6 °C
Test Date: 02/06/2021
Plot No.: 60
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, 2450MHz (0); Frequency: 2412 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 40.887$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.47, 7.47, 7.47) @ 2412 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

802.11b Body worn Rear 1Mbps 1ch/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.179 W/kg


802.11b Body worn Rear 1Mbps 1ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.862 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.200 W/kg

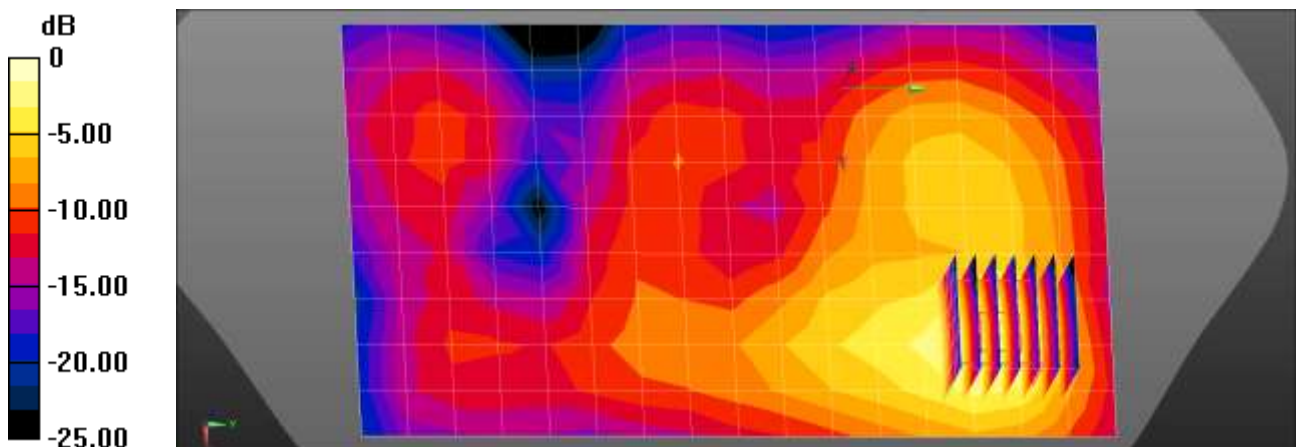

0 dB = 0.200 W/kg = -6.99 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 20.3 °C
Ambient Temperature: 20.5 °C
Test Date: 02/04/2021
Plot No.: 61
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, WIFI 5GHz n40 (0); Frequency: 5590 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5590$ MHz; $\sigma = 5.203$ S/m; $\epsilon_r = 35.495$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3863; ConvF(4.6, 4.6, 4.6) @ 5590 MHz; Calibrated: 2020-05-27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Right
- Measurement SW: DASY52, Version 52.10 (4)

802.11n40 Body Worn Rear MCS0 118ch/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.436 W/kg


802.11n40 Body Worn Rear MCS0 118ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.840 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.479 W/kg

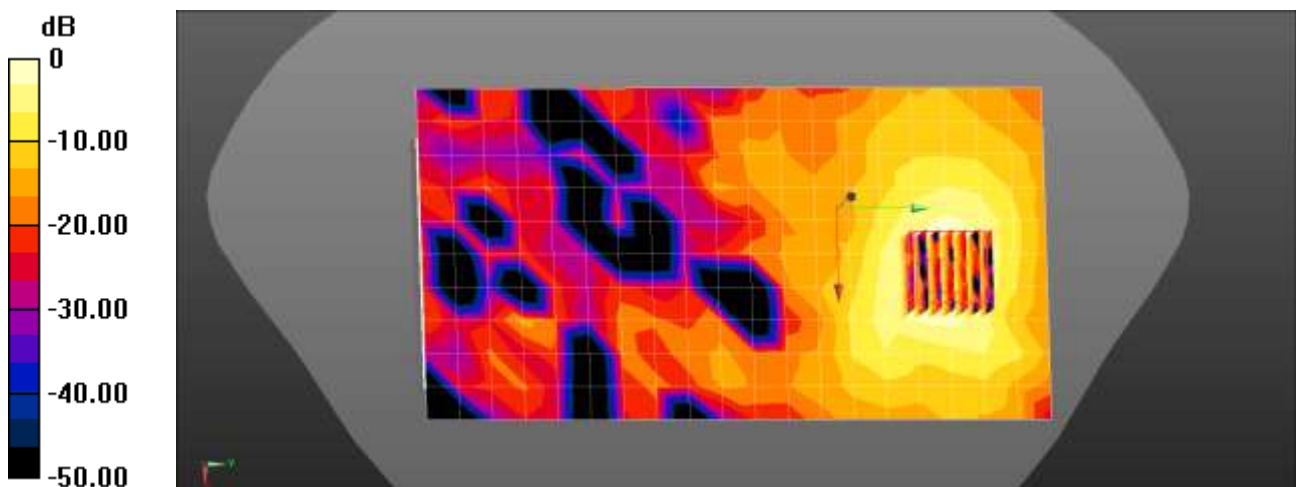

$$0 \text{ dB} = 0.436 \text{ W/kg} = -3.60 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.5 °C
Ambient Temperature: 21.8 °C
Test Date: 01/21/2021
Plot No.: 62
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.302
Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.736$ S/m; $\epsilon_r = 38.572$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.34, 7.34, 7.34) @ 2402 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

Bluetooth Body Rear DH5 0ch body worn/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0203 W/kg


Bluetooth Body Rear DH5 0ch body worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00487 W/kg

Maximum value of SAR (measured) = 0.0229 W/kg

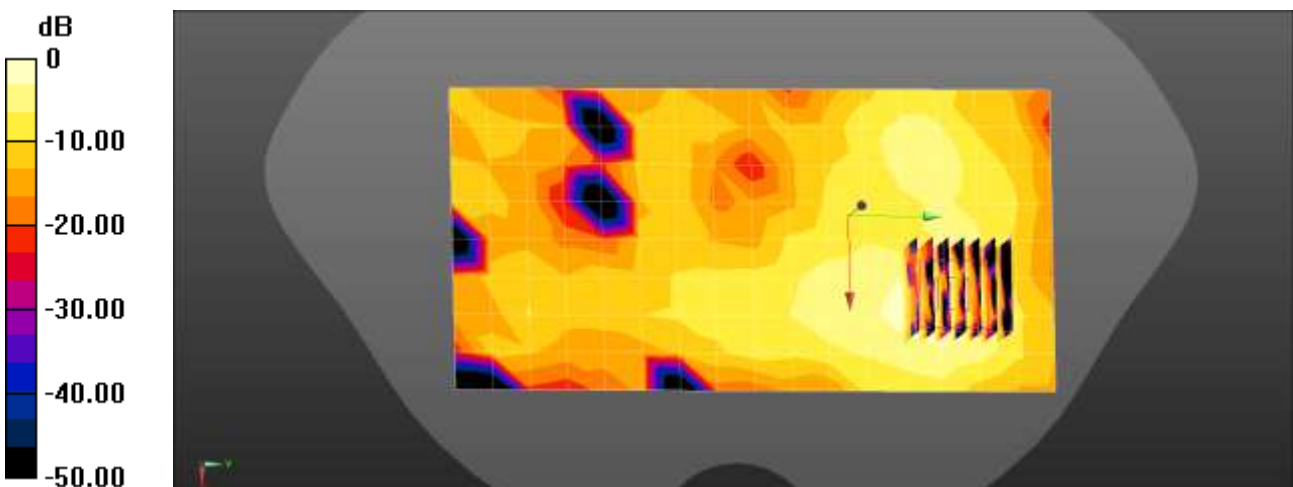

$$0 \text{ dB} = 0.0203 \text{ W/kg} = -16.92 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.8 °C
 Ambient Temperature: 22.0 °C
 Test Date: 01/06/2021
 Plot No.: 63
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, CDMA BC10 (FCC) (0); Frequency: 820 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 820 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.919$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.96, 6.96, 6.96) @ 820 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

CDMA BC10 Body Rear EVDO Rev.0 560ch/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.455 W/kg


CDMA BC10 Body Rear EVDO Rev.0 560ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.27 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.484 W/kg

SAR(1 g) = 0.361 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.401 W/kg

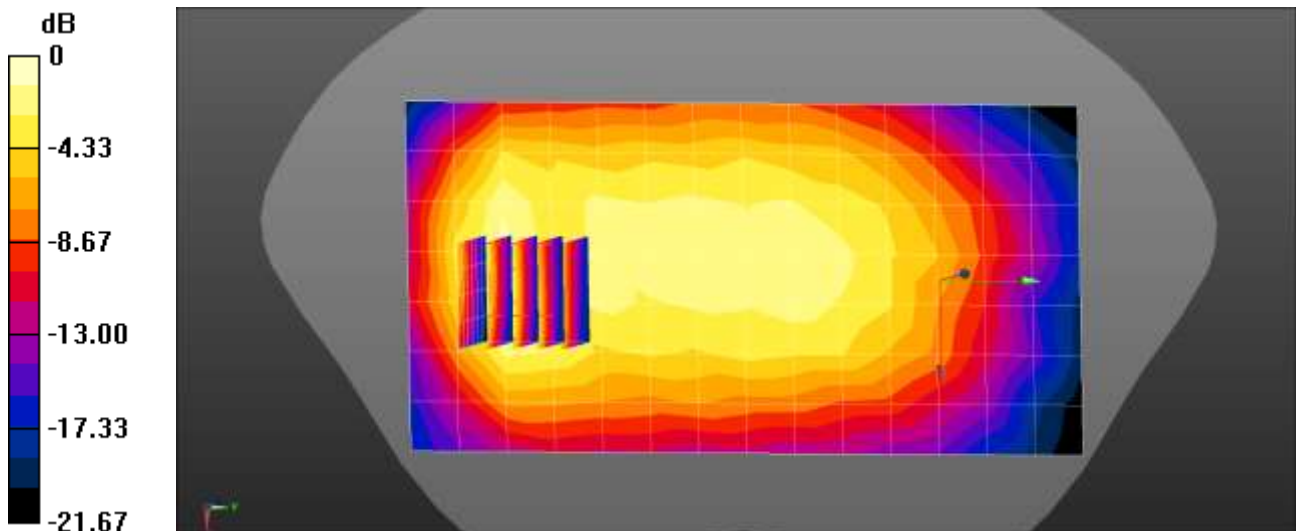

$0 \text{ dB} = 0.455 \text{ W/kg} = -3.42 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.9 °C
 Ambient Temperature: 22.0 °C
 Test Date: 01/07/2021
 Plot No.: 64
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 41.71$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.96, 6.96, 6.96) @ 836.52 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

CDMA BC0 Body Rear EVDO Rev.0 384ch/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.487 W/kg

CDMA BC0 Body Rear EVDO Rev.0 384ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 13.74 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.523 W/kg
SAR(1 g) = 0.394 W/kg; SAR(10 g) = 0.238 W/kg
 Maximum value of SAR (measured) = 0.437 W/kg

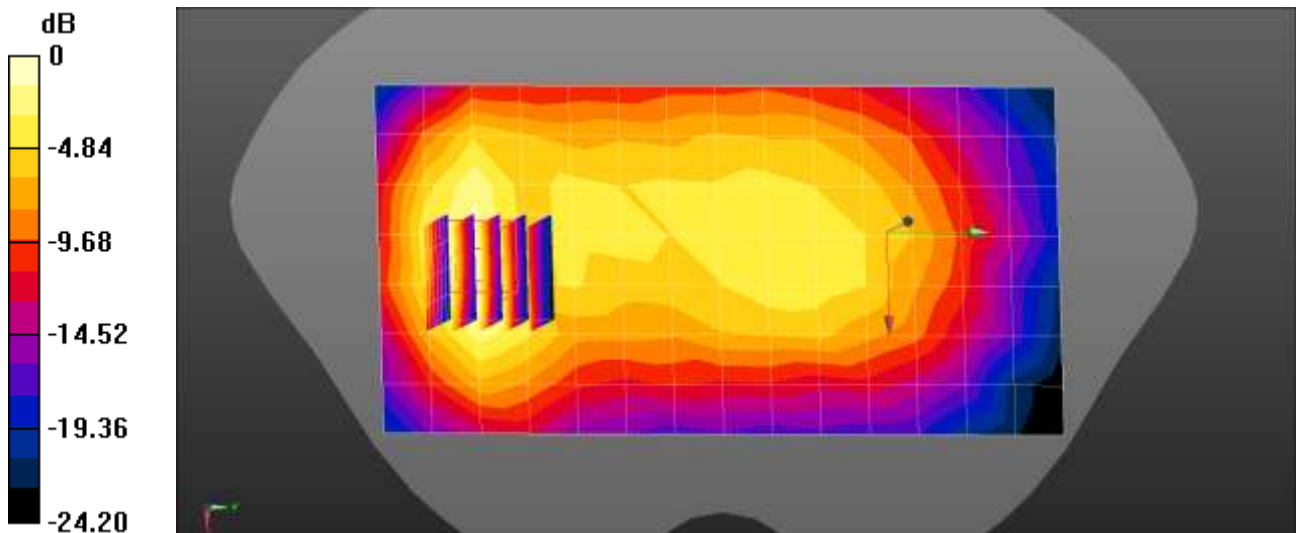

0 dB = 0.487 W/kg = -3.12 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 22.2 °C
Ambient Temperature: 22.4 °C
Test Date: 02/01/2021
Plot No.: 65
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, CDMA BC1 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 41.103$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(8.19, 8.19, 8.19) @ 1880 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

CDMA BC1 Body Rear EVDO Rev.0 600ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.654 W/kg

CDMA BC1 Body Rear EVDO Rev.0 600ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.64 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.821 W/kg
SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.257 W/kg
Maximum value of SAR (measured) = 0.662 W/kg

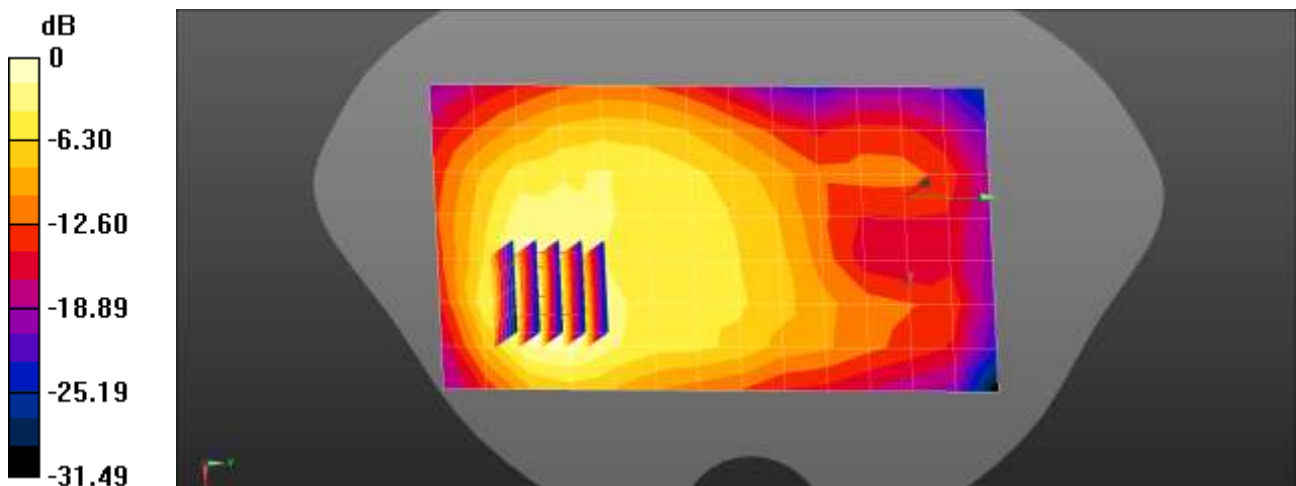

0 dB = 0.654 W/kg = -1.84 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 18.9 °C
 Ambient Temperature: 19.1 °C
 Test Date: 01/04/2021
 Plot No.: 66
 DUT: SM-A326U; Type: Bar;
 Communication System: UID 0, GSM850 GPRS 4TX (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.07491
 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 42.912$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.61, 9.61, 9.61) @ 824.2 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4)

GSM 850 Body Rear 4Tx 128ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.13 W/kg

GSM 850 Body Rear 4Tx 128ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.43 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.437 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Maximum value of SAR (measured) = 1.11 W/kg


GSM 850 Body Rear 4Tx 128ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.43 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.680 W/kg; SAR(10 g) = 0.405 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

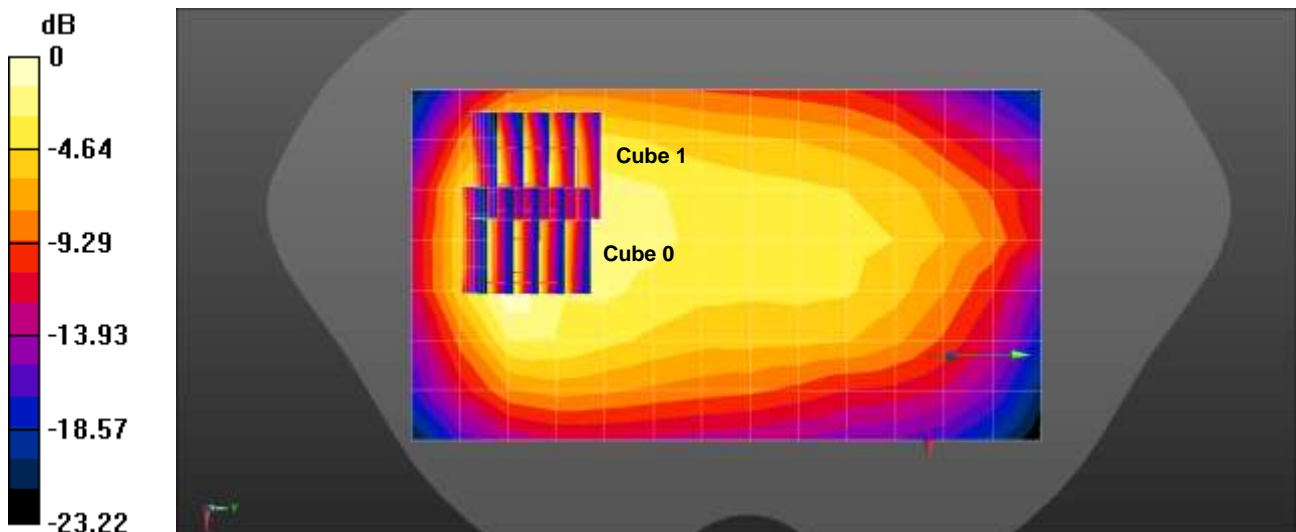

0 dB = 1.13 W/kg = 0.54 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 18.9 °C
 Ambient Temperature: 19.1 °C
 Test Date: 01/04/2021
 Plot No.: 67
 DUT: SM-A326U; Type: Bar;
 Communication System: UID 0, GSM850 GPRS 4TX (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.07491
 Medium parameters used (interpolated): $f = 848.8 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 42.63$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.61, 9.61, 9.61) @ 848.8 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4)

GSM 850 Body Rear 4Tx 251ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.13 W/kg

GSM 850 Body Rear 4Tx 251ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.56 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.750 W/kg; SAR(10 g) = 0.429 W/kg

Smallest distance from peaks to all points 3 dB below = 11.6 mm

Maximum value of SAR (measured) = 1.07 W/kg


GSM 850 Body Rear 4Tx 251ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.56 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.677 W/kg; SAR(10 g) = 0.396 W/kg

Maximum value of SAR (measured) = 0.986 W/kg

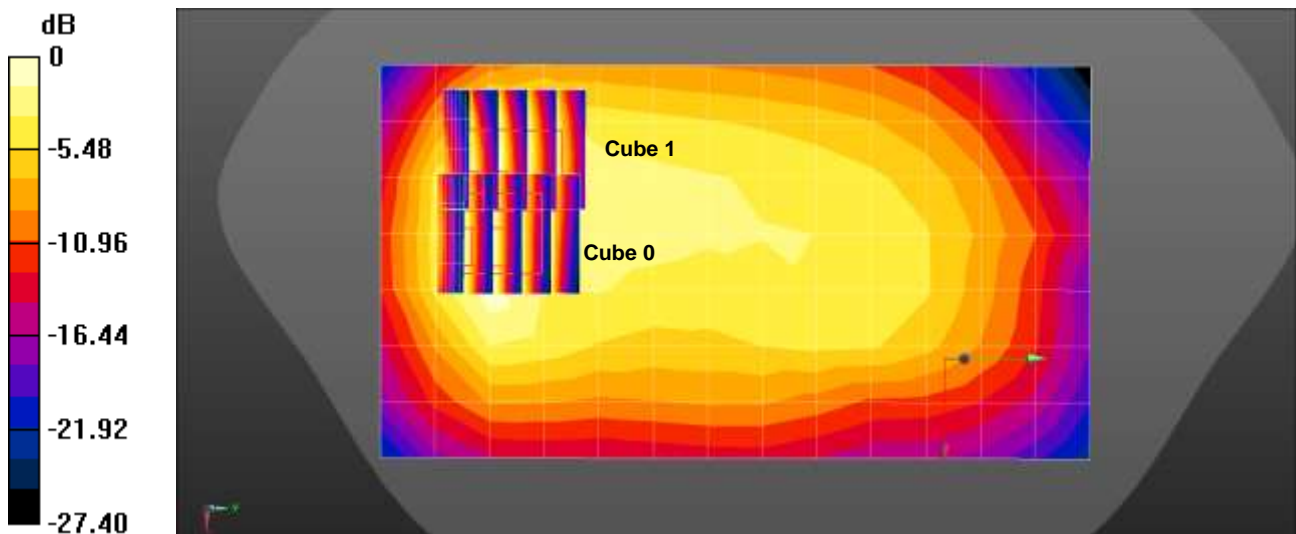

0 dB = 1.13 W/kg = 0.54 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.9 °C
 Ambient Temperature: 22.0 °C
 Test Date: 01/04/2021
 Plot No.: 68
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, GSM 1900 4TX (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.436 \text{ S/m}$; $\epsilon_r = 39.221$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.63, 5.63, 5.63) @ 1880 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

GSM1900 Body Rear 4Tx 190ch/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.646 W/kg

GSM1900 Body Rear 4Tx 190ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 10.91 V/m; Power Drift = -0.15 dB
 Peak SAR (extrapolated) = 0.740 W/kg
SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.334 W/kg
 Maximum value of SAR (measured) = 0.585 W/kg

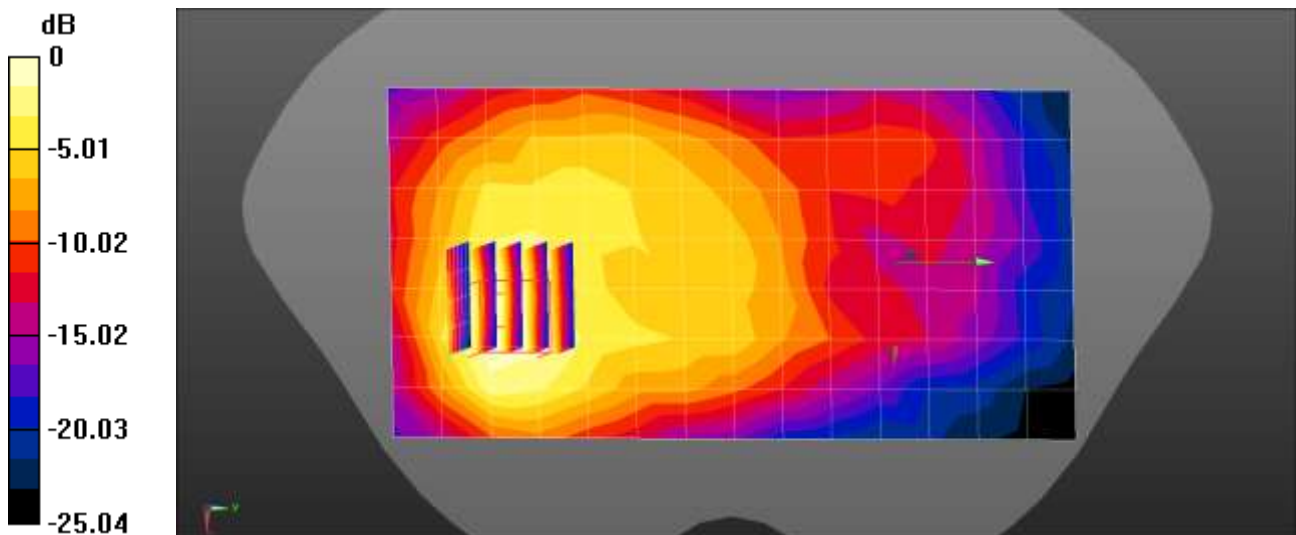

$0 \text{ dB} = 0.646 \text{ W/kg} = -1.89 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.0 °C
 Ambient Temperature: 22.2 °C
 Test Date: 12/31/2020
 Plot No.: 69
 DUT: SM-A326U; Type: Bar;
 Communication System: UID 0, WCDMA850 (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4 \text{ MHz}$; $\sigma = 0.908 \text{ S/m}$; $\epsilon_r = 42.845$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.61, 9.61, 9.61) @ 826.4 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4)

WCDMA Band5 Body Rear 4132ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.738 W/kg

WCDMA Band5 Body Rear 4132ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.55 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.323 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm


Maximum value of SAR (measured) = 0.825 W/kg

WCDMA Band5 Body Rear 4132ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm,, Reference Value = 22.55 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.928 W/kg

SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.273 W/kg

Maximum value of SAR (measured) = 0.768 W/kg

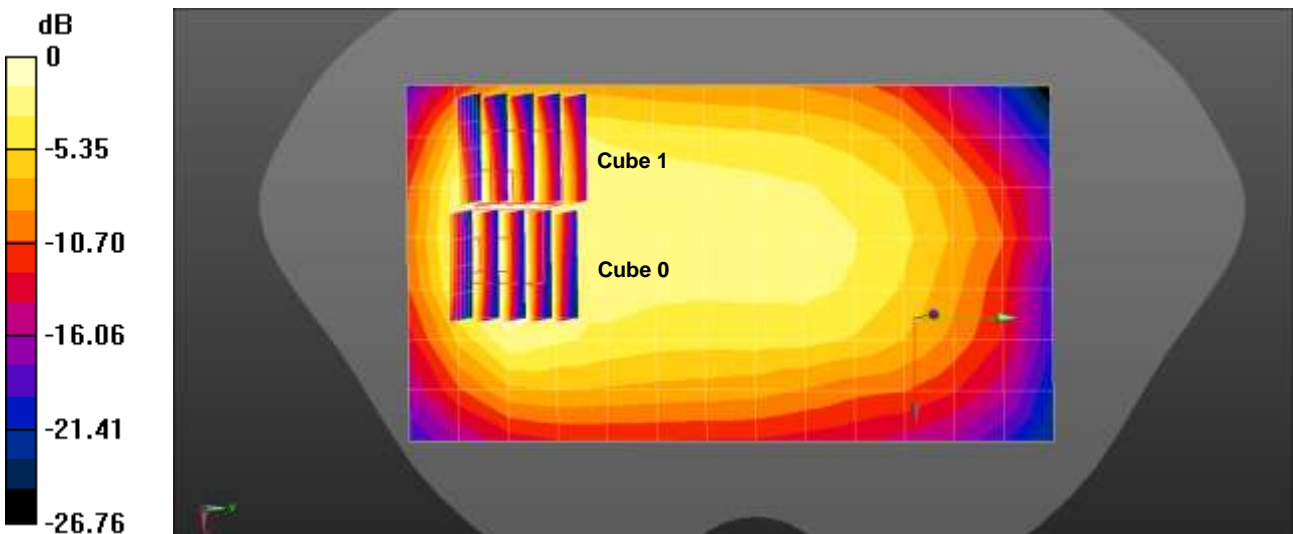

0 dB = 0.738 W/kg = -1.32 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 22.3 °C
Ambient Temperature: 22.4 °C
Test Date: 02/07/2021
Plot No.: 70
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, WCDMA1700 (0); Frequency: 1752.6 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.375$ S/m; $\epsilon_r = 41.832$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(8.56, 8.56, 8.56) @ 1752.6 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

WCDMA Band 4 Body Rear 1513ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.332 W/kg


WCDMA Band 4 Body Rear 1513ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.882 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.141 W/kg

Maximum value of SAR (measured) = 0.370 W/kg

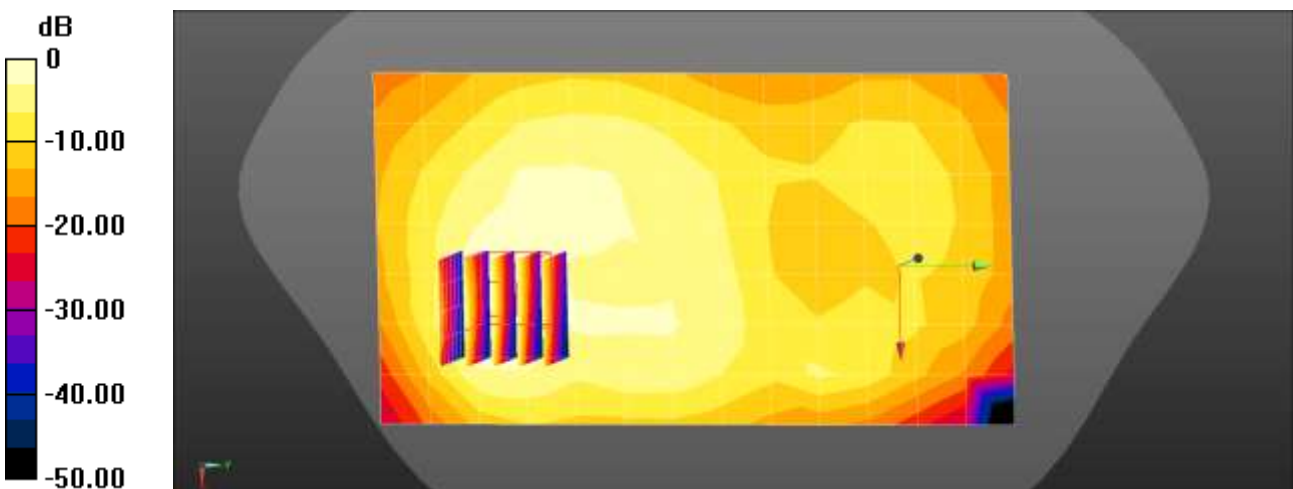

$$0 \text{ dB} = 0.332 \text{ W/kg} = -4.80 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.3 °C
 Ambient Temperature: 22.4 °C
 Test Date: 02/06/2021
 Plot No.: 71
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, WCDMA Band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.415 \text{ S/m}$; $\epsilon_r = 41.275$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(8.19, 8.19, 8.19) @ 1880 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

WCDMA Band 2 Body Rear 9400ch/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.367 W/kg

WCDMA Band 2 Body Rear 9400ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.634 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 0.519 W/kg
SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.153 W/kg
 Maximum value of SAR (measured) = 0.420 W/kg

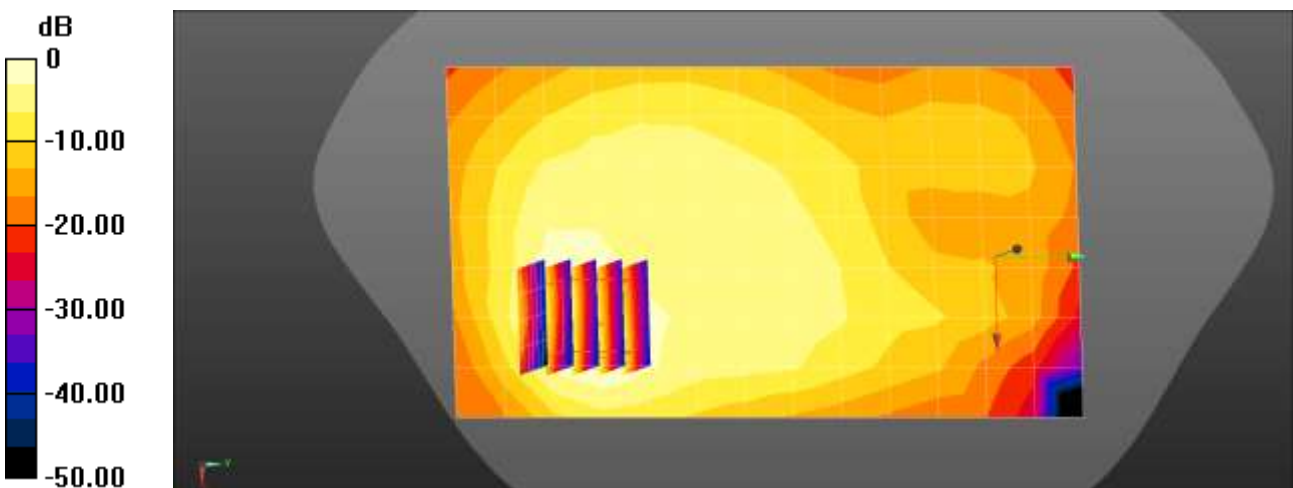

$0 \text{ dB} = 0.367 \text{ W/kg} = -4.35 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.2 °C
Ambient Temperature: 21.4 °C
Test Date: 02/04/2021
Plot No.: 72
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band7 (0); Frequency: 2560 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 39.932$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2560 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 7 Body Rear QPSK 20MHz 1RB 99offset 21350ch/Area Scan (10x17x1): Measurement grid:
dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.667 W/kg

LTE Band 7 Body Rear QPSK 20MHz 1RB 99offset 21350ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.111 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.894 W/kg
SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.176 W/kg
Maximum value of SAR (measured) = 0.694 W/kg

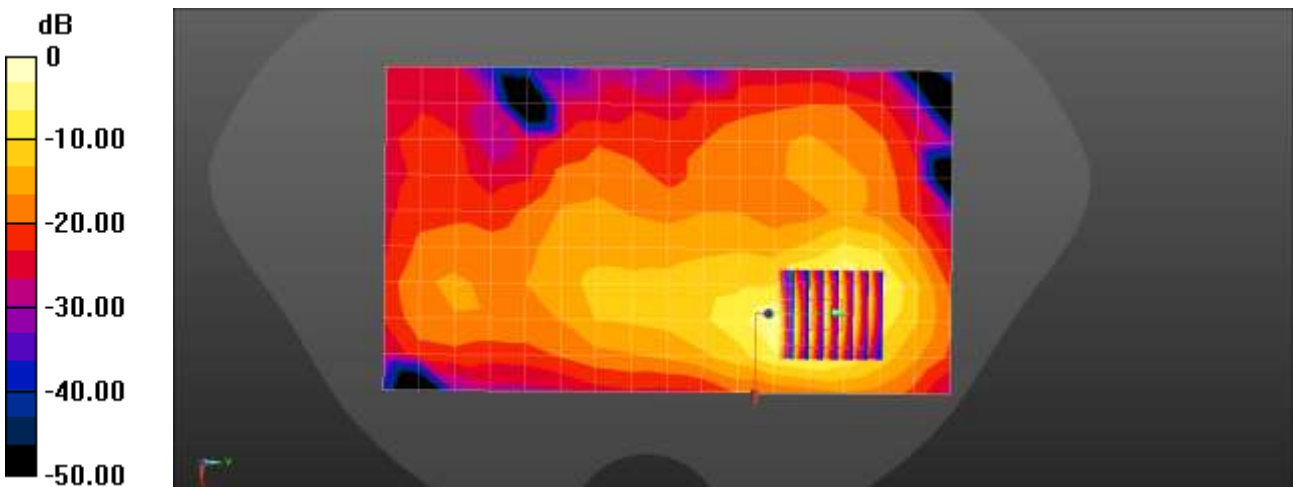

$$0 \text{ dB} = 0.667 \text{ W/kg} = -1.76 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.2 °C
 Ambient Temperature: 21.4 °C
 Test Date: 02/04/2021
 Plot No.: 73

DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band7 (0); Frequency: 2560 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2560 \text{ MHz}$; $\sigma = 1.959 \text{ S/m}$; $\epsilon_r = 39.932$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2560 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 7 Body Rear QPSK 20MHz 50RB 49offset 21350ch/Area Scan (10x17x1): Measurement grid:
 $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.701 W/kg

LTE Band 7 Body Rear QPSK 20MHz 50RB 49offset 21350ch/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.991 V/m; Power Drift = -0.13 dB
 Peak SAR (extrapolated) = 0.922 W/kg
SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.184 W/kg
 Maximum value of SAR (measured) = 0.713 W/kg

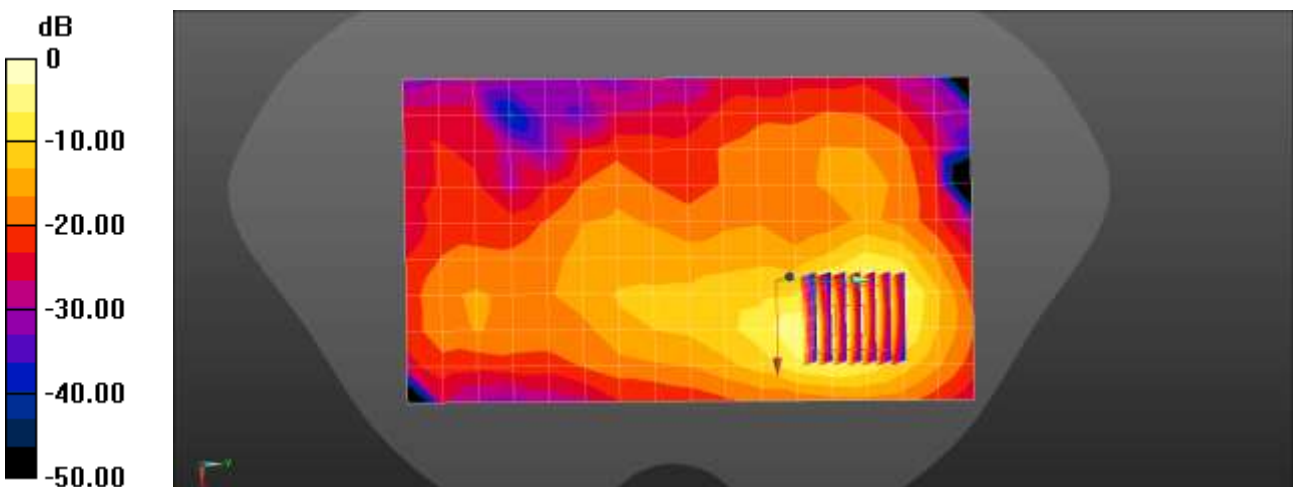

$$0 \text{ dB} = 0.701 \text{ W/kg} = -1.54 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 18.5 °C
 Ambient Temperature: 18.7 °C
 Test Date: 01/05/2021
 Plot No.: 74
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 707.5 \text{ MHz}$; $\sigma = 0.862 \text{ S/m}$; $\epsilon_r = 43.25$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.86, 9.86, 9.86) @ 707.5 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 12 Body Rear 10MHz QPSK 1RB 0offset 23095ch/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.735 W/kg

LTE Band 12 Body Rear 10MHz QPSK 1RB 0offset 23095ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.37 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.351 W/kg

Maximum value of SAR (measured) = 0.899 W/kg

LTE Band 12 Body Rear 10MHz QPSK 1RB 0offset 23095ch/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.37 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.914 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.312 W/kg

Maximum value of SAR (measured) = 0.763 W/kg


LTE Band 12 Body Rear 10MHz QPSK 1RB 0offset 23095ch/Zoom Scan (5x5x7)/Cube 2: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.37 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.647 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.372 W/kg

Maximum value of SAR (measured) = 0.554 W/kg

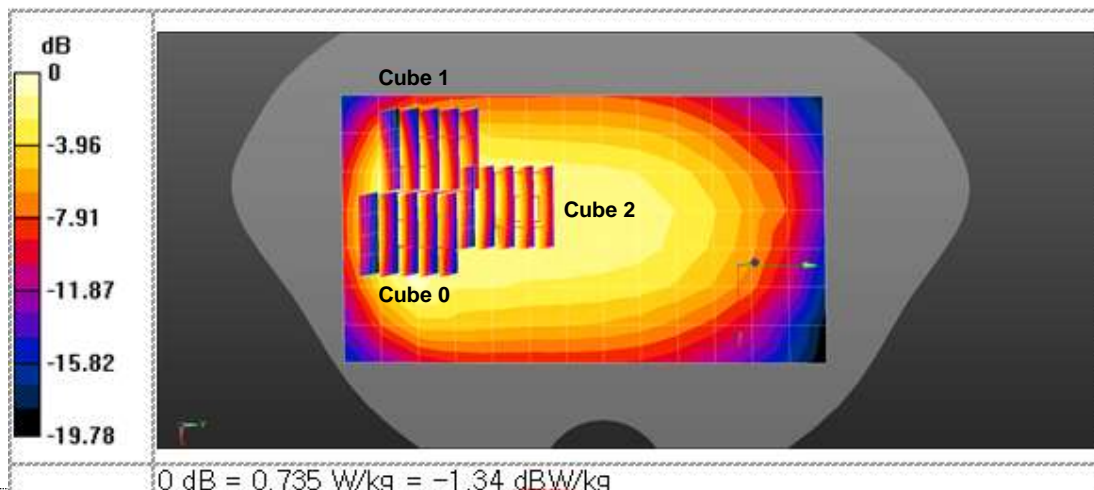

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.9 °C
 Ambient Temperature: 22.0 °C
 Test Date: 01/29/2021
 Plot No.: 75
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE 13 (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 0.879 \text{ S/m}$; $\epsilon_r = 41.951$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(9.94, 9.94, 9.94) @ 782 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 13 Body Right Qpsk 10MHz 25RB 12offset 23230ch/Area Scan (6x14x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.269 W/kg

LTE Band 13 Body Right Qpsk 10MHz 25RB 12offset 23230ch/Zoom Scan (5x5x7)/Cube 0:
 Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 19.06 V/m; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 0.332 W/kg
SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.156 W/kg
 Maximum value of SAR (measured) = 0.293 W/kg

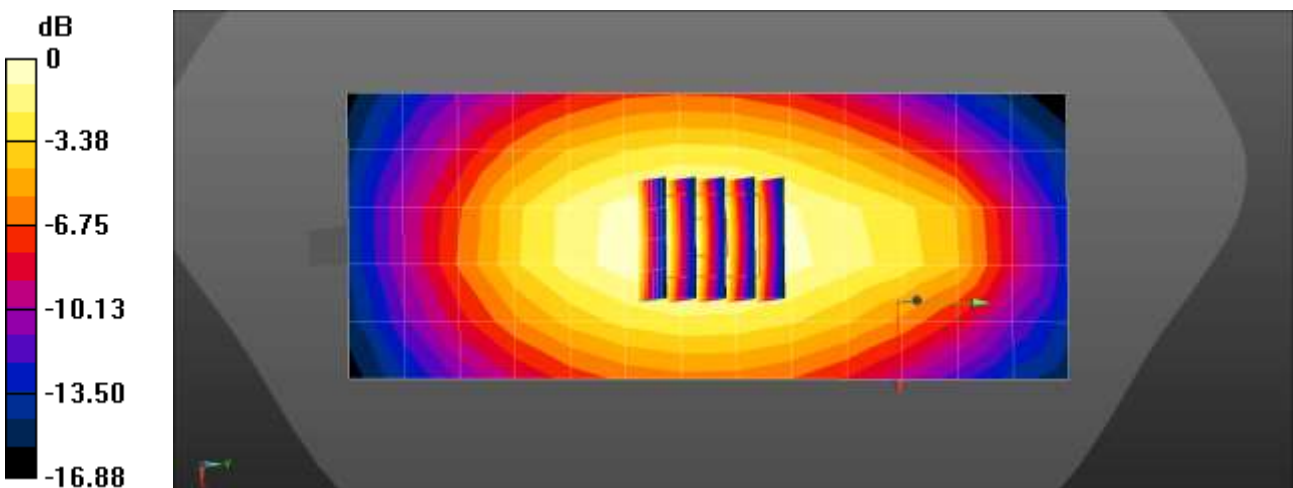

$0 \text{ dB} = 0.269 \text{ W/kg} = -5.70 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.9 °C
Ambient Temperature: 22.0 °C
Test Date: 01/29/2021
Plot No.: 76
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 793$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 41.771$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(9.94, 9.94, 9.94) @ 793 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 14 Body Left Qpsk 10MHz 25RB 24offset 23330ch/Area Scan (6x14x1): Measurement grid:
dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.232 W/kg

LTE Band 14 Body Left Qpsk 10MHz 25RB 24offset 23330ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.48 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.283 W/kg
SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.130 W/kg
Maximum value of SAR (measured) = 0.247 W/kg

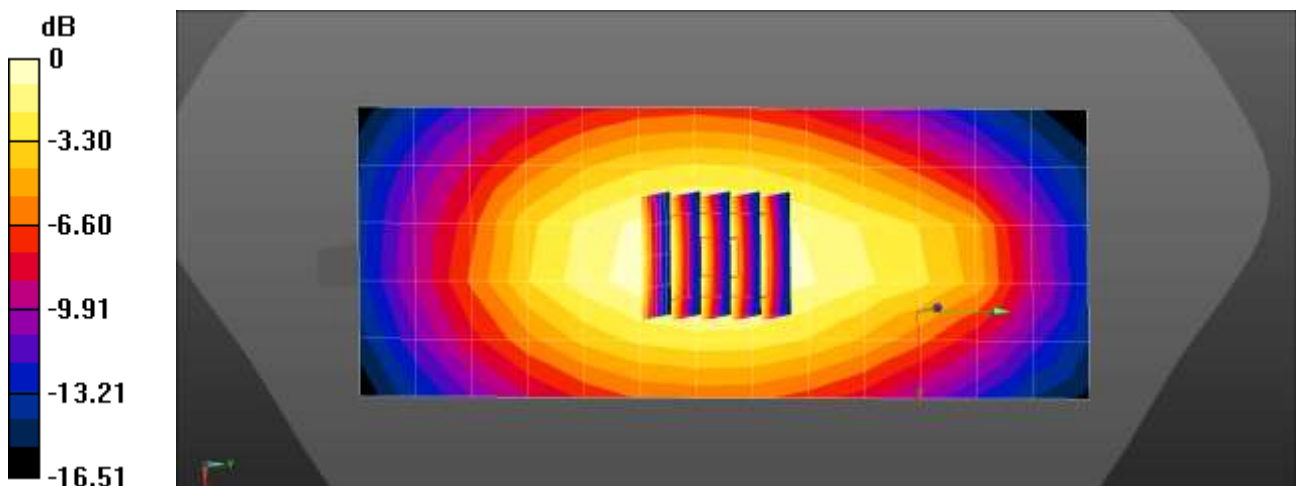

0 dB = 0.232 W/kg = -6.34 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 19.0 °C
 Ambient Temperature: 19.1 °C
 Test Date: 01/25/2021
 Plot No.: 77
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 25 (0); Frequency: 1860 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1860 \text{ MHz}$; $\sigma = 1.4 \text{ S/m}$; $\epsilon_r = 41.093$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(8.31, 8.31, 8.31) @ 1860 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

LTE band 25 Body Rear QPSK 20MHz 1RB 49offset 26140ch/Area Scan (8x14x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.619 W/kg


LTE band 25 Body Rear QPSK 20MHz 1RB 49offset 26140ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.62 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.449 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.717 W/kg

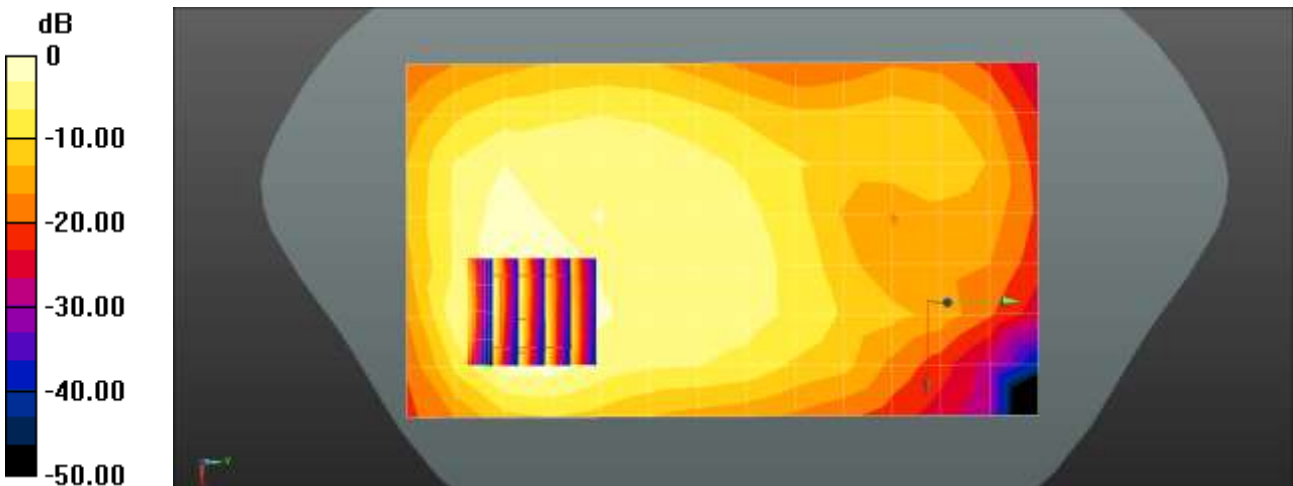

$$0 \text{ dB} = 0.619 \text{ W/kg} = -2.09 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.4 °C
 Ambient Temperature: 20.5 °C
 Test Date: 01/14/2021
 Plot No.: 78
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 831.5 \text{ MHz}$; $\sigma = 0.932 \text{ S/m}$; $\epsilon_r = 41.192$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.96, 6.96, 6.96) @ 831.5 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 26 Body Rear QPSK 15MHz 1RB 0offset 26865ch/Area Scan (8x15x1): Measurement grid:

$dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.763 W/kg


LTE Band 26 Body Rear QPSK 15MHz 1RB 0offset 26865ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.37 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.806 W/kg

SAR(1 g) = 0.588 W/kg; SAR(10 g) = 0.356 W/kg

Maximum value of SAR (measured) = 0.645 W/kg

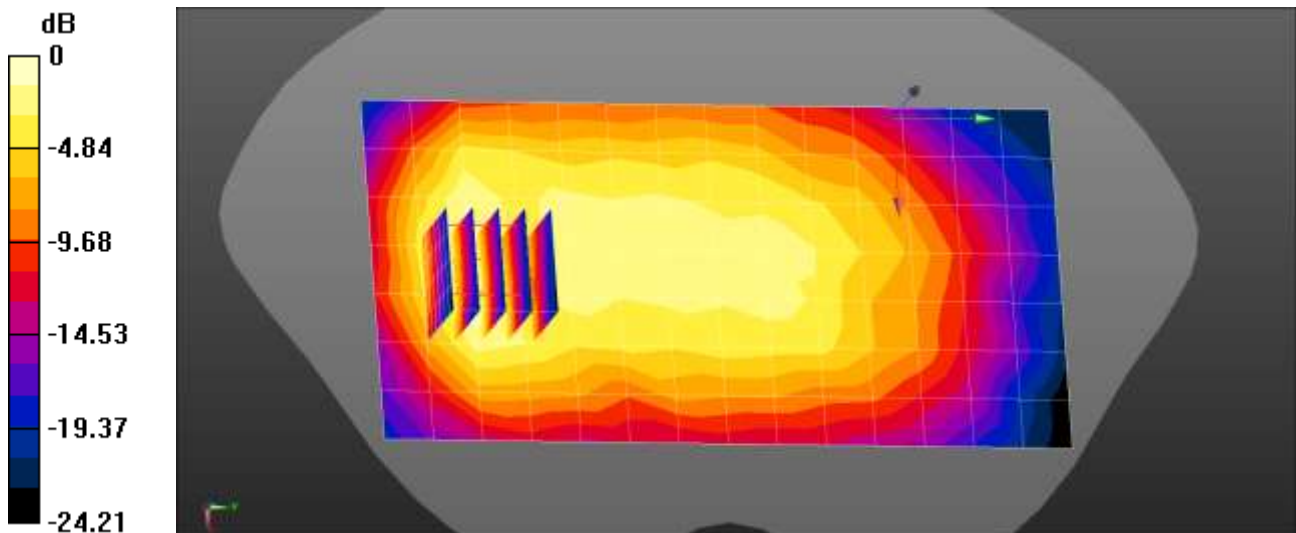

$0 \text{ dB} = 0.763 \text{ W/kg} = -1.18 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.0 °C
 Ambient Temperature: 22.2 °C
 Test Date: 02/06/2021
 Plot No.: 79
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band 30 (0); Frequency: 2310 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2310 \text{ MHz}$; $\sigma = 1.668 \text{ S/m}$; $\epsilon_r = 40.115$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2310 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 30 Body Rear QPSK 10MHz 25RB 24offset 27710ch/Area Scan (10x17x1): Measurement grid:
 $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 0.771 W/kg

LTE Band 30 Body Rear QPSK 10MHz 25RB 24offset 27710ch/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.127 V/m; Power Drift = -0.11 dB
 Peak SAR (extrapolated) = 0.994 W/kg
SAR(1 g) = 0.449 W/kg; SAR(10 g) = 0.203 W/kg
 Maximum value of SAR (measured) = 0.776 W/kg

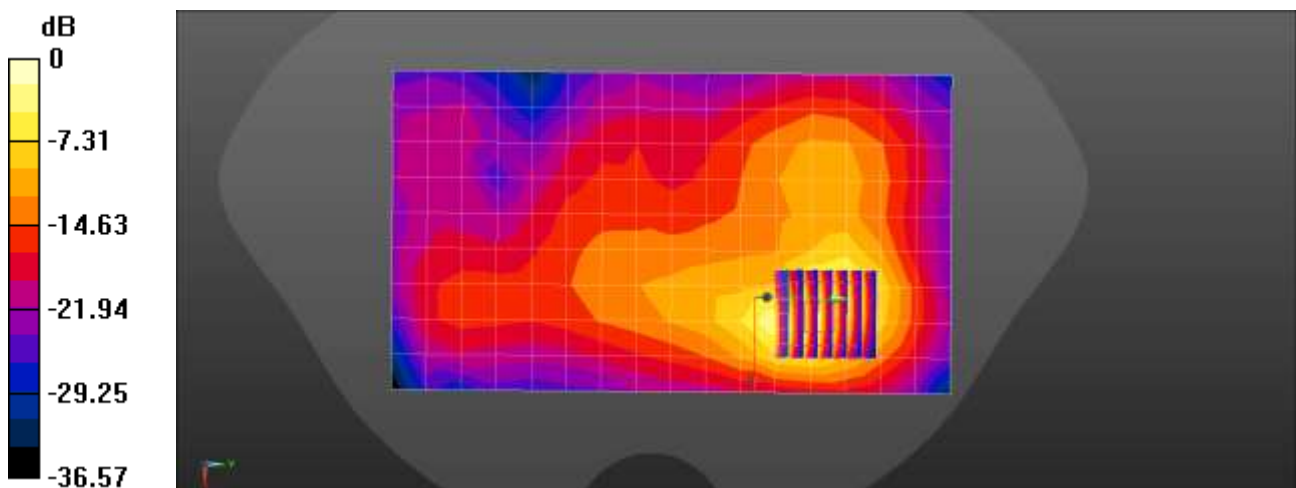

$0 \text{ dB} = 0.771 \text{ W/kg} = -1.13 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.1 °C
Ambient Temperature: 21.2 °C
Test Date: 01/20/2021
Plot No.: 80
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 40 (0); Frequency: 2310 MHz; Duty Cycle: 1:1.58125
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.671$ S/m; $\epsilon_r = 40.813$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2310 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 40 Body Rear QPSK 10MHz 1RB 24offset 38750ch/Area Scan (10x17x1): Measurement grid:

$dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.0863 W/kg

LTE Band 40 Body Rear QPSK 10MHz 1RB 24offset 38750ch/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.9060 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0975 W/kg

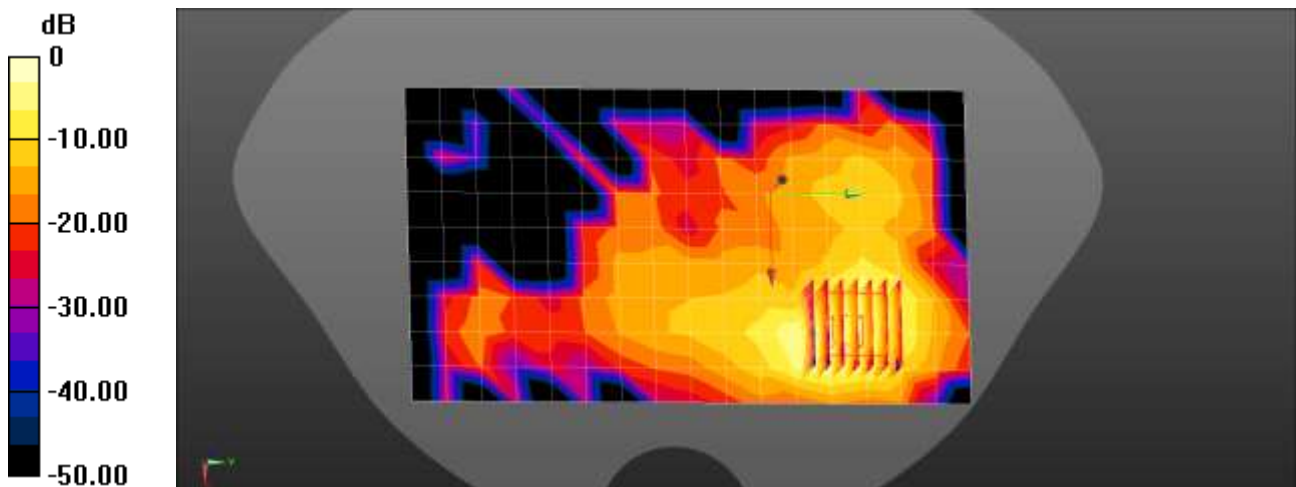

0 dB = 0.0863 W/kg = -10.64 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.1 °C
Ambient Temperature: 21.2 °C
Test Date: 01/20/2021
Plot No.: 81
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band 40 (0); Frequency: 2355 MHz;Duty Cycle: 1:1.58125
Medium parameters used (interpolated): $f = 2355$ MHz; $\sigma = 1.721$ S/m; $\epsilon_r = 40.669$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2355 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 40 Body Rear QPSK 10MHz 1RB 0offset 39200ch/Area Scan (10x17x1): Measurement grid:
dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0921 W/kg

LTE Band 40 Body Rear QPSK 10MHz 1RB 0offset 39200ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.254 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.140 W/kg
SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.026 W/kg
Maximum value of SAR (measured) = 0.107 W/kg

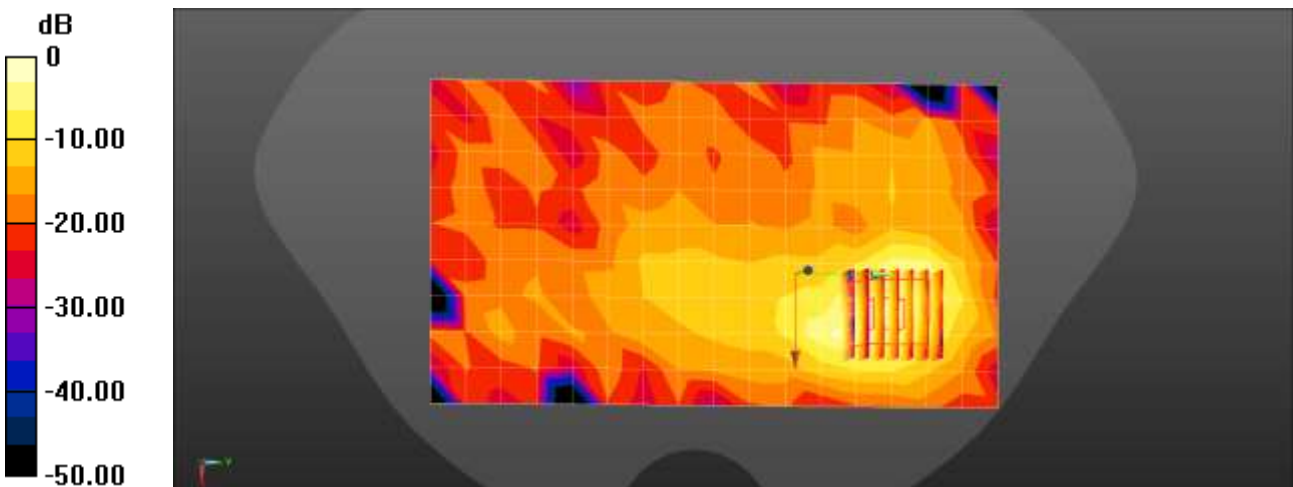

0 dB = 0.0921 W/kg = -10.36 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.5 °C
 Ambient Temperature: 20.7 °C
 Test Date: 02/02/2021
 Plot No.: 82
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band41 (0); Frequency: 2549.5 MHz; Duty Cycle: 1:1.58016
 Medium parameters used: $f = 2550$ MHz; $\sigma = 1.953$ S/m; $\epsilon_r = 39.957$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2549.5 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 41 Body Rear QPSK 20MHz 50RB 49offset 40185ch/Area Scan (9x17x1): Measurement grid:
 $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 1.39 W/kg

LTE Band 41 Body Rear QPSK 20MHz 50RB 49offset 40185ch/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 4.943 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 1.93 W/kg
SAR(1 g) = 0.812 W/kg; SAR(10 g) = 0.365 W/kg
 Maximum value of SAR (measured) = 1.43 W/kg

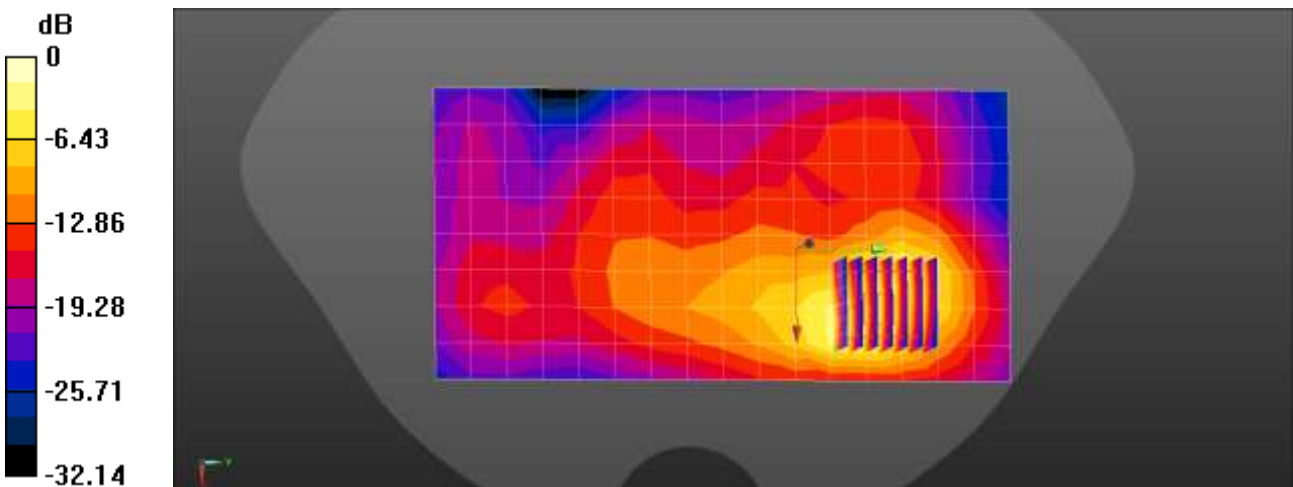

0 dB = 1.39 W/kg = 1.42 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 22.3 °C
Ambient Temperature: 22.5 °C
Test Date: 01/26/2021
Plot No.: 83
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE bands (0); Frequency: 3560 MHz;Duty Cycle: 1:1.58016
Medium parameters used: $f = 3560$ MHz; $\sigma = 3.012$ S/m; $\epsilon_r = 37.981$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(6.87, 6.87, 6.87) @ 3560 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 48 Body Top Qpsk 20MHz 1RB 0offset 55340ch/Area Scan (7x13x1): Measurement grid:
dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.463 W/kg

LTE Band 48 Body Top Qpsk 20MHz 1RB 0offset 55340ch/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm
Reference Value = 5.595 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.726 W/kg
SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.112 W/kg
Maximum value of SAR (measured) = 0.540 W/kg

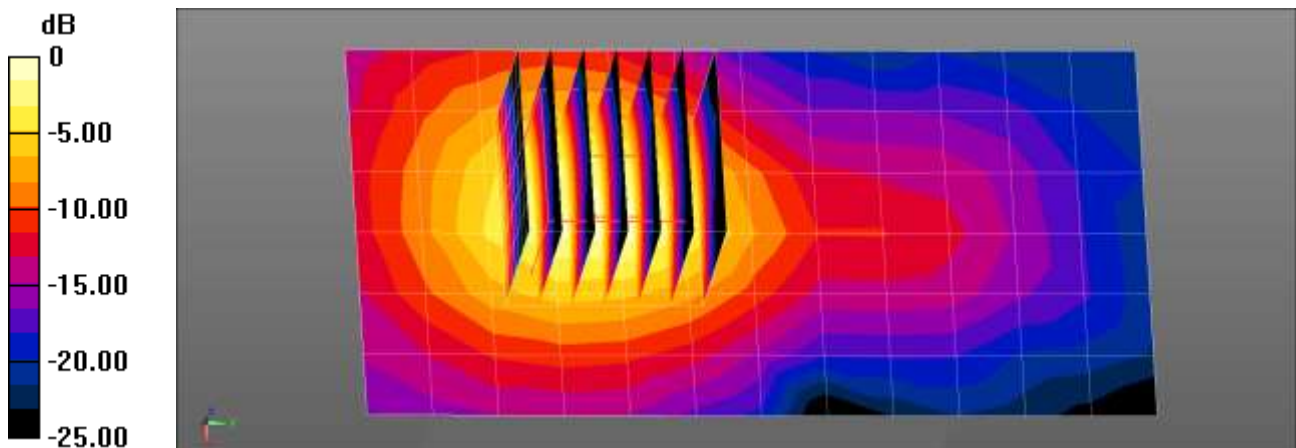

0 dB = 0.540 W/kg = -2.68 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 19.1 °C
 Ambient Temperature: 19.2 °C
 Test Date: 01/26/2021
 Plot No.: 84
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.326$ S/m; $\epsilon_r = 41.641$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(8.62, 8.62, 8.62) @ 1745 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

LTE band 66 Body Rear QPSK 20MHz 50RB 49offset 132322ch/Area Scan (8x14x1): Measurement grid:
 $dx=15$ mm, $dy=15$ mm


Maximum value of SAR (measured) = 0.483 W/kg

LTE band 66 Body Rear QPSK 20MHz 50RB 49offset 132322ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
 Reference Value = 8.908 V/m; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.214 W/kg

Maximum value of SAR (measured) = 0.525 W/kg

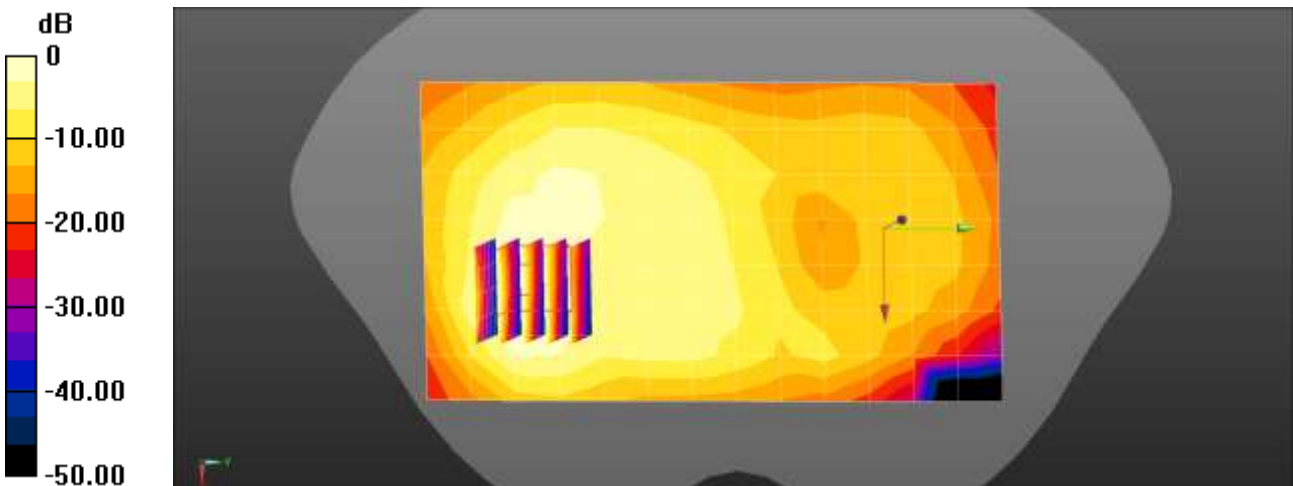

$$0 \text{ dB} = 0.483 \text{ W/kg} = -3.16 \text{ dBW/kg}$$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 18.5 °C
 Ambient Temperature: 18.6 °C
 Test Date: 01/08/2021
 Plot No.: 85

DUT: SM-A326U; Type: Bar


Communication System: UID 0, LTE 71 (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 680.5 \text{ MHz}$; $\sigma = 0.854 \text{ S/m}$; $\epsilon_r = 41.179$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.86, 9.86, 9.86) @ 680.5 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4);

LTE Band 71 Body Rear 20MHz QPSK 1RB 0offset 133297ch/Area Scan (8x14x1): Measurement grid:
 $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.594 W/kg

LTE Band 71 Body Rear 20MHz QPSK 1RB 0offset 133297ch/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 23.86 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.786 W/kg
SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.258 W/kg
 Maximum value of SAR (measured) = 0.608 W/kg

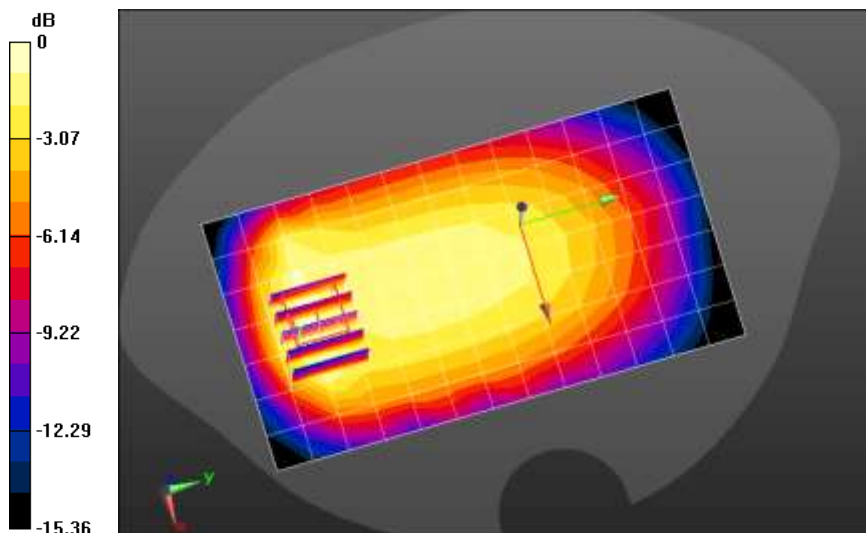

$0 \text{ dB} = 0.608 \text{ W/kg} = -2.16 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.9 °C
 Ambient Temperature: 22.1 °C
 Test Date: 01/19/2021
 Plot No.: 86
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, 5G NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.887 \text{ S/m}$; $\epsilon_r = 41.887$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3968; ConvF(9.55, 9.55, 9.55) @ 836.5 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n5 Body Rear DFT-s QPSK 20MHz 50RB 28offset 167300ch/Area Scan (8x14x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.648 W/kg

NR Band n5 Body Rear DFT-s QPSK 20MHz 50RB 28offset 167300ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 23.49 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 1.01 W/kg
SAR(1 g) = 0.514 W/kg; SAR(10 g) = 0.270 W/kg
 Maximum value of SAR (measured) = 0.787 W/kg

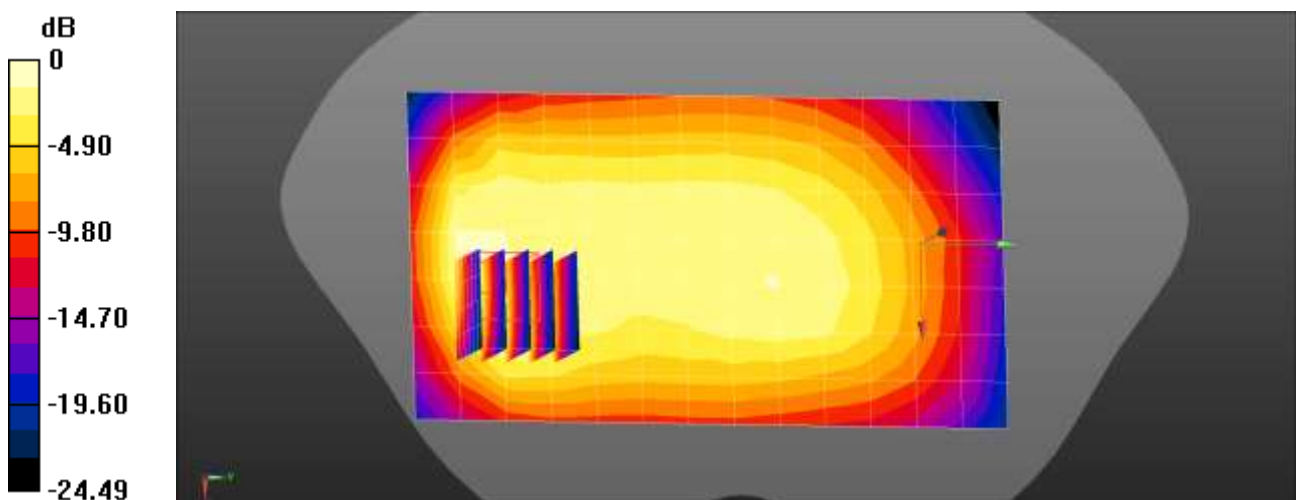

$0 \text{ dB} = 0.648 \text{ W/kg} = -1.88 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.6 °C
 Ambient Temperature: 20.5 °C
 Test Date: 01/20/2021
 Plot No.: 87
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR Band 2,25 (0); Frequency: 1905 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 40.917$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: ES3DV3 - SN3076; ConvF(5.08, 5.08, 5.08) @ 1905 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n25 Body Rear DFT-s QPSK 20MHz 1RB 53offset 381000ch/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.666 W/kg

NR Band n25 Body Rear DFT-s QPSK 20MHz 1RB 53offset 381000ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 10.65 V/m; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.561 W/kg; SAR(10 g) = 0.312 W/kg
 Maximum value of SAR (measured) = 0.665 W/kg

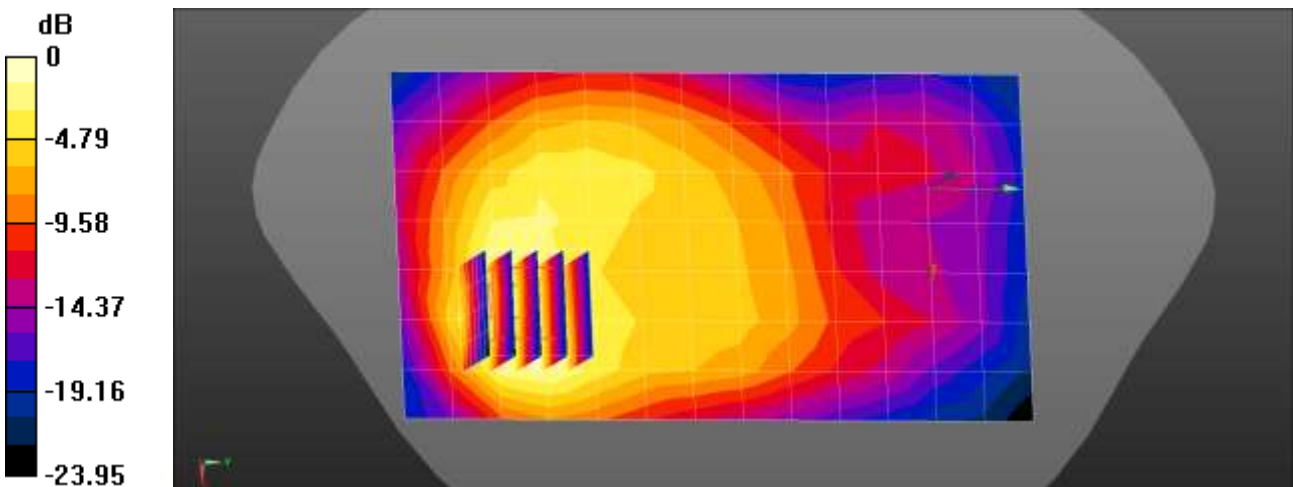

0 dB = 0.666 W/kg = -1.77 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.2 °C
 Ambient Temperature: 21.3 °C
 Test Date: 01/28/2021
 Plot No.: 88
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 2.028$ S/m; $\epsilon_r = 40.275$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3968; ConvF(7.34, 7.34, 7.34) @ 2592.99 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n41 Body Rear DFT-s QPSK 20MHz 135RB 69offset 518598ch/Area Scan (10x17x1):

Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.933 W/kg

NR Band n41 Body Rear DFT-s QPSK 20MHz 135RB 69offset 518598ch/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 3.416 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 1.22 W/kg
SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.262 W/kg
 Maximum value of SAR (measured) = 0.945 W/kg

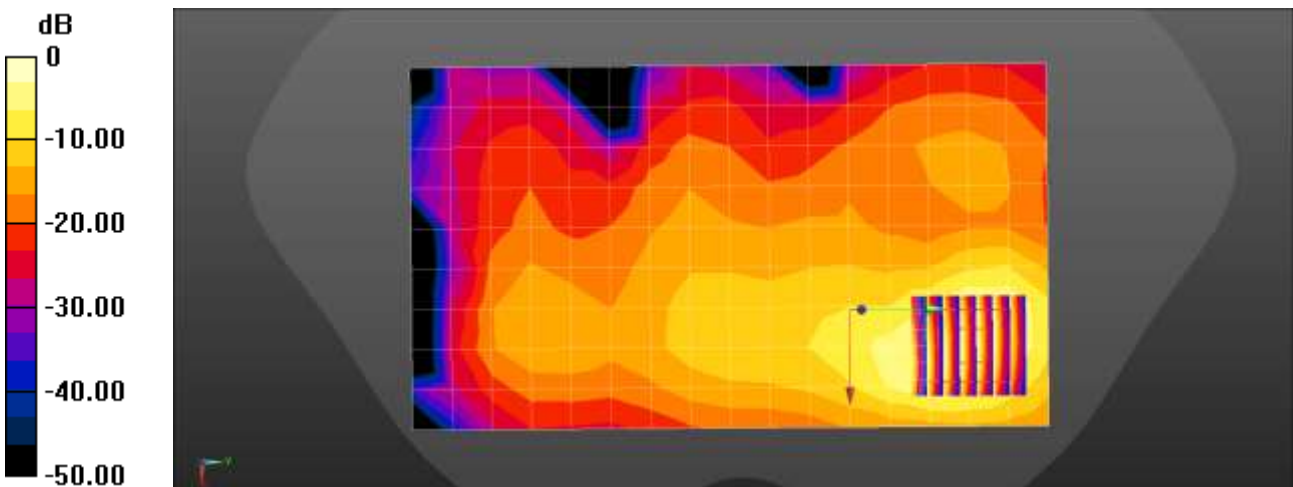

0 dB = 0.933 W/kg = -0.30 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.5 °C
Ambient Temperature: 21.3 °C
Test Date: 01/22/2021
Plot No.: 89
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 41.622$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: ES3DV3 - SN3076; ConvF(5.24, 5.24, 5.24) @ 1745 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n66 Body Rear DFT-s QPSK 40MHz 1RB 108offset 349000ch/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.618 W/kg

NR Band n66 Body Rear DFT-s QPSK 40MHz 1RB 108offset 349000ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.216 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.948 W/kg
SAR(1 g) = 0.547 W/kg; SAR(10 g) = 0.300 W/kg
Maximum value of SAR (measured) = 0.671 W/kg

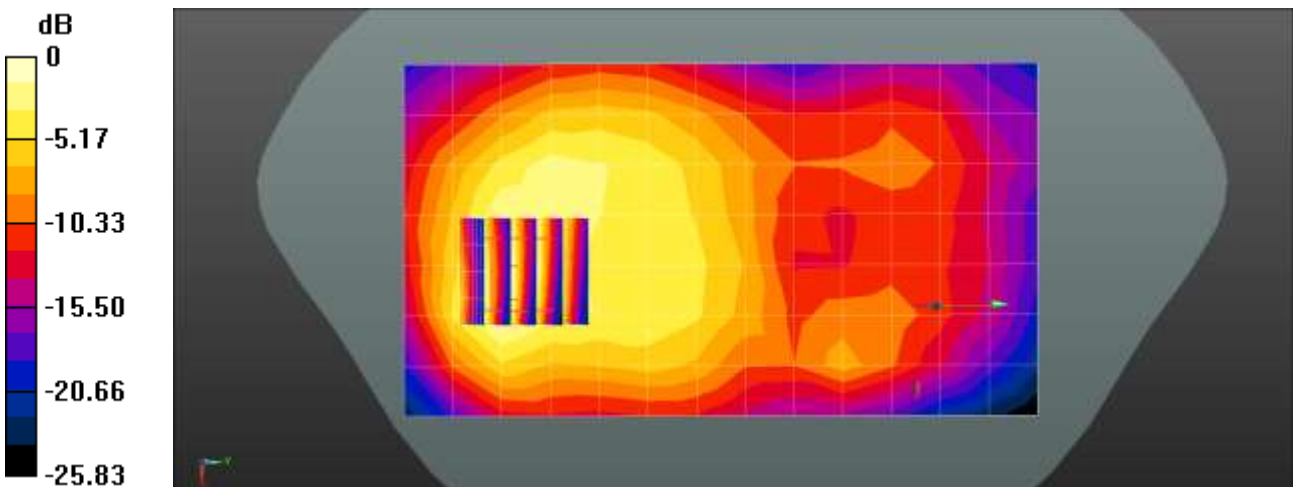

0 dB = 0.618 W/kg = -2.09 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.3 °C
 Ambient Temperature: 22.5 °C
 Test Date: 01/21/2021
 Plot No.: 90
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, 5G NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 680.5 \text{ MHz}$; $\sigma = 0.912 \text{ S/m}$; $\epsilon_r = 42.315$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3968; ConvF(9.94, 9.94, 9.94) @ 680.5 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n71 Body Rear DFT-s QPSK 20MHz 1RB 104offset 136100ch/Area Scan (8x14x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.509 W/kg

NR Band n71 Body Rear DFT-s QPSK 20MHz 1RB 104offset 136100ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 22.40 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.811 W/kg
SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.214 W/kg
 Maximum value of SAR (measured) = 0.626 W/kg

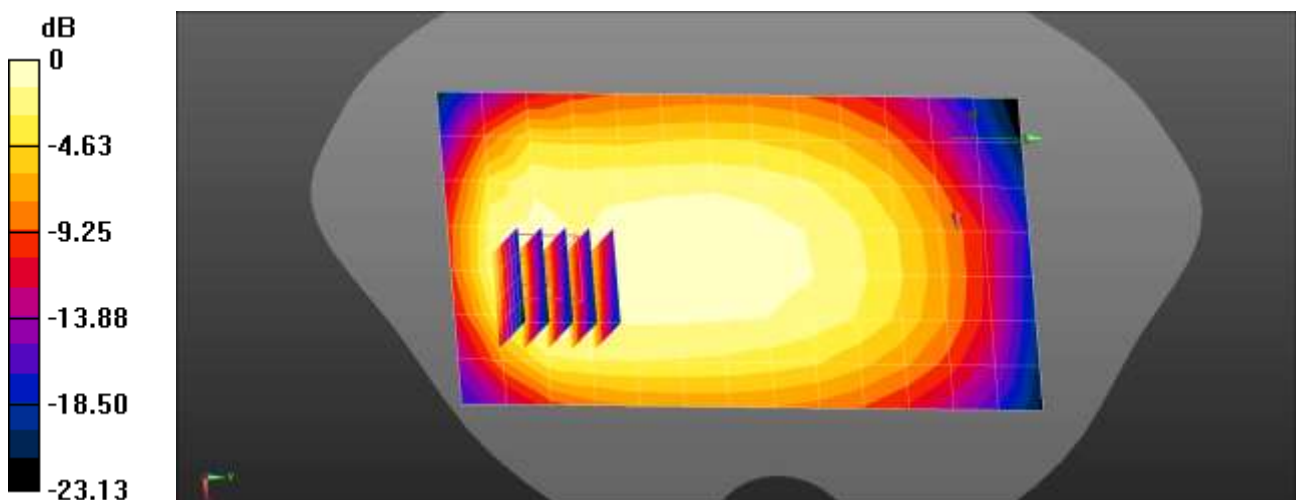

$0 \text{ dB} = 0.509 \text{ W/kg} = -2.93 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.7 °C
 Ambient Temperature: 20.7 °C
 Test Date: 01/27/2021
 Plot No.: 91
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR n77 Duty100% (0); Frequency: 3840 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 3840 \text{ MHz}$; $\sigma = 3.254 \text{ S/m}$; $\epsilon_r = 37.6$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7622; ConvF(6.93, 6.93, 6.93) @ 3840 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n77 Body Top DFT-s QPSK 100MHz 135RB 69offset 656000ch/Area Scan (8x10x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 1.02 W/kg

NR Band n77 Body Top DFT-s QPSK 100MHz 135RB 69offset 656000ch/Zoom Scan (7x7x8)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=4\text{mm}$
 Reference Value = 8.200 V/m; Power Drift = -0.15 dB
 Peak SAR (extrapolated) = 1.50 W/kg
SAR(1 g) = 0.525 W/kg; SAR(10 g) = 0.209 W/kg
 Maximum value of SAR (measured) = 1.05 W/kg

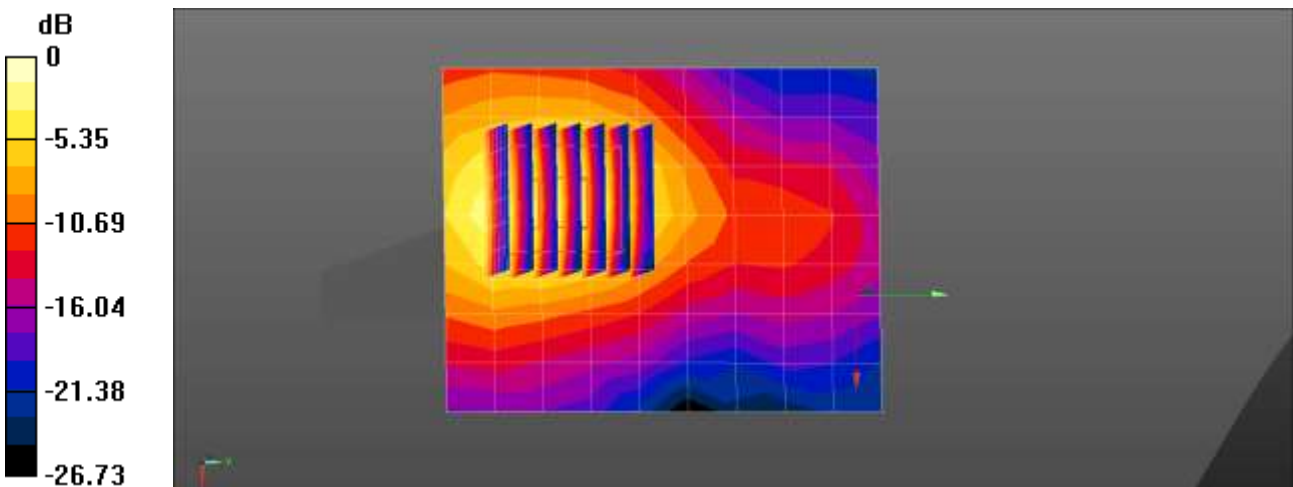

0 dB = 1.02 W/kg = 0.07 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 20.7 °C
Ambient Temperature: 20.7 °C
Test Date: 01/27/2021
Plot No.: 92
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR n77 Duty100% (0); Frequency: 3930 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 3930$ MHz; $\sigma = 3.291$ S/m; $\epsilon_r = 37.379$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7622; ConvF(6.93, 6.93, 6.93) @ 3930 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n77 Body Top DFT-s QPSK 100MHz 135RB 138offset 662000ch/Area Scan (8x10x1):

Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.12 W/kg

NR Band n77 Body Top DFT-s QPSK 100MHz 135RB 138offset 662000ch/Zoom Scan (7x7x8)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=4$ mm
Reference Value = 8.686 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 1.62 W/kg
SAR(1 g) = 0.559 W/kg; SAR(10 g) = 0.226 W/kg
Maximum value of SAR (measured) = 1.13 W/kg

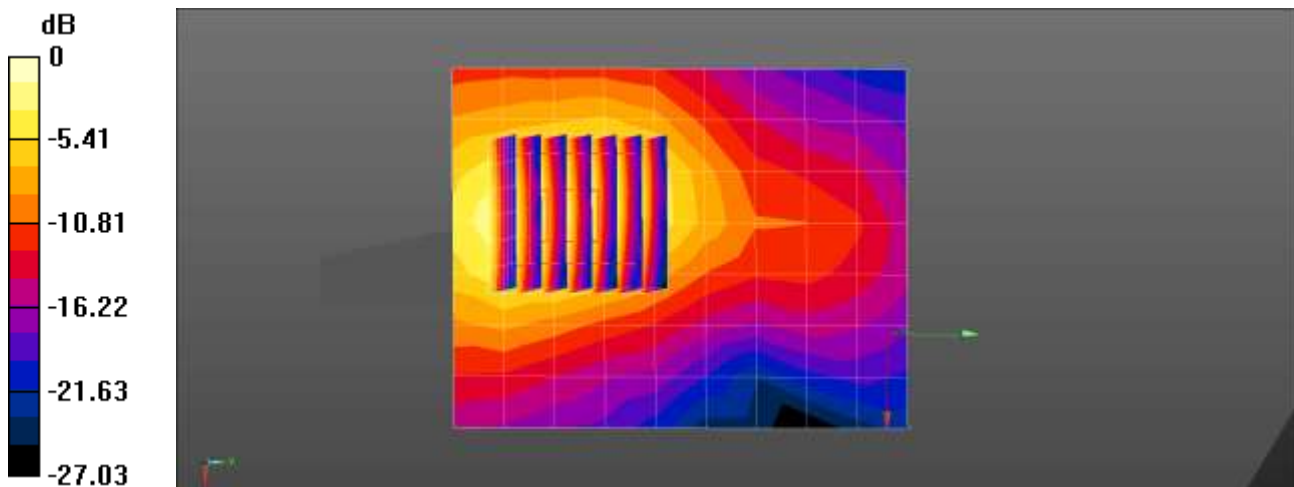

0 dB = 1.12 W/kg = 0.49 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.4 °C
 Ambient Temperature: 21.6 °C
 Test Date: 02/06/2021
 Plot No.: 93
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, 2450MHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2412 \text{ MHz}$; $\sigma = 1.801 \text{ S/m}$; $\epsilon_r = 40.887$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.47, 7.47, 7.47) @ 2412 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

802.11b Body Rear 1Mbps 1ch/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.495 W/kg

802.11b Body Rear 1Mbps 1ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 3.724 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.700 W/kg
SAR(1 g) = 0.319 W/kg; SAR(10 g) = 0.141 W/kg
 Maximum value of SAR (measured) = 0.554 W/kg

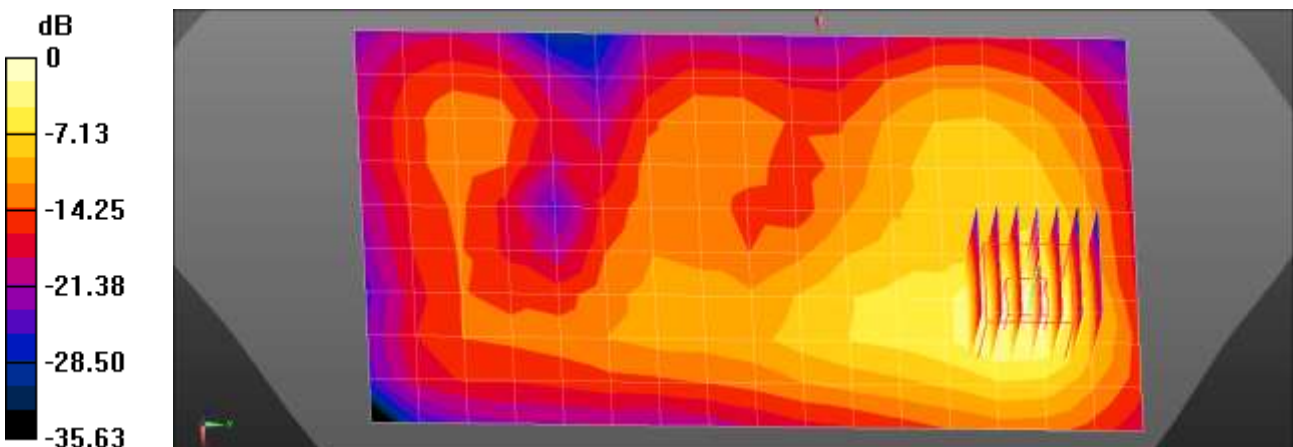

0 dB = 0.554 W/kg = -2.56 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.5 °C
Test Date: 02/06/2021
Plot No.: 94
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, WIFI 5GHz n40 (0); Frequency: 5795 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5795$ MHz; $\sigma = 5.376$ S/m; $\epsilon_r = 35.159$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3863; ConvF(4.85, 4.85, 4.85) @ 5795 MHz; Calibrated: 2020-05-27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Right
- Measurement SW: DASY52, Version 52.10 (4)

802.11n40 Body Rear MCS0 159ch/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.562 W/kg


802.11n40 Body Rear MCS0 159ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.654 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.699 W/kg

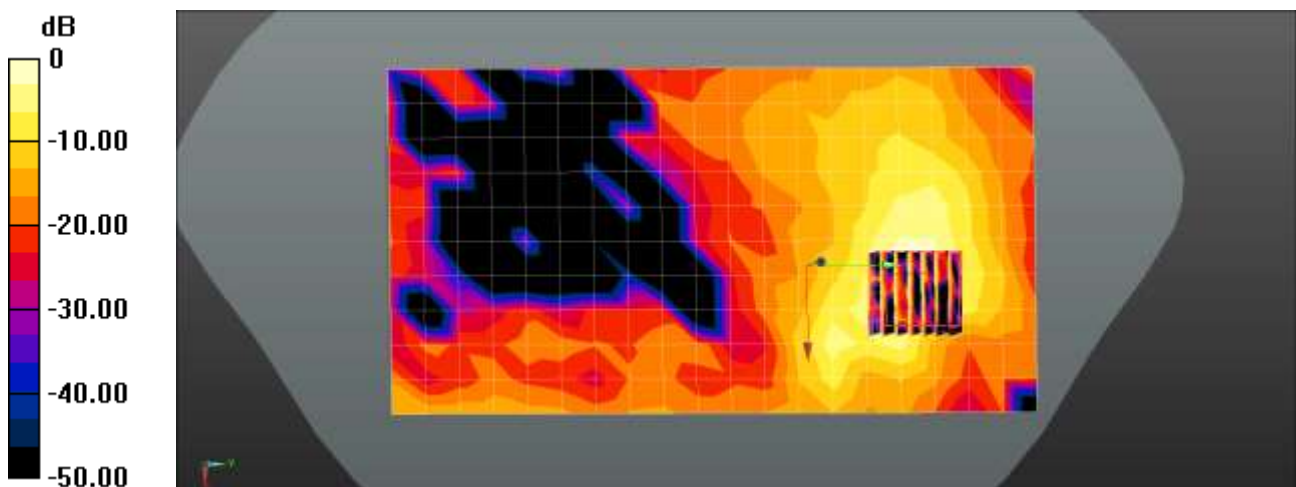

0 dB = 0.562 W/kg = -2.50 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.5 °C
 Ambient Temperature: 21.8 °C
 Test Date: 01/21/2021
 Plot No.: 95
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.302
 Medium parameters used (interpolated): $f = 2402$ MHz; $\sigma = 1.736$ S/m; $\epsilon_r = 38.572$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.34, 7.34, 7.34) @ 2402 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

Bluetooth Body Rear DH5 0ch/Area Scan (9x17x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 0.0463 W/kg

Bluetooth Body Rear DH5 0ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 0.6130 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.0820 W/kg
SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.014 W/kg
 Maximum value of SAR (measured) = 0.0615 W/kg

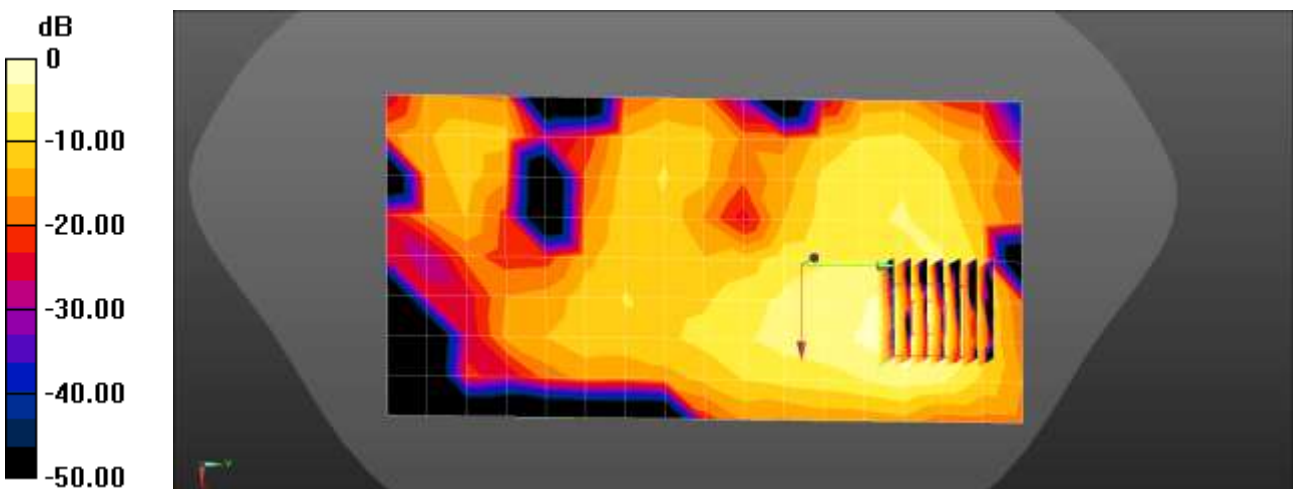

0 dB = 0.0463 W/kg = -13.34 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 22.2 °C
Ambient Temperature: 22.3 °C
Test Date: 02/08/2021
Plot No.: 96
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band 7 (0); Frequency: 2560 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.951$ S/m; $\epsilon_r = 39.941$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.34, 7.34, 7.34) @ 2560 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 7 Body Rear QPSK 20MHz 1RB 99offset 21350ch/Area Scan (10x17x1): Measurement grid:
dx=12mm, dy=12mm
Maximum value of SAR (measured) = 2.48 W/kg

LTE Band 7 Body Rear QPSK 20MHz 1RB 99offset 21350ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.861 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 9.28 W/kg
SAR(1 g) = 2.4 W/kg; SAR(10 g) = 0.774 W/kg
Maximum value of SAR (measured) = 5.98 W/kg

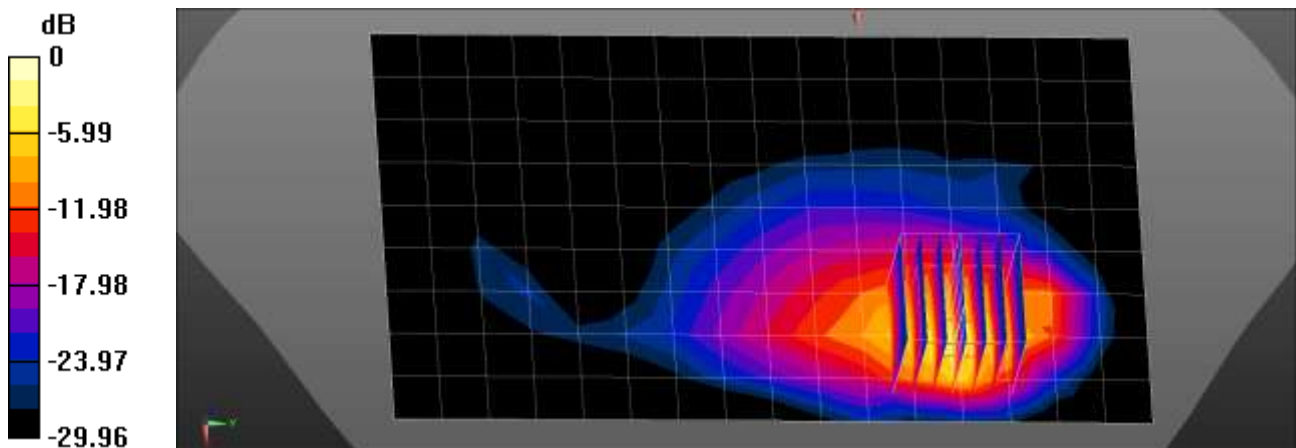

0 dB = 5.98 W/kg = 7.77 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.2 °C
 Ambient Temperature: 22.3 °C
 Test Date: 02/08/2021
 Plot No.: 97
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band 7 (0); Frequency: 2560 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2560 \text{ MHz}$; $\sigma = 1.951 \text{ S/m}$; $\epsilon_r = 39.941$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.34, 7.34, 7.34) @ 2560 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 7 Body Rear QPSK 20MHz 50RB 49offset 21350ch/Area Scan (10x17x1): Measurement grid:
 $dx=12\text{mm}$, $dy=12\text{mm}$
 Maximum value of SAR (measured) = 2.48 W/kg

LTE Band 7 Body Rear QPSK 20MHz 50RB 49offset 21350ch/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.976 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 9.67 W/kg
SAR(1 g) = 2.43 W/kg; SAR(10 g) = 0.780 W/kg
 Maximum value of SAR (measured) = 6.08 W/kg

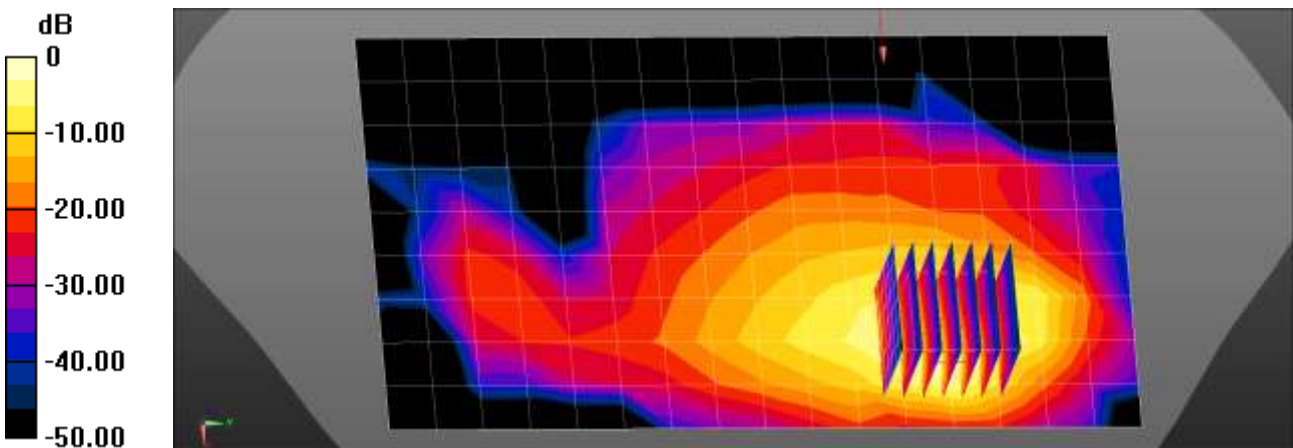

0 dB = 2.48 W/kg = 3.94 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 21.8 °C
 Ambient Temperature: 22.0 °C
 Test Date: 02/88/2021
 Plot No.: 99
 DUT: SM-A326U; Type: Bar;


Communication System: UID 0, LTE Band 30 (0); Frequency: 2310 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.671$ S/m; $\epsilon_r = 40.109$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7370; ConvF(7.73, 7.73, 7.73) @ 2310 MHz; Calibrated: 2020-08-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: Twin-SAM V4.0 (20deg probe tilt)_1588_20200429
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 30 Body Rear QPSK 10MHz 1RB 24offset 27710ch/Area Scan (10x17x1): Measurement grid:
 $dx=12$ mm, $dy=12$ mm
 Maximum value of SAR (measured) = 3.55 W/kg

LTE Band 30 Body Rear QPSK 10MHz 1RB 24offset 27710ch/Zoom Scan (7x7x7)/Cube 0:
 Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 6.287 V/m; Power Drift = -0.19 dB
 Peak SAR (extrapolated) = 7.43 W/kg
SAR(1 g) = 2.02 W/kg; SAR(10 g) = 0.794 W/kg
 Maximum value of SAR (measured) = 5.13 W/kg

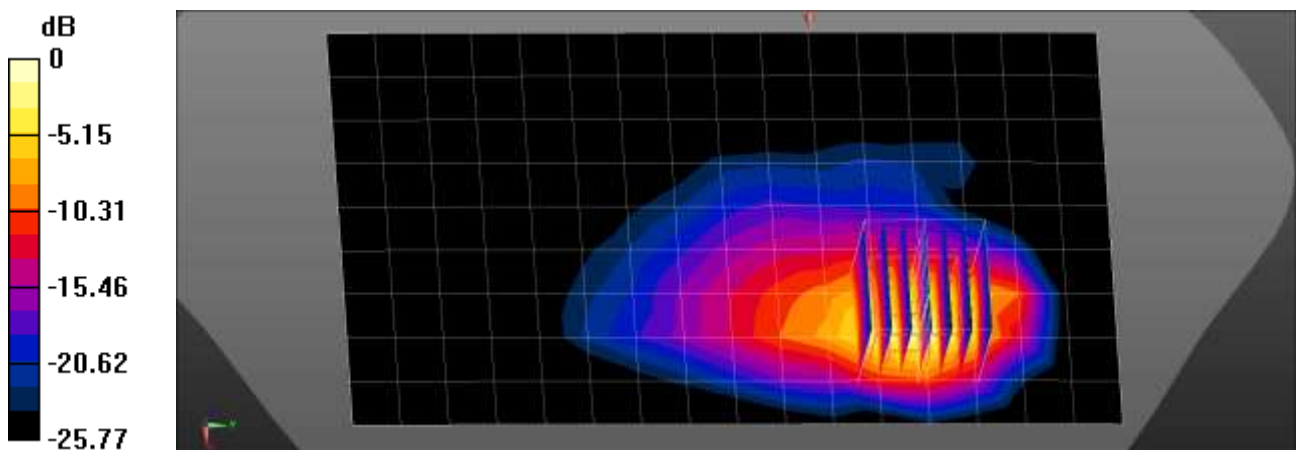

0 dB = 5.13 W/kg = 7.10 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.8 °C
Ambient Temperature: 22.0 °C
Test Date: 02/08/2021
Plot No.: 99
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band 30 (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.671$ S/m; $\epsilon_r = 40.109$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7370; ConvF(7.73, 7.73, 7.73) @ 2310 MHz; Calibrated: 2020-08-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: Twin-SAM V4.0 (20deg probe tilt)_1588_20200429
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 30 Body Rear QPSK 10MHz 50RB 24offset 27710ch/Area Scan (10x17x1): Measurement grid:

$dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 3.54 W/kg

LTE Band 30 Body Rear QPSK 10MHz 50RB 24offset 27710ch/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.144 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 7.52 W/kg

SAR(1 g) = 2.03 W/kg; SAR(10 g) = 0.785 W/kg

Maximum value of SAR (measured) = 5.14 W/kg

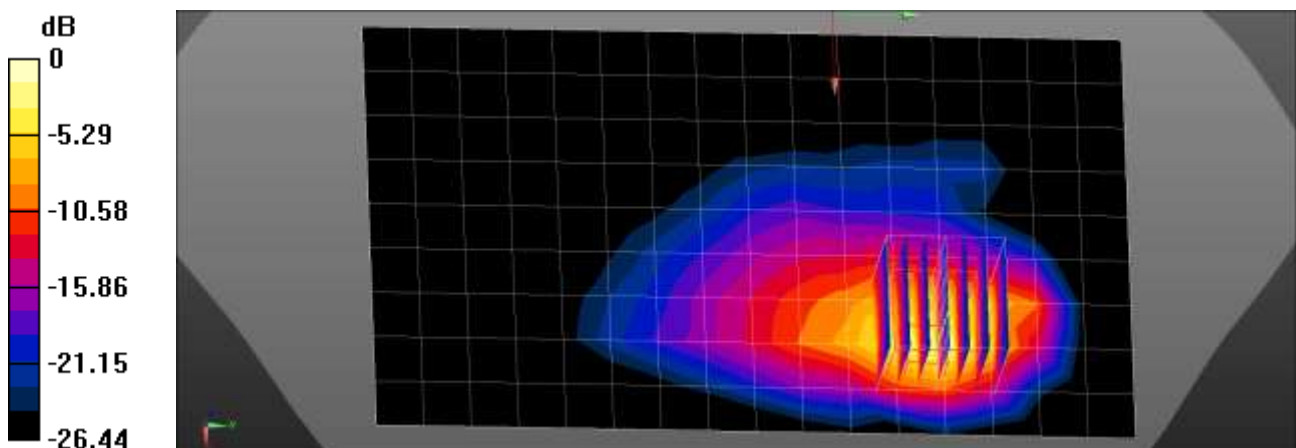

0 dB = 5.14 W/kg = 7.11 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.6 °C
Ambient Temperature: 21.8 °C
Test Date: 02/08/2021
Plot No.: 100

DUT: SM-A326U; Type: Bar;

Communication System: UID 0, LTE Band41 (0); Frequency: 2680 MHz;Duty Cycle: 1:1.58016
Medium parameters used: $f = 2680$ MHz; $\sigma = 2.116$ S/m; $\epsilon_r = 39.639$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2680 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

LTE Band 41 Body Rear QPSK 20MHz 50RB 0offset 41490ch grip 0mm/Area Scan (9x17x1):

Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 5.40 W/kg

LTE Band 41 Body Rear QPSK 20MHz 50RB 0offset 41490ch grip 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.975 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 15.5 W/kg
SAR(1 g) = 3.7 W/kg; SAR(10 g) = 1.11 W/kg
Maximum value of SAR (measured) = 9.39 W/kg

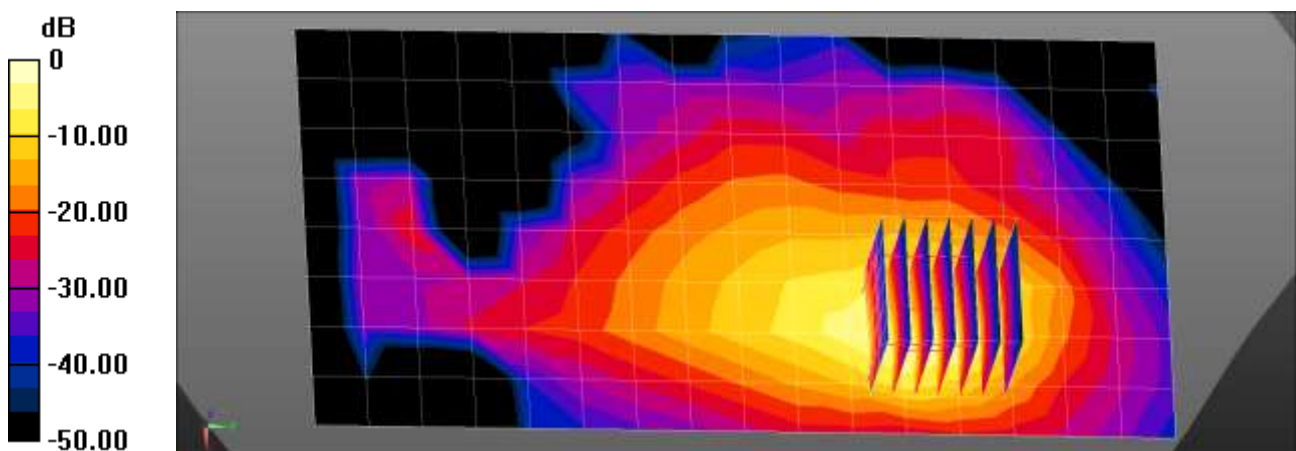

0 dB = 5.40 W/kg = 7.33 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.1 °C
Test Date: 01/21/2021
Plot No.: 101
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR Band 2,25 (0); Frequency: 1905 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1905$ MHz; $\sigma = 1.449$ S/m; $\epsilon_r = 41.047$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: ES3DV3 - SN3076; ConvF(5.08, 5.08, 5.08) @ 1905 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n25 Body Front DFT-s QPSK 20MHz 1RB 53offset 381000ch/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 3.35 W/kg

NR Band n25 Body Front DFT-s QPSK 20MHz 1RB 53offset 381000ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.591 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 7.58 W/kg
SAR(1 g) = 3.31 W/kg; SAR(10 g) = 1.54 W/kg
Maximum value of SAR (measured) = 4.58 W/kg

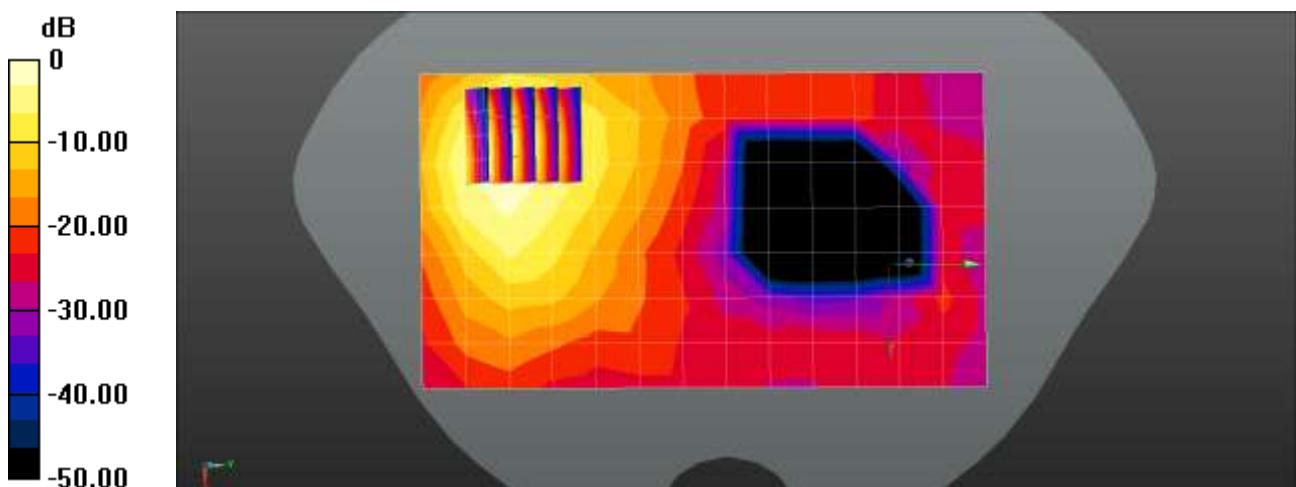

0 dB = 3.35 W/kg = 5.24 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 22.0 °C
Ambient Temperature: 22.0 °C
Test Date: 01/29/2021
Plot No.: 102
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 2.033$ S/m; $\epsilon_r = 40.739$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3968; ConvF(7.34, 7.34, 7.34) @ 2592.99 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n41 Phablet Rear DFT-s QPSK 20MHz 1RB 137offset 518598ch/Area Scan (10x17x1):

Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 5.71 W/kg

NR Band n41 Phablet Rear DFT-s QPSK 20MHz 1RB 137offset 518598ch/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.934 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 8.65 W/kg
SAR(1 g) = 2.34 W/kg; SAR(10 g) = 0.764 W/kg
Maximum value of SAR (measured) = 5.21 W/kg

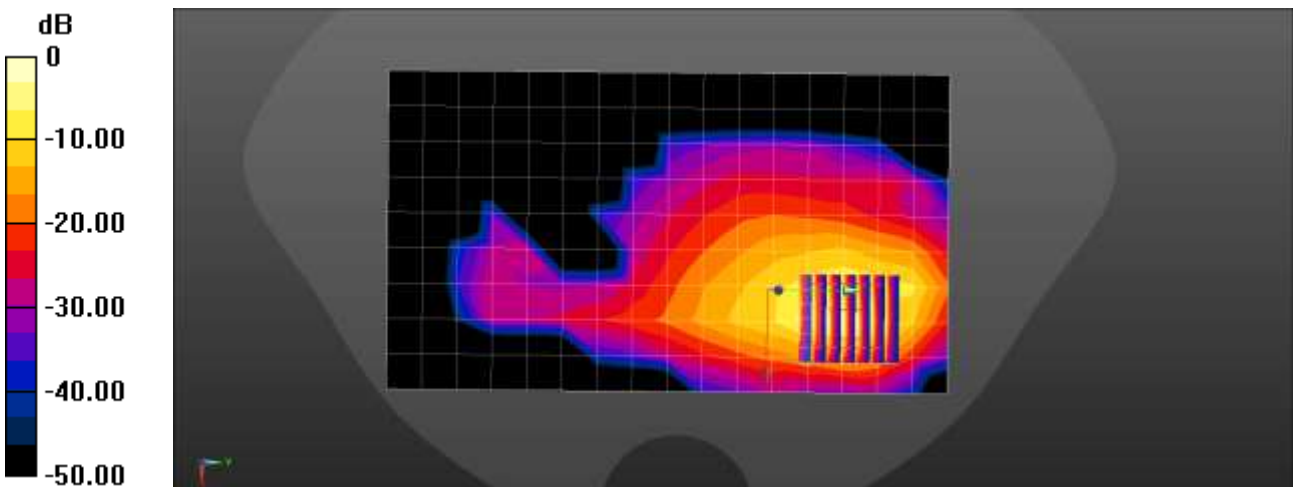

0 dB = 5.71 W/kg = 7.57 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.4 °C
Ambient Temperature: 21.3 °C
Test Date: 01/28/2021
Plot No.: 103
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 41.732$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: ES3DV3 - SN3076; ConvF(5.24, 5.24, 5.24) @ 1745 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n66 Body Front DFT-s QPSK 40MHz 1RB 108offset 349000ch/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 3.46 W/kg

NR Band n66 Body Front DFT-s QPSK 40MHz 1RB 108offset 349000ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.6950 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 6.40 W/kg
SAR(1 g) = 2.96 W/kg; SAR(10 g) = 1.41 W/kg
Maximum value of SAR (measured) = 3.98 W/kg

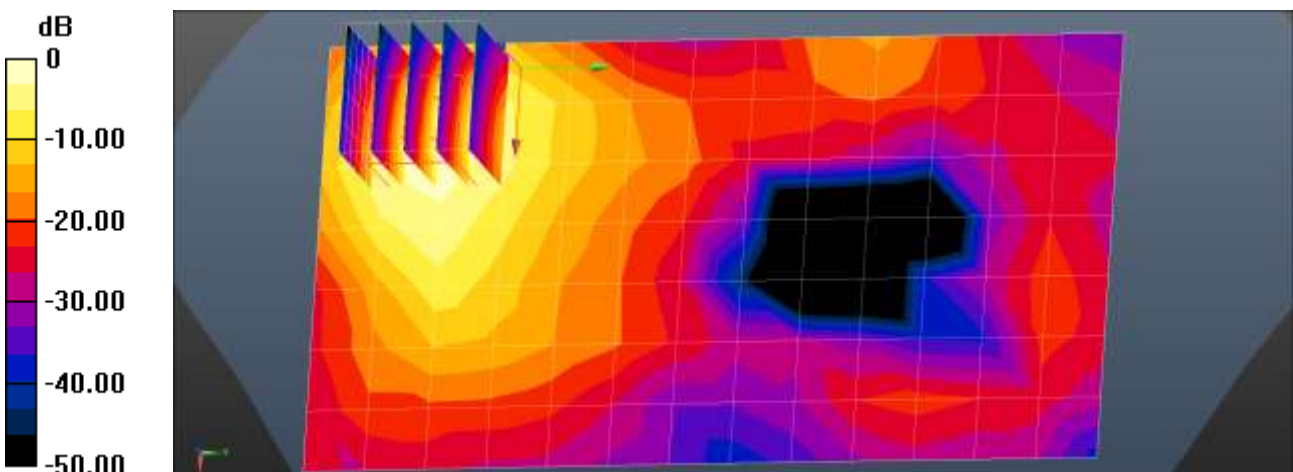

0 dB = 3.46 W/kg = 5.39 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.3 °C
Ambient Temperature: 21.4 °C
Test Date: 01/28/2021
Plot No.: 104
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1745$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 41.732$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: ES3DV3 - SN3076; ConvF(5.24, 5.24, 5.24) @ 1745 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n66 Body Rear DFT-s QPSK 40MHz 108RB 54offset 349000ch/Area Scan (8x14x1):

Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 3.15 W/kg

NR Band n66 Body Rear DFT-s QPSK 40MHz 108RB 54offset 349000ch/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.560 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 12.3 W/kg
SAR(1 g) = 3.67 W/kg; SAR(10 g) = 1.5 W/kg
Maximum value of SAR (measured) = 5.51 W/kg

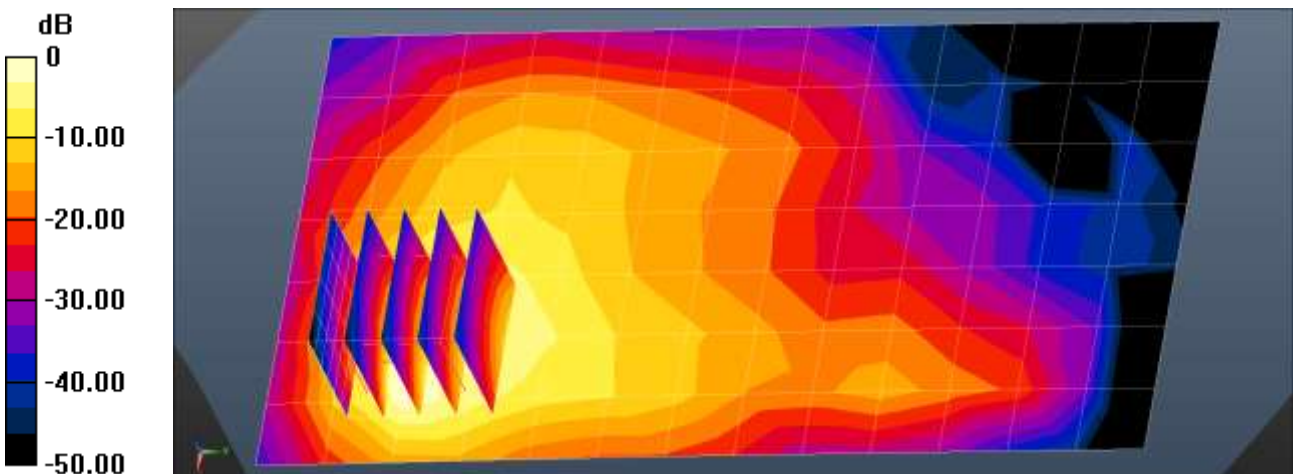

0 dB = 3.15 W/kg = 4.98 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 20.7 °C
 Ambient Temperature: 20.7 °C
 Test Date: 01/27/2021
 Plot No.: 105
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR n77 Duty100% (0); Frequency: 3750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 3750 \text{ MHz}$; $\sigma = 3.193 \text{ S/m}$; $\epsilon_r = 37.641$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7622; ConvF(7.15, 7.15, 7.15) @ 3750 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n77 Body Top DFT-s QPSK 100MHz 135RB 69offset 650000ch/Area Scan (8x11x1):

Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
 Maximum value of SAR (measured) = 7.59 W/kg

NR Band n77 Body Top DFT-s QPSK 100MHz 135RB 69offset 650000ch/Zoom Scan (7x7x8)/Cube 0:

Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=4\text{mm}$
 Reference Value = 7.804 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 15.0 W/kg
SAR(1 g) = 3.21 W/kg; SAR(10 g) = 0.763 W/kg
 Maximum value of SAR (measured) = 9.25 W/kg

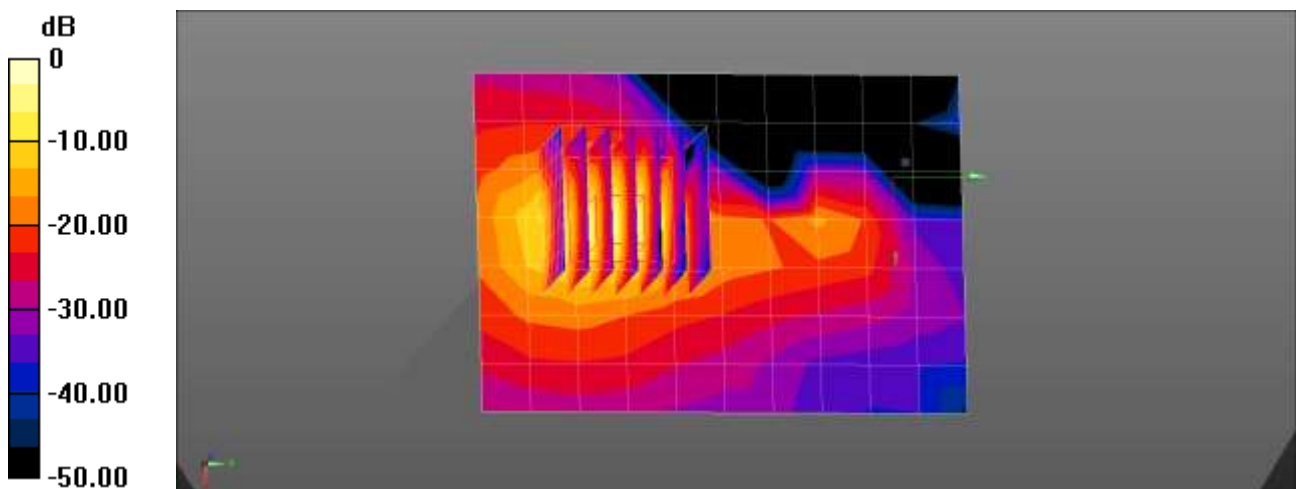

$0 \text{ dB} = 7.59 \text{ W/kg} = 8.80 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 20.3 °C
Ambient Temperature: 20.5 °C
Test Date: 02/04/2021
Plot No.: 106
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, WIFI 5GHz n40 (0); Frequency: 5270 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5270$ MHz; $\sigma = 4.844$ S/m; $\epsilon_r = 35.636$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3863; ConvF(5, 5, 5) @ 5270 MHz; Calibrated: 2020-05-27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Right
- Measurement SW: DASY52, Version 52.10 (4)

802.11n40 Body Rear MCS0 54ch/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 16.2 W/kg

802.11n40 Body Rear MCS0 54ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 40.8 W/kg
SAR(1 g) = 5.62 W/kg; SAR(10 g) = 1.01 W/kg
Maximum value of SAR (measured) = 18.5 W/kg

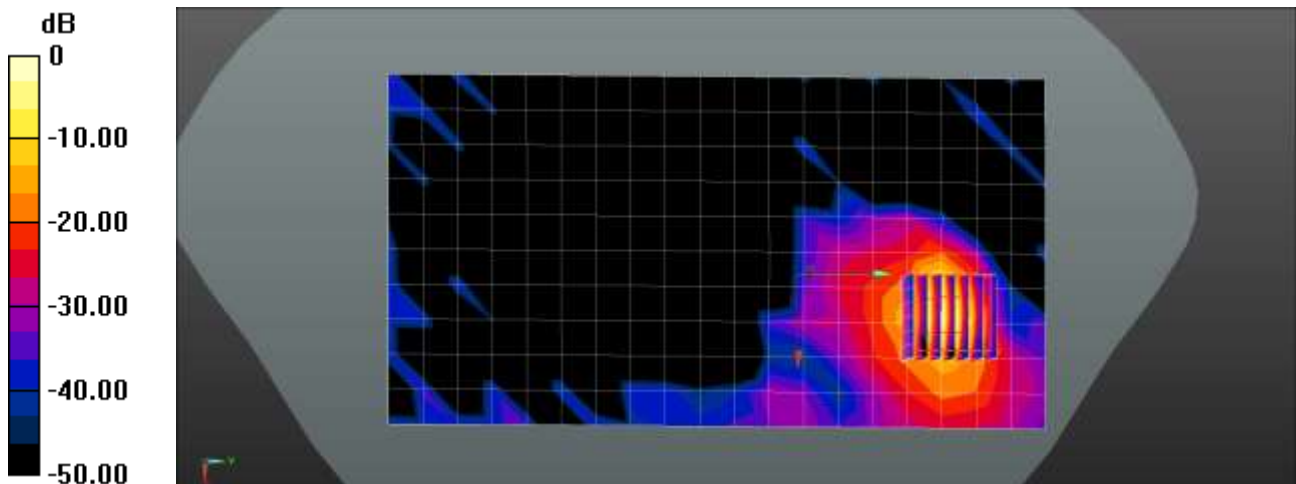

0 dB = 16.2 W/kg = 12.10 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 20.3 °C
Ambient Temperature: 20.5 °C
Test Date: 02/04/2021
Plot No.: 107
DUT: SM-A326U; Type: Bar;


Communication System: UID 0, WIFI 5GHz n40 (0); Frequency: 5590 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5590$ MHz; $\sigma = 5.203$ S/m; $\epsilon_r = 35.495$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3863; ConvF(4.6, 4.6, 4.6) @ 5590 MHz; Calibrated: 2020-05-27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Right
- Measurement SW: DASY52, Version 52.10 (4)

802.11n40 Body Rear MCS0 118ch/Area Scan (11x20x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 10.3 W/kg

802.11n40 Body Rear MCS0 118ch/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 0.5580 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 43.0 W/kg
SAR(1 g) = 5.51 W/kg; SAR(10 g) = 1.01 W/kg
Maximum value of SAR (measured) = 17.6 W/kg

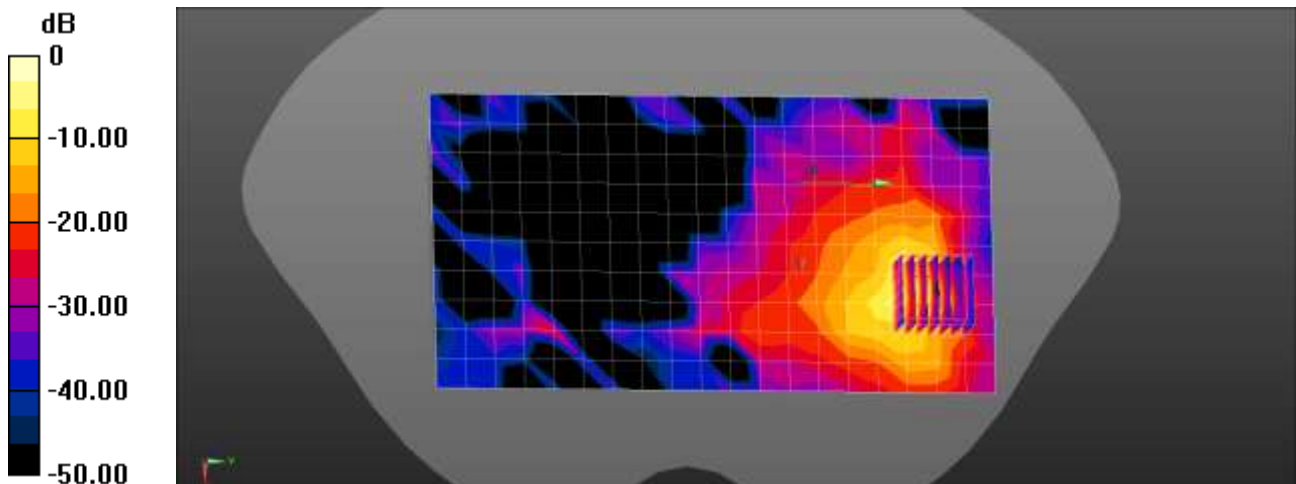

0 dB = 10.3 W/kg = 10.12 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 22.3 °C
Ambient Temperature: 22.4 °C
Test Date: 02/24/2021
Plot No.: 108
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 39.705$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3863; ConvF(7.34, 7.34, 7.34) @ 2592.99 MHz; Calibrated: 2020-05-27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn652; Calibrated: 2021-01-21
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n41 Head Right Touch DFT-s QPSK 100MHz 135RB 67offset 518598ch/Area Scan (10x17x1):

Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.686 W/kg

NR Band n41 Head Right Touch DFT-s QPSK 100MHz 135RB 67offset 518598ch/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.761 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.429 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.734 W/kg

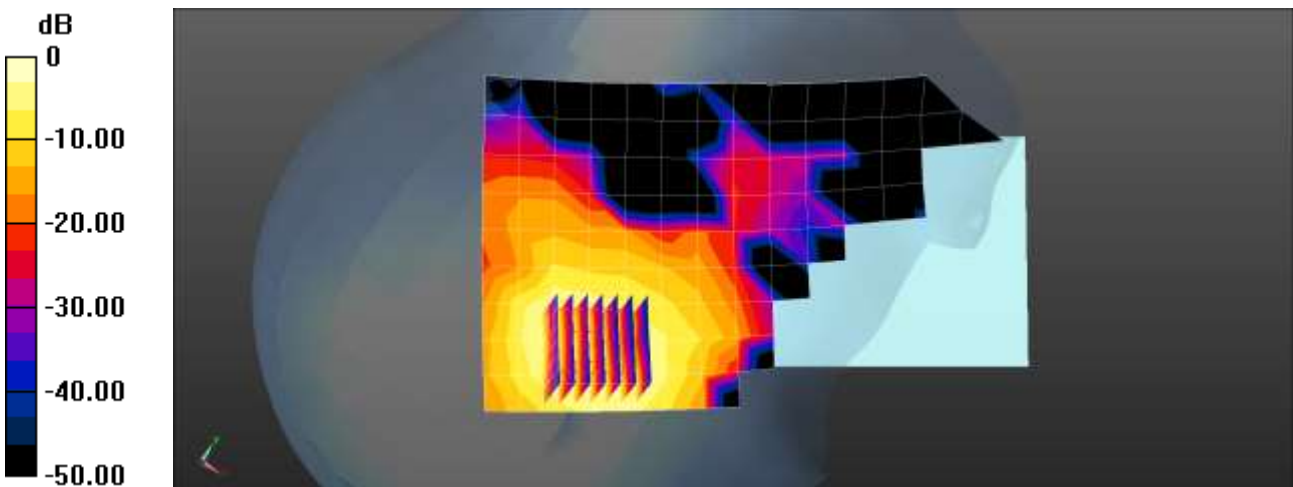

$0 \text{ dB} = 0.686 \text{ W/kg} = -1.64 \text{ dBW/kg}$

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.3 °C
 Ambient Temperature: 22.4 °C
 Test Date: 02/24/2021
 Plot No.: 109
 DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR n41 (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 39.705$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3863; ConvF(7.34, 7.34, 7.34) @ 2592.99 MHz; Calibrated: 2020-05-27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn652; Calibrated: 2021-01-21
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

NR Band n41 Bodyworn Rear DFT-s QPSK 100MHz 135RB 67offset 518598ch/Area Scan (10x17x1):

Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 1.67 W/kg

NR Band n41 Bodyworn Rear DFT-s QPSK 100MHz 135RB 67offset 518598ch/Zoom Scan


(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.485 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.16 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.488 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

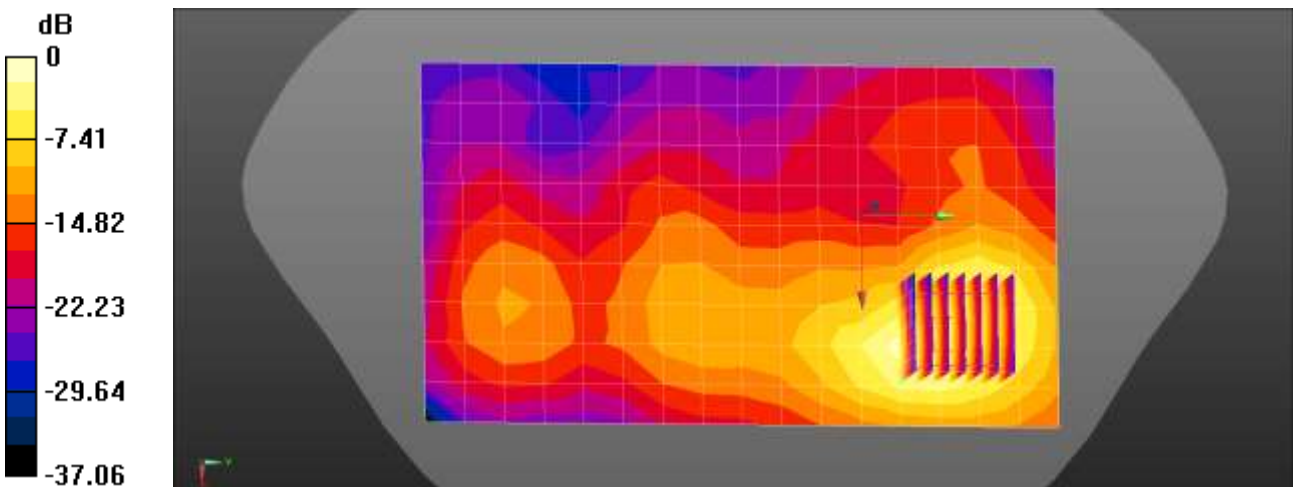

0 dB = 1.67 W/kg = 2.23 dBW/kg

Test Laboratory: HCT CO., LTD
 EUT Type: Mobile Phone
 Liquid Temperature: 22.3 °C
 Ambient Temperature: 22.4 °C
 Test Date: 02/24/2021
 Plot No.: 110
 DUT: SM-A326U; Type: Bar

Communication System: UID 0, NR n41 (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 2.027$ S/m; $\epsilon_r = 39.705$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:


- Probe: EX3DV4 - SN3863; ConvF(7.34, 7.34, 7.34) @ 2592.99 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn652; Calibrated: 2021-01-21
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4);

NR Band n41 Body Rear DFT-s QPSK 100MHz 270RB 0offset 518598ch/Area Scan

(10x17x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 1.44 W/kg

NR Band n41 Body Rear DFT-s QPSK 100MHz 270RB 0offset 518598ch/Zoom Scan (7x7x7)/Cube

0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.068 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 2.14 W/kg
SAR(1 g) = 0.896 W/kg; SAR(10 g) = 0.396 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.8 mm
 Ratio of SAR at M2 to SAR at M1 = 40.5%
 Maximum value of SAR (measured) = 1.63 W/kg

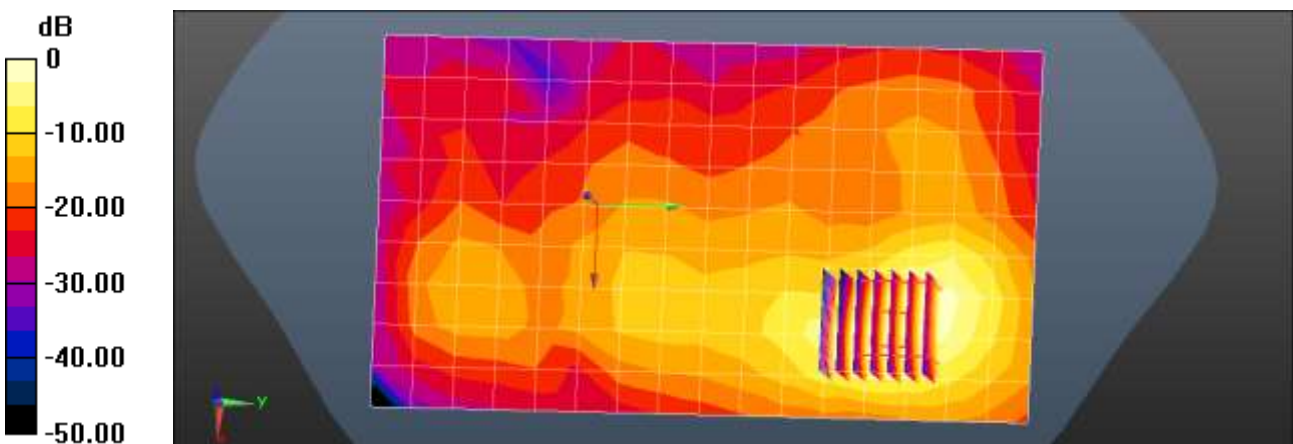

0 dB = 1.44 W/kg = 1.59 dBW/kg

Test Laboratory: HCT CO., LTD
EUT Type: Mobile Phone
Liquid Temperature: 21.9 °C
Ambient Temperature: 22.1 °C
Test Date: 02/24/2021
Plot No.: 111
DUT: SM-A326U; Type: Bar;

Communication System: UID 0, NR n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 2592.99$ MHz; $\sigma = 1.985$ S/m; $\epsilon_r = 39.719$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7622; ConvF(7.86, 7.86, 7.86) @ 2592.99 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V4.0 (20deg probe tilt)_1588_20200429
- Measurement SW: DASY52, Version 52.10 (4)

NR Band 41 Body Rear DFT-s QPSK 100MHz 135RB 67offset 518598ch/Area Scan (10x17x1):

Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.33 W/kg

NR Band 41 Body Rear DFT-s QPSK 100MHz 135RB 67offset 518598ch/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.751 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 14.1 W/kg
SAR(1 g) = 3.46 W/kg; SAR(10 g) = 1.12 W/kg
Maximum value of SAR (measured) = 9.45 W/kg

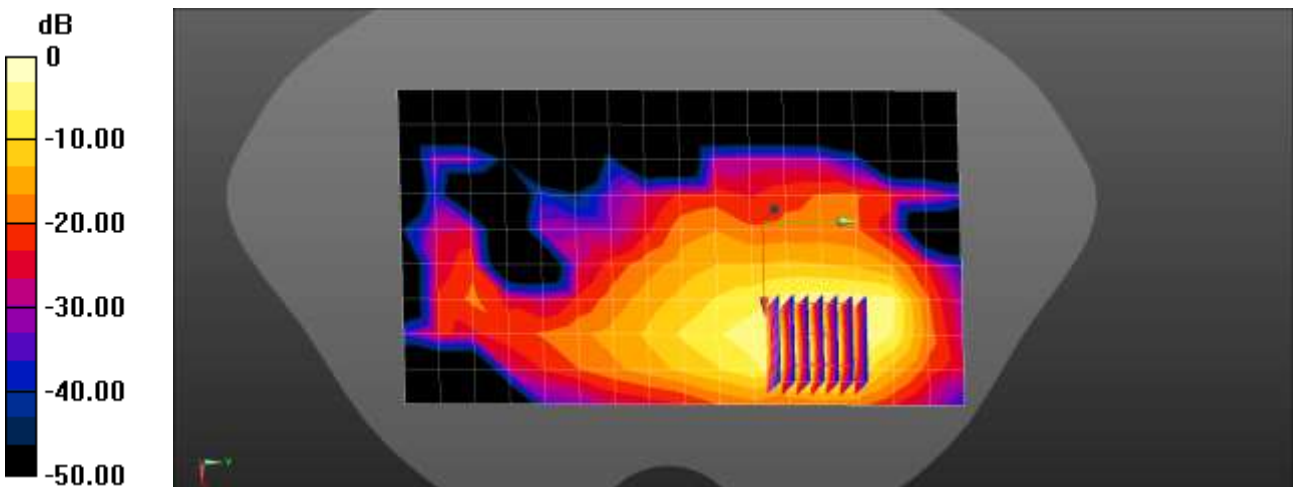

0 dB = 3.33 W/kg = 5.23 dBW/kg

Appendix C. – Dipole Verification Plots

■ **Verification Data (750 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 18.5 °C
 Test Date: 01/05/2021

DUT: Dipole 750 MHz D750V3; Type: D750V3;


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 42.607$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.86, 9.86, 9.86) @ 750 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4)

750MHz Head Verification/Area Scan (6x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.510 W/kg

750MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 25.37 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 0.583 W/kg
SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.290 W/kg
 Maximum value of SAR (measured) = 0.534 W/kg

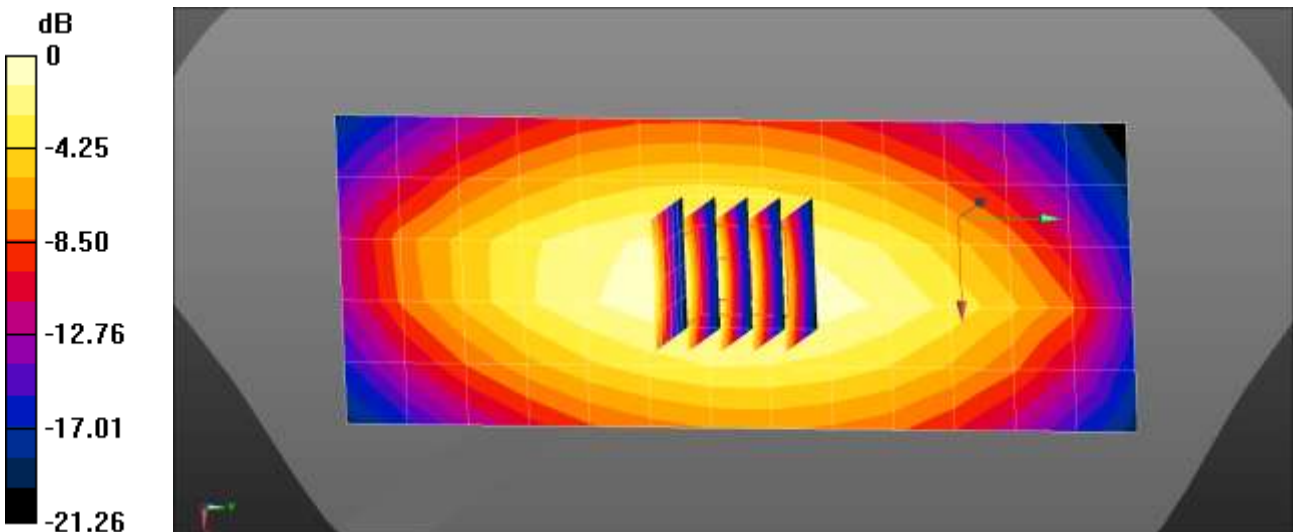

$0 \text{ dB} = 0.510 \text{ W/kg} = -2.93 \text{ dBW/kg}$

■ **Verification Data (750 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 18.5 °C
 Test Date: 01/08/2021

DUT: Dipole 750 MHz D750V3; Type: D750V3

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 40.319$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.86, 9.86, 9.86) @ 750 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4);

Dipole/750MHz Head Verification/Area Scan (51x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.538 W/kg


Dipole/750MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.97 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.599 W/kg

SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 0.546 W/kg

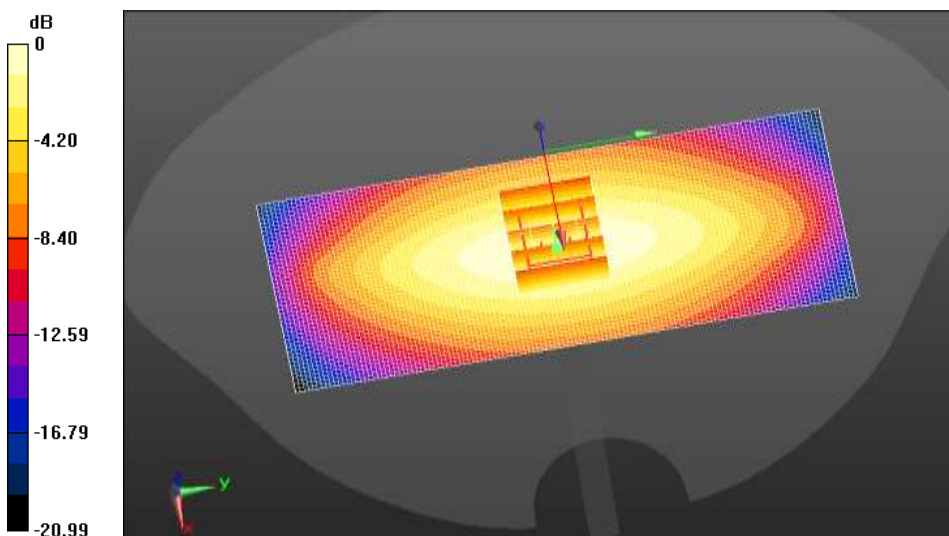

$$0 \text{ dB} = 0.538 \text{ W/kg} = -2.69 \text{ dBW/kg}$$

■ **Verification Data (750 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.4 °C
Test Date: 01/12/2021

DUT: Dipole 750 MHz D750V3; Type: D750V3

Communication System: UID 0, CW (0); Frequency: 750 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.935 \text{ S/m}$; $\epsilon_r = 42.351$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4);

Dipole/750MHz Head Verification/Area Scan (5x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.476 W/kg


Dipole/750MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$,
 $dz=5\text{mm}$

Reference Value = 22.12 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.328 W/kg

Maximum value of SAR (measured) = 0.438 W/kg

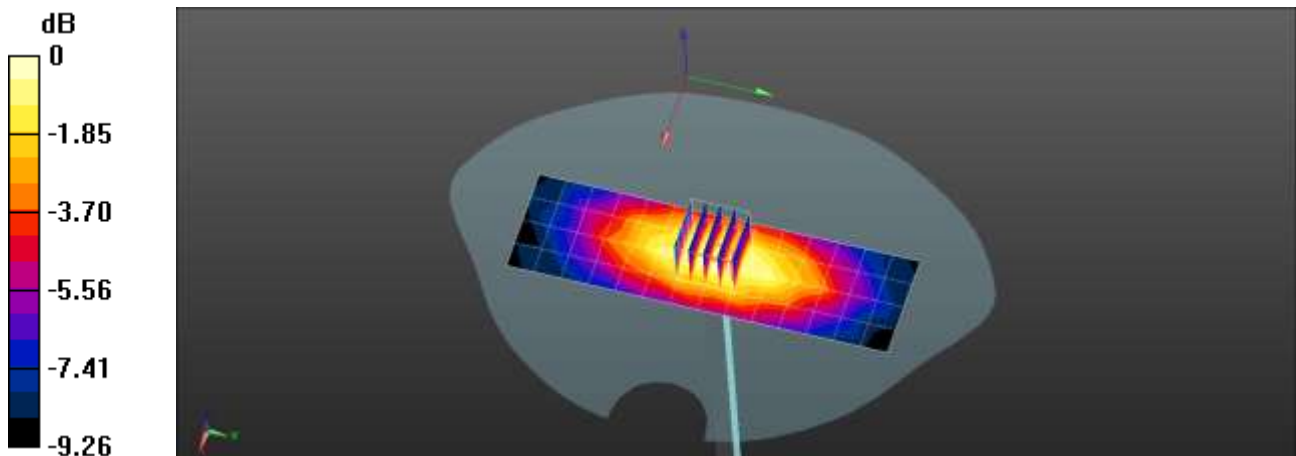

$0 \text{ dB} = 0.476 \text{ W/kg} = -3.23 \text{ dBW/kg}$

■ **Verification Data (750 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 20.9 °C
 Test Date: 01/13/2021

DUT: Dipole 750 MHz D750V3; Type: D750V3;

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.882 \text{ S/m}$; $\epsilon_r = 42.235$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(7.22, 7.22, 7.22) @ 750 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/750MHz Head Verification/Area Scan (5x15x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.452 W/kg


Dipole/750MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.24 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.308 W/kg

Maximum value of SAR (measured) = 0.411 W/kg

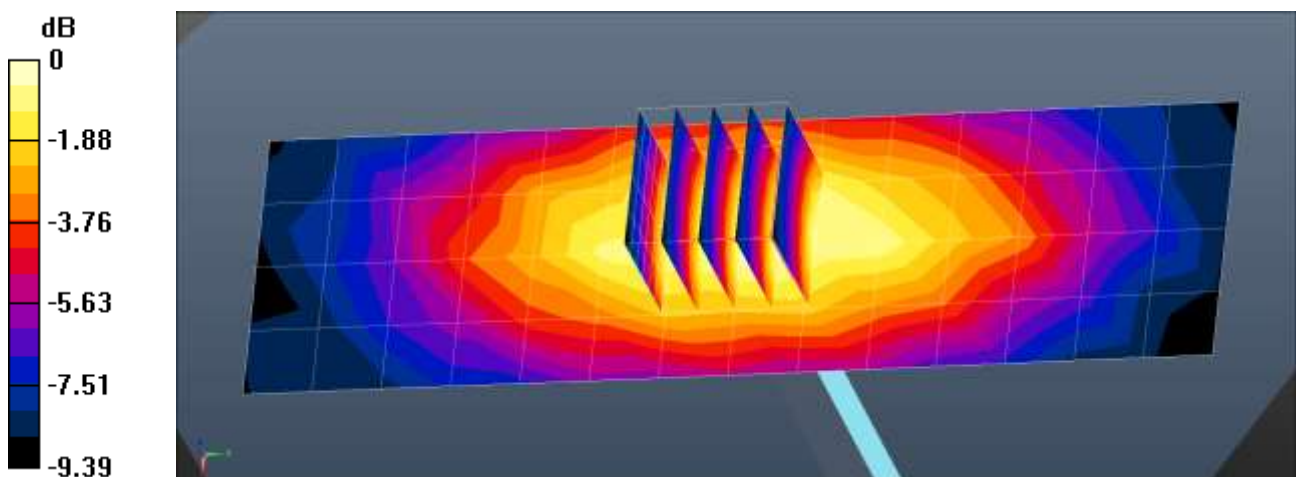

0 dB = 0.452 W/kg = -3.45 dBW/kg

■ **Verification Data (750 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 21.9 °C
 Test Date: 01/29/2021

DUT: Dipole 750 MHz D750V3; Type: D750V3;

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.849 \text{ S/m}$; $\epsilon_r = 42.371$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(9.94, 9.94, 9.94) @ 750 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/750MHz Head Verification/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.478 W/kg


Dipole/750MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.44 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.270 W/kg

Maximum value of SAR (measured) = 0.627 W/kg

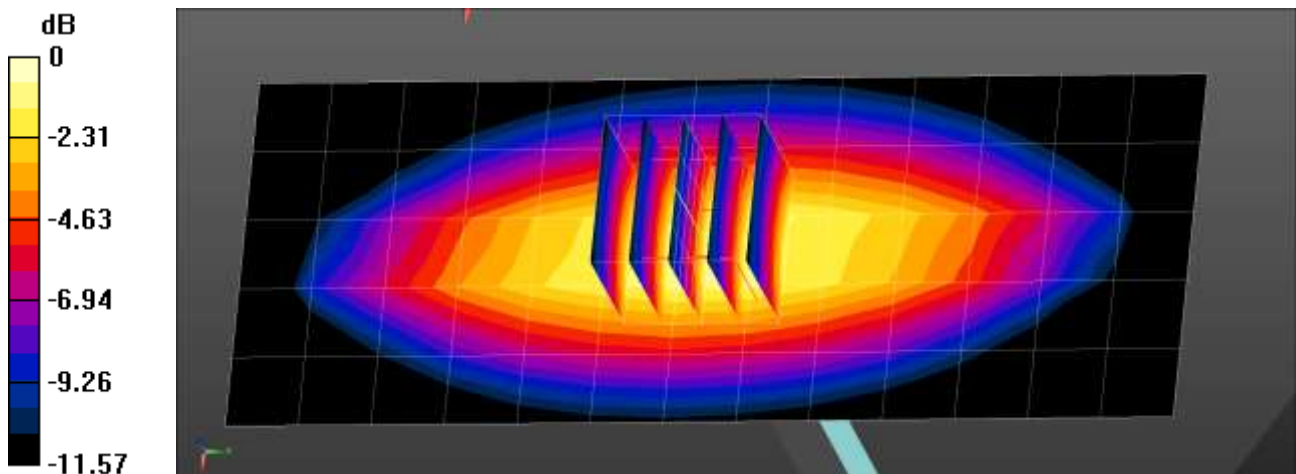

$0 \text{ dB} = 0.627 \text{ W/kg} = -2.03 \text{ dBW/kg}$

■ **Verification Data (835 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 21.9 °C
 Test Date: 01/07/2021

DUT: Dipole 835 MHz D835V2; Type: D835V2;


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.938 \text{ S/m}$; $\epsilon_r = 41.728$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.96, 6.96, 6.96) @ 835 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

835MHz Head Verification(CDMA BC0)/Area Scan (5x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.629 W/kg

835MHz Head Verification(CDMA BC0)/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 25.24 V/m; Power Drift = -0.18 dB
 Peak SAR (extrapolated) = 0.643 W/kg
SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.335 W/kg
 Maximum value of SAR (measured) = 0.559 W/kg

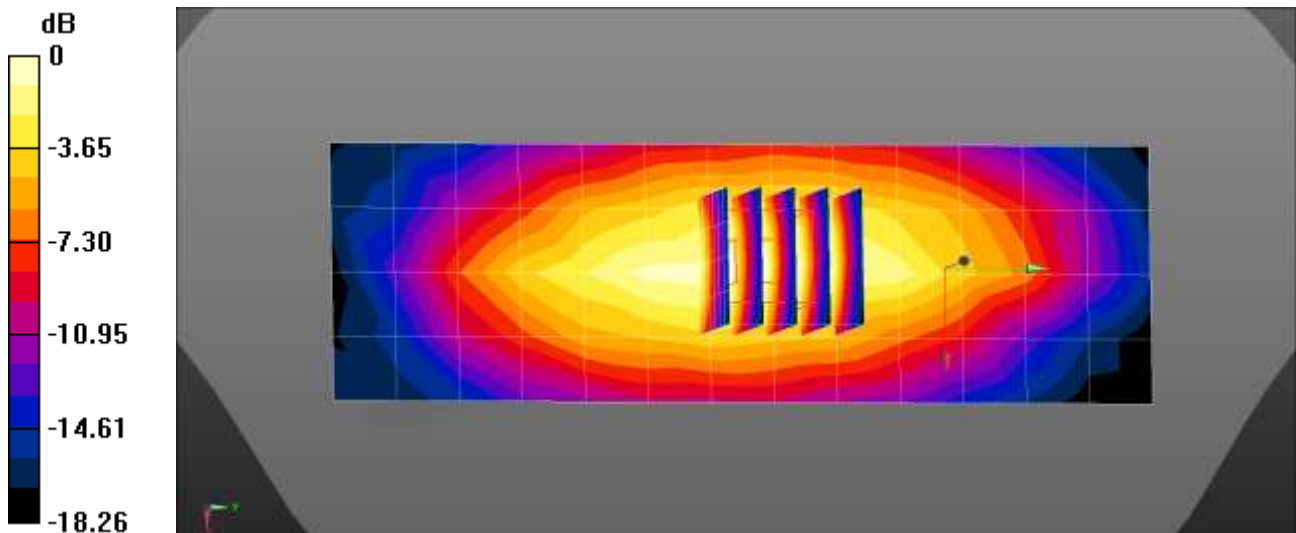

0 dB = 0.629 W/kg = -2.02 dBW/kg

■ **Verification Data (835 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 21.9 °C
 Test Date: 01/06/2021

DUT: Dipole 835 MHz D835V2; Type: D835V2;


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.937 \text{ S/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.96, 6.96, 6.96) @ 835 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)

835MHz Head Verification/Area Scan (5x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.602 W/kg

835MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 24.71 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 0.613 W/kg
SAR(1 g) = 0.510 W/kg; SAR(10 g) = 0.350 W/kg
 Maximum value of SAR (measured) = 0.552 W/kg

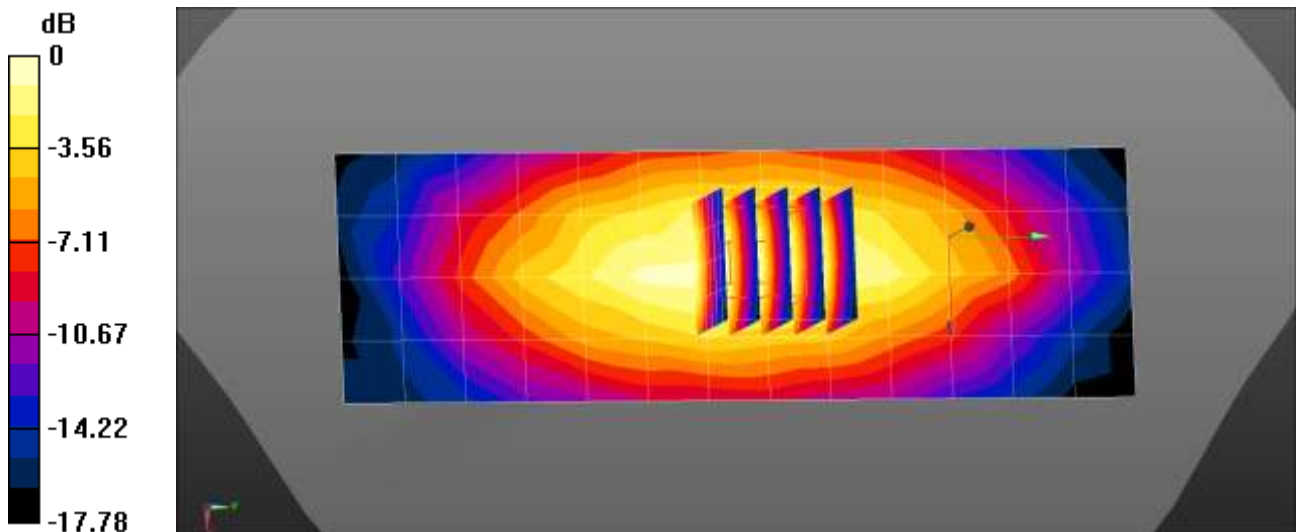

$0 \text{ dB} = 0.602 \text{ W/kg} = -2.21 \text{ dBW/kg}$

■ **Verification Data (835 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 18.9 °C
 Test Date: 01/04/2021

DUT: Dipole 835 MHz D835V2; Type: D835V2;


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 42.788$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.61, 9.61, 9.61) @ 835 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4)

835MHz Head Verification/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.601 W/kg

835MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 28.31 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.756 W/kg
SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.337 W/kg
 Smallest distance from peaks to all points 3 dB below = 20.5 mm
 Maximum value of SAR (measured) = 0.672 W/kg

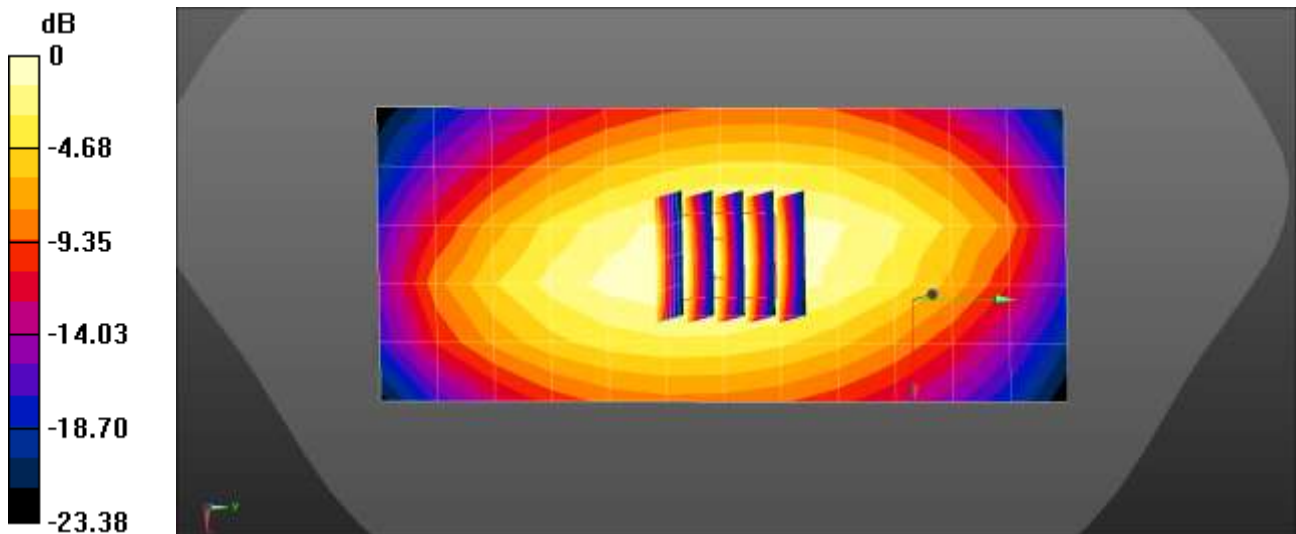

$0 \text{ dB} = 0.601 \text{ W/kg} = -2.21 \text{ dBW/kg}$

■ **Verification Data (835 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 22.0 °C
 Test Date: 12/31/2020

DUT: Dipole 835 MHz D835V2; Type: D835V2;


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 42.745$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(9.61, 9.61, 9.61) @ 835 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn466; Calibrated: 2020-04-22
- Phantom: Twin-SAM V4.0 (20deg probe tilt)
- Measurement SW: DASY52, Version 52.10 (4)

835MHz Head Verification/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.610 W/kg

835MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 28.52 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.742 W/kg
SAR(1 g) = 0.504 W/kg; SAR(10 g) = 0.337 W/kg
 Smallest distance from peaks to all points 3 dB below = 20.5 mm
 Maximum value of SAR (measured) = 0.664 W/kg

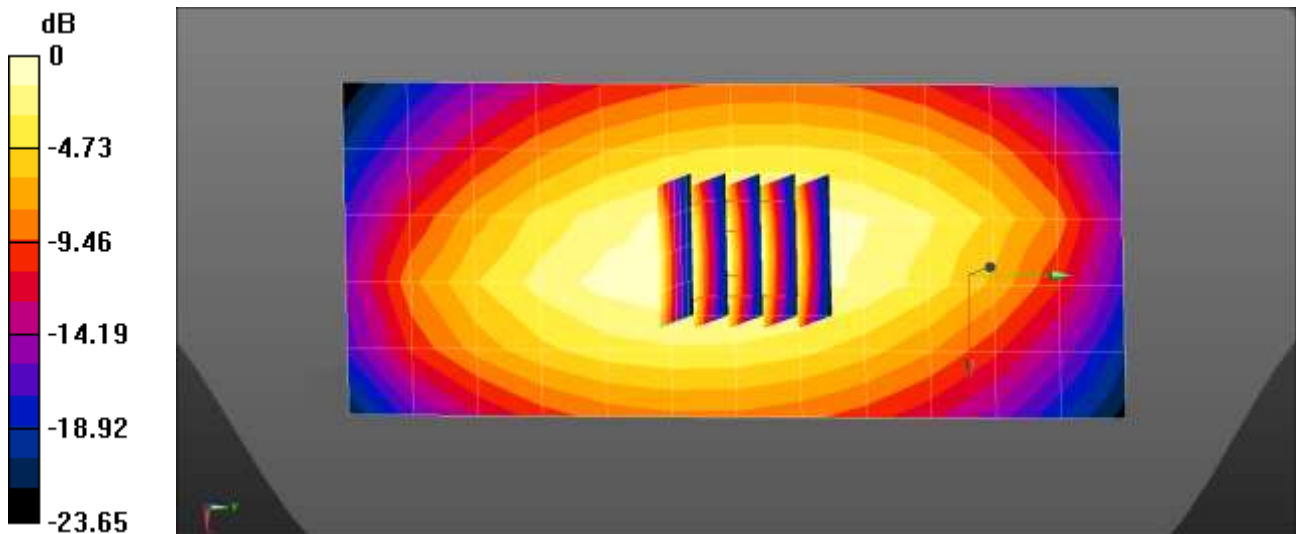

$0 \text{ dB} = 0.610 \text{ W/kg} = -2.15 \text{ dBW/kg}$

■ **Verification Data (835 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 20.4 °C
 Test Date: 01/14/2021

DUT: Dipole 835 MHz D835V2; Type: D835V2;

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.935 \text{ S/m}$; $\epsilon_r = 41.156$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(6.96, 6.96, 6.96) @ 835 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Right_20170913
- Measurement SW: DASY52, Version 52.10 (4)


Dipole/835MHz Head Verification/Area Scan (5x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.603 W/kg

Dipole/835MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.41 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.607 W/kg

SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.357 W/kg

Maximum value of SAR (measured) = 0.552 W/kg

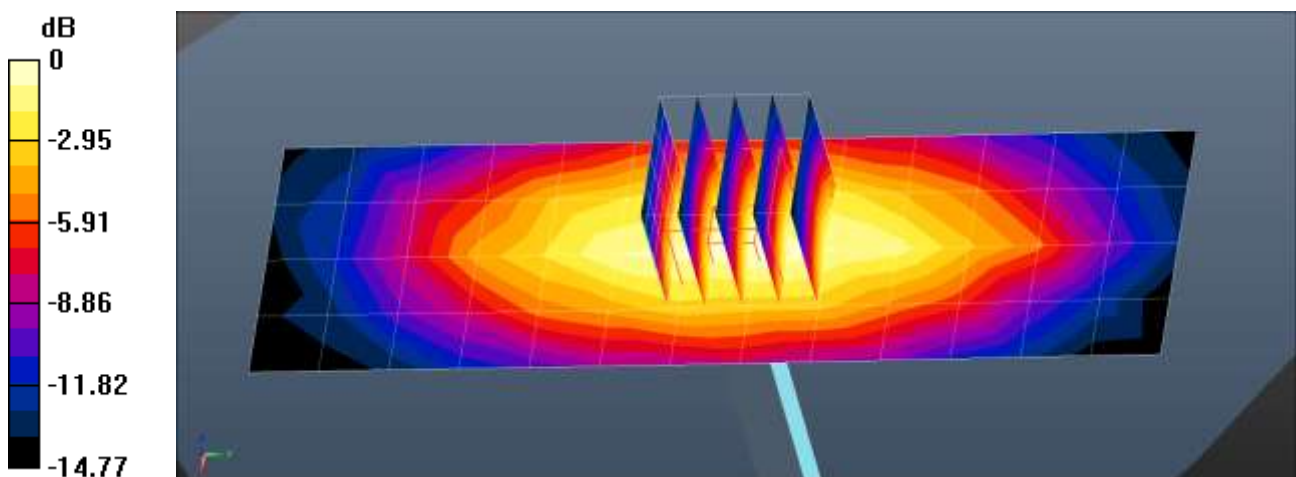

$0 \text{ dB} = 0.603 \text{ W/kg} = -2.19 \text{ dBW/kg}$

■ **Verification Data (1 800 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 21.9 °C
Test Date: 01/27/2021
DUT: Dipole 1800 MHz D1800V2; Type: D1800V2;


Communication System: UID 0, CW (0); Frequency: 1800 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1800$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.708$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(8.62, 8.62, 8.62) @ 1800 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

1800MHz Head Verification/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.84 W/kg

1800MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 46.55 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 3.86 W/kg
SAR(1 g) = 2 W/kg; SAR(10 g) = 1.03 W/kg
Maximum value of SAR (measured) = 3.20 W/kg

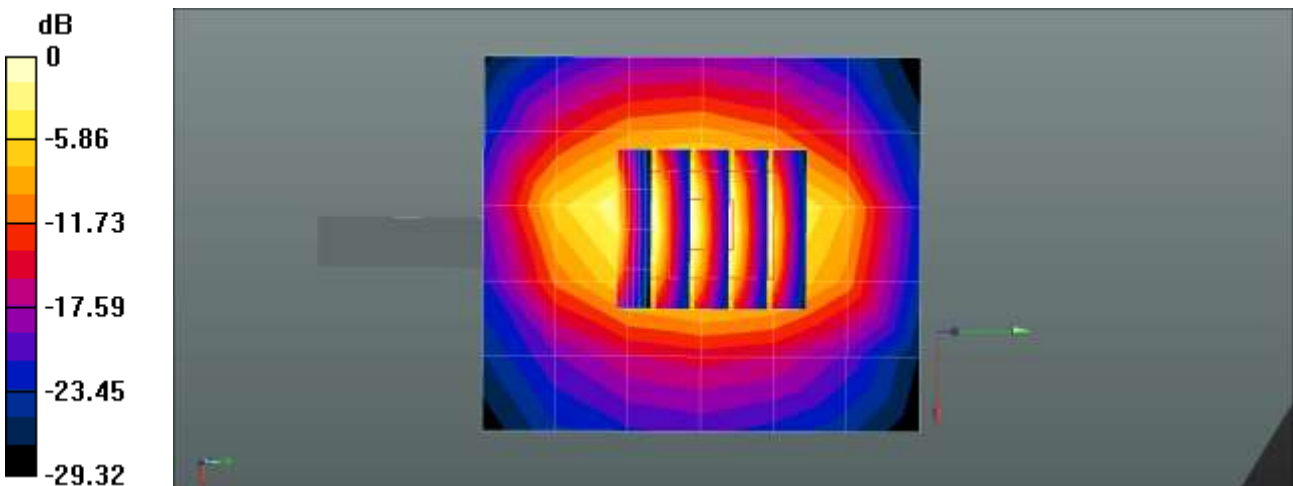

0 dB = 2.84 W/kg = 4.53 dBW/kg

■ **Verification Data (1 800 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 22.3 °C
Test Date: 02/07/2021
DUT: Dipole 1800 MHz D1800V2; Type: D1800V2;


Communication System: UID 0, CW (0); Frequency: 1800 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1800$ MHz; $\sigma = 1.431$ S/m; $\epsilon_r = 41.64$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(8.56, 8.56, 8.56) @ 1800 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

1800MHz Head Verification/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.15 W/kg

1800MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 46.01 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 3.47 W/kg
SAR(1 g) = 1.83 W/kg; SAR(10 g) = 0.954 W/kg
Maximum value of SAR (measured) = 2.84 W/kg

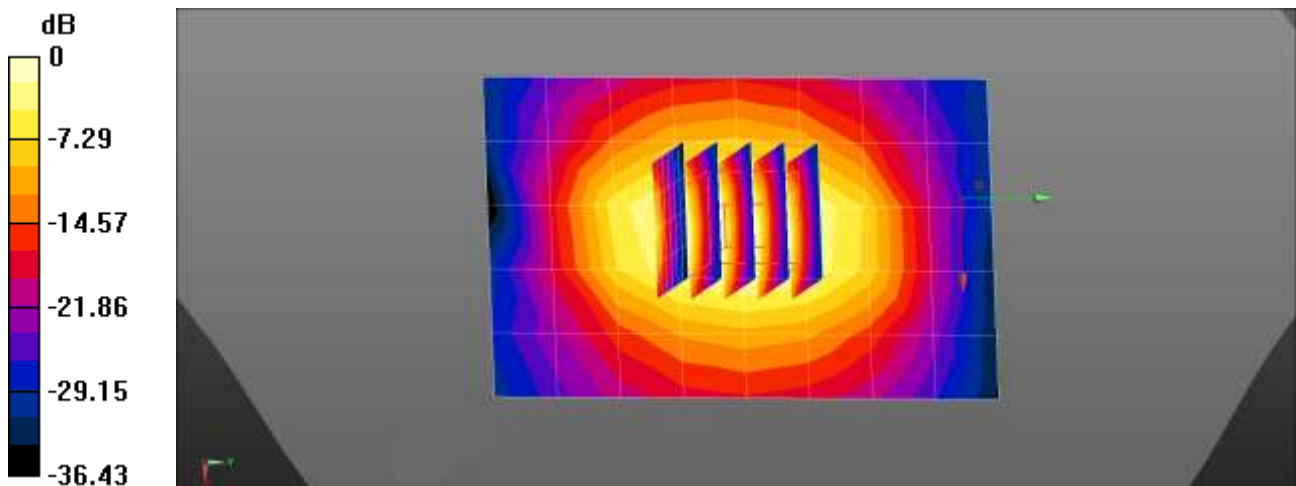

0 dB = 2.15 W/kg = 3.33 dBW/kg

■ **Verification Data (1 800 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 19.6 °C
Test Date: 01/07/2021

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2;

Communication System: UID 0, CW (0); Frequency: 1800 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1800$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 40.798$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(9.12, 9.12, 9.12) @ 1800 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/1800MHz Head Verification/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.86 W/kg


Dipole/1800MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.71 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.85 W/kg

SAR(1 g) = 2.03 W/kg; SAR(10 g) = 1.06 W/kg

Maximum value of SAR (measured) = 3.21 W/kg

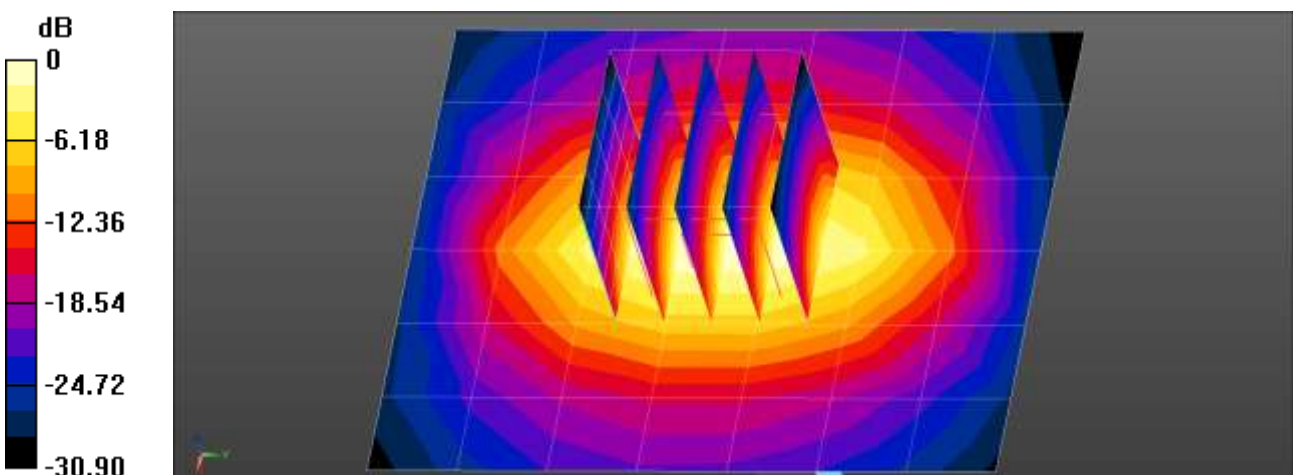

0 dB = 2.86 W/kg = 4.57 dBW/kg

■ **Verification Data (1 800 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 19.1 °C
 Test Date: 01/26/2021
 DUT: Dipole 1800 MHz D1800V2; Type: D1800V2;


Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1800$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 41.37$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(8.62, 8.62, 8.62) @ 1800 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

1800MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 3.04 W/kg

1800MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 48.73 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 3.95 W/kg
SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.06 W/kg
 Maximum value of SAR (measured) = 3.27 W/kg

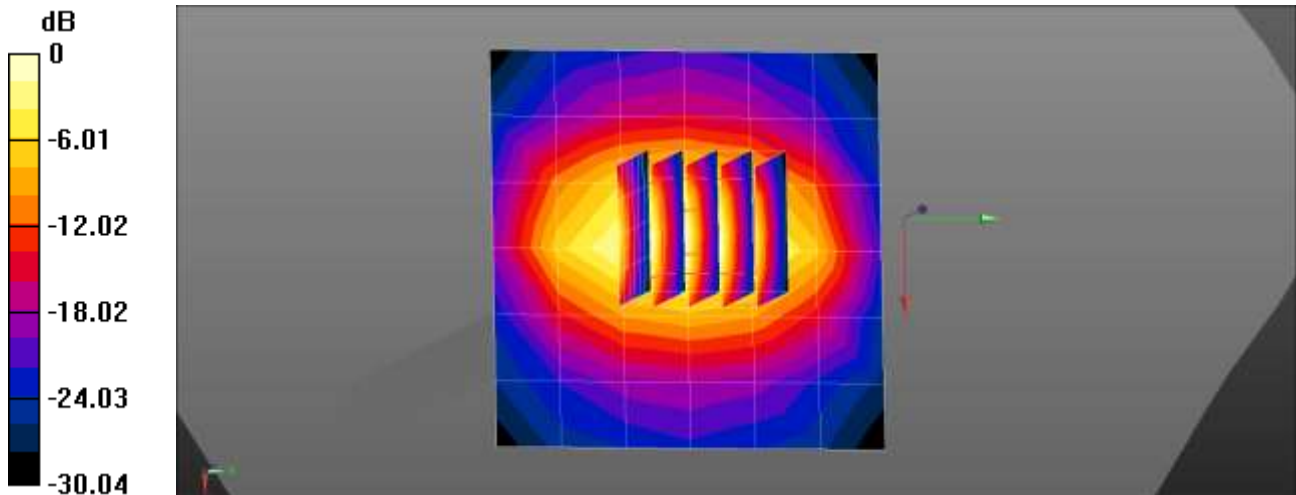

0 dB = 3.04 W/kg = 4.83 dBW/kg

■ **Verification Data (1 900 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 20.3 °C
 Test Date: 12/31/2020

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.449$ S/m; $\epsilon_r = 39.294$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(8.78, 8.78, 8.78) @ 1900 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/1900MHz Head Verification/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 2.98 W/kg


Dipole/1900MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.43 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 4.07 W/kg

SAR(1 g) = 2.13 W/kg; SAR(10 g) = 1.1 W/kg

Maximum value of SAR (measured) = 3.38 W/kg

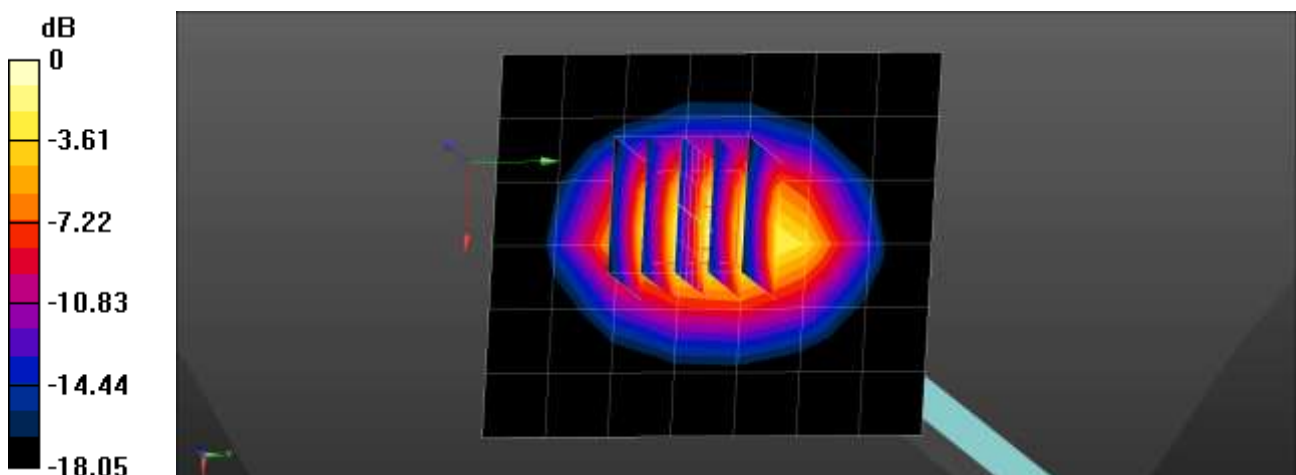

0 dB = 3.38 W/kg = 5.29 dBW/kg

■ **Verification Data (1 900 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 21.9 °C
 Test Date: 01/04/2021

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2;


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.467$ S/m; $\epsilon_r = 39.203$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.63, 5.63, 5.63) @ 1900 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

1900MHz Head Verification/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 1.87 W/kg

1900MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 39.90 V/m; Power Drift = -0.18 dB
 Peak SAR (extrapolated) = 2.58 W/kg
SAR(1 g) = 1.96 W/kg; SAR(10 g) = 1.12 W/kg
 Maximum value of SAR (measured) = 2.25 W/kg

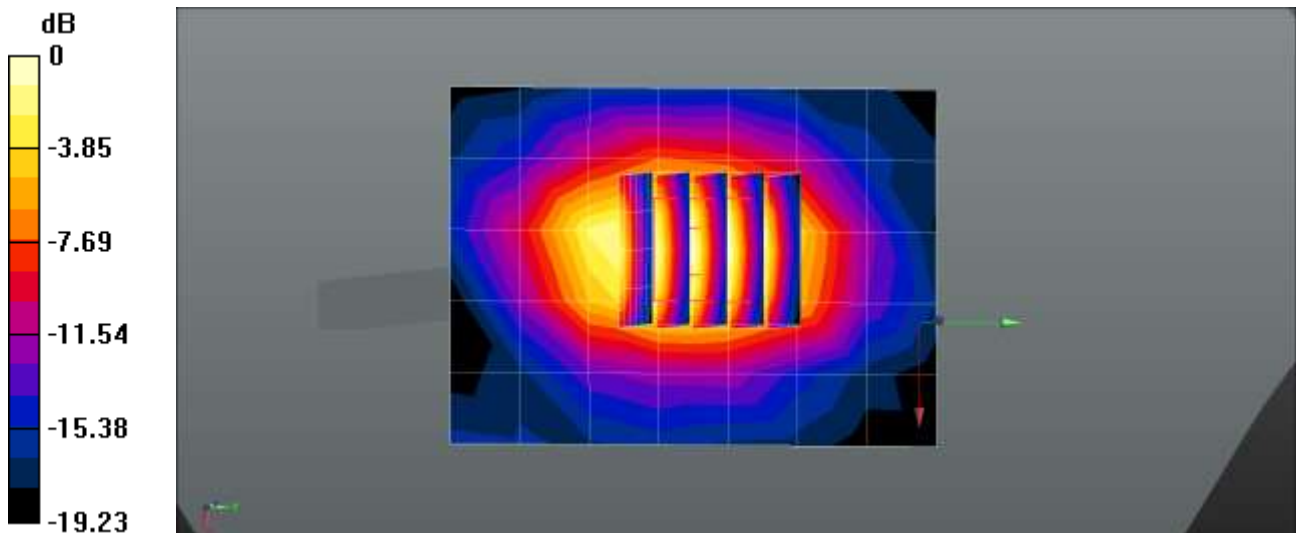

0 dB = 1.87 W/kg = 2.73 dBW/kg

■ **Verification Data (1 900 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.9 °C
Test Date: 01/05/2021
DUT: Dipole 1900 MHz D1900V2; Type: D1900V2;


Communication System: UID 0, CW (0); Frequency: 1900 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.466$ S/m; $\epsilon_r = 39.66$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ET3DV6 - SN1630; ConvF(5.63, 5.63, 5.63) @ 1900 MHz; Calibrated: 2020-02-26
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

1900MHz Head Verification/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.91 W/kg

1900MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 40.50 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 2.75 W/kg
SAR(1 g) = 2.02 W/kg; SAR(10 g) = 1.13 W/kg
Maximum value of SAR (measured) = 2.31 W/kg

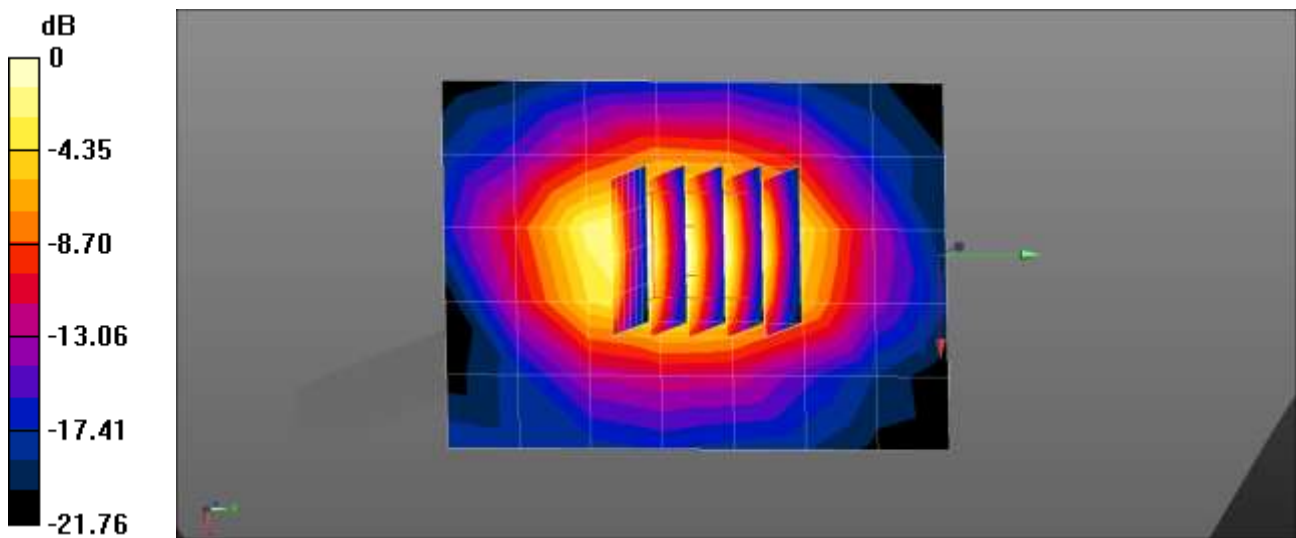

0 dB = 1.91 W/kg = 2.81 dBW/kg

■ **Verification Data (1 900 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 22.3 °C
 Test Date: 01/06/2021

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.446$ S/m; $\epsilon_r = 39.149$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(8.78, 8.78, 8.78) @ 1900 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/1900MHz Head Verification/Area Scan (7x8x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 2.92 W/kg


Dipole/1900MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 48.46 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.19 W/kg

SAR(1 g) = 2.13 W/kg; SAR(10 g) = 1.09 W/kg

Maximum value of SAR (measured) = 3.43 W/kg

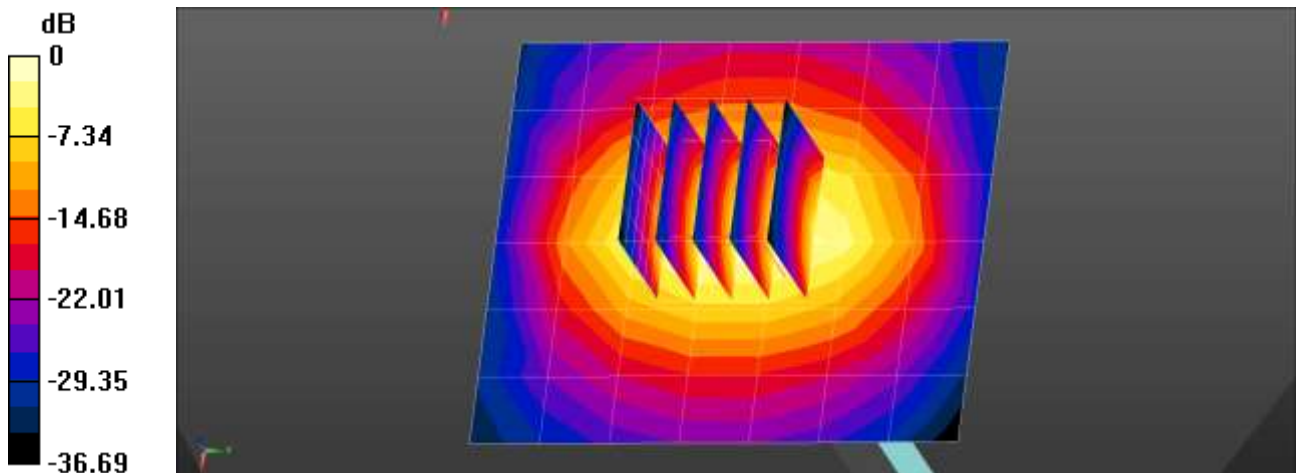

0 dB = 2.92 W/kg = 4.65 dBW/kg

■ **Verification Data (1 900 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 19.0 °C
Test Date: 01/25/2021

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2;


Communication System: UID 0, CW (0); Frequency: 1900 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.449$ S/m; $\epsilon_r = 40.978$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3903; ConvF(8.31, 8.31, 8.31) @ 1900 MHz; Calibrated: 2020-03-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn869; Calibrated: 2020-09-28
- Phantom: SAM_Left_20170913
- Measurement SW: DASY52, Version 52.10 (4)

1900MHz Head Verification/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.36 W/kg

1900MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 46.82 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 3.73 W/kg
SAR(1 g) = 1.99 W/kg; SAR(10 g) = 1.02 W/kg
Maximum value of SAR (measured) = 3.14 W/kg

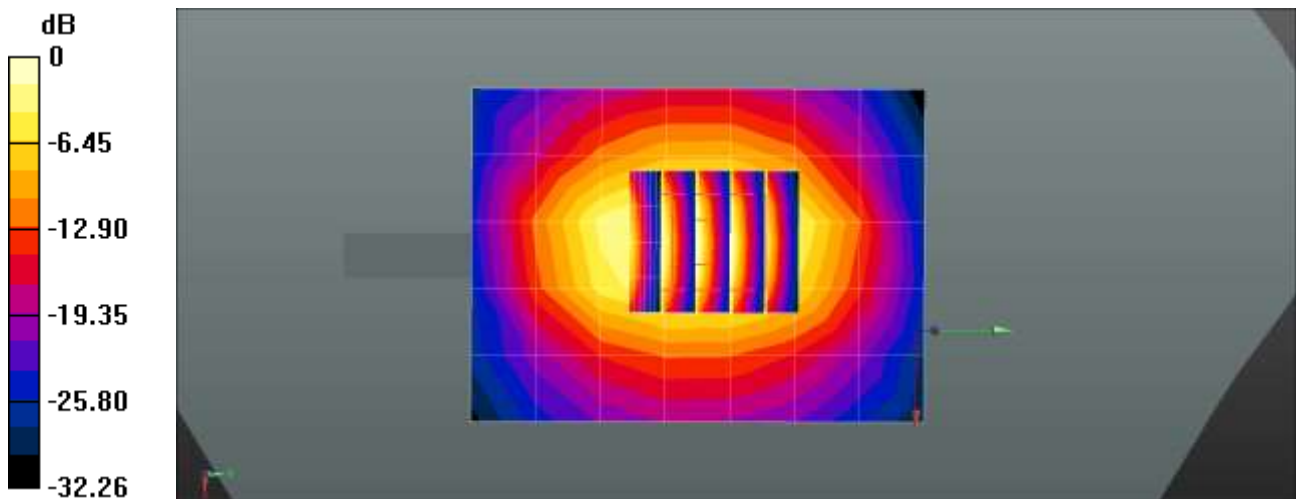

0 dB = 2.36 W/kg = 3.73 dBW/kg

■ Verification Data (1 900 MHz Head)

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 22.2 °C
Test Date: 02/01/2021

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.448$ S/m; $\epsilon_r = 41.078$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(8.19, 8.19, 8.19) @ 1900 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/1900MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.86 W/kg


Dipole/1900MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 46.00 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.65 W/kg

SAR(1 g) = 1.91 W/kg; SAR(10 g) = 0.975 W/kg

Maximum value of SAR (measured) = 3.04 W/kg

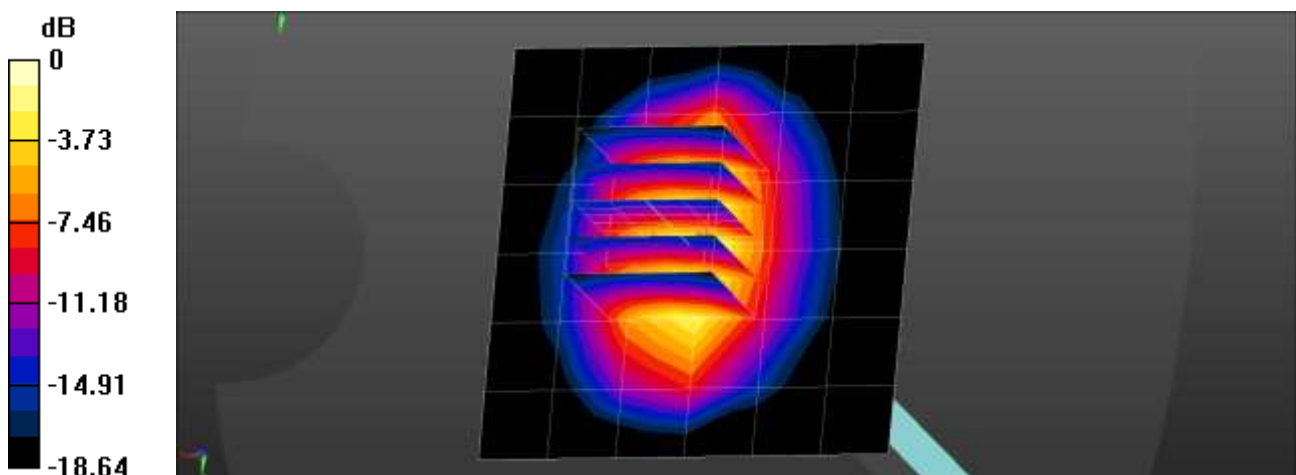

0 dB = 3.04 W/kg = 4.83 dBW/kg

■ **Verification Data (1 900 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 22.3 °C
Test Date: 02/06/2021
DUT: Dipole 1900 MHz D1900V2; Type: D1900V2;


Communication System: UID 0, CW (0); Frequency: 1900 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.446$ S/m; $\epsilon_r = 41.217$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(8.19, 8.19, 8.19) @ 1900 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

1900MHz Head Verification/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.78 W/kg

1900MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 47.29 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 3.60 W/kg
SAR(1 g) = 1.9 W/kg; SAR(10 g) = 0.968 W/kg
Maximum value of SAR (measured) = 3.01 W/kg

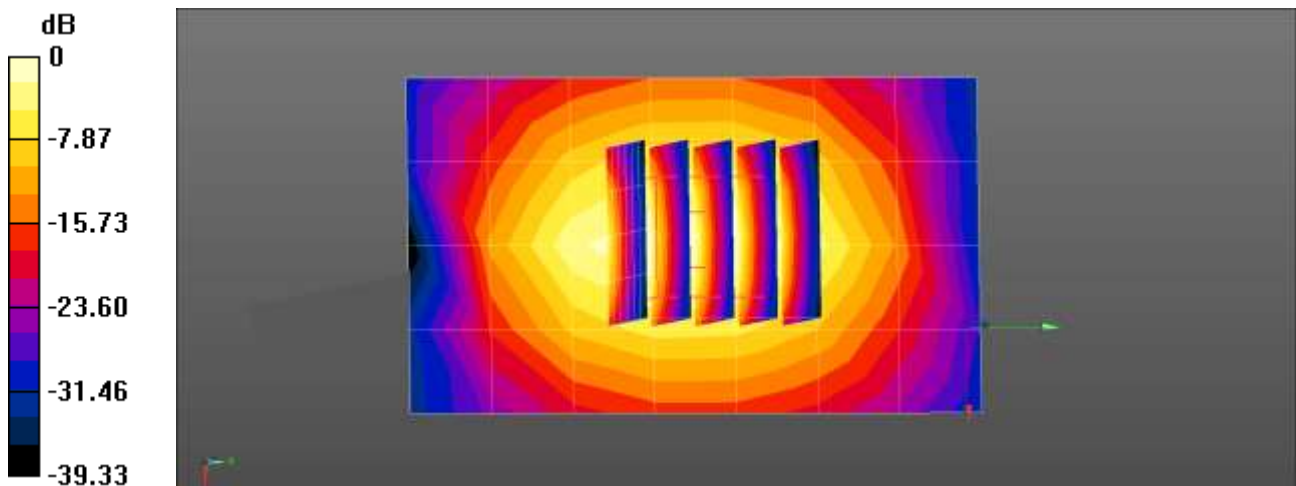

0 dB = 2.78 W/kg = 4.45 dBW/kg

■ **Verification Data (2 300 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.0 °C
Test Date: 02/06/2021
DUT: Dipole 2300 MHz D2300V2; Type: D2300V2;


Communication System: UID 0, CW (0); Frequency: 2300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2300$ MHz; $\sigma = 1.655$ S/m; $\epsilon_r = 40.129$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2300 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

2300MHz Head Verification/Area Scan (6x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.61 W/kg

2300MHz Head Verification/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 50.76 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 5.38 W/kg
SAR(1 g) = 2.49 W/kg; SAR(10 g) = 1.17 W/kg
Maximum value of SAR (measured) = 4.18 W/kg

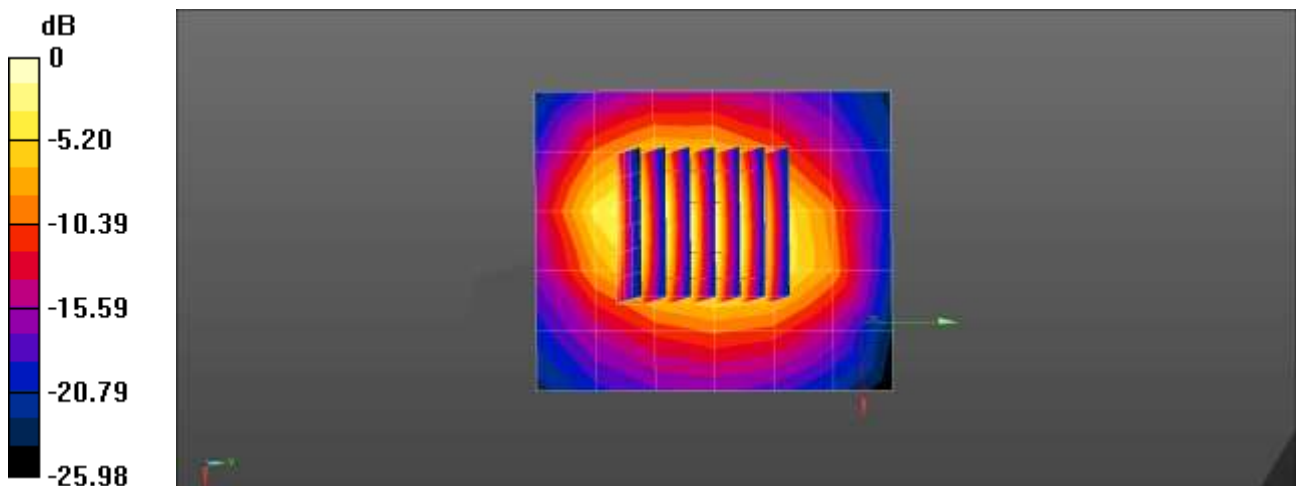

0 dB = 3.61 W/kg = 5.57 dBW/kg

■ **Verification Data (2 300 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power 0.05 W
 Liquid Temp: 20.5 °C
 Test Date: 01/19/2021
 DUT: Dipole 2300 MHz D2300V2; Type: D2300V2;


Communication System: UID 0, CW (0); Frequency: 2300 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.639$ S/m; $\epsilon_r = 40.81$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2300 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

2300MHz Head Verification/Area Scan (6x7x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 3.22 W/kg

2300MHz Head Verification/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 55.19 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 6.27 W/kg
SAR(1 g) = 2.55 W/kg; SAR(10 g) = 1.11 W/kg
 Maximum value of SAR (measured) = 4.66 W/kg

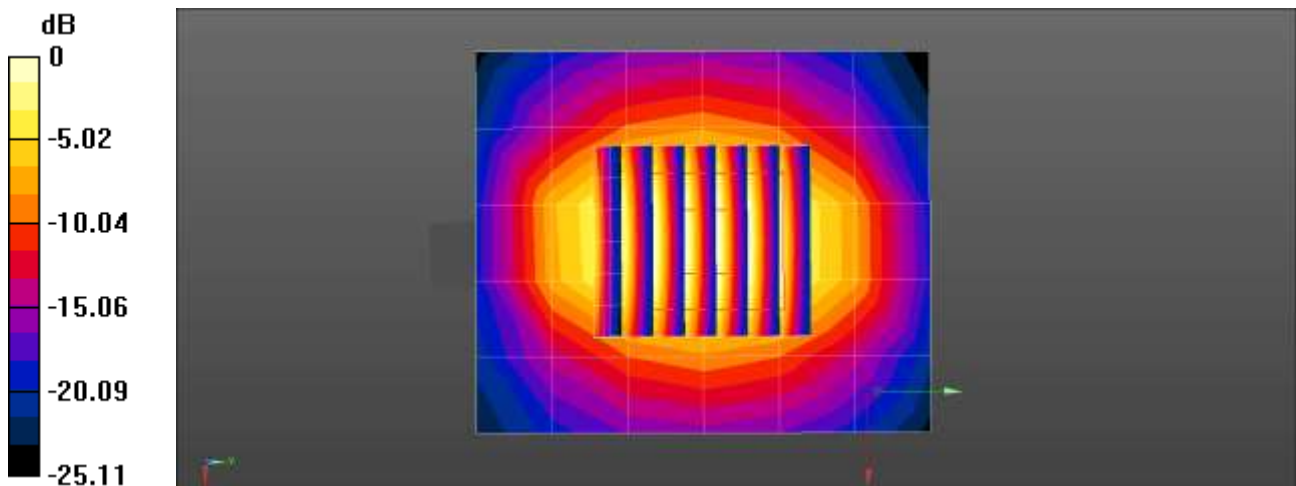

0 dB = 3.22 W/kg = 5.08 dBW/kg

■ **Verification Data (2 300 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 21.1 °C
Test Date: 01/20/2021
DUT: Dipole 2300 MHz D2300V2; Type: D2300V2;


Communication System: UID 0, CW (0); Frequency: 2300 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2300$ MHz; $\sigma = 1.639$ S/m; $\epsilon_r = 40.81$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.41, 7.41, 7.41) @ 2300 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

2300MHz Head Verification/Area Scan (6x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.74 W/kg

2300MHz Head Verification/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 54.42 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 6.27 W/kg
SAR(1 g) = 2.58 W/kg; SAR(10 g) = 1.12 W/kg
Maximum value of SAR (measured) = 4.69 W/kg

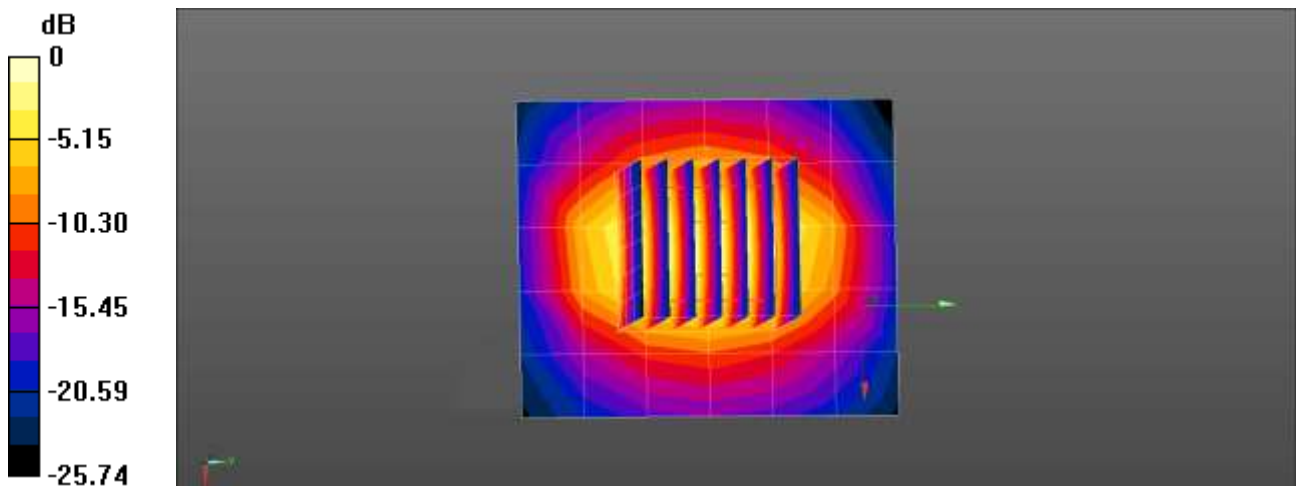

0 dB = 3.74 W/kg = 5.73 dBW/kg

■ **Verification Data (2 450 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 21.4 °C
Test Date: 02/06/2021
DUT: Dipole 2450 MHz D2450V2; Type: D2450V2;


Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.851$ S/m; $\epsilon_r = 40.807$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.47, 7.47, 7.47) @ 2450 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

2450MHz Head Verification/Area Scan (6x8x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.37 W/kg

2450MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 51.18 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 5.79 W/kg
SAR(1 g) = 2.65 W/kg; SAR(10 g) = 1.2 W/kg
Maximum value of SAR (measured) = 4.59 W/kg

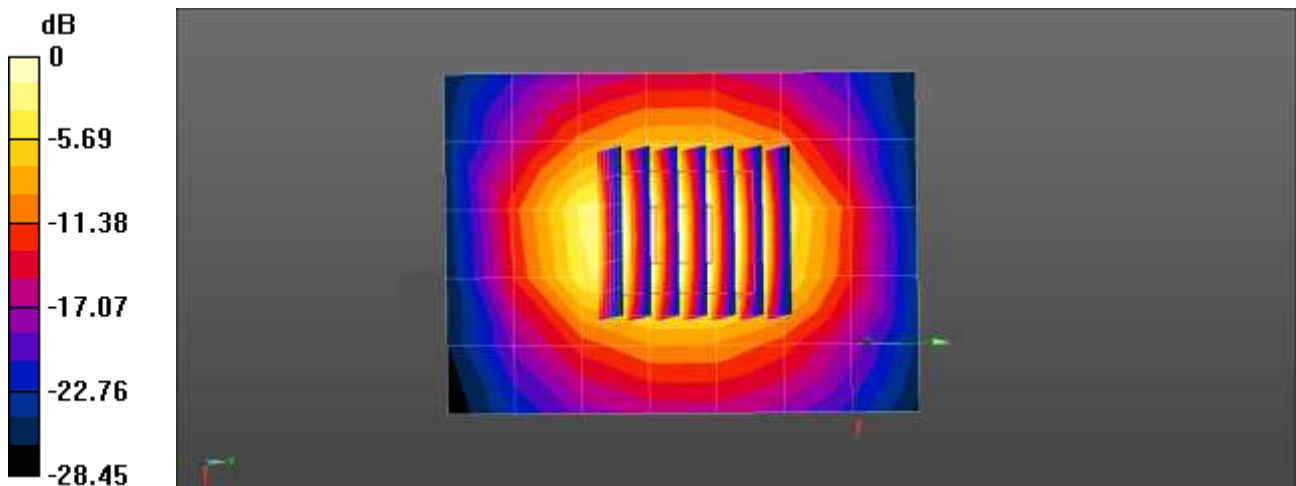

0 dB = 3.37 W/kg = 5.27 dBW/kg

■ **Verification Data (2 450 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 21.5 °C
Test Date: 01/21/2021

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2;

Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2450$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 38.42$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.34, 7.34, 7.34) @ 2450 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/2450MHz Head Verification/Area Scan (6x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.59 W/kg


Dipole/2450MHz Head Verification/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.94 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 6.04 W/kg

SAR(1 g) = 2.54 W/kg; SAR(10 g) = 1.12 W/kg

Maximum value of SAR (measured) = 4.56 W/kg

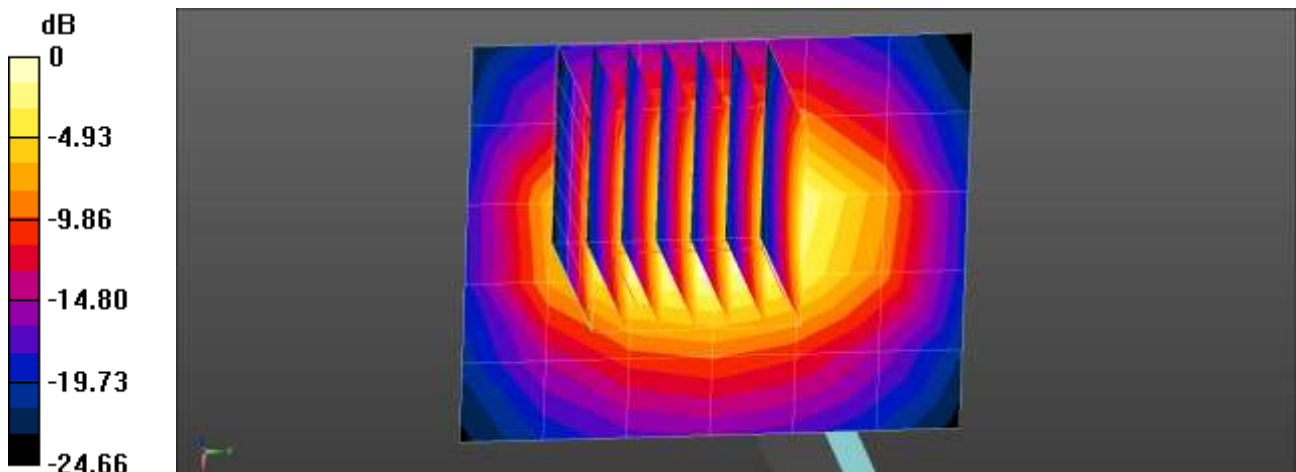

0 dB = 3.59 W/kg = 5.55 dBW/kg

■ **Verification Data (2 600 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 21.2 °C
Test Date: 02/04/2021
DUT: Dipole 2600 MHz D2600V2; Type: D2600V2;


Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.003$ S/m; $\epsilon_r = 39.843$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2600 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

2600MHz Head Verification/Area Scan (6x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 4.03 W/kg

2600MHz Head Verification/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 51.64 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 6.54 W/kg
SAR(1 g) = 2.82 W/kg; SAR(10 g) = 1.23 W/kg
Maximum value of SAR (measured) = 5.01 W/kg

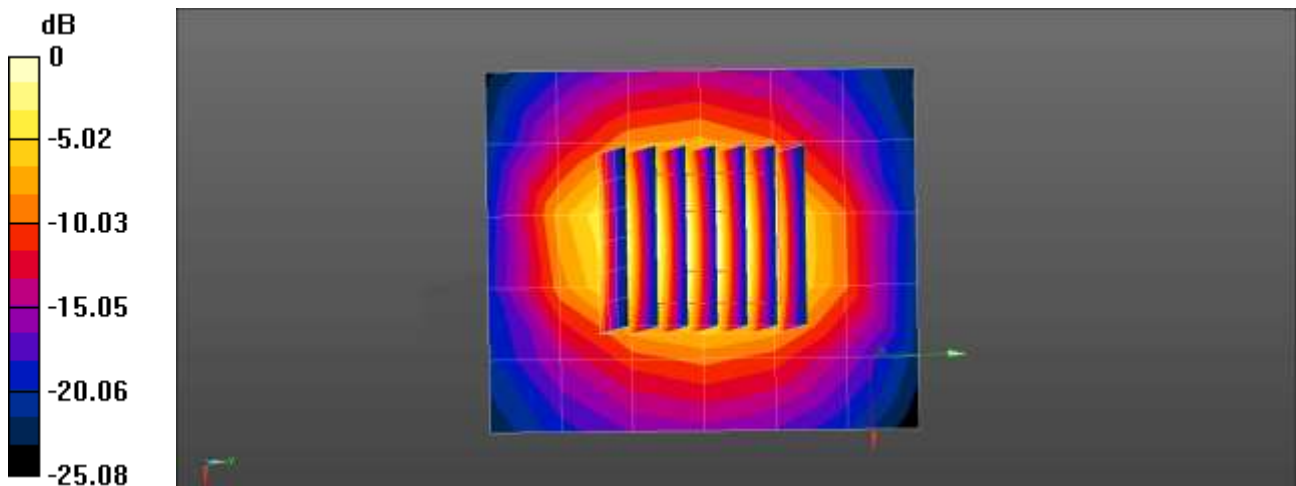

0 dB = 4.03 W/kg = 6.05 dBW/kg

■ **Verification Data (2 600 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 22.5 °C
Test Date: 02/03/2021
DUT: Dipole 2600 MHz D2600V2; Type: D2600V2;


Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.005$ S/m; $\epsilon_r = 39.864$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2600 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

2600MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 5.06 W/kg

2600MHz Head Verification/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 52.62 V/m; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 6.53 W/kg
SAR(1 g) = 2.83 W/kg; SAR(10 g) = 1.24 W/kg
Maximum value of SAR (measured) = 5.05 W/kg

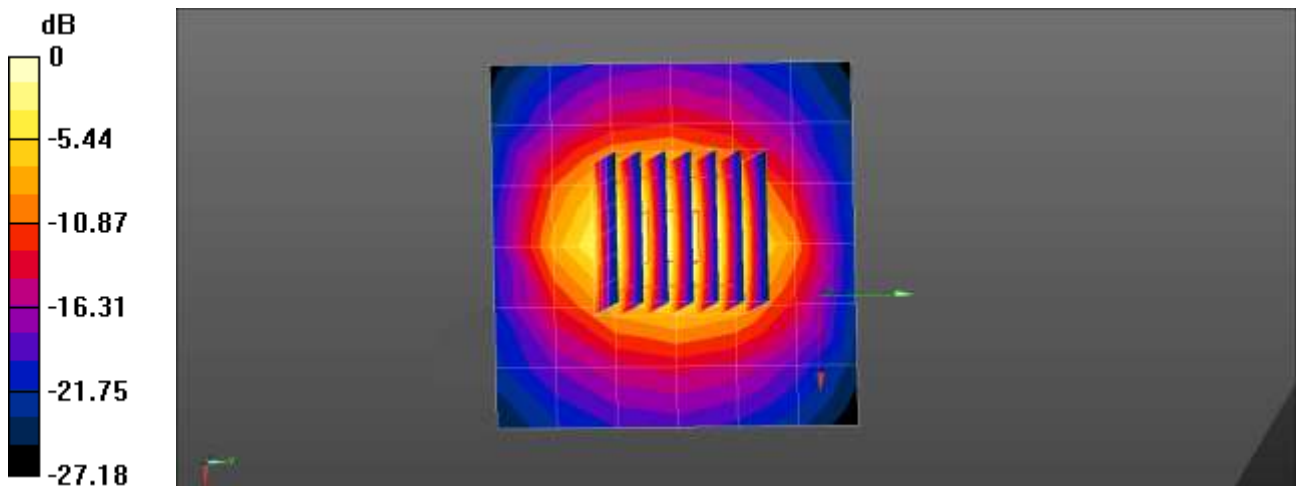

0 dB = 5.06 W/kg = 7.04 dBW/kg

■ **Verification Data (2 600 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power 0.05 W
 Liquid Temp: 20.5 °C
 Test Date: 02/02/2021
 DUT: Dipole 2600 MHz D2600V2; Type: D2600V2;


Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.011$ S/m; $\epsilon_r = 39.844$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2600 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

2600MHz Head Verification/Area Scan (6x7x1): Measurement grid: dx=12mm, dy=12mm
 Maximum value of SAR (measured) = 3.76 W/kg

2600MHz Head Verification/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 52.50 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 6.80 W/kg
SAR(1 g) = 2.83 W/kg; SAR(10 g) = 1.21 W/kg
 Maximum value of SAR (measured) = 5.14 W/kg

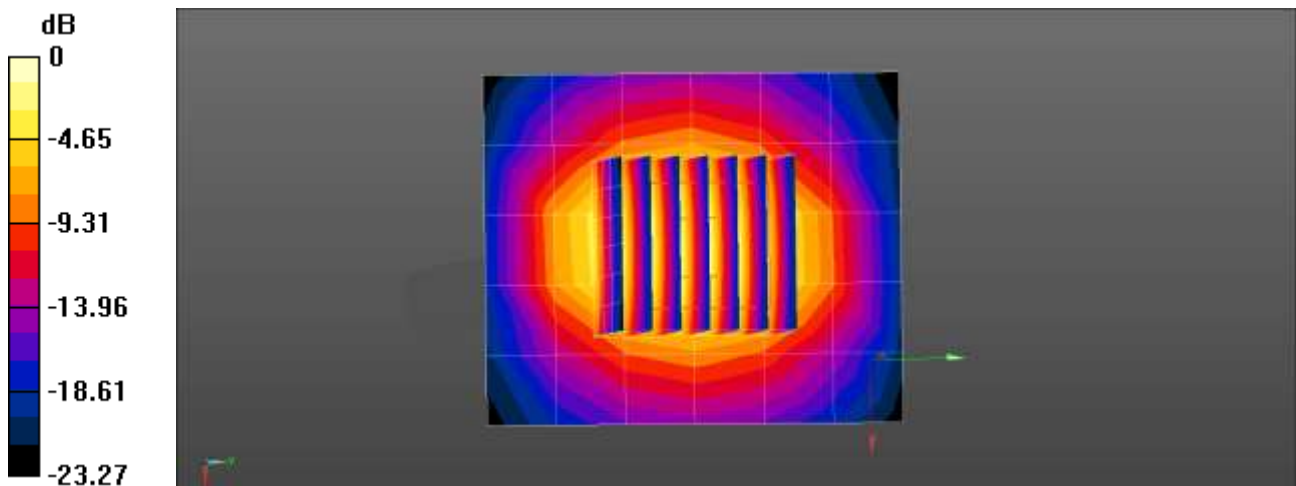

0 dB = 3.76 W/kg = 5.75 dBW/kg

■ Verification Data (2 600 MHz Head)

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 21.6 °C
Test Date: 02/08/2021

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2;

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.025$ S/m; $\epsilon_r = 39.924$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2600 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/2600MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 5.01 W/kg


Dipole/2600MHz Head Verification/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 51.70 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 6.58 W/kg

SAR(1 g) = 2.86 W/kg; SAR(10 g) = 1.25 W/kg

Maximum value of SAR (measured) = 5.08 W/kg

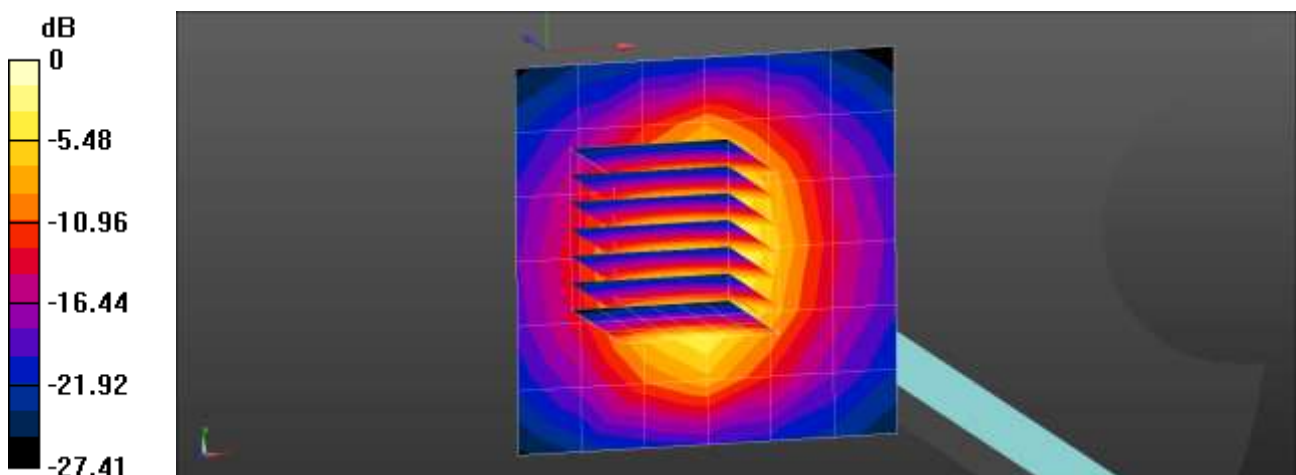

0 dB = 5.01 W/kg = 7.00 dBW/kg

■ Verification Data (3 500 MHz Head)

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 22.3 °C
Test Date: 01/26/2021

DUT: Dipole 3500 MHz D3500V2; Type: D3500V2;


Communication System: UID 0, CW (0); Frequency: 3500 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 3500$ MHz; $\sigma = 2.982$ S/m; $\epsilon_r = 38.151$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(6.87, 6.87, 6.87) @ 3500 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

3500MHz Head Verification/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 3.45 W/kg

3500MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 49.78 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 8.81 W/kg
SAR(1 g) = 3.36 W/kg; SAR(10 g) = 1.28 W/kg
Maximum value of SAR (measured) = 6.52 W/kg

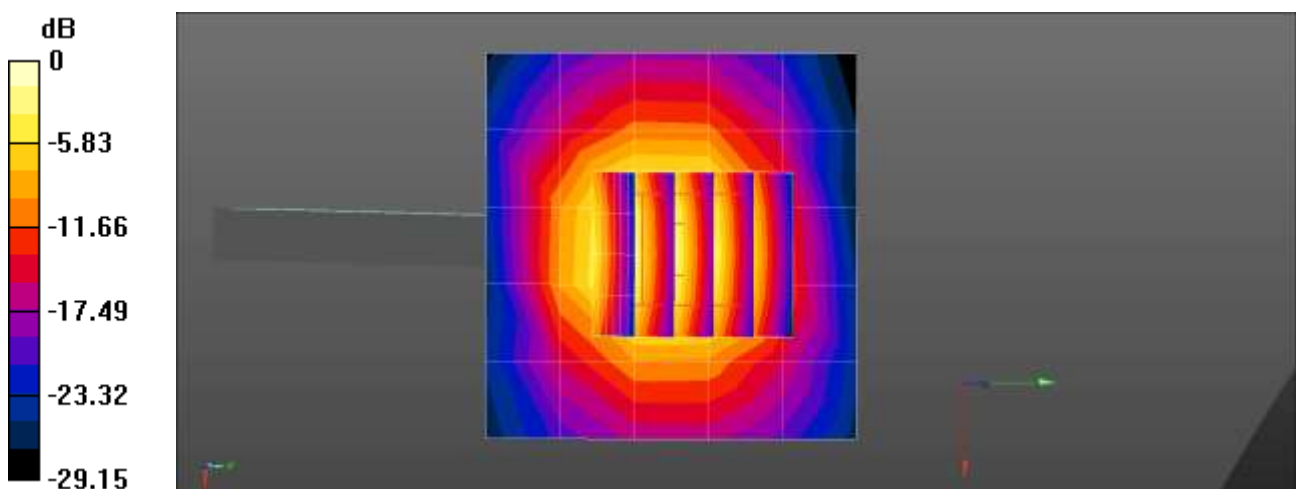

0 dB = 3.45 W/kg = 5.38 dBW/kg

■ **Verification Data (5 250 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 22.1 °C
Test Date: 02/02/2021
DUT: Dipole D5GHzV2; Type: D5GHzV2;


Communication System: UID 0, CW (0); Frequency: 5250 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5250$ MHz; $\sigma = 4.84$ S/m; $\epsilon_r = 37.142$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(5.45, 5.45, 5.45) @ 5250 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

5250MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 9.44 W/kg

5250MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 49.35 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 15.4 W/kg
SAR(1 g) = 3.85 W/kg; SAR(10 g) = 1.09 W/kg
Maximum value of SAR (measured) = 9.68 W/kg

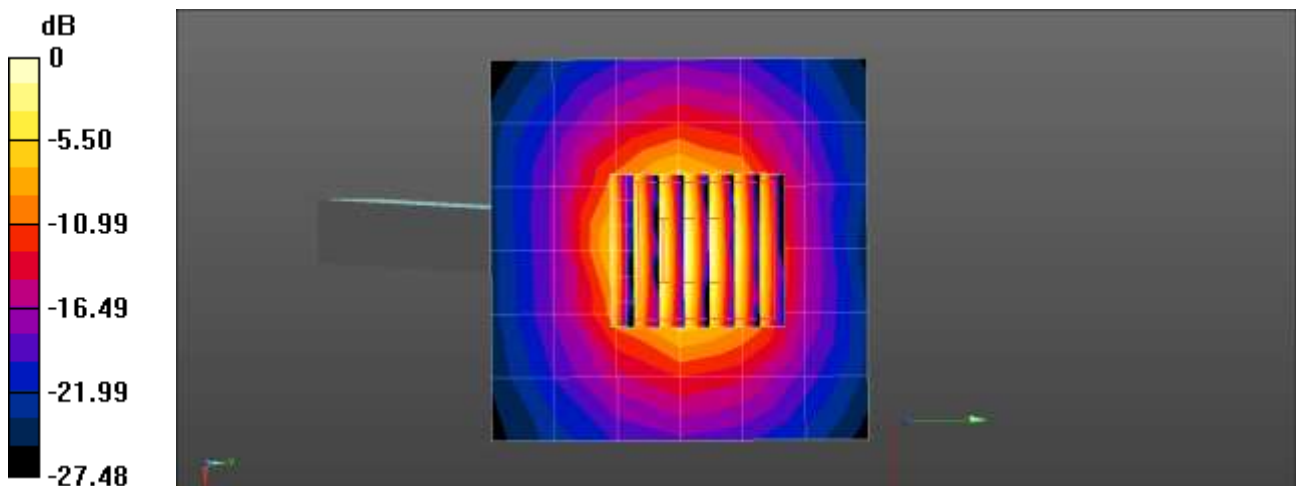

0 dB = 9.44 W/kg = 9.75 dBW/kg

■ **Verification Data (5 600 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 21.8 °C
 Test Date: 02/03/2021
 DUT: Dipole D5GHzV2; Type: D5GHzV2;


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.096 \text{ S/m}$; $\epsilon_r = 36.468$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(4.78, 4.78, 4.78) @ 5600 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

5600MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 10.3 W/kg

5600MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 49.87 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 17.6 W/kg
SAR(1 g) = 3.96 W/kg; SAR(10 g) = 1.1 W/kg
 Maximum value of SAR (measured) = 10.4 W/kg

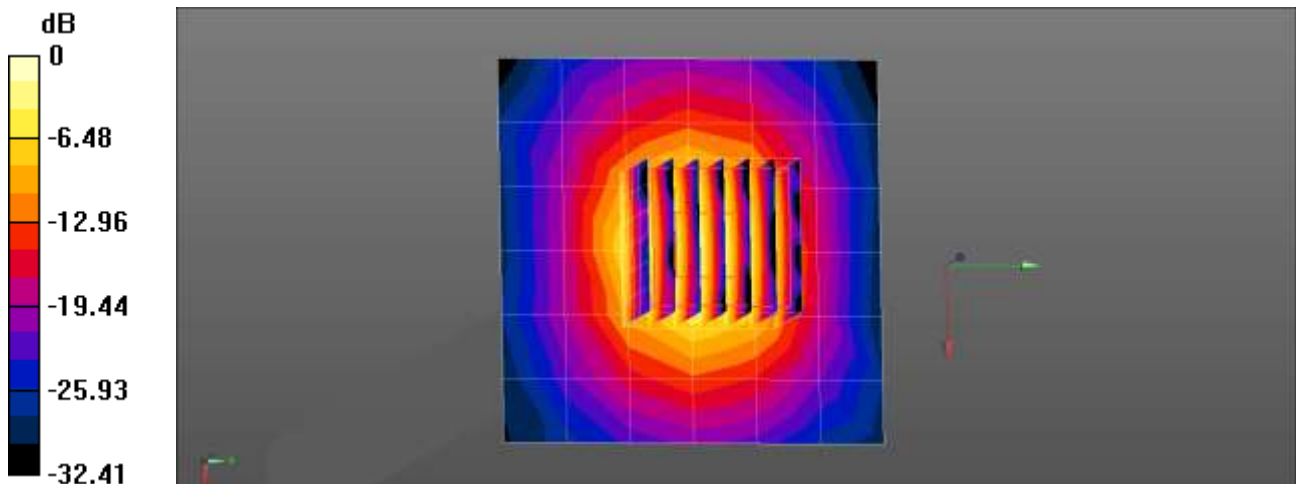

0 dB = 10.3 W/kg = 10.14 dBW/kg

■ **Verification Data (5 750 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 21.8 °C
Test Date: 02/03/2021
DUT: Dipole D5GHzV2; Type: D5GHzV2;


Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5750$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.888$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(4.94, 4.94, 4.94) @ 5750 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

5750MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 11.1 W/kg

5750MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 51.08 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 19.8 W/kg
SAR(1 g) = 4.28 W/kg; SAR(10 g) = 1.22 W/kg
Maximum value of SAR (measured) = 11.3 W/kg

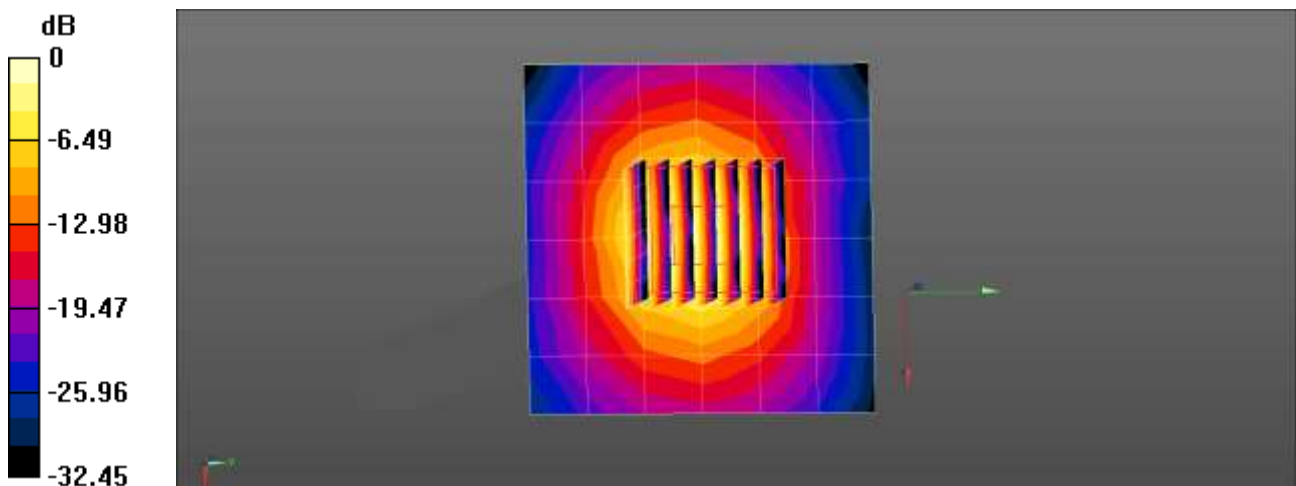

0 dB = 11.1 W/kg = 10.44 dBW/kg

■ **Verification Data (5 250 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power 0.05 W
 Liquid Temp: 20.3 °C
 Test Date: 02/04/2021
 DUT: Dipole D5GHzV2; Type: D5GHzV2;

Communication System: UID 0, CW (0); Frequency: 5250 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 5250 \text{ MHz}$; $\sigma = 4.861 \text{ S/m}$; $\epsilon_r = 36.206$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN3863; ConvF(5, 5, 5) @ 5250 MHz; Calibrated: 2020-05-27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Right
- Measurement SW: DASY52, Version 52.10 (4)

5250MHz Head Verification/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 9.49 W/kg

5250MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 49.13 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 3.98 W/kg; SAR(10 g) = 1.22 W/kg
 Maximum value of SAR (measured) = 9.72 W/kg

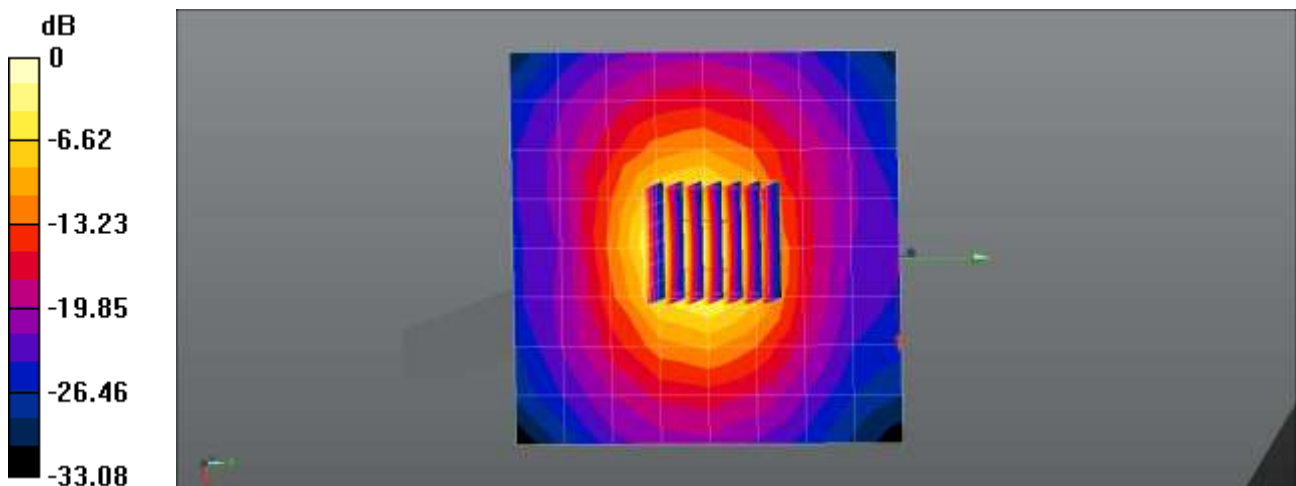

$0 \text{ dB} = 9.49 \text{ W/kg} = 9.77 \text{ dBW/kg}$

■ **Verification Data (5 600 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power 0.05 W
 Liquid Temp: 20.3 °C
 Test Date: 02/04/2021
 DUT: Dipole D5GHzV2; Type: D5GHzV2;


Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5600$ MHz; $\sigma = 5.166$ S/m; $\epsilon_r = 35.46$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3863; ConvF(4.6, 4.6, 4.6) @ 5600 MHz; Calibrated: 2020-05-27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Right
- Measurement SW: DASY52, Version 52.10 (4)

5600MHz Head Verification/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 10.1 W/kg

5600MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
 Reference Value = 49.06 V/m; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 17.6 W/kg
SAR(1 g) = 4.16 W/kg; SAR(10 g) = 1.27 W/kg
 Maximum value of SAR (measured) = 10.6 W/kg

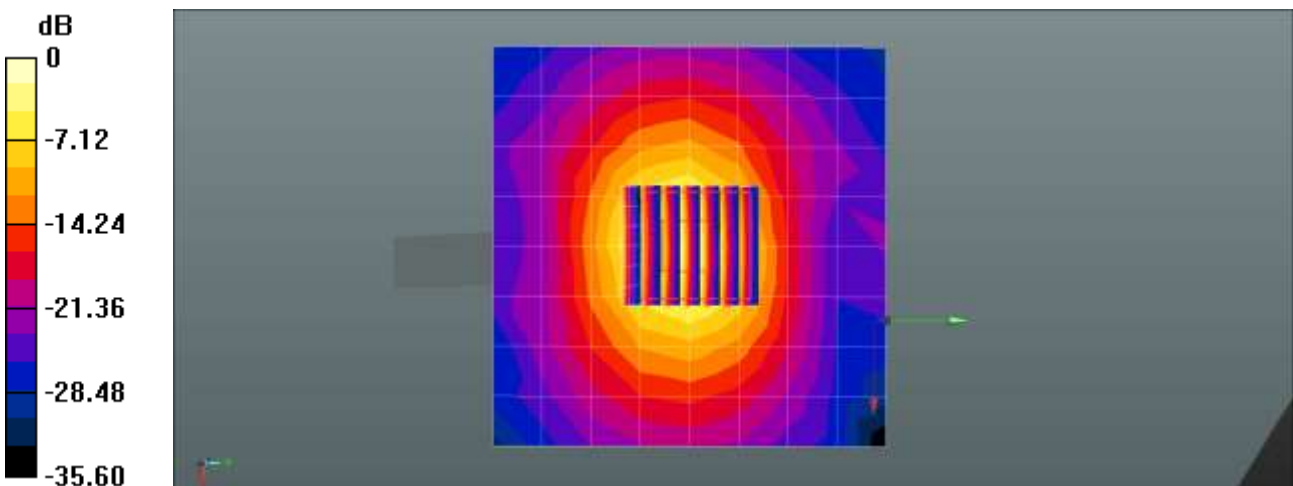

0 dB = 10.1 W/kg = 10.03 dBW/kg

■ **Verification Data (5 750 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 21.3 °C
Test Date: 02/06/2021
DUT: Dipole D5GHzV2; Type: D5GHzV2;


Communication System: UID 0, CW (0); Frequency: 5750 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5750$ MHz; $\sigma = 5.327$ S/m; $\epsilon_r = 35.523$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3863; ConvF(4.85, 4.85, 4.85) @ 5750 MHz; Calibrated: 2020-05-27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Right
- Measurement SW: DASY52, Version 52.10 (4)

5750MHz Head Verification/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 10.0 W/kg

5750MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 47.80 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 18.0 W/kg
SAR(1 g) = 4.09 W/kg; SAR(10 g) = 1.22 W/kg
Maximum value of SAR (measured) = 10.6 W/kg

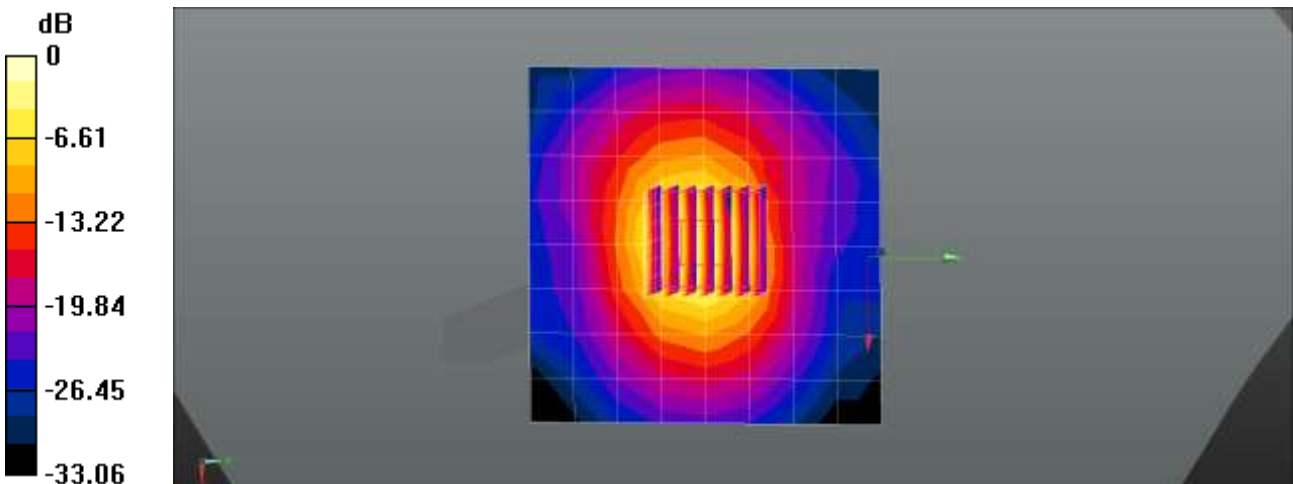

0 dB = 10.0 W/kg = 10.00 dBW/kg

- 5G NR SUB 6

■ Verification Data (750 MHz Head)

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 22.3 °C
 Test Date: 01/21/2021

DUT: Dipole 750 MHz D750V3; Type: D750V3;


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 41.328$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(9.94, 9.94, 9.94) @ 750 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

750MHz Head Verification/Area Scan (6x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.460 W/kg

750MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 25.40 V/m; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.624 W/kg
SAR(1 g) = 0.398 W/kg; SAR(10 g) = 0.255 W/kg
 Maximum value of SAR (measured) = 0.546 W/kg

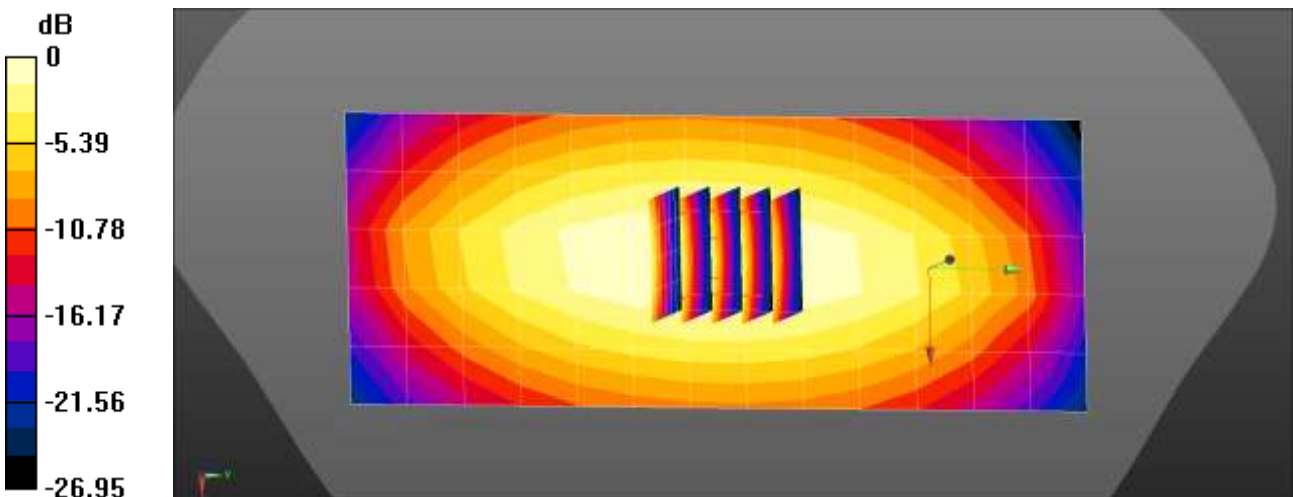

$$0 \text{ dB} = 0.460 \text{ W/kg} = -3.38 \text{ dBW/kg}$$

■ **Verification Data (835 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 21.9 °C
 Test Date: 01/19/2021

DUT: Dipole 835 MHz D835V2; Type: D835V2;


Communication System: UID 0, CW (0); Frequency: 835 MHz;Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.886 \text{ S/m}$; $\epsilon_r = 41.904$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(9.55, 9.55, 9.55) @ 835 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

835MHz Head Verification/Area Scan (6x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.570 W/kg

835MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 28.24 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.753 W/kg
SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.292 W/kg
 Maximum value of SAR (measured) = 0.647 W/kg

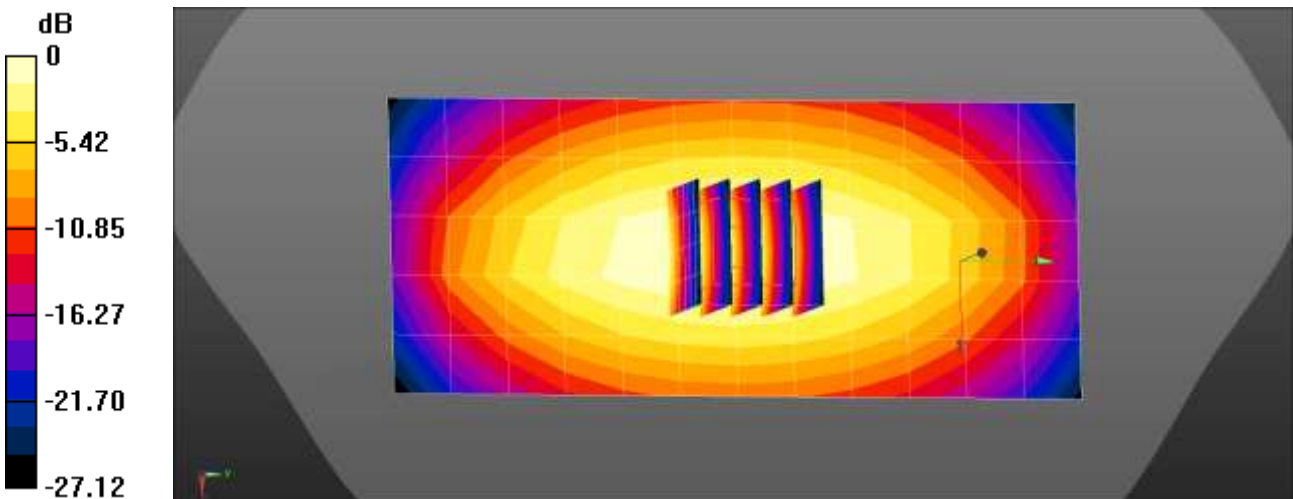

$0 \text{ dB} = 0.570 \text{ W/kg} = -2.44 \text{ dBW/kg}$

■ Verification Data (1 800 MHz Head)

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 21.3 °C
Test Date: 01/22/2021

DUT: Dipole 1800 MHz D1800V2; Type: D1800V2;

Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1800$ MHz; $\sigma = 1.438$ S/m; $\epsilon_r = 41.368$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3076; ConvF(5.24, 5.24, 5.24) @ 1800 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/1800MHz Head Verification/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.78 W/kg


Dipole/1800MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 41.67 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 1.97 W/kg; SAR(10 g) = 1.04 W/kg

Maximum value of SAR (measured) = 2.50 W/kg

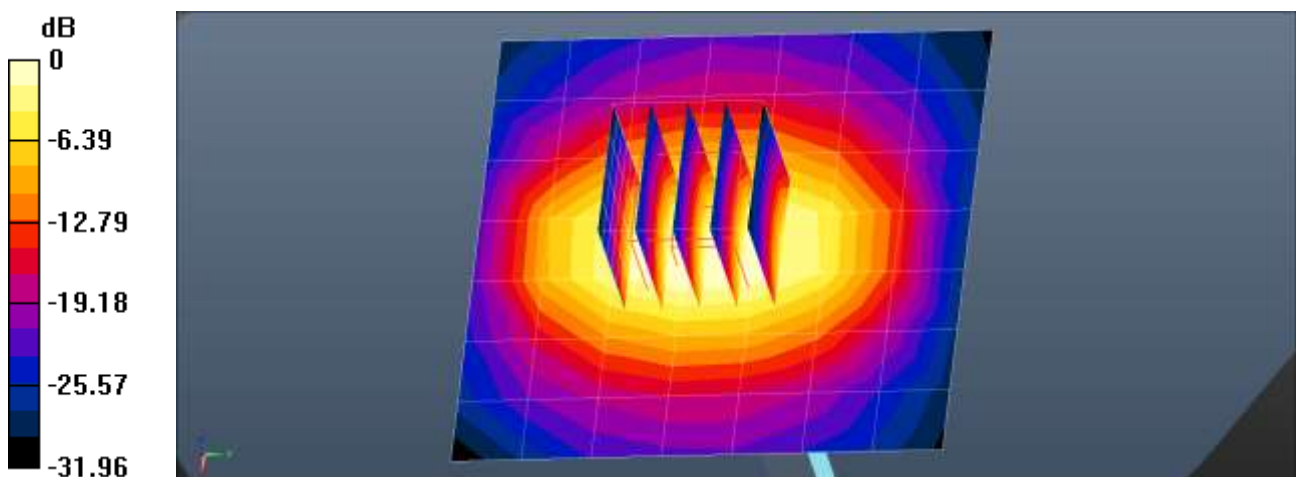

0 dB = 1.78 W/kg = 2.49 dBW/kg

■ **Verification Data (1 900 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.5 °C
Test Date: 01/20/2021

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2;

Communication System: UID 0, CW (0); Frequency: 1900 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.452$ S/m; $\epsilon_r = 40.924$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3076; ConvF(5.08, 5.08, 5.08) @ 1900 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/1900MHz Head Verification/Area Scan (8x8x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.94 W/kg


Dipole/1900MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 42.45 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 3.93 W/kg

SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.06 W/kg

Maximum value of SAR (measured) = 2.68 W/kg

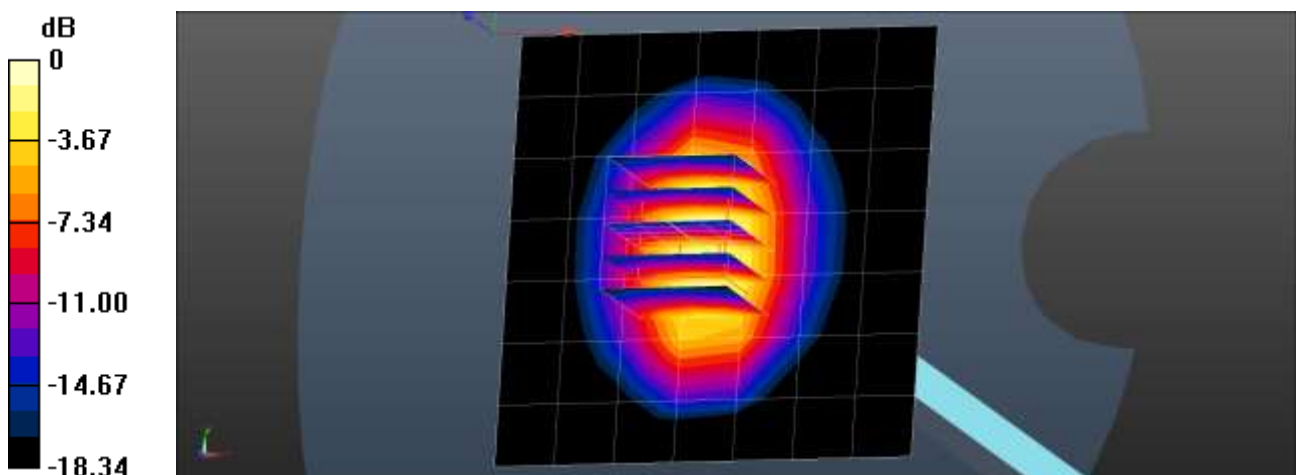

0 dB = 2.68 W/kg = 4.28 dBW/kg

■ **Verification Data (2 600 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 21.2 °C
Test Date: 01/28/2021
DUT: Dipole 2600 MHz D2600V2; Type: D2600V2;


Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.055$ S/m; $\epsilon_r = 40.285$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.34, 7.34, 7.34) @ 2600 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

2600MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 5.04 W/kg

2600MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 51.24 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 6.37 W/kg
SAR(1 g) = 2.92 W/kg; SAR(10 g) = 1.33 W/kg
Maximum value of SAR (measured) = 5.00 W/kg

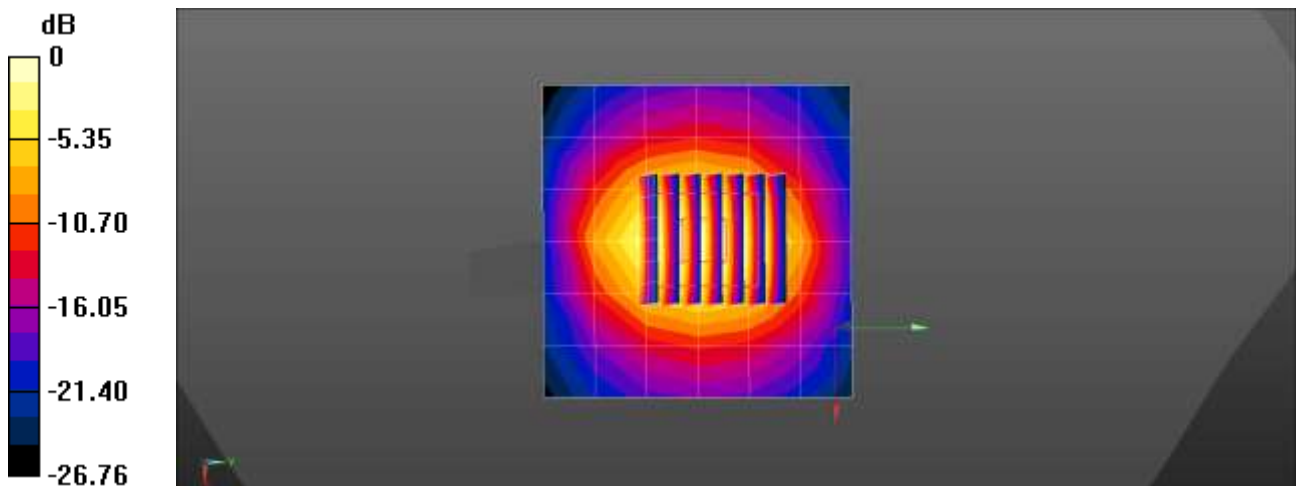

0 dB = 5.04 W/kg = 7.02 dBW/kg

■ **Verification Data (3 700 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.7 °C
Test Date: 01/27/2021

DUT: Dipole 3500 MHz D3500V2; Type: D3500V2;

Communication System: UID 0, CW (0); Frequency: 3700 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 3700$ MHz; $\sigma = 3.151$ S/m; $\epsilon_r = 37.474$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(7.15, 7.15, 7.15) @ 3700 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/3700MHz Head Verification/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 7.01 W/kg


Dipole/3700MHz Head Verification/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 50.34 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 10.3 W/kg

SAR(1 g) = 3.56 W/kg; SAR(10 g) = 1.3 W/kg

Maximum value of SAR (measured) = 7.37 W/kg

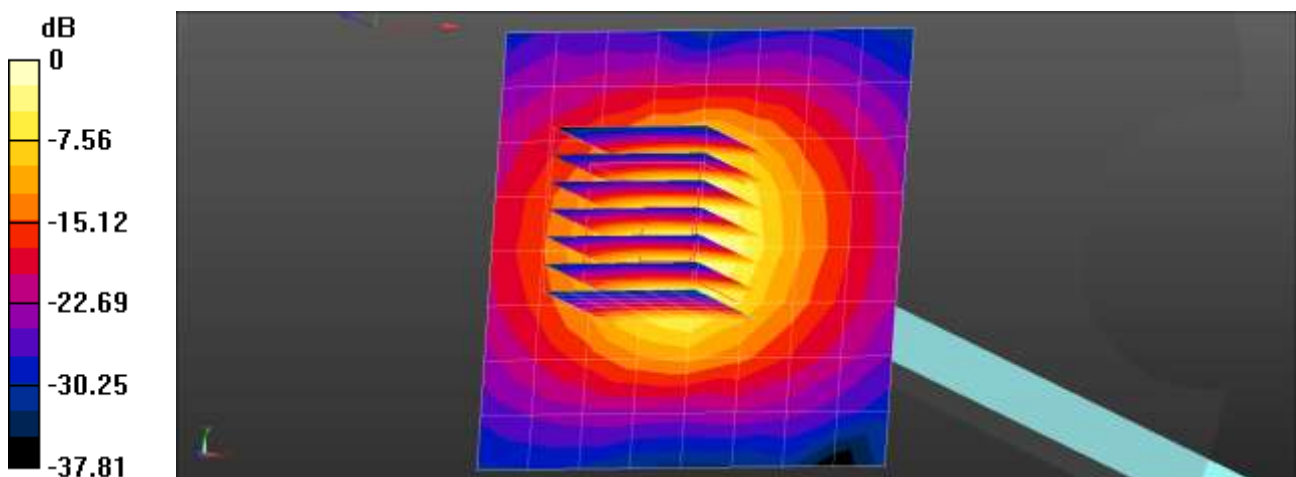

0 dB = 7.01 W/kg = 8.46 dBW/kg

■ **Verification Data (3 900 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 20.7 °C
Test Date: 01/27/2021

DUT: D3900V2 - SN1019; Type: D3900V2;

Communication System: UID 0, CW (0); Frequency: 3900 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 3900$ MHz; $\sigma = 3.312$ S/m; $\epsilon_r = 37.551$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(6.93, 6.93, 6.93) @ 3900 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/3900MHz Head Verification/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 6.97 W/kg


Dipole/3900MHz Head Verification/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 49.40 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 3.4 W/kg; SAR(10 g) = 1.19 W/kg

Maximum value of SAR (measured) = 7.23 W/kg

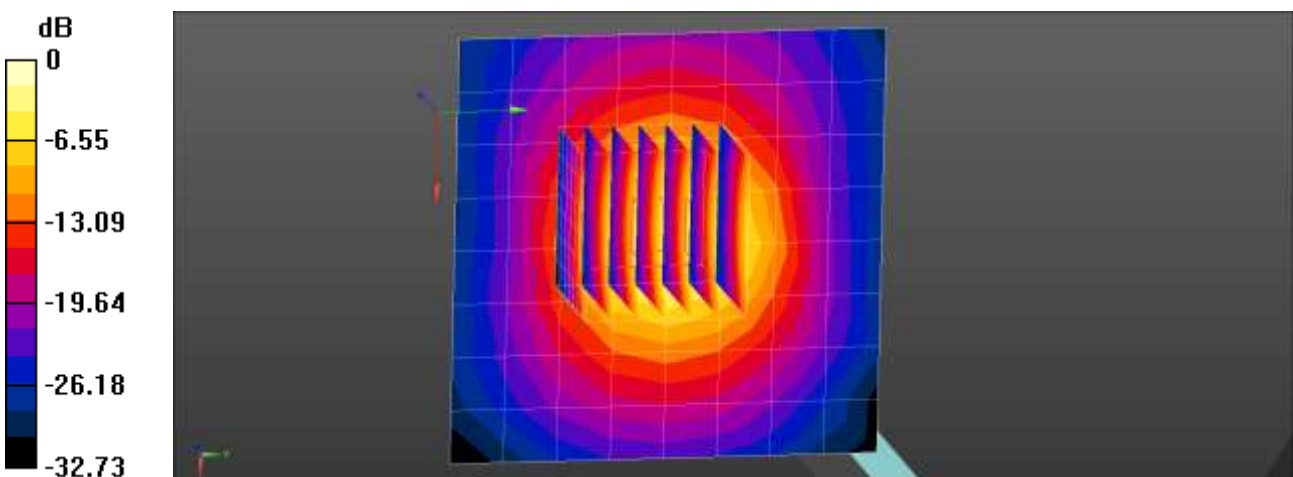

0 dB = 6.97 W/kg = 8.43 dBW/kg

- Extremity SAR

■ Verification Data (1 800 MHz Head)

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 21.3 °C
 Test Date: 01/28/2021
 DUT: Dipole 1800 MHz D1800V2; Type: D1800V2;


Communication System: UID 0, CW (0); Frequency: 1800 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.433 \text{ S/m}$; $\epsilon_r = 41.487$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3076; ConvF(5.24, 5.24, 5.24) @ 1800 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

1800MHz Head Verification/Area Scan (6x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 2.09 W/kg

1800MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 43.13 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 3.59 W/kg
SAR(1 g) = 2 W/kg; SAR(10 g) = 1.06 W/kg
 Maximum value of SAR (measured) = 2.54 W/kg

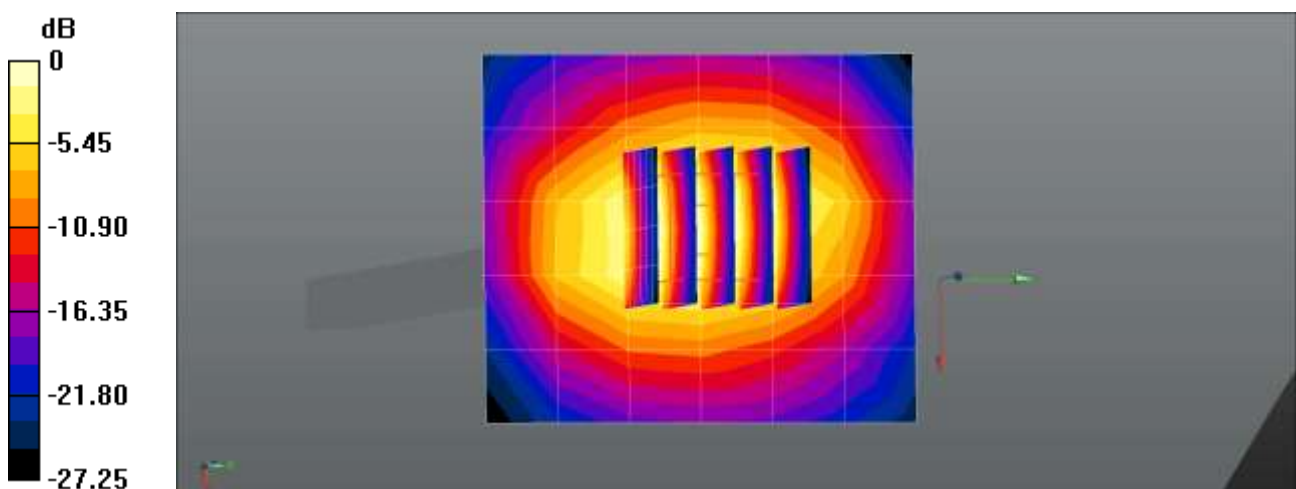

$$0 \text{ dB} = 2.09 \text{ W/kg} = 3.19 \text{ dBW/kg}$$

■ Verification Data (1 900 MHz Head)

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 21.1 °C
Test Date: 01/20/2021

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 41.06$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3076; ConvF(5.08, 5.08, 5.08) @ 1900 MHz; Calibrated: 2020-07-31
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1417; Calibrated: 2020-02-26
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/1900MHz Head Verification/Area Scan (6x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.37 W/kg


Dipole/1900MHz Head Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 43.09 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.90 W/kg

SAR(1 g) = 2.07 W/kg; SAR(10 g) = 1.06 W/kg

Maximum value of SAR (measured) = 2.64 W/kg

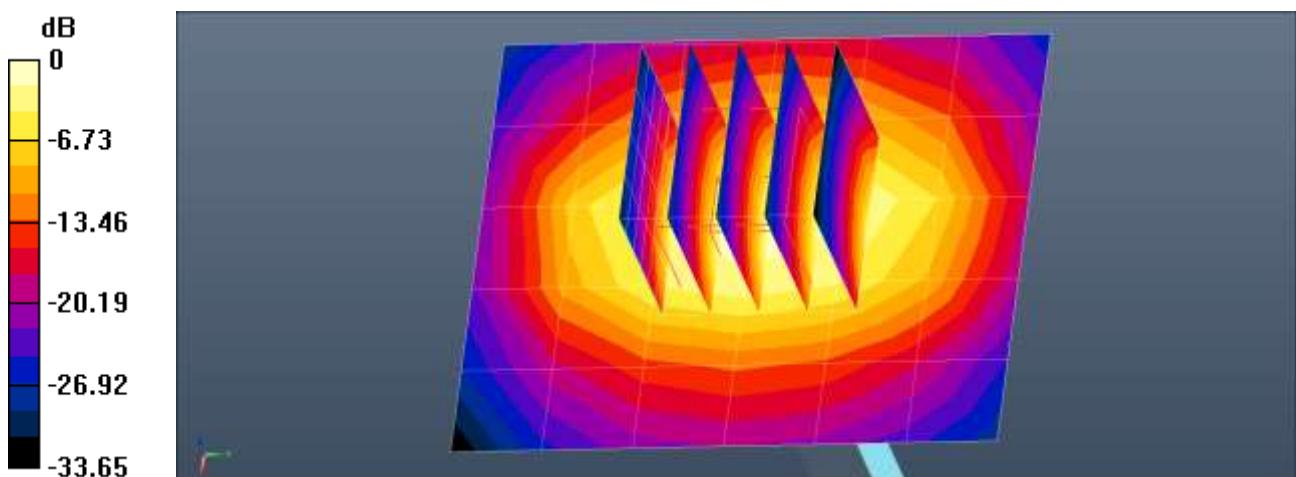

0 dB = 2.37 W/kg = 3.74 dBW/kg

■ **Verification Data (2 300 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 21.8 °C
Test Date: 02/08/2021

DUT: Dipole 2300 MHz D2300V2; Type: D2300V3;

Communication System: UID 0, CW (0); Frequency: 2300 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2300$ MHz; $\sigma = 1.661$ S/m; $\epsilon_r = 40.123$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7370; ConvF(7.73, 7.73, 7.73) @ 2300 MHz; Calibrated: 2020-08-31
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1225; Calibrated: 2020-08-07
- Phantom: Twin-SAM V4.0 (20deg probe tilt)_1588_20200429
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/2300MHz Head Verification/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.42 W/kg


Dipole/2300MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.63 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 4.80 W/kg

SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.09 W/kg

Maximum value of SAR (measured) = 3.86 W/kg

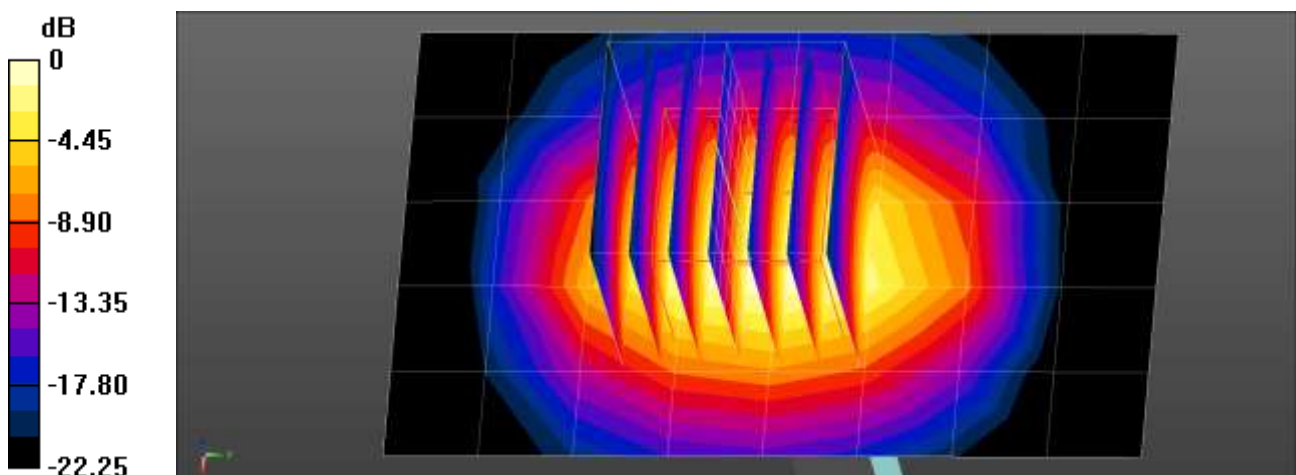

0 dB = 3.86 W/kg = 5.87 dBW/kg

■ **Verification Data (2 600 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 22.2 °C
Test Date: 02/08/2021
DUT: Dipole 2600 MHz D2600V2; Type: D2600V2;


Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.998$ S/m; $\epsilon_r = 39.829$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.34, 7.34, 7.34) @ 2600 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

2600MHz Head Verifiacton/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.81 W/kg

2600MHz Head Verifiacton/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 50.49 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 6.08 W/kg
SAR(1 g) = 2.77 W/kg; SAR(10 g) = 1.23 W/kg
Maximum value of SAR (measured) = 4.80 W/kg

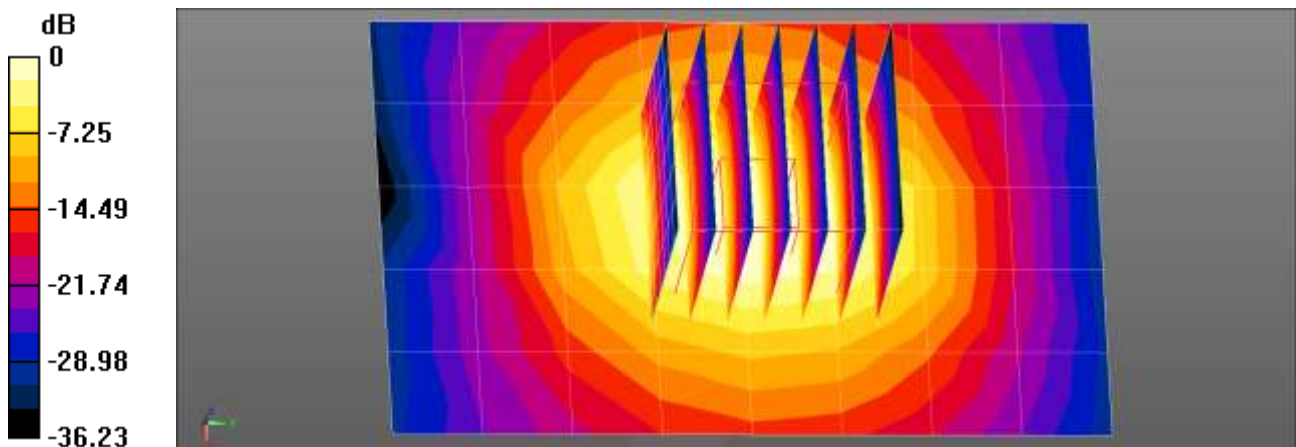

0 dB = 3.81 W/kg = 5.81 dBW/kg

■ **Verification Data (2 600 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 21.6 °C
Test Date: 02/08/2021
DUT: Dipole 2600 MHz D2600V2; Type: D2600V2;


Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.025$ S/m; $\epsilon_r = 39.924$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3797; ConvF(7.22, 7.22, 7.22) @ 2600 MHz; Calibrated: 2020-11-25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1629; Calibrated: 2020-08-11
- Phantom: Twin-SAM V4.0(Left-Left)
- Measurement SW: DASY52, Version 52.10 (4)

2600MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 5.01 W/kg

2600MHz Head Verification/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 51.70 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 6.58 W/kg
SAR(1 g) = 2.86 W/kg; SAR(10 g) = 1.25 W/kg
Maximum value of SAR (measured) = 5.08 W/kg

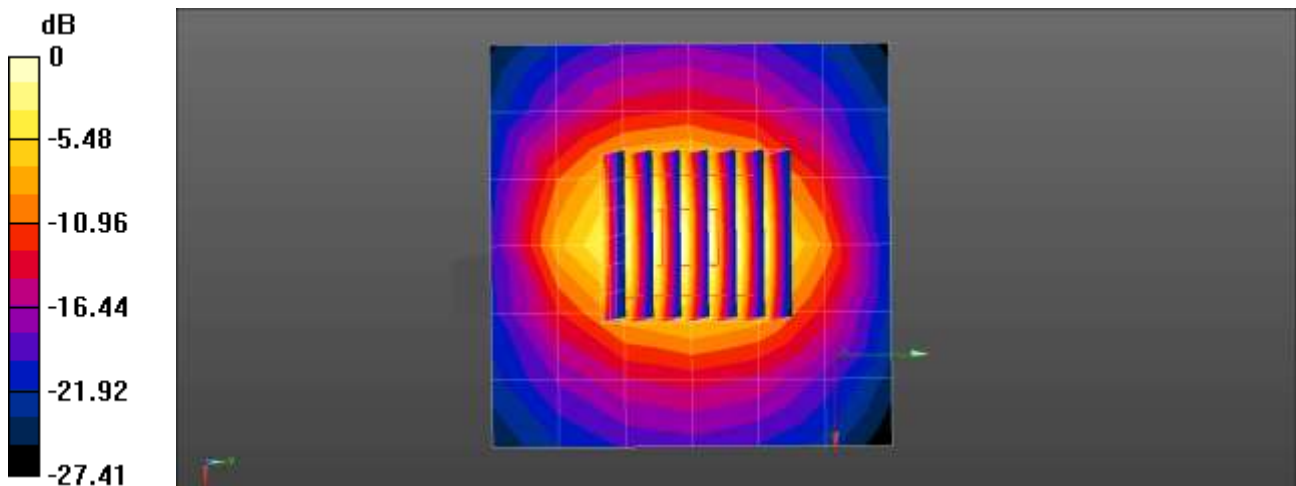

0 dB = 5.01 W/kg = 7.00 dBW/kg

■ **Verification Data (2 600 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 22.0 °C
Test Date: 01/29/2021
DUT: Dipole 2600 MHz D2600V2; Type: D2600V2;


Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.046$ S/m; $\epsilon_r = 40.687$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3968; ConvF(7.34, 7.34, 7.34) @ 2600 MHz; Calibrated: 2020-09-28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn868; Calibrated: 2020-09-29
- Phantom: Twin-SAM V4.0 Right
- Measurement SW: DASY52, Version 52.10 (4)

2600MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 4.36 W/kg

2600MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 47.09 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 6.38 W/kg
SAR(1 g) = 2.95 W/kg; SAR(10 g) = 1.34 W/kg
Maximum value of SAR (measured) = 5.06 W/kg

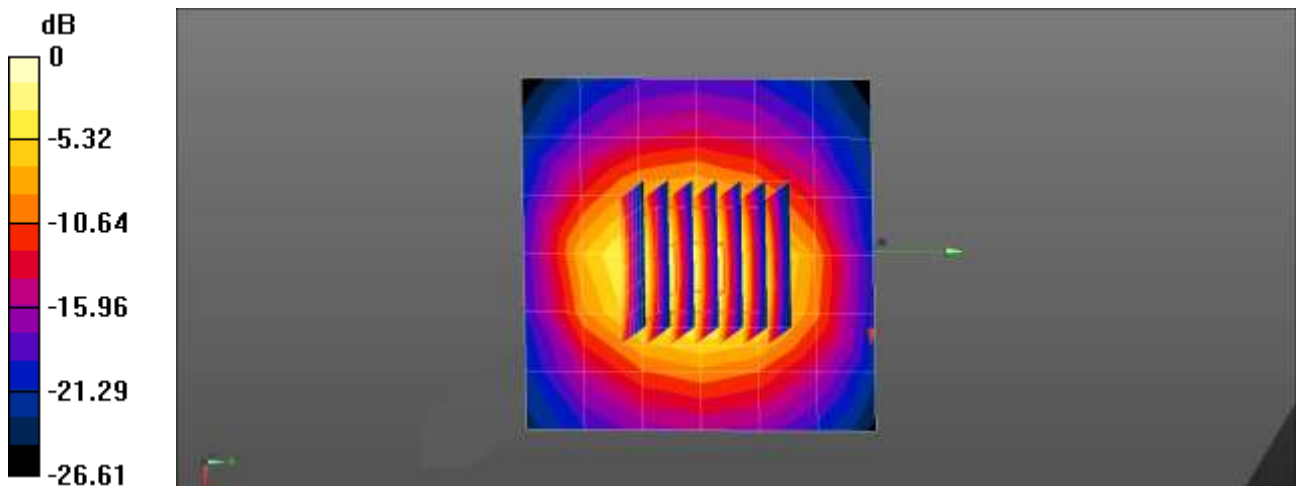

0 dB = 4.36 W/kg = 6.40 dBW/kg

■ **Verification Data (3 700 MHz Head)**

Test Laboratory: HCT CO., LTD
 Input Power: 0.05 W
 Liquid Temp: 22.1 °C
 Test Date: 02/04/2021

DUT: Dipole 3700 MHz D3700V2; Type: D3700V2;

Communication System: UID 0, CW (0); Frequency: 3700 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 3700$ MHz; $\sigma = 3.143$ S/m; $\epsilon_r = 37.657$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(7.15, 7.15, 7.15) @ 3700 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/3700MHz Head Verification/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (measured) = 6.45 W/kg


Dipole/3700MHz Head Verification/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 48.68 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 9.81 W/kg

SAR(1 g) = 3.44 W/kg; SAR(10 g) = 1.26 W/kg

Maximum value of SAR (measured) = 7.06 W/kg

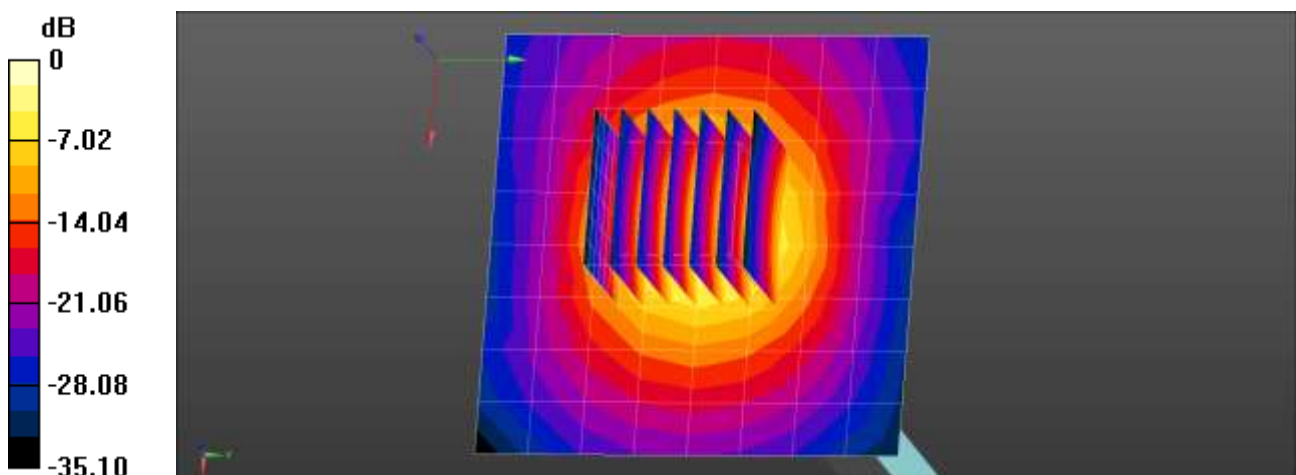

$0 \text{ dB} = 6.45 \text{ W/kg} = 8.10 \text{ dBW/kg}$

■ **Verification Data (3 900 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power 0.05 W
Liquid Temp: 22.1 °C
Test Date: 02/04/2021
DUT: D3900V2 - SN1019; Type: D3900V2;


Communication System: UID 0, CW (0); Frequency: 3900 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 3900$ MHz; $\sigma = 3.321$ S/m; $\epsilon_r = 37.637$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(6.93, 6.93, 6.93) @ 3900 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V8.0 (Left)
- Measurement SW: DASY52, Version 52.10 (4)

3900MHz Head Verification/Area Scan (9x9x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 6.86 W/kg

3900MHz Head Verification/Zoom Scan (7x7x8)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm
Reference Value = 48.49 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 10.1 W/kg
SAR(1 g) = 3.33 W/kg; SAR(10 g) = 1.15 W/kg
Maximum value of SAR (measured) = 7.12 W/kg

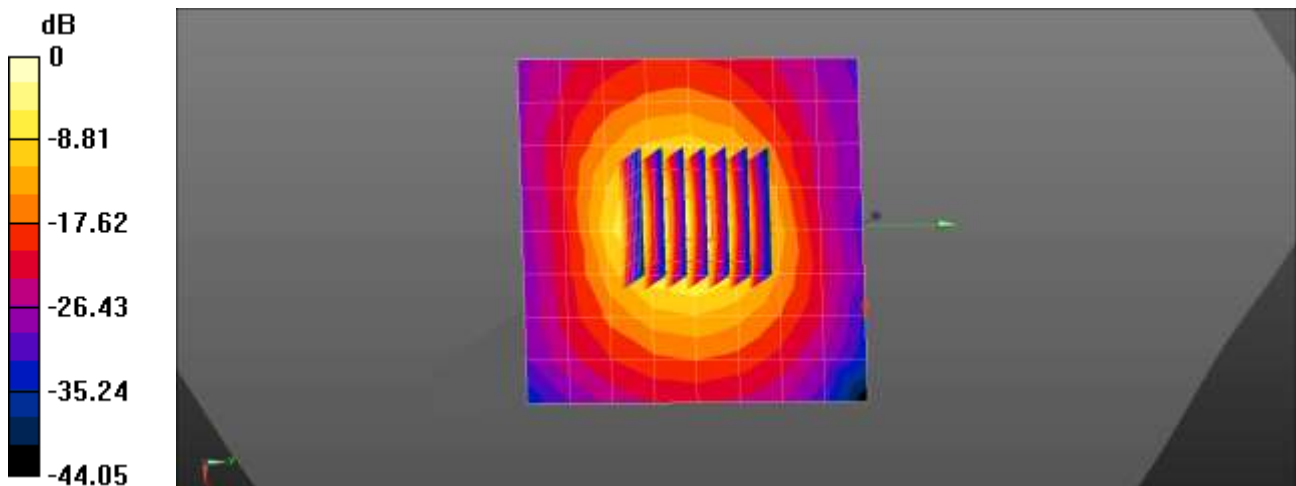

0 dB = 6.86 W/kg = 8.36 dBW/kg

■ Verification Data (2 600 MHz Head)

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 22.3 °C
Test Date: 02/24/2021

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2;


Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.044$ S/m; $\epsilon_r = 39.727$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3863; ConvF(7.34, 7.34, 7.34) @ 2600 MHz; Calibrated: 2020-05-27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn652; Calibrated: 2021-01-21
- Phantom: SAM with CRP v5.0_Front
- Measurement SW: DASY52, Version 52.10 (4)

2600MHz Head Verification/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 4.90 W/kg

2600MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 51.05 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 6.29 W/kg
SAR(1 g) = 2.78 W/kg; SAR(10 g) = 1.24 W/kg
Maximum value of SAR (measured) = 4.88 W/kg

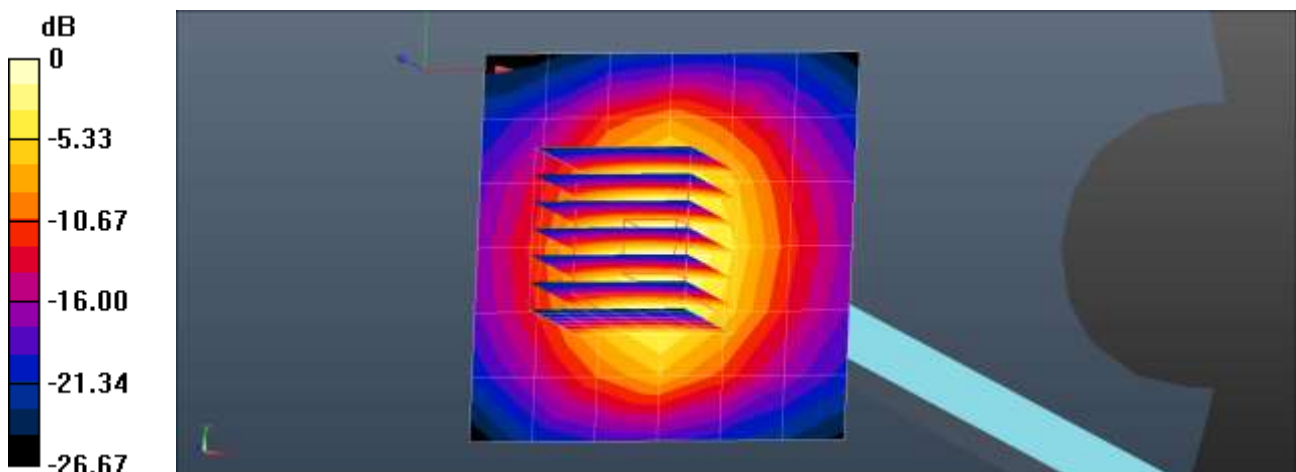

0 dB = 4.90 W/kg = 6.90 dBW/kg

■ **Verification Data (2 600 MHz Head)**

Test Laboratory: HCT CO., LTD
Input Power: 0.05 W
Liquid Temp: 21.9 °C
Test Date: 02/24/2021

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2;

Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.006$ S/m; $\epsilon_r = 39.766$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7622; ConvF(7.86, 7.86, 7.86) @ 2600 MHz; Calibrated: 2020-11-06
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn648; Calibrated: 2020-05-25
- Phantom: Twin-SAM V4.0 (20deg probe tilt)_1588_20200429
- Measurement SW: DASY52, Version 52.10 (4)

Dipole/2600MHz Head Verification/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 4.14 W/kg


Dipole/2600MHz Head Verification/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 54.27 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 6.96 W/kg

SAR(1 g) = 3.02 W/kg; SAR(10 g) = 1.33 W/kg

Maximum value of SAR (measured) = 5.39 W/kg

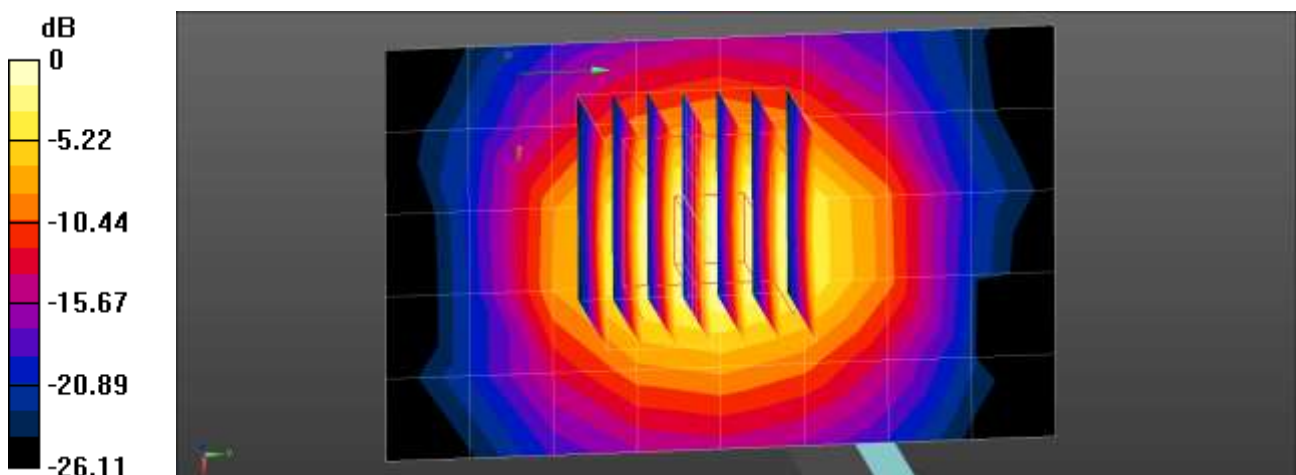

0 dB = 5.39 W/kg = 7.32 dBW/kg

Appendix D. – SAR Tissue Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethyl cellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bacteriacide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Harts grove.

Ingredients (% by weight)	Frequency (MHz)											
	750		835		1 750		1 900		2 450 – 2 700		3500 - 5 800	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	41.1	51.7	40.45	53.06	52.6	68.8	54.9	70.17	71.88	73.2	65.52	78.66
Salt (NaCl)	1.4	0.9	1.45	0.94	0.4	0.2	0.18	0.39	0.16	0.1	0.0	0.0
Sugar	57.0	47.2	57.0	44.9	0.0	0.0	0.0	0	0.0	0.0	0.0	0.0
HEC	0.2	0	1.0	1.0	0.0	0.0	0.0	0	0.0	0.0	0.0	0.0
Bactericide	0.2	0.1	0.1	0.1	0.0	0.0	0.0	0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	19.97	0.0	17.24	10.67
DGBE	0.0	0.0	0.0	0.0	47	31	44.92	29.44	7.99	26.7	0.0	0.0
Diethylene glycol hexyl ether	-	-	-	-	-	-	-	-	-	-	-	-

Salt:	99 % Pure Sodium Chloride	Sugar:	98 % Pure Sucrose
Water:	De-ionized, 16M resistivity	HEC:	Hydroxyethyl Cellulose
DGBE:	99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]		
Triton X-100(ultra-pure):	Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether		

Composition of the Tissue Equivalent Matter

Appendix E. – SAR Tissue Characterization

Per FCC KCB 865664 D02v01r02, SAR system validation status should be document to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in IEEE 1528-2013 and FCC KDB 865664 D01v01r04. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

SAR System No.	Probe	Probe Type	Probe Calibration Point	Dipole	Date	Dielectric Parameters		CW Validation			Modulation Validation			
						Measured Permittivity	Measured Conductivity	Sensitivity	Probe Linearity	Probe Isotropy	MOD. Type	Duty Factor	PAR	
5	3903	EX3DV4	Head	750	1014	2020-06-25	42.1	0.92	PASS	PASS	PASS	N/A	N/A	N/A
7	1630	ET3DV6	Head	750	1014	2020-06-16	42.1	0.88	PASS	PASS	PASS	N/A	N/A	N/A
9	3968	EX3DV4	Head	750	1014	2020-10-28	41.7	0.87	PASS	PASS	PASS	N/A	N/A	N/A
7	1630	ET3DV6	Head	835	4d165	2020-08-19	41.3	0.88	PASS	PASS	PASS	GMSK	PASS	N/A
7	1630	ET3DV6	Head	835	4d165	2020-08-19	41.3	0.88	PASS	PASS	PASS	N/A	N/A	N/A
5	3903	EX3DV4	Head	835	4d165	2020-08-20	41.5	0.89	PASS	PASS	PASS	GMSK	PASS	N/A
5	3903	EX3DV4	Head	1750	2d007	2020-09-22	40.1	1.41	PASS	PASS	PASS	GMSK	PASS	N/A
9	3968	EX3DV4	Head	1750	2d007	2020-10-16	40.1	1.41	PASS	PASS	PASS	GMSK	PASS	N/A
13	7622	EX3DV4	Head	1750	2d007	2020-12-05	40.1	1.41	PASS	PASS	PASS	N/A	N/A	N/A
5	3903	EX3DV4	Head	1750	2d007	2020-09-22	40.1	1.41	PASS	PASS	PASS	N/A	N/A	N/A
13	7622	EX3DV4	Head	1900	5d061	2020-12-07	40.1	1.42	PASS	PASS	PASS	GMSK	PASS	N/A
7	1630	ET3DV6	Head	1900	5d061	2020-03-24	40.1	1.42	PASS	PASS	PASS	GMSK	PASS	N/A
13	7622	EX3DV4	Head	1900	5d061	2020-12-07	40.1	1.42	PASS	PASS	PASS	N/A	N/A	N/A
5	3903	EX3DV4	Head	1900	1230	2020-09-18	40.1	1.42	PASS	PASS	PASS	N/A	N/A	N/A
9	3968	EX3DV4	Head	1900	1230	2020-10-27	40.1	1.42	PASS	PASS	PASS	GMSK	PASS	N/A
3	3797	EX3DV4	Head	2300	1010	2020-12-26	39.4	1.72	PASS	PASS	PASS	N/A	N/A	N/A
9	3968	EX3DV4	Head	2450	1049	2020-10-20	39.2	1.83	PASS	PASS	PASS	OFDM	N/A	PASS
3	3797	EX3DV4	Head	2450	1049	2020-12-24	39.2	1.83	PASS	PASS	PASS	OFDM	N/A	PASS
3	3797	EX3DV4	Head	2600	1015	2020-12-26	39.1	1.94	PASS	PASS	PASS	N/A	N/A	N/A
3	3797	EX3DV4	Head	2600	1015	2020-12-26	39.1	1.94	PASS	PASS	PASS	TDD	PASS	N/A
9	3968	EX3DV4	Head	3500	1040	2020-12-18	37.7	2.92	PASS	PASS	PASS	TDD	PASS	N/A
9	3968	EX3DV4	Head	5250	1253	2020-10-26	35.7	4.70	PASS	PASS	PASS	OFDM	N/A	PASS
9	3968	EX3DV4	Head	5600	1253	2020-10-26	35.3	5.05	PASS	PASS	PASS	OFDM	N/A	PASS
9	3968	EX3DV4	Head	5750	1253	2020-10-26	35.6	5.24	PASS	PASS	PASS	OFDM	N/A	PASS
1	3863	EX3DV4	Head	5250	1253	2020-10-25	35.7	4.70	PASS	PASS	PASS	OFDM	N/A	PASS
1	3863	EX3DV4	Head	5600	1253	2020-10-25	35.3	5.05	PASS	PASS	PASS	OFDM	N/A	PASS
1	3863	EX3DV4	Head	5750	1253	2020-10-25	35.6	5.24	PASS	PASS	PASS	OFDM	N/A	PASS
9	3968	EX3DV4	Head	750	1014	2020-10-28	41.7	0.87	PASS	PASS	PASS	N/A	N/A	N/A
9	3968	EX3DV4	Head	835	4d165	2020-10-22	41.6	0.92	PASS	PASS	PASS	N/A	N/A	N/A
11	3076	ES3DV3	Head	1750	2d007	2020-09-22	40.1	1.41	PASS	PASS	PASS	N/A	N/A	N/A
9	3968	EX3DV4	Head	1900	5d061	2020-10-25	39.8	1.41	PASS	PASS	PASS	N/A	N/A	N/A
9	3968	EX3DV4	Head	2600	1015	2020-09-25	38.7	1.95	PASS	PASS	PASS	NA	N/A	NA
13	7622	EX3DV4	Head	3500	1066	2020-12-15	37.7	2.92	PASS	PASS	PASS	N/A	N/A	N/A
13	7622	EX3DV4	Head	3900	1019	2020-12-11	37.8	3.33	PASS	PASS	PASS	N/A	N/A	N/A
1	3863	EX3DV4	Head	2600	1015	2020-12-26	39.1	1.94	PASS	PASS	PASS	N/A	N/A	N/A

SAR System Validation Summary 1g

SAR System No.	Probe	Probe Type	Probe Calibration Point			Dipole	Date	Dielectric Parameters		CW Validation			Modulation Validation		
								Measured Permittivity	Measured Conductivity	Sensitivity	Probe Linearity	Probe Isotropy	MOD. Type	Duty Factor	PAR
11	3076	ES3DV3	Head	1800	2d007	2020-09-22	40.1	1.41	PASS	PASS	PASS	N/A	N/A	N/A	
11	3076	ES3DV3	Head	1900	5d061	2020-08-19	40.1	1.42	PASS	PASS	PASS	N/A	N/A	N/A	
12	7370	EX3DV4	Head	2300	1010	2020-09-26	39.4	1.72	PASS	PASS	PASS	N/A	N/A	N/A	
3	3797	EX3DV4	Head	2600	1015	2020-12-26	38.7	1.95	PASS	PASS	PASS	N/A	N/A	N/A	
9	3968	EX3DV4	Head	2600	1015	2020-09-25	38.7	1.95	PASS	PASS	PASS	NA	N/A	NA	
13	7622	EX3DV4	Head	3500	1066	2020-12-15	37.7	2.92	PASS	PASS	PASS	N/A	N/A	N/A	
13	7622	EX3DV4	Head	3900	1019	2020-12-19	37.8	3.33	PASS	PASS	PASS	N/A	N/A	N/A	
1	3863	EX3DV4	Head	5250	1253	2020-10-25	48.8	5.36	PASS	PASS	PASS	OFDM	N/A	PASS	
1	3863	EX3DV4	Head	5600	1253	2020-10-25	48.3	5.78	PASS	PASS	PASS	OFDM	N/A	PASS	
13	7622	EX3DV4	Head	2600	1015	2020-12-26	38.7	1.95	PASS	PASS	PASS	NA	N/A	NA	

SAR System Validation Summary – Extremity SAR Considerations

Note;

All measurement were performed using probes calibrated for CW signal only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04. SAR system were validated for modulated signals with a periodic duty cycle, or with a high peak to average ratio (>5 dB), such as OFDM according to KDB 865664 D01v01r04.