

FCC BT REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:
January 07, 2022

Test Site/Location:
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2201-FC044

FCC ID: A3LSMA336B

APPLICANT: SAMSUNG Electronics Co., Ltd.

According to the Evaluation report, all of the data contained herein is reused from the reference
FCC ID : A3LSMA336M report.

Model: SM-A336B/DSN
Additional Model: SM-A336B
EUT Type: Mobile Phone
Max. RF Output Power: 15.579 dBm (36.13 mW)
Frequency Range: 2 402 MHz – 2 480 MHz (Bluetooth)
Modulation type GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
FCC Classification: FCC Part 15 Spread Spectrum Transmitter (DSS)
FCC Rule Part(s): Part 15 subpart C 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2201-FC044

REVIEWED BY



Report prepared by : Jeong Ho Kim
Engineer of Telecommunication Testing Center



Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2201-FC044	January 07, 2022	- First Approval Report

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
2. Requirements for Bluetooth transmitter(15.247).....	6
3. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION.....	8
5. FACILITIES AND ACCREDITATIONS	8
FACILITIES	8
EQUIPMENT	8
6. ANTENNA REQUIREMENTS	8
7. MEASUREMENT UNCERTAINTY	9
8. DESCRIPTION OF TESTS.....	10
9. SUMMARY OF TEST RESULTS	28
10. TEST RESULT	29
10.1 PEAK POWER	29
10.2 BAND EDGES.....	35
10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW).....	42
10.4 NUMBER OF HOPPING FREQUENCY	50
10.5 TIME OF OCCUPANCY (DWELL TIME)	54
10.6 SPURIOUS EMISSIONS.....	60
10.6.1 CONDUCTED SPURIOUS EMISSIONS	60
10.6.2 RADIATED SPURIOUS EMISSIONS.....	68
10.6.3 RADIATED RESTRICTED BAND EDGES	76
10.7 POWERLINE CONDUCTED EMISSIONS	80
11. LIST OF TEST EQUIPMENT	88
12. ANNEX A_ TEST SETUP PHOTO.....	90

1. EUT DESCRIPTION

Model	SM-A336B/DSN
Additional Model	SM-A336B
EUT Type	Mobile Phone
Power Supply	DC 3.86 V
Frequency Range	2 402 MHz ~ 2 480 MHz
Max. RF Output Power	15.579 dBm (36.13 mW)
BT Operating Mode	Normal, EDR, AFH
Modulation Type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
Modulation Technique	FHSS
Number of Channels	79 Channels, Minimum 20 Channels(AFH)
Date(s) of Tests	December 08, 2021 ~ January 06, 2022
Serial number	Radiated : R3CRA0TYEFE Conducted: 5b225620bb337ece

2. Requirements for Bluetooth transmitter(15.247)

This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:

- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.
 - 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
 - 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device (ANSI C63.10-2013, KDB 558074) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector and add the DCCF calculations.

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil,

Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

(1) The antennas of this E.U.T are permanently attached.

(2) The E.U.T Complies with the requirement of §15.203

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS


8.1. Conducted Maximum Peak Output Power

Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 W.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test Configuration

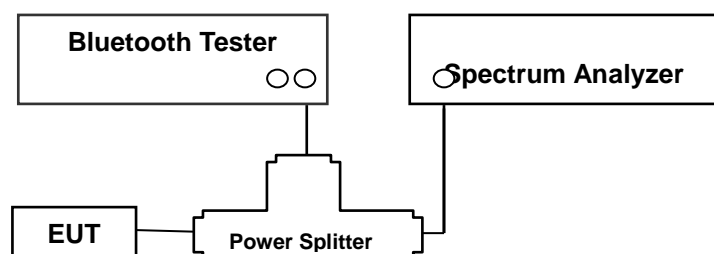

Test Procedure

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013 & Procedure 10(b)(6)(i) in KDB 558074 v05r02)

- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW ≥ RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

Sample Calculation


$$\begin{aligned}\text{Output Power} &= \text{Spectrum Measured Power} + \text{Power Splitter loss} + \text{Cable loss}(2 \text{ ea}) \\ &= 10 \text{ dBm} + 6 \text{ dB} + 1.5 \text{ dB} = 17.5 \text{ dBm}\end{aligned}$$

8.2. Conducted Band Edge(Out of Band Emissions)

Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

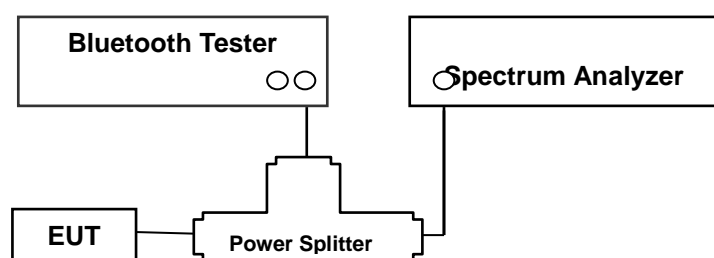

Test Procedure

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)


- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

8.3. Frequency Separation & 20 dB Bandwidth

Limit

According to §15.247(a)(1), Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Configuration

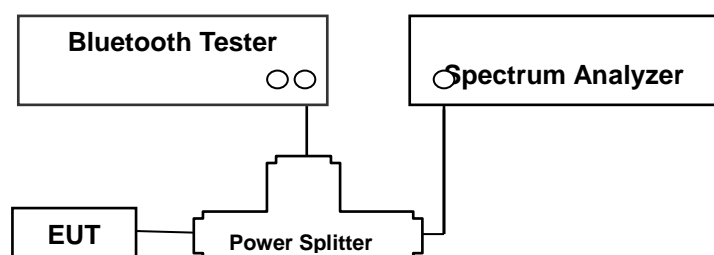

Test Procedure(Frequency Separation)

The Channel Separation test is performed with hopping on.

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013 & Procedure 10(b)(6)(iii) in KDB 558074 v05r02)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW \geq RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.
- 8) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

Test Procedure (20 dB Bandwidth)

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (6.9.2 in ANSI 63.10-2013)


- 1) Span: Set between two times and five times the OBW
- 2) RBW: 1 % to 5 % of the OBW.
- 3) VBW $\geq 3 \times$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

8.4. Number of Hopping Frequencies

Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration

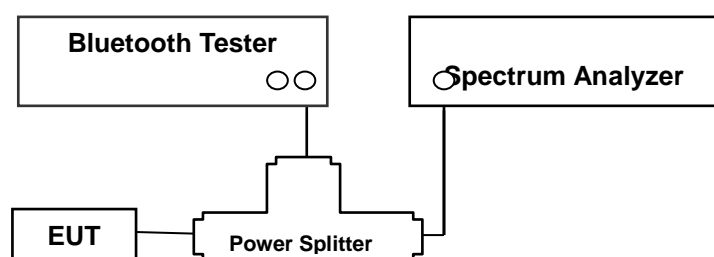

Test Procedure

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013 & Procedure 10(b)(4) in KDB 558074 v05r02)


- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW \geq RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

8.5. Time of Occupancy

Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration

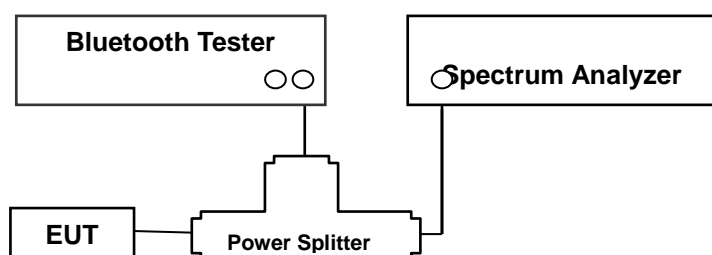

Test Procedure

This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013 & Procedure 10(b)(6)(iv) in KDB 558074 v05r02)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

Sample Calculation

The following calculation process is not relevant to our measurement results. It is just an example.

(1) Non-AFH Mode

- DH 5 (GFSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)
- 3-DH 5 (8DPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)

(2) AFH Mode

- DH 5 (GFSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)
- 3-DH 5 (8DPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)

Note :

DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving.

Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.667 times of appearance.

Each tx-time per appearance of DH5 is 2.890 ms.


Dwell time = Tx-time x 106.667 = 308.27 (ms)

8.6. Conducted Spurious Emissions

Limit

Conducted > 20 dBc

Test Configuration

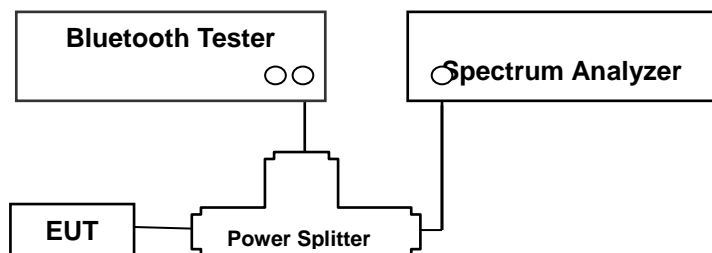

Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013 & Procedure 8.5 and 8.6 in KDB 558074 v05r02)

- 1) Span: 30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

Factors for frequency

Freq(MHz)	Factor(dB)
30	16.09
100	16.19
200	16.26
300	16.37
400	16.43
500	16.46
600	16.46
700	16.50
800	16.53
900	16.57
1000	16.60
2000	16.88
2400	16.99
2480	16.99
2500	16.99
3000	17.09
4000	17.27
5000	17.43
5150	17.46
5850	17.55
6000	17.55
7000	17.72
8000	17.86
9000	17.99
10000	18.14
11000	18.21
12000	18.37
13000	18.55
14000	18.50
15000	18.57
16000	18.66
17000	18.74
18000	18.87
19000	18.94
20000	19.04
21000	19.42
22000	19.38
23000	19.61
24000	19.48
25000	19.55
26000	19.64

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(10 dB) + Cable loss(2 EA) + Splitter loss(6 dB) + EUT Cable loss


8.7. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

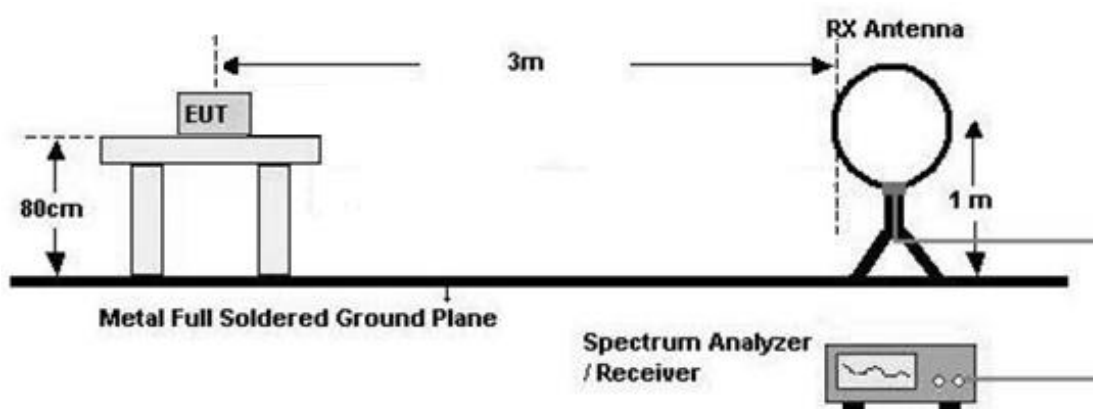

30 MHz - 1 GHz

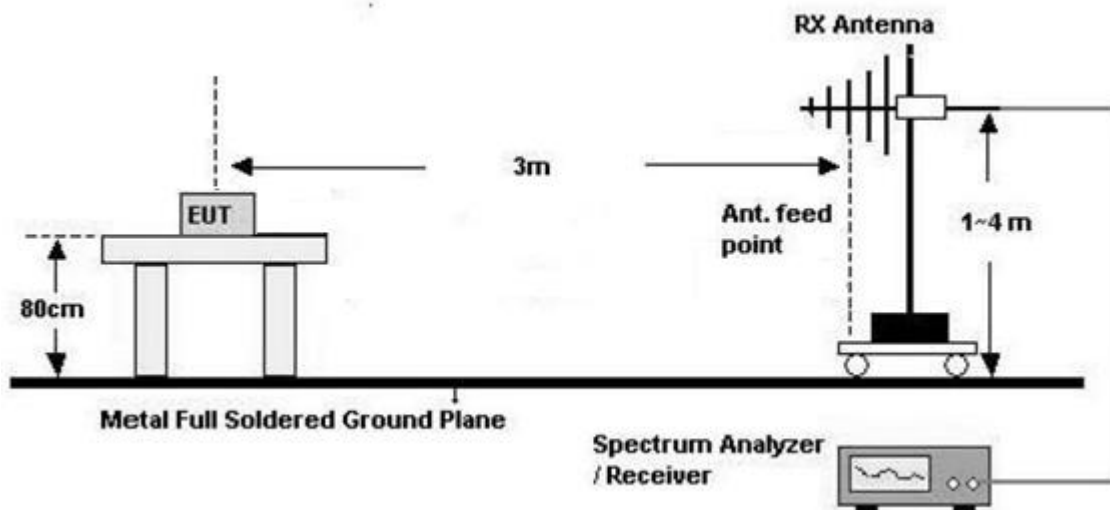

Above 1 GHz

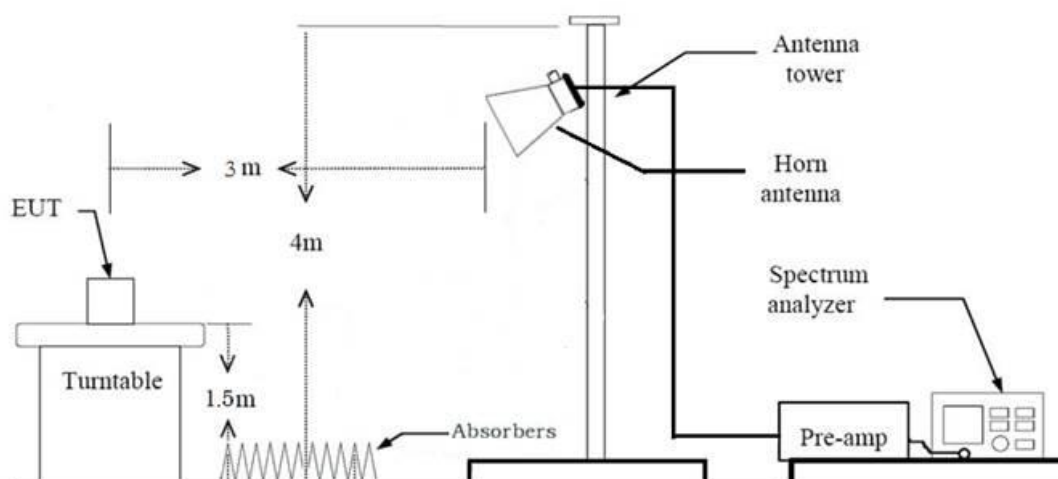

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW $\geq 3 \times$ RBW

9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※ In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from

the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.

9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average):

- Average value of pulsed emissions
- Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determined from the peak field strength after correcting for the worst-case duty cycle as described in Number.14 (On Page. 23)

◆ Duty Cycle Correction(AFH) = $20\log(\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -24.7314 \text{ dB}$

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance}) \text{ (dB)}$

12. Total

(1)Measurement(Peak)

Reading Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

(2)Measurement(Avg)

Reading Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F) + + DCCF(AFH)

13. Duty Cycle Correction Factor (79 channel hopping)

- a. Time to cycle through all channels = $\Delta t = \tau$ [ms] x 79 channels = 229.100 ms, where τ = pulse width
- b. $100 \text{ ms} / \Delta t$ [ms] = $H \rightarrow$ Round up to next highest integer, $H' = 1$
- c. Worst Case Dwell Time = τ [ms] x $H' = 2.9$ ms
- d. Duty Cycle Correction = $20\log (\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -30.752 \text{ dB}$

14. Duty Cycle Correction Factor (AFH mode – minimum channel number case - 20 channels)

- a. Time to cycle through all channels = $\Delta t = \tau$ [ms] x 20 channels = 58.00 ms, where τ = pulse width
- b. $100 \text{ ms} / \Delta t$ [ms] = $H \rightarrow$ Round up to next highest integer, $H' = 2$
- c. Worst Case Dwell Time = τ [ms] x $H' = 5.800$ ms
- d. Duty Cycle Correction (AFH) = $20\log (\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -24.7314 \text{ dB}$

Test Procedure of Radiated Restricted Band Edge

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - Average value of pulsed emissions
 - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall be determined from the peak field strength after correcting for the worst-case duty cycle as described in Number.14 (On Page. 23)
- ◆ Duty Cycle Correction (AFH) = $20\log (\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -24.7314 \text{ dB}$
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log (\text{test distance} / \text{specific distance}) \text{ (dB)}$

11. Total

(1)Measurement(Peak)

Reading Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

(2)Measurement(Avg)

Reading Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F) + +
DCCF(AFH)

8.8. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

8.9 Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories (Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X
3. All data rate of operation were investigated and the test results are worst case in highest datarate of each mode.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
5. SM-A336B/DSN, SM-A336B were tested and the worst case results are reported.
(Worst case : SM-A336B/DSN)

Radiated test(DBS)

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Y, Z
3. The following tables show the worst case configurations determined during testing.

Description	Bluetooth Emission	5 GHz Emission
Antenna	WIFI/BT	WIFI/BT
Channel	0	165
Data Rate	1 Mbps	MCS 0
Mode	GFSK : DH5	802.11n(HT20)

4. SM-A336B/DSN, SM-A336B were tested and the worst case results are reported.
(Worst case : SM-A336B/DSN)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter

Stand alone + Travel Adapter

- Worstcase : Stand alone + Travel Adapter

2. SM-A336B/DSN, SM-A336B were tested and the worst case results are reported.

(Worst case : SM-A336B/DSN)

Conducted test

1. The EUT was configured with data rate of highest power.

- GFSK : DH5

- $\pi/4$ DQPSK : 2-DH5

- 8DPSK : 3-DH5

2. AFH & Non-AFH were tested and the worst case results are reported.

(Worst case : Non-AFH)

3. SM-A336B/DSN, SM-A336B were tested and the worst case results are reported.

(Worst case : SM-A336B/DSN)

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§15.247(a)(1)	N/A	Conducted	PASS
Occupied Bandwidth	N/A	N/A		N/A
Conducted Maximum Peak Output Power	§15.247(b)(1)	< 0.125 W		PASS
Carrier Frequency Separation	§15.247(a)(1)	> 25 kHz or >2/3 of the 20 dB BW		PASS
Number of Hopping Frequencies	§15.247(a)(1)(iii)	≥ 15		PASS
Time of Occupancy	§15.247(a)(1)(iii)	< 400 ms		PASS
Conducted Spurious Emissions	§15.247(d)	> 20 dB for all out-of band emissions		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§15.207(a)	cf. Section 8.8		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 8.7	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.7		PASS

Note: Average Power data refer to SAR report

10. TEST RESULT

10.1 PEAK POWER

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	15.579	36.13	125
Mid	2441	15.236	33.39	
High	2480	14.204	26.33	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	14.604	28.87	125
Mid	2441	14.273	26.75	
High	2480	13.304	21.40	

Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	13.998	25.11	125
Mid	2441	13.646	23.15	
High	2480	12.708	18.66	

Note:


1. Spectrum measured values are not plot data.

The power results in plot is already including the actual values of loss for the splitter and cable combination.


2. Actual value of loss for the splitter and cable combination is 16.99 dB at 2400 MHz

and is 16.99 dB at 2500 MHz. So, 16.99 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result.

Test Plots (GFSK)
Peak Power (CH.0)

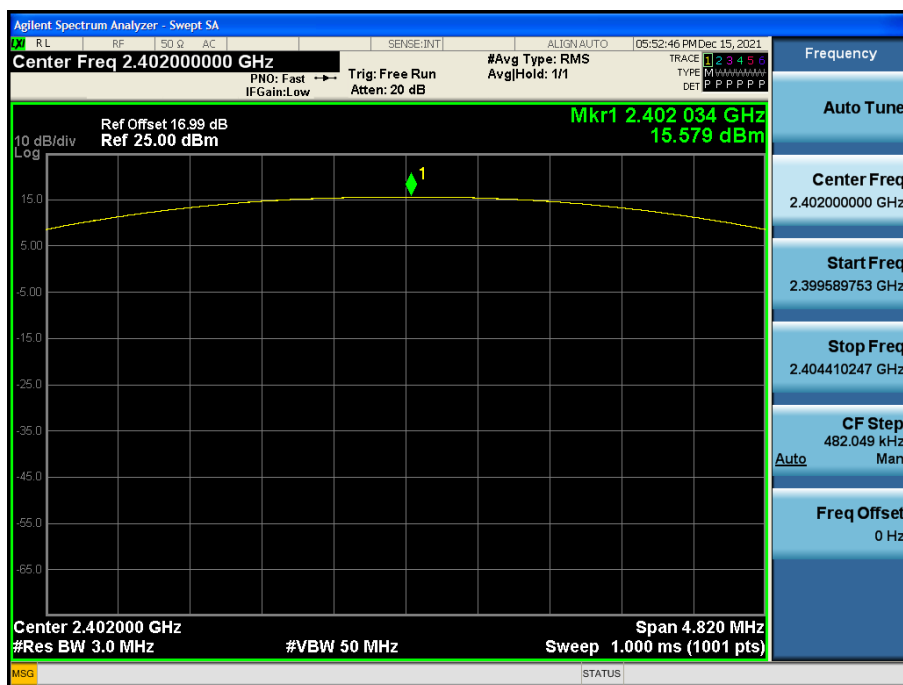


Test Plots (GFSK)
Peak Power (CH.39)

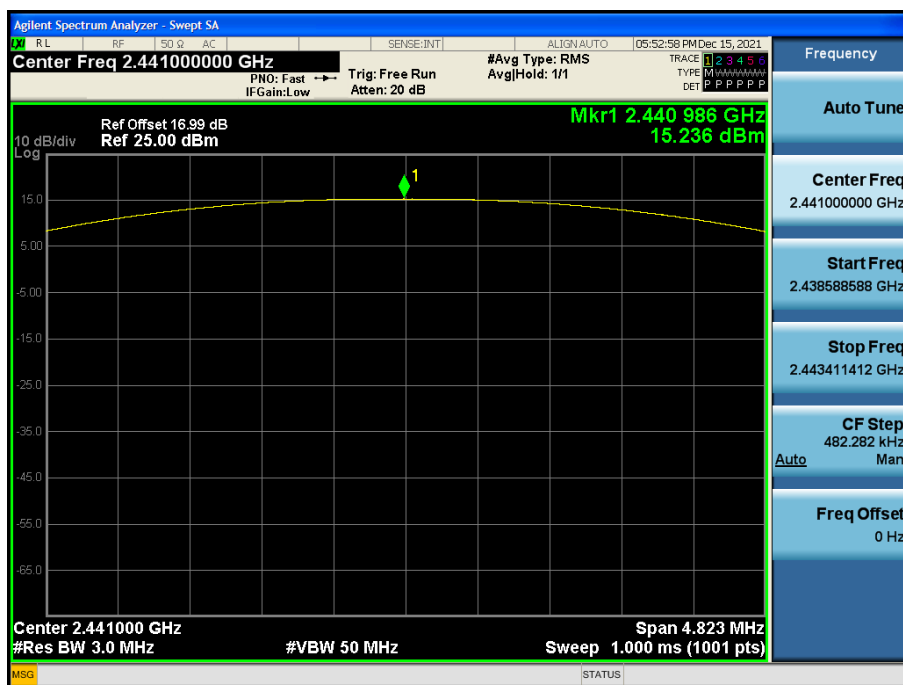


Test Plots (GFSK)

Peak Power (CH.78)

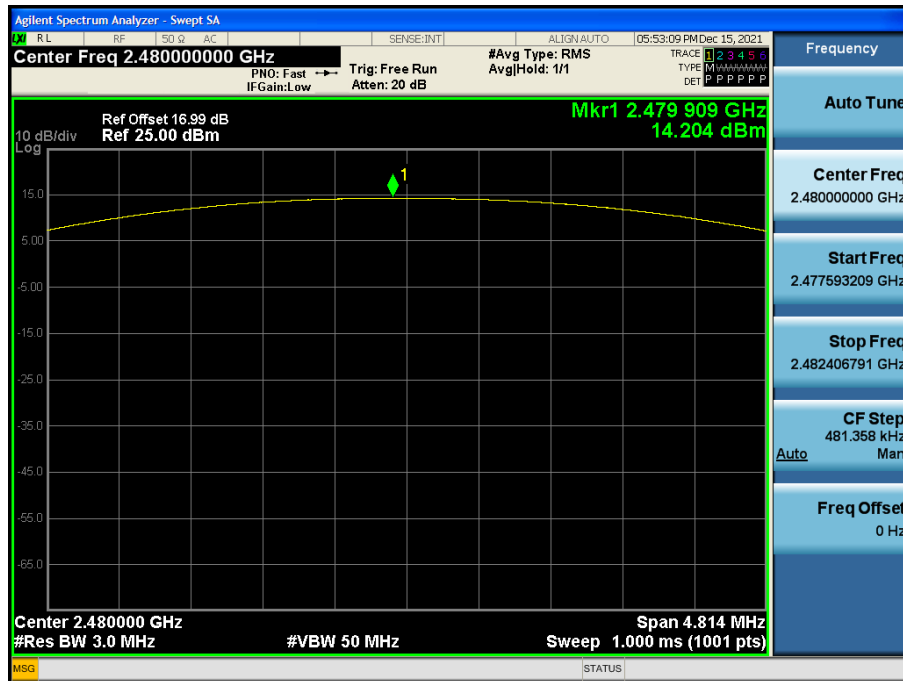


Test Plots (8DPSK)

Peak Power (CH.0)

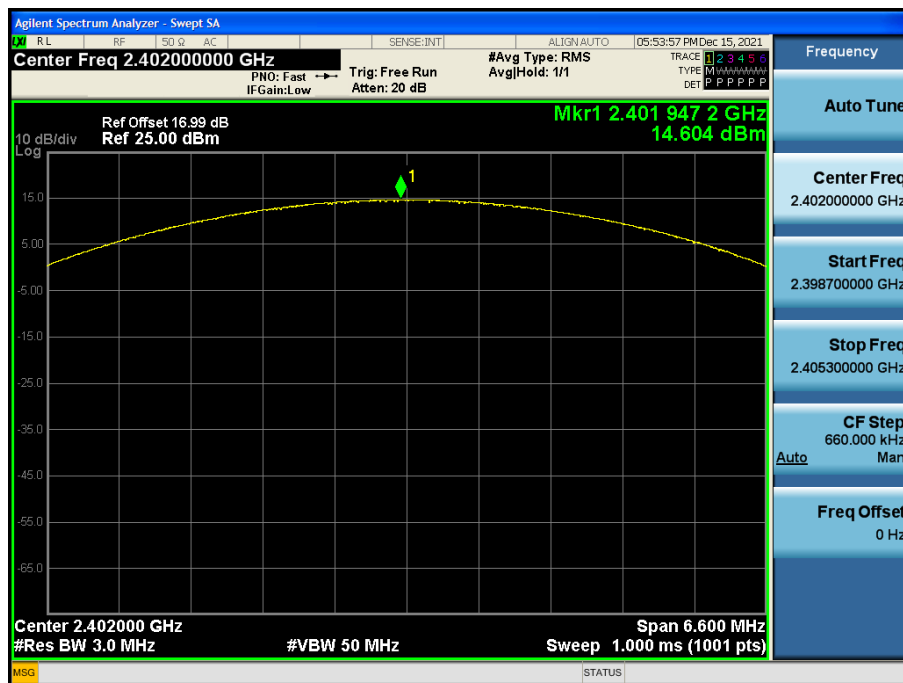


Test Plots (8DPSK)

Peak Power (CH.39)

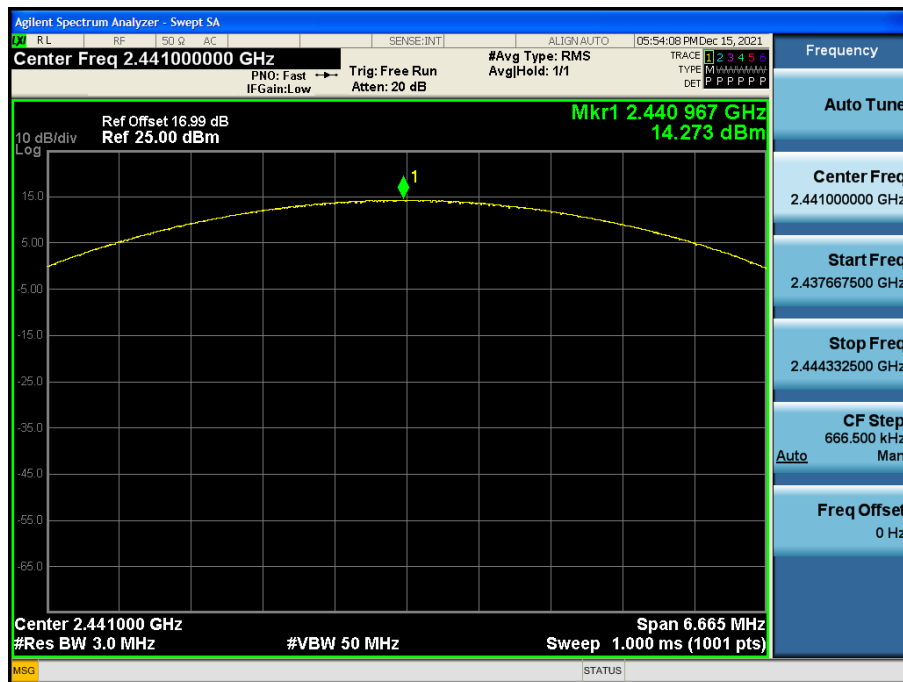


Test Plots (8DPSK)

Peak Power (CH.78)

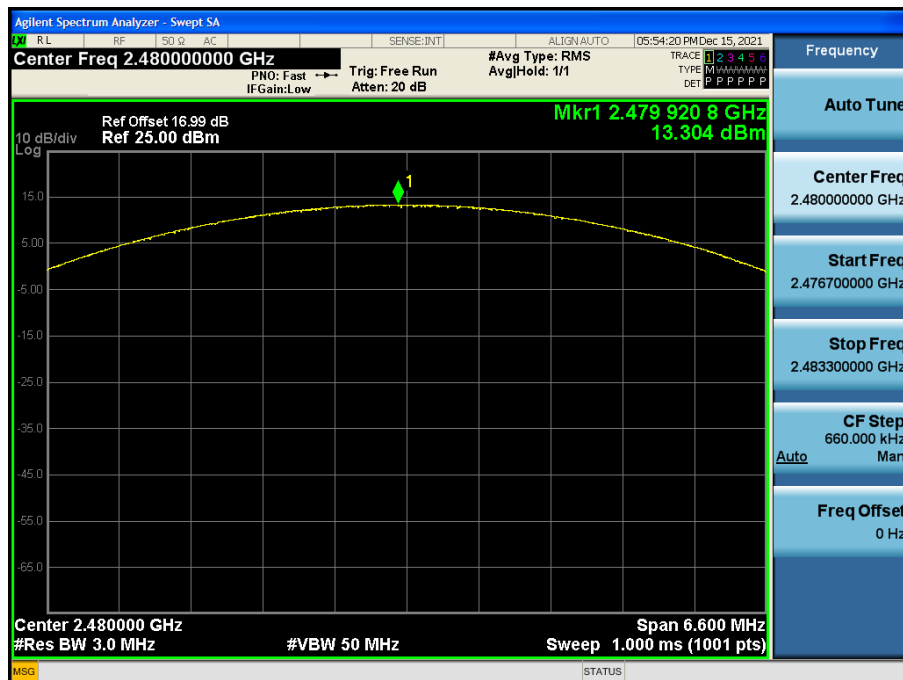


Test Plots ($\pi/4$ DQPSK)

Peak Power (CH.0)

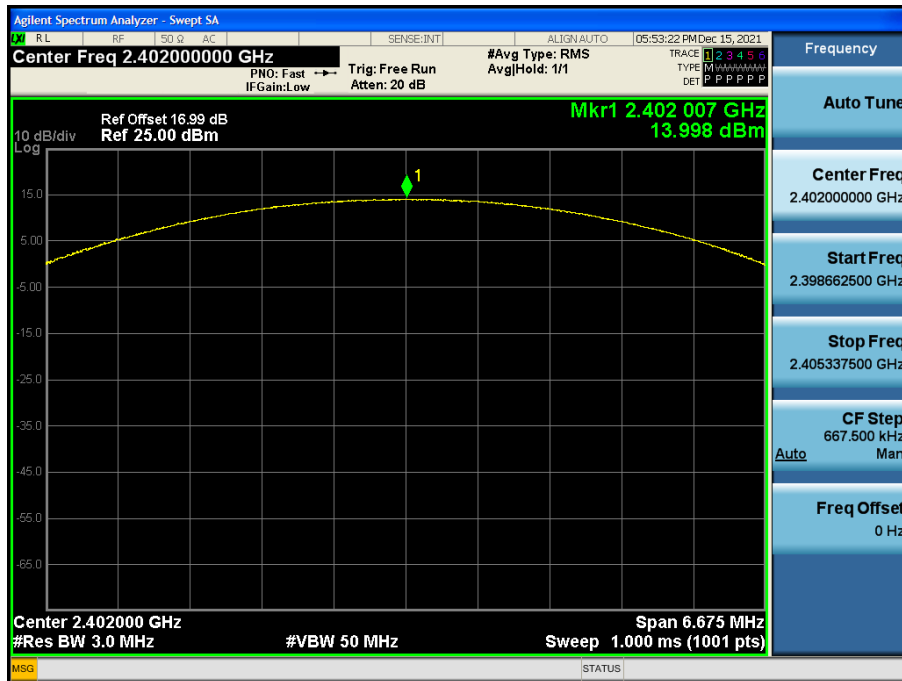


Test Plots ($\pi/4$ DQPSK)

Peak Power (CH.39)

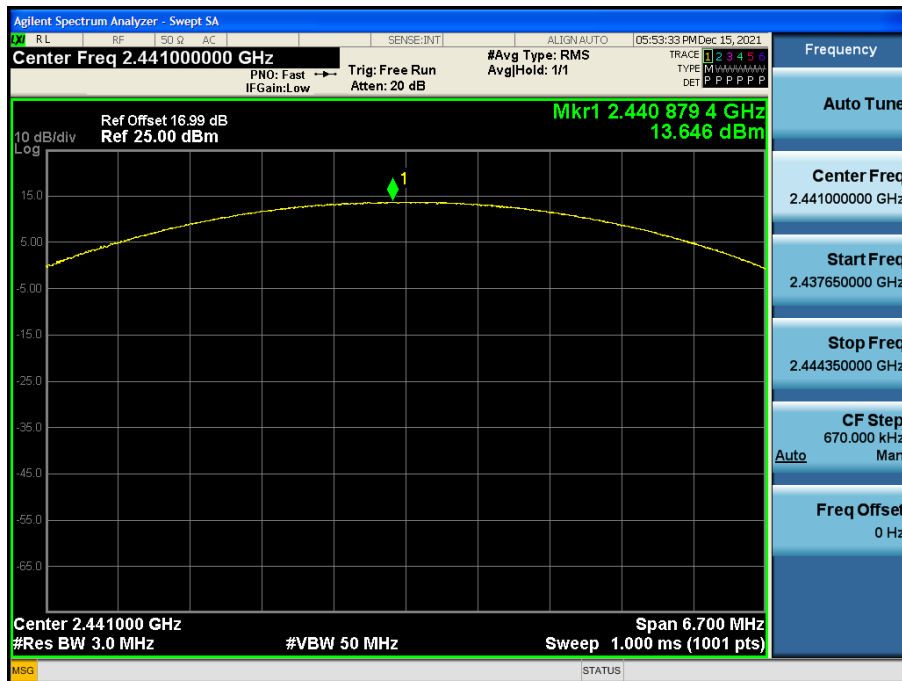

Test Plots ($\pi/4$ DQPSK)

Peak Power (CH.78)

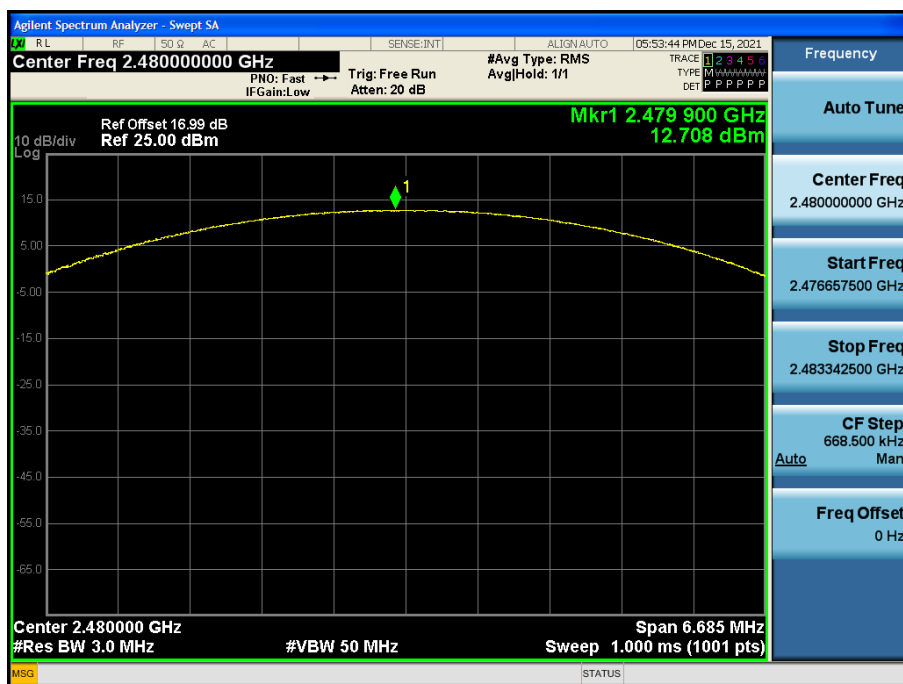

10.2 BAND EDGES

Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	55.015	52.113	52.034	20
Upper	61.311	58.814	57.930	

With hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	55.912	58.154	52.744	20
Upper	62.665	60.758	62.267	

Note :

1. Spectrum measured levels are not plot data.


The power results in plot is already including the actual values of loss for the splitter and cable combination.

2. . Actual value of loss for the splitter and cable combination is 16.99 dB at 2400 MHz

and is 16.99 dB at 2500 MHz. So, 16.99 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result.


Test Plots without hopping (GFSK)

Band Edges (CH.0)

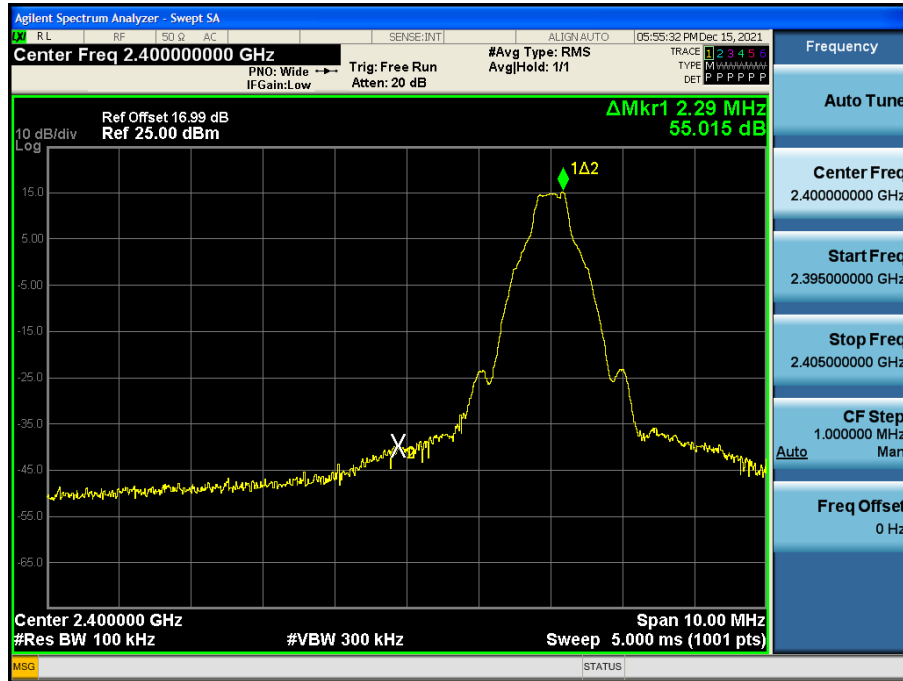

Test Plots without hopping (GFSK)

Band Edges (CH.78)

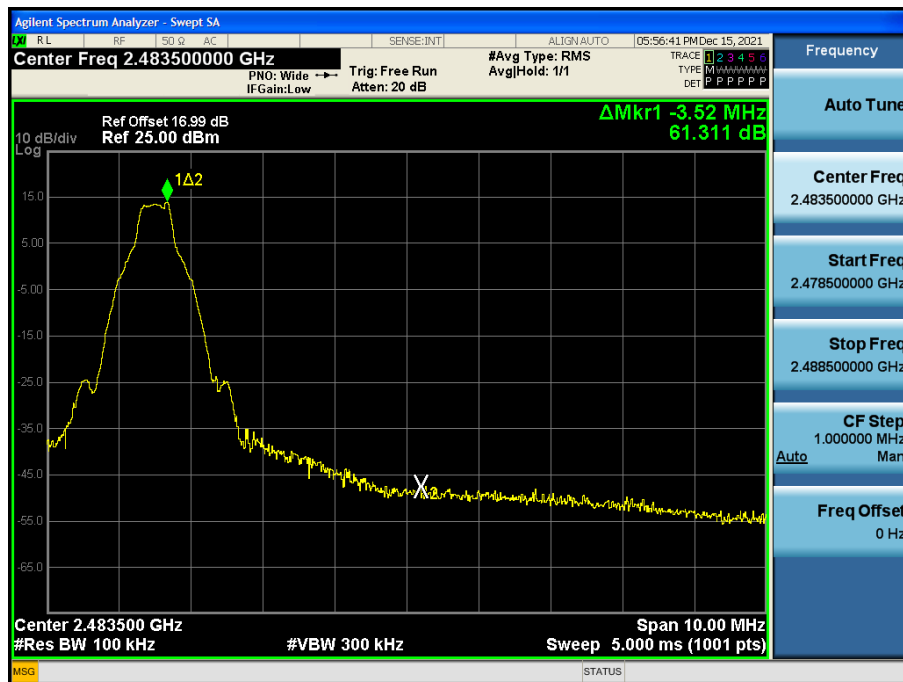


Test Plots without hopping (8DPSK)

Band Edges (CH.0)



Test Plots without hopping (8DPSK)

Band Edges (CH.78)

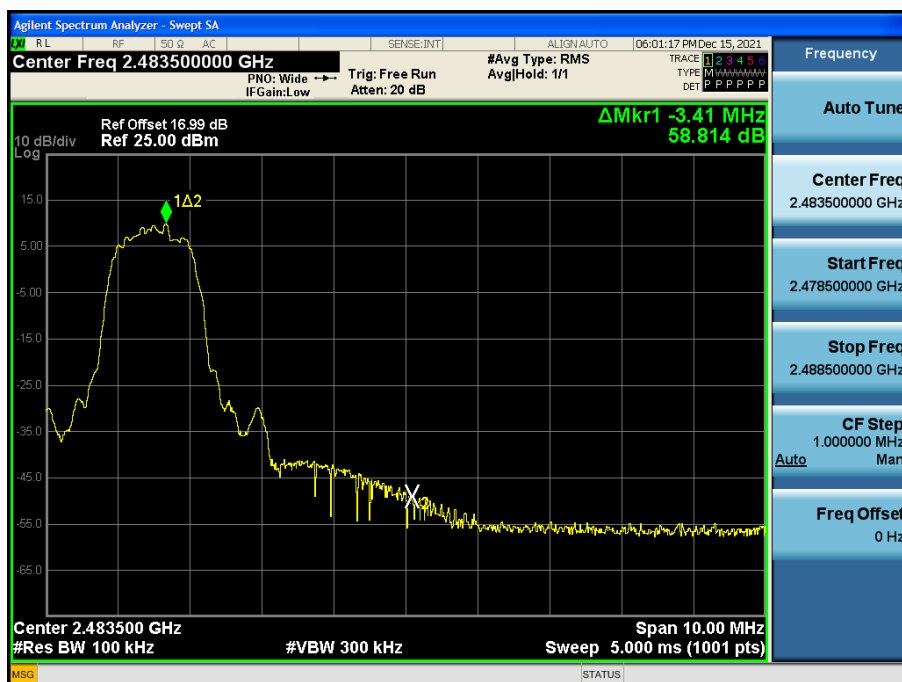

Test Plots without hopping ($\pi/4$ DQPSK)

Band Edges (CH.0)




Test Plots without hopping ($\pi/4$ DQPSK)

Band Edges (CH.78)




Test Plots with hopping (GFSK)

Band Edges (CH.0)

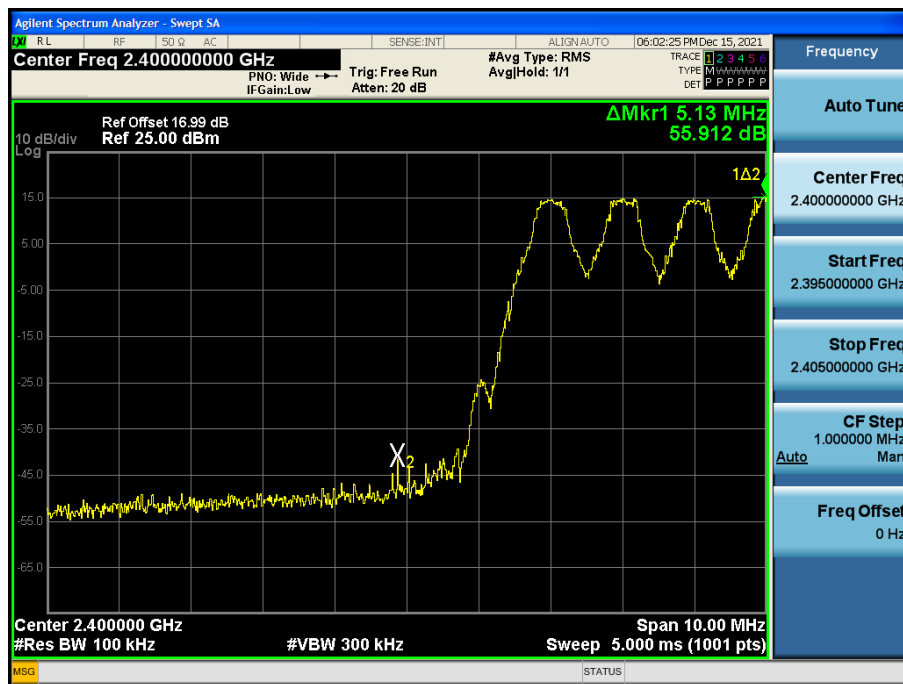

Test Plots with hopping (GFSK)

Band Edges (CH.78)

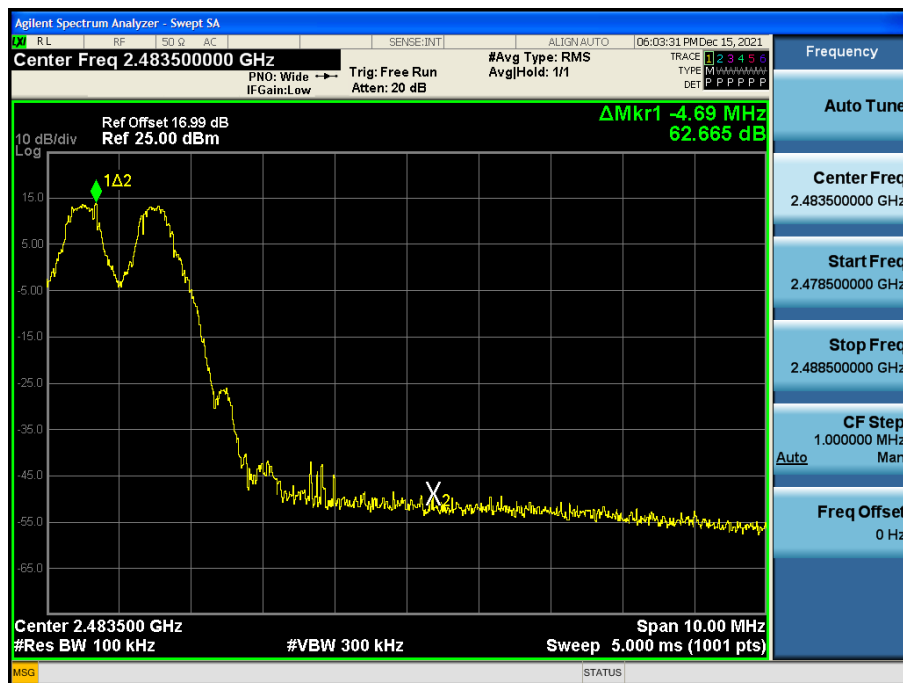

Test Plots with hopping (8DPSK)

Band Edges (CH.0)




Test Plots with hopping (8DPSK)

Band Edges (CH.78)



Test Plots with hopping ($\pi/4$ DQPSK)

Band Edges (CH.0)

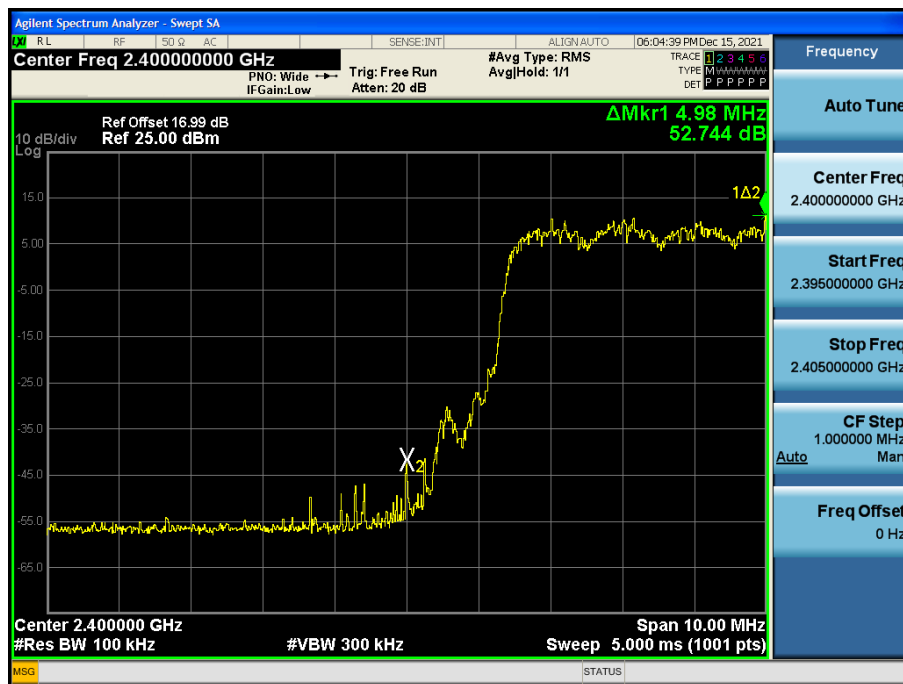

Test Plots with hopping ($\pi/4$ DQPSK)

Band Edges (CH.78)



10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)

99 % BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	878.63	1193.4	1191.6
CH.39	877.37	1198.6	1193.8
CH.78	876.14	1193.6	1189.4

20 dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	964.1	1320	1335
CH.39	964.6	1333	1340
CH.78	962.7	1320	1337

Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
998	991	1001	>25 kHz or >2/3 of the 20 dB BW


Test Plots (GFSK)

Channel Separation




Test Plots (8DPSK)

Channel Separation

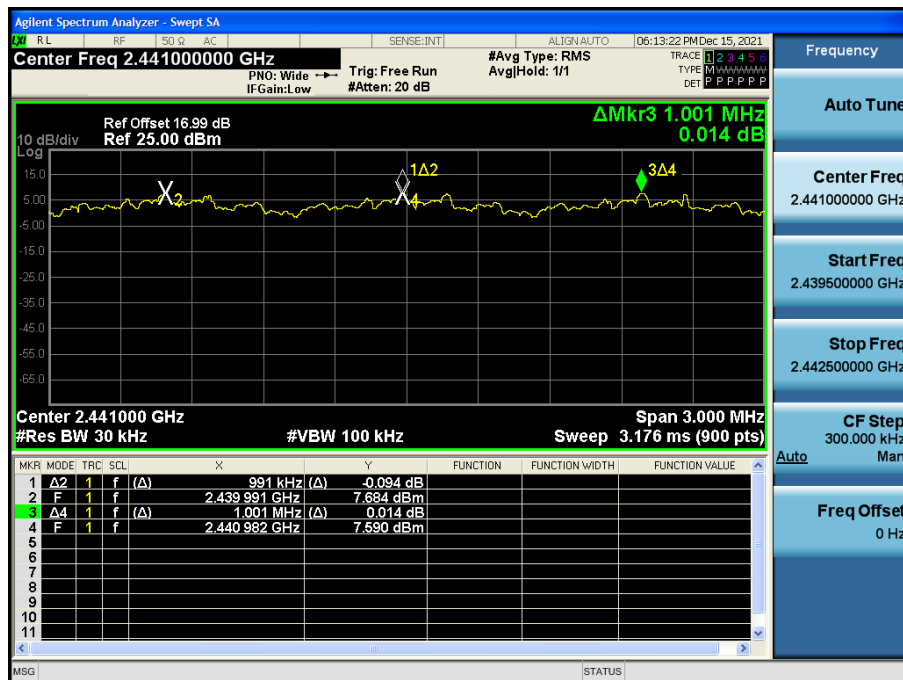


Test Plots ($\pi/4$ DQPSK)

Channel Separation

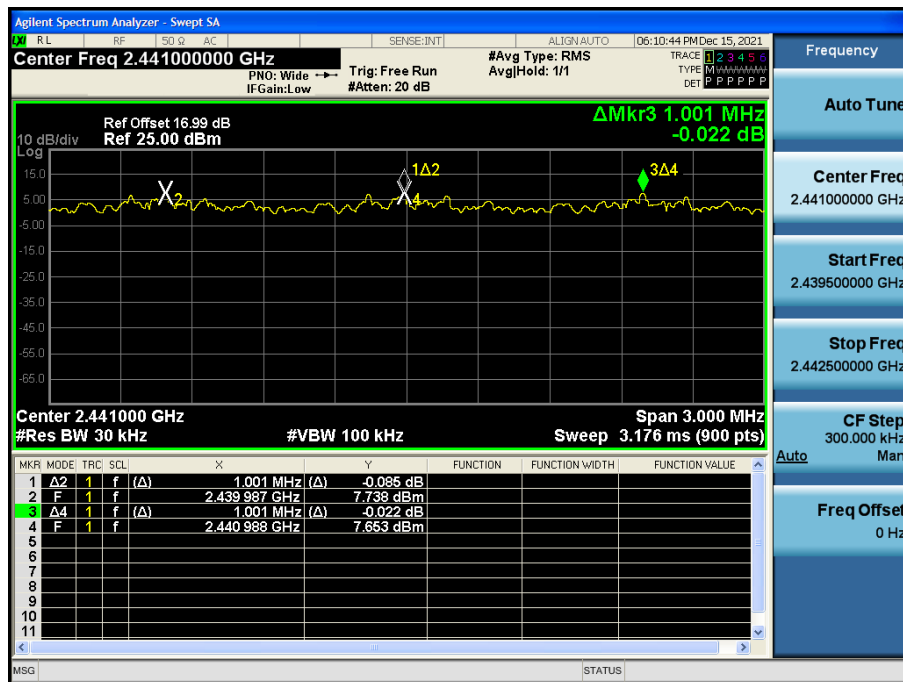


Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

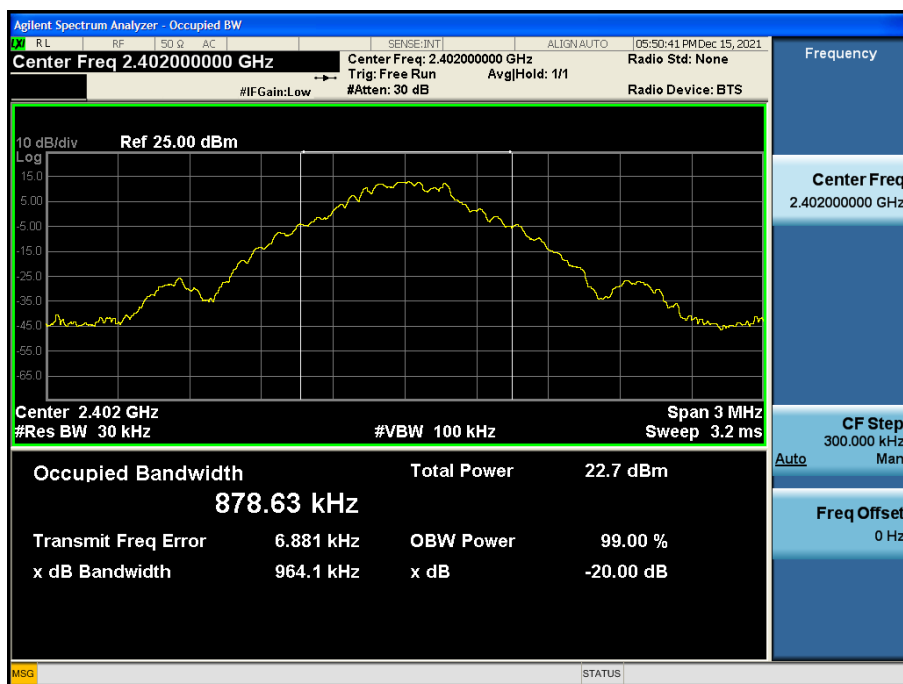

Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

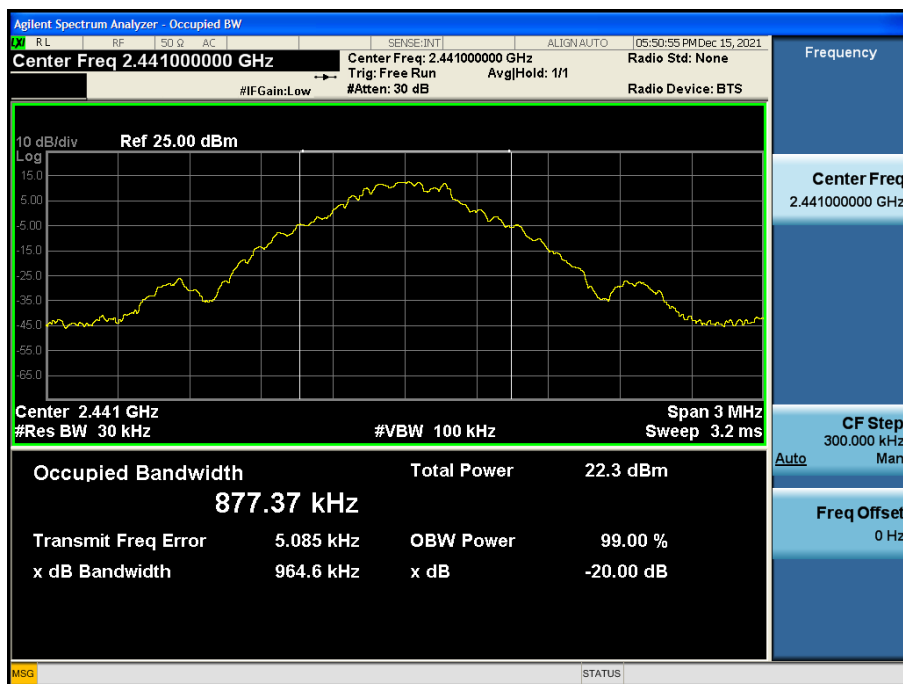

Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)




Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)



Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

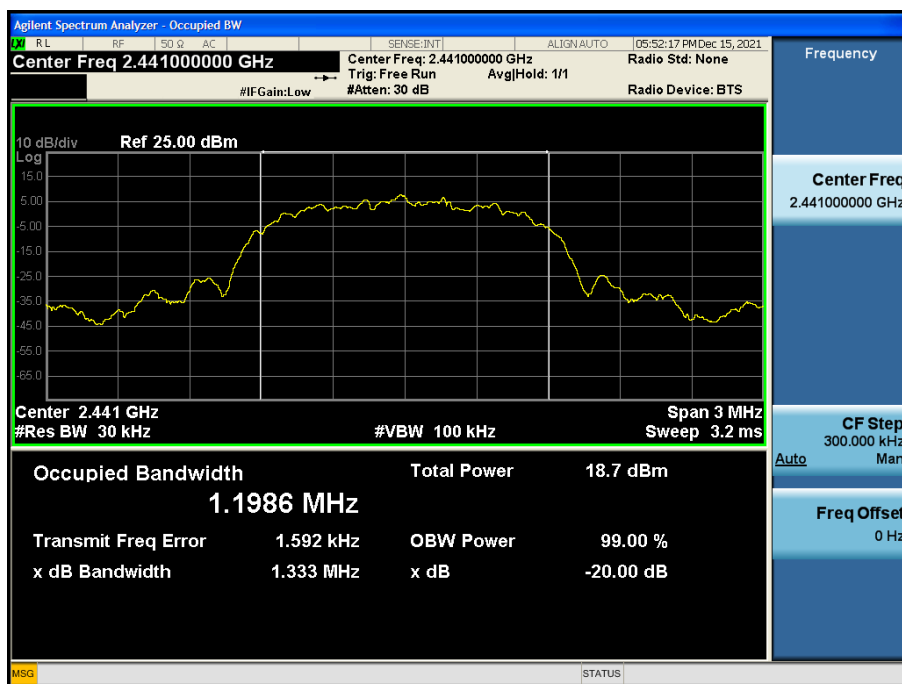


Test Plots (8DPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)




Test Plots ($\pi/4$ DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.0)

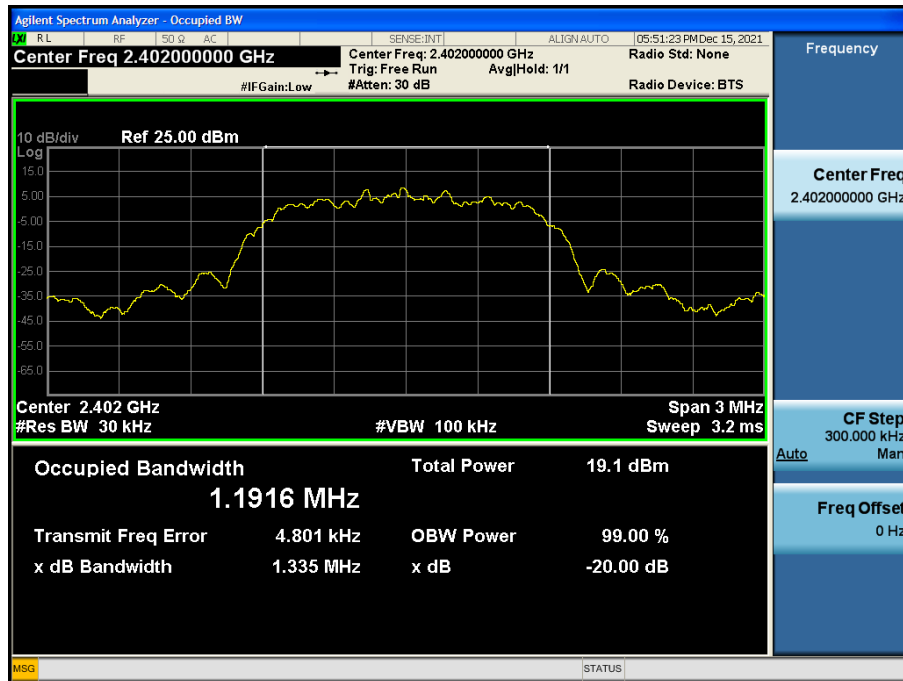


Test Plots ($\pi/4$ DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.39)

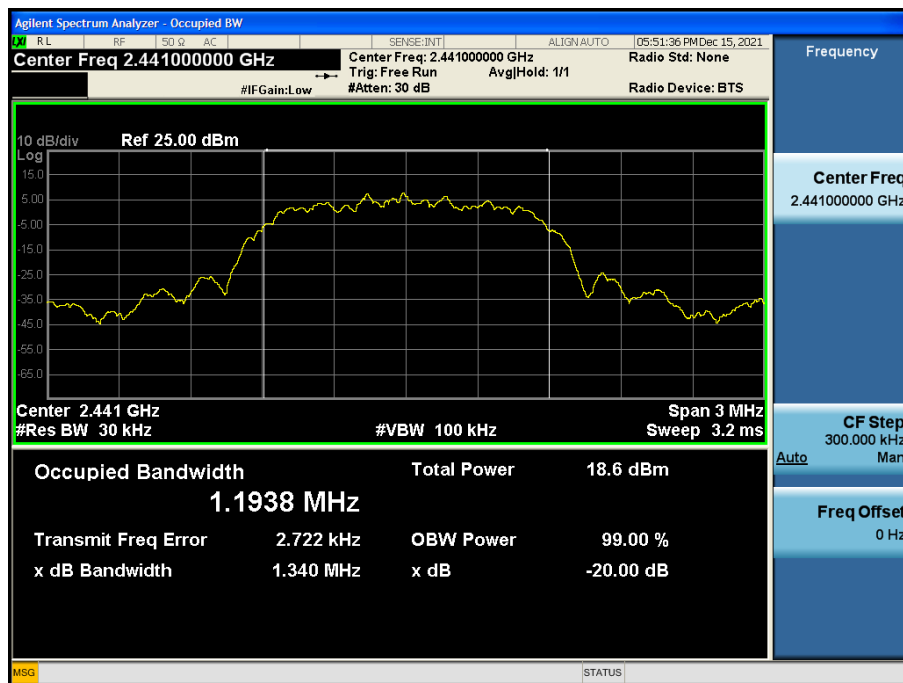

Test Plots ($\pi/4$ DQPSK)

20 dB Bandwidth & Occupied Bandwidth (CH.78)

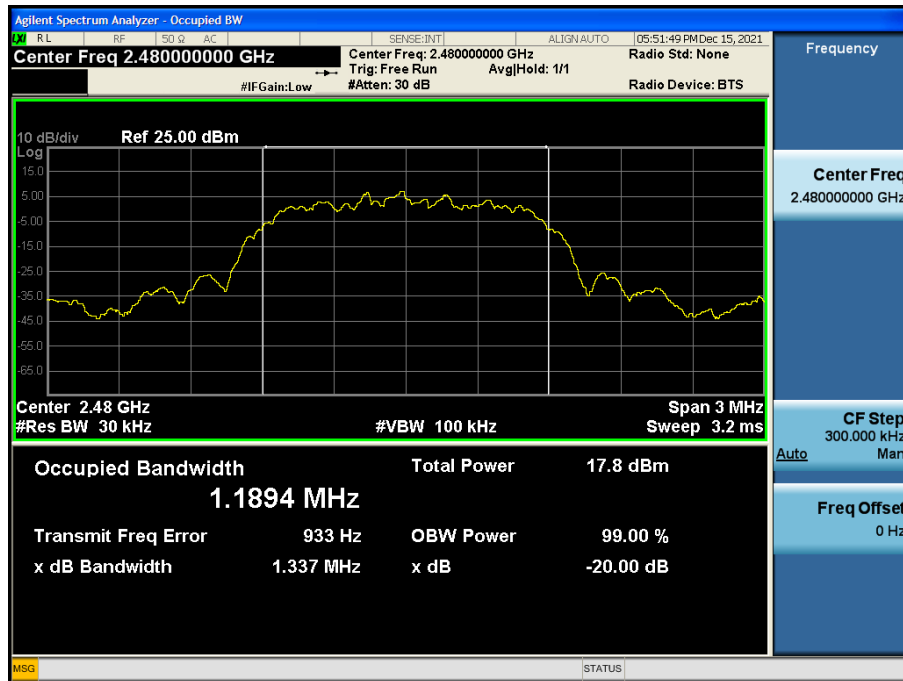

10.4 NUMBER OF HOPPING FREQUENCY


Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15

Note :

In case of AFH mode, minimum number of hopping channels is 20.


Test Plots (GFSK)

Number of Channels (2.4 GHz - 2.441 GHz)

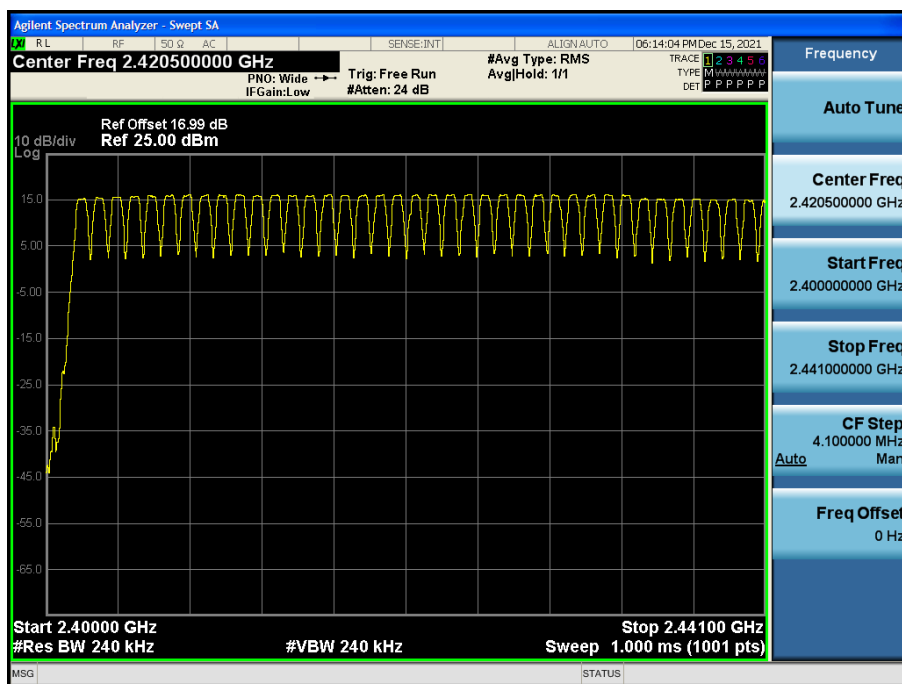


Test Plots (GFSK)

Number of Channels (2.441 GHz - 2.483.5 GHz)

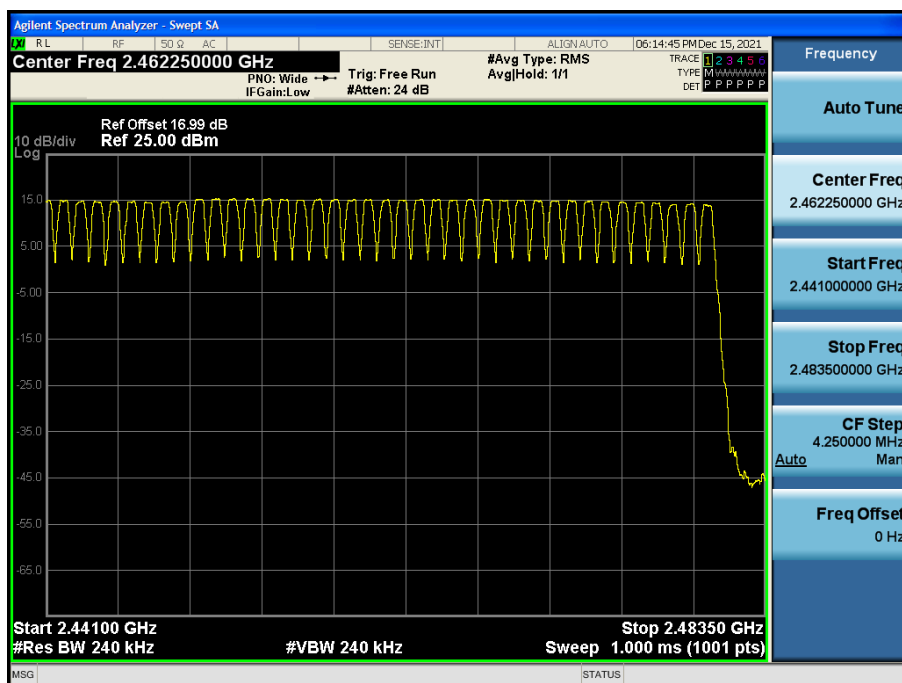


Test Plots (8DPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

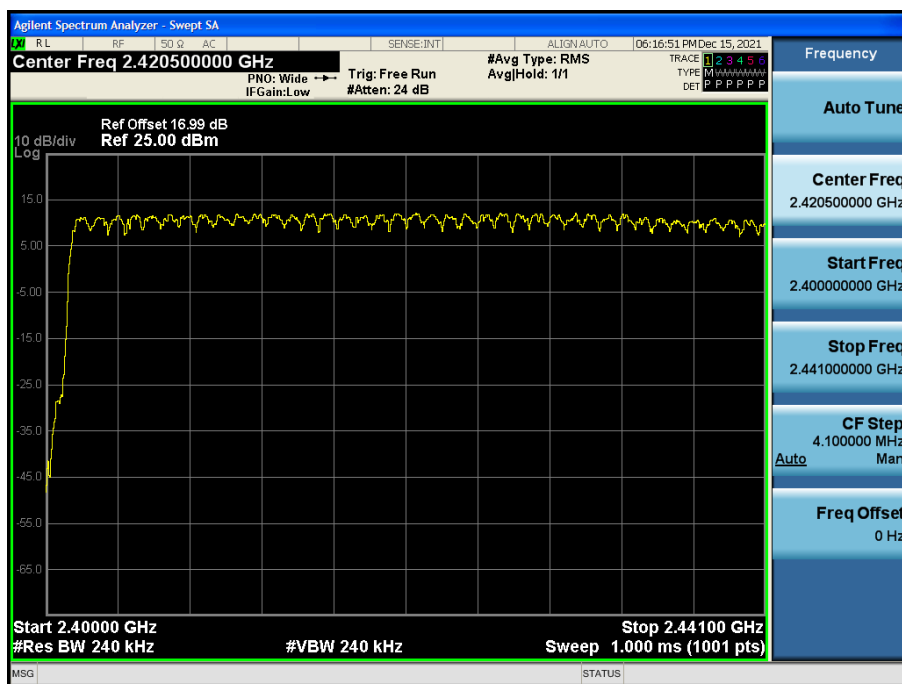


Test Plots (8DPSK)

Number of Channels (2.441 GHz - 2.483.5 GHz)

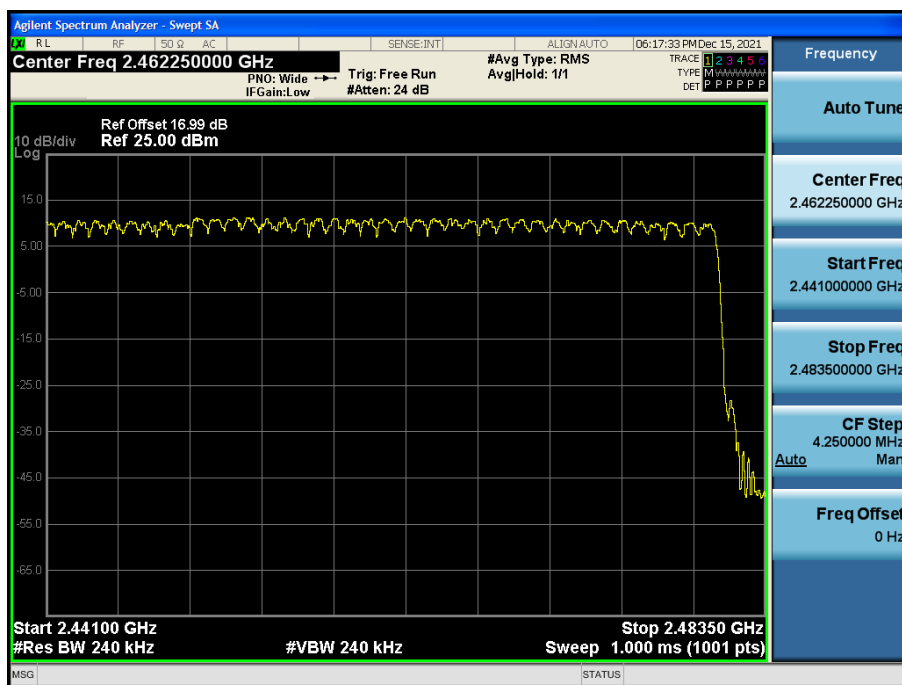


Test Plots ($\pi/4$ DQPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

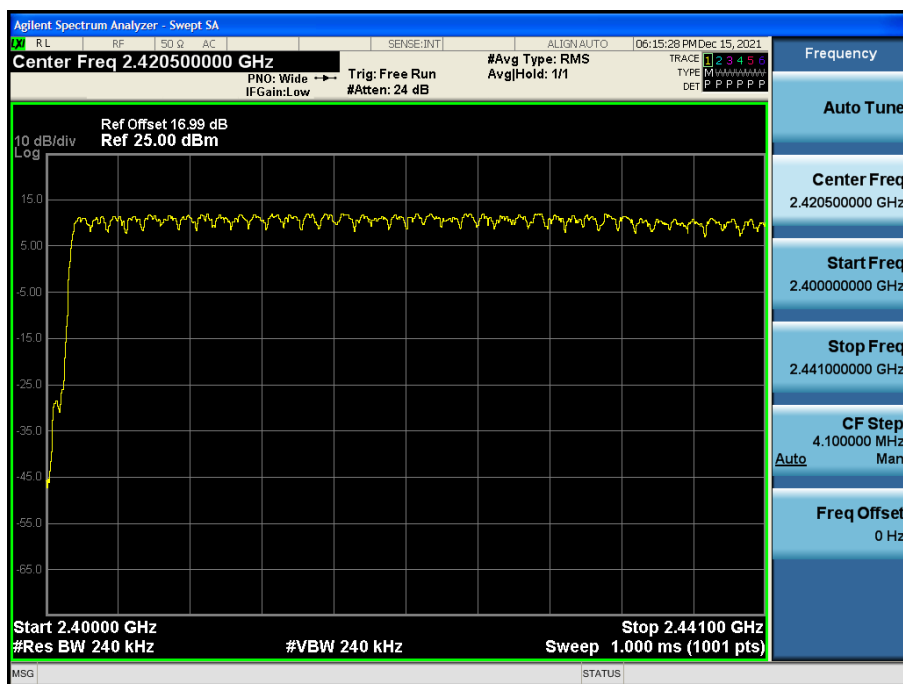
Test Plots ($\pi/4$ DQPSK)

Number of Channels (2.441 GHz - 2.483.5 GHz)

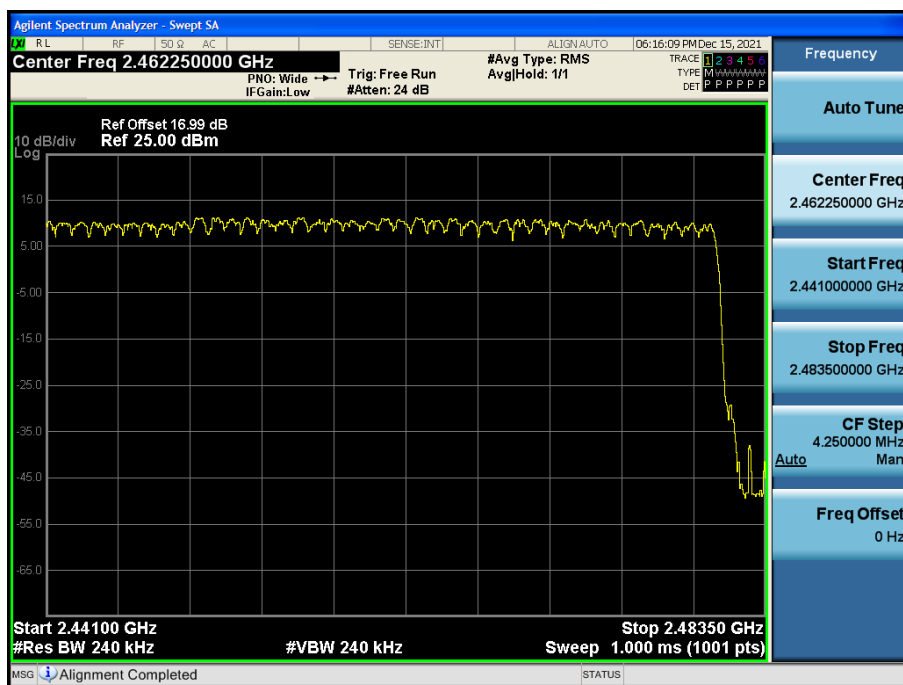

10.5 TIME OF OCCUPANCY (DWELL TIME)

Pulse Time (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
	Low	2.885	2.890	2.895
	Mid	2.885	2.895	2.895
	High	2.885	2.895	2.895

Non-AFH Mode


Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	307.73	308.27	308.80	31.6	400
	Mid	307.73	308.80	308.80	31.6	
	High	307.73	308.80	308.80	31.6	

AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	153.87	154.13	154.40	8.0	400
	Mid	153.87	154.40	154.40	8.0	
	High	153.87	154.40	154.40	8.0	


Test Plots (GFSK)

Dwell Time (CH.0)

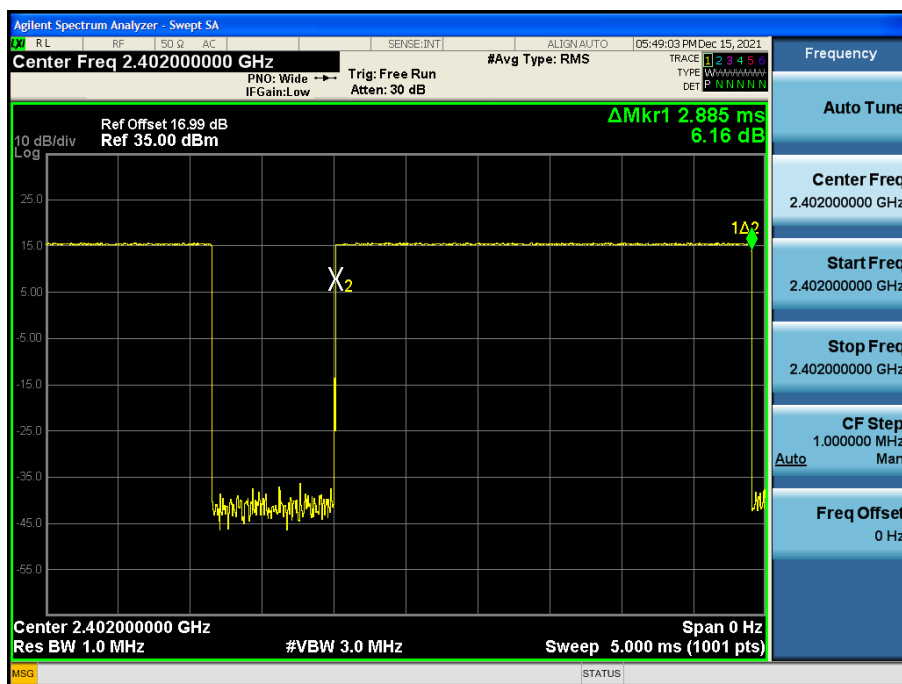


Test Plots (GFSK)

Dwell Time (CH.39)

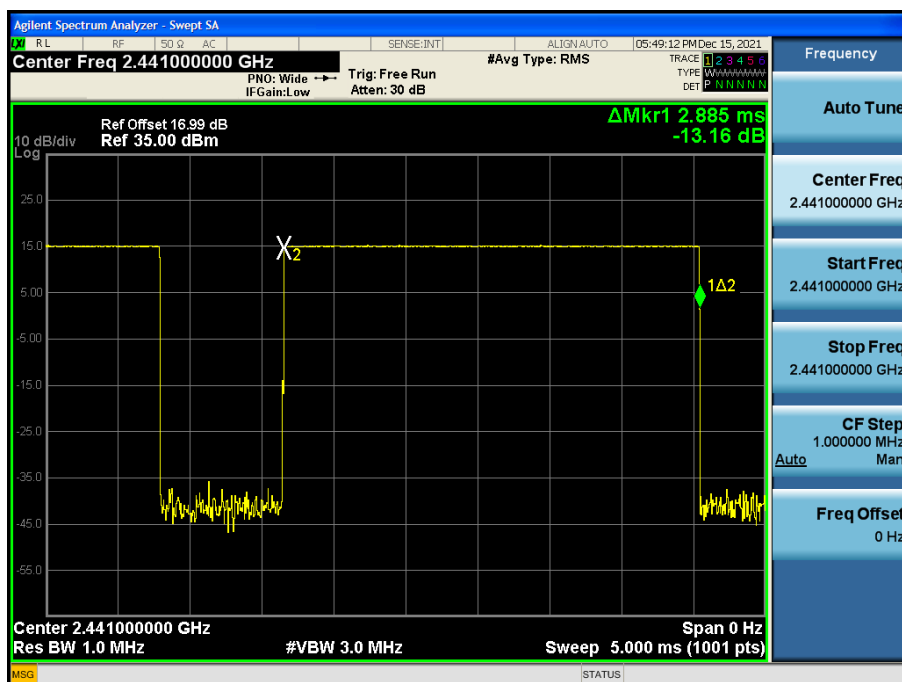


Test Plots (GFSK)

Dwell Time (CH.78)

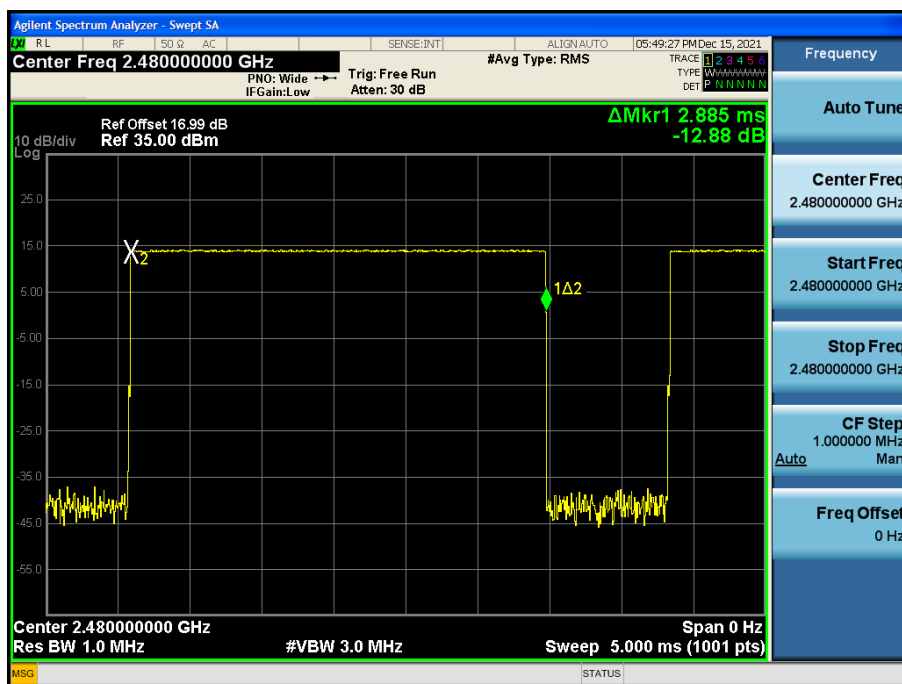


Test Plots (8DPSK)

Dwell Time (CH.0)

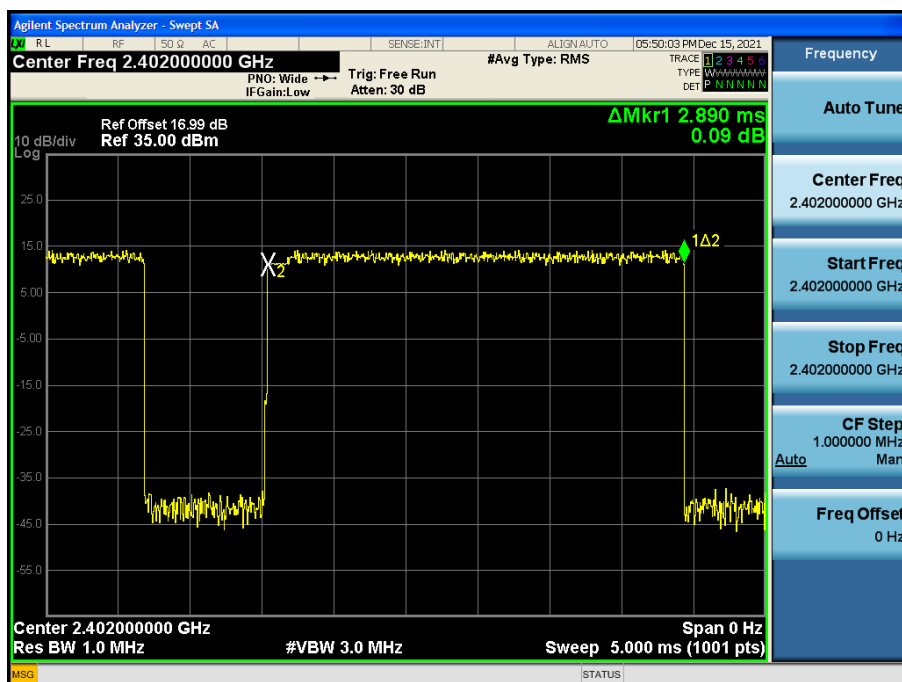


Test Plots (8DPSK)

Dwell Time (CH.39)

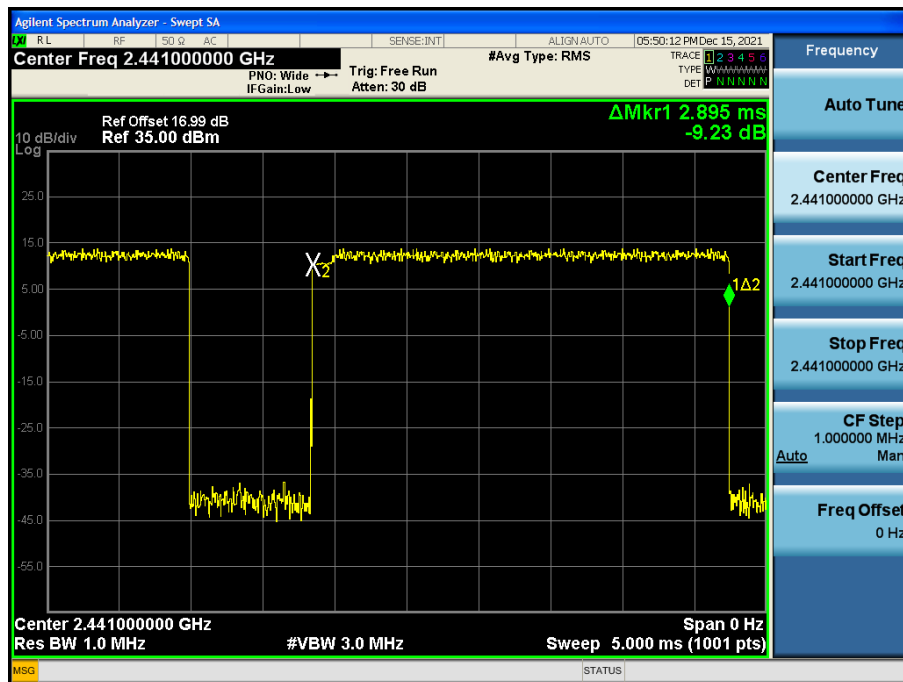


Test Plots (8DPSK)

Dwell Time (CH.78)

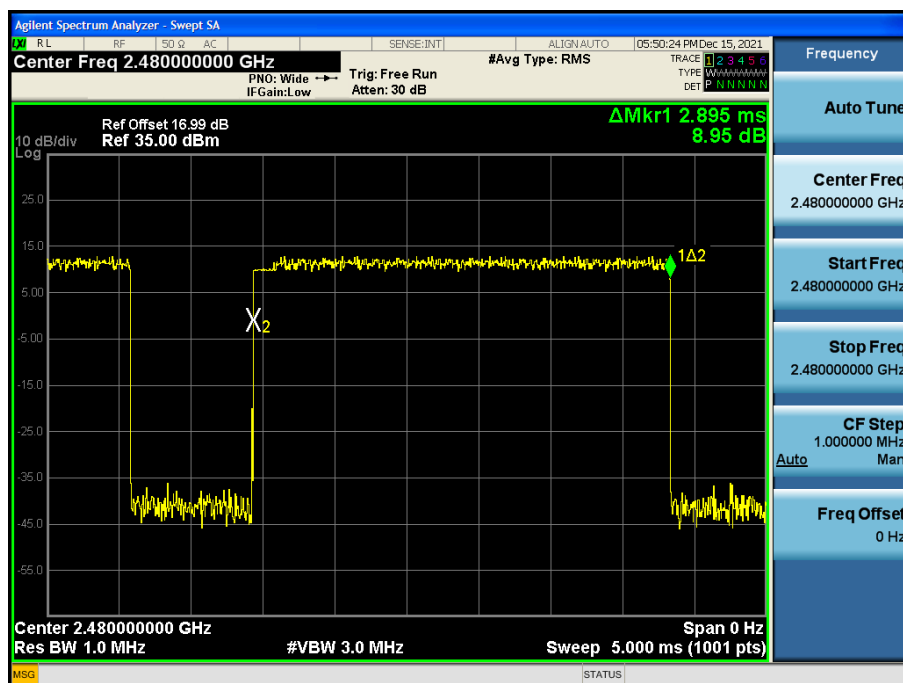


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.0)

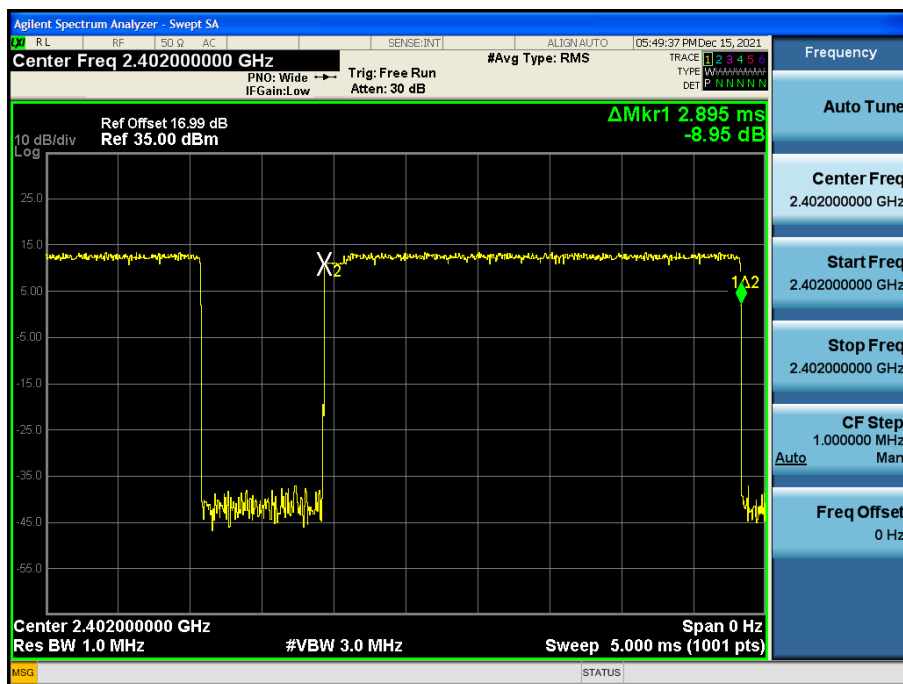

Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.39)

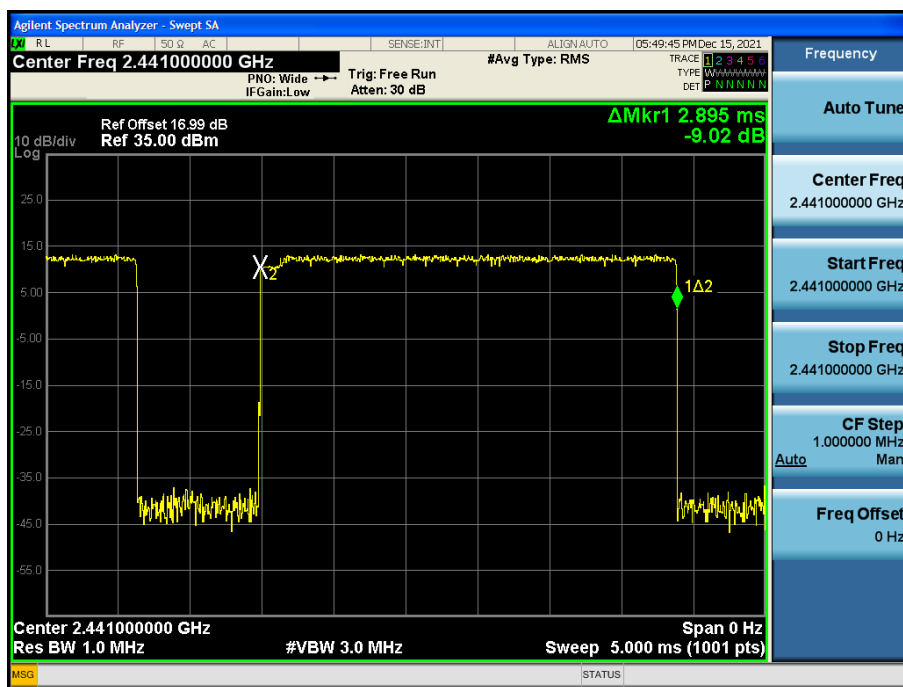

Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.78)

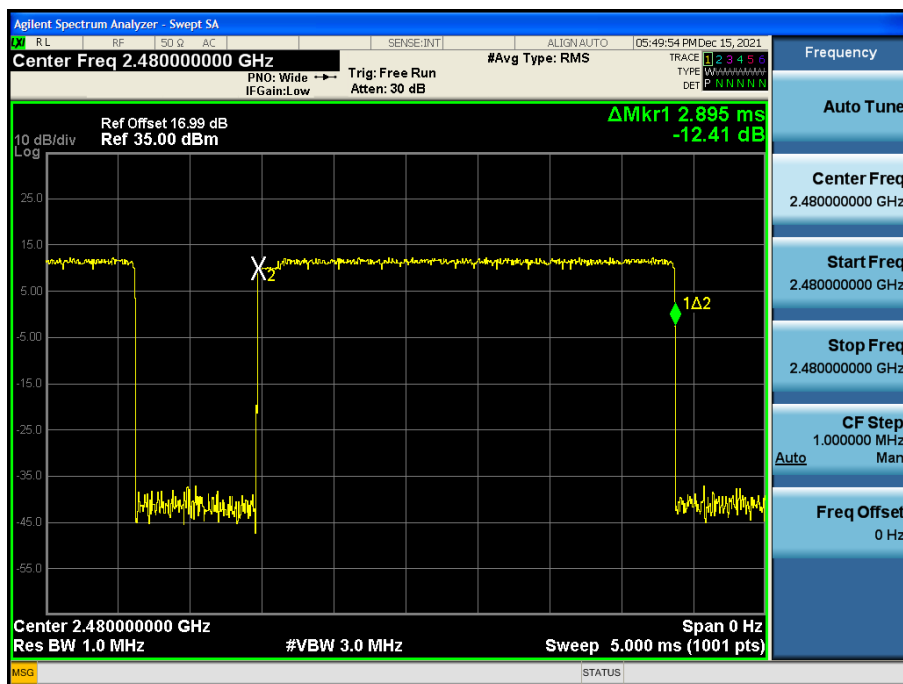

10.6 SPURIOUS EMISSIONS


10.6.1 CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.


Test Plots (GFSK)- 30 MHz - 1 GHz

Spurious Emission (CH.0)

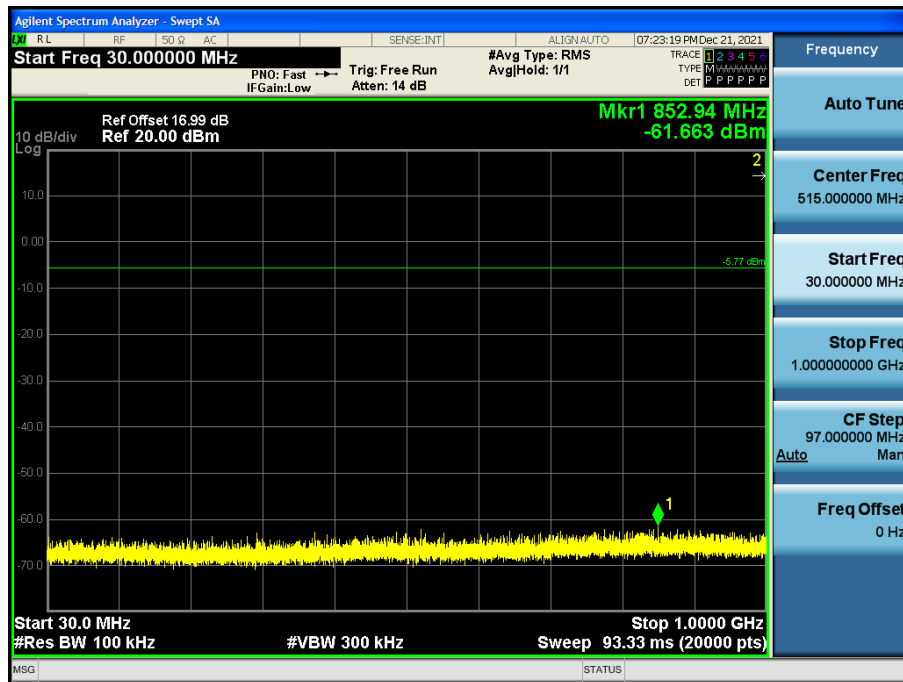


Test Plots (GFSK)- 1 GHz – 3 GHz

Spurious Emission (CH.0)

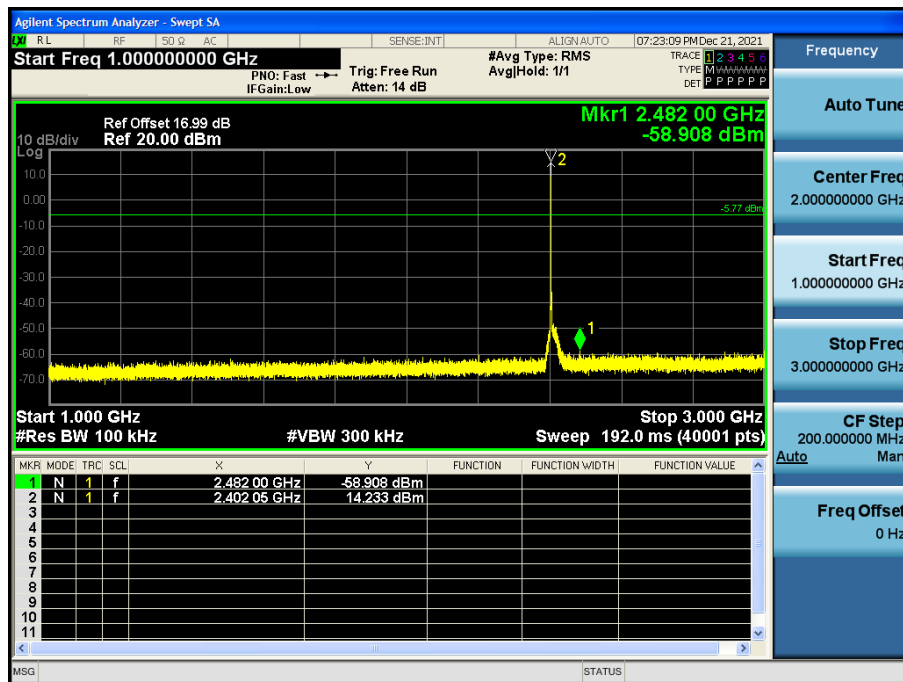


Test Plots(GFSK)- 3 GHz - 5 GHz

Spurious Emission (CH.0)

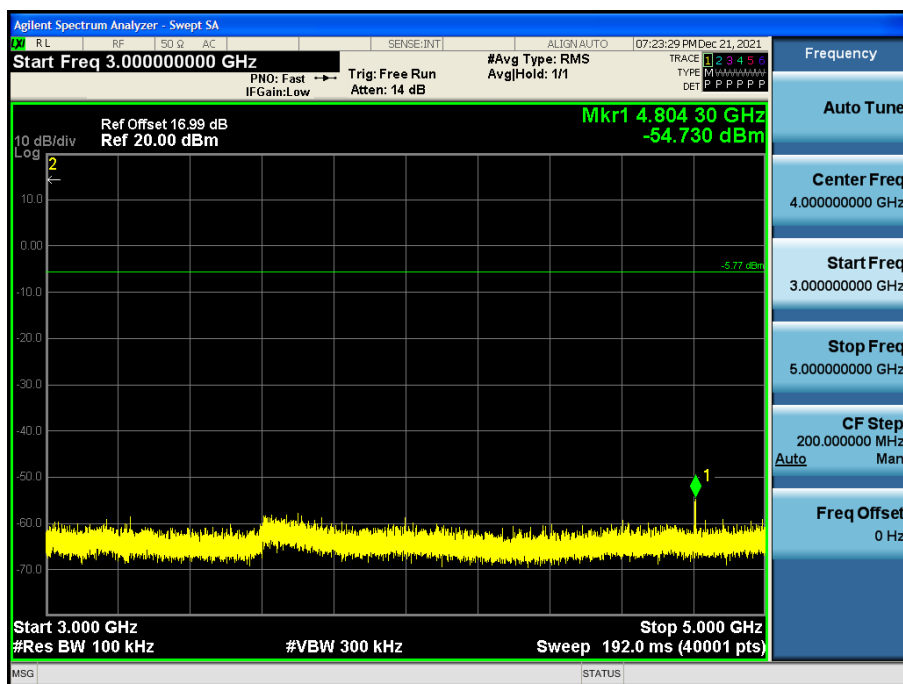


Test Plots (GFSK)- 5 GHz - 7 GHz

Spurious Emission (CH.0)

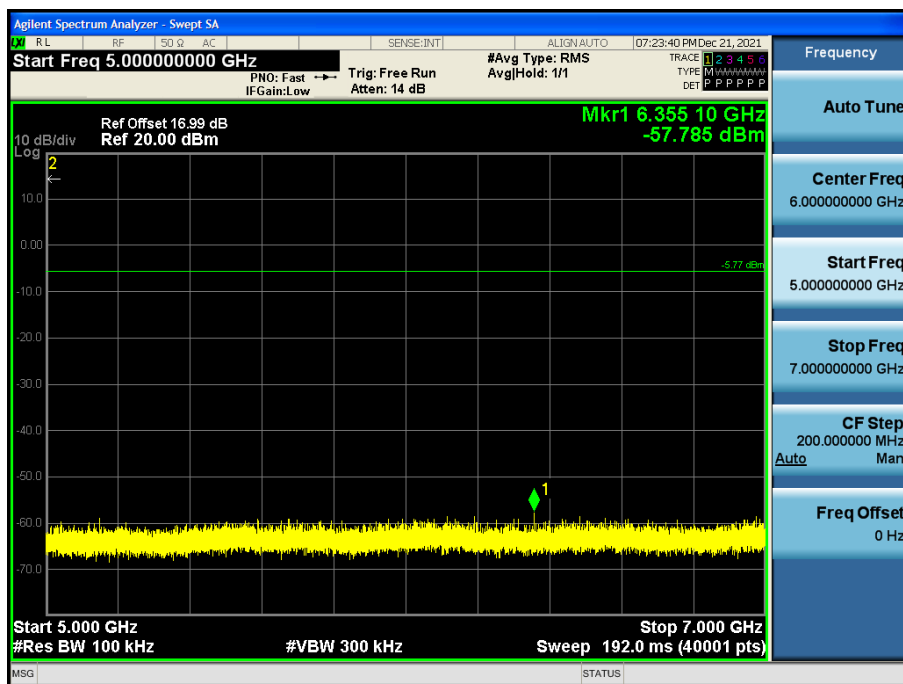


Test Plots(GFSK)- 7 GHz - 9 GHz

Spurious Emission (CH.0)

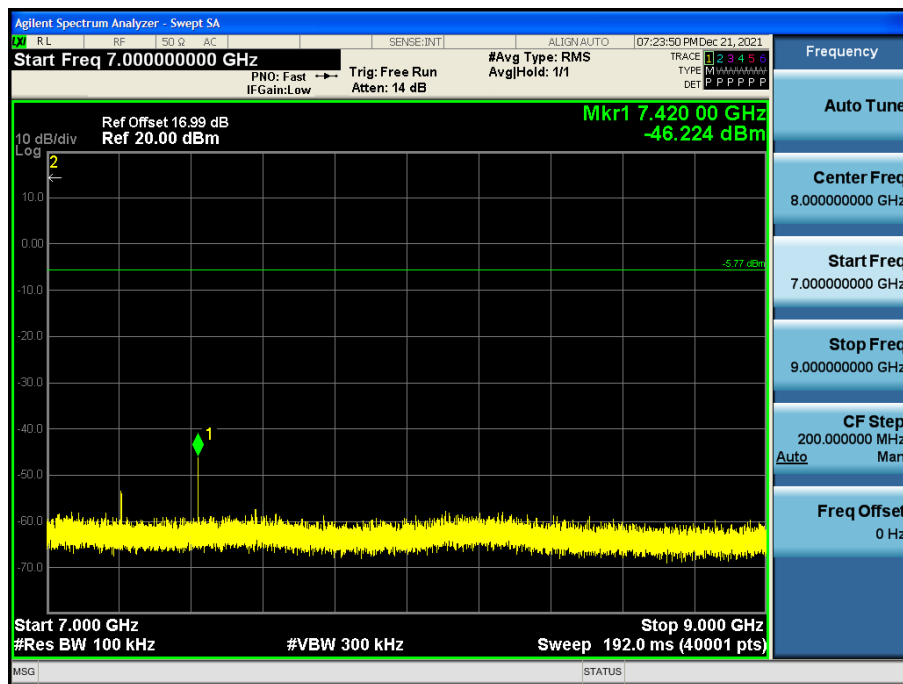


Test Plots(GFSK)- 9 GHz - 11 GHz

Spurious Emission (CH.0)

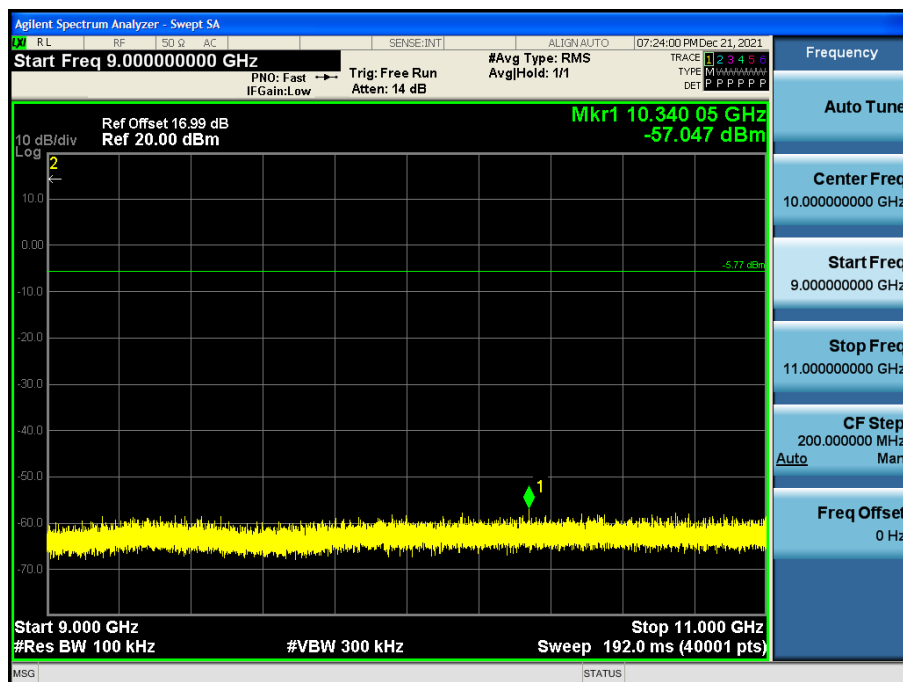


Test Plots(GFSK) 11 GHz - 13 GHz

Spurious Emission (CH.0)

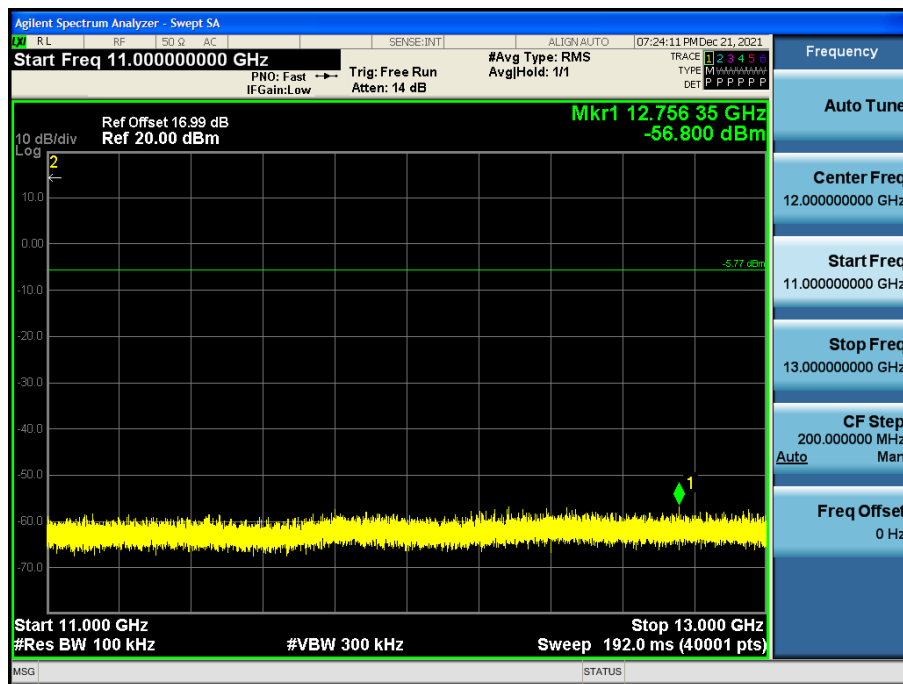


Test Plots (GFSK)- 13 GHz – 15 GHz

Spurious Emission (CH.0)

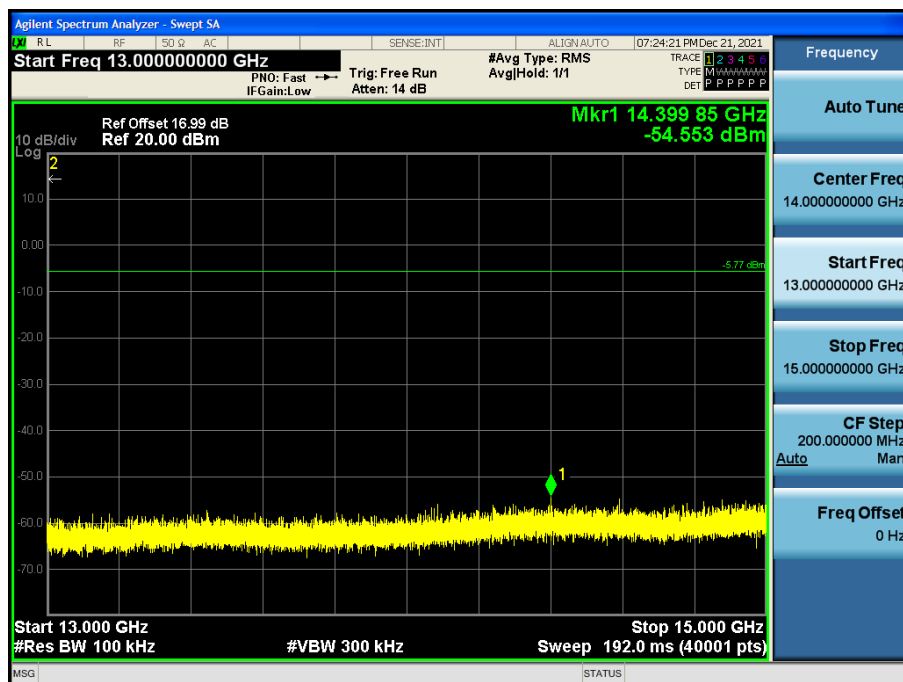


Test Plots(GFSK)- 15 GHz - 17 GHz

Spurious Emission (CH.0)

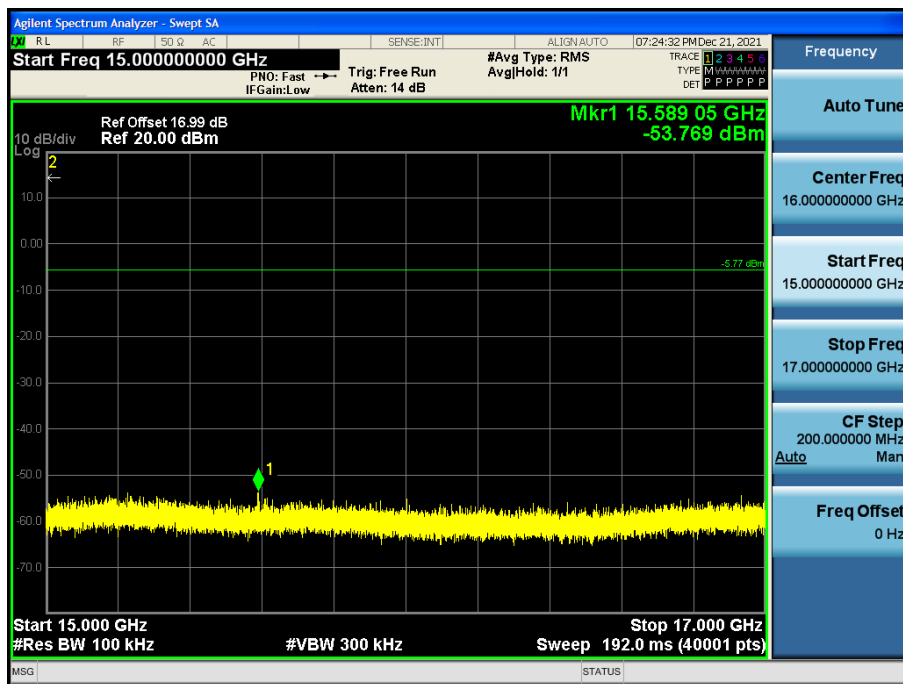


Test Plots(GFSK)- 17 GHz - 19 GHz

Spurious Emission (CH.0)

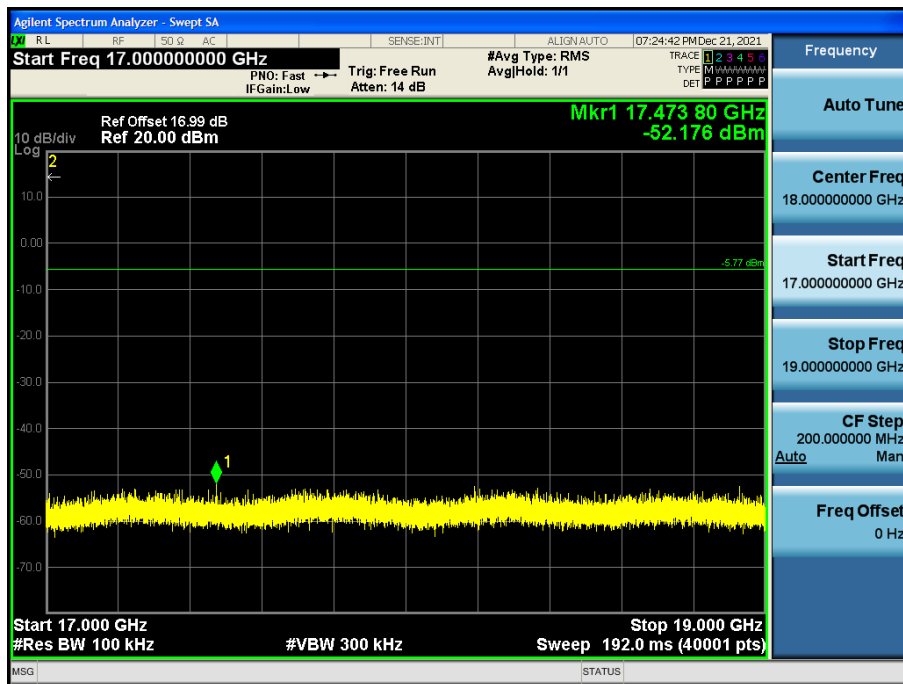


Test Plots (GFSK)- 19 GHz - 21 GHz

Spurious Emission (CH.0)

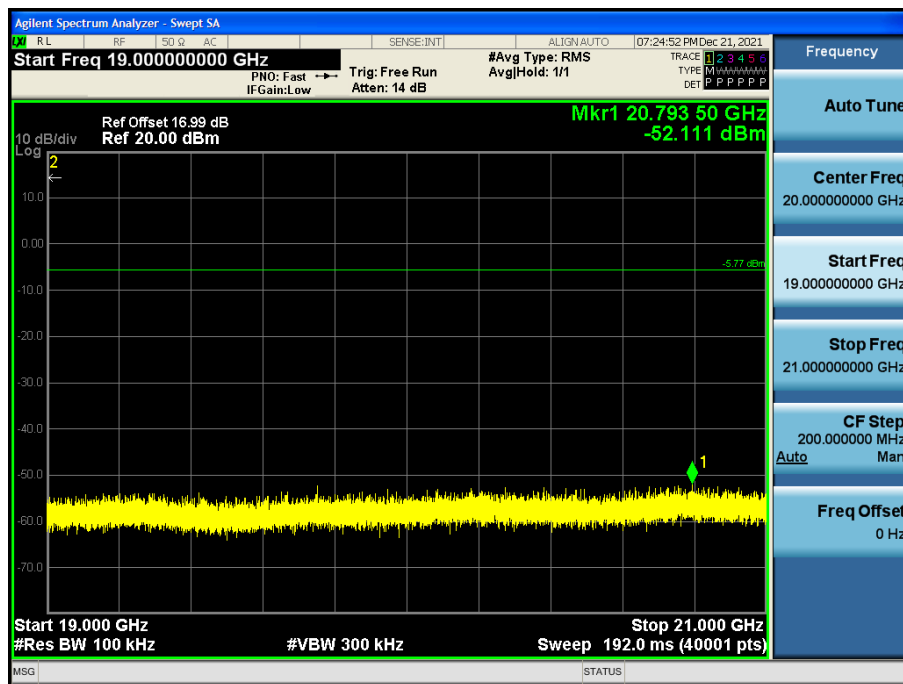


Test Plots (GFSK)- 21 GHz - 23 GHz

Spurious Emission (CH.0)

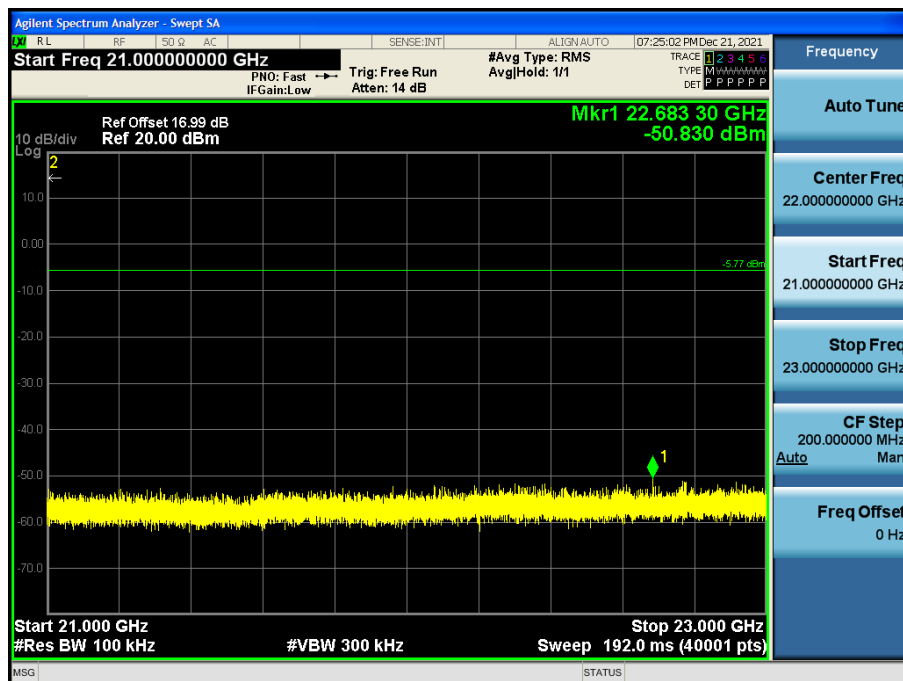

Test Plots (GFSK)- 23 GHz - 25 GHz

Spurious Emission (CH.0)

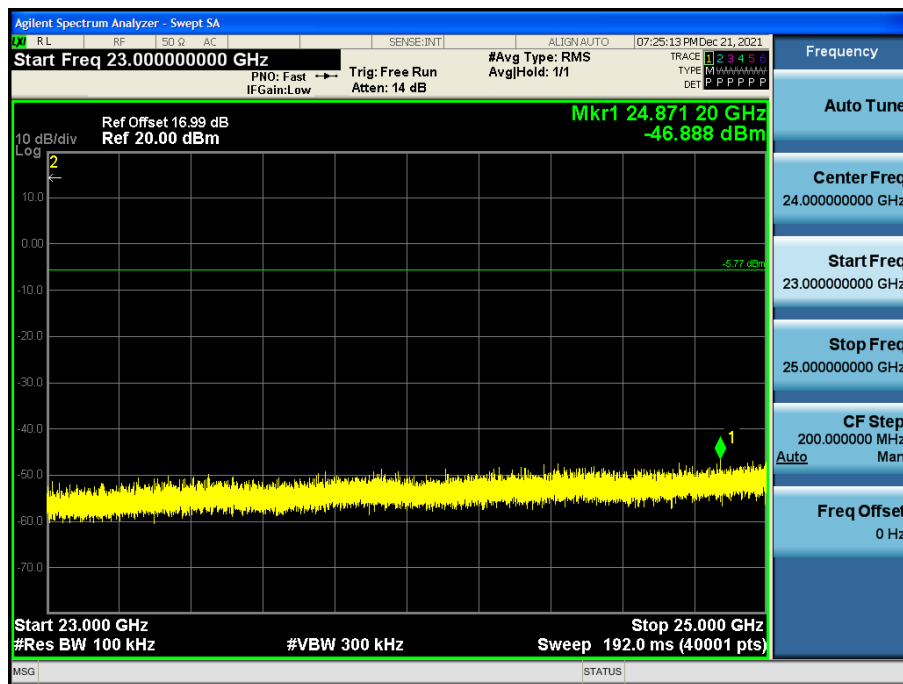

10.6.2 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+C.L+D.F	POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBμV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

Frequency Range : Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	39.94	5.14	V	0.00	45.08	73.98	28.90	PK
4804	39.94	5.14	V	-24.73	20.35	53.98	33.63	AV
7206	39.74	12.89	V	0.00	52.63	73.98	21.35	PK
7206	39.74	12.89	V	-24.73	27.90	53.98	26.08	AV
4804	41.34	5.14	H	0.00	46.48	73.98	27.50	PK
4804	41.34	5.14	H	-24.73	21.75	53.98	32.23	AV
7206	39.96	12.89	H	0.00	52.85	73.98	21.13	PK
7206	39.96	12.89	H	-24.73	28.12	53.98	25.86	AV

Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4882	40.62	5.46	V	0.00	46.08	73.98	27.90	PK
4882	40.62	5.46	V	-24.73	21.35	53.98	32.63	AV
7323	37.56	12.94	V	0.00	50.50	73.98	23.48	PK
7323	37.56	12.94	V	-24.73	25.77	53.98	28.21	AV
4882	40.76	5.46	H	0.00	46.22	73.98	27.76	PK
4882	40.76	5.46	H	-24.73	21.49	53.98	32.49	AV
7323	38.11	12.94	H	0.00	51.05	73.98	22.93	PK
7323	38.11	12.94	H	-24.73	26.32	53.98	27.66	AV

Operation Mode: CH High(GFSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	40.85	6.25	V	0.00	47.10	73.98	26.88	PK
4960	40.85	6.25	V	-24.73	22.37	53.98	31.61	AV
7440	38.45	12.61	V	0.00	51.06	73.98	22.92	PK
7440	38.45	12.61	V	-24.73	26.33	53.98	27.65	AV
4960	41.12	6.25	H	0.00	47.37	73.98	26.61	PK
4960	41.12	6.25	H	-24.73	22.64	53.98	31.34	AV
7440	38.63	12.61	H	0.00	51.24	73.98	22.74	PK
7440	38.63	12.61	H	-24.73	26.51	53.98	27.47	AV

Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	39.90	5.14	V	0.00	45.04	73.98	28.94	PK
4804	39.90	5.14	V	-24.73	20.31	53.98	33.67	AV
7206	37.97	12.89	V	0.00	50.86	73.98	23.12	PK
7206	37.97	12.89	V	-24.73	26.13	53.98	27.85	AV
4804	41.35	5.14	H	0.00	46.49	73.98	27.49	PK
4804	41.35	5.14	H	-24.73	21.76	53.98	32.22	AV
7206	38.22	12.89	H	0.00	51.11	73.98	22.87	PK
7206	38.22	12.89	H	-24.73	26.38	53.98	27.60	AV

Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4882	40.28	5.46	V	0.00	45.74	73.98	28.24	PK
4882	40.28	5.46	V	-24.73	21.01	53.98	32.97	AV
7323	37.84	12.94	V	0.00	50.78	73.98	23.20	PK
7323	37.84	12.94	V	-24.73	26.05	53.98	27.93	AV
4882	40.49	5.46	H	0.00	45.95	73.98	28.03	PK
4882	40.49	5.46	H	-24.73	21.22	53.98	32.76	AV
7323	38.27	12.94	H	0.00	51.21	73.98	22.77	PK
7323	38.27	12.94	H	-24.73	26.48	53.98	27.50	AV

Operation Mode: CH High($\pi/4$ DQPSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	40.87	6.25	V	0.00	47.12	73.98	26.86	PK
4960	40.87	6.25	V	-24.73	22.39	53.98	31.59	AV
7440	37.82	12.61	V	0.00	50.43	73.98	23.55	PK
7440	37.82	12.61	V	-24.73	25.70	53.98	28.28	AV
4960	41.04	6.25	H	0.00	47.29	73.98	26.69	PK
4960	41.04	6.25	H	-24.73	22.56	53.98	31.42	AV
7440	38.07	12.61	H	0.00	50.68	73.98	23.30	PK
7440	38.07	12.61	H	-24.73	25.95	53.98	28.03	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	39.84	5.14	V	0.00	44.98	73.98	29.00	PK
4804	39.84	5.14	V	-24.73	20.25	53.98	33.73	AV
7206	38.12	12.89	V	0.00	51.01	73.98	22.97	PK
7206	38.12	12.89	V	-24.73	26.28	53.98	27.70	AV
4804	41.07	5.14	H	0.00	46.21	73.98	27.77	PK
4804	41.07	5.14	H	-24.73	21.48	53.98	32.50	AV
7206	38.49	12.89	H	0.00	51.38	73.98	22.60	PK
7206	38.49	12.89	H	-24.73	26.65	53.98	27.33	AV

Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4882	40.50	5.46	V	0.00	45.96	73.98	28.02	PK
4882	40.50	5.46	V	-24.73	21.23	53.98	32.75	AV
7323	37.96	12.94	V	0.00	50.90	73.98	23.08	PK
7323	37.96	12.94	V	-24.73	26.17	53.98	27.81	AV
4882	40.75	5.46	H	0.00	46.21	73.98	27.77	PK
4882	40.75	5.46	H	-24.73	21.48	53.98	32.50	AV
7323	38.35	12.94	H	0.00	51.29	73.98	22.69	PK
7323	38.35	12.94	H	-24.73	26.56	53.98	27.42	AV

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	41.12	6.25	V	0.00	47.37	73.98	26.61	PK
4960	41.12	6.25	V	-24.73	22.64	53.98	31.34	AV
7440	38.04	12.61	V	0.00	50.65	73.98	23.33	PK
7440	38.04	12.61	V	-24.73	25.92	53.98	28.06	AV
4960	41.30	6.25	H	0.00	47.55	73.98	26.43	PK
4960	41.30	6.25	H	-24.73	22.82	53.98	31.16	AV
7440	38.16	12.61	H	0.00	50.77	73.98	23.21	PK
7440	38.16	12.61	H	-24.73	26.04	53.98	27.94	AV

[DBS Mode]

WLAN/BT Ant : 802.11n(HT20) ch. 165 & Bluetooth Ch. 0 (GFSK)


Frequency [MHz]	Measured Value [dBμV]	A.F+C.L-A.G+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	42.86	5.14	V	0.00	48.00	73.98	25.98	PK
4804	42.86	5.14	V	-24.73	23.27	53.98	30.71	AV
7206	39.02	12.89	V	0.00	51.91	73.98	22.07	PK
7206	39.02	12.89	V	-24.73	27.18	53.98	26.80	AV
4804	43.43	5.14	H	0.00	48.57	73.98	25.41	PK
4804	43.43	5.14	H	-24.73	23.84	53.98	30.14	AV
7206	39.50	12.89	H	0.00	52.39	73.98	21.59	PK
7206	39.50	12.89	H	-24.73	27.66	53.98	26.32	AV

Note :


1. Used duty cycle correction factor.
2. WLAN DBS Data refer to UNII Test Report.

RESULT PLOTS


Radiated Spurious Emissions plot – Peak & Average Result (GFSK, Ch.0 3rd Harmonic, Z-H)

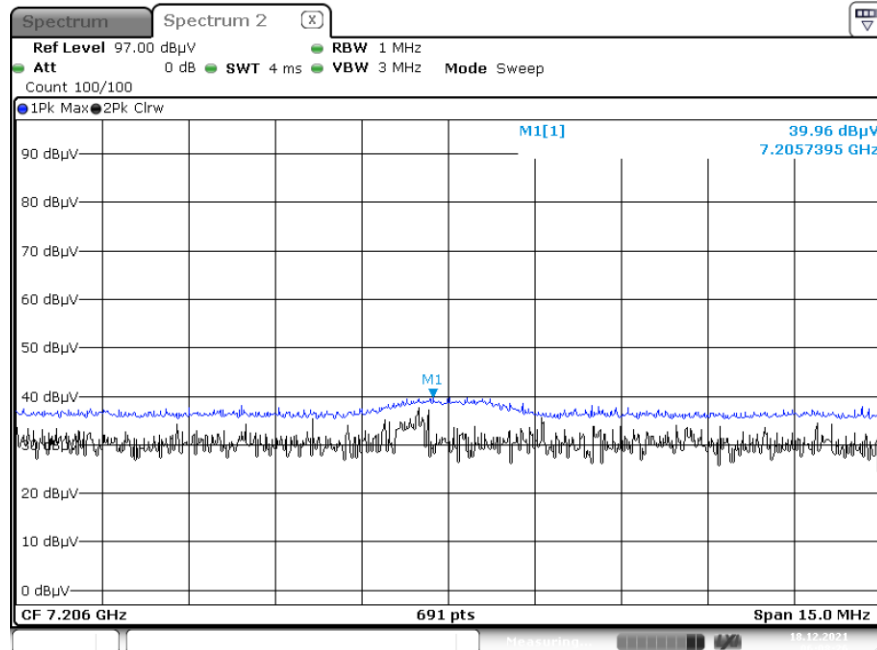

Radiated Spurious Emissions plot – Peak & Average Result ($\pi/4$ DQPSK, Ch.39 3rd Harmonic, X-H)

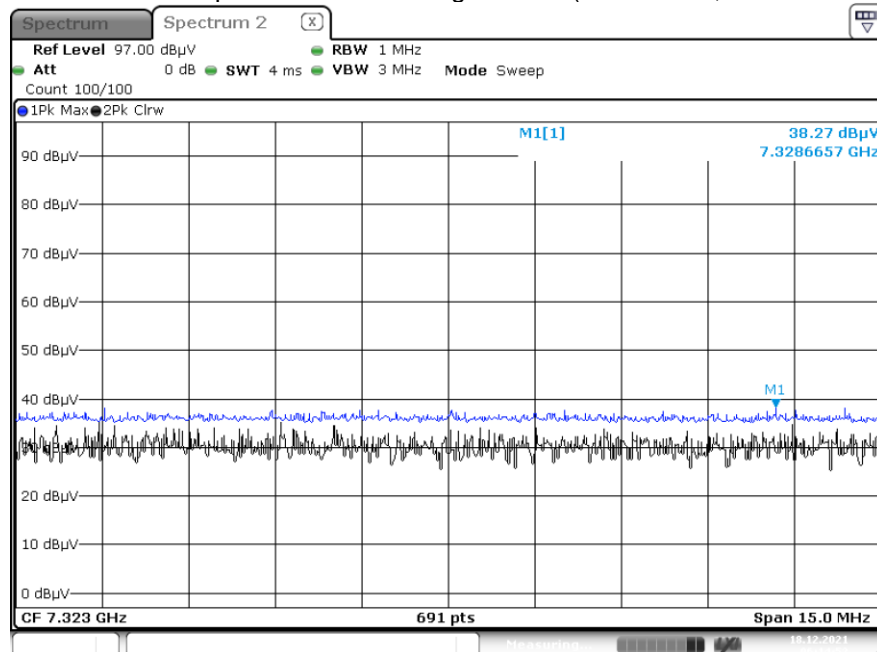

Radiated Spurious Emissions plot – Peak & Average Result (8DPSK, Ch.0 3rd Harmonic, Z-H)

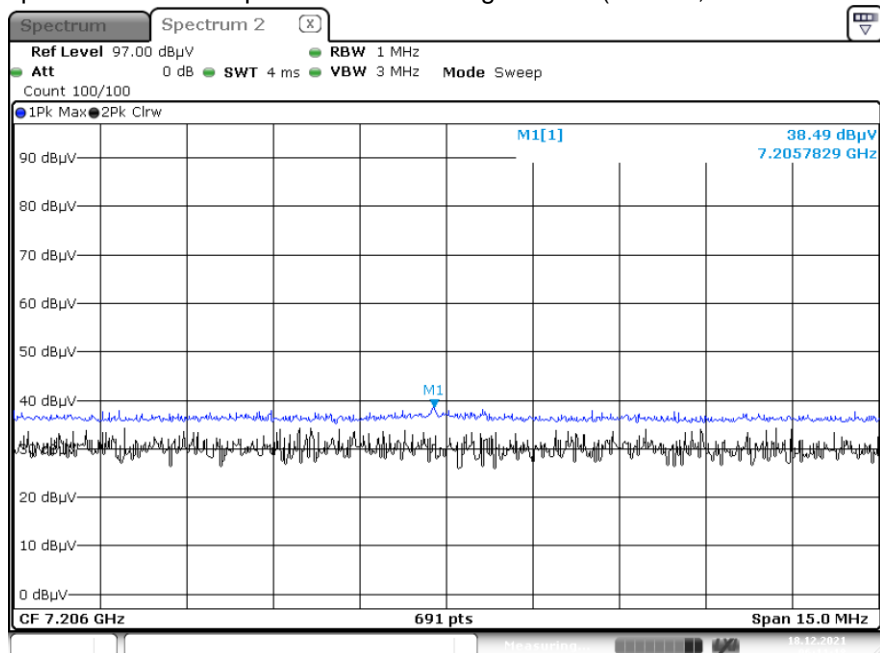


Note:

Plot of worst case are only reported.

RESULT PLOTS(DBS)

WLAN/BT Ant : 802.11n(HT20) ch. 165 & Bluetooth Ch. 0 (GFSK)

Radiated Spurious Emissions plot – Average & Peak Result (3rd Harmonic, Z-H)

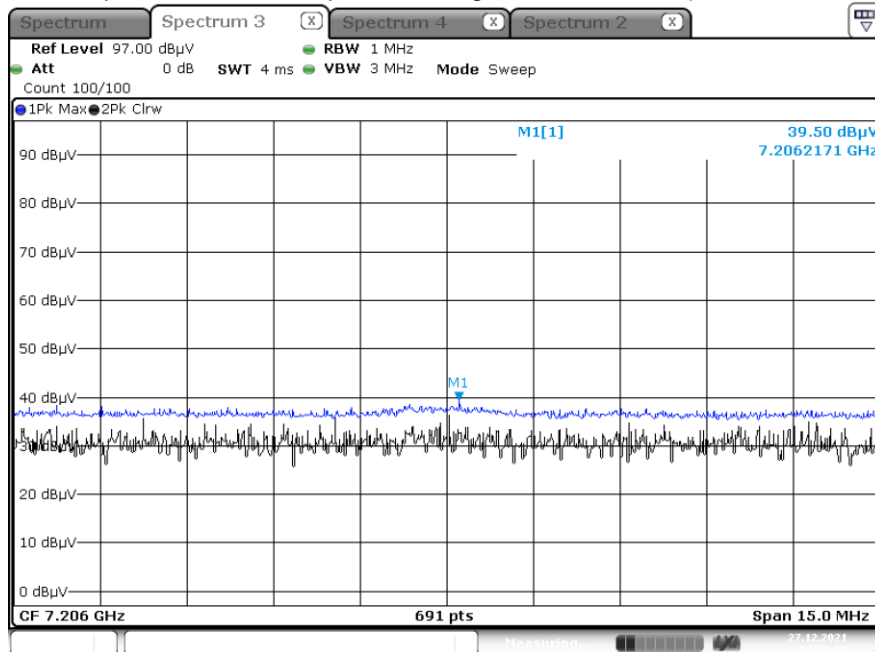

Note:

Plot of worst case are only reported.

10.6.3 RADIATED RESTRICTED BAND EDGES

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Measured Level [dBμV]	A.F+C.L+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	52.44	2.99	H	0	55.43	73.98	18.55	PK
2390.0	52.44	2.99	H	-24.73	30.70	53.98	23.28	AV
2390.0	50.24	2.99	V	0	53.23	73.98	20.75	PK
2390.0	50.24	2.99	V	-24.73	28.50	53.98	25.48	AV
2483.5	54.85	4.20	H	0	59.05	73.98	14.93	PK
2483.5	54.85	4.20	H	-24.73	34.32	53.98	19.66	AV
2483.5	65.94	4.20	V	0	70.14	73.98	3.84	PK
2483.5	65.94	4.20	V	-24.73	45.41	53.98	8.57	AV

Operation Mode	EDR($\pi/4$ DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78



Frequency [MHz]	Measured Level [dBμV]	A.F+C.L+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	50.02	2.99	H	0	53.01	73.98	20.97	PK
2390.0	50.02	2.99	H	-24.73	28.28	53.98	25.70	AV
2390.0	49.39	2.99	V	0	52.38	73.98	21.60	PK
2390.0	49.39	2.99	V	-24.73	27.65	53.98	26.33	AV
2483.5	54.76	4.20	H	0	58.96	73.98	15.02	PK
2483.5	54.76	4.20	H	-24.73	34.23	53.98	19.75	AV
2483.5	65.90	4.20	V	0	70.10	73.98	3.88	PK
2483.5	65.90	4.20	V	-24.73	45.37	53.98	8.61	AV

Operation Mode	EDR(8DPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Measured Level [dBμV]	A.F+C.L+D.F [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	49.90	2.99	H	0	52.89	73.98	21.09	PK
2390.0	49.90	2.99	H	-24.73	28.16	53.98	25.82	AV
2390.0	49.42	2.99	V	0	52.41	73.98	21.57	PK
2390.0	49.42	2.99	V	-24.73	27.68	53.98	26.30	AV
2483.5	54.59	4.20	H	0	58.79	73.98	15.19	PK
2483.5	54.59	4.20	H	-24.73	34.06	53.98	19.92	AV
2483.5	65.78	4.20	V	0	69.98	73.98	4.00	PK
2483.5	65.78	4.20	V	-24.73	45.25	53.98	8.73	AV

RESULT PLOTS

Radiated Restricted Band Edges plot – Average & Peak Result (GFSK, Ch.78, Y-V)

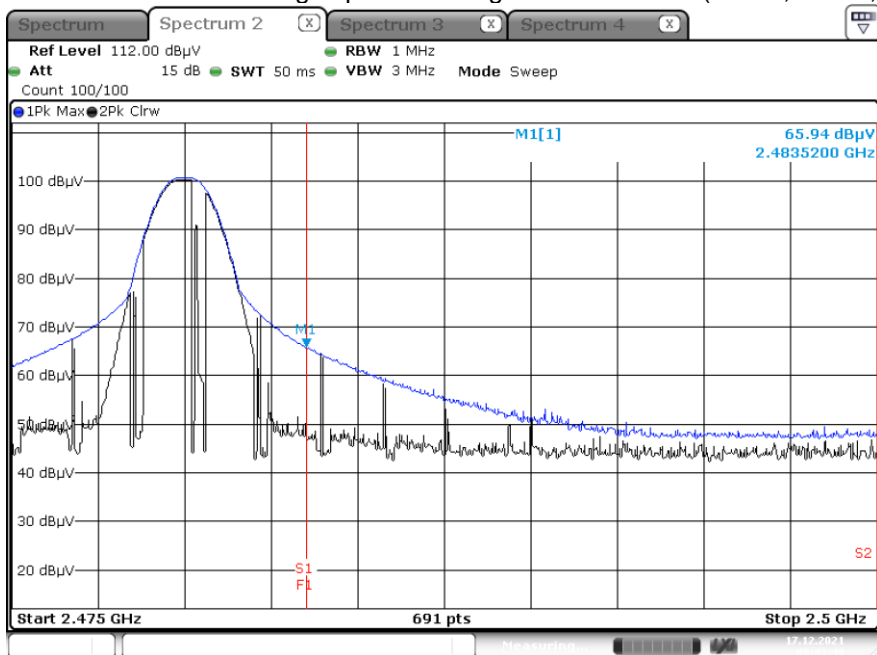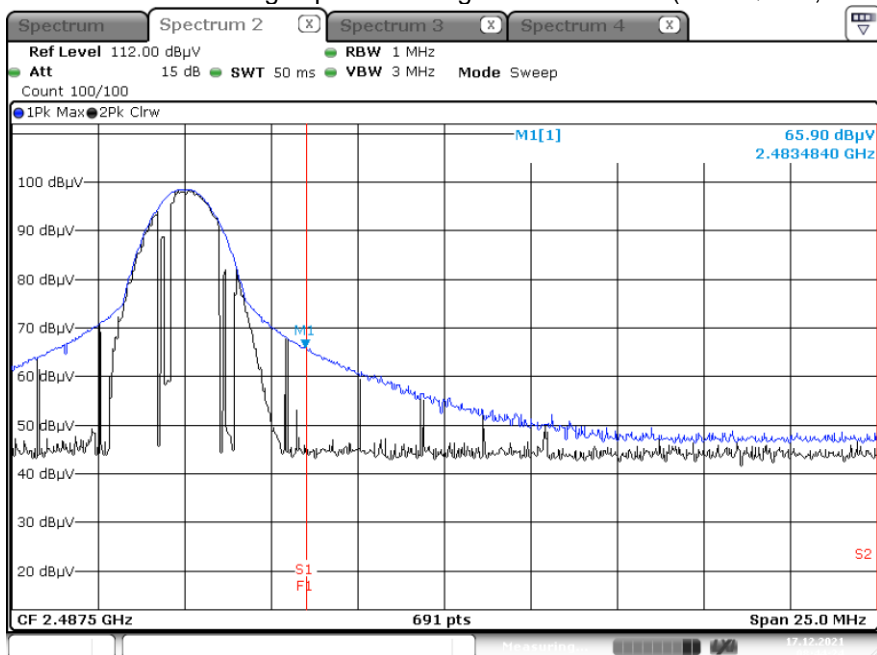
Radiated Restricted Band Edges plot – Average & Peak Result ($\pi/4$ DQPSK, Ch.78, Y-V)


10.7 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

BT MODE_L1


1 / 2

Test Report

Common Information

EUT : SM-A336M/DSN
Manufacturer : SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions : BT MODE_L1

Full Spectrum

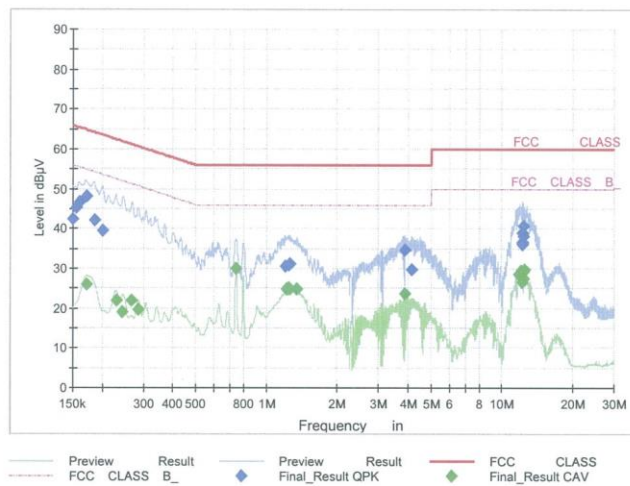

Final Result QPK

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	42.43	66.00	23.57	9.000	L1	OFF	9.6
0.1545	45.17	65.75	20.58	9.000	L1	OFF	9.6
0.1613	46.61	65.40	18.78	9.000	L1	OFF	9.6
0.1725	48.24	64.84	16.60	9.000	L1	OFF	9.6
0.1860	42.26	64.21	21.96	9.000	L1	OFF	9.6
0.2018	39.39	63.54	24.15	9.000	L1	OFF	9.6
1.2043	30.62	56.00	25.38	9.000	L1	OFF	9.7
1.2403	30.73	56.00	25.27	9.000	L1	OFF	9.7
1.2628	31.15	56.00	24.85	9.000	L1	OFF	9.7
3.8705	34.66	56.00	21.34	9.000	L1	OFF	9.8
3.8750	34.74	56.00	21.26	9.000	L1	OFF	9.8
4.1338	29.57	56.00	26.43	9.000	L1	OFF	9.8
12.2113	36.06	60.00	23.94	9.000	L1	OFF	10.1
12.2180	36.30	60.00	23.70	9.000	L1	OFF	10.1
12.2225	36.62	60.00	23.38	9.000	L1	OFF	10.1
12.2293	39.03	60.00	20.97	9.000	L1	OFF	10.1
12.2900	37.99	60.00	22.01	9.000	L1	OFF	10.1
12.2945	40.62	60.00	19.38	9.000	L1	OFF	10.1

2021-12-18

오전 3:58:40

BT MODE_L1

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1725	25.93	54.84	28.91	9.000	L1	OFF	9.6
0.2288	21.81	52.50	30.69	9.000	L1	OFF	9.6
0.2445	19.12	51.94	32.82	9.000	L1	OFF	9.6
0.2670	22.04	51.21	29.17	9.000	L1	OFF	9.6
0.2850	19.55	50.67	31.12	9.000	L1	OFF	9.6
0.7430	29.87	46.00	16.13	9.000	L1	OFF	9.7
1.2178	24.80	46.00	21.20	9.000	L1	OFF	9.7
1.2335	24.80	46.00	21.20	9.000	L1	OFF	9.7
1.2403	24.96	46.00	21.04	9.000	L1	OFF	9.7
1.2538	24.91	46.00	21.09	9.000	L1	OFF	9.7
1.3505	24.82	46.00	21.18	9.000	L1	OFF	9.7
3.8728	23.69	46.00	22.31	9.000	L1	OFF	9.8
11.8445	28.49	50.00	21.51	9.000	L1	OFF	10.1
12.0245	29.41	50.00	20.59	9.000	L1	OFF	10.1
12.2383	26.42	50.00	23.58	9.000	L1	OFF	10.1
12.2990	27.51	50.00	22.49	9.000	L1	OFF	10.1
12.3598	29.10	50.00	20.90	9.000	L1	OFF	10.1
12.4205	29.58	50.00	20.42	9.000	L1	OFF	10.1

2021-12-18

오전 3:58:40

BT 45W MODE_L1


1 / 2

Test Report

Common Information

EUT : SM-A336M/DSN
Manufacturer : SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions : BT 45W MODE_L1

Full Spectrum

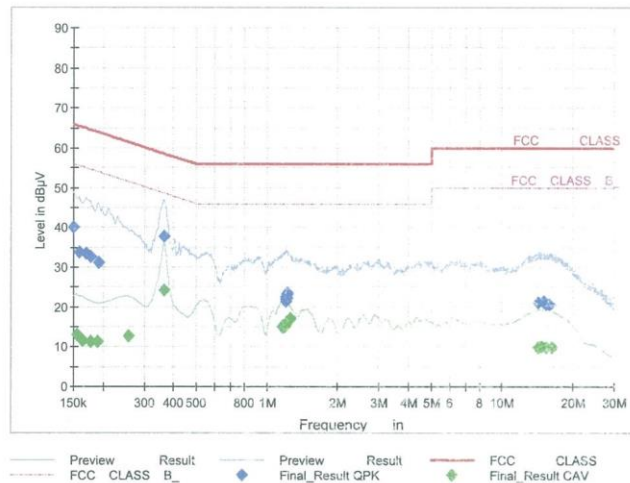

Final Result QPK

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	40.22	66.00	25.78	9.000	L1	OFF	9.6
0.1590	33.77	65.52	31.74	9.000	L1	OFF	9.6
0.1703	33.34	64.95	31.61	9.000	L1	OFF	9.6
0.1770	32.64	64.63	31.99	9.000	L1	OFF	9.6
0.1928	31.18	63.92	32.74	9.000	L1	OFF	9.6
0.3638	37.68	58.64	20.96	9.000	L1	OFF	9.6
1.1953	21.80	56.00	34.20	9.000	L1	OFF	9.7
1.1998	21.47	56.00	34.53	9.000	L1	OFF	9.7
1.2065	22.37	56.00	33.63	9.000	L1	OFF	9.7
1.2133	22.22	56.00	33.78	9.000	L1	OFF	9.7
1.2200	23.26	56.00	32.74	9.000	L1	OFF	9.7
1.2335	23.41	56.00	32.59	9.000	L1	OFF	9.7
14.3443	20.95	60.00	39.05	9.000	L1	OFF	10.2
15.1453	21.35	60.00	38.65	9.000	L1	OFF	10.2
15.1633	20.92	60.00	39.08	9.000	L1	OFF	10.2
15.1813	20.95	60.00	39.05	9.000	L1	OFF	10.2
15.5255	20.82	60.00	39.18	9.000	L1	OFF	10.2
15.8923	20.50	60.00	39.50	9.000	L1	OFF	10.3

2021-12-26

오전 5:59:40

BT 45W MODE_L1

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	12.85	55.75	42.91	9.000	L1	OFF	9.6
0.1635	11.63	55.28	43.65	9.000	L1	OFF	9.6
0.1770	11.18	54.63	43.45	9.000	L1	OFF	9.6
0.1905	11.13	54.02	42.88	9.000	L1	OFF	9.6
0.2580	12.79	51.50	38.70	9.000	L1	OFF	9.6
0.3660	24.10	48.59	24.49	9.000	L1	OFF	9.6
1.1615	15.13	46.00	30.87	9.000	L1	OFF	9.7
1.1728	15.03	46.00	30.97	9.000	L1	OFF	9.7
1.1930	15.14	46.00	30.86	9.000	L1	OFF	9.7
1.2065	15.71	46.00	30.29	9.000	L1	OFF	9.7
1.2178	16.29	46.00	29.71	9.000	L1	OFF	9.7
1.2538	17.00	46.00	29.00	9.000	L1	OFF	9.7
14.2340	9.80	50.00	40.20	9.000	L1	OFF	10.2
14.6953	10.18	50.00	39.82	9.000	L1	OFF	10.2
14.7583	10.09	50.00	39.91	9.000	L1	OFF	10.2
15.4693	9.94	50.00	40.06	9.000	L1	OFF	10.2
15.5075	9.71	50.00	40.29	9.000	L1	OFF	10.2
16.3985	9.68	50.00	40.32	9.000	L1	OFF	10.3

2021-12-26

오전 5:59:40

Conducted Emissions (Line 2)

BT MODE_N


1 / 2

Test Report

Common Information

EUT : SM-A336M/DSN
Manufacturer : SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions : BT MODE_N

Full Spectrum

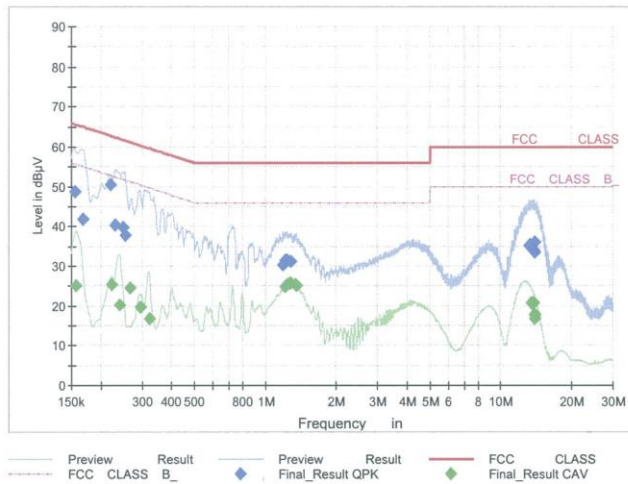

Final Result QPK

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	48.89	65.75	16.86	9.000	N	OFF	9.6
0.1680	41.70	65.06	23.36	9.000	N	OFF	9.6
0.2198	50.34	62.83	12.49	9.000	N	OFF	9.6
0.2310	40.34	62.41	22.07	9.000	N	OFF	9.6
0.2490	39.90	61.79	21.89	9.000	N	OFF	9.6
0.2535	37.73	61.64	23.91	9.000	N	OFF	9.6
1.1908	30.21	56.00	25.79	9.000	N	OFF	9.7
1.2110	30.89	56.00	25.11	9.000	N	OFF	9.7
1.2155	31.52	56.00	24.48	9.000	N	OFF	9.7
1.2268	31.50	56.00	24.50	9.000	N	OFF	9.7
1.2403	31.47	56.00	24.53	9.000	N	OFF	9.7
1.2920	31.12	56.00	24.88	9.000	N	OFF	9.7
13.2148	35.09	60.00	24.91	9.000	N	OFF	10.2
13.2958	35.47	60.00	24.53	9.000	N	OFF	10.2
13.6018	34.23	60.00	25.77	9.000	N	OFF	10.2
13.7458	33.96	60.00	26.04	9.000	N	OFF	10.2
13.8830	35.97	60.00	24.03	9.000	N	OFF	10.2
14.0338	33.51	60.00	26.49	9.000	N	OFF	10.2

2021-12-18

오전 3:53:26

BT MODE_N

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1568	25.23	55.63	30.41	9.000	N	OFF	9.6
0.2220	25.46	52.74	27.28	9.000	N	OFF	9.6
0.2400	20.32	52.10	31.77	9.000	N	OFF	9.6
0.2648	24.62	51.28	26.66	9.000	N	OFF	9.6
0.2940	19.62	50.41	30.79	9.000	N	OFF	9.6
0.3210	16.80	49.68	32.89	9.000	N	OFF	9.6
1.2178	24.93	46.00	21.07	9.000	N	OFF	9.7
1.2403	25.27	46.00	20.73	9.000	N	OFF	9.7
1.2650	25.80	46.00	20.20	9.000	N	OFF	9.7
1.2898	25.75	46.00	20.25	9.000	N	OFF	9.7
1.3505	25.36	46.00	20.64	9.000	N	OFF	9.7
1.3618	25.03	46.00	20.97	9.000	N	OFF	9.7
13.4983	20.70	50.00	29.30	9.000	N	OFF	10.2
13.6018	20.50	50.00	29.50	9.000	N	OFF	10.2
13.7323	20.70	50.00	29.30	9.000	N	OFF	10.2
13.8988	16.77	50.00	33.23	9.000	N	OFF	10.2
13.9190	17.99	50.00	32.01	9.000	N	OFF	10.2
13.9550	17.61	50.00	32.39	9.000	N	OFF	10.2

2021-12-18

오전 3:53:26

BT 45W MODE_N


1 / 2

Test Report

Common Information

EUT : SM-A336M/DSN
Manufacturer : SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions : BT 45W MODE_N

Full Spectrum

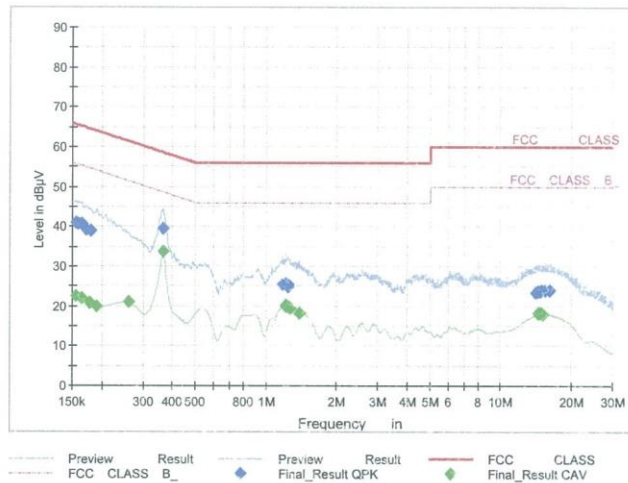

Final Result QPK

Frequency (MHz)	QuasiPeak (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	40.95	65.75	24.80	9.000	N	OFF	9.6
0.1590	40.61	65.52	24.90	9.000	N	OFF	9.6
0.1635	40.58	65.28	24.71	9.000	N	OFF	9.6
0.1725	39.34	64.84	25.50	9.000	N	OFF	9.6
0.1793	39.03	64.52	25.49	9.000	N	OFF	9.6
0.3638	39.60	58.64	19.04	9.000	N	OFF	9.6
1.1795	25.25	56.00	30.75	9.000	N	OFF	9.7
1.2110	25.26	56.00	30.74	9.000	N	OFF	9.7
1.2178	25.62	56.00	30.38	9.000	N	OFF	9.7
1.2335	25.64	56.00	30.36	9.000	N	OFF	9.7
1.2380	25.29	56.00	30.71	9.000	N	OFF	9.7
1.2448	24.90	56.00	31.10	9.000	N	OFF	9.7
14.0450	23.47	60.00	36.53	9.000	N	OFF	10.2
14.4118	23.77	60.00	36.23	9.000	N	OFF	10.3
14.7380	23.78	60.00	36.22	9.000	N	OFF	10.3
14.9585	23.94	60.00	36.06	9.000	N	OFF	10.3
15.4198	23.83	60.00	36.17	9.000	N	OFF	10.3
16.0835	23.89	60.00	36.11	9.000	N	OFF	10.3

2021-12-26

오전 5:54:02

BT 45W MODE_N

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	22.55	55.75	33.21	9.000	N	OFF	9.6
0.1635	21.85	55.28	33.44	9.000	N	OFF	9.6
0.1770	20.88	54.63	33.75	9.000	N	OFF	9.6
0.1905	19.95	54.02	34.06	9.000	N	OFF	9.6
0.2603	20.93	51.42	30.50	9.000	N	OFF	9.6
0.3660	33.66	48.59	14.93	9.000	N	OFF	9.6
1.2088	20.04	46.00	25.96	9.000	N	OFF	9.7
1.2178	20.16	46.00	25.84	9.000	N	OFF	9.7
1.2313	19.98	46.00	26.02	9.000	N	OFF	9.7
1.2403	19.87	46.00	26.13	9.000	N	OFF	9.7
1.2650	19.44	46.00	26.56	9.000	N	OFF	9.7
1.3865	18.27	46.00	27.73	9.000	N	OFF	9.7
14.3780	18.08	50.00	31.92	9.000	N	OFF	10.3
14.4973	18.14	50.00	31.86	9.000	N	OFF	10.3
14.5558	18.10	50.00	31.90	9.000	N	OFF	10.3
14.7200	18.05	50.00	31.95	9.000	N	OFF	10.3
14.9968	18.11	50.00	31.89	9.000	N	OFF	10.3
15.1745	17.95	50.00	32.05	9.000	N	OFF	10.3

2021-12-26

오전 5:54:02

11. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/17/2022	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/15/2022	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	03/09/2022	Annual
Power Meter	N1911A	Agilent	MY45100523	04/08/2022	Annual
Power Sensor	N1921A	Agilent	MY57820067	04/08/2022	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/09/2022	Annual
DC Power Supply	E3632A	HP	MY50360067	02/26/2022	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	07560	06/18/2022	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	08285	06/28/2022	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/08/2022	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	TNM system	TM19050002	N/A	N/A
Loop Antenna	1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	09/04/2022	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	02296	05/19/2022	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/14/2022	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/06/2022	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/24/2022	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/24/2022	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/23/2022	Annual
HPF(3~18GHz) + LNA1(1~18GHz)	FMSR-05B	TNM system	F6	01/20/2022	Annual
ATT(10dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/20/2022	Annual
ATT(3dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/20/2022	Annual
LNA1(1~18GHz)	FMSR -05B	TNM system	25540	01/20/2022	Annual
HPF(7~18GHz) + LNA2(6~18GHz)	FMSR -05B	TNM system	28550	01/20/2022	Annual
Thru(30MHz ~ 18GHz)	FMSR -05B	TNM system	None	01/20/2022	Annual

Note:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2201-FC044-P