

PART 24 MEASUREMENT REPORT

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea

Date of Testing:
 11/6/2023 - 12/27/2023
Test Report Issue Date:
 1/3/2024
Test Site/Location:
 Element lab., Columbia, MD, USA
Test Report Serial No.:
 1M2310260110-03.A3L

FCC ID:	A3LSMA356E
Applicant Name:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-A356E/DS
Additional Model(s): SM-A356E
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: 24
Test Procedure(s): ANSI C63.26-2015, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez
 Executive Vice President



FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 1 of 67

TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	Software and Firmware	5
2.5	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	11
7.1	Summary.....	11
7.2	Conducted Output Power Data	12
7.3	Occupied Bandwidth	14
7.4	Spurious and Harmonic Emissions at Antenna Terminal	20
7.5	Band Edge Emissions at Antenna Terminal	30
7.6	Peak-Average Ratio	42
7.7	Radiated Power (EIRP).....	48
7.8	Radiated Spurious Emissions Measurements.....	52
7.9	Frequency Stability / Temperature Variation	63
8.0	CONCLUSION.....	67

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 2 of 67

PART 24 MEASUREMENT REPORT

Antenna-1						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	N/A	GMSK	1850.2 - 1909.8	0.671	28.27	245KGXW
EDGE	N/A	8-PSK	1850.2 - 1909.8	0.273	24.36	247KG7W
TDMA	N/A	Spread Spectrum	1852.4 - 1907.6	0.181	22.59	4M17F9W
LTE Band 25/2	20 MHz	QPSK	1860 - 1905	0.168	22.25	18M0G7D
		16QAM	1860 - 1905	0.145	21.60	18M0W7D
	15 MHz	QPSK	1857.5 - 1907.5	0.164	22.16	13M5G7D
		16QAM	1857.5 - 1907.5	0.141	21.48	13M5W7D
	10 MHz	QPSK	1855 - 1910	0.161	22.07	9M05G7D
		16QAM	1855 - 1910	0.153	21.84	9M02W7D
	5 MHz	QPSK	1852.5 - 1912.5	0.168	22.24	4M55G7D
		16QAM	1852.5 - 1912.5	0.145	21.60	4M54W7D
	3 MHz	QPSK	1851.5 - 1913.5	0.162	22.08	2M72G7D
		16QAM	1851.5 - 1913.5	0.146	21.64	2M73W7D
	1.4 MHz	QPSK	1850.7 - 1914.3	0.169	22.27	1M10G7D
		16QAM	1850.7 - 1914.3	0.152	21.81	1M10W7D

Antenna-2						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 25/2	20 MHz	QPSK	1860 - 1905	0.090	19.55	18M0G7D
		16QAM	1860 - 1905	0.077	18.84	18M0W7D
	15 MHz	QPSK	1857.5 - 1907.5	0.094	19.75	13M5G7D
		16QAM	1857.5 - 1907.5	0.077	18.86	13M5W7D
	10 MHz	QPSK	1855 - 1910	0.094	19.72	9M07G7D
		16QAM	1855 - 1910	0.075	18.72	9M04W7D
	5 MHz	QPSK	1852.5 - 1912.5	0.095	19.77	4M53G7D
		16QAM	1852.5 - 1912.5	0.080	19.06	4M53W7D
	3 MHz	QPSK	1851.5 - 1913.5	0.094	19.71	2M72G7D
		16QAM	1851.5 - 1913.5	0.074	18.72	2M72W7D
	1.4 MHz	QPSK	1850.7 - 1914.3	0.093	19.68	1M10G7D
		16QAM	1850.7 - 1914.3	0.078	18.92	1M10W7D

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 3 of 67

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 4 of 67

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMA356E**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

Test Device Serial No.: 1111M, 184M, 1193M, 1025M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC

Band	Ant1	Ant2
GSM/GPRS	Ant A	N/A
WCDMA	Ant A	N/A
B25/2	Ant B	Ant F

Table 2-1. Antenna Naming Convention

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version A356BXXU0AWJ3 installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 5 of 67

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi];$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 6 of 67

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 7 of 67

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	AP2-001
-	ETS-001	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	ETS-001
-	ETS-002	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	ETS-002
-	MD 1M 18-40	EMC Cable and Switch System	1/11/2023	Annual	1/11/2024	MD 1M 18-40
-	WL40-1	Conducted Cable Set (40GHz)	1/12/2023	Annual	1/12/2024	WL40-1
-	WL25-1	Conducted Cable Set (25GHz)	1/12/2023	Annual	1/12/2024	WL25-1
Anritsu	MA24406A	Microwave Peak Power Sensor	9/7/2023	Annual	9/7/2024	11240
Emco	3115	Horn Antenna (1-18GHz)	8/8/2022	Biennial	8/8/2024	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	7/5/2022	Biennial	7/5/2024	9203-2178
Pastermack	MNLC-2	Line Conducted Emission Cable (NM)	1/11/2023	Annual	1/11/2024	NMLC-2
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	8/11/2022	Biennial	8/11/2024	114451
ETS Lindgren	3116C	1-18 GHz DRG Horn Antenna	2/27/2023	Biennial	2/27/2024	00218893
ETS Lindgren	3115	Double Ridged Guide Horn	4/12/2022	Biennial	4/12/2024	82333
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	4/13/2022	Biennial	4/13/2025	121034
Keysight Technologies	N9020A	MXA Signal Analyzer	3/15/2023	Annual	3/15/2024	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	3/15/2023	Annual	3/15/2024	MY52350166
Keysight Technologies	N9030A	PXA Signal Analyzer	1/31/2023	Annual	1/31/2024	MY55410501
Keysight Technologies	N9030B	PXA Signal Analyzer, Multi-touch	9/7/2023	Annual	9/7/2024	MY57141001
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	9/25/2023	Annual	9/25/2024	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/11/2023	Annual	9/11/2024	100348
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	3/1/2023	Annual	3/1/2024	101716
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	1/13/2023	Annual	1/13/2024	103200
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	2/21/2023	Biennial	2/21/2025	A051107
Sunol	JB6	LB6 Antenna	3/2/2023	Biennial	3/2/2025	A082816

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 8 of 67

6.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz
 G = Phase Modulation
 X = Cases not otherwise covered
 W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz
 F = Frequency Modulation
 9 = Composite Digital Info
 W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Data transmission, telemetry, telecommand

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 9 of 67



Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 10 of 67

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMA356E
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM/GPRS/EDGE/WCDMA/LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power *	2.1046(a), 2.1046(c)	N/A	PASS	See RF Exposure Report
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	> 43 + 10log10(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Peak-to-Average Ratio	24.232(d)	≤ 13 dB	PASS	Section 7.5
	Frequency Stability	2.1055, 24.235	Fundamental emissions stay within authorized frequency block **Carrier frequency shall not depart from the reference frequency in excess of ±2.5 ppm	PASS	Section 7.8
RADIATED	Equivalent Isotropic Radiated Power	24.232(c)	< 2 Watts max. EIRP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 24.238(a)	≥ 43 + 10 log (P[Watts]) dB of attenuation below transmitter power **Spurious emissions from receivers shall not exceed the limits detailed in RSS-Gen(7.3)	PASS	Section 7.7

* The only transmitter output conducted powers included in this report are those where the Pmax value, per the tune-up document, is higher than any of the DSI power levels. For the remaining conducted power measurements, see the **RF Exposure Report**.

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.2.2.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 11 of 67

7.2 Conducted Output Power Data

Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Settings

1. Detector = RMS
2. Trace mode = trace average for continuous emissions, max hold for pulse emissions
3. Sweep time = auto couple
4. The trace was allowed to stabilize
5. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

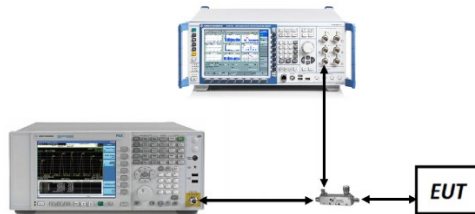


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
2. All other conducted power measurements are contained in the RF exposure report for this filing.
3. Conducted power was found to reduce for the higher order QAM modulations when compared to 16QAM. Due to this trend, only the worst-case QAM (16QAM) powers are included in this section.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 12 of 67

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
20 MHz	QPSK	26140	1860.0	1 / 0	23.26
		26365	1882.5	1 / 0	23.00
		26590	1905.0	1 / 0	22.98
	16-QAM	26140	1860.0	1 / 0	22.40
15 MHz	QPSK	26115	1857.5	1 / 37	23.46
		26365	1882.5	1 / 37	23.10
		26615	1907.5	1 / 37	23.10
	16-QAM	26115	1857.5	1 / 37	22.42
10 MHz	QPSK	26090	1855.0	1 / 0	23.43
		26365	1882.5	1 / 49	23.17
		26640	1910.0	1 / 25	22.63
	16-QAM	26090	1855.0	1 / 0	22.28
5 MHz	QPSK	26065	1852.5	1 / 12	23.48
		26365	1882.5	1 / 12	23.07
		26665	1912.5	1 / 0	23.23
	16-QAM	26065	1852.5	1 / 12	22.62
3 MHz	QPSK	26055	1851.5	1 / 14	23.42
		26365	1882.5	1 / 0	23.06
		26675	1913.5	1 / 0	22.76
	16-QAM	26055	1851.5	1 / 14	22.28
1.4 MHz	QPSK	26047	1850.7	1 / 0	23.39
		26365	1882.5	1 / 5	23.10
		26683	1914.3	1 / 0	21.45
	16-QAM	26047	1850.7	1 / 0	22.48

Table 7-2. Conducted Max Power - LTE Band B25/2 - Ant2

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 13 of 67

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

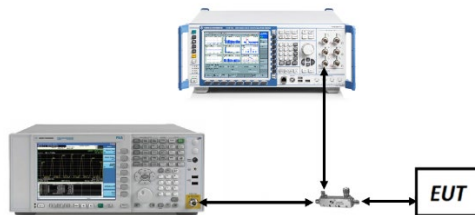


Figure 7-2. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 14 of 67

Mode	Bandwidth	Modulation	OBW [MHz]
GSM-PCS	N/A	GMSK	0.245
GSM-PCS EDGE		8-PSK	0.247
WCDMA-PCS		Spread Spectrum	4.175
LTE-B25-2	20MHz	QPSK	18.00
		16QAM	18.00
	15MHz	QPSK	13.52
		16QAM	13.51
	10MHz	QPSK	9.05
		16QAM	9.02
	5MHz	QPSK	4.55
		16QAM	4.54
	3MHz	QPSK	2.72
		16QAM	2.73
	1.4MHz	QPSK	1.10
		16QAM	1.10


Table 7-3. Occupied Bandwidth Summary – Antenna 1

Mode	Bandwidth	Modulation	OBW [MHz]
LTE-B25-2	20MHz	QPSK	17.98
		16QAM	17.97
	15MHz	QPSK	13.52
		16QAM	13.50
	10MHz	QPSK	9.07
		16QAM	9.04
	5MHz	QPSK	4.53
		16QAM	4.53
	3MHz	QPSK	2.72
		16QAM	2.72
	1.4MHz	QPSK	1.10
		16QAM	1.10

Table 7-4. Occupied Bandwidth Summary – Antenna 2

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 15 of 67

GSM/GPRS PCS – Ant1

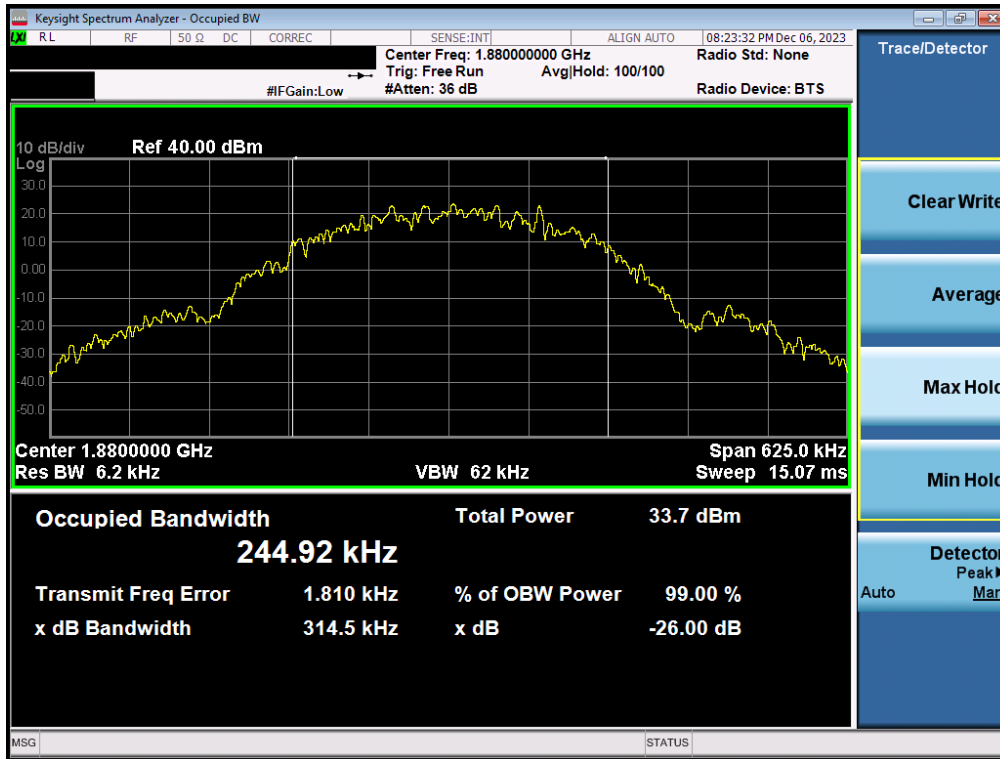


Plot 7-1. Occupied Bandwidth Plot (GPRS, Ch. 661 - Ant1)



Plot 7-2. Occupied Bandwidth Plot (EDGE, Ch. 661 - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 16 of 67


WCDMA PCS – Ant1

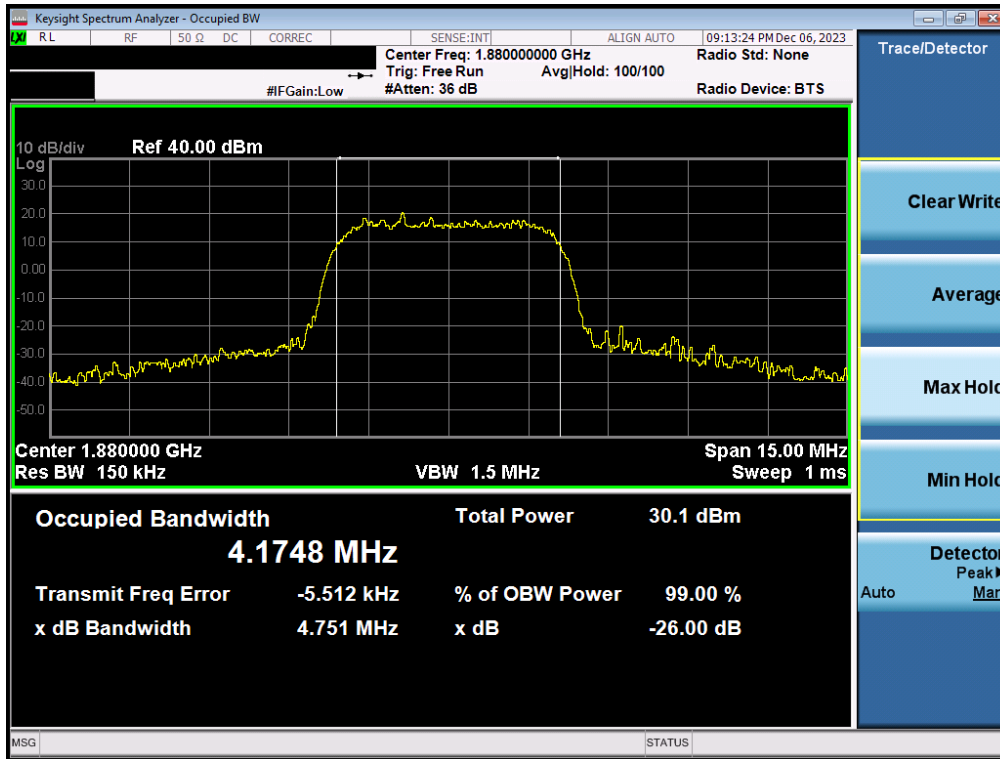


Plot 7-3. Occupied Bandwidth Plot (WCDMA, Ch. 9400 - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 17 of 67

LTE Band 25/2 – Ant1

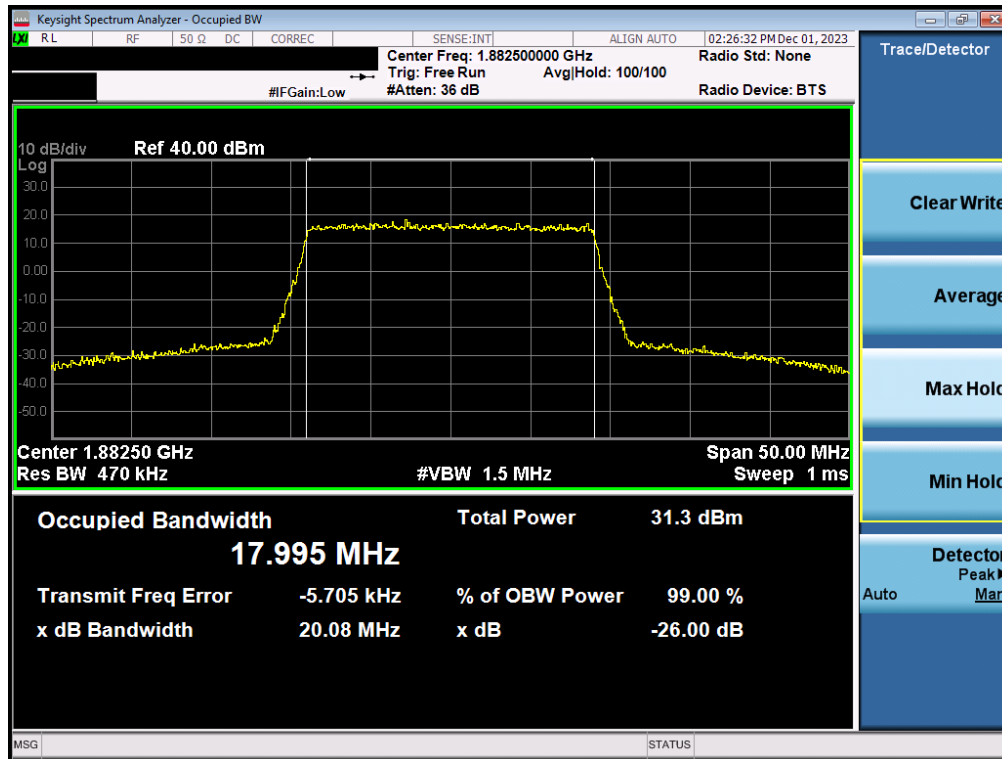


Plot 7-4. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz QPSK - Full RB - Ant1)

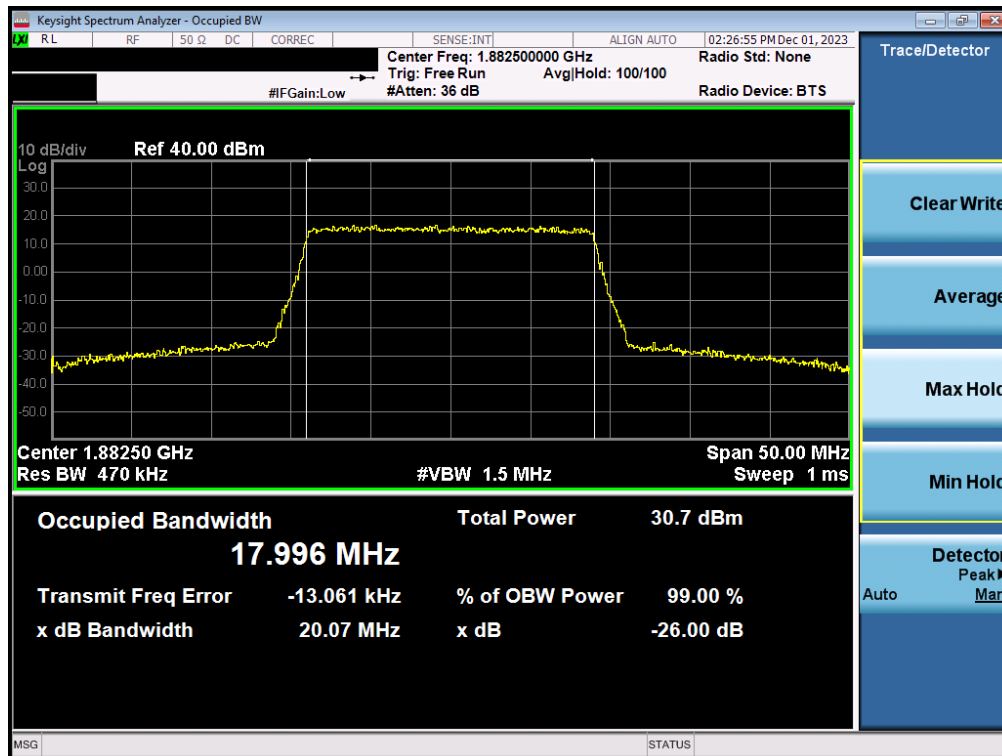


Plot 7-5. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 16-QAM - Full RB - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 18 of 67

LTE Band 25/2 – Ant2

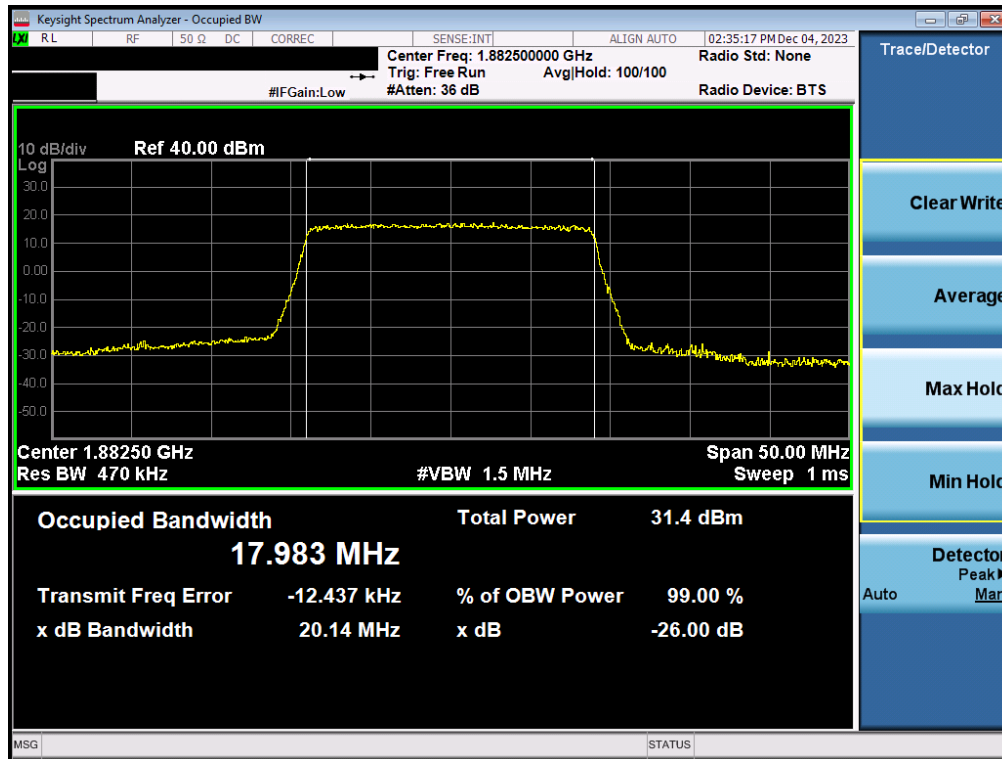

Plot 7-6. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz QPSK - Full RB - Ant2)

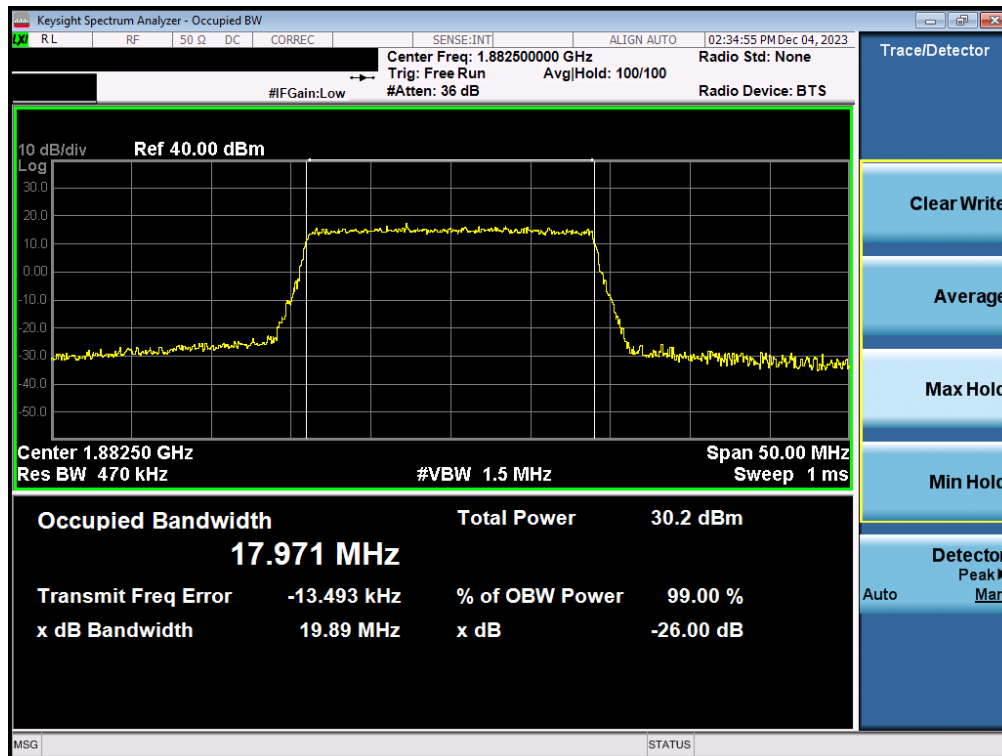

Plot 7-7. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 16-QAM - Full RB - Ant2)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 19 of 67

7.4 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.4

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

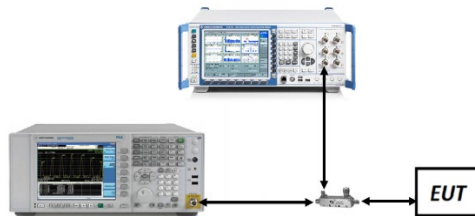


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

1. Per Part 24 and RSS-133, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 20 of 67

Mode	Bandwidth	Channel	Range [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
GSM-PCS	250kHz	Low	30.0 - 1845.0	-45.35	-13	-32.35
		Low	1910.0 - 10000.0	-39.37	-13	-26.37
		Low	10000.0 - 20000.0	-55.59	-13	-42.59
		Mid	30.0 - 1850.0	-45.28	-13	-32.28
		Mid	1910.0 - 10000.0	-39.05	-13	-26.05
		Mid	10000.0 - 20000.0	-55.15	-13	-42.15
		High	30.0 - 1850.0	-45.35	-13	-32.35
		High	1915.0 - 10000.0	-39.25	-13	-26.25
		High	10000.0 - 20000.0	-55.62	-13	-42.62
WCDMA-PCS	5MHz	Low	30.0 - 1845.0	-38.94	-13	-25.94
		Low	1910.0 - 10000.0	-47.40	-13	-34.40
		Low	10000.0 - 20000.0	-62.96	-13	-49.96
		Mid	30.0 - 1850.0	-53.72	-13	-40.72
		Mid	1910.0 - 10000.0	-47.46	-13	-34.46
		Mid	10000.0 - 20000.0	-62.79	-13	-49.79
		High	30.0 - 1850.0	-53.63	-13	-40.63
		High	1915.0 - 10000.0	-37.19	-13	-24.18
		High	10000.0 - 20000.0	-62.83	-13	-49.83
LTE-B25-2	20MHz	Low	30.0 - 1849.0	-38.82	-13	-25.82
		Low	1915.0 - 10000.0	-47.19	-13	-34.19
		Low	10000.0 - 20000.0	-63.06	-13	-50.06
		Mid	30.0 - 1850.0	-53.31	-13	-40.31
		Mid	1915.0 - 10000.0	-47.00	-13	-34.00
		Mid	10000.0 - 20000.0	-62.86	-13	-49.86
		High	30.0 - 1850.0	-53.99	-13	-40.99
		High	1916.0 - 10000.0	-41.03	-13	-28.03
		High	10000.0 - 20000.0	-62.93	-13	-49.93


Table 7-5. Spurious Emissions Test Summary – Antenna 1

Mode	Bandwidth	Channel	Range [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]
LTE-B25-2	20MHz	Low	30.0 - 1849.0	-38.99	-13	-25.99
		Low	1915.0 - 10000.0	-47.06	-13	-34.06
		Low	10000.0 - 20000.0	-62.65	-13	-49.64
		Mid	30.0 - 1850.0	-52.62	-13	-39.62
		Mid	1915.0 - 10000.0	-46.96	-13	-33.96
		Mid	10000.0 - 20000.0	-62.69	-13	-49.69
		High	30.0 - 1850.0	-53.78	-13	-40.78
		High	1916.0 - 10000.0	-41.21	-13	-28.21
		High	10000.0 - 20000.0	-62.64	-13	-49.64


Table 7-6. Spurious Emissions Test Summary – Antenna 2

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 21 of 67

GSM/GPRS PCS – Ant1

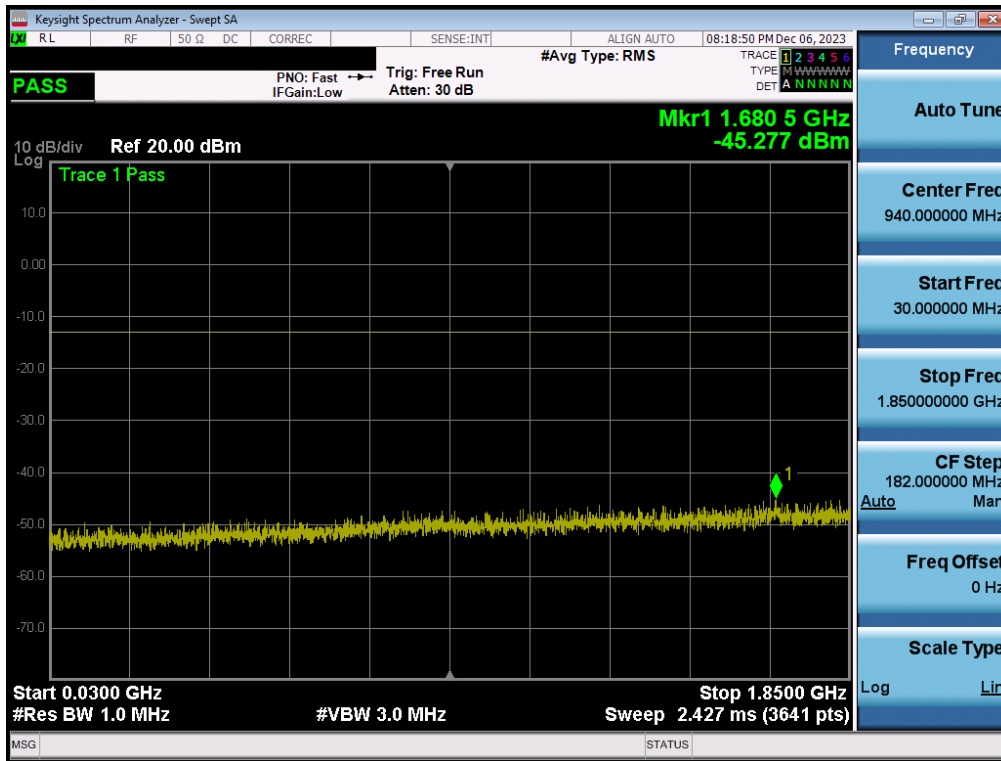


Plot 7-8. Conducted Spurious Plot (GPRS Ch. 661 - Ant1)

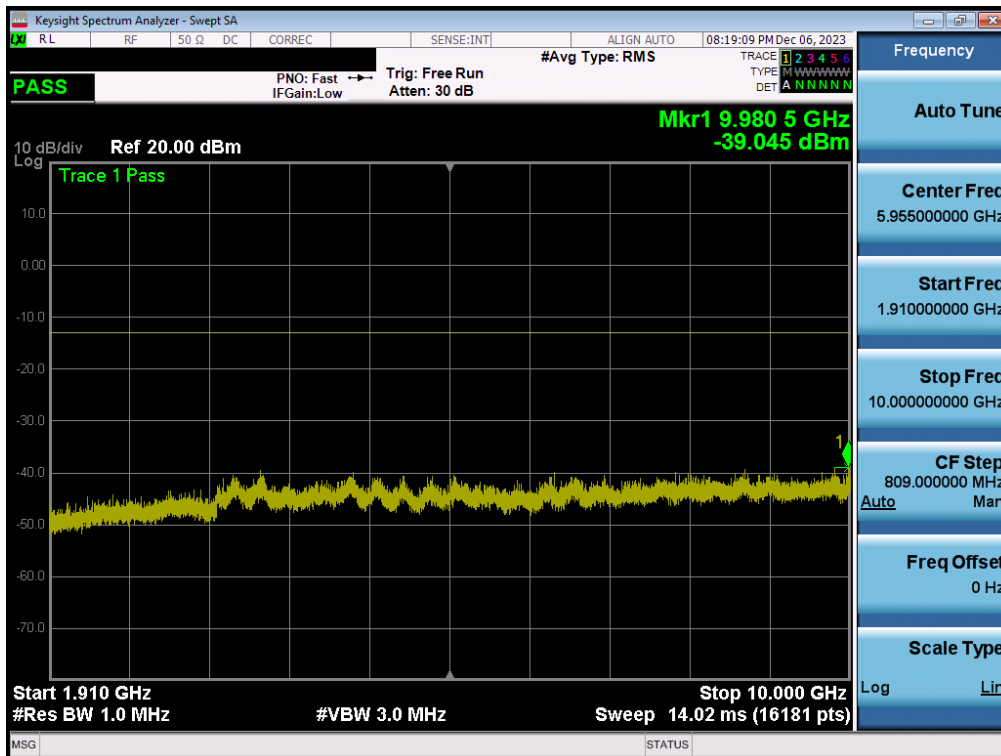

Plot 7-9. Conducted Spurious Plot (GPRS Ch. 661 - Ant1)


FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 22 of 67

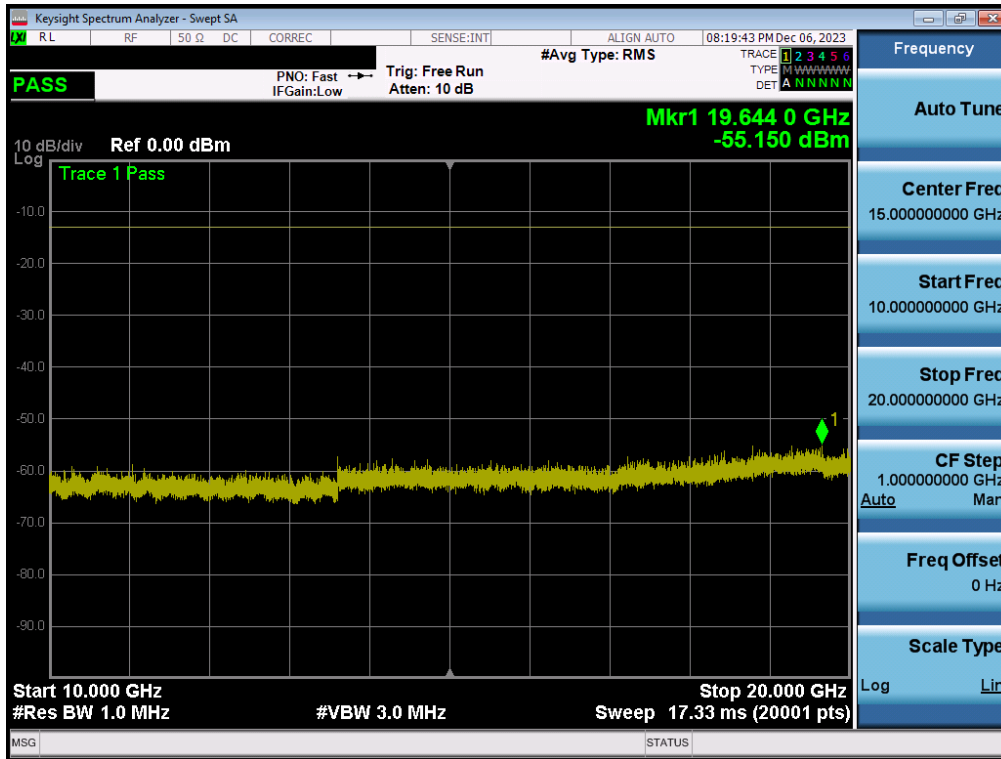


Plot 7-10. Conducted Spurious Plot (GPRS Ch. 661 - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 23 of 67

WCDMA PCS – Ant1

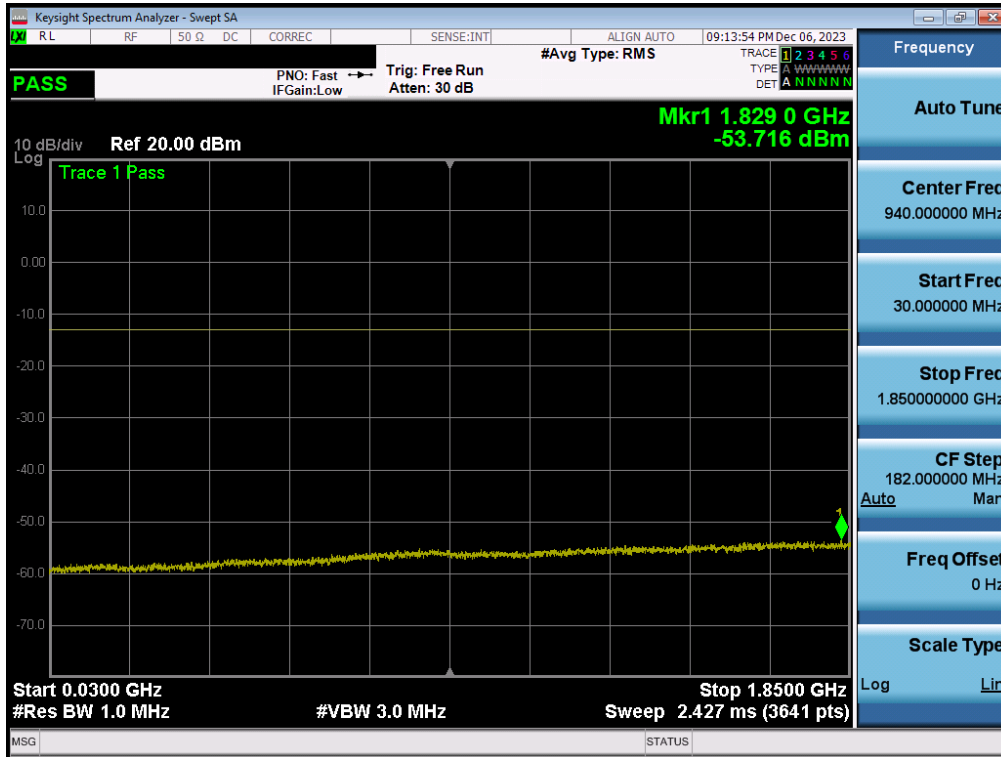


Plot 7-11. Conducted Spurious Plot (WCDMA Ch. 9400 - Ant1)

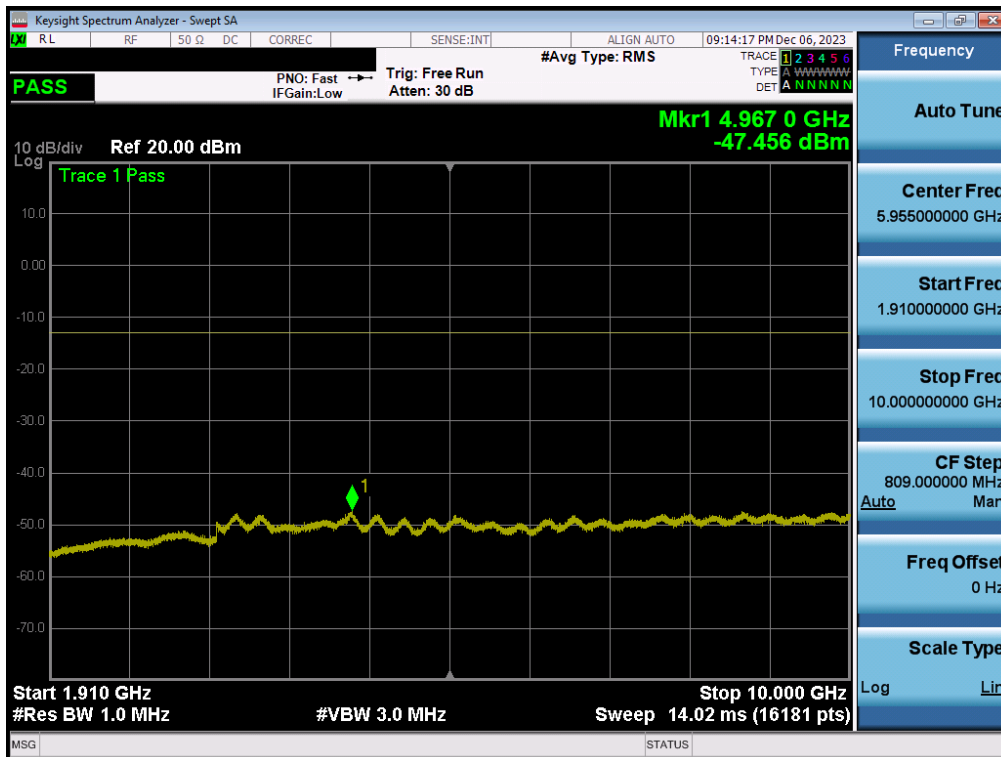

Plot 7-12. Conducted Spurious Plot (WCDMA Ch. 9400 - Ant1)


FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 24 of 67

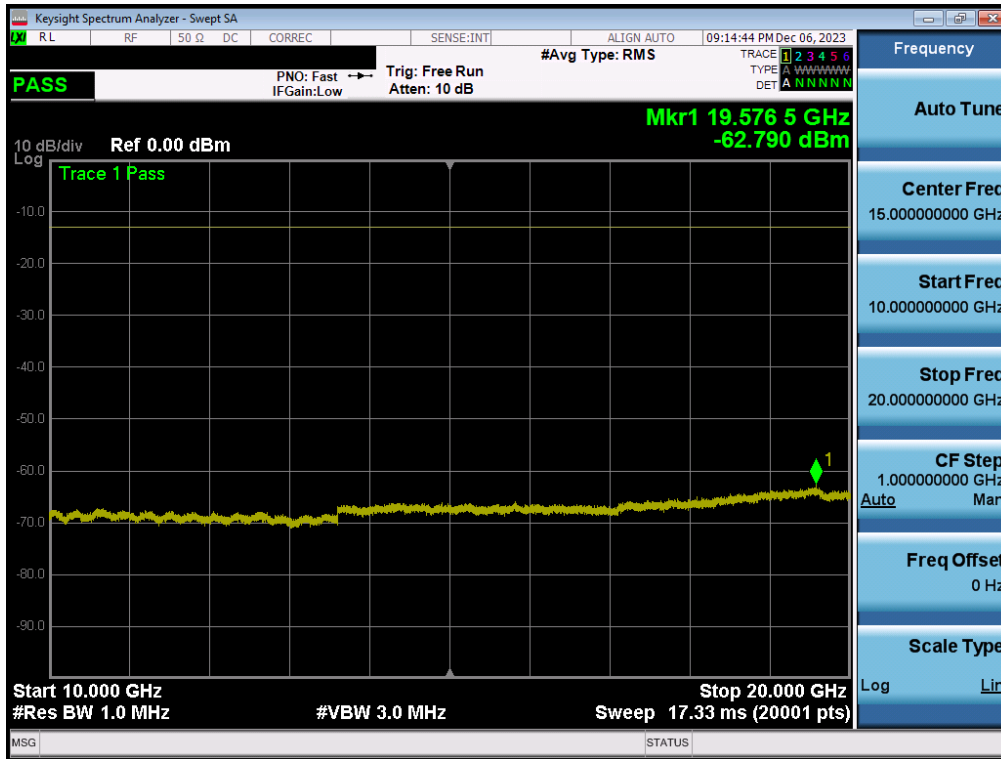


Plot 7-13. Conducted Spurious Plot (WCDMA Ch. 9400 - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 25 of 67

LTE Band 25/2 – Ant1

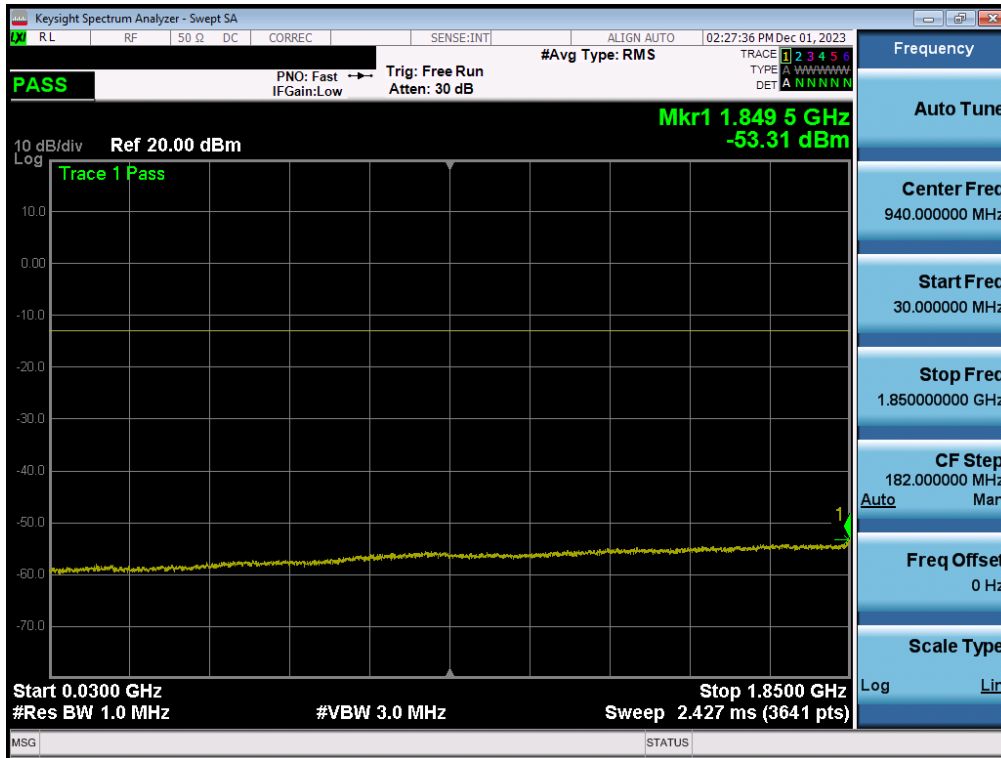


Plot 7-14. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Mid Channel - Ant1)

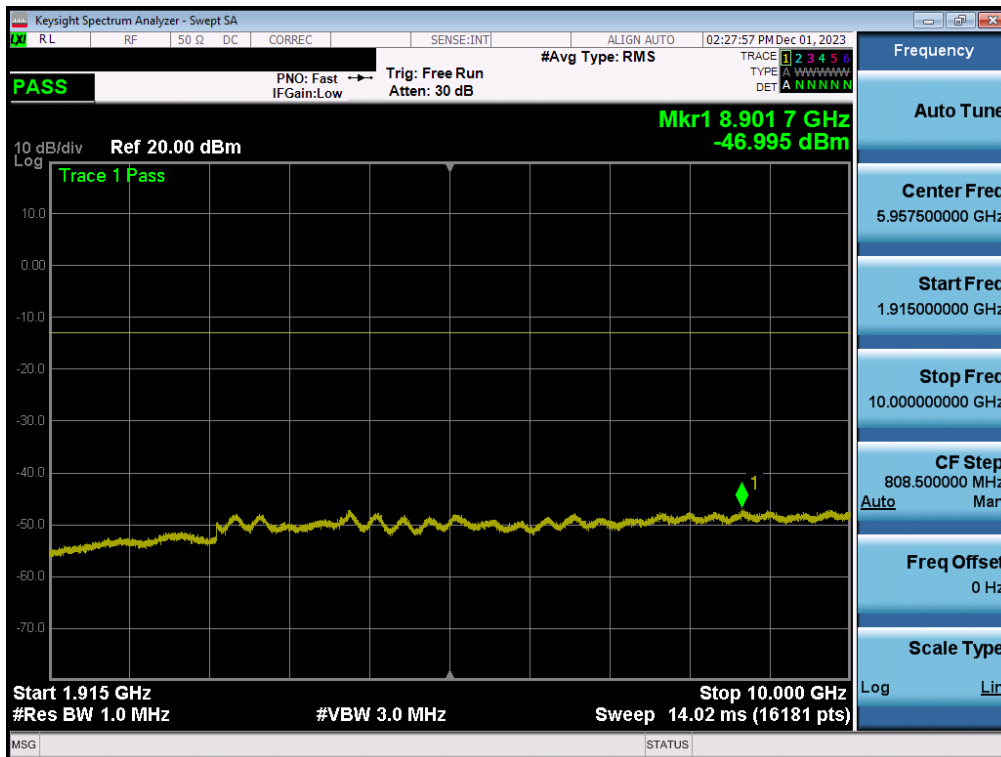

Plot 7-15. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Mid Channel - Ant1)


FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 26 of 67

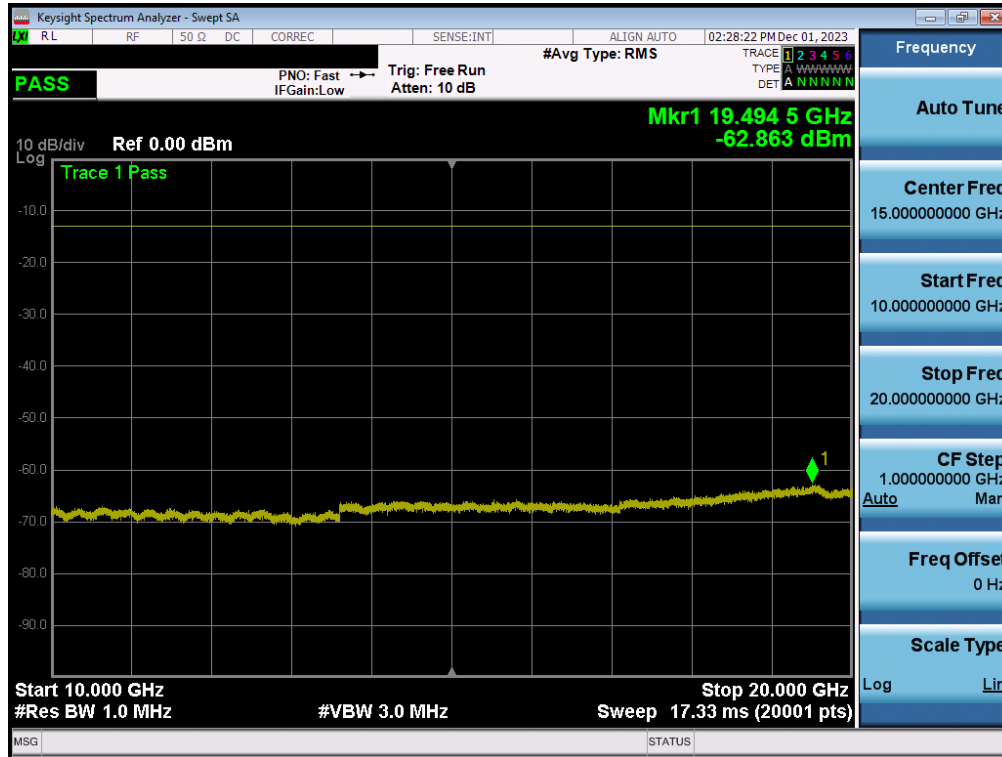


Plot 7-16. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Mid Channel - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 27 of 67

LTE Band 25/2 – Ant2

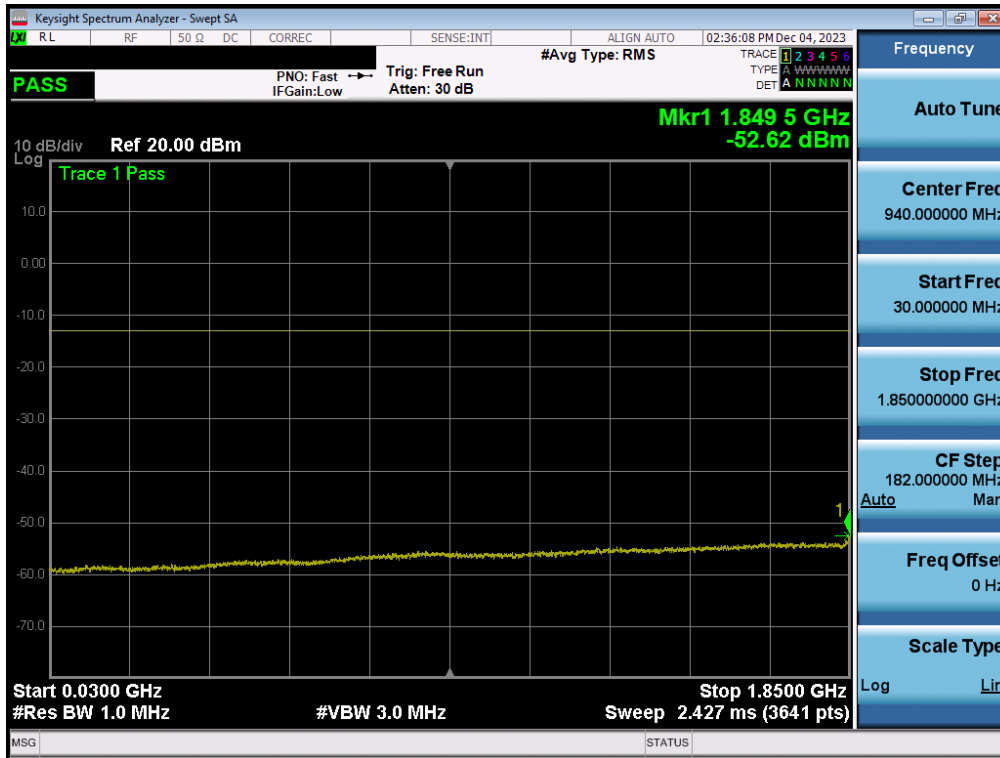


Plot 7-17. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Mid Channel - Ant2)

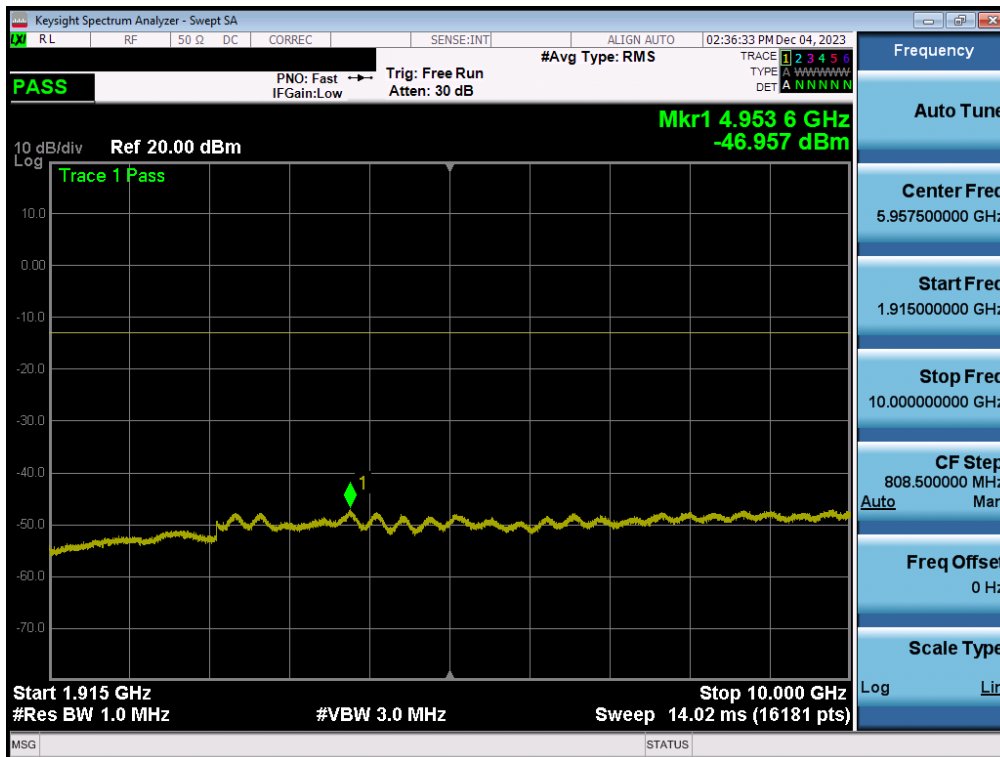

Plot 7-18. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Mid Channel - Ant2)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 28 of 67

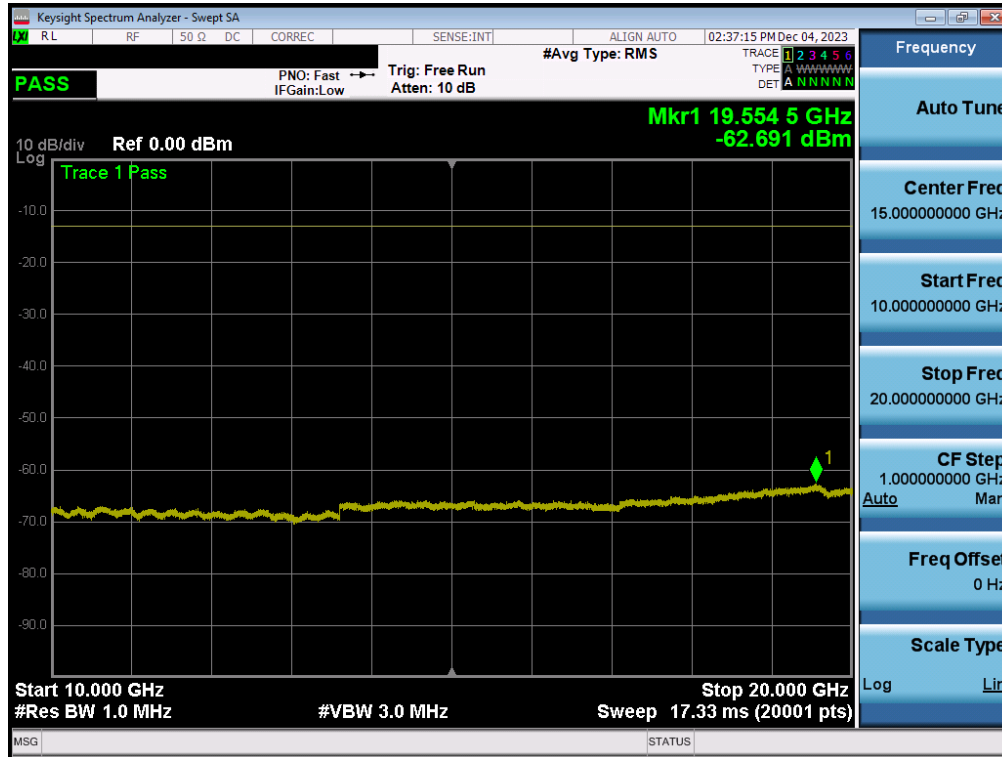

Plot 7-19. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Mid Channel - Ant2)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 29 of 67

7.5 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

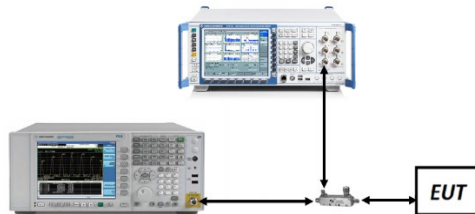


Figure 7-4. Test Instrument & Measurement Setup

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 30 of 67

Test Notes

1. Per 24.238(b) and RSS-133(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 31 of 67

Mode	Bandwidth	Channel	Test Case	Level [dBm]	Limit [dBm]	Margin [dB]
GSM-PCS	250kHz	Low	Band Edge	-17.77	-13	-4.77
		High	Band Edge	-18.78	-13	-5.78
WCDMA-PCS	5MHz	Low	Band Edge	-21.79	-13	-8.79
		Low	Extended	-15.69	-13	-2.69
		High	Band Edge	-21.49	-13	-8.49
		High	Extended	-15.81	-13	-2.81
LTE-B25-2	20MHz	Low	Band Edge	-31.69	-13	-18.69
		Low	Extended	-27.99	-13	-14.99
		High [B2]	Band Edge	-32.57	-13	-19.57
		High [B25]	Band Edge	-32.89	-13	-19.89
		High [B2]	Extended	-31.72	-13	-18.72
		High [B25]	Extended	-31.06	-13	-18.06
	15MHz	Low	Band Edge	-30.77	-13	-17.77
		Low	Extended	-26.33	-13	-13.33
		High [B2]	Band Edge	-30.00	-13	-17.00
		High [B25]	Band Edge	-30.57	-13	-17.57
		High [B2]	Extended	-29.32	-13	-16.32
		High [B25]	Extended	-28.92	-13	-15.92
	10MHz	Low	Band Edge	-27.97	-13	-14.97
		Low	Extended	-23.82	-13	-10.82
		High [B2]	Band Edge	-28.43	-13	-15.43
		High [B25]	Band Edge	-30.68	-13	-17.68
		High [B2]	Extended	-24.92	-13	-11.92
		High [B25]	Extended	-25.00	-13	-12.00
	5MHz	Low	Band Edge	-23.55	-13	-10.55
		Low	Extended	-27.69	-13	-14.69
		High [B2]	Band Edge	-24.63	-13	-11.63
		High [B25]	Band Edge	-25.51	-13	-12.51
		High [B2]	Extended	-14.51	-13	-1.51
		High [B25]	Extended	-29.52	-13	-16.52
	3MHz	Low	Band Edge	-24.97	-13	-11.96
		Low	Extended	-28.33	-13	-15.33
		High [B2]	Band Edge	-24.59	-13	-11.59
		High [B25]	Band Edge	-24.80	-13	-11.80
		High [B2]	Extended	-28.93	-13	-15.93
		High [B25]	Extended	-30.37	-13	-17.37
1.4MHz	Low	Band Edge	-29.40	-13	-16.40	
	Low	Extended	-34.42	-13	-21.42	
	High [B2]	Band Edge	-30.76	-13	-17.76	
	High [B25]	Band Edge	-29.73	-13	-16.73	
	High [B2]	Extended	-34.70	-13	-21.70	
	High [B25]	Extended	-33.52	-13	-20.52	

Table 7-7. Band Edge Summary – Antenna 1


FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 32 of 67

Mode	Bandwidth	Channel	Test Case	Level [dBm]	Limit [dBm]	Margin [dB]
LTE-B25-2	20MHz	Low	Band Edge	-30.00	-13	-17.00
		Low	Extended	-26.40	-13	-13.40
		High [B2]	Band Edge	-27.62	-13	-14.62
		High [B25]	Band Edge	-29.67	-13	-16.67
		High [B2]	Extended	-23.31	-13	-10.31
		High [B25]	Extended	-24.85	-13	-11.85
	15MHz	Low	Band Edge	-29.64	-13	-16.64
		Low	Extended	-25.49	-13	-12.49
		High [B2]	Band Edge	-26.66	-13	-13.66
		High [B25]	Band Edge	-29.36	-13	-16.36
		High [B2]	Extended	-20.57	-13	-7.57
		High [B25]	Extended	-23.69	-13	-10.69
	10MHz	Low	Band Edge	-24.45	-13	-11.45
		Low	Extended	-20.31	-13	-7.31
		High [B2]	Band Edge	-24.13	-13	-11.13
		High [B25]	Band Edge	-29.76	-13	-16.76
		High [B2]	Extended	-18.98	-13	-5.98
		High [B25]	Extended	-23.42	-13	-10.42
	5MHz	Low	Band Edge	-22.83	-13	-9.83
		Low	Extended	-20.69	-13	-7.69
		High [B2]	Band Edge	-23.45	-13	-10.45
		High [B25]	Band Edge	-26.62	-13	-13.62
		High [B2]	Extended	-21.19	-13	-8.19
		High [B25]	Extended	-25.67	-13	-12.67
	3MHz	Low	Band Edge	-23.77	-13	-10.77
		Low	Extended	-20.70	-13	-7.70
		High [B2]	Band Edge	-24.08	-13	-11.08
		High [B25]	Band Edge	-25.52	-13	-12.52
		High [B2]	Extended	-23.27	-13	-10.27
		High [B25]	Extended	-25.23	-13	-12.23
1.4MHz	Low	Band Edge	-26.18	-13	-13.18	
	Low	Extended	-29.54	-13	-16.54	
	High [B2]	Band Edge	-28.58	-13	-15.57	
	High [B25]	Band Edge	-27.64	-13	-14.64	
	High [B2]	Extended	-29.39	-13	-16.39	
	High [B25]	Extended	-28.98	-13	-15.98	


Table 7-8. Band Edge Summary – Antenna 2

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 33 of 67

GSM/GPRS PCS – Ant1

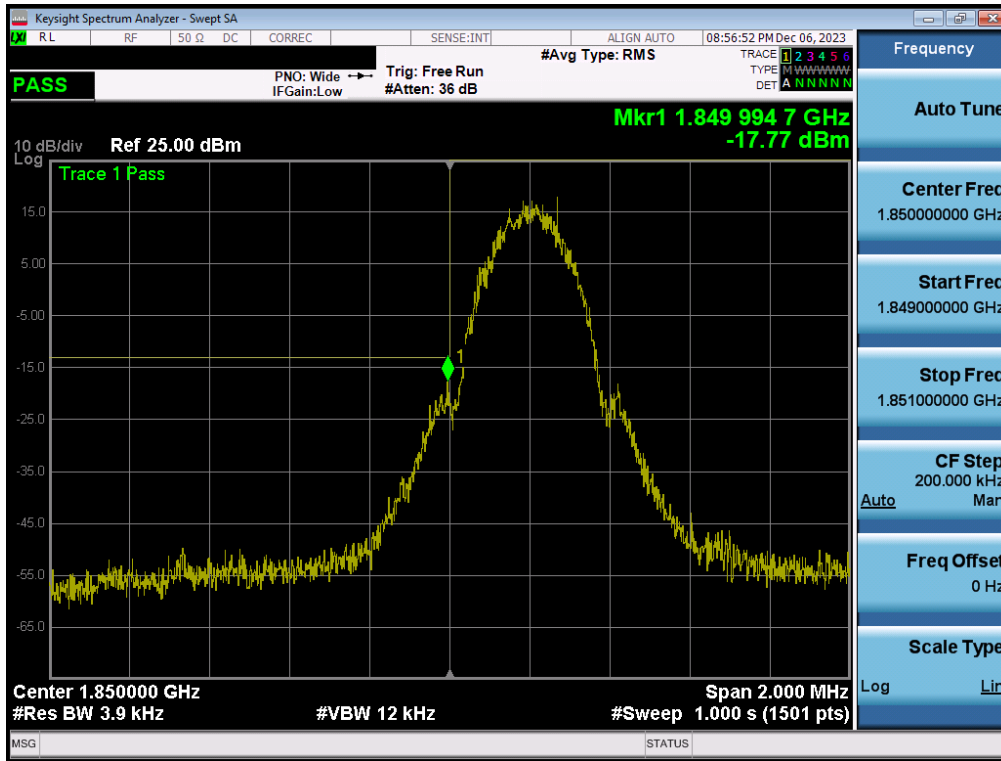


Plot 7-20. Lower Band Edge Plot (GPRS PCS – Ch. 512 - Ant1)

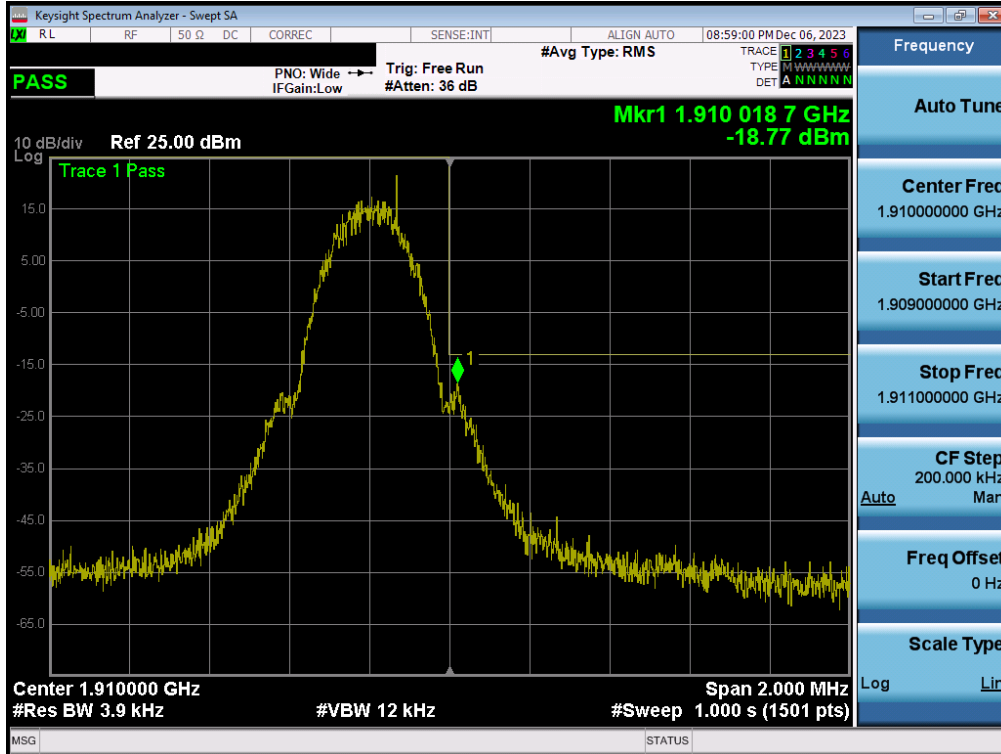

Plot 7-21. Upper Band Edge Plot (GPRS PCS – Ch. 810 - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 34 of 67

WCDMA PCS – Ant1

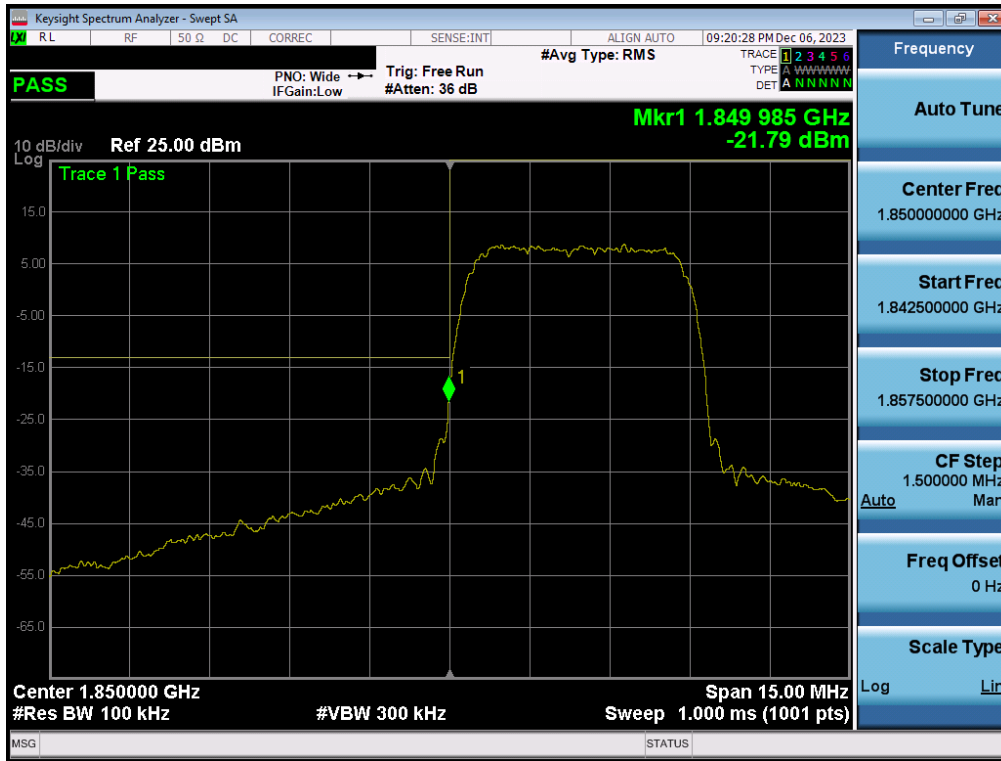

Plot 7-22. Lower Band Edge Plot (WCDMA PCS – Ch. 9262 - Ant1)




Plot 7-23. Upper Band Edge Plot (WCDMA PCS – Ch. 9538 - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 35 of 67

LTE Band 25/2 – Ant1



Plot 7-24. Lower Band Edge Plot (LTE Band 25/2 - 20MHz QPSK – Full RB - Ant1)

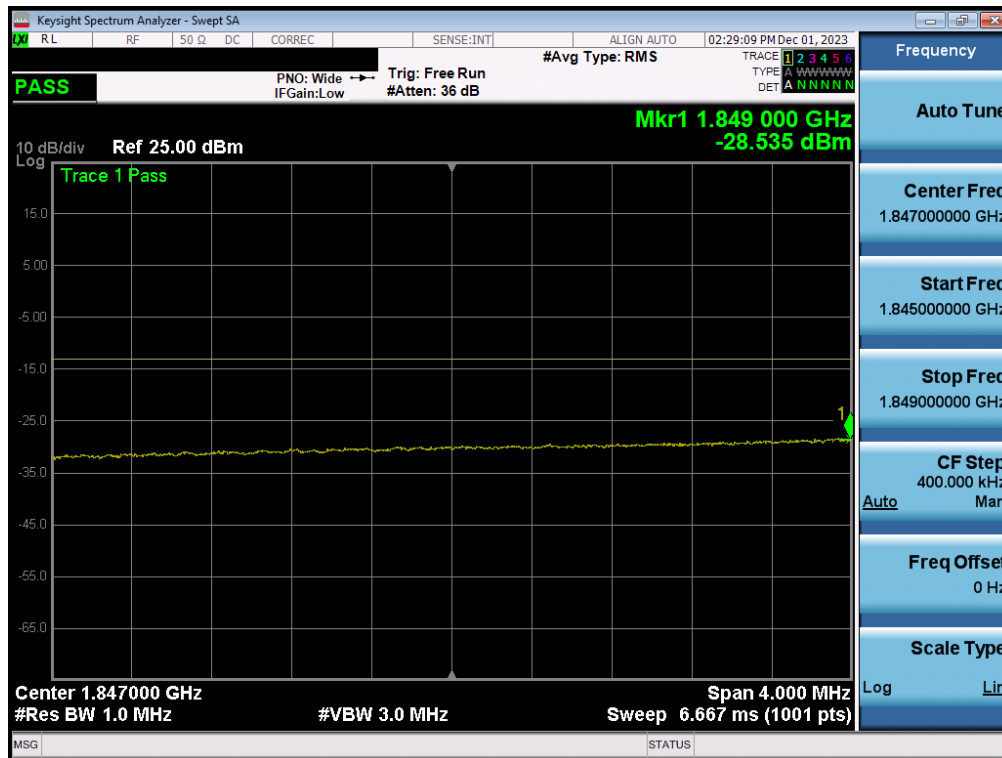

Plot 7-25. Extended Lower Band Edge Plot (LTE Band 25/2 - 20MHz QPSK – Full RB - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 36 of 67




Plot 7-26. Upper Band Edge Plot (LTE Band 2 - 20MHz QPSK – Full RB - Ant1)




Plot 7-27. Extended Upper Band Edge Plot (LTE Band 2 - 20MHz QPSK – Full RB - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 37 of 67

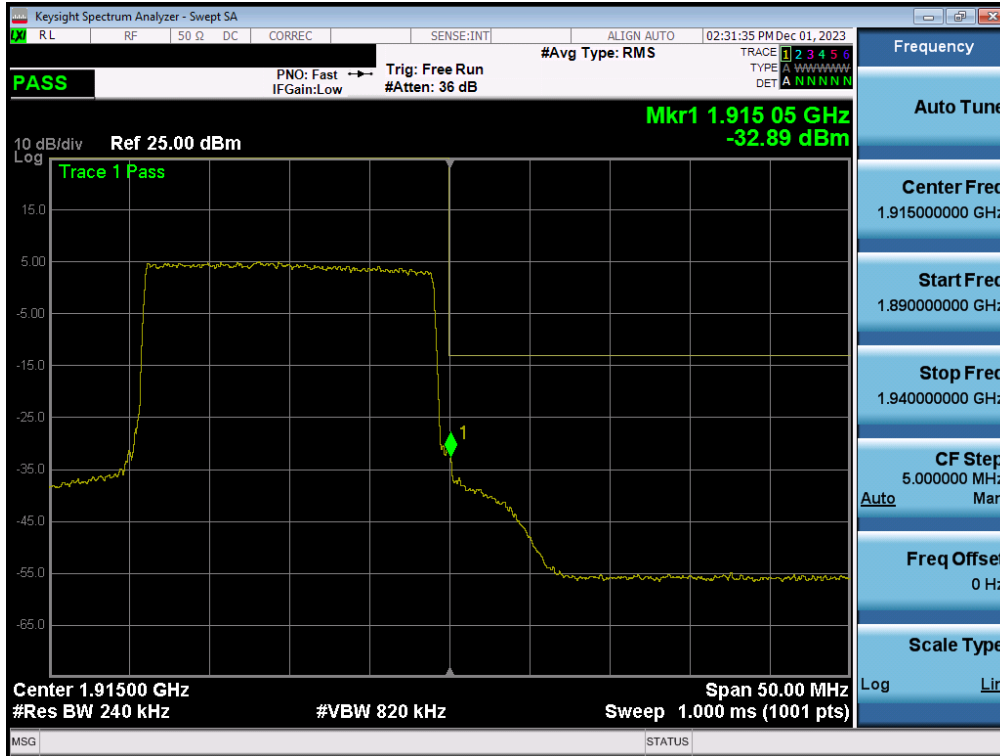

Plot 7-28. Upper Band Edge Plot (LTE Band 25 - 20MHz QPSK – Full RB - Ant1)

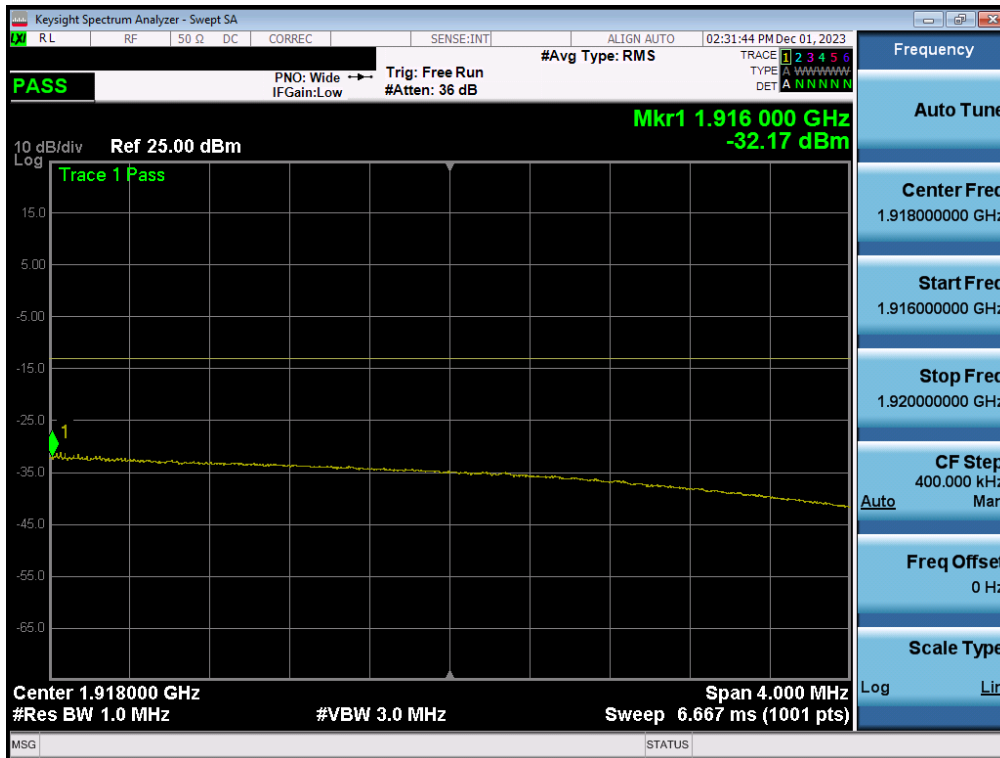


Plot 7-29. Extended Upper Band Edge Plot (LTE Band 25 - 20MHz QPSK – Full RB - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 38 of 67

LTE Band 25/2 – Ant2



Plot 7-30. Lower Band Edge Plot (LTE Band 25/2 - 20MHz QPSK – Full RB - Ant2)

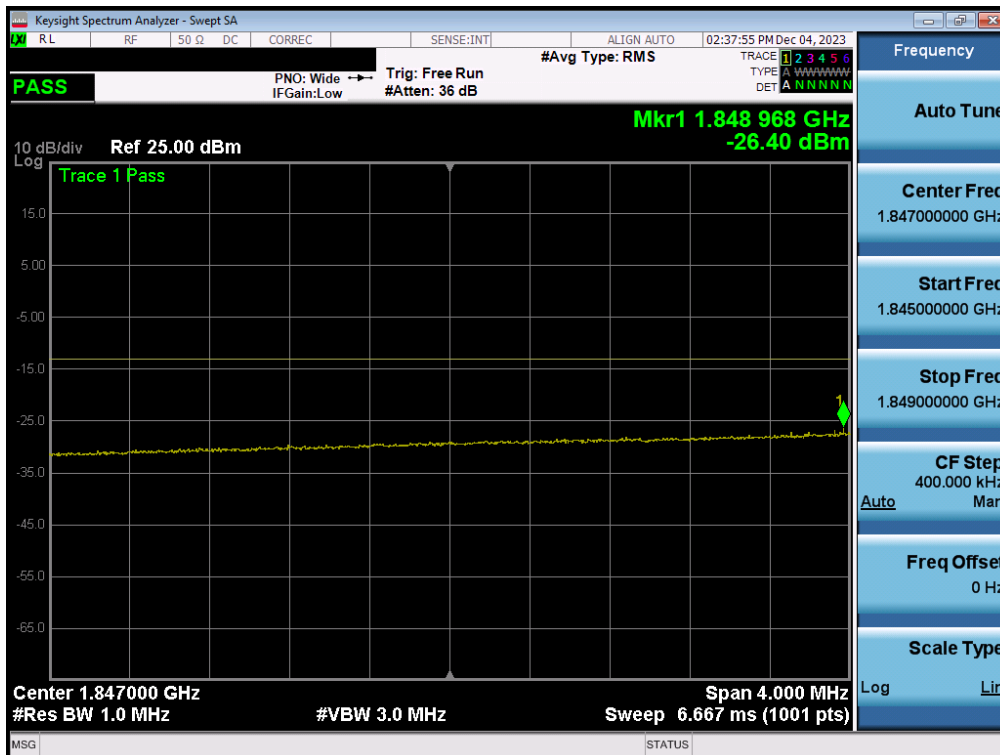

Plot 7-31. Extended Lower Band Edge Plot (LTE Band 25/2 - 20MHz QPSK – Full RB - Ant2)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 39 of 67




Plot 7-32. Upper Band Edge Plot (LTE Band 2 - 20MHz QPSK – Full RB - Ant2)




Plot 7-33. Extended Upper Band Edge Plot (LTE Band 2 - 20MHz QPSK – Full RB - Ant2)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 40 of 67

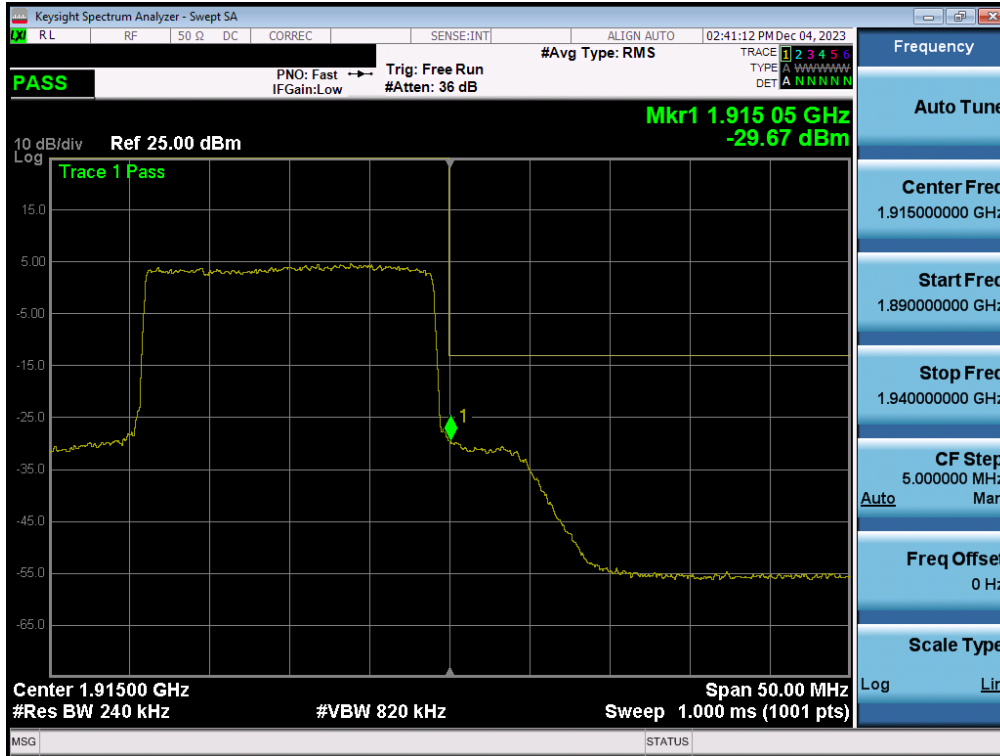

Plot 7-34. Upper Band Edge Plot (LTE Band 25 - 20MHz QPSK – Full RB - Ant2)

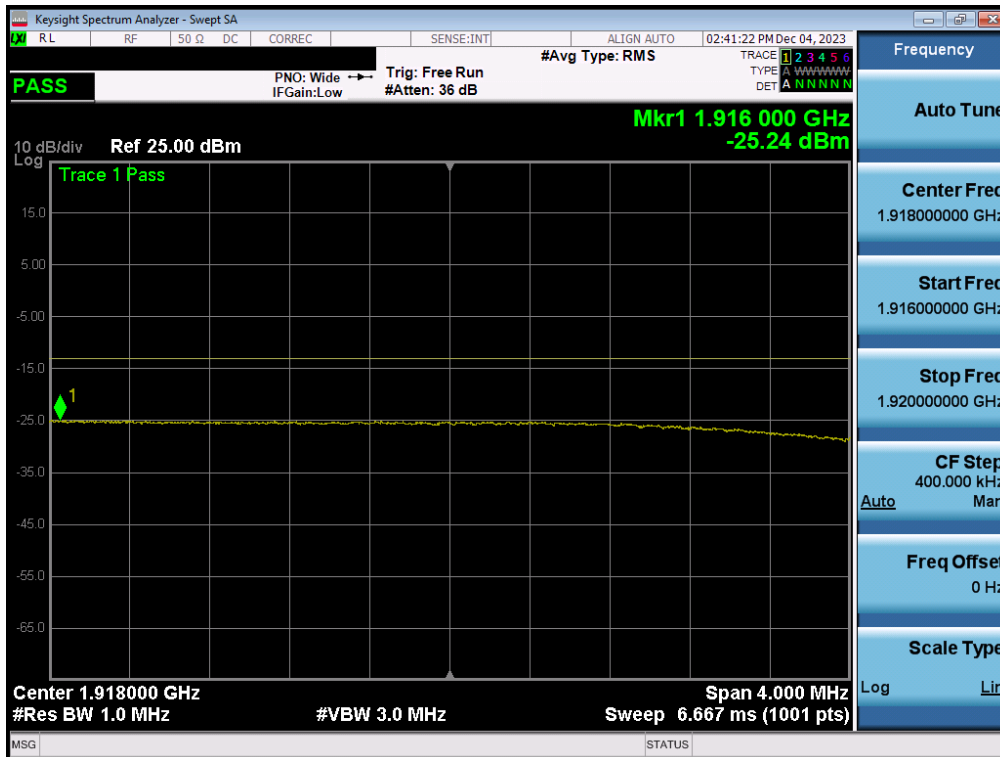

Plot 7-35. Extended Upper Band Edge Plot (LTE Band 25 - 20MHz QPSK – Full RB - Ant2)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 41 of 67

7.6 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2.3.4

Test Settings

1. The signal analyzer’s CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW \geq OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

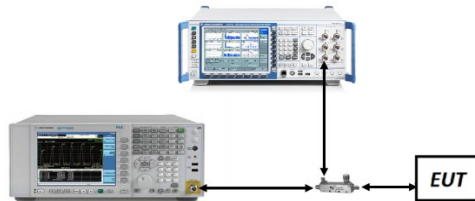


Figure 7-5. Test Instrument & Measurement Setup

Test Notes

For the QAM modulations, 256QAM was found to have the worst-case peak-to-average ratio so it is the only QAM measurement included in this section.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 42 of 67

Mode	Bandwidth	Modulation	Average Power [dBm]	PAR at 0.1% [dB]	PAR Limit [dB]	Margin [dB]
GSM-PCS	N/A	GMSK	28.54	0.57	13	-12.43
GSM-PCS EDGE		8-PSK	21.26	4.26	13	-8.74
WCDMA-PCS		Spread Spectrum	22.96	3.05	13	-9.95
LTE-B25-2	20MHz	QPSK	22.23	5.89	13	-7.11
		256QAM	18.19	6.69	13	-6.31
	15MHz	QPSK	22.20	5.84	13	-7.16
		256QAM	18.19	6.66	13	-6.34
	10MHz	QPSK	22.23	5.99	13	-7.01
		256QAM	18.14	6.69	13	-6.31
	5MHz	QPSK	22.22	5.96	13	-7.04
		256QAM	18.14	6.66	13	-6.34
	3MHz	QPSK	22.28	6.03	13	-6.97
		256QAM	18.18	6.69	13	-6.31
	1.4MHz	QPSK	22.36	5.98	13	-7.02
		256QAM	18.26	6.58	13	-6.42


Table 7-9. Peak-Average Ratio Summary – Antenna 1

Mode	Bandwidth	Modulation	Average Power [dBm]	PAR at 0.1% [dB]	PAR Limit [dB]	Margin [dB]
LTE-B25-2	20MHz	QPSK	21.95	5.68	13	-7.32
		256QAM	17.90	6.54	13	-6.46
	15MHz	QPSK	22.02	5.68	13	-7.32
		256QAM	17.98	6.50	13	-6.50
	10MHz	QPSK	22.11	5.81	13	-7.19
		256QAM	18.06	6.53	13	-6.47
	5MHz	QPSK	22.04	5.77	13	-7.23
		256QAM	18.03	6.53	13	-6.47
	3MHz	QPSK	22.07	5.82	13	-7.18
		256QAM	18.01	6.53	13	-6.47
	1.4MHz	QPSK	22.04	5.69	13	-7.31
		256QAM	17.93	6.47	13	-6.53


Table 7-10. Peak-Average Ratio Summary – Antenna 2

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 43 of 67

GSM/GPRS PCS – Ant1

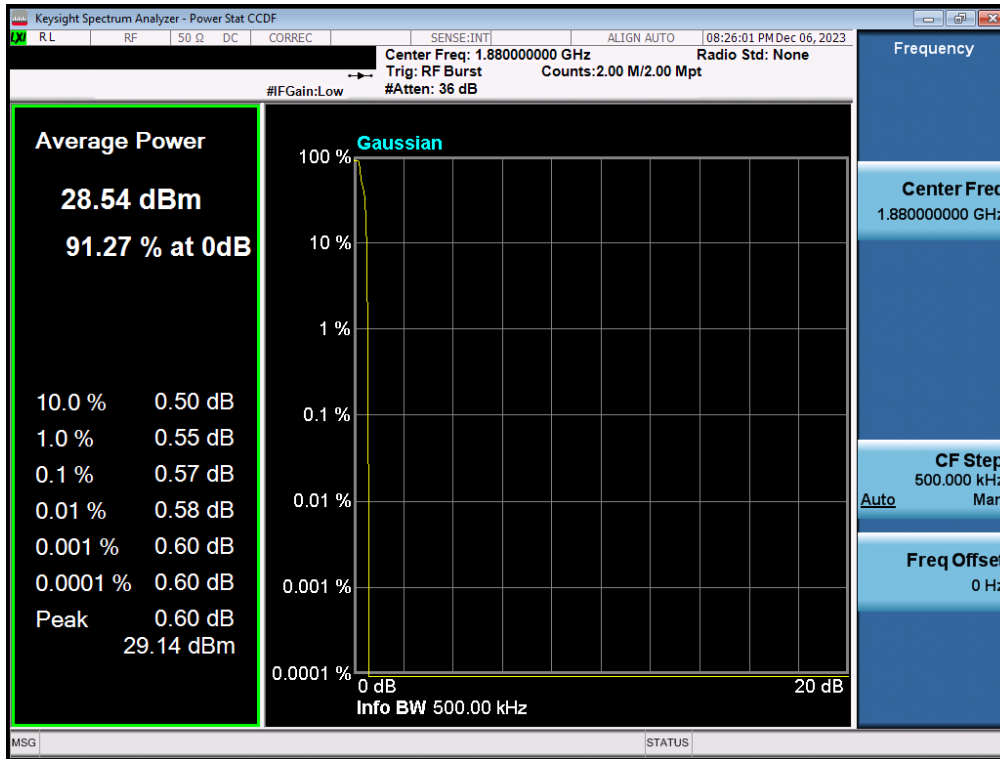


Plot 7-36. PAR Plot (GPRS, Ch. 661 - Ant1)

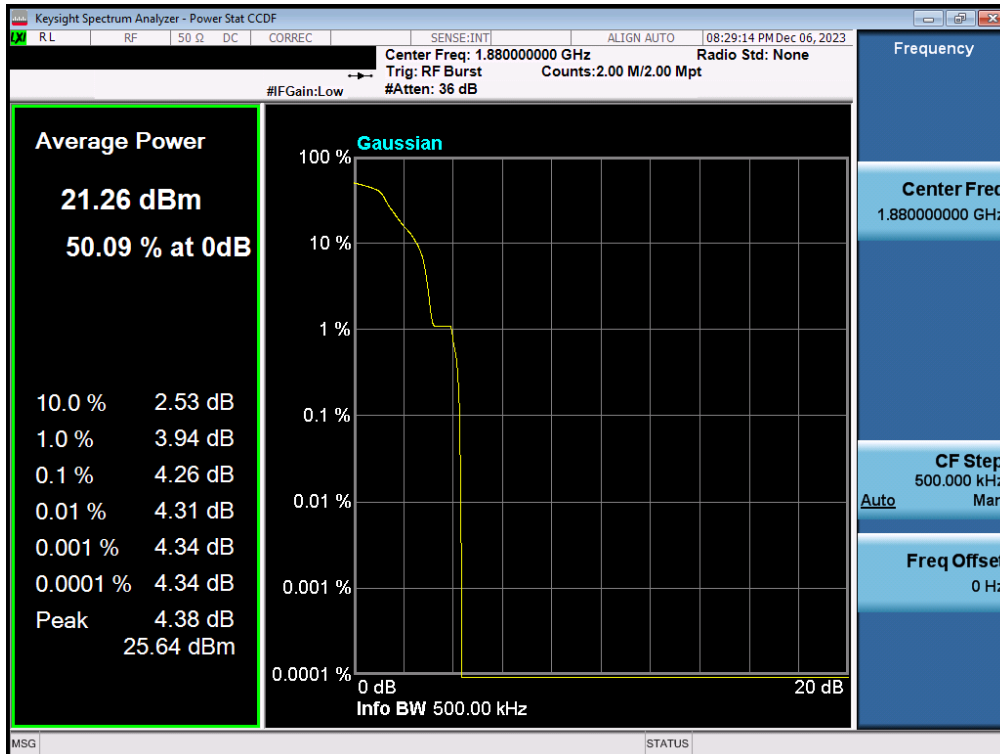

Plot 7-37. PAR Plot (EDGE, Ch. 661 - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 44 of 67


WCDMA PCS – Ant1

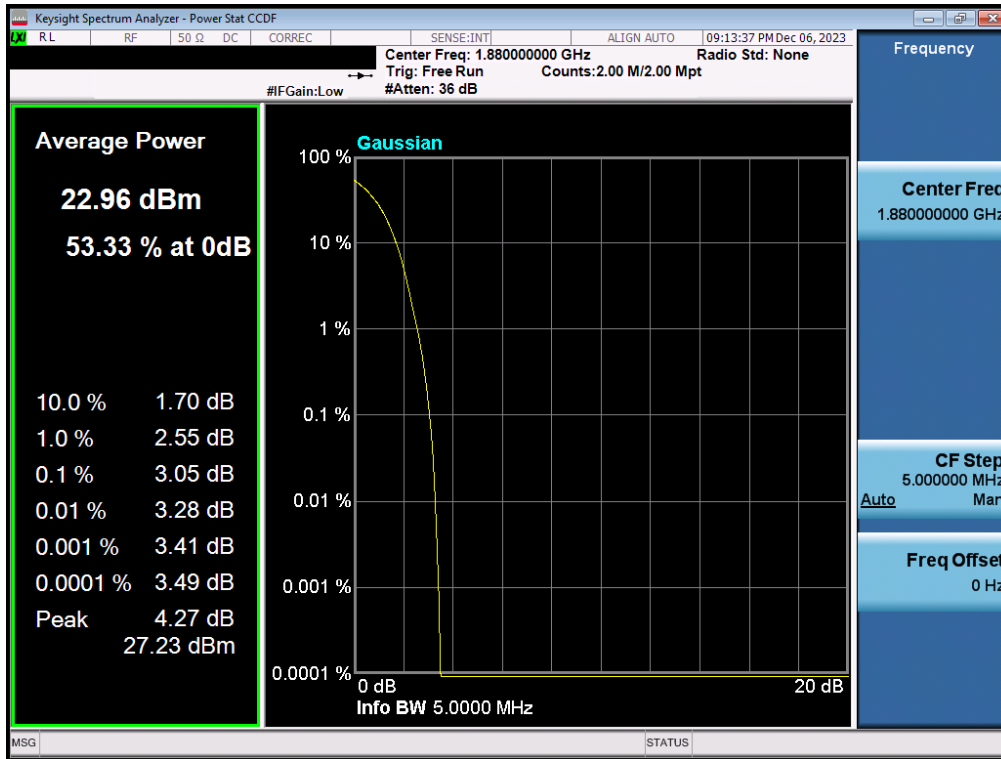


Plot 7-38. PAR Plot (WCDMA, Ch. 9400 - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 45 of 67

LTE Band 25/2 – Ant1

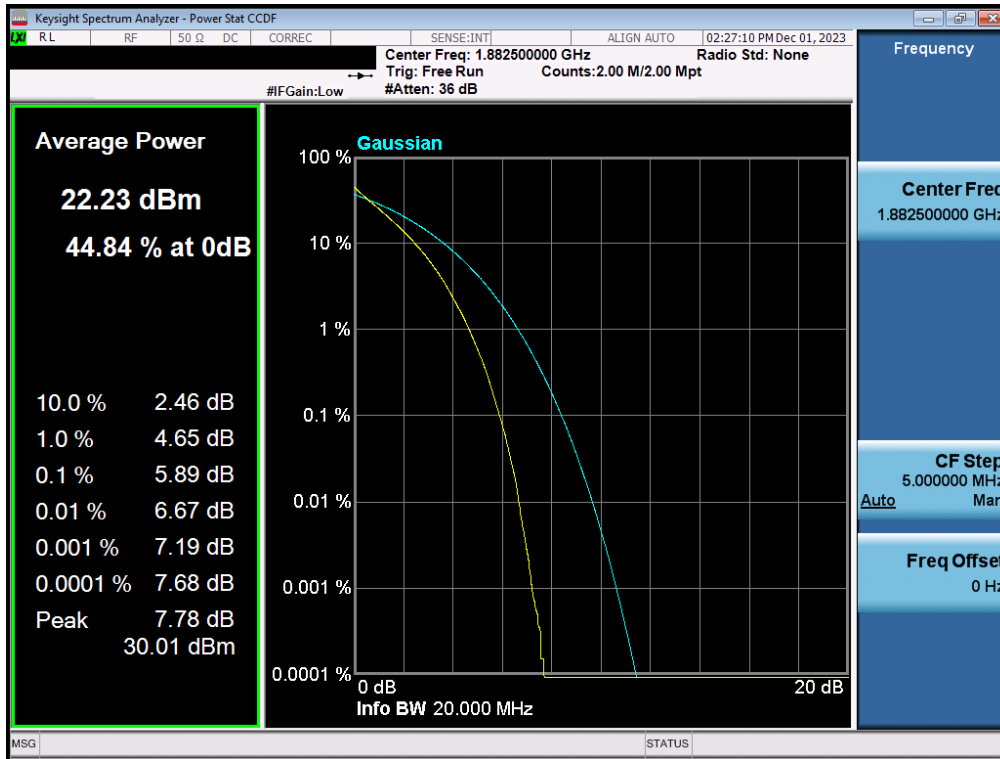


Plot 7-39. PAR Plot (LTE Band 25/2 - 20MHz QPSK - Full RB - Ant1)

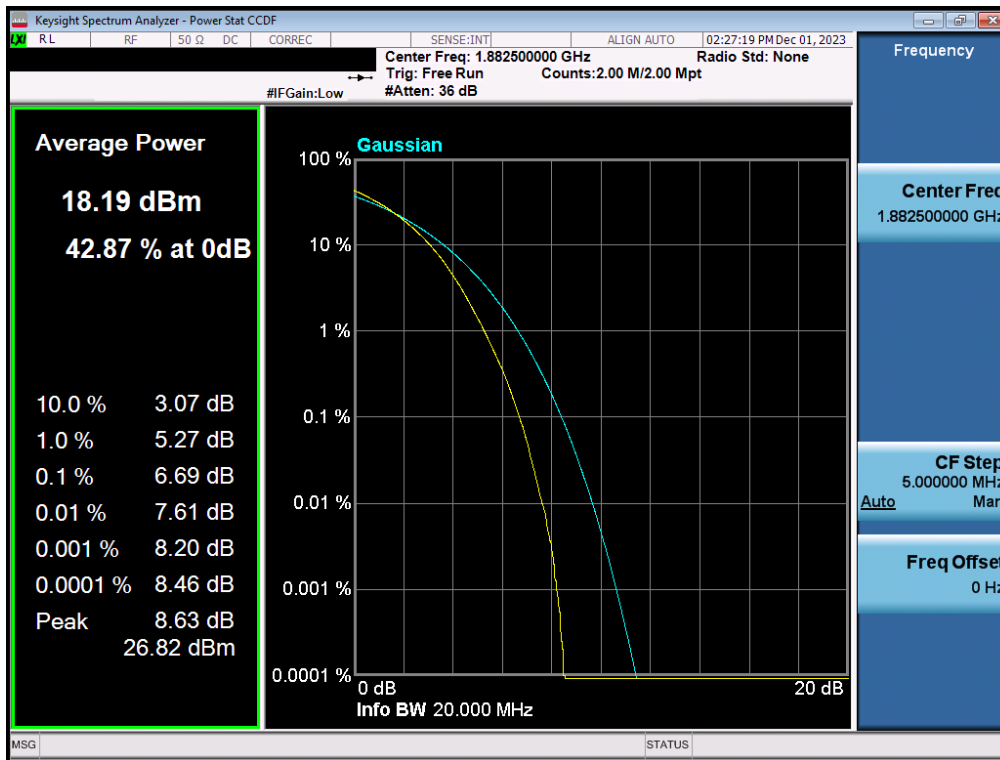


Plot 7-40. PAR Plot (LTE Band 25/2 - 20MHz 256-QAM - Full RB - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 46 of 67

LTE Band 25/2 – Ant2

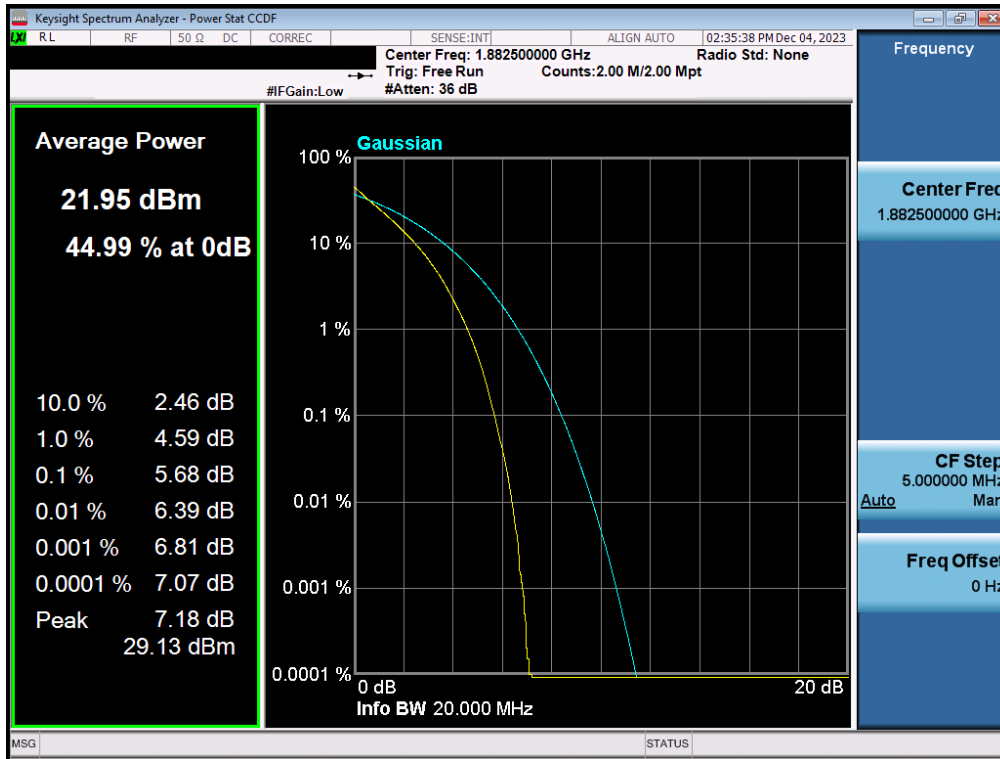

Plot 7-41. PAR Plot (LTE Band 25/2 - 20MHz QPSK - Full RB - Ant2)

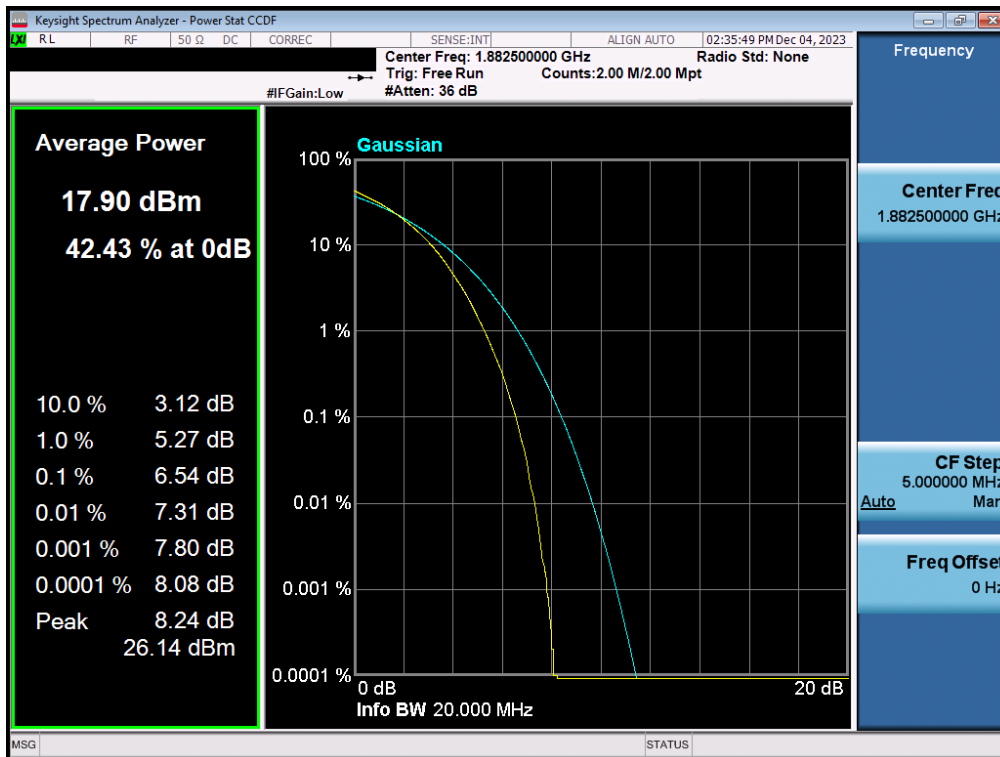

Plot 7-42. PAR Plot (LTE Band 25/2 - 20MHz 256-QAM - Full RB - Ant2)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 47 of 67



7.7 Radiated Power (EIRP)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 – Section 5.2.4.4

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 48 of 67

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

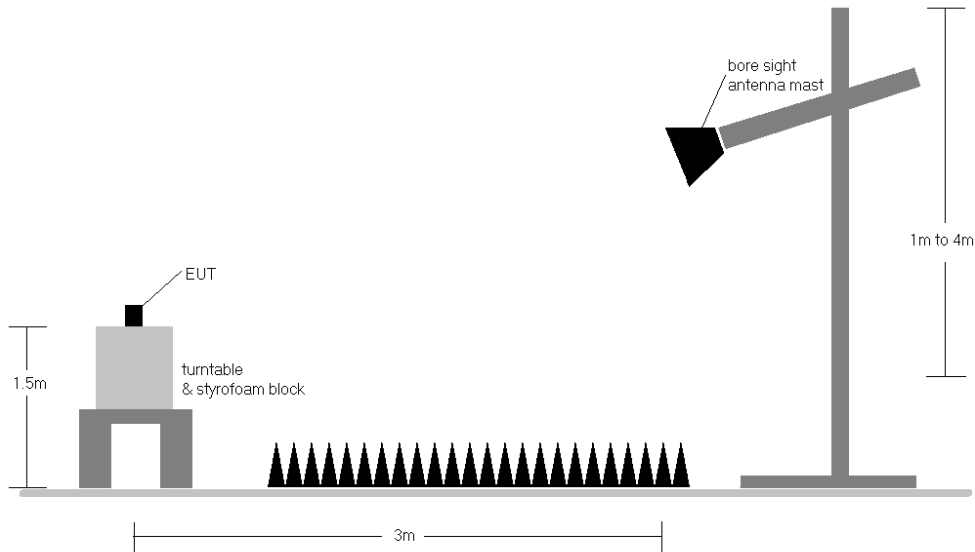


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers are reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest powers are reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 4) This unit was tested with its standard battery.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 49 of 67

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GSM1900	H	153	217	24.67	2.86	27.53	0.566	33.01	-5.48
1880.00	GSM1900	H	153	215	25.38	2.67	28.05	0.638	33.01	-4.97
1909.80	GSM1900	H	146	245	25.72	2.55	28.27	0.671	33.01	-4.74
1909.80	EDGE1900	H	146	245	21.81	2.55	24.36	0.273	33.01	-8.65

Table 7-11. EIRP Data (GPRS PCS – Ant1)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	H	372	211	19.32	2.84	22.16	0.164	33.01	-10.85
1880.00	WCDMA1900	H	153	221	19.92	2.67	22.59	0.181	33.01	-10.43
1907.60	WCDMA1900	H	143	243	19.70	2.54	22.24	0.168	33.01	-10.77

Table 7-12. EIRP Data (WCDMA PCS – Ant1)

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	EUT Pol.	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	1860.00	H	X	115	212	2.79	1 / 99	19.19	21.98	0.158	33.01	-11.03
	QPSK	1882.50	H	X	156	5	2.65	1 / 50	19.47	22.12	0.163	33.01	-10.89
	QPSK	1905.00	H	X	153	287	2.54	1 / 0	19.71	22.25	0.168	33.01	-10.76
	16-QAM	1905.00	H	X	153	287	2.54	1 / 0	19.06	21.60	0.145	33.01	-11.41
15 MHz	QPSK	1857.50	H	X	115	212	2.81	1 / 37	19.31	22.12	0.163	33.01	-10.89
	QPSK	1882.50	H	X	156	5	2.65	1 / 37	19.51	22.16	0.164	33.01	-10.85
	QPSK	1907.50	H	X	153	287	2.54	1 / 37	19.59	22.13	0.163	33.01	-10.88
	16-QAM	1882.50	H	X	156	5	2.65	1 / 37	18.83	21.48	0.141	33.01	-11.53
10 MHz	QPSK	1855.00	H	X	115	212	2.82	1 / 49	19.25	22.07	0.161	33.01	-10.94
	QPSK	1882.50	H	X	156	5	2.65	1 / 0	19.40	22.05	0.160	33.01	-10.97
	QPSK	1910.00	H	X	153	287	2.55	1 / 0	19.48	22.03	0.159	33.01	-10.98
	16-QAM	1910.00	H	X	153	287	2.55	1 / 0	19.29	21.84	0.153	33.01	-11.17
5 MHz	QPSK	1852.50	H	X	115	212	2.84	1 / 12	19.32	22.16	0.164	33.01	-10.85
	QPSK	1882.50	H	X	156	5	2.65	1 / 24	19.54	22.19	0.165	33.01	-10.82
	QPSK	1912.50	H	X	153	287	2.55	1 / 12	19.69	22.24	0.168	33.01	-10.77
	16-QAM	1882.50	H	X	156	5	2.65	1 / 24	18.95	21.60	0.145	33.01	-11.41
3 MHz	QPSK	1851.50	H	X	115	212	2.85	1 / 0	19.11	21.95	0.157	33.01	-11.06
	QPSK	1882.50	H	X	156	5	2.65	1 / 14	19.40	22.05	0.160	33.01	-10.96
	QPSK	1913.50	H	X	153	287	2.55	1 / 7	19.53	22.08	0.162	33.01	-10.93
	16-QAM	1913.50	H	X	153	287	2.55	1 / 7	19.09	21.64	0.146	33.01	-11.37
1.4 MHz	QPSK	1850.70	H	X	115	212	2.85	1 / 3	19.35	22.20	0.166	33.01	-10.81
	QPSK	1882.50	H	X	156	5	2.65	1 / 5	19.62	22.27	0.169	33.01	-10.74
	QPSK	1914.30	H	X	153	287	2.55	1 / 0	19.64	22.19	0.165	33.01	-10.83
	16-QAM	1914.30	H	X	153	287	2.55	1 / 0	19.26	21.81	0.152	33.01	-11.20

Table 7-13. EIRP Data (LTE Band 25/2 – Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 50 of 67



Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	EUT Pol.	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	1860.00	H	Z	175	357	2.79	1 / 0	16.76	19.55	0.090	33.01	-13.46
	QPSK	1882.50	H	Z	166	358	2.65	1 / 99	16.45	19.10	0.081	33.01	-13.91
	QPSK	1905.00	H	Z	211	356	2.54	1 / 50	16.05	18.59	0.072	33.01	-14.42
	16-QAM	1860.00	H	Z	175	357	2.79	1 / 0	16.05	18.84	0.077	33.01	-14.17
15 MHz	QPSK	1857.50	H	Z	175	357	2.81	1 / 37	16.94	19.75	0.094	33.01	-13.26
	QPSK	1882.50	H	Z	166	358	2.65	1 / 37	16.54	19.19	0.083	33.01	-13.82
	QPSK	1907.50	H	Z	211	356	2.54	1 / 37	16.17	18.71	0.074	33.01	-14.30
	16-QAM	1857.50	H	Z	175	357	2.81	1 / 37	16.05	18.86	0.077	33.01	-14.15
10 MHz	QPSK	1855.00	H	Z	175	357	2.82	1 / 0	16.89	19.72	0.094	33.01	-13.29
	QPSK	1882.50	H	Z	166	358	2.65	1 / 49	16.61	19.26	0.084	33.01	-13.75
	QPSK	1910.00	H	Z	211	356	2.55	1 / 25	15.69	18.24	0.067	33.01	-14.77
	16-QAM	1855.00	H	Z	175	357	2.82	1 / 0	15.90	18.72	0.075	33.01	-14.29
5 MHz	QPSK	1852.50	H	Z	175	357	2.84	1 / 12	16.93	19.77	0.095	33.01	-13.24
	QPSK	1882.50	H	Z	166	358	2.65	1 / 12	16.52	19.17	0.083	33.01	-13.84
	QPSK	1912.50	H	Z	211	356	2.55	1 / 0	16.29	18.83	0.076	33.01	-14.18
	16-QAM	1852.50	H	Z	175	357	2.84	1 / 12	16.22	19.06	0.080	33.01	-13.95
3 MHz	QPSK	1851.50	H	Z	175	357	2.85	1 / 14	16.86	19.71	0.094	33.01	-13.30
	QPSK	1882.50	H	Z	166	358	2.65	1 / 0	16.51	19.16	0.082	33.01	-13.85
	QPSK	1913.50	H	Z	211	356	2.55	1 / 0	15.82	18.37	0.069	33.01	-14.64
	16-QAM	1851.50	H	Z	175	357	2.85	1 / 14	15.87	18.72	0.074	33.01	-14.29
1.4 MHz	QPSK	1850.70	H	Z	175	357	2.85	1 / 0	16.82	19.68	0.093	33.01	-13.33
	QPSK	1882.50	H	Z	166	358	2.65	1 / 5	16.54	19.19	0.083	33.01	-13.82
	QPSK	1914.30	H	Z	211	356	2.55	1 / 0	14.51	17.06	0.051	33.01	-15.95
	16-QAM	1850.70	H	Z	175	357	2.85	1 / 0	16.07	18.92	0.078	33.01	-14.09

Table 7-14. EIRP Data (LTE Band 25/2 – Ant2)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 51 of 67

7.8 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 52 of 67

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

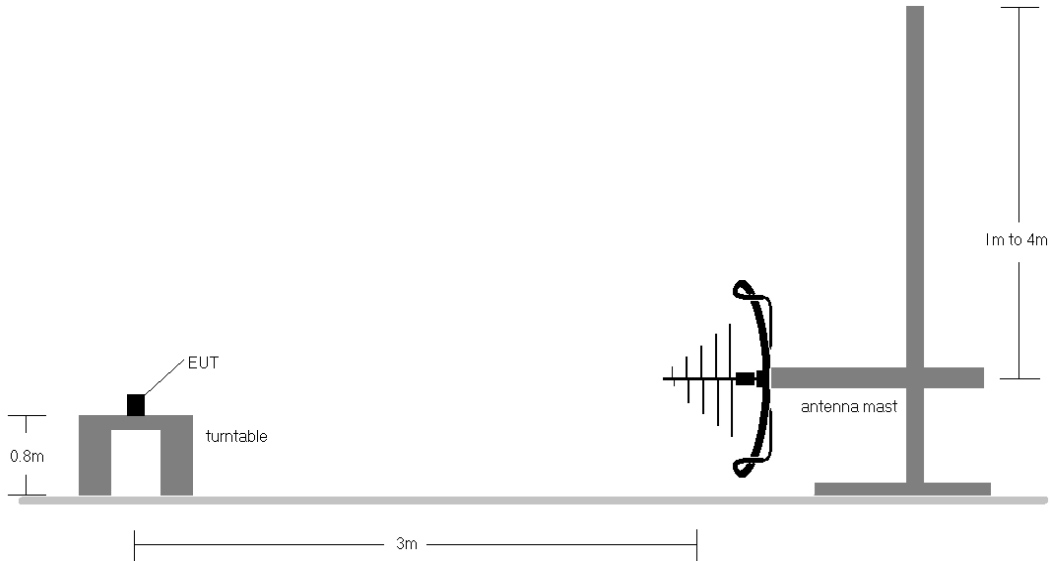


Figure 7-7. Test Instrument & Measurement Setup < 1GHz

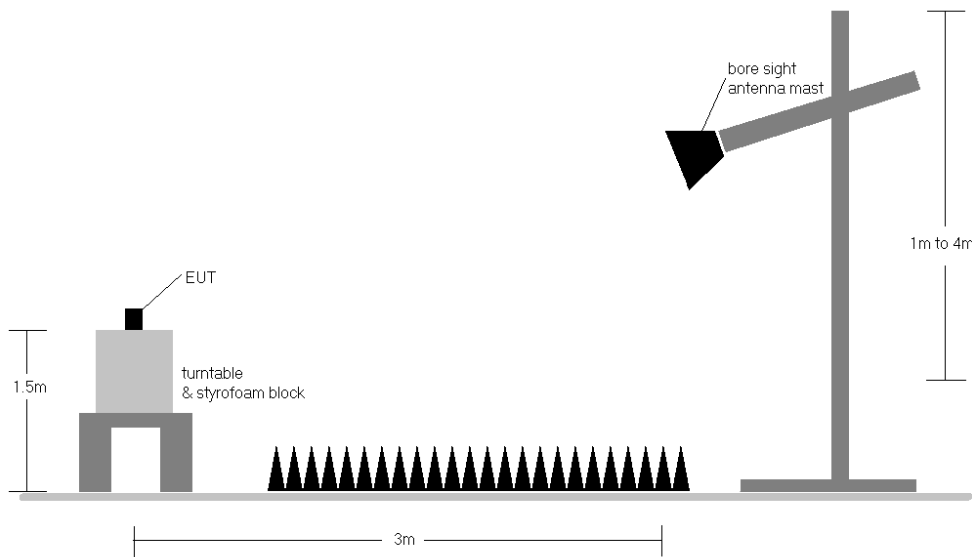


Figure 7-8. Test Instrument & Measurement Setup >1 GHz


FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 53 of 67

Test Notes


- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
 - a) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers are reported in GPRS mode while transmitting with one slot active.
- 3) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest powers are reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 5) This unit was tested with its standard battery.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 54 of 67

GSM/GPRS PCS – Ant1

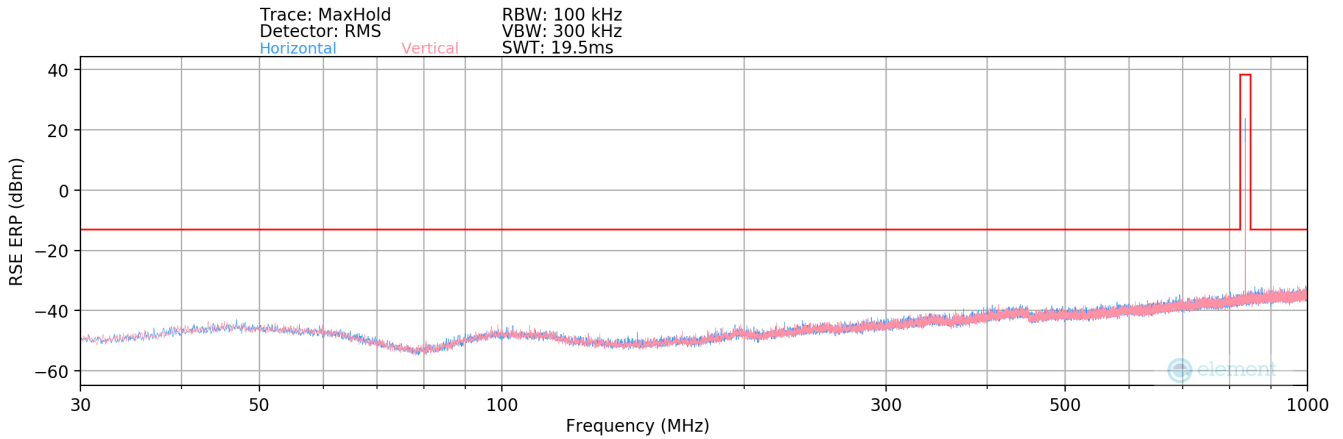

Plot 7-43. Radiated Spurious Plot (GPRS PCS - Ant1)

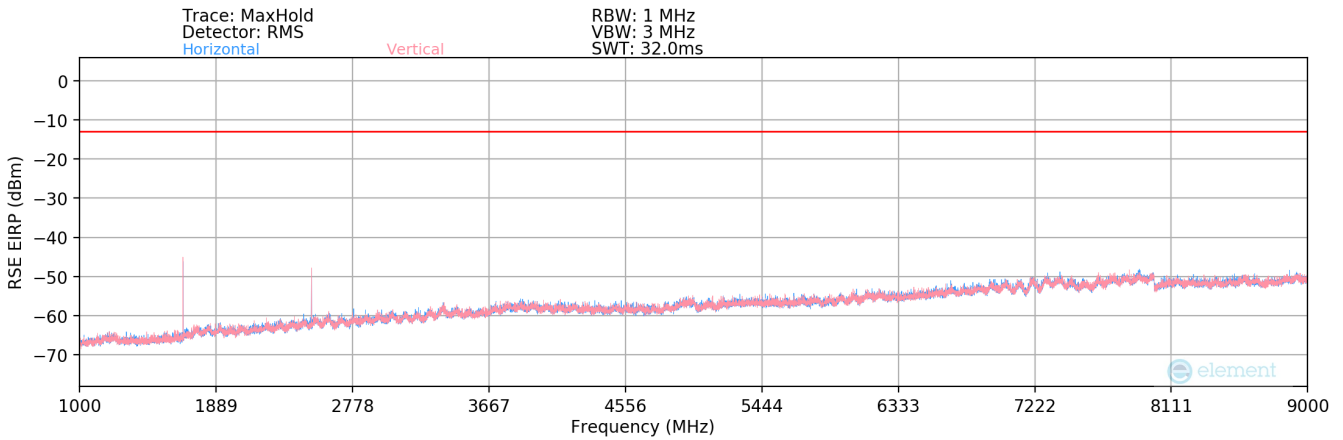

Plot 7-44. Radiated Spurious Plot (GPRS PCS - Ant1)

Mode:	GPRS 1 Tx Slot
Channel:	810
Frequency (MHz):	1909.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
710.17	H	-	-	-66.99	-3.38	36.63	-60.78	-13.00	-47.78

Table 7-15. Radiated Spurious Data (GPRS PCS – Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 55 of 67

Mode:	GPRS 1 Tx Slot
Channel:	512
Frequency (MHz):	1850.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3700.40	H	-	-	-76.14	5.52	36.38	-58.88	-13.00	-45.88
5550.60	H	126	184	-68.20	8.56	47.36	-47.89	-13.00	-34.89
7400.80	H	287	42	-69.43	13.22	50.79	-44.47	-13.00	-31.47
9251.00	H	-	-	-78.74	14.91	43.17	-52.08	-13.00	-39.08
11101.20	H	-	-	-79.47	17.55	45.08	-50.17	-13.00	-37.17
12951.40	H	-	-	-79.52	20.36	47.84	-47.41	-13.00	-34.41

Table 7-16. Radiated Spurious Data (GPRS PCS – Low Channel - Ant1)

Mode:	GPRS 1 Tx Slot
Channel:	661
Frequency (MHz):	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.00	H	-	-	-76.14	5.88	36.74	-58.52	-13.00	-45.52
5640.00	H	195	296	-71.88	8.48	43.60	-51.66	-13.00	-38.66
7520.00	H	143	298	-68.50	13.52	52.02	-43.24	-13.00	-30.24
9400.00	H	-	-	-79.50	15.63	43.13	-52.13	-13.00	-39.13
11280.00	H	-	-	-79.45	18.05	45.60	-49.65	-13.00	-36.65
13160.00	H	-	-	-79.88	21.02	48.14	-47.12	-13.00	-34.12

Table 7-17. Radiated Spurious Data (GPRS PCS – Mid Channel - Ant1)


Mode:	GPRS 1 Tx Slot
Channel:	810
Frequency (MHz):	1909.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3819.60	H	-	-	-76.28	6.24	36.96	-58.30	-13.00	-45.30
5729.40	H	112	54	-68.53	9.02	47.49	-47.77	-13.00	-34.77
7639.20	H	146	298	-67.11	12.78	52.67	-42.59	-13.00	-29.59
9549.00	H	-	-	-79.10	14.99	42.89	-52.37	-13.00	-39.37
11458.80	H	-	-	-79.65	18.26	45.61	-49.65	-13.00	-36.65
13368.60	H	-	-	-79.67	21.03	48.36	-46.89	-13.00	-33.89


Table 7-18. Radiated Spurious Data (GPRS PCS – High Channel - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 56 of 67

WCDMA PCS – Ant1

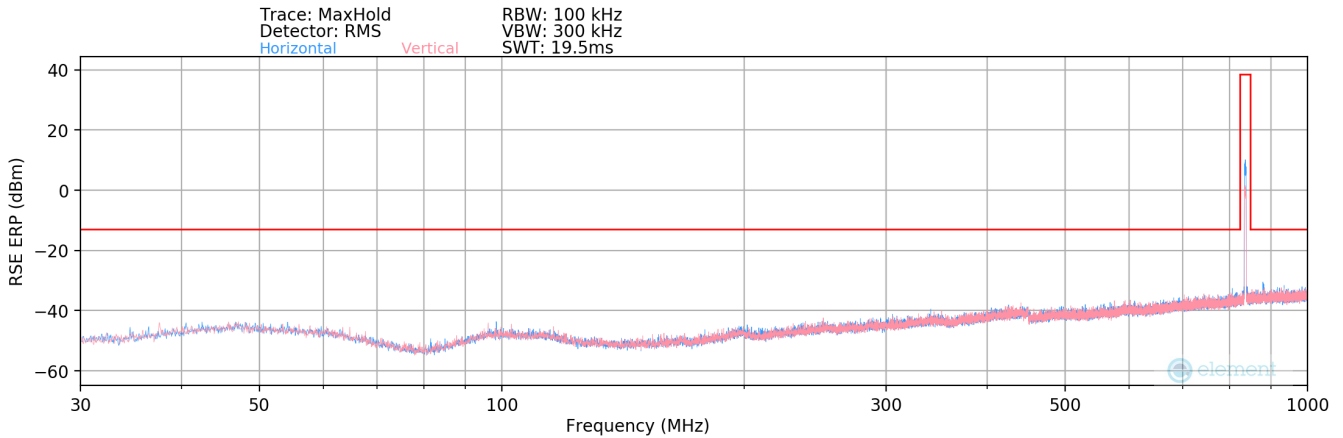

Plot 7-45. Radiated Spurious Plot (WCDMA PCS - Ant1)

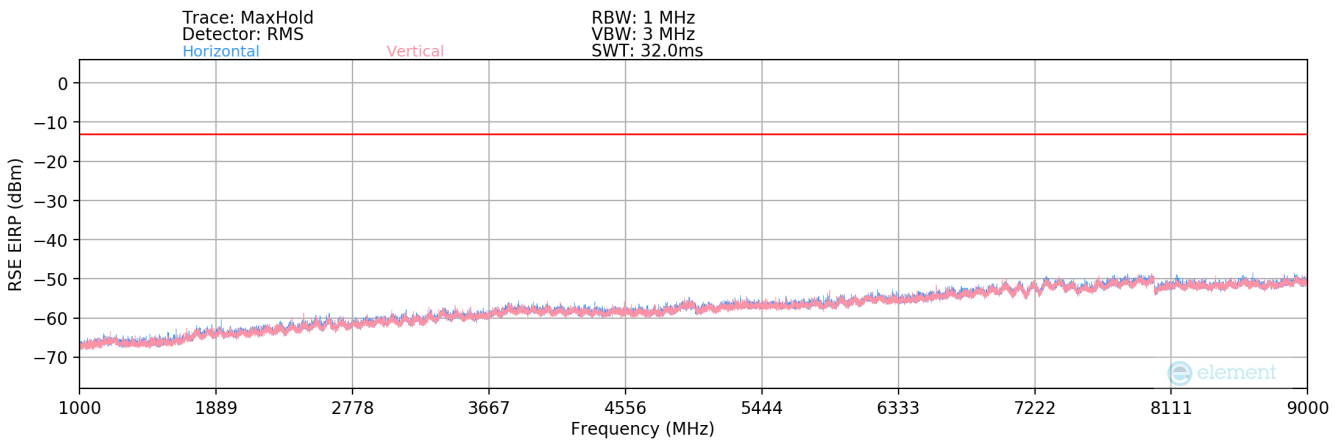

Plot 7-46. Radiated Spurious Plot (WCDMA PCS - Ant1)

Mode:	WCDMA RMC
Channel:	9400
Frequency (MHz):	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
778.84	H	-	-	-89.57	29.80	47.23	-50.18	-13.00	-37.18

Table 7-19. Radiated Spurious Data (WCDMA PCS – Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 57 of 67

Mode:	WCDMA RMC
Channel:	9262
Frequency (MHz):	1852.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3704.80	H	-	-	-78.69	1.19	29.50	-65.76	-13.00	-52.76
5557.20	H	-	-	-78.55	4.41	32.86	-62.39	-13.00	-49.39
7409.60	H	-	-	-78.58	9.27	37.69	-57.56	-13.00	-44.56

Table 7-20. Radiated Spurious Data (WCDMA PCS – Low Channel - Ant1)

Mode:	WCDMA RMC
Channel:	9400
Frequency (MHz):	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.00	H	-	-	-78.34	1.11	29.77	-65.49	-13.00	-52.49
5640.00	H	-	-	-78.82	4.53	32.71	-62.55	-13.00	-49.55
7520.00	H	-	-	-78.90	9.20	37.30	-57.96	-13.00	-44.96

Table 7-21. Radiated Spurious Data (WCDMA PCS – Mid Channel - Ant1)


Mode:	WCDMA RMC
Channel:	9538
Frequency (MHz):	1907.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3815.20	H	-	-	-78.37	1.13	29.76	-65.50	-13.00	-52.50
5722.80	H	-	-	-78.76	4.68	32.92	-62.34	-13.00	-49.34
7630.40	H	-	-	-79.02	9.31	37.29	-57.97	-13.00	-44.97


Table 7-22. Radiated Spurious Data (WCDMA PCS – High Channel - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 58 of 67

LTE Band 25/2 – Ant1

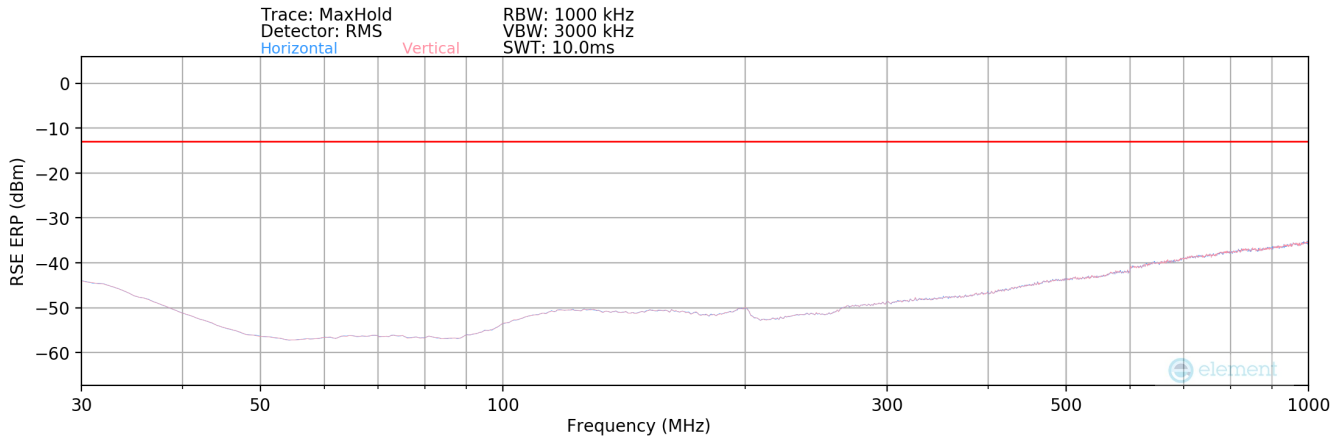

Plot 7-47. Radiated Spurious Plot (LTE Band 25/2 - Ant1)

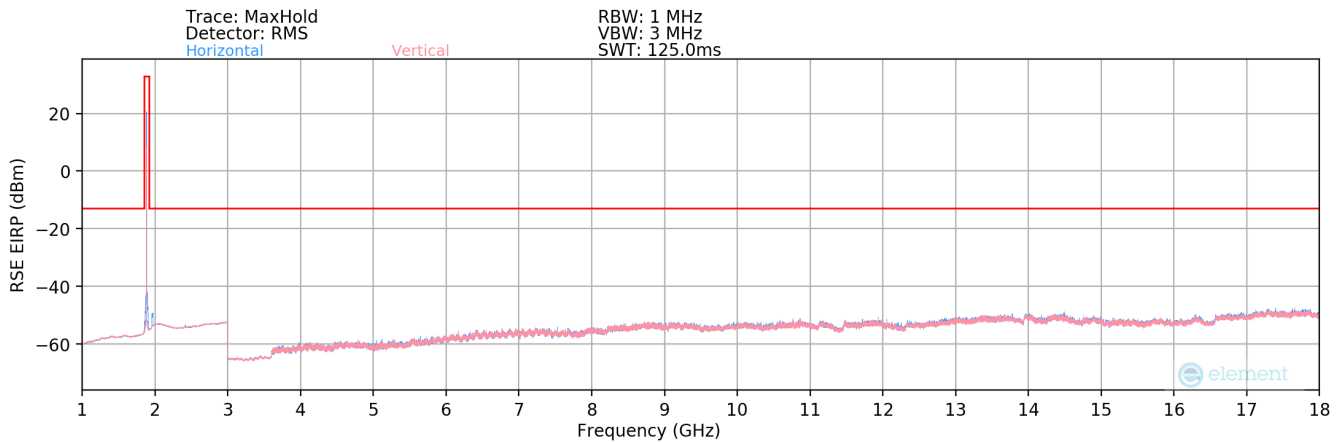

Plot 7-48. Radiated Spurious Plot (LTE Band 25/2 - Ant1)

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
477.00	H	-	-	-89.30	25.43	43.13	-54.28	-13.00	-41.28

Table 7-23. Radiated Spurious Data (LTE Band 25/2 – Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 59 of 67

Bandwidth (MHz):	20
Frequency (MHz):	1860
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3720.00	H	143	339	-76.87	1.19	31.32	-63.94	-13.00	-50.94
5580.00	H	146	26	-75.66	4.45	35.79	-59.46	-13.00	-46.46
7440.00	H	164	306	-70.72	9.10	45.38	-49.88	-13.00	-36.88
9300.00	H	-	-	-79.89	11.45	38.56	-56.70	-13.00	-43.70
11160.00	H	-	-	-80.76	12.39	38.63	-56.63	-13.00	-43.63
13020.00	H	-	-	-81.41	14.54	40.13	-55.13	-13.00	-42.13

Table 7-24. Radiated Spurious Data (LTE Band 25/2 – Low Channel - Ant1)

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3765.00	H	114	350	-76.19	1.07	31.88	-63.38	-13.00	-50.38
5647.50	H	131	15	-76.69	4.60	34.91	-60.34	-13.00	-47.34
7530.00	H	161	302	-72.43	9.20	43.77	-51.49	-13.00	-38.49
9412.50	H	-	-	-81.30	12.18	37.88	-57.38	-13.00	-44.38
11295.00	H	-	-	-81.56	12.86	38.30	-56.96	-13.00	-43.96
13177.50	H	-	-	-81.69	14.56	39.87	-55.39	-13.00	-42.39

Table 7-25. Radiated Spurious Data (LTE Band 25/2 – Mid Channel - Ant1)


Bandwidth (MHz):	20
Frequency (MHz):	1905
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3810.00	H	116	348	-77.14	1.13	30.99	-64.27	-13.00	-51.27
5715.00	H	112	60	-73.77	4.60	37.83	-57.43	-13.00	-44.43
7620.00	H	140	306	-72.18	9.53	44.35	-50.91	-13.00	-37.91
9525.00	H	-	-	-81.51	11.90	37.39	-57.87	-13.00	-44.87
11430.00	H	-	-	-81.48	13.02	38.54	-56.72	-13.00	-43.72
13335.00	H	-	-	-81.76	14.85	40.09	-55.17	-13.00	-42.17


Table 7-26. Radiated Spurious Data (LTE Band 25/2 – High Channel - Ant1)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 60 of 67

LTE Band 25/2 – Ant2

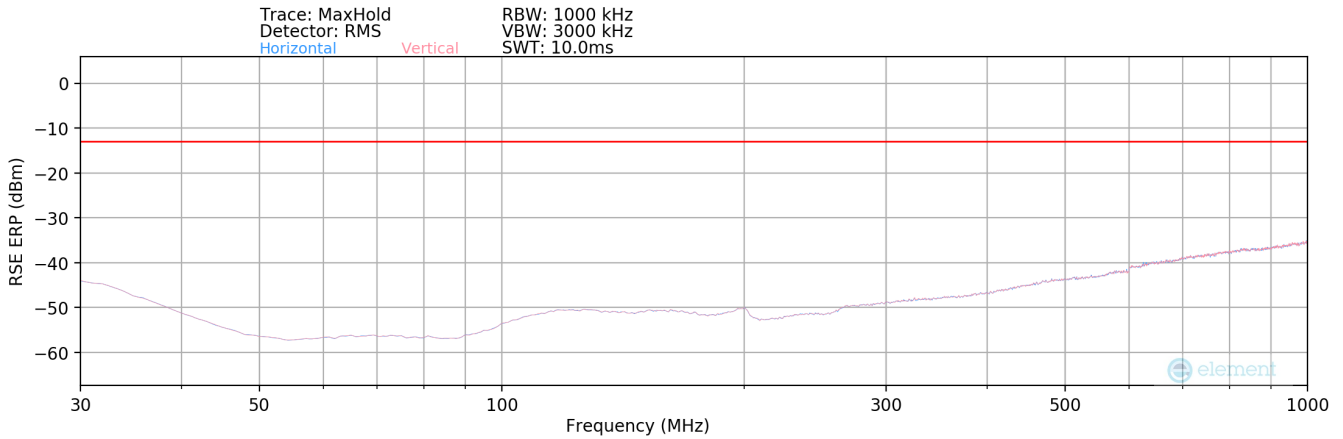

Plot 7-49. Radiated Spurious Plot (LTE Band 25/2 - Ant2)

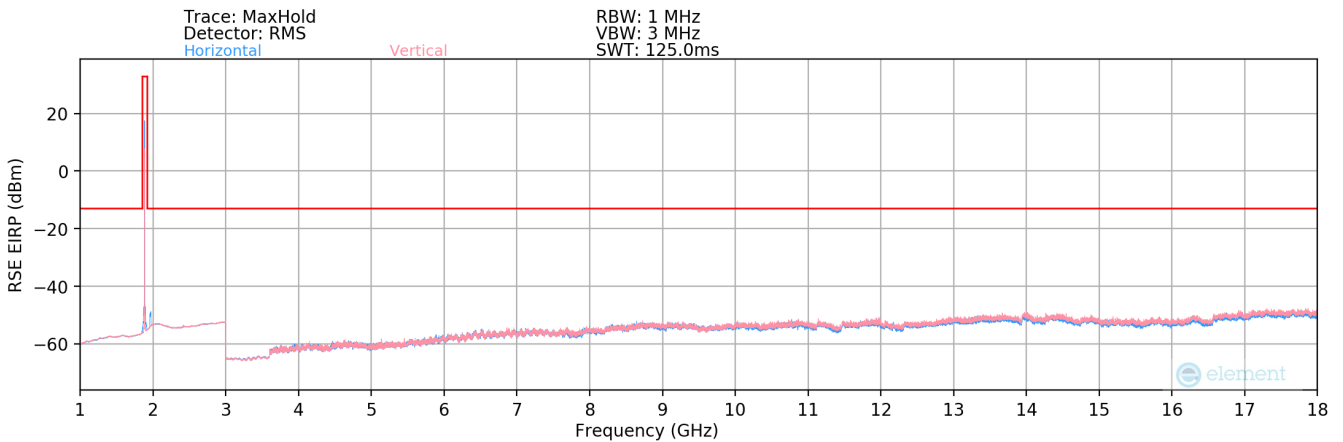

Plot 7-50. Radiated Spurious Plot (LTE Band 25/2 - Ant2)

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
313.00	V	-	-	-89.68	21.42	38.74	-58.67	-13.00	-45.67

Table 7-27. Radiated Spurious Data (LTE Band 25/2 – Ant2)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset		Page 61 of 67



Bandwidth (MHz):	20
Frequency (MHz):	1860
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3720.00	V	-	-	-78.63	1.19	29.56	-65.70	-13.00	-52.70
5580.00	V	-	-	-78.87	4.45	32.58	-62.67	-13.00	-49.67
7440.00	V	-	-	-79.46	9.10	36.64	-58.62	-13.00	-45.62

Table 7-28. Radiated Spurious Data (LTE Band 25/2 – Low Channel - Ant2)

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3765.00	V	-	-	-78.47	1.07	29.60	-65.66	-13.00	-52.66
5647.50	V	-	-	-78.63	4.60	32.97	-62.28	-13.00	-49.28
7530.00	V	-	-	-79.61	9.20	36.59	-58.67	-13.00	-45.67

Table 7-29. Radiated Spurious Data (LTE Band 25/2 – Mid Channel - Ant2)

Bandwidth (MHz):	20
Frequency (MHz):	1905
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3810.00	V	-	-	-78.03	1.13	30.10	-65.16	-13.00	-52.16
5715.00	V	-	-	-78.77	4.60	32.83	-62.43	-13.00	-49.43
7620.00	V	-	-	-79.76	9.53	36.77	-58.49	-13.00	-45.49

Table 7-30. Radiated Spurious Data (LTE Band 25/2 – High Channel - Ant2)

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 62 of 67



7.9 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015 – Section 5.6

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.


Test Notes

None

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 63 of 67

LTE Band 25/2					
Operating Frequency (Hz):		1,882,500,000			
Ref. Voltage (VDC):		4.414			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.414	- 30	1,882,499,134	-1,808	-0.0000960
		- 20	1,882,500,032	-909	-0.0000483
		- 10	1,882,499,433	-1,509	-0.0000802
		0	1,882,500,172	-770	-0.0000409
		+ 10	1,882,499,964	-978	-0.0000520
		+ 20 (Ref)	1,882,500,942	0	0.0000000
		+ 30	1,882,500,588	-354	-0.0000188
		+ 40	1,882,499,790	-1,152	-0.0000612
Battery Endpoint	3.774	+ 20	1,882,500,730	-212	-0.0000113

Table 7-31. LTE Band 25/2 Frequency Stability Data

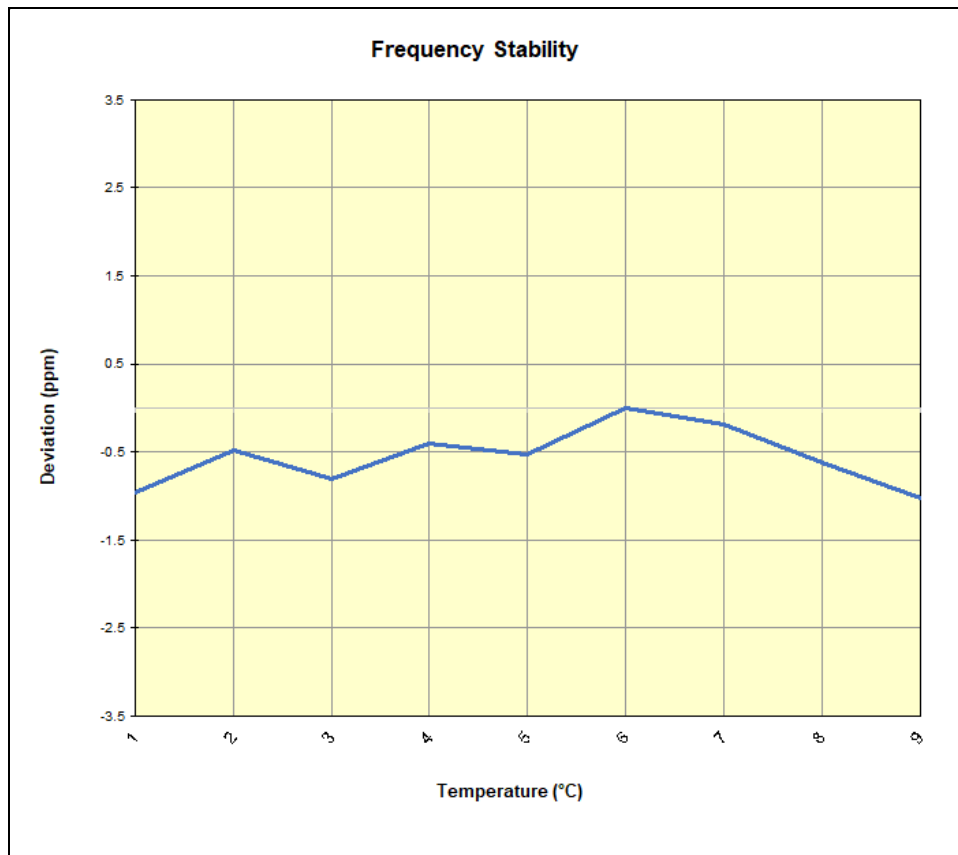


Plot 7-51. LTE Band 25/2 Frequency Stability Chart

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 64 of 67

GSM/GPRS PCS					
		Operating Frequency (Hz):		1,880,000,000	
		Ref. Voltage (VDC):		4.414	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.414	- 30	1,880,000,880	-2,483	-0.0001321
		- 20	1,880,002,895	-468	-0.0000249
		- 10	1,880,005,638	2,276	0.0001210
		0	1,880,005,638	2,276	0.0001210
		+ 10	1,880,000,840	-2,523	-0.0001342
		+ 20 (Ref)	1,880,003,363	0	0.0000000
		+ 30	1,879,999,040	-4,323	-0.0002299
		+ 40	1,880,000,803	-2,560	-0.0001362
		+ 50	1,880,002,686	-677	-0.0000360
Battery Endpoint	3.774	+ 20	1,880,002,590	-773	-0.0000411

Table 7-32. GSM/GPRS PCS Frequency Stability Data

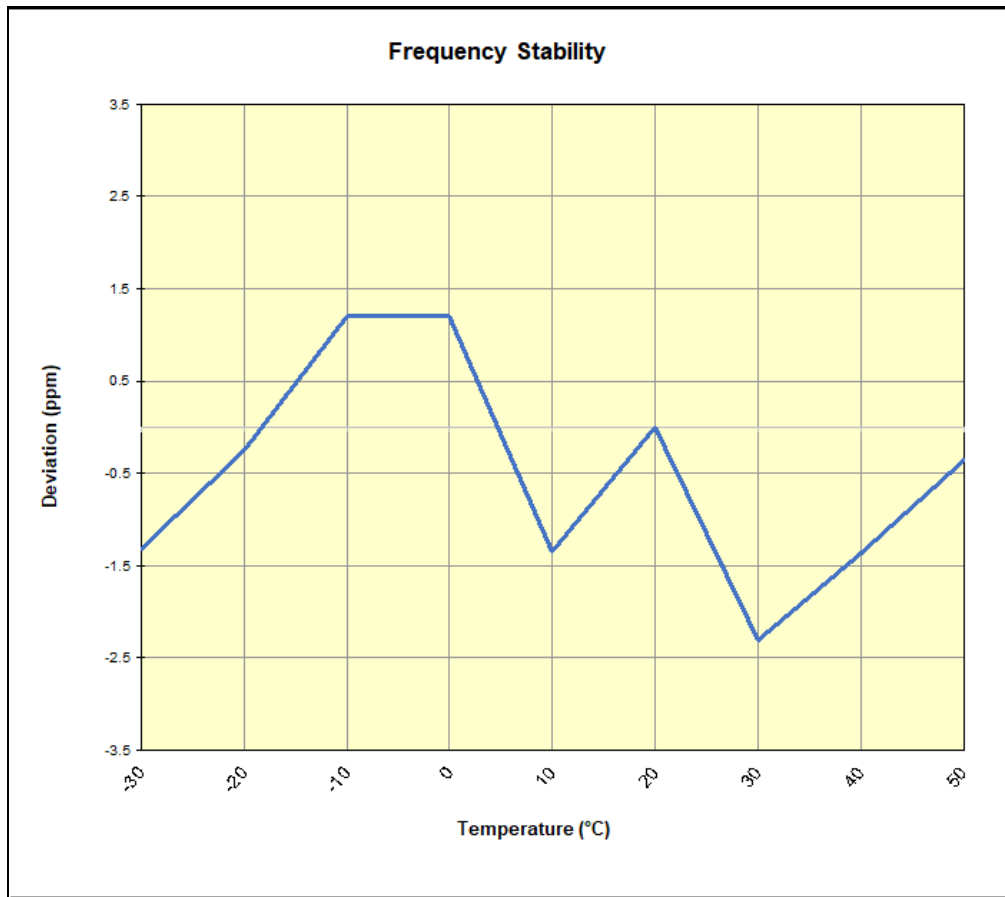


Plot 7-52. GSM/GPRS PCS Frequency Stability Chart

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 65 of 67

WCDMA PCS					
		Operating Frequency (Hz):		1,880,000,000	
		Ref. Voltage (VDC):		4.414	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.414	- 30	1,880,035,227	3,834	0.0002039
		- 20	1,880,035,435	4,042	0.0002150
		- 10	1,880,035,110	3,718	0.0001977
		0	1,880,033,723	2,331	0.0001240
		+ 10	1,880,033,652	2,259	0.0001202
		+ 20 (Ref)	1,880,031,393	0	0.0000000
		+ 30	1,880,030,506	-887	-0.0000472
		+ 40	1,880,034,836	3,444	0.0001832
		+ 50	1,880,031,162	-230	-0.0000122
Battery Endpoint	3.774	+ 20	1,880,031,307	-86	-0.0000046

Table 7-33. WCDMA PCS Frequency Stability Data

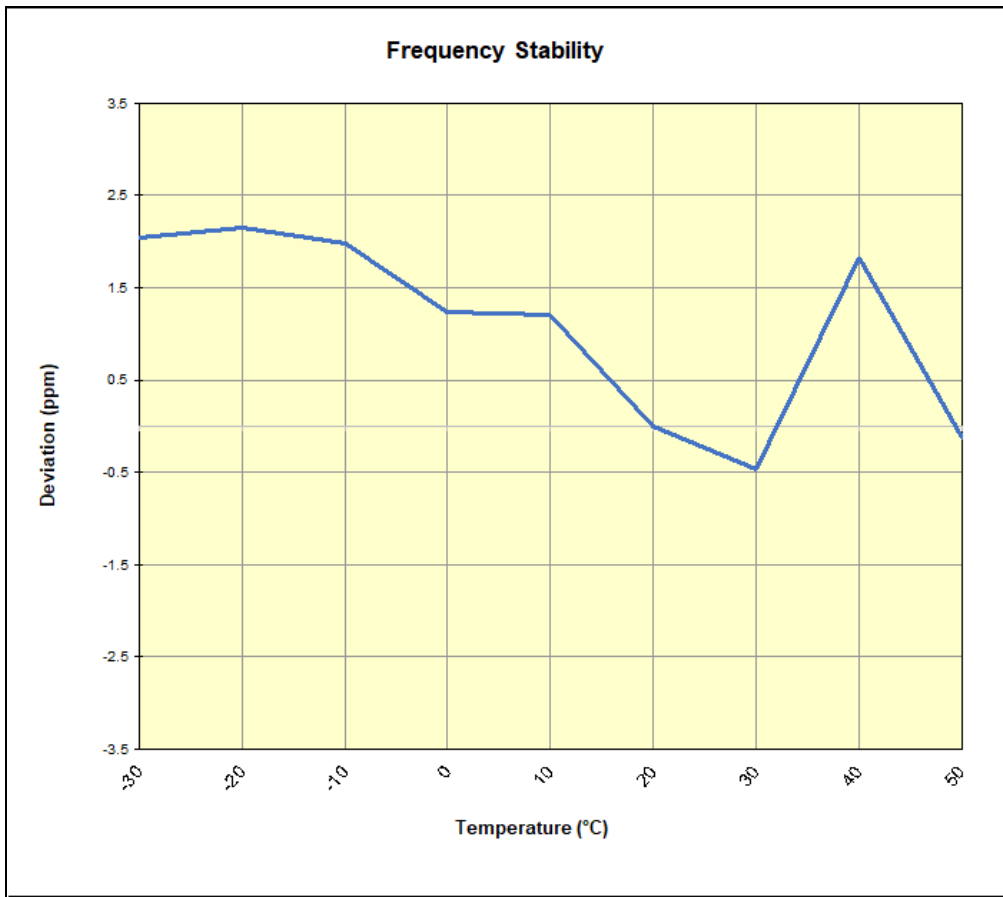

Plot 7-53. WCDMA PCS Frequency Stability Chart

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 66 of 67

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMA356E** complies with all the requirements of Part 24 of the FCC rules.

FCC ID: A3LSMA356E	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2310260110-03.A3L	Test Dates: 11/6/2023 - 12/27/2023	EUT Type: Portable Handset	Page 67 of 67