

APPENDIX B: SAR DIPOLE VERIFICATION PLOTS

ELEMENT

DUT: Dipole 13.0 MHz; Type: CLA-13 - SN1002

Communication System: UID: 0, CW; Frequency: 13.0 MHz
Medium: 30 Head; Medium parameters used:
f = 13.0 MHz; cond = 0.748 S/m; perm = 52.9; density = 1000 kg/m³
Phantom Section: Flat; Space: 0 mm

Test Date: 12/22/2023; Ambient Temp: 20.2°C; Tissue Temp: 20.2°C

Probe: EX3DV4 - SN7417; ConvF:(18.67,18.67,18.67); 2023-02-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn665; 2023-02-15
Phantom: ELI V8.0 (20deg probe tilt); Serial: 2077
Measurement SW: DASY Module SAR V16.2.0.1425

13.0 MHz System Verification at 30.0 dBm (1000 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.323 W/kg

Deviation (1 g) = -0.38%; Deviation (10 g) = -1.22%

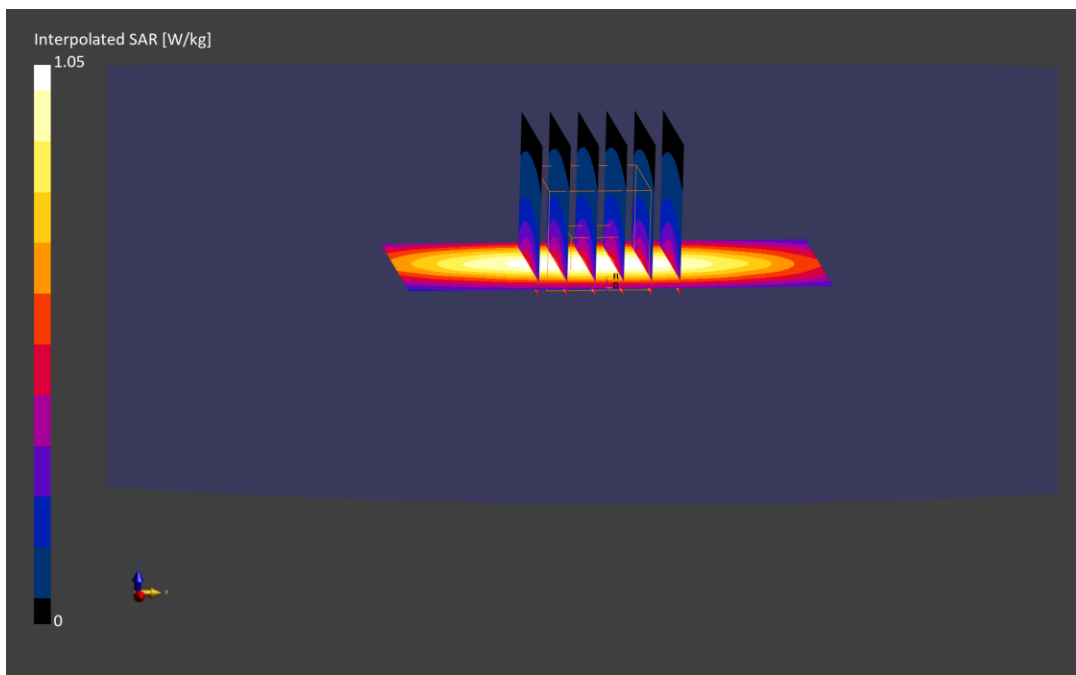

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1046

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
f = 750.0 MHz; cond = 0.889 S/m; perm = 41.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 11/09/2023; Ambient Temp: 22.4°C; Tissue Temp: 22.1°C

Probe: EX3DV4 - SN7640; ConvF:(10.91,10.91,10.91); 2023-02-10
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn1645; 2023-02-16
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1868
Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.57 W/kg

SAR(1 g) = 1.65 W/kg; SAR(10 g) = 1.09 W/kg

Deviation (1 g) = -5.06%; Deviation (10 g) = -4.39%

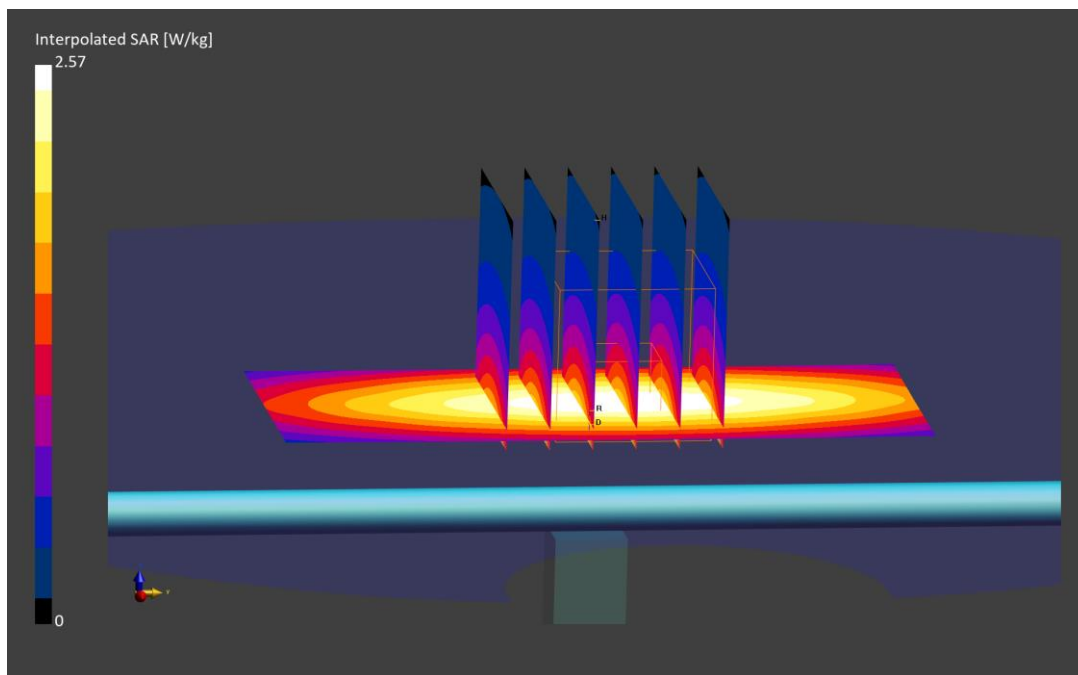

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1003

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
f = 750.0 MHz; cond = 0.887 S/m; perm = 40.2; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 11/13/2023; Ambient Temp: 23.4°C; Tissue Temp: 22.8°C

Probe: EX3DV4 - SN7565; ConvF:(9.58,9.58,9.58); 2023-01-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; 2023-01-20
Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1937
Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.61 W/kg

SAR(1 g) = 1.72 W/kg; SAR(10 g) = 1.13 W/kg

Deviation (1 g) = 1.42%; Deviation (10 g) = 1.62%

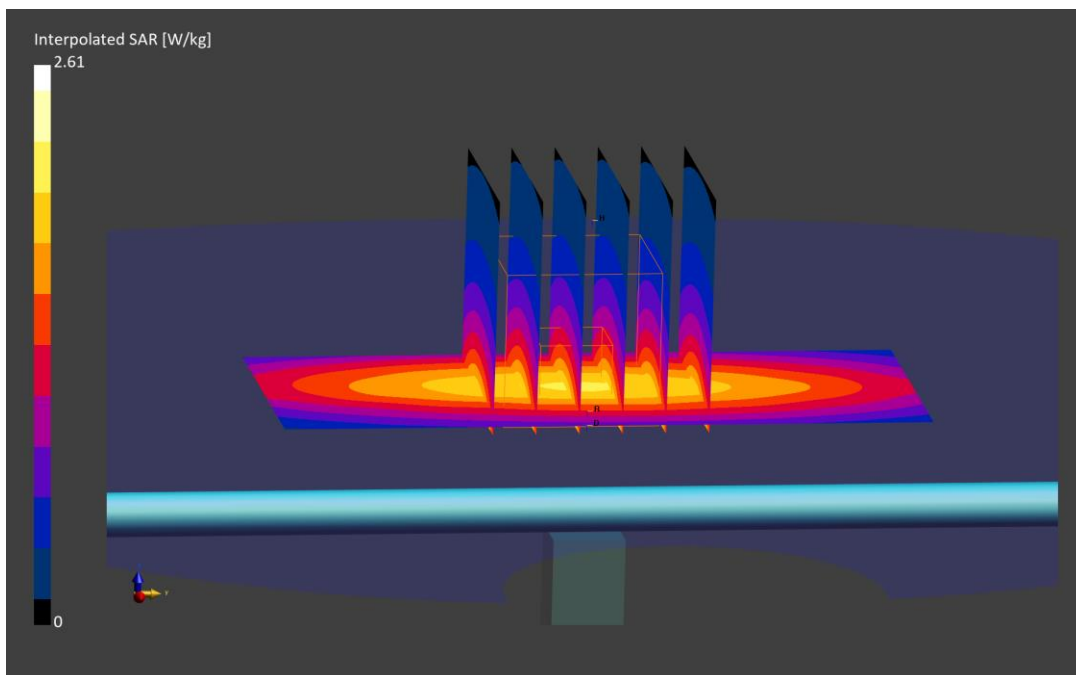

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1046

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
f = 750.0 MHz; cond = 0.893 S/m; perm = 41.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 11/13/2023; Ambient Temp: 21.3°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN7491; ConvF:(9.91,9.91,9.91); 2023-06-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1532; 2023-06-15
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1797
Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 1.78 W/kg; SAR(10 g) = 1.18 W/kg

Deviation (1 g) = 2.42%; Deviation (10 g) = 3.51%

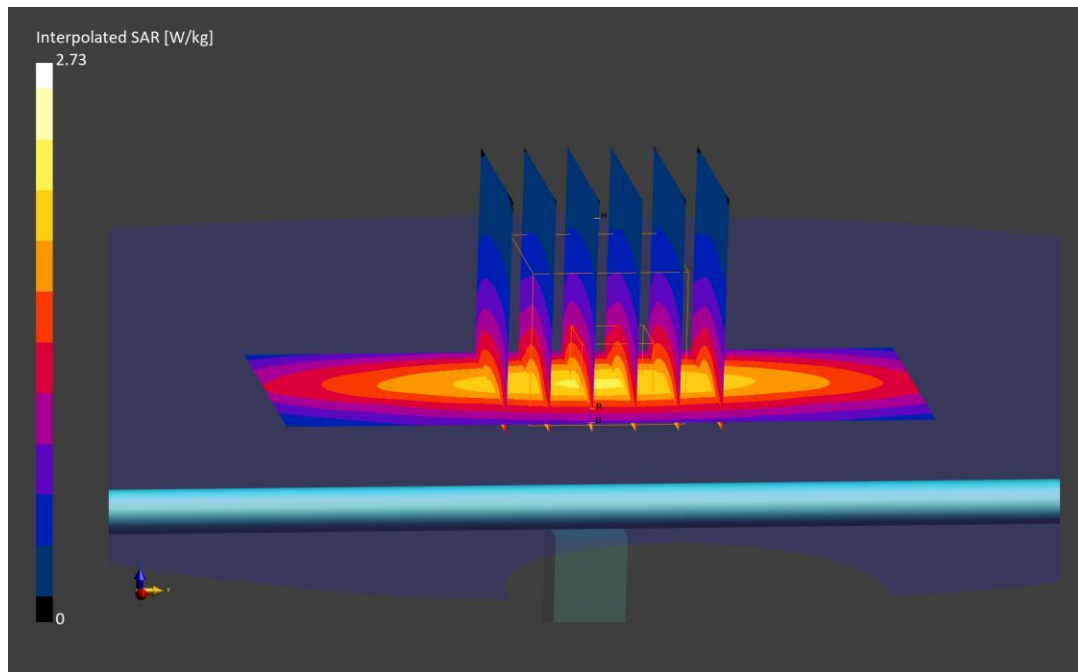

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1046

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
f = 750.0 MHz; cond = 0.884 S/m; perm = 41.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 11/24/2023; Ambient Temp: 21.6°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7491; ConvF:(9.91,9.91,9.91); 2023-06-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1532; 2023-06-15
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1797
Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.73 W/kg

SAR(1 g) = 1.81 W/kg; SAR(10 g) = 1.19 W/kg

Deviation (1 g) = 4.14%; Deviation (10 g) = 4.39%

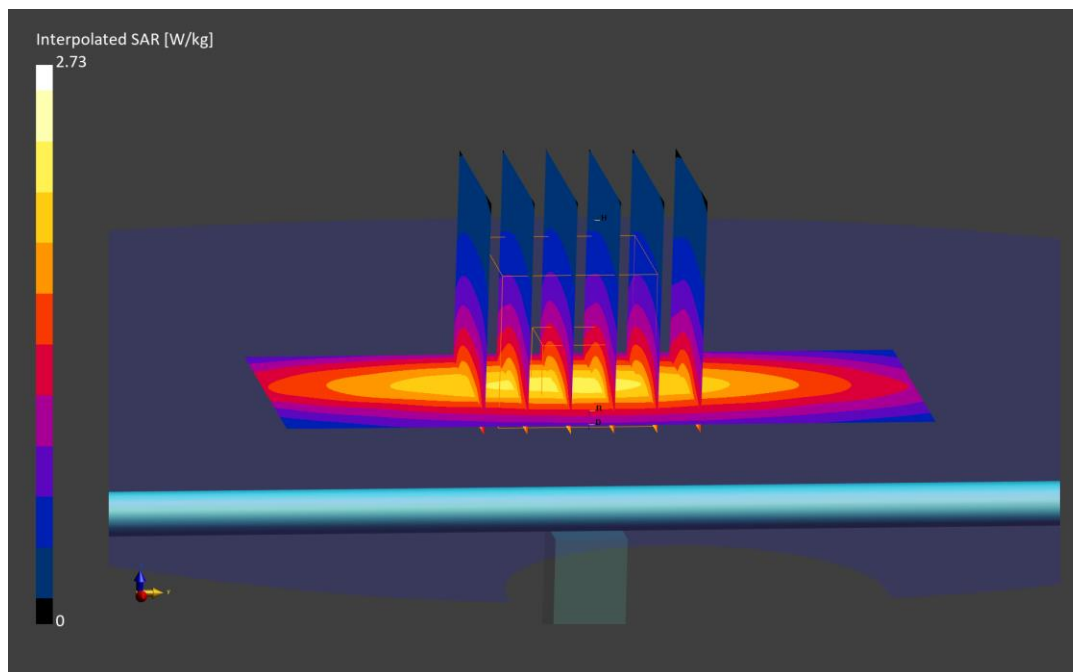

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1046

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
f = 750.0 MHz; cond = 0.874 S/m; perm = 41.2; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 11/27/2023; Ambient Temp: 20.3°C; Tissue Temp: 19.6°C

Probe: EX3DV4 - SN7491; ConvF:(9.91,9.91,9.91); 2023-06-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1532; 2023-06-15
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1797
Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.75 W/kg

SAR(1 g) = 1.75 W/kg; SAR(10 g) = 1.15 W/kg

Deviation (1 g) = 0.69%; Deviation (10 g) = 0.88%

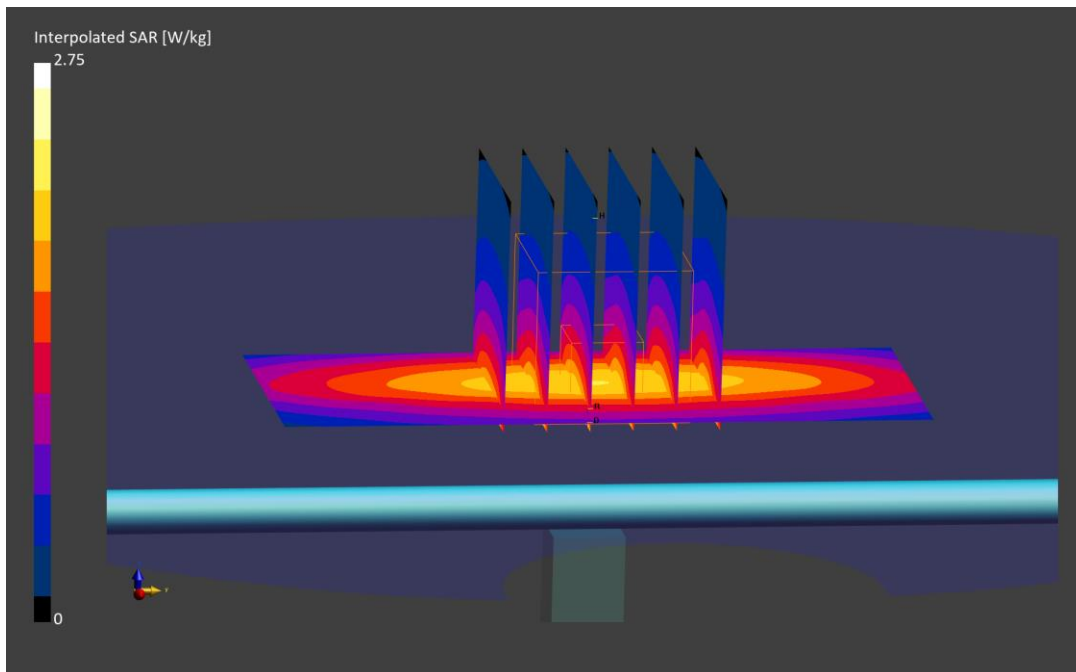

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1046

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
f = 750.0 MHz; cond = 0.899 S/m; perm = 41.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 12/06/2023; Ambient Temp: 20.8°C; Tissue Temp: 19.2°C

Probe: EX3DV4 - SN7640; ConvF:(10.91,10.91,10.91); 2023-02-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1645; 2023-02-16
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1868
Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.50 W/kg

SAR(1 g) = 1.62 W/kg; SAR(10 g) = 1.08 W/kg

Deviation (1 g) = -6.79%; Deviation (10 g) = -5.26%

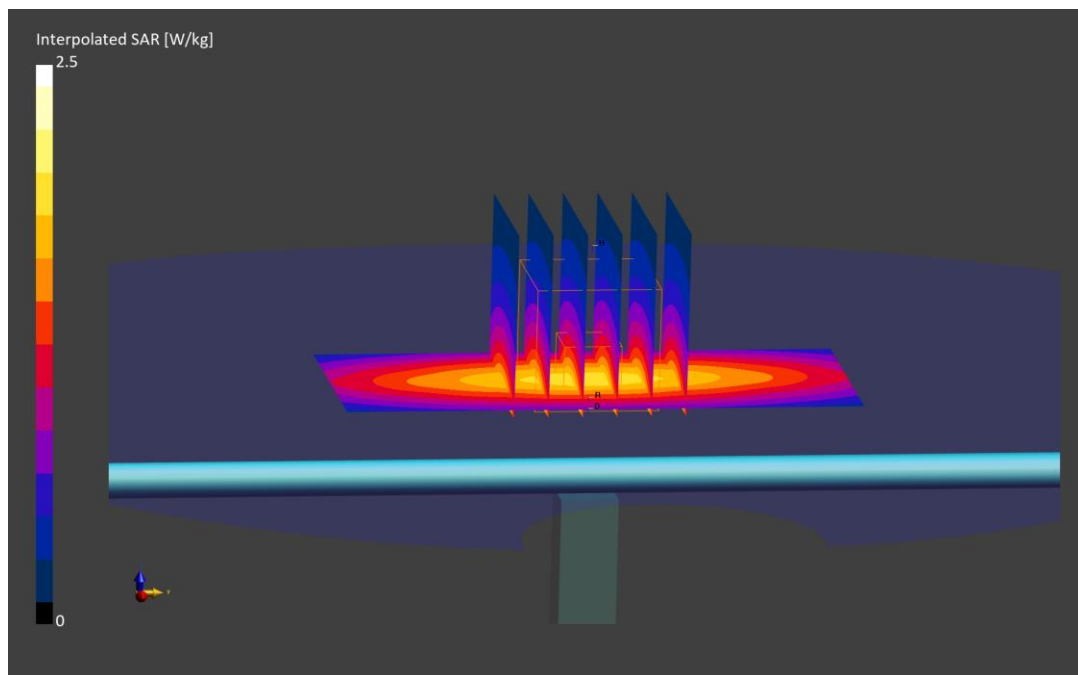

ELEMENT

DUT: Dipole 750.0 MHz; Type: D750V3 - SN1054

Communication System: UID: 0, CW; Frequency: 750.0 MHz
Medium: 750 Head; Medium parameters used:
f = 750.0 MHz; cond = 0.885 S/m; perm = 43.0; density = 1000 kg/m3
Phantom Section: Flat; Space: 15 mm

Test Date: 12/13/2023; Ambient Temp: 21.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7570; ConvF:(10.29,10.29,10.29); 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1558; 2023-01-17
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.0.1425

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.81 W/kg

SAR(1 g) = 1.75 W/kg; SAR(10 g) = 1.16 W/kg

Deviation (1 g) = 2.70%; Deviation (10 g) = 3.57%

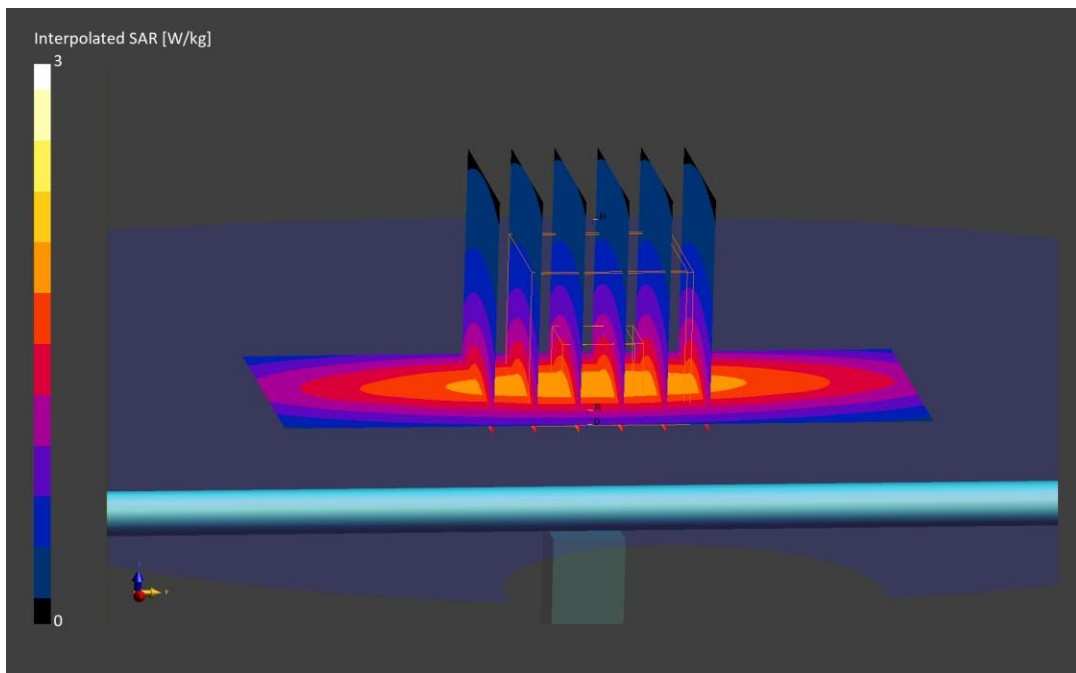

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d180

Communication System: UID: 0, CW; Frequency: 835.0 MHz
Medium: 835 Head; Medium parameters used:
f = 835.0 MHz; cond = 0.932 S/m; perm = 41.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 11/08/2023; Ambient Temp: 22.6°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7558; ConvF:(9.92,9.92,9.92); 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.0.1425

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.25 W/kg

SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.33 W/kg

Deviation (1 g) = 6.44%; Deviation (10 g) = 6.06%

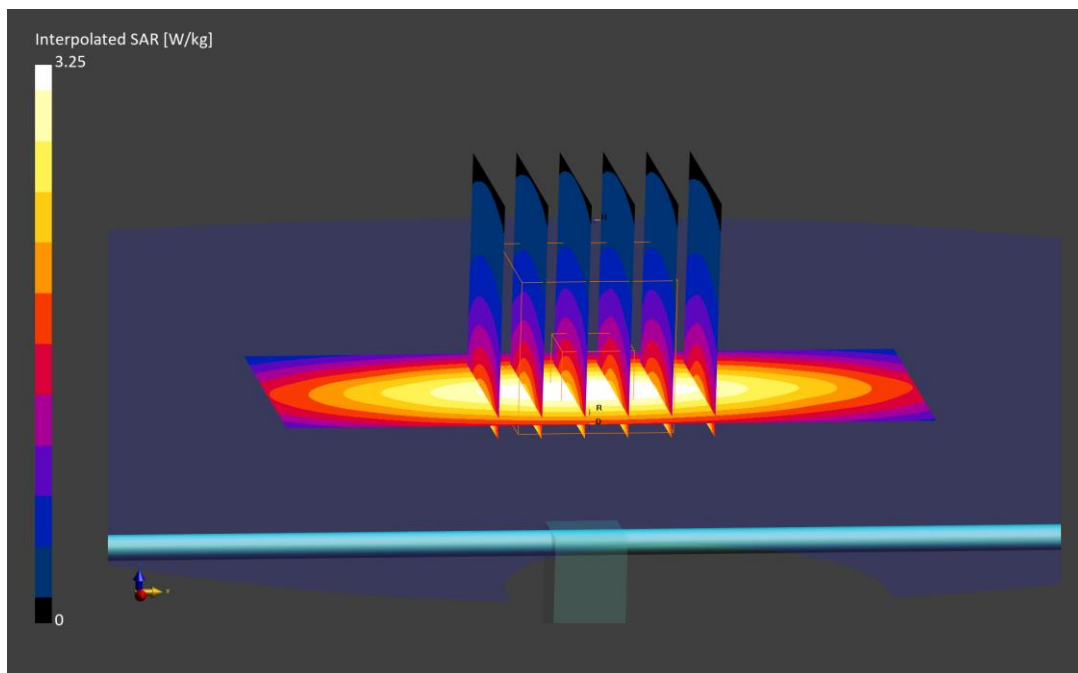

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d119

Communication System: UID: 0, CW; Frequency: 835.0 MHz
Medium: 835 Head; Medium parameters used:
f = 835.0 MHz; cond = 0.925 S/m; perm = 40.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 11/15/2023; Ambient Temp: 21.5°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7640; ConvF:(10.56,10.56,10.56); 2023-02-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1645; 2023-02-16
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1868
Measurement SW: DASY Module SAR V16.2.0.1425

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.23 W/kg

SAR(1 g) = 2.02 W/kg; SAR(10 g) = 1.31 W/kg

Deviation (1 g) = 3.91%; Deviation (10 g) = 2.66%

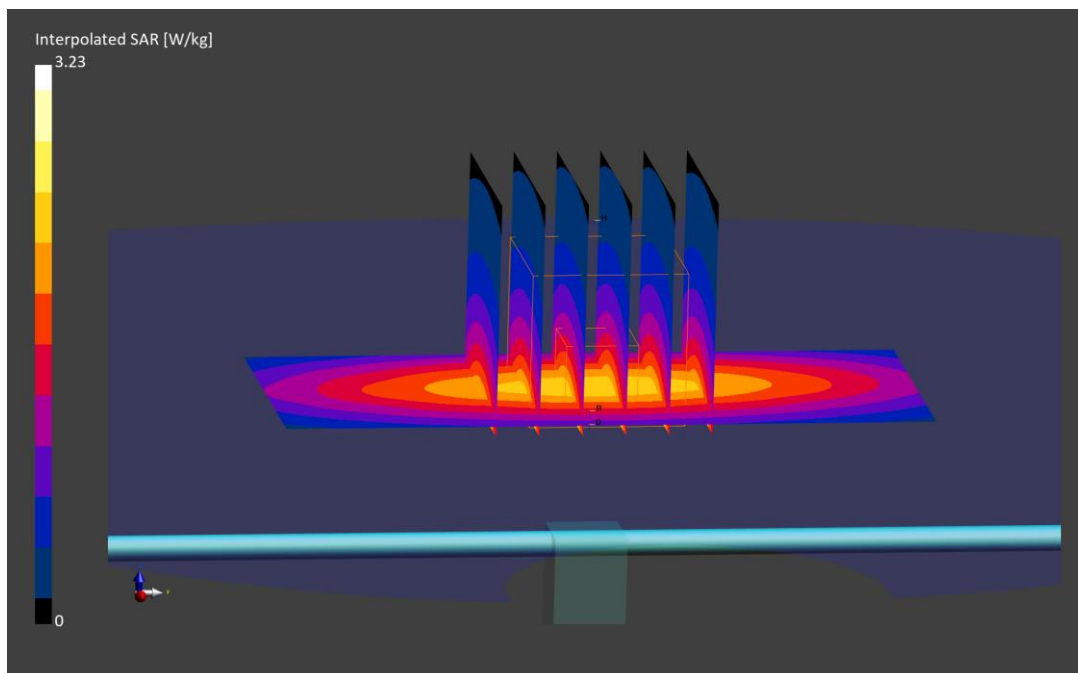

ELEMENT

DUT: D835V2; Type: D835V2; Serial: SN4d180

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$; $\sigma = 0.927 \text{ S/m}$; $\epsilon_r = 40.551$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 11/20/2023; Ambient Temp: 23.2°C; Tissue Temp: 23.3°C

Probe: EX3DV4 - SN7402; ConvF(9.84, 9.84, 9.84) @ 835 MHz; Calibrated: 5/10/2023

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1502; Calibrated: 6/27/2023

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1626

Measurement SW: DASY52, Version 52.10 (4);SEMCAD X Version 14.6.14 (7501)

835 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (7x14x1): Measurement grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.96 W/kg

SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.3 W/kg

Deviation(1 g) = 2.80%; Deviation(10 g) = 3.67%

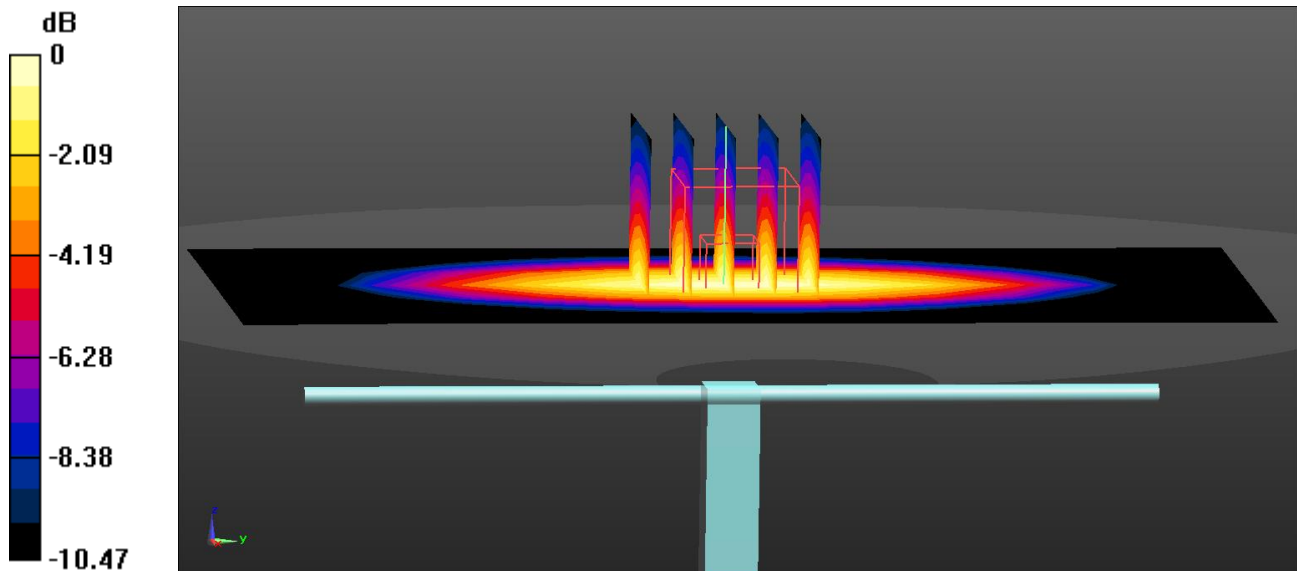

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d119

Communication System: UID: 0, CW; Frequency: 835.0 MHz
Medium: 835 Head; Medium parameters used:
f = 835.0 MHz; cond = 0.889 S/m; perm = 40.1; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 11/20/2023; Ambient Temp: 20.7°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7640; ConvF:(10.56,10.56,10.56); 2023-02-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1645; 2023-02-16
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1868
Measurement SW: DASY Module SAR V16.2.0.1425

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.18 W/kg

SAR(1 g) = 2.02 W/kg; SAR(10 g) = 1.32 W/kg

Deviation (1 g) = 3.91%; Deviation (10 g) = 3.45%

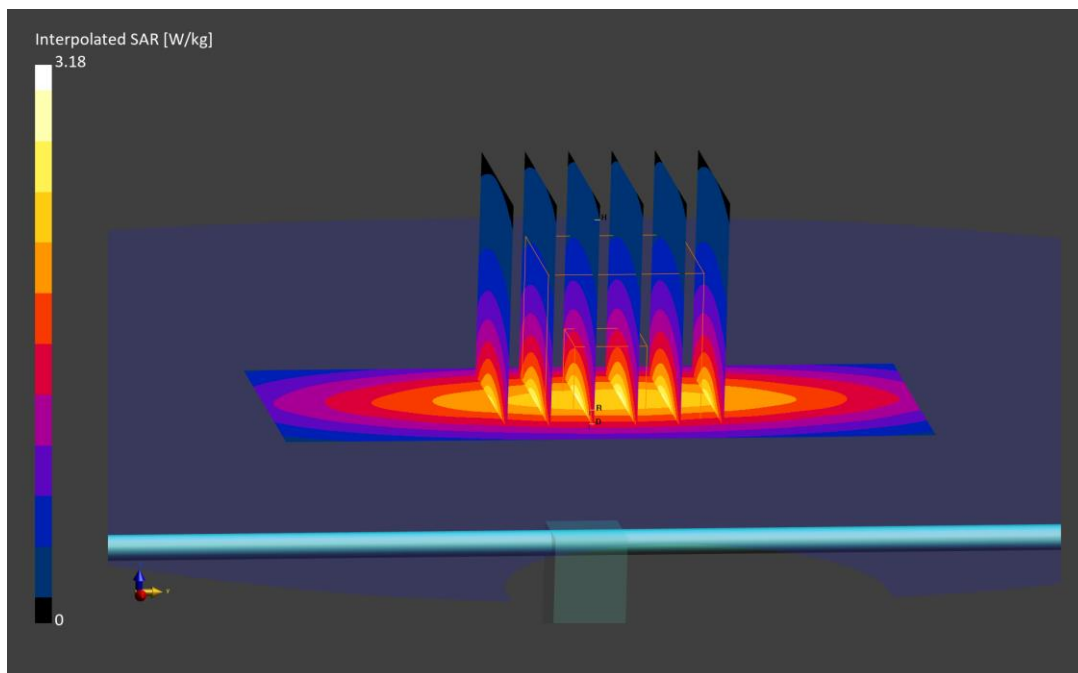

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d119

Communication System: UID: 0, CW; Frequency: 835.0 MHz
Medium: 835 Head; Medium parameters used:
f = 835.0 MHz; cond = 0.915 S/m; perm = 39.9; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 11/22/2023; Ambient Temp: 21.0°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7491; ConvF:(9.72,9.72,9.72); 2023-06-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1532; 2023-06-15
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1797
Measurement SW: DASY Module SAR V16.2.0.1425

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 2.00 W/kg; SAR(10 g) = 1.30 W/kg

Deviation (1 g) = 2.88%; Deviation (10 g) = 1.88%

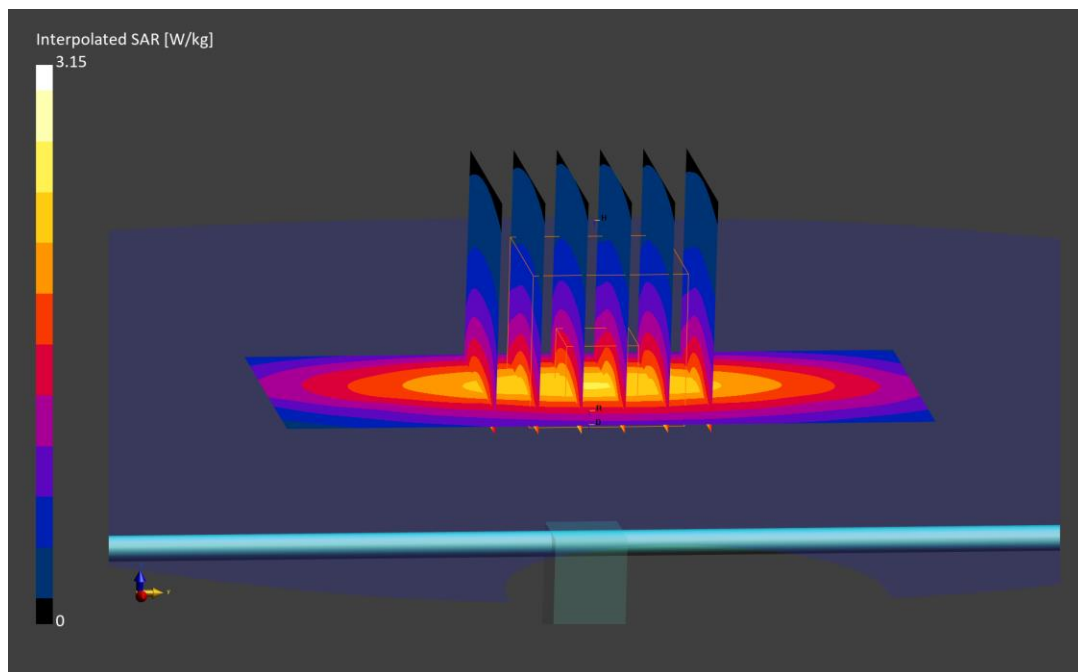

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d119

Communication System: UID: 0, CW; Frequency: 835.0 MHz
Medium: 750 Head; Medium parameters used:
f = 835.0 MHz; cond = 0.931 S/m; perm = 41.1; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 12/06/2023; Ambient Temp: 20.8°C; Tissue Temp: 19.2°C

Probe: EX3DV4 - SN7640; ConvF:(10.56,10.56,10.56); 2023-02-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1645; 2023-02-16
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1868
Measurement SW: DASY Module SAR V16.2.0.1425

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.98 W/kg

SAR(1 g) = 1.89 W/kg; SAR(10 g) = 1.23 W/kg

Deviation (1 g) = -2.78%; Deviation (10 g) = -3.61%

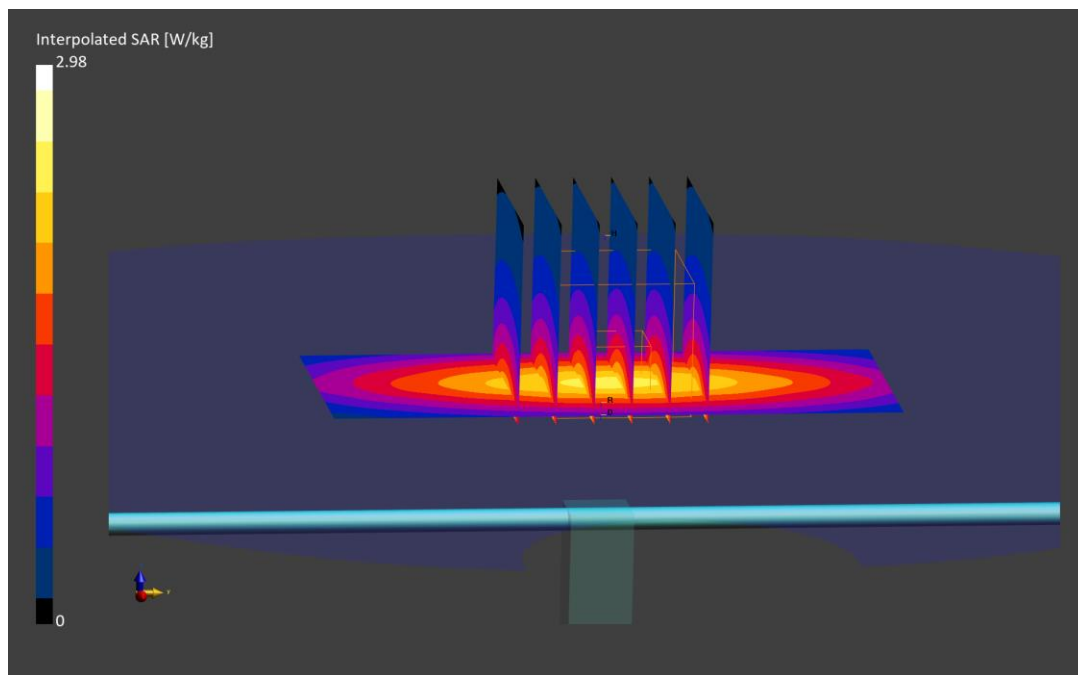

ELEMENT

DUT: Dipole 835.0 MHz; Type: D835V2 - SN4d132

Communication System: UID: 0, CW; Frequency: 835.0 MHz
Medium: 835 Head; Medium parameters used:
f = 835.0 MHz; cond = 0.915 S/m; perm = 42.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 12/13/2023; Ambient Temp: 21.0°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7570; ConvF:(9.92,9.92,9.92); 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1558; 2023-01-17
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.0.1425

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.18 W/kg

SAR(1 g) = 2.01 W/kg; SAR(10 g) = 1.32 W/kg

Deviation (1 g) = 4.04%; Deviation (10 g) = 5.26%

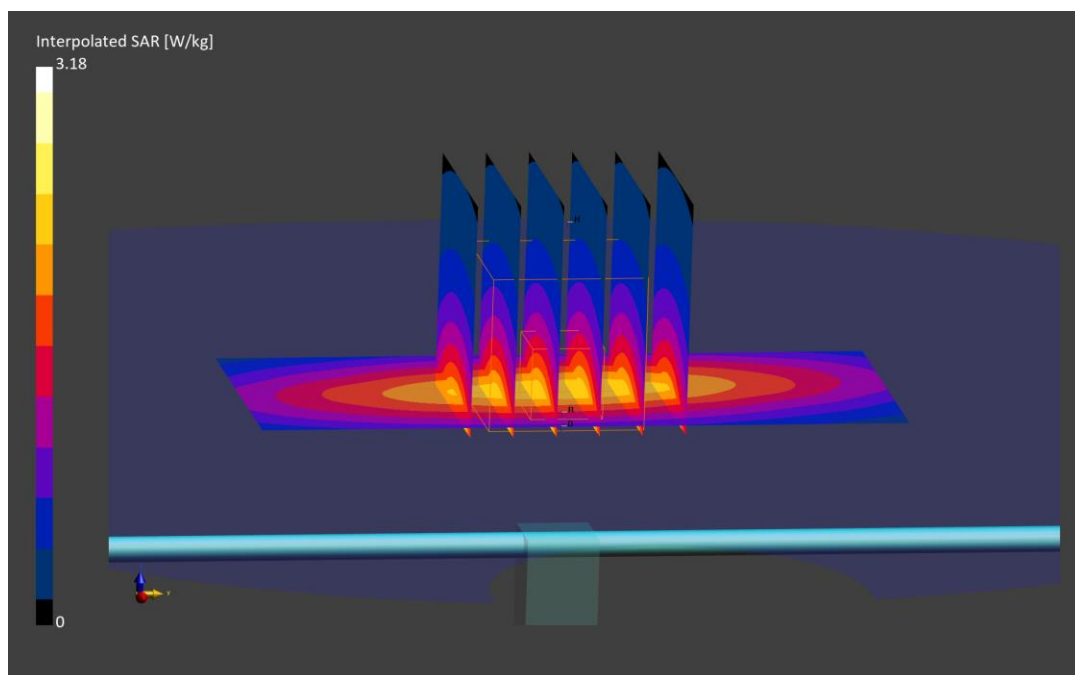

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1051

Communication System: UID: 0, CW; Frequency: 1750.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1750.0 MHz; cond = 1.37 S/m; perm = 39.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/15/2023; Ambient Temp: 21.8°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7491; ConvF:(8.69,8.69,8.69); 2023-06-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1532; 2023-06-15
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1797
Measurement SW: DASY Module SAR V16.2.0.1425

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.32 W/kg

SAR(1 g) = 3.71 W/kg; SAR(10 g) = 1.96 W/kg

Deviation (1 g) = 2.77%; Deviation (10 g) = 3.16%

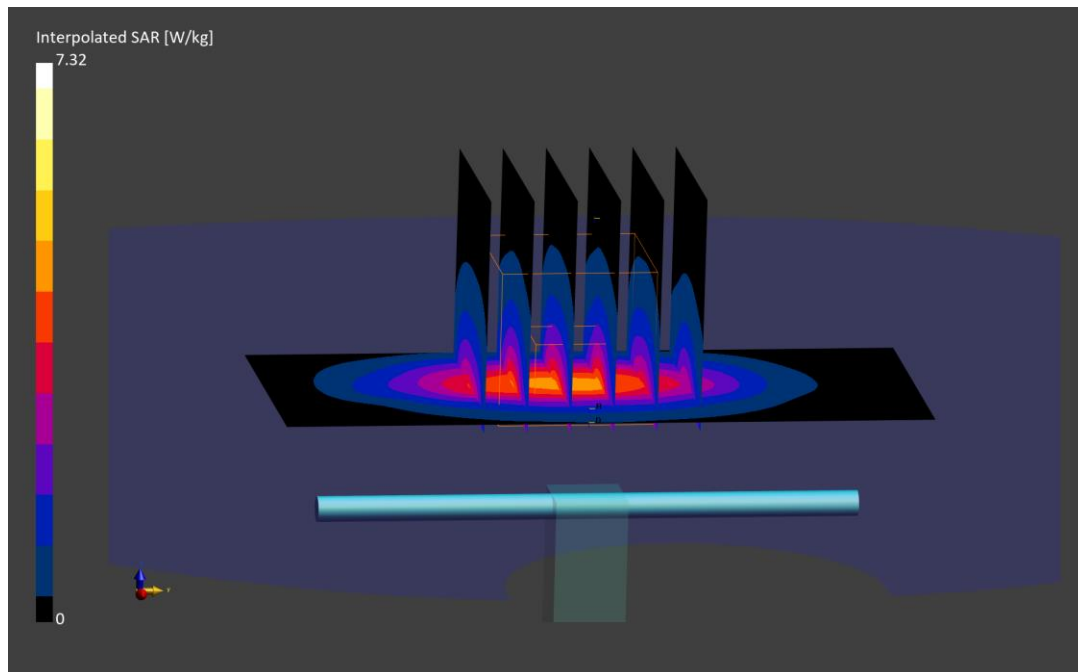

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1051

Communication System: UID: 0, CW; Frequency: 1750.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1750.0 MHz; cond = 1.33 S/m; perm = 38.2; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/21/2023; Ambient Temp: 22.2°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7640; ConvF:(9.23,9.23,9.23); 2023-02-10
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn1645; 2023-02-16
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1868
Measurement SW: DASY Module SAR V16.2.0.1425

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.98 W/kg

SAR(1 g) = 3.65 W/kg; SAR(10 g) = 1.94 W/kg

Deviation (1 g) = 1.11%; Deviation (10 g) = 2.11%

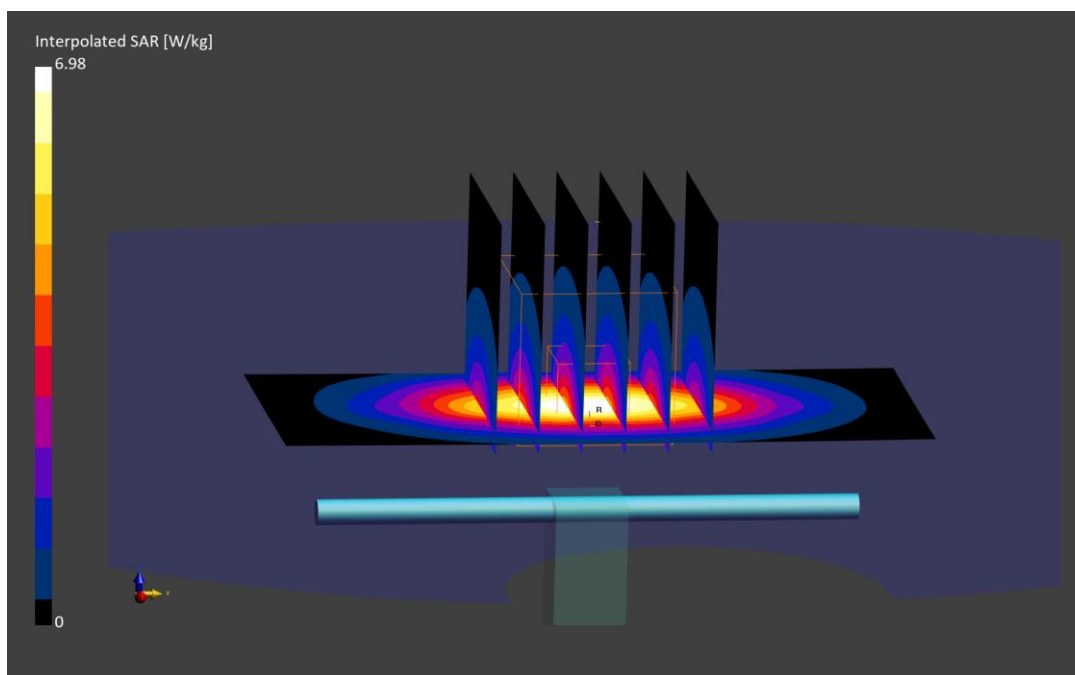

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1765V2 - SN1008

Communication System: UID: 0, CW; Frequency: 1750.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1750.0 MHz; cond = 1.37 S/m; perm = 41.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/30/2023; Ambient Temp: 21.6°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7713; ConvF:(8.99,8.99,8.99); 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; 2023-01-18
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.0.1425

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.93 W/kg

SAR(1 g) = 3.79 W/kg; SAR(10 g) = 2.04 W/kg

Deviation (1 g) = 1.34%; Deviation (10 g) = 4.08%

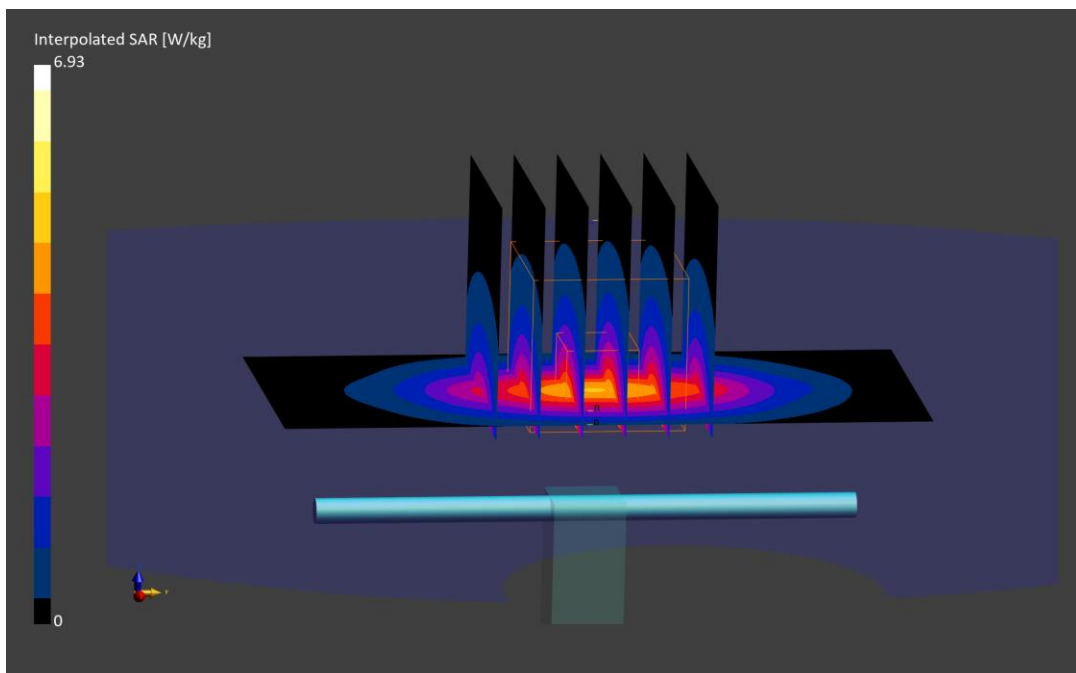

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1765V2 - SN1008

Communication System: UID: 0, CW; Frequency: 1750.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1750.0 MHz; cond = 1.39 S/m; perm = 38.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/04/2023; Ambient Temp: 22.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN7713; ConvF:(8.99,8.99,8.99); 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; 2023-01-18
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.0.1425

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.99 W/kg

SAR(1 g) = 3.68 W/kg; SAR(10 g) = 1.93 W/kg

Deviation (1 g) = -1.60%; Deviation (10 g) = -1.53%

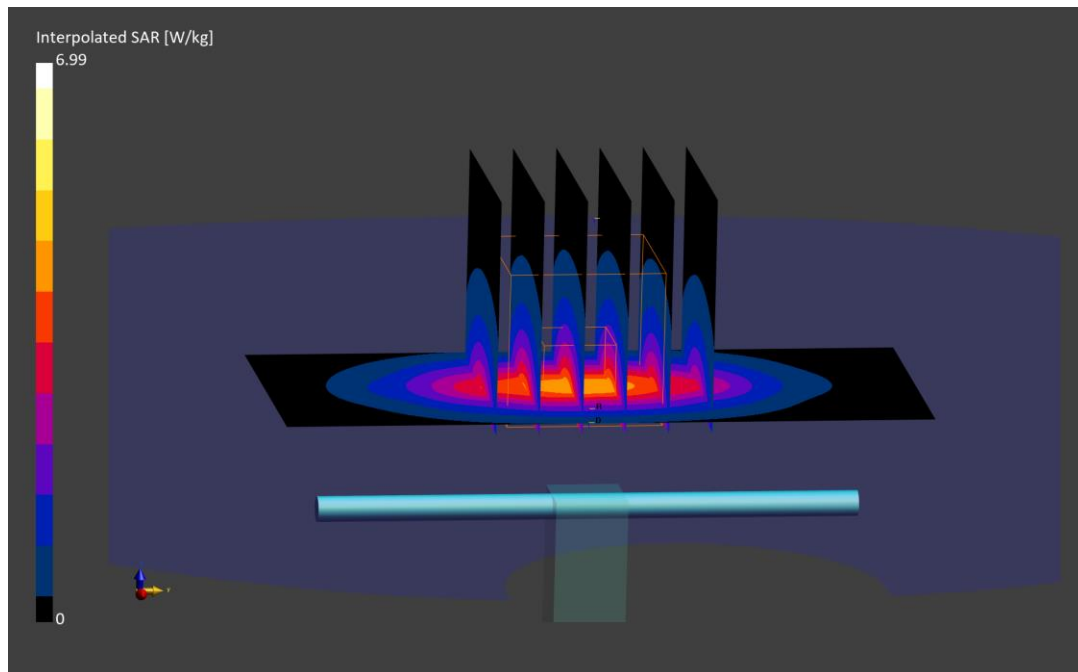

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1150

Communication System: UID: 0, CW; Frequency: 1750.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1750.0 MHz; cond = 1.43 S/m; perm = 38.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/11/2023; Ambient Temp: 19.1°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7417; ConvF:(8.32,8.32,8.32); 2023-02-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn665; 2023-02-15
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.0.1425

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.59 W/kg

SAR(1 g) = 3.87 W/kg; SAR(10 g) = 1.99 W/kg

Deviation (1 g) = 4.88%; Deviation (10 g) = 2.58%

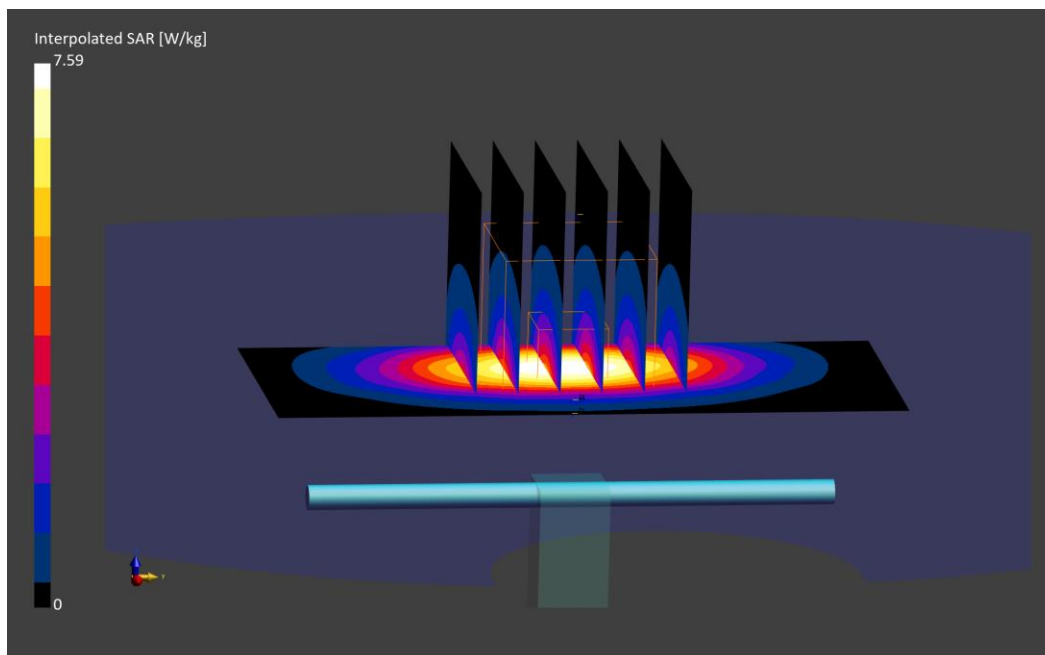

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1148

Communication System: UID: 0, CW; Frequency: 1750.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1750.0 MHz; cond = 1.31 S/m; perm = 39.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/11/2023; Ambient Temp: 20.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7409; ConvF:(8.37,8.37,8.37); 2023-06-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1334; 2023-06-15
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.2.0.1425

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.10 W/kg

SAR(1 g) = 3.83 W/kg; SAR(10 g) = 2.05 W/kg

Deviation (1 g) = 2.96%; Deviation (10 g) = 5.67%

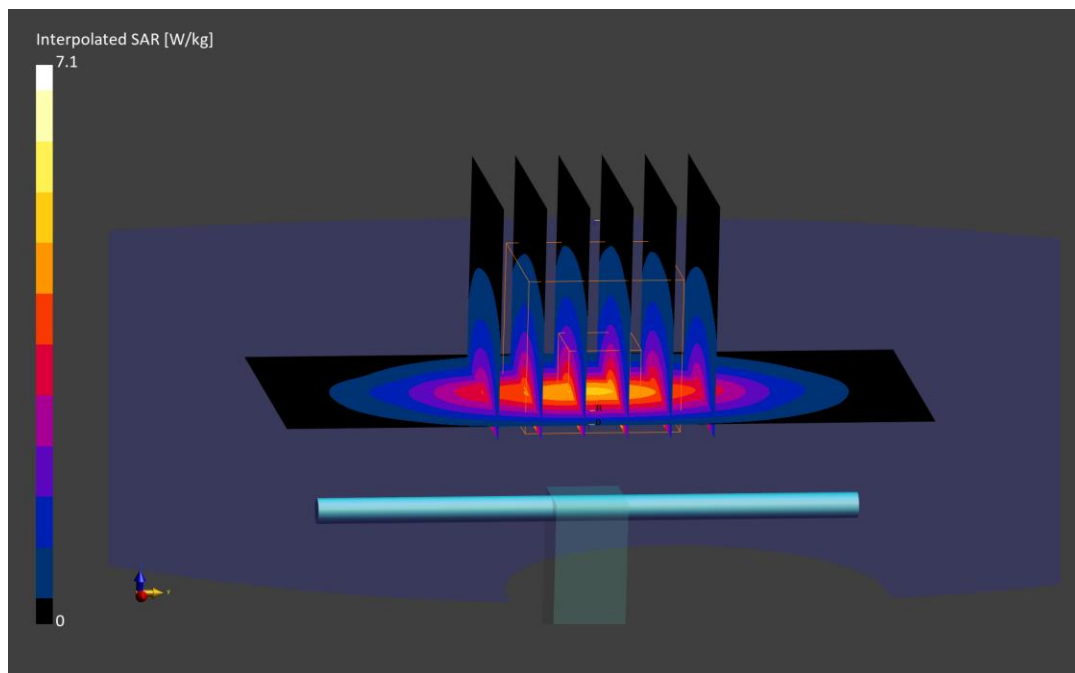

ELEMENT

DUT: Dipole 1750.0 MHz; Type: D1750V2 - SN1148

Communication System: UID: 0, CW; Frequency: 1750.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1750.0 MHz; cond = 1.42 S/m; perm = 41.2; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/13/2023; Ambient Temp: 21.2°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7417; ConvF:(8.32,8.32,8.32); 2023-02-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn665; 2023-02-15
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.0.1425

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.68 W/kg

SAR(1 g) = 3.88 W/kg; SAR(10 g) = 2.01 W/kg

Deviation (1 g) = 4.30%; Deviation (10 g) = 3.61%

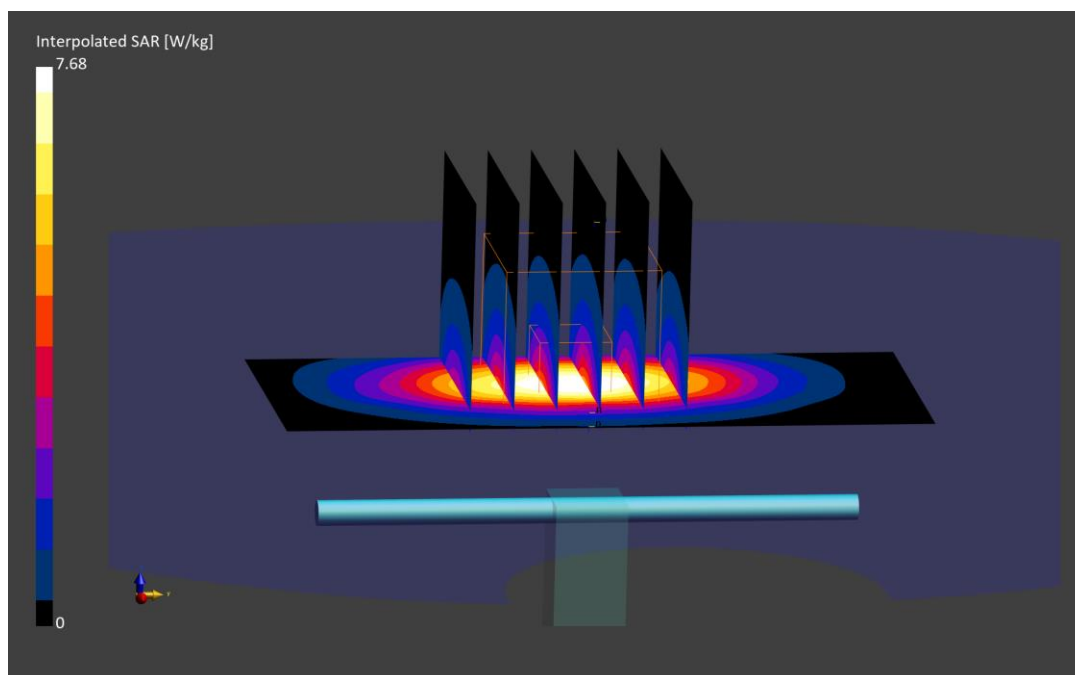

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d141

Communication System: UID: 0, CW; Frequency: 1900.0 MHz
Medium: 1900 Head; Medium parameters used:
f = 1900.0 MHz; cond = 1.45 S/m; perm = 39.5; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/15/2023; Ambient Temp: 21.8°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7491; ConvF:(8.27,8.27,8.27); 2023-06-08

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1532; 2023-06-15

Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1797

Measurement SW: DASY Module SAR V16.2.0.1425

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 8.32 W/kg

SAR(1 g) = 4.28 W/kg; SAR(10 g) = 2.19 W/kg

Deviation (1 g) = 7.27%; Deviation (10 g) = 5.29%

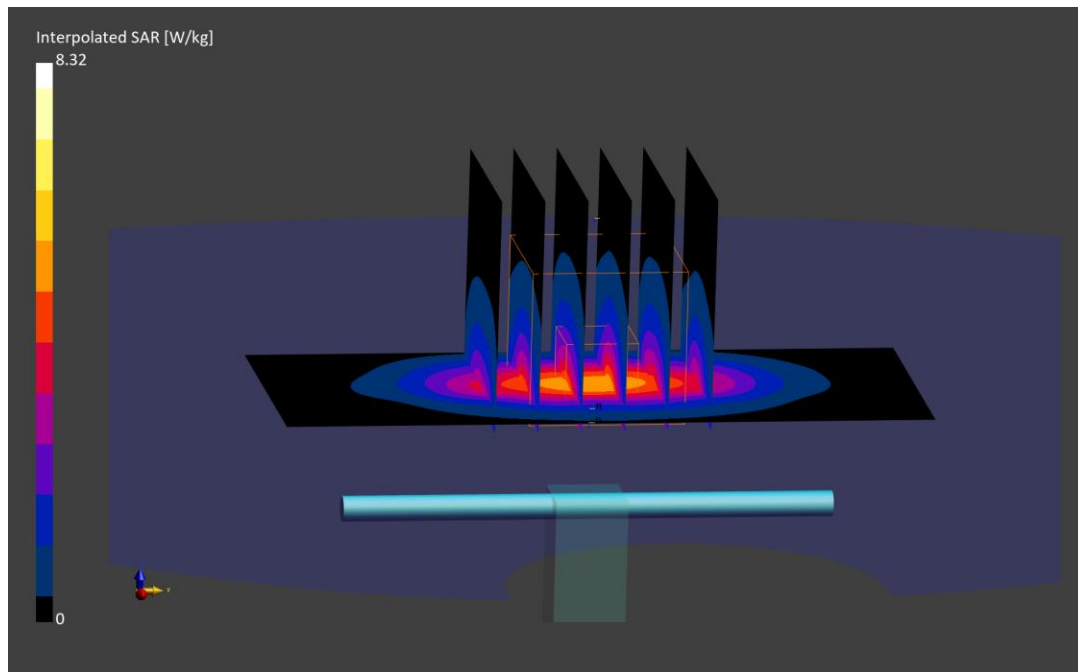

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d141

Communication System: UID: 0, CW; Frequency: 1900.0 MHz
Medium: 1750 Head; Medium parameters used:
f = 1900.0 MHz; cond = 1.44 S/m; perm = 38.1; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/17/2023; Ambient Temp: 21.7°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7491; ConvF:(8.27,8.27,8.27); 2023-06-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1532; 2023-06-15
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1797
Measurement SW: DASY Module SAR V16.2.0.1425

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 8.23 W/kg

SAR(1 g) = 4.16 W/kg; SAR(10 g) = 2.14 W/kg

Deviation (1 g) = 4.26%; Deviation (10 g) = 2.88%

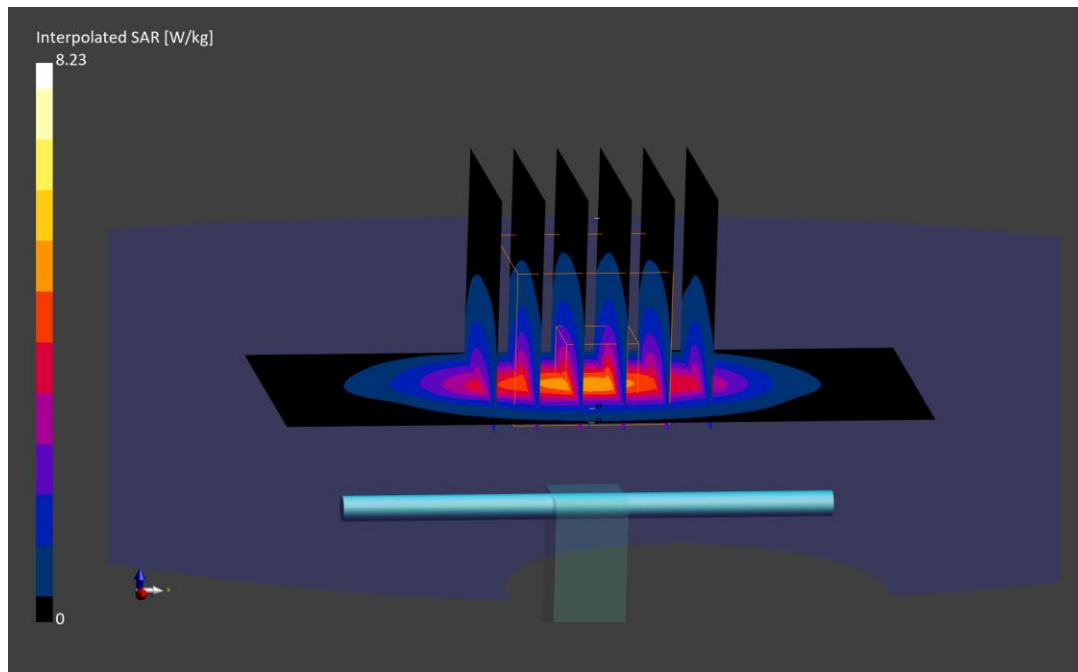

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d026

Communication System: UID: 0, CW; Frequency: 1900.0 MHz
Medium: 1900 Head; Medium parameters used:
f = 1900.0 MHz; cond = 1.43 S/m; perm = 38.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/20/2023; Ambient Temp: 22.5°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7565; ConvF:(7.89,7.89,7.89); 2023-01-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; 2023-01-20
Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1937
Measurement SW: DASY Module SAR V16.2.0.1425

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.64 W/kg

SAR(1 g) = 4.15 W/kg; SAR(10 g) = 2.15 W/kg

Deviation (1 g) = 6.68%; Deviation (10 g) = 4.88%

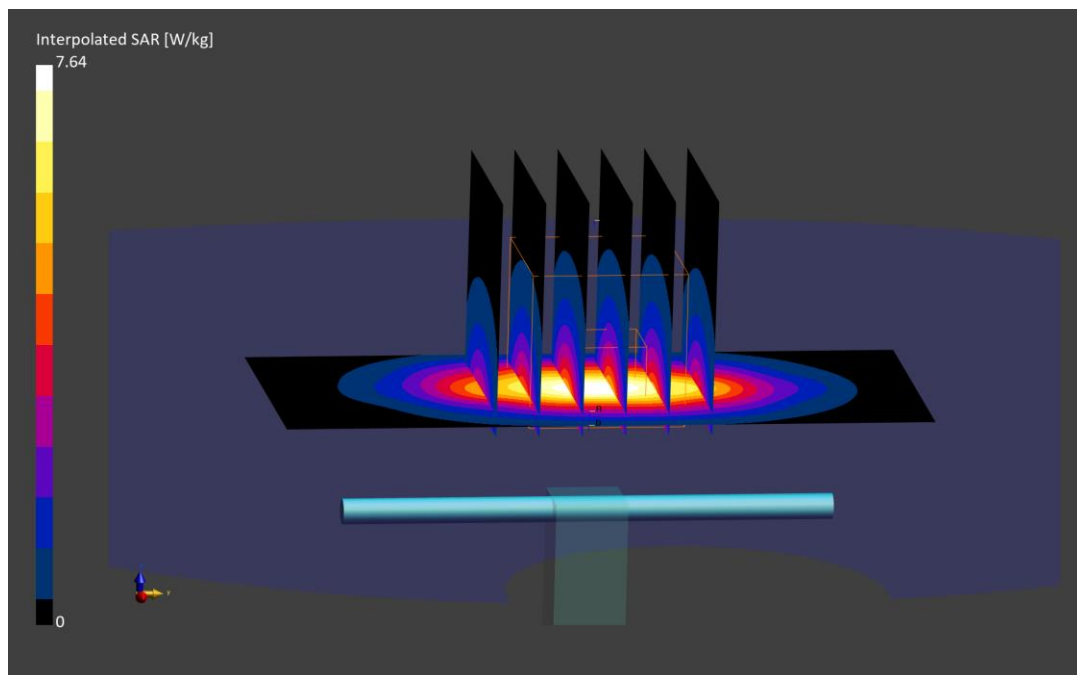

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d148

Communication System: UID: 0, CW; Frequency: 1900.0 MHz
Medium: 1900 Head; Medium parameters used:
f = 1900.0 MHz; cond = 1.43 S/m; perm = 40.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/30/2023; Ambient Temp: 21.7°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7409; ConvF:(8.2,8.2,8.2); 2023-06-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1334; 2023-06-15
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASYS Module SAR V16.2.0.1425

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 8.29 W/kg

SAR(1 g) = 4.22 W/kg; SAR(10 g) = 2.19 W/kg

Deviation (1 g) = 5.24%; Deviation (10 g) = 4.29%

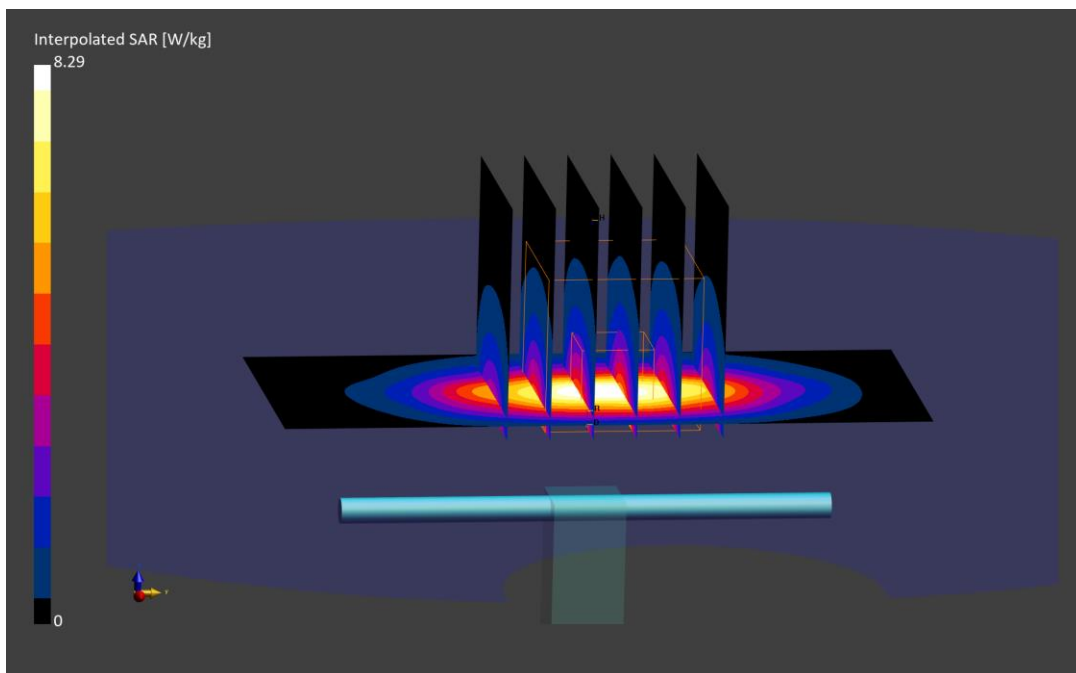

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d148

Communication System: UID: 0, CW; Frequency: 1900.0 MHz
Medium: 1900 Head; Medium parameters used:
f = 1900.0 MHz; cond = 1.42 S/m; perm = 41.5; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/06/2023; Ambient Temp: 19.5°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7570; ConvF:(8.28,8.28,8.28); 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1558; 2023-01-17
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.0.1425

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.94 W/kg

SAR(1 g) = 4.09 W/kg; SAR(10 g) = 2.12 W/kg

Deviation (1 g) = 2.00%; Deviation (10 g) = 0.95%

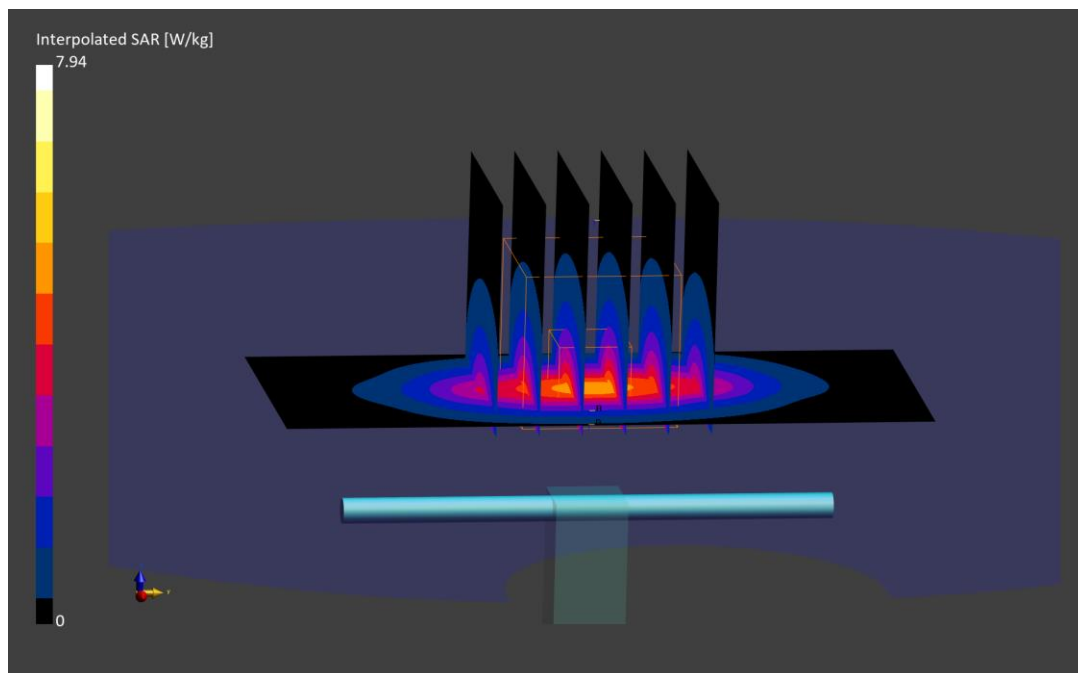

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d148

Communication System: UID: 0, CW; Frequency: 1900.0 MHz
Medium: 1900 Head; Medium parameters used:
f = 1900.0 MHz; cond = 1.37 S/m; perm = 40.5; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/13/2023; Ambient Temp: 20.1°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7659; ConvF:(9.09,9.09,9.09); 2023-04-14
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1407; 2023-04-14
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.0.1425

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.83 W/kg

SAR(1 g) = 4.17 W/kg; SAR(10 g) = 2.19 W/kg

Deviation (1 g) = 3.99%; Deviation (10 g) = 4.29%

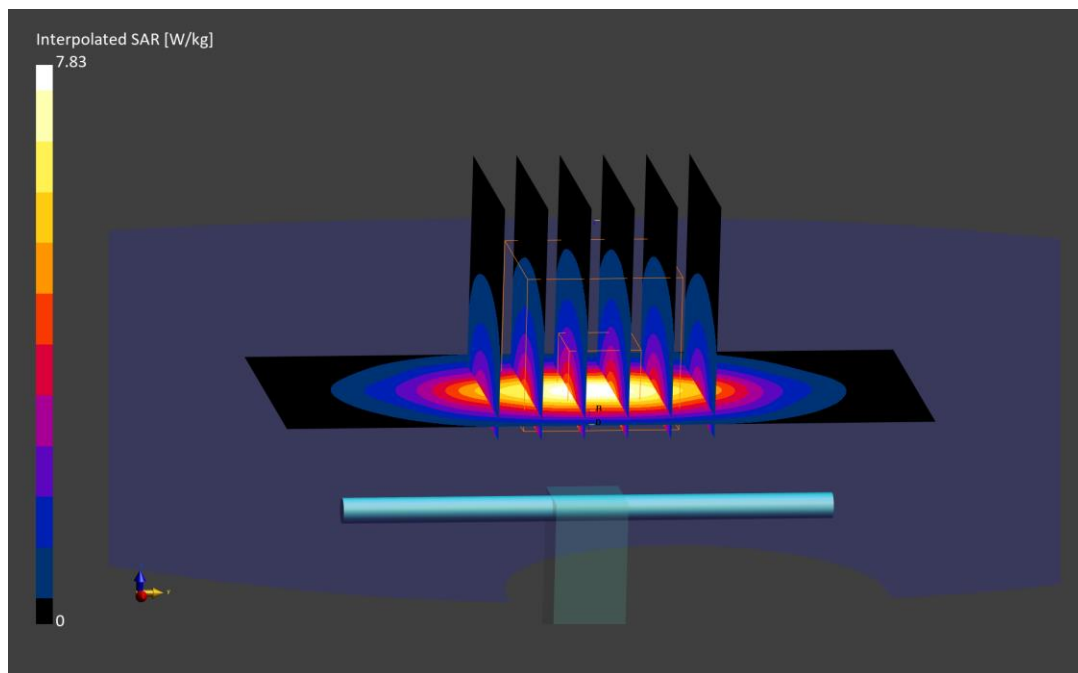

ELEMENT

DUT: Dipole 1900.0 MHz; Type: D1900V2 - SN5d148

Communication System: UID: 0, CW; Frequency: 1900.0 MHz
Medium: 1900 Head; Medium parameters used:
f = 1900.0 MHz; cond = 1.41 S/m; perm = 39.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/18/2023; Ambient Temp: 20.1°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7409; ConvF:(8.2,8.2,8.2); 2023-06-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1334; 2023-06-15
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.2.0.1425

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: dx=10.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 8.10 W/kg

SAR(1 g) = 4.22 W/kg; SAR(10 g) = 2.21 W/kg

Deviation (1 g) = 5.24%; Deviation (10 g) = 5.24%

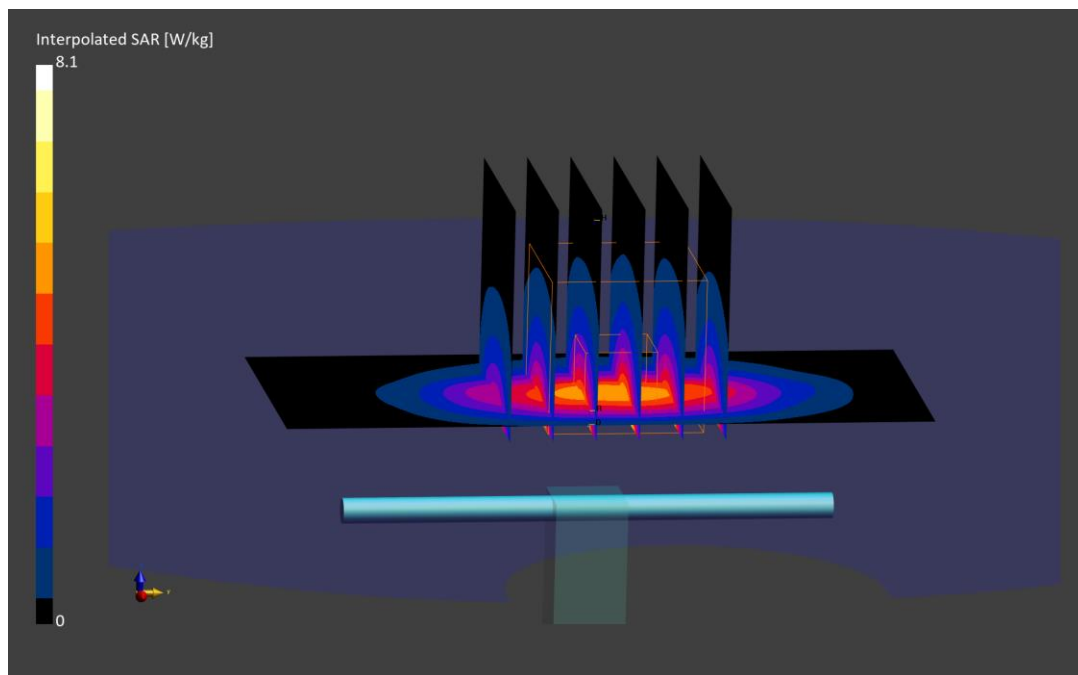

ELEMENT

DUT: Dipole 2300.0 MHz; Type: D2300V2 - SN1117

Communication System: UID: 0, CW; Frequency: 2300.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2300.0 MHz; cond = 1.73 S/m; perm = 38.1; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/20/2023; Ambient Temp: 21.3°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7558; ConvF:(7.93,7.93,7.93); 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.0.1425

2300.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 4.79 W/kg; SAR(10 g) = 2.28 W/kg

Deviation (1 g) = -4.01%; Deviation (10 g) = -6.17%

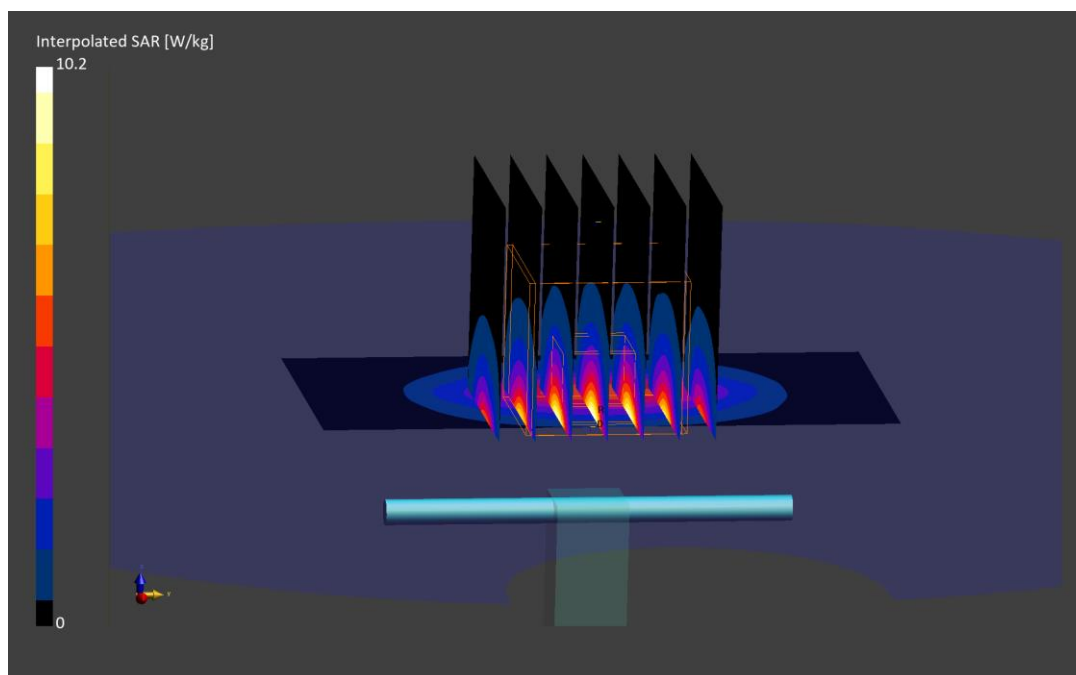

ELEMENT

DUT: Dipole 2300.0 MHz; Type: D2300V2 - SN1008

Communication System: UID: 0, CW; Frequency: 2300.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2300.0 MHz; cond = 1.74 S/m; perm = 38.1; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/22/2023; Ambient Temp: 21.5°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7558; ConvF:(7.93,7.93,7.93); 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.0.1425

2300.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 5.13 W/kg; SAR(10 g) = 2.45 W/kg

Deviation (1 g) = 3.64%; Deviation (10 g) = 3.38%

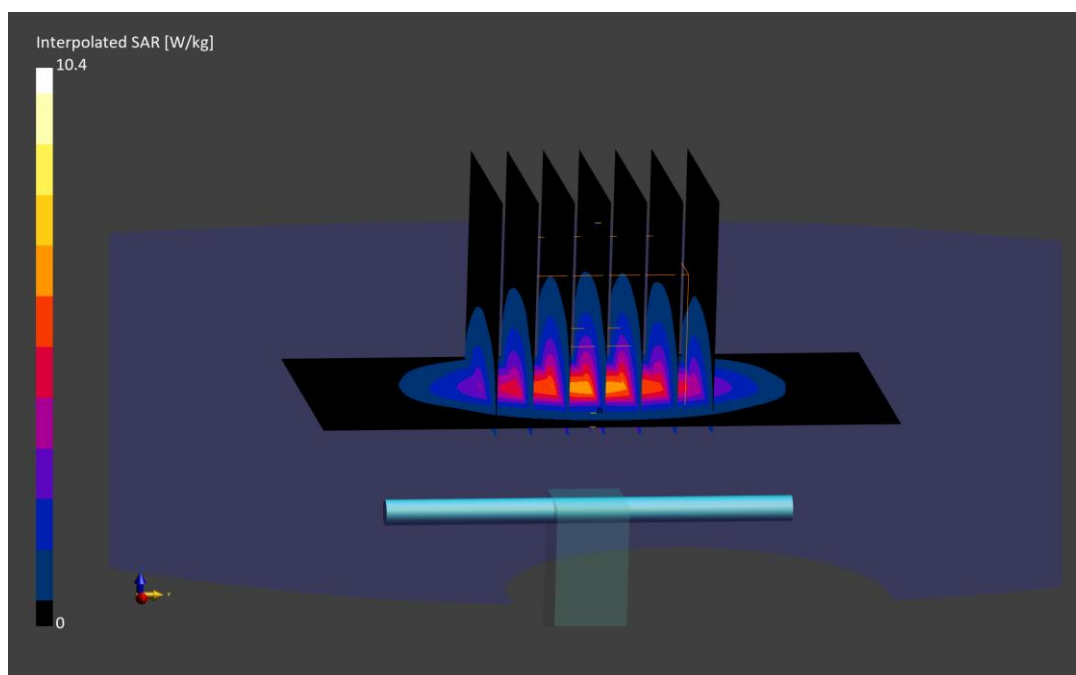

ELEMENT

DUT: Dipole 2300.0 MHz; Type: D2300V2 - SN1116

Communication System: UID: 0, CW; Frequency: 2300.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2300.0 MHz; cond = 1.66 S/m; perm = 39.5; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/28/2023; Ambient Temp: 19.0°C; Tissue Temp: 19.5°C

Probe: EX3DV4 - SN7659; ConvF:(8.69,8.69,8.69); 2023-04-14
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1407; 2023-04-14
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.0.1425

2300.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.1 W/kg

SAR(1 g) = 4.93 W/kg; SAR(10 g) = 2.38 W/kg

Deviation (1 g) = -0.60%; Deviation (10 g) = 0.00%

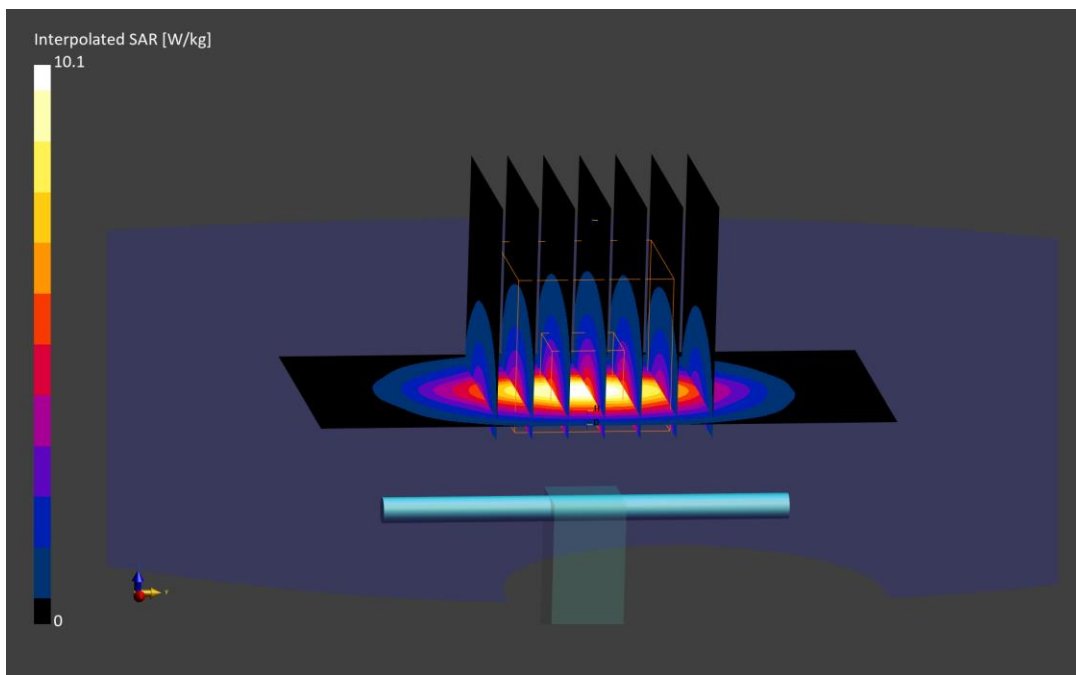

ELEMENT

DUT: Dipole 2300.0 MHz; Type: D2300V2 - SN1116

Communication System: UID: 0, CW; Frequency: 2300.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2300.0 MHz; cond = 1.65 S/m; perm = 40.1; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/30/2023; Ambient Temp: 20.3°C; Tissue Temp: 19.1°C

Probe: EX3DV4 - SN7659; ConvF:(8.69,8.69,8.69); 2023-04-14
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1407; 2023-04-14
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.0.1425

2300.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 9.52 W/kg

SAR(1 g) = 4.69 W/kg; SAR(10 g) = 2.27 W/kg

Deviation (1 g) = -5.44%; Deviation (10 g) = -4.62%

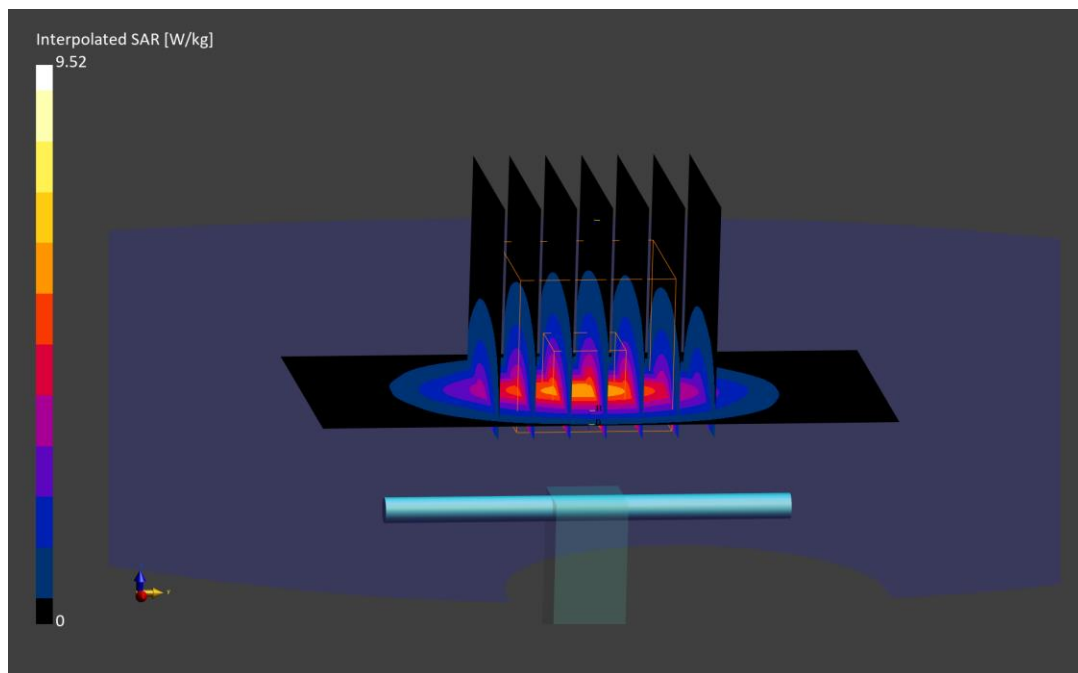

ELEMENT

DUT: Dipole 2300.0 MHz; Type: D2300V2 - SN1116

Communication System: UID: 0, CW; Frequency: 2300.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2300.0 MHz; cond = 1.69 S/m; perm = 38.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/13/2023; Ambient Temp: 20.8°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7713; ConvF:(8.53,8.53,8.53); 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; 2023-01-18
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.0.1425

2300.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 9.43 W/kg

SAR(1 g) = 4.64 W/kg; SAR(10 g) = 2.23 W/kg

Deviation (1 g) = -6.45%; Deviation (10 g) = -6.30%

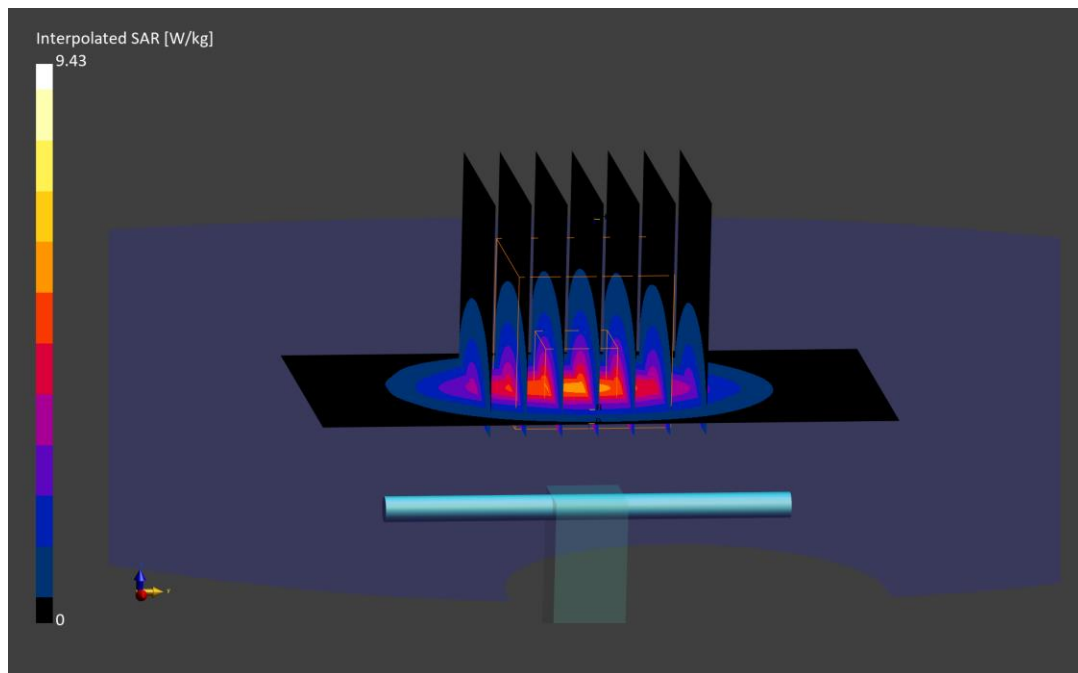

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN945

Communication System: UID: 0, CW; Frequency: 2450.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2450.0 MHz; cond = 1.84 S/m; perm = 37.9; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/20/2023; Ambient Temp: 21.3°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7558; ConvF:(7.64,7.64,7.64); 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.0.1425

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 5.36 W/kg; SAR(10 g) = 2.46 W/kg

Deviation (1 g) = 3.28%; Deviation (10 g) = 0.00%

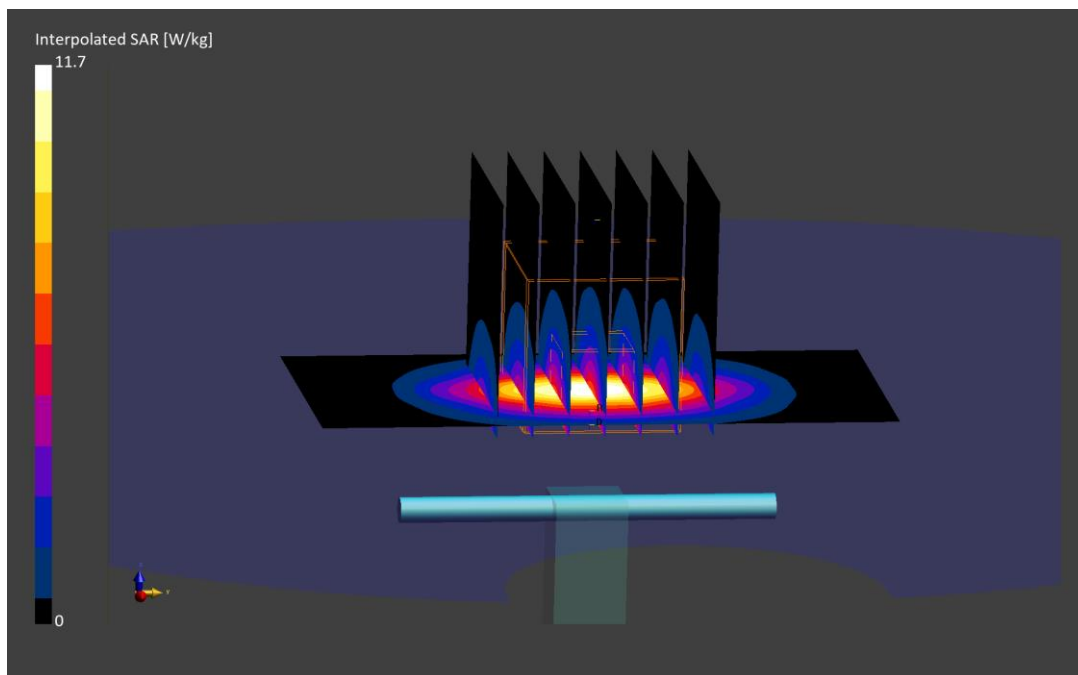

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN719

Communication System: UID: 0, CW; Frequency: 2450.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2450.0 MHz; cond = 1.79 S/m; perm = 38.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/08/2023; Ambient Temp: 22.3°C; Tissue Temp: 19.6°C

Probe: EX3DV4 - SN7713; ConvF:(8.26,8.26,8.26); 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; 2023-01-18
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.0.1425

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.12 W/kg; SAR(10 g) = 2.38 W/kg

Deviation (1 g) = -6.91%; Deviation (10 g) = -7.39%

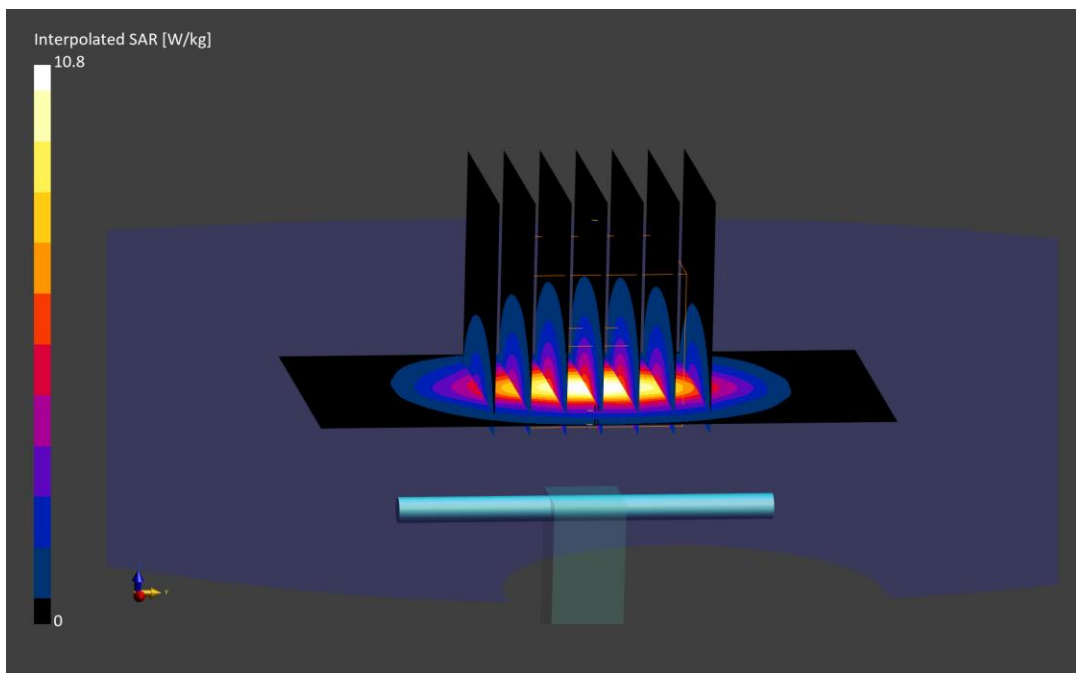

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN719

Communication System: UID: 0, CW; Frequency: 2450.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2450.0 MHz; cond = 1.77 S/m; perm = 39.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/11/2023; Ambient Temp: 21.1°C; Tissue Temp: 19.6°C

Probe: EX3DV4 - SN7713; ConvF:(8.26,8.26,8.26); 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; 2023-01-18
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.0.1425

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.8 W/kg

SAR(1 g) = 5.26 W/kg; SAR(10 g) = 2.45 W/kg

Deviation (1 g) = -4.36%; Deviation (10 g) = -4.67%

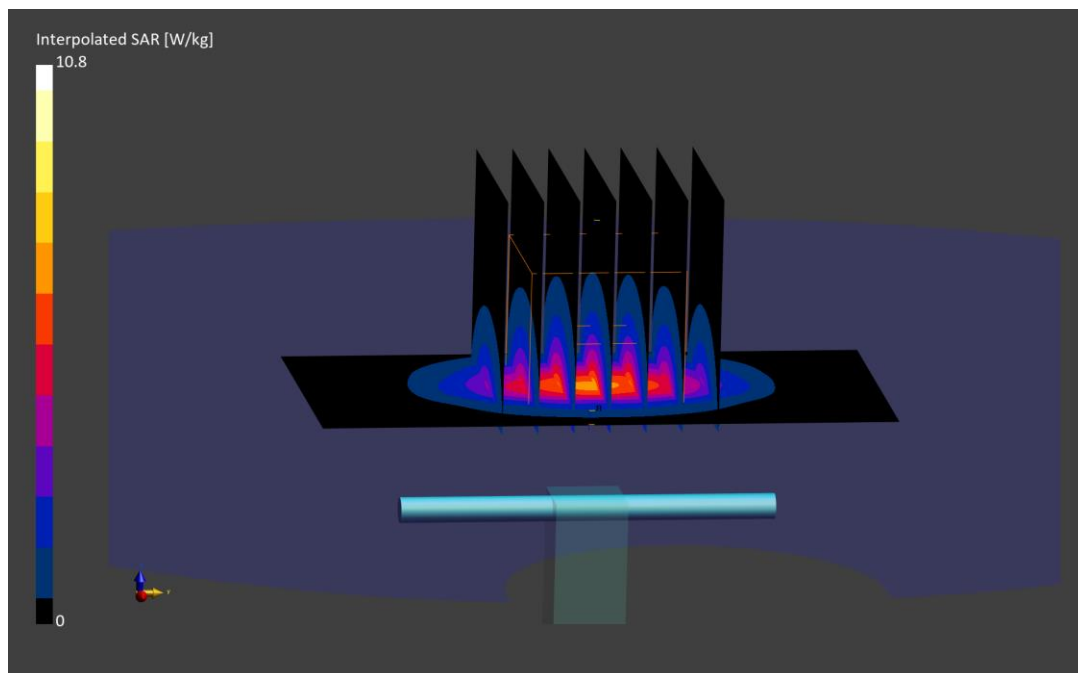

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN719

Communication System: UID: 0, CW; Frequency: 2450.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2450.0 MHz; cond = 1.81 S/m; perm = 38.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/13/2023; Ambient Temp: 20.8°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7713; ConvF:(8.26,8.26,8.26); 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; 2023-01-18
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.0.1425

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.2 W/kg

SAR(1 g) = 5.02 W/kg; SAR(10 g) = 2.35 W/kg

Deviation (1 g) = -8.73%; Deviation (10 g) = -8.56%

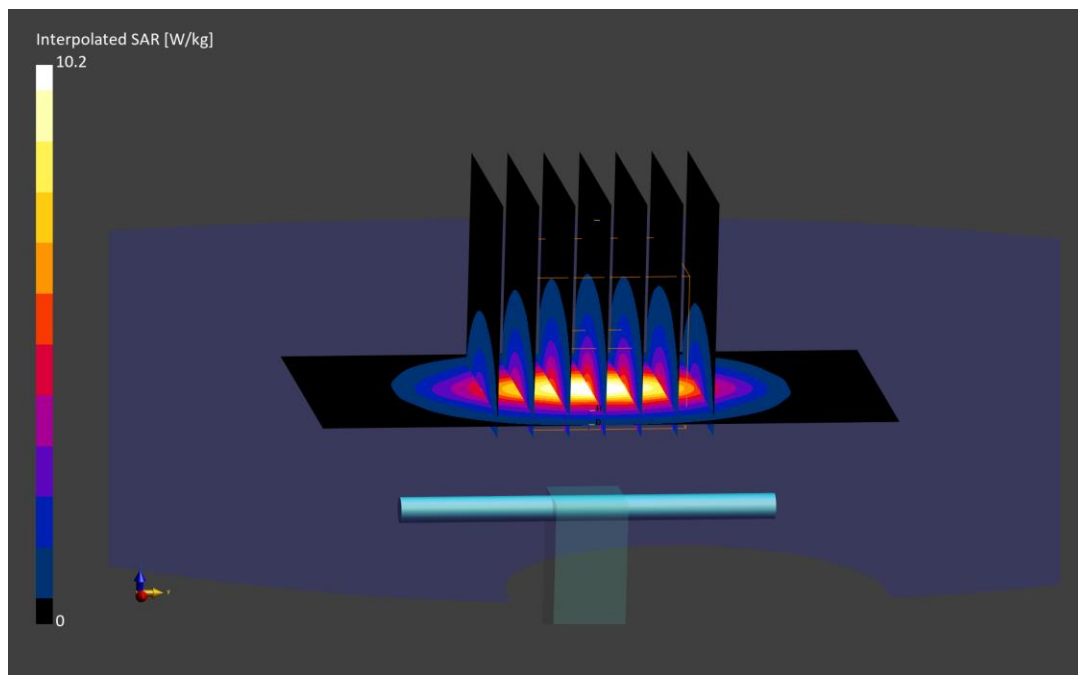

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN945

Communication System: UID: 0, CW; Frequency: 2450.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2450.0 MHz; cond = 1.79 S/m; perm = 39.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/13/2023; Ambient Temp: 22.0°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7565; ConvF:(7.08,7.08,7.08); 2023-01-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; 2023-01-20
Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1937
Measurement SW: DASY Module SAR V16.2.0.1425

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 10.6 W/kg

SAR(1 g) = 5.22 W/kg; SAR(10 g) = 2.44 W/kg

Deviation (1 g) = 0.58%; Deviation (10 g) = -0.81%

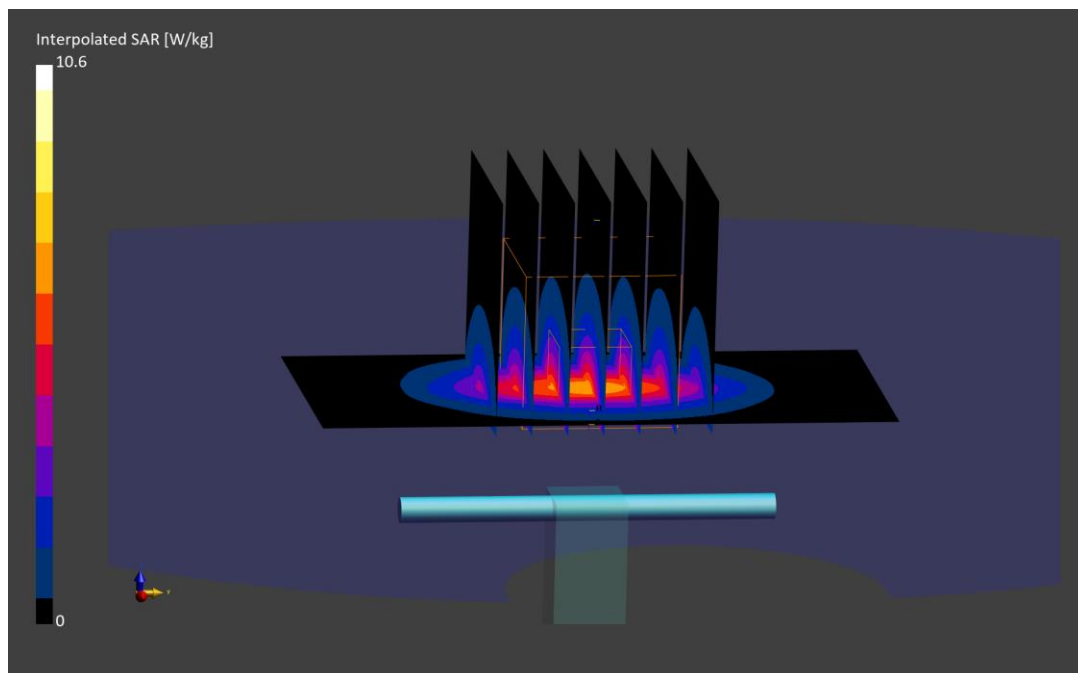

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN981

Communication System: UID: 0, CW; Frequency: 2450.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2450.0 MHz; cond = 1.76 S/m; perm = 38.5; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/26/2023; Ambient Temp: 20.3°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7409; ConvF:(7.44,7.44,7.44); 2023-06-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1334; 2023-06-15
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.2.0.1425

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.1 W/kg

SAR(1 g) = 5.47 W/kg; SAR(10 g) = 2.58 W/kg

Deviation (1 g) = 1.48%; Deviation (10 g) = 1.57%

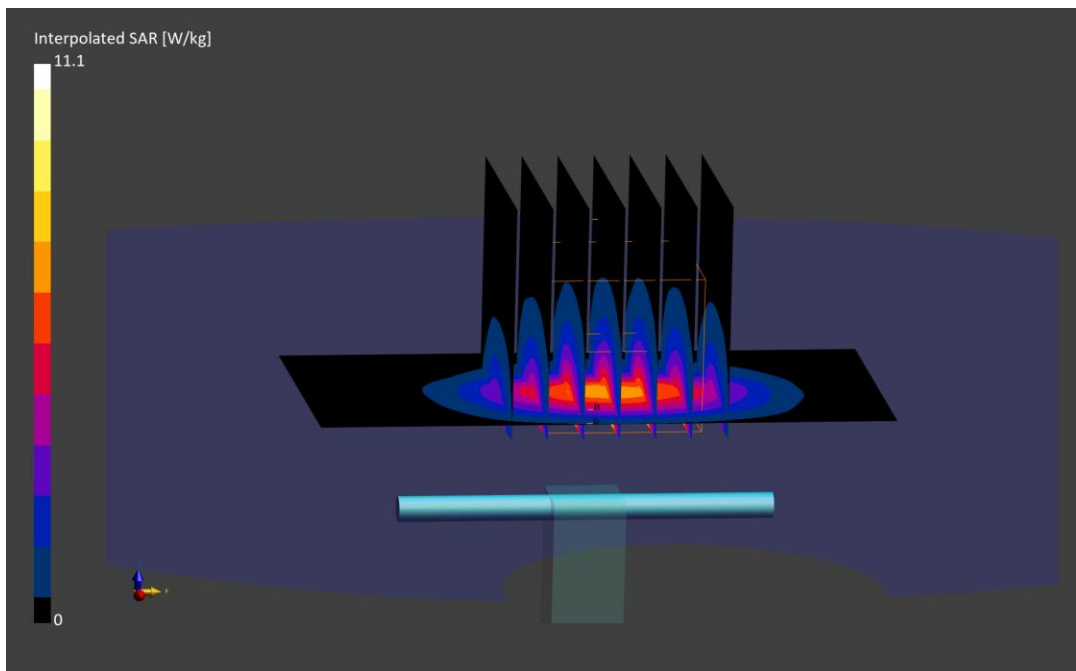

ELEMENT

DUT: Dipole 2450.000 MHz; Type: D2450V2 - SN981

Communication System: UID: 0, CW; Frequency: 2450.000 MHz
Medium: 2450 Head; Medium parameters used:
f = 2450.000 MHz; cond = 1.80 S/m; perm = 38.3; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 01/08/2024; Ambient Temp: 20.0°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7409; ConvF:(7.44,7.44,7.44); 2023-06-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1334; 2023-06-15
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.2.4.2524

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.2 W/kg

SAR(1 g) = 5.36 W/kg; SAR(10 g) = 2.49 W/kg

Deviation (1 g) = -0.56%; Deviation (10 g) = -1.97%

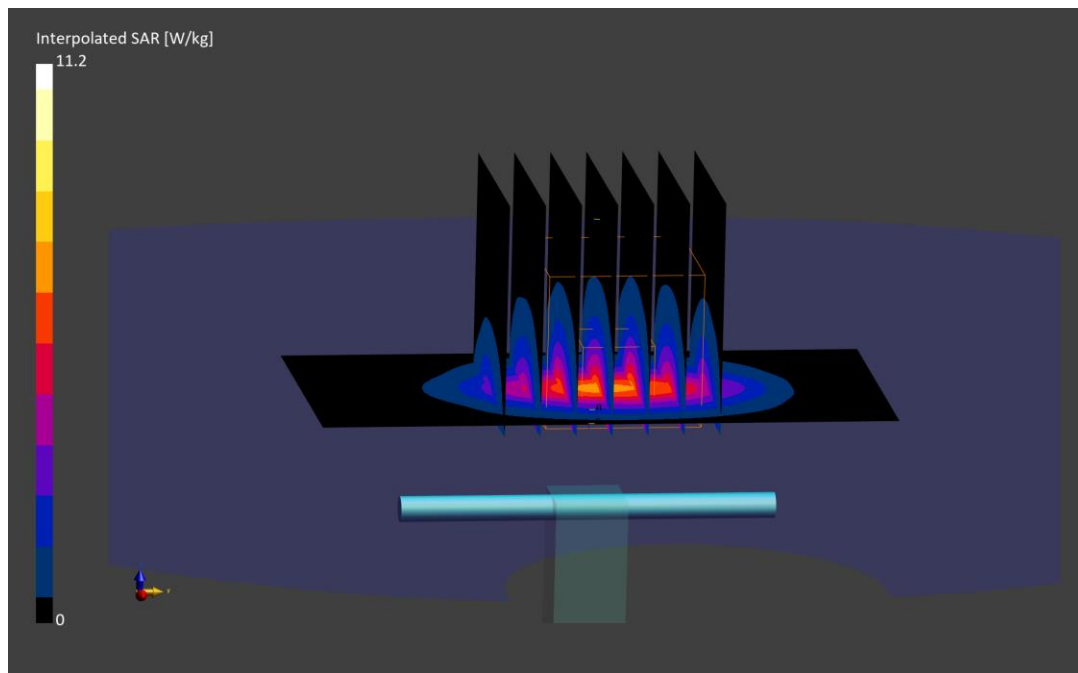

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1009

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2600.0 MHz; cond = 1.97 S/m; perm = 37.7; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/20/2023; Ambient Temp: 21.3°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7558; ConvF:(7.42,7.42,7.42); 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.0.1425

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.3 W/kg

SAR(1 g) = 5.59 W/kg; SAR(10 g) = 2.50 W/kg

Deviation (1 g) = -2.44%; Deviation (10 g) = -3.10%

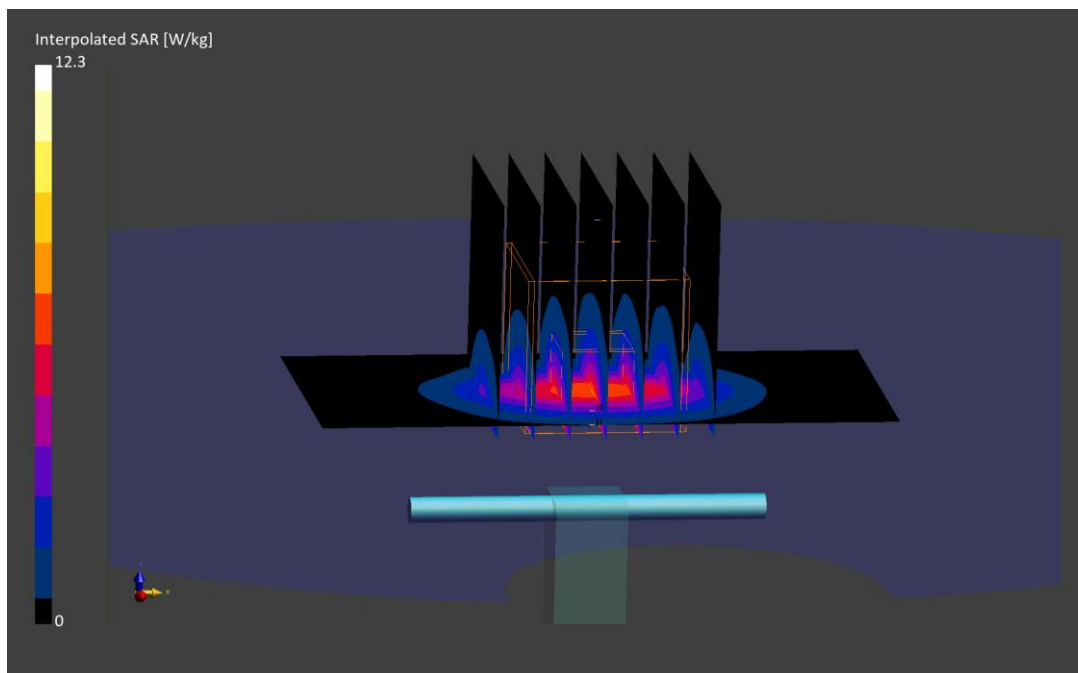

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1009

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2600.0 MHz; cond = 1.98 S/m; perm = 38.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 11/29/2023; Ambient Temp: 21.6°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7640; ConvF:(8.42,8.42,8.42); 2023-02-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1645; 2023-02-16
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1868
Measurement SW: DASY Module SAR V16.2.0.1425

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 5.75 W/kg; SAR(10 g) = 2.58 W/kg

Deviation (1 g) = 0.35%; Deviation (10 g) = 0.00%

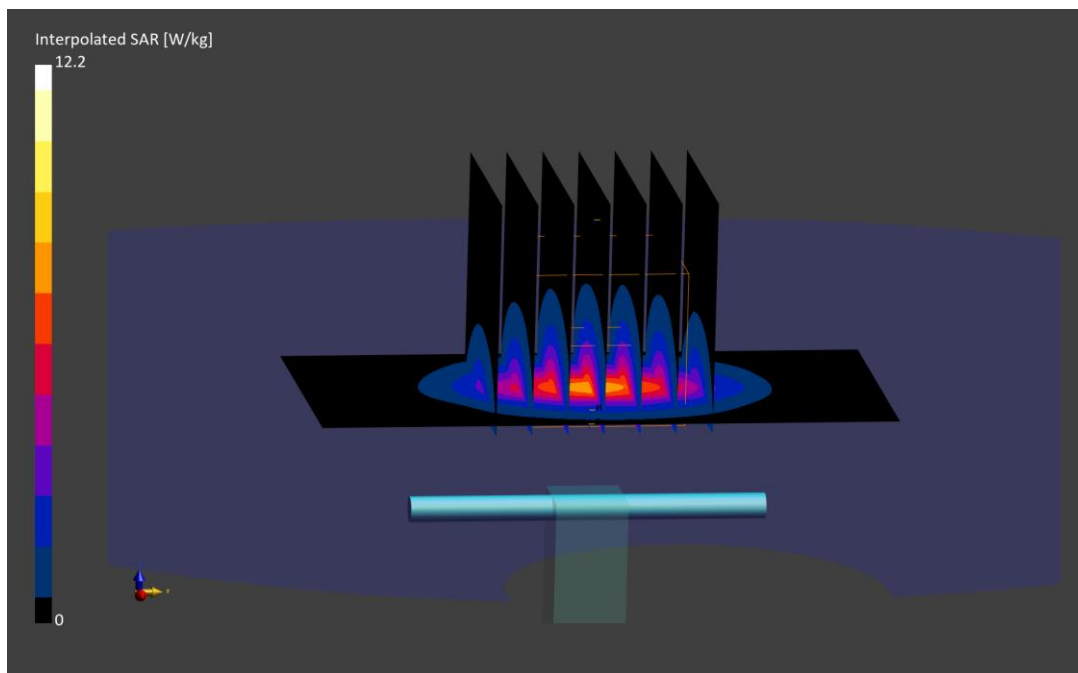

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1126

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2600.0 MHz; cond = 1.94 S/m; perm = 37.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/11/2023; Ambient Temp: 22.7°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7565; ConvF:(6.89,6.89,6.89); 2023-01-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; 2023-01-20
Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1937
Measurement SW: DASY Module SAR V16.2.0.1425

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.4 W/kg

SAR(1 g) = 5.84 W/kg; SAR(10 g) = 2.64 W/kg

Deviation (1 g) = 4.29%; Deviation (10 g) = 4.35%

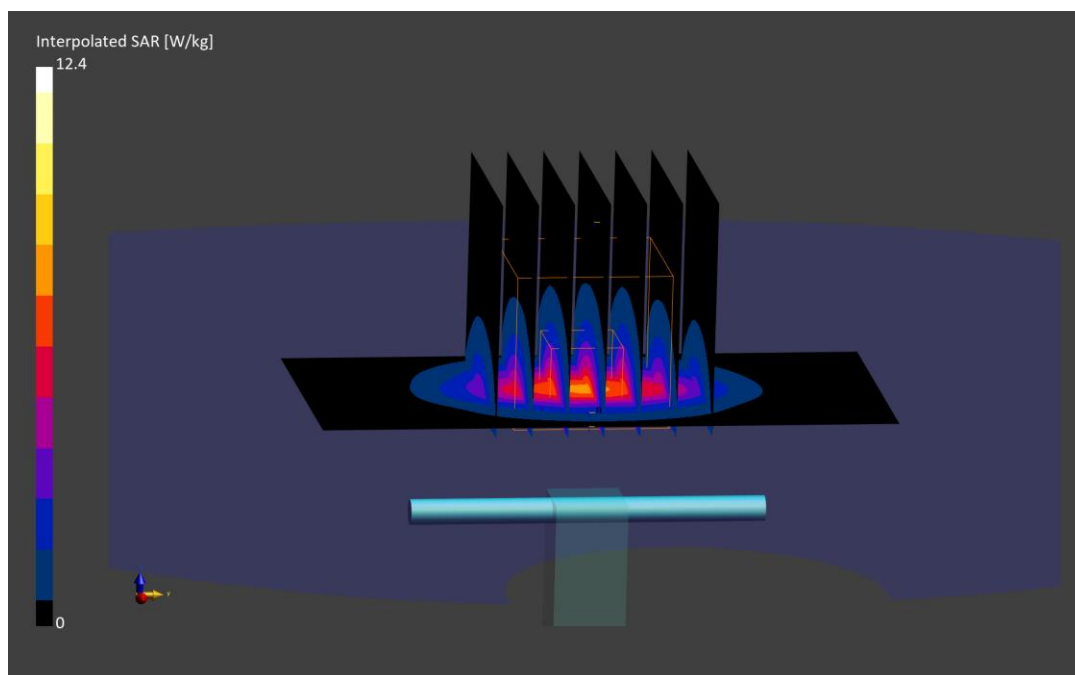

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1126

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2600.0 MHz; cond = 1.90 S/m; perm = 38.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/13/2023; Ambient Temp: 22.0°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7565; ConvF:(6.89,6.89,6.89); 2023-01-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; 2023-01-20
Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1937
Measurement SW: DASY Module SAR V16.2.0.1425

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.7 W/kg

SAR(1 g) = 5.53 W/kg; SAR(10 g) = 2.50 W/kg

Deviation (1 g) = -1.25%; Deviation (10 g) = -1.19%

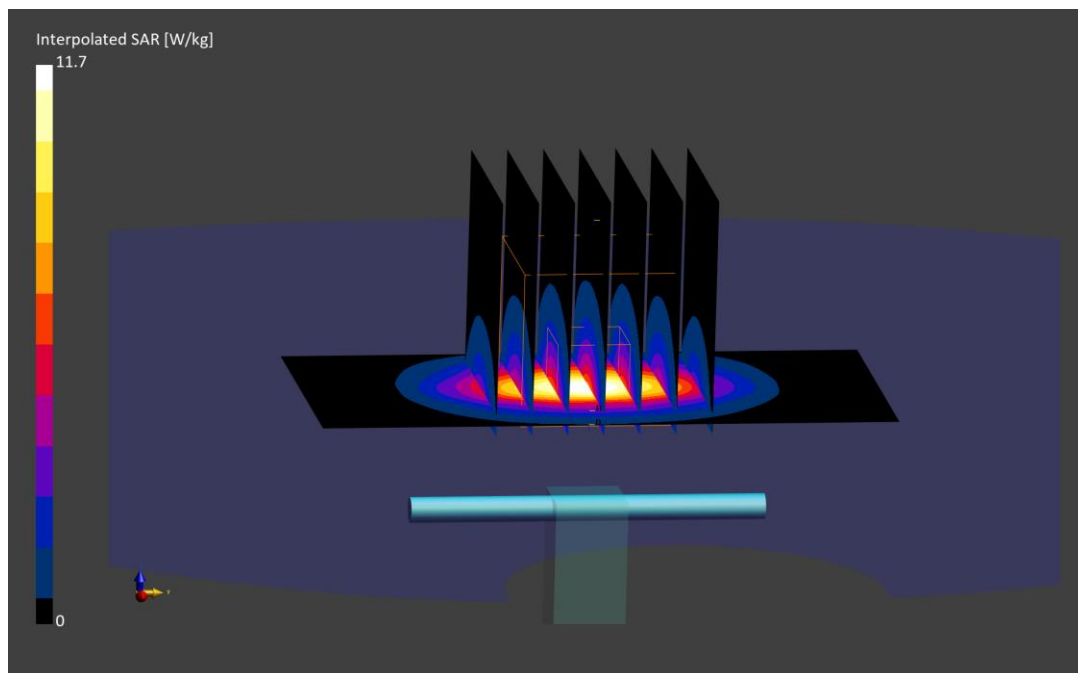

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1004

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2600.0 MHz; cond = 1.90 S/m; perm = 37.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/20/2023; Ambient Temp: 20.6°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7409; ConvF:(7.17,7.17,7.17); 2023-06-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1334; 2023-06-15
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.2.0.1425

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 5.68 W/kg; SAR(10 g) = 2.56 W/kg

Deviation (1 g) = -1.73%; Deviation (10 g) = -0.39%

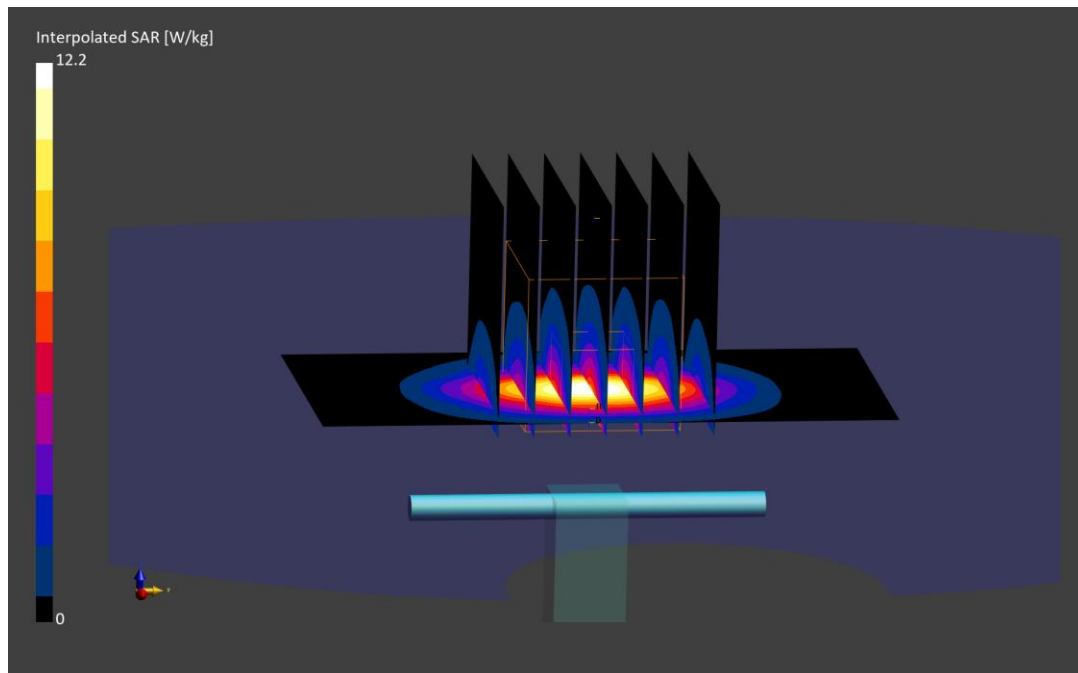

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1004

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2600.0 MHz; cond = 1.89 S/m; perm = 38.3; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/26/2023; Ambient Temp: 20.3°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7409; ConvF:(7.17,7.17,7.17); 2023-06-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1334; 2023-06-15
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.2.0.1425

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.6 W/kg

SAR(1 g) = 5.81 W/kg; SAR(10 g) = 2.61 W/kg

Deviation (1 g) = 0.52%; Deviation (10 g) = 1.56%

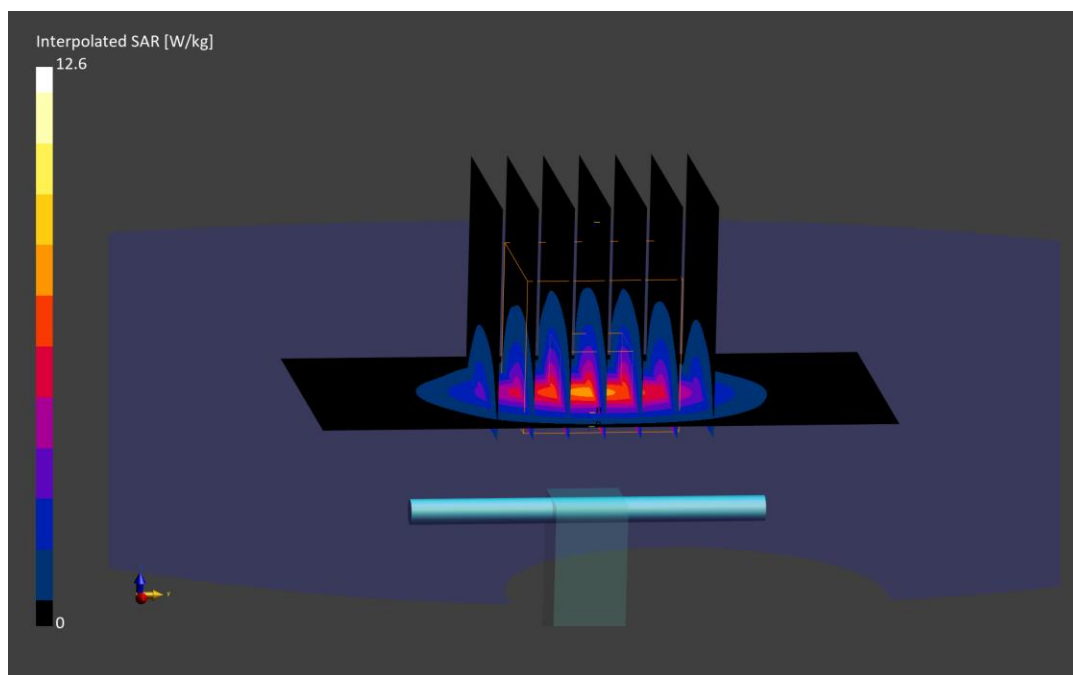

ELEMENT

DUT: Dipole 2600.0 MHz; Type: D2600V2 - SN1126

Communication System: UID: 0, CW; Frequency: 2600.0 MHz
Medium: 2450 Head; Medium parameters used:
f = 2600.0 MHz; cond = 1.93 S/m; perm = 37.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 01/02/2024; Ambient Temp: 22.7°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7565; ConvF:(6.89,6.89,6.89); 2023-01-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; 2023-01-20
Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1937
Measurement SW: DASY Module SAR V16.2.0.1425

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 5.72 W/kg; SAR(10 g) = 2.59 W/kg

Deviation (1 g) = 2.14%; Deviation (10 g) = 2.37%

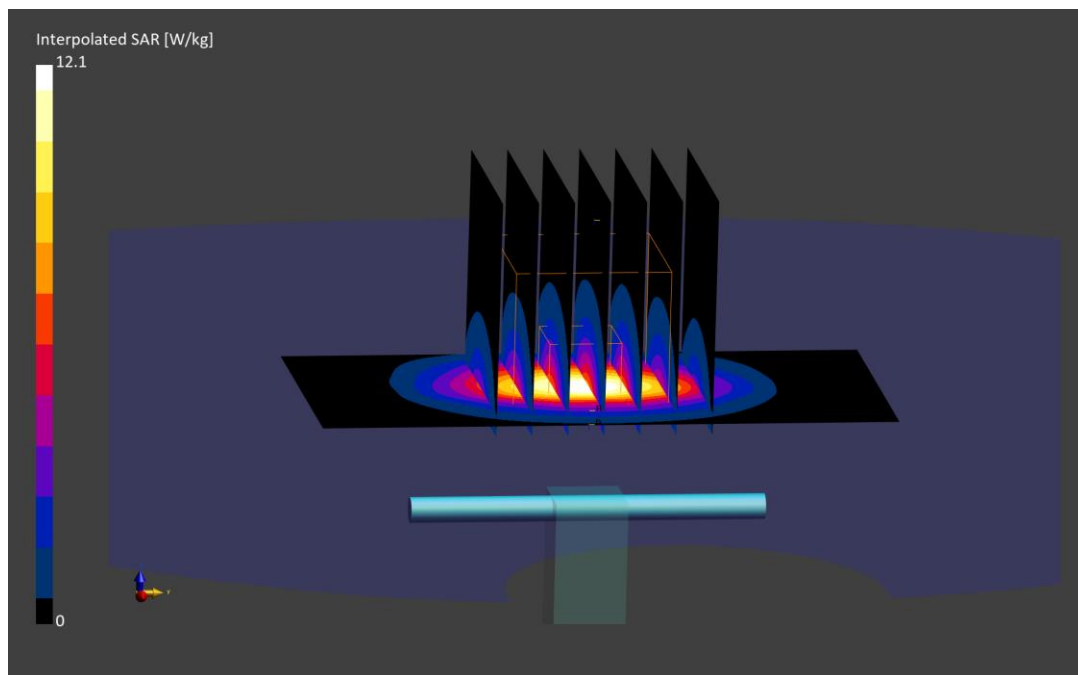

ELEMENT

DUT: Dipole 2600.000 MHz; Type: D2600V2 - SN1004

Communication System: UID: 0, CW; Frequency: 2600.000 MHz
Medium: 2450 Head; Medium parameters used:
f = 2600.000 MHz; cond = 1.93 S/m; perm = 38.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 01/08/2024; Ambient Temp: 20.0°C; Tissue Temp: 20.0°C

Probe: EX3DV4 - SN7409; ConvF:(7.17,7.17,7.17); 2023-06-15
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1334; 2023-06-15
Phantom: Twin-SAM V8.0; Serial: 1630
Measurement SW: DASY Module SAR V16.2.4.2524

2600.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.5 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 12.7 W/kg

SAR(1 g) = 5.92 W/kg; SAR(10 g) = 2.65 W/kg

Deviation (1 g) = 2.42%; Deviation (10 g) = 3.11%

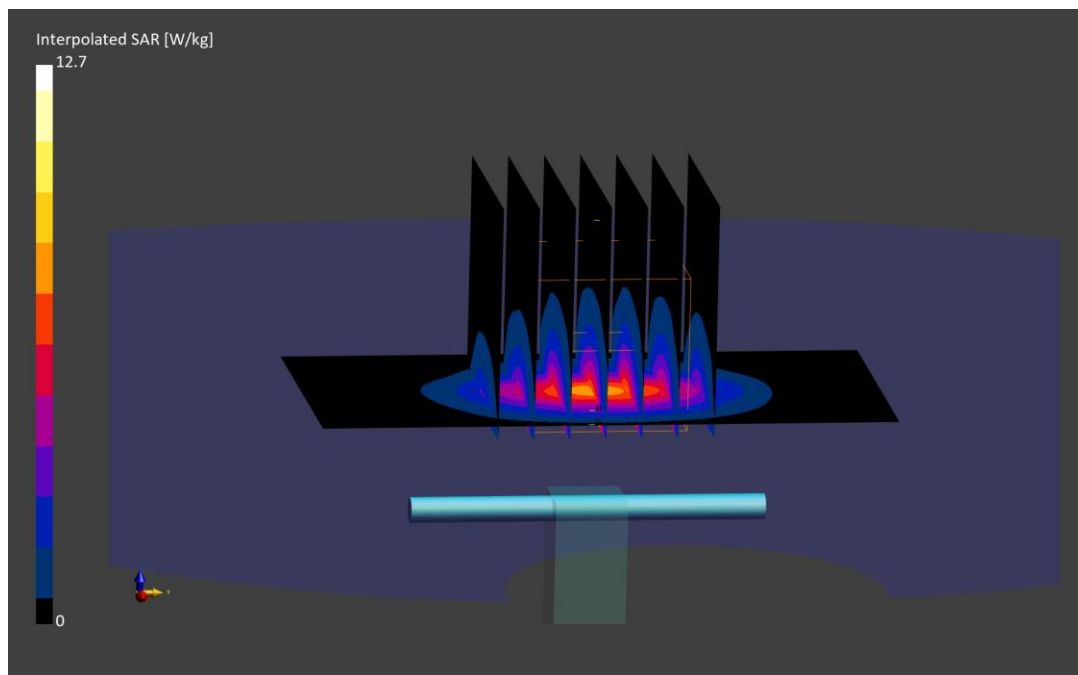

ELEMENT

DUT: Dipole 3500.0 MHz; Type: D3500V2 - SN1127

Communication System: UID: 0, CW; Frequency: 3500.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3500.0 MHz; cond = 2.78 S/m; perm = 37.6; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/04/2023; Ambient Temp: 19.1°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7640; ConvF:(7.44,7.44,7.44); 2023-02-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1645; 2023-02-16
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1868
Measurement SW: DASY Module SAR V16.2.0.1425

3500.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 6.34 W/kg; SAR(10 g) = 2.40 W/kg

Deviation (1 g) = -2.31%; Deviation (10 g) = -1.64%

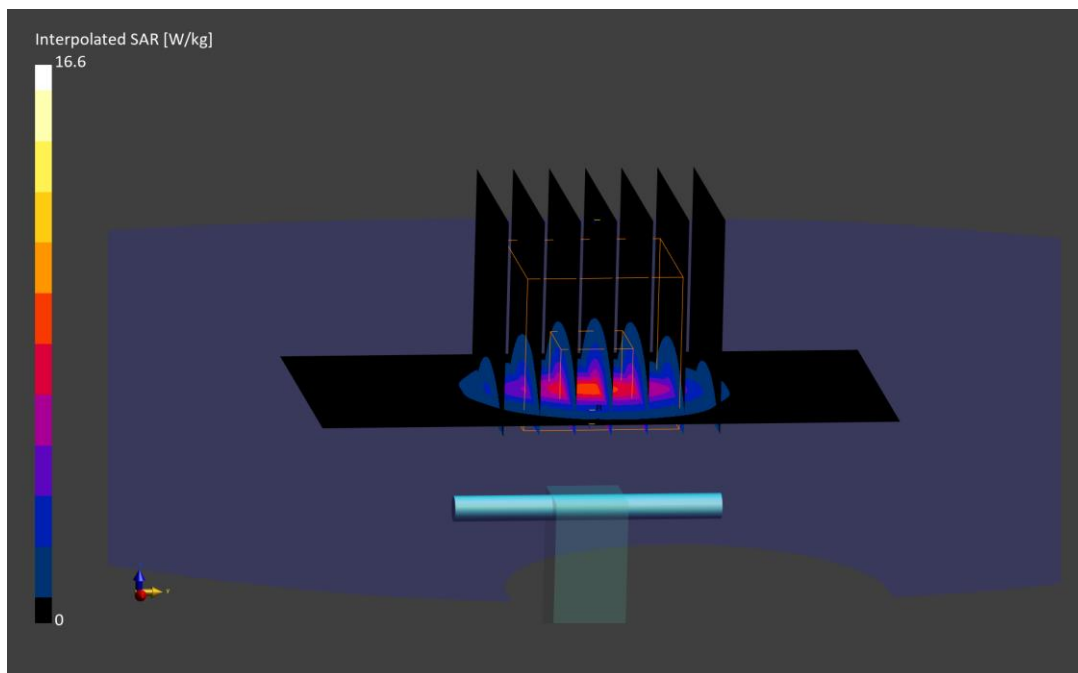

ELEMENT

DUT: Dipole 3500.0 MHz; Type: D3500V2 - SN1059

Communication System: UID: 0, CW; Frequency: 3500.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3500.0 MHz; cond = 2.79 S/m; perm = 38.2; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/06/2023; Ambient Temp: 20.2°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7659; ConvF:(7.81,7.81,7.81); 2023-04-14
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1407; 2023-04-14
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.0.1425

3500.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 6.03 W/kg; SAR(10 g) = 2.35 W/kg

Deviation (1 g) = -5.34%; Deviation (10 g) = -1.67%

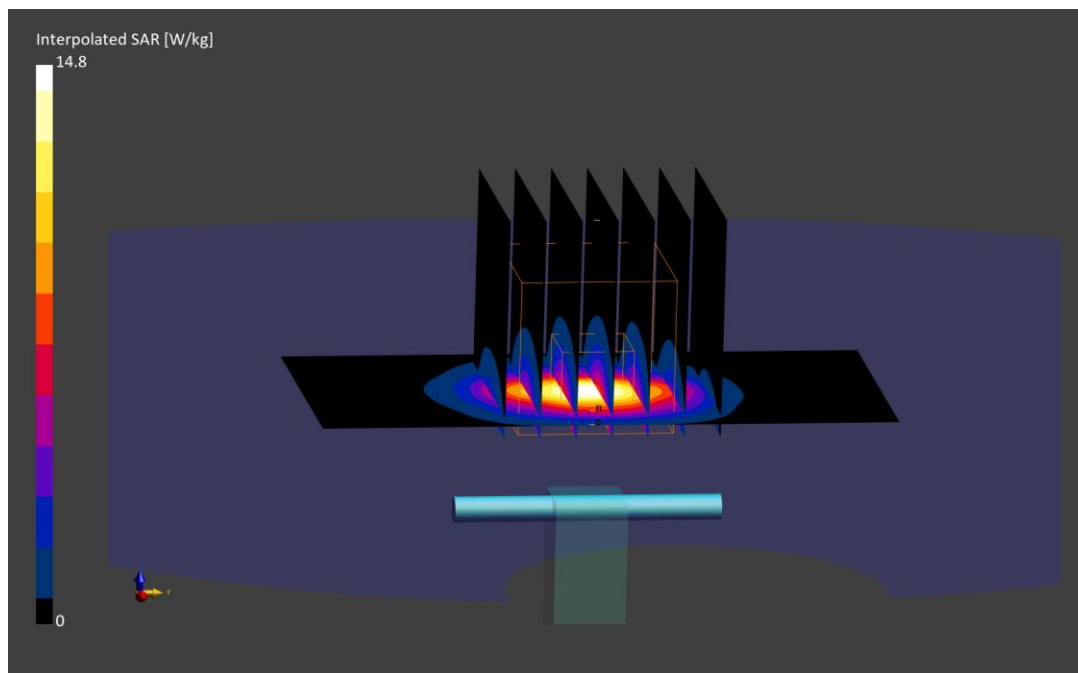

ELEMENT

DUT: Dipole 3500.0 MHz; Type: D3500V2 - SN1059

Communication System: UID: 0, CW; Frequency: 3500.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3500.0 MHz; cond = 2.83 S/m; perm = 39.3; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/26/2023; Ambient Temp: 20.9°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7659; ConvF:(7.81,7.81,7.81); 2023-04-14
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1407; 2023-04-14
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.0.1425

3500.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 15.3 W/kg

SAR(1 g) = 6.23 W/kg; SAR(10 g) = 2.44 W/kg

Deviation (1 g) = -2.20%; Deviation (10 g) = 2.09%

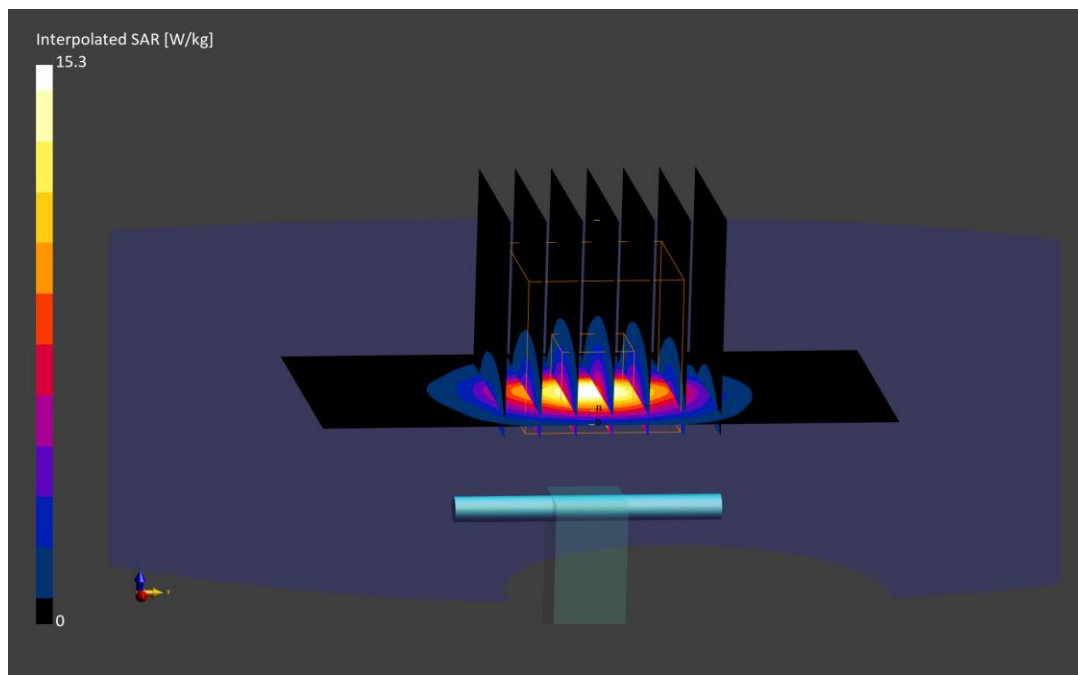

ELEMENT

DUT: Dipole 3700.0 MHz; Type: D3700V2 - SN1096

Communication System: UID: 0, CW; Frequency: 3700.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3700.0 MHz; cond = 2.97 S/m; perm = 37.3; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/04/2023; Ambient Temp: 19.1°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7640; ConvF:(7.39,7.39,7.39); 2023-02-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1645; 2023-02-16
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1868
Measurement SW: DASY Module SAR V16.2.0.1425

3700.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 17.3 W/kg

SAR(1 g) = 6.30 W/kg; SAR(10 g) = 2.32 W/kg

Deviation (1 g) = -5.83%; Deviation (10 g) = -4.92%

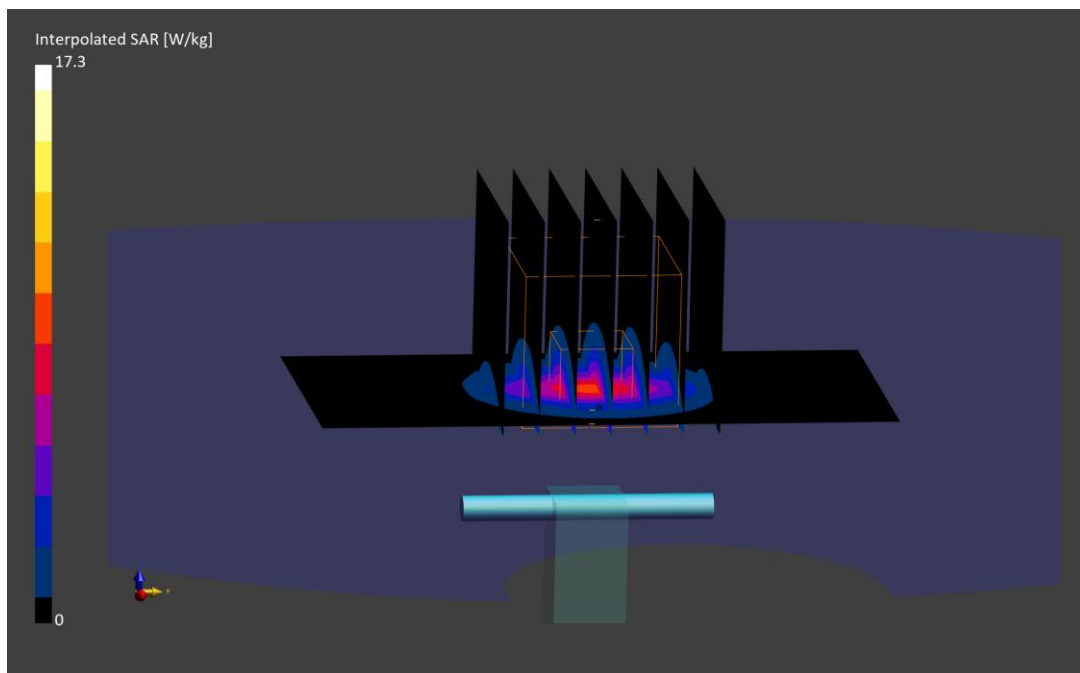

ELEMENT

DUT: Dipole 3700.0 MHz; Type: D3700V2 - SN1067

Communication System: UID: 0, CW; Frequency: 3700.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3700.0 MHz; cond = 2.98 S/m; perm = 37.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/06/2023; Ambient Temp: 20.2°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7659; ConvF:(7.42,7.42,7.42); 2023-04-14
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1407; 2023-04-14
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.0.1425

3700.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 6.40 W/kg; SAR(10 g) = 2.42 W/kg

Deviation (1 g) = -4.33%; Deviation (10 g) = -0.41%

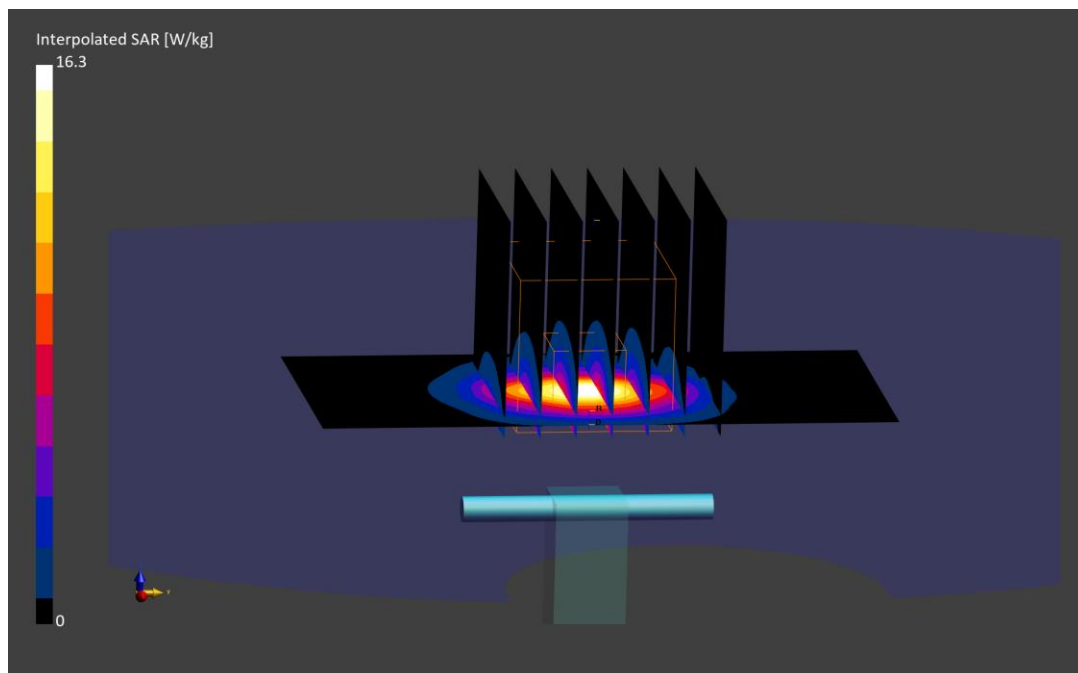

ELEMENT

DUT: Dipole 3700.0 MHz; Type: D3700V2 - SN1067

Communication System: UID: 0, CW; Frequency: 3700.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3700.0 MHz; cond = 2.97 S/m; perm = 37.4; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/18/2023; Ambient Temp: 20.3°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7659; ConvF:(7.42,7.42,7.42); 2023-04-14
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1407; 2023-04-14
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.0.1425

3700.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 6.46 W/kg; SAR(10 g) = 2.44 W/kg

Deviation (1 g) = -3.44%; Deviation (10 g) = 0.41%

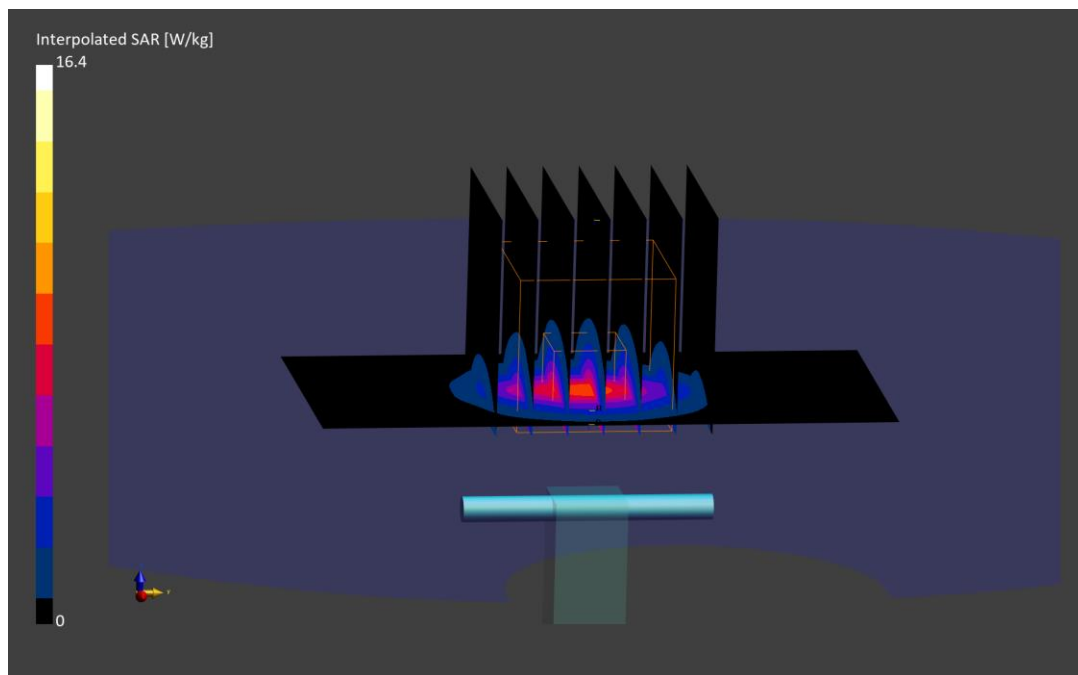

ELEMENT

DUT: Dipole 3700.0 MHz; Type: D3700V2 - SN1067

Communication System: UID: 0, CW; Frequency: 3700.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3700.0 MHz; cond = 3.03 S/m; perm = 38.9; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/26/2023; Ambient Temp:20.9°C; Tissue Temp: 19.4°C

Probe: EX3DV4 - SN7659; ConvF:(7.42,7.42,7.42); 2023-04-14
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1407; 2023-04-14
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.0.1425

3700.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 6.66 W/kg; SAR(10 g) = 2.50 W/kg

Deviation (1 g) = -0.45%; Deviation (10 g) = 2.88%

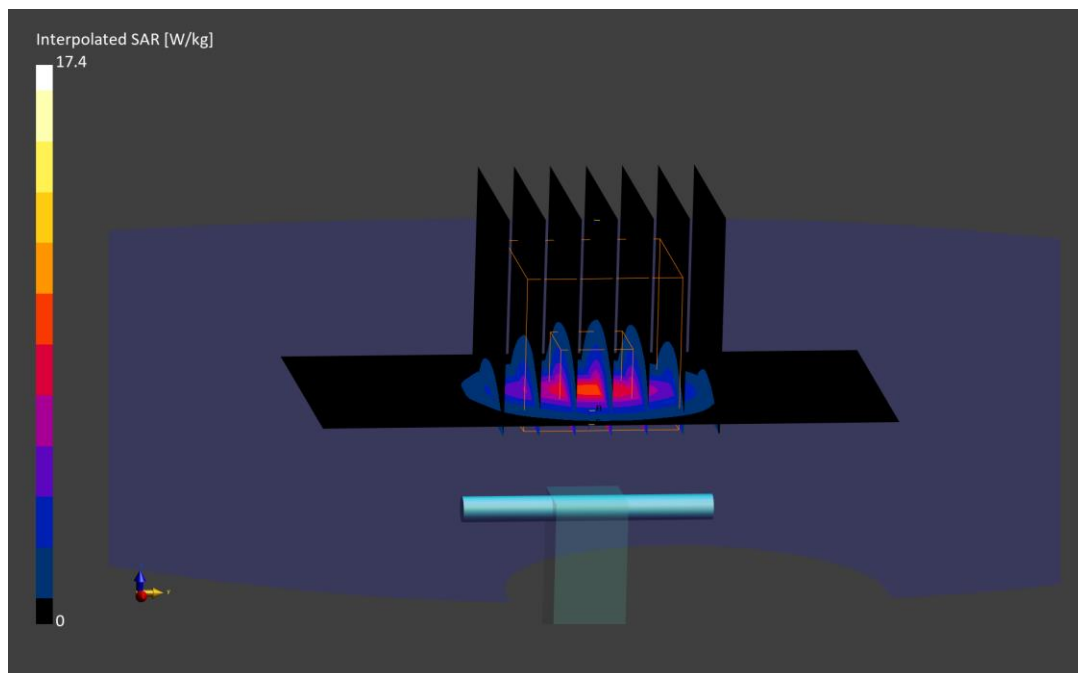

ELEMENT

DUT: Dipole 3900.0 MHz; Type: D3900V2 - SN1074

Communication System: UID: 0, CW; Frequency: 3900.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3900.0 MHz; cond = 3.17 S/m; perm = 37.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/04/2023; Ambient Temp: 19.1°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7640; ConvF:(6.88,6.88,6.88); 2023-02-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1645; 2023-02-16
Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1868
Measurement SW: DASY Module SAR V16.2.0.1425

3900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 6.53 W/kg; SAR(10 g) = 2.29 W/kg

Deviation (1 g) = -5.91%; Deviation (10 g) = -4.98%

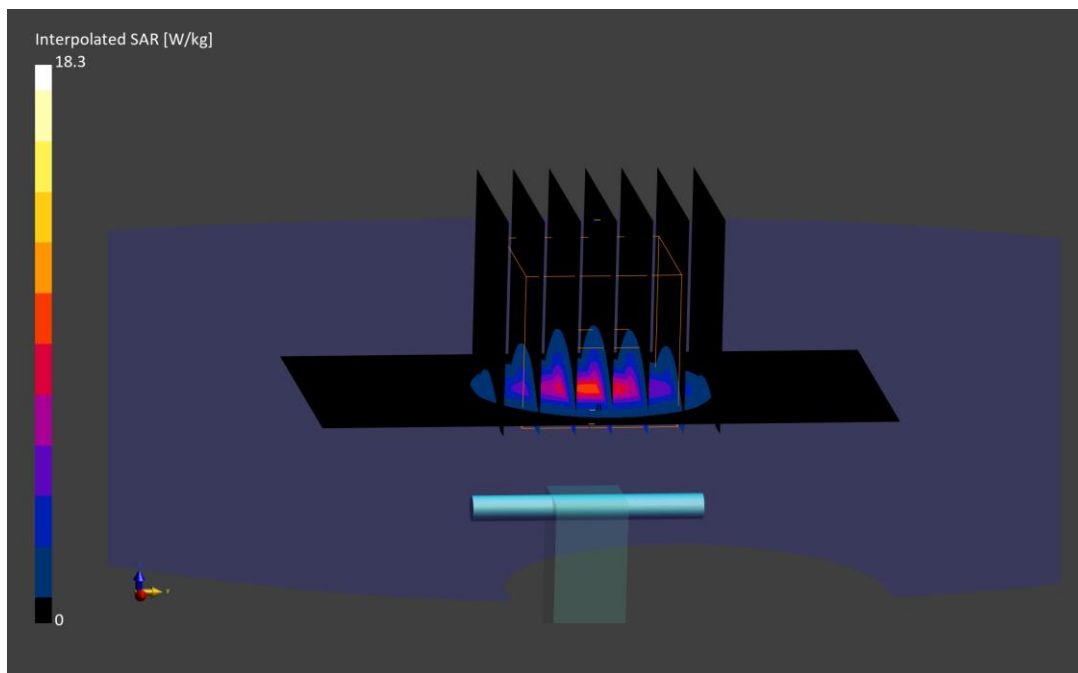

ELEMENT

DUT: Dipole 3900.0 MHz; Type: D3900V2 - SN1056

Communication System: UID: 0, CW; Frequency: 3900.0 MHz
Medium: 3600 Head; Medium parameters used:
f = 3900.0 MHz; cond = 3.17 S/m; perm = 37.0; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/18/2023; Ambient Temp: 20.3°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7659; ConvF:(7.35,7.35,7.35); 2023-04-14
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1407; 2023-04-14
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.0.1425

3900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: dx=5.0 mm, dy=5.0 mm, dz=1.4 mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 16.6 W/kg

SAR(1 g) = 6.38 W/kg; SAR(10 g) = 2.28 W/kg

Deviation (1 g) = -6.45%; Deviation (10 g) = -4.20%

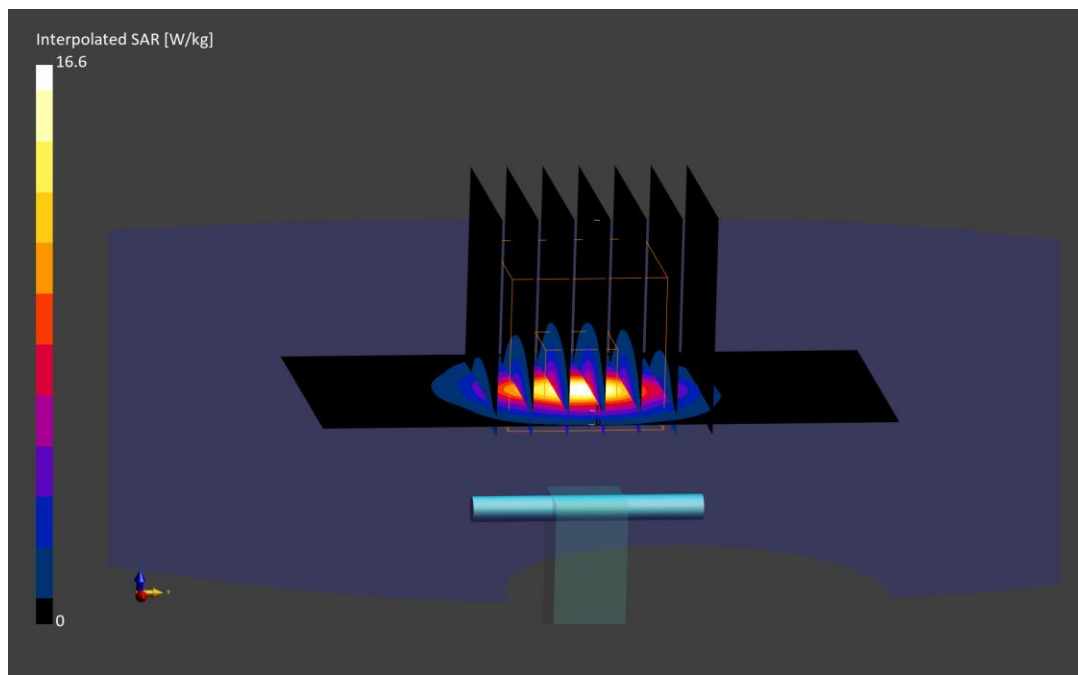

ELEMENT

DUT: Dipole 5250.0 MHz; Type: D5GHzV2 - SN1191

Communication System: UID: 0, CW; Frequency: 5250.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5250.0 MHz; cond = 4.80 S/m; perm = 35.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/08/2023; Ambient Temp: 20.0°C; Tissue Temp: 19.1°C

Probe: EX3DV4 - SN7570; ConvF:(5.52,5.52,5.52); 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1558; 2023-01-17
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.0.1425

5250.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 14.6 W/kg

SAR(1 g) = 3.73 W/kg; SAR(10 g) = 1.07 W/kg

Deviation (1 g) = -7.21%; Deviation (10 g) = -7.36%

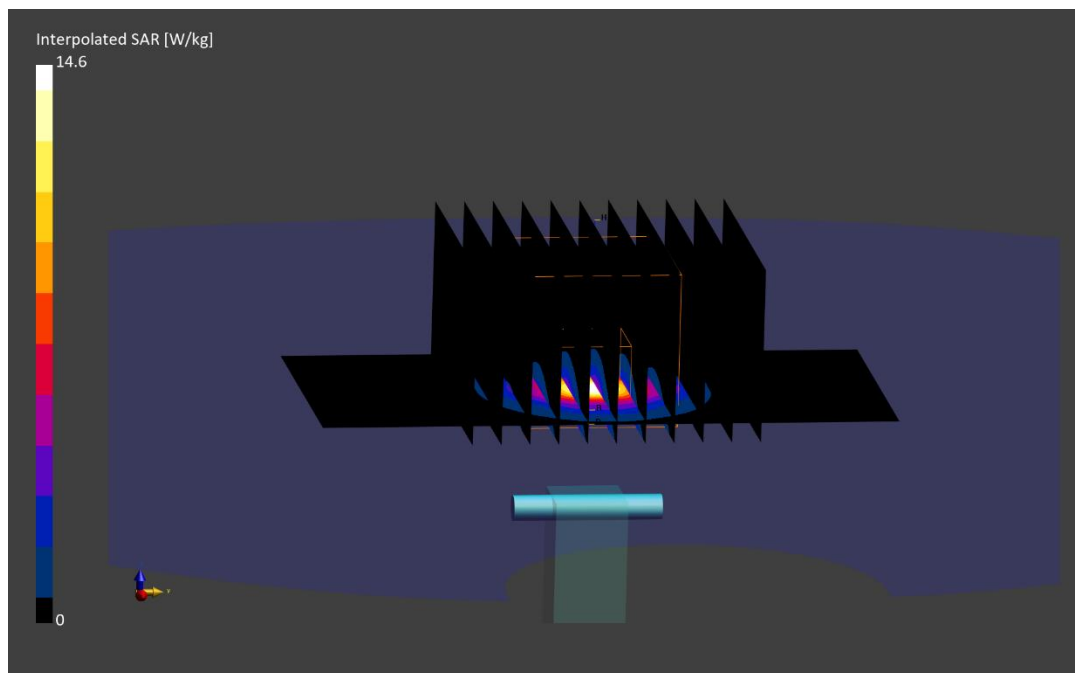

ELEMENT

DUT: Dipole 5600.0 MHz; Type: D5GHzV2 - SN1191

Communication System: UID: 0, CW; Frequency: 5600.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5600.0 MHz; cond = 5.22 S/m; perm = 35.1; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/08/2023; Ambient Temp: 20.0°C; Tissue Temp: 19.1°C

Probe: EX3DV4 - SN7570; ConvF:(4.84,4.84,4.84); 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1558; 2023-01-17
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.0.1425

5600.0 MHz System Verification at 17.0 dBm (50 mW)


Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 4.34 W/kg; SAR(10 g) = 1.25 W/kg

Deviation (1 g) = 5.98%; Deviation (10 g) = 7.30%

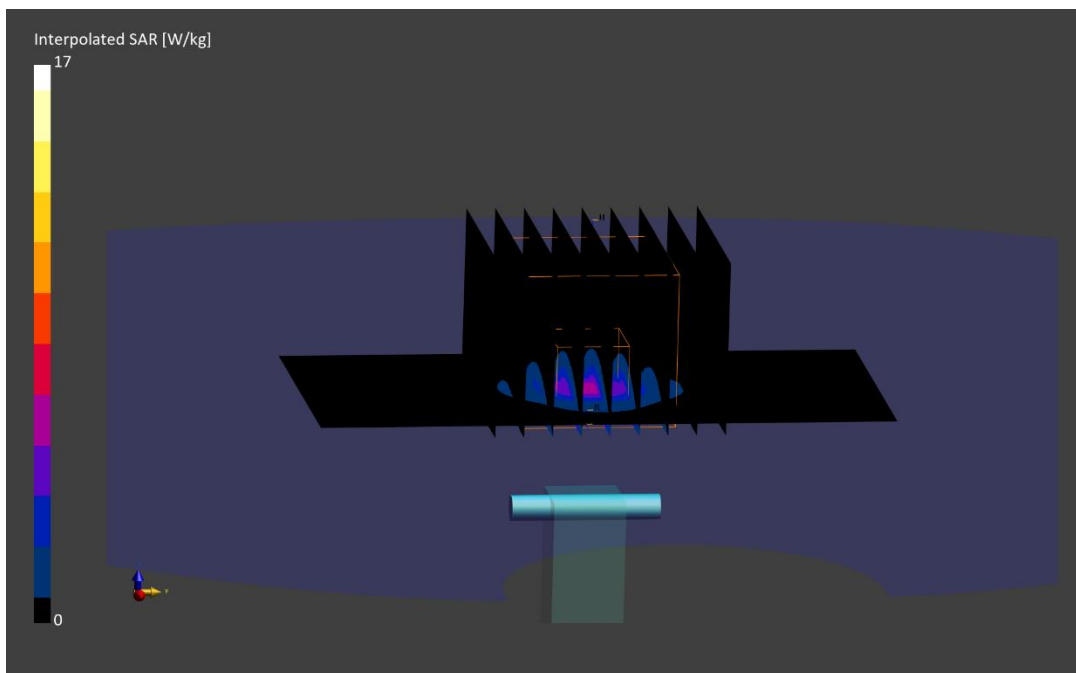

ELEMENT

DUT: Dipole 5750.0 MHz; Type: D5GHzV2 - SN1191

Communication System: UID: 0, CW; Frequency: 5750.0 MHz
Medium: 5200-5800 Head; Medium parameters used:
f = 5750.0 MHz; cond = 5.41 S/m; perm = 34.8; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 12/08/2023; Ambient Temp: 20.0°C; Tissue Temp: 19.1°C

Probe: EX3DV4 - SN7570; ConvF:(4.92,4.92,4.92); 2023-01-11
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1558; 2023-01-17
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.0.1425

5750.0 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 3.91 W/kg; SAR(10 g) = 1.11 W/kg

Deviation (1 g) = -0.26%; Deviation (10 g) = -0.45%

