

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0109


Page (64) of (69)




Conducted band-edge / 2 467 MHz

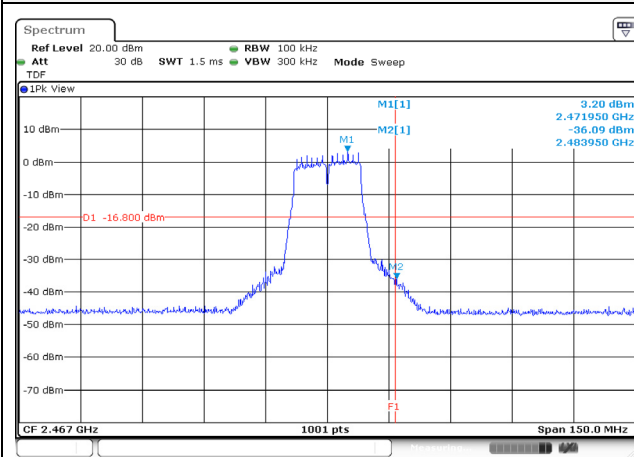


Conducted spurious / 2 467 MHz

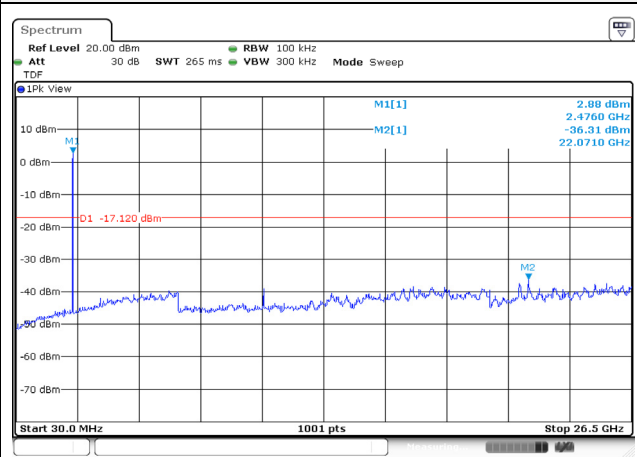

Conducted band-edge / 2 472 MHz

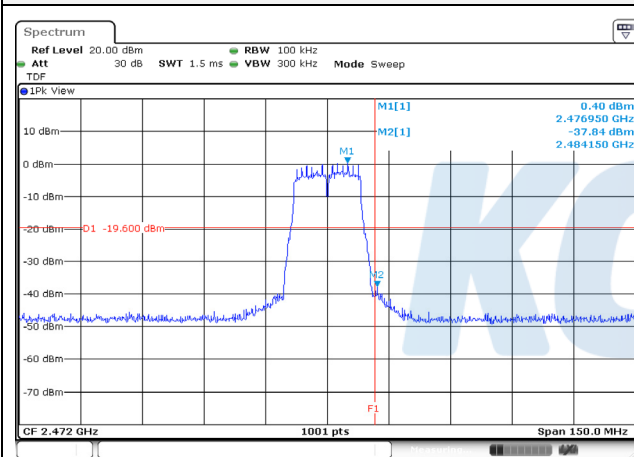


Conducted spurious / 2 472 MHz

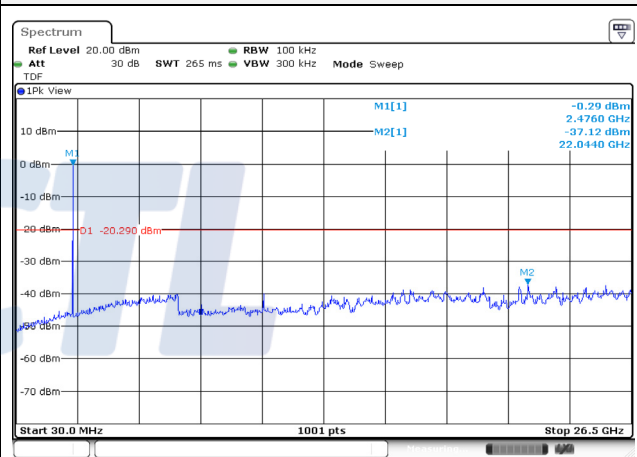


802.11n HT20


Conducted band-edge / 2 412 MHz

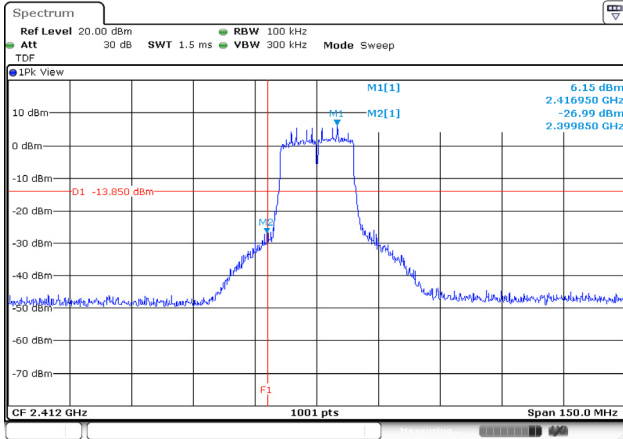


Conducted spurious / 2 412 MHz

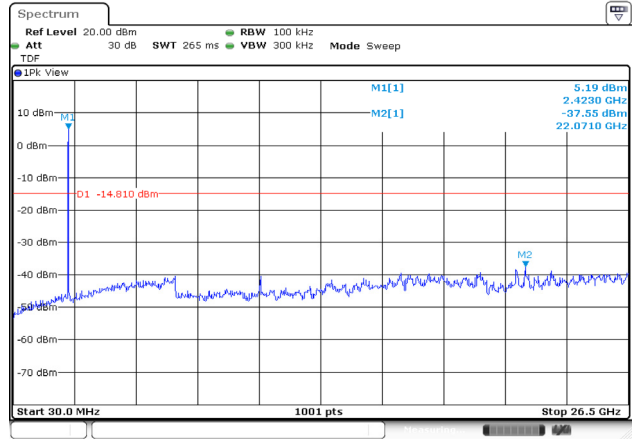


Conducted band-edge / 2 437 MHz

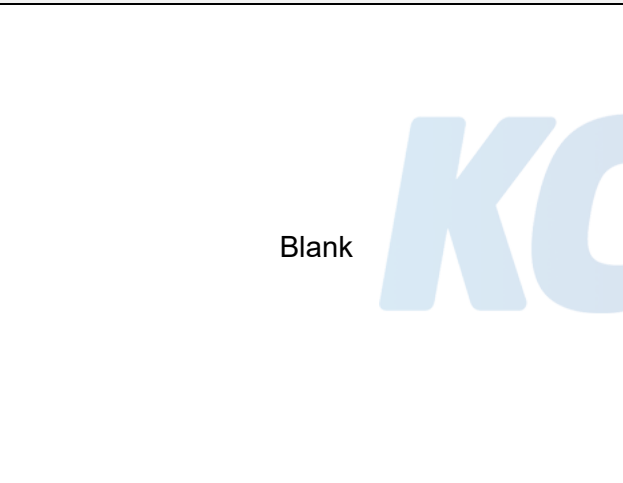


Conducted spurious / 2 437 MHz

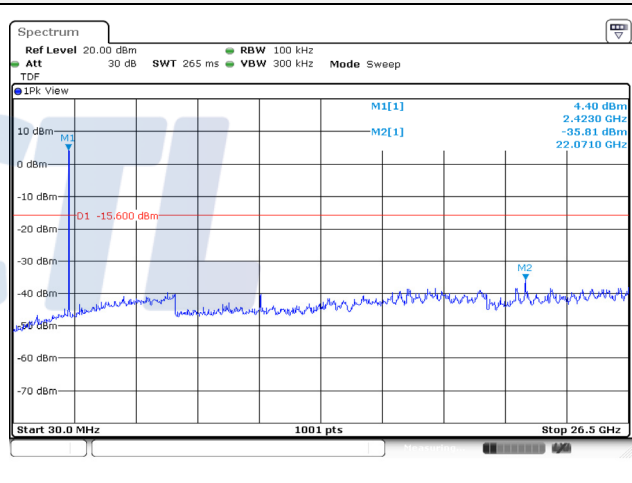

Conducted band-edge / 2 462 MHz

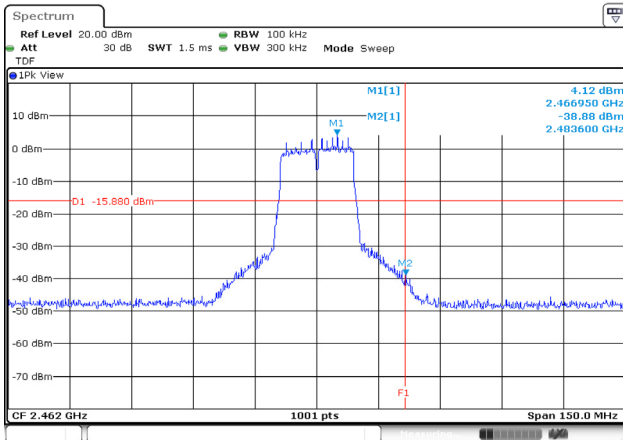

Conducted spurious / 2 462 MHz

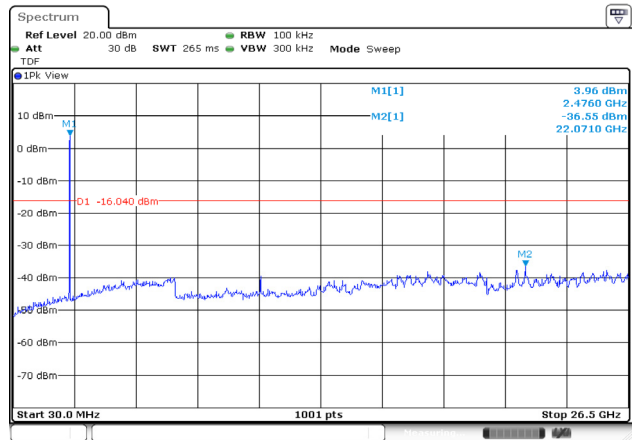

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0109


Page (66) of (69)




Conducted band-edge / 2 467 MHz

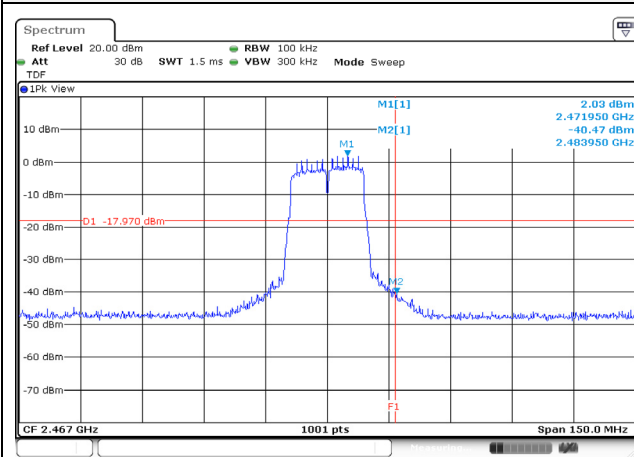


Conducted spurious / 2 467 MHz

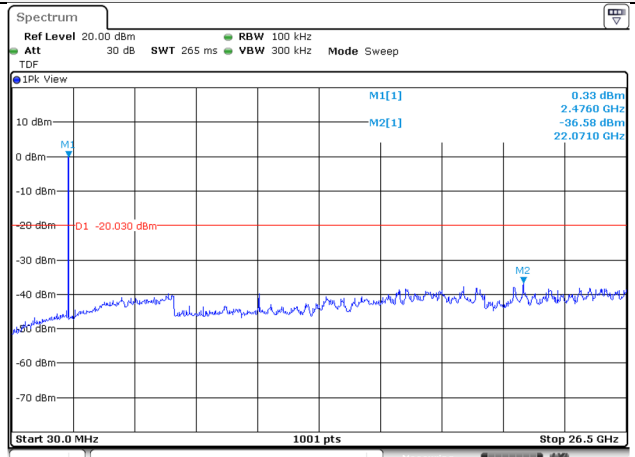

Conducted band-edge / 2 472 MHz

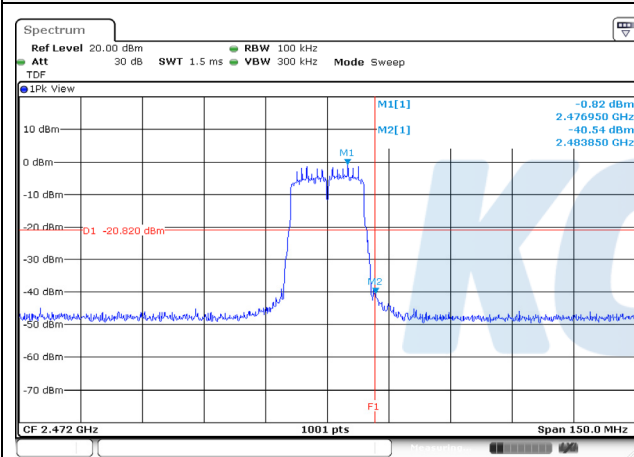


Conducted spurious / 2 472 MHz

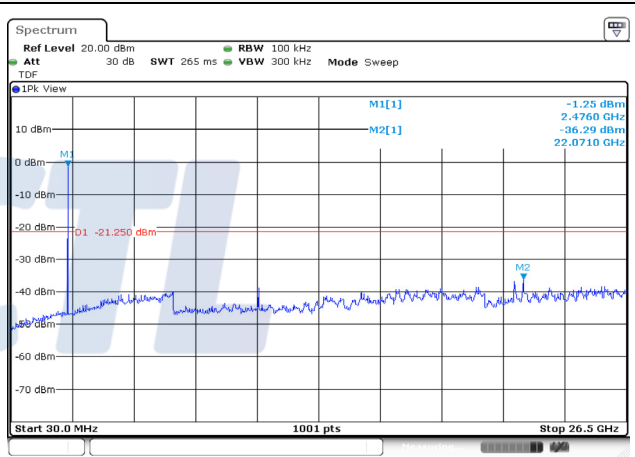

7.6. AC Conducted emission

Test setup

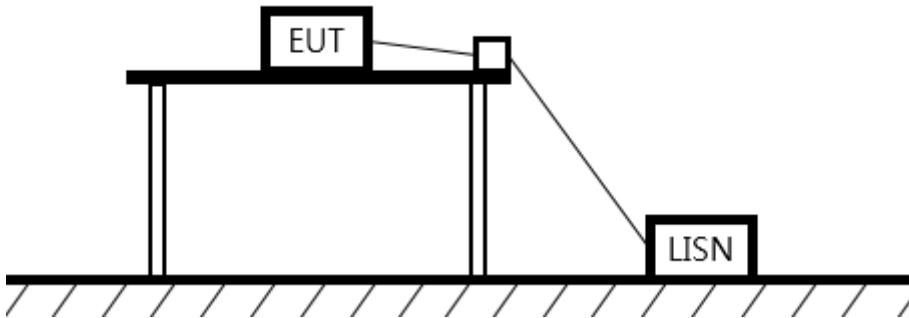

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Measurement procedure

1. The EUT was placed on a wooden table of size, 1 m by 1.5 m, raised 80 cm in which is located 40 cm away from the vertical wall and 1.5m away from the side wall of the shielded room.
2. Each current-carrying conductor of the EUT power cord was individually connected through a 50 Ω /50 μ H LISN, which is an input transducer to a spectrum analyzer or an EMI/Field Intensity Meter, to the input power source.
3. Exploratory measurements were made to identify the frequency of the emission that had the highest amplitude relative to the limit by operating the EUT in a range of typical modes of operation, cable position, and with a typical system equipment configuration and arrangement. Based on the exploratory tests of the EUT, the one EUT cable configuration and arrangement and mode of operation that had produced the emission with the highest amplitude relative to the limit was selected for the final measurement.
4. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment is the system) was then performed over the frequency range of 0.15 MHz to 30 MHz.
5. The measurements were made with the detector set to peak amplitude within a bandwidth of 10 kHz or to quasi-peak and average within a bandwidth of 9 kHz. The EUT was in transmitting mode during the measurements.

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0109

Page (68) of (69)



Test results – Worst case : 802.11 g mode/ 2 412 MHz

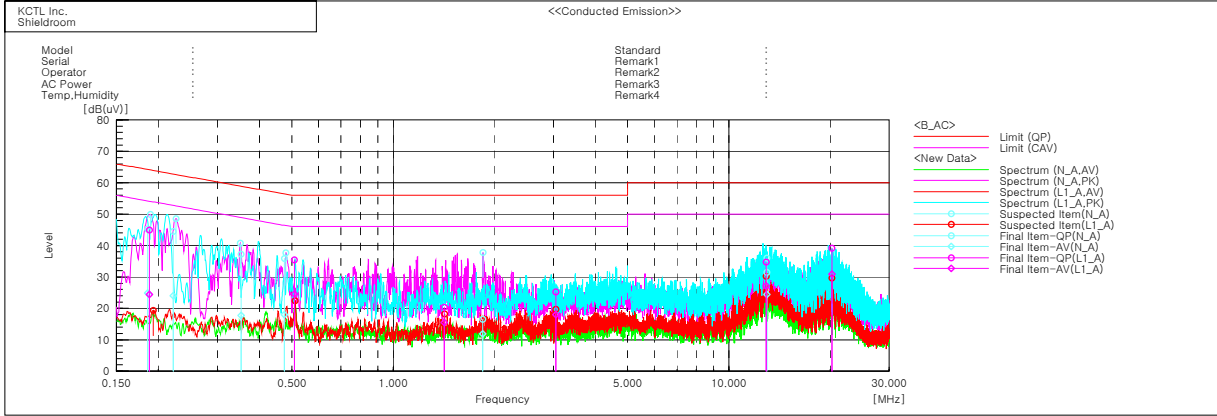


Final Result

--- N_A Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.18586	35.0	14.6	10.3	45.3	24.9	64.2	54.2	18.9	29.3
2	0.22146	34.4	14.0	10.0	44.4	24.0	62.8	52.8	18.4	28.8
3	0.35285	27.1	7.7	10.1	37.2	17.8	58.9	48.9	21.7	31.1
4	0.47517	25.7	7.8	10.2	35.9	18.0	56.4	46.4	20.5	28.4
5	1.84995	6.3	1.6	10.3	16.6	11.9	56.0	46.0	39.4	34.1
6	12.97824	20.7	13.7	10.7	31.4	24.4	60.0	50.0	28.6	25.6

--- L1_A Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f [dB]	Result QP [dB(uV)]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.18809	34.7	14.1	10.3	45.0	24.4	64.1	54.1	19.1	29.7
2	0.50883	25.2	14.4	10.2	35.4	24.6	56.0	46.0	20.6	21.4
3	1.41938	10.1	5.2	10.3	20.4	15.5	56.0	46.0	35.6	30.5
4	3.05178	14.8	7.6	10.4	25.2	18.0	56.0	46.0	30.8	28.0
5	12.92845	23.9	16.4	10.8	34.7	27.2	60.0	50.0	25.3	22.8
6	20.2591	26.0	19.7	11.2	39.2	30.9	60.0	50.0	20.8	19.1

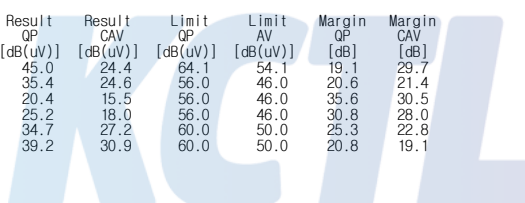

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR20-SRF0109

Page (69) of (69)

KCTL**8. Measurement equipment**

Equipment Name	Manufacturer	Model No.	Serial No.	Next Cal. Date
Spectrum Analyzer	R&S	FSV30	100806	20.07.30
Attenuator	Weinschel ENGINEERING	56-10	51395	21.01.22
Signal Generator	R&S	SMB100A	176206	21.01.21
Vector Signal Generator	R&S	SMBV100A	257566	20.07.16
Pulse Power Sensor	ANRITSU	MA2411B	1726174	20.07.31
Pulse Power Meter	ANRITSU	ML2495A	1608009	20.07.31
DC Power Supply	AGILENT	E3632A	MY40001543	20.05.13
EMI TEST RECEIVER	R&S	ESCI7	100732	20.08.22
Spectrum Analyzer	R&S	FSV40	100988	21.01.03
Bi-Log Antenna	SCHWARZBECK	VULB 9168	440	20.08.17
Amplifier	SONOMA INSTRUMENT	310N	284608	20.08.22
COAXIAL FIXED ATTENUATOR	Agilent	8491B-003	2708A18758	20.05.04
Horn antenna	ETS.lindgren	3117	155787	20.10.24
Horn antenna	ETS.lindgren	3116	00086632	21.02.17
Attenuator	API Inmet	40AH2W-10	12	20.05.15
Broadband PreAmplifier	SCHWARZBECK	BBV9718	216	20.07.30
AMPLIFIER	L-3 Narda-MITEQ	AMF-7D-01001800 -22-10P	2031196	21.02.12
AMPLIFIER	L-3 Narda-MITEQ	JS44-18004000-33-8P	2000996	21.01.22
LOOP Antenna	R&S	HFH2-Z2	100355	20.08.24
Antenna Mast	Innco Systems	MA4640-XP-ET	-	-
Turn Table	Innco Systems	DT2000	79	-
Antenna Mast	Innco Systems	MA4000-EP	303	-
Turn Table	Innco Systems	DT2000	79	-
High pass Filter	WT	WT-A1698-HS	WT160411001	20.05.14
TWO-LINE V - NETWORK	R&S	ENV216	101358	20.10.02
EMI TEST RECEIVER	R&S	ESCI	100001	20.08.22

End of test report