


**VERTICAL PEAK AND AVERAGE PLOT**

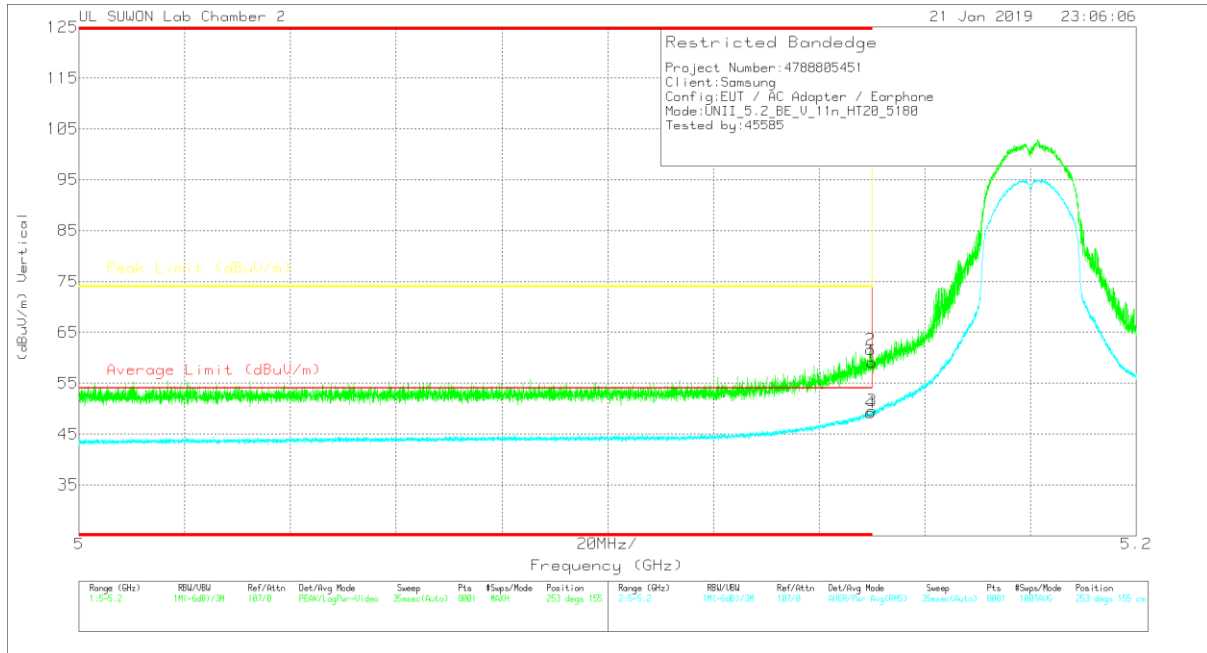

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[db]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	43.07	Pk	34.3	-18.2	0	59.17	-	-	74	-14.83	253	155	V
2	* 5.15	45.47	Pk	34.3	-18.2	0	61.57	-	-	74	-12.43	253	155	V
3	5.15	32.46	RMS	34.3	-17.3	.11	49.57	54	-4.43	-	-	253	155	V
4	* 5.15	32.16	RMS	34.3	-17.3	.11	49.27	54	-4.73	-	-	253	155	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

### HARMONICS AND SPURIOUS EMISSIONS

#### LOW CHANNEL HORIZONTAL

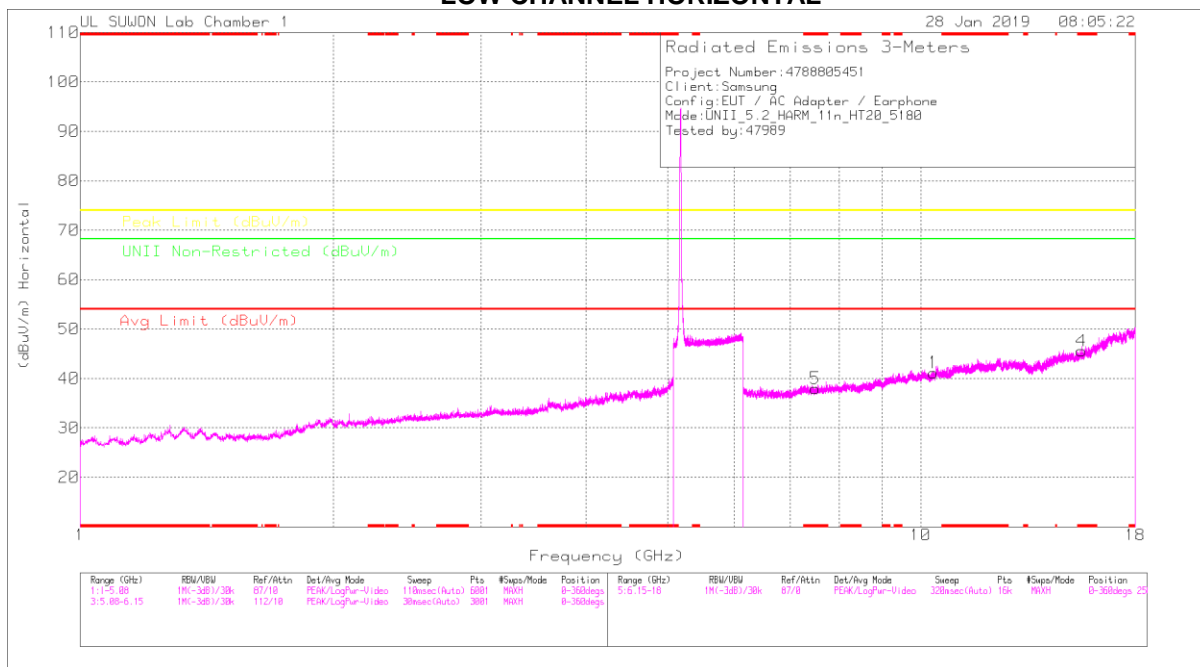

#### LOW CHANNEL VERTICAL

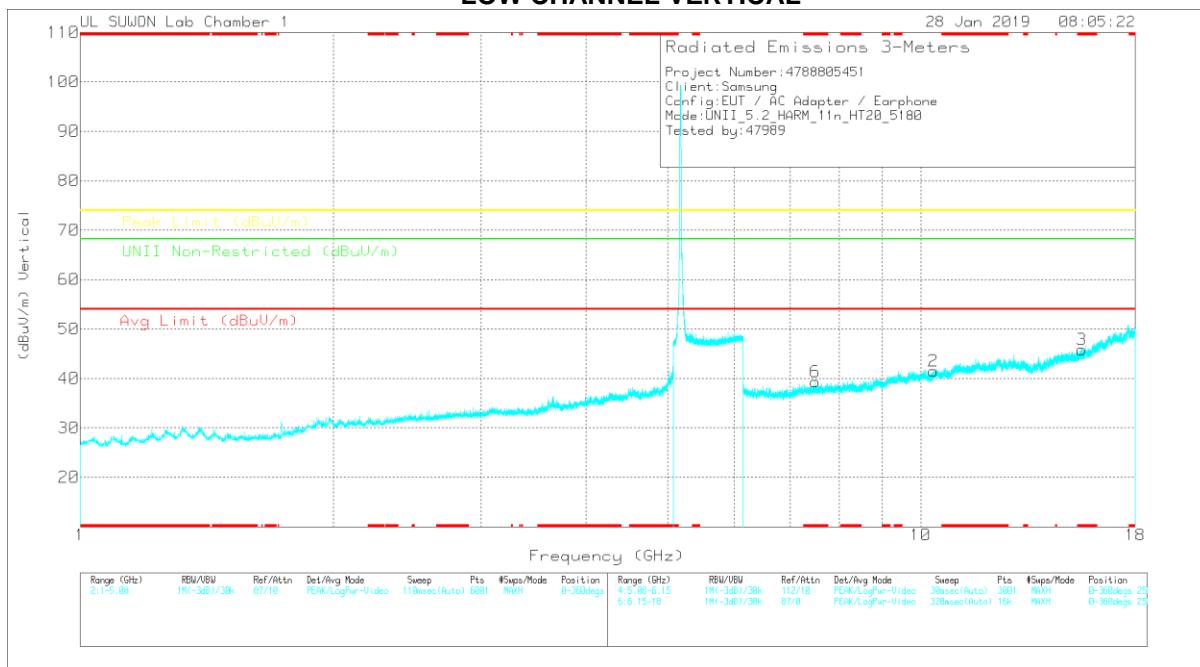

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**


Trace Markers

Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	3117_00188717	66Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	10.356	25.95	PK	37.6	-22.4	0	41.15	-	-	-	-	68.2	-27.05	0-360	250	H
4	* 15.537	26.06	PK	40.2	-20.7	0	45.56	-	-	74	-28.44	-	-	0-360	150	H
5	* 7.494	29.16	PK	35.8	-27	0	37.96	-	-	74	-36.04	-	-	0-360	150	H
2	10.362	26.19	PK	37.6	-22.3	0	41.49	-	-	-	-	68.2	-26.71	0-360	250	V
3	* 15.541	26.44	PK	40.2	-20.8	0	45.84	-	-	74	-28.16	-	-	0-360	250	V
6	* 7.494	30.54	PK	35.8	-27	0	39.34	-	-	74	-34.66	-	-	0-360	250	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

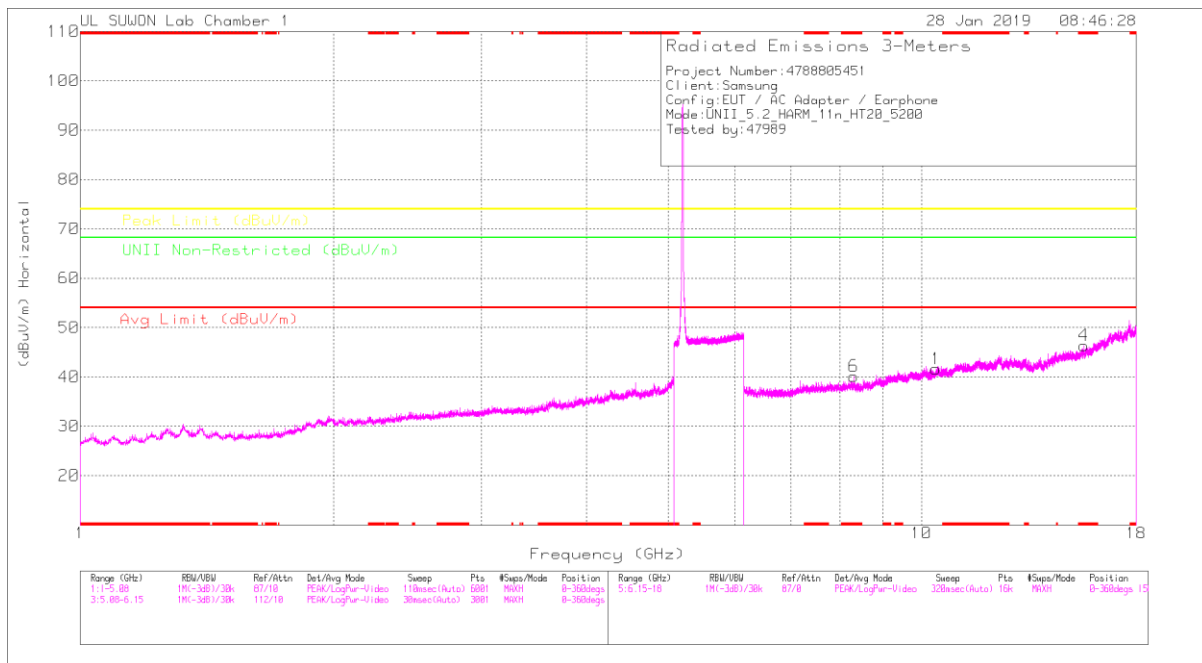

MID CHANNEL VERTICAL

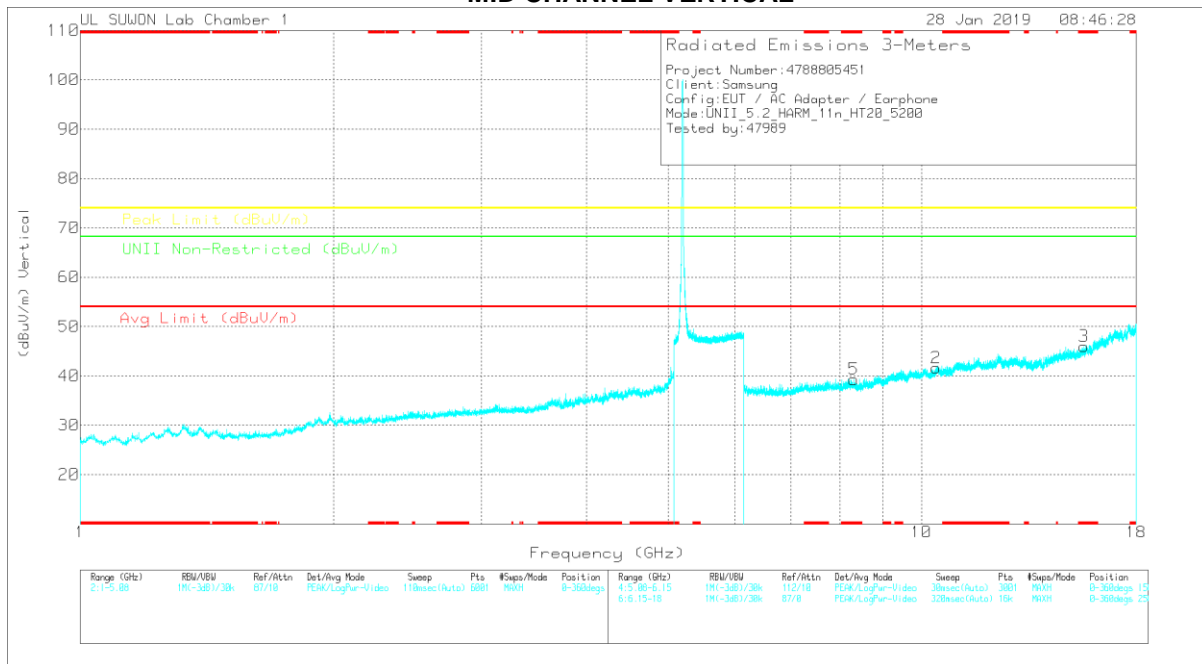

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNII Non-Restricted (dBuV/m)	Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	10.403	25.74	PK	37.6	-21.7	0	41.64	-	-	-	-	68.2	-26.56	0-360	250	H
4	* 15.603	27.48	PK	40.2	-21.3	0	46.38	-	-	74	-27.62	-	-	0-360	150	H
6	* 8.31	29.02	PK	36.4	-25.3	0	40.12	-	-	74	-33.88	-	-	0-360	150	H
2	10.405	25.71	PK	37.6	-21.7	0	41.61	-	-	-	-	68.2	-26.59	0-360	150	V
3	* 15.593	26.98	PK	40.2	-21.2	0	45.98	-	-	74	-28.02	-	-	0-360	250	V
5	* 8.314	28.29	PK	36.3	-25.3	0	39.29	-	-	74	-34.71	-	-	0-360	150	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK - Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### HIGH CHANNEL HORIZONTAL

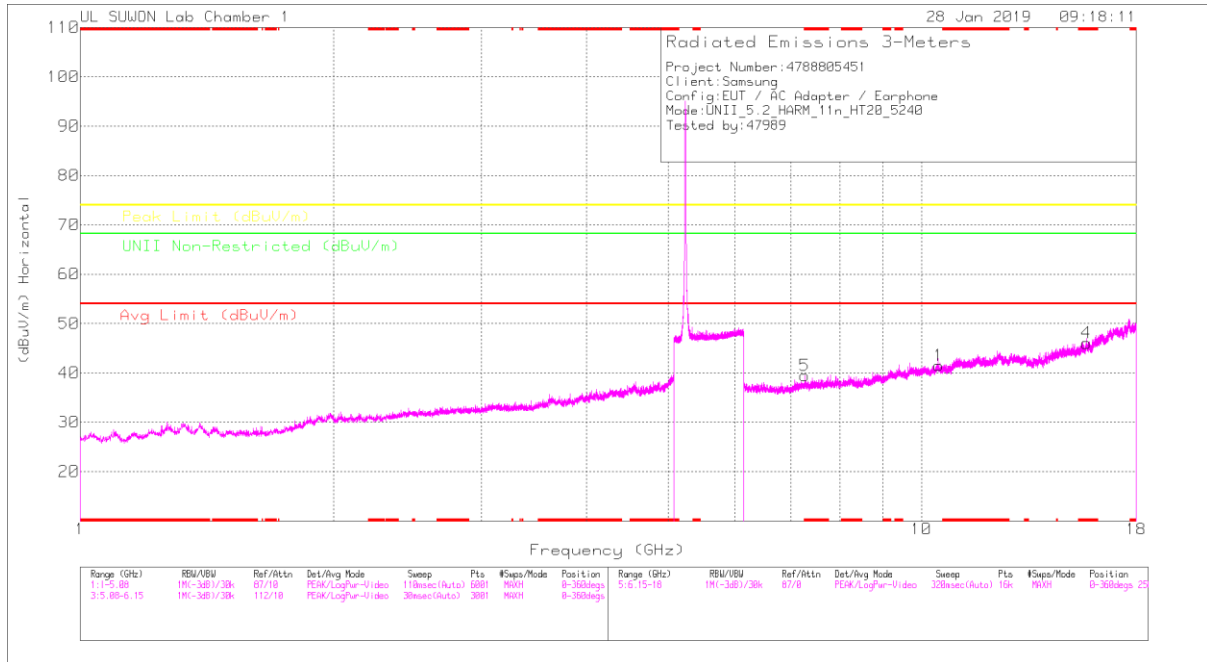

### HIGH CHANNEL VERTICAL

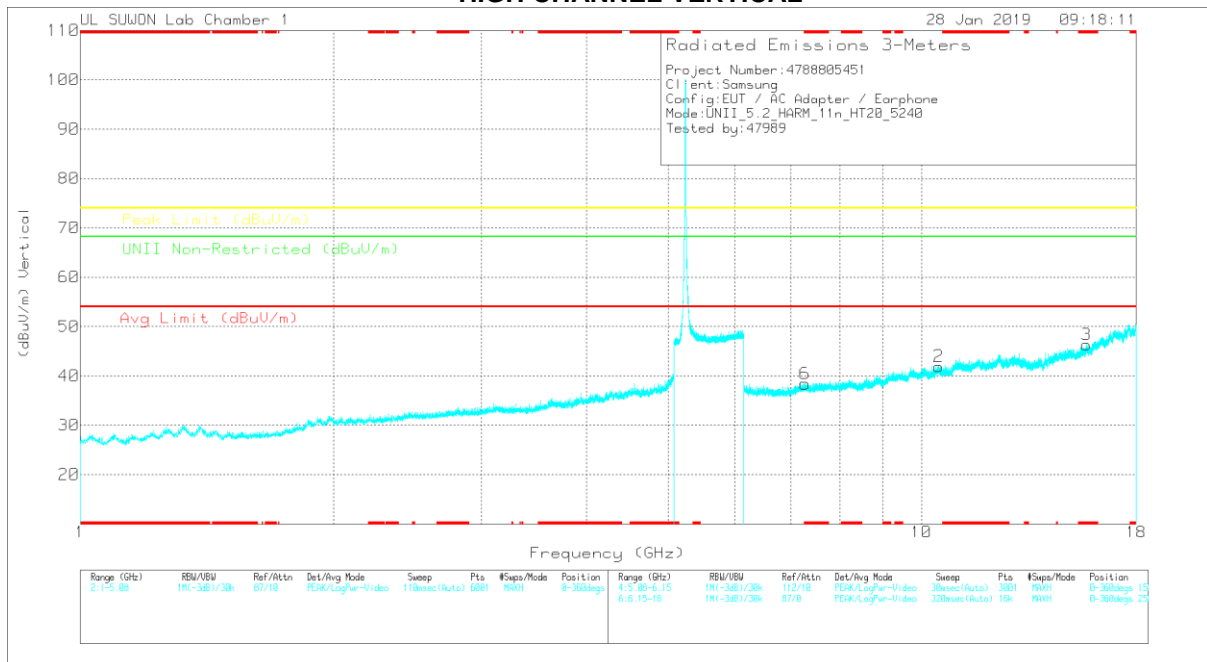

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

Trace Markers


Marker	Frequency (GHz)	Major Reading (dBuV)	Det	3117_00188717	66Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	10.476	25.6	PK	37.7	-21.8	0	41.5	-	-	-	-	68.2	-26.7	0-360	150	H
4	* 15.718	26.63	PK	40.4	-21	0	46.03	-	-	74	-27.97	-	-	0-360	150	H
5	* 7.268	30.58	PK	35.8	-26.9	0	39.48	-	-	74	-34.52	-	-	0-360	250	H
2	10.477	26.01	PK	37.7	-21.8	0	41.91	-	-	-	-	68.2	-26.29	0-360	250	V
3	* 15.719	26.94	PK	40.4	-21	0	46.34	-	-	74	-27.66	-	-	0-360	250	V
6	* 7.27	29.5	PK	35.8	-26.9	0	38.4	-	-	74	-35.6	-	-	0-360	150	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### 11.1.3.TX Above 1GHz 802.11n HT40 MODE IN THE 5.2GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

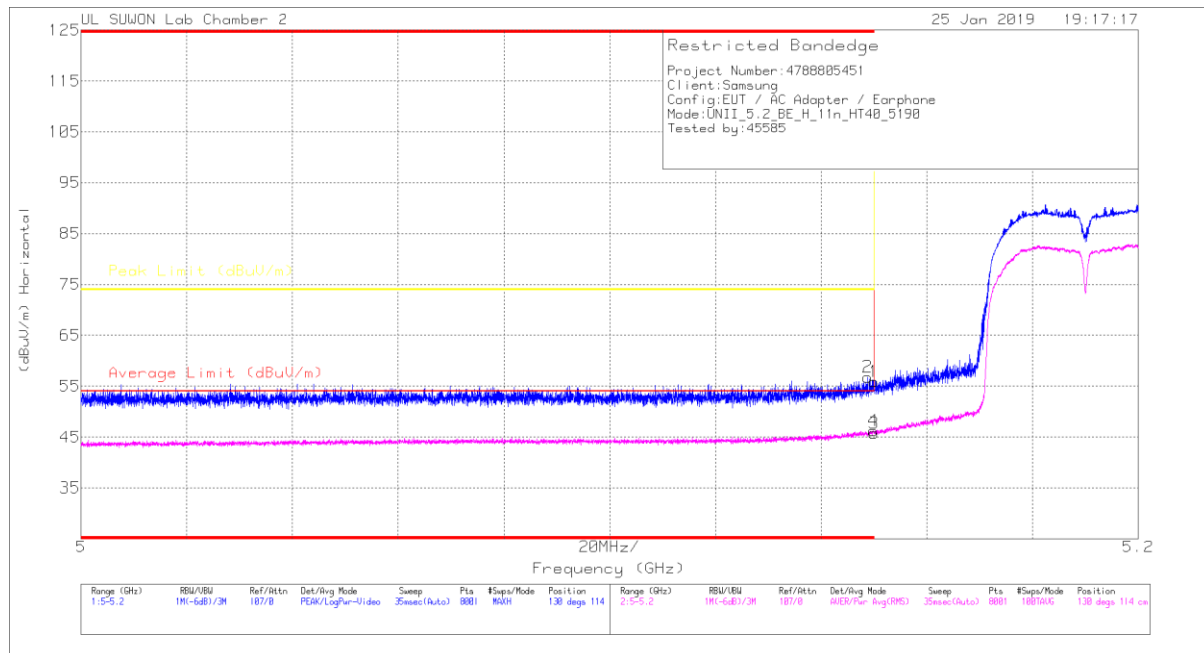

#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBu/m)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBu/m)	Average Limit (dBu/m)	Margin (dB)	Peak Limit (dBu/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	39.74	Pk	34.3	-18.2	0	55.84	-	-	74	-18.16	130	114	H
2	* 5.149	40.72	Pk	34.3	-18.2	0	56.82	-	-	74	-17.18	130	114	H
3	5.15	28.49	RMS	34.3	-17.3	.31	45.8	54	-8.2	-	-	130	114	H
4	* 5.15	28.97	RMS	34.3	-17.3	.31	46.28	54	-7.72	-	-	130	114	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection



**VERTICAL PEAK AND AVERAGE PLOT**

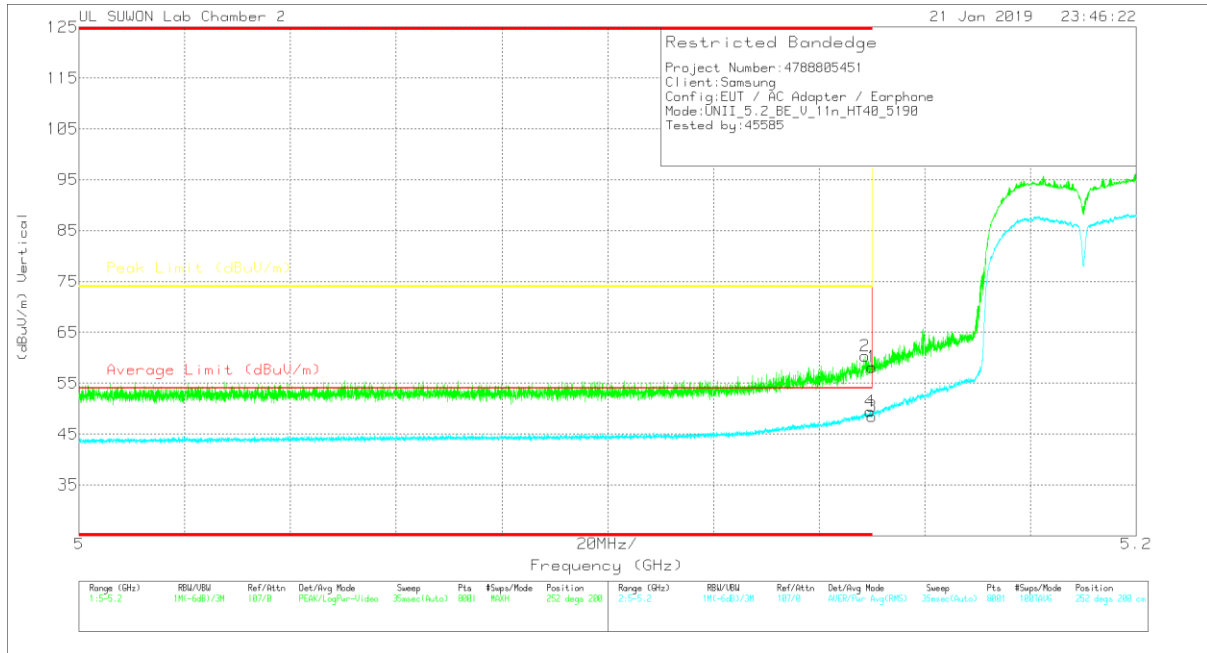

**VERTICAL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[db]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	42.08	Pk	34.3	-18.2	0	58.18	-	-	74	-15.82	252	200	V
2	* 5.149	44.15	Pk	34.3	-18.1	0	60.35	-	-	74	-13.65	252	200	V
3	5.15	31.11	RMS	34.3	-17.3	.31	48.42	54	-5.58	-	-	252	200	V
4	* 5.15	32.18	RMS	34.3	-17.3	.31	49.49	54	-4.51	-	-	252	200	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

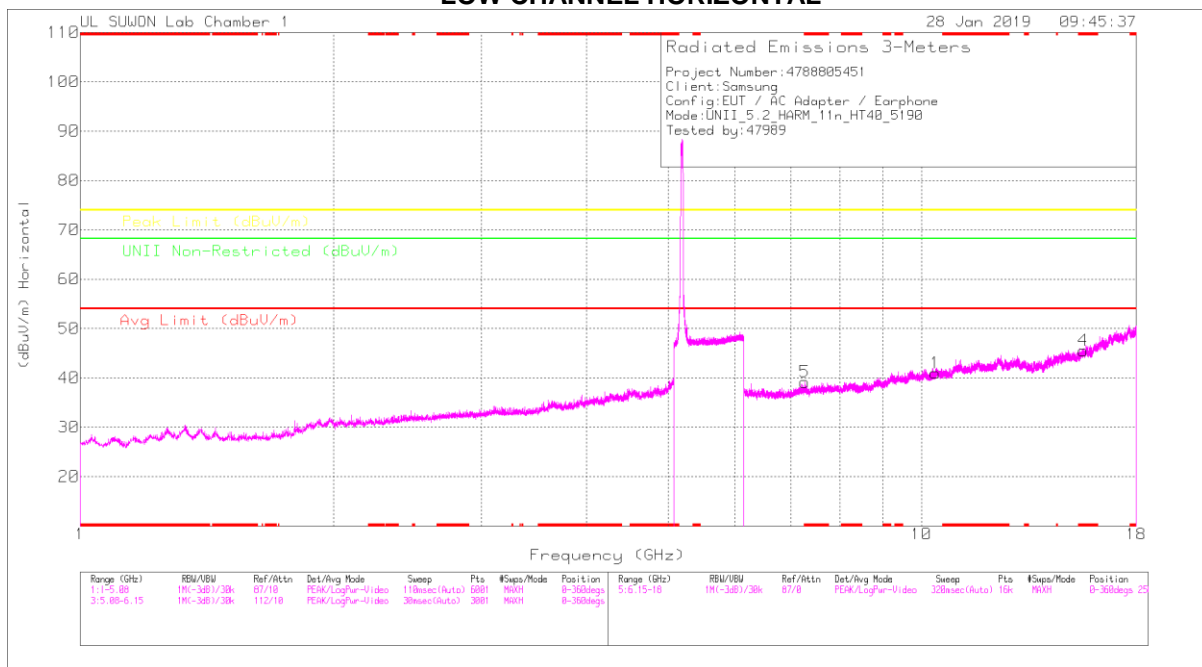

### LOW CHANNEL VERTICAL

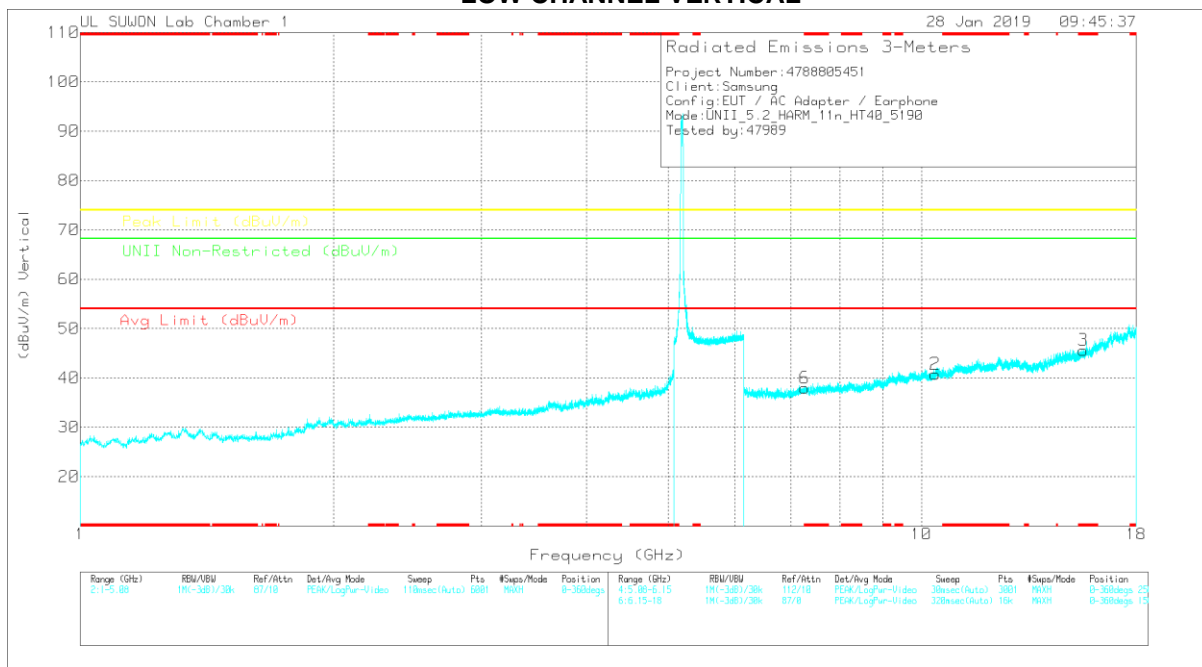

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**


Trace Markers

Marker	Frequency (GHz)	Major Reading (dBuV)	Det	3117_00168717	66Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.385	25.46	PK	37.6	-22.1	0	40.96	-	-	-	-	68.2	-27.24	0-360	150	H
4	* 15.575	26.43	PK	40.2	-21.1	0	45.53	-	-	74	-28.47	-	-	0-360	150	H
5	* 7.265	30.26	PK	35.8	-26.9	0	39.16	-	-	74	-34.84	-	-	0-360	150	H
2	10.384	25.29	PK	37.6	-22.1	0	40.79	-	-	-	-	68.2	-27.41	0-360	150	V
3	* 15.578	26.51	PK	40.2	-21.1	0	45.61	-	-	74	-28.39	-	-	0-360	250	V
6	* 7.265	29.06	PK	35.8	-26.9	0	37.96	-	-	74	-36.04	-	-	0-360	250	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### HIGH CHANNEL HORIZONTAL

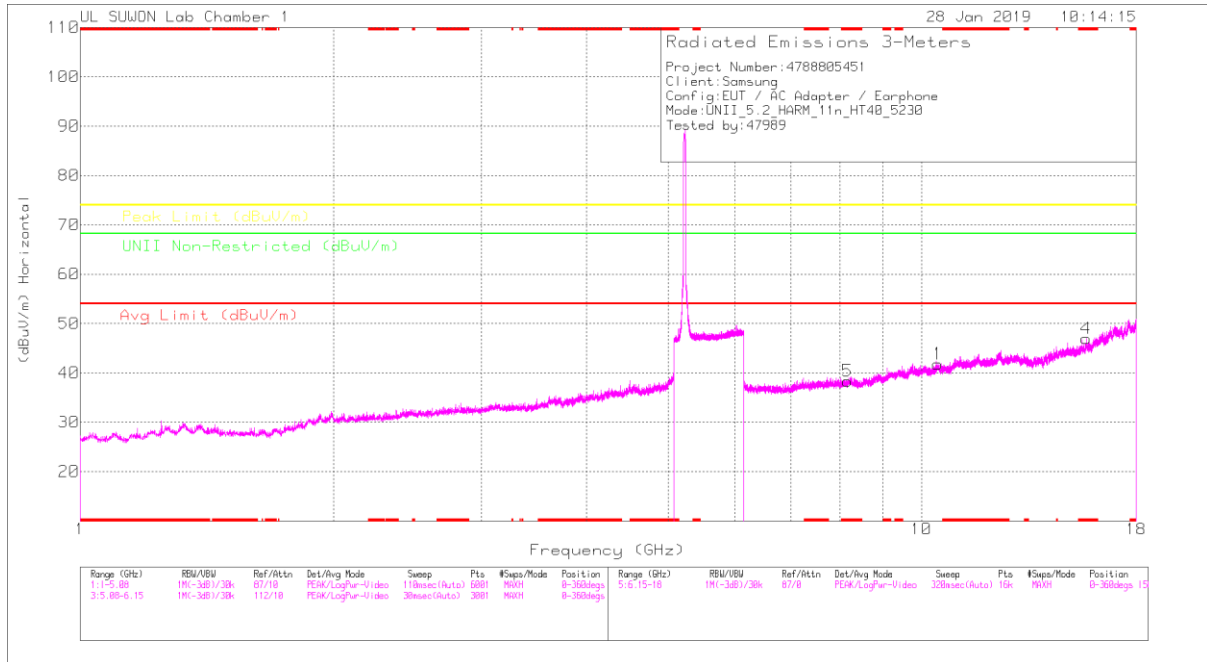

### HIGH CHANNEL VERTICAL

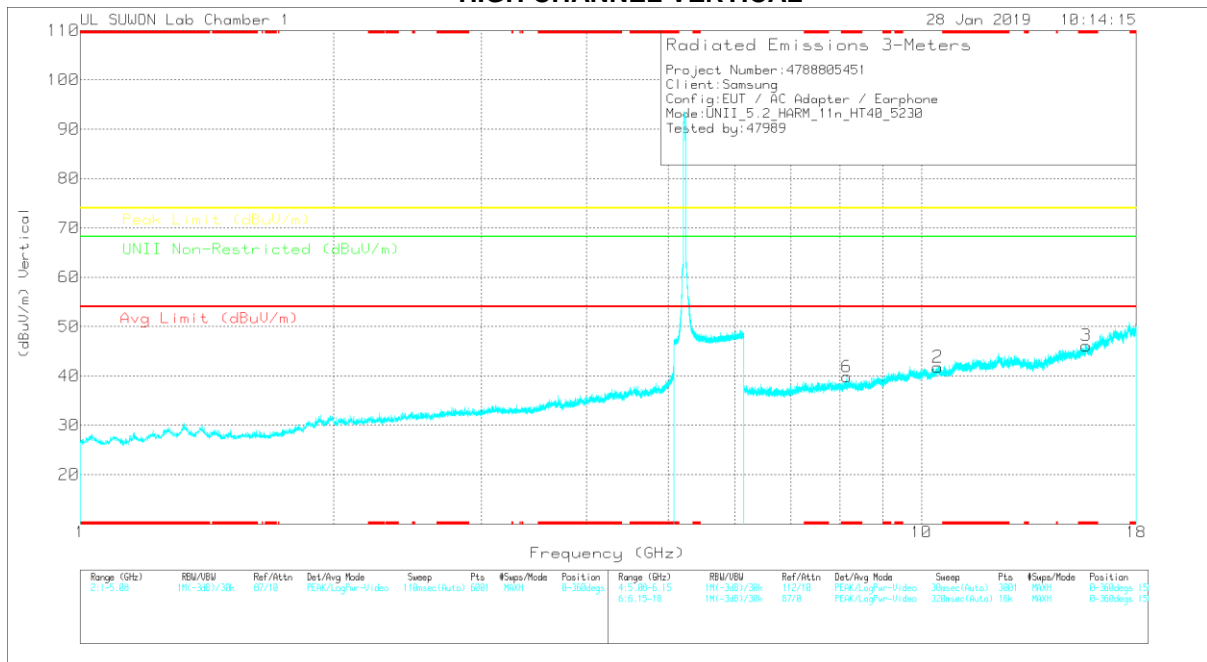

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

Trace Markers


Marker	Frequency (GHz)	Major Reading (dBuV)	Det	3117_00188717	66Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.456	25.69	PK	37.7	-21.6	0	41.79	-	-	-	-	68.2	-26.41	0-360	250	H
4	* 15.698	27.58	PK	40.4	-21	0	46.98	-	-	74	-27.02	-	-	0-360	150	H
5	* 8.163	28.24	PK	36.3	-26.2	0	38.34	-	-	74	-35.66	-	-	0-360	250	H
2	10.456	25.69	PK	37.7	-21.6	0	41.79	-	-	-	-	68.2	-26.41	0-360	250	V
3	* 15.697	26.75	PK	40.4	-21	0	46.15	-	-	74	-27.85	-	-	0-360	150	V
6	* 8.158	29.86	PK	36.3	-26.3	0	39.86	-	-	74	-34.14	-	-	0-360	150	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK - Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### 11.1.4.TX Above 1GHz 802.11ac VHT80 MODE IN THE 5.2GHz BAND RESTRICTED BANDEDGE (MID CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

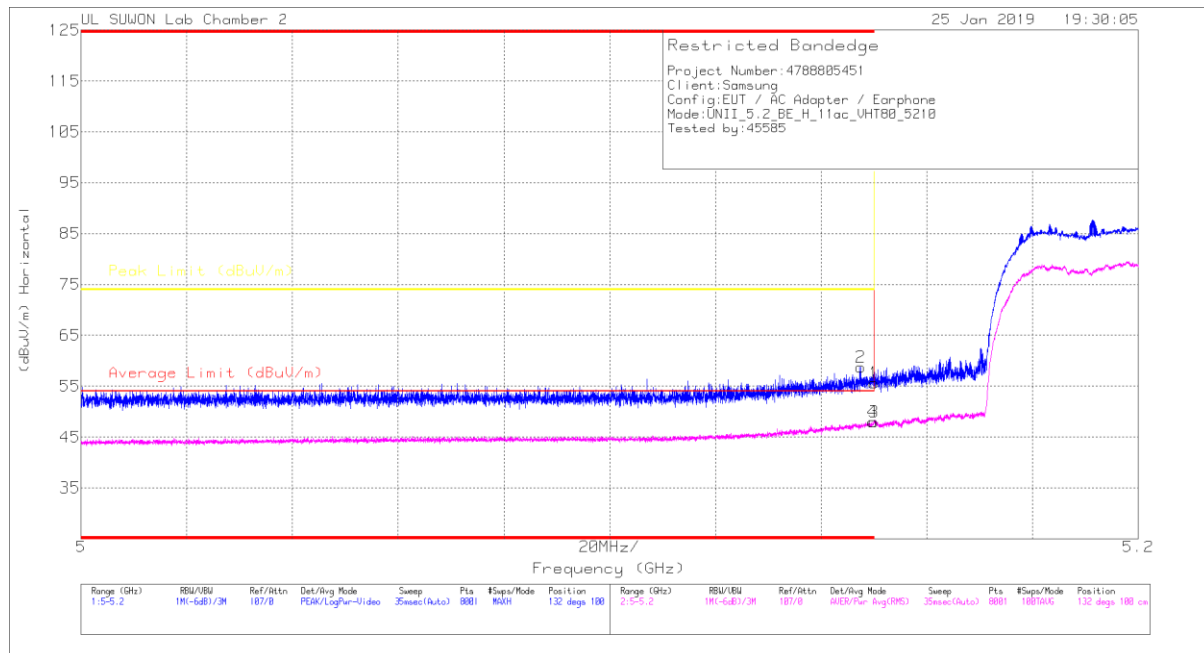

#### HORIZONTAL DATA

##### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBu/m)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBu/m)	Average Limit (dBu/m)	Margin (dB)	Peak Limit (dBu/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	39.5	Pk	34.3	-18.2	0	55.6	-	-	74	-18.4	132	100	H
2	* 5.147	42.55	Pk	34.3	-18.1	0	58.75	-	-	74	-15.25	132	100	H
3	5.15	30.35	RMS	34.3	-17.3	.67	48.02	54	-5.98	-	-	132	100	H
4	* 5.15	30.36	RMS	34.3	-17.3	.67	48.03	54	-5.97	-	-	132	100	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

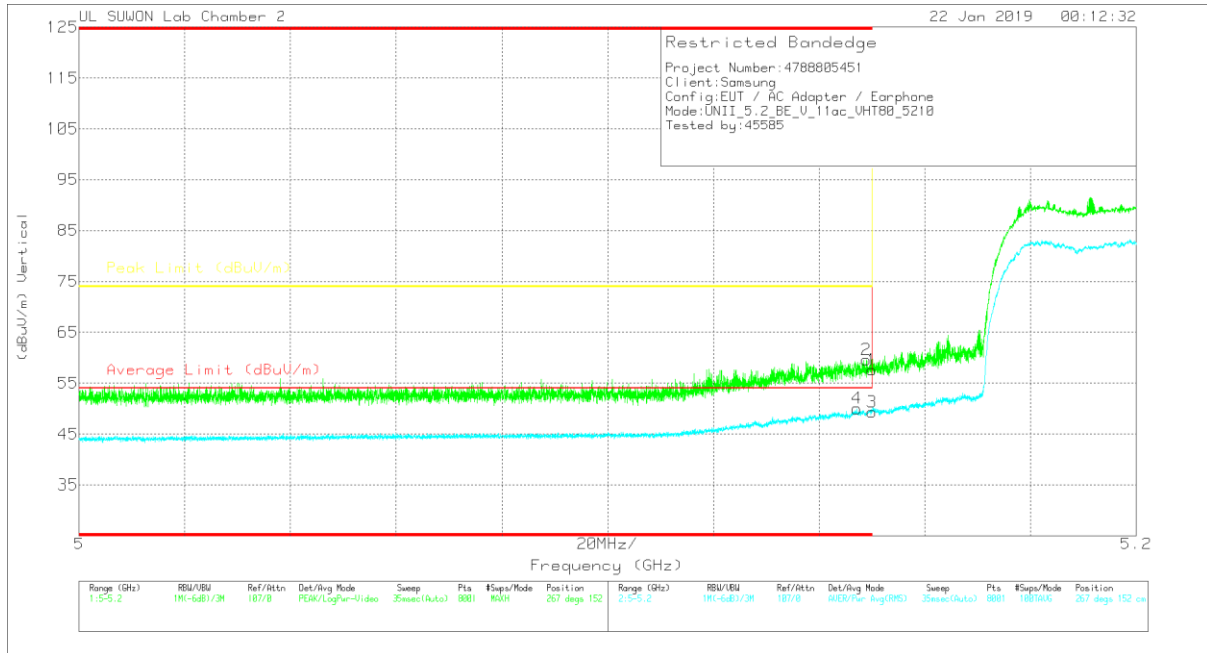

**VERTICAL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[db]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.15	41.5	Pk	34.3	-18.2	0	57.6	-	-	74	-16.4	267	152	V
2	* 5.149	43.55	Pk	34.3	-18.2	0	59.65	-	-	74	-14.35	267	152	V
3	5.15	31.7	RMS	34.3	-17.3	.67	49.37	54	-4.63	-	-	267	152	V
4	* 5.147	32.35	RMS	34.3	-17.3	.67	50.02	54	-3.98	-	-	267	152	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS

### MID CHANNEL HORIZONTAL

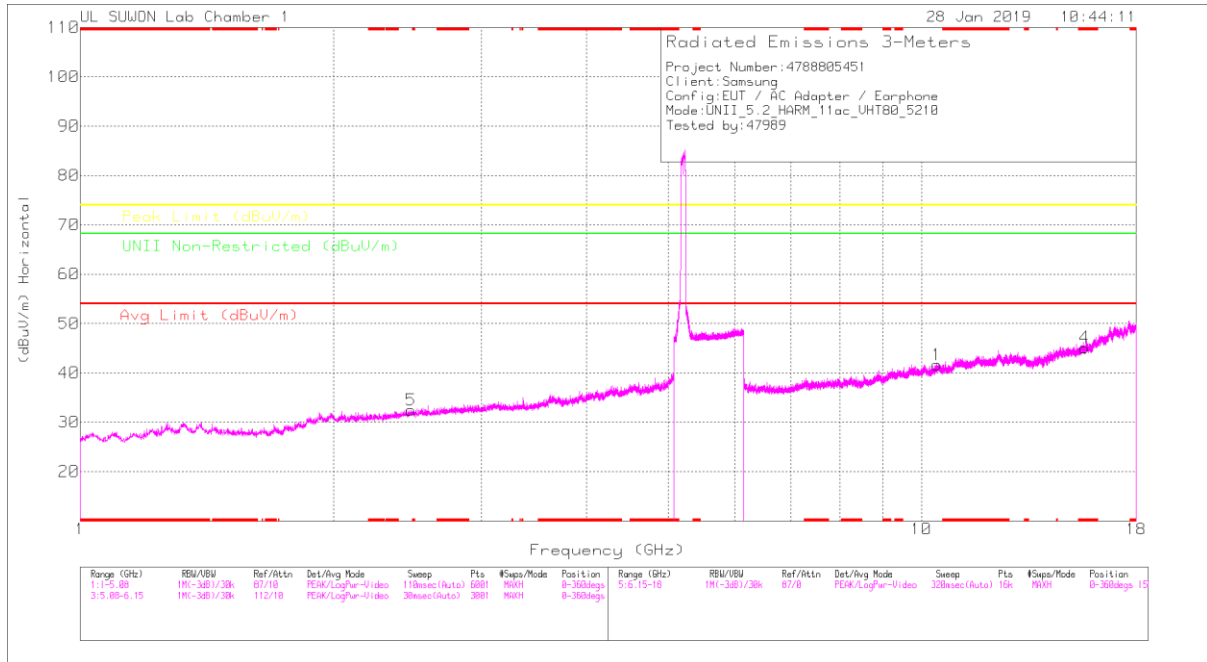

### MID CHANNEL VERTICAL

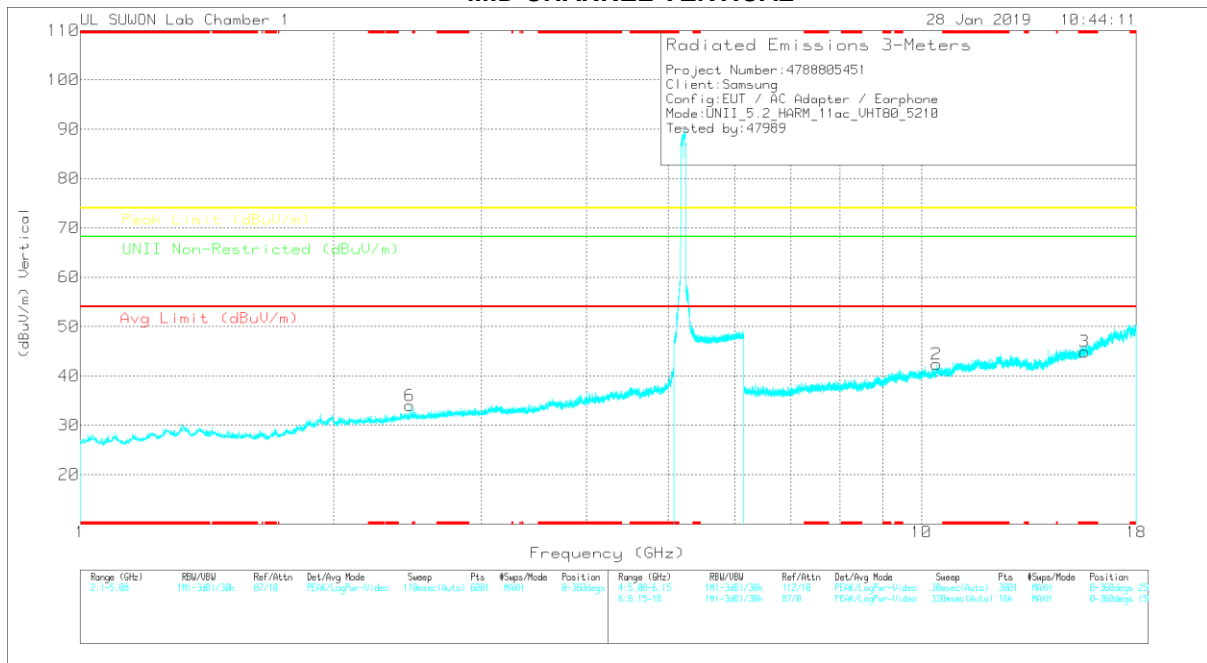

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



**MID CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00188717	SGHL_LF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	ULN Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	2.472	34.96	PK	31.9	-34.4	0	32.46	-	-	-	-	68.2	-35.74	0-360	250	H
6	2.466	36.48	PK	31.9	-34.4	0	33.98	-	-	-	-	68.2	-34.22	0-360	150	V
1	10.423	25.5	PK	37.6	-21.5	0	41.6	-	-	-	-	68.2	-26.6	0-360	250	H
4	* 15.635	26.19	PK	40.3	-21.4	0	45.09	-	-	74	-28.91	-	-	0-360	150	H
2	10.42	26.28	PK	37.6	-21.5	0	42.38	-	-	-	-	68.2	-25.82	0-360	250	V
3	* 15.638	25.9	PK	40.3	-21.3	0	44.9	-	-	74	-29.1	-	-	0-360	150	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

## 11.2. 5.3 GHz

### 11.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND AUTHORIZED BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

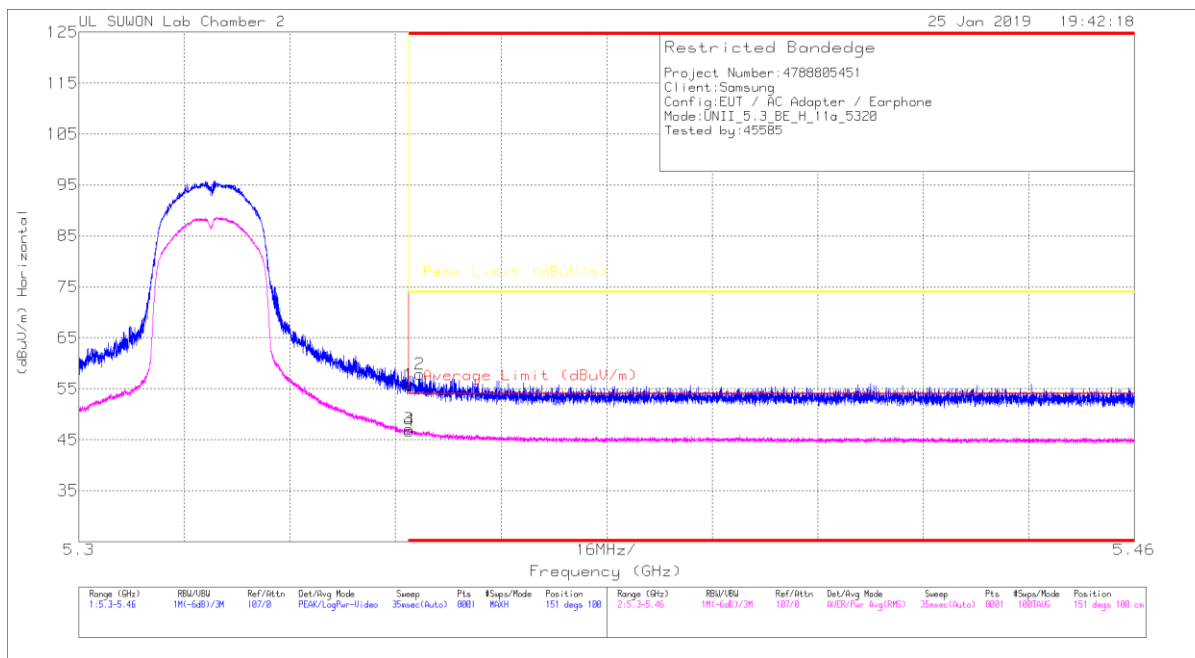

#### HORIZONTAL DATA

#### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.32	Pk	34.5	-18.1	0	55.72	-	-	74	-18.28	151	100	H
2	* 5.352	41.44	Pk	34.5	-18.1	0	57.84	-	-	74	-16.16	151	100	H
3	* 5.35	29.57	RMS	34.5	-17.1	.1	47.07	54	-6.93	-	-	151	100	H
4	* 5.35	29.3	RMS	34.5	-17.1	.1	46.8	54	-7.2	-	-	151	100	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

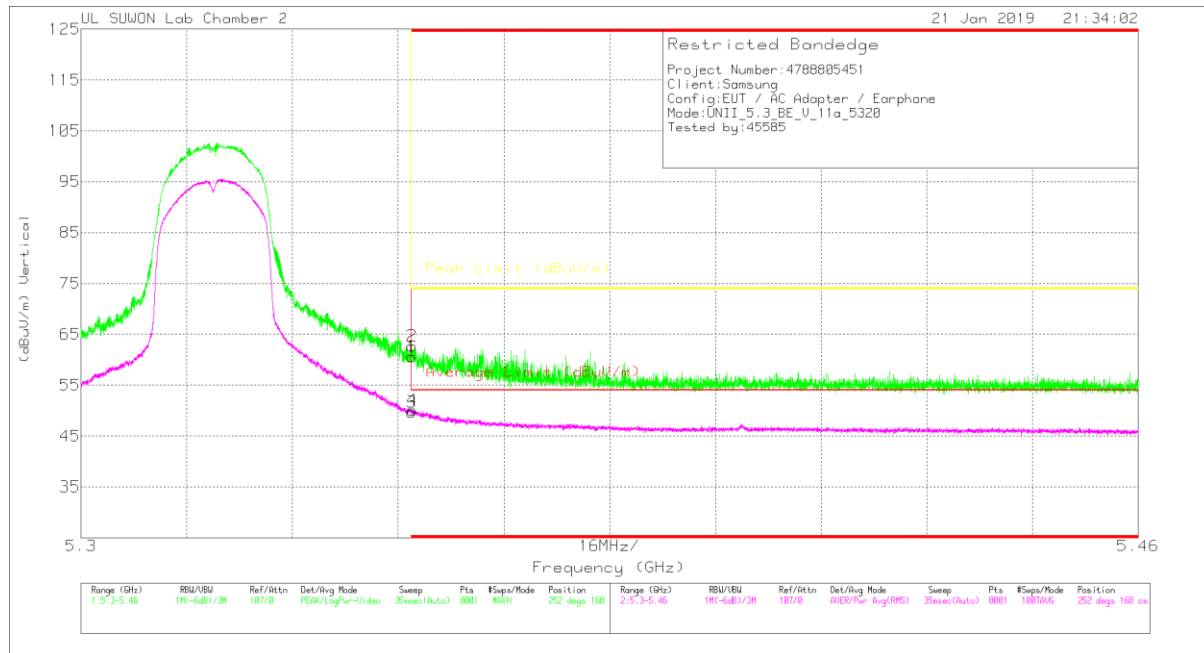

**VERTICAL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	44.19	Pk	34.5	-18.1	0	60.59	-	-	74	-13.41	252	168	V
2	* 5.35	46.34	PK	34.5	-18.1	0	62.74	-	-	74	-11.26	252	168	V
3	* 5.35	32.2	RMS	34.5	-17.1	.1	49.7	54	-4.3	-	-	252	168	V
4	* 5.35	32.59	RMS	34.5	-17.1	.1	50.09	54	-3.91	-	-	252	168	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

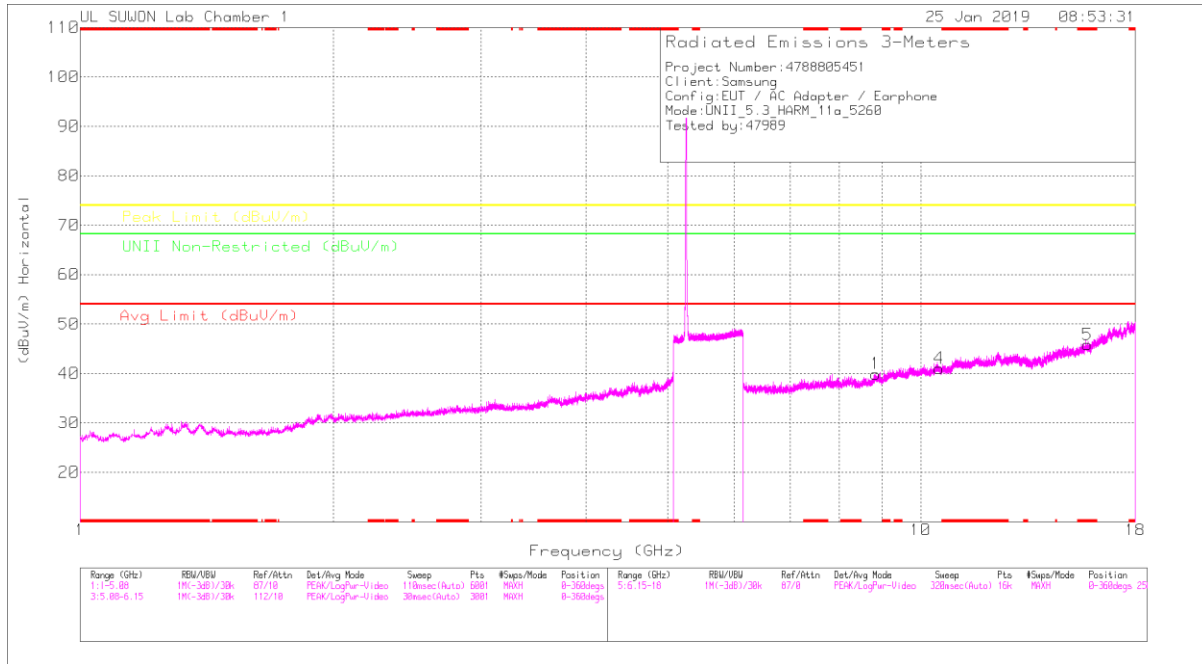

### LOW CHANNEL VERTICAL

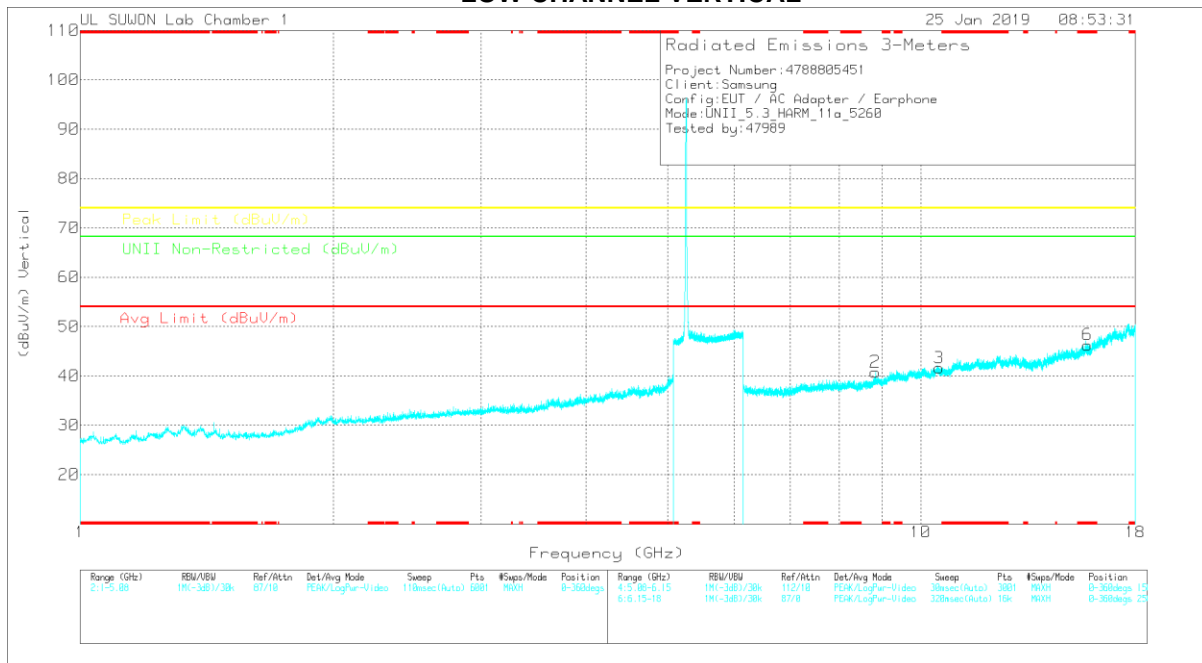

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**


Trace Markers

Marker	Frequency (GHz)	Marker Reading (dBuV)	Det	3117_00168717	Gain_HIP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.835	27.71	PK	36.5	-24.3	0	39.91	-	-	-	-	68.2	-28.29	0-360	150	H
4	10.523	26.03	PK	37.7	-22.7	0	41.03	-	-	-	-	68.2	-27.17	0-360	150	H
5	* 15.781	26.54	PK	40.5	-21.2	0	45.84	-	-	74	-28.16	-	-	0-360	250	H
2	8.832	28.59	PK	36.5	-24.3	0	40.79	-	-	-	-	68.2	-27.41	0-360	250	V
3	10.518	26.52	PK	37.7	-22.6	0	41.62	-	-	-	-	68.2	-26.58	0-360	150	V
6	* 15.781	26.98	PK	40.5	-21.2	0	46.28	-	-	74	-27.72	-	-	0-360	250	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

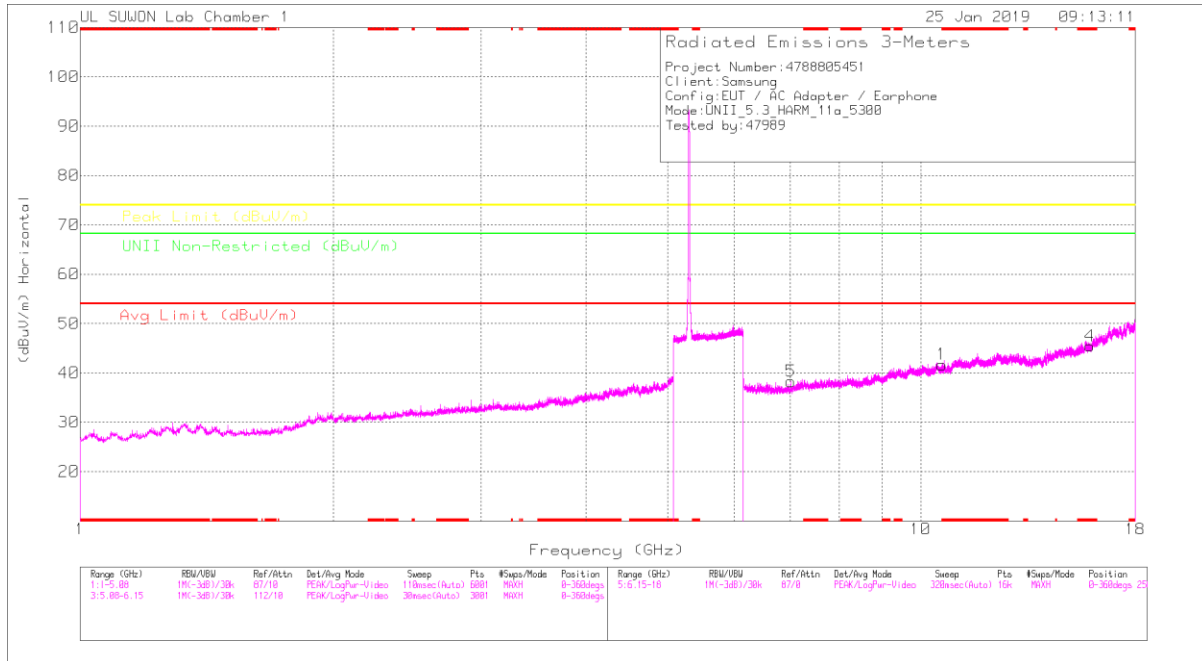

MID CHANNEL VERTICAL

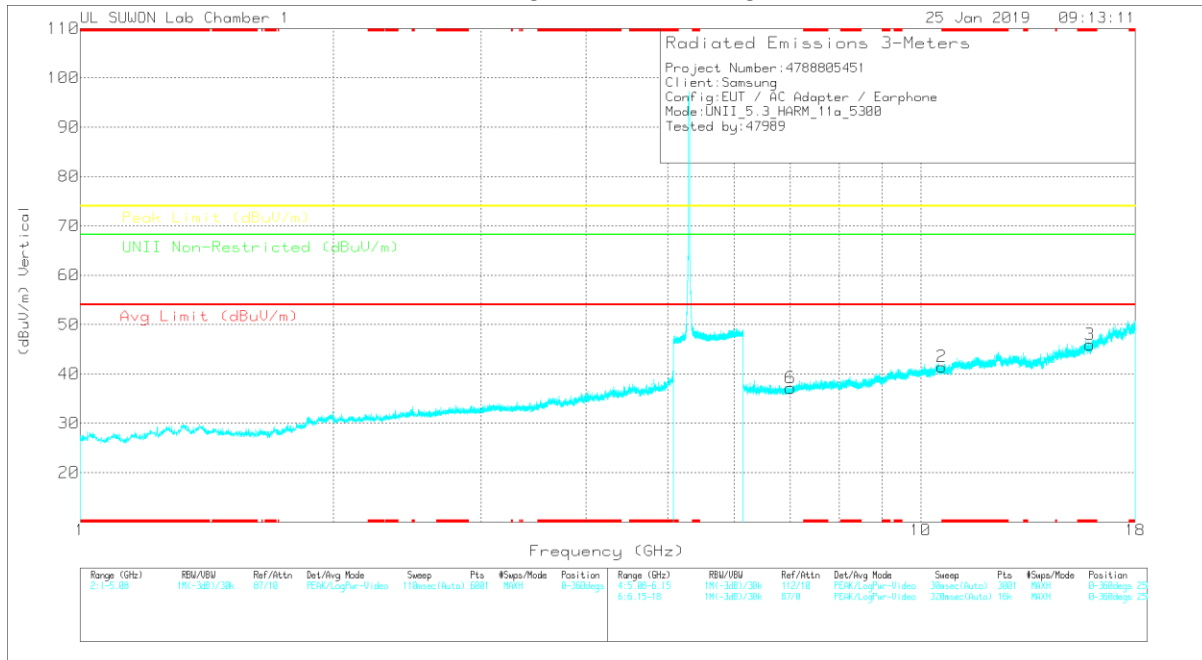

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**


Trace Markers

Marker	Frequency (GHz)	Major Reading (dBuV)	Det	3117_00188717	66Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 10.6	26.19	PK	37.8	-22.3	0	41.69	-	-	74	-32.31	-	-	0-360	150	H
4	* 15.9	26.05	PK	40.6	-21.2	0	45.45	-	-	74	-28.55	-	-	0-360	250	H
5	7.004	30.48	PK	35.7	-27.9	0	38.28	-	-	-	-	68.2	-29.92	0-360	150	H
2	10.596	25.94	PK	37.8	-22.3	0	41.44	-	-	-	-	68.2	-26.76	0-360	250	V
3	* 15.904	26.41	PK	40.6	-21.1	0	45.91	-	-	74	-28.09	-	-	0-360	250	V
6	7.002	29.32	PK	35.7	-27.9	0	37.12	-	-	-	-	68.2	-31.08	0-360	150	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### HIGH CHANNEL HORIZONTAL

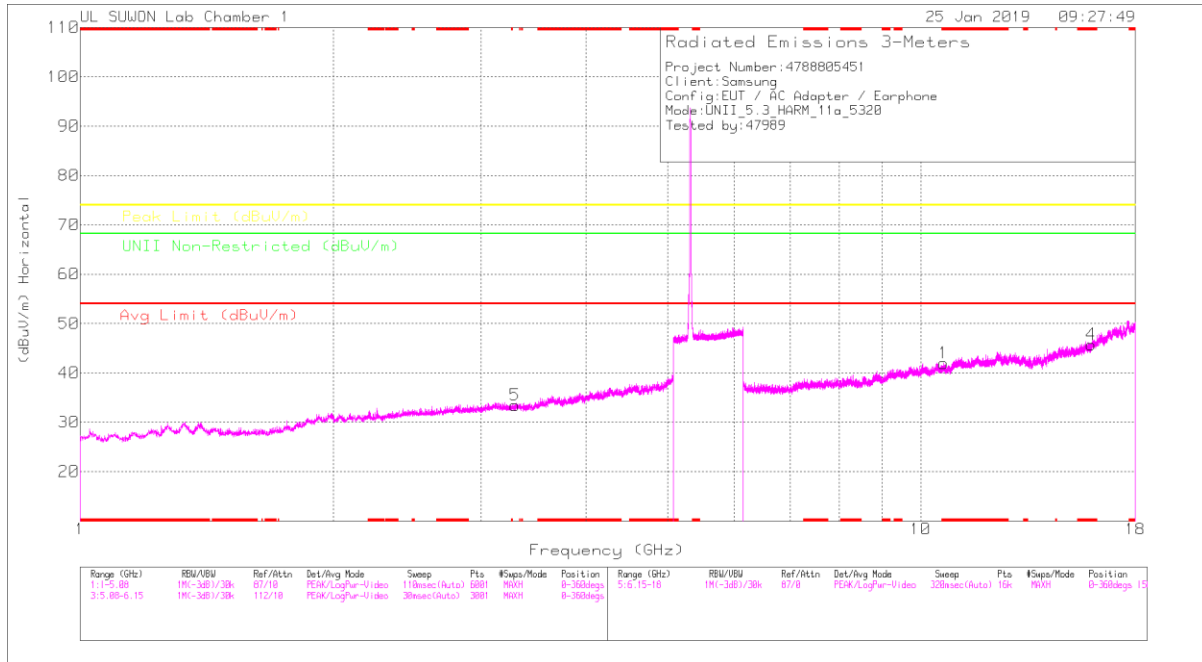

### HIGH CHANNEL VERTICAL

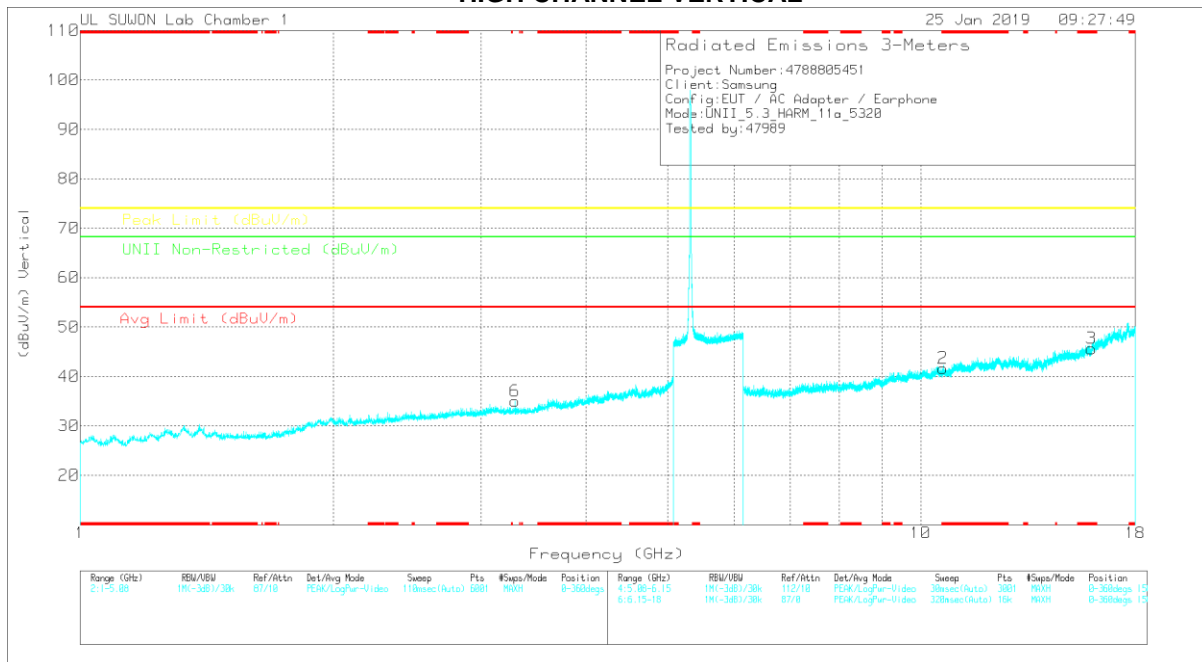

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



**HIGH CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Marker Reading (dBuV)	Det	3117_00188717	SGH_LF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	ULN Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	3.292	33.74	PK	32.7	-33	0	33.44	-	-	-	-	68.2	-34.76	0-360	250	H
6	3.29	35.32	PK	32.7	-33	0	35.02	-	-	-	-	68.2	-33.18	0-360	250	V
1	* 10.642	26.27	PK	37.8	-22.1	0	41.97	-	-	74	-32.03	-	-	0-360	150	H
4	* 15.959	25.93	PK	40.7	-20.9	0	45.73	-	-	74	-28.27	-	-	0-360	250	H
2	* 10.634	26.06	PK	37.8	-22.2	0	41.66	-	-	74	-32.34	-	-	0-360	150	V
3	* 15.965	25.75	PK	40.7	-20.8	0	45.65	-	-	74	-28.35	-	-	0-360	250	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### 11.2.2.TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.3GHz BAND

### AUTHORIZED BANDEDGE (HIGH CHANNEL)

### HORIZONTAL PEAK AND AVERAGE PLOT

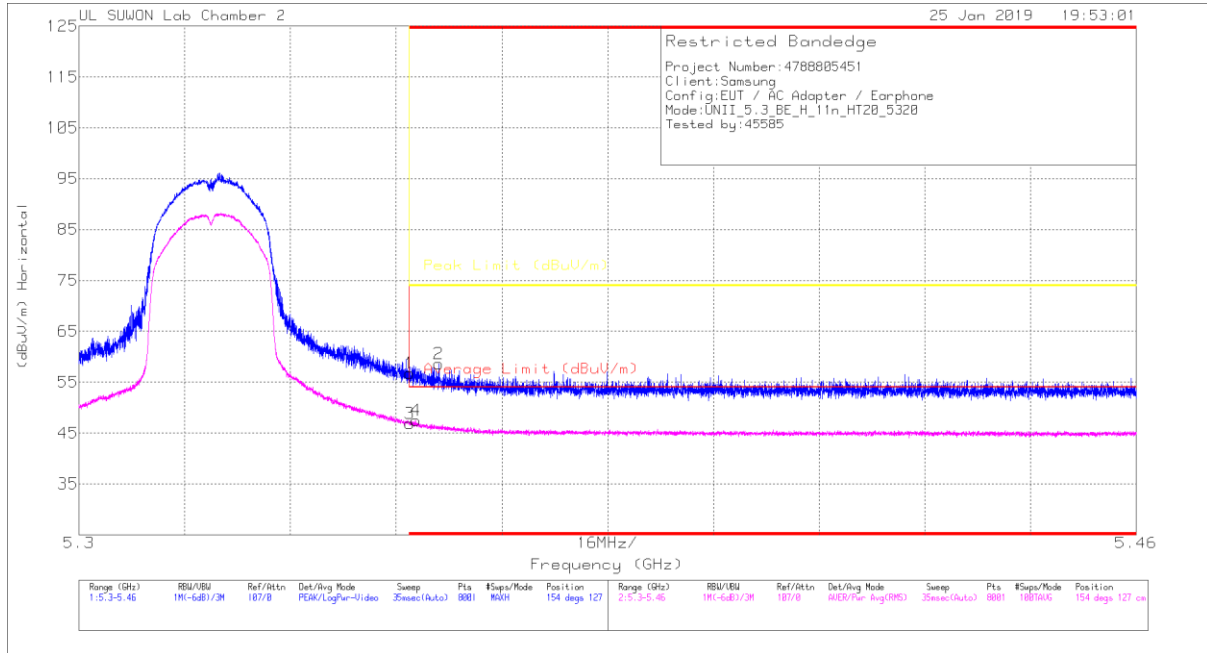

### HORIZONTAL DATA

#### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.35	Pk	34.5	-18.1	0	56.75	-	-	74	-17.25	154	127	H
2	* 5.354	42.16	Pk	34.5	-18.1	0	58.56	-	-	74	-15.44	154	127	H
3	* 5.35	29.39	RMS	34.5	-17.1	.11	46.9	54	-7.1	-	-	154	127	H
4	* 5.351	29.93	RMS	34.5	-17.1	.11	47.44	54	-6.56	-	-	154	127	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

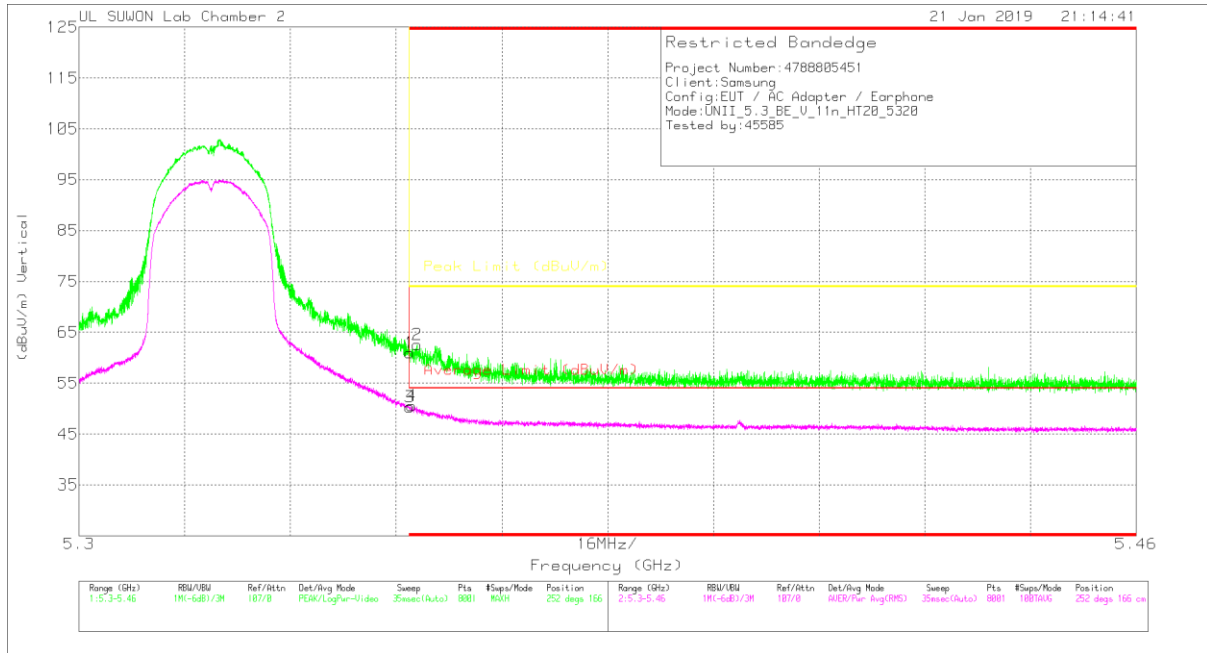

**VERTICAL DATA**

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[db]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Pk Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	44.56	Pk	34.5	-18.1	0	60.96	-	-	74	-13.04	252	166	V
2	* 5.351	46.18	Pk	34.5	-18.1	0	62.58	-	-	74	-11.42	252	166	V
3	* 5.35	32.81	RMS	34.5	-17.1	.11	50.32	54	-3.68	-	-	252	166	V
4	* 5.35	33.12	RMS	34.5	-17.1	.11	50.63	54	-3.37	-	-	252	166	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

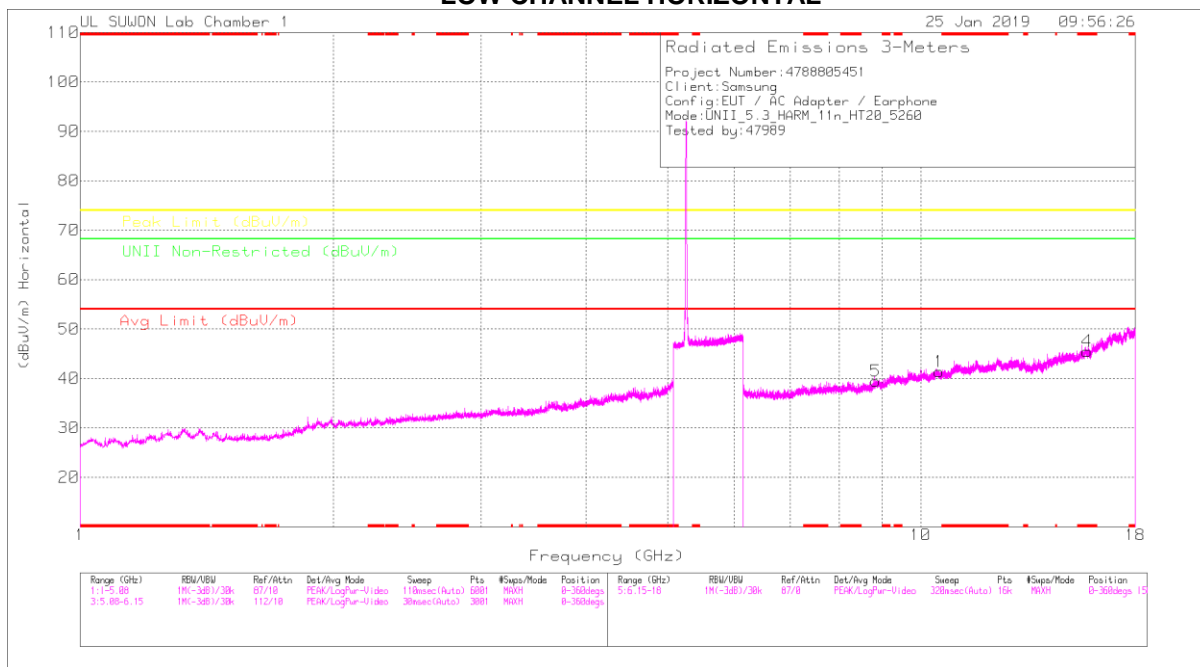

### LOW CHANNEL VERTICAL

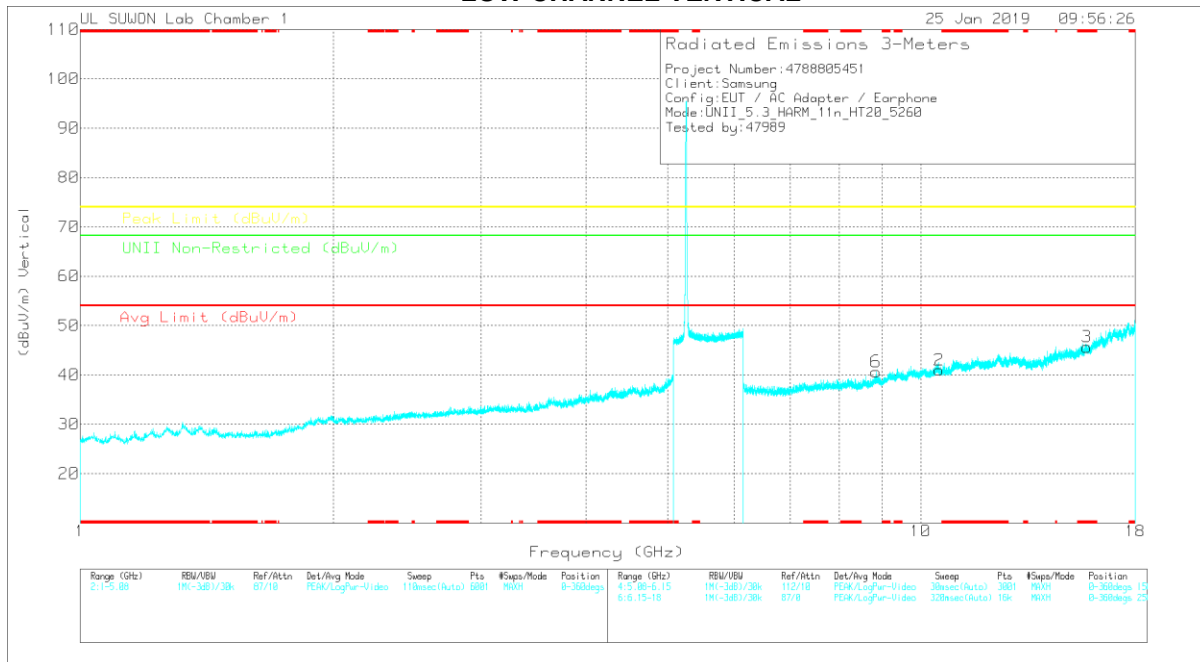

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**


Trace Markers

Marker	Frequency (GHz)	Major Reading (dBuV)	Det	3117_00188717	66Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	10.522	26.36	PK	37.7	-22.7	0	41.36	-	-	-	-	68.2	-26.84	0-360	250	H
4	* 15.775	26.07	PK	40.5	-21.1	0	45.47	-	-	74	-28.53	-	-	0-360	250	H
5	8.844	27.04	PK	36.5	-24.1	0	39.44	-	-	-	-	68.2	-28.76	0-360	150	H
2	10.512	25.8	PK	37.7	-22.5	0	41	-	-	-	-	68.2	-27.2	0-360	250	V
3	* 15.772	26.25	PK	40.5	-21.1	0	45.65	-	-	74	-28.35	-	-	0-360	150	V
6	8.849	28.14	PK	36.5	-24	0	40.64	-	-	-	-	68.2	-27.56	0-360	250	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

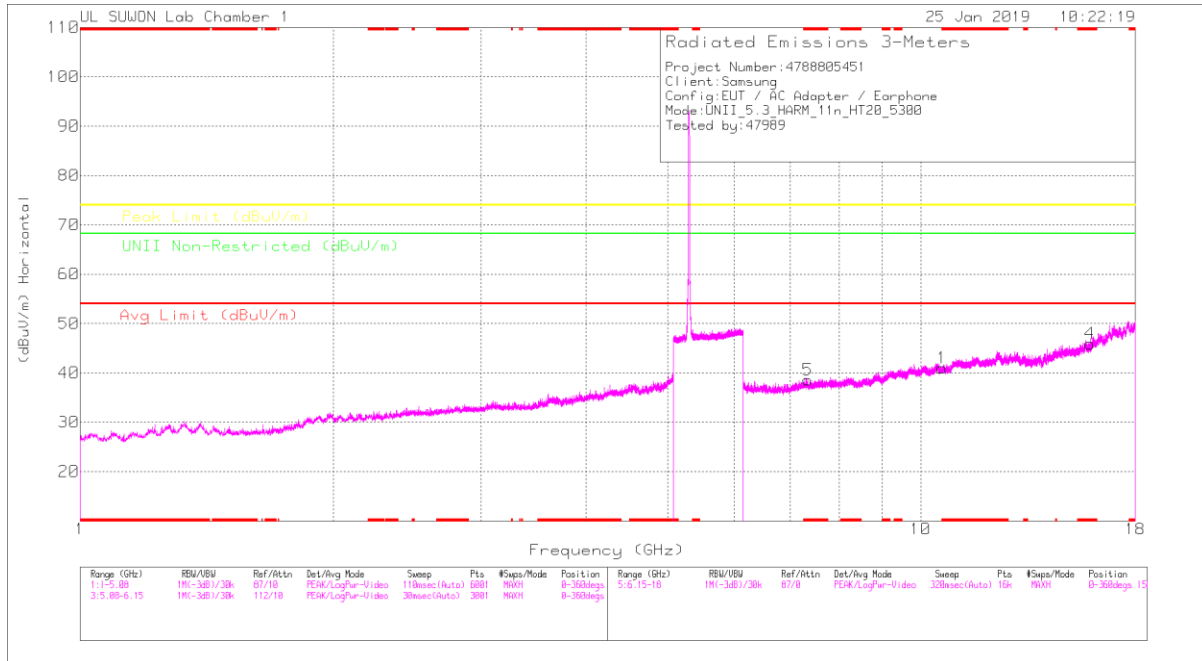

MID CHANNEL VERTICAL

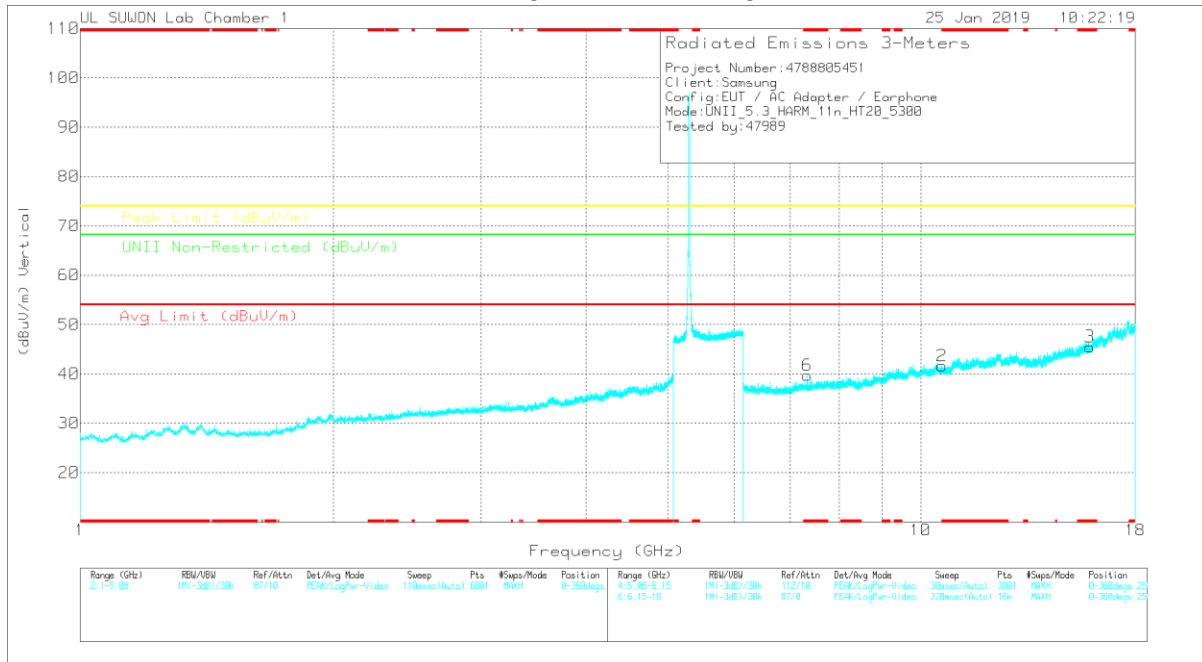

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 10.601	25.48	PK	37.8	-22.3	0	40.98	-	-	74	-33.02	-	-	0-360	250	H
4	* 15.901	26.41	PK	40.6	-21.1	0	45.91	-	-	74	-28.09	-	-	0-360	250	H
5	* 7.337	30.09	PK	35.8	-27.3	0	38.59	-	-	74	-35.41	-	-	0-360	250	H
2	10.599	26.1	PK	37.8	-22.3	0	41.6	-	-	-	-	68.2	-26.6	0-360	250	V
3	* 15.907	25.97	PK	40.6	-21.1	0	45.47	-	-	74	-28.53	-	-	0-360	150	V
6	* 7.33	31.11	PK	35.8	-27.2	0	39.71	-	-	74	-34.29	-	-	0-360	150	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### HIGH CHANNEL HORIZONTAL

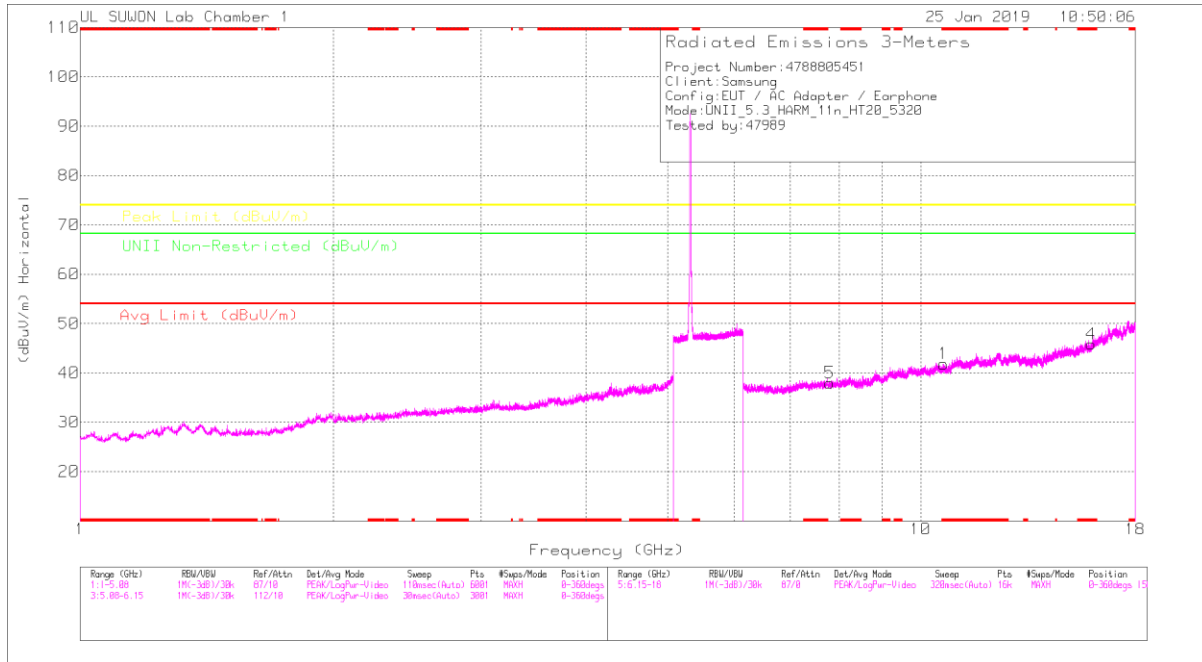

### HIGH CHANNEL VERTICAL

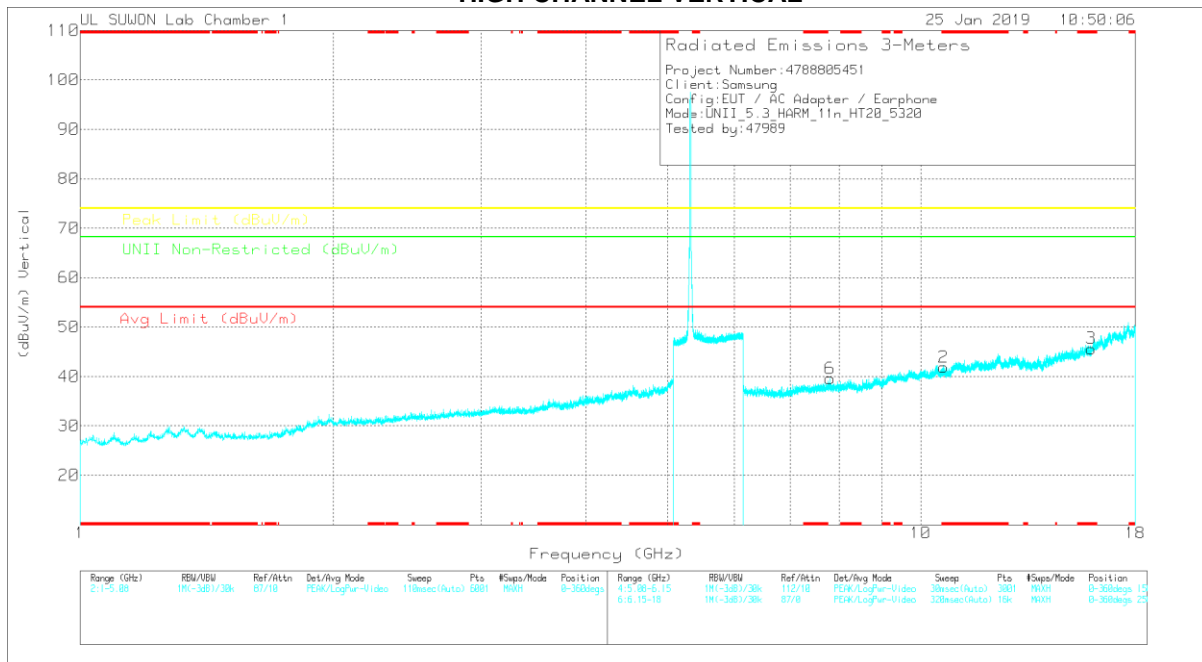

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



**HIGH CHANNEL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	LNI Non-Restricted (dBuV/m)	Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	* 10.641	26.13	PK	37.8	-22.1	0	41.83	-	-	74	-32.17	-	-	0-360	250	H
4	* 15.949	26.13	PK	40.7	-21	0	45.83	-	-	74	-28.17	-	-	0-360	250	H
5	7.796	28.56	PK	35.9	-26.5	0	37.96	-	-	-	-	68.2	-30.24	0-360	250	H
2	* 10.641	26.18	PK	37.8	-22.1	0	41.88	-	-	74	-32.12	-	-	0-360	150	V
3	* 15.962	25.74	PK	40.7	-20.8	0	45.64	-	-	74	-28.36	-	-	0-360	250	V
6	7.802	30.2	PK	35.9	-26.5	0	39.6	-	-	-	-	68.2	-28.6	0-360	250	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

**11.2.3.TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.3GHz BAND**

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL PEAK AND AVERAGE PLOT**

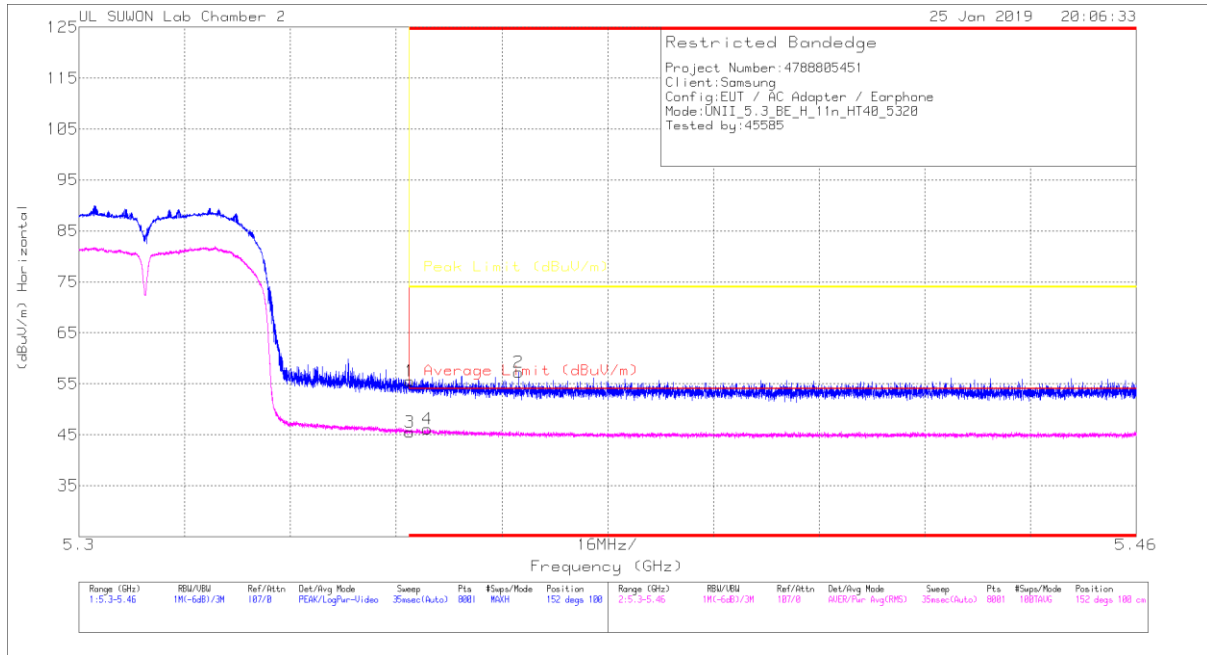

**HORIZONTAL DATA**

**Trace Markers**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.07	Pk	34.5	-18.1	0	55.47	-	-	74	-18.53	152	100	H
2	* 5.367	40.97	Pk	34.5	-18.2	0	57.27	-	-	74	-16.73	152	100	H
3	* 5.35	27.84	RMS	34.5	-17.1	.31	45.55	54	-8.45	-	-	152	100	H
4	* 5.353	28.44	RMS	34.5	-17.1	.31	46.15	54	-7.85	-	-	152	100	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

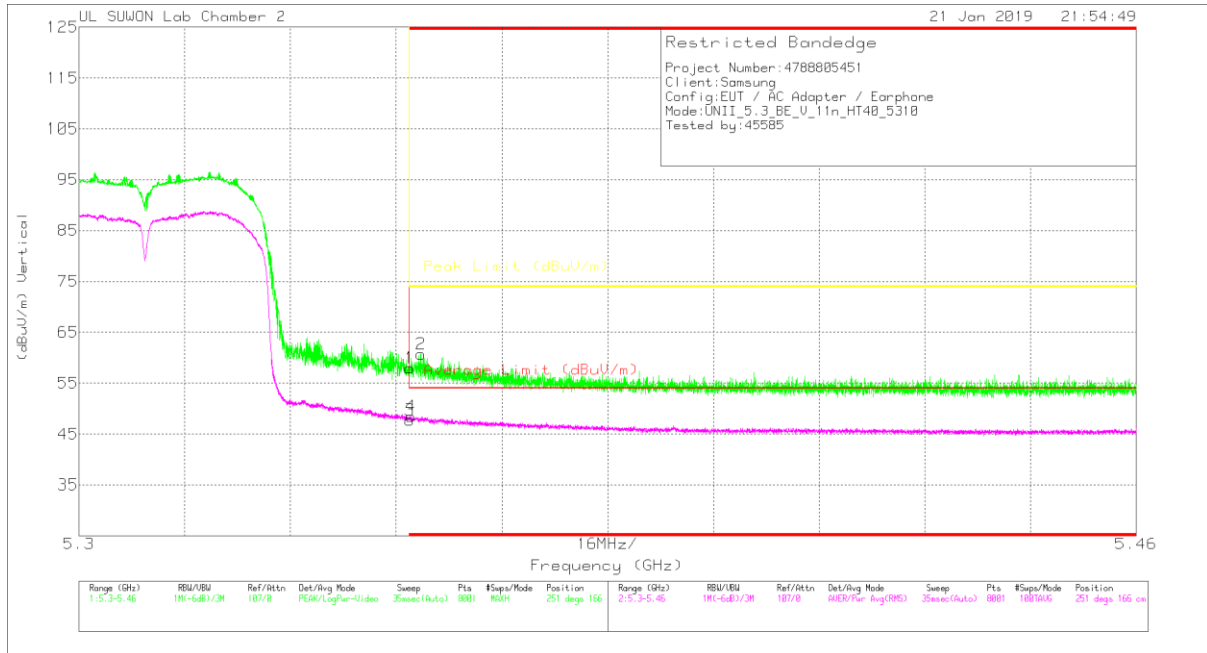

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[db]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Pk Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.57	Pk	34.5	-18.1	0	57.97	-	-	74	-16.03	251	166	V
2	* 5.352	44.32	Pk	34.5	-18.1	0	60.72	-	-	74	-13.28	251	166	V
3	* 5.35	30.01	RMS	34.5	-17.1	.31	47.72	54	-6.28	-	-	251	166	V
4	* 5.35	30.73	RMS	34.5	-17.1	.31	48.44	54	-5.56	-	-	251	166	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

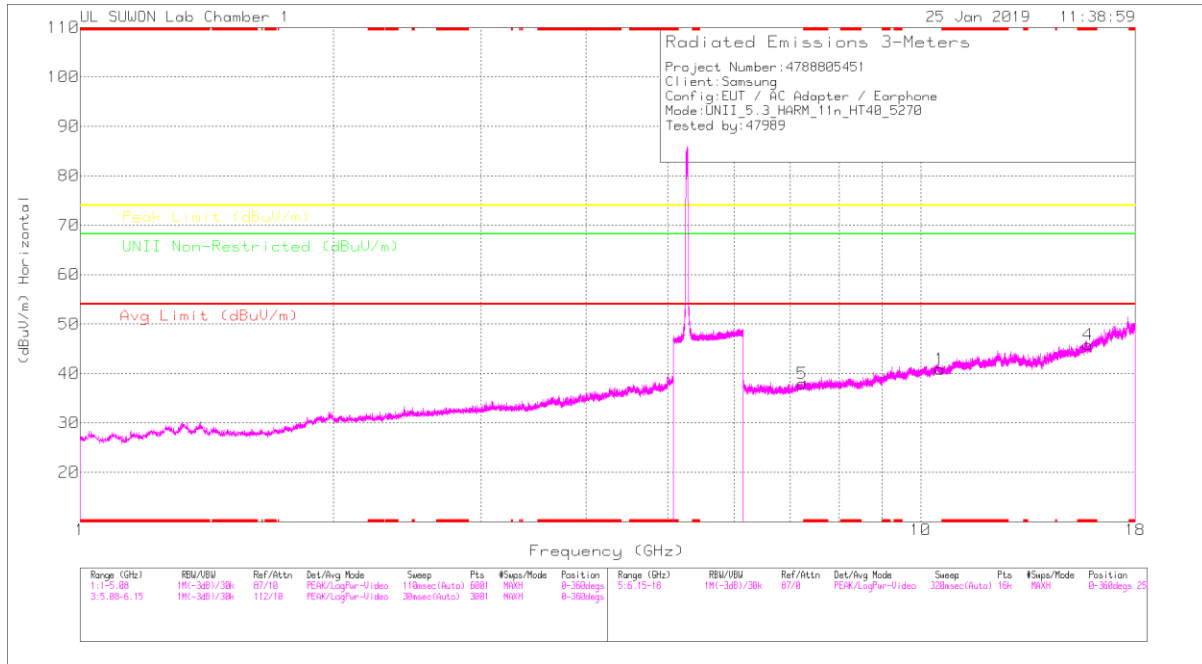

### LOW CHANNEL VERTICAL

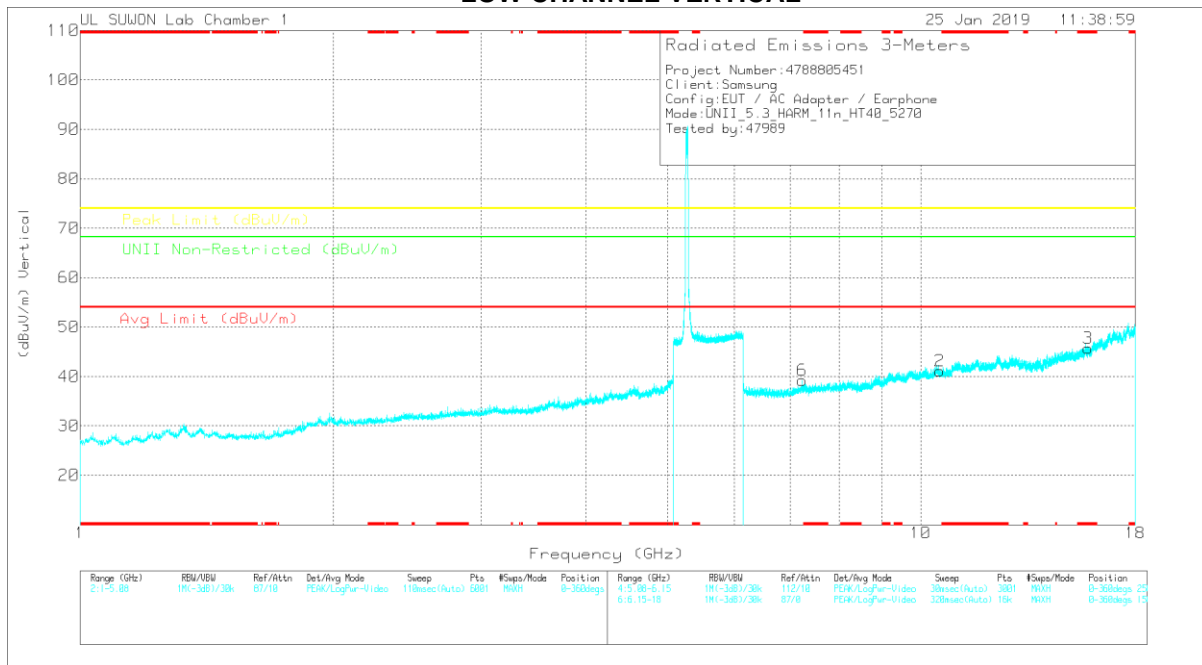

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**


Trace Markers

Marker	Frequency (GHz)	Major Reading (dBuV)	Det	3117_00168717	66Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	10.542	25.85	PK	37.8	-22.8	0	40.85	-	-	-	-	68.2	-27.35	0-360	150	H
4	* 15.817	26.43	PK	40.5	-21.1	0	45.83	-	-	74	-28.17	-	-	0-360	150	H
5	7.225	29.42	PK	35.8	-27.3	0	37.92	-	-	-	-	68.2	-30.28	0-360	150	H
2	10.54	26.09	PK	37.8	-22.8	0	41.09	-	-	-	-	68.2	-27.11	0-360	150	V
3	* 15.815	26.28	PK	40.5	-21.1	0	45.68	-	-	74	-28.32	-	-	0-360	250	V
6	7.228	30.59	PK	35.8	-27.2	0	39.19	-	-	-	-	68.2	-29.01	0-360	150	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### HIGH CHANNEL HORIZONTAL

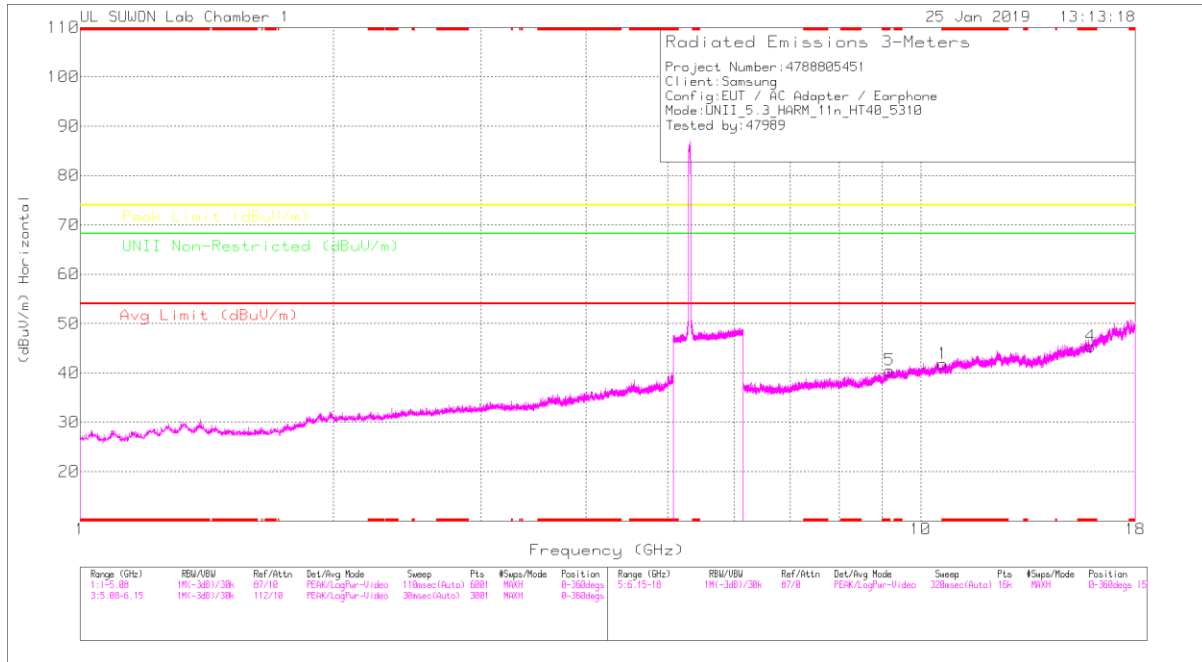

### HIGH CHANNEL VERTICAL

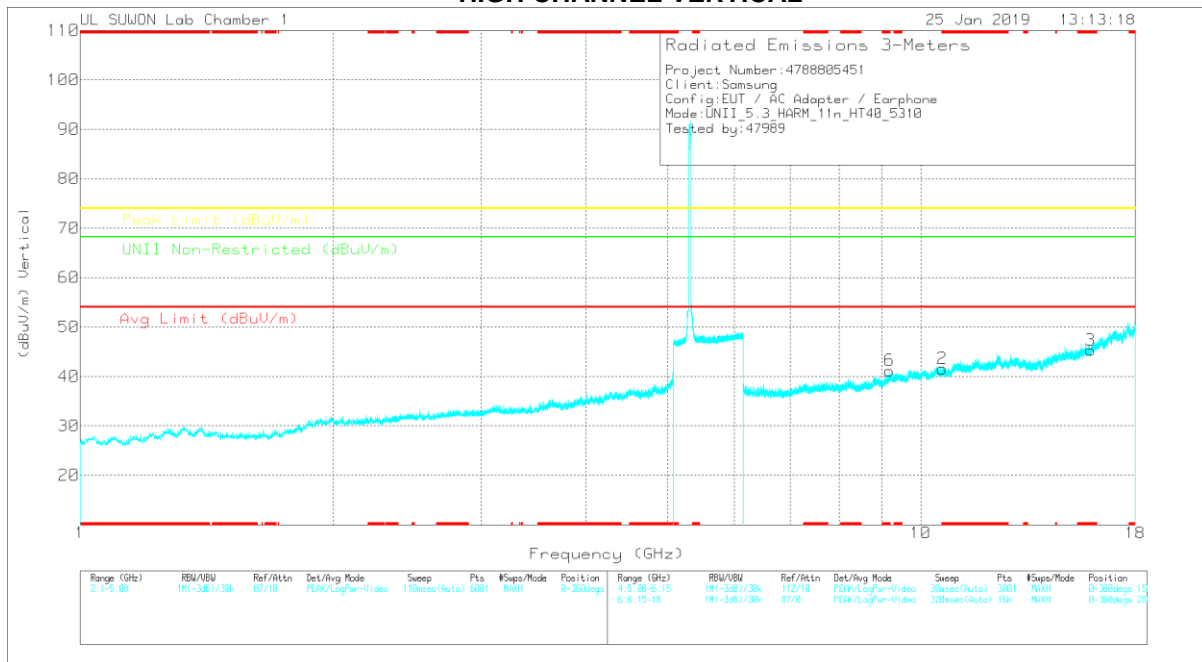

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

Trace Markers


Marker	Frequency (GHz)	Marker Reading (dBuV)	Det	3117_00188717	66Hz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Unli Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 10.623	26.26	PK	37.8	-22.2	0	41.86	-	-	74	-32.14	-	-	0-360	150	H
4	* 15.932	25.78	PK	40.7	-21.1	0	45.38	-	-	74	-28.62	-	-	0-360	250	H
5	* 9.176	27.45	PK	36.7	-23.6	0	40.55	-	-	74	-33.45	-	-	0-360	250	H
2	* 10.615	25.99	PK	37.8	-22.2	0	41.59	-	-	74	-32.41	-	-	0-360	250	V
3	* 15.933	25.71	PK	40.7	-21.1	0	45.31	-	-	74	-28.69	-	-	0-360	250	V
6	* 9.183	28.09	PK	36.7	-23.6	0	41.19	-	-	74	-32.81	-	-	0-360	250	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### 11.2.4.TX Above 1GHz 802.11ac VHT80 MODE IN THE 5.3GHz BAND RESTRICTED BANDEGE (MID CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

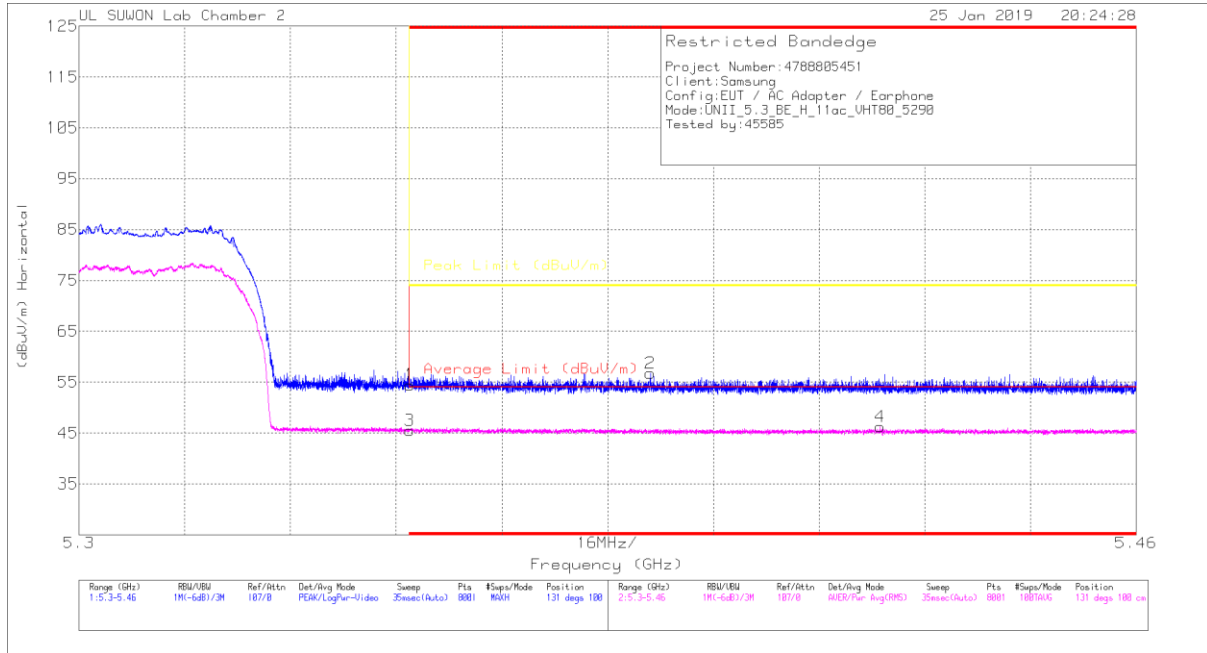

#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	38.07	Pk	34.5	-18.1	0	54.47	-	-	74	-19.53	131	100	H
2	* 5.386	40.4	Pk	34.5	-18.1	0	56.8	-	-	74	-17.2	131	100	H
3	* 5.35	27.44	RMS	34.5	-17.1	.67	45.51	54	-8.49	-	-	131	100	H
4	* 5.421	28.03	RMS	34.5	-17	.67	46.2	54	-7.8	-	-	131	100	H


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection



**VERTICAL PEAK AND AVERAGE PLOT**

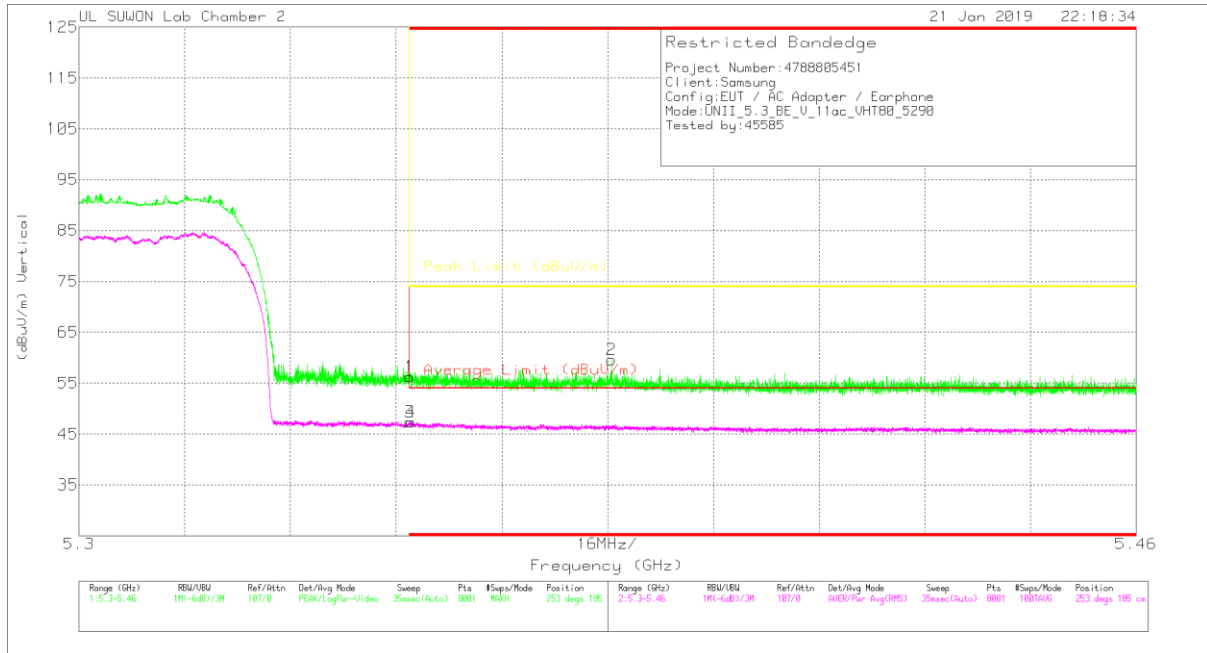

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[db]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Pk Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35	39.92	Pk	34.5	-18.1	0	56.32	-	-	74	-17.68	253	185	V
2	* 5.381	43.34	Pk	34.5	-18.2	0	59.64	-	-	74	-14.36	253	185	V
3	* 5.35	29.26	RMS	34.5	-17.1	.67	47.33	54	-6.67	-	-	253	185	V
4	* 5.35	29.29	RMS	34.5	-17.1	.67	47.36	54	-6.64	-	-	253	185	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS

### MID CHANNEL HORIZONTAL

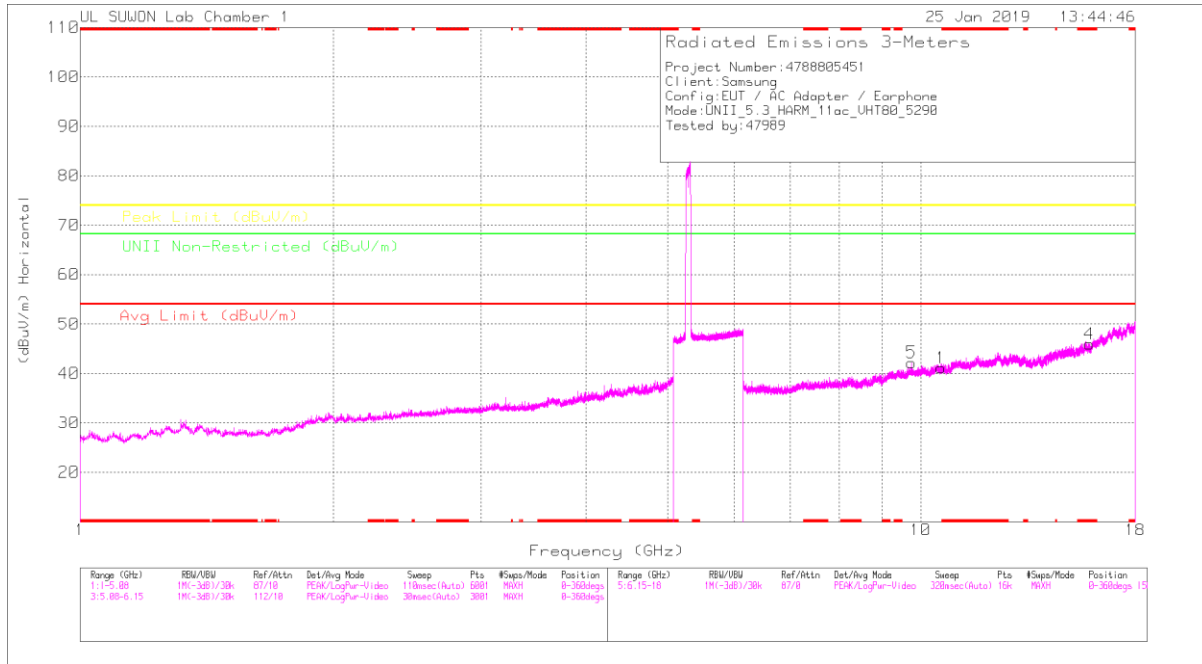

### MID CHANNEL VERTICAL

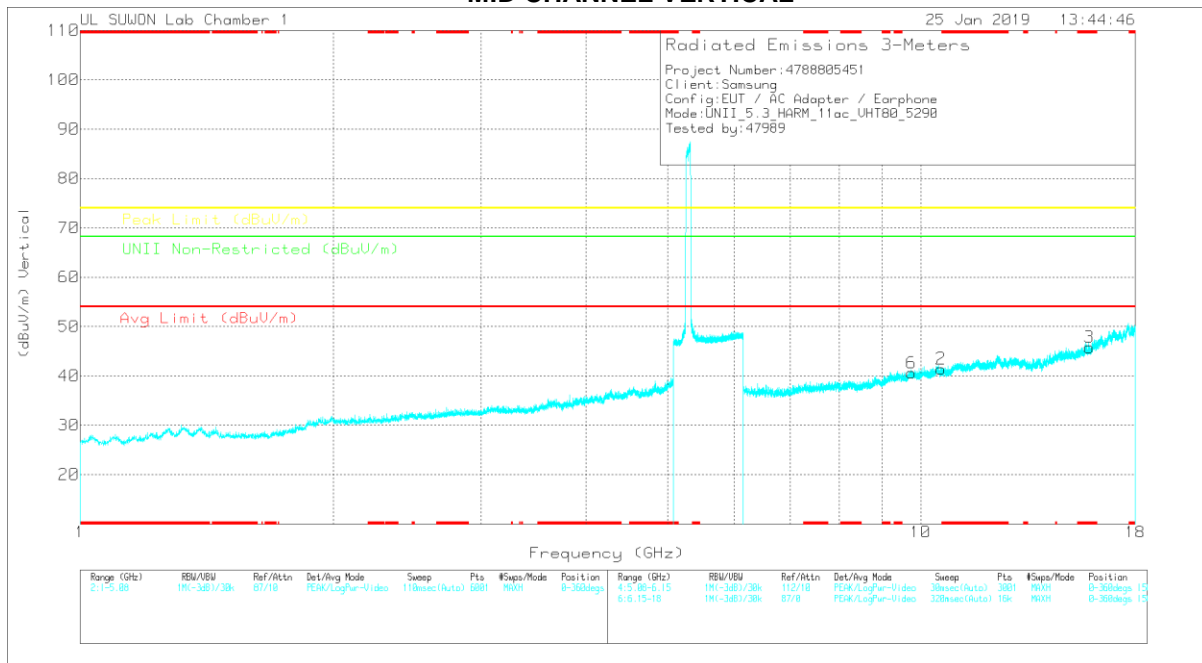

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Marker Reading (dBuV)	Det	3117_00168717	60Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	10.576	26.01	PK	37.8	-22.7	0	41.11	-	-	-	-	68.2	-27.09	0-360	150	H
4	* 15.869	26.33	PK	40.6	-21	0	45.93	-	-	74	-28.07	-	-	0-360	250	H
5	9.753	27.89	PK	37.2	-22.9	0	42.19	-	-	-	-	68.2	-26.01	0-360	150	H
2	10.577	26.31	PK	37.8	-22.7	0	41.41	-	-	-	-	68.2	-26.79	0-360	150	V
3	* 15.869	26.18	PK	40.6	-21	0	45.78	-	-	74	-28.22	-	-	0-360	250	V
6	9.749	26.28	PK	37.2	-22.9	0	40.58	-	-	-	-	68.2	-27.62	0-360	250	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 PK – Peak Detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

### 11.3. 5.5-5.6 GHz

#### 11.3.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.5 GHz BAND

#### RESTRICTED BANDEDGE (LOW CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

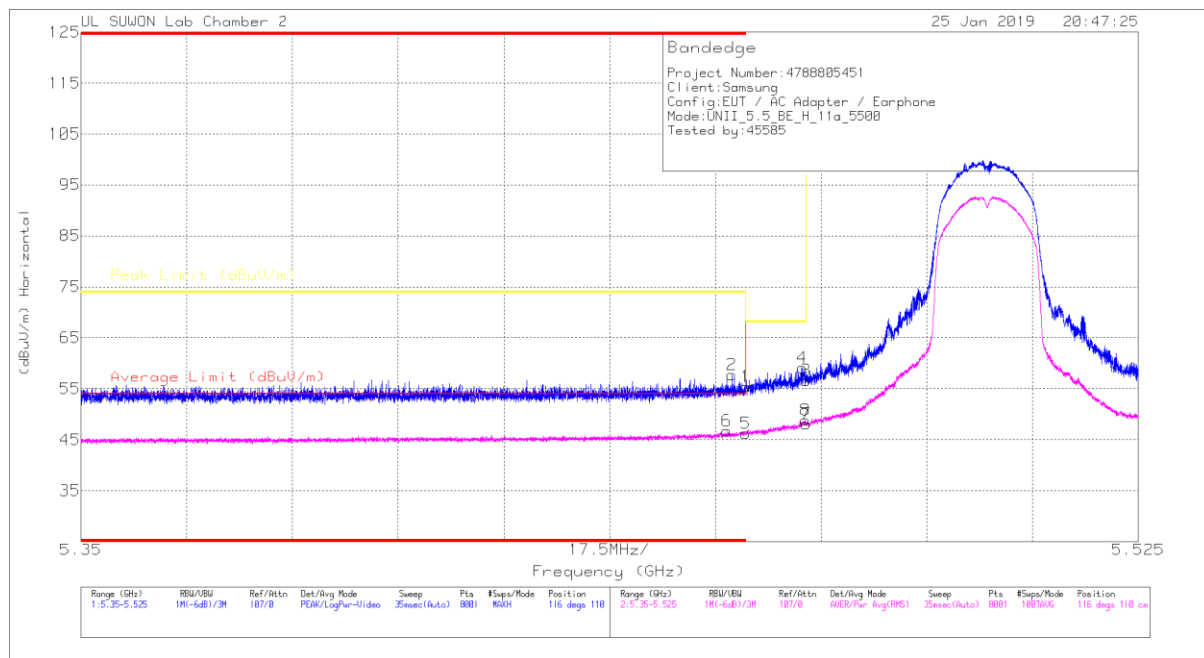

#### HORIZONTAL DATA

#### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.99	Pk		-18.2	0	55.39	-	-	74	-18.61	116	110	H
2	* 5.458	41.38	Pk		-18.2	0	57.78	-	-	74	-16.22	116	110	H
3	5.47	40.13	Pk		-18.1	0	56.63	-	-	68.2	-11.57	116	110	H
4	5.469	42.58	Pk		-18.1	0	59.08	-	-	68.2	-9.12	116	110	H
5	* 5.46	28.44	RMS		-16.9	.1	46.24	54	-7.76	-	-	116	110	H
6	* 5.457	28.9	RMS		-16.9	.1	46.7	54	-7.3	-	-	116	110	H
7	5.47	30.29	RMS		-16.9	.1	48.09	-	-	-	-	116	110	H
8	5.47	31.01	RMS		-16.9	.1	48.81	-	-	-	-	116	110	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**VERTICAL PEAK AND AVERAGE PLOT**

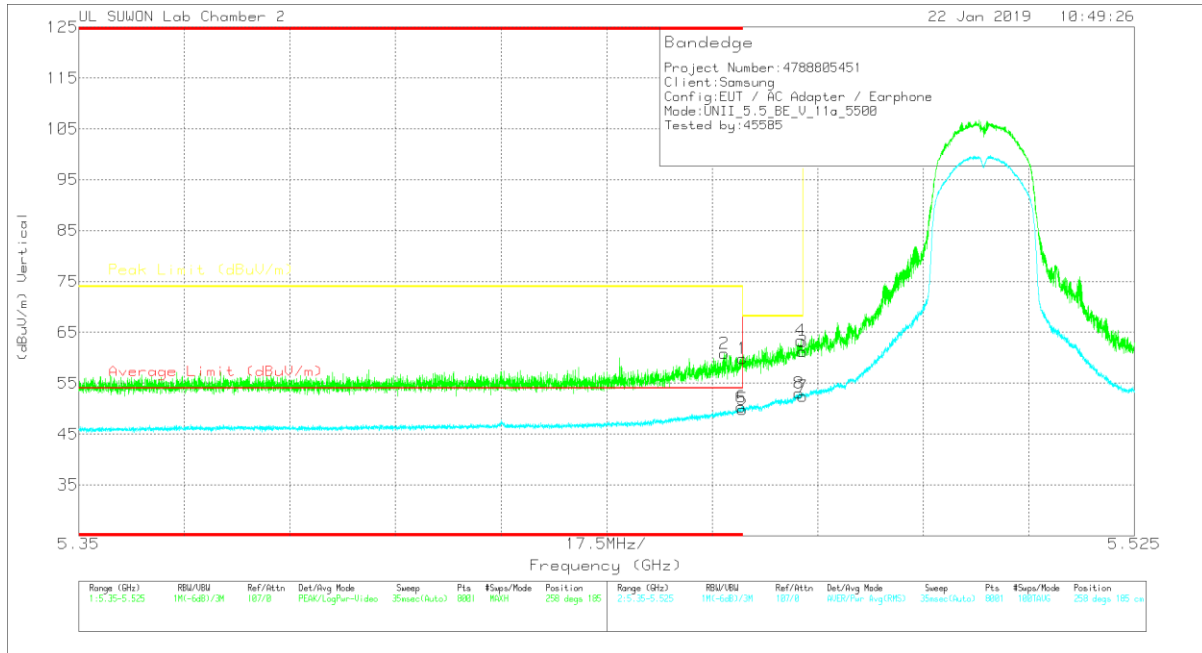

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.46	43.49	PK	34.6	-18.2	0	59.89	-	-	74	-14.11	258	185	V
2	* 5.457	44.42	PK	34.6	-18.2	0	60.82	-	-	74	-13.18	258	185	V
3	5.47	44.72	PK	34.6	-18.1	0	61.22	-	-	68.2	-6.98	258	185	V
4	5.47	46.88	PK	34.6	-18.1	0	63.38	-	-	68.2	-4.82	258	185	V
5	* 5.46	32.09	RMS	34.6	-16.9	.1	49.89	54	-4.11	-	-	258	185	V
6	* 5.46	32.48	RMS	34.6	-16.9	.1	50.28	54	-3.72	-	-	258	185	V
7	5.47	34.64	RMS	34.6	-16.9	.1	52.44	-	-	-	-	258	185	V
8	5.469	35.3	RMS	34.6	-16.9	.1	53.1	-	-	-	-	258	185	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

### AUTHORIZED BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL PEAK AND AVERAGE PLOT

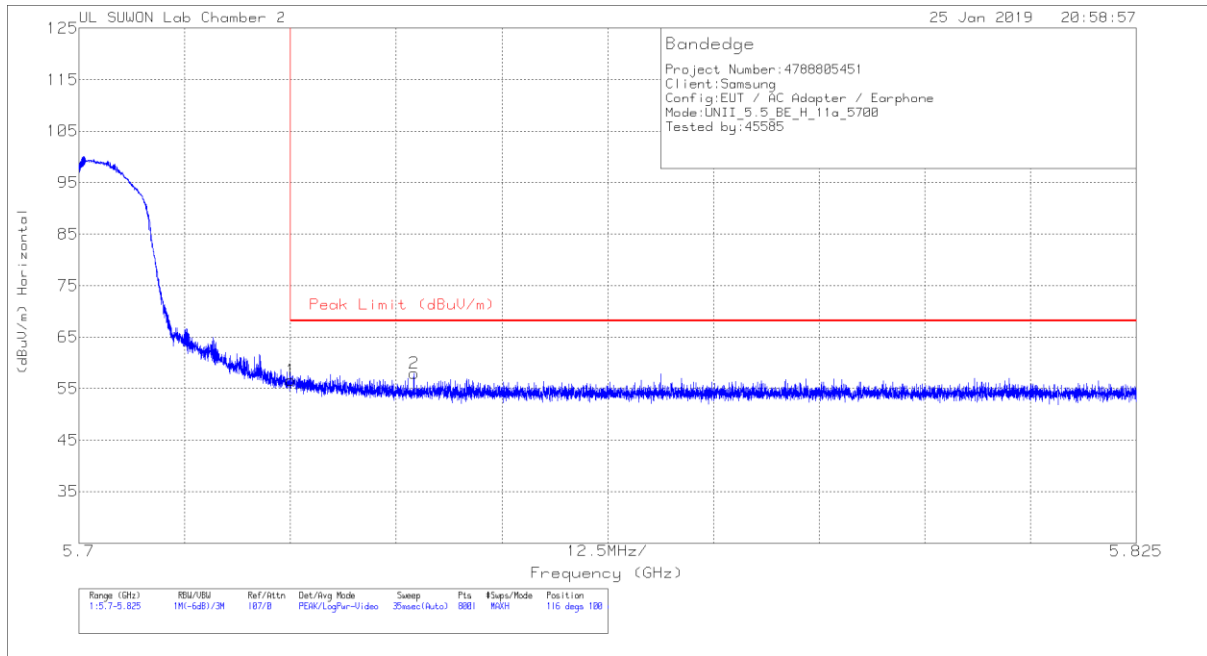


#### HORIZONTAL DATA

##### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.53	Pk	34.7	-17.6	0	56.63	68.2	-11.57	116	100	H
2	5.74	40.93	Pk	34.7	-17.6	0	58.03	68.2	-10.17	116	100	H

Pk - Peak detector

**VERTICAL PEAK AND AVERAGE PLOT**

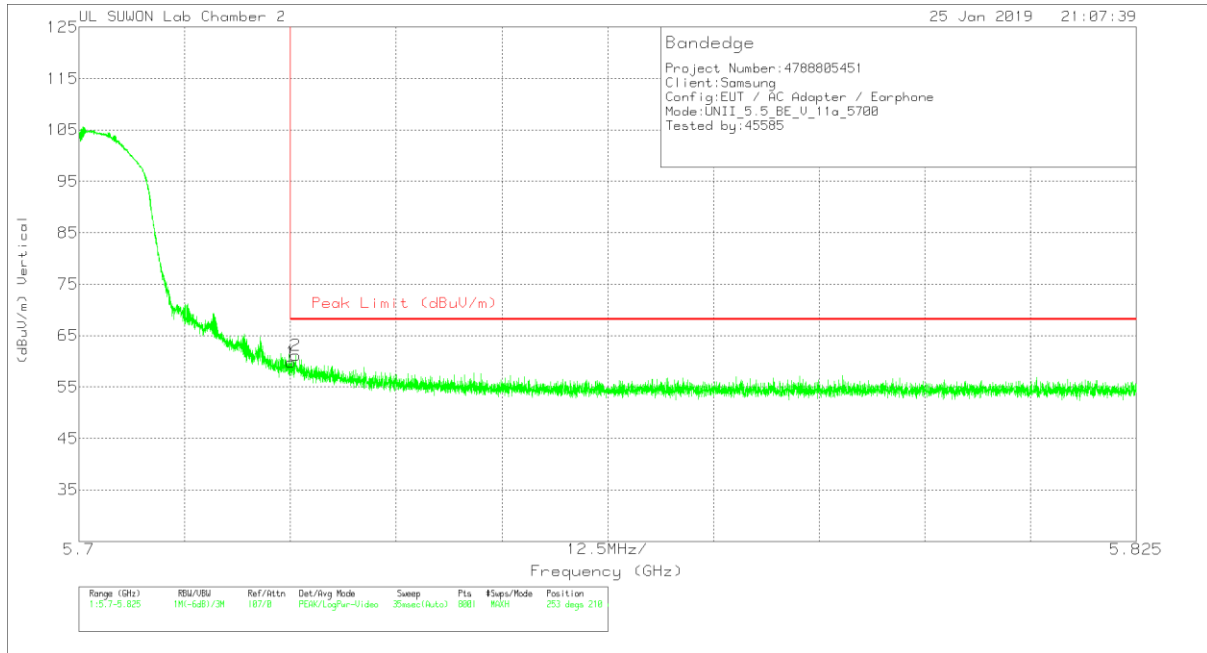

**VERTICAL DATA**

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.7	Pk	34.7	-17.6	0	59.8	68.2	-8.4	253	210	V
2	5.726	44	Pk	34.7	-17.5	0	61.2	68.2	-7	253	210	V

Pk - Peak detector