



HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

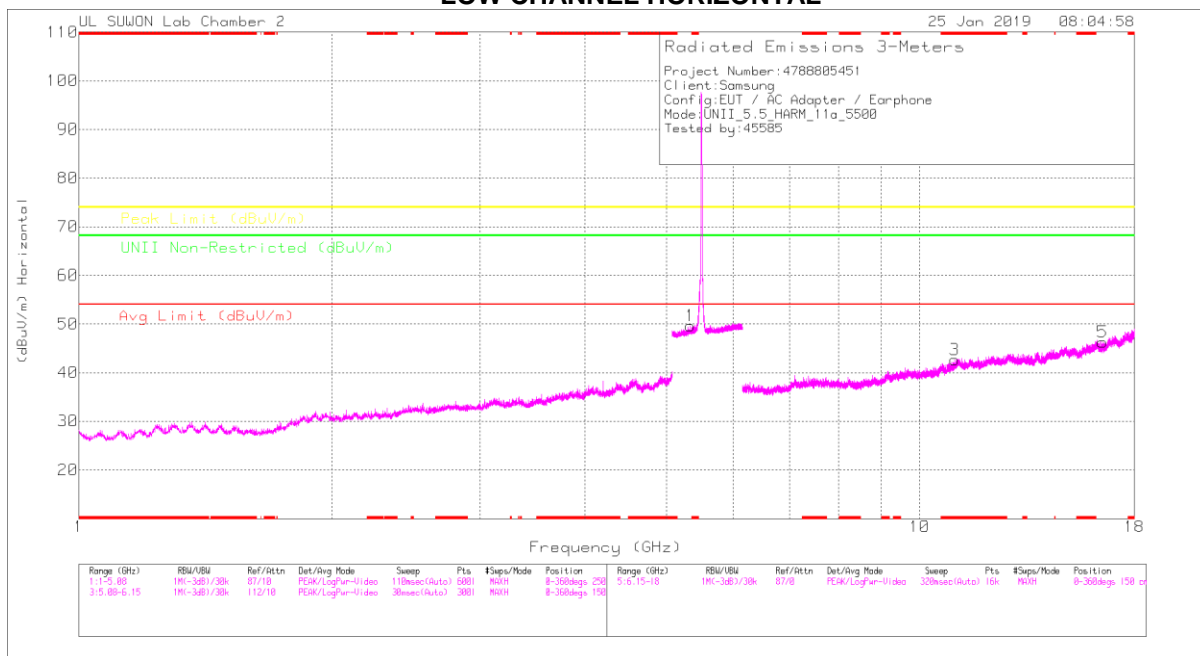

LOW CHANNEL VERTICAL

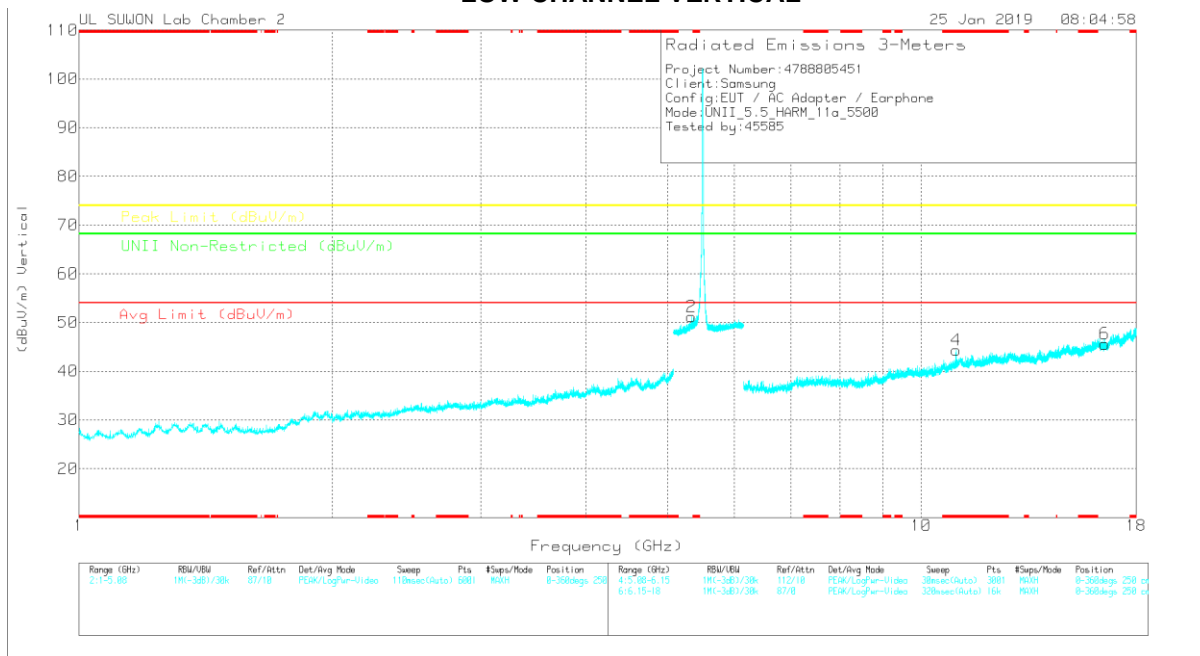

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	100dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNI Non-Restricted (dBuV/m)	Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
1	5.34	33.18	PK	34.5	-18	0	49.68	-	-	-	-	68.2	-18.52	0-360	150	H
2	5.34	34.68	PK	34.5	-18	0	51.18	-	-	-	-	68.2	-17.02	0-360	250	V
3	* 11.001	25.1	PK	38.1	-20.5	0	42.7	-	-	74	-31.3	-	-	0-360	150	H
5	16.499	25.7	PK	40.5	-19.9	0	46.3	-	-	-	-	68.2	-21.9	0-360	250	H
4	* 11	26.89	PK	38.1	-20.6	0	44.39	-	-	74	-29.61	-	-	0-360	150	V
6	16.502	24.87	PK	40.5	-19.8	0	45.57	-	-	-	-	68.2	-22.63	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	100dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	UNI Non-Restricted (dBuV/m)	Margin (dB)	Asimuth (Degs)	Height (cm)	Polarity
5.339	44.32	PK-U	34.5	-18.1	0	60.72	-	-	-	-	68.2	-7.48	216	100	H
5.34	45.86	PK-U	34.5	-18	0	62.36	-	-	-	-	68.2	-5.84	253	211	V
* 11	26.26	ADR	38.1	-20.6	.1	43.86	54	-10.14	-	-	-	-	264	194	V
* 11	24.99	ADR	38.1	-20.6	.1	42.59	54	-11.41	-	-	-	-	158	174	H
* 11.004	37.62	PK-U	38.1	-20.5	0	55.22	-	-	74	-18.78	-	-	264	194	V
* 11	37.16	PK-U	38.1	-20.6	0	54.66	-	-	74	-19.34	-	-	158	174	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL HORIZONTAL

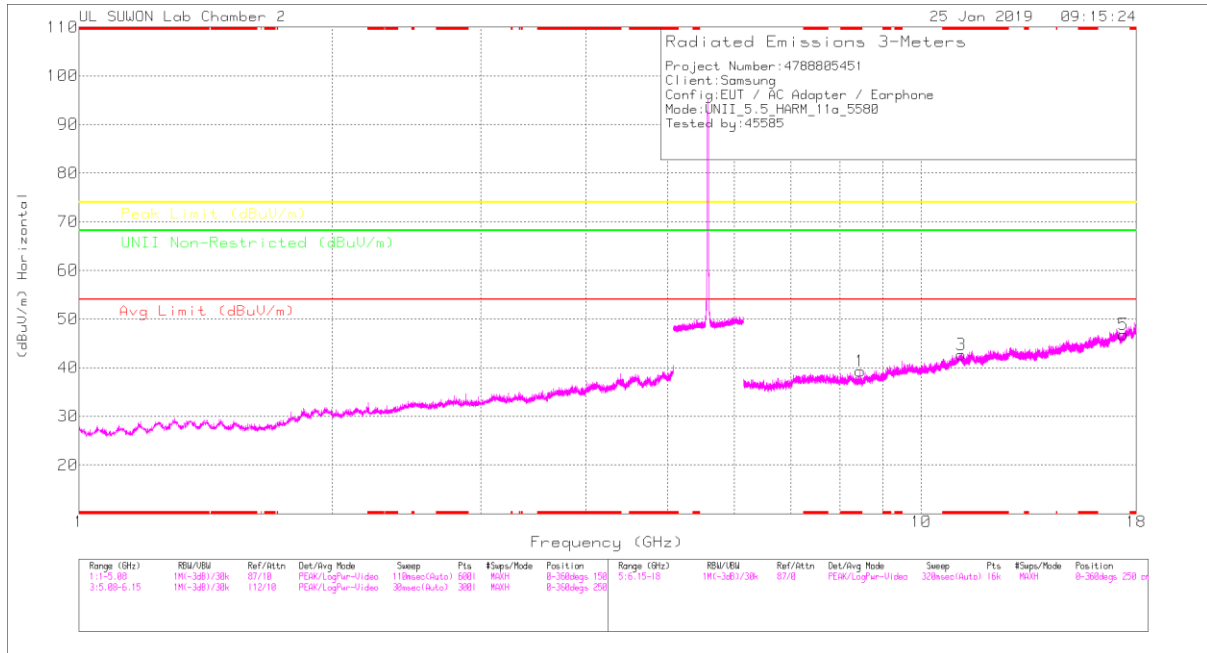

MID CHANNEL VERTICAL

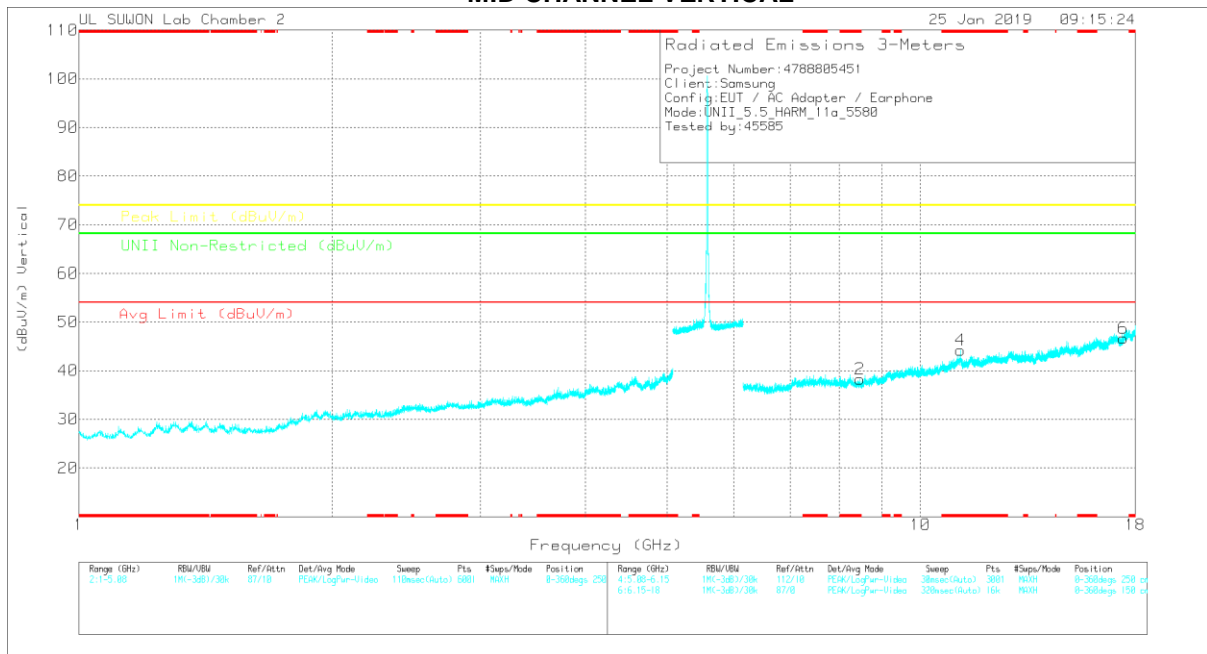

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	U-NII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.467	26.44	PK	36.1	-23.3	0	39.24	-	-	74	-34.76	-	-	0-360	250	H
3	* 11.16	24.05	PK	38.2	-19.6	0	42.65	-	-	74	-31.35	-	-	0-360	250	H
5	17.4	24.13	PK	41.4	-18.7	0	46.83	-	-	-	-	68.2	-21.37	0-360	250	H
2	* 8.472	25.55	PK	36.1	-23.4	0	38.25	-	-	74	-35.75	-	-	0-360	150	V
4	* 11.157	25.62	PK	38.2	-19.6	0	44.22	-	-	74	-29.78	-	-	0-360	150	V
6	17.405	23.93	PK	41.4	-18.7	0	46.63	-	-	-	-	68.2	-21.57	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	U-NII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.16	36.41	PK-U	38.2	-19.6	0	55.01	-	-	74	-18.99	-	-	157	173	H
* 11.16	24.01	ADR	38.2	-19.6	.1	42.71	54	-11.29	-	-	-	-	157	173	H
* 11.165	36.8	PK-U	38.2	-19.6	0	55.4	-	-	74	-18.6	-	-	262	170	V
* 11.16	24.97	ADR	38.2	-19.6	.1	43.67	54	-10.33	-	-	-	-	262	170	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HORIZONTAL

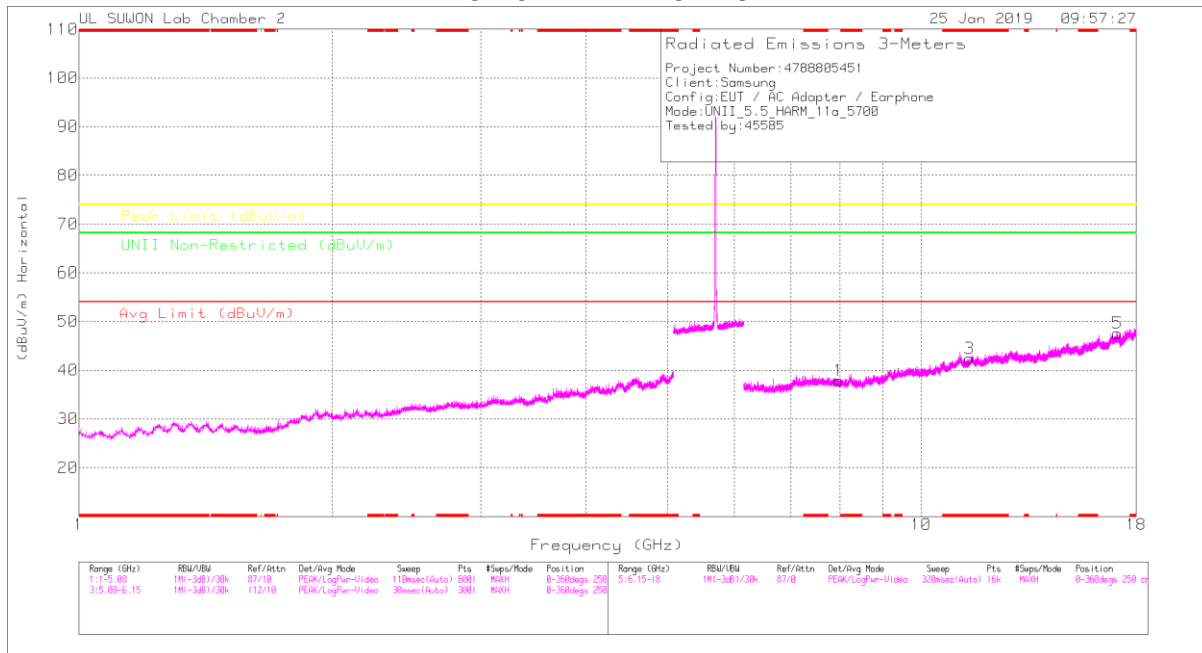

HIGH CHANNEL VERTICAL

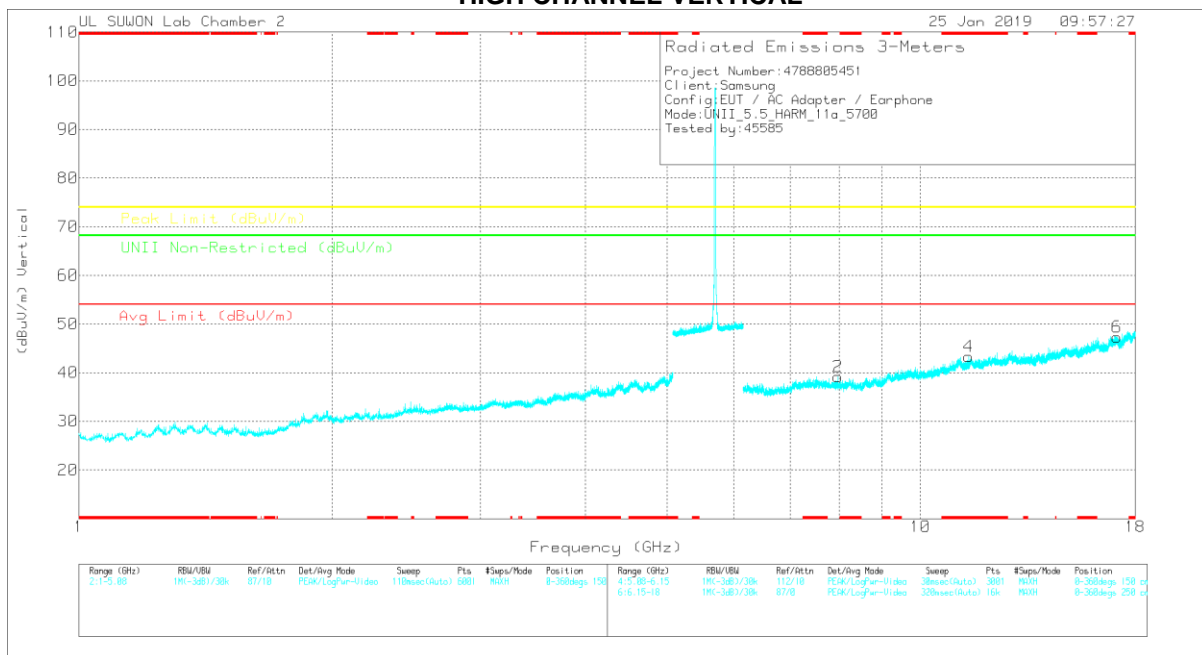

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Major Reading (dBuV)	Det	3117_00168724	66Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	7.976	25.89	PK	35.9	-23.9	0	37.89	-	-	-	-	68.2	-30.31	0-360	150	H
3	*11.402	24.34	PK	38.3	-20.2	0	42.44	-	-	74	-31.56	-	-	0-360	250	H
5	17.105	24.96	PK	41.3	-18.7	0	47.56	-	-	-	-	68.2	-20.64	0-360	250	H
2	7.979	27.21	PK	35.9	-23.9	0	39.21	-	-	-	-	68.2	-28.99	0-360	250	V
4	*11.404	25.17	PK	38.3	-20.2	0	43.27	-	-	74	-30.73	-	-	0-360	250	V
6	17.108	24.68	PK	41.3	-18.7	0	47.28	-	-	-	-	68.2	-20.92	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.3.2.TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.5GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

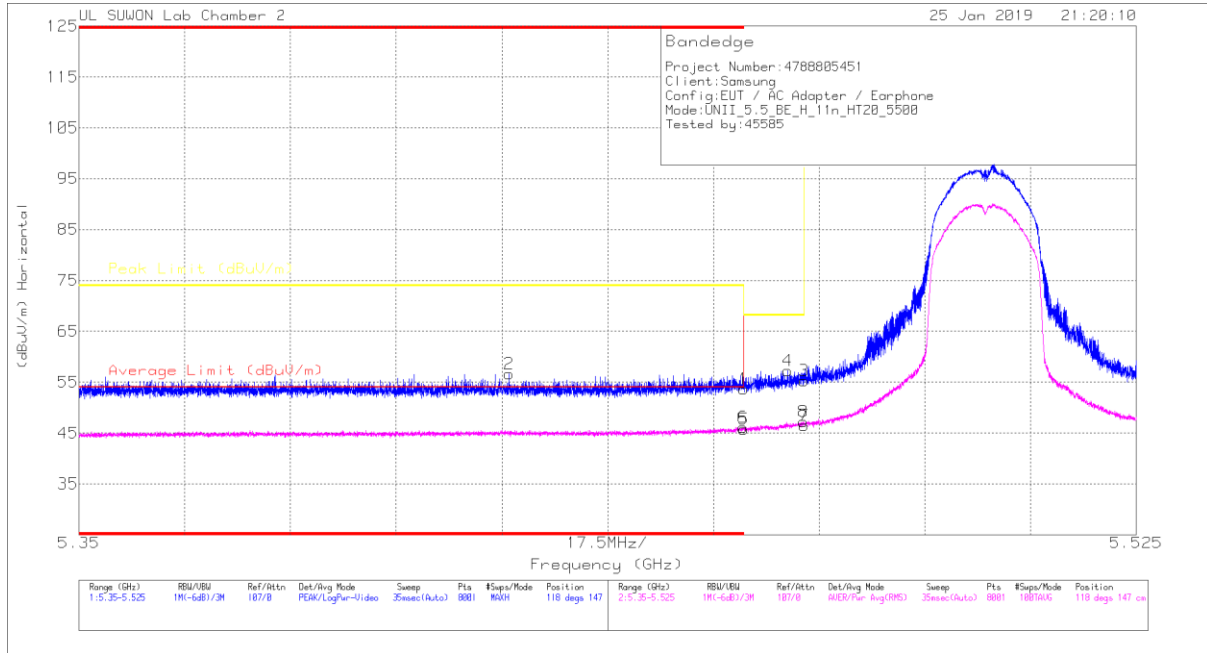

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.31	Pk	34.6	-18.2	0	53.71	-	-	74	-20.29	118	147	H
2	* 5.421	40.35	Pk	34.5	-18.2	0	56.65	-	-	74	-17.35	118	147	H
3	5.47	38.81	Pk	34.6	-18.1	0	55.31	-	-	68.2	-12.89	118	147	H
4	5.467	40.8	Pk	34.6	-18.2	0	57.2	-	-	68.2	-11	118	147	H
5	* 5.46	27.99	RMS	34.6	-16.9	.1	45.79	54	-8.21	-	-	118	147	H
6	* 5.46	28.36	RMS	34.6	-16.9	.1	46.16	54	-7.84	-	-	118	147	H
7	5.47	28.64	RMS	34.6	-16.9	.1	46.44	-	-	-	-	118	147	H
8	5.47	29.4	RMS	34.6	-16.9	.1	47.2	-	-	-	-	118	147	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

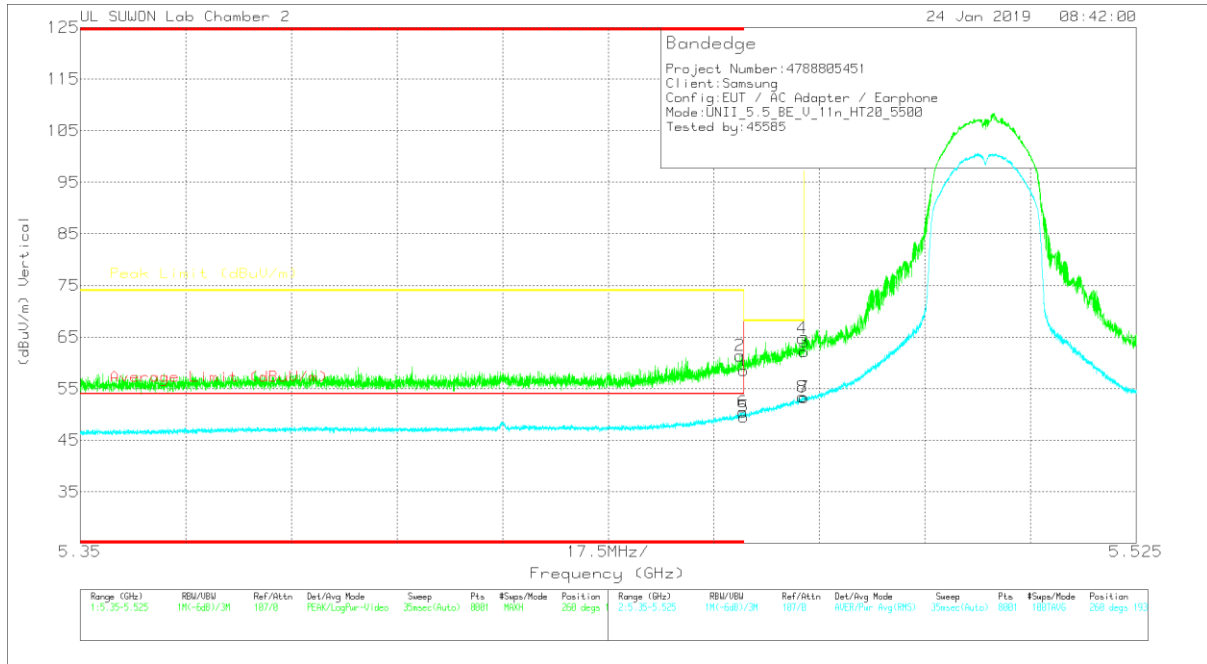

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.46	42.12	Pk	34.6	-18.2	0	58.52	-	-	74	-15.48	260	193	V
2	* 5.459	44.99	Pk	34.6	-18.2	0	61.39	-	-	74	-12.61	260	193	V
3	5.47	45.64	Pk	34.6	-18.1	0	62.14	-	-	68.2	-6.06	260	193	V
4	5.47	48.24	Pk	34.6	-18.1	0	64.74	-	-	68.2	-3.46	260	193	V
5	* 5.46	31.73	RMS	34.6	-16.9	.11	49.54	54	-4.46	-	-	260	193	V
6	* 5.46	32.64	RMS	34.6	-16.9	.11	50.45	54	-3.55	-	-	260	193	V
7	5.47	35.51	RMS	34.6	-16.9	.11	53.32	-	-	-	-	260	193	V
8	5.47	35.57	RMS	34.6	-16.9	.11	53.38	-	-	-	-	260	193	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

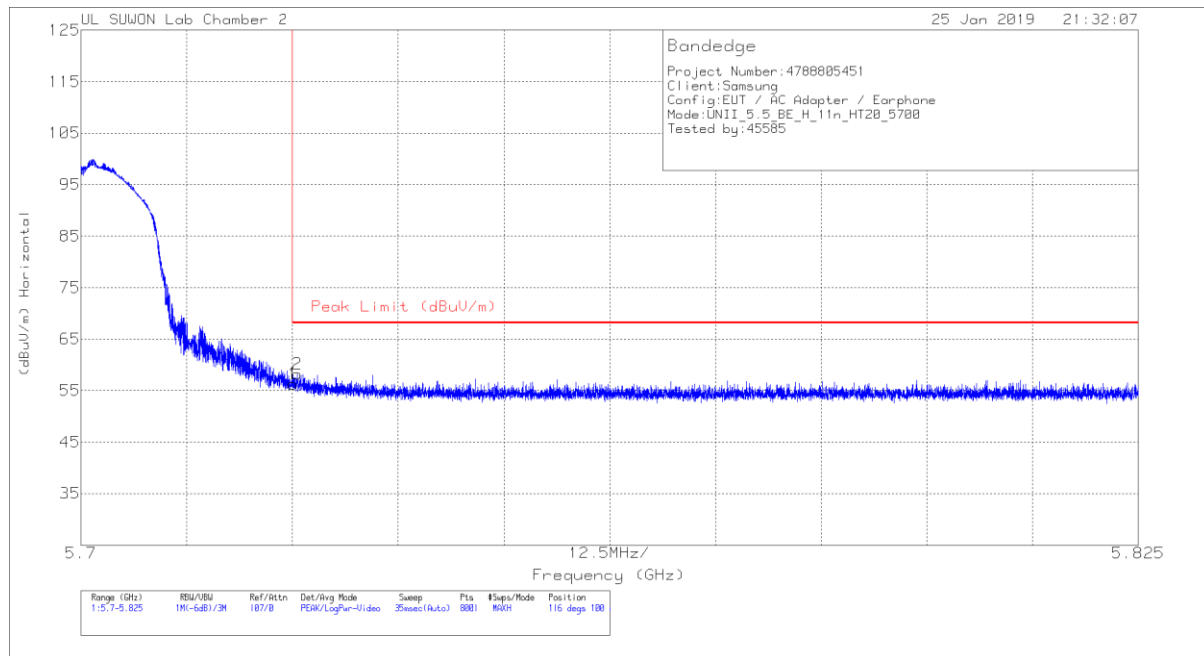


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.15	Pk	34.7	-17.6	0	56.25	68.2	-11.95	116	100	H
2	5.726	40.99	Pk	34.7	-17.5	0	58.19	68.2	-10.01	116	100	H

Pk - Peak detector

VERTICAL PEAK AND AVERAGE PLOT

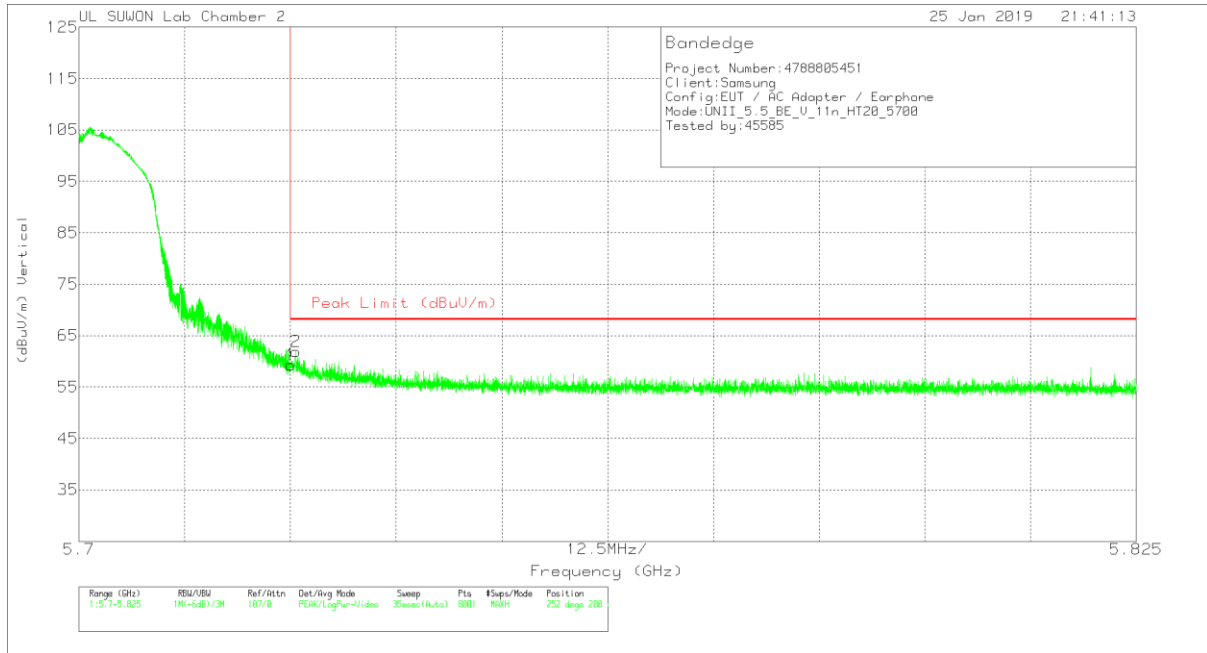

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.18	Pk	34.7	-17.6	0	59.28	68.2	-8.92	252	208	V
2	5.726	44.7	Pk	34.7	-17.5	0	61.9	68.2	-6.3	252	208	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

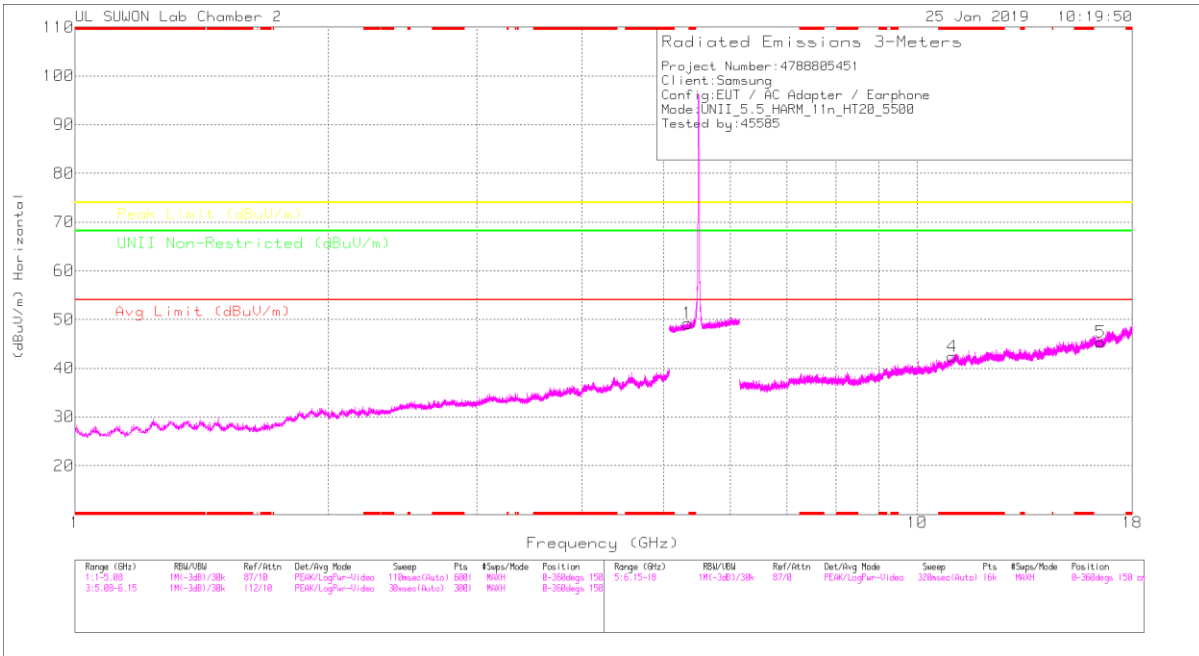

LOW CHANNEL VERTICAL

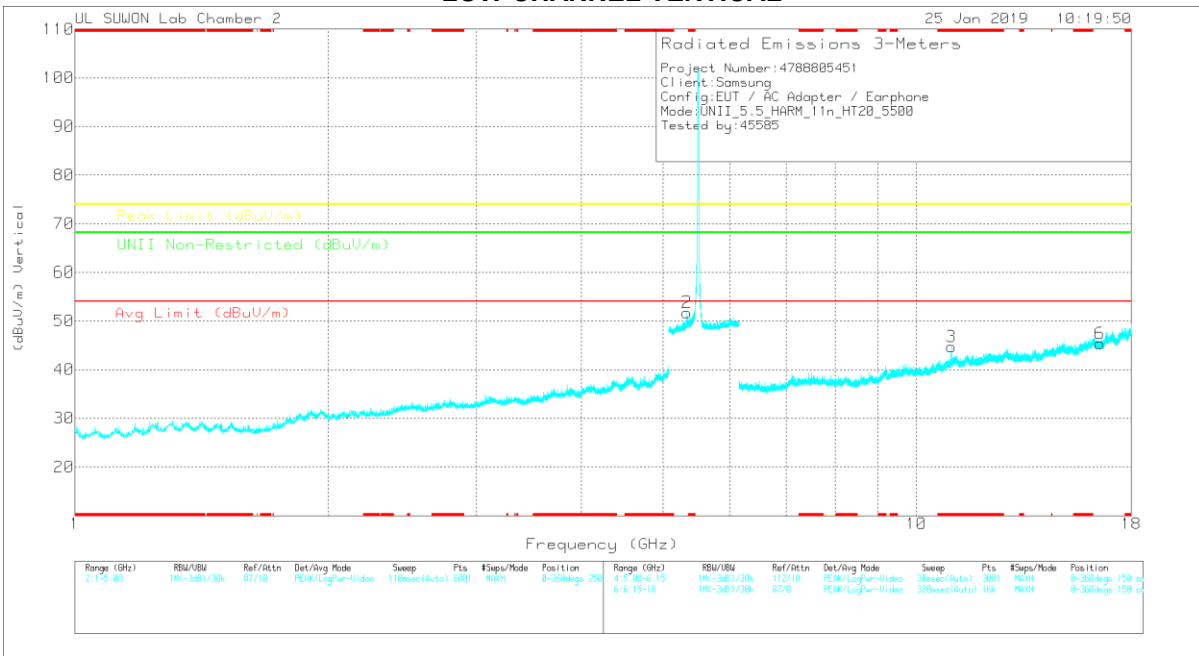

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	100B(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	ULN Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.34	32.69	PK	34.5	-18	0	49.19	-	-	-	-	68.2	-19.01	0-360	250	H
2	5.34	35.27	PK	34.5	-18	0	51.77	-	-	-	-	68.2	-16.43	0-360	150	V
4	* 11.001	24.83	PK	38.1	-20.5	0	42.43	-	-	74	-31.57	-	-	0-360	150	H
5	16.5	24.8	PK	40.5	-19.9	0	45.4	-	-	-	-	68.2	-22.8	0-360	250	H
3	* 11.001	27.16	PK	38.1	-20.5	0	44.76	-	-	74	-29.24	-	-	0-360	250	V
6	16.5	24.63	PK	40.5	-19.8	0	45.33	-	-	-	-	68.2	-22.87	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	100B(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	ULN Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5.341	42.91	PK-U	34.5	-18.1	0	59.31	-	-	-	-	68.2	-8.89	218	112	H
5.34	46.06	PK-U	34.5	-18	0	62.56	-	-	-	-	68.2	-5.64	253	183	V
* 11	26.08	ADR	38.1	-20.6	.11	43.69	54	-10.31	-	-	-	-	270	192	V
* 10.964	22.17	ADR	38.1	-20.5	.11	39.88	54	-14.12	-	-	-	-	97	207	H
* 11	38.4	PK-U	38.1	-20.6	0	55.9	-	-	74	-18.1	-	-	270	192	V
* 10.963	34.42	PK-U	38.1	-20.5	0	52.02	-	-	74	-21.98	-	-	97	207	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL HORIZONTAL

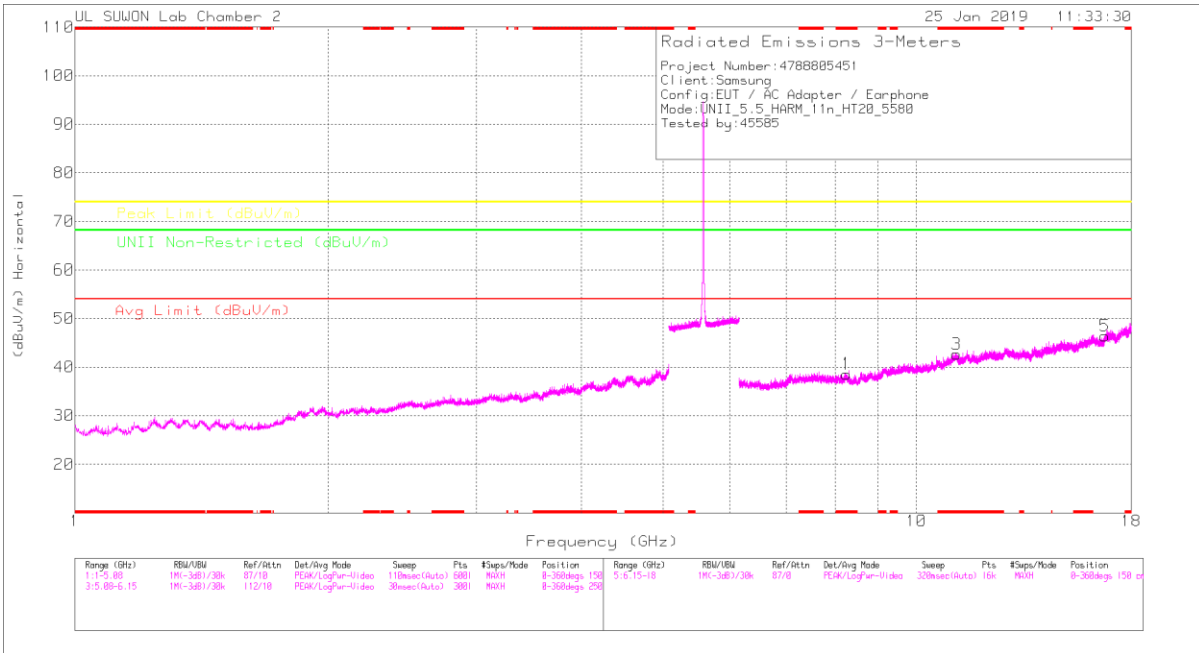

MID CHANNEL VERTICAL

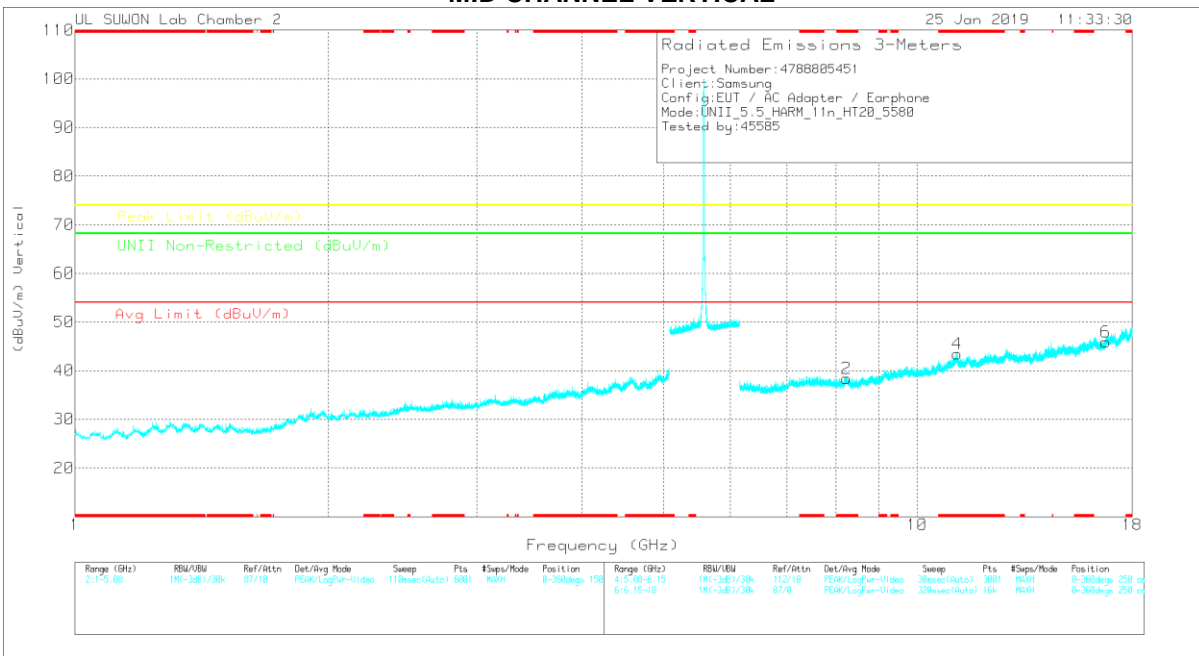

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Agc Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	U-NII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.252	25.58	PK	36	-23	0	38.58	-	-	74	-35.42	-	-	0-360	150	H
3	* 11.16	24.05	PK	38.2	-19.6	0	42.65	-	-	74	-31.35	-	-	0-360	150	H
5	16.743	24.61	PK	40.9	-19.1	0	46.41	-	-	-	-	68.2	-21.79	0-360	150	H
2	* 8.247	25.44	PK	36	-23.1	0	38.34	-	-	74	-35.66	-	-	0-360	150	V
4	* 11.161	24.69	PK	38.2	-19.5	0	43.39	-	-	74	-30.61	-	-	0-360	250	V
6	16.744	24.12	PK	40.9	-19.1	0	45.92	-	-	-	-	68.2	-22.28	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	6GHz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Agc Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	U-NII Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.157	35.22	PK-U	38.2	-19.6	0	53.82	-	-	74	-20.18	-	-	152	185	H
* 11.16	23.17	ADR	38.2	-19.6	11	41.88	54	-12.12	-	-	-	-	152	185	H
* 11.165	36.53	PK-U	38.2	-19.6	0	55.13	-	-	74	-18.87	-	-	263	178	V
* 11.16	24.5	ADR	38.2	-19.6	11	43.21	54	-10.79	-	-	-	-	263	178	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL HORIZONTAL

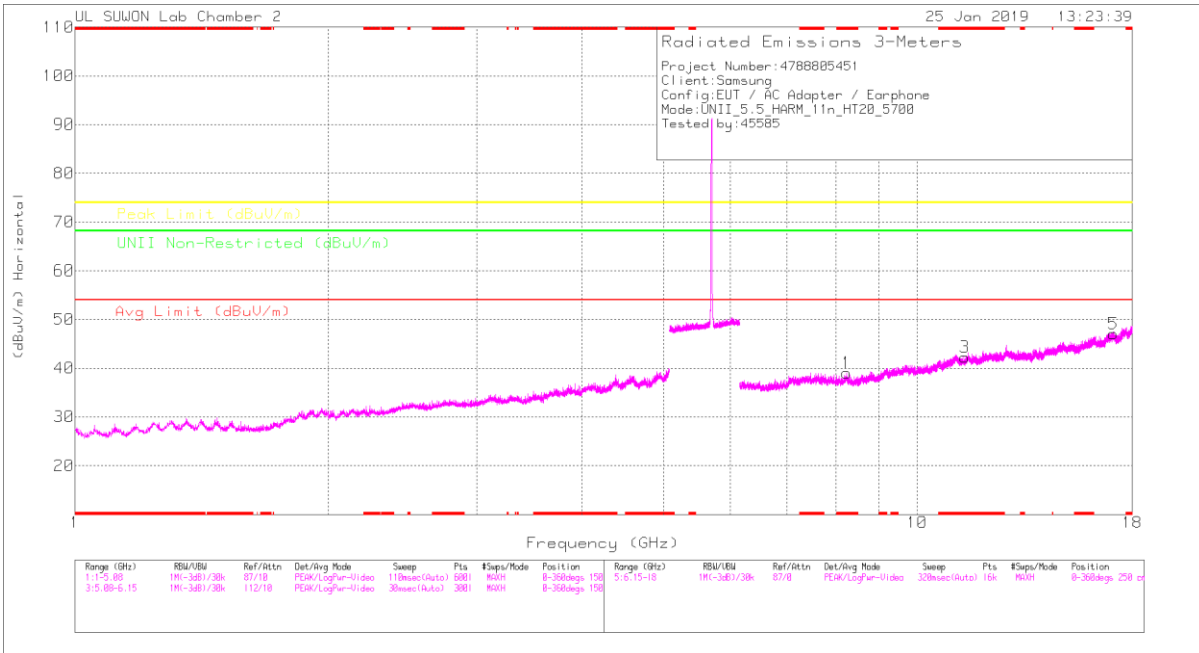

HIGH CHANNEL VERTICAL

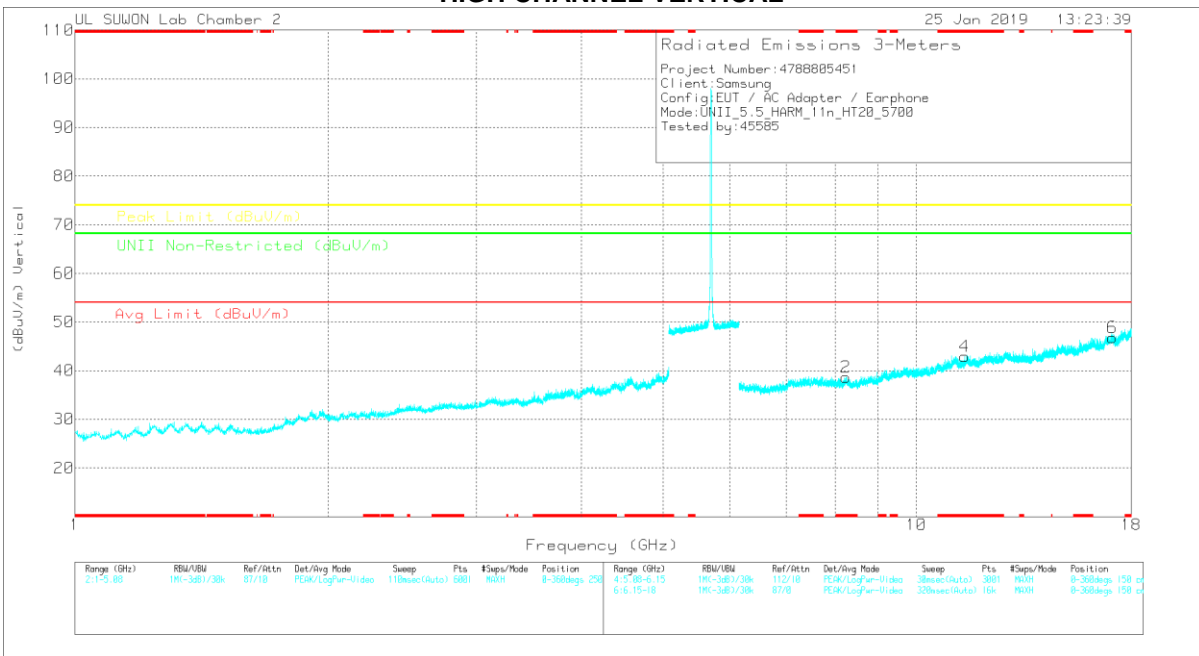

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers


Marker	Frequency (Hz)	Major Reading (dBuV)	Det	3117_00168724	66Hz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 8.24	26.19	PK	36	-23.2	0	38.99	-	-	74	-35.01	-	-	0-360	150	H
3	* 11.397	24.12	PK	38.3	-20.2	0	42.22	-	-	74	-31.78	-	-	0-360	250	H
5	17.102	24.34	PK	41.3	-18.6	0	47.04	-	-	-	-	68.2	-21.16	0-360	250	H
2	* 8.241	25.88	PK	36	-23.2	0	38.68	-	-	74	-35.32	-	-	0-360	150	V
4	* 11.401	24.79	PK	38.3	-20.2	0	42.89	-	-	74	-31.11	-	-	0-360	250	V
6	17.102	24.25	PK	41.3	-18.7	0	46.85	-	-	-	-	68.2	-21.35	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.3.3.TX ABOVE 1GHz 802.11n HT40 MODE IN THE 5.5GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

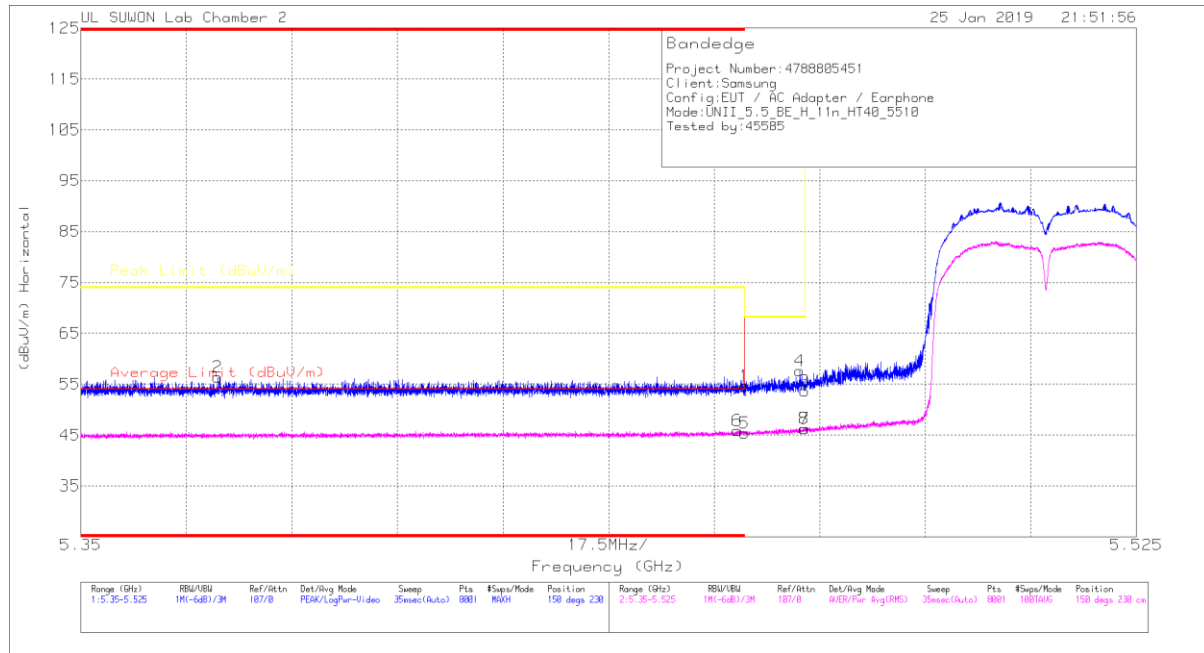

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.28	Pk	34.6	-18.2	0	54.68	-	-	74	-19.32	150	230	H
2	* 5.373	40.03	Pk	34.5	-18.1	0	56.43	-	-	74	-17.57	150	230	H
3	5.47	37.21	Pk	34.6	-18.1	0	53.71	-	-	68.2	-14.49	150	230	H
4	5.469	41.08	Pk	34.6	-18.1	0	57.58	-	-	68.2	-10.62	150	230	H
5	* 5.46	27.34	RMS	34.6	-16.9	.31	45.35	54	-8.65	-	-	150	230	H
6	* 5.459	27.92	RMS	34.6	-16.9	.31	45.93	54	-8.07	-	-	150	230	H
7	5.47	28.22	RMS	34.6	-16.9	.31	46.23	-	-	-	-	150	230	H
8	5.47	28.29	RMS	34.6	-16.9	.31	46.3	-	-	-	-	150	230	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

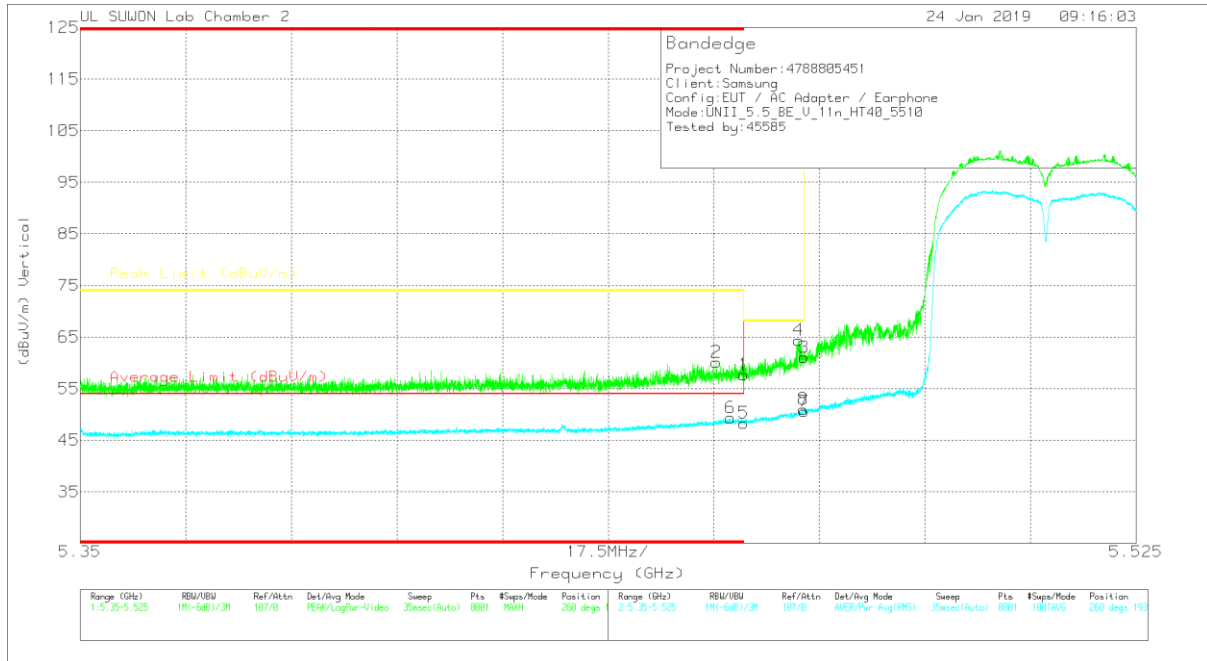

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Aimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.31	Pk	34.6	-18.2	0	57.71	-	-	74	-16.29	260	193	V
2	* 5.455	43.72	Pk	34.6	-18.2	0	60.12	-	-	74	-13.88	260	193	V
3	5.47	44.57	Pk	34.6	-18.1	0	61.07	-	-	68.2	-7.13	260	193	V
4	5.469	47.91	Pk	34.6	-18.1	0	64.41	-	-	68.2	-3.79	260	193	V
5	* 5.46	30.33	RMS	34.6	-16.9	.31	48.34	54	-5.66	-	-	260	193	V
6	* 5.458	31.33	RMS	34.6	-16.9	.31	49.34	54	-4.66	-	-	260	193	V
7	5.47	32.56	RMS	34.6	-16.9	.31	50.57	-	-	-	-	260	193	V
8	5.47	33	RMS	34.6	-16.9	.31	51.01	-	-	-	-	260	193	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

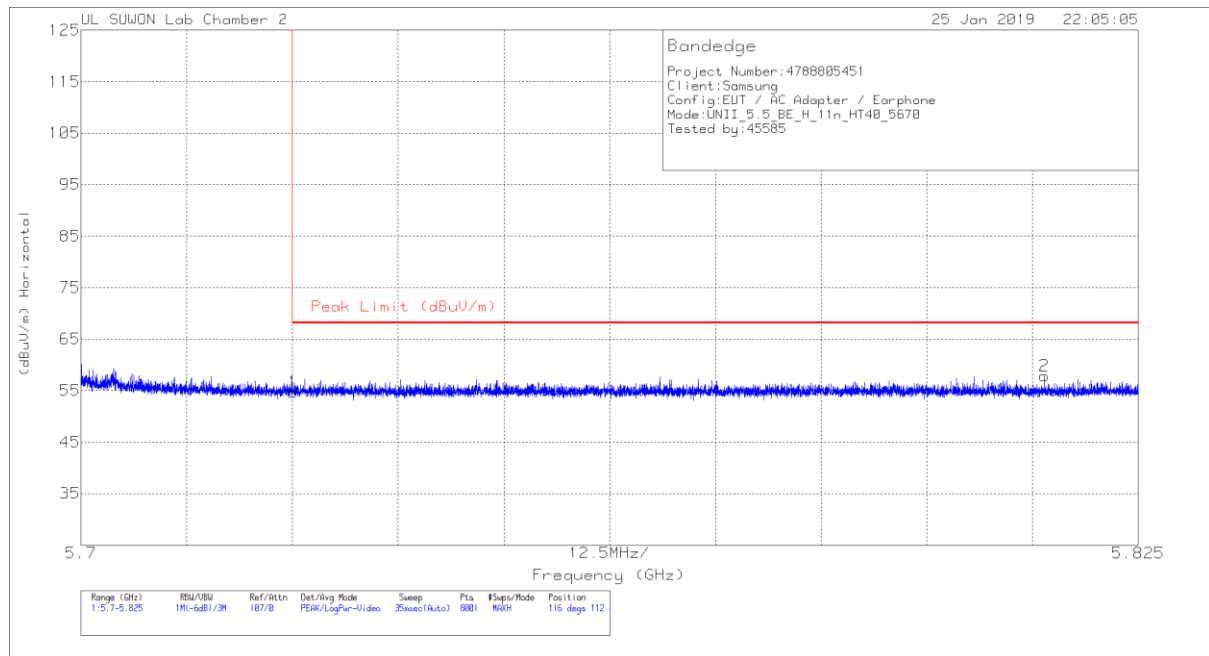


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.56	Pk	34.7	-17.6	0	54.66	68.2	-13.54	116	112	H
2	5.814	40.57	Pk	34.8	-17.5	0	57.87	68.2	-10.33	116	112	H

Pk - Peak detector

VERTICAL PEAK AND AVERAGE PLOT

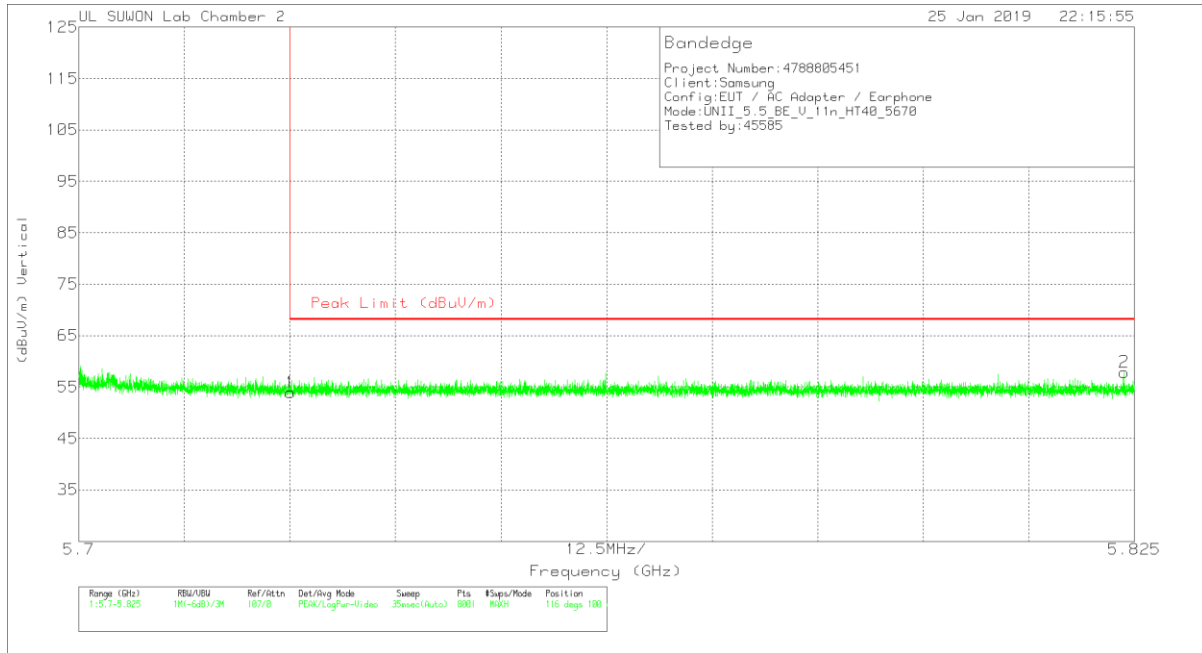

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.88	Pk	34.7	-17.6	0	53.98	68.2	-14.22	116	100	V
2	5.824	40.62	Pk	34.8	-17.5	0	57.92	68.2	-10.28	116	100	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

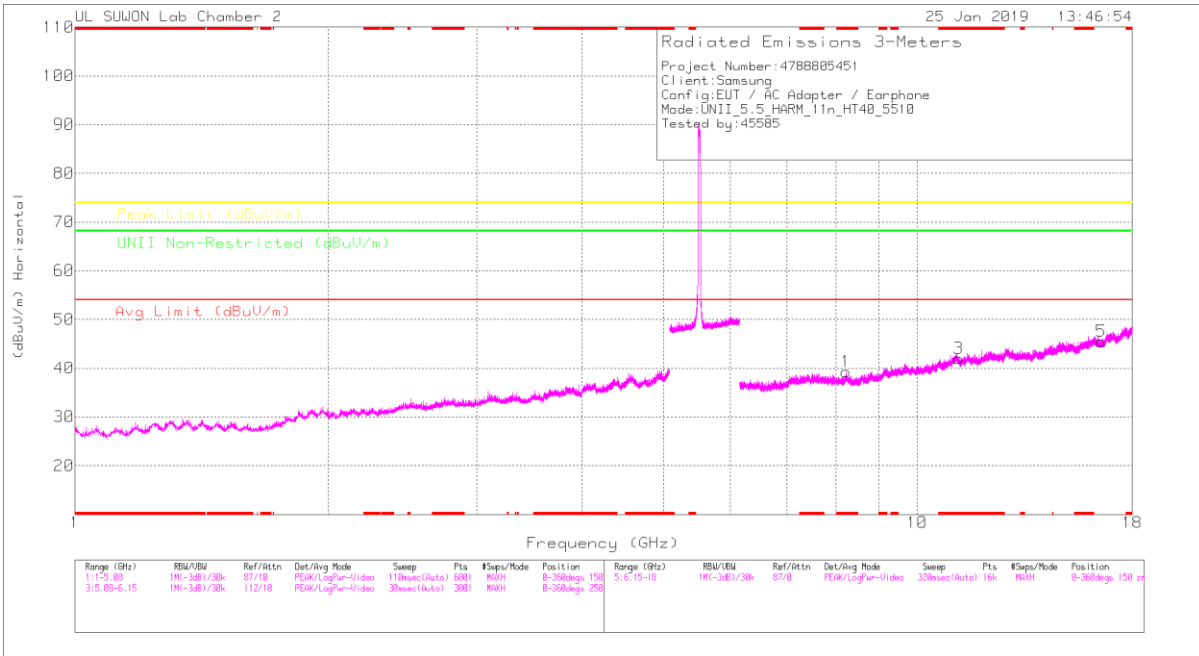

LOW CHANNEL VERTICAL

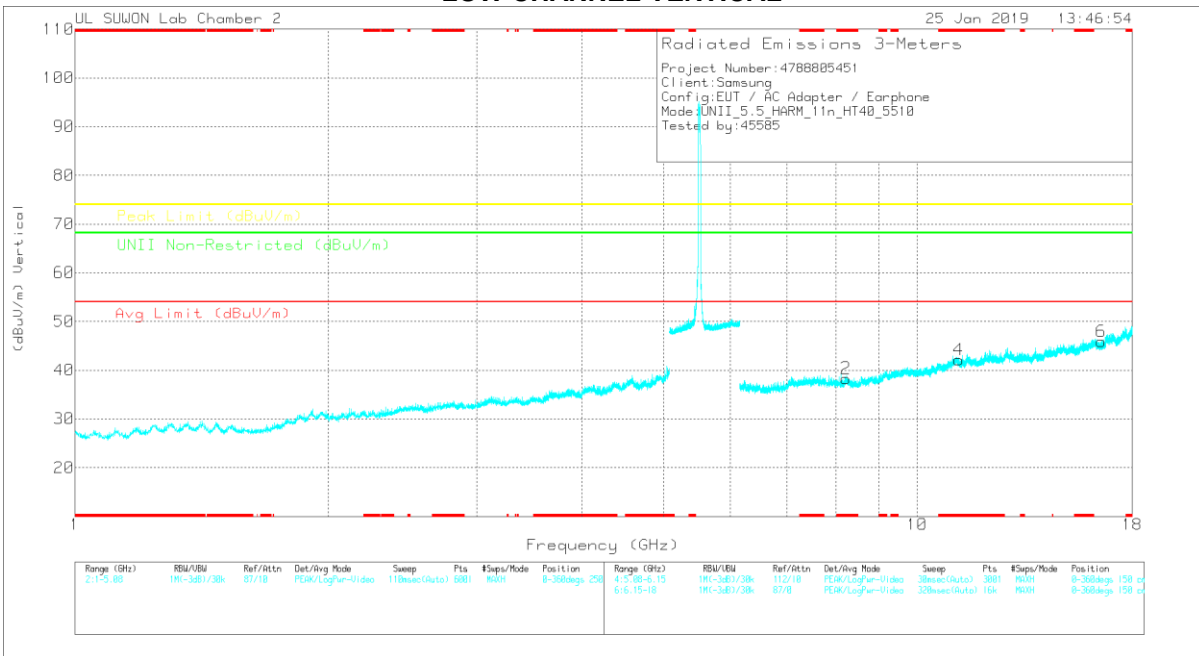

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	3117_00168724	60Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.231	26.67	PK	36	-23.4	0	39.27	-	-	74	-34.73	-	-	0-360	150	H
3	* 11.204	23.74	PK	38.3	-20	0	42.04	-	-	74	-31.96	-	-	0-360	250	H
5	16.533	24.81	PK	40.5	-19.8	0	45.51	-	-	-	-	68.2	-22.69	0-360	250	H
2	* 8.232	25.62	PK	36	-23.3	0	38.32	-	-	74	-35.68	-	-	0-360	150	V
4	* 11.205	23.81	PK	38.3	-20	0	42.11	-	-	74	-31.89	-	-	0-360	250	V
6	16.532	25.22	PK	40.5	-19.8	0	45.92	-	-	-	-	68.2	-22.28	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

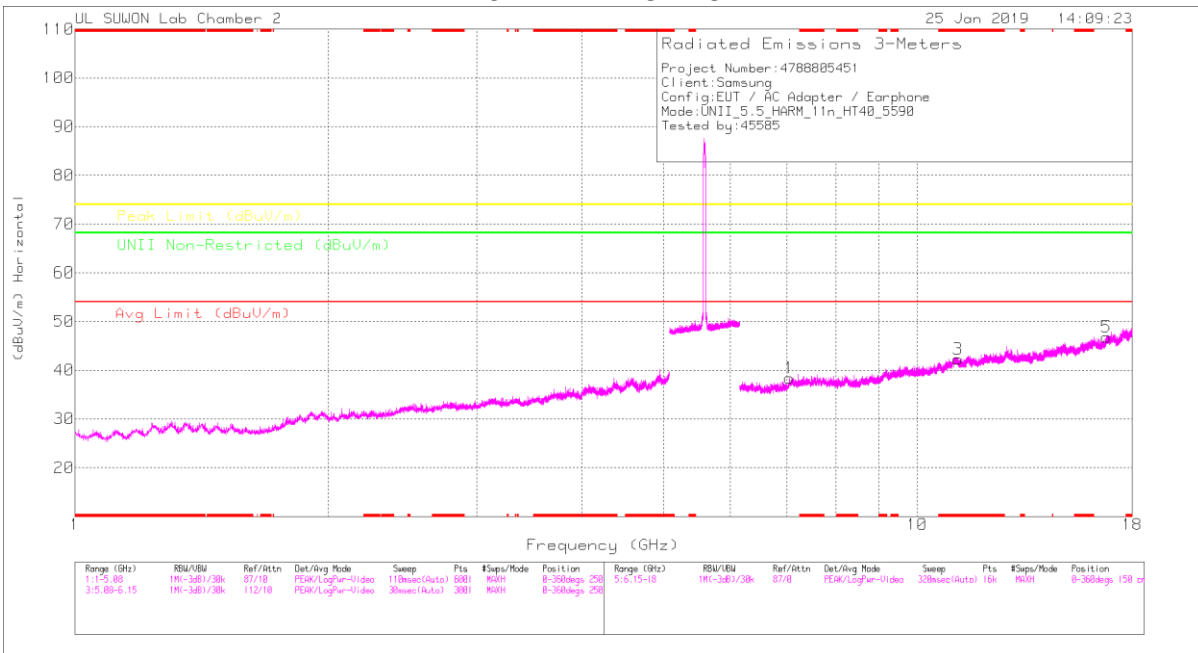

MID CHANNEL VERTICAL

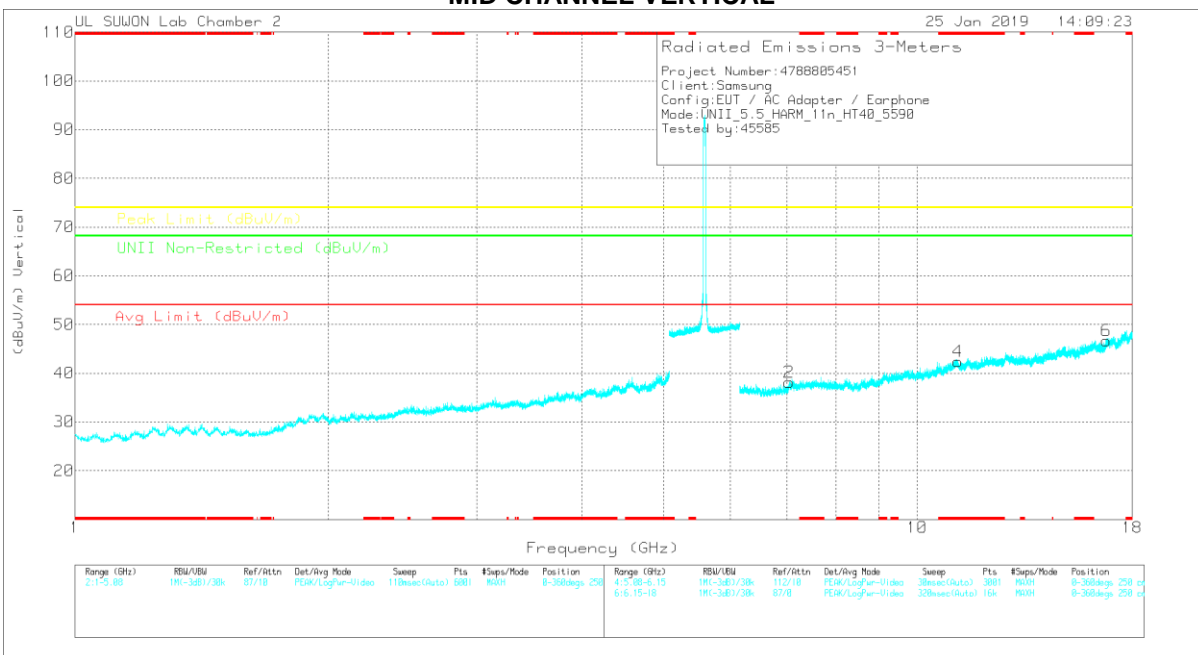

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Major Reading (dBuV)	Det	3117_00168724	66Hz_HF(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	7.047	27.14	PK	35.9	-24.7	0	38.34	-	-	-	-	68.2	-29.86	0-360	150	H
3	*11.184	23.76	PK	38.2	-19.7	0	42.26	-	-	74	-31.74	-	-	0-360	251	H
5	16.776	24.63	PK	41	-18.8	0	46.83	-	-	-	-	68.2	-21.37	0-360	251	H
2	7.044	27.05	PK	35.9	-24.8	0	38.15	-	-	-	-	68.2	-30.05	0-360	150	V
4	*11.181	23.81	PK	38.2	-19.6	0	42.41	-	-	74	-31.59	-	-	0-360	150	V
6	16.768	24.52	PK	41	-18.8	0	46.72	-	-	-	-	68.2	-21.48	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

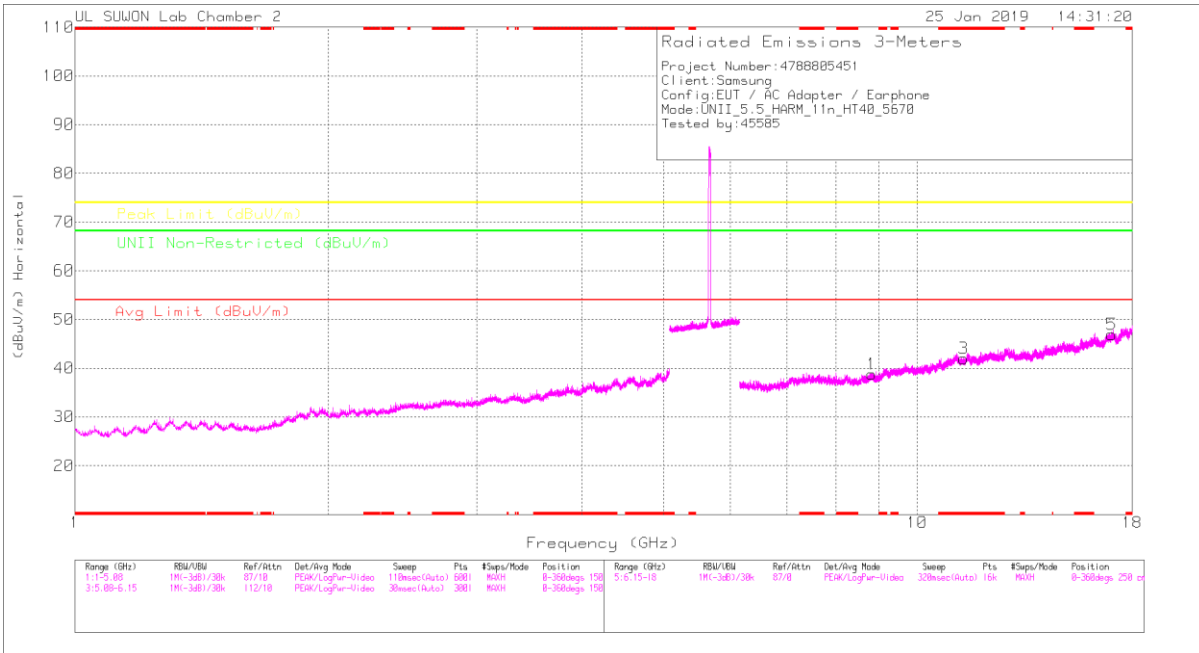

HIGH CHANNEL VERTICAL

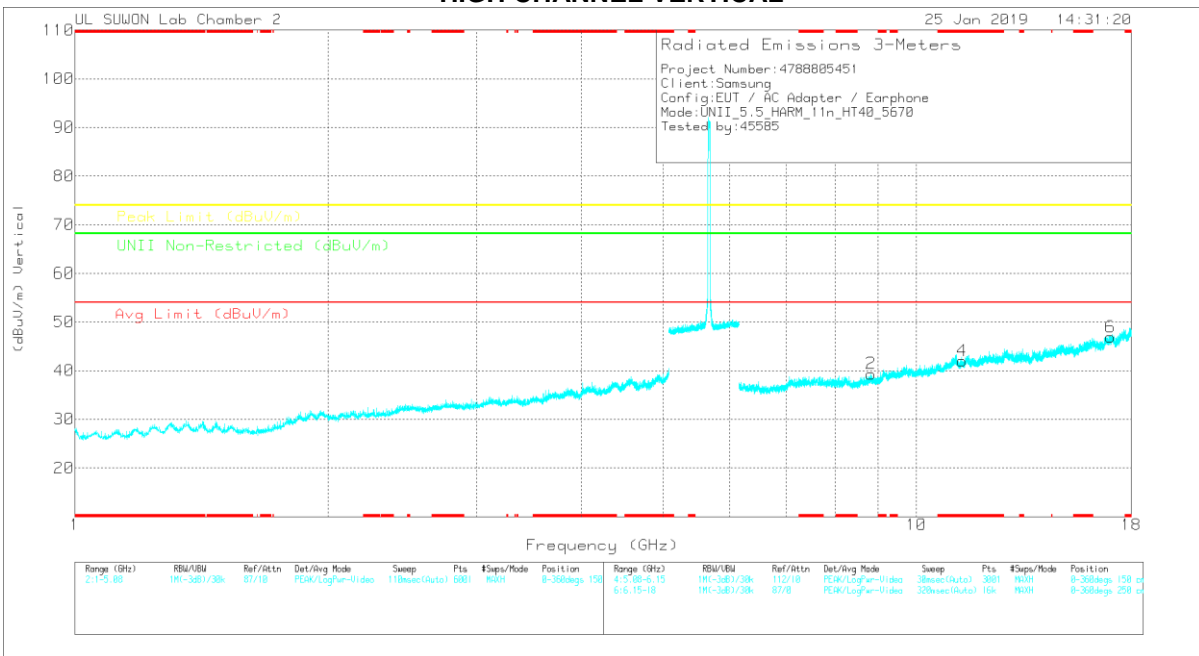

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Marker Reading (dBuV)	Det	3117_00168724	60Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	8.825	24.61	PK	36.4	-22.2	0	38.81	-	-	-	-	68.2	-29.39	0-360	150	H
3	*11.344	23.85	PK	38.3	-20.2	0	41.95	-	-	74	-32.05	-	-	0-360	150	H
5	17.017	24.34	PK	41.3	-18.7	0	46.94	-	-	-	-	68.2	-21.26	0-360	250	H
2	8.829	25.06	PK	36.4	-22.1	0	39.36	-	-	-	-	68.2	-28.84	0-360	250	V
4	*11.341	23.97	PK	38.3	-20.3	0	41.97	-	-	74	-32.03	-	-	0-360	150	V
6	17.008	24.17	PK	41.3	-18.6	0	46.87	-	-	-	-	68.2	-21.33	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.3.4.TX ABOVE 1GHz 802.11ac VHT80 MODE IN THE 5.5GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

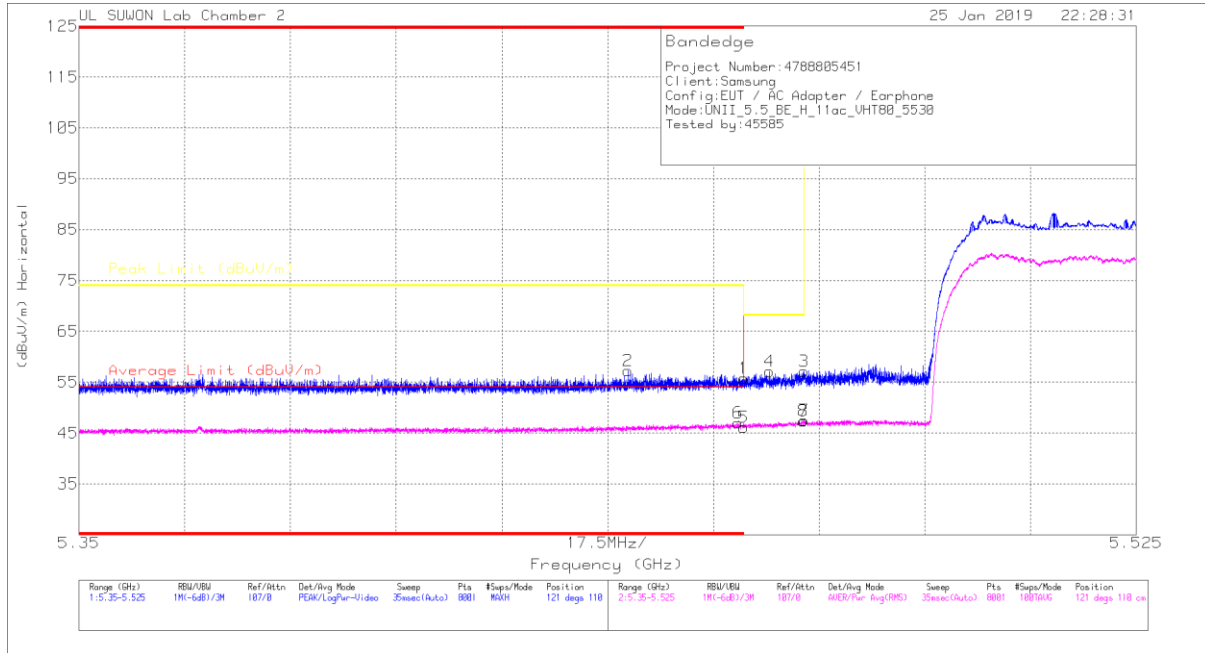


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.42	Pk	34.6	-18.2	0	55.82	-	-	74	-18.18	121	110	H
2	* 5.441	40.94	Pk	34.5	-18.2	0	57.24	-	-	74	-16.76	121	110	H
3	5.47	40.67	Pk	34.6	-18.1	0	57.17	-	-	68.2	-11.03	121	110	H
4	5.464	40.73	Pk	34.6	-18.2	0	57.13	-	-	68.2	-11.07	121	110	H
5	* 5.46	27.77	RMS	34.6	-16.9	.67	46.14	54	-7.86	-	-	121	110	H
6	* 5.459	28.62	RMS	34.6	-16.9	.67	46.99	54	-7.01	-	-	121	110	H
7	5.47	29.13	RMS	34.6	-16.9	.67	47.5	-	-	-	-	121	110	H
8	5.47	29.02	RMS	34.6	-16.9	.67	47.39	-	-	-	-	121	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

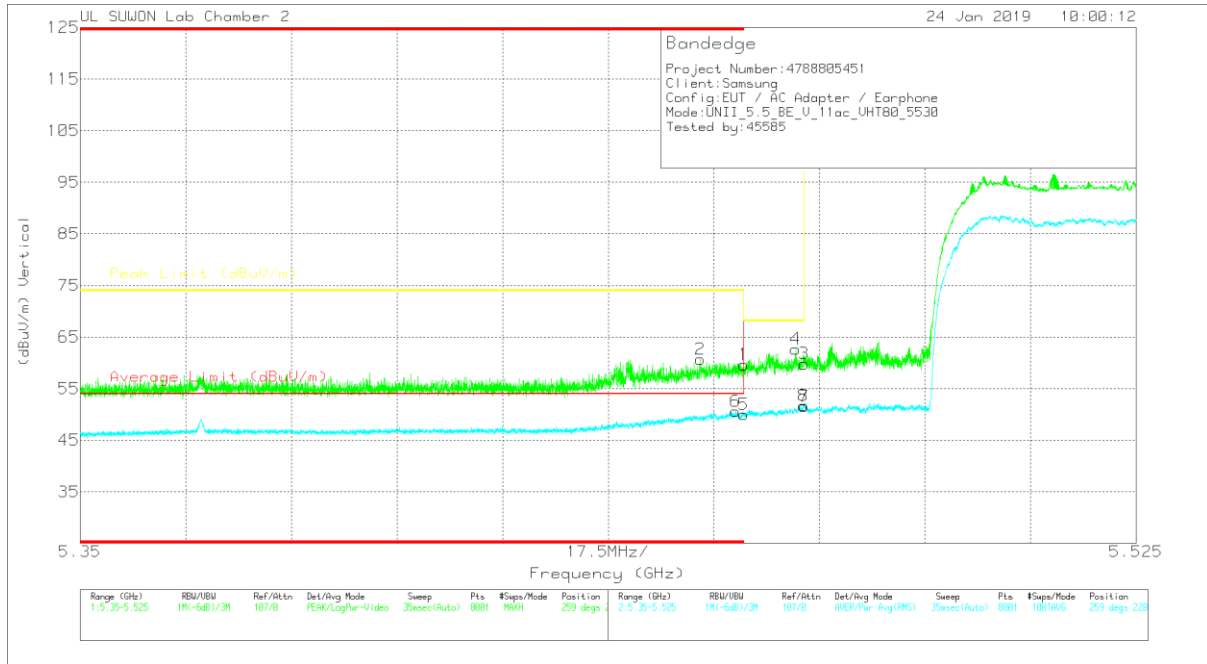

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	43.26	Pk	34.6	-18.2	0	59.66	-	-	74	-14.34	259	220	V
2	* 5.453	44.2	Pk	34.6	-18.1	0	60.7	-	-	74	-13.3	259	220	V
3	5.47	43.3	Pk	34.6	-18.1	0	59.8	-	-	68.2	-8.4	259	220	V
4	5.469	46.27	Pk	34.6	-18.2	0	62.67	-	-	68.2	-5.53	259	220	V
5	* 5.46	31.62	RMS	34.6	-16.9	.67	49.99	54	-4.01	-	-	259	220	V
6	* 5.459	32.22	RMS	34.6	-16.9	.67	50.59	54	-3.41	-	-	259	220	V
7	5.47	33.2	RMS	34.6	-16.9	.67	51.57	-	-	-	-	259	220	V
8	5.47	33.33	RMS	34.6	-16.9	.67	51.7	-	-	-	-	259	220	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

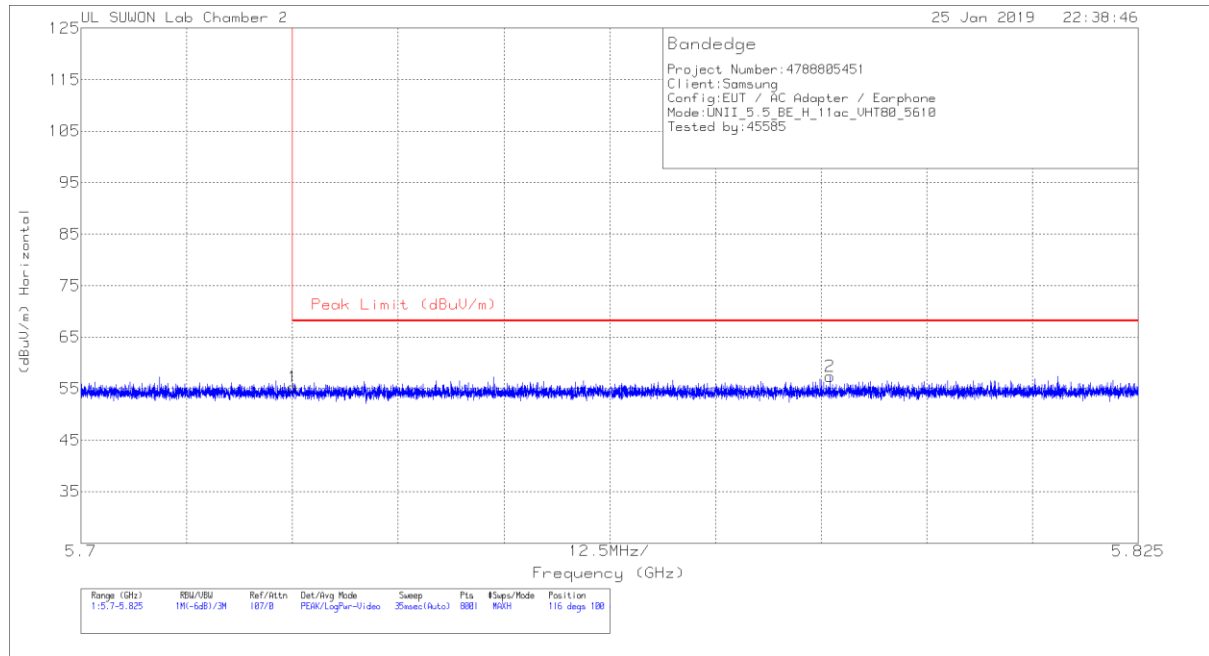


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	38.17	Pk	34.7	-17.6	0	55.27	68.2	-12.93	116	100	H
2	5.789	40.11	Pk	34.8	-17.5	0	57.41	68.2	-10.79	116	100	H

Pk - Peak detector

VERTICAL PEAK AND AVERAGE PLOT

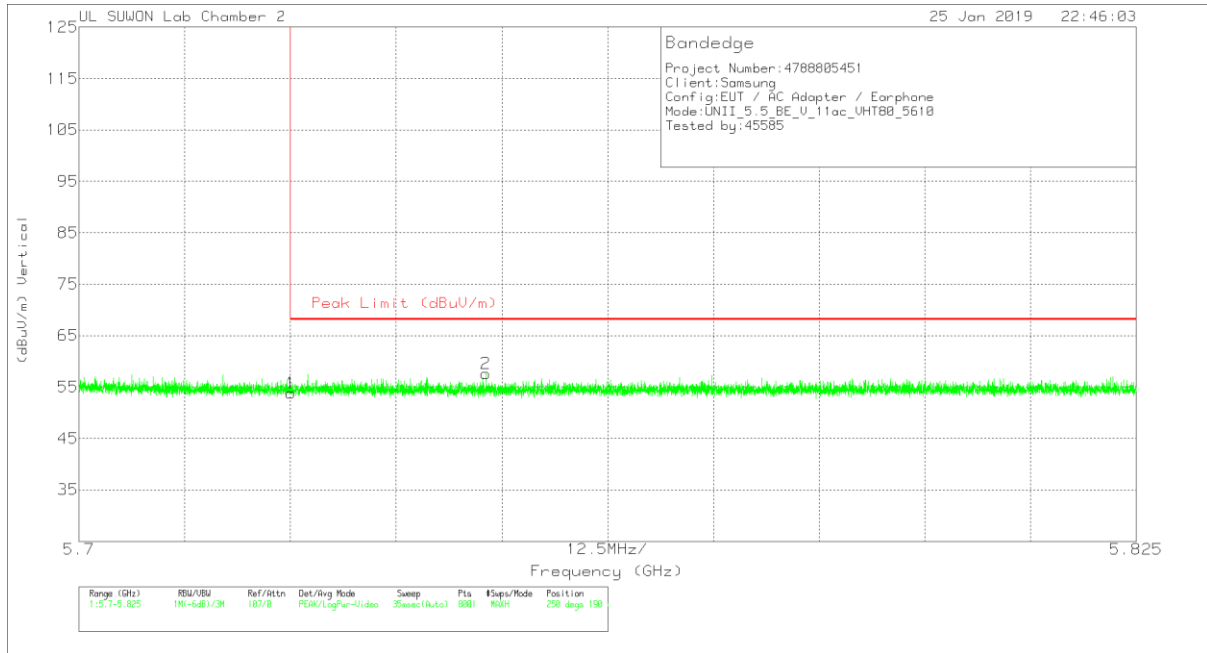

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168724	10dB[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.71	Pk	34.7	-17.6	0	53.81	68.2	-14.39	250	190	V
2	5.748	40.45	Pk	34.7	-17.5	0	57.65	68.2	-10.55	250	190	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

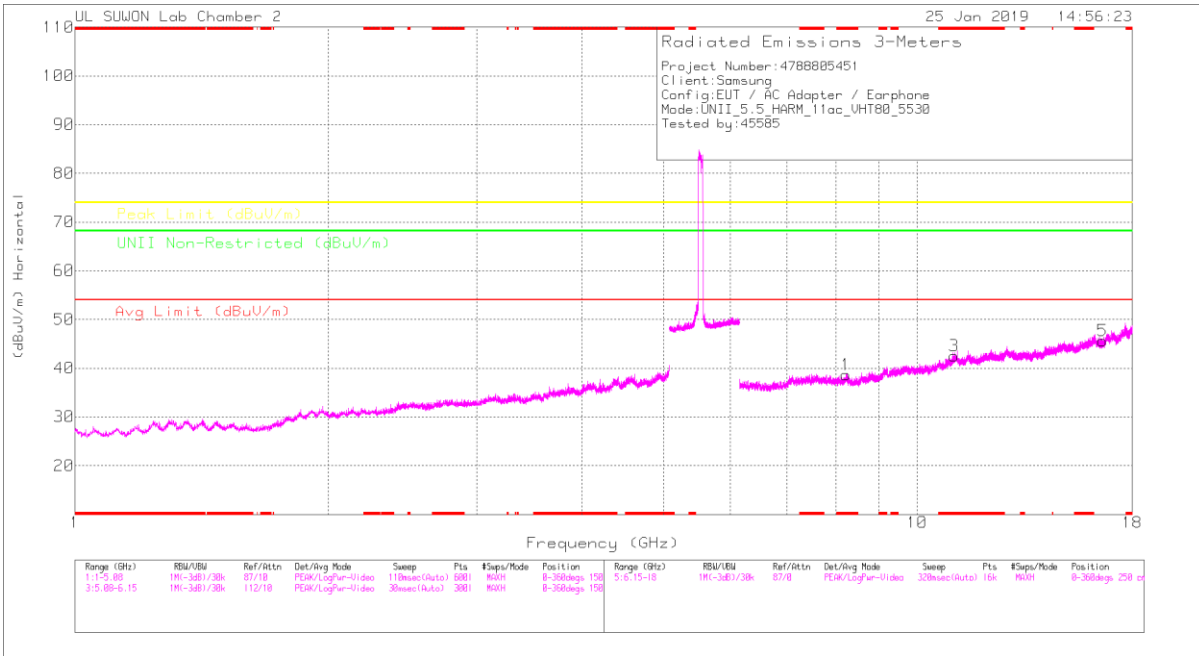

LOW CHANNEL VERTICAL

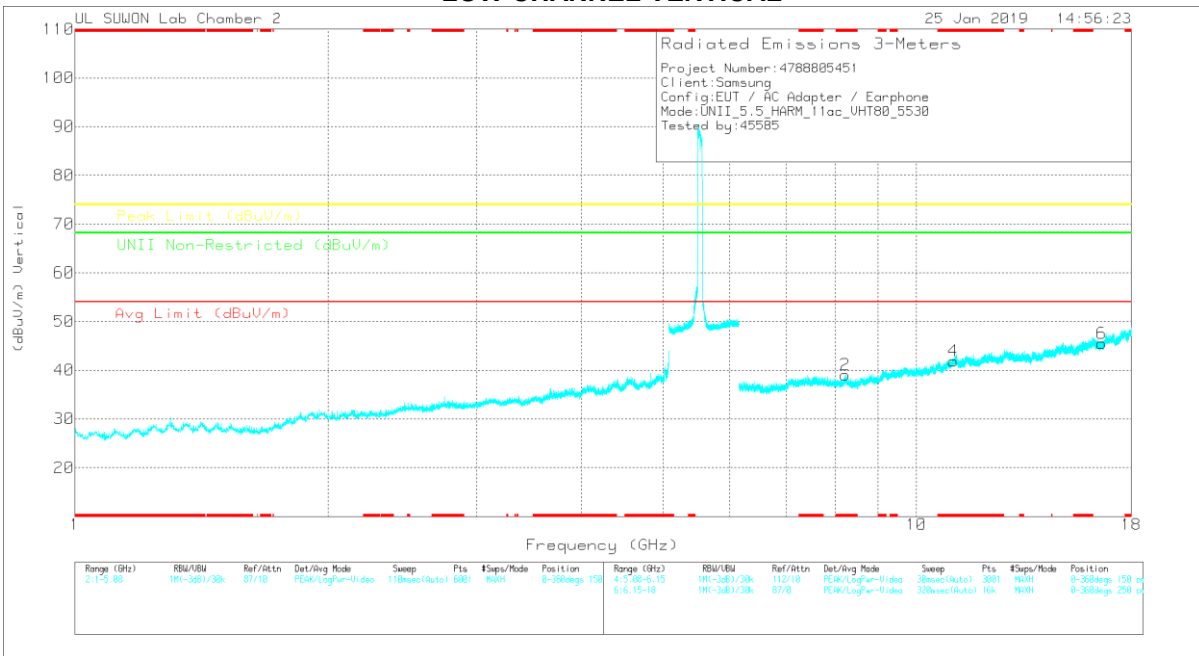

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Marker Reading (dBuV)	Det	3117_00168724	60Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 8.235	25.9	PK	36	-23.3	0	38.6	-	-	74	-35.4	-	-	0-360	250	H
3	* 11.067	24.87	PK	38.2	-20.5	0	42.57	-	-	74	-31.43	-	-	0-360	250	H
5	16.591	24.68	PK	40.6	-19.7	0	45.58	-	-	-	-	68.2	-22.62	0-360	150	H
2	* 8.235	26.38	PK	36	-23.3	0	39.08	-	-	74	-34.92	-	-	0-360	250	V
4	* 11.06	24.18	PK	38.2	-20.5	0	41.88	-	-	74	-32.12	-	-	0-360	150	V
6	16.592	24.58	PK	40.6	-19.7	0	45.48	-	-	-	-	68.2	-22.72	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

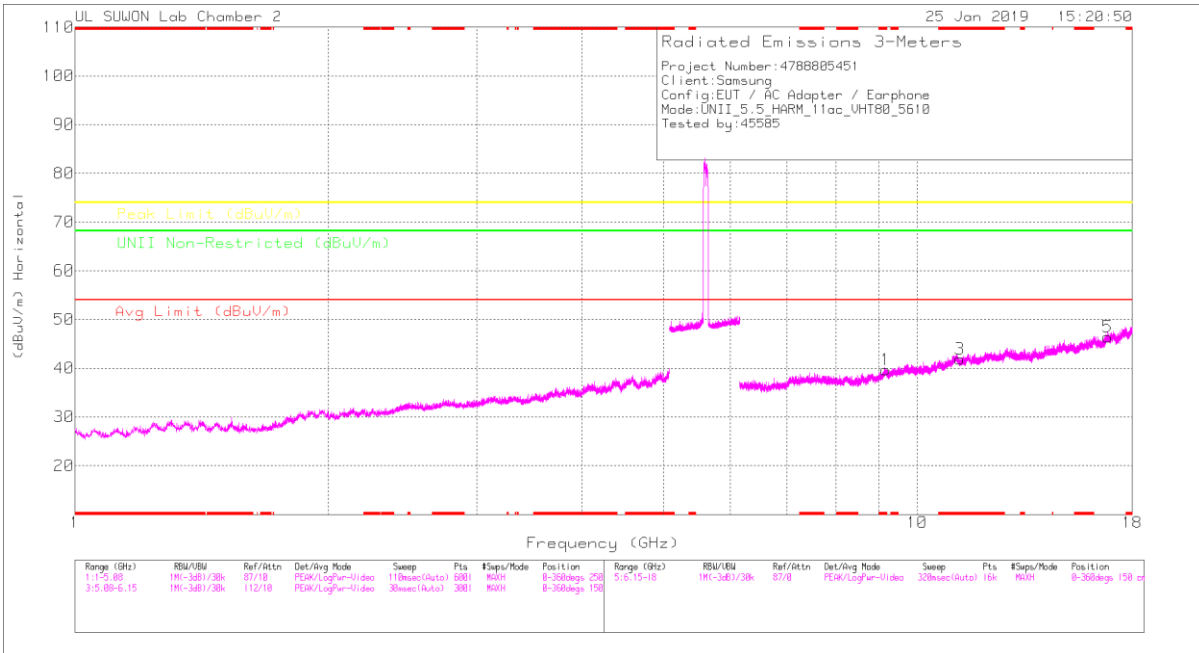

HIGH CHANNEL VERTICAL

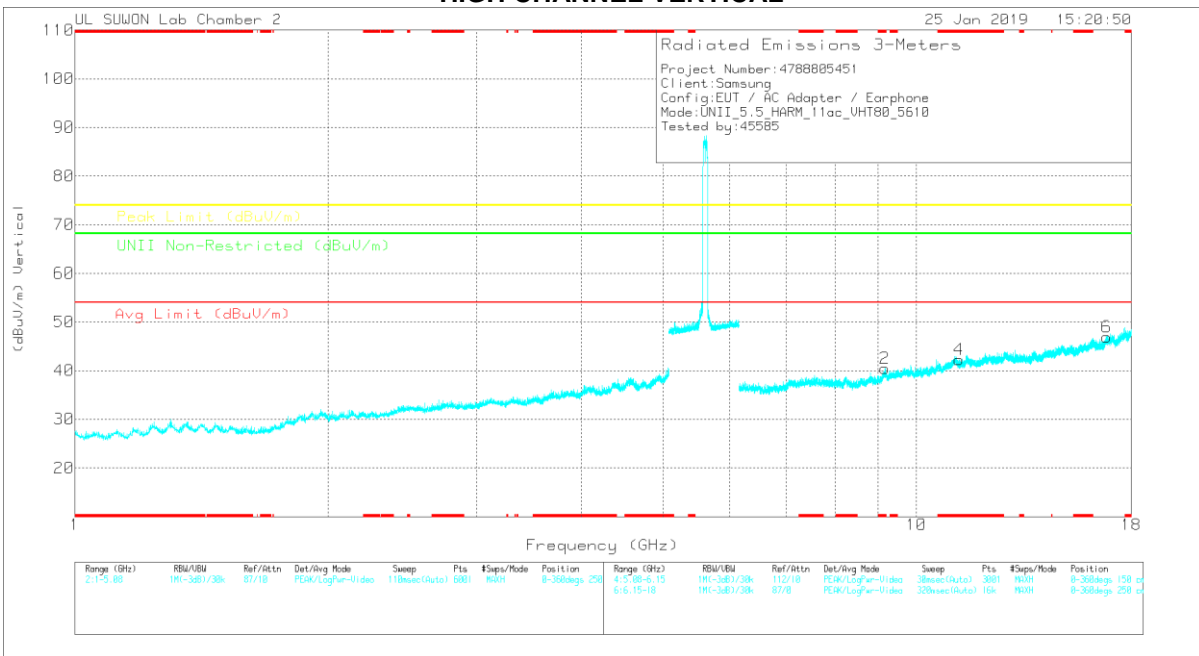

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Marker Reading (dBuV)	Det	3117_00168724	GM1_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 9.172	24.71	PK	36.6	-21.6	0	39.71	-	-	74	-34.29	-	-	0-360	150	H
3	* 11.227	23.85	PK	38.3	-20.3	0	41.85	-	-	74	-32.15	-	-	0-360	150	H
5	16.842	23.78	PK	41.2	-18.6	0	46.38	-	-	-	-	68.2	-21.82	0-360	150	H
2	* 9.174	25.4	PK	36.6	-21.5	0	40.5	-	-	74	-33.5	-	-	0-360	250	V
4	* 11.225	24.3	PK	38.3	-20.3	0	42.3	-	-	74	-31.7	-	-	0-360	250	V
6	16.84	24.31	PK	41.2	-18.6	0	46.91	-	-	-	-	68.2	-21.29	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.4. 5.8 GHz

11.4.1. TX ABOVE 1GHz 802.11a MODE IN THE 5.8GHz BAND BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK PLOT

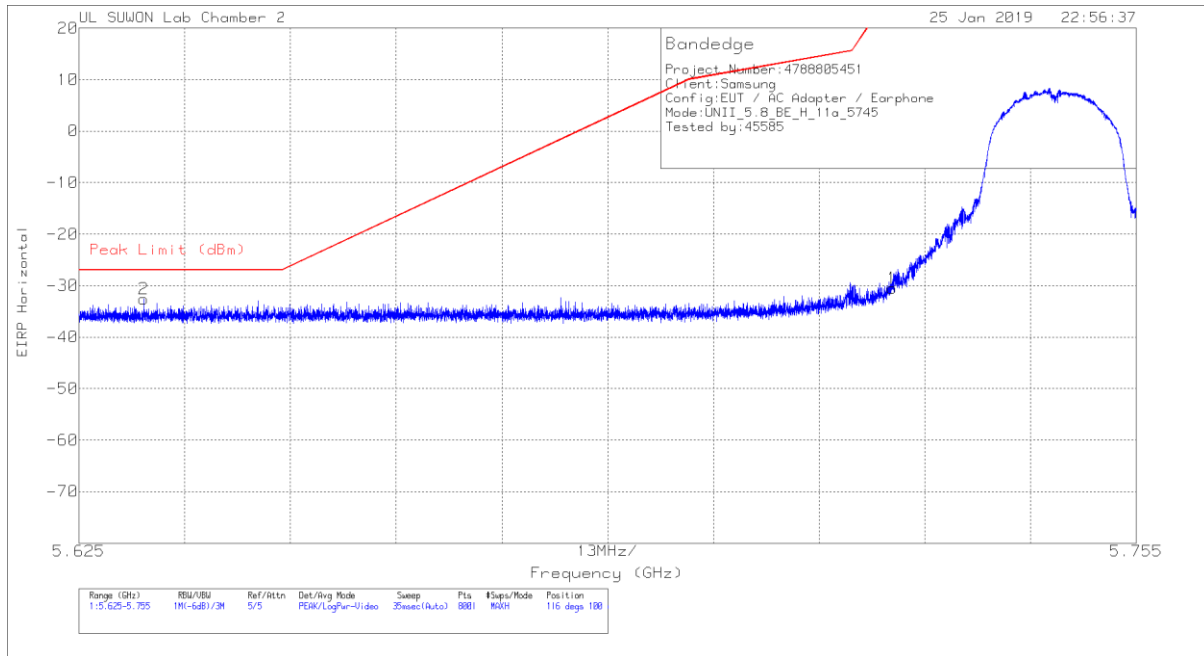


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-61.25	Pk	34.5	-15.6	11.8	0	-30.55	26.97	-57.52	116	100	H
2	5.633	-63.06	Pk	34.4	-15.7	11.8	0	-32.56	-27	-5.56	116	100	H

Pk - Peak detector

VERTICAL PEAK PLOT

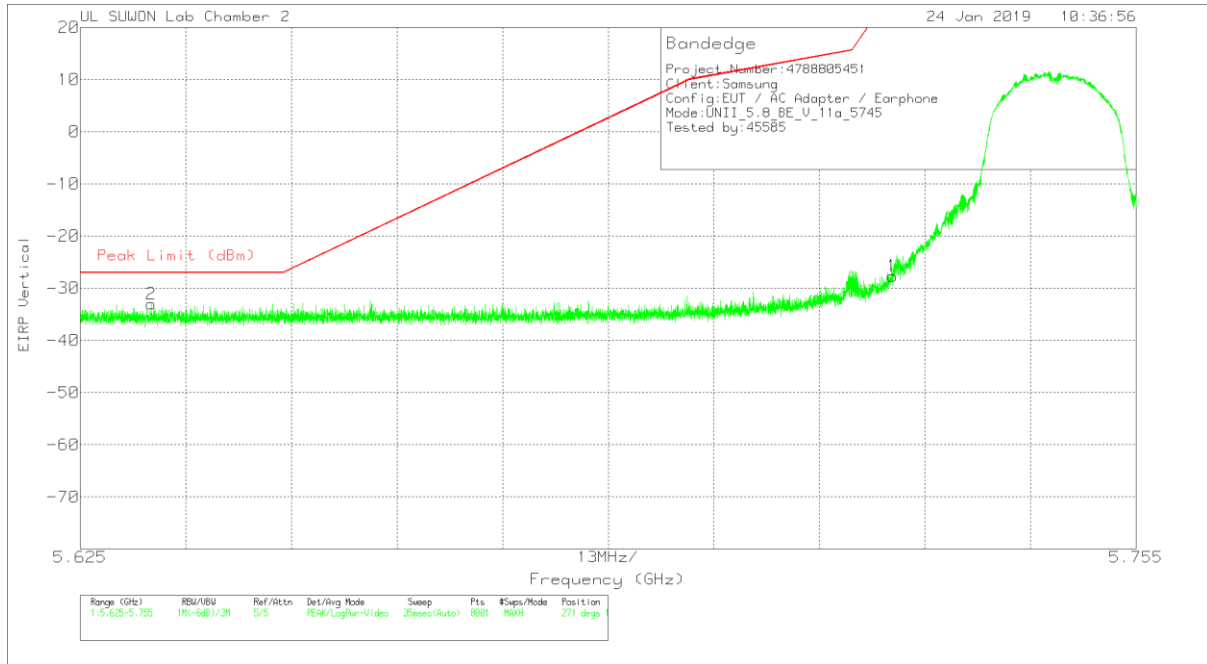

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-58.38	Pk	34.5	-15.6	11.8	0	-27.68	26.97	-54.65	271	140	V
2	5.634	-63.5	Pk	34.4	-15.7	11.8	0	-33	-27	-6	271	140	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK PLOT

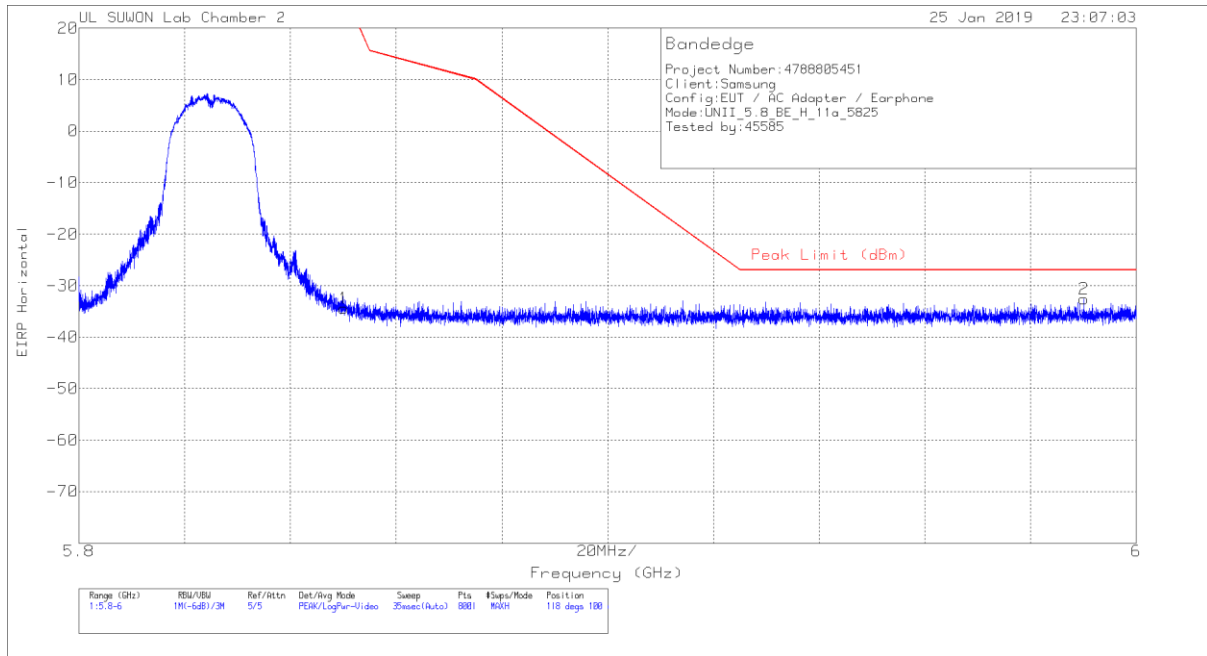


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-65.16	Pk	34.5	-15.5	11.8	0	-34.36	26.94	-61.3	118	100	H
2	5.99	-63.83	Pk	34.8	-15.4	11.8	0	-32.63	-27	-5.63	118	100	H

Pk - Peak detector

VERTICAL PEAK PLOT

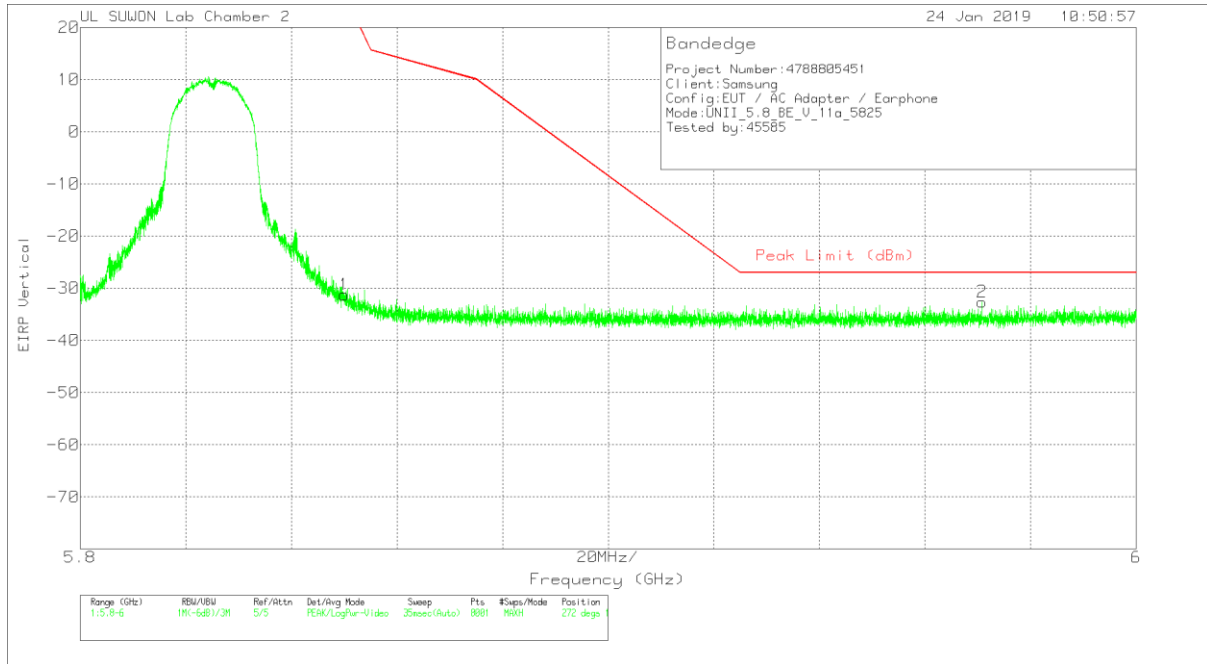

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-62.04	Pk	34.5	-15.5	11.8	0	-31.24	26.94	-58.18	272	154	V
2	5.971	-63.72	Pk	34.7	-15.4	11.8	0	-32.62	-27	-5.62	272	154	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

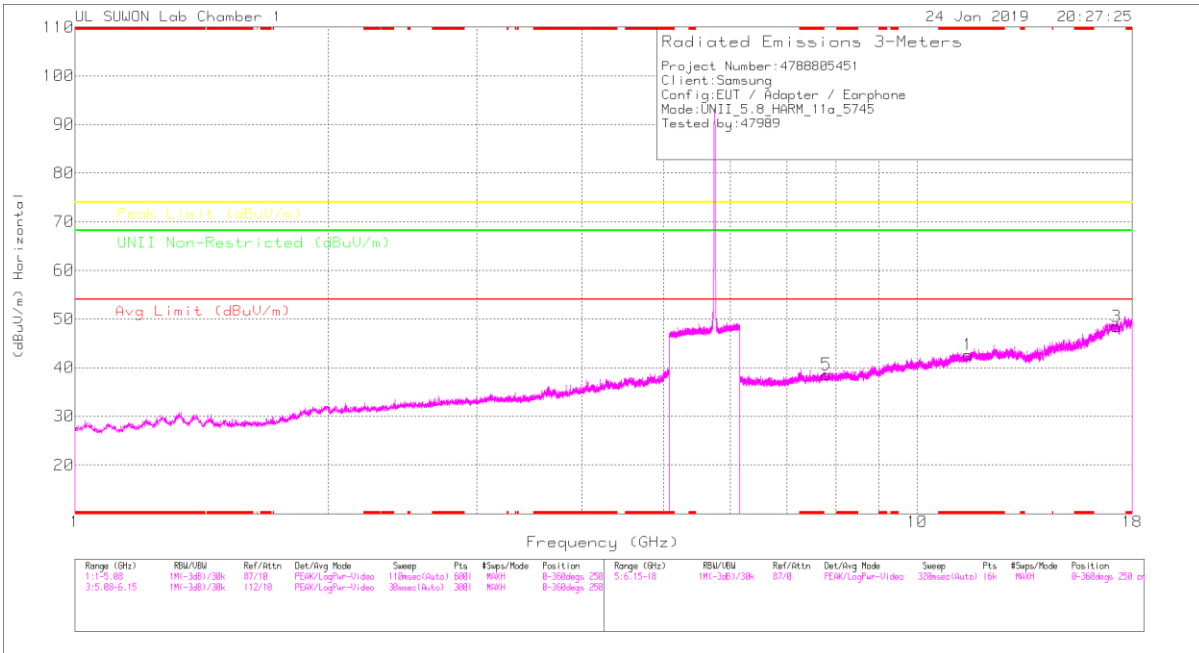

LOW CHANNEL VERTICAL

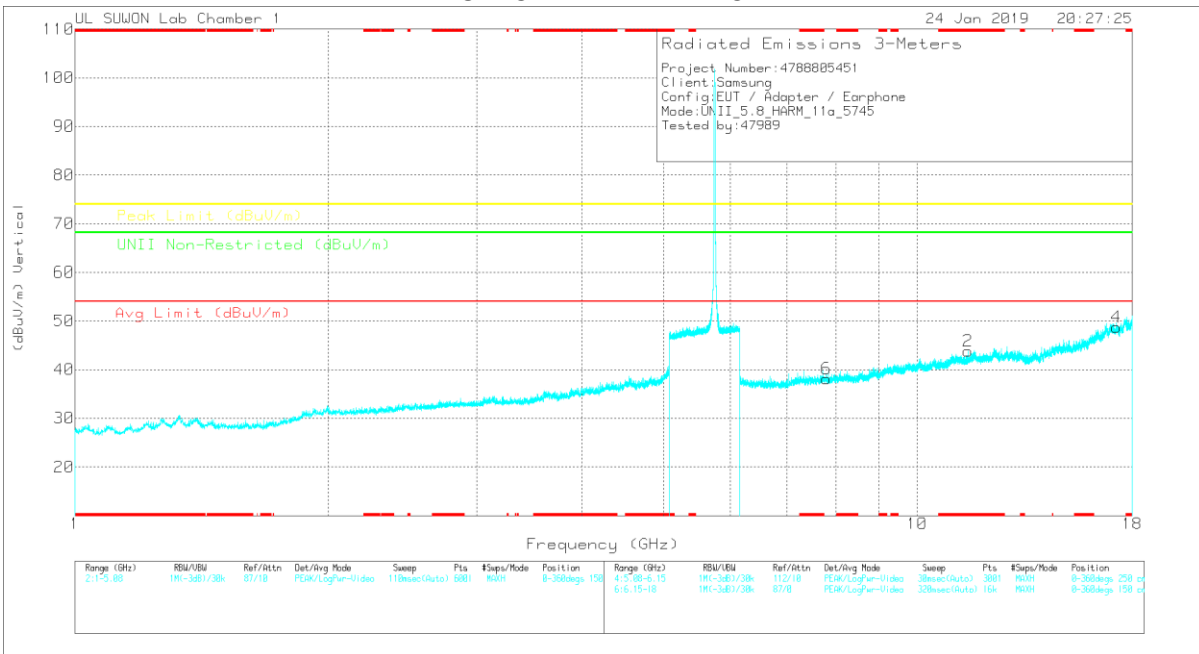

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	3117_00168717	60Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*11.487	26.46	PK	38.5	-22.3	0	42.66	-	-	74	-31.34	-	-	0-360	150	H
3	17.235	23.87	PK	41.3	-16.7	0	48.47	-	-	-	-	68.2	-19.73	0-360	250	H
5	7.803	29.18	PK	35.9	-26.5	0	38.58	-	-	-	-	68.2	-29.62	0-360	150	H
2	*11.489	27.59	PK	38.5	-22.3	0	43.79	-	-	74	-30.21	-	-	0-360	250	V
4	17.234	24.26	PK	41.3	-16.8	0	48.76	-	-	-	-	68.2	-19.44	0-360	250	V
6	7.806	28.73	PK	35.9	-26.5	0	38.13	-	-	-	-	68.2	-30.07	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

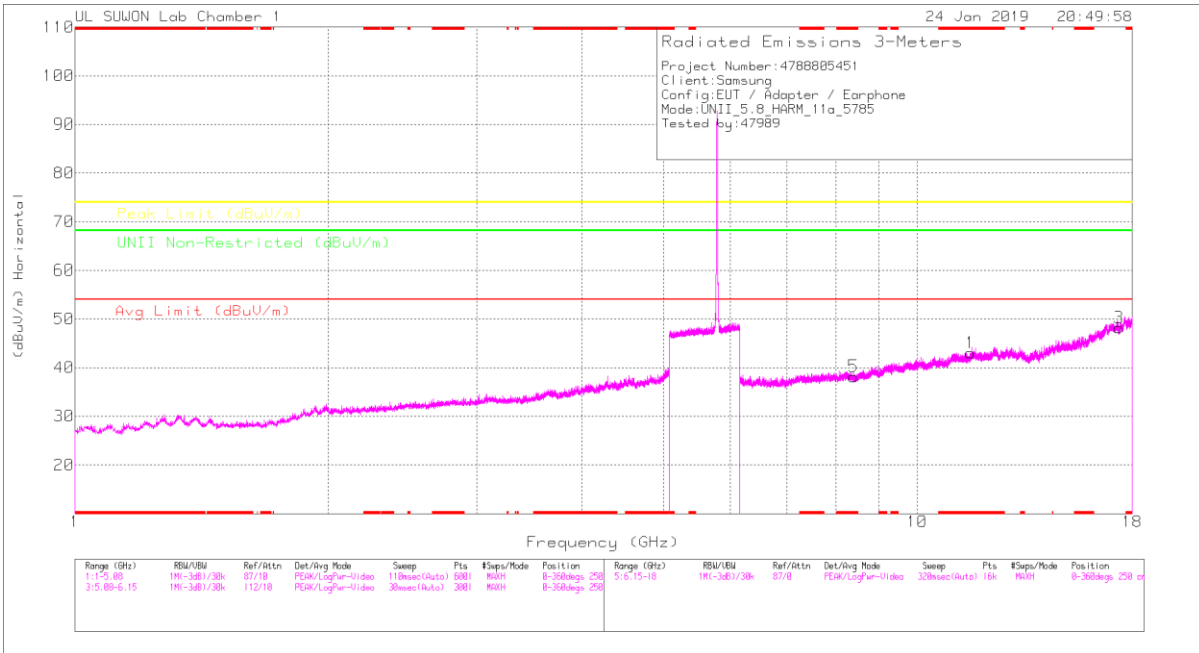

MID CHANNEL VERTICAL

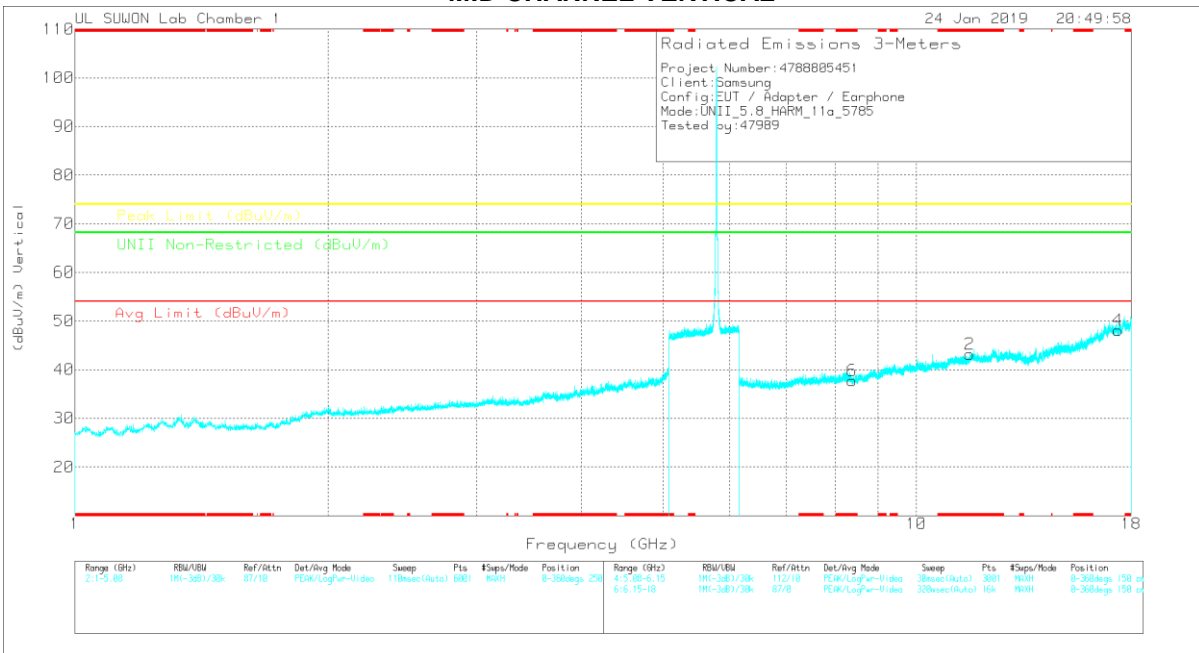

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Marker Reading (dBuV)	Det	3117_00188717	66Hz_HR(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*11.568	27	PK	38.6	-22.5	0	43.1	-	-	74	-30.9	-	-	0-360	150	H
3	17.35	24.51	PK	41.2	-17.5	0	48.21	-	-	-	-	68.2	-19.99	0-360	250	H
5	*8.395	27.69	PK	36.3	-25.8	0	38.19	-	-	74	-35.81	-	-	0-360	250	H
2	*11.566	27.08	PK	38.6	-22.5	0	43.18	-	-	74	-30.82	-	-	0-360	150	V
4	17.356	24.45	PK	41.2	-17.6	0	48.05	-	-	-	-	68.2	-20.15	0-360	250	V
6	*8.39	27.09	PK	36.3	-25.7	0	37.69	-	-	74	-36.31	-	-	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

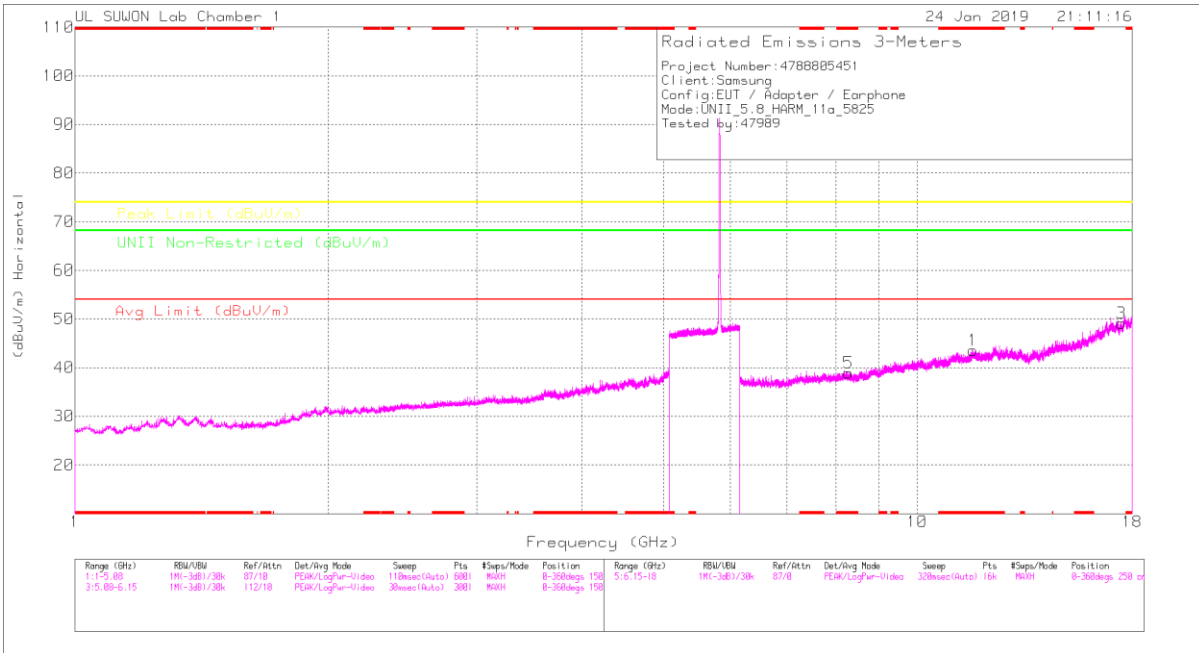

HIGH CHANNEL VERTICAL

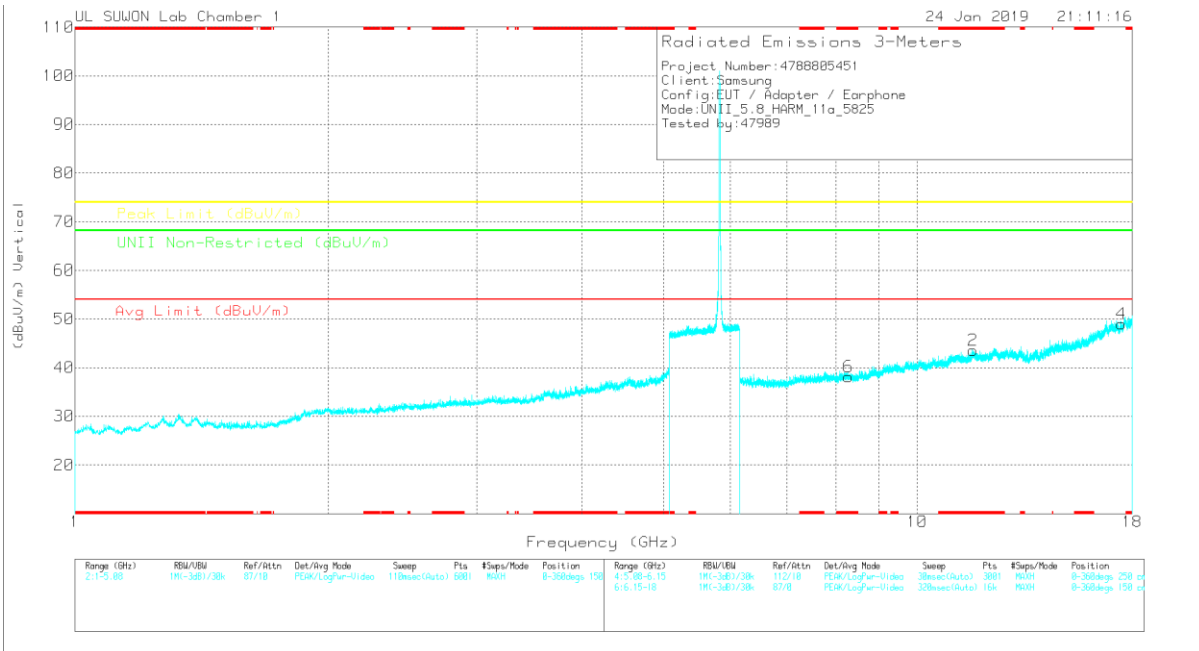

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	3117_00168717	GM1_H1(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*11.643	26.62	PK	38.7	-21.7	0	43.62	-	-	74	-30.38	-	-	0-360	150	H
3	17.482	24.48	PK	41.2	-16.6	0	49.08	-	-	-	-	68.2	-19.12	0-360	150	H
5	* 8.289	27.83	PK	36.4	-25.3	0	38.93	-	-	74	-35.07	-	-	0-360	250	H
2	*11.646	26.53	PK	38.7	-21.7	0	43.53	-	-	74	-30.47	-	-	0-360	250	V
4	17.476	24.27	PK	41.2	-16.5	0	48.97	-	-	-	-	68.2	-19.23	0-360	250	V
6	* 8.29	27.08	PK	36.4	-25.4	0	38.08	-	-	74	-35.92	-	-	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.4.2.TX ABOVE 1GHz 802.11n HT20 MODE IN THE 5.8GHz BAND BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK PLOT

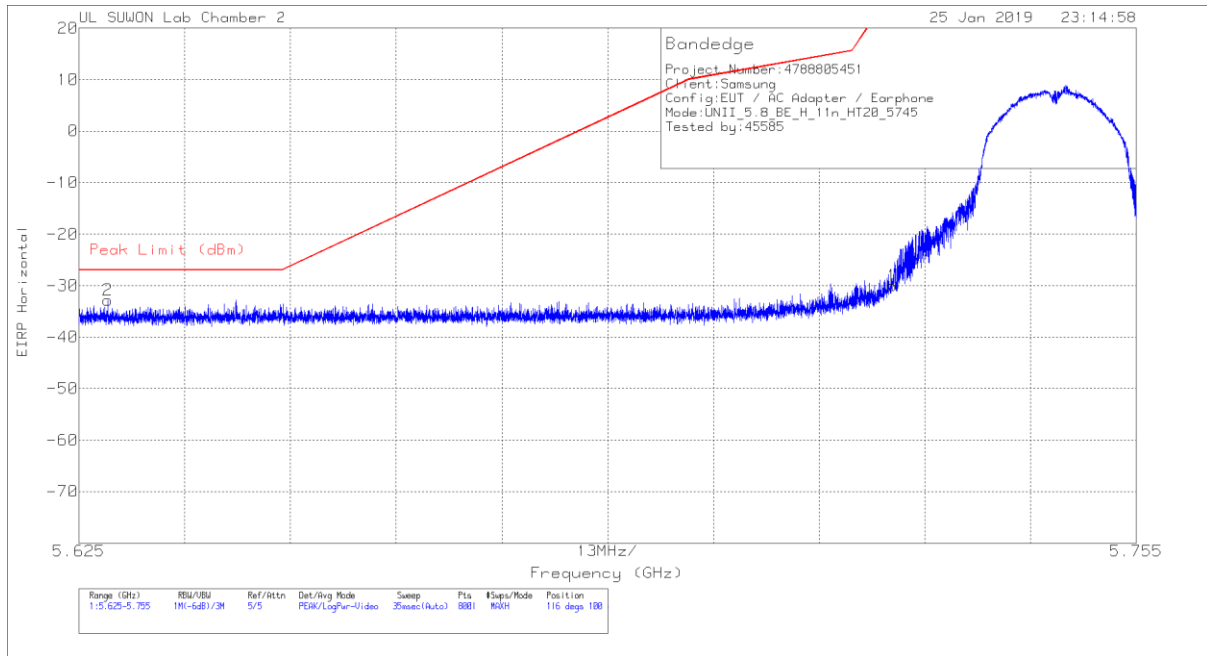


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	1705311_00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-60.74	Pk	34.5	-15.6	11.8	0	-30.04	26.97	-57.01	116	100	H
2	5.629	-63.27	Pk	34.4	-15.7	11.8	0	-32.77	-27	-5.77	116	100	H

Pk - Peak detector

VERTICAL PEAK PLOT

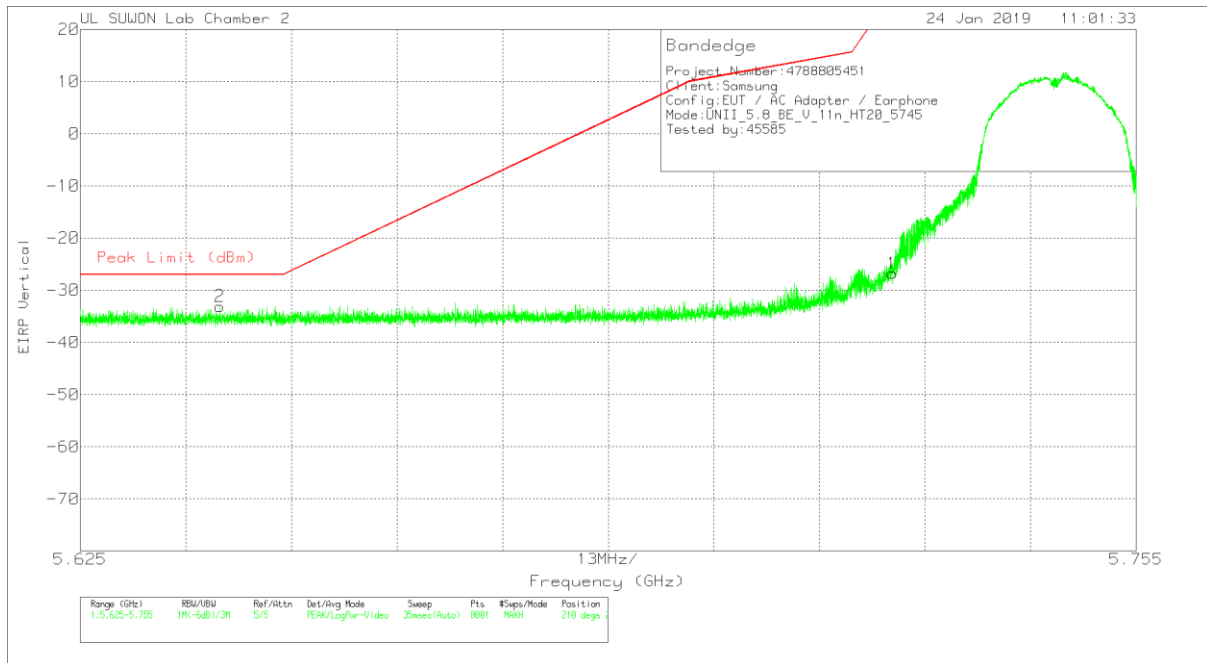

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	-57.46	Pk	34.5	-15.6	11.8	0	-26.76	26.97	-53.73	210	205	V
2	5.642	-63.6	Pk	34.4	-15.7	11.8	0	-33.1	-27	-6.1	210	205	V

Pk - Peak detector

BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

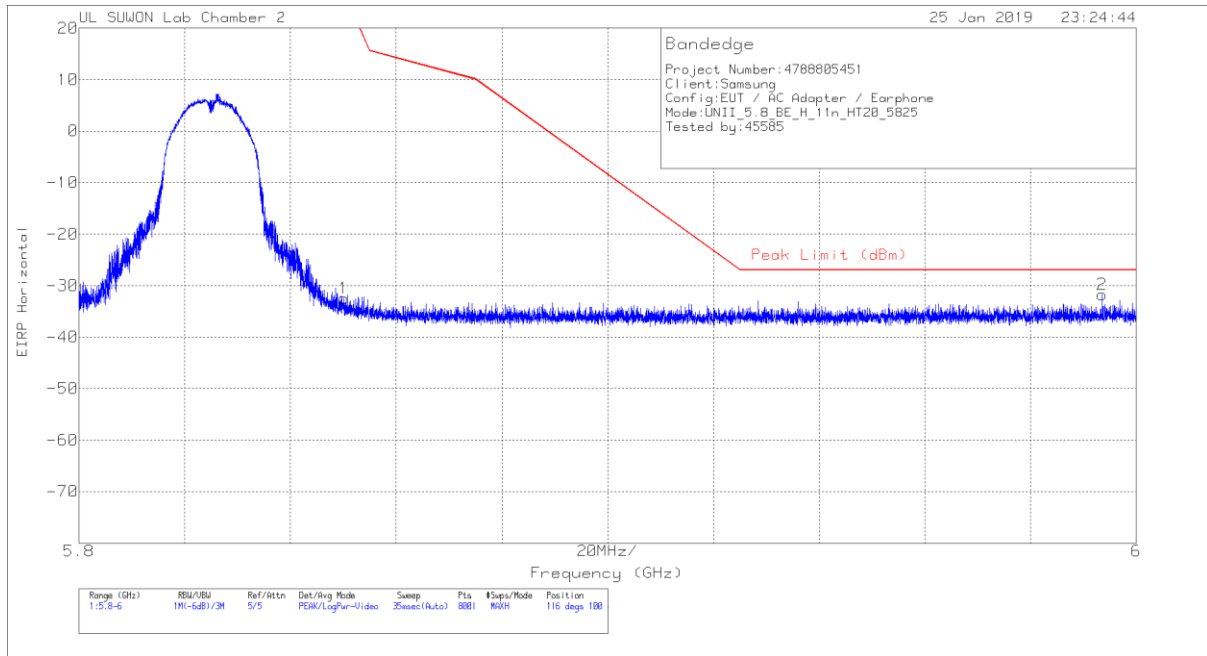


HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-63.28	Pk	34.5	-15.5	11.8	0	-32.48	26.94	-59.42	116	100	H
2	5.994	-62.9	Pk	34.8	-15.4	11.8	0	-31.7	-27	-4.7	116	100	H

Pk - Peak detector

VERTICAL PEAK PLOT

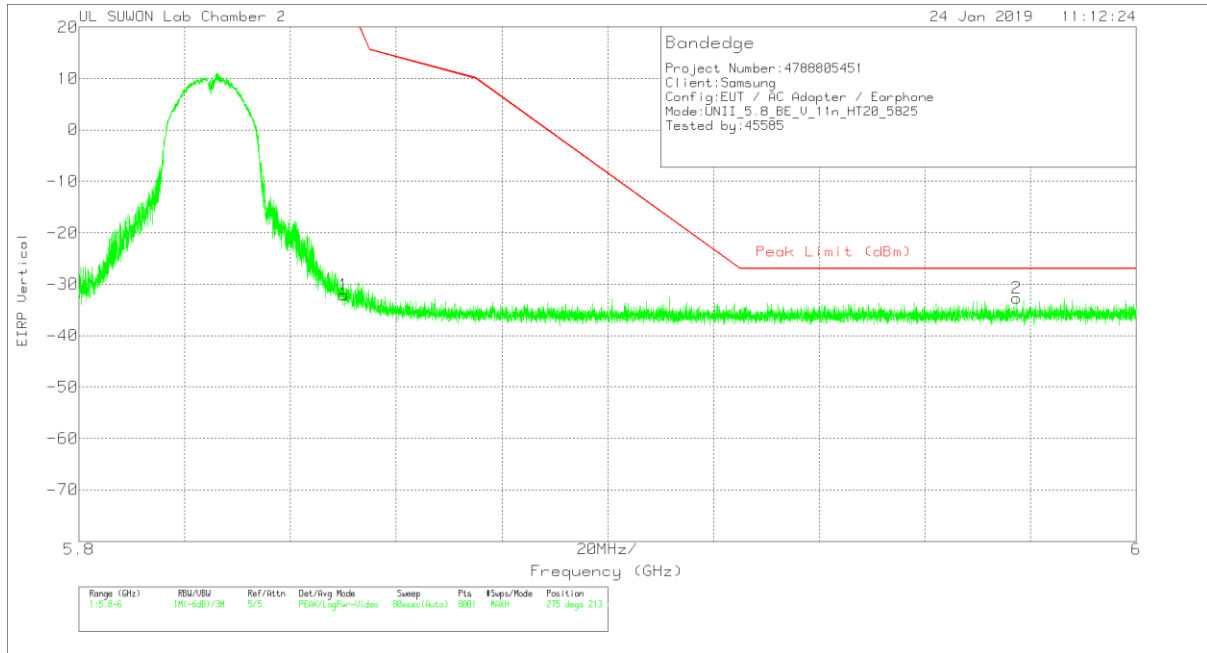

VERTICAL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	170531_3117[00 168724]	Path_2_10dB	Conversion Factor (dB)	DC Corr (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.85	-62.86	Pk	34.5	-15.5	11.8	0	-32.06	26.94	-59	275	213	V
2	5.977	-63.77	Pk	34.7	-15.4	11.8	0	-32.67	-27	-5.67	275	213	V


Pk - Peak detector
 Radiated Emissions

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

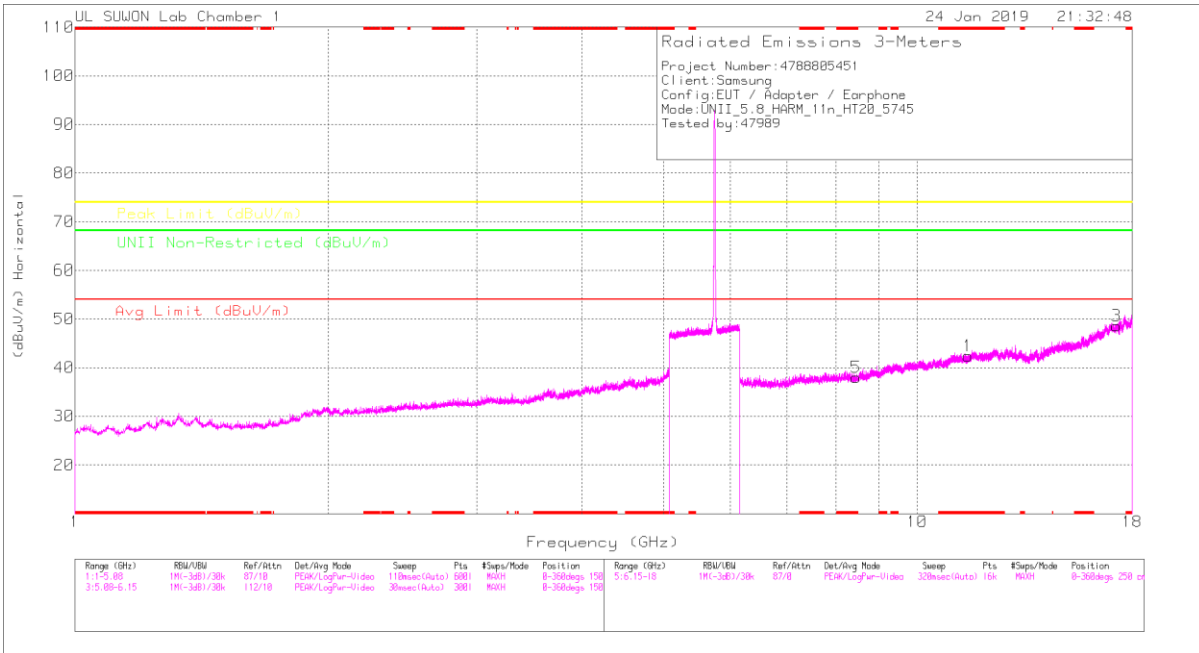

LOW CHANNEL VERTICAL

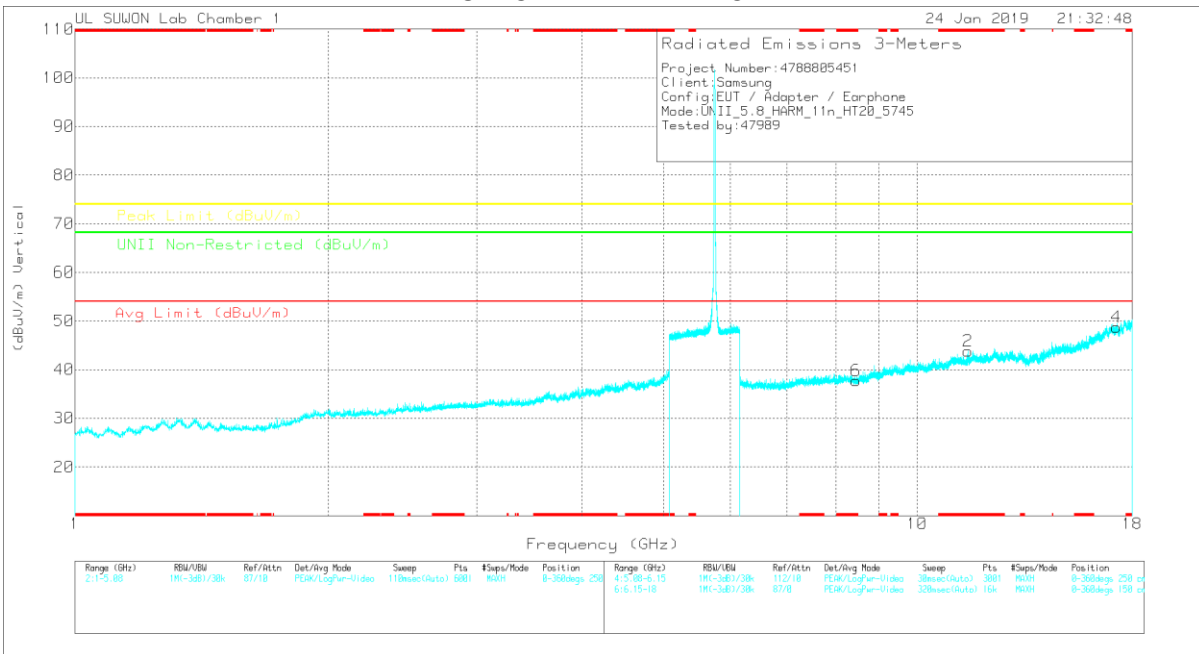

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meas Reading (dBuV)	Det	3117_00168717	GM1_H1(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Limit Non-Restricted (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*11.489	26.19	PK	38.5	-22.3	0	42.39	-	-	74	-31.61	-	-	0-360	150	H
3	17.234	24.16	PK	41.3	-16.8	0	48.66	-	-	-	-	68.2	-19.54	0-360	150	H
5	*8.455	27.47	PK	36.3	-25.8	0	37.97	-	-	74	-36.03	-	-	0-360	150	H
2	*11.49	27.65	PK	38.5	-22.3	0	43.85	-	-	74	-30.15	-	-	0-360	150	V
4	17.233	24.27	PK	41.3	-16.8	0	48.77	-	-	-	-	68.2	-19.43	0-360	150	V
6	*8.458	27.21	PK	36.3	-25.8	0	37.71	-	-	74	-36.29	-	-	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).