






TEST REPORT

<p>KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p>Report No.: KR19-SRF0177 Page (1) of (75)</p>	
<p>1. Client</p>		
<p>◦ Name : Samsung Electronics Co., Ltd. ◦ Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea ◦ Date of Receipt : 2019-10-25</p>		
<p>2. Use of Report : -</p>		
<p>3. Name of Product and Model : Mobile phone / SM-A515F/DS</p>		
<p>4. Manufacturer and Country of Origin : SAMSUNG ELECTRONICS VIETNAM CO.,LTD. / Vietnam</p>		
<p>5. FCC ID : A3LSMA515F</p>		
<p>6. Date of Test : 2019-11-11 to 2019-11-27</p>		
<p>7. Test Standards : FCC Part 2 FCC Part 22 Subpart H FCC Part 24 Subpart E FCC Part 27 Subpart L</p>		
<p>8. Test Results : Refer to the test result in the test report</p>		
<p>Affirmation</p>	<p>Tested by Name : Euijung Kim  (Signature)</p>	<p>Technical Manager Name : Jaehyong Lee  (Signature)</p>
<p style="text-align: right;">2019-11-28</p>		
<p style="text-align: center;">KCTL Inc.</p>		
<p>As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.</p>		

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0177

Page (2) of (75)

**Report revision history**

Date	Revision	Page No
2019-11-28	Initial report	-

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.



CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Accessory information	6
2.2.	Information about derivative model	6
2.3.	Frequency/channel operations.....	6
3.	Maximum ERP/EIRP power.....	7
4.	Summary of tests.....	8
5.	Measurement uncertainty	9
6.	Measurement results explanation example	10
7.	Test results	11
7.1.	Conducted output power.....	11
7.2.	99% Occupied Bandwidth & 26dB Bandwidth	14
7.3.	Spurious Emissions at Antenna Terminal.....	27
7.4.	Band Edge Emissions at Antenna Terminal	33
7.5.	Peak to Average Power Ratio (PAPR)	38
7.6.	Frequency stability	42
7.7.	Radiated Power (ERP/EIRP)	49
7.8.	Radiated Spurious Emissions.....	54
8.	Measurement equipment	75

1. General information

Client : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677,
Rep. of Korea
Manufacturer : SAMSUNG ELECTRONICS VIETNAM CO.,LTD.
Address : Kcn Yen Binh1, huyen pho Yen Tinh Thai Nguyen Vietnam
Laboratory : KCTL Inc.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
Industry Canada Registration No. : 8035A
KOLAS No.: KT231

2. Device information

Equipment under test : Mobile Phone
Model : SM-A515F/DS
Derivative model : SM-A515F
Modulation technique : Bluetooth(BDR/EDR)_ GFSK, $\pi/4$ DQPSK, 8DPSK
Bluetooth(BLE), ANT+_GFSK
WIFI(802.11b/g/n20/n40/ac20/ac40/ac80)_DSSS, OFDM
LTE_QPSK, 16QAM
WCDMA_QPSK
GSM_GMSK, 8-PSK
Number of channels : Bluetooth(BDR/EDR), ANT+_79ch / Bluetooth(BLE)_40ch
11 ch: 802.11b/g/n_HT20
UNII-1: 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
UNII-2A: 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
UNII-2C: 12 ch (20 MHz), 6 ch (40 MHz), 3 ch (80 MHz)
UNII-3: 5 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
Power source : DC 3.85 V
Antenna specification : LTE/WCDMA_FPCB Antenna
WIFI/Bluetooth(BDR/EDR/BLE)_FPCB Antenna
Antenna gain : WIFI/Bluetooth(BDR/EDR/BLE) : -4.70 dBi
UNII-1 -4.10 dBi
UNII-2A -4.74 dBi
UNII-2C -3.92 dBi
UNII-3 -4.40 dBi

Frequency range	: Bluetooth(BDR/EDR/BLE), ANT+_2 402 MHz ~ 2 480 MHz 2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20) UNII-1: 5 180 MHz ~ 5 240 MHz (802.11a/n_HT20/ac_VHT20) UNII-1: 5 190 MHz ~ 5 230 MHz (802.11n_HT40/ac_VHT40) UNII-1: 5 210 MHz (802.11ac_VHT80) UNII-2A: 5 260 MHz ~ 5 320 MHz (802.11a/n_HT20/ac_VHT20) UNII-2A: 5 270 MHz ~ 5 310 MHz (802.11n_HT40/ac_VHT40) UNII-2A: 5 290 MHz (802.11ac_VHT80) UNII-2C: 5 500 MHz ~ 5 720 MHz (802.11a/n_HT20/ac_VHT20) UNII-2C: 5 510 MHz ~ 5 710 MHz (802.11n_HT40/ac_VHT40) UNII-2C: 5 530 MHz ~ 5 690 MHz (802.11ac_VHT80) UNII-3: 5 745 MHz ~ 5 825 MHz (802.11a/n_HT20/ac_VHT20) UNII-3: 5 755 MHz ~ 5 795 MHz (802.11n_HT40/ac_VHT40) UNII-3: 5 775 MHz (802.11ac_VHT80) LTE Band 2_1 850.7 MHz ~ 1 909.3 MHz LTE Band 4_1 710.7 MHz ~ 1 754.3 MHz LTE Band 5_824.7 MHz ~ 848.3 MHz LTE Band 12_699.7 MHz ~ 715.3 MHz LTE Band 13_779.5 MHz ~ 784.5 MHz LTE Band 17_706.5 MHz ~ 713.5 MHz LTE Band 26_824.7 MHz ~ 848.3 MHz, 814.7 MHz ~ 823.3 MHz LTE Band 41_2 498.5 MHz ~ 2 687.5 MHz LTE Band 66_1 710.7 MHz ~ 1 779.3 MHz GSM 850_824.2 MHz ~ 848.8 MHz GSM 1900_1 850.2 MHz ~ 1 909.8 MHz WCDMA 850_826.4 MHz ~ 846.6 MHz WCDMA 1700_1 712.4 MHz ~ 1 752.6 MHz WCDMA 1910_1 852.4 MHz ~ 1 907.6 MHz
Software version	: A515F.001
Hardware version	: REV0.1
Test device serial No.	: Conducted(cecbed2e6a3f7e34) Radiated(R38MA05XG0M, R38MA05WHQF)
Operation temperature	: -30 °C ~ 50 °C

2.1. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
Earphone	Samsung Electronics Co., Ltd.	EHS61ASFBE	-	-
Travel Adapter	Samsung Electronics Co., Ltd.	EP-TA200	R37M6LAKG31DK3	AC 100-240V 50-60 Hz, 9.0V-1.67A 5.0V-2.0A
Micro USB Data Cable	Samsung Electronics Co., Ltd.	-	-	-

2.2. Information about derivative model

The difference between basic model and derivative models is:

SM-A515F

- It does not support Dual-Sim card, support Single-Sim card and changed from Dual SIM tray to single SIM tray.

2.3. Frequency/channel operations

This device contains the following capabilities:

WIFI(2.4GHz band 802.11b/g/n(HT20), 5GHz band 802.11a/n(HT20/HT40)/ac(VHT/20/40/80)),

Bluetooth(BDR/EDR/BLE), ANT+

LTE Band 2, LTE Band 4, LTE Band 5, LTE Band 12, LTE Band 13, LTE Band 17, LTE Band 26, LTE Band41, WCDMA 850, WCDMA 1700, WCDMA 1900, GSM 850, GSM 1900

GSM 850

Ch.	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Table 2.3.1.
GPRS/EDGE

GSM 1900

Ch.	Frequency (MHz)
512	1 850.2
661	1 880.0
810	1 909.8

Table 2.3.2.
GPRS/EDGE

WCDMA 850

Ch.	Frequency (MHz)
4132	826.4
4183	836.6
4233	846.6

Table 2.3.3.
RMC / HSDPA
HSUPA / DC-HSDPA

WCDMA 1700

Ch.	Frequency (MHz)
1312	1 712.4
1412	1 732.4
1513	1 752.6

Table 2.3.4.
RMC / HSDPA
HSUPA / DC-HSDPA

WCDMA 1900

Ch.	Frequency (MHz)
9262	1 852.4
9400	1 880.0
9538	1 907.6

Table 2.3.5.
RMC / HSDPA
HSUPA / DC-HSDPA

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0177

Page (7) of (75)

KCTL**3. Maximum ERP/EIRP power****GSM 850 / WCDMA 850**

Mode	Tx frequency (MHz)	Emission designator	ERP	
			Max. power (dBm)	Max. power (W)
GSM 850 (GPRS)	824.2 ~ 848.8	234KGXW	26.30	0.427
GSM 850 (EDGE)	824.2 ~ 848.8	232KG7W	26.00	0.398
WCDMA 850 (RMC)	826.4 ~ 846.6	4M17F9W	19.44	0.088

GSM 1900 / WCDMA 1700 / WCDMA 1900

Mode	Tx frequency (MHz)	Emission designator	EIRP	
			Max. power (dBm)	Max. power (W)
GSM 1900 (GPRS)	1 850.2 ~ 1 909.8	234KGXW	28.05	0.638
GSM 1900 (EDGE)	1 850.2 ~ 1 909.8	232KG7W	28.09	0.644
WCDMA 1700 (RMC)	1 712.4 ~ 1 752.6	4M15F9W	18.96	0.079
WCDMA 1900 (RMC)	1 852.4 ~ 1 907.6	4M20F9W	20.85	0.122

KCTL

4. Summary of tests

FCC Part Section(s)	Parameter	Test Limit	Test Condition	Test results
2.1046 22.913(a)(5) 24.232(c) 27.50(d)(4)	Conducted Output Power	N/A	Conducted	Pass
2.1049	Occupied Bandwidth & 26 dB Bandwidth	N/A		Pass
2.1051 22.917(a) 24.238(a) 27.53(h)	Band Edge Emissions at Antenna Terminal	>43 + 10Log ₁₀ (P) dB at Band Edge and for all out-of-band emissions		Pass
	Spurious Emissions at Antenna Terminal			Pass
24.232(d) 27.50(d)(5)	Peak to Average Power Ratio	< 13 dB		Pass
2.1055 22.355 24.235 27.54	Frequency stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)		Pass
22.913(a)(5)	Effective Radiated Power	< 7 Watts max. ERP (Part 22)	Radiated	Pass
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP (Part 24)		Pass
27.50(d)(4)		< 1 Watts max. EIRP (Part 27)		Pass
2.1053 22.917(a) 24.238(a) 27.53(h)	Radiated Spurious Emissions	>43 + 10Log ₁₀ (P) dB for all out-of-band emissions		Pass

Notes:

- All modes of operation were investigated and the worst case emissions are reported with the EUT positioning, modulations and paging service configurations in the test data.
- The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that Z orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Z orientation
- All final radiated testing was performed with the EUT in worst case orientation.
- Per evaluation report, all of the data contained herein is re-used from the reference FCC ID : A3LSMA515FN
- The test procedure(s) in this report were performed in accordance as following.
 - ◆ ANSI C63.26-2015
 - ◆ ANSI/TIA-603-E-2016
 - ◆ KDB 971168 D01 v03r01

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0177

Page (9) of (75)

KCTL**5. Measurement uncertainty**

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty (\pm)	
Conducted RF power	1.76 dB	
Conducted spurious emissions	4.03 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz	2.28 dB
	30 MHz ~ 1 GHz	3.68 dB
	Above 1 GHz	5.72 dB

KCTL

6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	16.06	11 000	18.29
50	16.14	12 000	18.60
100	16.17	13 000	18.67
200	16.27	14 000	19.16
300	16.27	15 000	19.25
400	16.30	16 000	19.33
500	16.37	17 000	19.58
600	16.46	18 000	19.65
700	16.46	19 000	20.10
800	16.55	20 000	20.11
900	16.58	21 000	20.28
1 000	16.61	22 000	20.36
2 000	16.93	23 000	20.37
3 000	17.18	24 000	20.51
4 000	17.34	25 000	20.64
5 000	17.59	26 000	20.68
6 000	17.75	26 500	20.72
7 000	17.99	27 000	20.94
8 000	18.18	28 000	21.00
9 000	18.23	29 000	21.68
10 000	18.26	30 000	21.79


Note.

Offset(dB) = RF cable loss(dB) + Divider (dB) + Attenuator(dB)

7. Test results

7.1. Conducted output power

Test setup



Test procedure

971168 D01 v03r01 – Section 5.2
ANSI C63.26-2015 – Section 5.2.4.2
CFR 47, - Section §2.1046

Test settings

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurement be performed only over durations of active transmissions at maximum output power level applies. Thus, an average power meter can always be used to perform the measurement when the EUT can be configured to transmit continuously.

If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle < 98%), then the following options can be implemented to facilitate measurement of the average power with an average power meter:

- a) A gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only during active transmission bursts at maximum output power levels.
- b) A conventional average power meter with no signal gating capability can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than or equal to $\pm 2\%$) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to $[10\log(1/\text{duty cycle})]$. See 5.2.4.3.4 for guidance with respect to measuring the transmitter duty cycle.

See item r) of 4.1 for more information regarding power meter functional requirements and limitations, and consult the instrumentation-specific application literature for proper set-up and use.

Notes:

1. HSPA+

Since 16QAM is not used for uplink, the uplink category and release is same as HSUPA.
Therefore, the RF conducted power is not measured.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0177

Page (12) of (75)

**Test results**

Maximum Burst-Average Output Power (dBm)										
Test Band	Channel	GSM	GPRS				EDGE			
		Voice	1Tx	2Tx	3Tx	4Tx	1Tx	2Tx	3Tx	4Tx
GSM850	Low	32.36	32.48	29.50	28.30	28.26	26.40	24.59	23.18	22.01
	Middle	32.84	32.98	30.00	28.85	28.38	26.34	24.52	23.03	21.97
	High	33.36	33.39	31.36	30.10	28.97	26.02	24.42	22.87	21.69
GSM1900	Low	29.49	29.84	26.80	25.16	23.50	25.00	23.43	21.97	20.60
	Middle	29.26	29.20	26.62	25.81	23.50	25.23	23.46	21.94	20.61
	High	29.00	29.10	26.50	25.38	23.51	25.26	23.64	22.11	20.66



KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR19-SRF0177


Page (13) of (75)



Test Band	Test mode	Average Conducted Power (dBm)			3GPP MPR (dB)
		Frequency (MHz)			
		Low	Middle	High	
WCDMA 850	RMC	24.97	24.95	24.61	-
	HSDPA-Subtest 1	23.73	23.74	23.41	0
	HSDPA-Subtest 2	22.53	22.69	22.54	0
	HSDPA-Subtest 3	21.61	21.57	21.56	0.5
	HSDPA-Subtest 4	21.58	21.58	21.52	0.5
	HSUPA-Subtest 1	20.75	20.71	20.64	0
	HSUPA-Subtest 2	18.69	18.66	18.66	2
	HSUPA-Subtest 3	19.82	19.88	19.68	1
	HSUPA-Subtest 4	18.82	18.79	18.63	2
	HSUPA-Subtest 5	21.83	21.84	21.45	0
	DC-HSDPA-Subtest 1	23.27	23.23	23.50	0
	DC-HSDPA-Subtest 2	22.83	22.84	22.54	0
	DC-HSDPA-Subtest 3	21.58	21.62	21.51	0.5
	DC-HSDPA-Subtest 4	21.54	21.54	21.56	0.5
WCDMA 1700	RMC	22.75	22.83	22.58	-
	HSDPA-Subtest 1	22.72	22.48	22.51	0
	HSDPA-Subtest 2	21.51	21.19	21.25	0
	HSDPA-Subtest 3	20.51	20.52	20.56	0.5
	HSDPA-Subtest 4	20.98	20.81	20.87	0.5
	HSUPA-Subtest 1	19.90	19.65	19.66	0
	HSUPA-Subtest 2	17.82	17.61	17.59	2
	HSUPA-Subtest 3	19.47	19.17	19.20	1
	HSUPA-Subtest 4	17.81	17.55	17.63	2
	HSUPA-Subtest 5	21.36	21.44	21.48	0
	DC-HSDPA-Subtest 1	22.41	22.45	22.36	0
	DC-HSDPA-Subtest 2	21.71	21.43	21.35	0
	DC-HSDPA-Subtest 3	20.71	20.53	20.52	0.5
	DC-HSDPA-Subtest 4	21.06	21.11	21.02	0.5
WCDMA 1900	RMC	23.53	23.25	23.16	-
	HSDPA-Subtest 1	23.46	23.22	23.06	0
	HSDPA-Subtest 2	22.71	22.59	22.22	0
	HSDPA-Subtest 3	21.63	21.50	21.56	0.5
	HSDPA-Subtest 4	21.85	21.51	21.58	0.5
	HSUPA-Subtest 1	22.02	21.78	21.65	0
	HSUPA-Subtest 2	20.17	19.82	19.60	2
	HSUPA-Subtest 3	21.19	20.93	20.75	1
	HSUPA-Subtest 4	20.17	19.86	19.61	2
	HSUPA-Subtest 5	22.98	22.69	22.50	0
	DC-HSDPA-Subtest 1	22.94	23.11	23.05	0
	DC-HSDPA-Subtest 2	22.90	22.58	22.56	0
	DC-HSDPA-Subtest 3	21.94	21.70	21.77	0.5
	DC-HSDPA-Subtest 4	21.98	21.73	21.74	0.5

7.2. 99% Occupied Bandwidth & 26dB Bandwidth

Test setup

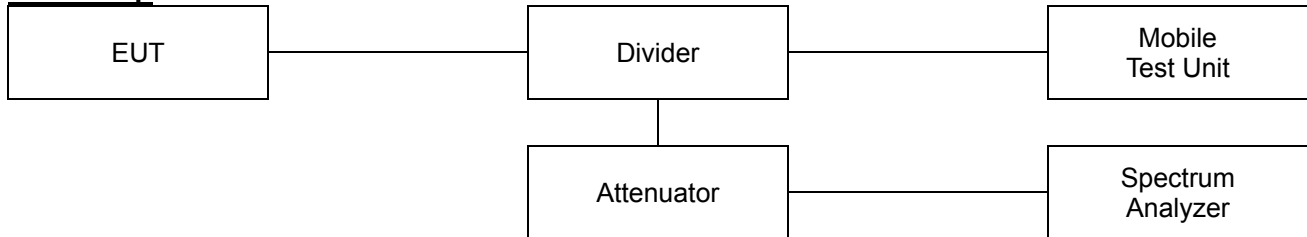

Limit

According to §2.1049, the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Test procedure

971168 D01 v03r01 – Section 4.2 and 4.3
ANSI C63.26-2015 – Section 5.4.3 and 5.4.4

Test settings

◆ 26dB Bandwidth

- c) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- d) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- e) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- f) Determine the reference value by either of the following:
 - 1) Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
 - 2) Set the EUT to transmit an unmodulated carrier. Set the spectrum analyzer marker to the level of the carrier.
- g) Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- h) If the reference value was determined using an unmodulated carrier, turn the EUT modulation on, then either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise the trace from step f) shall be used for step i).

- i) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- j) The spectral envelope can cross the “-X dB amplitude” at multiple points. The lowest or highest frequency shall be selected as the frequencies that are the farthest away from the center frequency at which the spectral envelope crosses the “-X dB amplitude.”
- k) The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

◆ 99% Occupied Bandwidth

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test results

Test mode		Frequency (MHz)	26 dB bandwidth (MHz)	99 % bandwidth (MHz)
GSM 850	GPRS	824.2	0.304	0.234
		836.6	0.298	0.232
		848.8	0.306	0.232
	EDGE	824.2	0.304	0.232
		836.6	0.306	0.232
		848.8	0.300	0.232
GSM 1900	GPRS	1 850.2	0.290	0.228
		1 880.0	0.298	0.234
		1 909.8	0.286	0.230
	EDGE	1 850.2	0.298	0.232
		1 880.0	0.302	0.230
		1 909.8	0.296	0.230
WCDMA 850	RMC	826.4	4.77	4.17
		836.6	4.77	4.15
		846.6	4.77	4.15
WCDMA 1700	RMC	1 712.4	4.74	4.15
		1 732.4	4.74	4.15
		1 752.6	4.74	4.14
WCDMA 1900	RMC	1 852.4	4.77	4.15
		1 880.0	4.77	4.17
		1 907.6	4.84	4.20

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0177

Page (17) of (75)




26dB Bandwidth

Test mode: GSM 850

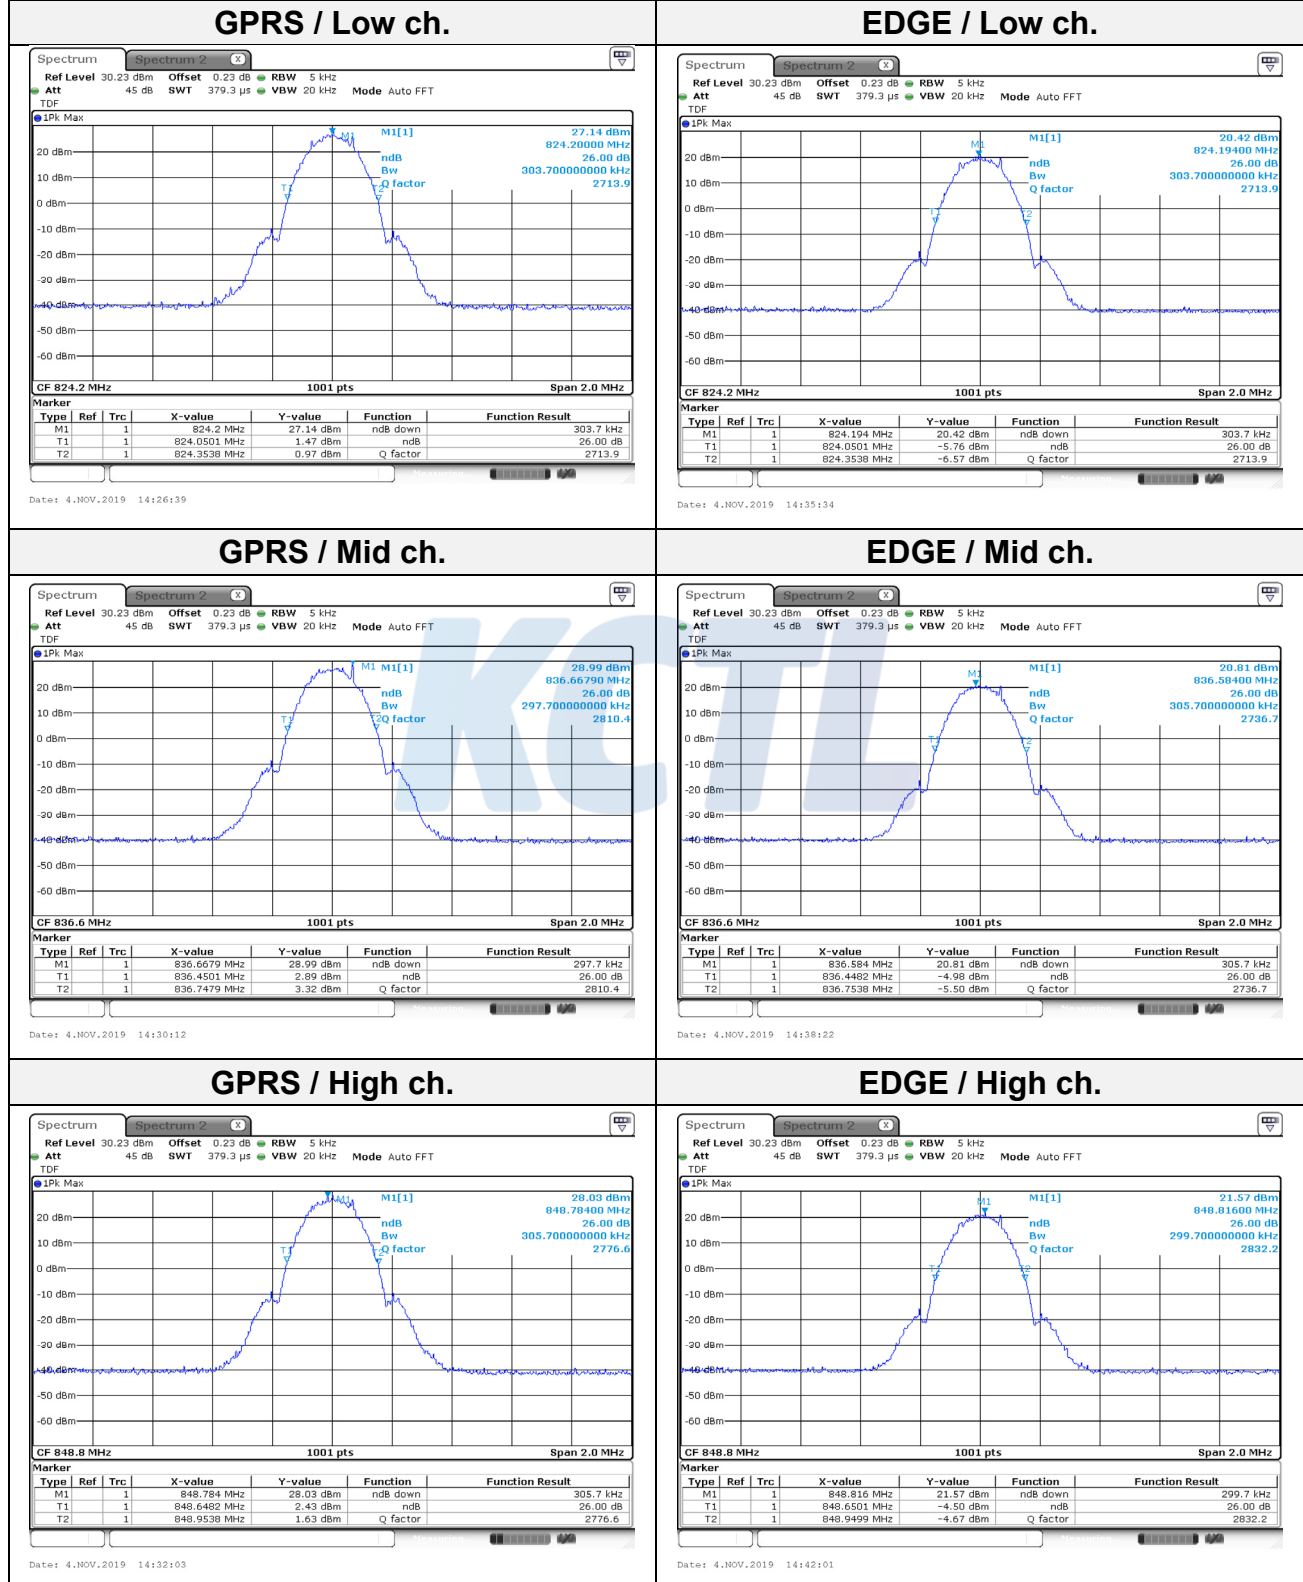


Test mode: GSM 1900

GPRS / Low ch.

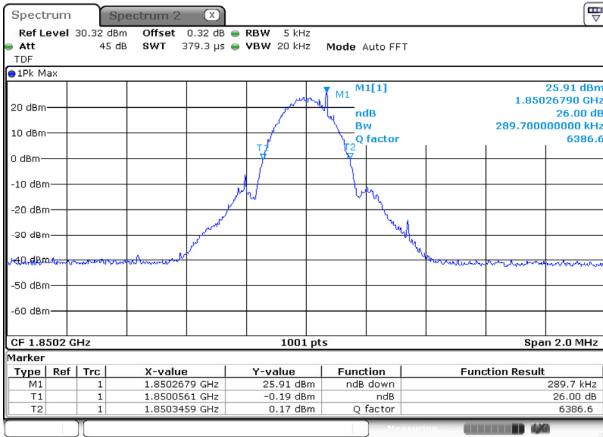


Date: 4.NOV.2019 15:15:47

EDGE / Low ch.

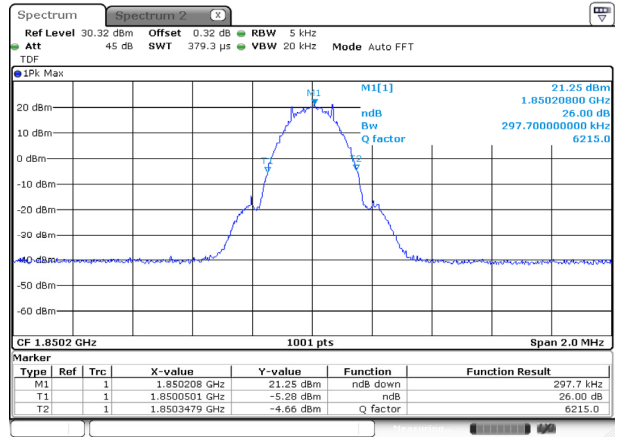


Date: 4.NOV.2019 15:23:34

GPRS / Mid ch.

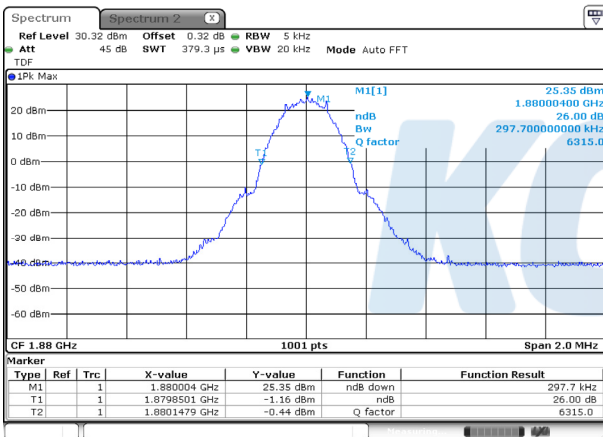


Date: 4.NOV.2019 15:18:05

EDGE / Mid ch.

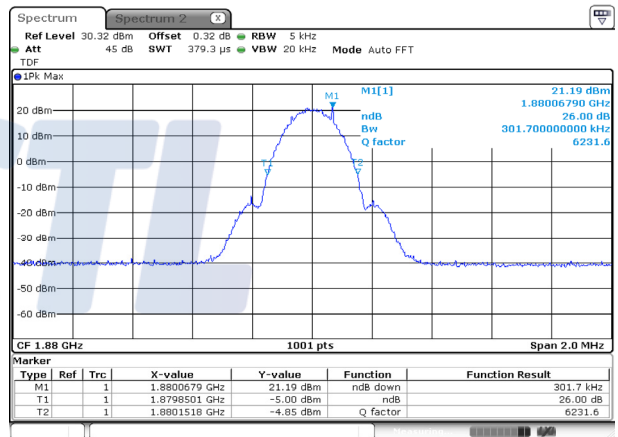


Date: 4.NOV.2019 15:26:10

GPRS / High ch.

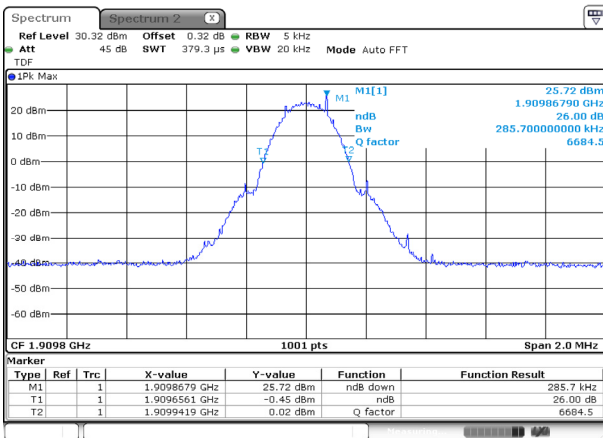

Date: 4.NOV.2019 15:19:54

EDGE / High ch.

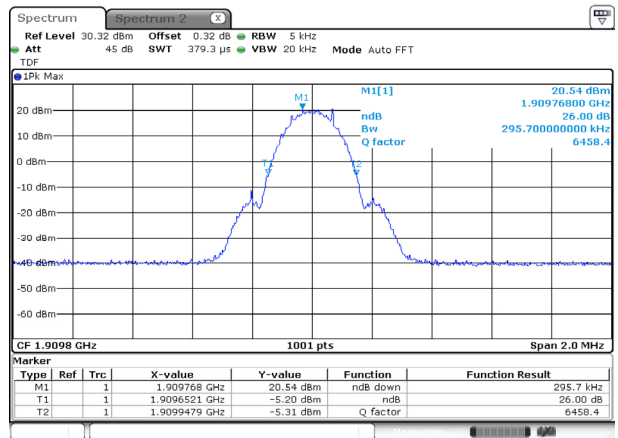

Date: 4.NOV.2019 15:30:08

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0177

Page (19) of (75)




Test mode: WCDMA 850

RMC / Low ch.

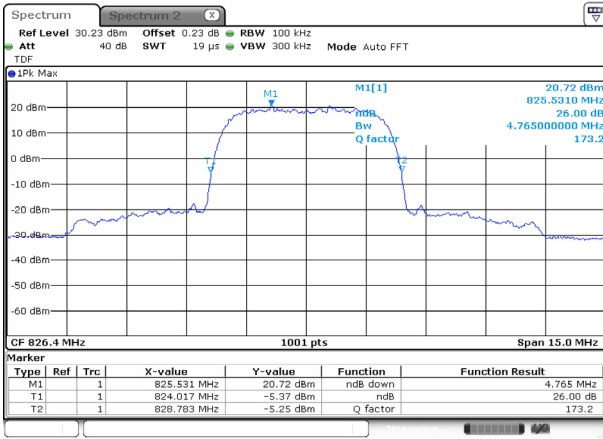


Date: 4.NOV.2019 12:06:18

RMC / Mid ch.

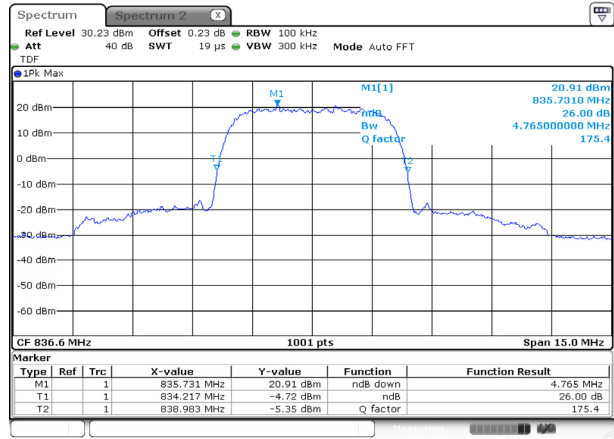

Date: 4.NOV.2019 12:12:34

RMC / High ch.

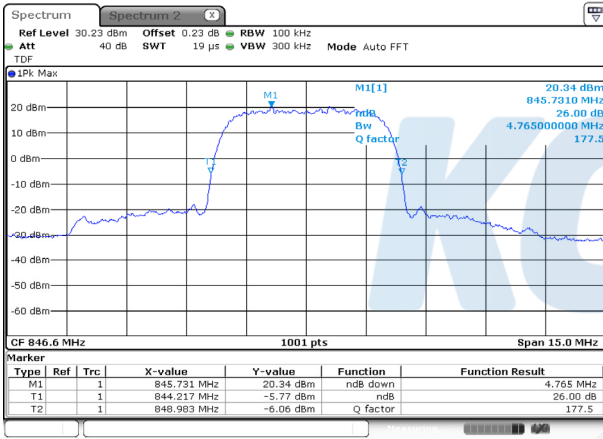

Date: 4.NOV.2019 12:14:05

Blank

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0177

Page (20) of (75)




Test mode: WCDMA 1700


RMC / Low ch.

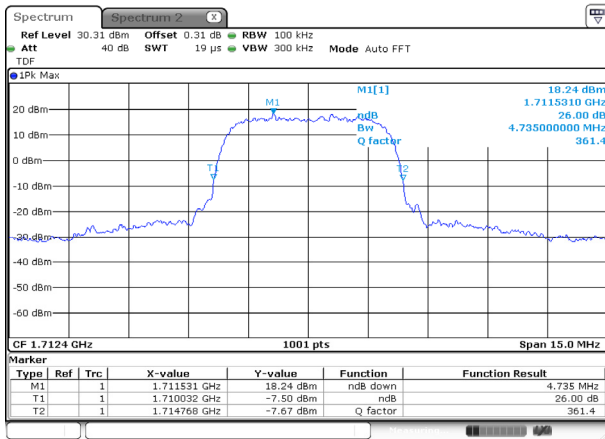

RMC / Mid ch.

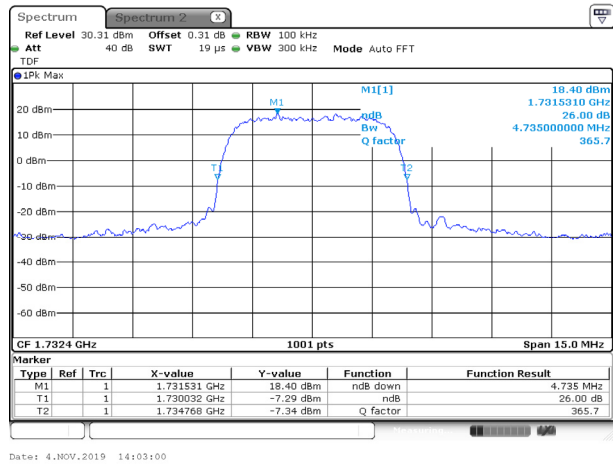

RMC / High ch.

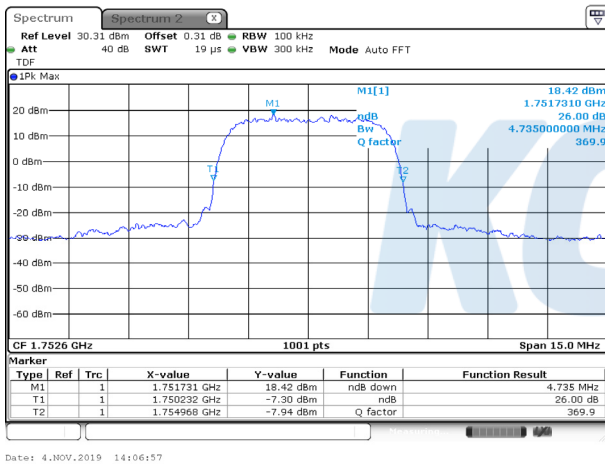

Blank

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0177

Page (21) of (75)




Test mode: WCDMA 1900


RMC / Low ch.

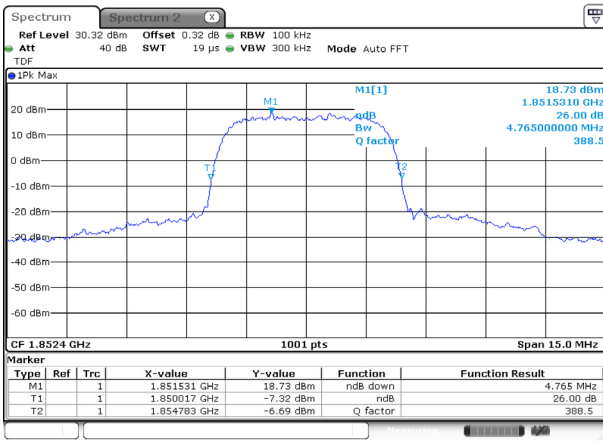

RMC / Mid ch.

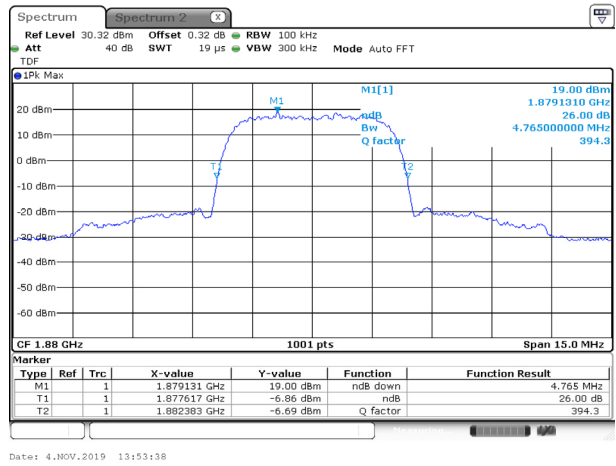


RMC / High ch.

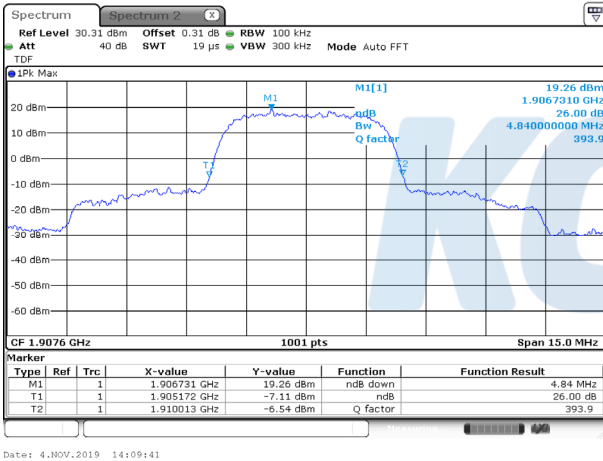

Blank


99% Occupied Bandwidth

Test mode: GSM 850

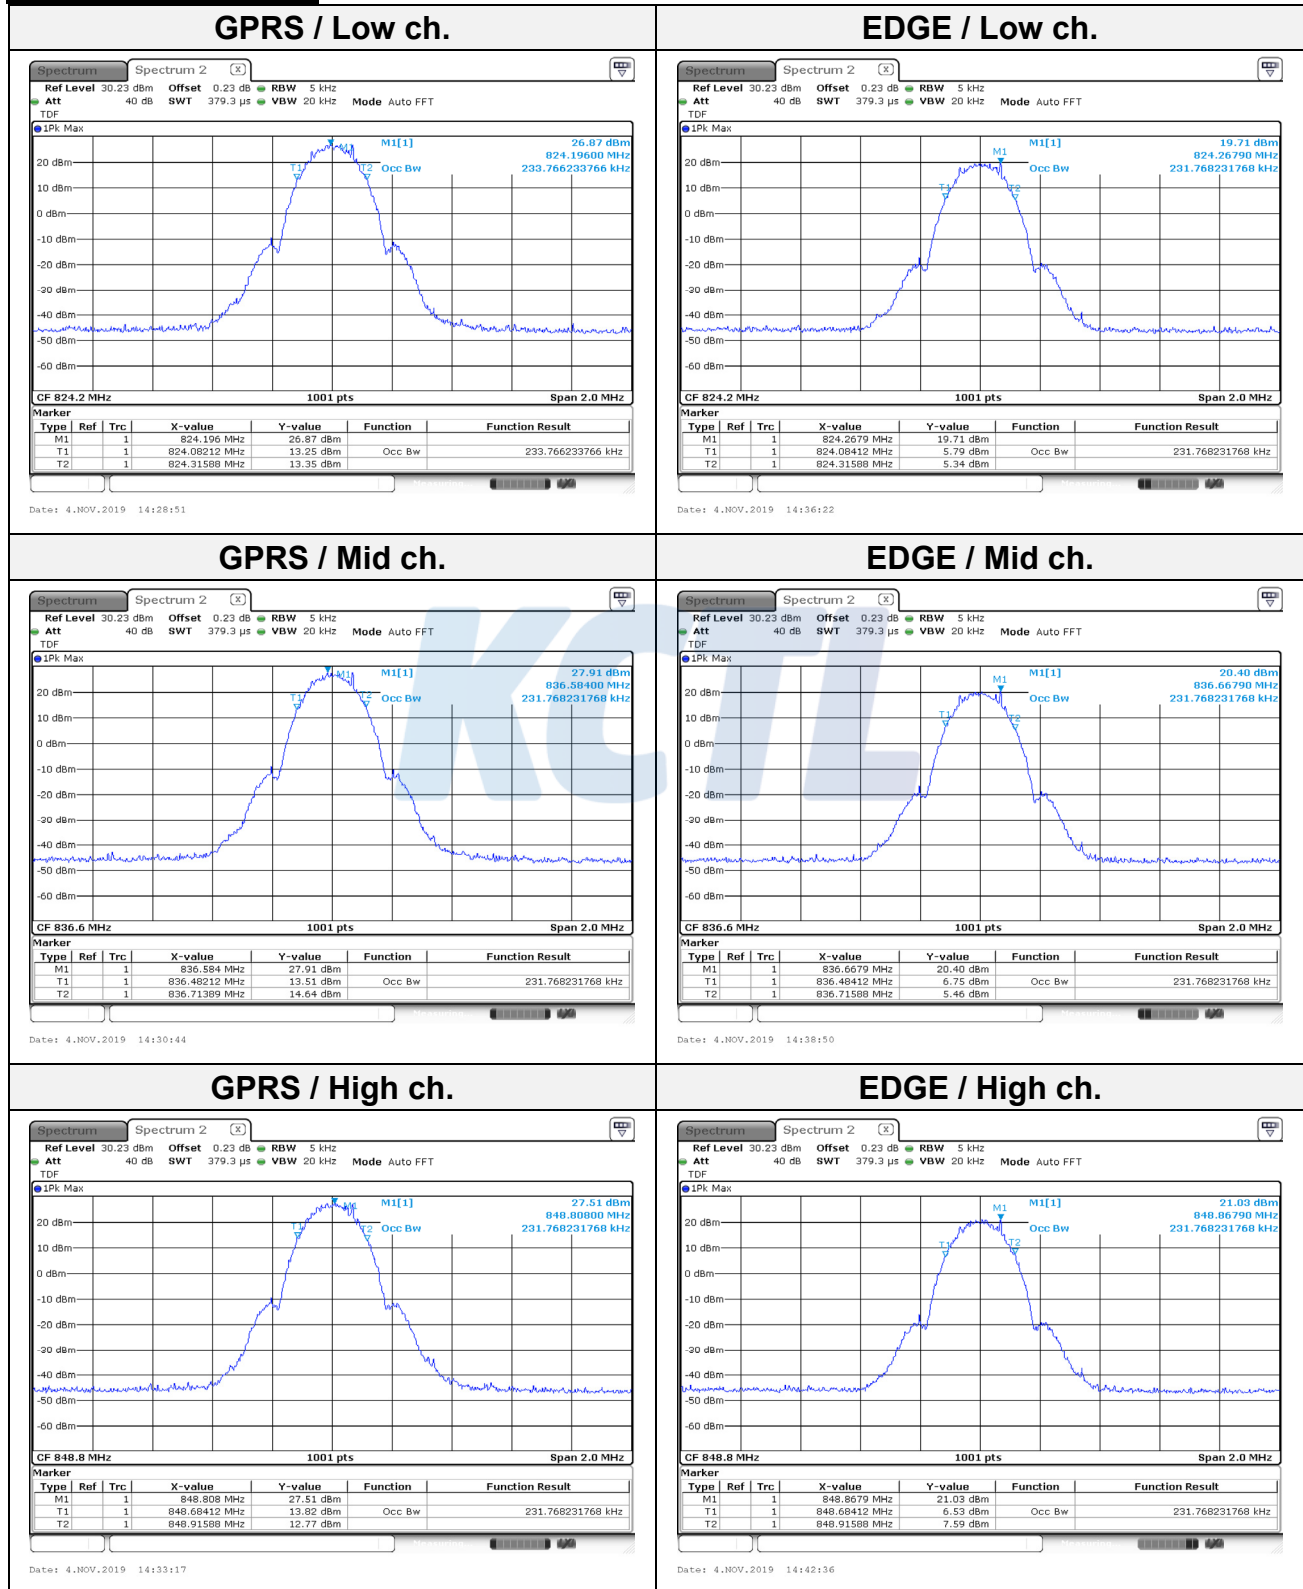


Test mode: GSM 1900

GPRS / Low ch.

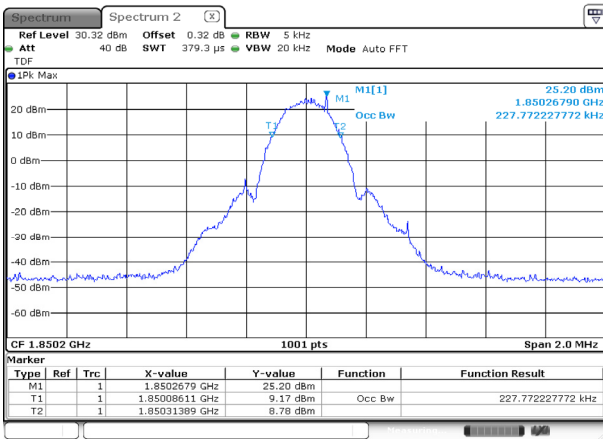


Date: 4.NOV.2019 15:16:32

EDGE / Low ch.

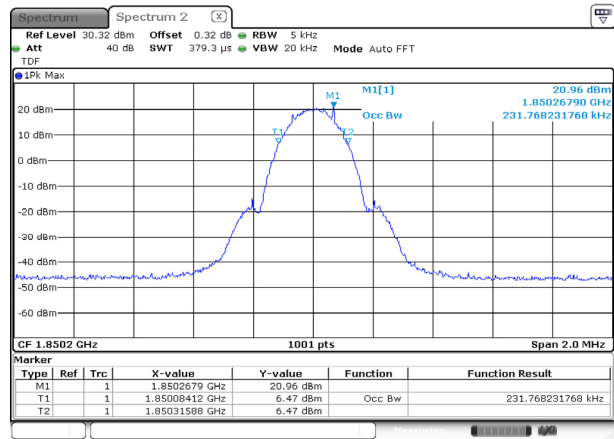


Date: 4.NOV.2019 15:24:44

GPRS / Mid ch.

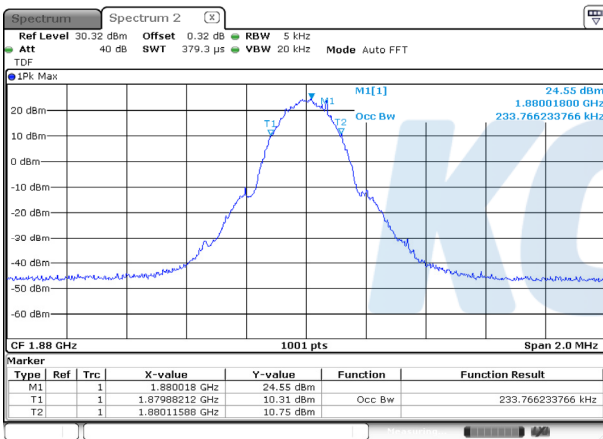


Date: 4.NOV.2019 15:19:00

EDGE / Mid ch.

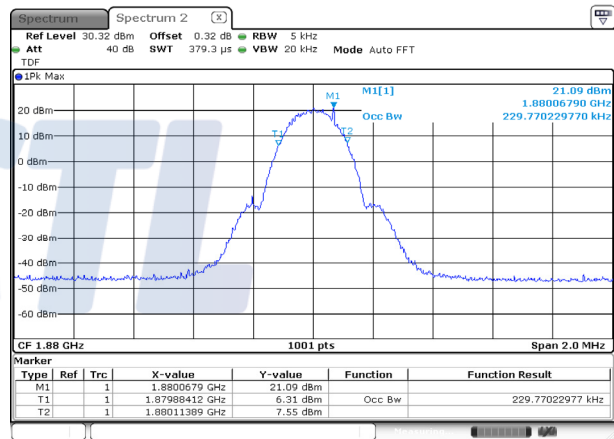


Date: 4.NOV.2019 15:28:26

GPRS / High ch.

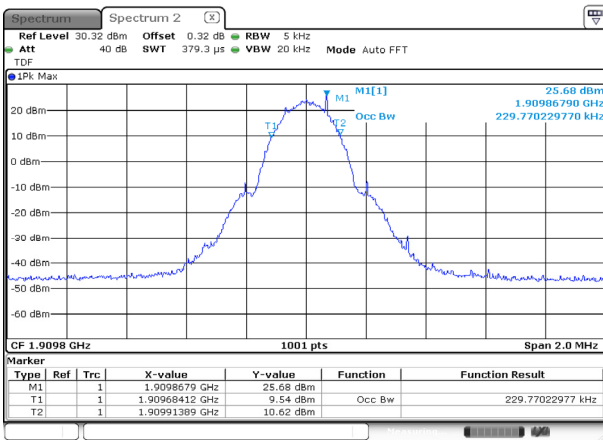

Date: 4.NOV.2019 15:20:52

EDGE / High ch.

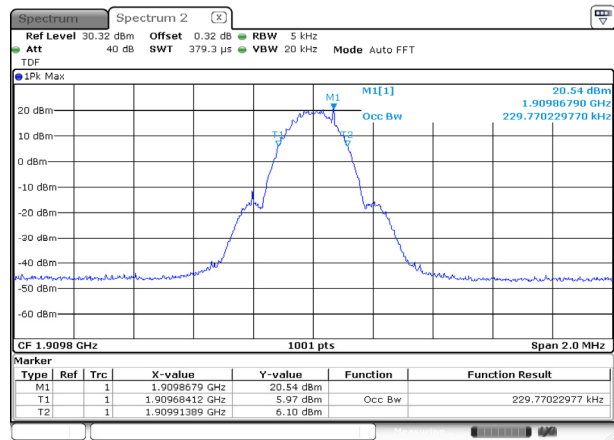

Date: 4.NOV.2019 15:32:18

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR19-SRF0177

Page (24) of (75)




Test mode: WCDMA 850


RMC / Low ch.

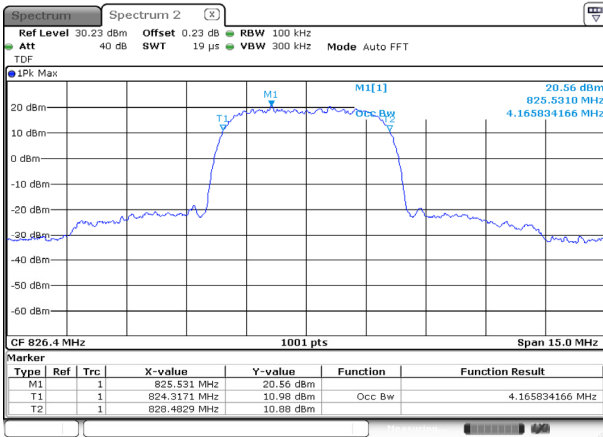

RMC / Mid ch.

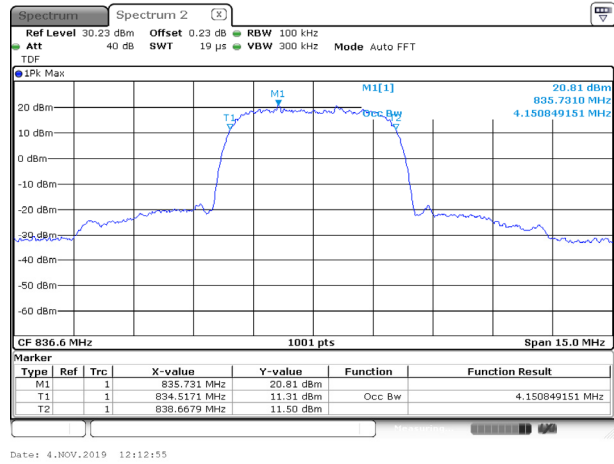

RMC / High ch.

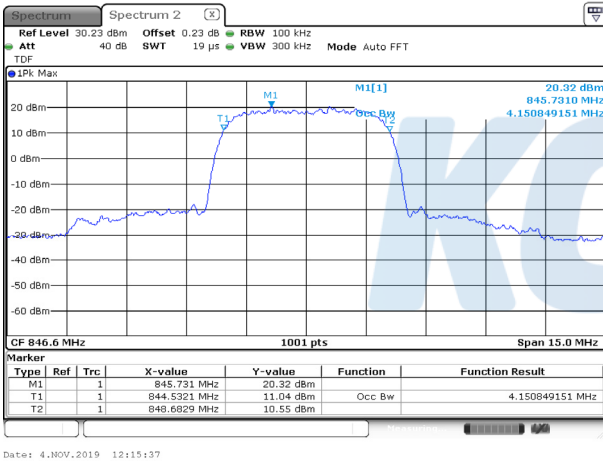

Blank