



# TEST REPORT

<p><b>KCTL Inc.</b>                  65, Sinwon-ro, Yeongtong-gu,                  Suwon-si, Gyeonggi-do, 16677, Korea                  TEL: 82-31-285-0894 FAX: 82-505-299-8311  <a href="http://www.kctl.co.kr">www.kctl.co.kr</a></p>	<p>Report No.:                  KR19-SRF0194-A                  Page (1) of (89)</p>	
--	--	---

**1. Client**

- Name : Samsung Electronics Co., Ltd.
- Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
- Date of Receipt : 2019-10-25

**2. Use of Report** : -

**3. Name of Product and Model** : Mobile phone / SM-A515F/DS



**4. Manufacturer and Country of Origin** : SAMSUNG ELECTRONICS VIETNAM CO.,LTD. / Vietnam

**5. FCC ID** : A3LSMA515F

**6. Date of Test** : 2019-11-11 to 2019-11-27

**7. Test Standards** : FCC Part 2  
 FCC Part 22 Subpart H  
 FCC Part 90 Subpart S

**8. Test Results** : Refer to the test result in the test report

Affirmation	Tested by	Technical Manager
	Name : Euijung Kim  (Signature)	Name : Jaehyong Lee  (Signature)

2019-12-09

## KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A

Page (2) of (89)

**Report revision history**

Date	Revision	Page No
2019-11-28	Initial report	-
2019-12-09	Updated	12 ~ 14

*This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a General report that does not use the KOLAS accreditation mark and is not related to KOLAS accreditation.*

Note. The report No. KR19-SRF0194 is superseded by the report No. KR19-SRF0194-A.



## CONTENTS

1.	General information .....	4
2.	Device information .....	4
2.1.	Accessory information .....	6
2.2.	Information about derivative model .....	6
2.3.	Frequency/channel operations.....	6
3.	Maximum ERP/EIRP power.....	7
4.	Summary of tests.....	8
4.1.	Worst case orientation .....	8
5.	Measurement uncertainty .....	9
6.	Measurement results explanation example .....	10
7.	Test results .....	11
7.1.	Conducted output power.....	11
7.2.	99% Occupied Bandwidth & 26 dB Bandwidth.....	15
7.3.	Spurious Emissions at Antenna Terminal.....	41
7.4.	Band Edge Emissions at Antenna Terminal .....	46
7.5.	Frequency stability .....	68
7.6.	Radiated Power (ERP/EIRP) .....	72
7.7.	Radiated Spurious Emissions.....	78
8.	Measurement equipment .....	89

## 1. General information

Client : Samsung Electronics Co., Ltd.  
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea  
Manufacturer : SAMSUNG ELECTRONICS VIETNAM CO.,LTD.  
Address : Kcn Yen Binh1, huyen pho Yen Tinh Thai Nguyen Vietnam  
Laboratory : KCTL Inc.  
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea  
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132  
VCCI Registration No. : R-20080, G-20078, C-20059, T-20056  
Industry Canada Registration No. : 8035A  
KOLAS No.: KT231

## 2. Device information

Equipment under test : Mobile Phone  
Model : SM-A515F/DS  
Derivative model : SM-A515F  
Modulation technique : Bluetooth(BDR/EDR)\_ GFSK,  $\pi/4$ DQPSK, 8DPSK  
Bluetooth(BLE), ANT+\_GFSK  
WIFI(802.11b/g/n20/n40/ac20/ac40/ac80)\_DSSS, OFDM  
LTE\_QPSK, 16QAM  
WCDMA\_QPSK  
GSM\_GMSK, 8-PSK  
Number of channels : Bluetooth(BDR/EDR), ANT+\_79ch / Bluetooth(BLE)\_40ch  
11 ch: 802.11b/g/n\_HT20  
UNII-1: 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)  
UNII-2A: 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)  
UNII-2C: 12 ch (20 MHz), 6 ch (40 MHz), 3 ch (80 MHz)  
UNII-3: 5 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)  
Power source : DC 3.85 V  
Antenna specification : LTE/WCDMA\_FPCB Antenna  
WIFI/Bluetooth(BDR/EDR/BLE)\_FPCB Antenna  
Antenna gain : WIFI/Bluetooth(BDR/EDR/BLE) : -4.70 dBi  
UNII-1 -4.10 dBi  
UNII-2A -4.74 dBi  
UNII-2C -3.92 dBi  
UNII-3 -4.40 dBi

Frequency range	: Bluetooth(BDR/EDR/BLE), ANT+_2 402 MHz ~ 2 480 MHz 2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20) UNII-1: 5 180 MHz ~ 5 240 MHz (802.11a/n_HT20/ac_VHT20) UNII-1: 5 190 MHz ~ 5 230 MHz (802.11n_HT40/ac_VHT40) UNII-1: 5 210 MHz (802.11ac_VHT80) UNII-2A: 5 260 MHz ~ 5 320 MHz (802.11a/n_HT20/ac_VHT20) UNII-2A: 5 270 MHz ~ 5 310 MHz (802.11n_HT40/ac_VHT40) UNII-2A: 5 290 MHz (802.11ac_VHT80) UNII-2C: 5 500 MHz ~ 5 720 MHz (802.11a/n_HT20/ac_VHT20) UNII-2C: 5 510 MHz ~ 5 710 MHz (802.11n_HT40/ac_VHT40) UNII-2C: 5 530 MHz ~ 5 690 MHz (802.11ac_VHT80) UNII-3: 5 745 MHz ~ 5 825 MHz (802.11a/n_HT20/ac_VHT20) UNII-3: 5 755 MHz ~ 5 795 MHz (802.11n_HT40/ac_VHT40) UNII-3: 5 775 MHz (802.11ac_VHT80) LTE Band 2_1 850.7 MHz ~ 1 909.3 MHz LTE Band 4_1 710.7 MHz ~ 1 754.3 MHz LTE Band 5_824.7 MHz ~ 848.3 MHz LTE Band 12_699.7 MHz ~ 715.3 MHz LTE Band 13_779.5 MHz ~ 784.5 MHz LTE Band 17_706.5 MHz ~ 713.5 MHz LTE Band 26_824.7 MHz ~ 848.3 MHz, 814.7 MHz ~ 823.3 MHz LTE Band 41_2 498.5 MHz ~ 2 687.5 MHz LTE Band 66_1 710.7 MHz ~ 1 779.3 MHz GSM 850_824.2 MHz ~ 848.8 MHz GSM 1900_1 850.2 MHz ~ 1 909.8 MHz WCDMA 850_826.4 MHz ~ 846.6 MHz WCDMA 1700_1 712.4 MHz ~ 1 752.6 MHz WCDMA 1910_1 852.4 MHz ~ 1 907.6 MHz
Software version	: A515F.001
Hardware version	: REV0.1
Test device serial No.	: Conducted(cecbed2e6a3f7e34) Radiated(R38MA05XG0M, R38MA05WHQF)
Operation temperature	: -30 °C ~ 50 °C

## 2.1. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
Earphone	Samsung Electronics Co., Ltd.	EHS61ASFBE	-	-
Travel Adapter	Samsung Electronics Co., Ltd.	EP-TA200	R37M6LAKG31DK3	AC 100-240V 50-60 Hz, 9.0V-1.67A 5.0V-2.0A
Micro USB Data Cable	Samsung Electronics Co., Ltd.	-	-	-

## 2.2. Information about derivative model

The difference between basic model and derivative models is:

SM-A515F

- It does not support Dual-Sim card, support Single-Sim card and changed from Dual SIM tray to single SIM tray.

## 2.3. Frequency/channel operations

This device contains the following capabilities:

WIFI(2.4GHz band 802.11b/g/n(HT20), 5GHz band 802.11a/n(HT20/HT40)/ac(VHT/20/40/80)),

Bluetooth(BDR/EDR/BLE), ANT+

LTE Band 2, LTE Band 4, LTE Band 5, LTE Band 12, LTE Band 13, LTE Band 17, LTE Band 26, LTE Band41, WCDMA 850, WCDMA 1700, WCDMA 1900, GSM 850, GSM 1900

### LTE Band 26

Ch.	Frequency (MHz)
26697	814.7
26797	824.7
26783	823.3
26915	836.5
27033	848.3

Table 2.3.1. 1.4M BW

Ch.	Frequency (MHz)
26705	815.5
26775	822.5
26805	825.5
26915	836.5
27025	847.5

Table 2.3.2. 3M BW

Ch.	Frequency (MHz)
26715	816.5
26765	821.5
26815	826.5
26915	836.5
27015	846.5

Table 2.3.3. 5M BW

Ch.	Frequency (MHz)
26740	819.0
26840	829.0
26915	836.5
26990	844.0

Table 2.3.4. 10M BW

Ch.	Frequency (MHz)
26765	821.5
26865	831.5
26965	841.5

Table 2.3.5. 15M BW

**3. Maximum ERP/EIRP power****LTE Band 26**

Mode	Tx frequency (MHz)	Emission designator	ERP	
			Max. power (dBm)	Max. power (W)
LTE Band 26 (Part 90S)	814.7 ~ 823.3	1M10G7D	18.69	0.074
		1M10W7D	17.41	0.055
	815.5 ~ 822.5	2M71G7D	18.50	0.071
		2M71W7D	17.60	0.058
	816.5 ~ 821.5	4M52G7D	18.64	0.073
		4M53W7D	17.72	0.059
	819.0	8M99G7D	18.43	0.070
		8M99W7D	17.23	0.053
	821.5	13M5G7D	18.43	0.070
		13M5W7D	17.40	0.055
LTE Band 26 (Part 22H)	824.7 ~ 848.3	1M11G7D	18.75	0.075
		1M10W7D	17.60	0.058
	825.5 ~ 847.5	2M72G7D	18.90	0.078
		2M71W7D	17.68	0.059
	826.5 ~ 846.5	4M55G7D	17.95	0.062
		4M53W7D	16.94	0.049
	829.0 ~ 844.0	9M08G7D	17.72	0.059
		9M04W7D	16.88	0.049
	831.5 ~ 841.5	13M6G7D	17.69	0.059
		13M5W7D	16.62	0.046
Straddle channel	824.0	1M10G7D	19.18	0.083
		1M09W7D	18.09	0.064
		2M71G7D	19.35	0.086
		2M72W7D	18.07	0.064
		4M55G7D	19.21	0.083
		4M56W7D	19.09	0.081
		9M02G7D	19.19	0.083
		9M07W7D	18.08	0.064
		13M5G7D	19.29	0.085
		13M5W7D	18.11	0.065

#### 4. Summary of tests

FCC Part section(s)	Parameter	Test Limit	Test Condition	Test results
2.1046 90.635	Conducted Output Power	< 100 Watts	Conducted	Pass
2.1049	Occupied Bandwidth & 26 dB Bandwidth	N/A		Pass
2.1051 22.917(a) 90.691(a)	Band Edge Emissions at Antenna Terminal	>43 + 10Log <sub>10</sub> (P) dB for all out-of-band emissions except >50 10Log <sub>10</sub> (P) dB at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		Pass
	Spurious Emissions at Antenna Terminal			Pass
2.1055 22.355 90.213	Frequency stability	< 2.5 ppm		Pass
22.913(a)(5)	Effective Radiated Power	< 7 Watts max. ERP	Radiated	Pass
2.1053 22.917(a) 90.691(a)	Radiated Spurious Emissions	>43 + 10Log <sub>10</sub> (P) dB for all out-of-band emissions except		Pass

#### Notes:

- The test procedure(s) in this report were performed in accordance as following.
  - ◆ ANSI C63.26-2015
  - ◆ ANSI/TIA-603-E-2016
  - ◆ KDB 971168 D01 v03r01
- Per evaluation report, all of the data contained herein is re-used from the reference FCC ID : A3LSMA515FN

#### 4.1. Worst case orientation

- All modes of operation were investigated and the worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations in the test data.
- All final radiated testing was performed with the EUT in worst case orientation.
- The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that Z orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in Z orientation

Test condition	LTE Band	Modulation	Bandwidth (MHz)	RB size	RB offset
Radiated	B26 (Part90)	QPSK	1.4	1	0
	B26 (Part22)		3	1	0
Conducted	B26 (Part90)	QPSK, 16QAM	1.4, 3, 5, 10, 15	1	0, 5, 14, 24, 49, 74
				Full	0
	B26 (Part22)		1	0, 5, 14, 24, 49, 74	
			Full	0	

## 5. Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicated a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty ( $\pm$ )	
Conducted RF power	1.76 dB	
Conducted spurious emissions	4.03 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz:	2.28 dB
	30 MHz ~ 1 GHz	3.68 dB
	Above 1 GHz	5.72 dB



**6. Measurement results explanation example**

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	16.06	11 000	18.29
50	16.14	12 000	18.60
100	16.17	13 000	18.67
200	16.27	14 000	19.16
300	16.27	15 000	19.25
400	16.30	16 000	19.33
500	16.37	17 000	19.58
600	16.46	18 000	19.65
700	16.46	19 000	20.10
800	16.55	20 000	20.11
900	16.58	21 000	20.28
1 000	16.61	22 000	20.36
2 000	16.93	23 000	20.37
3 000	17.18	24 000	20.51
4 000	17.34	25 000	20.64
5 000	17.59	26 000	20.68
6 000	17.75	26 500	20.72
7 000	17.99	27 000	20.94
8 000	18.18	28 000	21.00
9 000	18.23	29 000	21.68
10 000	18.26	30 000	21.79


**Note.**

Offset(dB) = RF cable loss(dB) + Divider (dB) + Attenuator(dB)

## 7. Test results

### 7.1. Conducted output power

#### Test setup



#### Test procedure

971168 D01 v03r01 – Section 5.2  
ANSI C63.26-2015 – Section 5.2.4.2  
CFR 47, - Section §2.1046

#### Test settings

When an average power meter is used to perform RF output power measurements, the fundamental condition that measurement be performed only over durations of active transmissions at maximum output power level applies. Thus, an average power meter can always be used to perform the measurement when the EUT can be configured to transmit continuously.

If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle < 98%), then the following options can be implemented to facilitate measurement of the average power with an average power meter:

- a) A gated average power meter can be used to perform the measurement if the gating parameters can be adjusted such that the power is measured only during active transmission bursts at maximum output power levels.
- b) A conventional average power meter with no signal gating capability can also be used if the measured burst duty cycle is constant (i.e., duty cycle variations are less than or equal to  $\pm 2\%$ ) by performing the measurement over the on/off burst cycles and then correcting (increasing) the measured level by a factor equal to  $[10\log (1/\text{duty cycle})]$ . See 5.2.4.3.4 for guidance with respect to measuring the transmitter duty cycle.

See item r) of 4.1 for more information regarding power meter functional requirements and limitations, and consult the instrumentation-specific application literature for proper set-up and use.

**Test results**

Test Band	Bandwidth (MHz)	Test mode	RB size	RB offset	MPR	Maximum power			
						Frequency (MHz)			
						Low	Middle	High	
LTE Band 26 (Part 90S)	1.4	QPSK	1	0	0	24.12	-	24.55	
			1	3	0	24.08	-	24.53	
			1	5	0	24.12	-	24.50	
			3	0	0	24.12	-	24.48	
			3	1	0	24.15	-	24.48	
			3	3	0	24.16	-	24.44	
		6	0	1	23.05	-	23.33		
		16QAM	1	0	1	23.03	-	23.48	
			1	3	1	22.91	-	23.54	
			1	5	1	23.06	-	23.44	
			3	0	1	23.09	-	23.49	
			3	1	1	23.14	-	23.48	
			3	3	1	23.14	-	23.49	
		3	QPSK	6	0	2	22.03	-	22.48
				1	0	0	24.23	-	24.48
				1	8	0	24.23	-	24.41
				1	14	0	24.20	-	24.47
				8	0	1	23.12	-	23.37
	8			4	1	23.16	-	23.37	
	16QAM		8	7	1	23.11	-	23.35	
			15	0	1	23.12	-	23.38	
			1	0	1	22.99	-	23.00	
			1	8	1	22.91	-	23.49	
			1	14	1	22.93	-	23.14	
			8	0	2	22.17	-	22.40	
	5		QPSK	8	4	2	22.15	-	22.40
				8	7	2	22.19	-	22.39
				15	0	2	22.14	-	22.41
				1	0	0	24.37	-	24.36
				1	12	0	24.38	-	24.40
				1	24	0	24.34	-	24.39
		16QAM	12	0	1	23.16	-	23.33	
			12	7	1	23.15	-	23.34	
			12	13	1	23.14	-	23.32	
			25	0	1	23.15	-	23.35	
			1	0	1	22.89	-	23.51	
			1	12	1	22.93	-	23.38	
		10	QPSK	1	24	1	22.92	-	23.37
				12	0	2	22.09	-	22.33
				12	7	2	22.06	-	22.26
				12	13	2	22.02	-	22.30
				25	0	2	22.15	-	22.41
				1	0	0	-	24.31	-
	16QAM		1	25	0	-	24.30	-	
			1	49	0	-	24.27	-	
			25	0	1	-	23.15	-	
			25	12	1	-	23.14	-	
			25	25	1	-	23.10	-	
			50	0	1	-	23.12	-	
	15		QPSK	1	0	1	-	23.14	-
				1	25	1	-	23.10	-
				1	49	1	-	23.09	-
				25	0	2	-	22.12	-
				25	12	2	-	22.08	-
				25	25	2	-	22.12	-
		16QAM	50	0	2	-	22.21	-	
			1	0	0	-	24.40	-	
			1	36	0	-	24.32	-	
			1	74	0	-	23.62	-	
			36	0	1	-	23.34	-	
			36	18	1	-	23.25	-	
		QPSK	36	37	1	-	23.27	-	
			75	0	1	-	23.29	-	
			1	0	1	-	22.90	-	
			1	36	1	-	23.02	-	
			1	74	1	-	22.77	-	
			36	0	2	-	22.23	-	
	16QAM	36	18	2	-	22.21	-		
		36	37	2	-	22.21	-		
		75	0	2	-	22.29	-		

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A

Page (13) of (89)



Test Band	Bandwidth (MHz)	Test mode	RB size	RB offset	MPR	Maximum power			
						Frequency (MHz)			
						Low	Middle	High	
LTE Band 26 (Part 22H)	1.4	QPSK	1	0	0	24.45	24.52	23.81	
			1	3	0	24.40	24.41	23.78	
			1	5	0	24.44	24.47	23.77	
			3	0	0	24.48	24.41	23.82	
			3	1	0	24.46	24.41	23.87	
			3	3	0	24.41	24.40	23.85	
		6	0	1	23.35	23.32	22.75		
		16QAM	1	0	1	23.49	23.34	22.76	
			1	3	1	23.50	23.31	22.73	
			1	5	1	23.46	23.21	22.79	
			3	0	1	23.50	23.25	22.76	
			3	1	1	23.37	23.24	22.80	
			3	3	1	23.33	23.18	22.71	
		3	QPSK	6	0	2	22.42	22.29	21.68
				1	0	0	24.43	24.55	23.90
				1	8	0	24.44	24.56	23.89
				1	14	0	24.46	24.55	23.86
				8	0	1	23.36	23.32	22.77
				8	4	1	23.39	23.34	22.74
			16QAM	8	7	1	23.38	23.32	22.76
				15	0	1	23.40	23.34	22.76
				1	0	1	23.55	23.03	22.62
				1	8	1	23.50	23.31	22.60
				1	14	1	23.54	23.01	22.60
	8			0	2	22.39	22.22	21.75	
	5		QPSK	8	4	2	22.41	22.20	21.75
				8	7	2	22.39	22.21	21.75
				15	0	2	22.36	22.22	21.69
				1	0	0	24.47	24.39	23.91
				1	12	0	24.45	24.41	23.96
				1	24	0	24.45	24.36	23.93
			16QAM	12	0	1	23.44	23.34	22.79
				12	7	1	23.41	23.36	22.79
				12	13	1	23.40	23.32	22.82
				25	0	1	23.42	23.33	22.77
				1	0	1	23.68	23.23	22.70
				1	12	1	23.78	23.44	22.70
		10	QPSK	1	24	1	23.35	23.17	22.70
				12	0	2	22.27	22.27	21.72
				12	7	2	22.29	22.25	21.74
				12	13	2	22.27	22.26	21.71
				25	0	2	22.38	22.33	21.77
				1	0	0	24.56	24.36	24.14
			16QAM	1	25	0	24.56	24.30	24.06
				1	49	0	24.53	24.33	24.04
				25	0	1	23.47	23.37	23.01
				25	12	1	23.44	23.35	22.93
				25	25	1	23.41	23.31	22.94
				50	0	1	23.41	23.38	22.97
	15		QPSK	1	0	1	23.37	23.52	22.92
				1	25	1	23.40	23.35	22.88
				1	49	1	23.43	23.48	22.86
				25	0	2	22.41	22.30	22.02
				25	12	2	22.43	22.29	21.94
				25	25	2	22.41	22.27	21.95
			16QAM	50	0	2	22.44	22.27	21.95
				1	0	0	24.26	-	24.38
				1	36	0	24.56	-	24.25
				1	74	0	24.29	-	23.67
				36	0	1	23.41	-	23.13
				36	18	1	23.35	-	23.14
		15	QPSK	36	37	1	23.34	-	23.09
				75	0	1	23.36	-	23.13
				1	0	1	23.54	-	23.16
				1	36	1	23.49	-	23.09
				1	74	1	23.44	-	22.91
				36	0	2	22.43	-	22.09
			16QAM	36	18	2	22.38	-	22.01
				36	37	2	22.33	-	22.00
				75	0	2	22.29	-	22.05

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A


Page (14) of (89)

**Straddle channel**

Test Band	Bandwidth (MHz)	Test mode	RB size	RB offset	MPR	Maximum power
						Frequency (MHz)
LTE Band 26 (Part 90S)	1.4	QPSK	1	0	0	24.26
			1	3	0	24.16
			1	5	0	24.27
			3	0	0	24.17
			3	1	0	24.15
			3	3	0	24.10
		16QAM	6	0	1	23.15
			1	0	1	23.30
			1	3	1	23.27
			1	5	1	23.31
			3	0	1	23.07
			3	1	1	23.06
	3	QPSK	3	3	1	23.05
			6	0	2	22.16
			1	0	0	24.09
			1	8	0	24.14
			1	14	0	24.10
			8	0	1	23.09
		16QAM	8	4	1	23.04
			8	7	1	23.08
			15	0	1	23.14
			1	0	1	22.97
			1	8	1	22.94
			1	14	1	22.95
	5	QPSK	8	0	2	22.12
			8	4	2	22.10
			8	7	2	22.09
			15	0	2	22.10
			1	0	0	24.22
			1	12	0	24.25
		16QAM	1	24	0	24.27
			12	0	1	23.14
			12	7	1	23.13
			12	13	1	23.13
			25	0	1	23.12
			1	0	1	23.10
	10	QPSK	1	12	1	23.07
			1	24	1	23.03
			12	0	2	22.05
			12	7	2	22.11
			12	13	2	22.09
			25	0	2	22.10
		16QAM	1	0	0	24.56
			1	25	0	24.56
			1	49	0	24.53
			25	0	1	23.47
			25	12	1	23.44
			25	25	1	23.41
	15	QPSK	50	0	1	23.41
			1	0	1	23.37
			1	25	1	23.40
			1	49	1	23.43
			25	0	2	22.41
			25	12	2	22.43
		16QAM	25	25	2	22.41
			50	0	2	22.44
			1	0	0	24.16
			1	36	0	24.06
			1	74	0	23.89
			36	0	1	23.05
15	QPSK	36	18	1	23.05	
		36	37	1	23.05	
		75	0	1	23.03	
		1	0	1	22.79	
		1	36	1	22.82	
		1	74	1	22.79	
	16QAM	36	0	2	22.02	
		36	18	2	22.01	
		36	37	2	21.97	
		75	0	2	22.04	

## 7.2. 99% Occupied Bandwidth & 26 dB Bandwidth

### Test setup

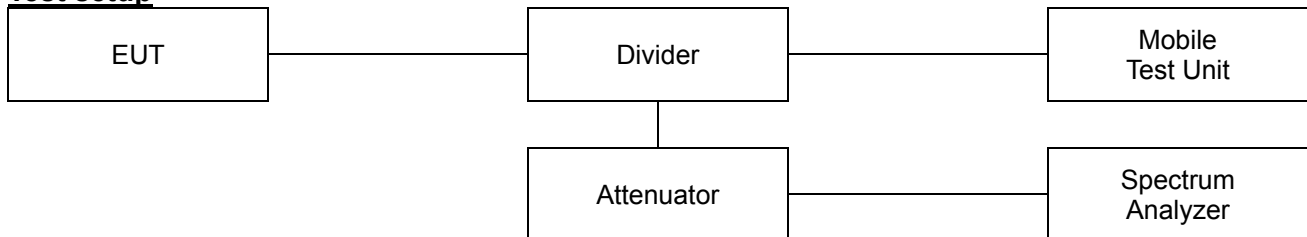

### Limit

According to §2.1049, the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

### Test procedure

971168 D01 v03r01 – Section 4.2 and 4.3  
ANSI C63.26-2015 – Section 5.4.3 and 5.4.4

### Test settings

#### ◆ 26dB Bandwidth

- c) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- d) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- e) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- f) Determine the reference value by either of the following:
  - 1) Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
  - 2) Set the EUT to transmit an unmodulated carrier. Set the spectrum analyzer marker to the level of the carrier.
- g) Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- h) If the reference value was determined using an unmodulated carrier, turn the EUT modulation on, then either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise the trace from step f) shall be used for step i).

- i) Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- j) The spectral envelope can cross the “-X dB amplitude” at multiple points. The lowest or highest frequency shall be selected as the frequencies that are the farthest away from the center frequency at which the spectral envelope crosses the “-X dB amplitude.”
- k) The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

#### ◆ 99% Occupied Bandwidth

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of  $1.5 \times \text{OBW}$  is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

#### Notes:

1. The EUT was setup to maximum output power as its lowest and highest channel with all bandwidth, Modulation.

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A

Page (17) of (89)

**KCTL****Test results**

Test Band	Bandwidth (MHz)	Frequency (MHz)	Test mode	26dB bandwidth (MHz)	99 % bandwidth (MHz)
LTE Band 26 (Part 90S)	1.4	814.7	QPSK	1.35	1.10
			16QAM	1.35	1.10
		823.3	QPSK	1.36	1.10
			16QAM	1.34	1.10
	3	815.5	QPSK	3.16	2.71
			16QAM	3.14	2.71
		822.5	QPSK	3.10	2.71
			16QAM	3.15	2.71
	5	816.5	QPSK	5.46	4.51
			16QAM	5.40	4.53
		821.5	QPSK	5.46	4.52
			16QAM	5.52	4.52
	10	819.0	QPSK	10.69	8.99
			16QAM	10.37	8.99
	15	821.5	QPSK	15.21	13.45
			16QAM	15.25	13.45

**Straddle channel**

Test Band	Bandwidth (MHz)	Frequency (MHz)	Test mode	26dB bandwidth (MHz)	99 % bandwidth (MHz)
LTE Band 26 (Part 90S)	1.4	824	QPSK	1.36	1.10
			16QAM	1.33	1.09
	3	824	QPSK	3.07	2.71
			16QAM	3.13	2.72
	5	824	QPSK	5.59	4.55
			16QAM	5.51	4.56
	10	824	QPSK	10.66	9.02
			16QAM	10.34	9.07
	15	824	QPSK	15.36	13.49
			16QAM	15.21	13.49

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2

**KCTL Inc.**

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A

Page (18) of (89)

**KCTL**

Test Band	Bandwidth (MHz)	Frequency (MHz)	Test mode	26dB bandwidth (MHz)	99 % bandwidth (MHz)
LTE Band 26 (Part 22H)	1.4	824.7	QPSK	1.36	1.11
			16QAM	1.34	1.09
		836.5	QPSK	1.35	1.10
			16QAM	1.34	1.10
		848.3	QPSK	1.34	1.09
			16QAM	1.34	1.10
	3	825.5	QPSK	3.19	2.71
			16QAM	3.12	2.71
		836.5	QPSK	3.11	2.70
			16QAM	3.15	2.70
		847.5	QPSK	3.12	2.72
			16QAM	3.12	2.71
	5	826.5	QPSK	5.45	4.54
			16QAM	5.37	4.54
		836.5	QPSK	5.37	4.53
			16QAM	5.43	4.53
		846.5	QPSK	5.51	4.55
			16QAM	5.38	4.53
	10	829.0	QPSK	10.51	9.08
			16QAM	10.37	9.04
		836.5	QPSK	10.39	8.99
			16QAM	10.34	8.99
		844.0	QPSK	10.49	9.02
			16QAM	10.39	9.04
15	831.5	QPSK	15.40	13.49	
		16QAM	15.17	13.45	
	841.5	QPSK	15.32	13.56	
		16QAM	15.25	13.52	

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0194-A

Page (19) of (89)



## 26dB Bandwidth

### Test mode: LTE Band 26 (Part 90S)

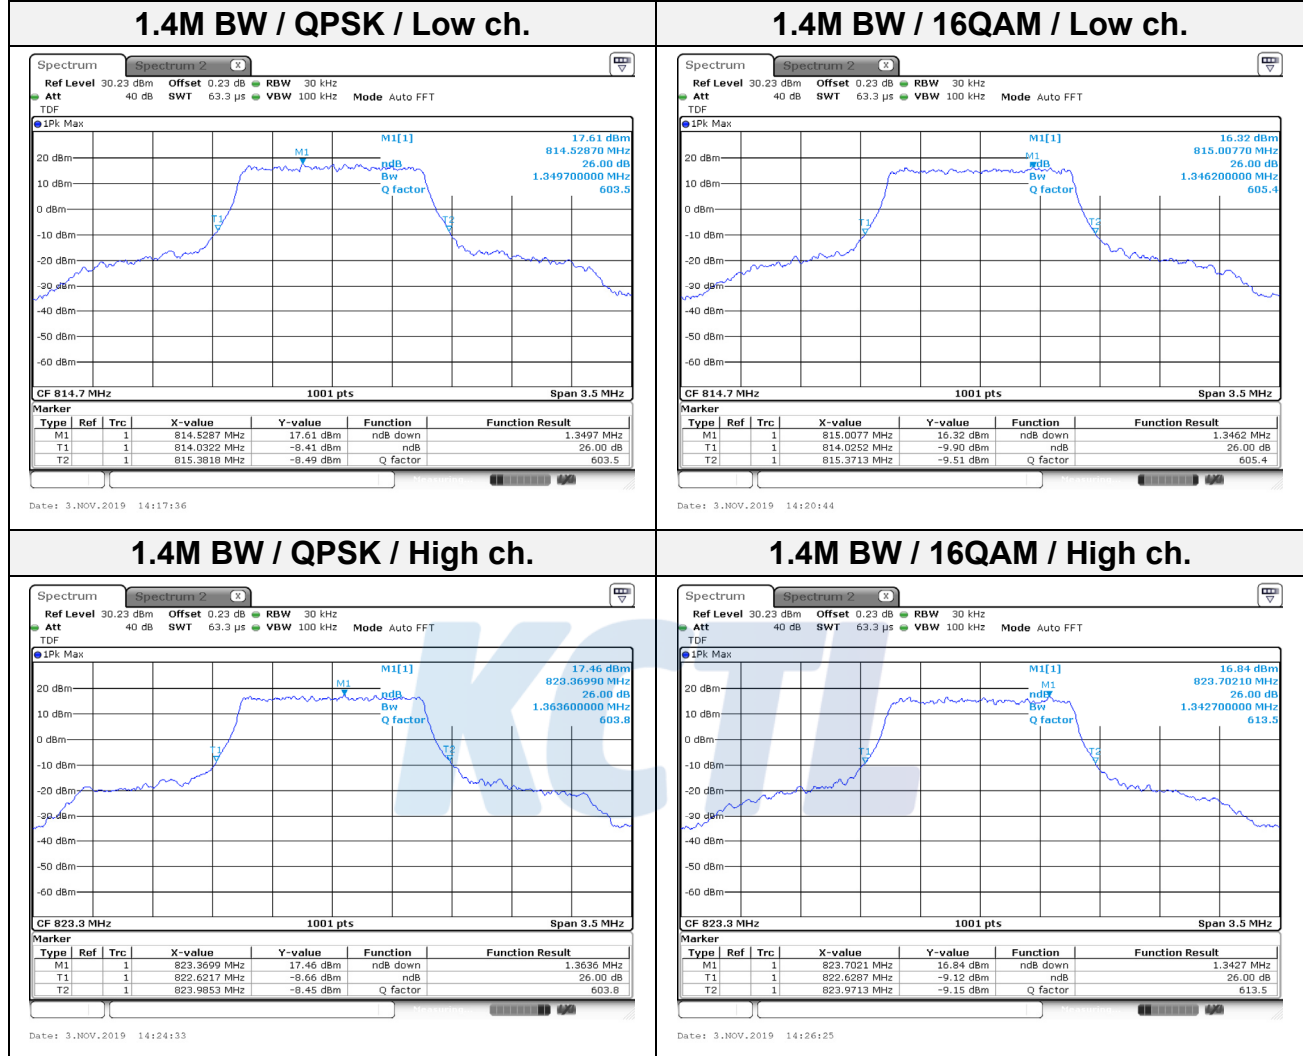

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A

Page (20) of (89)




## 3M BW / QPSK / Low ch.

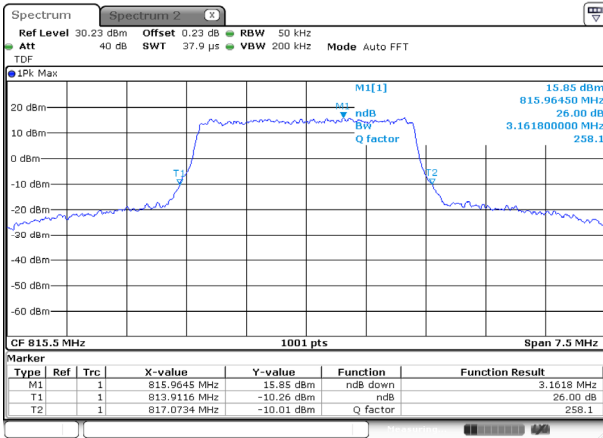


Date: 3.NOV.2019 14:29:45

## 3M BW / 16QAM / Low ch.

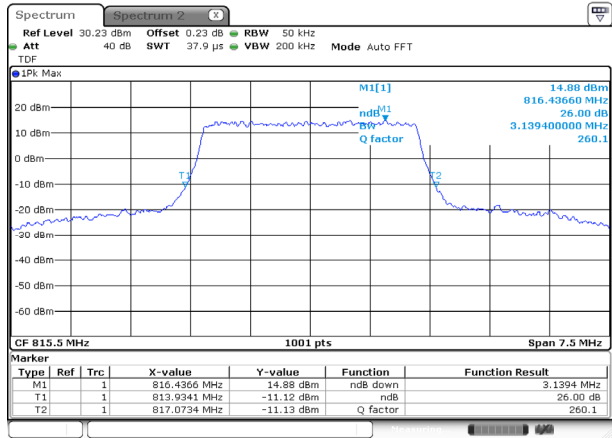


Date: 3.NOV.2019 14:33:58

## 3M BW / QPSK / High ch.

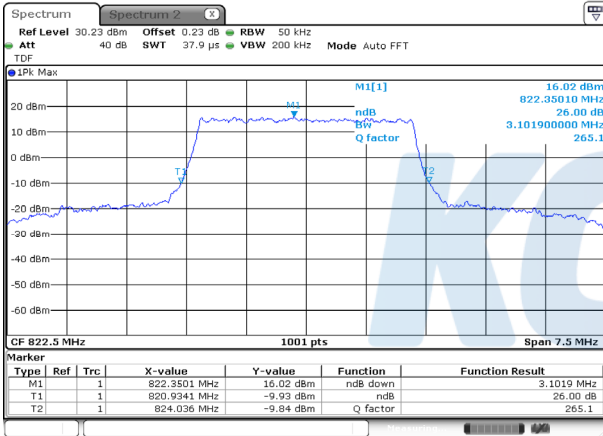

Date: 3.NOV.2019 14:37:20

## 3M BW / 16QAM / High ch.

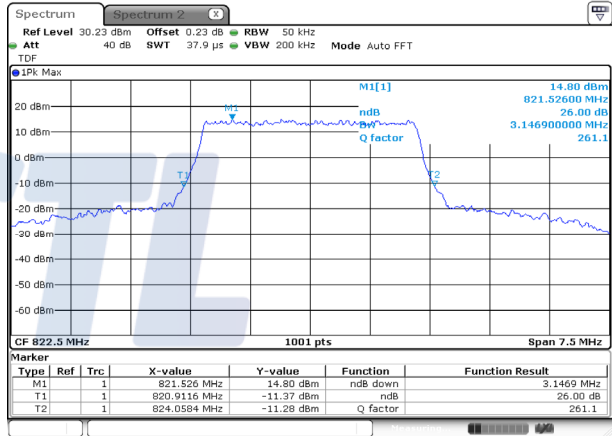

Date: 3.NOV.2019 14:39:10

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A

Page (21) of (89)




## 5M BW / QPSK / Low ch.

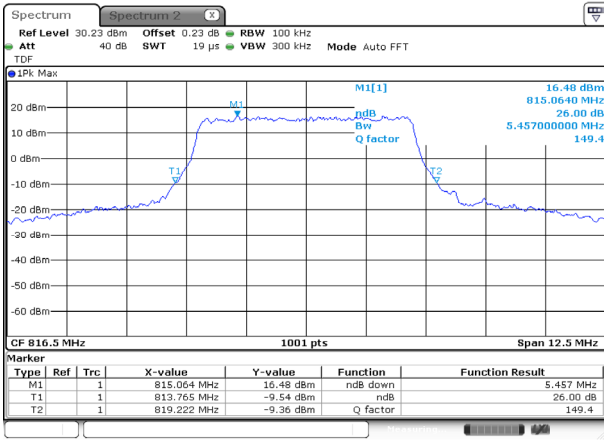


Date: 3.NOV.2019 14:43:00

## 5M BW / 16QAM / Low ch.

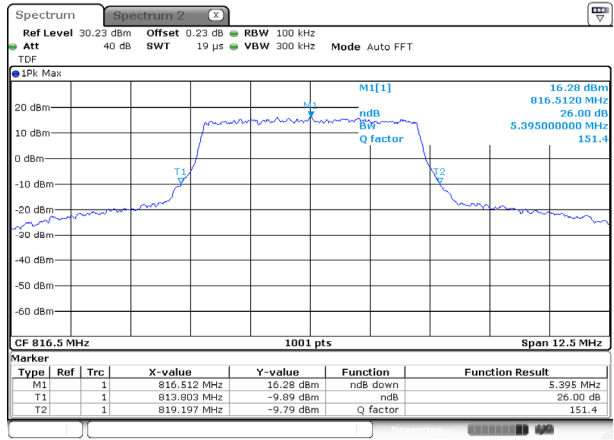


Date: 3.NOV.2019 14:45:48

## 5M BW / QPSK / High ch.

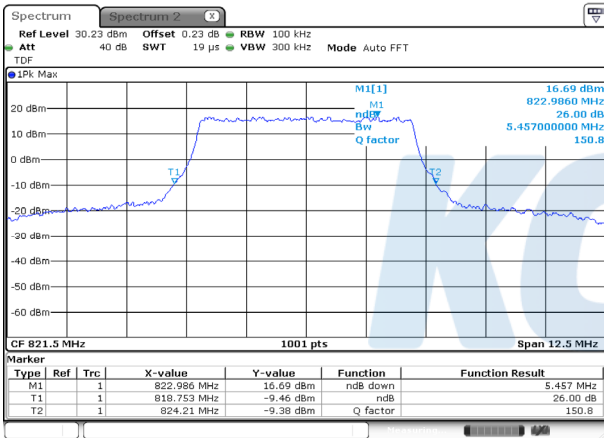

Date: 3.NOV.2019 14:48:46

## 5M BW / 16QAM / High ch.

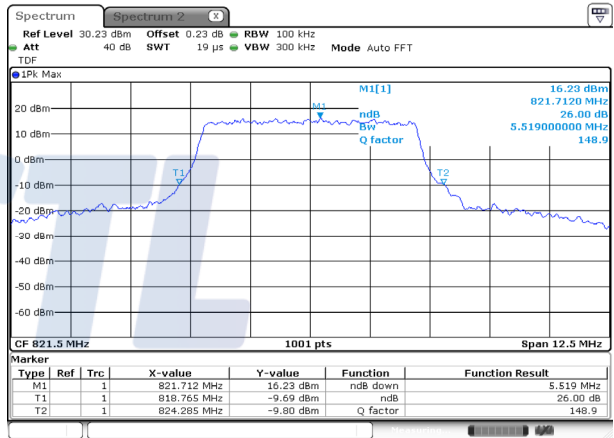

Date: 3.NOV.2019 14:51:33

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A

Page (22) of (89)




## 10M BW / QPSK / Mid ch.

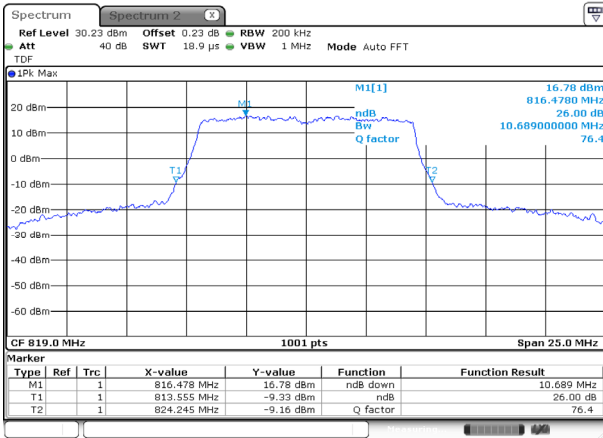


Date: 3.NOV.2019 14:56:48

## 10M BW / 16QAM / Mid ch.

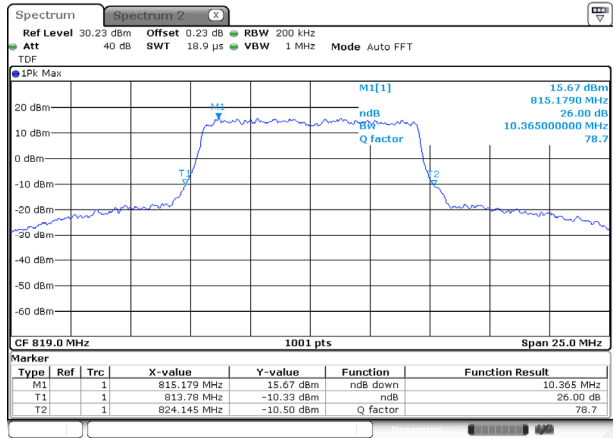


Date: 3.NOV.2019 15:00:23

## 15M BW / QPSK / Mid ch.

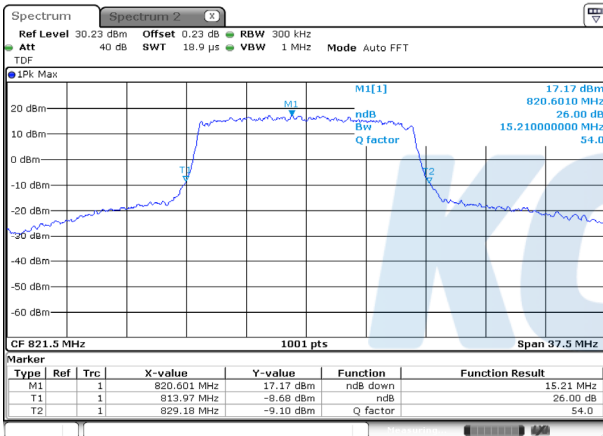

Date: 3.NOV.2019 15:04:12


## 15M BW / 16QAM / Mid ch.

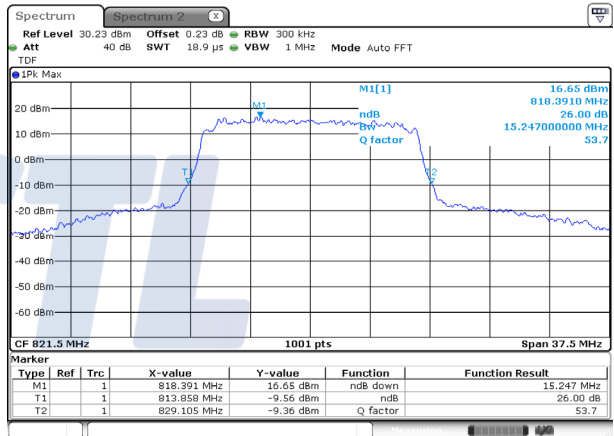


Date: 3.NOV.2019 15:06:29

## Test mode: LTE Band 26 (Part 22H)


### 1.4M BW / QPSK / Low ch.

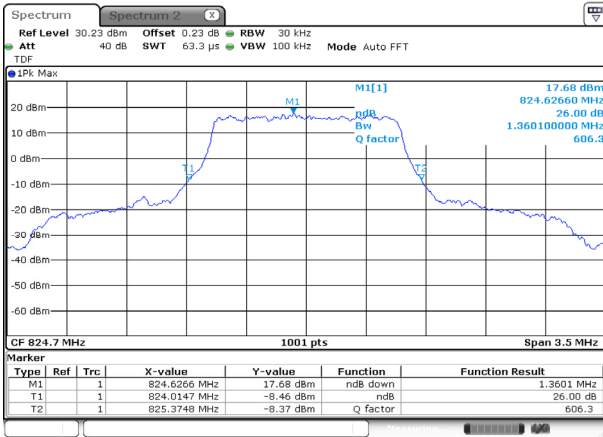


### 1.4M BW / 16QAM / Low ch.

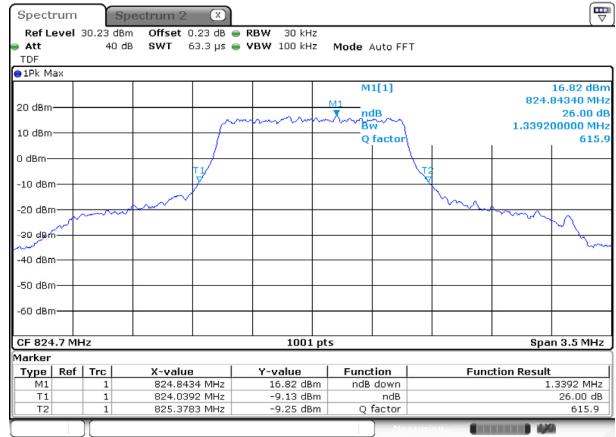


### 1.4M BW / QPSK / Mid ch.

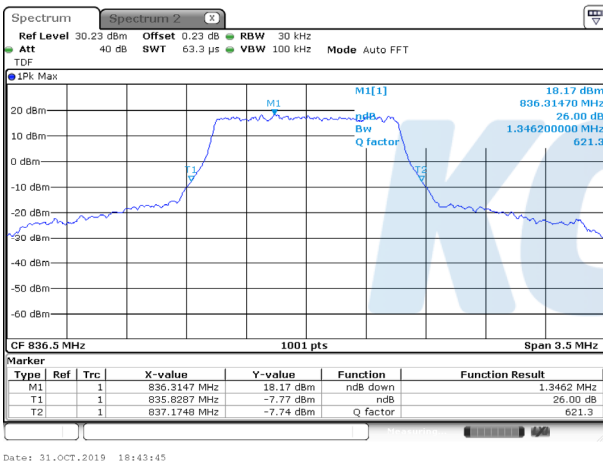


### 1.4M BW / 16QAM / Mid ch.

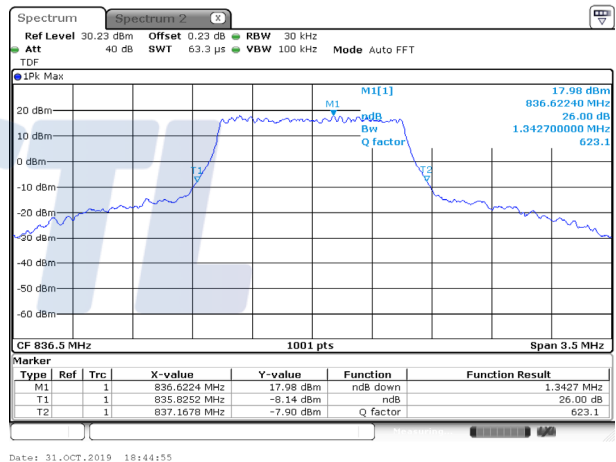

### 1.4M BW / QPSK / High ch.

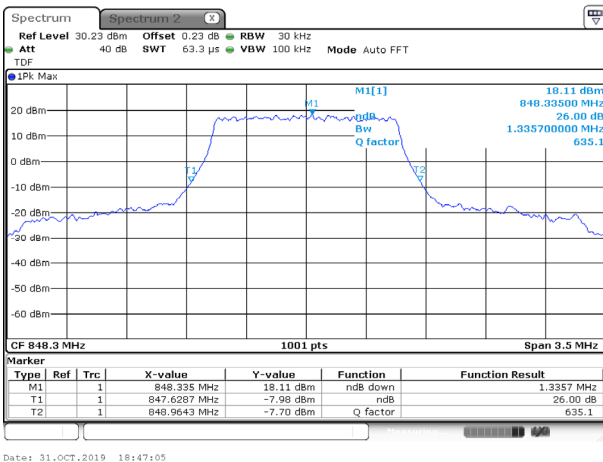

### 1.4M BW / 16QAM / High ch.

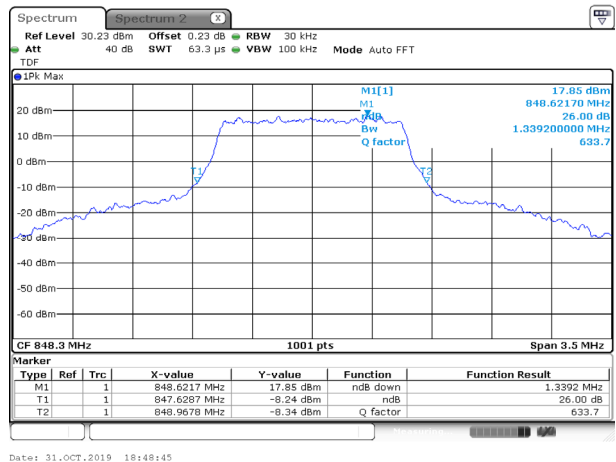

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A

Page (24) of (89)




## 3M BW / QPSK / Low ch.

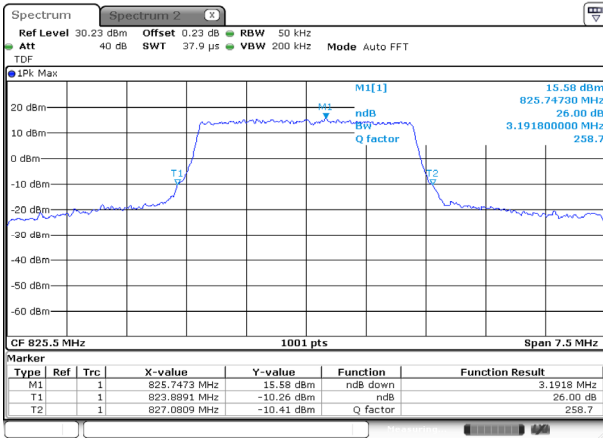


Date: 15.NOV.2019 22:08:22

## 3M BW / 16QAM / Low ch.

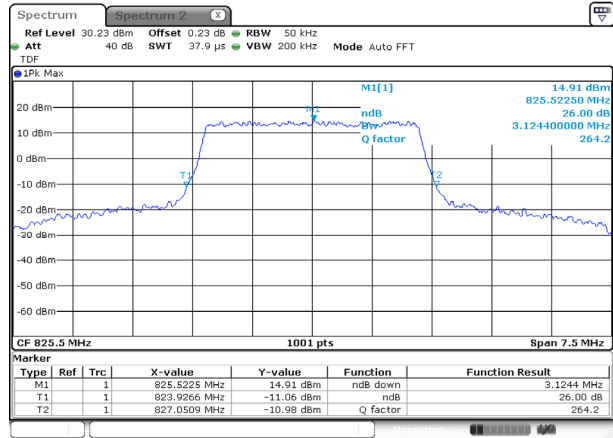


Date: 15.NOV.2019 22:09:23

## 3M BW / QPSK / Mid ch.

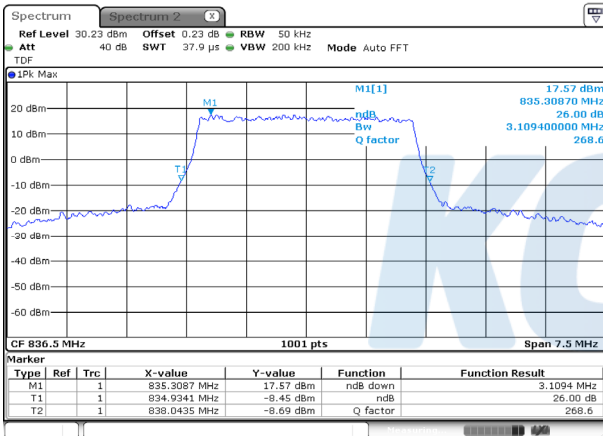


Date: 31.OCT.2019 19:14:05

## 3M BW / 16QAM / Mid ch.

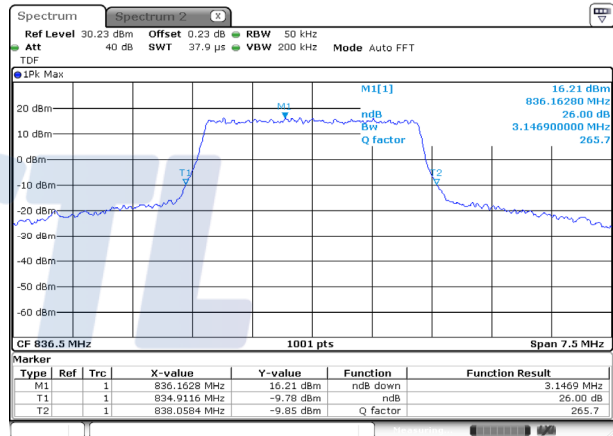


Date: 31.OCT.2019 19:17:52

## 3M BW / QPSK / High ch.

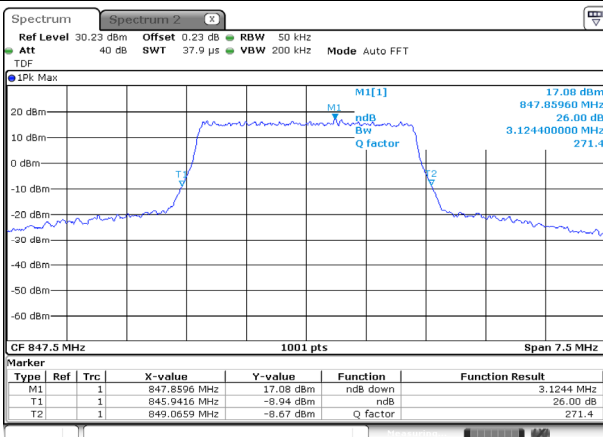

Date: 31.OCT.2019 19:19:57

## 3M BW / 16QAM / High ch.

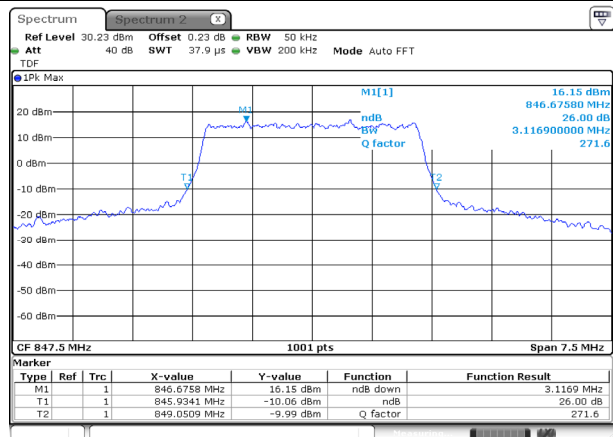

Date: 31.OCT.2019 19:21:39

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A


Page (25) of (89)




## 5M BW / QPSK / Low ch.

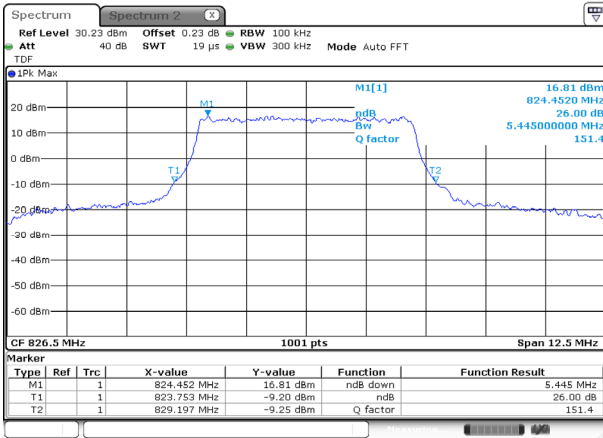


## 5M BW / 16QAM / Low ch.

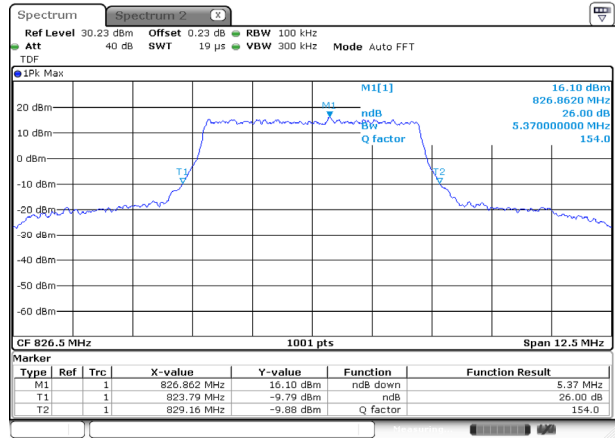


## 5M BW / QPSK / Mid ch.

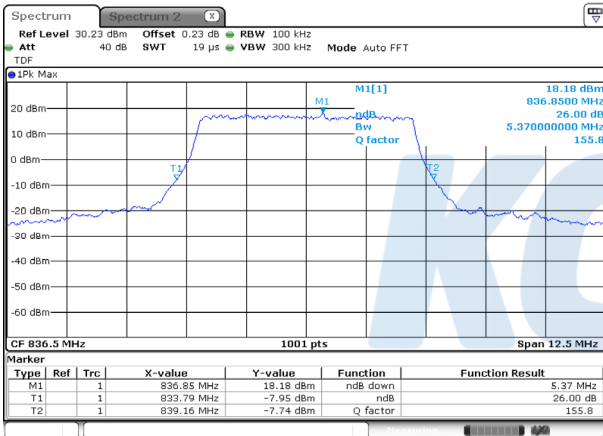


## 5M BW / 16QAM / Mid ch.

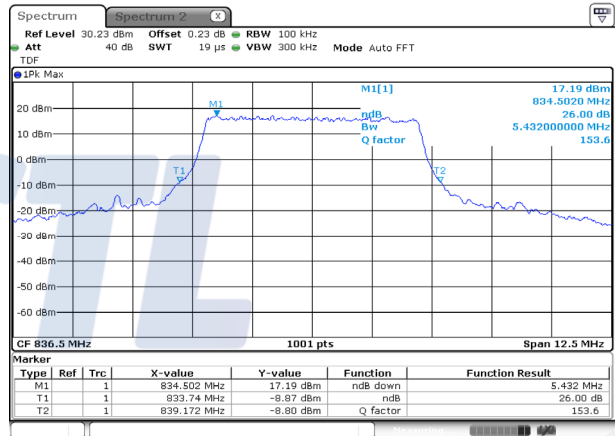

## 5M BW / QPSK / High ch.

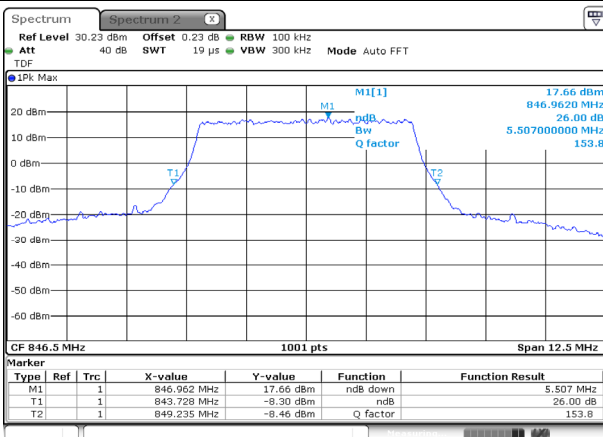

## 5M BW / 16QAM / High ch.

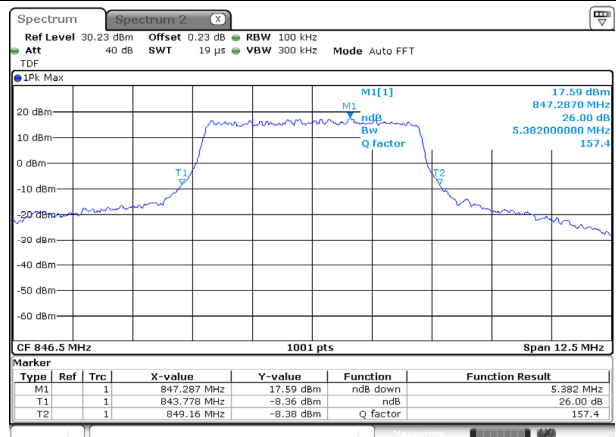

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A


Page (26) of (89)




## 10M BW / QPSK / Low ch.

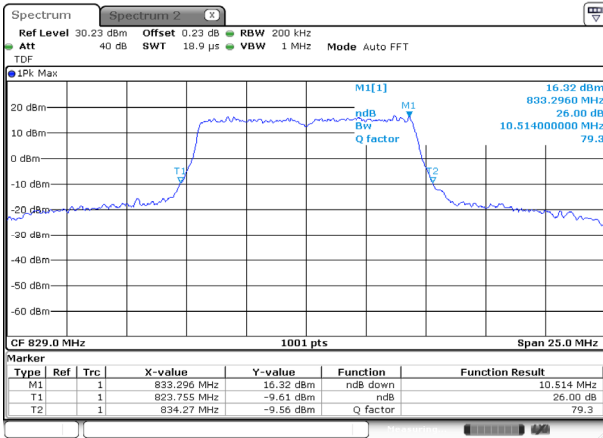


## 10M BW / 16QAM / Low ch.

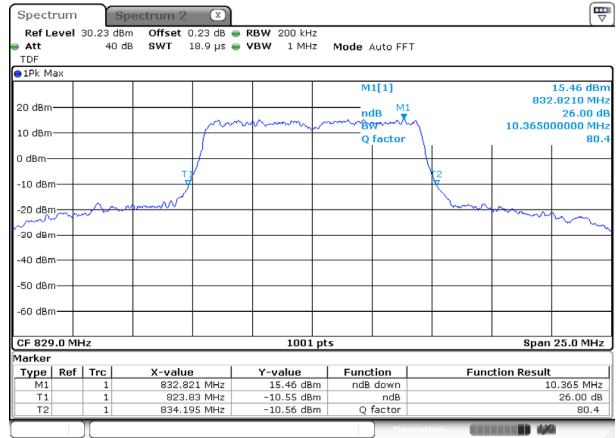


## 10M BW / QPSK / Mid ch.

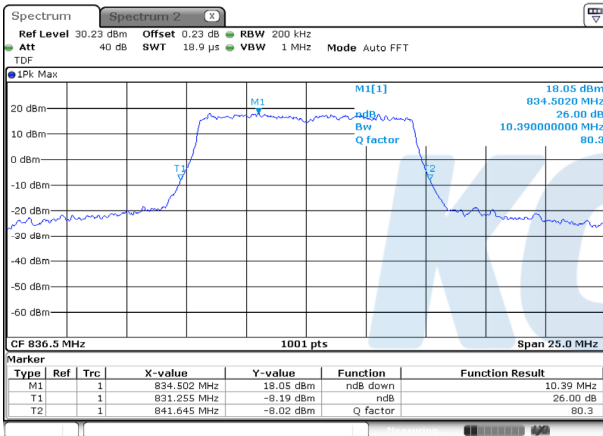


## 10M BW / 16QAM / Mid ch.

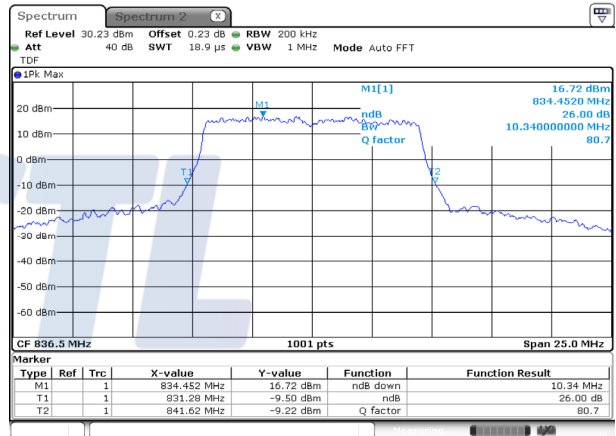

## 10M BW / QPSK / High ch.

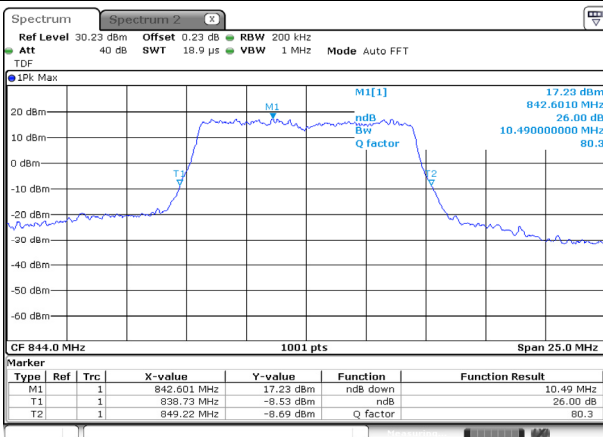

## 10M BW / 16QAM / High ch.

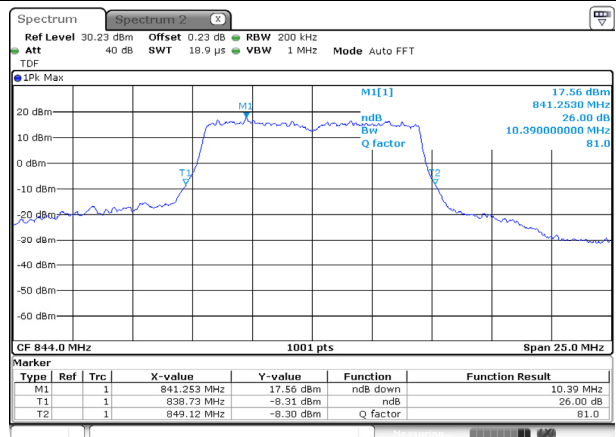

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A

Page (27) of (89)




## 15M BW / QPSK / Low ch.

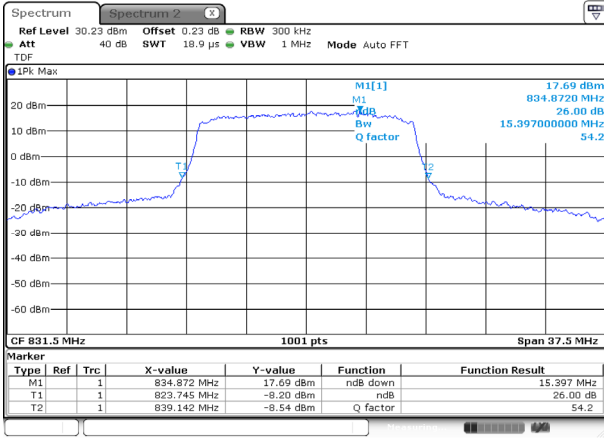


Date: 3.NOV.2019 13:54:40

## 15M BW / 16QAM / Low ch.

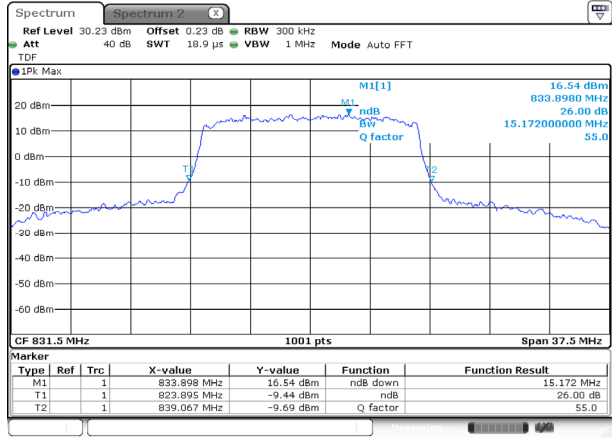


Date: 3.NOV.2019 13:59:39

## 15M BW / QPSK / High ch.

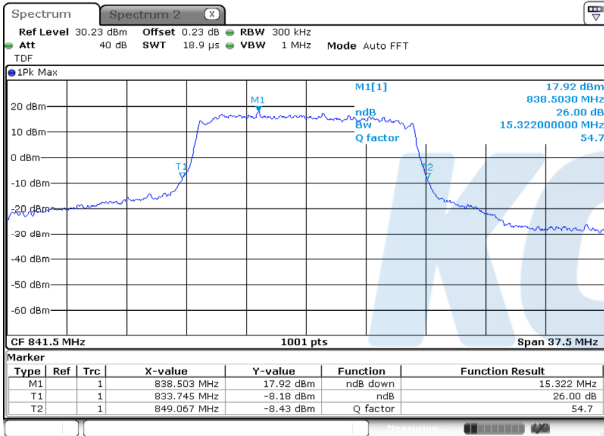

Date: 3.NOV.2019 14:02:52

## 15M BW / 16QAM / High ch.

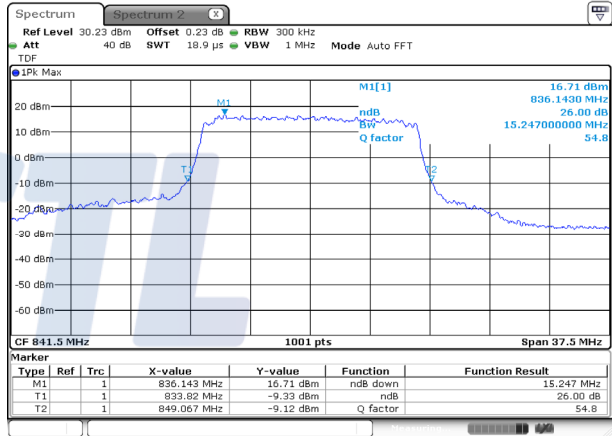

Date: 3.NOV.2019 14:14:08

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)


Report No.:  
KR19-SRF0194-A

Page (28) of (89)




## Straddle channel


### 1.4M BW / QPSK

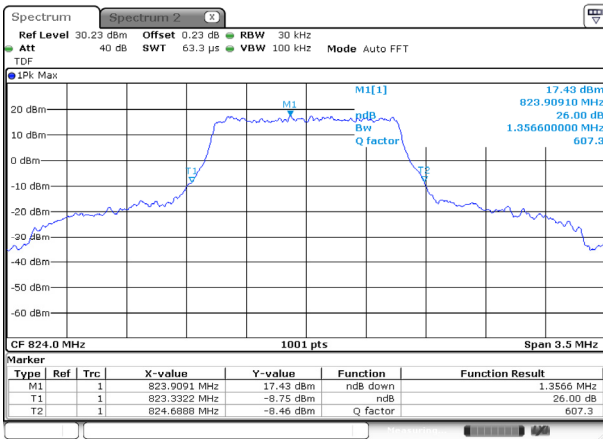


### 1.4M BW / 16QAM

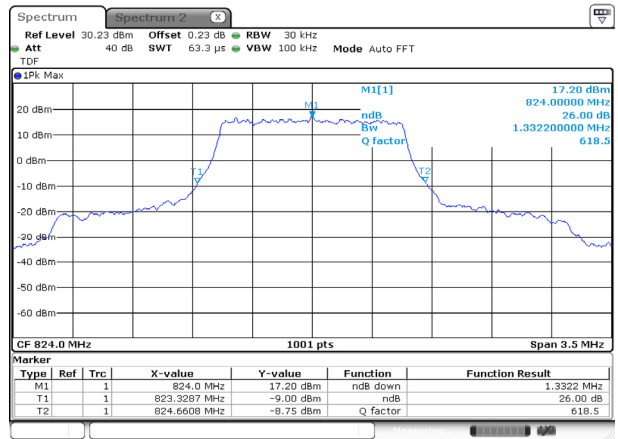


### 3M BW / QPSK

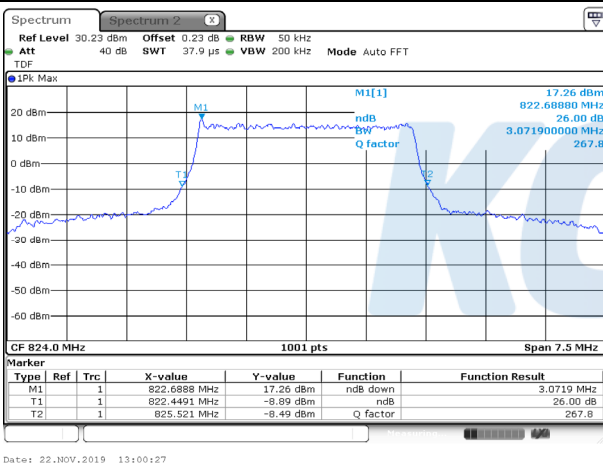


### 3M BW / 16QAM

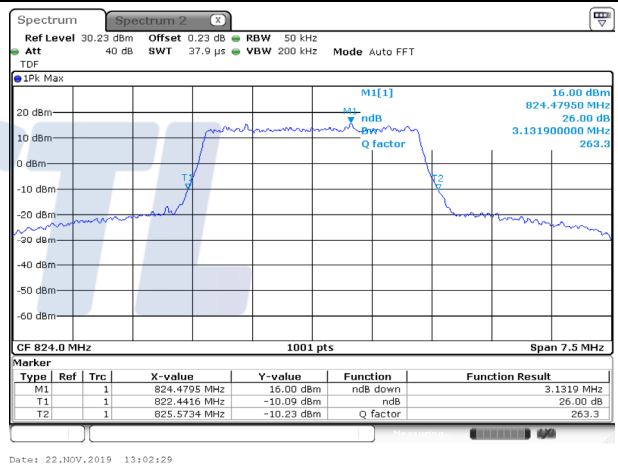

### 5M BW / QPSK

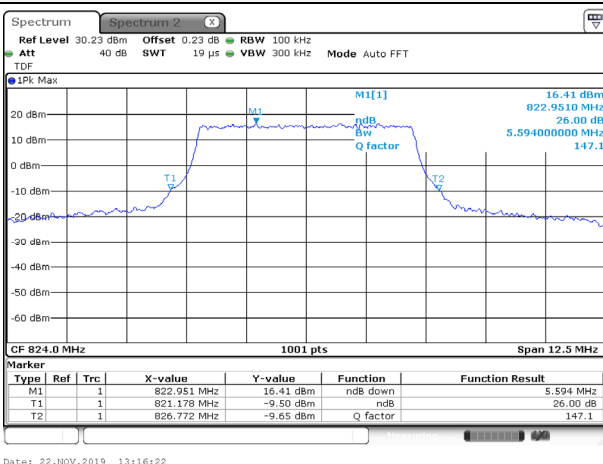

### 5M BW / 16QAM

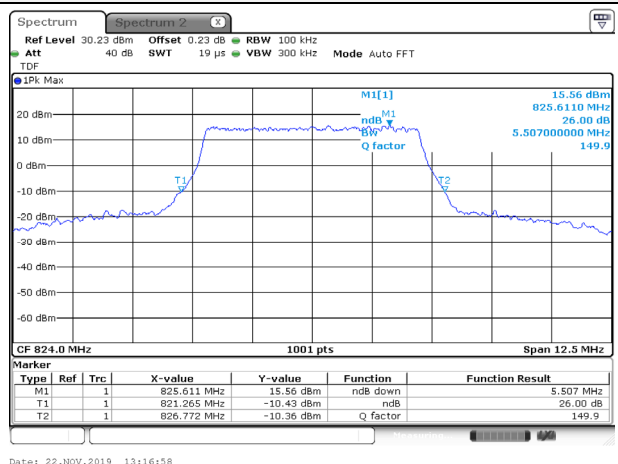

# KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A

Page (29) of (89)




## 10M BW / QPSK

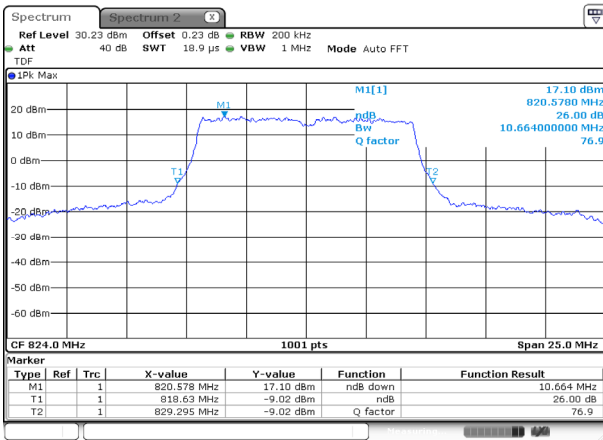


Date: 22.NOV.2019 13:20:17

## 10M BW / 16QAM

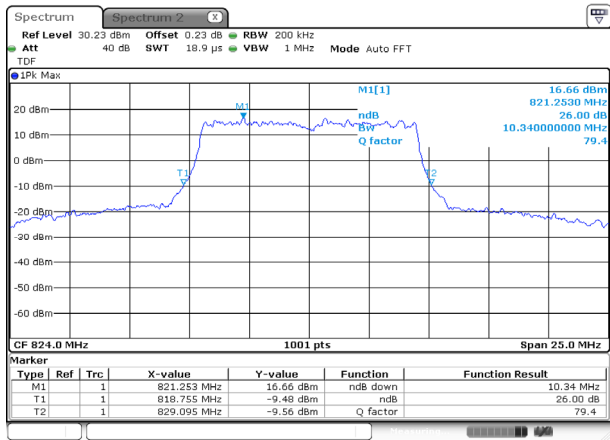


Date: 22.NOV.2019 13:20:45

## 15M BW / QPSK

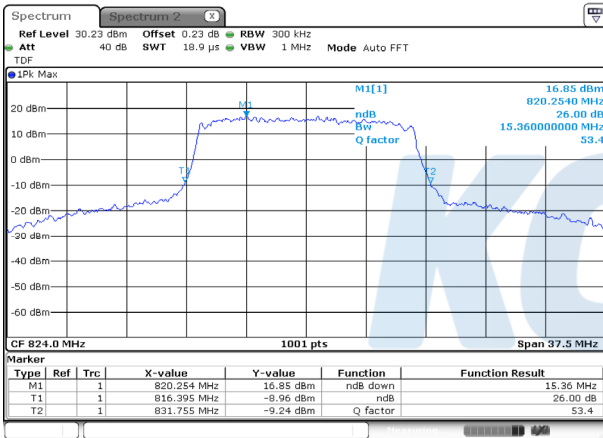

Date: 22.NOV.2019 13:24:56

## 15M BW / 16QAM

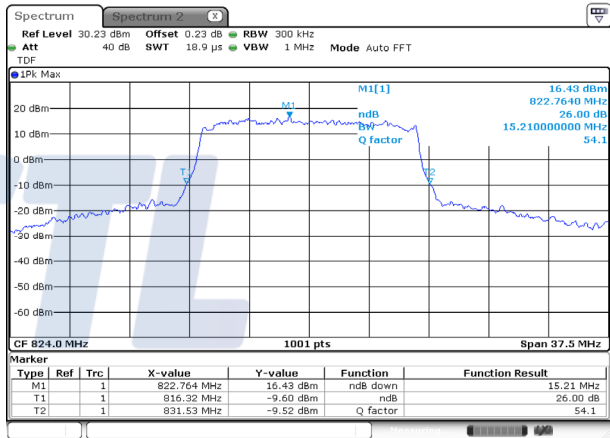

Date: 22.NOV.2019 13:25:34

# KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Korea  
TEL: 82-31-285-0894 FAX: 82-505-299-8311  
[www.kctl.co.kr](http://www.kctl.co.kr)

Report No.:  
KR19-SRF0194-A


Page (30) of (89)



## 99% Occupied Bandwidth


### Test mode: LTE Band 26 (Part 90S)

#### 1.4M BW / QPSK / Low ch.

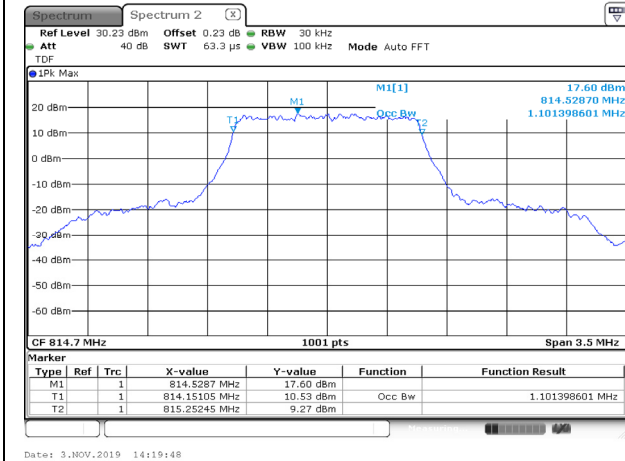


Date: 3.NOV.2019 14:19:48

#### 1.4M BW / 16QAM / Low ch.

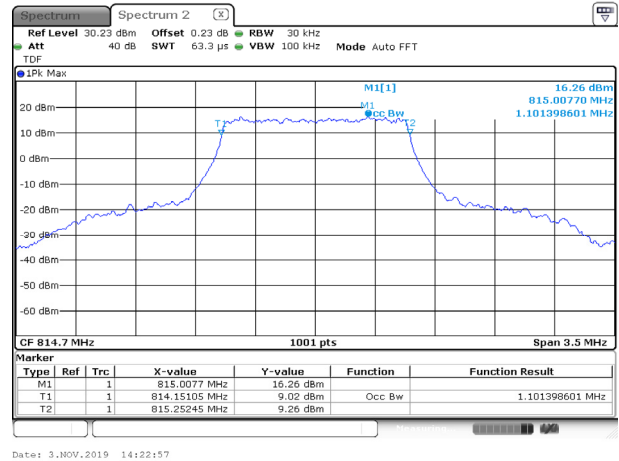


Date: 3.NOV.2019 14:22:57

#### 1.4M BW / QPSK / High ch.

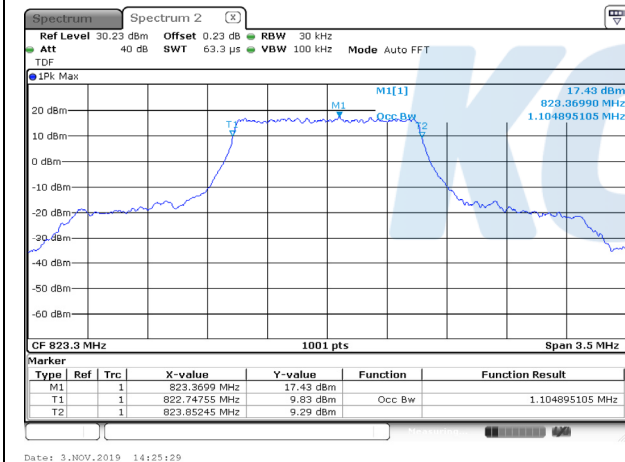

Date: 3.NOV.2019 14:25:29

#### 1.4M BW / 16QAM / High ch.

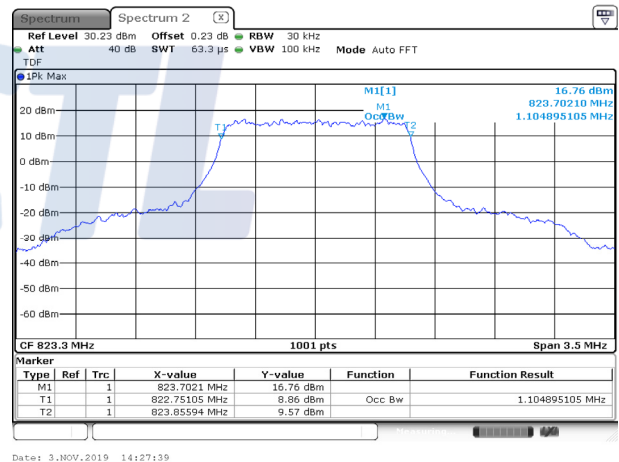

Date: 3.NOV.2019 14:27:39

This test report shall not be reproduced, except in full, without the written approval

KCTL-TIR001-003/2