



**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

SAR EVALUATION REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, ANT+ and NFC

MODEL NUMBER: SC-54A, SCG07

FCC ID: A3LSMA516JPN

REPORT NUMBER: 4789582668-S1V3

ISSUE DATE: 9/7/2020

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



Testing Laboratory

TL-637

Revision History

Rev.	Date	Revisions	Revised By
V1	8/25/2020	Initial Issue	--
V2	8/28/2020	Revised note in Sec.1. Added note.4 in 2 nd table of Sec.6.4.	Sunghoon Kim
V3	9/7/2020	Revised Sec.6.4.	Sunghoon Kim

Table of Contents

1. Attestation of Test Results 5

 1.1. *The Highest Reported SAR for RF exposure conditions for each bands 6*

2. Test Specification, Methods and Procedures..... 6

3. Facilities and Accreditation 6

4. SAR Measurement System & Test Equipment 7

 4.1. *SAR Measurement System..... 7*

 4.2. *SAR Scan Procedures 8*

 4.3. *Test Equipment..... 10*

5. Measurement Uncertainty..... 11

 5.1. *DECISION RULE..... 11*

6. Device Under Test (DUT) Information 11

 6.1. *DUT Description 11*

 6.2. *Wireless Technologies..... 12*

 6.3. *Nominal and Maximum Output Power..... 13*

 6.4. *Power Back-off Operation..... 14*

 6.5. *General LTE SAR Test and Reporting Considerations..... 15*

 6.6. *LTE (TDD) Considerations..... 16*

7. RF Exposure Conditions (Test Configurations) 17

8. Dielectric Property Measurements & System Check 18

 8.1 *Dielectric Property Measurements..... 18*

 8.2 *System Check..... 21*

9. Conducted Output Power Measurements..... 23

 9.1 *GSM 23*

 9.2 *W-CDMA 25*

 9.3 *LTE..... 28*

 9.4 *Wi-Fi 2.4 GHz (DTS Band)..... 38*

 9.5 *Wi-Fi 5GHz (U-NII Bands)..... 39*

 9.6 *Bluetooth 40*

10. Measured and Reported (Scaled) SAR Results..... 41

 10.1 *GSM 850 43*

 10.2 *GSM 1900 43*

 10.3 *W-CDMA Band V..... 44*

 10.4 *LTE Band 5 (10MHz Bandwidth)..... 44*

10.5 LTE Band 12 (10MHz Bandwidth)..... 45

10.6 LTE Band 41 (20MHz Bandwidth)..... 45

10.7 Wi-Fi (DTS Band) 46

10.8 Bluetooth 46

10.9 Wi-Fi (U-NII Bands) 47

11 SAR Measurement Variability..... 48

12 Simultaneous Transmission SAR Analysis..... 49

 12.1 Sum of the SAR for WWAN & Wi-Fi & BT..... 51

Appendixes 52

 4789582668-S1 FCC Report SAR_App A_Photos & Ant. Locations 52

 4789582668-S1 FCC Report SAR_App B_Highest SAR Test Plots 52

 4789582668-S1 FCC Report SAR_App C_System Check Plots 52

 4789582668-S1 FCC Report SAR_App D_SAR Tissue Ingredients..... 52

 4789582668-S1 FCC Report SAR_App E_Probe Cal. Certificates..... 52



 4789582668-S1 FCC Report SAR_App F_Dipole Cal. Certificates 52

1. Attestation of Test Results

Applicant Name		SAMSUNG ELECTRONICS CO.,LTD.			
FCC ID		A3LSMA516JPN			
Model Number		SC-54A, SCG07			
Applicable Standards		FCC 47 CFR § 2.1093 IEEE Std 1528-2013 Published RF exposure KDB procedures			
Exposure Category		SAR Limits (W/Kg)			
		Peak spatial-average (1g of tissue)		Product Specific 10g (10g of tissue)	
General population / Uncontrolled exposure		1.6		4.0	
RF Exposure Conditions		Equipment Class - The Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
Head		0.23	0.14	< 0.10	0.19
Body-worn		0.47	0.14	0.86	< 0.10
Hotspot		0.93	0.41	N/A	< 0.10
Product Specific 10g		2.80	N/A	2.69	N/A
Simultaneous TX	Head	0.42	0.38	0.28	0.42
	Body-worn	1.33	0.61	1.33	0.49
	Hotspot	1.34	1.34	N/A	1.00
	Product Specific 10g	N/A	N/A	N/A	N/A
Date Tested		8/4/2020 to 8/21/2020			
Test Results		Pass			

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This report covers the Samsung model SC-54A and SCG07. These models are identical in hardware. Basic model SC-54A was set for test. See the PED document for details. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released By: 	Prepared By: 
Justin Park Operations Leader UL Korea, Ltd. Suwon Laboratory	Sunghoon Kim Test Engineer UL Korea, Ltd. Suwon Laboratory

1.1. The Highest Reported SAR for RF exposure conditions for each bands

Equipment Class	Band	The Highest Reported SAR (W/kg)			
		1g of tissue			10g of tissue
		Head Exposure condition	Body-worn Exposure condition	Hotspot Exposure condition	Product Specific Exposure condition
PCE	GSM 850	0.210	0.289	0.563	N/A
	GSM 1900	0.086	0.467	0.932	2.798
	WCDMA Band V	0.234	0.302	0.552	N/A
	LTE Band 5	0.226	0.289	0.591	N/A
	LTE Band 12	0.175	0.267	0.412	N/A
	LTE Band 41	0.089	0.219	0.452	N/A
DTS	2.4GHz WLAN	0.144	0.139	0.412	N/A
NII	5GHz WLAN	0.046	0.861	N/A	2.691
DSS	Bluetooth	0.190	0.020	0.071	N/A

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, ANSI C63.26-2015 the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 648474 D04 Handset SAR v01r03
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D06 Hotspot Mode v02r01
- 941225 D07 UMPC Mini Tablet v01r02
- 971168 D01 Power Meas License Digital System v03r01

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; Page 37, RF Exposure Procedures Update (Other LTE Considerations)
- [TCB workshop](#) October, 2016; Page 7, RF Exposure Procedures (Bluetooth Duty Factor)
- [TCB workshop](#) October, 2016; Page 18, RF Exposure Procedures (DUT Holder Perturbations)
- [TCB workshop](#) April, 2019 Page 19, RF Exposure Procedures (Tissue Simulating Liquids (TSL))

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon	
SAR 1 Room	SAR 4 Room
SAR 2 Room	SAR 5 Room
SAR 3 Room	


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

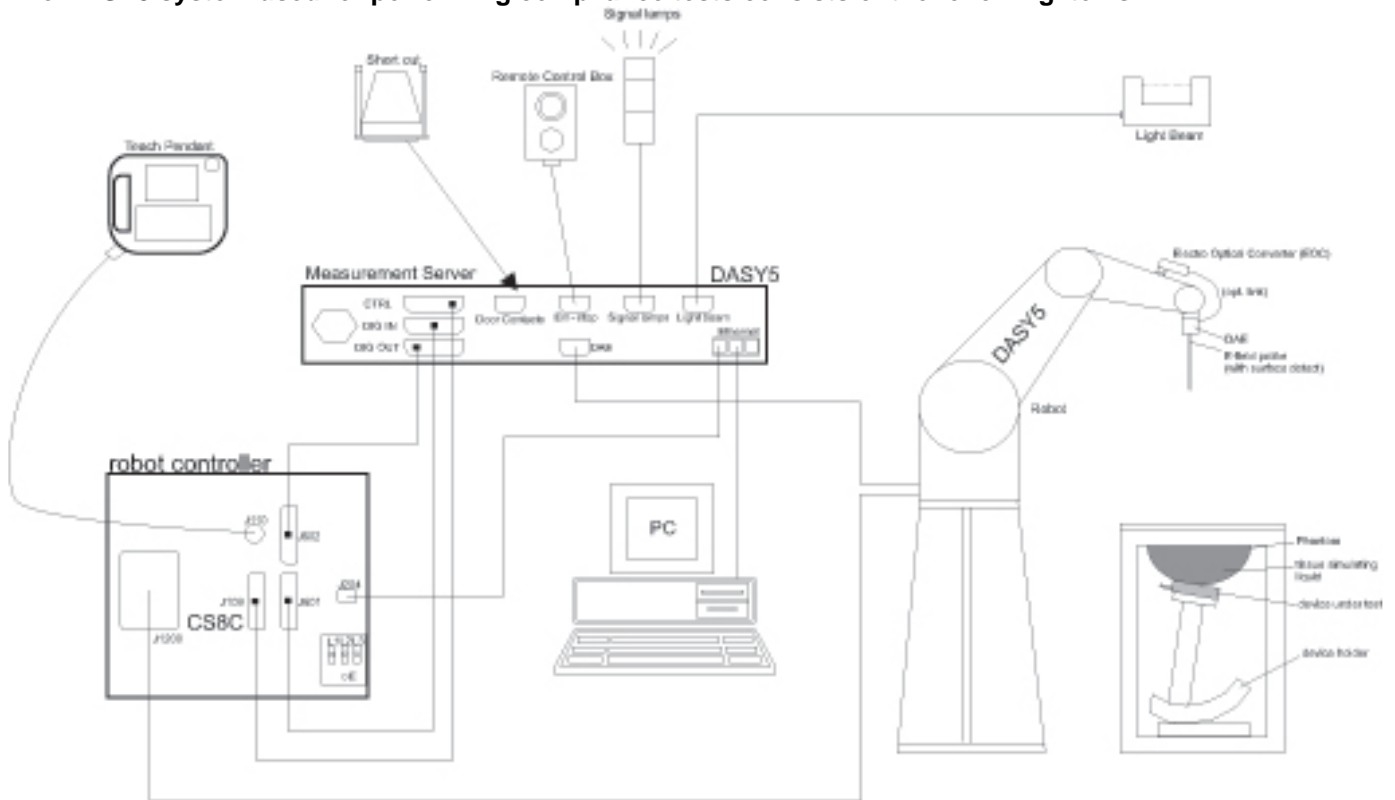

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date	Note
Network Analyzer	Agilent	E5071C	MY46522054	8-7-2020	1
				8-4-2021	
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	6-17-2021	
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A	
Thermometer	LKM	DTM3000	3424	8-9-2020	1
				8-7-2021	

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date	Note
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-6-2020	1
				8-4-2021	
Power Sensor	Agilent	U2000A	MY54260010	8-9-2020	1
				8-4-2021	
Power Sensor	Agilent	U2000A	MY54260007	8-9-2020	1
				8-4-2021	
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	8-8-2020	1
				8-4-2021	
Directional Coupler	Agilent	772D	MY52180193	8-7-2020	1
				8-4-2021	
Directional Coupler	Agilent	778D	MY52180432	8-7-2020	1
				8-4-2021	
Low Pass Filter	MICROLAB	LA-15N	03943	8-7-2020	1
				8-4-2021	
Low Pass Filter	FILTRON	L14012FL	1410003S	8-7-2020	1
				8-4-2021	
Low Pass Filter	MICROLAB	LA-60N	03942	8-7-2020	1
				8-4-2021	
Attenuator	Agilent	8491B/003	MY39269292	8-7-2020	1
				8-4-2021	
Attenuator	Agilent	8491B/010	MY39269315	8-7-2020	1
Attenuator	R & S	8997 / OSP	-	8-6-2021	
Attenuator	Agilent	8491B/020	MY39269298	8-7-2020	1
				8-4-2021	
E-Field Probe (SAR1)	SPEAG	EX3DV4	7313	2-25-2021	
E-Field Probe (SAR3)	SPEAG	EX3DV4	7314	5-29-2021	
E-Field Probe (SAR4)	SPEAG	EX3DV4	7545	9-23-2020	
E-Field Probe (SAR5)	SPEAG	EX3DV4	3871	8-29-2020	
Data Acquisition Electronics (SAR1)	SPEAG	DAE4	1494	7-18-2020	
Data Acquisition Electronics (SAR1)	SPEAG	DAE4	912	11-22-2020	
Data Acquisition Electronics (SAR3)	SPEAG	DAE4	1468	9-20-2020	
Data Acquisition Electronics (SAR4)	SPEAG	DAE4	1591	9-11-2020	
Data Acquisition Electronics (SAR5)	SPEAG	DAE4	1343	8-27-2020	
System Validation Dipole	SPEAG	D750V3	1122	2-24-2022	
System Validation Dipole	SPEAG	D835V2	4d174	2-24-2022	
System Validation Dipole	SPEAG	D1900V2	5d199	3-19-2022	
System Validation Dipole	SPEAG	D2450V2	939	7-25-2021	2
System Validation Dipole	SPEAG	D2600V2	1097	9-19-2021	
System Validation Dipole	SPEAG	D5GHzV2	1209	2-27-2022	
Thermometer (SAR1)	Lutron	MHB-382SD	AH.50215	8-8-2020	1
				8-7-2021	
Thermometer (SAR3)	Lutron	MHB-382SD	AH.50213	8-8-2020	1
				8-7-2021	
Thermometer (SAR4),(SAR5)	Lutron	MHB-382SD	AH.91463	8-8-2020	1
				8-7-2021	

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date	Note
Base Station Simulator	R & S	CMW500	150313	8-8-2020	1
				8-4-2021	
Base Station Simulator	R & S	CMW500	150314	8-8-2020	1
				8-4-2021	
Base Station Simulator	R & S	CMW500	162790	8-9-2020	1
				8-4-2021	
Wireless Connectivity Tester	R & S	CMW270	100982	8-5-2020	1
				8-3-2021	
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	8-7-2020	1
				8-3-2021	

Note(s):

1. Before the calibration period expired, it was recalibrated and used.
2. Refer to Appendix F that mentioned about justification for Extended SAR Dipole Calibrations. (D2450V2 (SN : 939))

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

5.1. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedures 1, Clause 4.4.2 in IEC Guide 115:2007.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Refer to Appendix A.		
Back Cover	<input checked="" type="checkbox"/> The Back Cover is not removable.		
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz_ Channels 36-48, Channels 149-161)		
Test Sample Information	No.	S/N	Notes
	1	R3CN709MX9T	Main Conducted
	2	R3CN709MXCR	Main Conducted
	3	R38CN709MKFY	Wi-Fi & BT Conducted
	4	R3CN709MWFV	SAR
	5	R3CN709MWND	SAR
	6	R3CN709MRKA	SAR

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK)	GPRS Multi-Slot Class: <input type="checkbox"/> Class 8 - 1 Up, 4 Down <input type="checkbox"/> Class 10 - 2 Up, 4 Down <input type="checkbox"/> Class 12 - 4 Up, 4 Down <input checked="" type="checkbox"/> Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
		GPRS (GMSK)		
		EGPRS (8PSK)		
Does this device support DTM (Dual Transfer Mode)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				
W-CDMA (UMTS)	Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Category 10) HSUPA (Category 6)		100%
LTE	FDD Band 5 FDD Band 12 TDD Band 41	QPSK	Rel. 11 Does not support Carrier Aggregation (CA)	100% (FDD) 63.3% (TDD)
		16QAM		
		64QAM		
Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		98.8% (802.11b)
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		98.7% (802.11a) 98.5% (802.11n 40MHz BW)
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Does this device support Band gap channel(s)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
Bluetooth	2.4 GHz	Version 5.0 LE		76.8% (DH5)
NFC	13.56 MHz	Type A/B/F		N/A ³

Notes:

- The Bluetooth protocol is considered source-based averaging. Bluetooth GFSK (DH5) was verified to have the highest duty cycle of 76.8% and was considered and used for SAR Testing.
- Duty cycle for Wi-Fi is referenced from the DTS and UNII report.
- Measured Duty Cycle is not required due to SAR test exemption.

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1. at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

RF Air interface	Antenna	Mode	Time Slots	Max. RF Output Power (dBm)		Reduced. RF Output Power (dBm)	
				Tune-up Limit	Frame Power	Tune-up Limit	Frame Power
GSM850	Main 1 Ant.	Voice	1	32.0	23.0		
		GPRS	1	32.0	23.0		
		GPRS	2	30.0	24.0		
		GPRS	3	28.0	23.7		
		GPRS	4	27.0	24.0		
		EGPRS	1	27.5	18.5		
		EGPRS	2	26.5	20.5		
		EGPRS	3	24.0	19.7		
GSM1900	Main 1 Ant.	Voice	1	28.5	19.5	26.5	17.5
		GPRS	1	28.5	19.5	26.5	17.5
		GPRS	2	27.0	21.0	25.0	19.0
		GPRS	3	25.5	21.2	22.0	17.7
		GPRS	4	24.5	21.5	22.0	19.0
		EGPRS	1	26.5	17.5	24.0	15.0
		EGPRS	2	24.5	18.5	22.0	16.0
		EGPRS	3	23.0	18.7	20.0	15.7
		EGPRS	4	22.0	19.0	19.0	16.0

RF Air interface	Antenna	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power (dBm)
W-CDMA Band V	Main 1 Ant.	R99	24.5	
		HSDPA	23.5	
		HSUPA	23.5	

RF Air interface	Antenna	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power (dBm)
LTE Band 5	Main 1 Ant.	QPSK	24.5	
LTE Band 12	Main 1 Ant.	QPSK	25.0	
LTE Band 41	Main 2 Ant.	QPSK	23.5	

RF Air interface	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power (dBm)
WiFi 2.4 GHz (Ch.1 - Ch.11)	802.11b	20.0	12.0
	802.11g	17.0	12.0
	802.11n HT20	20.0	12.0
WiFi 2.4 GHz (Ch.12)	802.11b	18.0	12.0
	802.11g	13.0	8.0
	802.11n HT20	13.0	8.0
WiFi 2.4 GHz (Ch.13)	802.11b	14.0	12.0
	802.11g	11.0	6.0
	802.11n HT20	11.0	6.0
WiFi 5 GHz	802.11a	16.0	12.0
	802.11n HT20	16.0	12.0
	802.11n HT40	13.0	12.0
	802.11ac VHT20	16.0	12.0
	802.11ac VHT40	13.0	12.0
	802.11ac VHT80	12.0	11.0
	Bluetooth BDR	12.0	
	Bluetooth EDR	11.0	
	Bluetooth LE_Low	7.0	
	Bluetooth LE_Mid	7.0	
	Bluetooth LE_High	9.0	

6.4. Power Back-off Operation

This device supports multiple power back-off modes: WWAN (Ear-jack), WWAN (Hotspot) and WLAN (RCV). Each of the power back-off operates within specific exposure conditions for certain technologies. For full details on how each power back-off mode operates, refer to the Operational Description.

Power Back-off mode	Technologies Supported	Exposure Conditions Active			
		Head	Body-worn	Hotspot	Product Specific 10-g
WWAN (Earjack)	GSM 1900	N/A	✓	N/A	✓
WWAN (Hotspot)	GSM 1900	N/A	N/A	✓	N/A
WLAN (RCV)	Wi-Fi 2.4GHz Wi-Fi 5GHz	✓	N/A	N/A	N/A

Note(s):

1. Body-worn SAR tested at full power without ear-jack connected because no SAR values were over 1.2 W/kg.
2. Product Specific 10-g SAR tested at full power without ear-jack connected.

Product Specific 10g Adjusted SAR Calculation

Wireless technologies	Max Tune-up Limit (dBm)	Reduced Tune-Up Limit (dBm)	Power Factor	Reported SAR Limit (W/kg)
GSM 1900	21.5	19.0	1.78	0.675

Note(s):

1. Hotspot mode supports power reduction. When the measured SAR is scaled to the maximum tune-up limit, the adjusted SAR is < 1.2 W/kg. Therefore, Extremity SAR testing is not required for this band in accordance with KDB 648474 §2.5 b. Refer to §10 for Reported SAR results. If the Reported SAR 1g value in §10 is less than the Reported SAR Limit listed above, then Extremity SAR is not required.
2. LTE 50% RB is scaled up to the Max Tune-Up Limit with MPR included.
3. For Reported SAR limit in above table, It was calculated using Max tune-up Limit & Reduced Tune-up limit & Reported SAR 1.2 W/kg. (Reported SAR Limit = 1.2 W/kg / Power factor, Power factor = $10^{(Max\ tune-up\ limit - Reduced\ tune-up\ limit)/10}$)
4. For GSM mode, Frame power(dBm) was used for Product Specific 10g Adjusted SAR Calculation. Please refer to Sec.6.3.

6.5. General LTE SAR Test and Reporting Considerations

Item	Description																																																																				
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 5	Frequency range: 824 - 849 MHz																																																																			
		Channel Bandwidth																																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7																																																														
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5																																																														
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3																																																														
	Band 12	Frequency range: 699 – 716 MHz																																																																			
		Channel Bandwidth																																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7																																																														
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5																																																														
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3																																																														
	Band 41	Frequency range: 2496 - 2690 MHz																																																																			
		Channel Bandwidth																																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
	Low	39750 / 2506.0																																																																			
	Low-Mid	40185 / 2549.5																																																																			
Mid	40620 / 2593.0																																																																				
Mid-High	41055 / 2636.5																																																																				
High	41490 / 2680.0																																																																				
LTE transmitter and antenna implementation	Refer to Appendix A.																																																																				
Maximum power reduction (MPR)	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table> <p>MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing</p>							Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																														
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																														
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																														
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																														
256 QAM	≥ 1						≤ 5																																																														
Power reduction	No																																																																				
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																				

Notes:

- Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports Overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE devices.
- LTE Band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths.
- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.6. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink $\times (T_s) \times \#$ of S + $\#$ of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle for Power class 3, configuration 1 at 43.3% duty cycle for Power class 2

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	Antenna	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	Main 1 Ant. & Main 2 Ant.	0 mm	Left Touch	N/A	Yes	
				Left Tilt (15°)	N/A	Yes	
				Right Touch	N/A	Yes	
				Right Tilt (15°)	N/A	Yes	
	Body	Main 1 Ant. & Main 2 Ant.	15 mm	Rear	N/A	Yes	
				Front	N/A	Yes	
				Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
	Hotspot	Main 1 Ant.	10 mm	Edge 1 (Top)	> 25 mm	No	1
				Edge 2 (Right)	< 25 mm	Yes	
				Edge 3 (Bottom)	< 25 mm	Yes	
				Edge 4 (Left)	< 25 mm	Yes	
				Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
	Hotspot	Main 2 Ant.	10 mm	Edge 1 (Top)	> 25 mm	No	1
				Edge 2 (Right)	> 25 mm	No	1
				Edge 3 (Bottom)	< 25 mm	Yes	
				Edge 4 (Left)	< 25 mm	Yes	
				Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
Product Specific 10-g	Main 1 Ant. & Main 2 Ant.	0 mm	Rear	Refer to notes 2 & 3			
			Front				
			Edge 1 (Top)				
			Edge 2 (Right)				
			Edge 3 (Bottom)				
			Edge 4 (Left)				
WLAN	Head	WiFi/BT Ant.	0 mm	Left Touch	N/A	Yes	
				Left Tilt (15°)	N/A	Yes	
				Right Touch	N/A	Yes	
				Right Tilt (15°)	N/A	Yes	
	Body	WiFi/BT Ant.	15 mm	Rear	N/A	Yes	
				Front	N/A	Yes	
				Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
	Hotspot	WiFi/BT Ant.	10 mm	Edge 1 (Top)	< 25 mm	Yes	
				Edge 2 (Right)	> 25 mm	No	1
				Edge 3 (Bottom)	> 25 mm	No	1
				Edge 4 (Left)	< 25 mm	Yes	
				Rear	< 25 mm	Yes	
				Front	< 25 mm	Yes	
	Product Specific 10-g	WiFi/BT Ant.	0 mm	Rear	Refer to notes 2 & 4		
				Front			
				Edge 1 (Top)			
				Edge 2 (Right)			
				Edge 3 (Bottom)			
				Edge 4 (Left)			

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- For Phablet devices: When hotspot mode applies, Product specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
- For Phablet devices : When hotspot mode applies and power reduction applies to hotspot mode, Product specific 10-g SAR is required for each test position that has and adjusted SAR to maximum power that is > 1.2 W/kg.
- For Phablet devices: When hotspot mode is not supported, Product specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

8. Dielectric Property Measurements & System Check

8.1 Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

SAR test were performed in All RF exposure conditions using Head tissue according to TCB workshop note of April. 2019.

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

**Dielectric Property Measurements Results:
SAR 1 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
8-10-2020	Head 5250	e'	36.4900	Relative Permittivity (ϵ_r):	36.49	35.93	1.55	5
		e"	15.8900	Conductivity (σ):	4.64	4.70	-1.35	5
	Head 5260	e'	36.4600	Relative Permittivity (ϵ_r):	36.46	35.92	1.50	5
		e"	15.8900	Conductivity (σ):	4.65	4.71	-1.38	5
	Head 5600	e'	35.9700	Relative Permittivity (ϵ_r):	35.97	35.53	1.23	5
		e"	16.1200	Conductivity (σ):	5.02	5.06	-0.81	5
	Head 5750	e'	35.7400	Relative Permittivity (ϵ_r):	35.74	35.36	1.07	5
		e"	16.2100	Conductivity (σ):	5.18	5.21	-0.60	5
	Head 5825	e'	35.6000	Relative Permittivity (ϵ_r):	35.60	35.30	0.85	5
		e"	16.2400	Conductivity (σ):	5.26	5.27	-0.19	5
8-13-2020	Head 5250	e'	36.4800	Relative Permittivity (ϵ_r):	36.48	35.93	1.52	5
		e"	16.3300	Conductivity (σ):	4.77	4.70	1.38	5
	Head 5260	e'	36.4500	Relative Permittivity (ϵ_r):	36.45	35.92	1.47	5
		e"	16.3400	Conductivity (σ):	4.78	4.71	1.41	5
	Head 5600	e'	35.7300	Relative Permittivity (ϵ_r):	35.73	35.53	0.55	5
		e"	16.4100	Conductivity (σ):	5.11	5.06	0.98	5
	Head 5750	e'	35.4100	Relative Permittivity (ϵ_r):	35.41	35.36	0.13	5
		e"	16.4500	Conductivity (σ):	5.26	5.21	0.88	5
	Head 5825	e'	35.2500	Relative Permittivity (ϵ_r):	35.25	35.30	-0.14	5
		e"	16.4600	Conductivity (σ):	5.33	5.27	1.16	5
8-18-2020	Head 5250	e'	36.6000	Relative Permittivity (ϵ_r):	36.60	35.93	1.86	5
		e"	15.7900	Conductivity (σ):	4.61	4.70	-1.97	5
	Head 5260	e'	36.5900	Relative Permittivity (ϵ_r):	36.59	35.92	1.86	5
		e"	15.7800	Conductivity (σ):	4.62	4.71	-2.06	5
	Head 5600	e'	36.0200	Relative Permittivity (ϵ_r):	36.02	35.53	1.37	5
		e"	15.9500	Conductivity (σ):	4.97	5.06	-1.85	5
	Head 5750	e'	35.8000	Relative Permittivity (ϵ_r):	35.80	35.36	1.24	5
		e"	16.0800	Conductivity (σ):	5.14	5.21	-1.39	5
	Head 5825	e'	35.7200	Relative Permittivity (ϵ_r):	35.72	35.30	1.19	5
		e"	16.1000	Conductivity (σ):	5.21	5.27	-1.05	5
8-21-2020	Head 5250	e'	35.9300	Relative Permittivity (ϵ_r):	35.93	35.93	-0.01	5
		e"	16.0600	Conductivity (σ):	4.69	4.70	-0.30	5
	Head 5260	e'	35.9100	Relative Permittivity (ϵ_r):	35.91	35.92	-0.03	5
		e"	16.0700	Conductivity (σ):	4.70	4.71	-0.26	5
	Head 5600	e'	35.3000	Relative Permittivity (ϵ_r):	35.30	35.53	-0.66	5
		e"	16.2100	Conductivity (σ):	5.05	5.06	-0.25	5
	Head 5750	e'	35.0400	Relative Permittivity (ϵ_r):	35.04	35.36	-0.91	5
		e"	16.2700	Conductivity (σ):	5.20	5.21	-0.23	5
	Head 5825	e'	34.9000	Relative Permittivity (ϵ_r):	34.90	35.30	-1.13	5
		e"	16.3100	Conductivity (σ):	5.28	5.27	0.24	5

SAR 3 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
8-10-2020	Head 2450	e'	39.0100	Relative Permittivity (ϵ_r):	39.01	39.20	-0.48	5
		e"	13.4000	Conductivity (σ):	1.83	1.80	1.41	5
	Head 2400	e'	39.0300	Relative Permittivity (ϵ_r):	39.03	39.30	-0.68	5
		e"	13.4300	Conductivity (σ):	1.79	1.75	2.32	5
	Head 2480	e'	38.9900	Relative Permittivity (ϵ_r):	38.99	39.16	-0.44	5
		e"	13.4200	Conductivity (σ):	1.85	1.83	0.99	5

SAR 4 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
8-4-2020	Head 1900	e'	39.6800	Relative Permittivity (ϵ_r):	39.68	40.00	-0.80	5
		e"	13.7100	Conductivity (σ):	1.45	1.40	3.46	5
	Head 1850	e'	39.7400	Relative Permittivity (ϵ_r):	39.74	40.00	-0.65	5
		e"	13.7500	Conductivity (σ):	1.41	1.40	1.03	5
	Head 1910	e'	39.6700	Relative Permittivity (ϵ_r):	39.67	40.00	-0.82	5
		e"	13.7100	Conductivity (σ):	1.46	1.40	4.00	5
8-20-2020	Head 1900	e'	40.6800	Relative Permittivity (ϵ_r):	40.68	40.00	1.70	5
		e"	13.7600	Conductivity (σ):	1.45	1.40	3.83	5
	Head 1850	e'	40.7500	Relative Permittivity (ϵ_r):	40.75	40.00	1.88	5
		e"	13.7700	Conductivity (σ):	1.42	1.40	1.18	5
	Head 1910	e'	40.6700	Relative Permittivity (ϵ_r):	40.67	40.00	1.68	5
		e"	13.7600	Conductivity (σ):	1.46	1.40	4.38	5

SAR 5 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
8-5-2020	Head 750	e'	41.2900	Relative Permittivity (ϵ_r):	41.29	41.96	-1.60	5
		e"	21.5300	Conductivity (σ):	0.90	0.89	0.53	5
	Head 700	e'	41.4700	Relative Permittivity (ϵ_r):	41.47	42.22	-1.77	5
		e"	22.6100	Conductivity (σ):	0.88	0.89	-1.03	5
	Head 790	e'	41.1600	Relative Permittivity (ϵ_r):	41.16	41.76	-1.43	5
		e"	20.7500	Conductivity (σ):	0.91	0.90	1.71	5
8-5-2020	Head 835	e'	41.0300	Relative Permittivity (ϵ_r):	41.03	41.50	-1.13	5
		e"	19.9600	Conductivity (σ):	0.93	0.90	2.97	5
	Head 820	e'	41.0600	Relative Permittivity (ϵ_r):	41.06	41.60	-1.30	5
		e"	20.2100	Conductivity (σ):	0.92	0.90	2.56	5
	Head 850	e'	41.0100	Relative Permittivity (ϵ_r):	41.01	41.50	-1.18	5
		e"	19.7300	Conductivity (σ):	0.93	0.92	1.91	5
8-5-2020	Head 2600	e'	37.7100	Relative Permittivity (ϵ_r):	37.71	39.01	-3.33	5
		e"	13.2000	Conductivity (σ):	1.91	1.96	-2.75	5
	Head 2500	e'	37.9100	Relative Permittivity (ϵ_r):	37.91	39.14	-3.13	5
		e"	13.2000	Conductivity (σ):	1.83	1.85	-1.03	5
	Head 2700	e'	37.5500	Relative Permittivity (ϵ_r):	37.55	38.88	-3.43	5
		e"	13.1900	Conductivity (σ):	1.98	2.07	-4.35	5
8-10-2020	Head 2600	e'	38.4600	Relative Permittivity (ϵ_r):	38.46	39.01	-1.41	5
		e"	13.5000	Conductivity (σ):	1.95	1.96	-0.53	5
	Head 2500	e'	38.6200	Relative Permittivity (ϵ_r):	38.62	39.14	-1.32	5
		e"	13.4000	Conductivity (σ):	1.86	1.85	0.47	5
	Head 2700	e'	38.2600	Relative Permittivity (ϵ_r):	38.26	38.88	-1.61	5
		e"	13.5400	Conductivity (σ):	2.03	2.07	-1.81	5

8.2 System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 2.5 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 1.4 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles.

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)	
				1g/10g	Head
D750V3	1122	2-24-2020	750	1g	8.54
				10g	5.59
D835V2	4d174	2-24-2020	835	1g	9.59
				10g	6.24
D1900V2	5d199	3-19-2020	1900	1g	40.50
				10g	21.00
D2450V2	939	7-25-2019	2450	1g	53.20
				10g	25.10
D2600V2	1097	9-19-2019	2450	1g	57.30
				10g	25.70
D5GHzV2	1209	2-27-2020	5250	1g	79.90
				10g	22.60
			5600	1g	83.60
				10g	23.60
			5750	1g	80.20
				10g	22.60

Note(s):

Refer to Appendix F that mentioned about justification for Extended SAR Dipole Calibrations. (D2450V2 (SN : 939))

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 1 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
8-10-2020	D5GHzV2 (5250)	1209	Head	1g	7.64	76.4	79.90	-4.38	
				10g	2.18	21.8	22.60	-3.54	
8-10-2020	D5GHzV2 (5600)	1209	Head	1g	8.22	82.2	83.60	-1.67	
				10g	2.32	23.2	23.60	-1.69	
8-10-2020	D5GHzV2 (5750)	1209	Head	1g	7.36	73.6	80.20	-8.23	1, 2
				10g	2.08	20.8	22.60	-7.96	
8-13-2020	D5GHzV2 (5250)	1209	Head	1g	8.22	82.2	79.90	2.88	
				10g	2.35	23.5	22.60	3.98	
8-13-2020	D5GHzV2 (5600)	1209	Head	1g	8.55	85.5	83.60	2.27	
				10g	2.41	24.1	23.60	2.12	
8-13-2020	D5GHzV2 (5750)	1209	Head	1g	7.47	74.7	80.20	-6.86	
				10g	2.12	21.2	22.60	-6.19	
8-18-2020	D5GHzV2 (5250)	1209	Head	1g	7.38	73.8	79.90	-7.63	
				10g	2.10	21.0	22.60	-7.08	
8-18-2020	D5GHzV2 (5750)	1209	Head	1g	8.08	80.8	80.20	0.75	
				10g	2.29	22.9	22.60	1.33	
8-21-2020	D5GHzV2 (5750)	1209	Head	1g	8.40	84.0	80.20	4.74	
				10g	2.38	23.8	22.60	5.31	

SAR 3 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
8-10-2020	D2450V2	939	Head	1g	5.52	55.2	53.20	3.76	3, 4
				10g	2.58	25.8	25.10	2.79	

SAR 4 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
8-4-2020	D1900V2	5d199	Head	1g	4.07	40.7	40.50	0.49	5, 6
				10g	2.10	21.0	21.00	0.00	
8-20-2020	D1900V2	5d199	Head	1g	4.06	40.6	40.50	0.25	
				10g	2.10	21.0	21.00	0.00	

SAR 5 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta ±10 %	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
8-5-2020	D750V3	1122	Head	1g	0.81	8.1	8.54	-5.15	7, 8
				10g	0.54	5.4	5.59	-4.29	
8-5-2020	D835V2	4d174	Head	1g	0.97	9.7	9.59	1.36	9, 10
				10g	0.63	6.3	6.24	1.44	
8-5-2020	D2600V2	1097	Head	1g	5.33	53.3	57.30	-6.98	11, 12
				10g	2.41	24.1	25.70	-6.23	
8-10-2020	D2600V2	1097	Head	1g	5.45	54.5	57.30	-4.89	
				10g	2.47	24.7	25.70	-3.89	

9. Conducted Output Power Measurements

9.1 GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM (Voice)	CS1	1	128	824.2	30.9	21.9	32.0	23.0
			190	836.6	31.3	22.3		
			251	848.8	31.2	22.1		
GPRS (GMSK)	CS1	1	128	824.2	31.0	21.9	32.0	23.0
			190	836.6	31.3	22.3		
			251	848.8	31.2	22.1		
		2	128	824.2	29.0	23.0	30.0	24.0
			190	836.6	29.3	23.3		
			251	848.8	29.0	22.9		
		3	128	824.2	26.9	22.6	28.0	23.7
			190	836.6	27.3	23.0		
			251	848.8	27.0	22.7		
		4	128	824.2	25.4	22.4	27.0	24.0
			190	836.6	26.0	23.0		
			251	848.8	26.0	23.0		
EGPRS (8PSK)	MCS5	1	128	824.2	26.2	17.2	27.5	18.5
			190	836.6	27.0	17.9		
			251	848.8	26.6	17.6		
		2	128	824.2	24.9	18.9	26.5	20.5
			190	836.6	25.8	19.8		
			251	848.8	25.4	19.4		
		3	128	824.2	22.9	18.6	24.0	19.7
			190	836.6	23.5	19.2		
			251	848.8	23.1	18.9		
		4	128	824.2	21.9	18.9	23.0	20.0
			190	836.6	22.6	19.5		
			251	848.8	22.3	19.3		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 4 time slots for Max power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2 W/kg.

GSM1900 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)				Reduced Average Power (dBm) Hotspot back-off			
					Measured		Tune-up Limit		Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GSM (Voice)	CS1	1	512	1850.2	28.3	19.3	28.5	19.5	25.8	16.8	26.5	17.5
			661	1880.0	27.9	18.9			25.2	16.2		
			810	1909.8	28.1	19.1			25.3	16.3		
GPRS (GMSK)	CS1	1	512	1850.2	28.3	19.3	28.5	19.5	25.8	16.8	26.5	17.5
			661	1880.0	27.9	18.8			25.1	16.1		
			810	1909.8	28.1	19.0			25.3	16.3		
		2	512	1850.2	26.6	20.6	27.0	21.0	24.7	18.6	25.0	19.0
			661	1880.0	26.6	20.6			24.1	18.1		
			810	1909.8	26.6	20.6			24.3	18.3		
		3	512	1850.2	25.1	20.9	25.5	21.2	21.1	16.8	22.0	17.7
			661	1880.0	24.5	20.2			20.8	16.6		
			810	1909.8	24.7	20.5			20.8	16.5		
		4	512	1850.2	23.6	20.6	24.5	21.5	21.0	17.9	22.0	19.0
			661	1880.0	23.3	20.3			20.7	17.7		
			810	1909.8	23.6	20.6			20.6	17.6		
EGPRS (8PSK)	MCS5	1	512	1850.2	25.8	16.8	26.5	17.5	23.5	14.5	24.0	15.0
			661	1880.0	25.9	16.9			23.2	14.2		
			810	1909.8	25.9	16.9			23.2	14.2		
		2	512	1850.2	24.2	18.2	24.5	18.5	21.6	15.6	22.0	16.0
			661	1880.0	24.1	18.1			21.4	15.4		
			810	1909.8	24.1	18.1			21.5	15.4		
		3	512	1850.2	22.3	18.0	23.0	18.7	19.4	15.1	20.0	15.7
			661	1880.0	22.1	17.8			19.4	15.2		
			810	1909.8	22.1	17.8			19.3	15.0		
		4	512	1850.2	21.3	18.3	22.0	19.0	18.2	15.2	19.0	16.0
			661	1880.0	21.2	18.2			18.3	15.3		
			810	1909.8	21.2	18.2			18.3	15.3		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 4 time slots for Max power & 4 time slots for Reduced power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2W/kg.

9.2 W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C,11.1.3 of 3GPP TS 34.121-1 v13. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	A _{hs} = β_{hs}/β_c	30/15				
HSUPA Specific Settings	E-DPDCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelization Codes	2xSF2				SF4	

W-CDMA Band V Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	23.4	N/A	24.5
		4183	836.6	23.8		
		4233	846.6	23.7		
HSDPA	Subtest 1	4132	826.4	22.4	0	23.5
		4183	836.6	22.7		
		4233	846.6	22.6		
	Subtest 2	4132	826.4	22.4	0	23.5
		4183	836.6	22.7		
		4233	846.6	22.7		
	Subtest 3	4132	826.4	22.0	0.5	23.0
		4183	836.6	22.2		
		4233	846.6	22.1		
	Subtest 4	4132	826.4	21.9	0.5	23.0
		4183	836.6	22.2		
		4233	846.6	22.1		
HSUPA	Subtest 1	4132	826.4	22.5	0	23.5
		4183	836.6	22.7		
		4233	846.6	22.8		
	Subtest 2	4132	826.4	20.6	2	21.5
		4183	836.6	20.9		
		4233	846.6	20.7		
	Subtest 3	4132	826.4	21.5	1	22.5
		4183	836.6	21.8		
		4233	846.6	21.8		
	Subtest 4	4132	826.4	20.5	2	21.5
		4183	836.6	20.9		
		4233	846.6	20.7		
	Subtest 5	4132	826.4	22.5	0	23.5
		4183	836.6	22.8		
		4233	846.6	22.7		

9.3 LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A

Maximum Output Power (Tune-up Limit) for LTE

Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths.

When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

LTE QPSK configuration has the highest maximum average output power per 3GPP standard.

SAR measurement is not required for Higher order modulations . When the highest maximum output power for Higher order modulations are ≤ 0.5 dB higher than the QPSK or when the reported SAR for QPSK configuration is ≤ 1.45 W/kg.

LTE Band 5 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				20450	20525	20600		
				829 MHz	836.5 MHz	844 MHz		
10 MHz	QPSK	1	0		23.8		0.0	24.5
		1	25		23.9		0.0	24.5
		1	49		23.8		0.0	24.5
		25	0		22.9		1.0	23.5
		25	12		22.9		1.0	23.5
		25	25		22.9		1.0	23.5
	16QAM	1	0		23.2		1.0	23.5
		1	25		23.3		1.0	23.5
		1	49		23.2		1.0	23.5
		25	0		22.0		2.0	22.5
		25	12		22.0		2.0	22.5
		25	25		22.0		2.0	22.5
	64QAM	1	0		21.9		2.0	22.5
		1	25		22.1		2.0	22.5
		1	49		22.1		2.0	22.5
		25	0		21.0		3.0	21.5
		25	12		21.0		3.0	21.5
		25	25		21.0		3.0	21.5
5 MHz	QPSK	1	0	23.7	24.0	23.5	0.0	24.5
		1	12	23.6	24.0	23.5	0.0	24.5
5 MHz	QPSK	1	24	23.7	23.9	23.4	0.0	24.5
		12	0	22.7	22.9	22.5	1.0	23.5
		12	7	22.7	22.9	22.5	1.0	23.5
		12	13	22.7	22.9	22.5	1.0	23.5
		25	0	22.7	22.9	22.5	1.0	23.5
		16QAM	1	0	22.8	23.1	23.1	1.0
	1		12	22.8	23.1	23.0	1.0	23.5
	1		24	22.9	23.1	22.9	1.0	23.5
	12		0	21.7	22.0	21.6	2.0	22.5
	12		7	21.8	22.0	21.6	2.0	22.5
	12		13	21.8	21.9	21.6	2.0	22.5
	64QAM	25	0	21.7	21.9	21.5	2.0	22.5
		1	0	22.0	22.3	21.5	2.0	22.5
		1	12	22.0	22.3	21.5	2.0	22.5
		1	24	22.0	22.2	21.4	2.0	22.5
		12	0	20.6	21.0	20.6	3.0	21.5
		12	7	20.7	21.0	20.5	3.0	21.5
	5 MHz	64QAM	12	13	20.6	21.0	20.6	3.0
25			0	20.7	20.9	20.5	3.0	21.5

LTE Band 5 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20415	20525	20635		
				825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	23.5	23.8	23.5	0.0	24.5
		1	8	23.6	23.8	23.3	0.0	24.5
		1	14	23.6	23.8	23.3	0.0	24.5
		8	0	22.6	22.9	22.5	1.0	23.5
		8	4	22.6	22.9	22.5	1.0	23.5
		8	7	22.6	22.9	22.5	1.0	23.5
		15	0	22.6	22.9	22.5	1.0	23.5
	16QAM	1	0	23.0	22.9	22.5	1.0	23.5
		1	8	23.0	22.9	22.3	1.0	23.5
		1	14	23.0	22.9	22.3	1.0	23.5
		8	0	21.7	21.9	21.6	2.0	22.5
		8	4	21.7	22.0	21.6	2.0	22.5
		8	7	21.7	21.9	21.6	2.0	22.5
		15	0	21.6	21.8	21.5	2.0	22.5
	64QAM	1	0	21.9	22.3	21.7	2.0	22.5
		1	8	21.8	22.3	21.6	2.0	22.5
		1	14	21.9	22.2	21.6	2.0	22.5
		8	0	20.6	21.0	20.5	3.0	21.5
		8	4	20.6	21.0	20.6	3.0	21.5
		8	7	20.6	21.0	20.6	3.0	21.5
		15	0	20.7	20.9	20.5	3.0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				20407	20525	20643		
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	23.4	23.8	23.3	0.0	24.5
		1	3	23.5	23.9	23.3	0.0	24.5
		1	5	23.5	23.8	23.2	0.0	24.5
		3	0	23.4	23.8	23.3	0.0	24.5
		3	1	23.5	23.8	23.3	0.0	24.5
		3	3	23.5	23.8	23.3	0.0	24.5
		6	0	22.5	22.8	22.3	1.0	23.5
	16QAM	1	0	22.6	23.2	22.4	1.0	23.5
		1	3	22.7	23.3	22.4	1.0	23.5
		1	5	22.6	23.2	22.3	1.0	23.5
		3	0	22.5	23.0	22.6	1.0	23.5
		3	1	22.6	23.0	22.6	1.0	23.5
		3	3	22.6	23.1	22.6	1.0	23.5
		6	0	21.7	21.7	21.5	2.0	22.5
	64QAM	1	0	21.9	21.9	21.6	2.0	22.5
		1	3	22.1	22.1	21.7	2.0	22.5
		1	5	21.9	21.9	21.6	2.0	22.5
		3	0	21.8	22.0	21.4	2.0	22.5
		3	1	21.9	22.0	21.4	2.0	22.5
		3	3	21.9	22.1	21.4	2.0	22.5
		6	0	20.5	21.1	20.5	3.0	21.5

LTE Band 12 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				Measured Pwr (dBm)			MPR	Tune-up Limit
				23060	23095	23130		
				704 MHz	707.5 MHz	711 MHz		
10 MHz	QPSK	1	0		24.1		0.0	25.0
		1	25		23.8		0.0	25.0
		1	49		23.5		0.0	25.0
		25	0		23.2		1.0	24.0
		25	12		22.9		1.0	24.0
		25	25		22.7		1.0	24.0
		50	0		22.9		1.0	24.0
	16QAM	1	0		23.2		1.0	24.0
		1	25		22.9		1.0	24.0
		1	49		22.5		1.0	24.0
		25	0		22.2		2.0	23.0
		25	12		21.9		2.0	23.0
		25	25		21.8		2.0	23.0
		50	0		21.9		2.0	23.0
	64QAM	1	0		22.5		2.0	23.0
		1	25		22.2		2.0	23.0
		1	49		21.8		2.0	23.0
		25	0		21.1		3.0	22.0
25		12		21.0		3.0	22.0	
25		25		20.9		3.0	22.0	
50		0		20.9		3.0	22.0	
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				23035	23095	23155		
				701.5 MHz	707.5 MHz	713.5 MHz		
5 MHz	QPSK	1	0	24.4	24.1	23.6	0.0	25.0
		1	12	24.2	23.9	23.4	0.0	25.0
		1	24	24.0	23.7	23.2	0.0	25.0
		12	0	23.4	23.0	22.6	1.0	24.0
		12	7	23.3	22.9	22.5	1.0	24.0
		12	13	23.2	22.8	22.4	1.0	24.0
		25	0	23.3	22.9	22.5	1.0	24.0
	16QAM	1	0	23.6	23.3	23.2	1.0	24.0
		1	12	23.3	23.0	23.0	1.0	24.0
		1	24	23.2	22.9	22.8	1.0	24.0
		12	0	22.4	22.1	21.7	2.0	23.0
		12	7	22.3	22.0	21.6	2.0	23.0
		12	13	22.2	21.9	21.5	2.0	23.0
		25	0	22.2	21.9	21.6	2.0	23.0
	64QAM	1	0	22.7	22.4	21.6	2.0	23.0
		1	12	22.5	22.2	21.4	2.0	23.0
		1	24	22.3	22.0	21.2	2.0	23.0
		12	0	21.3	21.1	20.6	3.0	22.0
		12	7	21.2	21.0	20.5	3.0	22.0
		12	13	21.1	20.9	20.4	3.0	22.0
		25	0	21.2	20.9	20.5	3.0	22.0

LTE Band 12 Measured Results (Continued)


BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				23025	23095	23165		
				700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0	24.3	23.9	23.5	0.0	25.0
		1	8	24.2	23.7	23.3	0.0	25.0
		1	14	24.1	23.7	23.2	0.0	25.0
		8	0	23.3	22.9	22.5	1.0	24.0
		8	4	23.3	22.9	22.4	1.0	24.0
		8	7	23.2	22.8	22.3	1.0	24.0
		15	0	23.3	22.8	22.4	1.0	24.0
	16QAM	1	0	23.4	22.9	22.9	1.0	24.0
		1	8	23.2	22.8	22.7	1.0	24.0
		1	14	23.1	22.6	22.6	1.0	24.0
		8	0	22.4	22.1	21.6	2.0	23.0
		8	4	22.4	22.0	21.5	2.0	23.0
		8	7	22.3	22.0	21.4	2.0	23.0
		15	0	22.2	21.9	21.4	2.0	23.0
	64QAM	1	0	22.6	22.4	21.8	2.0	23.0
		1	8	22.4	22.1	21.7	2.0	23.0
		1	14	22.3	22.0	21.5	2.0	23.0
		8	0	21.4	20.9	20.5	3.0	22.0
		8	4	21.4	20.8	20.5	3.0	22.0
		8	7	21.3	20.8	20.4	3.0	22.0
		15	0	21.3	20.9	20.4	3.0	22.0
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)			MPR	Tune-up Limit
				23017	23095	23173		
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4 MHz	QPSK	1	0	24.2	23.8	23.2	0.0	25.0
		1	3	24.2	23.8	23.2	0.0	25.0
		1	5	24.1	23.7	23.1	0.0	25.0
		3	0	24.2	23.7	23.2	0.0	25.0
		3	1	24.2	23.7	23.2	0.0	25.0
		3	3	24.2	23.7	23.2	0.0	25.0
		6	0	23.2	22.8	22.2	1.0	24.0
	16QAM	1	0	23.2	23.0	22.7	1.0	24.0
		1	3	23.3	23.0	22.7	1.0	24.0
		1	5	23.2	22.8	22.5	1.0	24.0
		3	0	23.6	22.8	22.4	1.0	24.0
		3	1	23.5	22.8	22.4	1.0	24.0
		3	3	23.5	22.8	22.4	1.0	24.0
		6	0	22.4	21.9	21.1	2.0	23.0
	64QAM	1	0	22.7	22.0	21.5	2.0	23.0
		1	3	22.8	22.0	21.5	2.0	23.0
		1	5	22.6	21.8	21.4	2.0	23.0
		3	0	22.7	22.0	21.2	2.0	23.0
		3	1	22.8	21.9	21.3	2.0	23.0
		3	3	22.7	21.9	21.3	2.0	23.0
		6	0	21.2	21.1	20.3	3.0	22.0

LTE Band TDD Measured Results


Procedure used to establish SAR test signal for LTE TDD Band

Set to CMW-500 with following parameters:

- Turn the LTE Signaling off using “ON | OFF” key
- Operating Band: Select Band 41 and TDD
- Go to “Config...”

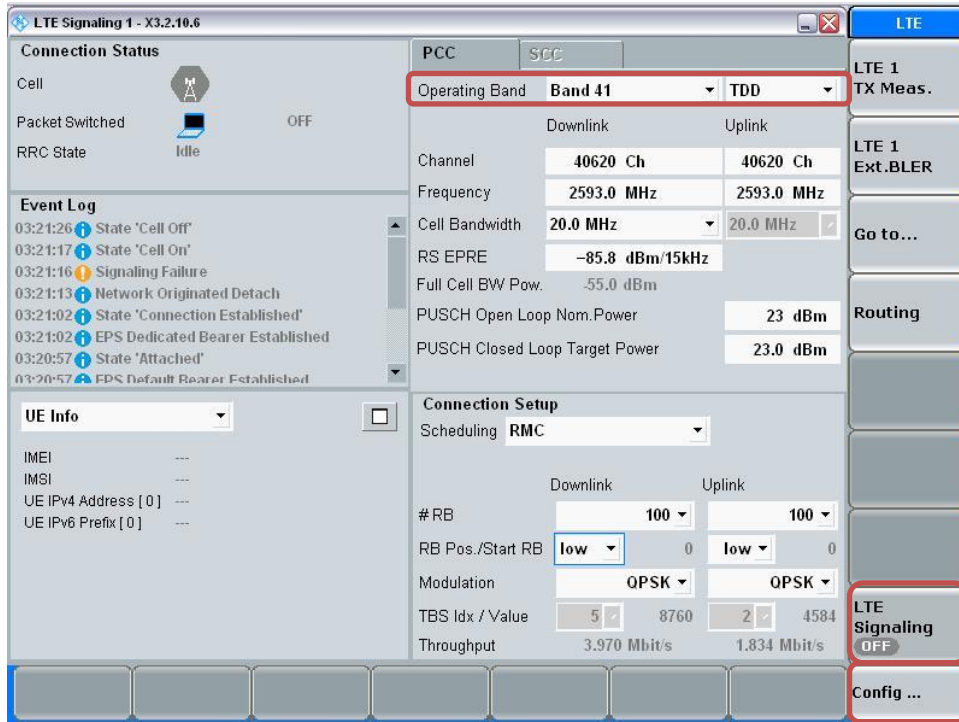


- Go to “Physical Cell Setup”
- Select “TDD” and Set “Uplink Downlink Configuration” to “0”
- Turn the cell on using “ON | OFF” key

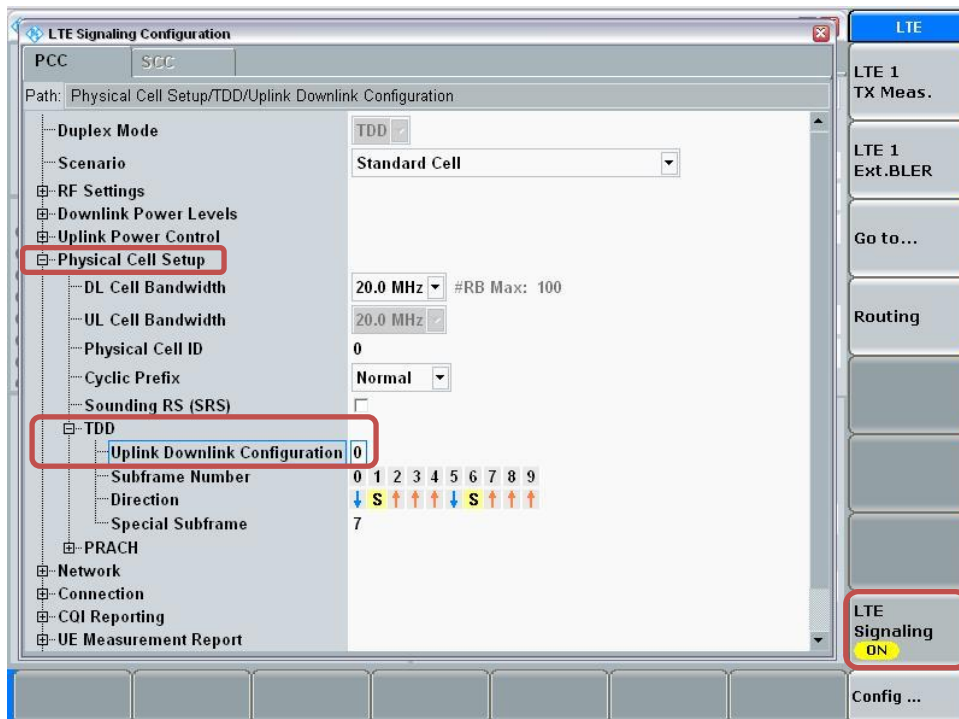


Connect to EUT

- Turn the cell on using “ON | OFF” key
- After EUT is Attached
- Select “Connect”

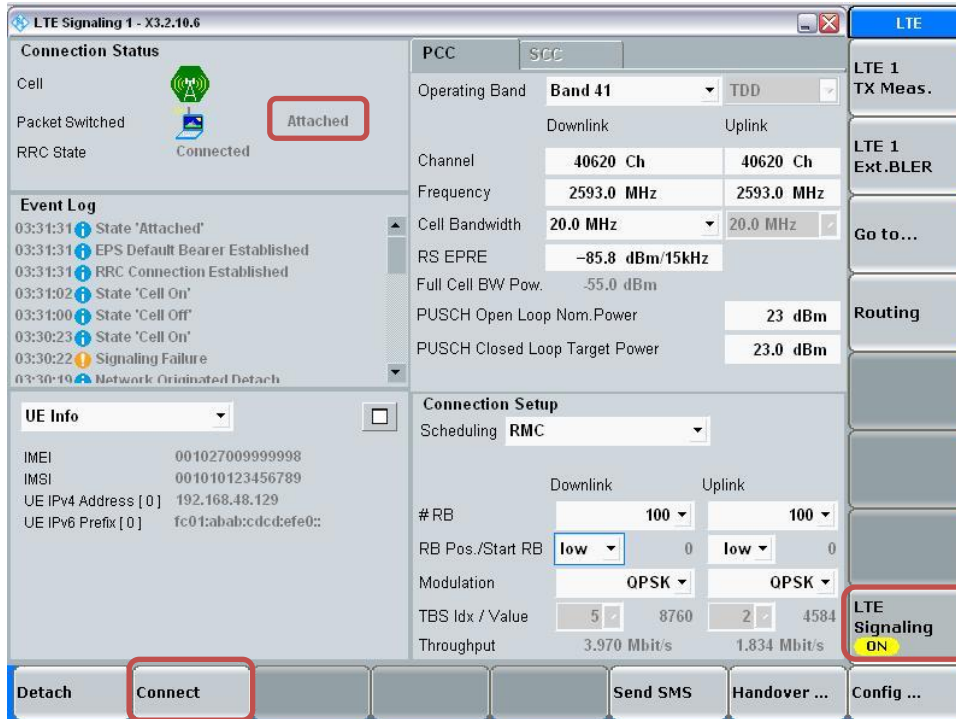


Max Power Setting

- Select “LTE 1 TX Meas.”
- Press “RESTART | STOP” Soft key

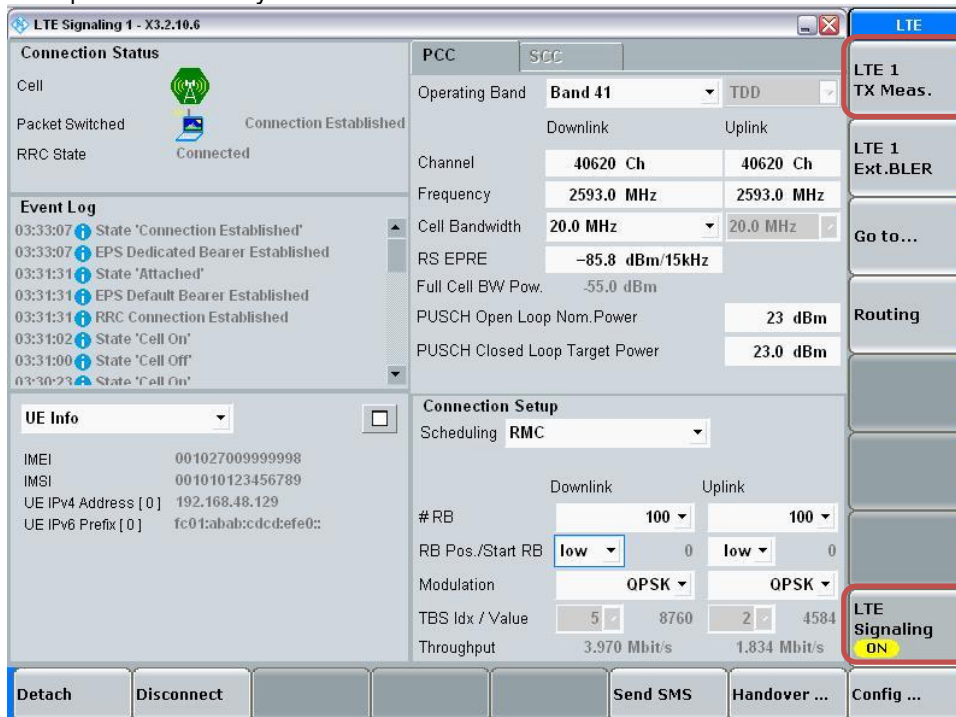

- Select “Signaling Parameter”
- Select “TX Power Control (TPC)” > Select “Active TPC Setup” to “Max Power” > Set “Closed Loop Target Power” to “23 dBm”

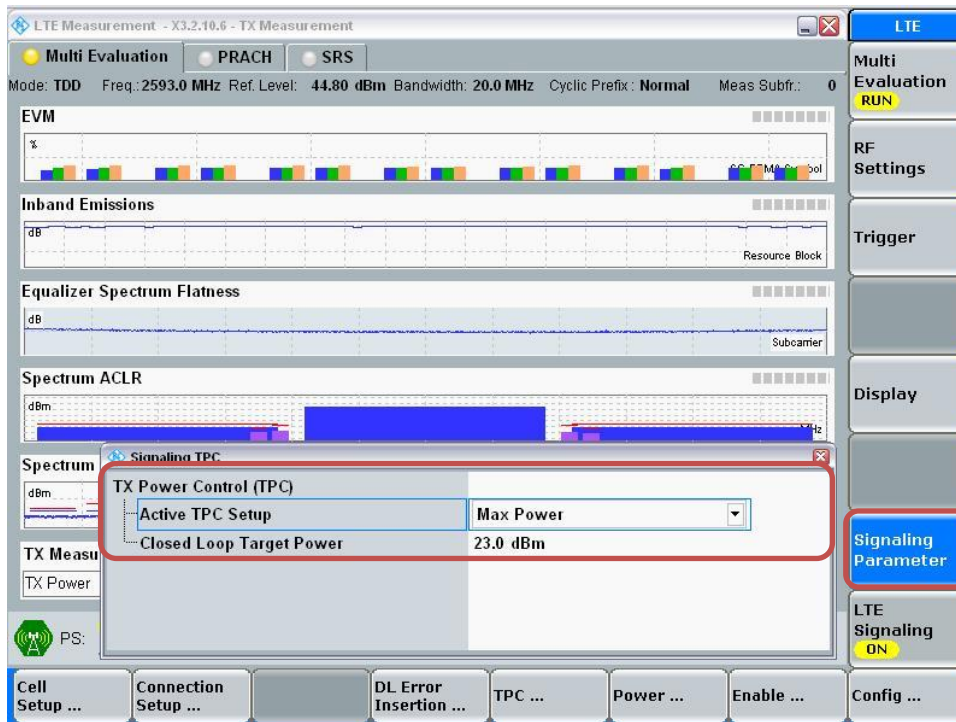

View TX Power

- Go to “Display”
- Select “Select View...”
- Select “Spectrum Emission Mask”



LTE Band 41 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	22.6	23.1	23.2	23.0	22.3	0.0	23.5
		1	49	22.7	23.1	23.2	22.8	22.1	0.0	23.5
		1	99	22.8	23.0	23.2	22.7	22.0	0.0	23.5
		50	0	21.7	22.2	22.1	21.9	21.3	1.0	22.5
		50	24	21.8	22.2	22.2	21.9	21.3	1.0	22.5
		50	50	21.8	22.2	22.1	21.7	21.1	1.0	22.5
		100	0	21.8	22.2	22.1	21.9	21.3	1.0	22.5
	16QAM	1	0	21.7	22.2	22.0	22.0	21.3	1.0	22.5
		1	49	21.8	22.1	22.0	21.9	21.0	1.0	22.5
		1	99	21.9	22.0	22.0	21.9	21.0	1.0	22.5
		50	0	20.7	21.1	21.1	21.0	20.3	2.0	21.5
		50	24	20.9	21.2	21.1	20.9	20.2	2.0	21.5
		50	50	20.9	21.1	21.1	20.8	20.1	2.0	21.5
		100	0	20.8	21.2	21.1	20.9	20.2	2.0	21.5
	64QAM	1	0	20.9	21.3	21.0	21.4	20.4	2.0	21.5
		1	49	21.0	21.2	21.0	21.1	20.1	2.0	21.5
		1	99	21.2	21.1	20.9	21.1	20.0	2.0	21.5
		50	0	19.7	20.2	20.1	19.9	19.4	3.0	20.5
		50	24	19.9	20.3	20.1	19.9	19.3	3.0	20.5
		50	50	19.9	20.2	20.1	19.8	19.2	3.0	20.5
		100	0	19.8	20.3	20.1	19.9	19.3	3.0	20.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
				15 MHz	QPSK	1	0	22.6	23.1	23.0
1	37	22.7	23.1			22.8	22.8	22.0	0.0	23.5
1	74	22.7	23.1			23.1	22.8	22.0	0.0	23.5
36	0	21.7	22.1			21.9	21.9	21.3	1.0	22.5
36	20	21.8	22.2			21.9	21.9	21.3	1.0	22.5
36	39	21.8	22.2			21.9	21.8	21.1	1.0	22.5
75	0	21.8	22.2			21.9	21.8	21.2	1.0	22.5
16QAM	1	0	21.7		22.0	22.0	21.9	21.4	1.0	22.5
	1	37	21.7		22.1	21.9	21.8	21.3	1.0	22.5
	1	74	21.8		22.1	22.1	21.9	21.2	1.0	22.5
	36	0	20.7		21.2	20.8	20.9	20.3	2.0	21.5
	36	20	20.8		21.2	20.8	20.9	20.2	2.0	21.5
	36	39	20.9		21.2	20.8	20.8	20.1	2.0	21.5
	75	0	20.8		21.2	20.9	20.9	20.2	2.0	21.5
64QAM	1	0	20.2		21.1	21.5	20.4	20.0	2.0	21.5
	1	37	20.3		20.9	21.1	20.4	19.8	2.0	21.5
	1	74	20.4		21.0	20.9	20.3	19.8	2.0	21.5
	36	0	19.7		20.1	19.8	20.0	19.3	3.0	20.5
	36	20	19.8		20.2	19.8	20.0	19.3	3.0	20.5
	36	39	19.9		20.1	19.7	19.8	19.1	3.0	20.5
	75	0	19.8		20.2	19.8	19.9	19.3	3.0	20.5

LTE Band 41 Measured Results (Continued)

BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	22.7	23.1	23.0	22.8	22.2	0.0	23.5
		1	25	22.8	23.1	23.0	22.9	22.1	0.0	23.5
		1	49	22.8	23.1	23.0	22.7	22.1	0.0	23.5
		25	0	21.8	22.2	22.1	21.9	21.3	1.0	22.5
		25	12	21.9	22.3	22.1	22.0	21.3	1.0	22.5
		25	25	21.8	22.2	22.1	21.8	21.2	1.0	22.5
		50	0	21.8	22.2	22.1	21.9	21.2	1.0	22.5
	16QAM	1	0	21.9	22.2	22.0	22.0	21.3	1.0	22.5
		1	25	21.9	22.2	22.1	21.9	21.2	1.0	22.5
		1	49	21.9	22.2	22.1	21.9	21.2	1.0	22.5
		25	0	20.8	21.2	21.1	20.9	20.3	2.0	21.5
		25	12	20.9	21.2	21.1	20.9	20.3	2.0	21.5
		25	25	20.9	21.2	21.2	20.8	20.1	2.0	21.5
		50	0	20.9	21.2	21.1	20.9	20.2	2.0	21.5
	64QAM	1	0	20.4	21.4	21.3	20.5	20.4	2.0	21.5
		1	25	20.4	21.5	21.4	20.4	20.4	2.0	21.5
		1	49	20.5	21.4	21.3	20.4	20.3	2.0	21.5
		25	0	19.8	20.1	20.1	19.9	19.2	3.0	20.5
		25	12	19.9	20.2	20.2	19.9	19.2	3.0	20.5
		25	25	19.9	20.2	20.1	19.8	19.1	3.0	20.5
		50	0	19.8	20.4	20.1	19.8	19.3	3.0	20.5
BW (MHz)	Mode	RB Allocation	RB offset	Measured Pwr (dBm)					MPR	Tune-up Limit
				39750	40185	40620	41055	41490		
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5 MHz	QPSK	1	0	21.8	23.1	23.1	23.0	22.4	0.0	23.5
		1	12	22.6	23.1	23.1	22.9	22.3	0.0	23.5
		1	24	22.7	23.1	23.2	22.9	22.2	0.0	23.5
		12	0	21.9	22.4	22.4	22.1	22.3	1.0	22.5
		12	7	22.0	22.4	22.5	22.0	22.2	1.0	22.5
		12	13	22.0	22.5	22.4	22.0	22.2	1.0	22.5
		25	0	21.6	22.1	22.1	21.9	21.3	1.0	22.5
	16QAM	1	0	21.7	22.3	22.1	22.2	21.2	1.0	22.5
		1	12	21.8	22.4	22.1	22.0	21.2	1.0	22.5
		1	24	21.8	22.2	22.1	22.1	21.2	1.0	22.5
		12	0	20.9	21.4	21.3	21.1	21.3	2.0	21.5
		12	7	21.0	21.5	21.3	21.1	21.2	2.0	21.5
		12	13	21.1	21.5	21.3	21.0	21.2	2.0	21.5
		25	0	20.6	21.1	21.1	21.0	20.3	2.0	21.5
	64QAM	1	0	20.5	21.4	21.3	20.6	20.3	2.0	21.5
		1	12	20.6	21.4	21.4	20.6	20.4	2.0	21.5
		1	24	20.6	21.3	21.4	20.5	20.2	2.0	21.5
		12	0	19.8	20.1	20.3	19.9	19.3	3.0	20.5
		12	7	19.8	20.2	20.2	19.9	19.2	3.0	20.5
		12	13	19.9	20.1	20.2	19.9	19.2	3.0	20.5
		25	0	19.9	20.1	20.1	19.9	19.2	3.0	20.5

9.4 Wi-Fi 2.4 GHz (DTS Band)

When the RCV is active in a held-to-ear user scenario, the output power level is reduced. The maximum allowed output powers in all conditions are included in the maximum power document.

Refer to Operational Description for WLAN explanation.

Measured Results

Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Meas. Avg Pwr (dBm)	Reduced. Output Power (dBm)	SAR Test (Yes/No)
802.11b	1 Mbps	1	2412.0	19.8	20.0	Yes	11.7	12.0	Yes
		6	2437.0	19.6			11.7		
		11	2462.0	19.7			11.5		
		12	2467.0	17.5	18.0	No	11.5	12.0	No
		13	2472.0	13.7	14.0		11.5	12.0	
802.11g	6 Mbps	1	2412.0	Not Required	17.0	No	Not Required	12.0	No
		6	2437.0						
		11	2462.0		13.0				
		12	2467.0		11.0				
		13	2472.0		6.0				
802.11n (HT20)	6.5 Mbps	1	2412.0	Not Required	20.0	No	Not Required	12.0	No
		6	2437.0						
		11	2462.0		13.0				
		12	2467.0		8.0				
		13	2472.0		6.0				

Note(s):

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For “Not required”, SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11n/g/ax mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.
- Additionally, SAR is not required for Channels 12 and 13 because the tune-up limit and the measured output power for these two channels are no greater than those for the default test channels. Refer to §6.3.

9.5 Wi-Fi 5GHz (U-NII Bands)

When the RCV is active in a held-to-ear user scenario, the output power level is reduced. The maximum allowed output powers in all conditions are included in the maximum power document.

Refer to Operational Description for WLAN explanation.

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduction Pwr.		
					Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
5.3 (UNII 2A)	802.11a	6 Mbps	52	5260.0	14.9	16.0	Yes	Not Required	12.0	No
			56	5280.0	14.7			Not Required		
			60	5300.0	15.2			Not Required		
			64	5320.0	15.5			Not Required		
	802.11n (HT20)	6.5 Mbps	52	5260.0	Not Required	16.0	No	Not Required	12.0	No
			56	5280.0	Not Required			Not Required		
			60	5300.0	Not Required			Not Required		
			64	5320.0	Not Required			Not Required		
	802.11n (HT40)	13.5 Mbps	54	5270.0	Not Required	13.0	No	11.9	12.0	Yes
			62	5310.0	Not Required			11.6		
	802.11ac (VHT20)	6.5 Mbps	52	5260.0	Not Required	16.0	No	Not Required	12.0	No
			56	5280.0	Not Required			Not Required		
60			5300.0	Not Required	Not Required					
64			5320.0	Not Required	Not Required					
802.11ac (VHT40)	13.5 Mbps	54	5270.0	Not Required	13.0	No	Not Required	12.0	No	
		62	5310.0	Not Required			Not Required			
802.11ac (VHT80)	29.3 Mbps	58	5290.0	Not Required	12.0	No	Not Required	11.0	No	
5.5 (U-NII 2C)	802.11a	6 Mbps	100	5500.0	15.0	16.0	Yes	Not Required	12.0	No
			120	5600.0	15.2			Not Required		
			124	5620.0	15.6			Not Required		
			144	5720.0	15.5			Not Required		
	802.11n (HT20)	6.5 Mbps	100	5500.0	Not Required	16.0	No	Not Required	12.0	No
			120	5600.0	Not Required			Not Required		
			124	5620.0	Not Required			Not Required		
			144	5720.0	Not Required			Not Required		
	802.11n (HT40)	13.5 Mbps	102	5510.0	Not Required	13.0	No	11.8	12.0	Yes
			118	5590.0	Not Required			11.5		
			126	5630.0	Not Required			11.6		
			142	5710.0	Not Required			11.7		
	802.11ac (VHT20)	6.5 Mbps	100	5500.0	Not Required	16.0	No	Not Required	12.0	No
			120	5600.0	Not Required			Not Required		
			124	5620.0	Not Required			Not Required		
			144	5720.0	Not Required			Not Required		
	802.11ac (VHT40)	13.5 Mbps	102	5510.0	Not Required	13.0	No	Not Required	12.0	No
			118	5590.0	Not Required			Not Required		
126			5630.0	Not Required	Not Required					
142			5710.0	Not Required	Not Required					
802.11ac (VHT80)	29.3 Mbps	106	5530.0	Not Required	12.0	No	Not Required	11.0	No	
		122	5610.0	Not Required			Not Required			
		138	5690.0	Not Required			Not Required			
		154	5770.0	Not Required			Not Required			
5.8 (U-NII 3)	802.11a	6 Mbps	149	5745.0	15.5	16.0	Yes	Not Required	12.0	No
			157	5785.0	15.2			Not Required		
			165	5825.0	15.3			Not Required		
	802.11n (HT20)	6.5 Mbps	149	5745.0	Not Required	16.0	No	Not Required	12.0	No
			157	5785.0	Not Required			Not Required		
			165	5825.0	Not Required			Not Required		
	802.11n (HT40)	13.5 Mbps	151	5755.0	Not Required	13.0	No	11.9	12.0	Yes
			159	5795.0	Not Required			11.9		
	802.11ac (VHT20)	6.5 Mbps	149	5745.0	Not Required	16.0	No	Not Required	12.0	No
			157	5785.0	Not Required			Not Required		
	802.11ac (VHT40)	13.5 Mbps	151	5755.0	Not Required	13.0	No	Not Required	12.0	No
			159	5795.0	Not Required			Not Required		
802.11ac (VHT80)	29.3 Mbps	155	5775.0	Not Required	12.0	No	Not Required	11.0	No	

Note(s):

- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac/ax modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n ac then ax) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

9.6 Bluetooth

Measured Results

Band (GHz)	Mode	Ch #	Freq. (MHz)	Maximum Average Power (dBm)	
				Meas Pwr	Tune-up Limit
2.4	GFSK	0	2402	11.4	12.0
		39	2441	11.9	
		78	2480	11.9	
	EDR, 8-DPSK	0	2402	9.4	11.0
		39	2441	9.7	
		78	2480	10.3	
	LE, GFSK-1M (500 kbps (37 pkt))	0	2402	6.5	7.0
		19	2440	6.8	
		39	2480	8.2	
	LE, GFSK-2M (255 pkt)	0	2402	6.3	7.0
		19	2440	6.6	
		39	2480	7.9	

Note(s):


SAR test is evaluated at GFSK mode in Bluetooth

Duty Factor Measured Results

Mode	Type	T on (ms)	Period (ms)	Duty Cycle	Crest Factor (1/duty cycle)
GFSK	DH5	2.880	3.750	76.8%	1.30

Duty Cycle plots

GFSK

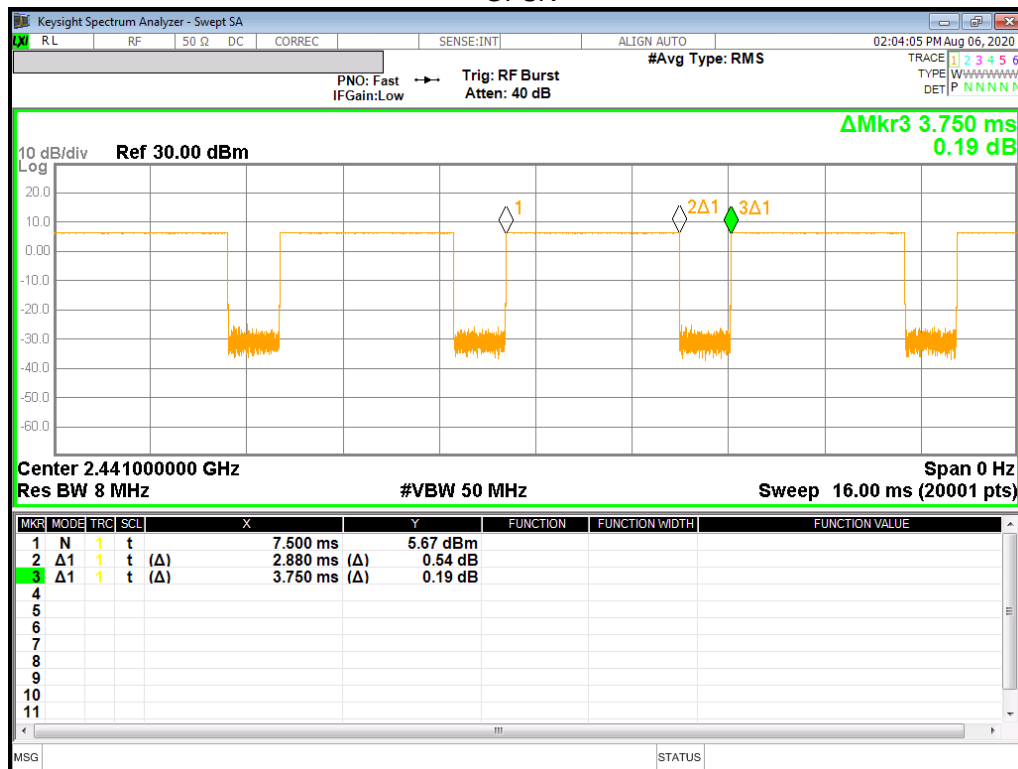

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN= Measured SAR *Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth= Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

For smart phones, with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm.

When hotspot mode does not apply, 10-g extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm From that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; However, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, Including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Additional 1-g SAR testing at 5 mm is not required when hotspot mode 10-g extremity SAR is not required for the surfaces and edges; since all 1-g reported SAR < 1.2 W/kg.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1 GSM 850

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	GPRS 4 Slots	N/A	0	Left Touch	190	836.6	27.0	26.0	0.113	0.141	1
					Left Tilt	190	836.6	27.0	26.0	0.074	0.091	
					Right Touch	190	836.6	27.0	26.0	0.169	0.210	
					Right Tilt	190	836.6	27.0	26.0	0.064	0.079	
	Body-w orn	GPRS 4 Slots	N/A	15	Rear	190	836.6	27.0	26.0	0.232	0.289	2
					Front	190	836.6	27.0	26.0	0.216	0.269	
	Hotspot	GPRS 4 Slots	N/A	10	Rear	190	836.6	27.0	26.0	0.452	0.563	3
					Front	190	836.6	27.0	26.0	0.300	0.373	
					Edge 2	190	836.6	27.0	26.0	0.228	0.284	
					Edge 3	190	836.6	27.0	26.0	0.276	0.344	
					Edge 4	190	836.6	27.0	26.0	0.060	0.075	

10.2 GSM 1900

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	GPRS 4 Slots	Off	0	Left Touch	661	1880.0	24.5	23.3	0.066	0.086	4
					Left Tilt	661	1880.0	24.5	23.3	0.060	0.079	
					Right Touch	661	1880.0	24.5	23.3	0.066	0.086	
					Right Tilt	661	1880.0	24.5	23.3	0.046	0.060	
	Body-w orn	GPRS 4 Slots	Off	15	Rear	661	1880.0	24.5	23.3	0.357	0.467	5
					Front	661	1880.0	24.5	23.3	0.276	0.361	
	Hotspot	GPRS 4 Slots	On	10	Rear	661	1880.0	22.0	20.7	0.441	0.597	
					Front	661	1880.0	22.0	20.7	0.344	0.465	
					Edge 2	661	1880.0	22.0	20.7	0.069	0.093	
					Edge 3	512	1850.2	22.0	21.0	0.618	0.786	
						661	1880.0	22.0	20.7	0.689	0.932	6
					Edge 4	661	1880.0	22.0	20.7	0.042	0.057	
Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Plot No.
Main 1 Ant.	Product Specific 10-g	GPRS 4 Slots	Off	0	Edge 3	512	1850.2	24.5	23.6	2.300	2.798	7
						661	1880	24.5	23.3	1.720	2.251	
						810	1909.8	24.5	23.6	1.930	2.383	

10.3 W-CDMA Band V

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	Rel 99 RMC	N/A	0	Left Touch	4183	836.6	24.5	23.8	0.122	0.145	8
					Left Tilt	4183	836.6	24.5	23.8	0.077	0.091	
					Right Touch	4183	836.6	24.5	23.8	0.197	0.234	
					Right Tilt	4183	836.6	24.5	23.8	0.088	0.104	
	Body-worn	Rel 99 RMC	N/A	15	Rear	4183	836.6	24.5	23.8	0.254	0.302	9
					Front	4183	836.6	24.5	23.8	0.229	0.272	
	Hotspot	Rel 99 RMC	N/A	10	Rear	4183	836.6	24.5	23.8	0.465	0.552	10
					Front	4183	836.6	24.5	23.8	0.364	0.432	
					Edge 2	4183	836.6	24.5	23.8	0.275	0.327	
					Edge 3	4183	836.6	24.5	23.8	0.321	0.381	
					Edge 4	4183	836.6	24.5	23.8	0.063	0.074	

10.4 LTE Band 5 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
Main 1 Ant.	Head	QPSK	N/A	0	Left Touch	20525	836.5	1	25	24.5	23.9	0.123	0.142	
								25	25	23.5	22.9	0.101	0.115	
					Left Tilt	20525	836.5	1	25	24.5	23.9	0.083	0.096	
								25	25	23.5	22.9	0.064	0.073	
					Right Touch	20525	836.5	1	25	24.5	23.9	0.196	0.226	11
								25	25	23.5	22.9	0.157	0.178	
					Right Tilt	20525	836.5	1	25	24.5	23.9	0.085	0.098	
								25	25	23.5	22.9	0.070	0.080	
	Body-worn	QPSK	N/A	15	Rear	20525	836.5	1	25	24.5	23.9	0.251	0.289	12
								25	25	23.5	22.9	0.203	0.230	
					Front	20525	836.5	1	25	24.5	23.9	0.243	0.280	
								25	25	23.5	22.9	0.193	0.219	
	Hotspot	QPSK	N/A	10	Rear	20525	836.5	1	25	24.5	23.9	0.513	0.591	13
								25	25	23.5	22.9	0.413	0.469	
					Front	20525	836.5	1	25	24.5	23.9	0.390	0.450	
								25	25	23.5	22.9	0.315	0.358	
					Edge 2	20525	836.5	1	25	24.5	23.9	0.242	0.279	
								25	25	23.5	22.9	0.182	0.207	
					Edge 3	20525	836.5	1	25	24.5	23.9	0.305	0.352	
								25	25	23.5	22.9	0.246	0.279	
					Edge 4	20525	836.5	1	25	24.5	23.9	0.055	0.063	
								25	25	23.5	22.9	0.046	0.052	

10.5 LTE Band 12 (10MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.				
										Tune-up limit	Meas.	Meas.	Scaled					
Main 1 Ant.	Head	QPSK	N/A	0	Left Touch	23095	707.5	1	0	25.0	24.1	0.107	0.132					
								25	0	24.0	23.2	0.081	0.098					
					Left Tilt	23095	707.5	1	0	25.0	24.1	0.053	0.066					
								25	0	24.0	23.2	0.041	0.049					
					Right Touch	23095	707.5	1	0	25.0	24.1	0.141	0.175	14				
								25	0	24.0	23.2	0.116	0.141					
					Right Tilt	23095	707.5	1	0	25.0	24.1	0.074	0.091					
								25	0	24.0	23.2	0.061	0.074					
					Body-worn	QPSK	N/A	15	Rear	23095	707.5	1	0	25.0	24.1	0.216	0.267	15
												25	0	24.0	23.2	0.196	0.238	
									Front	23095	707.5	1	0	25.0	24.1	0.187	0.232	
												25	0	24.0	23.2	0.158	0.192	
	Hotspot	QPSK	N/A	10	Rear	23095	707.5	1	0	25.0	24.1	0.333	0.412	16				
								25	0	24.0	23.2	0.277	0.337					
					Front	23095	707.5	1	0	25.0	24.1	0.220	0.272					
								25	0	24.0	23.2	0.183	0.222					
					Edge 2	23095	707.5	1	0	25.0	24.1	0.190	0.235					
								25	0	24.0	23.2	0.161	0.196					
					Edge 3	23095	707.5	1	0	25.0	24.1	0.172	0.213					
								25	0	24.0	23.2	0.148	0.180					
					Edge 4	23095	707.5	1	0	25.0	24.1	0.122	0.151					
								25	0	24.0	23.2	0.100	0.122					

10.6 LTE Band 41 (20MHz Bandwidth)

Antenna	RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.				
										Tune-up limit	Meas.	Meas.	Scaled					
Main 2 Ant.	Head	QPSK	N/A	0	Left Touch	40620	2593.0	1	49	23.5	23.2	0.056	0.061					
								50	24	22.5	22.2	0.039	0.041					
					Left Tilt	40620	2593.0	1	49	23.5	23.2	0.082	0.089	17				
								50	24	22.5	22.2	0.065	0.070					
					Right Touch	40620	2593.0	1	49	23.5	23.2	0.055	0.059					
								50	24	22.5	22.2	0.040	0.043					
					Right Tilt	40620	2593.0	1	49	23.5	23.2	0.038	0.041					
								50	24	22.5	22.2	0.033	0.035					
					Body-worn	QPSK	N/A	15	Rear	40620	2593.0	1	49	23.5	23.2	0.203	0.219	18
												50	24	22.5	22.2	0.162	0.173	
									Front	40620	2593.0	1	49	23.5	23.2	0.147	0.159	
												50	24	22.5	22.2	0.119	0.127	
	Hotspot	QPSK	N/A	10	Rear	40620	2593.0	1	49	23.5	23.2	0.336	0.363					
								50	24	22.5	22.2	0.272	0.290					
					Front	40620	2593.0	1	49	23.5	23.2	0.314	0.339					
								50	24	22.5	22.2	0.253	0.270					
					Edge 3	40620	2593.0	1	49	23.5	23.2	0.418	0.452	19				
								50	24	22.5	22.2	0.330	0.352					
					Edge 4	40620	2593.0	1	49	23.5	23.2	0.264	0.285					
								50	24	22.5	22.2	0.210	0.224					

10.7 Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Note	Plot No.
										Tune-up limit	Meas.	Meas.	Scaled		
2.4GHz	802.11b 1 Mbps	Head	On	0	Left Touch	6	2437.0	0.074	98.8	12.0	11.7				
					Left Tilt	6	2437.0	0.107	98.8	12.0	11.7				
					Right Touch	6	2437.0	0.149	98.8	12.0	11.7				
					Right Tilt	6	2437.0	0.160	98.8	12.0	11.7	0.132	0.144	1	20
		Body-worn	Off	15	Rear	1	2412.0	0.163	98.8	20.0	19.8	0.130	0.139	1	21
					Front	1	2412.0	0.110	98.8	20.0	19.8				
		Hotspot	Off	10	Rear	1	2412.0	0.307	98.8	20.0	19.8	0.255	0.273	2	
					Front	1	2412.0	0.194	98.8	20.0	19.8				
					Edge 1	1	2412.0	0.477	98.8	20.0	19.8	0.384	0.412		22
					Edge 4	1	2412.0	0.052	98.8	20.0	19.8				

Note(s):

1. When the Highest reported SAR is ≤ 0.4 or 1.0 W/kg (1-g or 10-g respectively). Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 or 1.0 W/kg (1-g or 10-g respectively). Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 or 2.0 W/kg (1-g or 10-g respectively) was reported.
3. Testing for a second channel was required because the reported SAR for this test position was > 0.8 or 2.0 W/kg (1-g or 10-g respectively).
4. Additional testing required in order satisfying FCC simultaneous transmission limit criteria.
5. SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

10.8 Bluetooth

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	GFSK	Head	N/A	0	Left Touch	39	2441.0	76.8	12.0	11.9	0.070	0.093	
					Left Tilt	39	2441.0	76.8	12.0	11.9	0.107	0.142	
					Right Touch	39	2441.0	76.8	12.0	11.9	0.109	0.145	
					Right Tilt	39	2441.0	76.8	12.0	11.9	0.143	0.190	23
	GFSK	Body-worn	N/A	15	Rear	39	2441.0	76.8	12.0	11.9	0.015	0.020	24
					Front	39	2441.0	76.8	12.0	11.9	0.012	0.016	
	GFSK	Hotspot	N/A	10	Rear	39	2441.0	76.8	12.0	11.9	0.034	0.045	
					Front	39	2441.0	76.8	12.0	11.9	0.020	0.027	
					Edge 1	39	2441.0	76.8	12.0	11.9	0.054	0.071	25
					Edge 4	39	2441.0	76.8	12.0	11.9	0.007	0.009	

10.9 Wi-Fi (U-NII Bands)

U-NII 2A Results

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Note	Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
5.3 GHz U-NII 2A	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	54	5270.0	0.010	98.5	12.0	11.9						
					Left Tilt	54	5270.0	0.011	98.5	12.0	11.9						
					Right Touch	54	5270.0	0.035	98.5	12.0	11.9	0.013	0.014			1	26
					Right Tilt	54	5270.0	0.010	98.5	12.0	11.9						
	802.11a 6 Mbps	Body-worn	Off	15	Rear	64	5320.0	0.285	98.7	16.0	15.5	0.148	0.167			1	27
					Front	64	5320.0	0.017	98.7	16.0	15.5						
		Product Specific 10-g	Off	0	Rear	64	5320.0	10.389	98.7	16.0	15.5			0.999	1.126		28
					Front	64	5320.0	0.073	98.7	16.0	15.5						
Edge 1	64	5320.0	0.061	98.7	16.0	15.5											
Edge 4	64	5320.0	1.026	98.7	16.0	15.5						0.115	0.130	2			

U-NII 2C Results

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Note	Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
5.5 GHz U-NII 2C	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	102	5510.0	0.028	98.5	12.0	11.8						
					Left Tilt	102	5510.0	0.029	98.5	12.0	11.8						
					Right Touch	102	5510.0	0.074	98.5	12.0	11.8	0.033	0.034			1	29
					Right Tilt	102	5510.0	0.030	98.5	12.0	11.8						
	802.11a 6 Mbps	Body-worn	Off	15	Rear	124	5620.0	1.686	98.7	16.0	15.6	0.771	0.861				30
					144	5720.0	0.927	98.7	16.0	15.5	0.427	0.484			3		
					Front	124	5620.0	0.088	98.7	16.0	15.6	0.041	0.046			2	
		Product Specific 10-g	Off	0	Rear	124	5620.0	33.814	98.7	16.0	15.6			2.410	2.691		31
					144	5720.0	15.569	98.7	16.0	15.5			1.120	1.271	3		
					Front	124	5620.0	0.547	98.7	16.0	15.6						
Edge 1	124	5620.0	0.594	98.7	16.0	15.6											
Edge 4	124	5620.0	4.672	98.7	16.0	15.6					0.685	0.765	2				

U-NII 3 Results

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Duty Cycle (%)	Power (dBm)		1-g SAR (W/kg)		10-g SAR (W/kg)		Note	Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	Meas.	Scaled		
5.8 GHz U-NII 3	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	159	5795.0	0.021	98.5	12.0	11.9						
					Left Tilt	159	5795.0	0.018	98.5	12.0	11.9						
					Right Touch	159	5795.0	0.116	98.5	12.0	11.9	0.044	0.046			1	32
					Right Tilt	159	5795.0	0.043	98.5	12.0	11.9						
	802.11a 6 Mbps	Body-worn	Off	15	Rear	149	5745.0	0.635	98.7	16.0	15.5	0.310	0.355			1	33
					Front	149	5745.0	0.042	98.7	16.0	15.5						
		Product Specific 10-g	Off	0	Rear	149	5745.0	9.624	98.7	16.0	15.5			0.921	1.055		34
					Front	149	5745.0	0.331	98.7	16.0	15.5						
Edge 1	149	5745.0	0.272	98.7	16.0	15.5											
Edge 4	149	5745.0	2.549	98.7	16.0	15.5						0.298	0.341	2			

Note(s):

1. When the Highest reported SAR is ≤ 0.4 or 1.0 W/kg (1-g or 10-g respectively). Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 or 1.0 W/kg (1-g or 10-g respectively). Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 or 2.0 W/kg (1-g or 10-g respectively) was reported.
3. Testing for a second channel was required because the reported SAR for this test position was > 0.8 or 2.0 W/kg (1-g or 10-g respectively).
4. Additional testing required in order satisfying FCC simultaneous transmission limit criteria.

11 SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Peak spatial-average (1g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Hotspot	Rear	No	0.333	N/A	N/A
835	GSM 850	Hotspot	Rear	No	0.452	N/A	N/A
	WCDMA Band V	Hotspot	Rear	No	0.465	N/A	N/A
	LTE Band 5	Hotspot	Rear	No	0.513	N/A	N/A
1900	GSM 1900	Hotspot	Edge 3	No	0.689	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Hotspot	Edge 1	No	0.384	N/A	N/A
	Bluetooth	Head	Right Tilt	No	0.143	N/A	N/A
2600	LTE Band 41	Hotspot	Edge 3	No	0.418	N/A	N/A
5250	Wi-Fi 802.11a/n	Body	Rear	No	0.148	N/A	N/A
5500	Wi-Fi 802.11a/n	Body	Rear	No	0.771	N/A	N/A
5800	Wi-Fi 802.11a/n	Body	Rear	No	0.310	N/A	N/A

Peak spatial-average (10g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
1900	GSM 1900	Product specific 10g	Edge 3	Yes	2.300	2.240	1.03
5250	Wi-Fi 802.11a/n	Product specific 10g	Rear	No	0.999	N/A	N/A
5500	Wi-Fi 802.11a/n	Product specific 10g	Rear	Yes	2.410	2.400	1.00
5800	Wi-Fi 802.11a/n	Product specific 10g	Rear	No	0.921	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12 Simultaneous Transmission SAR Analysis

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations		
Head & Body-w orn & Product Specific 10-g	1	GSM(Voice/GPRS)	+	DTS
	2	GSM(Voice/GPRS)	+	UNII
	3	GSM(Voice/GPRS)	+	BT
	4	WCDMA	+	DTS
	5	WCDMA	+	UNII
	6	WCDMA	+	BT
	7	LTE	+	DTS
	8	LTE	+	UNII
	9	LTE	+	BT
Hotspot	10	GSM(GPRS)	+	DTS
	11	GSM(GPRS)	+	UNII
	12	GSM(GPRS)	+	BT
	13	WCDMA	+	DTS
	14	WCDMA	+	UNII
	15	WCDMA	+	BT
	16	LTE	+	DTS
	17	LTE	+	UNII
	18	LTE	+	BT

Notes:

1. DTS supports Wi-Fi Direct, Hotspot and VoIP.
2. U-NII supports Wi-Fi Direct and VoIP.
3. U-NII does not support Hotspot.
4. GPRS, W-CDMA, LTE supports Hotspot and VoIP.
5. U-NII Radio cannot transmit simultaneously with Bluetooth Radio.
6. DTS Radio cannot transmit simultaneously with Bluetooth Radio.
7. BT tethering is consider about each RF exposure conditions

Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

SAR to Peak Location Ratio (SPLSR)

KDB 447498 D01 General RF Exposure Guidance explains how to calculate the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

R_i is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of

$$[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / R_i \leq 0.04$$

When an individual antenna transmits at on two bands simultaneously, the sum of the highest *reported* SAR for the frequency bands should be used to determine **SAR₁**, or **SAR₂**. When SPLSR is necessary, the smallest distance between the peak SAR locations for the antenna pair with respect to the peaks from each antenna should be used.

The antennas in all antenna pairs that do not qualify for simultaneous transmission SAR test exclusion must be tested for SAR compliance, according to the enlarged zoom scan and volume scan post-processing procedures in KDB Publication 865664 D01

The antennas for the unlicensed transmitters are closely situated. As a result, the associated SAR hotspots are also closely situated. Some of the sum of SAR calculations yielded results over 1.6 W/kg. The SPLSR calculations for these situations were performed by treating the unlicensed SAR values as a single transmitter. The most conservative distance between all the unlicensed hotspots to the licensed hotspot was used for the value of *d* in the SPLSR calculation.

Simultaneous transmission SAR measurement

When simultaneous transmission SAR measurements are required in different frequency bands not covered by a single probe calibration point then separate tests for each frequency band are performed. The tests are performed using enlarged zoom scans which are processed, by means of superposition, using the DASY5 volume scan postprocessing procedures to determine the 1-g SAR for the aggregate SAR distribution.

The spatial resolution used for all enlarged zoom scans is the same as used for the most stringent zoom scans. I.E. the scan parameters required for the highest frequency assessed are used for all enlarged zoom scans. The scans cover the complete area of the device to ensure all transmitting antennas and radiating structures are assessed.

DASY5 provides the ability to perform Multiband Evaluations according to the latest standards using the Volume Scan job as well as appropriate routines for the Post-processing.

In order to extract and process measurements within different frequency bands, the SEMCAD X Post-processor performs the combination and subsequent superposition of these measurement data via DASY5= Combined MultiBand Averaged SAR.

Combined Multi Band Averaged SAR allows - in addition to the data extraction - an evaluation of the 1 g, 10 g and/or arbitrary averaged mass SAR.

Power Scaling Factor is used to allow the volume scans to be scaled by a value other than "1", this is important when the results need to be scaled to different maximum power levels. The Power Scaling Factor is applied to each individual point of the scan. When power scaling is used in multi-band combinations the scaling factor is applied to each individual point of the first scan, the second factor is then applied to each individual point of the second scan and so on. The scans are then combined.

12.1 Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure	Test Position	Standalone SAR (W/kg)				Σ SAR (W/kg)		
		WWAN	DTS	UNII	BT	WWAN + DTS	WWAN + UNII	WWAN + BT
		1	2	3	4	1 + 2	1 + 3	1 + 4
Head (1-g SAR)	All positions	0.234	0.144	0.046	0.190	0.378	0.280	0.424
Body-worn (1-g SAR)	All positions	0.467	0.139	0.861	0.020	0.606	1.328	0.487
Hotspot (1-g SAR)	All positions	0.932	0.412		0.071	1.344		1.003
Product Specific 10-g (10-g SAR)	Rear			2.691				
	Front			2.691				
	Edge 1			2.691				
	Edge 2							
	Edge 3	2.798						
	Edge 4			0.341				

Note(s):

Blue values are reference from highest SAR value of initial test position procedure in each RF exposure of each bands.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because sum of the 1-g SAR (10-g SAR) is < 1.6 W/kg (4.0 W/kg).

Appendixes

Refer to separated files for the following appendixes.

4789582668-S1 FCC Report SAR_App A_Photos & Ant. Locations

4789582668-S1 FCC Report SAR_App B_Highest SAR Test Plots

4789582668-S1 FCC Report SAR_App C_System Check Plots

4789582668-S1 FCC Report SAR_App D_SAR Tissue Ingredients

4789582668-S1 FCC Report SAR_App E_Probe Cal. Certificates

4789582668-S1 FCC Report SAR_App F_Dipole Cal. Certificates

END OF REPORT