

# FCC DTS REPORT

## Certification

<b>Applicant Name:</b> SAMSUNG Electronics Co., Ltd.	<b>Date of Issue:</b> June 26, 2020
<b>Address:</b> 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	<b>Test Site/Location:</b> 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
	<b>Report No.:</b> HCT-RF-2006-FC015

<b>FCC ID:</b>	<b>A3LSMA516U</b>
<b>APPLICANT:</b>	<b>SAMSUNG Electronics Co., Ltd.</b>

<b>Model:</b>	SM-A516U
<b>Additional Model:</b>	SM-A516U1
<b>EUT Type:</b>	Mobile Phone
<b>Average Output Power:</b>	802.11b : 20.35 dBm / 802.11g : 18.99 dBm / 802.11n(HT20) : 18.98 dBm
<b>Frequency Range:</b>	2 412 MHz ~ 2 472 MHz
<b>Modulation type:</b>	CCK/DSSS/OFDM
<b>FCC Classification:</b>	Digital Transmission System(DTS)
<b>FCC Rule Part(s):</b>	Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2006-FC015

---

REVIEWED BY



---

Report prepared by : Jeong Ho Kim  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

This test results were applied only to the test methods required by the standard.

**This laboratory is not accredited for the test results marked \*.**

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2006-FC015	June 26, 2020	- First Approval Report

# Table of Contents

REVIEWED BY .....	2
1. EUT DESCRIPTION .....	5
2. TEST METHODOLOGY .....	6
EUT CONFIGURATION .....	6
EUT EXERCISE .....	6
GENERAL TEST PROCEDURES .....	6
DESCRIPTION OF TEST MODES .....	6
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS .....	7
FACILITIES .....	7
EQUIPMENT .....	7
5. ANTENNA REQUIREMENTS .....	8
6. MEASUREMENT UNCERTAINTY .....	8
7. DESCRIPTION OF TESTS.....	9
8. SUMMARY TEST OF RESULTS .....	24
9. TEST RESULT .....	25
9.1 DUTY CYCLE.....	25
9.2 6dB BANDWIDTH.....	28
9.3 OUTPUT POWER .....	31
9.4 POWER SPECTRAL DENSITY .....	37
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	40
9.6 RADIATED SPURIOUS EMISSIONS .....	54
9.7 RADIATED RESTRICTED BAND EDGES .....	65
9.8 POWERLINE CONDUCTED EMISSIONS .....	74
10. LIST OF TEST EQUIPMENT .....	78
11. ANNEX A_ TEST SETUP PHOTO .....	80

1. EUT DESCRIPTION

<b>Model</b>	SM-A516U
<b>Additional Model</b>	SM-A516U1
<b>EUT Type</b>	Mobile Phone
<b>Power Supply</b>	DC 3.86 V
<b>Battery Information</b>	Model: EB-BA516ABY Type: Li-ion Battery
<b>Travel Adapter Information</b>	Model : EP-TA200 Manufacture: DONG YANG E&P
<b>Data Cable Information</b>	Model : EP-DR140AWE Manufacture: KSD
<b>Ear-jack Information</b>	Model : EHS64AVFWE Manufacture: CRESYN
<b>Frequency Range</b>	2 412 MHz ~ 2 472 MHz
<b>Max. RF Output Power</b>	<b>Peak Power(For information only)</b> 802.11b : 26.24 dBm 802.11g : 27.19 dBm 802.11n(HT20) : 27.16 dBm <b>Average Power</b> 802.11b : 20.35 dBm 802.11g : 18.99 dBm 802.11n(HT20) : 18.98 dBm
<b>Modulation Type</b>	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n
<b>Number of Channels</b>	13 Channels
<b>Antenna Specification</b>	Antenna type: MFA Peak Gain : -5.57 dBi
<b>Date(s) of Tests</b>	May 01, 2020 ~ June 02, 2020

## **2. TEST METHODOLOGY**

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### **EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### **EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### **GENERAL TEST PROCEDURES**

#### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

### **DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### **3. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

### **4. FACILITIES AND ACCREDITATIONS**

#### **FACILITIES**

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

#### **EQUIPMENT**

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.


Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05



## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

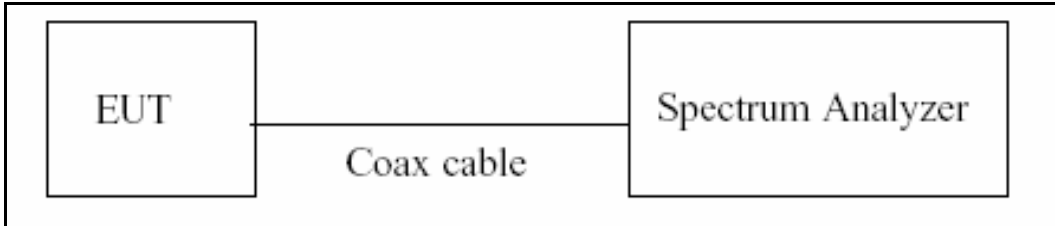

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured  $T$  data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on}/T_{total}$  and Duty Cycle Factor =  $10\log(1/Duty\ Cycle)$

## 7.2. 6dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration



#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
  
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3kHz BW.

### Test Configuration



### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / RBW]$ .
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.  
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98%

### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 30 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times$  Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	10.09
100	10.12
200	10.17
300	10.22
400	10.25
500	10.26
600	10.26
700	10.28
800	10.29
900	10.31
1000	10.32
2000	10.46
2400	10.50
2480	10.52
2500	10.52
3000	10.57
4000	10.65
5000	10.76
5150	10.76
5850	10.78
6000	10.78
7000	10.85
8000	10.90
9000	10.96
10000	11.02
11000	11.07
12000	11.15
13000	11.24
14000	11.21
15000	11.26
16000	11.27
17000	11.30
18000	11.35
19000	11.37
20000	11.41
21000	11.53
22000	11.60
23000	11.60

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


**7.6. Radiated Test**

**Limit**


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Test Configuration**


Below 30 MHz

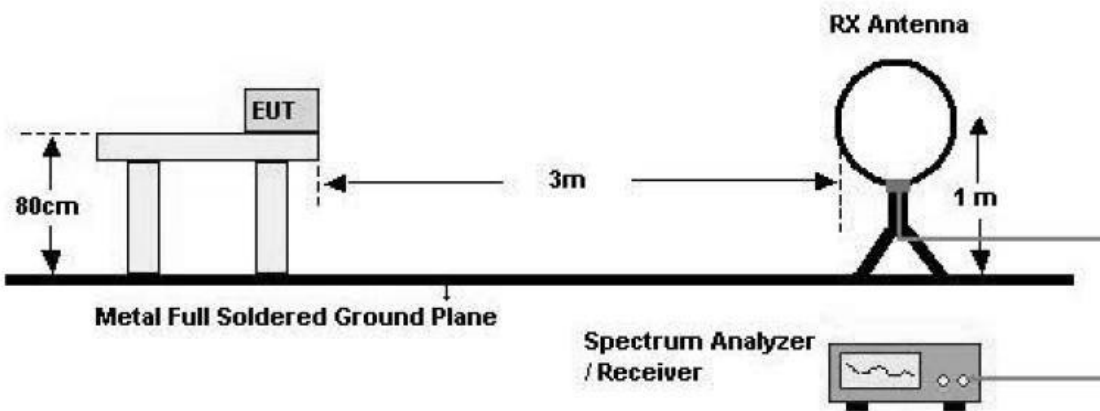

30 MHz - 1 GHz

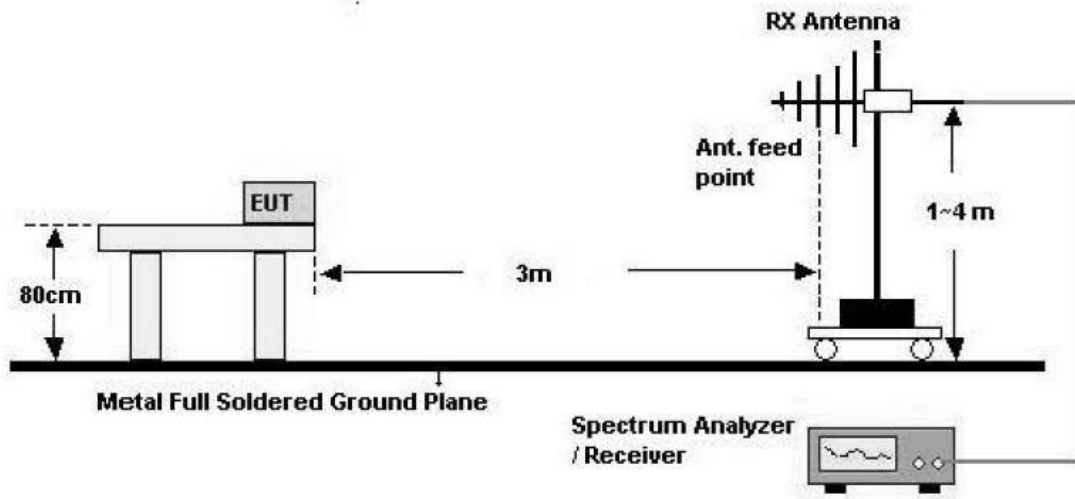

Above 1 GHz

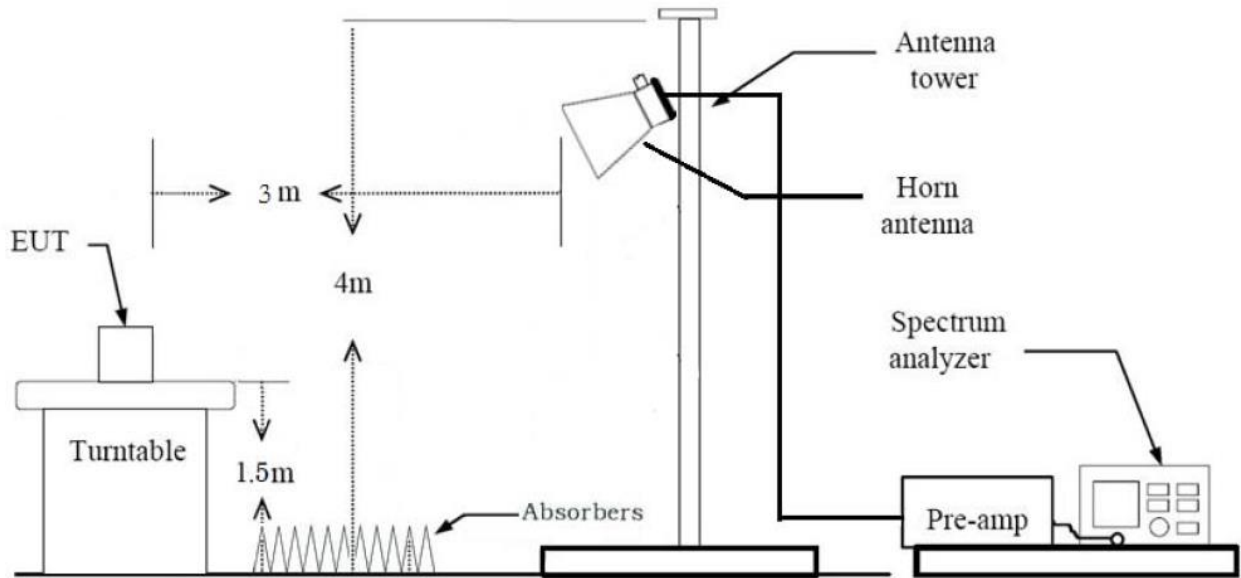



**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
- ※ In general, (1) is used mainly
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

(2) Measurement Type(Average): Duty cycle  $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle  $< 98\%$ , duty cycle variations are less than  $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log$  (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle  $\geq 98\%$ )

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle  $< 98\%$ )

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

+ Duty Cycle Factor

**Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average): Duty cycle  $\geq$  98%,
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
  - (3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$ 
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been

performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq$  98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

+ Duty Cycle Factor

## 7.7. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## 7.8. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
  - Worstcase : Stand alone
2. EUT Axis
  - Radiated Spurious Emissions : X,Y
  - Radiated Restricted Band Edge : X
3. Duty cycle factor applies only 802.11g/n(Duty cycle < 98%).
4. All data rate of operation were investigated and the test results are worst case in lowest datarate of each mode.
  - 802.11b : 1Mbps
  - 802.11g : 6Mbps
  - 802.11n\_HT20 : MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + External accessories(Earphone, etc) + Travel Adapter,  
Stand alone + Travel Adapter
  - Worstcase : Stand alone + Travel Adapter

### Conducted test

1. The EUT was configured with data rate of highest power.

**8. SUMMARY TEST OF RESULTS**

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS




## 9. TEST RESULT

### 9.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.603	8.693	0.990	0.045
	2	4.303	4.417	0.974	0.114
	5.5	1.630	1.740	0.937	0.284
	11	0.861	0.972	0.886	0.527
802.11g	6	1.426	1.524	0.936	0.289
	9	0.960	1.076	0.892	0.498
	12	0.723	0.839	0.862	0.647
	18	0.492	0.588	0.837	0.774
	24	0.372	0.487	0.764	1.172
	36	0.256	0.373	0.687	1.632
	48	0.196	0.313	0.627	2.030
	54	0.180	0.296	0.609	2.154
802.11n (HT20)	6.5 (MCS0)	1.337	1.451	0.921	0.358
	13 (MCS1)	0.688	0.804	0.855	0.680
	19.5 (MCS2)	0.472	0.570	0.828	0.819
	26 (MCS3)	0.365	0.480	0.760	1.192
	39 (MCS4)	0.257	0.353	0.728	1.378
	52 (MCS5)	0.201	0.317	0.633	1.983
	58.5 (MCS6)	0.184	0.300	0.613	2.128
	65 (MCS7)	0.169	0.284	0.593	2.267

☐ Test Plots


Duty cycle plot (802.11b(1Mbps))

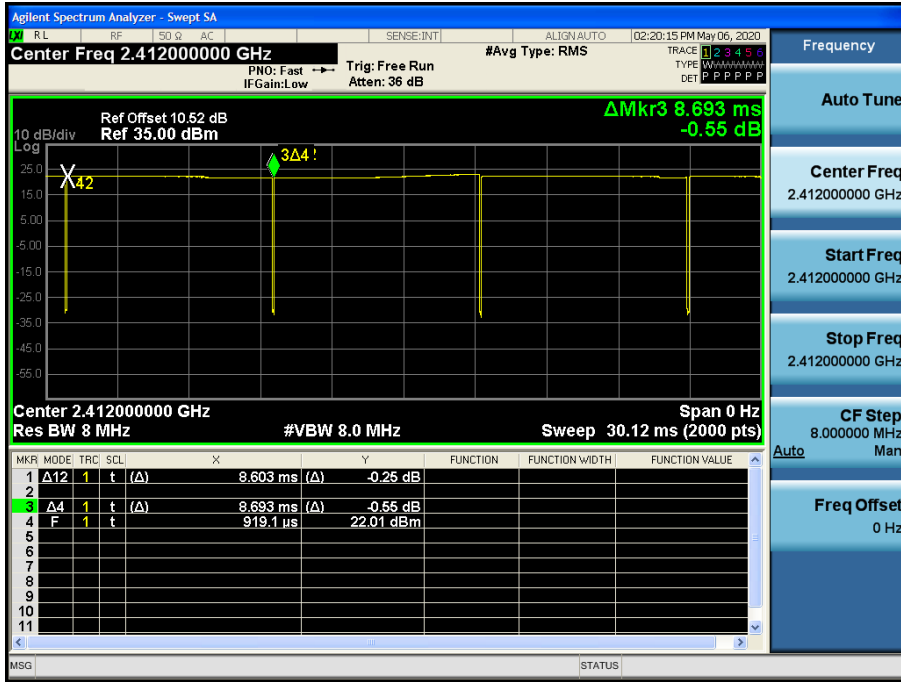

Duty cycle plot (802.11g(6Mbps))

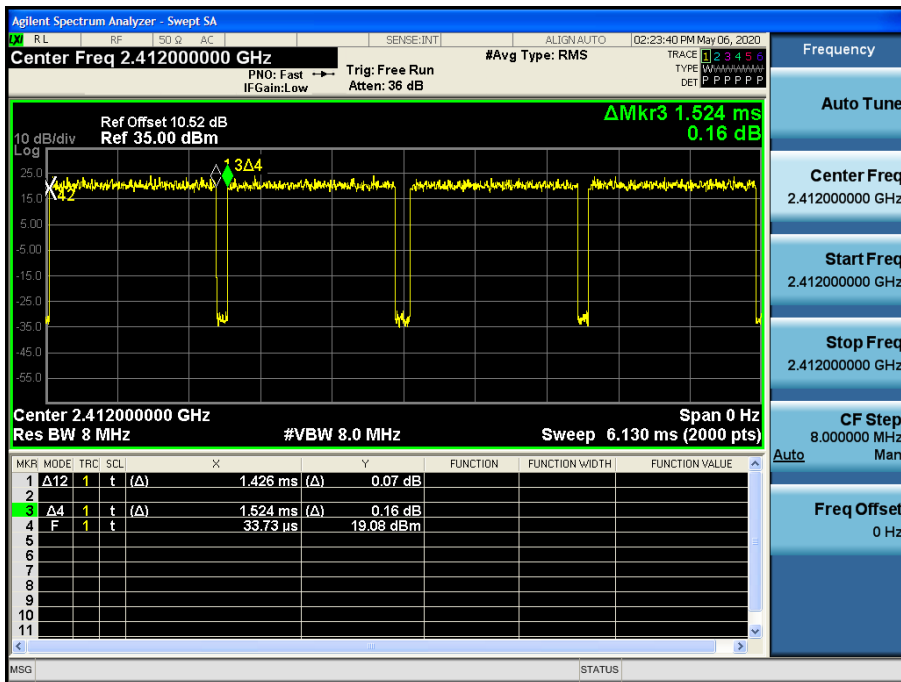

Duty cycle plot (802.11n(MCS0))

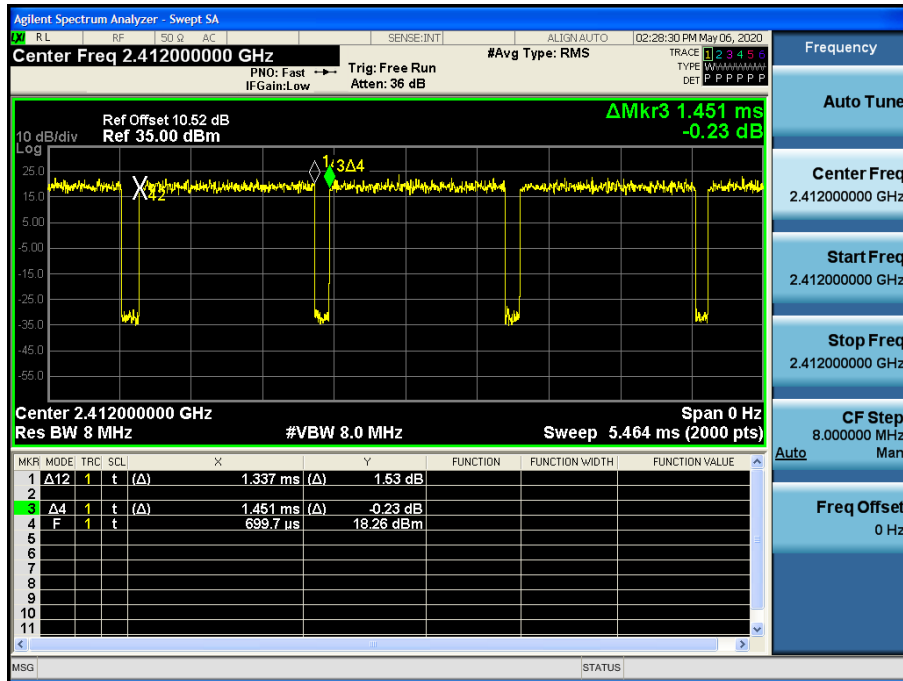

**Note:**

In order to simplify the report, attached plots were only the most lowest data rate.

**9.2 6dB BANDWIDTH**


802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	9.581	0.5
2437	6	10.04	0.5
2462	11	9.571	0.5
2467	12	10.04	0.5
2472	13	9.565	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.09	0.5
2437	6	16.10	0.5
2462	11	16.14	0.5
2467	12	16.09	0.5
2472	13	16.11	0.5


802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.66	0.5
2437	6	17.30	0.5
2462	11	17.43	0.5
2467	12	17.31	0.5
2472	13	16.58	0.5

Test Plots


6dB Bandwidth plot (802.11b-CH 13)

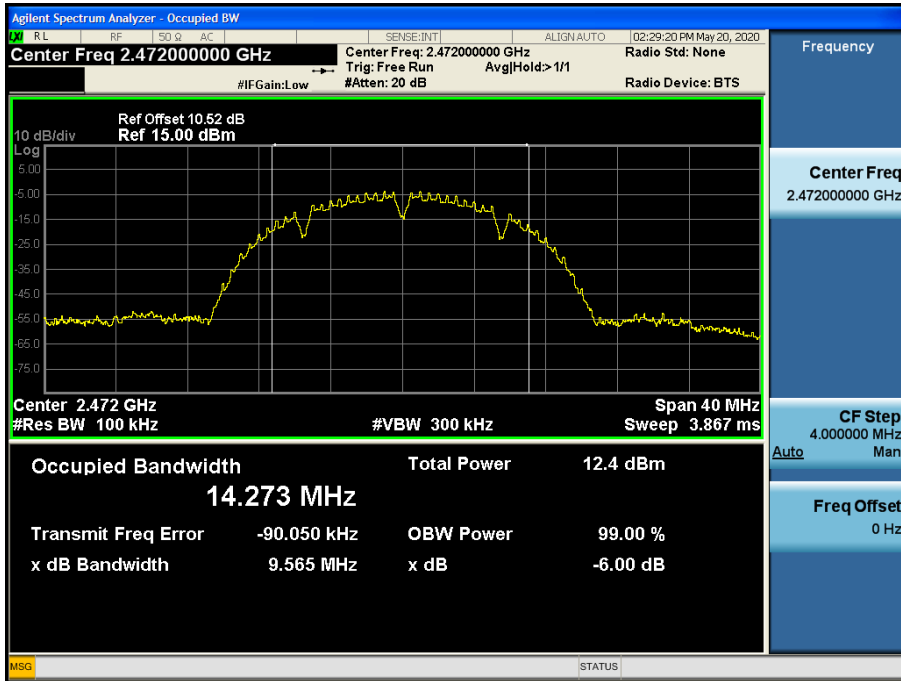

6dB Bandwidth plot (802.11g-CH 1)

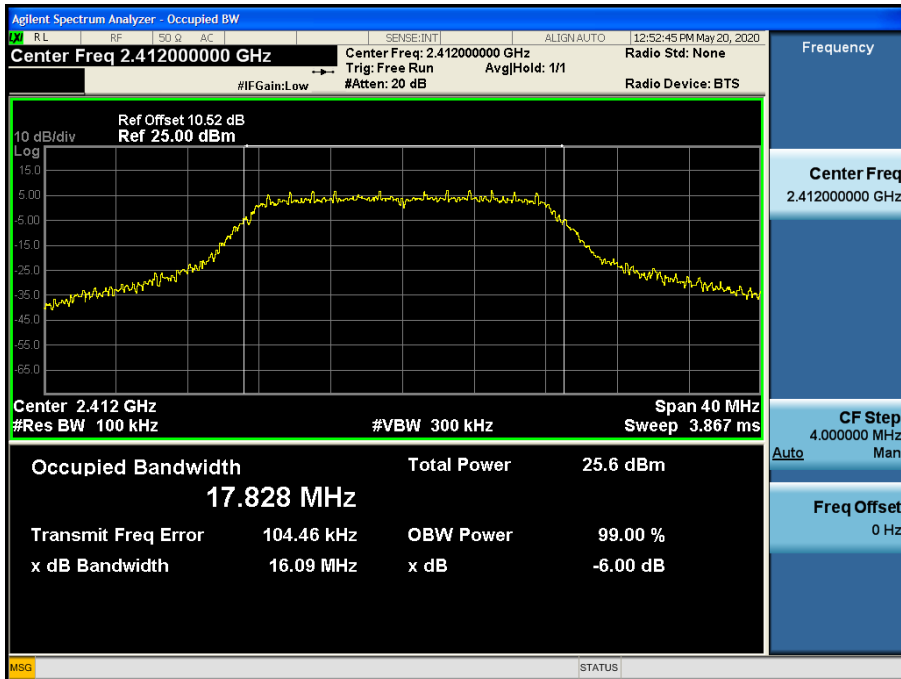

6dB Bandwidth plot (802.11n\_HT20-CH 13)

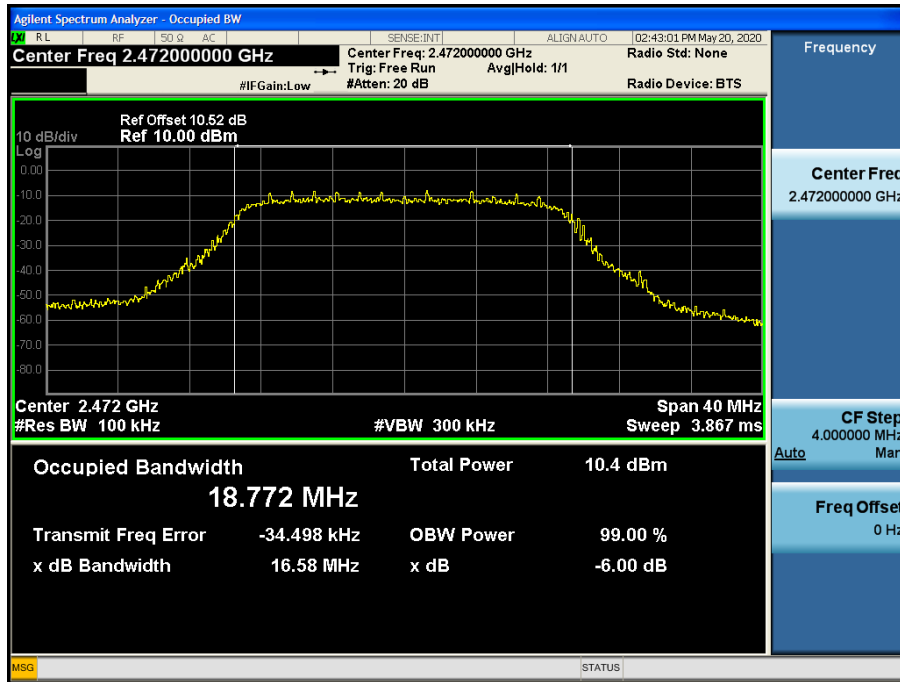

**Note:**

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

**9.3 OUTPUT POWER**

**Peak Power**

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.  
So, 10.52 dB is offset for 2.4 GHz Band

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	1	22.10	30	19.5
		2	22.47	30	
		5.5	23.95	30	
		11	25.71	30	
2437	6	1	22.48	30	
		2	23.18	30	
		5.5	24.66	30	
		11	26.24	30	
2462	11	1	22.18	30	
		2	22.82	30	
		5.5	24.32	30	
		11	25.94	30	
2467	12	1	7.92	30	7
		2	9.82	30	
		5.5	11.27	30	
		11	12.84	30	
2472	13	1	9.02	30	7
		2	9.46	30	
		5.5	10.79	30	
		11	12.35	30	

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	6	26.17	30	18
		9	26.46	30	
		12	26.14	30	
		18	26.18	30	
		24	26.85	30	
		36	26.71	30	
		48	25.40	30	17
		54	25.67	30	
2437	6	6	26.48	30	18
		9	26.83	30	
		12	26.26	30	
		18	26.40	30	
		24	27.09	30	
		36	26.88	30	
		48	25.58	30	17
		54	25.83	30	
2462	11	6	26.51	30	18
		9	26.80	30	
		12	26.39	30	
		18	26.56	30	
		24	27.19	30	
		36	27.09	30	
		48	25.80	30	17
		54	25.97	30	
2467	12	6	15.24	30	7
		9	15.56	30	
		12	15.20	30	
		18	15.29	30	
		24	16.15	30	
		36	15.92	30	
		48	15.07	30	
		54	15.26	30	
2472	13	6	13.19	30	7
		9	13.00	30	
		12	12.84	30	
		18	13.05	30	
		24	13.66	30	
		36	13.11	30	
		48	12.81	30	
		54	12.97	30	



802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	0	26.10	30	18
		1	26.12	30	
		2	26.33	30	
		3	26.75	30	
		4	26.80	30	17
		5	25.41	30	
		6	25.54	30	
		7	25.46	30	
2437	6	0	26.55	30	18
		1	26.37	30	
		2	26.52	30	
		3	27.11	30	
		4	27.16	30	17
		5	25.75	30	
		6	25.94	30	
		7	25.80	30	
2462	11	0	26.47	30	18
		1	26.47	30	
		2	26.70	30	
		3	27.06	30	
		4	27.08	30	17
		5	25.73	30	
		6	25.95	30	
		7	25.96	30	
2467	12	0	14.28	30	6
		1	14.38	30	
		2	14.52	30	
		3	14.90	30	
		4	14.89	30	
		5	13.86	30	
		6	13.98	30	
		7	13.94	30	
2472	13	0	11.02	30	3
		1	10.81	30	
		2	10.98	30	
		3	11.43	30	
		4	11.42	30	
		5	10.45	30	
		6	10.56	30	
		7	10.53	30	

**Average Power**

1. Power Meter offset = Attenuator loss + Cable loss

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 10.52 dB is offset for 2.4 GHz Band.

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	1	19.54	0.045	19.58	30	19.5
		2	19.51	0.114	19.62	30	
		5.5	19.34	0.284	19.63	30	
		11	19.37	0.527	19.90	30	
2437	6	1	19.82	0.045	19.87	30	
		2	20.13	0.114	20.24	30	
		5.5	20.00	0.284	20.29	30	
		11	19.82	0.527	20.35	30	
2462	11	1	19.61	0.045	19.65	30	
		2	19.87	0.114	19.98	30	
		5.5	19.83	0.284	20.11	30	
		11	19.66	0.527	20.19	30	
2467	12	1	6.78	0.045	6.83	30	7
		2	6.74	0.114	6.86	30	
		5.5	6.65	0.284	6.94	30	
		11	6.43	0.527	6.95	30	
2472	13	1	6.40	0.045	6.44	30	7
		2	6.47	0.114	6.58	30	
		5.5	6.27	0.284	6.55	30	
		11	5.98	0.527	6.51	30	

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	18.12	0.289	18.41	30	18
		9	18.22	0.498	18.72	30	
		12	18.14	0.647	18.78	30	
		18	17.75	0.774	18.52	30	
		24	17.09	1.172	18.26	30	
		36	17.25	1.632	18.89	30	
		48	15.49	2.030	17.52	30	17
		54	14.80	2.154	16.96	30	
2437	6	6	18.36	0.289	18.65	30	18
		9	18.47	0.498	18.97	30	
		12	18.22	0.647	18.86	30	
		18	17.99	0.774	18.77	30	
		24	17.81	1.172	18.98	30	
		36	17.33	1.632	18.96	30	
		48	15.62	2.030	17.65	30	17
		54	15.54	2.154	17.69	30	
2462	11	6	18.32	0.289	18.61	30	18
		9	18.42	0.498	18.92	30	
		12	18.29	0.647	18.94	30	
		18	18.13	0.774	18.90	30	
		24	17.80	1.172	18.97	30	
		36	17.36	1.632	18.99	30	
		48	15.90	2.030	17.93	30	17
		54	15.78	2.154	17.93	30	
2467	12	6	7.15	0.289	7.44	30	7
		9	7.29	0.498	7.79	30	
		12	7.18	0.647	7.82	30	
		18	6.86	0.774	7.63	30	
		24	6.79	1.172	7.96	30	
		36	6.35	1.632	7.98	30	
		48	5.21	2.030	7.24	30	
		54	5.03	2.154	7.19	30	
2472	13	6	5.06	0.289	5.34	30	7
		9	4.65	0.498	5.15	30	
		12	4.87	0.647	5.52	30	
		18	4.74	0.774	5.51	30	
		24	4.38	1.172	5.55	30	
		36	3.62	1.632	5.25	30	
		48	2.93	2.030	4.96	30	
		54	2.80	2.154	4.95	30	

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	0	18.01	0.358	18.37	30	18
		1	18.11	0.680	18.79	30	
		2	17.78	0.819	18.60	30	
		3	17.61	1.192	18.80	30	
		4	17.24	1.378	18.62	30	
		5	15.42	1.983	17.40	30	17
		6	15.47	2.128	17.60	30	
		7	15.28	2.267	17.55	30	
2437	6	0	18.37	0.358	18.73	30	18
		1	18.21	0.680	18.89	30	
		2	18.00	0.819	18.81	30	
		3	17.78	1.192	18.97	30	
		4	17.58	1.378	18.96	30	
		5	15.81	1.983	17.79	30	17
		6	15.68	2.128	17.81	30	
		7	15.52	2.267	17.79	30	
2462	11	0	18.33	0.358	18.69	30	18
		1	18.28	0.680	18.96	30	
		2	18.03	0.819	18.84	30	
		3	17.79	1.192	18.98	30	
		4	17.49	1.378	18.86	30	
		5	15.85	1.983	17.84	30	17
		6	15.79	2.128	17.92	30	
		7	15.65	2.267	17.91	30	
2467	12	0	6.11	0.358	6.46	30	6
		1	6.13	0.680	6.81	30	
		2	5.93	0.819	6.75	30	
		3	5.71	1.192	6.90	30	
		4	5.31	1.378	6.69	30	
		5	3.94	1.983	5.92	30	
		6	3.99	2.128	6.12	30	
		7	3.69	2.267	5.95	30	
2472	13	0	2.93	0.358	3.28	30	3
		1	2.69	0.680	3.37	30	
		2	2.52	0.819	3.34	30	
		3	2.30	1.192	3.49	30	
		4	1.97	1.378	3.35	30	
		5	0.60	1.983	2.58	30	
		6	0.55	2.128	2.68	30	
		7	0.40	2.267	2.66	30	

**9.4 POWER SPECTRAL DENSITY**

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	2.691	0.527	3.218	8
	2437	6	2.454	0.527	2.981	8
	2462	11	3.140	0.527	3.667	8
	2467	12	-10.755	0.527	-10.228	8
	2472	13	-10.489	0.114	-10.375	8
802.11g	2412	1	-1.661	1.632	-0.029	8
	2437	6	-1.134	1.172	0.038	8
	2462	11	-1.690	1.632	-0.058	8
	2467	12	-12.499	1.632	-10.867	8
	2472	13	-15.205	1.172	-14.033	8
802.11n	2412	1	-1.874	1.192	-0.682	8
	2437	6	-1.571	1.192	-0.379	8
	2462	11	-1.934	1.192	-0.742	8
	2467	12	-13.618	1.192	-12.426	8
	2472	13	-17.468	1.192	-16.276	8

**Note :**

1. Spectrum reading values are not plot data.


The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(10 dB) + Cable loss(1ea)


3. 10.52 dB is offset for 2.4 GHz Band.

▣ Test Plots


Power Spectral Density (802.11b-CH 11)

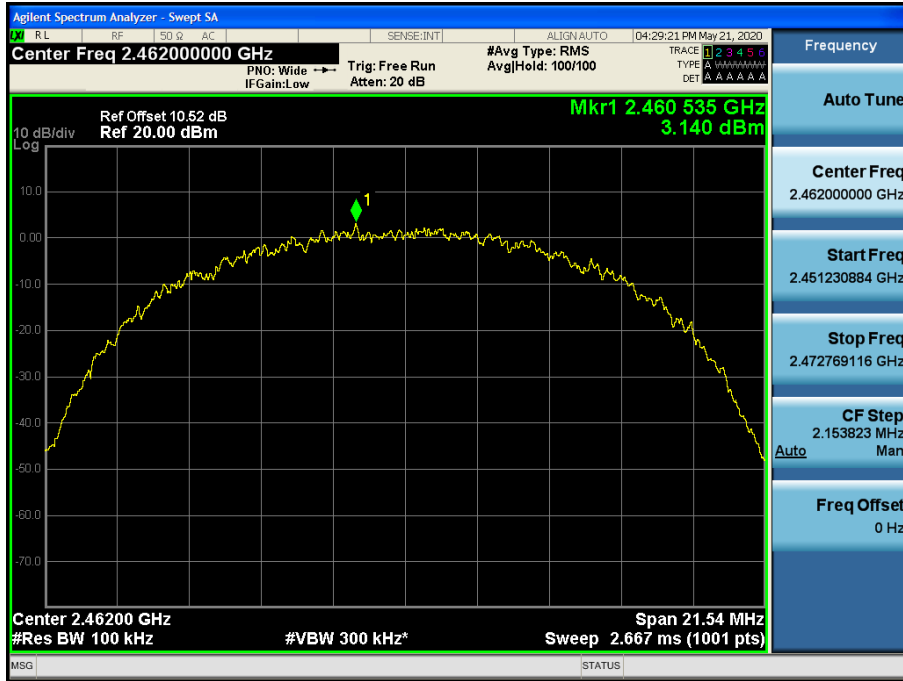

Power Spectral Density (802.11g-CH 6)

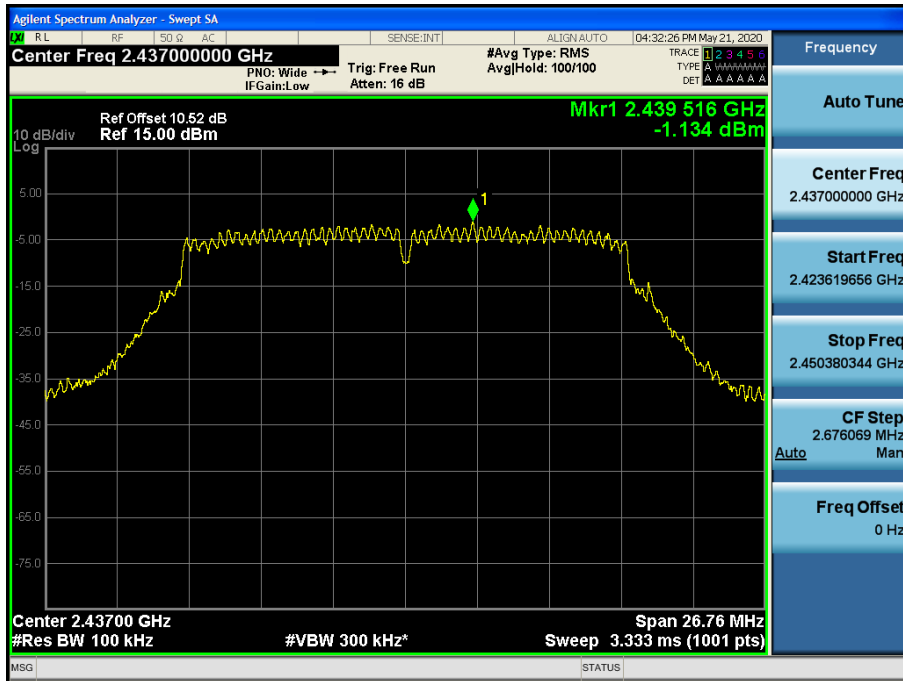

Power Spectral Density (802.11n\_HT20 -CH 6)

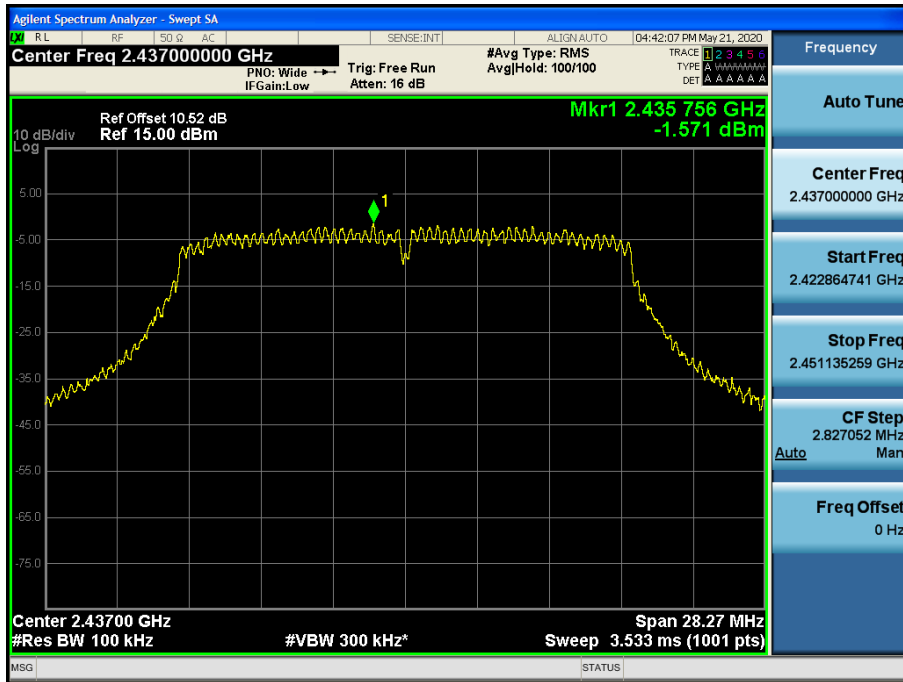

**Note :**

In order to simplify the report, attached plots were only the worst case PSD channel.

## 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.




▣ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

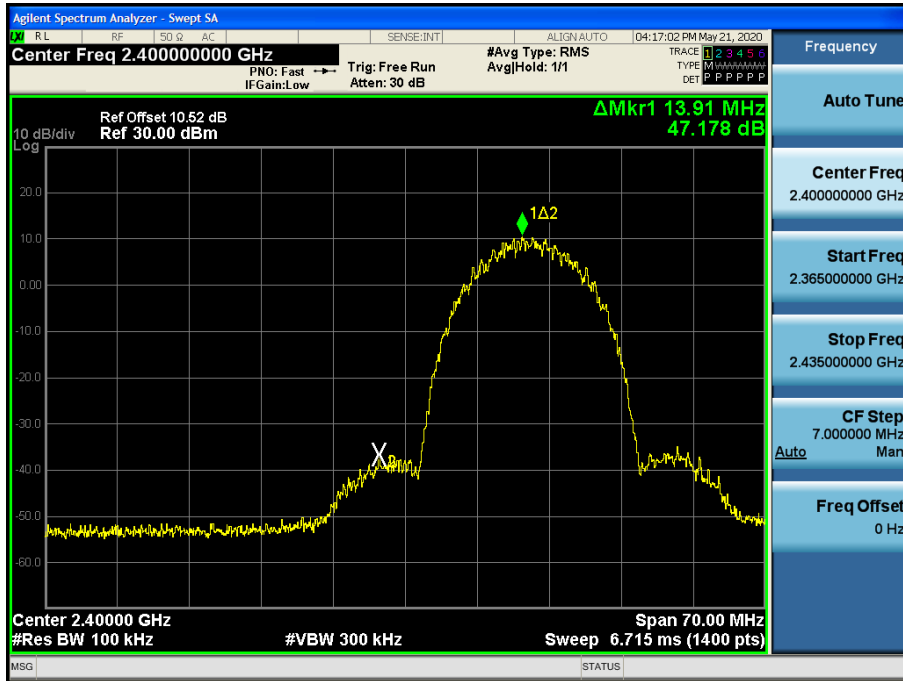


Band Edge (802.11b-CH11)

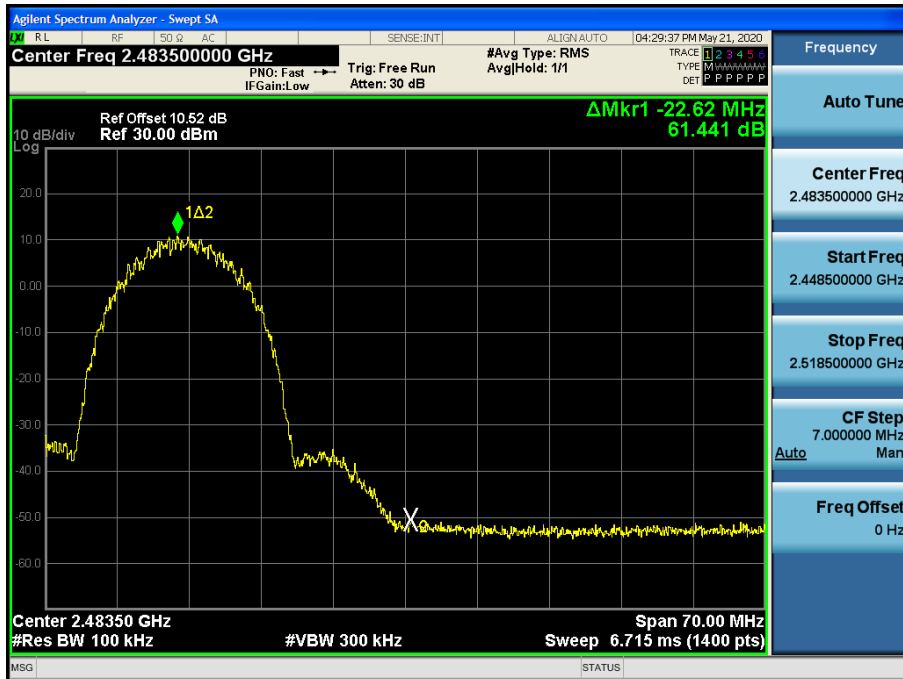


Band Edge (802.11b-CH12)

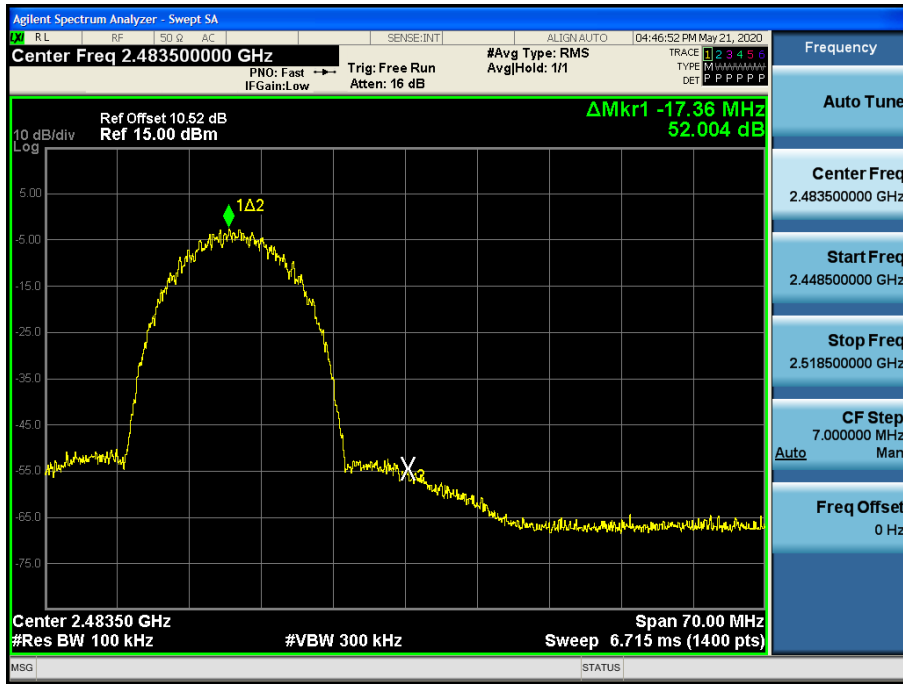


Band Edge (802.11b-CH13)

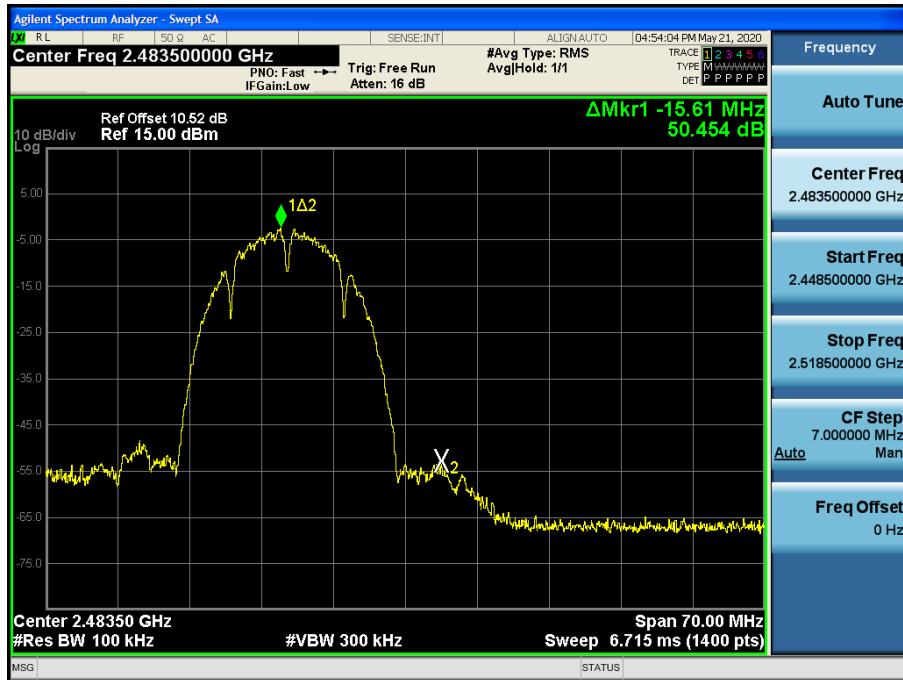


Band Edge (802.11g-CH1)

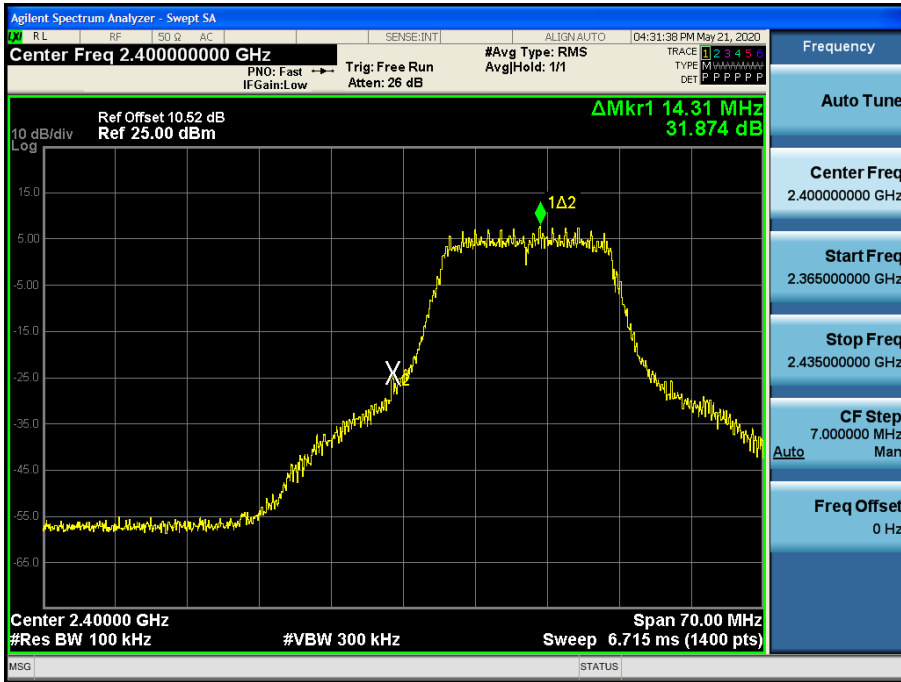


Band Edge (802.11g-CH11)

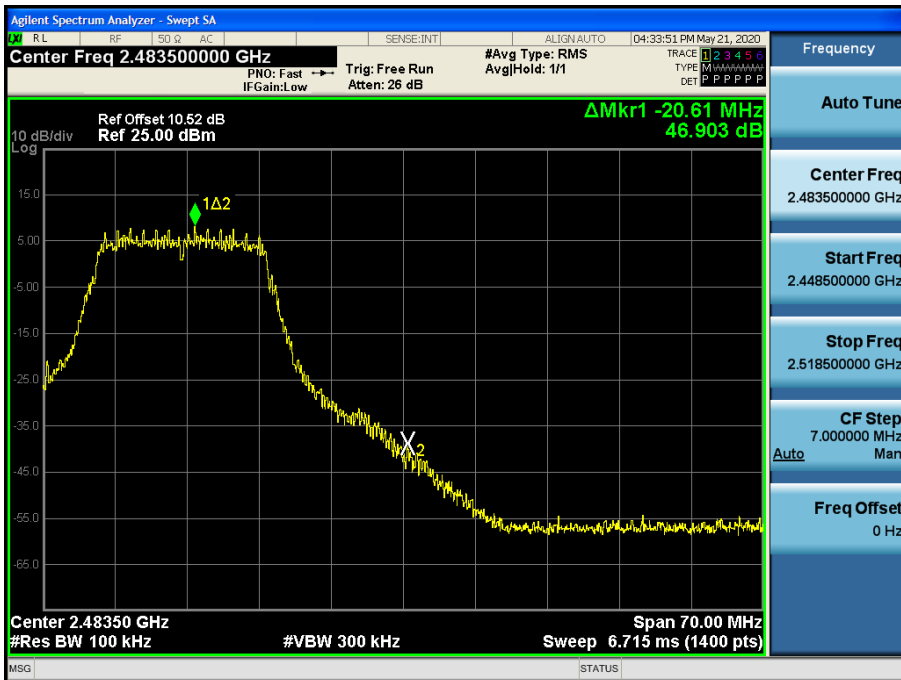


Band Edge (802.11g-CH12)

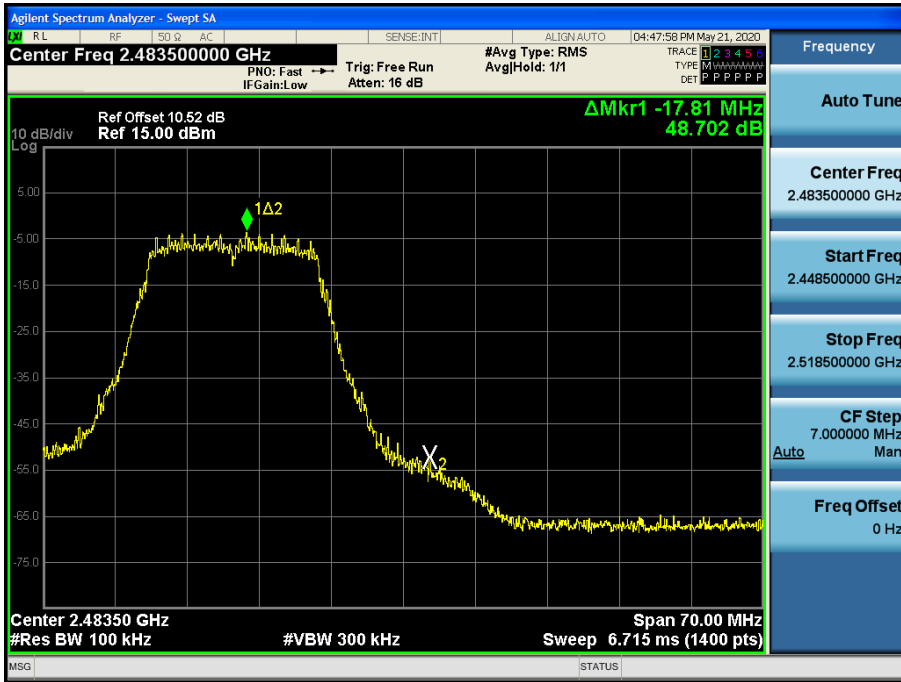


Band Edge (802.11g-CH13)

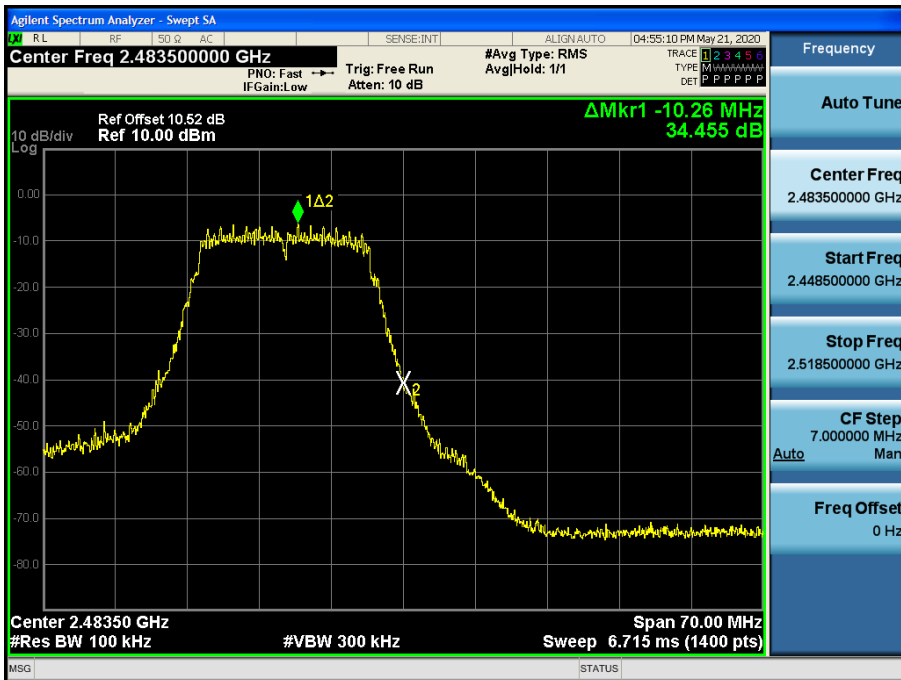


Band Edge (802.11n\_HT20 -CH1)

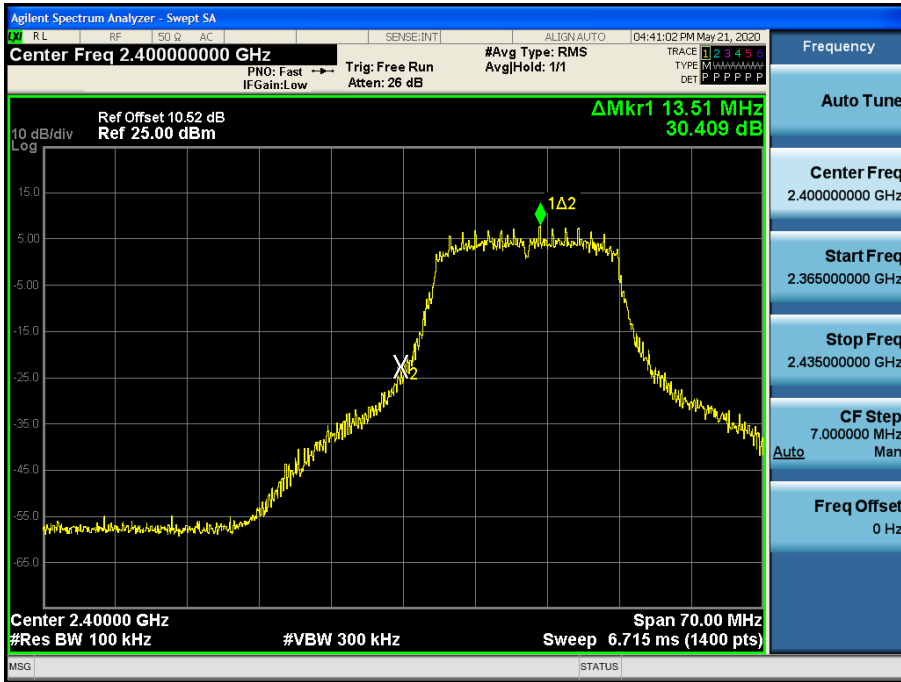

Band Edge (802.11n\_HT20 -CH11)

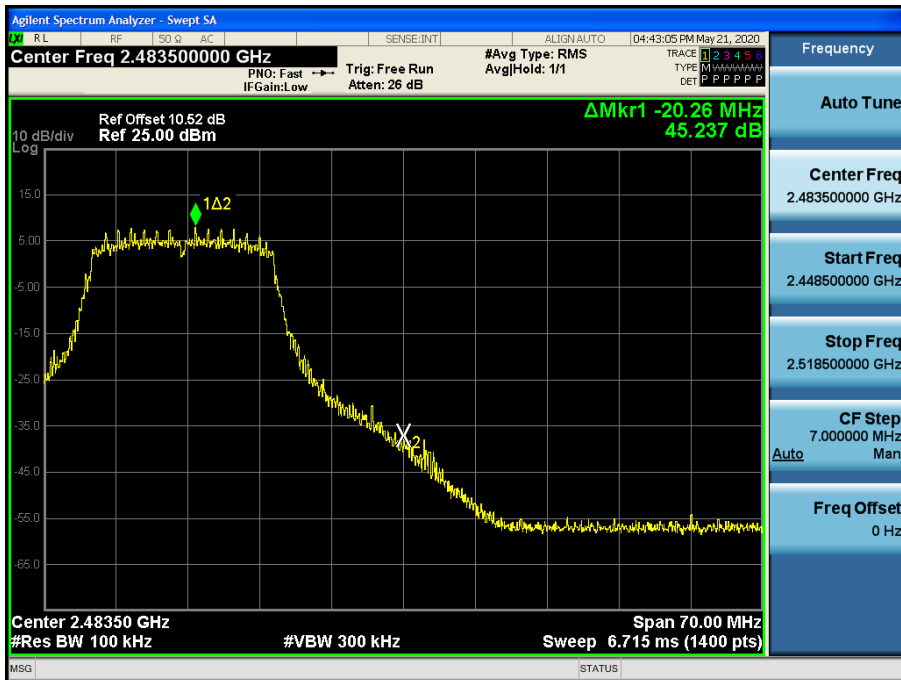

Band Edge (802.11n\_HT20 -CH12)

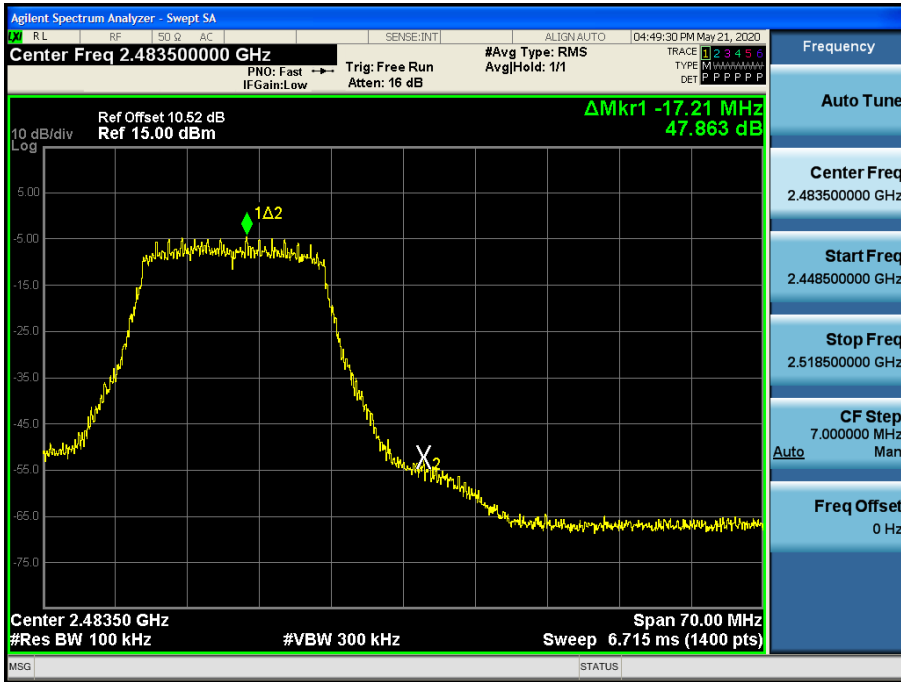


Band Edge (802.11n\_HT20 -CH13)



☑ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)

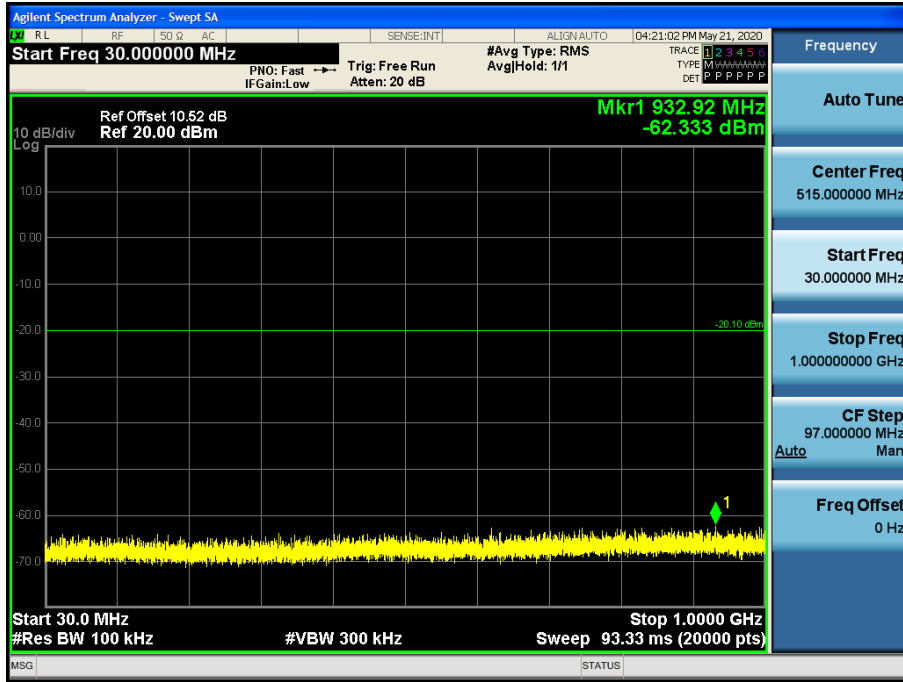


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)

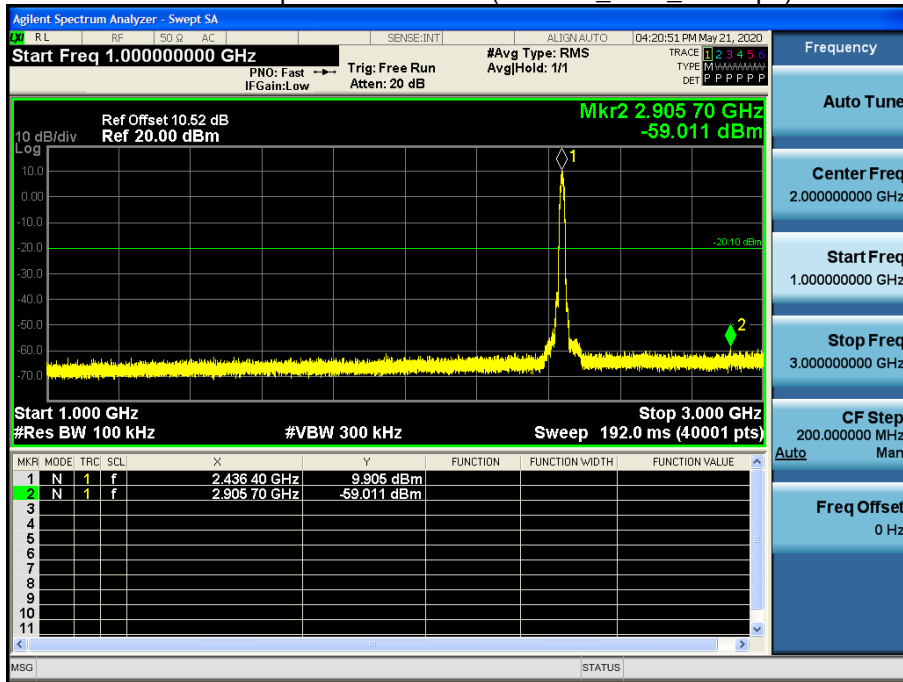


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)

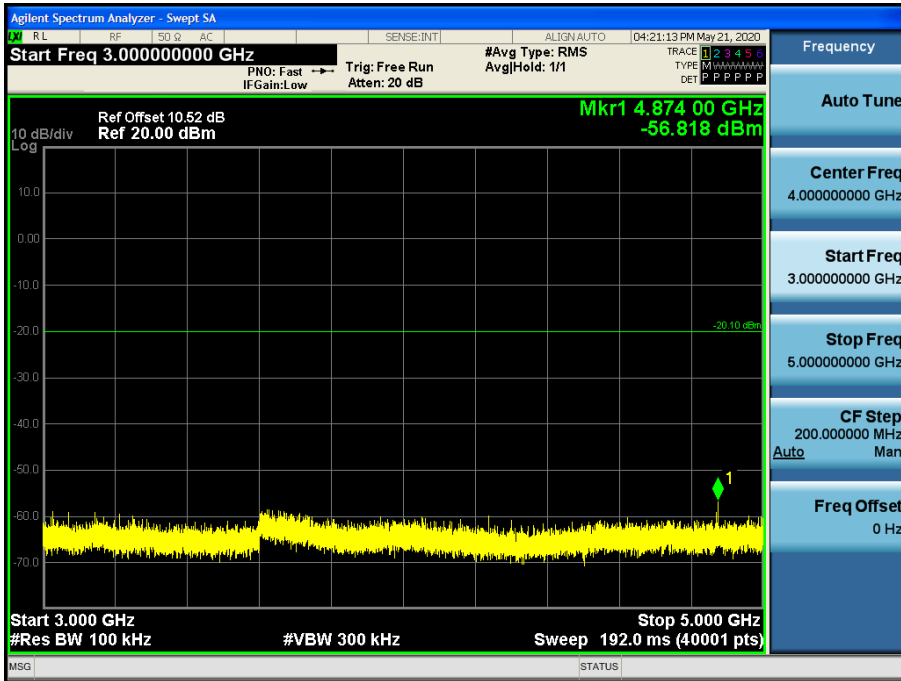

5 GHz ~ 7 GHz


Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)

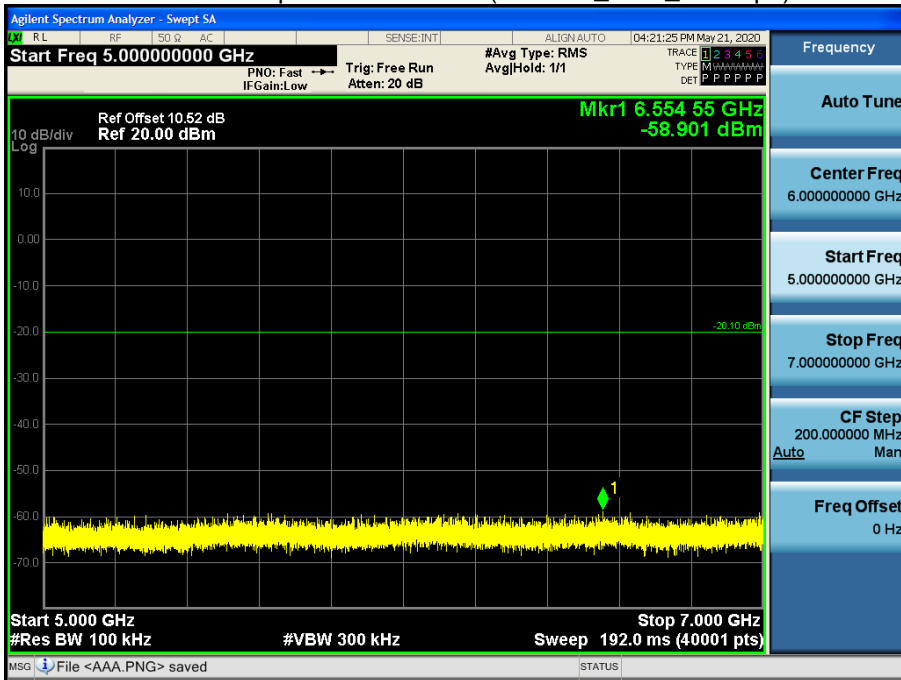




7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)

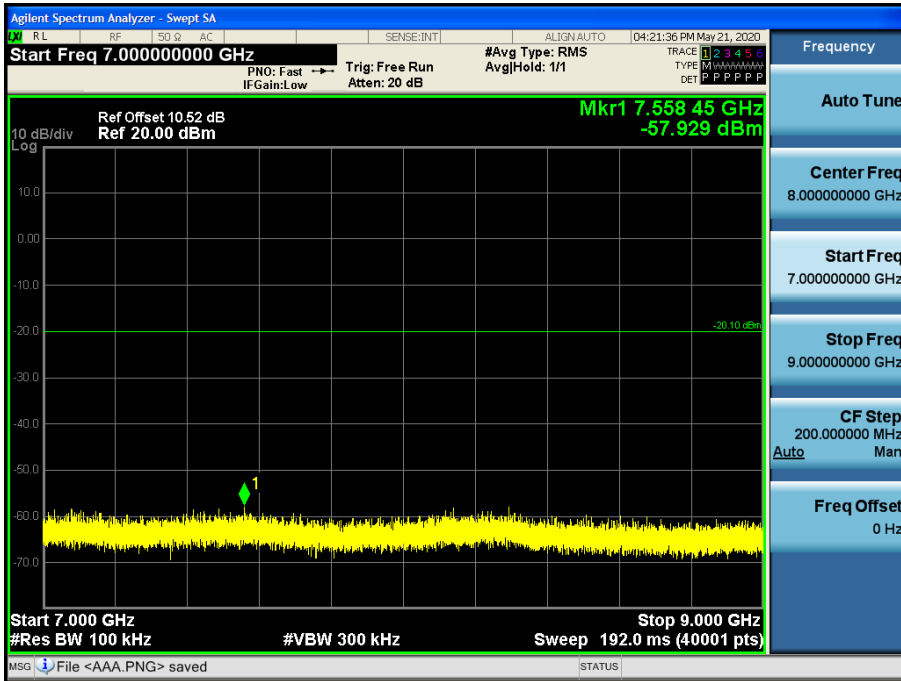


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)

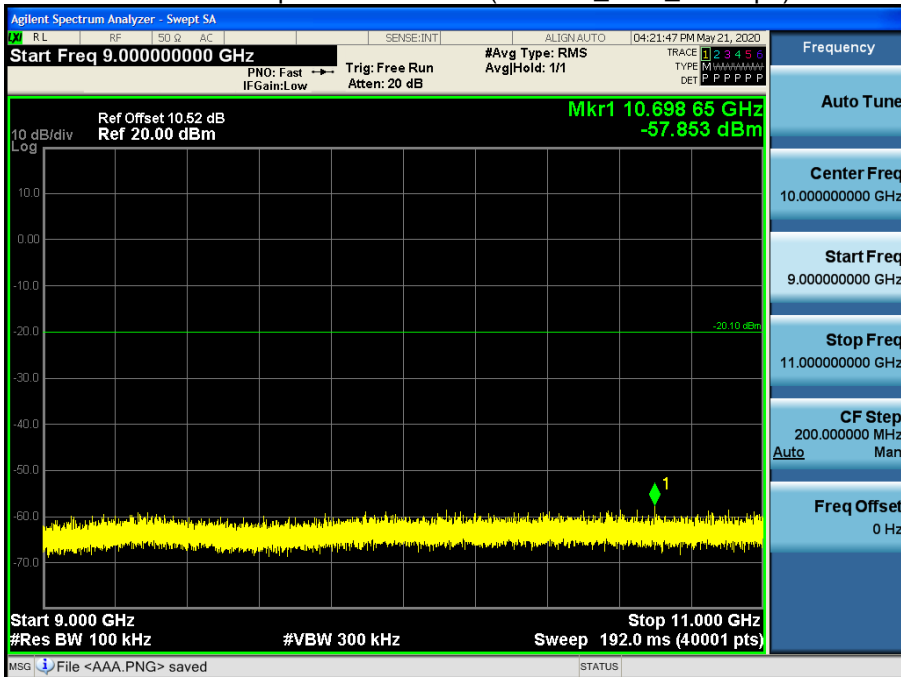


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)

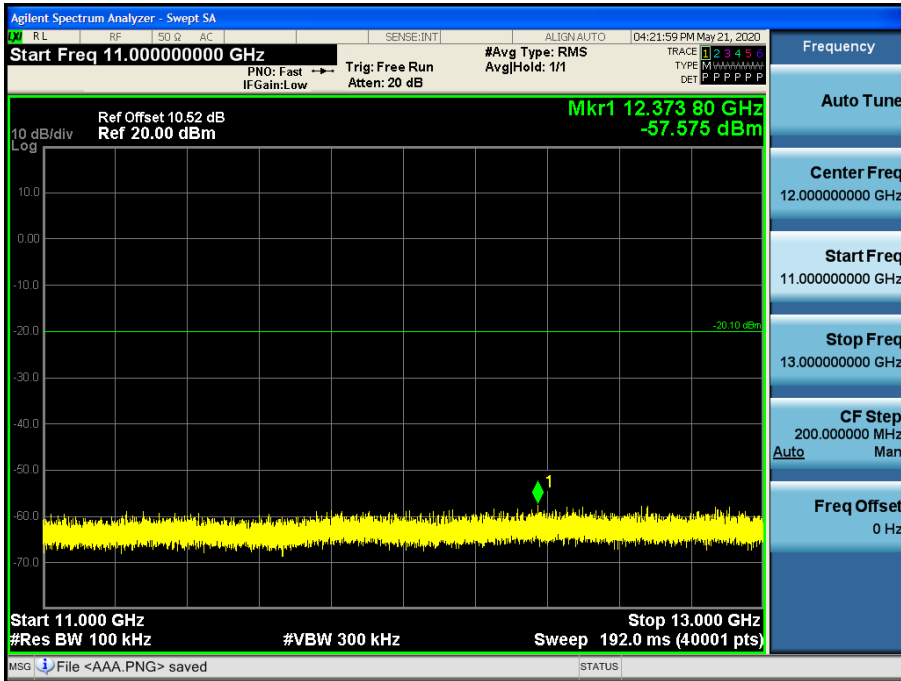


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)

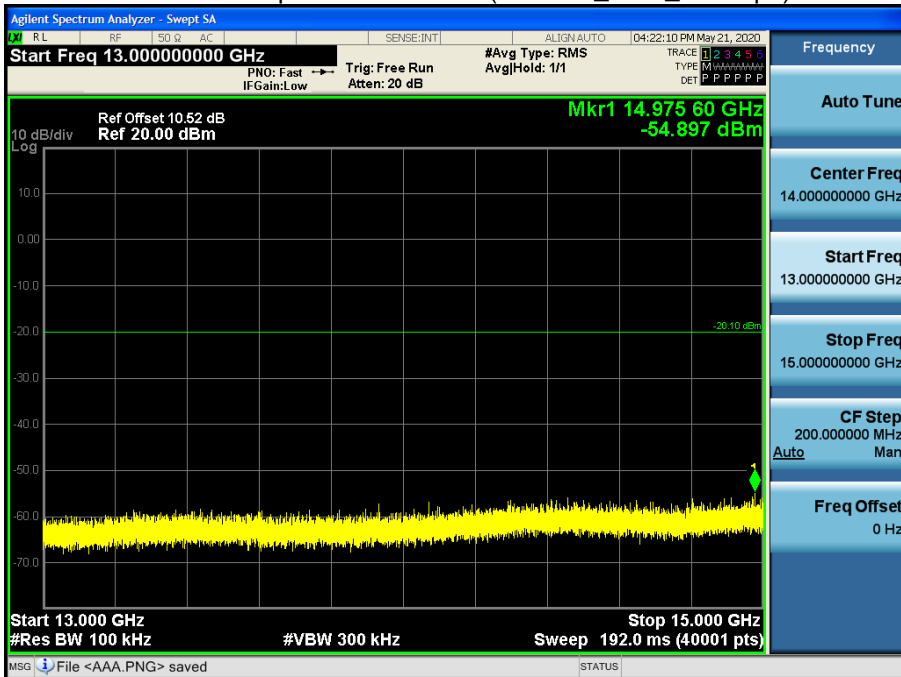


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)

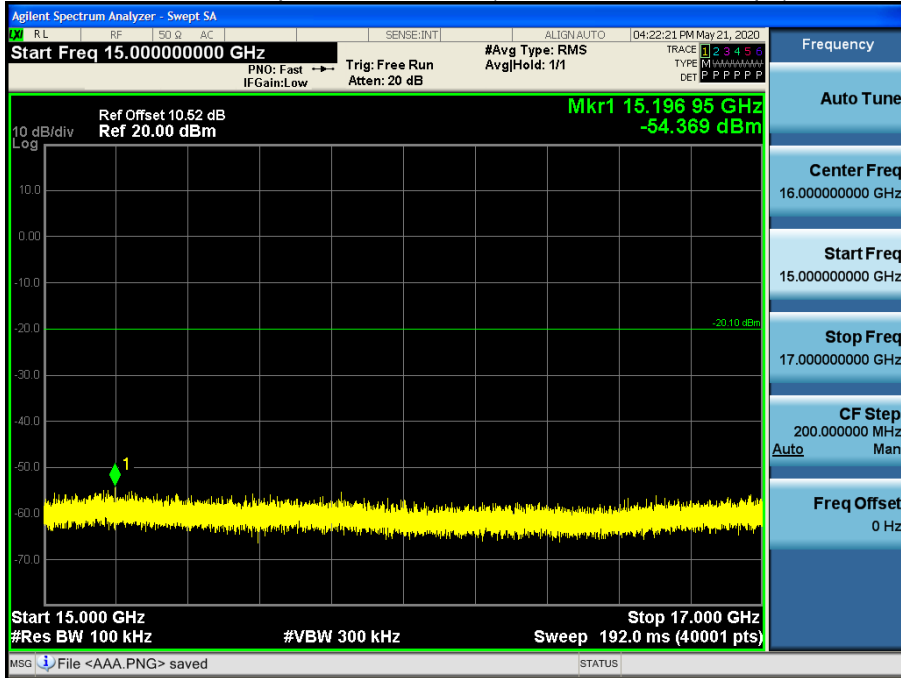


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)

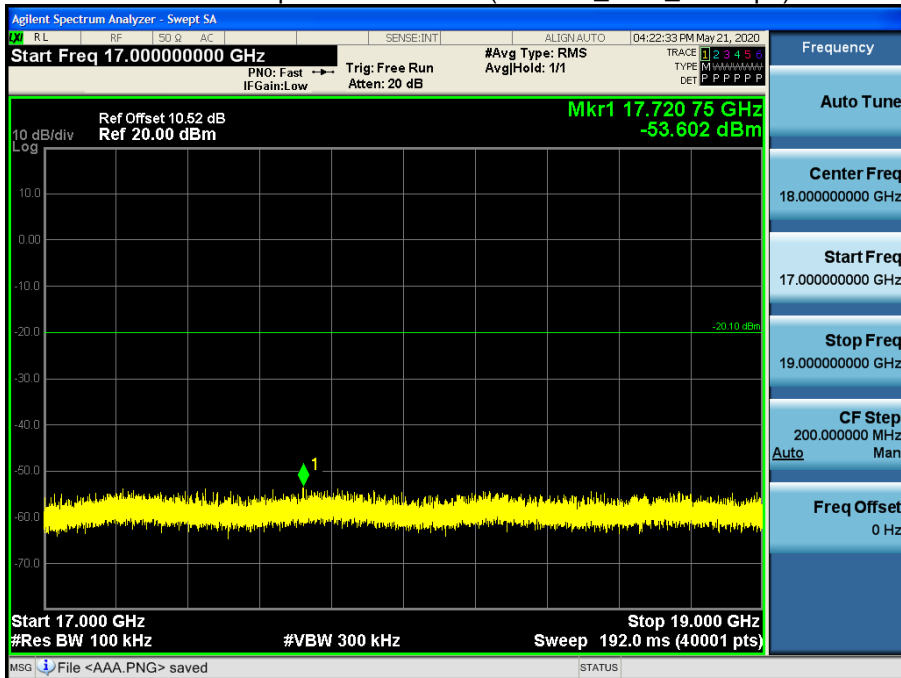


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)

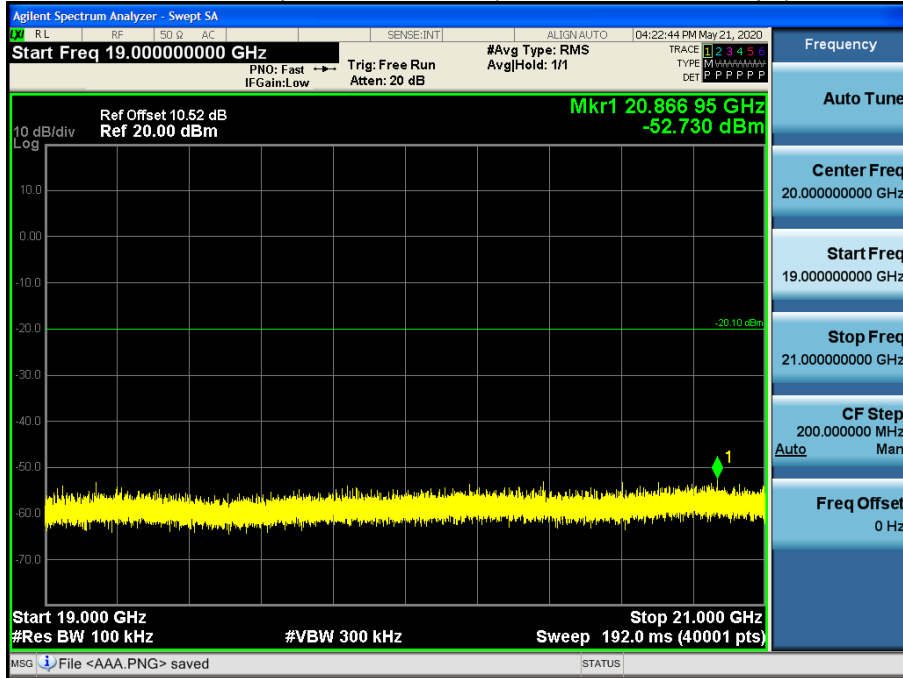

21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)

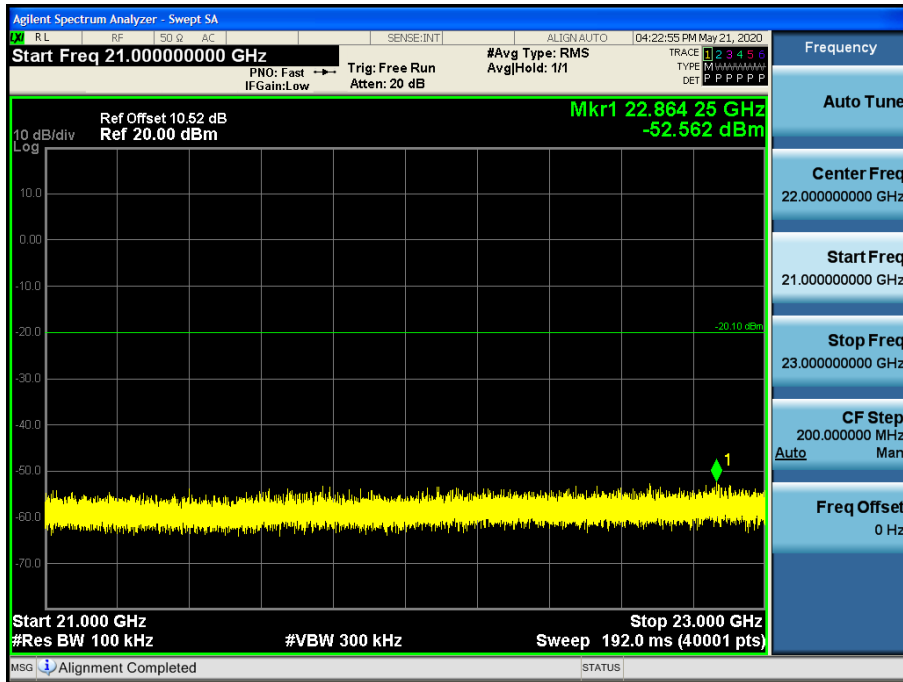

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b\_Ch.6\_11 Mbps)



**9.6 RADIATED SPURIOUS EMISSIONS**

**Frequency Range : 9 kHz – 30MHz**

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

**Frequency Range : Below 1 GHz**

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

**Frequency Range : Above 1 GHz**

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2412  
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	42.81	4.31	V	47.12	73.98	26.86	PK
4824	32.51	4.31	V	36.82	53.98	17.16	AV
7236	38.04	12.35	V	50.39	73.98	23.59	PK
7236	26.45	12.35	V	38.80	53.98	15.18	AV
4824	43.40	4.31	H	47.71	73.98	26.27	PK
4824	33.92	4.31	H	38.23	53.98	15.75	AV
7236	38.77	12.35	H	51.12	73.98	22.86	PK
7236	26.58	12.35	H	38.93	53.98	15.05	AV

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2437  
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	41.56	4.40	V	45.96	73.98	28.02	PK
4874	30.26	4.40	V	34.66	53.98	19.32	AV
7311	38.44	12.37	V	50.81	73.98	23.17	PK
7311	26.51	12.37	V	38.88	53.98	15.10	AV
4874	40.97	4.40	H	45.37	73.98	28.61	PK
4874	30.33	4.40	H	34.73	53.98	19.25	AV
7311	39.32	12.37	H	51.69	73.98	22.29	PK
7311	26.56	12.37	H	38.93	53.98	15.05	AV

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2462  
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	42.24	4.51	V	46.75	73.98	27.23	PK
4924	34.49	4.51	V	39.00	53.98	14.98	AV
7386	37.24	12.31	V	49.55	73.98	24.43	PK
7386	26.01	12.31	V	38.32	53.98	15.66	AV
4924	44.59	4.51	H	49.10	73.98	24.88	PK
4924	35.80	4.51	H	40.31	53.98	13.67	AV
7386	38.37	12.31	H	50.68	73.98	23.30	PK
7386	26.15	12.31	H	38.46	53.98	15.52	AV

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2467  
 Channel No.: 12 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	40.40	4.52	V	44.92	73.98	29.06	PK
4934	28.15	4.52	V	32.67	53.98	21.31	AV
7401	37.97	12.45	V	50.42	73.98	23.56	PK
7401	25.92	12.45	V	38.37	53.98	15.61	AV
4934	40.94	4.52	H	45.46	73.98	28.52	PK
4934	28.83	4.52	H	33.35	53.98	20.63	AV
7401	38.59	12.45	H	51.04	73.98	22.94	PK
7401	26.11	12.45	H	38.56	53.98	15.42	AV



Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2472  
 Channel No.: 13 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	40.32	4.53	V	44.85	73.98	29.13	PK
4944	29.03	4.53	V	33.56	53.98	20.42	AV
7416	37.15	12.39	V	49.54	73.98	24.44	PK
7416	25.51	12.39	V	37.90	53.98	16.08	AV
4944	41.16	4.53	H	45.69	73.98	28.29	PK
4944	29.07	4.53	H	33.60	53.98	20.38	AV
7416	38.43	12.39	H	50.82	73.98	23.16	PK
7416	26.09	12.39	H	38.48	53.98	15.50	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2412  
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	41.41	0.00	4.31	V	45.72	73.98	28.26	PK
4824	28.85	0.29	4.31	V	33.45	53.98	20.53	AV
7236	38.58	0.00	12.35	V	50.93	73.98	23.05	PK
7236	26.73	0.29	12.35	V	39.37	53.98	14.61	AV
4824	41.87	0.00	4.31	H	46.18	73.98	27.80	PK
4824	29.86	0.29	4.31	H	34.46	53.98	19.52	AV
7236	38.72	0.00	12.35	H	51.07	73.98	22.91	PK
7236	26.77	0.29	12.35	H	39.41	53.98	14.57	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2437  
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	41.36	0.00	4.40	V	45.76	73.98	28.22	PK
4874	28.50	0.29	4.40	V	33.19	53.98	20.79	AV
7311	38.03	0.00	12.37	V	50.40	73.98	23.58	PK
7311	25.57	0.29	12.37	V	38.23	53.98	15.75	AV
4874	42.47	0.00	4.40	H	46.87	73.98	27.11	PK
4874	29.61	0.29	4.40	H	34.30	53.98	19.68	AV
7311	38.74	0.00	12.37	H	51.11	73.98	22.87	PK
7311	26.55	0.29	12.37	H	39.21	53.98	14.77	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2462  
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	41.78	0.00	4.51	V	46.29	73.98	27.69	PK
4924	29.58	0.29	4.51	V	34.38	53.98	19.60	AV
7386	37.41	0.00	12.31	V	49.72	73.98	24.26	PK
7386	24.88	0.29	12.31	V	37.48	53.98	16.50	AV
4924	41.48	0.00	4.51	H	45.99	73.98	27.99	PK
4924	30.01	0.29	4.51	H	34.81	53.98	19.17	AV
7386	37.92	0.00	12.31	H	50.23	73.98	23.75	PK
7386	25.94	0.29	12.31	H	38.54	53.98	15.44	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2467  
 Channel No.: 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	40.50	0.00	4.52	V	45.02	73.98	28.96	PK
4934	28.32	0.29	4.52	V	33.13	53.98	20.85	AV
7401	37.64	0.00	12.45	V	50.09	73.98	23.89	PK
7401	25.98	0.29	12.45	V	38.72	53.98	15.26	AV
4934	40.98	0.00	4.52	H	45.50	73.98	28.48	PK
4934	29.07	0.29	4.52	H	33.88	53.98	20.10	AV
7401	38.64	0.00	12.45	H	51.09	73.98	22.89	PK
7401	26.02	0.29	12.45	H	38.76	53.98	15.22	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2472  
 Channel No.: 13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4944	40.86	0.00	4.53	V	45.39	73.98	28.59	PK
4944	28.46	0.29	4.53	V	33.28	53.98	20.70	AV
7416	37.79	0.00	12.39	V	50.18	73.98	23.80	PK
7416	26.04	0.29	12.39	V	38.72	53.98	15.26	AV
4944	40.91	0.00	4.53	H	45.44	73.98	28.54	PK
4944	29.07	0.29	4.53	H	33.89	53.98	20.09	AV
7416	38.58	0.00	12.39	H	50.97	73.98	23.01	PK
7416	26.13	0.29	12.39	H	38.81	53.98	15.17	AV

Operation Mode: 802.11n (HT20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412  
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	41.60	0.00	4.31	V	45.91	73.98	28.07	PK
4824	28.86	0.36	4.31	V	33.53	53.98	20.45	AV
7236	38.30	0.00	12.35	V	50.65	73.98	23.33	PK
7236	25.81	0.36	12.35	V	38.52	53.98	15.46	AV
4824	43.08	0.00	4.31	H	47.39	73.98	26.59	PK
4824	29.81	0.36	4.31	H	34.48	53.98	19.50	AV
7236	38.73	0.00	12.35	H	51.08	73.98	22.90	PK
7236	26.71	0.36	12.35	H	39.42	53.98	14.56	AV

Operation Mode: 802.11n (HT20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2437  
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	41.18	0.00	4.40	V	45.58	73.98	28.40	PK
4874	28.71	0.36	4.40	V	33.47	53.98	20.51	AV
7311	37.91	0.00	12.37	V	50.28	73.98	23.70	PK
7311	25.81	0.36	12.37	V	38.54	53.98	15.44	AV
4874	41.29	0.00	4.40	H	45.69	73.98	28.29	PK
4874	29.57	0.36	4.40	H	34.33	53.98	19.65	AV
7311	38.99	0.00	12.37	H	51.36	73.98	22.62	PK
7311	26.53	0.36	12.37	H	39.26	53.98	14.72	AV

Operation Mode: 802.11n (HT20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2462  
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	42.08	0.00	4.51	V	46.59	73.98	27.39	PK
4924	29.67	0.36	4.51	V	34.54	53.98	19.44	AV
7386	37.97	0.00	12.31	V	50.28	73.98	23.70	PK
7386	25.44	0.36	12.31	V	38.11	53.98	15.87	AV
4924	42.13	0.00	4.51	H	46.64	73.98	27.34	PK
4924	29.78	0.36	4.51	H	34.65	53.98	19.33	AV
7386	38.75	0.00	12.31	H	51.06	73.98	22.92	PK
7386	25.93	0.36	12.31	H	38.60	53.98	15.38	AV

Operation Mode: 802.11n (HT20)  
 Transfer Rate: 0  
 Operating Frequency: 2467  
 Channel No.: 12 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	40.52	0.00	4.52	V	45.04	73.98	28.94	PK
4934	28.99	0.36	4.52	V	33.87	53.98	20.11	AV
7401	37.85	0.00	12.45	V	50.30	73.98	23.68	PK
7401	25.62	0.36	12.45	V	38.43	53.98	15.55	AV
4934	41.77	0.00	4.52	H	46.29	73.98	27.69	PK
4934	29.03	0.36	4.52	H	33.91	53.98	20.07	AV
7401	38.27	0.00	12.45	H	50.72	73.98	23.26	PK
7401	25.94	0.36	12.45	H	38.75	53.98	15.23	AV

Operation Mode: 802.11n (HT20)  
 Transfer Rate: 0  
 Operating Frequency: 2472  
 Channel No.: 13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4944	40.86	0.00	4.53	V	45.39	73.98	28.59	PK
4944	28.09	0.36	4.53	V	32.98	53.98	21.00	AV
7416	38.44	0.00	12.39	V	50.83	73.98	23.15	PK
7416	25.48	0.36	12.39	V	38.23	53.98	15.75	AV
4944	41.69	0.00	4.53	H	46.22	73.98	27.76	PK
4944	29.11	0.36	4.53	H	34.00	53.98	19.98	AV
7416	38.95	0.00	12.39	H	51.34	73.98	22.64	PK
7416	25.96	0.36	12.39	H	38.71	53.98	15.27	AV


**Test Plots (Worst case : X-H)**

Radiated Spurious Emissions plot – Average Reading (802.11b\_1 Mbps, Ch.11 2nd Harmonic)

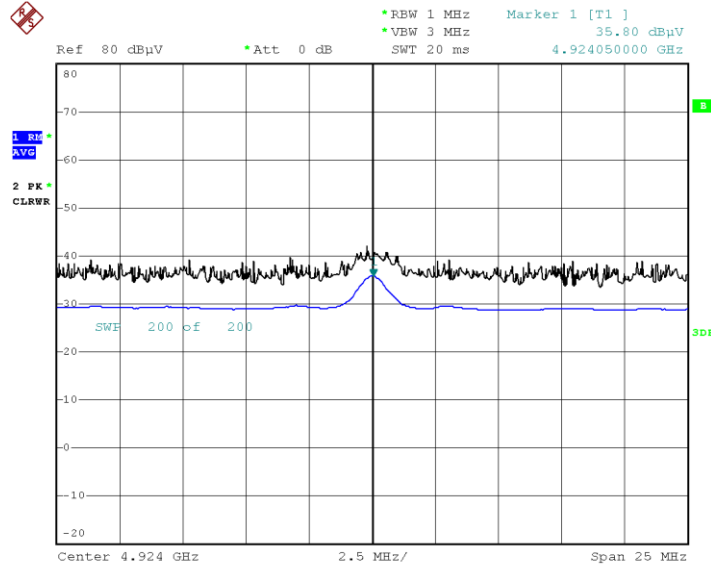

Date: 20.MAY.2020 11:10:06

Radiated Spurious Emissions plot – Peak Reading (802.11b\_1 Mbps, Ch.11 2nd Harmonic)

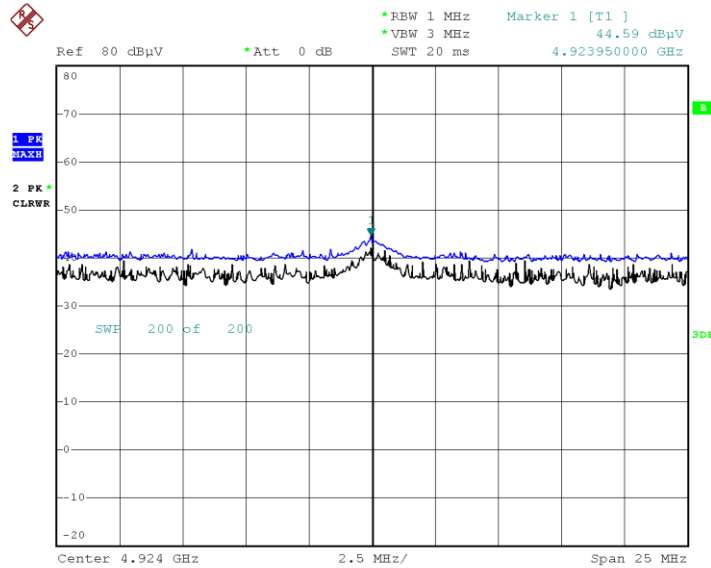

Date: 20.MAY.2020 11:11:09

**Note:**

Plot of worst case are only reported.



**9.7 RADIATED RESTRICTED BAND EDGES**

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	21.02	35.62	H	56.64	73.98	17.34	PK
2390.0	9.56	35.62	H	45.18	53.98	8.80	AV
2390.0	19.44	35.62	V	55.06	73.98	18.92	PK
2390.0	9.21	35.62	V	44.83	53.98	9.15	AV
2483.5	20.15	35.74	H	55.89	73.98	18.10	PK
2483.5	8.71	35.74	H	44.45	53.98	9.54	AV
2483.5	19.05	35.74	V	54.79	73.98	19.19	PK
2483.5	8.52	35.74	V	44.26	53.98	9.72	AV

Operation Mode: 802.11b  
 Transfer Rate: 1 Mbps  
 Operating Frequency: 2467 MHz  
 Channel No. 12 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	20.29	35.74	H	56.03	73.98	17.95	PK
2483.5	8.22	35.74	H	43.96	53.98	10.02	AV
2483.5	19.99	35.74	V	55.73	73.98	18.25	PK
2483.5	7.41	35.74	V	43.15	53.98	10.83	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2472 MHz
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	19.69	35.74	H	55.43	73.98	18.55	PK
2483.5	7.72	35.74	H	43.46	53.98	10.52	AV
2483.5	18.42	35.74	V	54.16	73.98	19.82	PK
2483.5	7.35	35.74	V	43.09	53.98	10.89	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	31.93	0.00	35.62	H	67.55	73.98	6.43	PK
2390.0	14.73	0.29	35.62	H	50.64	53.98	3.34	AV
2390.0	28.92	0.00	35.62	V	64.54	73.98	9.44	PK
2390.0	13.75	0.29	35.62	V	49.66	53.98	4.32	AV
2483.5	32.34	0.00	35.74	H	68.08	73.98	5.91	PK
2483.5	14.00	0.29	35.74	H	50.03	53.98	3.95	AV
2483.5	28.23	0.00	35.74	V	63.97	73.98	10.01	PK
2483.5	13.40	0.29	35.74	V	49.43	53.98	4.55	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2467 MHz  
 Channel No. 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	18.79	0.00	35.74	H	54.53	73.98	19.45	PK
2483.5	8.63	0.29	35.74	H	44.66	53.98	9.32	AV
2483.5	17.72	0.00	35.74	V	53.46	73.98	20.52	PK
2483.5	8.00	0.29	35.74	V	44.03	53.98	9.95	AV

Operation Mode: 802.11g  
 Transfer Rate: 6 Mbps  
 Operating Frequency: 2472 MHz  
 Channel No. 13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5#(2484)	26.25	0.00	35.74	H	61.99	73.98	11.99	PK
2483.5#(2484)	15.20	0.29	35.74	H	51.23	53.98	2.75	AV
2483.5#(2485)	22.64	0.00	35.74	H	58.38	73.98	15.60	PK
2483.5#(2485)	12.10	0.29	35.74	H	48.13	53.98	5.85	AV
2485.5~2500	25.53	0.00	35.74	H	61.27	73.98	12.71	PK
2485.5~2500	11.48	0.29	35.74	H	47.51	53.98	6.47	AV

# Note : # integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode: 802.11n (HT20)  
 Transfer Rate: 0  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390#(2389.5)	27.55	0.00	35.74	H	63.29	73.98	10.69	PK
2390#(2389.5)	15.18	0.36	35.74	H	51.28	53.98	2.70	AV
2390#(2388.5)	24.41	0.00	35.74	H	60.15	73.98	13.83	PK
2390#(2388.5)	13.31	0.36	35.74	H	49.41	53.98	4.57	AV
2310~2388	29.13	0.00	35.74	H	64.87	73.98	9.11	PK
2310~2388	12.59	0.36	35.74	H	48.69	53.98	5.29	AV
2483.5	32.65	0.00	35.74	H	68.39	73.98	5.60	PK
2483.5	14.01	0.36	35.74	H	50.11	53.98	3.87	AV
2483.5	29.34	0.00	35.74	V	65.08	73.98	8.90	PK
2483.5	13.98	0.36	35.74	V	50.08	53.98	3.90	AV

# Note : # integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode: 802.11n (HT20)  
 Transfer Rate: 0  
 Operating Frequency: 2467 MHz  
 Channel No. 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	20.01	0.00	35.74	H	55.75	73.98	18.23	PK
2483.5	8.65	0.36	35.74	H	44.75	53.98	9.23	AV
2483.5	19.99	0.00	35.74	V	55.73	73.98	18.25	PK
2483.5	8.08	0.36	35.74	V	44.18	53.98	9.80	AV


Operation Mode:	802.11n (HT20)
Transfer Rate:	0
Operating Frequency	2472 MHz
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5 <sup>#</sup> (2484)	27.37	0.00	35.74	H	63.11	73.98	10.87	PK
2483.5 <sup>#</sup> (2484)	15.69	0.36	35.74	H	51.79	53.98	2.19	AV
2483.5 <sup>#</sup> (2485)	24.30	0.00	35.74	H	60.04	73.98	13.94	PK
2483.5 <sup>#</sup> (2485)	12.34	0.36	35.74	H	48.44	53.98	5.54	AV
2485.5~2500	28.02	0.00	35.74	H	63.76	73.98	10.22	PK
2485.5~2500	11.49	0.36	35.74	H	47.59	53.98	6.39	AV


# Note : # integration method Used (ANSI C63.10 Section11.13.3)

■ **Test Plots (Worst case : X-H)**


Radiated Restricted Band Edges plot – Average Reading (802.11n (HT20)\_ Ch.13) 2 484 MHz

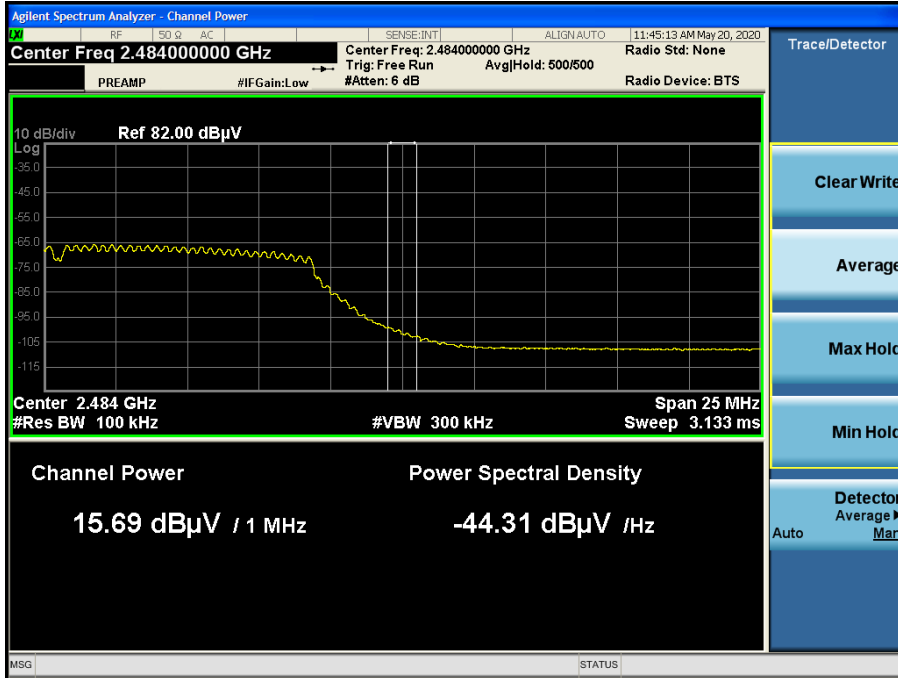


Radiated Restricted Band Edges plot – Peak Reading (802.11n (HT20)\_ Ch.13) 2 484 MHz

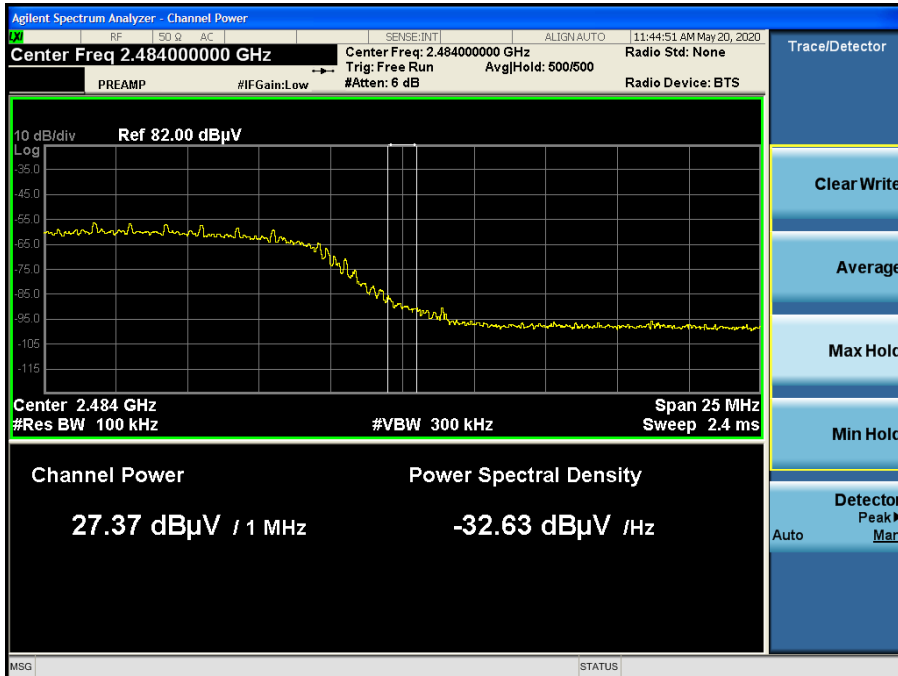

Radiated Restricted Band Edges plot – Average Reading (802.11n (HT20)\_ Ch.13) 2 485 MHz

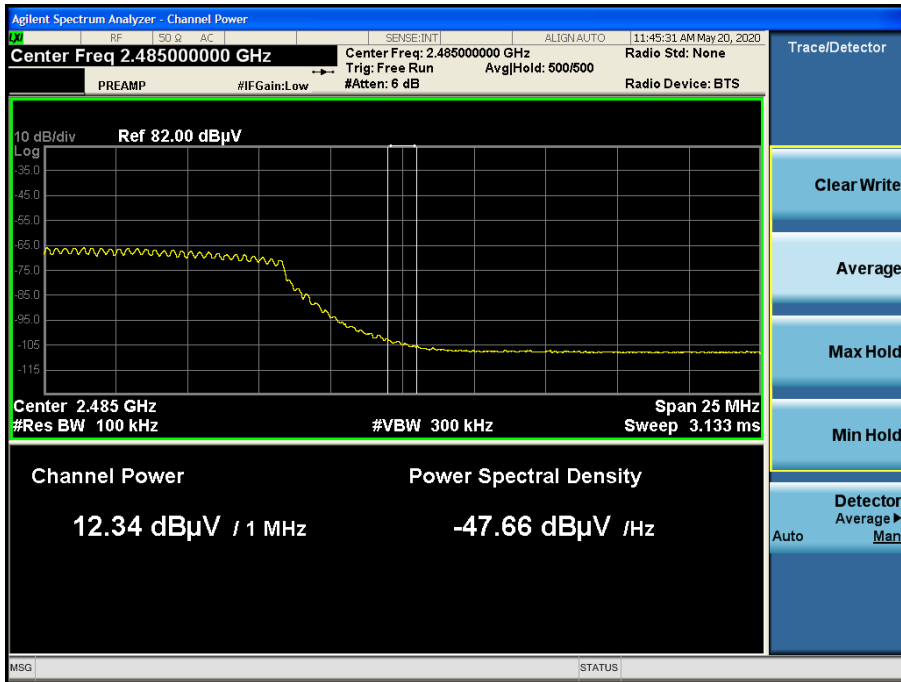


Radiated Restricted Band Edges plot – Peak Reading (802.11n (HT20)\_ Ch.13) 2 485 MHz

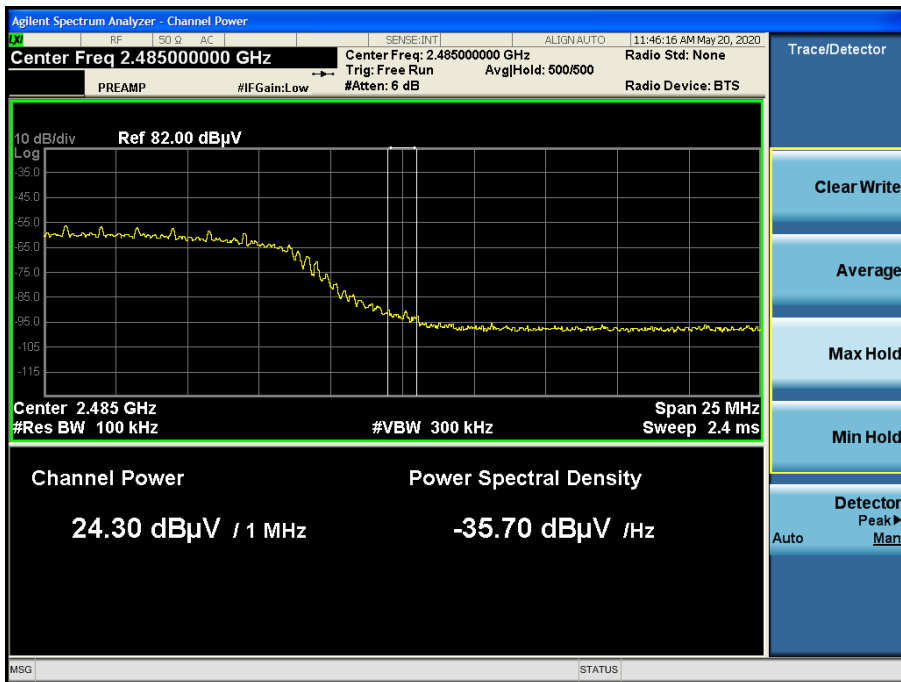



Radiated Restricted Band Edges plot – Average Reading (802.11n (HT20)\_ Ch.13) 2 485.5 MHz ~ 2 500 MHz

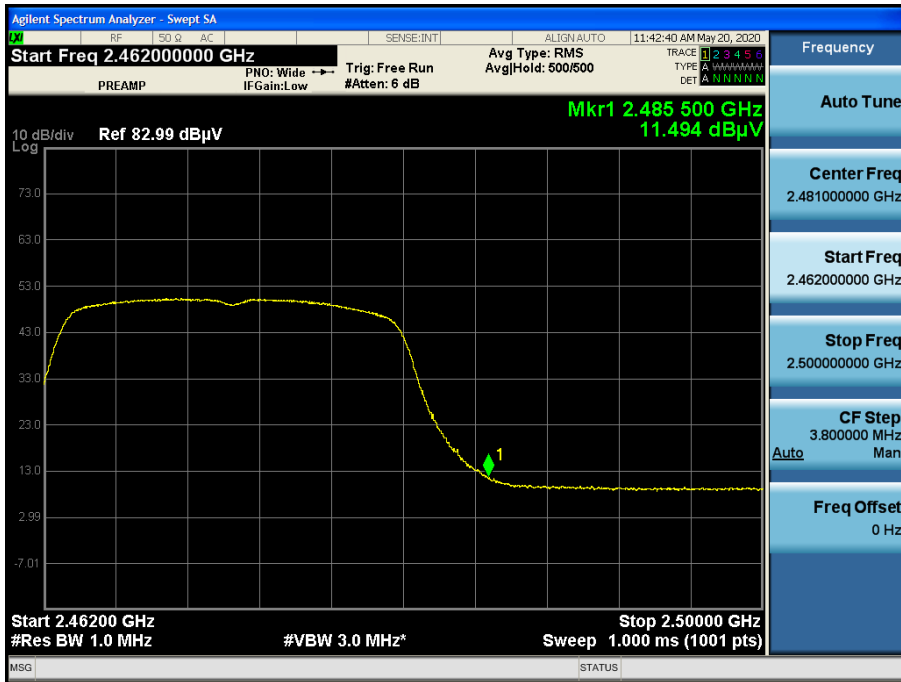

Radiated Restricted Band Edges plot – Peak Reading (802.11n (HT20)\_ Ch.13) 2 485.5 MHz ~ 2 500 MHz



**Note:**

Plot of worst case are only reported.

**9.8 POWERLINE CONDUCTED EMISSIONS**

Conducted Emissions (Line 1)

Test


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-A516U  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN 2.4G\_L1

FCC CLASS B\_Exten Cable

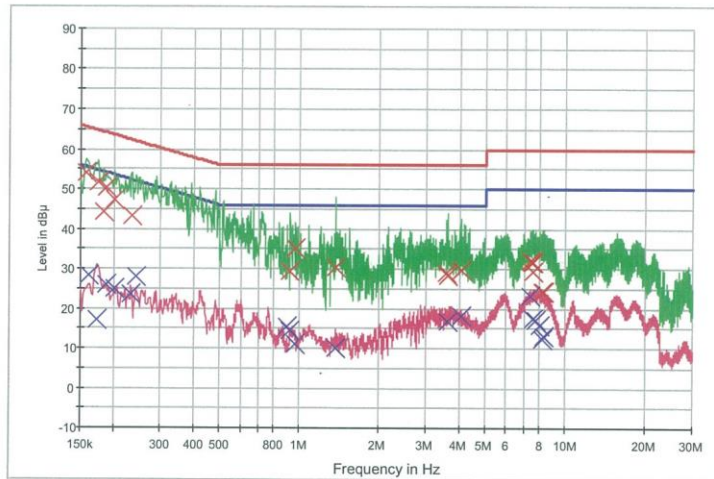

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-QPK      × Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.158000	54.0	9.000	Off	L1	9.8	11.6	65.6
0.174000	51.8	9.000	Off	L1	9.8	13.0	64.8
0.182000	44.3	9.000	Off	L1	9.8	20.1	64.4
0.188000	50.2	9.000	Off	L1	9.8	13.9	64.1
0.202000	47.4	9.000	Off	L1	9.8	16.1	63.5
0.234000	43.1	9.000	Off	L1	9.8	19.2	62.3
0.924000	29.3	9.000	Off	L1	9.8	26.7	56.0
0.968000	35.0	9.000	Off	L1	9.8	21.0	56.0
1.364000	30.4	9.000	Off	L1	9.9	25.6	56.0
3.558000	29.0	9.000	Off	L1	9.9	27.0	56.0
3.596000	28.4	9.000	Off	L1	9.9	27.6	56.0
4.038000	29.8	9.000	Off	L1	10.0	26.2	56.0
7.402000	31.9	9.000	Off	L1	10.1	28.1	60.0
7.482000	31.6	9.000	Off	L1	10.1	28.4	60.0
7.524000	31.8	9.000	Off	L1	10.1	28.2	60.0
7.582000	29.4	9.000	Off	L1	10.1	30.6	60.0
8.196000	24.3	9.000	Off	L1	10.1	35.7	60.0
8.264000	24.2	9.000	Off	L1	10.1	35.8	60.0

2020-05-20

오후 1:27:01

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.160000	28.5	9.000	Off	L1	9.8	27.0	55.5
0.172000	17.1	9.000	Off	L1	9.8	37.8	54.9
0.188000	25.8	9.000	Off	L1	9.8	28.3	54.1
0.202000	24.8	9.000	Off	L1	9.8	28.7	53.5
0.232000	23.6	9.000	Off	L1	9.8	28.8	52.4
0.242000	27.8	9.000	Off	L1	9.8	24.2	52.0
0.900000	15.6	9.000	Off	L1	9.8	30.4	46.0
0.924000	14.2	9.000	Off	L1	9.8	31.8	46.0
0.964000	10.9	9.000	Off	L1	9.8	35.1	46.0
1.364000	9.9	9.000	Off	L1	9.9	36.1	46.0
3.596000	16.9	9.000	Off	L1	9.9	29.1	46.0
4.038000	18.3	9.000	Off	L1	10.0	27.7	46.0
7.402000	23.3	9.000	Off	L1	10.1	26.7	50.0
7.582000	17.5	9.000	Off	L1	10.1	32.5	50.0
7.734000	17.1	9.000	Off	L1	10.1	32.9	50.0
7.962000	15.8	9.000	Off	L1	10.1	34.2	50.0
8.196000	12.4	9.000	Off	L1	10.1	37.6	50.0
8.264000	13.1	9.000	Off	L1	10.1	36.9	50.0

2020-05-20

오후 1:27:01

Conducted Emissions (Line 2)

Test


1 / 2

## HCT TEST Report

### Common Information

EUT: SM-A516U  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: WLAN 2.4G\_N

FCC CLASS B\_Exten Cable

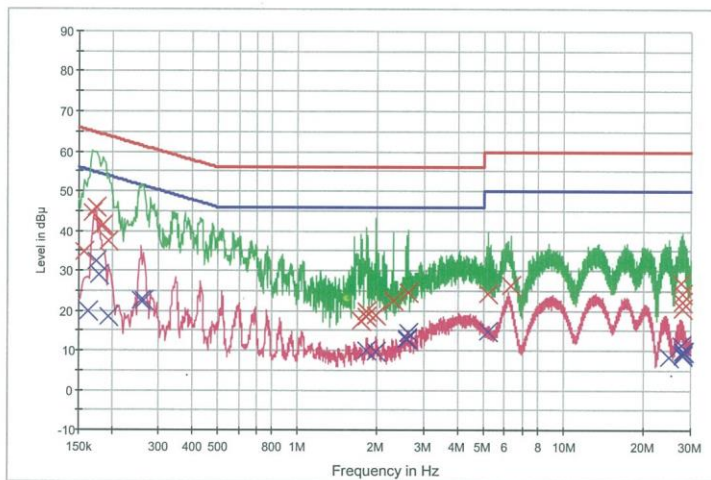

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      × Final Result 1-QPK      × Final Result 2-CAV

### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.158000	34.6	9.000	Off	N	9.8	31.0	65.6
0.168000	44.7	9.000	Off	N	9.8	20.3	65.1
0.174000	46.0	9.000	Off	N	9.8	18.7	64.8
0.182000	41.1	9.000	Off	N	9.8	23.3	64.4
0.186000	41.4	9.000	Off	N	9.8	22.8	64.2
0.194000	37.4	9.000	Off	N	9.8	26.5	63.9
1.722000	17.4	9.000	Off	N	9.9	38.6	56.0
1.810000	18.5	9.000	Off	N	9.9	37.5	56.0
1.816000	20.0	9.000	Off	N	9.9	36.0	56.0
1.966000	18.7	9.000	Off	N	9.9	37.3	56.0
2.290000	22.5	9.000	Off	N	9.9	33.5	56.0
2.592000	24.6	9.000	Off	N	9.9	31.4	56.0
5.178000	24.1	9.000	Off	N	10.0	35.9	60.0
6.318000	26.4	9.000	Off	N	10.1	33.6	60.0
27.626000	26.9	9.000	Off	N	10.8	33.1	60.0
27.842000	24.2	9.000	Off	N	10.9	35.8	60.0
27.962000	22.3	9.000	Off	N	10.9	37.7	60.0
28.034000	20.5	9.000	Off	N	10.9	39.5	60.0

2020-05-20

오후 1:14:54

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.162000	19.8	9.000	Off	N	9.8	35.6	55.4
0.174000	32.4	9.000	Off	N	9.8	22.3	54.8
0.178000	28.8	9.000	Off	N	9.8	25.8	54.6
0.194000	18.5	9.000	Off	N	9.8	35.4	53.9
0.258000	22.5	9.000	Off	N	9.8	29.0	51.5
0.262000	22.5	9.000	Off	N	9.8	28.8	51.4
1.816000	10.0	9.000	Off	N	9.9	36.0	46.0
1.966000	9.6	9.000	Off	N	9.9	36.4	46.0
2.566000	12.6	9.000	Off	N	9.9	33.4	46.0
2.574000	13.1	9.000	Off	N	9.9	32.9	46.0
2.592000	14.4	9.000	Off	N	9.9	31.6	46.0
5.176000	14.7	9.000	Off	N	10.0	35.3	50.0
24.842000	8.4	9.000	Off	N	10.8	41.6	50.0
27.652000	11.2	9.000	Off	N	10.8	38.8	50.0
27.842000	9.8	9.000	Off	N	10.9	40.2	50.0
27.962000	9.1	9.000	Off	N	10.9	40.9	50.0
28.044000	8.7	9.000	Off	N	10.9	41.3	50.0
28.440000	9.6	9.000	Off	N	10.9	40.4	50.0

2020-05-20

오후 1:14:54

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/11/2019	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/18/2019	Annual	100584
ESPAC	SU-642 /Temperature Chamber	08/14/2019	Annual	0093000718
Agilent	N9020A / Signal Analyzer	05/11/2020	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	03/23/2020	Annual	MY49432108
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45100523
Agilent	N1921A / Power Sensor	03/23/2020	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/11/2019	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	02/24/2020	Annual	10545
Hewlett Packard	E3632A / DC Power Supply	09/27/2019	Annual	MY40004427
Agilent	8493C / Attenuator(10 dB)	07/02/2019	Annual	07560
Rohde & Schwarz	18N-20dB / Attenuator(20 dB)	03/23/2020	Annual	8
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	03/02/2020	Annual	100808

### **Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
TNM system	FBSM-01B / Amp & Filter Bank Switch Controller	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/02/2019	Biennial	01039
Schwarzbeck	BBHA 9120D / Horn Antenna	06/28/2019	Biennial	1300
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	04/29/2019	Biennial	BBHA9170342
Rohde & Schwarz	FSP(9 kHz ~ 40 GHz) / Spectrum Analyzer	07/16/2019	Annual	100843
Rohde & Schwarz	FSV(10 Hz ~ 40 GHz) / Spectrum Analyzer	05/13/2020	Annual	101055
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/21/2020	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
CERNECX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNECX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/18/2020	Annual	3000C000276
TNM system	FBSM-05B / HPF(3~18GHz) + LNA1(1~18GHz)	01/21/2020	Annual	F6
TNM system	FBSM-05B / ATT(10dB) + LNA1(1~18GHz)	01/21/2020	Annual	None
TNM system	FBSM-05B / ATT(3dB) + LNA1(1~18GHz)	01/21/2020	Annual	None
TNM system	FBSM-05B / LNA1(1~18GHz)	01/21/2020	Annual	25540
TNM system	FBSM-05B / HPF(7~18GHz) + LNA2(6~18GHz)	01/21/2020	Annual	28550
TNM system	FBSM-05B / Thru(30MHz ~ 18GHz)	01/21/2020	Annual	None

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2006-FC015-P