

FCC 2G3G REPORT

Certification

Applicant Name:
 SAMSUNG Electronics Co., Ltd.

Date of Issue:
 June 26, 2020

Address:
 129, Samsung-ro, Yeongtong-gu,
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
 HCT CO., LTD.,
 74, Seoicheon-ro 578beon-gil, Majang-myeon,
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-2006-FC048

FCC ID: A3LSMA516U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-A516U
 Additional Model(s): SM-A516U1
 EUT Type: Mobile Phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §22, §24, §27, §2, §90

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
GSM850	824.2 – 848.8	869.2 – 893.8	247 KGXW	0.497	26.97
GSM850 EDGE			245 KG7W	0.127	21.03
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M17F9W	0.079	18.97
CDMA Secondary800	817.9 – 823.1	862.9 – 868.1	1M29F9W	0.077	18.87
CDMA Secondary800 EVDO_Rev.0			1M30F9W	0.071	18.52
CDMA Secondary800 EVDO_Rev.A			1M28F9W	0.068	18.32
CDMA 850	824.70– 848.31	869.70– 893.31	1M28F9W	0.124	20.93
CDMA 850 EVDO_Rev.0			1M28F9W	0.118	20.73
CDMA 850 EVDO_Rev.A			1M28F9W	0.113	20.51

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	244 KGXW	1.000	30.00
GSM1900 EDGE			249 KG7W	0.232	23.65
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M18F9W	0.156	21.94
WCDMA1700	1712.4 – 1752.6	2112.4 – 2152.6	4M18F9W	0.117	20.68
CDMA PCS	1851.25– 1 908.75	1 931.25– 1 988.75	1M28F9W	0.237	23.75
CDMA PCS EVDO_Rev.0			1M31F9W	0.226	23.55
CDMA PCS EVDO_Rev.A			1M28F9W	0.215	23.33

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2006-FC048

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2006-FC048	June 26, 2020	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	15
3.9 WORST CASE(CONDUCTED TEST)	16
3.10 WORST CASE(RADIATED TEST)	17
4. LIST OF TEST EQUIPMENT	19
5. MEASUREMENT UNCERTAINTY	21
6. SUMMARY OF TEST RESULTS	22
7. SAMPLE CALCULATION	23
8. TEST DATA	25
8.1 EFFECTIVE RADIATED POWER.....	25
8.2 EQUIVALENT ISOTROPIC RADIATED POWER.....	26
8.3 RADIATED SPURIOUS EMISSIONS	27
8.4 PEAK-TO-AVERAGE RATIO.....	35
8.5 OCCUPIED BANDWIDTH	36
8.6 CONDUCTED SPURIOUS EMISSIONS	38
8.7 BAND EDGE	39
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	40
9. TEST PLOTS.....	56
10. ANNEX A_ TEST SETUP PHOTO.....	176

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMA516U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§22, §24, §27, §2, §90
EUT Type:	Mobile Phone
Model(s):	SM-A516U
Additional Model(s):	SM-A516U1
Tx Frequency:	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.4 - 1 907.6 MHz (WCDMA1900) 1 712.4 - 1 752.6 MHz (WCDMA1700) 824.70 - 848.31 MHz (CDMA BC0) 1 851.25 - 1 908.75 MHz (PCS CDMA BC1) 817.90 - 823.10 MHz (Secondary CDMA BC10)
Rx Frequency:	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.4 - 1 987.6 MHz (WCDMA1900) 2 112.4 - 2 152.6 MHz (WCDMA1700) 869.70 - 893.31 MHz (CDMA BC0) 1 931.25 - 1 988.75 MHz (PCS CDMA BC1) 862.90 - 868.10 MHz (Secondary CDMA BC10)
Date(s) of Tests:	May 06, 2020 ~ June 25, 2020

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS, CDMA(BC0, 1, 10) and LTE, Sub6(n2/5/41/66/71).

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), Bluetooth, BT LE, NFC, ANT+.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

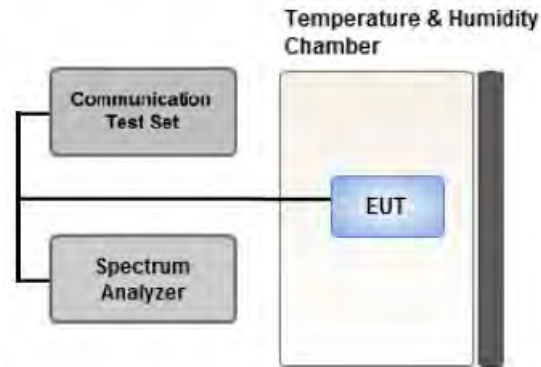

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \times \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \times \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.

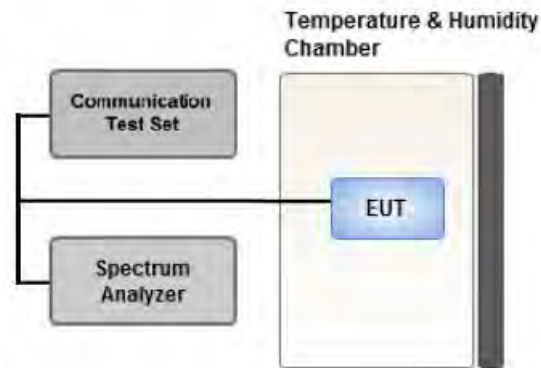

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

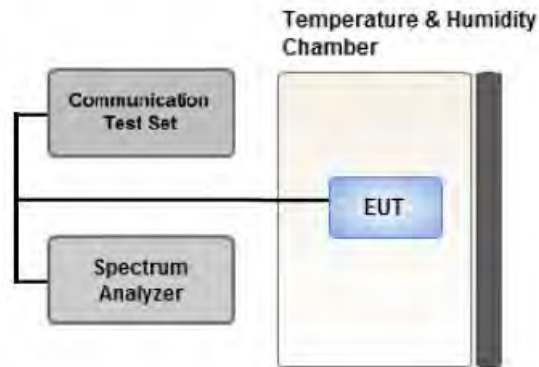

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings(GSM)

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

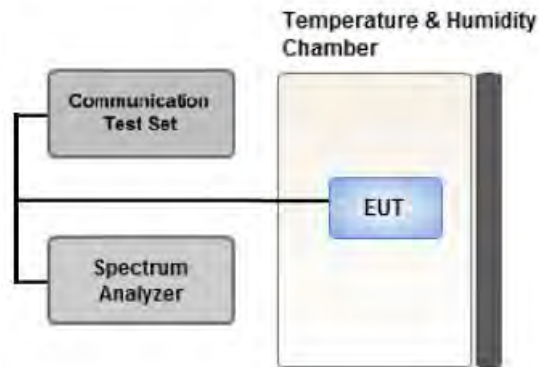

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \times \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

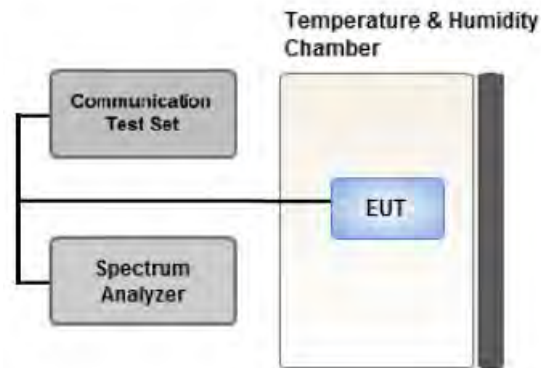

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

-SM-A516U & additional models were tested and the worst case results are reported.

(Worst case : SM-A516U)

[Worst case]

Test Description	Modulation	Test Channel
Occupied Bandwidth	2G : Voice & EDGE(1 TX Slot) 3G : QPSK CDMA : 1xRTT	Low, Mid, High
	2G : EDGE(1 TX Slot) CDMA : 1xEVDO_Rev.0 1xEVDO_Rev.A	Low, Mid, High
Band Edge	2G : Voice & EDGE(1 TX Slot) 3G : QPSK CDMA : 1xRTT	Low, High
Spurious and Harmonic Emissions at Antenna Terminal	2G : Voice 3G : QPSK CDMA : 1xRTT	Low, Mid, High

[Test Channel]

	UplinkChannel							
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)	CDMA (BC 0)	CDMA (BC 1)	CDMA (BC 10)
Low	128	512	9262	1312	4132	1013	25	476
Mid	190	661	9400	1412	4183	384	600	580
High	251	810	9538	1513	4233	777	1175	684

3.10 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.
- SM-A516U & additional models were tested and the worst case results are reported.
(Worst case : SM-A516U)

[Worst case_3G]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Z WCDMA B4 : Y WCDMA B5 : X	Low, Mid, High
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Y WCDMA B4 : X WCDMA B5 : Z	Low, Mid, High

[Worst case_2G]

Test Description	Mod	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	Voice	GSM850 : Y GSM1900 : X	Low, Mid, High
	EDGE(1 TX Slot)	GSM850 : Y GSM1900 : X	GSM 850 : Mid GSM1900 : Mid
Radiated Spurious and Harmonic Emissions	Voice	GSM850 : Y GSM1900 : Y	Low, Mid, High

[Worst case_CDMA]

Test Description	Modulation	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	1xRTT	CDMA BC0 : Y CDMA BC1 : X CDMA BC10 : Y	Low, Mid, High
Radiated Spurious and Harmonic Emissions	1xRTT	CDMA BC0 : Z CDMA BC1 : Y CDMA BC10 : X	Low, Mid, High

[Test Channel]

	UplinkChannel								
	2G (GSM850)	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)	CDMA (BC 0)	CDMA (BC 1)	CDMA (BC 10)	
Low	128	512	9262	1312	4132	1013	25	476	
Mid	190	661	9400	1412	4183	384	600	580	
High	251	810	9538	1513	4233	777	1175	684	

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
WAINWRIGHT INSTRUMENT	WHNX6.0/26.5G-6SS/H.P.F	1	03/19/2020	Annual	03/19/2021
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/27/2020	Annual	04/27/2021
Agilent	E3632A/DC Power Supply	MY40004326	07/01/2019	Annual	07/01/2020
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000717	08/14/2019	Annual	08/14/2020
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	04/27/2020	Annual	04/27/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2019	Annual	10/14/2020
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/27/2019	Annual	08/27/2020
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/26/2019	Biennial	04/26/2021
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/09/2019	Annual	08/09/2020
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/22/2020	Annual	01/22/2021
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/15/2019	Annual	07/15/2020
KEYSIGHT	E7515B / 5G Wireless Tester	MY58300756	01/07/2020	Annual	01/07/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
Mini-Circuits	ZC4PD-K1844+ / 4-Way Divider	942907	09/05/2019	Annual	09/05/2020
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).
3. Model : 8493C(S/N: 17280)
 - Use date of Equipment : May 07, 2020 ~ June 03, 2020
4. Model : N9030B(S/N: MY55480167)
 - Use date of Equipment : June 07, 2020 ~ June 18, 2020

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a), §24.238(a), §27.53(h), §90.691	< 43 + 10 x log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046, §90.635	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d), §27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, §90.213, § 22.355	< 2.5 ppm	PASS
	§24.235, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	< 2 Watts max. EIRP < 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h), §90.691	< 43 + 10 x log10 (P[Watts]) for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
GSM850	128	824.2	-25.66	37.95	-10.25	1.28	V	< 7.00	0.439	26.42
	190	836.6	-25.80	38.38	-10.19	1.29	V		0.490	26.90
	251	848.8	-25.61	38.41	-10.14	1.30	V		0.497	26.97
EDGE	251	848.8	-31.55	32.47	-10.14	1.30	V		0.127	21.03

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
WCDMA850	4132	826.4	-35.15	28.46	-10.25	1.28	H	< 7.00	0.049	16.93
	4183	836.6	-33.73	30.45	-10.19	1.29	H		0.079	18.97
	4233	846.6	-36.51	27.54	-10.15	1.30	H		0.041	16.09

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
CDMA Secondary 800	476	817.9	-33.21	30.31	-10.27	1.27	V	< 100	0.075	18.77
	580	820.5	-33.13	30.41	-10.26	1.28	V		0.077	18.87
	684	823.1	-33.20	30.34	-10.25	1.28	V		0.076	18.81

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit W	ERP	
	channel	Freq.(MHz)							W	dBm
CDMA850	1013	824.7	-33.04	30.58	-10.25	1.28	V	< 7.00	0.080	19.05
	384	836.5	-31.77	32.41	-10.19	1.29	V		0.124	20.93
	777	848.3	-33.60	30.39	-10.14	1.30	V		0.079	18.95

8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)							W	W
GSM1900	512	1850.2	-11.80	21.84	10.10	1.94	H	< 2.00	1.000	30.00
	661	1880.0	-12.24	21.65	10.15	1.98	H		0.959	29.82
	810	1909.8	-14.04	20.30	10.23	2.00	H		0.712	28.53
EDGE	512	1850.2	-18.15	15.49	10.10	1.94	H		0.232	23.65

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)							W	W
WCDMA1900	9262	1852.4	-20.71	12.93	10.10	1.94	V	< 2.00	0.129	21.09
	9400	1880.0	-20.37	13.52	10.15	1.98	V		0.147	21.69
	9538	1907.6	-20.63	13.71	10.23	2.00	V		0.156	21.94

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)							W	W
WCDMA1700	1312	1712.4	-21.31	11.99	9.85	1.88	H	< 1.00	0.099	19.96
	1412	1732.4	-21.32	12.06	9.90	1.89	H		0.102	20.07
	1513	1752.6	-20.74	12.58	10.00	1.90	H		0.117	20.68

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)							W	W
CDMA PCS	25	1851.3	-18.05	15.59	10.10	1.94	H	< 2.00	0.237	23.75
	600	1880.0	-18.32	15.56	10.15	1.98	H		0.236	23.73
	1175	1908.8	-19.35	14.99	10.23	2.00	H		0.210	23.22

8.3 RADIATED SPURIOUS EMISSIONS

▣ MODULATION SIGNAL: GSM850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured Level</u> [dBm]	Ant. Gain (dBi)	<u>Substitute Level</u> [dBm]	C.L	Pol.	Result (dBm)	Limit
128 (824.2)	1,648.40	-51.91	9.50	-62.67	1.84	H	-55.01	-13.00
	2,472.60	-51.21	10.60	-56.25	2.28	H	-47.93	-13.00
	3,296.80	-56.86	12.25	-58.68	2.69	V	-49.12	-13.00
190 (836.6)	1,673.20	-51.48	9.65	-62.24	1.86	H	-54.45	-13.00
	2,509.80	-51.43	10.75	-56.54	2.32	V	-48.11	-13.00
	3,346.40	-55.77	12.48	-57.42	2.70	H	-47.65	-13.00
251 (848.8)	1,697.60	-50.10	9.80	-60.57	1.87	H	-52.64	-13.00
	2,546.40	-53.28	10.88	-57.39	2.32	V	-48.83	-13.00
	3,395.20	-56.18	12.68	-58.16	2.72	V	-48.20	-13.00

▣ MODULATION SIGNAL: GSM1900

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
512 (1850.2)	3,700.40	-51.89	12.40	-56.86	2.86	H	-47.32	-13.00
	5,550.60	-40.83	13.10	-39.28	3.58	H	-29.76	-13.00
	7,400.80	-56.42	11.10	-46.63	4.26	H	-39.79	-13.00
661 (1880.0)	3,760.00	-53.16	12.48	-58.14	2.88	H	-48.54	-13.00
	5,640.00	-45.84	13.30	-44.46	3.62	V	-34.78	-13.00
	7,520.00	-57.03	11.30	-46.86	4.30	V	-39.86	-13.00
810 (1909.8)	3,819.60	-53.87	12.40	-58.84	2.90	V	-49.34	-13.00
	5,729.40	-52.61	13.35	-50.51	3.63	V	-40.79	-13.00
	7,639.20	-57.13	11.65	-47.00	4.34	V	-39.69	-13.00

▣ MODULATION SIGNAL: WCDMA850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
4,132 (826.4)	1,652.80	-52.90	9.50	-63.66	1.84	H	-56.00	-13.00
	2,479.20	-55.80	10.60	-60.61	2.30	H	-52.31	-13.00
	3,305.60	-56.88	12.33	-58.87	2.69	V	-49.23	-13.00
4,183 (836.6)	1,673.20	-53.39	9.65	-64.15	1.86	V	-56.36	-13.00
	2,509.80	-54.61	10.75	-59.72	2.32	V	-51.29	-13.00
	3,346.40	-58.31	12.48	-59.96	2.70	V	-50.19	-13.00
4,233 (846.6)	1,693.20	-52.85	9.73	-63.47	1.87	H	-55.61	-13.00
	2,539.80	-55.89	10.85	-59.75	2.32	H	-51.22	-13.00
	3,386.40	-57.51	12.63	-59.51	2.72	H	-49.60	-13.00

▣ MODULATION SIGNAL: WCDMA1900

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
9262 (1852.4)	3,704.80	-55.35	12.42	-60.34	2.86	V	-50.78	-13.00
	5,557.20	-56.33	13.15	-54.79	3.58	V	-45.22	-13.00
	7,409.60	-55.32	11.13	-45.41	4.25	H	-38.53	-13.00
9400 (1880.0)	3,760.00	-55.10	12.48	-60.08	2.88	V	-50.48	-13.00
	5,640.00	-56.23	13.30	-54.85	3.62	V	-45.17	-13.00
	7,520.00	-56.99	11.30	-46.82	4.30	H	-39.82	-13.00
9538 (1907.6)	3,815.20	-54.71	12.40	-59.72	2.90	H	-50.22	-13.00
	5,722.80	-56.19	13.35	-54.05	3.63	H	-44.33	-13.00
	7,630.40	-57.25	11.60	-47.20	4.34	H	-39.94	-13.00

▣ MODULATION SIGNAL: WCDMA1700

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
1312 (1712.4)	3,424.80	-55.46	12.60	-62.30	2.73	V	-52.43	-13.00
	5,137.20	-55.89	12.45	-53.60	3.39	H	-44.54	-13.00
	6,849.60	-56.24	12.20	-50.24	4.03	H	-42.07	-13.00
1412 (1732.4)	3,464.80	-55.21	12.48	-62.08	2.76	V	-52.36	-13.00
	5,197.20	-56.73	12.90	-56.00	3.43	H	-46.53	-13.00
	6,929.60	-56.29	12.05	-48.84	4.08	H	-40.87	-13.00
1513 (1752.6)	3,505.20	-54.36	12.28	-60.86	2.76	H	-51.34	-13.00
	5,257.80	-55.61	13.25	-55.33	3.47	H	-45.55	-13.00
	7,010.40	-55.88	11.65	-47.62	4.10	H	-40.07	-13.00

▣ MODULATION SIGNAL: CDMA Secondary800

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
476 (817.9)	1,635.80	-51.98	9.43	-62.59	1.83	H	-54.99	-13.00
	2,453.70	-55.65	10.51	-60.49	2.27	H	-52.25	-13.00
	3,271.60	-56.05	12.10	-57.47	2.67	H	-48.04	-13.00
580 (820.5)	1,641.00	-51.23	9.45	-61.85	1.83	V	-54.23	-13.00
	2,461.50	-54.15	10.55	-58.86	2.27	H	-50.58	-13.00
	3,282.00	-57.04	12.00	-58.83	2.69	V	-49.52	-13.00
684 (823.1)	1,646.20	-50.67	9.43	-61.31	1.84	H	-53.72	-13.00
	2,469.30	-55.18	10.60	-60.22	2.28	V	-51.90	-13.00
	3,292.40	-56.46	12.20	-58.17	2.69	V	-48.66	-13.00

▣ MODULATION SIGNAL: CDMA850

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
1013 (824.7)	1,649.40	-52.87	9.50	-63.63	1.84	H	-55.97	-13.00
	2,474.10	-55.71	10.60	-60.64	2.29	H	-52.33	-13.00
	3,298.80	-56.50	12.30	-58.44	2.69	V	-48.83	-13.00
384 (836.5)	1,673.00	-52.39	9.65	-63.15	1.86	V	-55.36	-13.00
	2,509.50	-54.69	10.75	-59.80	2.32	V	-51.37	-13.00
	3,346.00	-56.94	12.47	-58.59	2.70	V	-48.82	-13.00
777 (848.3)	1,696.60	-52.74	9.77	-63.17	1.87	H	-55.27	-13.00
	2,544.90	-53.96	10.87	-58.06	2.33	V	-49.52	-13.00
	3,393.20	-55.68	12.65	-57.63	2.71	V	-47.69	-13.00

▣ MODULATION SIGNAL: CDMA PCS

▣ DISTANCE: 3 meters

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	Limit
25 (1851.3)	3,702.60	-54.83	12.40	-59.80	2.86	H	-50.26	-13.00
	5,553.90	-56.89	13.10	-55.34	3.58	H	-45.82	-13.00
	7,405.20	-57.07	11.12	-47.21	4.26	H	-40.35	-13.00
600 (1880.0)	3,760.00	-54.78	12.48	-59.76	2.88	H	-50.16	-13.00
	5,640.00	-55.75	13.30	-54.37	3.62	H	-44.69	-13.00
	7,520.00	-56.74	11.30	-46.57	4.30	H	-39.57	-13.00
1175 (1908.8)	3,817.60	-55.40	12.40	-60.40	2.90	V	-50.90	-13.00
	5,726.40	-50.60	13.35	-48.46	3.63	H	-38.74	-13.00
	7,635.20	-57.86	11.62	-47.77	4.34	V	-40.49	-13.00
	9,544.00	-53.29	10.99	-36.85	4.91	H	-30.77	-13.00

8.4 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{Pk} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{Pk} - P _{Avg} (dB)	Limit (dB)	Pass / Fail		
				T _{XTotal} (ms)	T _{XOn} (ms)	Factor (dB)					
GSM1900	661	30.682	20.90	4.6160	0.5475	9.26	0.52	13	Pass		
GSM1900 EDGE	661	29.078	15.84	4.616	0.5475	9.26	3.98				
WCDMA1900	9400	CCDF Procedure					3.09			13	Pass
WCDMA1700	1732.4						3.11				
CDMA PCS	600						3.70				
CDMA PCS _Rev.0	600						4.15				
CDMA PCS _Rev.A	600						5.19				

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 83 ~ 93.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$$P.A.R.(dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \text{ (} P_{Avg} = \text{Average Power} + \text{Duty cycle Factor)}$$

$$\text{Duty cycle Factor} = 10 \times \log (1/X), X = T_{XOn} / T_{XTotal}$$

8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	245.11
	190	836.60	246.65
	251	848.80	241.47
GSM850 EDGE	128	824.20	241.87
	190	836.60	245.43
	251	848.80	242.92
GSM1900	512	1,850.20	244.27
	661	1,880.00	243.88
	810	1,909.80	243.79
GSM1900 EDGE	512	1,850.20	248.72
	661	1,880.00	246.38
	810	1,909.80	245.47
WCDMA850	4132	826.40	4.1680
	4183	836.60	4.1726
	4233	846.60	4.1513
WCDMA1900	9262	1852.40	4.1747
	9400	1880.00	4.1780
	9538	1907.60	4.1696
WCDMA1700	1312	1712.40	4.1730
	1412	1732.40	4.1715
	1513	1752.60	4.1801

Band	Channel	Frequency(MHz)	Data (CDMA : MHz)
CDMA Secondary800	476	817.9	1.2847
	580	820.5	1.2831
	684	823.1	1.2789
CDMA Secondary800 EVDO Rev.0	476	817.9	1.2969
	580	820.5	1.2925
	684	823.1	1.2812
CDMA Secondary800 EVDO Rev.A	476	817.9	1.2801
	580	820.5	1.2769
	684	823.1	1.2753
CDMA850	1013	824.7	1.2768
	384	836.5	1.2793
	777	848.3	1.2827
CDMA850 EVDO Rev.0	1013	824.7	1.2759
	384	836.5	1.2777
	777	848.3	1.2787
CDMA850 EVDO Rev.A	1013	824.7	1.2748
	384	836.5	1.2763
	777	848.3	1.2747
CDMA PCS	25	1851.3	1.2807
	600	1880.0	1.2787
	1175	1908.8	1.2824
CDMA PCS EVDO Rev.0	25	1851.3	1.3054
	600	1880.0	1.2845
	1175	1908.8	1.2994
CDMA PCS EVDO Rev.A	25	1851.3	1.2786
	600	1880.0	1.2776
	1175	1908.8	1.2795

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 57 ~ 82.

8.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result	(dBm)
GSM850	128	3.6576	27.976	-57.49	-29.509	-13.00
	190	6.8749	28.591	-57.65	-29.062	
	251	2.4687	27.976	-57.78	-29.801	
GSM1900	512	19.19548	29.489	-52.783	-23.294	
	661	19.23048	29.489	-52.704	-23.215	
	810	18.87297	29.489	-52.943	-23.454	
WCDMA850	4132	3.6920	27.976	-77.048	-49.072	
	4183	3.7044	27.976	-77.003	-49.027	
	4233	3.7094	27.976	-77.037	-49.061	
WCDMA1900	9262	18.9472	29.489	-72.828	-43.339	
	9400	18.9527	29.489	-72.893	-43.404	
	9538	18.9500	29.489	-72.986	-43.497	
WCDMA1700	1712.4	18.90522	29.489	-72.885	-43.396	
	1732.4	18.90372	29.489	-72.657	-43.168	
	1752.6	18.90897	29.489	-73.059	-43.570	
CDMA Secondary800	476	3.72398	27.976	-77.233	-49.257	
	580	3.70154	27.976	-76.896	-48.920	
	684	3.71800	27.976	-77.057	-49.081	
CDMA850	1013	3.69556	27.976	-77.019	-49.043	
	384	3.69307	27.976	-77.498	-49.522	
	777	6.21255	28.591	-76.956	-48.365	
CDMA PCS	25	18.91247	29.489	-72.958	-43.469	
	600	18.89597	29.489	-72.490	-43.001	
	1175	16.67642	29.489	-72.823	-43.334	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 140 ~ 175.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.7 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 94 ~ 139.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: GSM850
- ▣ OPERATING FREQUENCY: 836.600.000 Hz
- ▣ CHANNEL: 190
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	836 599 983	0.0	0.000 000	0.0000
100%		-30	836 599 965	-17.7	-0.000 002	-0.0212
100%		-20	836 599 964	-18.4	-0.000 002	-0.0220
100%		-10	836 599 965	-17.4	-0.000 002	-0.0208
100%		0	836 599 965	-17.5	-0.000 002	-0.0209
100%		+10	836 599 965	-18.3	-0.000 002	-0.0218
100%		+30	836 599 965	-17.5	-0.000 002	-0.0210
100%		+40	836 599 965	-17.6	-0.000 002	-0.0210
100%		+50	836 599 965	-17.7	-0.000 002	-0.0212
Batt. Endpoint		3.400	+20	836 599 965	-17.4	-0.000 002

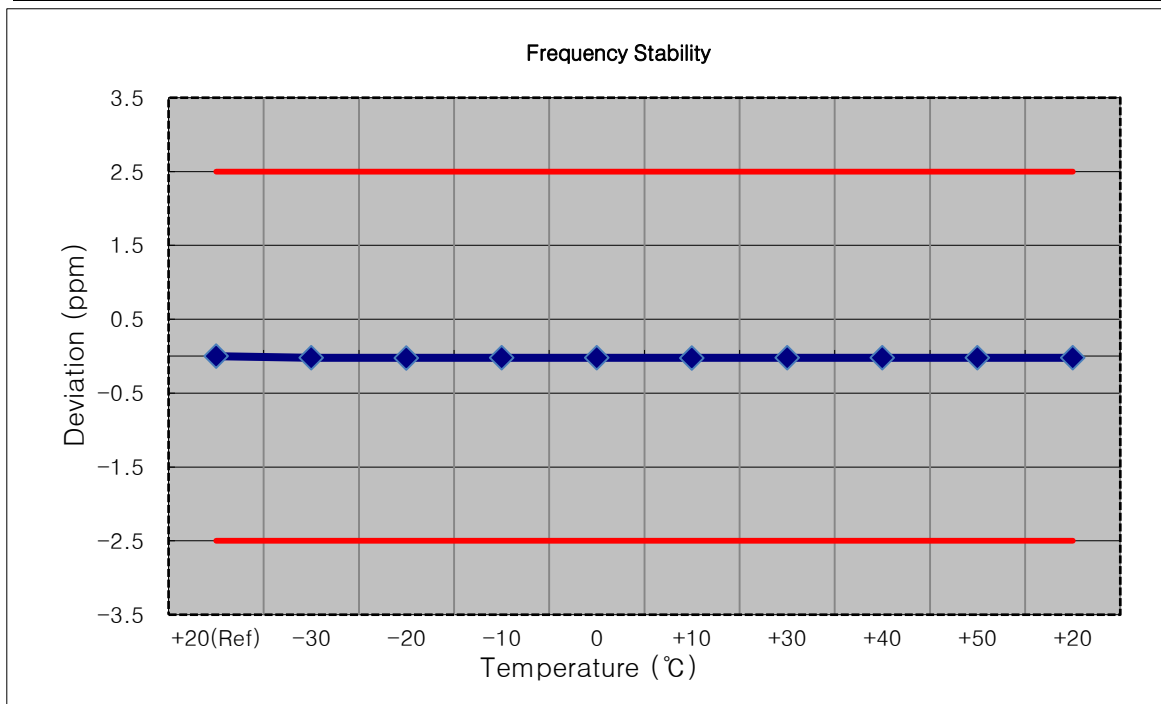


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1850,200,000 Hz
- ▣ CHANNEL: 512
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1850 199 978	0.0	0.000 000	0.0000
100%		-30	1850 199 956	-21.5	-0.000 001	-0.0116
100%		-20	1850 199 956	-21.4	-0.000 001	-0.0115
100%		-10	1850 199 957	-21.1	-0.000 001	-0.0114
100%		0	1850 199 956	-21.6	-0.000 001	-0.0117
100%		+10	1850 199 956	-22.0	-0.000 001	-0.0119
100%		+30	1850 199 956	-21.3	-0.000 001	-0.0115
100%		+40	1850 199 957	-20.8	-0.000 001	-0.0112
100%		+50	1850 199 956	-22.2	-0.000 001	-0.0120
Batt. Endpoint	3.400	+20	1850 199 956	-21.5	-0.000 001	-0.0116

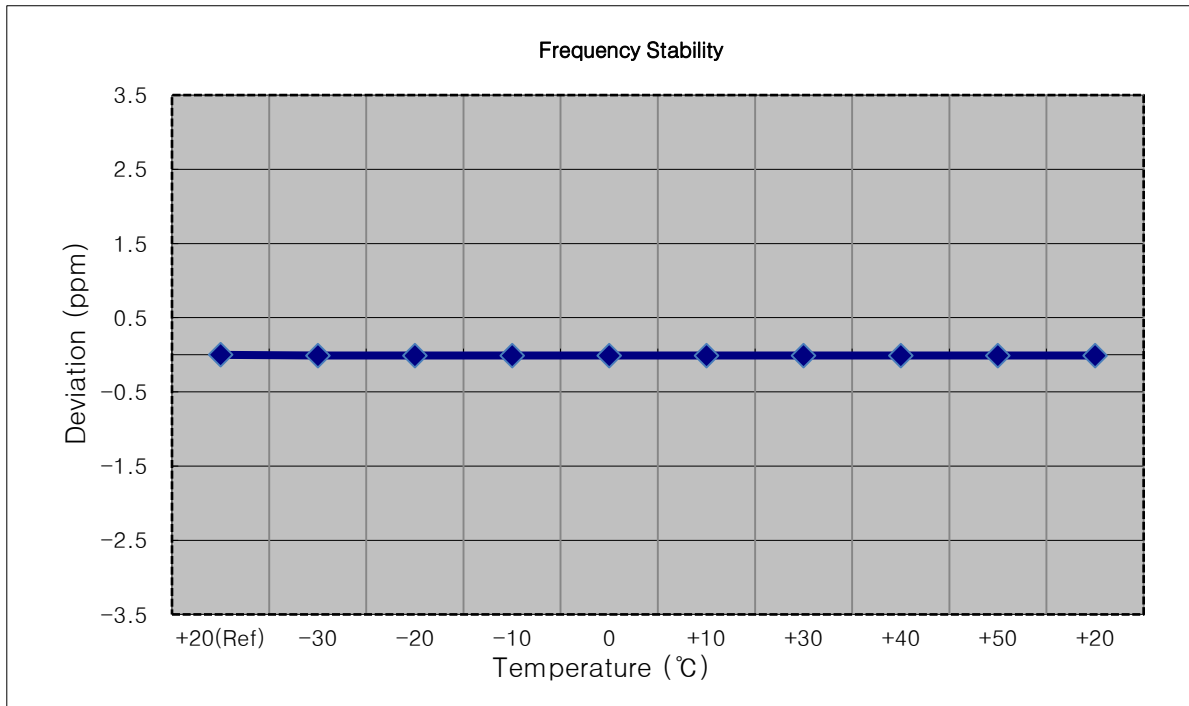


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 661
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1879 999 975	0.0	0.000 000	0.000
100%		-30	1879 999 949	-26.1	-0.000 001	-0.014
100%		-20	1879 999 951	-24.4	-0.000 001	-0.013
100%		-10	1879 999 951	-24.3	-0.000 001	-0.013
100%		0	1879 999 951	-24.1	-0.000 001	-0.013
100%		+10	1879 999 951	-24.3	-0.000 001	-0.013
100%		+30	1879 999 950	-24.9	-0.000 001	-0.013
100%		+40	1879 999 951	-24.5	-0.000 001	-0.013
100%		+50	1879 999 951	-24.5	-0.000 001	-0.013
Batt. Endpoint	3.400	+20	1879 999 951	-24.0	-0.000 001	-0.013

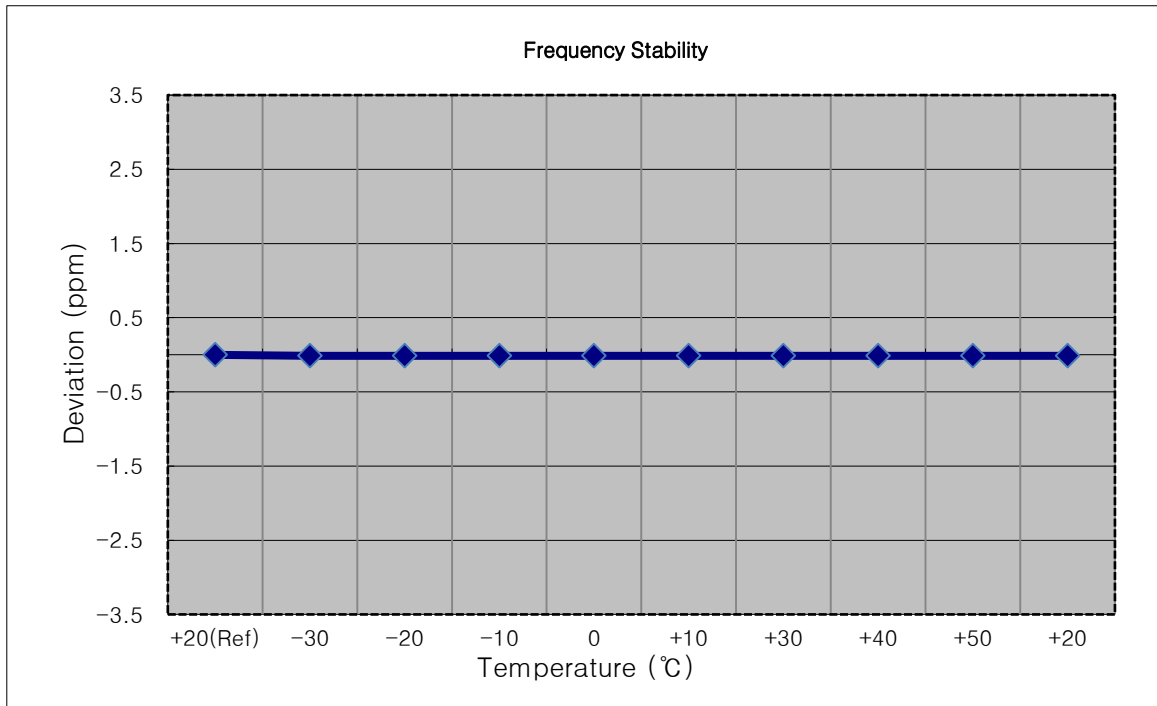


- ▣ Mode: GSM1900
- ▣ OPERATING FREQUENCY: 1909,800,000 Hz
- ▣ CHANNEL: 810
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1909 799 974	0.0	0.000 000	0.000
100%		-30	1909 799 948	-25.5	-0.000 001	-0.013
100%		-20	1909 799 948	-25.5	-0.000 001	-0.013
100%		-10	1909 799 947	-26.3	-0.000 001	-0.014
100%		0	1909 799 947	-26.3	-0.000 001	-0.014
100%		+10	1909 799 947	-26.3	-0.000 001	-0.014
100%		+30	1909 799 948	-25.8	-0.000 001	-0.014
100%		+40	1909 799 947	-26.6	-0.000 001	-0.014
100%		+50	1909 799 949	-25.1	-0.000 001	-0.013
Batt. Endpoint		3.400	+20	1909 799 948	-25.7	-0.000 001

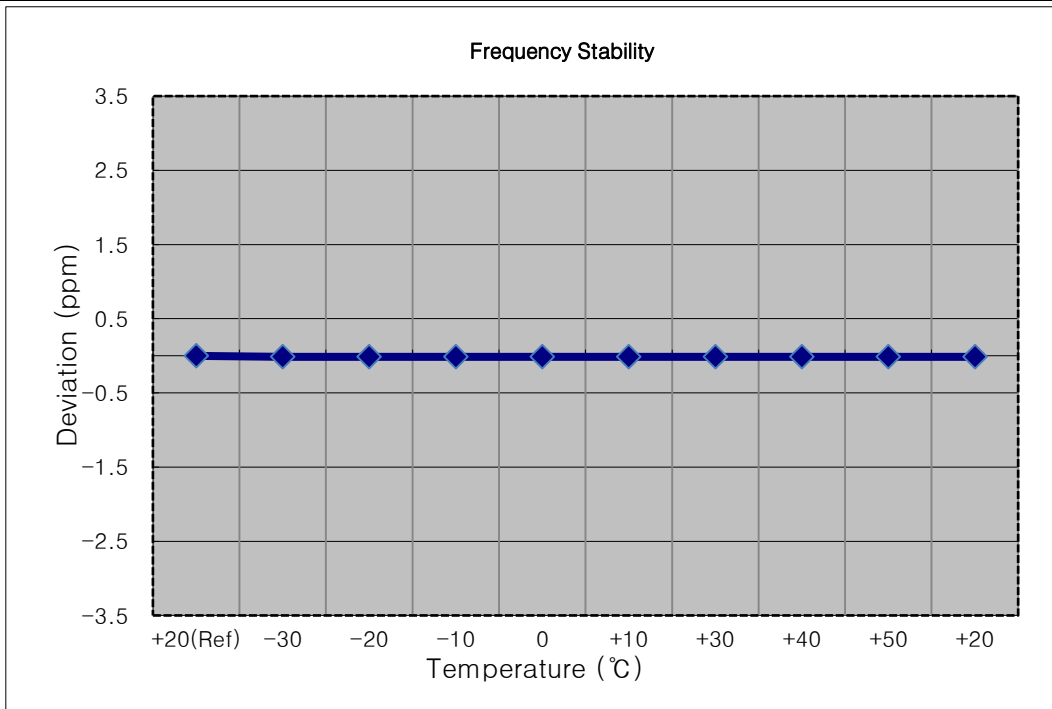


- ▣ Mode: WCDMA850
- ▣ OPERATING FREQUENCY: 836.600.000 Hz
- ▣ CHANNEL: 4183
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	836 600 004	0.0	0.000 000	0.0000
100%		-30	836 600 009	4.4	0.000 001	0.0052
100%		-20	836 600 008	3.4	0.000 000	0.0040
100%		-10	836 600 008	3.9	0.000 000	0.0047
100%		0	836 600 008	3.4	0.000 000	0.0041
100%		+10	836 600 009	4.3	0.000 001	0.0052
100%		+30	836 600 008	4.0	0.000 000	0.0048
100%		+40	836 600 008	3.5	0.000 000	0.0042
100%		+50	836 600 009	4.1	0.000 000	0.0049
Batt. Endpoint	3.400	+20	836 600 009	4.8	0.000 001	0.0057

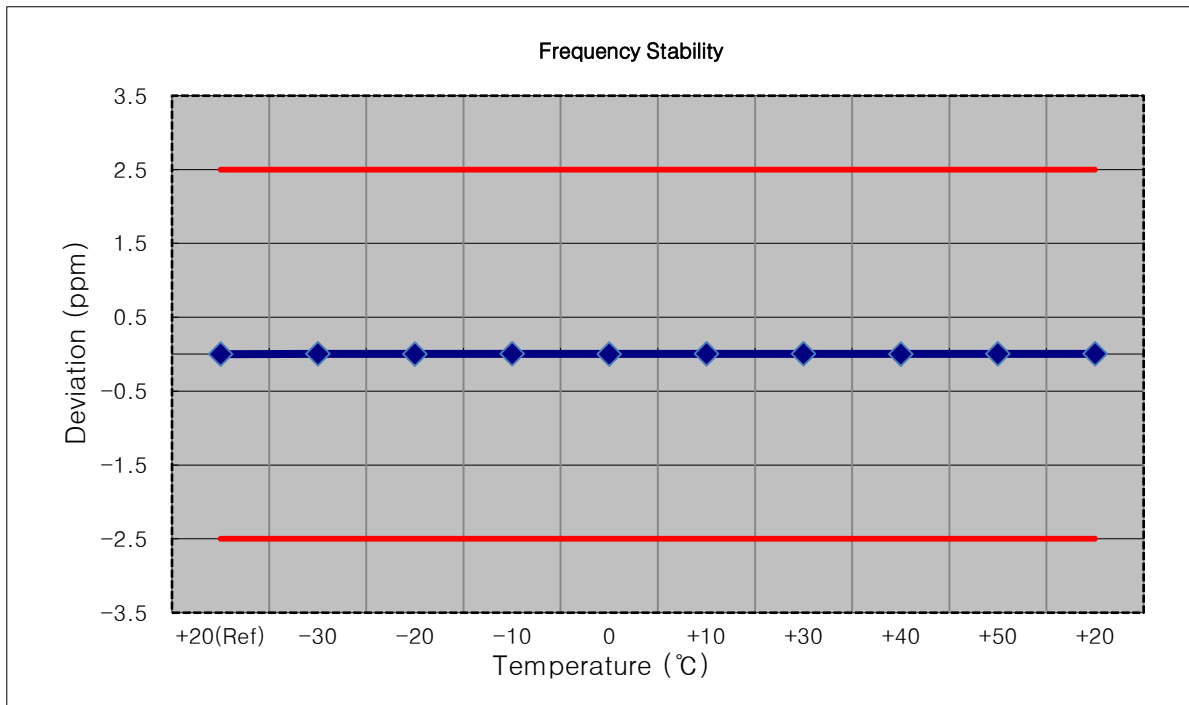


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,852,400,000 Hz
- ▣ CHANNEL: 9262
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1852 400 004	0.0	0.000 000	0.0000
100%		-30	1852 400 009	4.4	0.000 000	0.0024
100%		-20	1852 400 010	5.3	0.000 000	0.0028
100%		-10	1852 400 009	4.1	0.000 000	0.0022
100%		0	1852 400 009	4.4	0.000 000	0.0024
100%		+10	1852 400 009	4.4	0.000 000	0.0024
100%		+30	1852 400 009	4.3	0.000 000	0.0023
100%		+40	1852 400 008	4.0	0.000 000	0.0022
100%		+50	1852 400 009	4.8	0.000 000	0.0026
Batt. Endpoint	3.400	+20	1852 400 009	4.8	0.000 000	0.0026

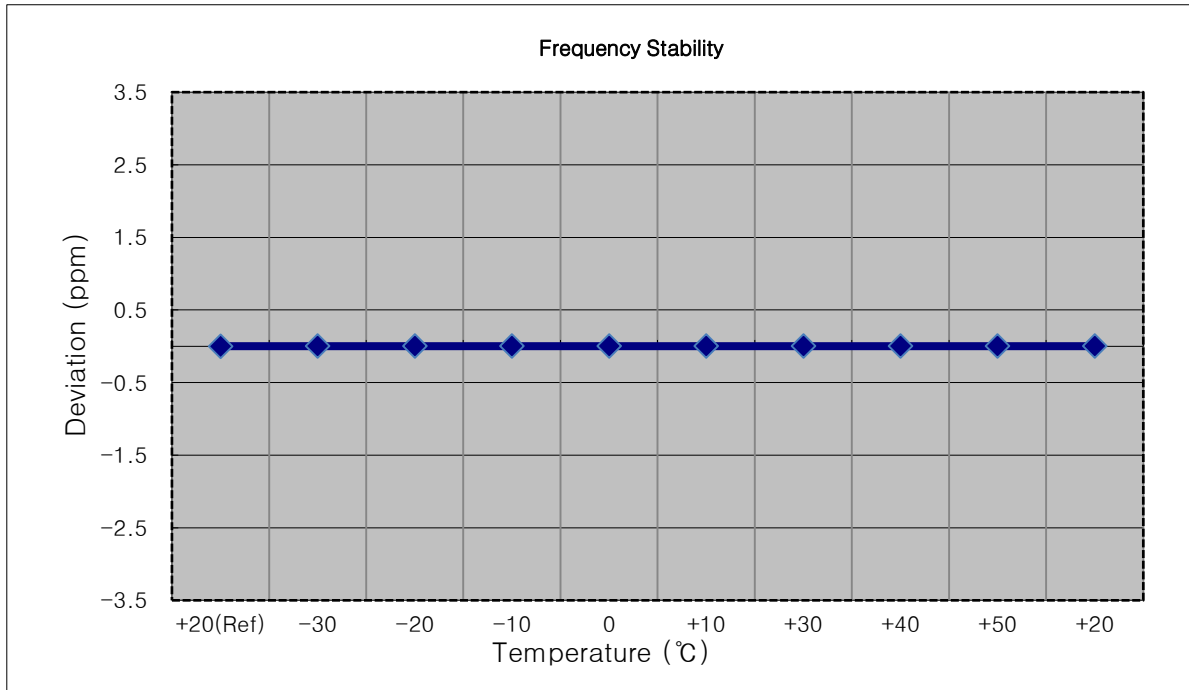


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 9400
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1880 000 003	0.0	0.000 000	0.0000
100%		-30	1880 000 005	2.2	0.000 000	0.0011
100%		-20	1880 000 005	2.6	0.000 000	0.0014
100%		-10	1880 000 007	4.0	0.000 000	0.0021
100%		0	1880 000 006	3.8	0.000 000	0.0020
100%		+10	1880 000 005	2.6	0.000 000	0.0014
100%		+30	1880 000 006	2.9	0.000 000	0.0016
100%		+40	1880 000 005	2.9	0.000 000	0.0015
100%		+50	1880 000 005	2.2	0.000 000	0.0012
Batt. Endpoint		3.400	+20	1880 000 005	2.7	0.000 000

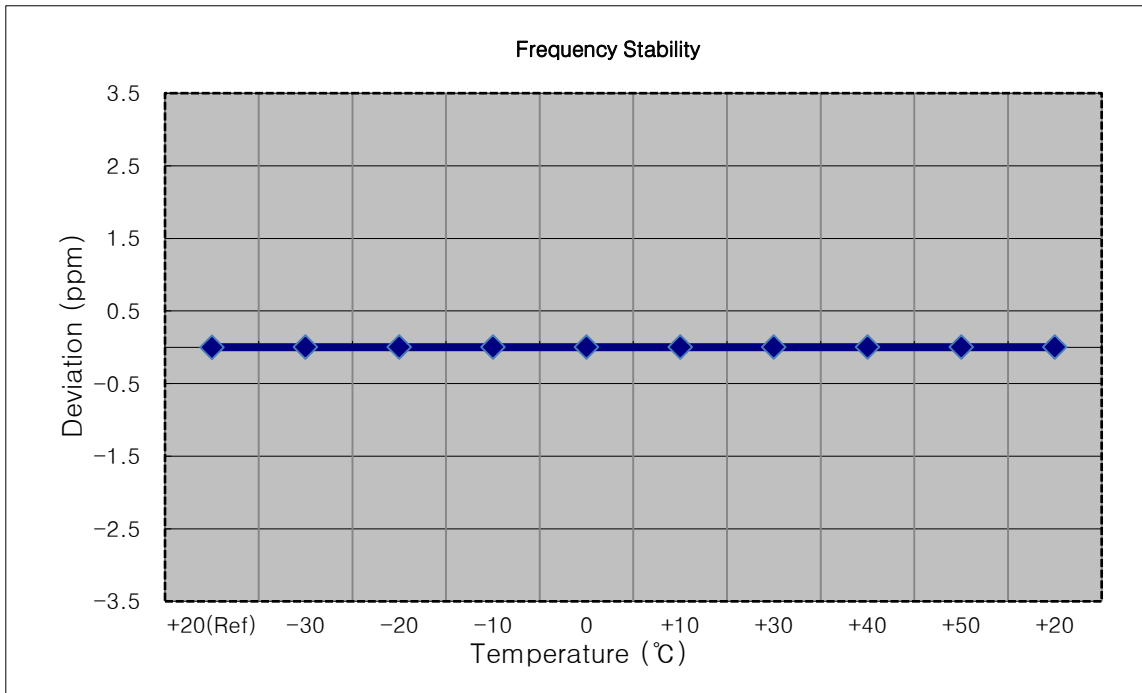


- ▣ Mode: WCDMA1900
- ▣ OPERATING FREQUENCY: 1,907,600,000 Hz
- ▣ CHANNEL: 9538
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1907 600 004	0.0	0.000 000	0.0000
100%		-30	1907 600 008	3.3	0.000 000	0.0017
100%		-20	1907 600 008	4.0	0.000 000	0.0021
100%		-10	1907 600 008	3.6	0.000 000	0.0019
100%		0	1907 600 009	4.4	0.000 000	0.0023
100%		+10	1907 600 008	4.0	0.000 000	0.0021
100%		+30	1907 600 008	4.2	0.000 000	0.0022
100%		+40	1907 600 007	2.9	0.000 000	0.0015
100%		+50	1907 600 007	2.9	0.000 000	0.0015
Batt. Endpoint		3.400	+20	1907 600 008	4.3	0.000 000

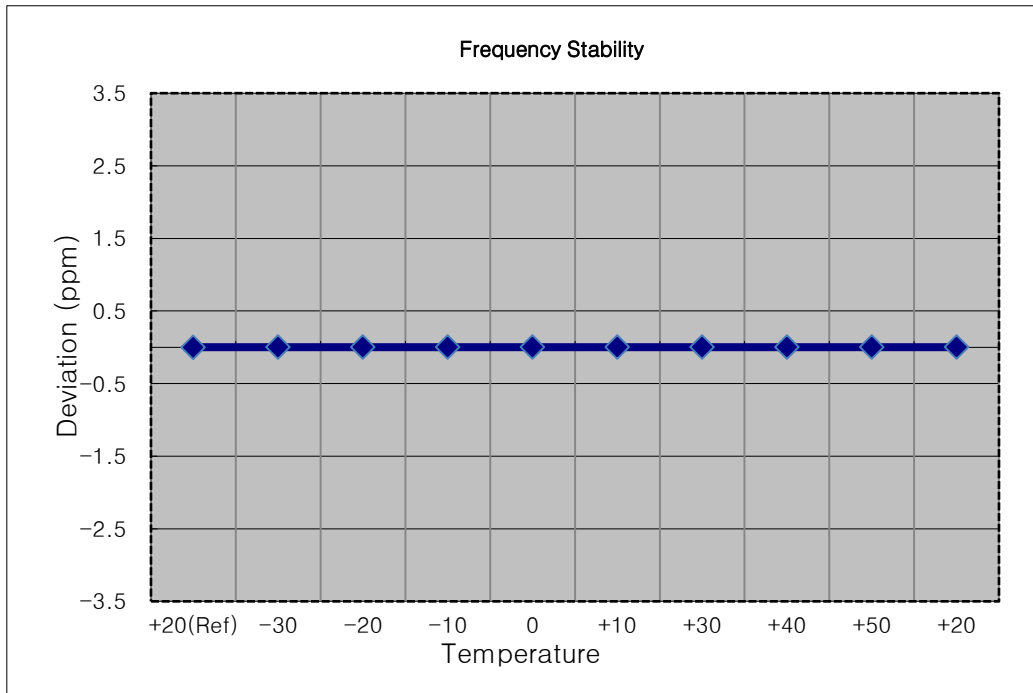


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,712,400,000 Hz
- ▣ CHANNEL: 1312
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1712 400 002	0.0	0.000 000	0.0000
100%		-30	1712 400 004	2.7	0.000 000	0.0016
100%		-20	1712 400 004	2.3	0.000 000	0.0014
100%		-10	1712 400 005	3.2	0.000 000	0.0019
100%		0	1712 400 005	2.9	0.000 000	0.0017
100%		+10	1712 400 004	2.0	0.000 000	0.0012
100%		+30	1712 400 005	3.4	0.000 000	0.0020
100%		+40	1712 400 004	2.6	0.000 000	0.0015
100%		+50	1712 400 004	2.2	0.000 000	0.0013
Batt. Endpoint		3.400	+20	1712 400 005	2.9	0.000 000

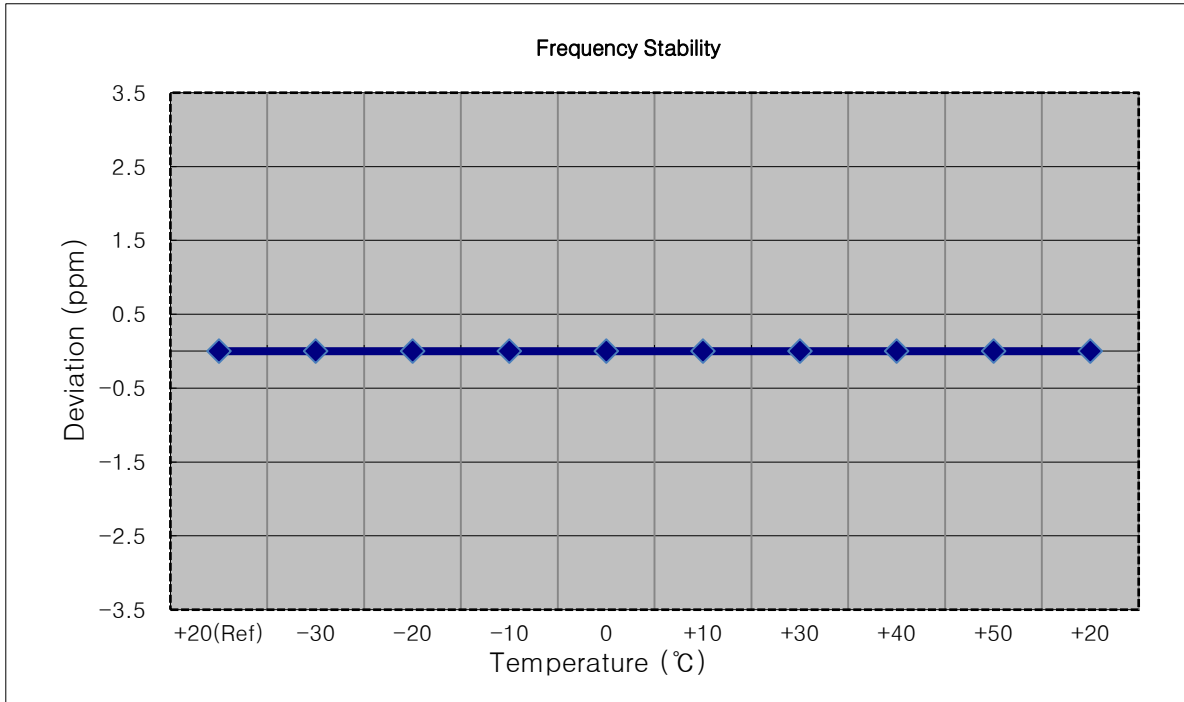


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1.732.400.000 Hz
- ▣ CHANNEL: 1412
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1732 400 005	0.0	0.000 000	0.0000
100%		-30	1732 400 010	5.6	0.000 000	0.0032
100%		-20	1732 400 009	4.7	0.000 000	0.0027
100%		-10	1732 400 009	4.9	0.000 000	0.0029
100%		0	1732 400 009	4.3	0.000 000	0.0025
100%		+10	1732 400 009	4.8	0.000 000	0.0028
100%		+30	1732 400 009	4.7	0.000 000	0.0027
100%		+40	1732 400 009	4.8	0.000 000	0.0028
100%		+50	1732 400 009	4.8	0.000 000	0.0028
Batt. Endpoint	3.400	+20	1732 400 011	6.2	0.000 000	0.0036

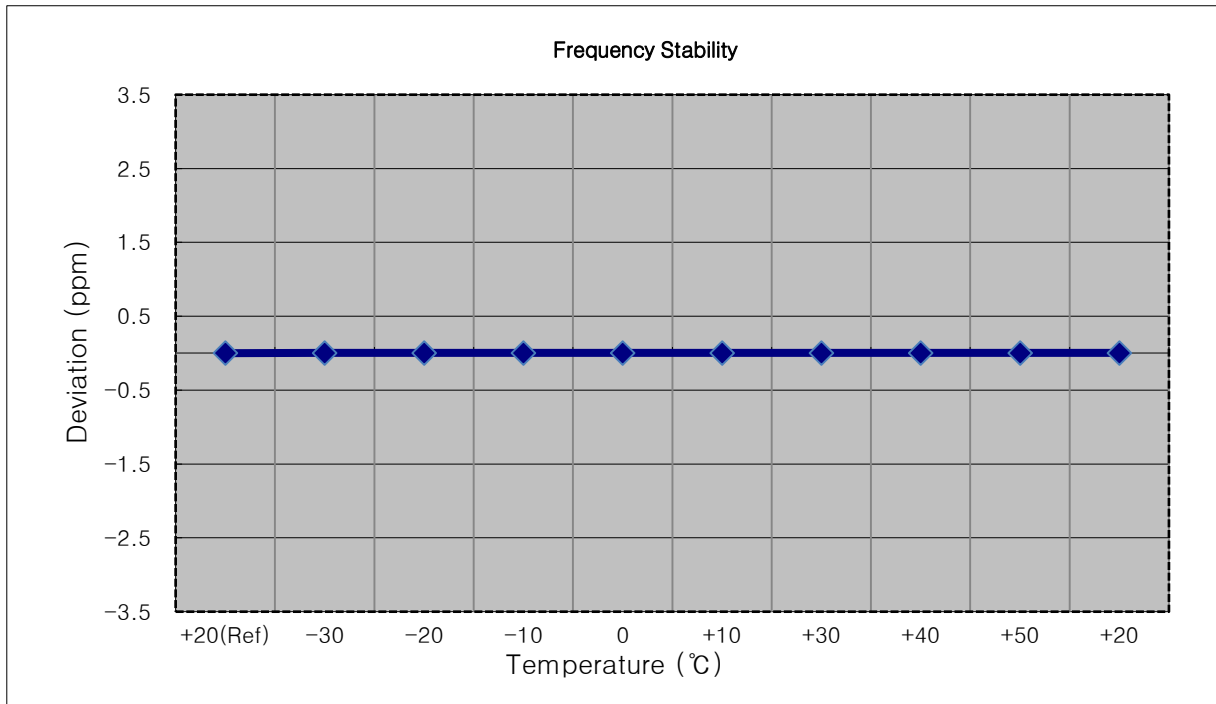


- ▣ Mode: WCDMA1700
- ▣ OPERATING FREQUENCY: 1,752,600,000 Hz
- ▣ CHANNEL: 1513
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1752 600 005	0.0	0.000 000	0.0000
100%		-30	1752 600 011	5.7	0.000 000	0.0033
100%		-20	1752 600 010	4.7	0.000 000	0.0027
100%		-10	1752 600 010	4.7	0.000 000	0.0027
100%		0	1752 600 012	6.5	0.000 000	0.0037
100%		+10	1752 600 010	4.9	0.000 000	0.0028
100%		+30	1752 600 010	4.9	0.000 000	0.0028
100%		+40	1752 600 011	5.4	0.000 000	0.0031
100%		+50	1752 600 010	5.0	0.000 000	0.0029
Batt. Endpoint		3.400	+20	1752 600 010	4.6	0.000 000

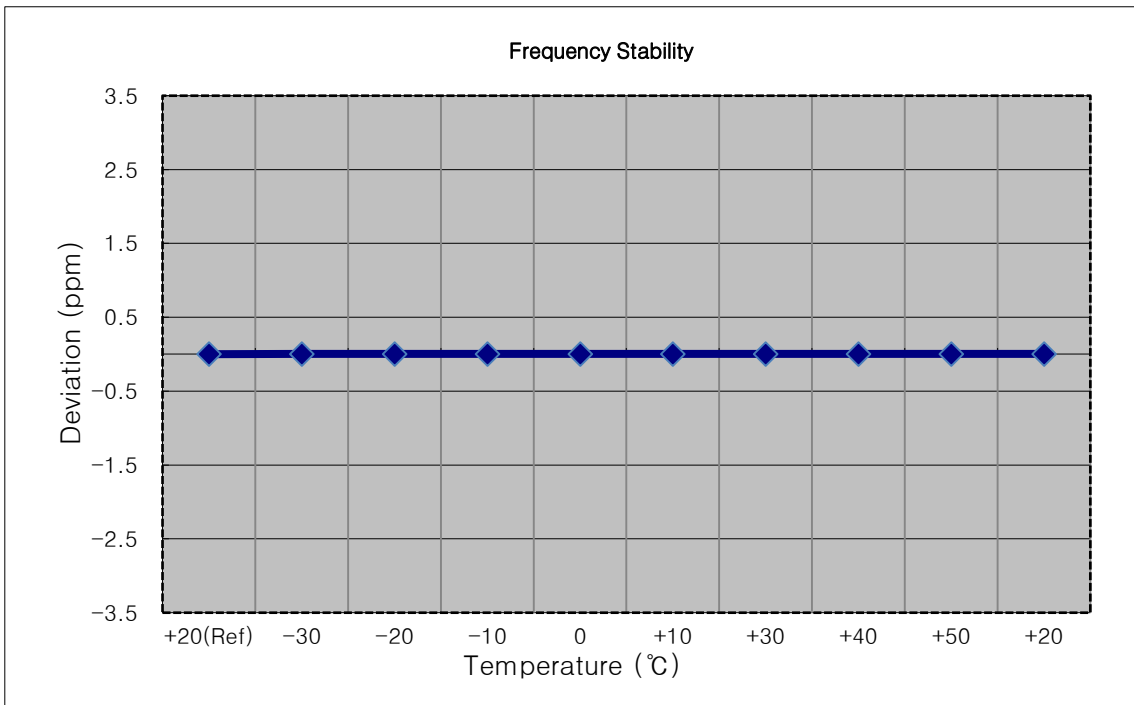


- ▣ Mode: CDMA850
- ▣ OPERATING FREQUENCY: 836,500,000 Hz
- ▣ CHANNEL: 384
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	836 500 003	0.0	0.000 000	0.0000
100%		-30	836 499 987	-15.7	-0.000 002	-0.0188
100%		-20	836 499 991	-11.4	-0.000 001	-0.0136
100%		-10	836 499 990	-12.4	-0.000 001	-0.0148
100%		0	836 499 989	-13.5	-0.000 002	-0.0161
100%		+10	836 499 993	-10.3	-0.000 001	-0.0123
100%		+30	836 499 991	-11.5	-0.000 001	-0.0138
100%		+40	836 499 989	-13.6	-0.000 002	-0.0162
100%		+50	836 499 990	-12.7	-0.000 002	-0.0152
Batt. Endpoint		3.400	+20	836 499 989	-13.4	-0.000 002

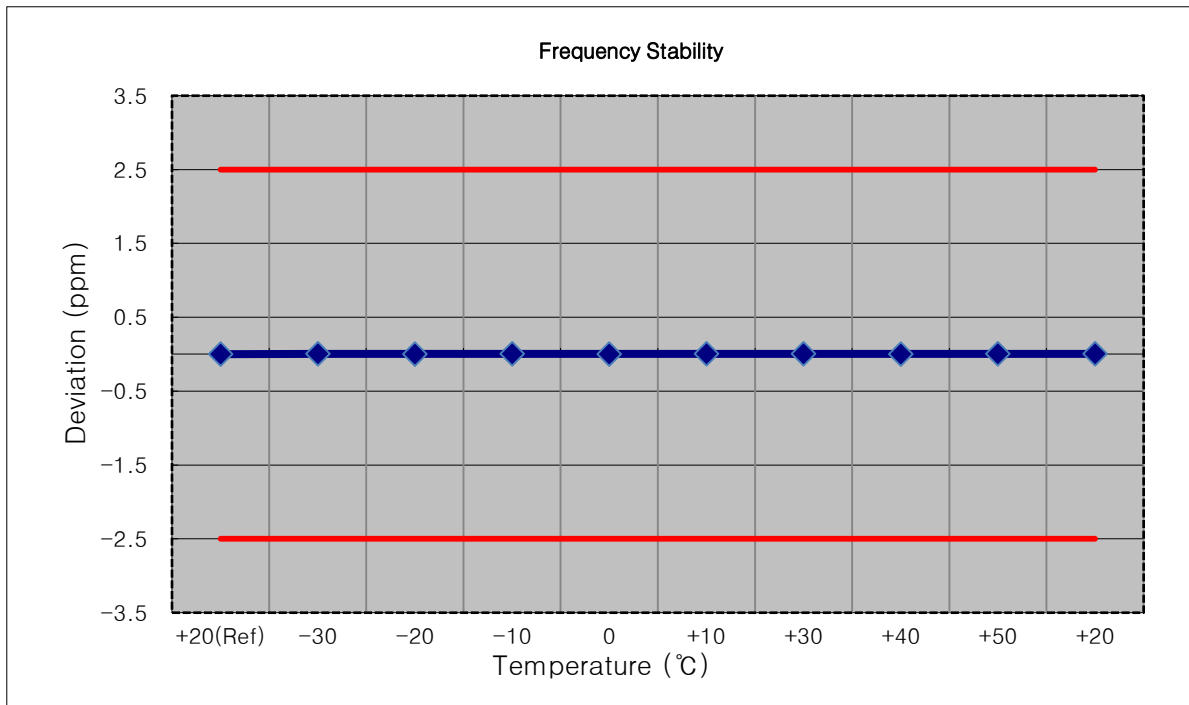


- ▣ Mode: CDMA Secondary800
- ▣ OPERATING FREQUENCY: 820,500,000 Hz
- ▣ CHANNEL: 580
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	820 499 983	0.0	0.000 000	0.0000
100%		-30	820 499 987	3.8	0.000 000	0.0046
100%		-20	820 499 985	2.5	0.000 000	0.0030
100%		-10	820 499 986	3.4	0.000 000	0.0041
100%		0	820 499 986	2.8	0.000 000	0.0034
100%		+10	820 499 987	4.1	0.000 000	0.0050
100%		+30	820 499 987	3.9	0.000 000	0.0048
100%		+40	820 499 986	2.9	0.000 000	0.0035
100%		+50	820 499 986	3.0	0.000 000	0.0037
Batt. Endpoint		3.400	+20	820 499 987	4.1	0.000 000

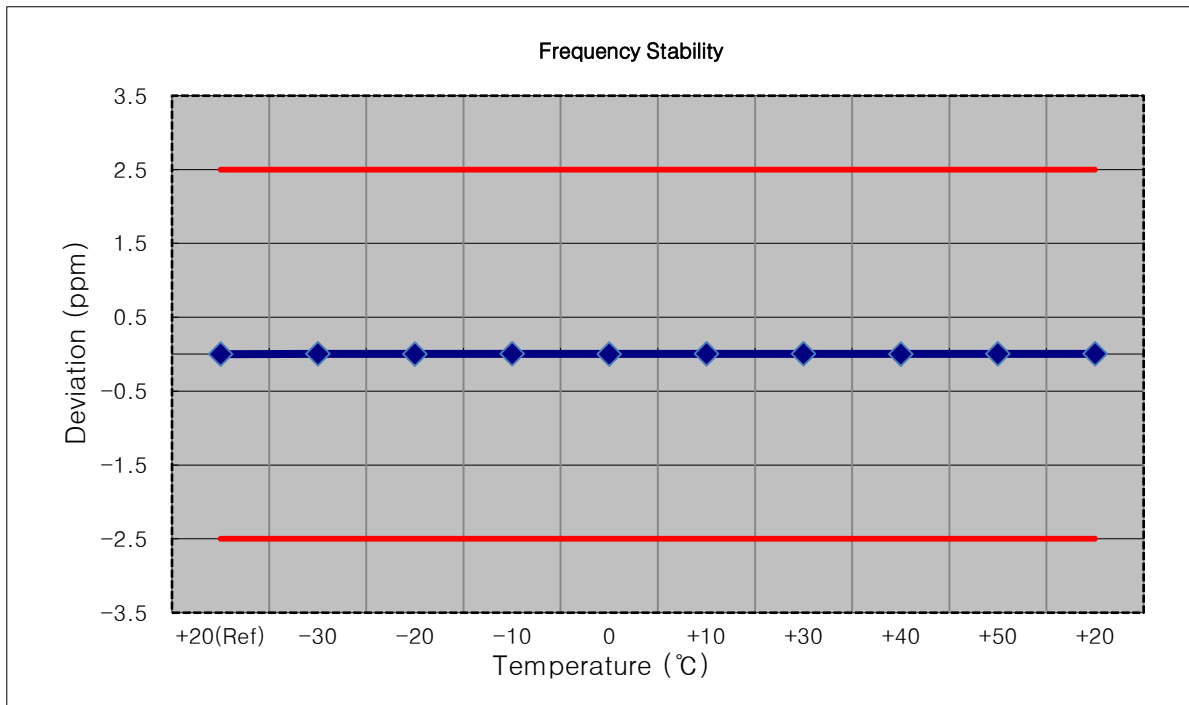


- ▣ Mode: CDMA PCS
- ▣ OPERATING FREQUENCY: 1,851,300,000 Hz
- ▣ CHANNEL: 25
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1851 299 893	0.0	0.000 000	0.0000
100%		-30	1851 299 895	2.5	0.000 000	0.0014
100%		-20	1851 299 895	2.7	0.000 000	0.0015
100%		-10	1851 299 896	3.5	0.000 000	0.0019
100%		0	1851 299 896	2.9	0.000 000	0.0016
100%		+10	1851 299 897	4.0	0.000 000	0.0022
100%		+30	1851 299 896	3.3	0.000 000	0.0018
100%		+40	1851 299 896	2.8	0.000 000	0.0015
100%		+50	1851 299 896	2.9	0.000 000	0.0016
Batt. Endpoint		3.400	+20	1851 299 896	3.6	0.000 000

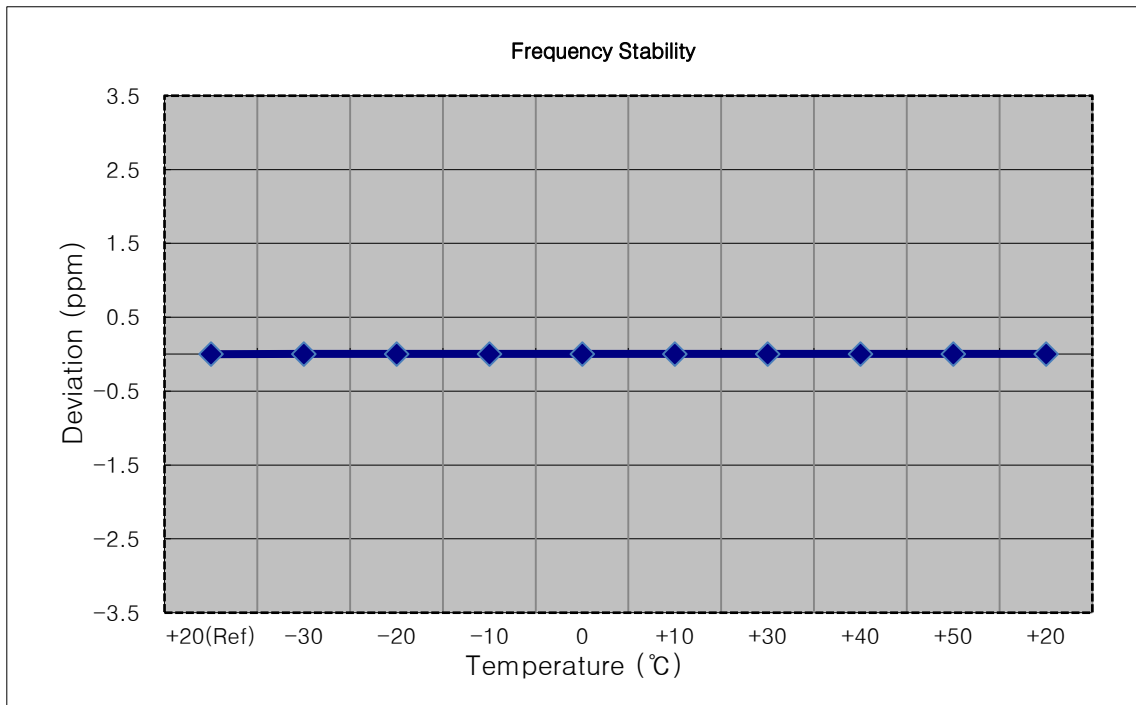


- ▣ Mode: CDMA PCS
- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 600
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1880 000 003	0.0	0.000 000	0.0000
100%		-30	1880 000 006	3.0	0.000 000	0.0016
100%		-20	1880 000 006	3.3	0.000 000	0.0018
100%		-10	1880 000 007	3.8	0.000 000	0.0020
100%		0	1880 000 006	2.9	0.000 000	0.0015
100%		+10	1880 000 006	3.0	0.000 000	0.0016
100%		+30	1880 000 006	3.4	0.000 000	0.0018
100%		+40	1880 000 005	2.7	0.000 000	0.0014
100%		+50	1880 000 006	3.5	0.000 000	0.0019
Batt. Endpoint	3.400	+20	1880 000 006	3.7	0.000 000	0.0020

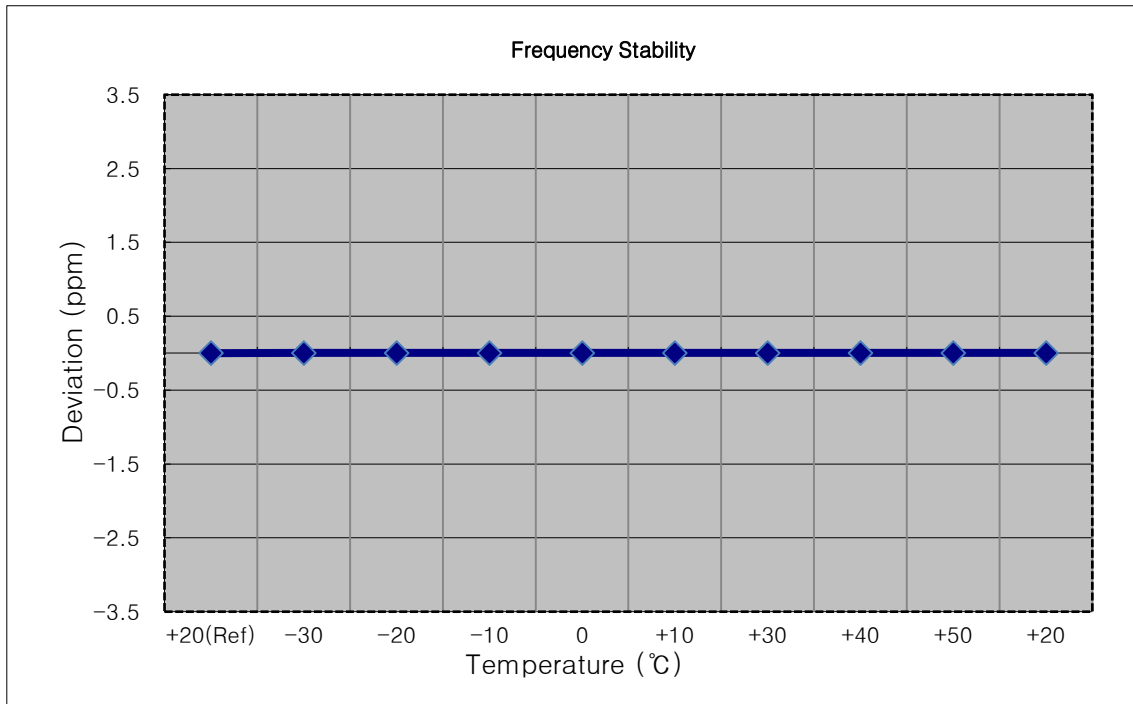


- ▣ Mode: CDMA PCS
- ▣ OPERATING FREQUENCY: 1,908,800,000 Hz
- ▣ CHANNEL: 1175
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	1908 799 996	0.0	0.000 000	0.0000
100%		-30	1908 799 998	2.1	0.000 000	0.0011
100%		-20	1908 799 999	2.9	0.000 000	0.0015
100%		-10	1908 800 000	3.8	0.000 000	0.0020
100%		0	1908 799 999	3.0	0.000 000	0.0016
100%		+10	1908 799 999	3.1	0.000 000	0.0016
100%		+30	1908 799 999	2.8	0.000 000	0.0015
100%		+40	1908 799 998	2.5	0.000 000	0.0013
100%		+50	1908 799 999	2.9	0.000 000	0.0015
Batt. Endpoint		3.400	+20	1908 800 000	3.9	0.000 000

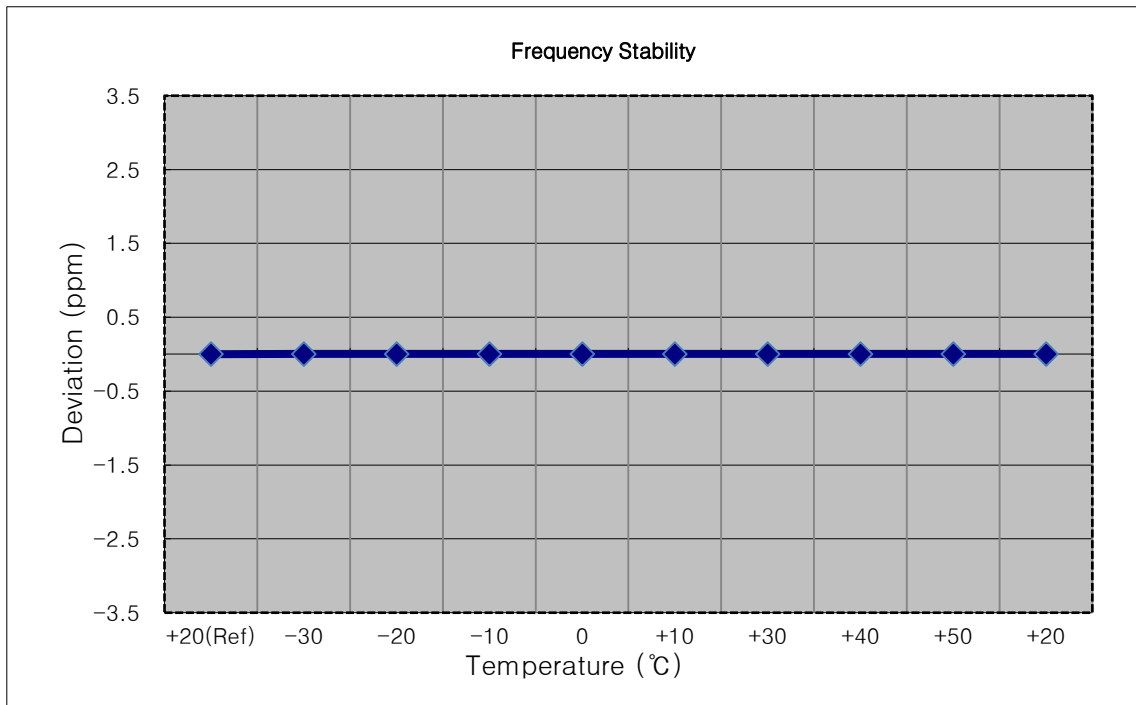


9. TEST PLOTS


■ GSM850 MODE (128 CH.) Occupied Bandwidth

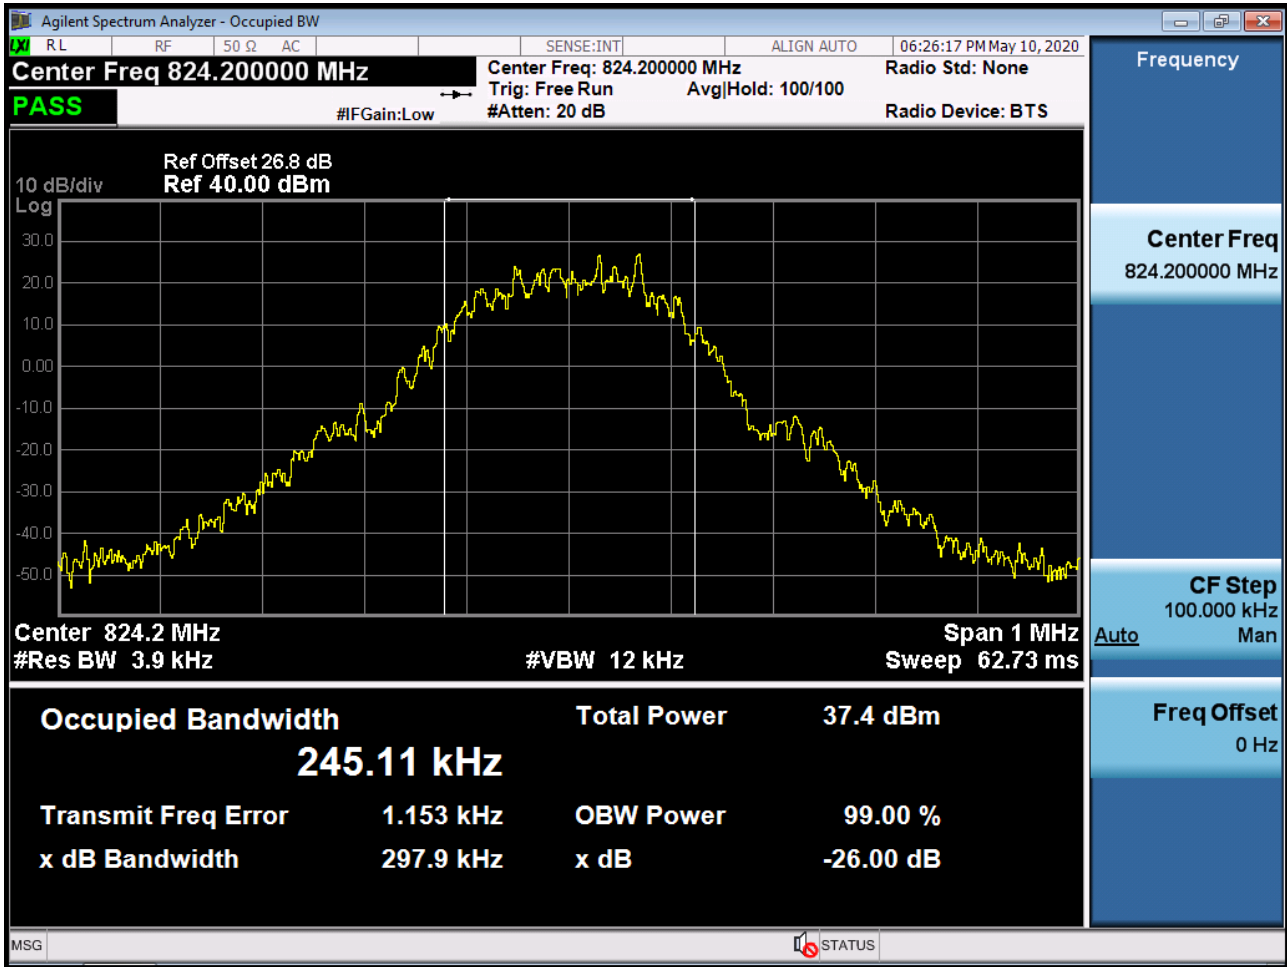


■ GSM850 MODE (190 CH.) Occupied Bandwidth

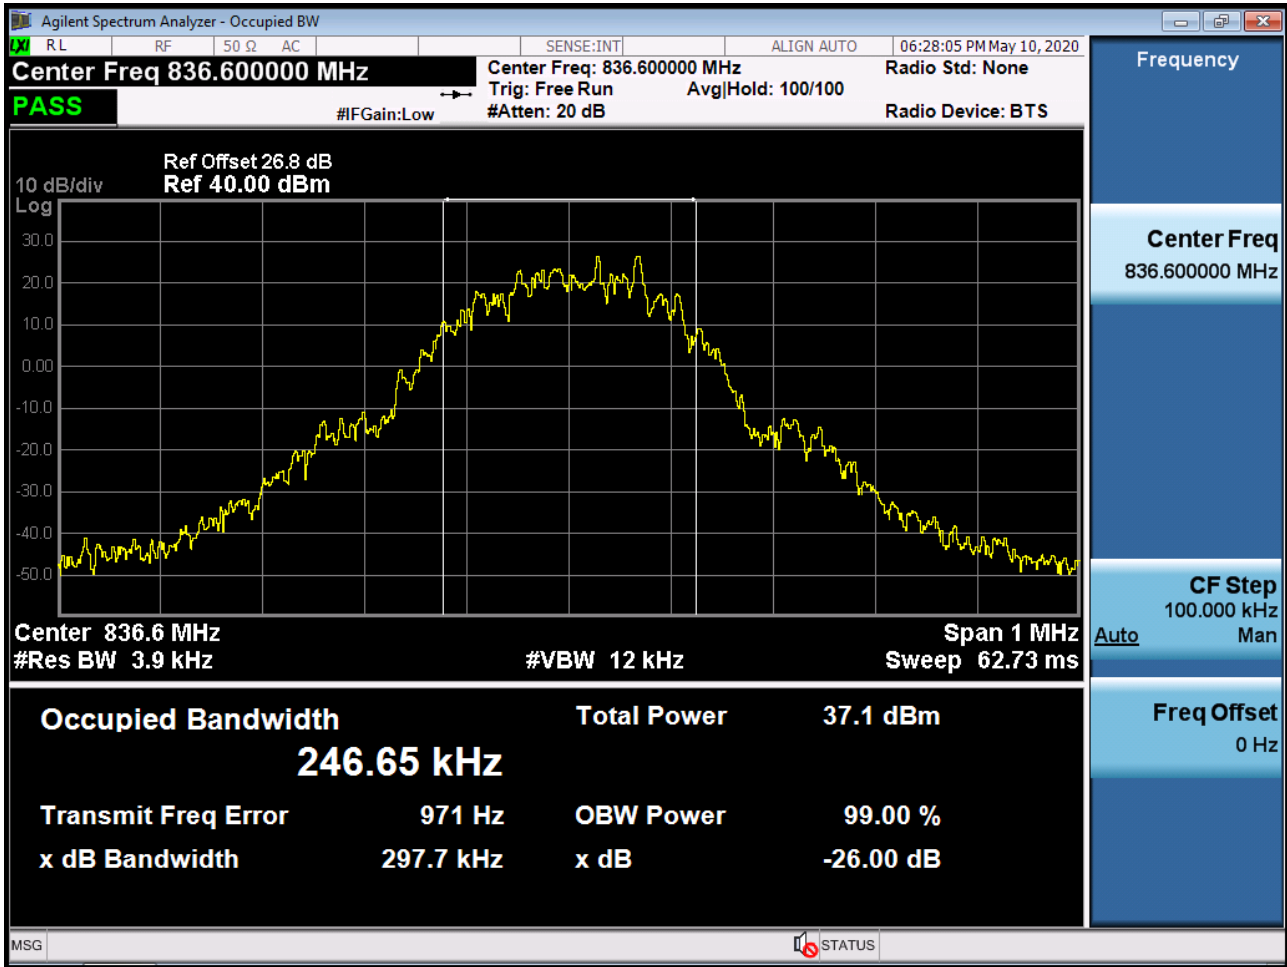


■ GSM850 MODE (251 CH.) Occupied Bandwidth

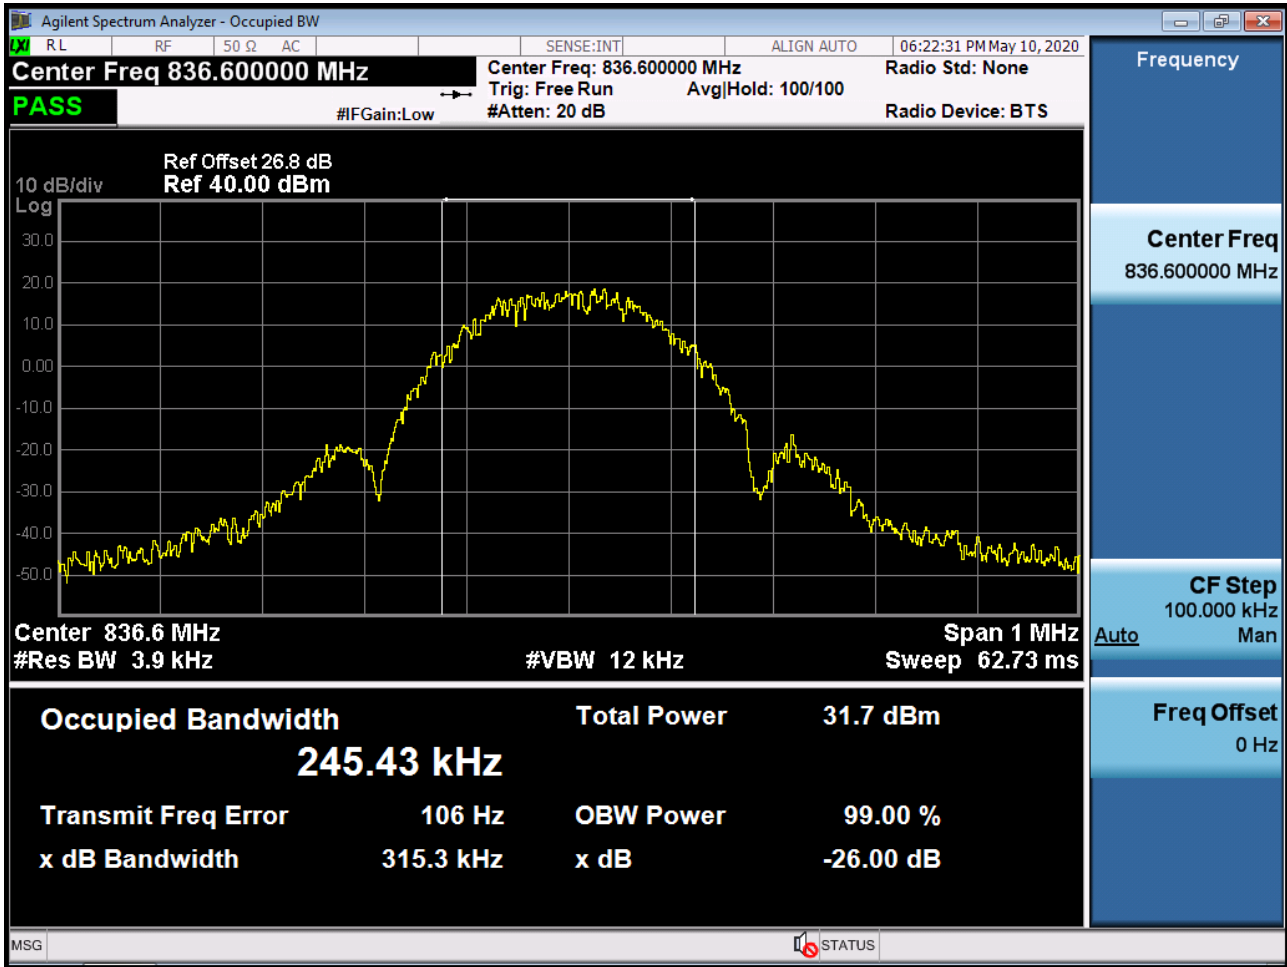


■ GSM850 EDGE (190 CH.) Occupied Bandwidth

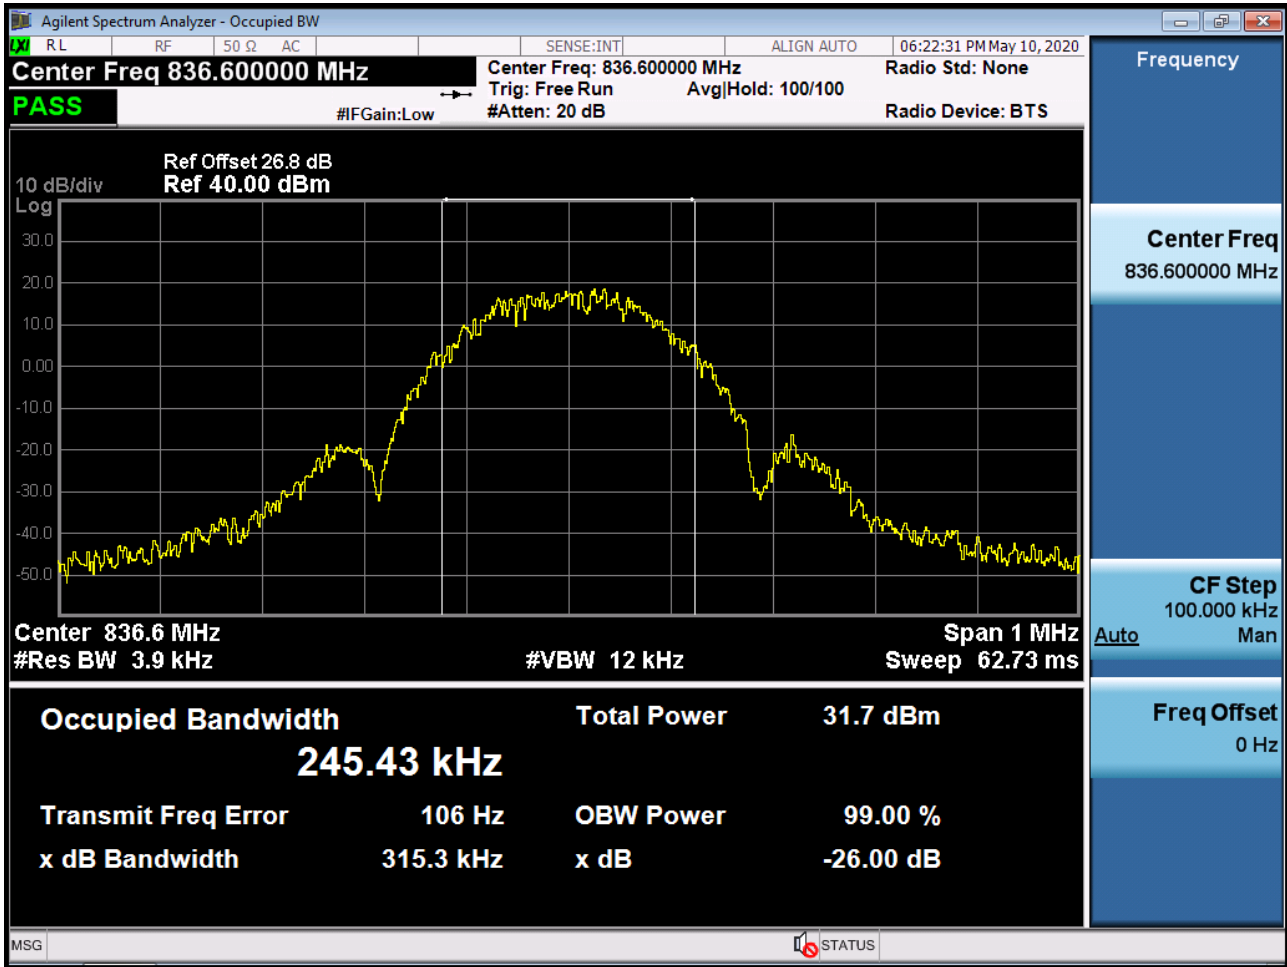


■ GSM1900 MODE (512 CH.) Occupied Bandwidth

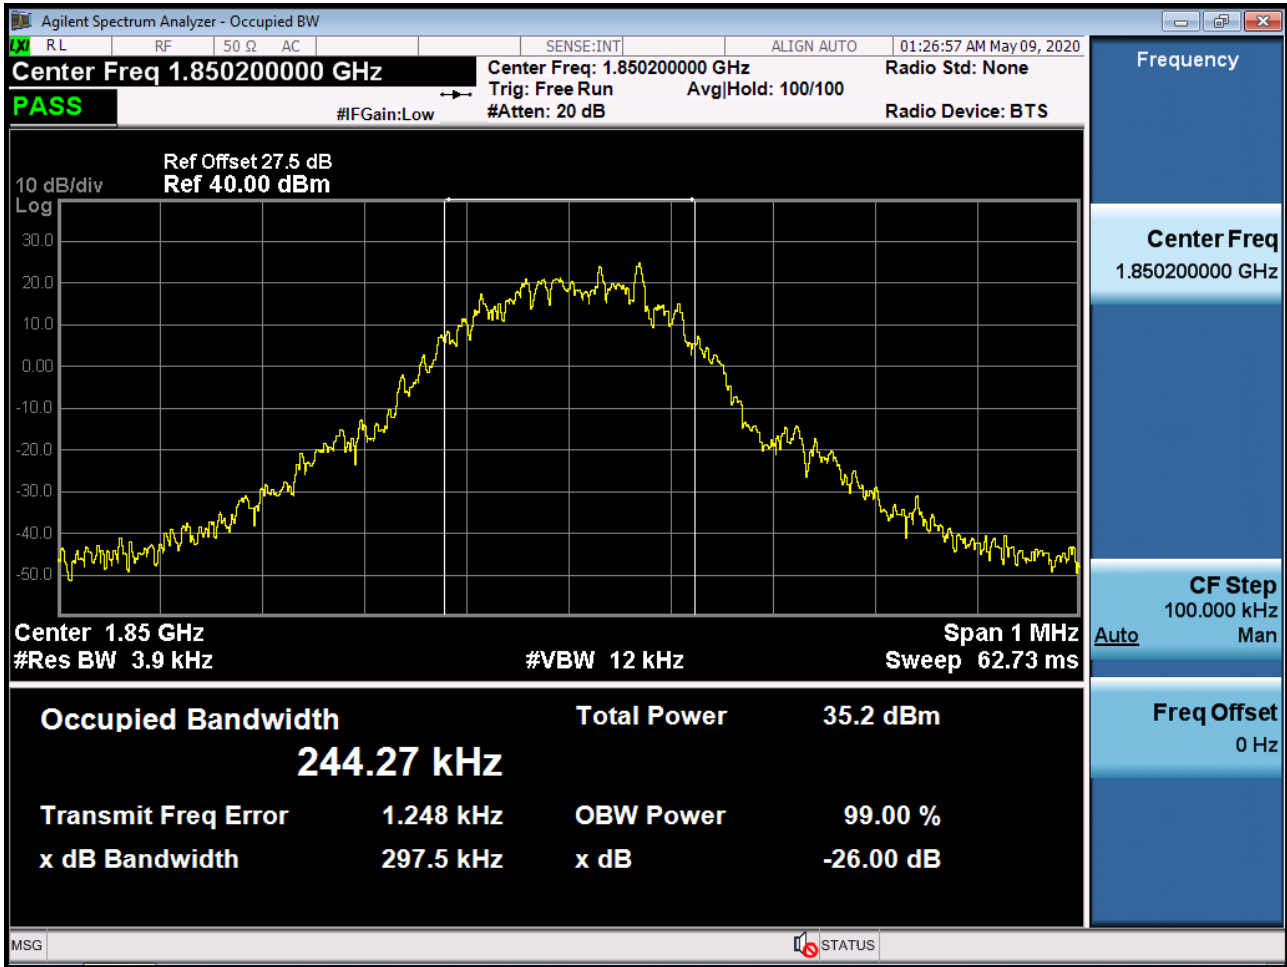


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

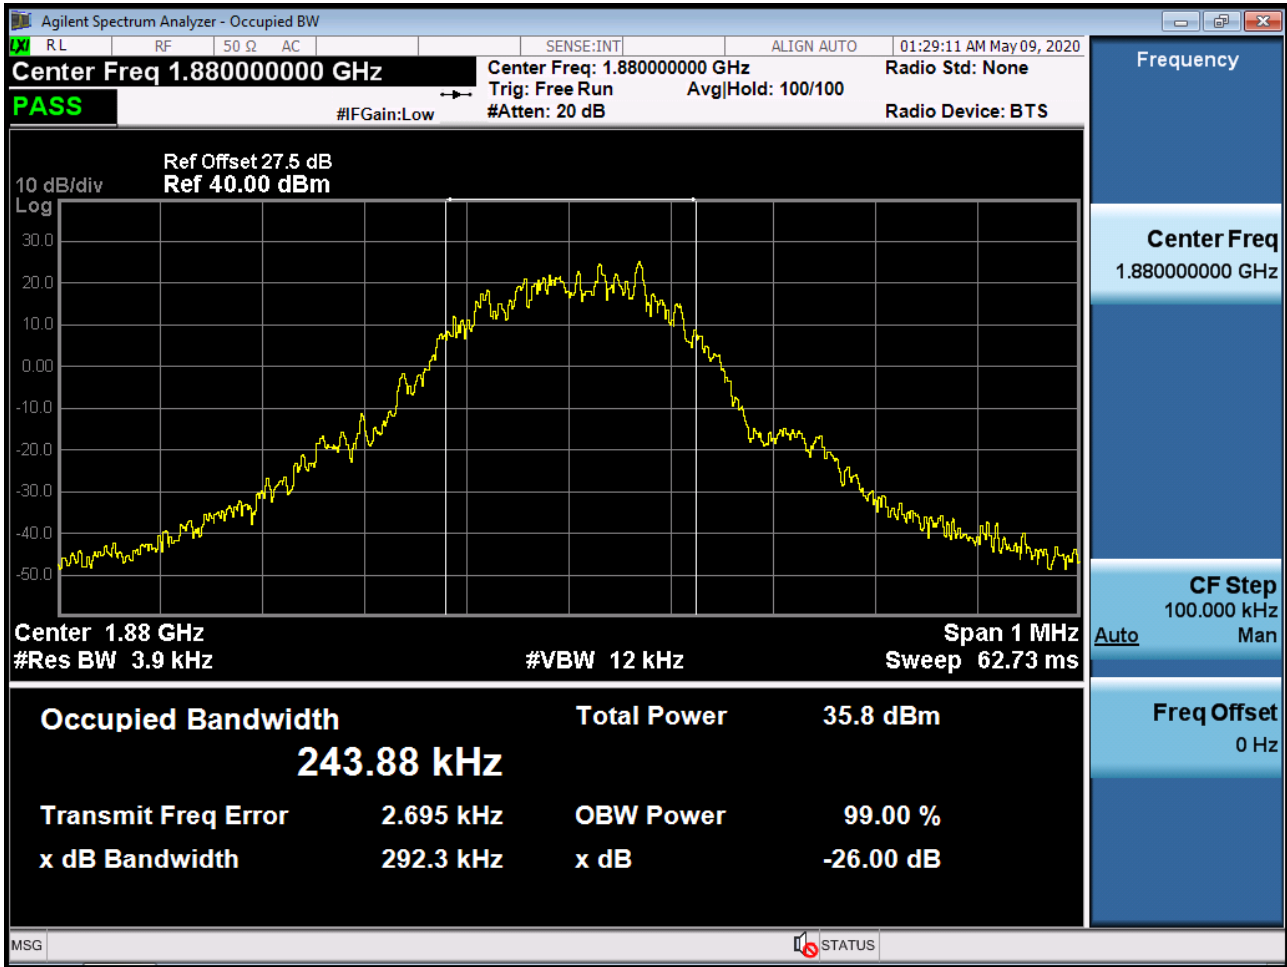


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

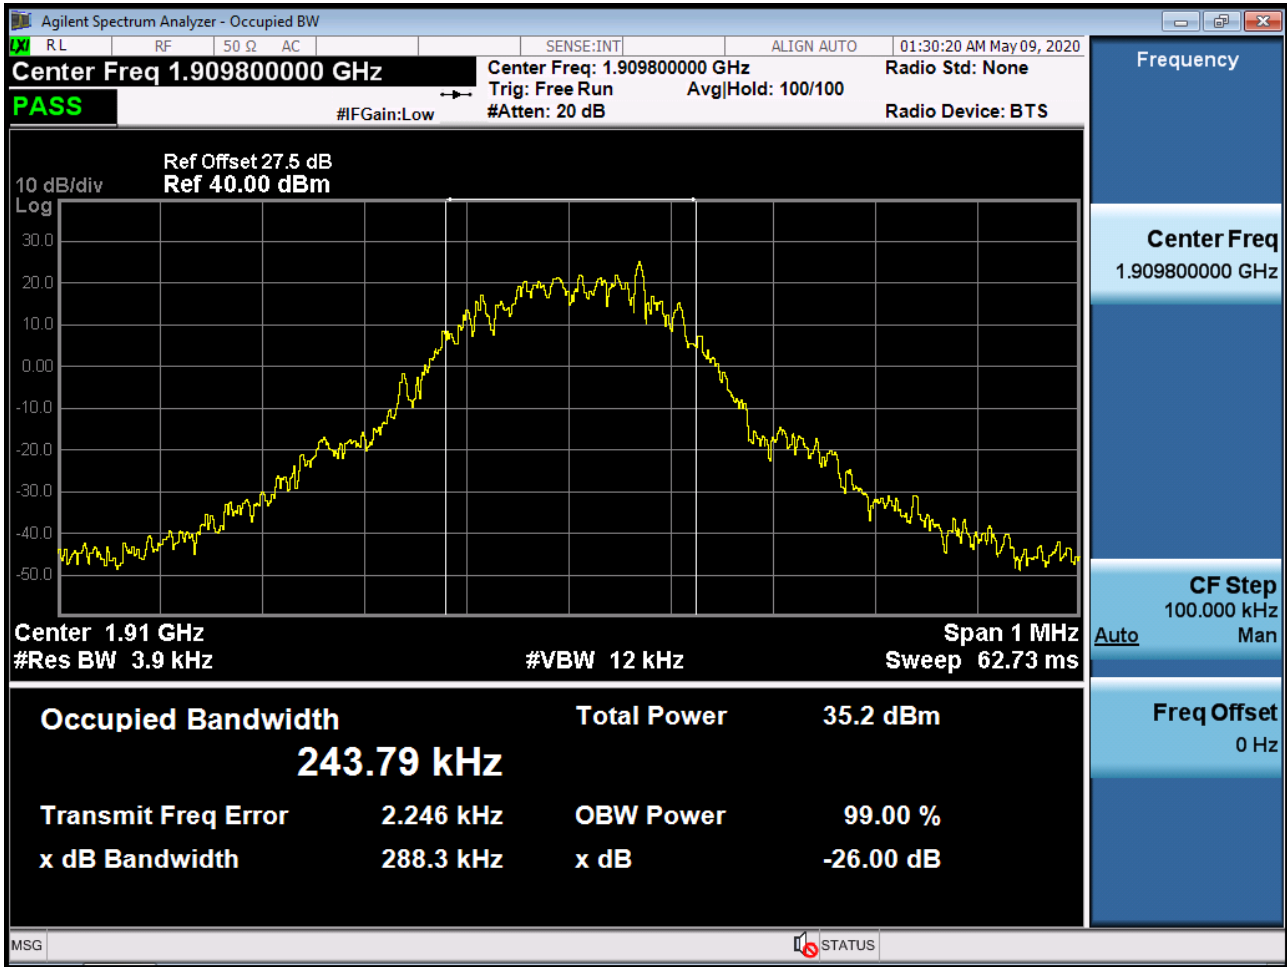


■ GSM1900 EDGE (512 CH.) Occupied Bandwidth

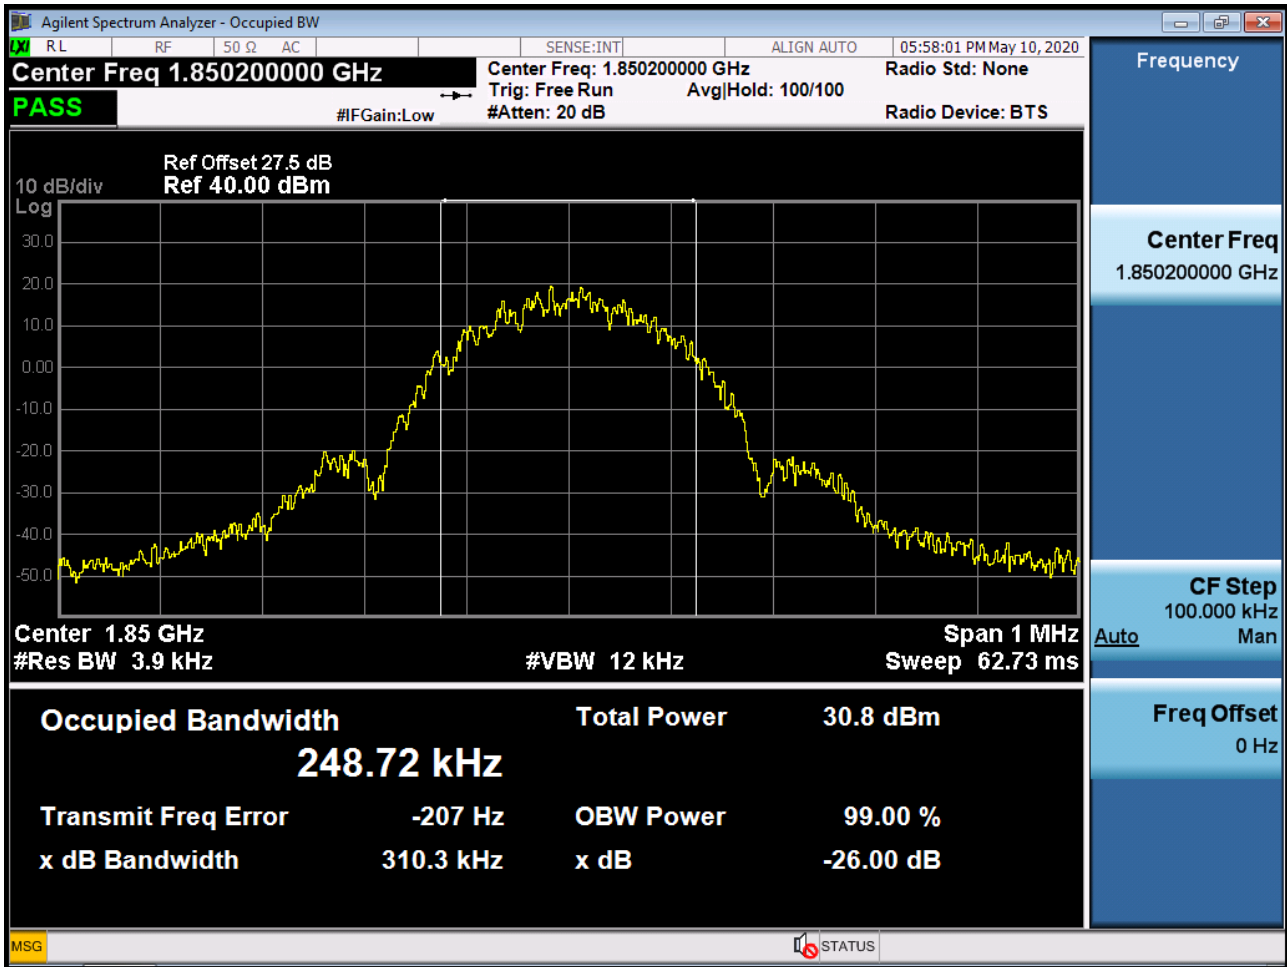


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

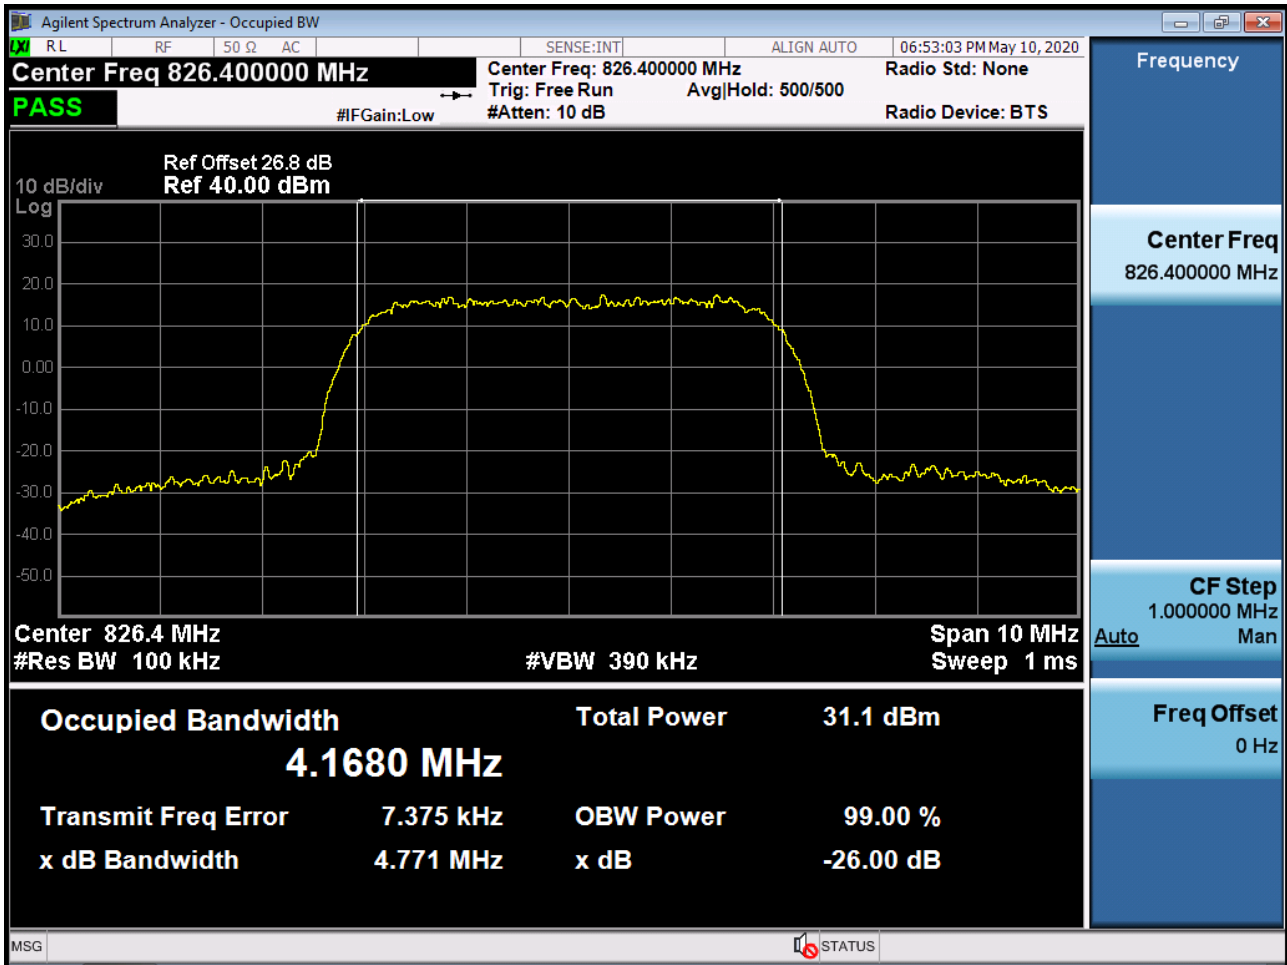


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

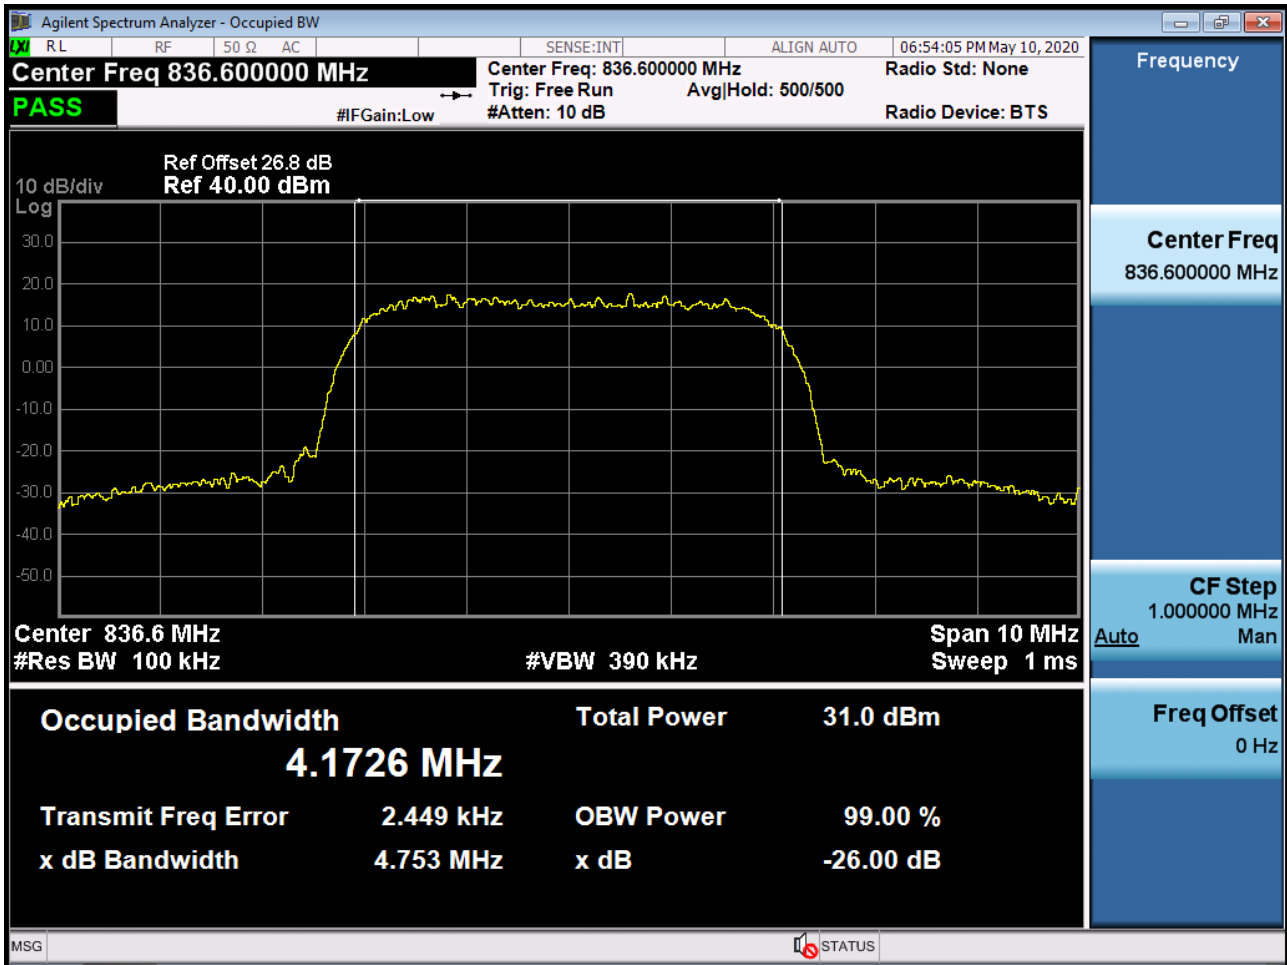


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

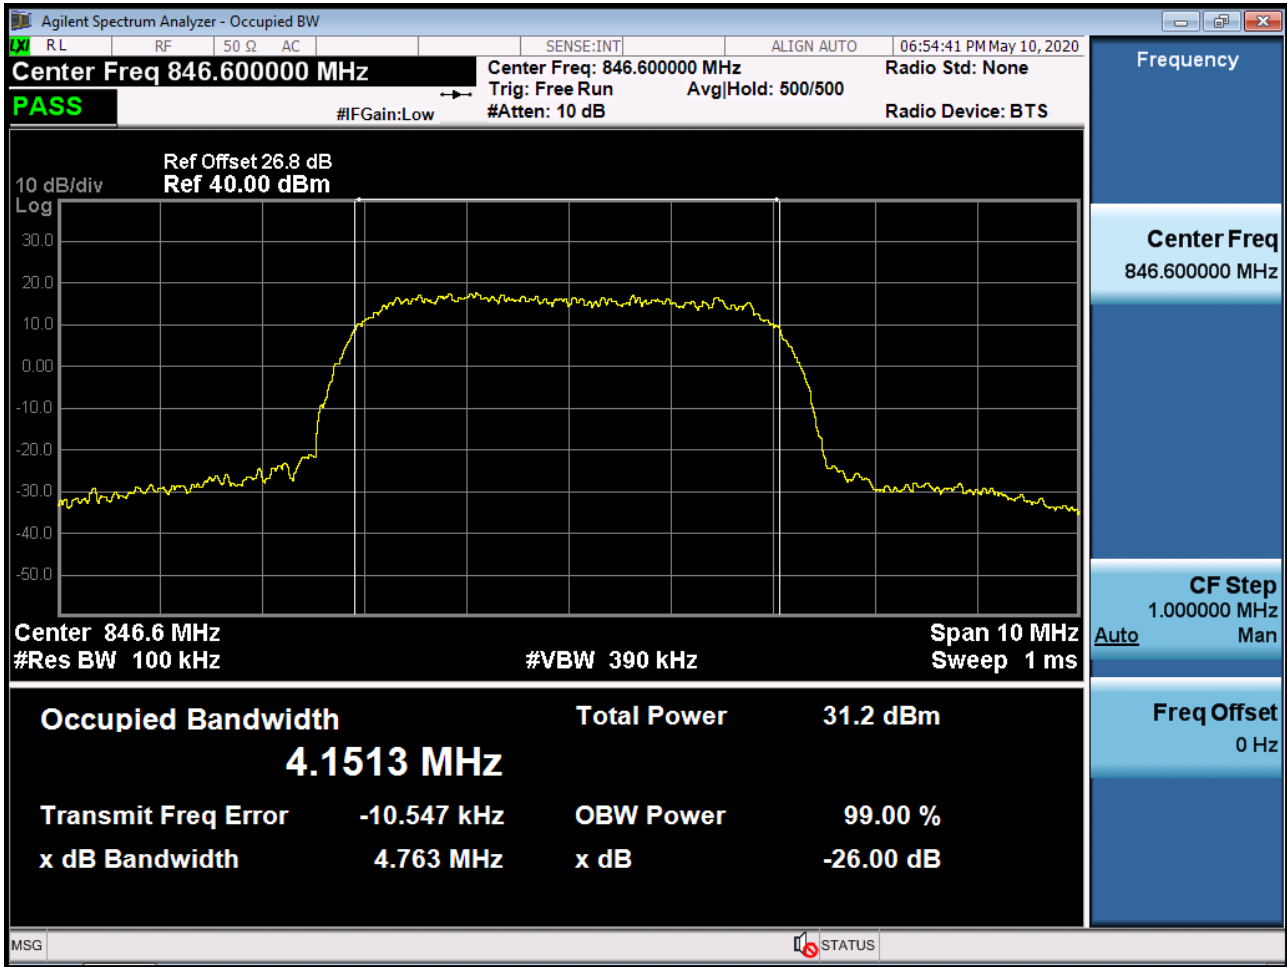


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

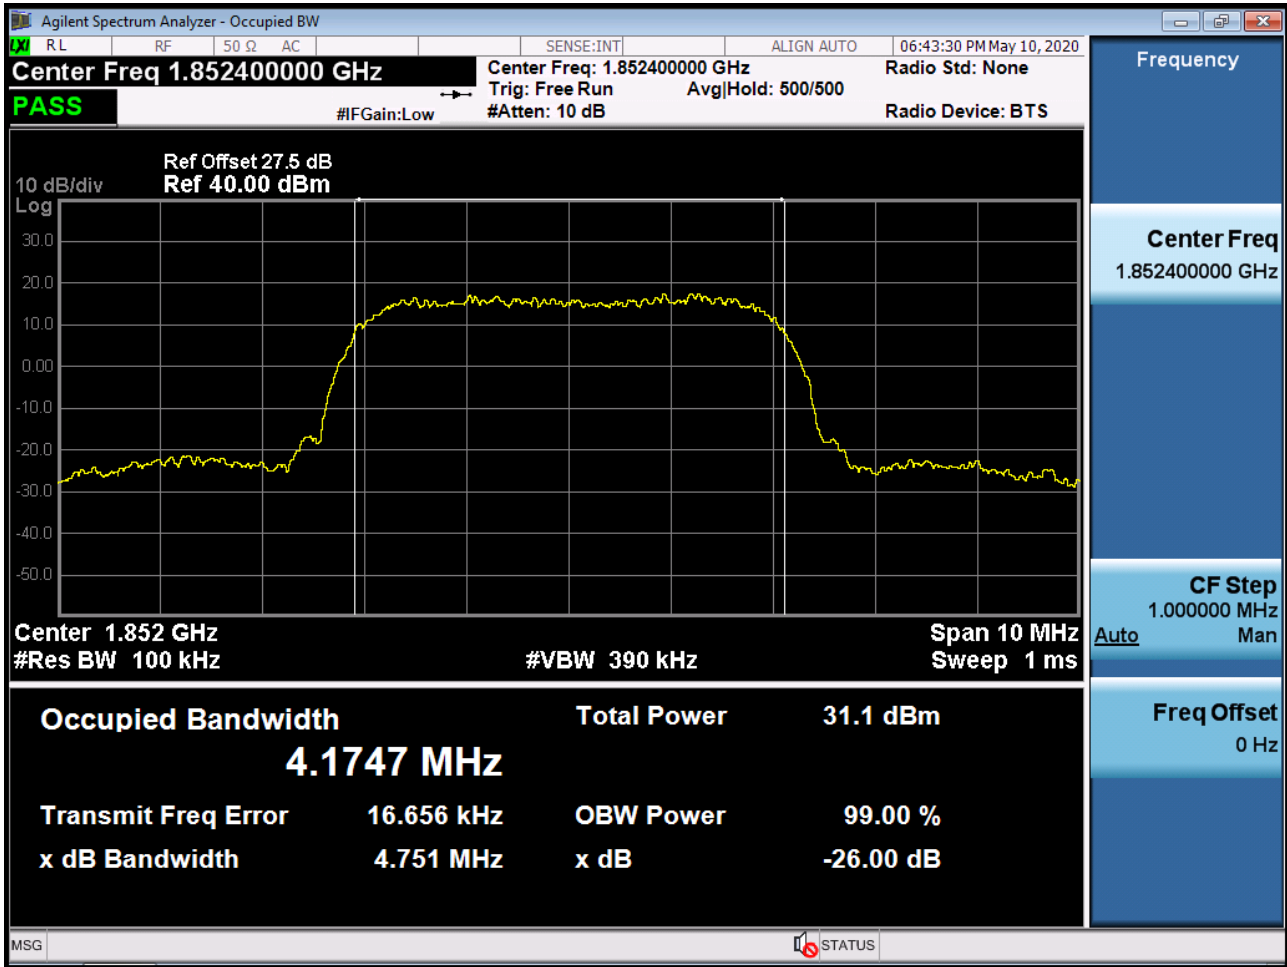


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

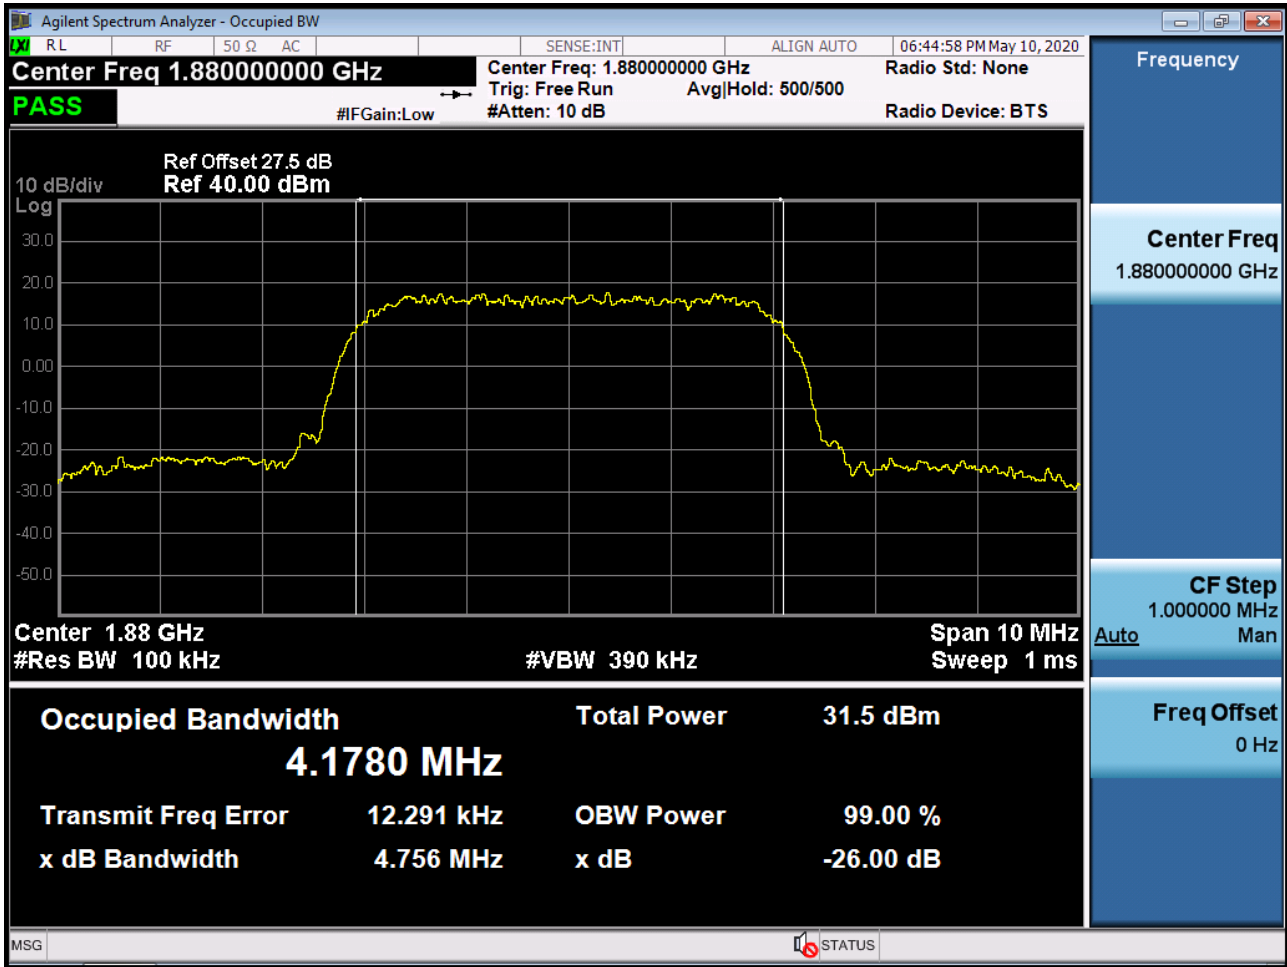


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

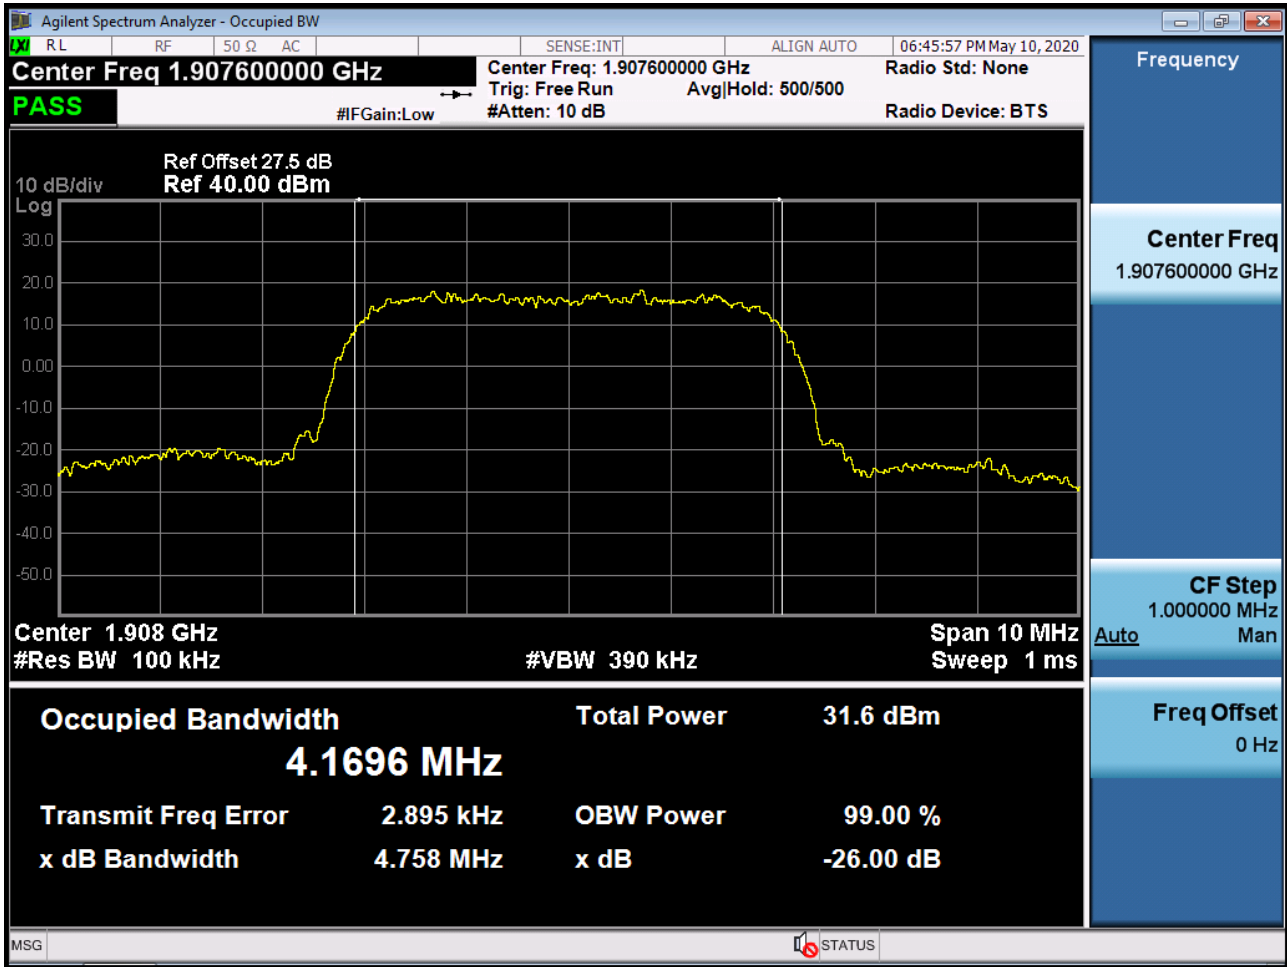


■ WCDMA1700 MODE (1712.4 CH.) Occupied Bandwidth

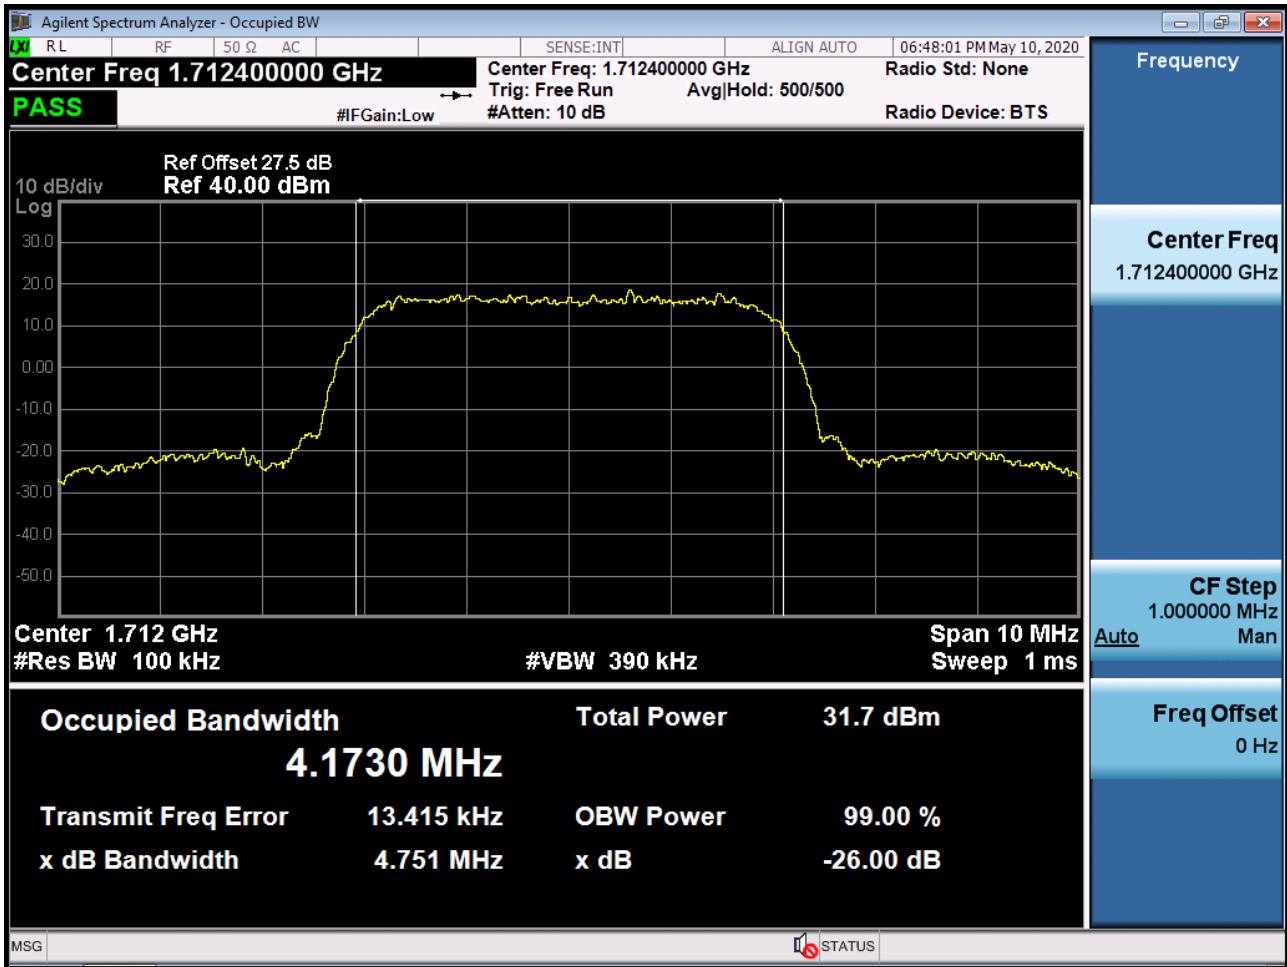


■ WCDMA1700 MODE (1732.4 CH.) Occupied Bandwidth

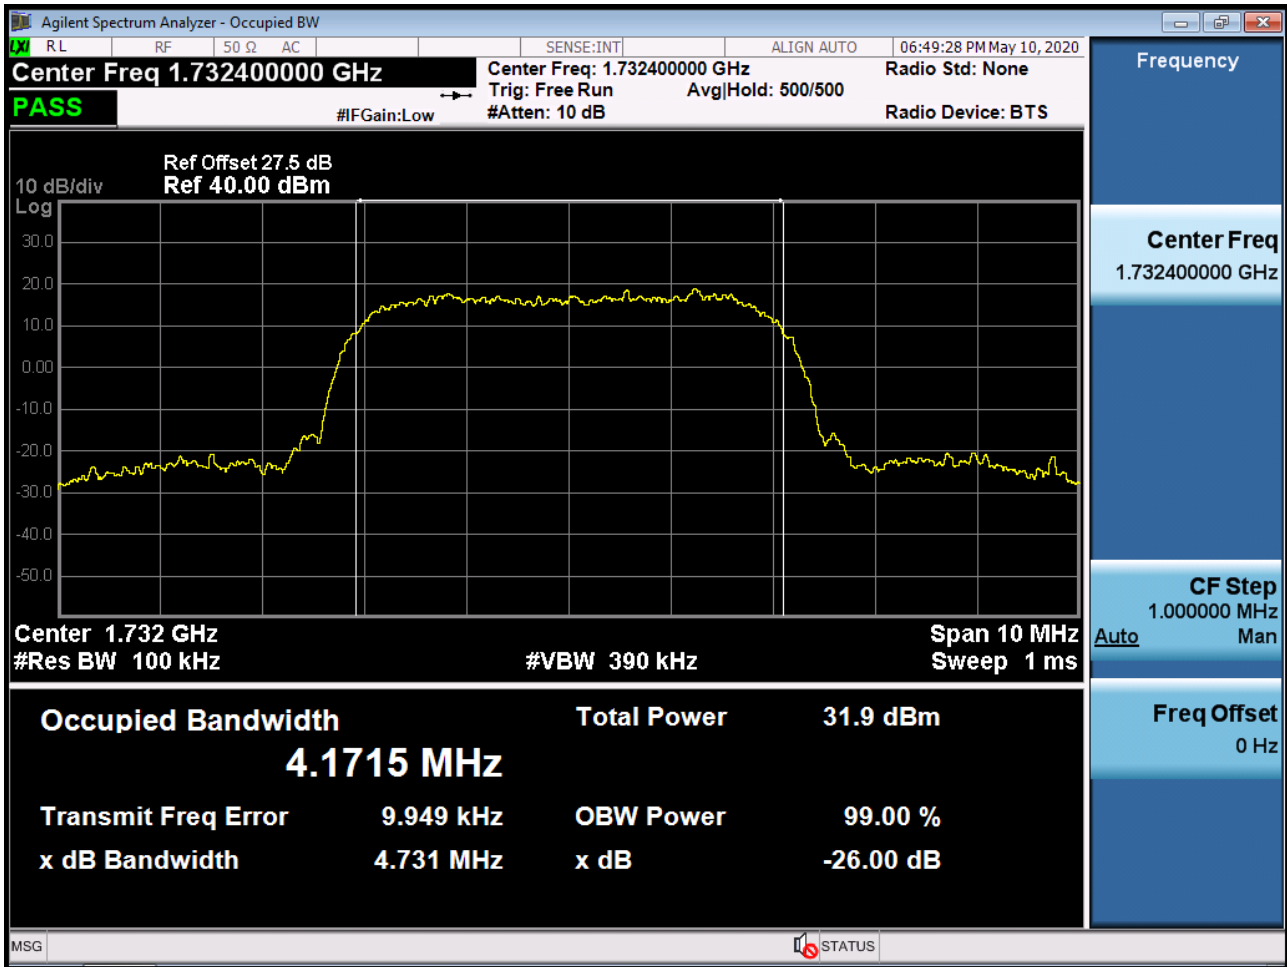


■ WCDMA1700 MODE (1752.6 CH.) Occupied Bandwidth

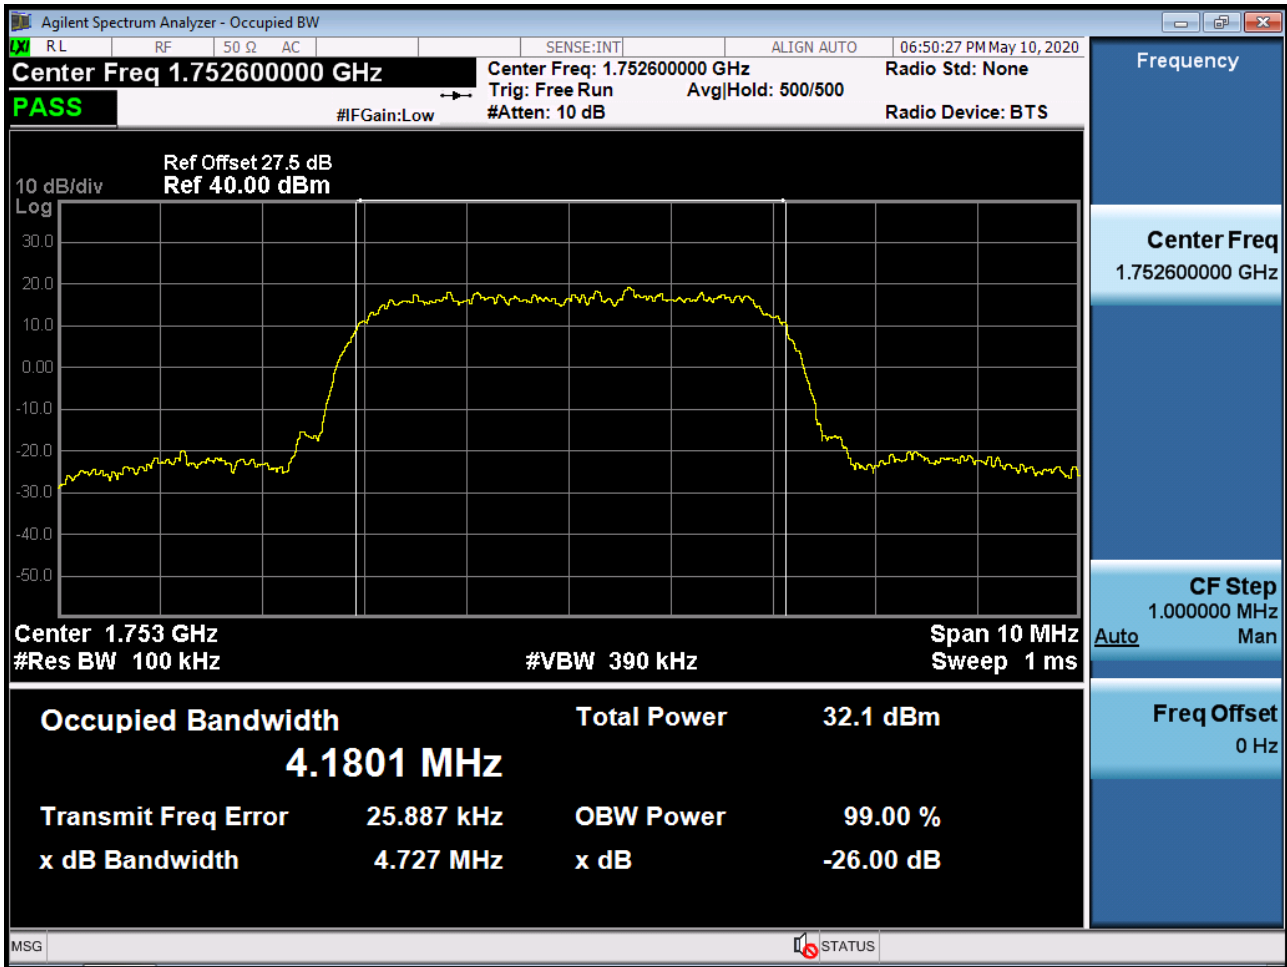


■ Secondary800_BC10 MODE (476 CH.) Occupied Bandwidth

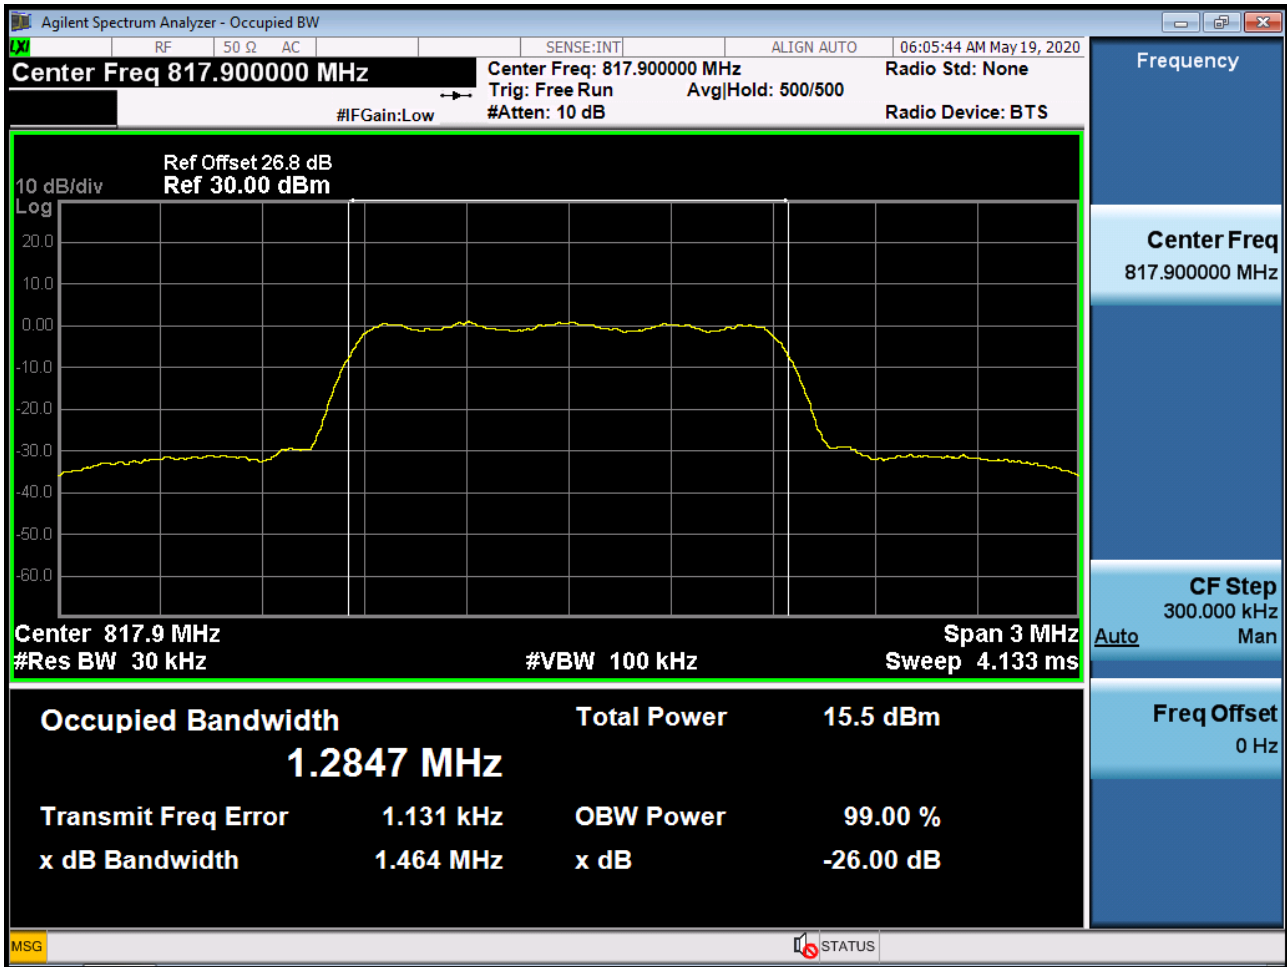


■ Secondary800_BC10_EVDO Rev.0 MODE (476 CH.) Occupied Bandwidth

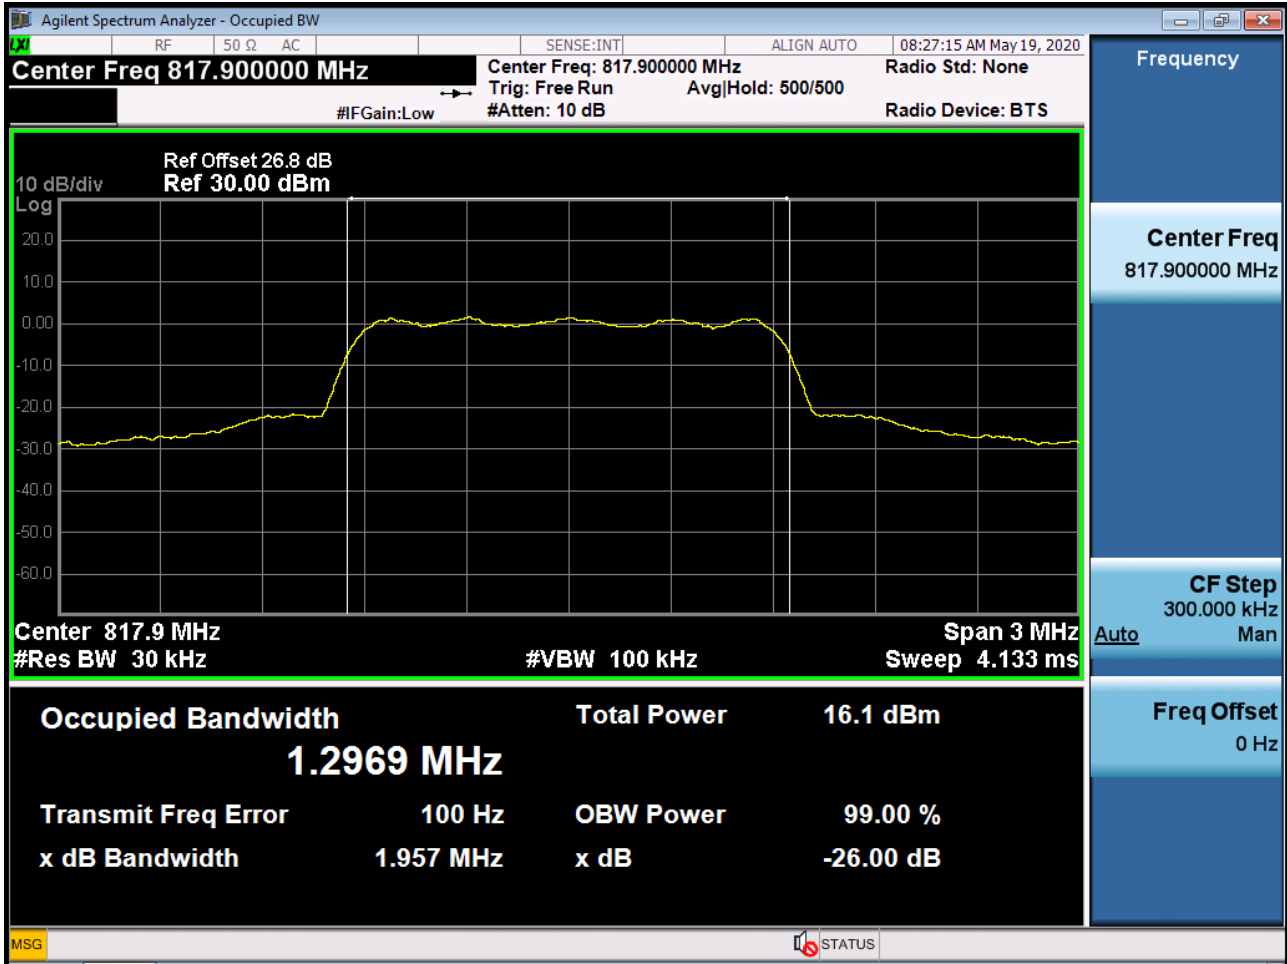


■ Secondary800_BC10_EVDO Rev.A MODE (476 CH.) Occupied Bandwidth

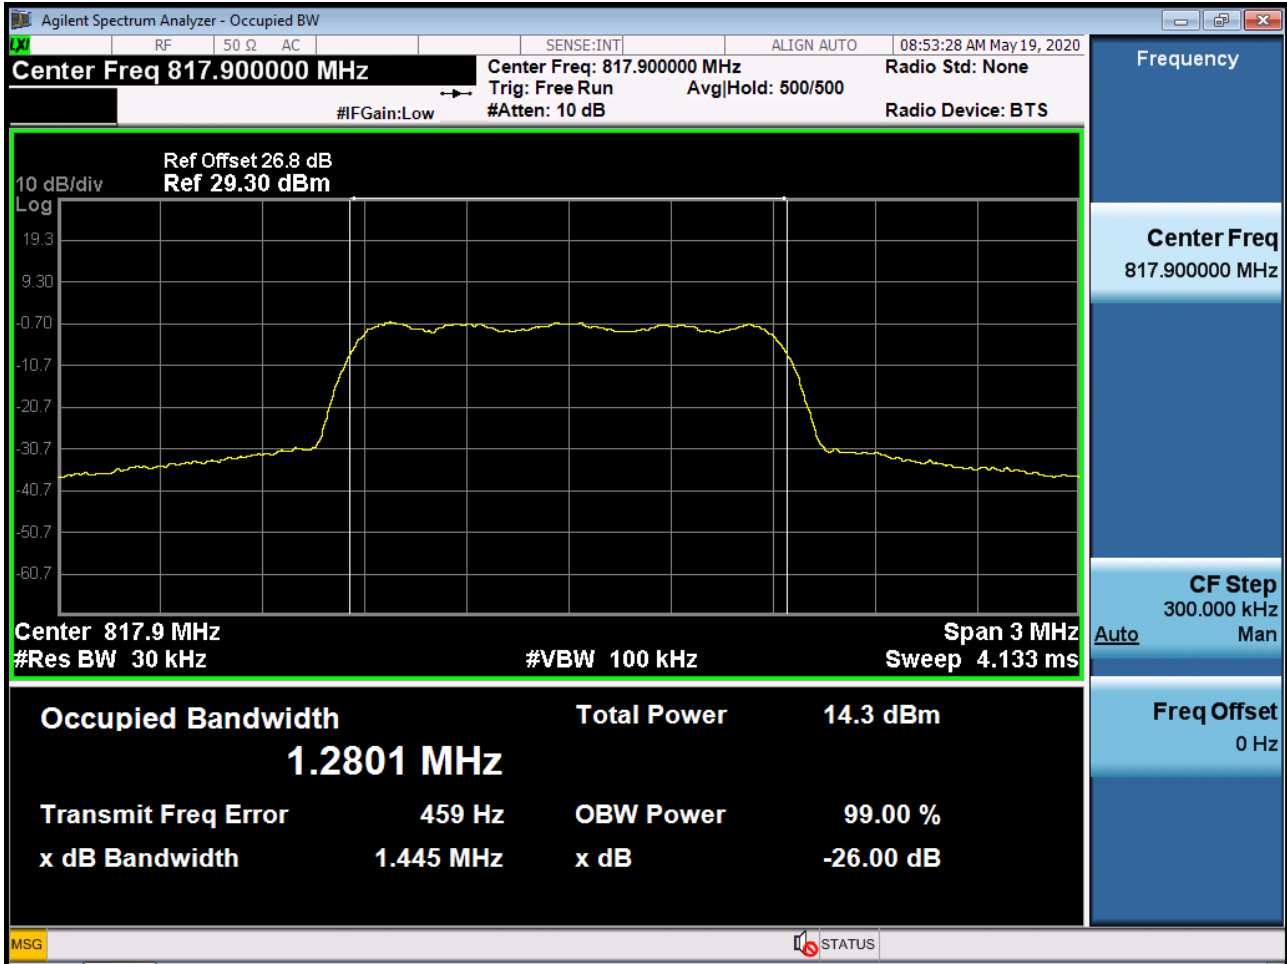


■ CDMA850_BC0 MODE (777 CH.) Occupied Bandwidth

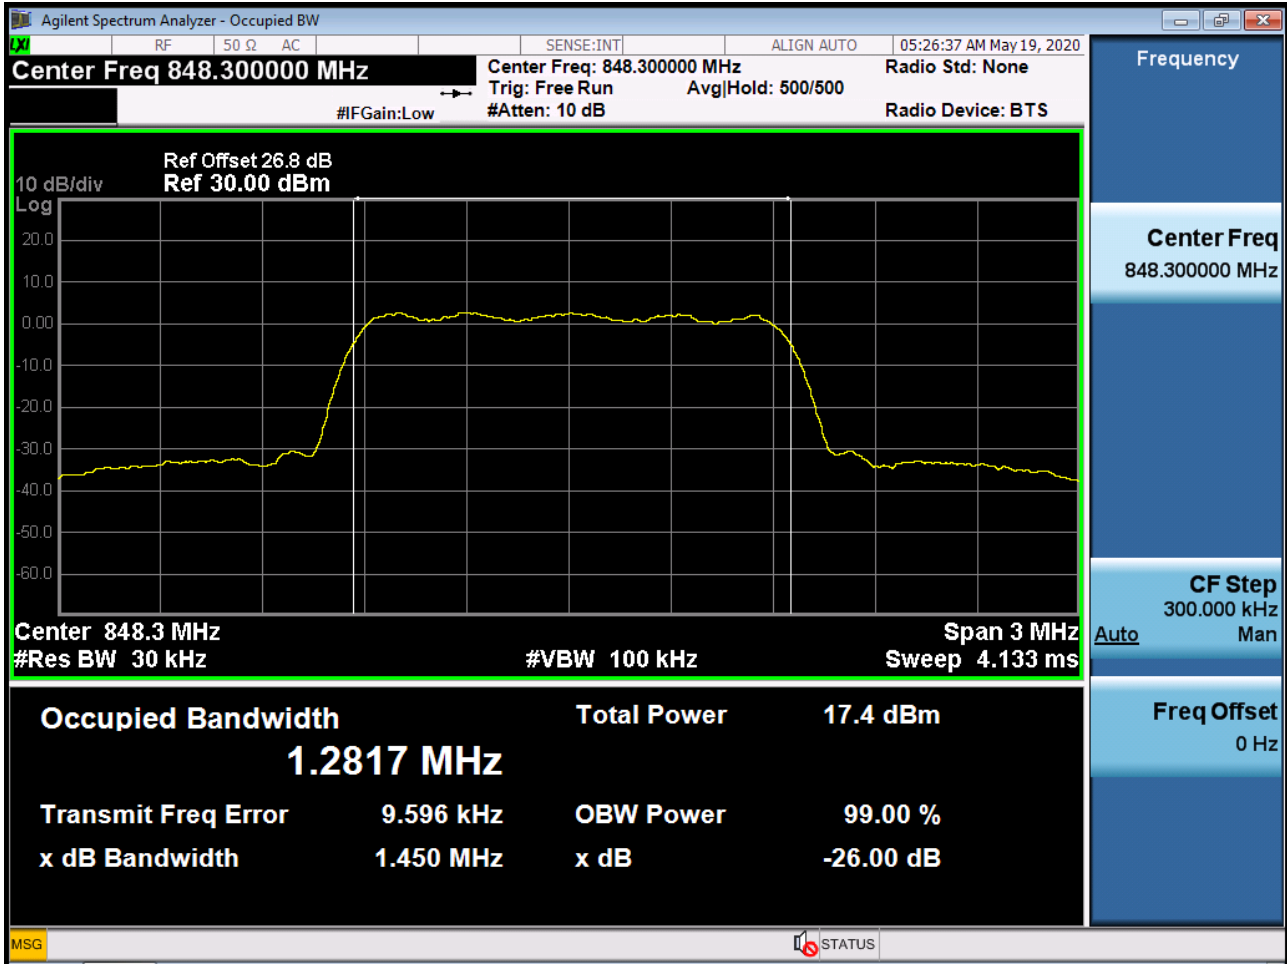


■ CDMA850_BC0_EVDO Rev.0 MODE (777 CH.) Occupied Bandwidth

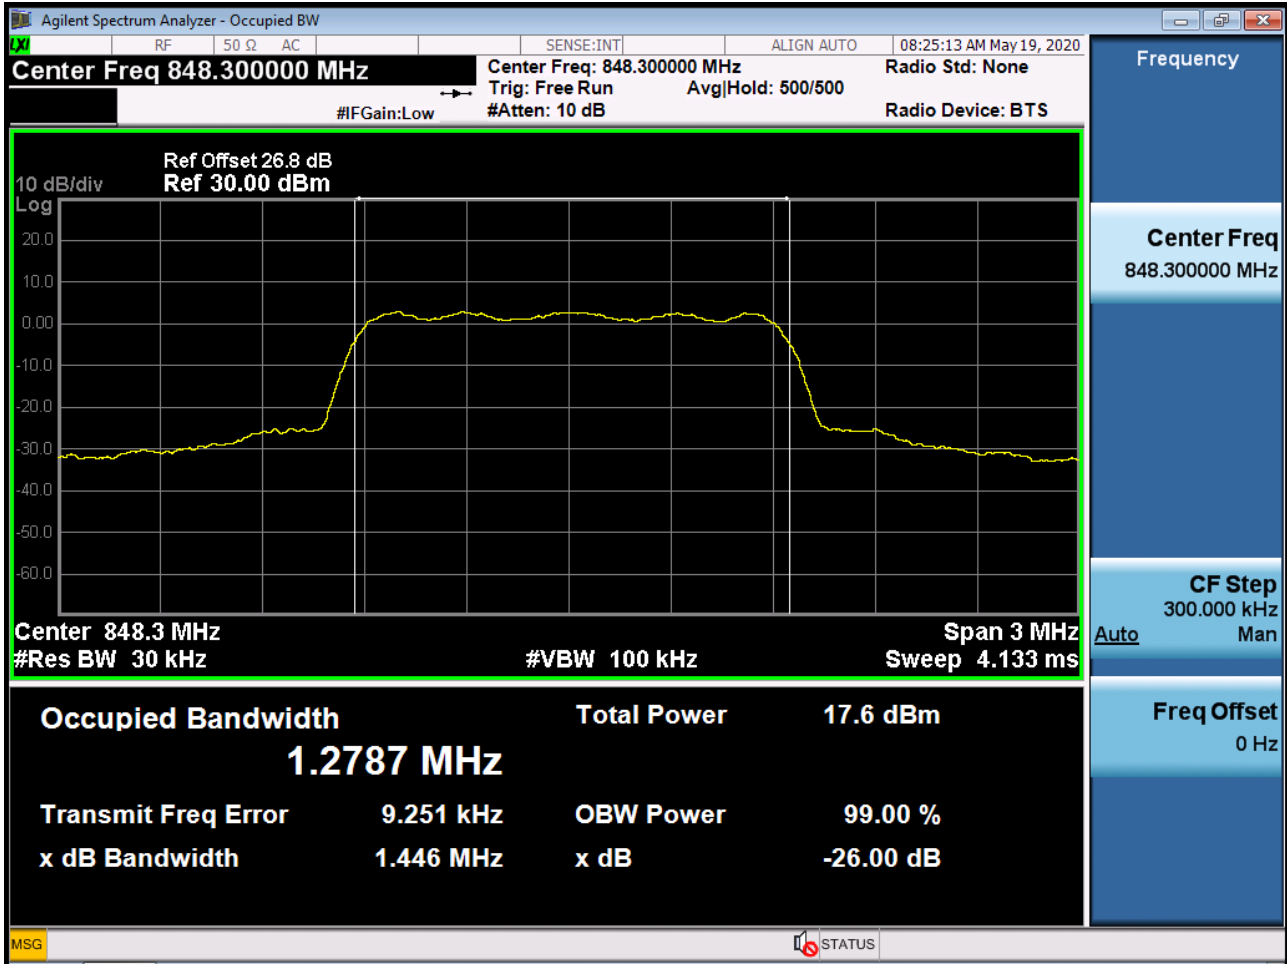


■ CDMA850_BC0_EVDO Rev.A MODE (777 CH.) Occupied Bandwidth

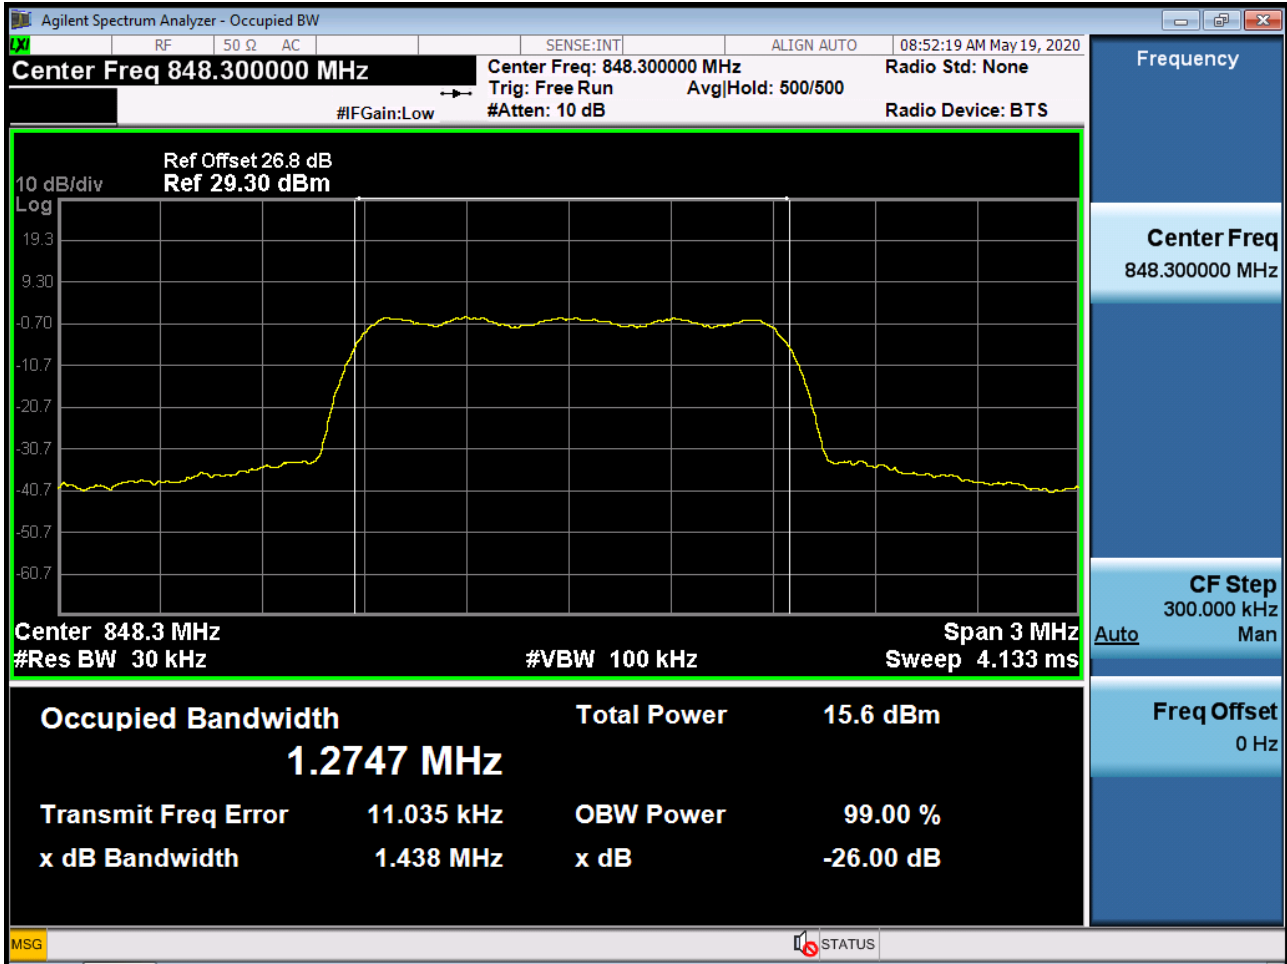


■ PCS CDMA MODE (25 CH.) Occupied Bandwidth

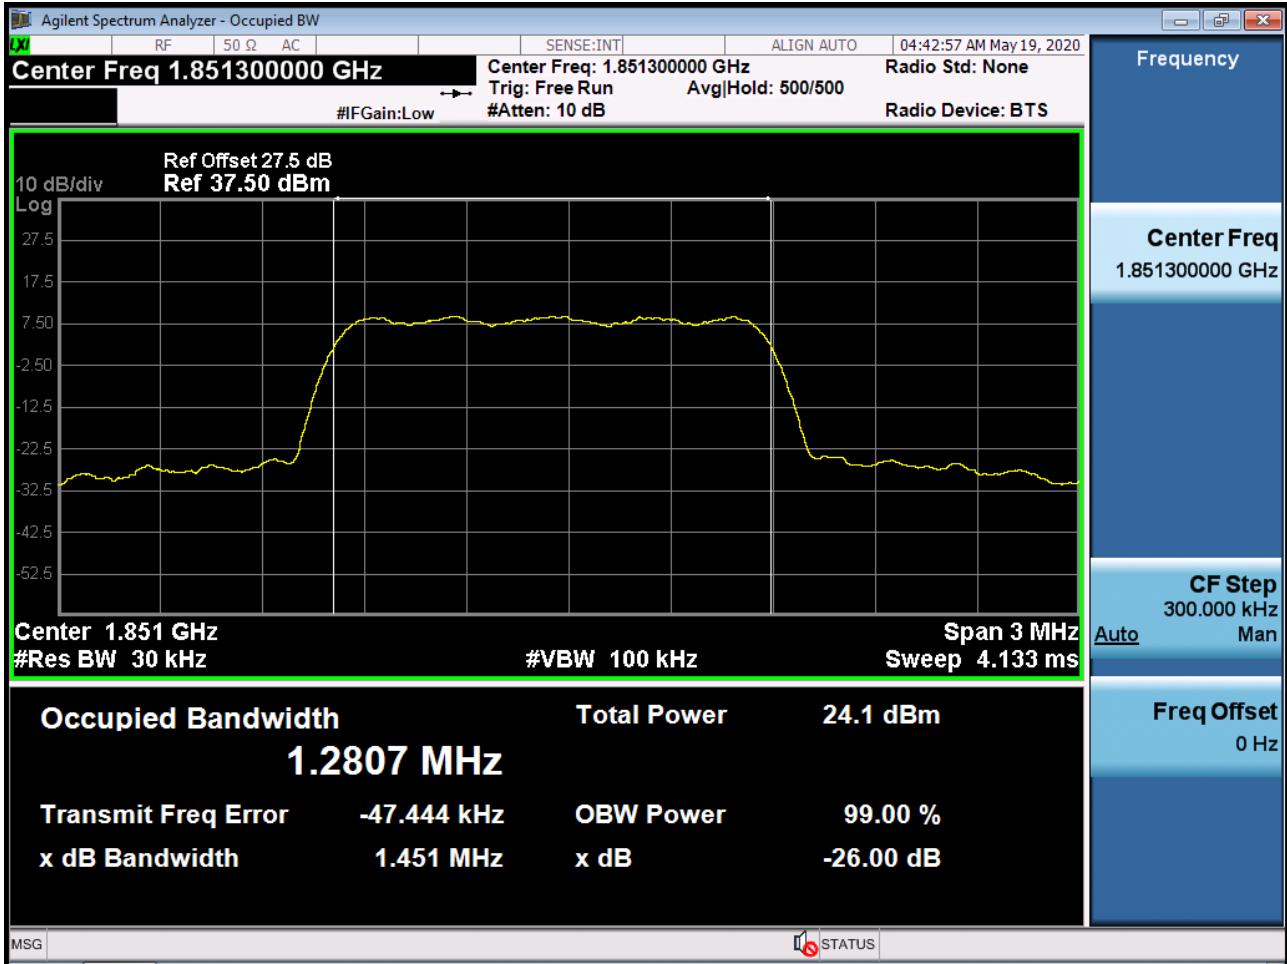

■ PCS CDMA_EVDO Rev.0 MODE (25 CH.) Occupied Bandwidth

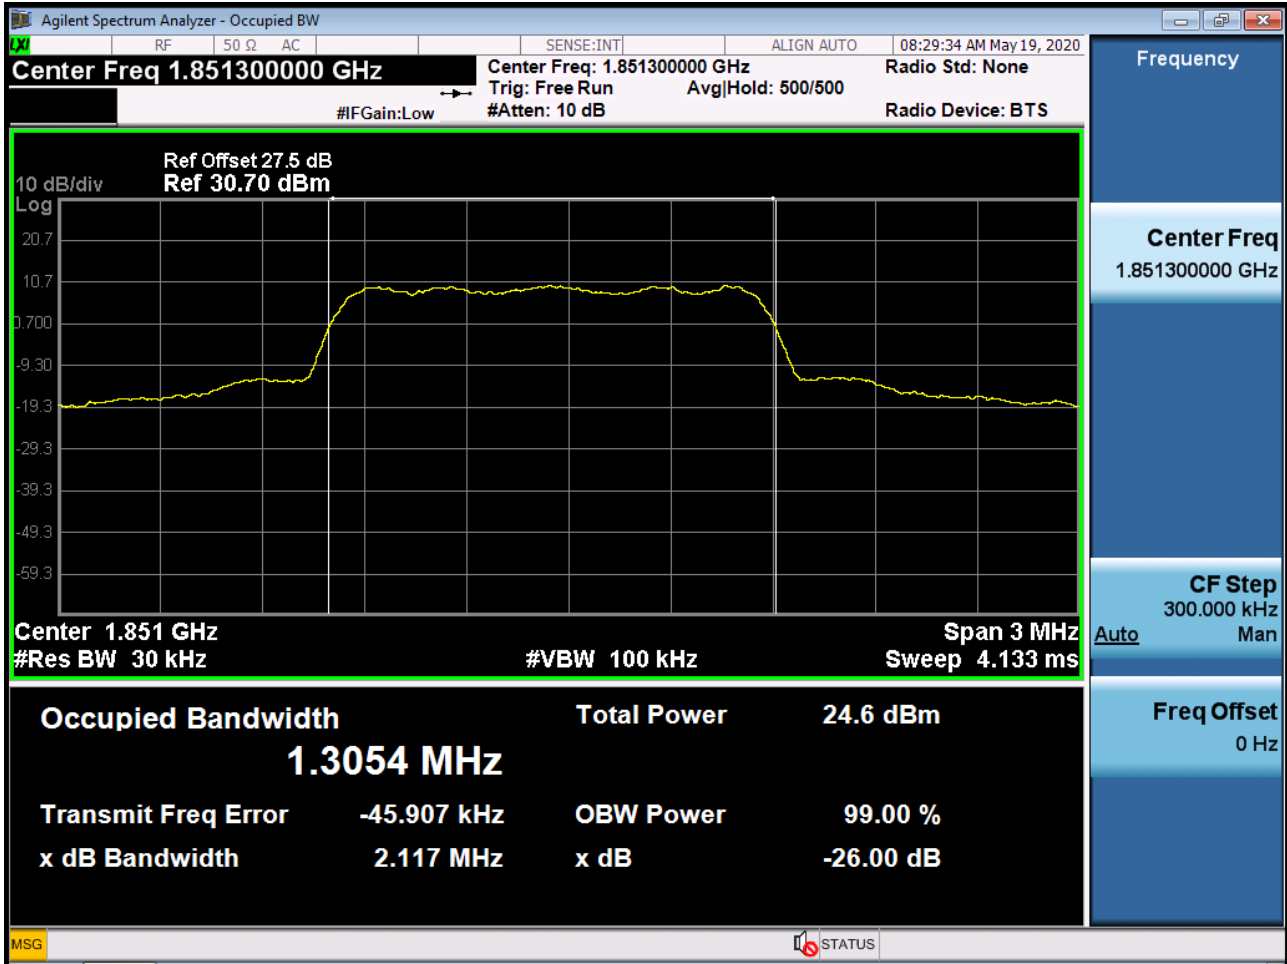


■ PCS CDMA_EVDO Rev.A MODE (25 CH.) Occupied Bandwidth

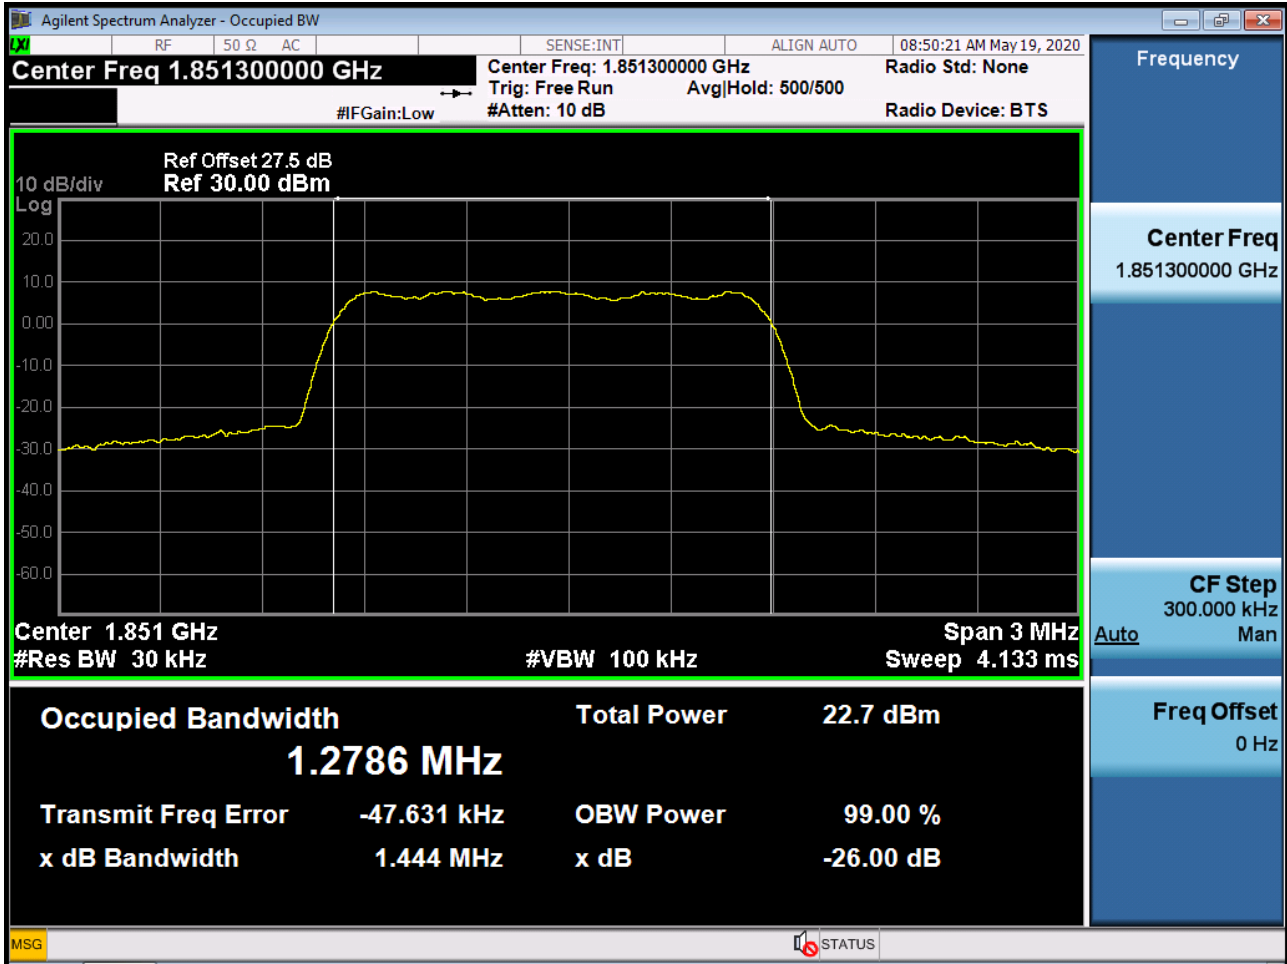


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{PK}




■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

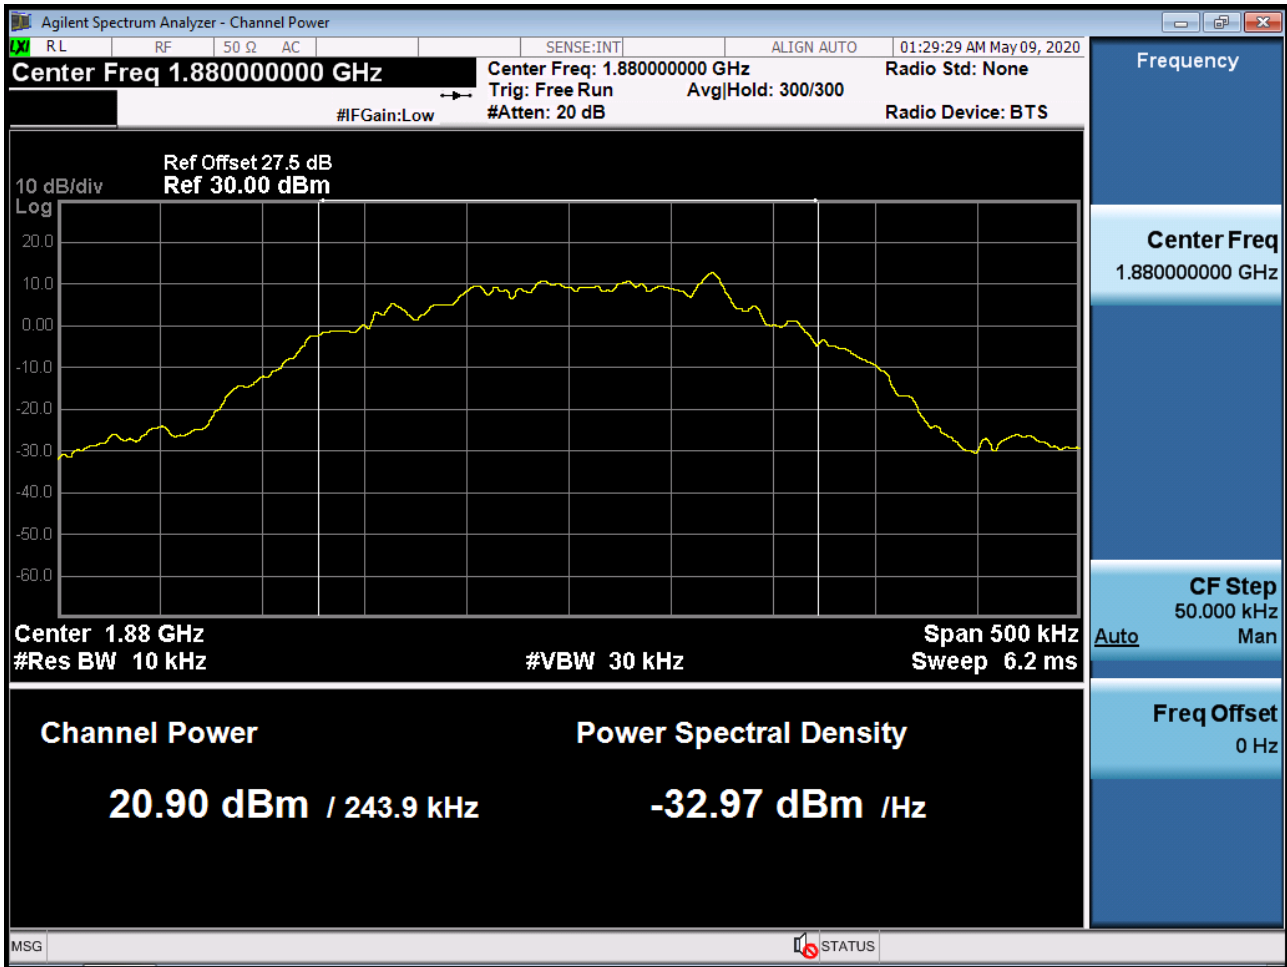


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

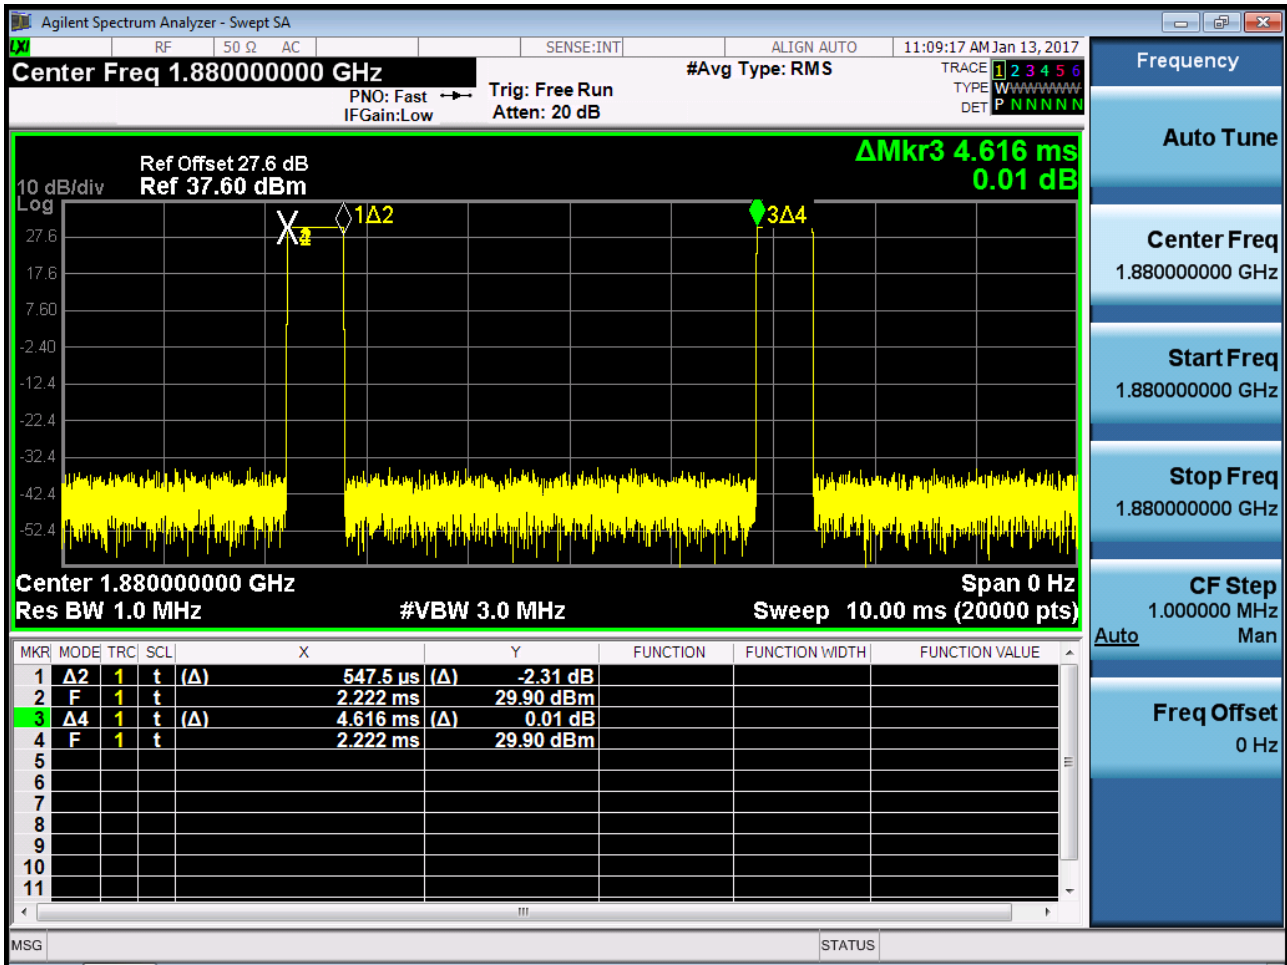


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

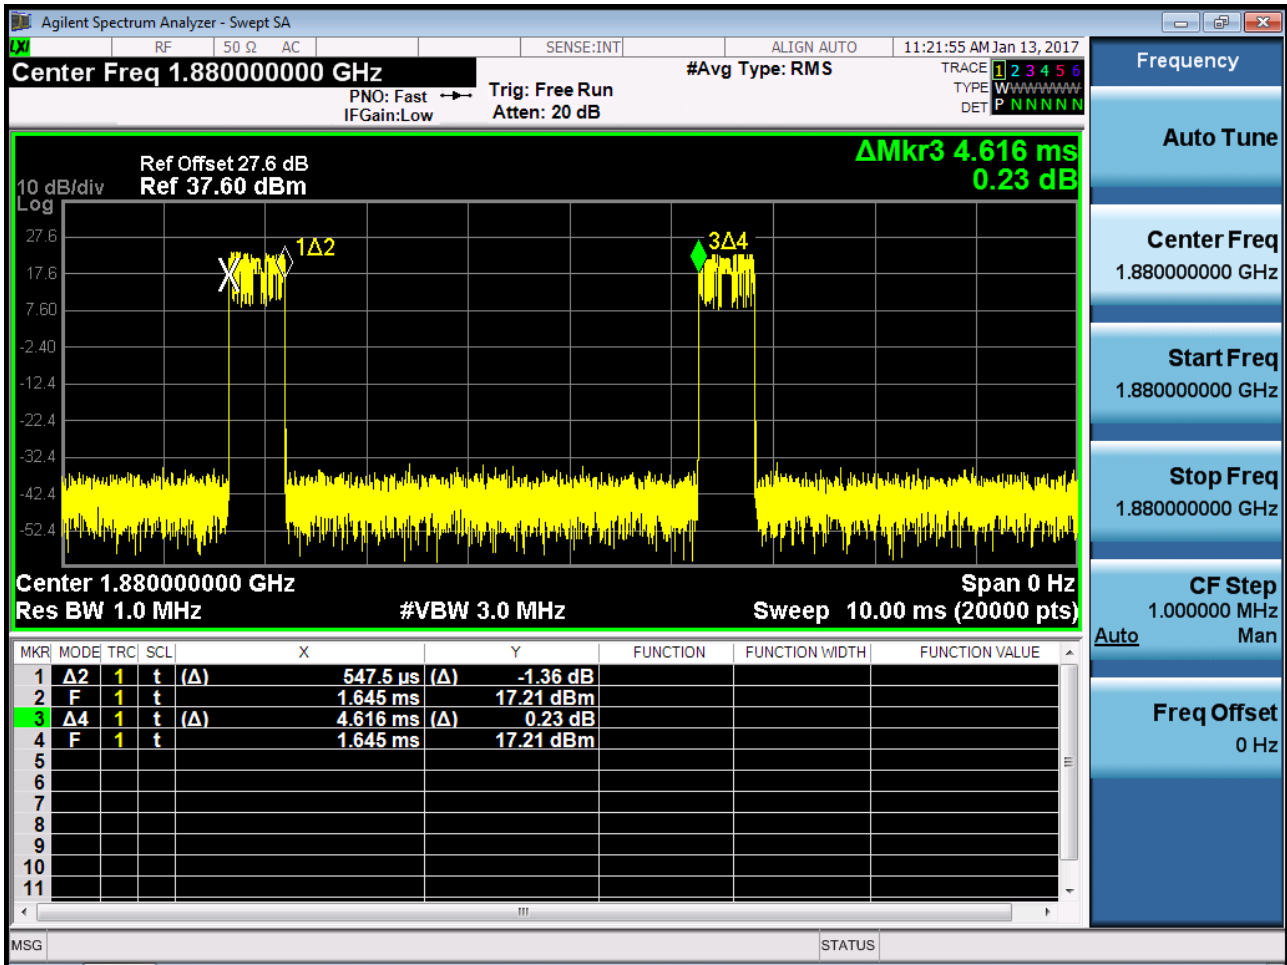


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{PK}

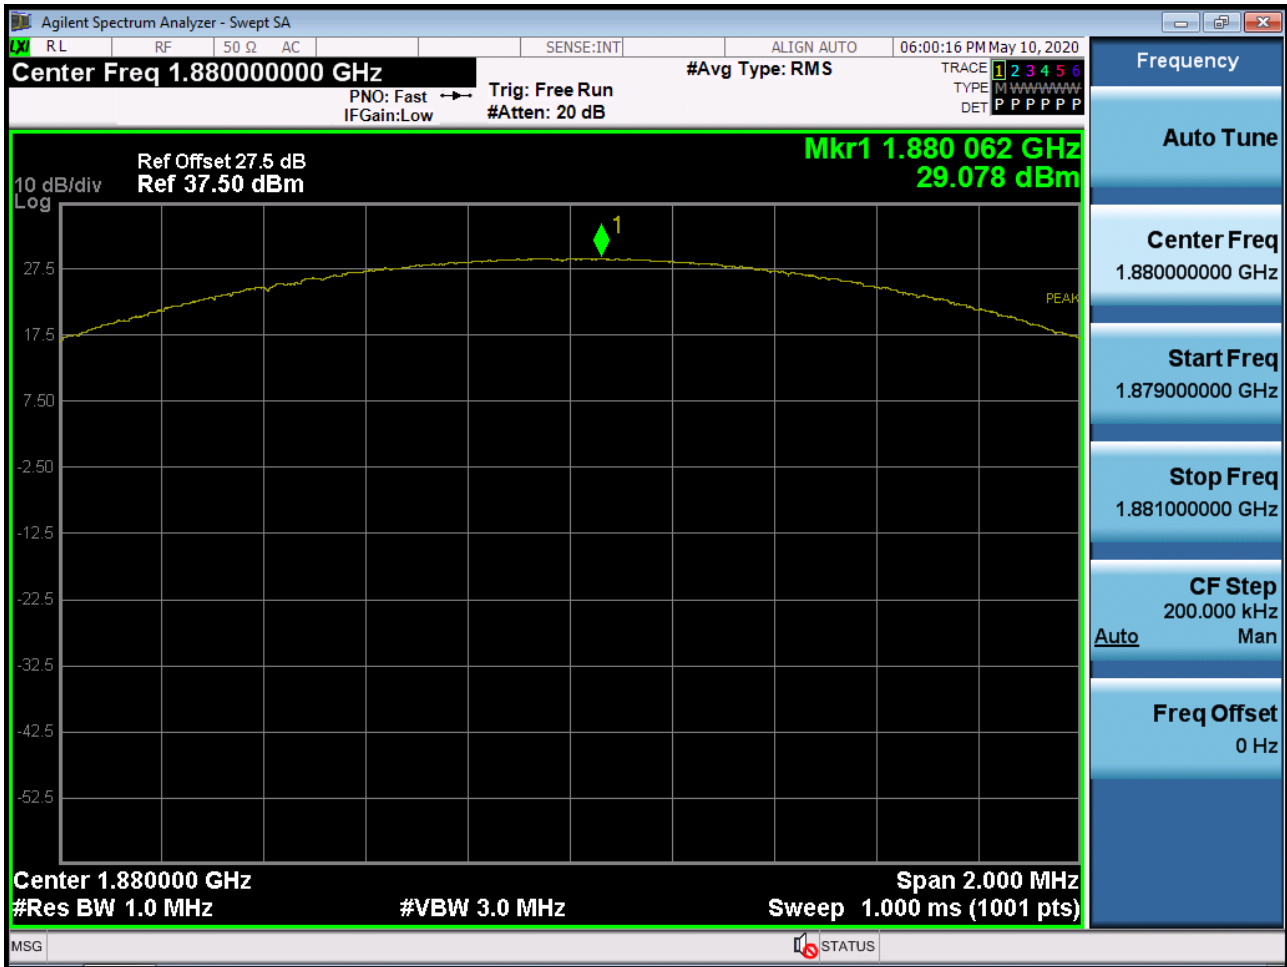

■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{AVG}

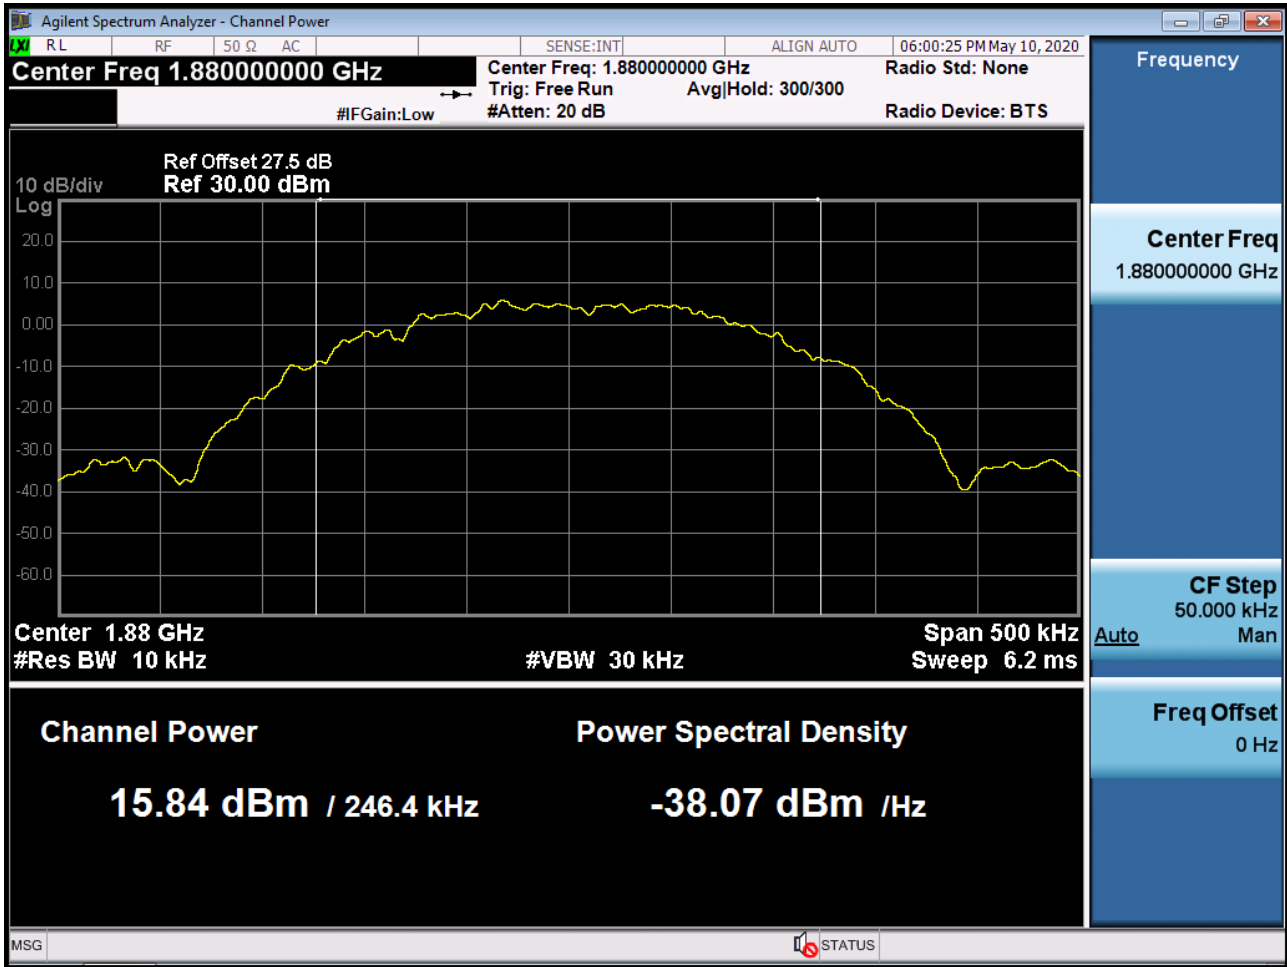

■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

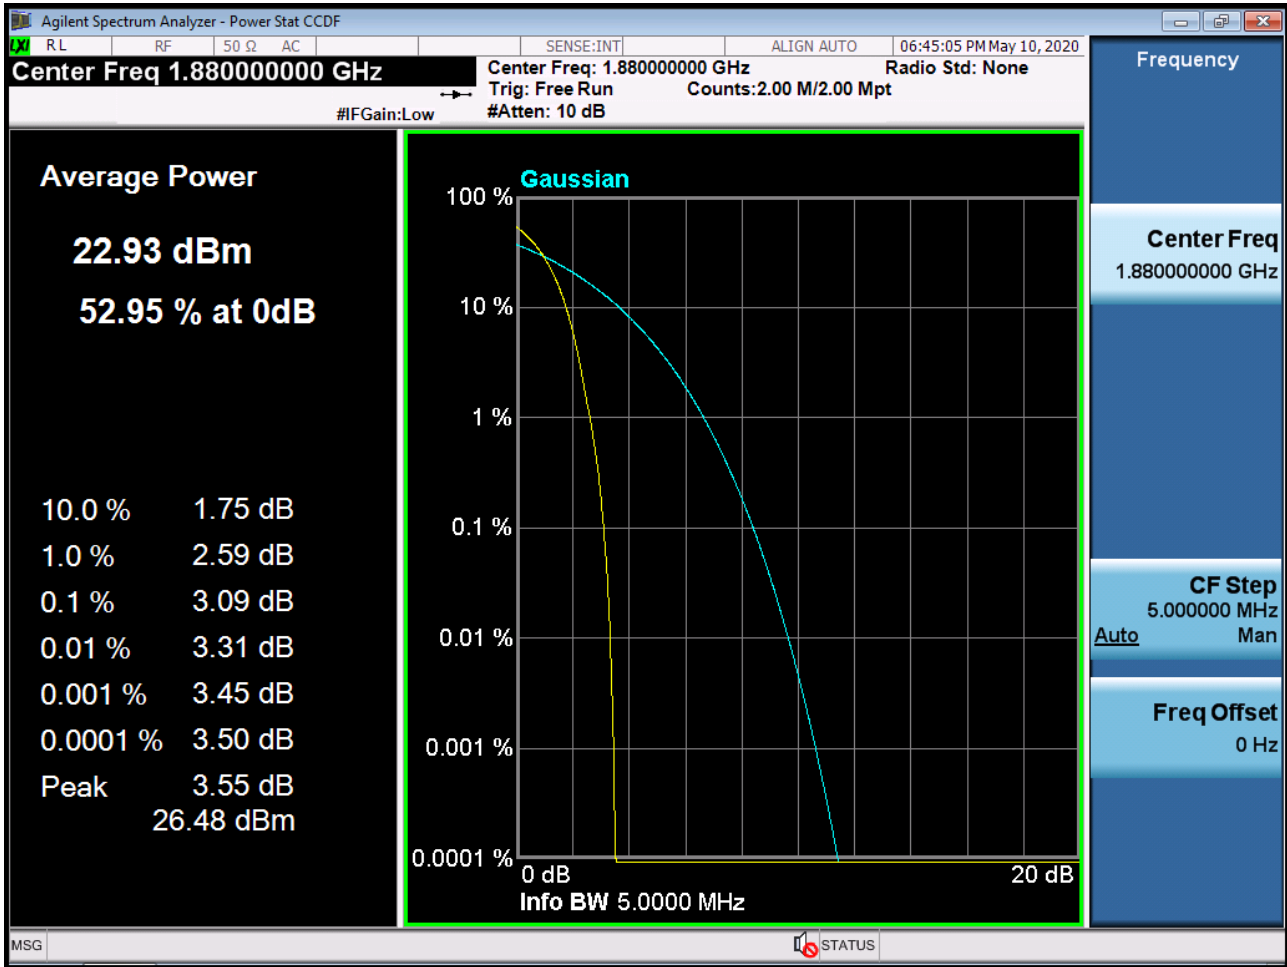

■ WCDMA1700 MODE (1412 CH.) Peak-to-Average Ratio

