

# FCC LTE REPORT

## Certification

<b>Applicant Name:</b> SAMSUNG Electronics Co., Ltd.	<b>Date of Issue:</b> June 26, 2020
<b>Address:</b> 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	<b>Location:</b> HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	<b>Report No.:</b> HCT-RF-2006-FC059

**FCC ID:** A3LSMA516U

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

Model(s): SM-A516U  
 Additional Model(s): SM-A516U1  
 EUT Type: Mobile Phone  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 40 (5)	2307.5 – 2312.5	4M53G7D	QPSK	0.007	8.63
		4M50W7D	16QAM	0.007	8.61
		4M49W7D	64QAM	0.007	8.46
	2352.5 – 2357.5	4M54G7D	QPSK	0.007	8.63
		4M51W7D	16QAM	0.007	8.31
		4M49W7D	64QAM	0.007	8.22
LTE – Band 40 (10)	2310.0	9M00G7D	QPSK	0.007	8.54
		8M98W7D	16QAM	0.007	8.50
		9M01W7D	64QAM	0.007	8.36
	2355.0	9M00G7D	QPSK	0.007	8.36
		9M00W7D	16QAM	0.007	8.28
		8M98W7D	64QAM	0.007	8.20

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.  
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report No.: HCT-RF-2006-FC059

---

REVIEWED BY



---

Report prepared by : Jae Mun Do  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

This test results were applied only to the test methods required by the standard.

**This laboratory is not accredited for the test results marked \*.**

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2006-FC059	June 26, 2020	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Table of Contents

REVIEWED BY .....	2
1. GENERAL INFORMATION .....	5
2. INTRODUCTION.....	6
2.1. DESCRIPTION OF EUT .....	6
2.2. MEASURING INSTRUMENT CALIBRATION .....	6
2.3. TEST FACILITY .....	6
3. DESCRIPTION OF TESTS .....	7
3.1 TEST PROCEDURE.....	7
3.2 RADIATED POWER .....	8
3.3 RADIATED SPURIOUS EMISSIONS .....	9
3.4 PEAK- TO- AVERAGE RATIO .....	10
3.5 OCCUPIED BANDWIDTH.....	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	13
3.7 BAND EDGE .....	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	16
3.9 WORST CASE(RADIATED TEST).....	17
3.10 WORST CASE(CONDUCTED TEST) .....	18
4. LIST OF TEST EQUIPMENT .....	19
5. MEASUREMENT UNCERTAINTY .....	21
6. SUMMARY OF TEST RESULTS .....	22
7. SAMPLE CALCULATION .....	23
8. TEST DATA .....	25
8.1 EQUIVALENT ISOTROPIC RADIATED POWER .....	25
8.2 RADIATED SPURIOUS EMISSIONS .....	27
8.3 PEAK-TO-AVERAGE RATIO .....	31
8.4 OCCUPIED BANDWIDTH.....	32
8.5 CONDUCTED SPURIOUS EMISSIONS .....	33
8.6 BAND EDGE .....	34
8.6.1 Lower Side.....	34
8.6.2 Upper Side.....	38
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	42
8.7.1 Lower Side.....	42
8.7.2 Upper Side.....	46
9. TEST PLOTS .....	50
10. ANNEX A_ TEST SETUP PHOTO .....	315

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMA516U
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§27, §2
<b>EUT Type:</b>	Note PC
<b>Model(s):</b>	SM-A516U
<b>Additional Model(s):</b>	SM-A516U1
<b>Tx Frequency(Lower Side):</b>	2307.5 MHz – 2312.5 MHz (LTE – Band40 (5 MHz)) 2310.0 MHz (LTE – Band40 (10 MHz))
<b>Tx Frequency(Upper Side):</b>	2352.5 MHz – 2357.5 MHz (LTE – Band40 (5 MHz)) 2355.0 MHz (LTE – Band40 (10 MHz))
<b>Date(s) of Tests:</b>	May 06, 2020 ~ June 25, 2020

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS, CDMA(BC0, 1, 10) and LTE, Sub6(n2/5/41/66/71).

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), Bluetooth, BT LE, NFC, ANT+.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

### 3.2 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $>$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT.

The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

### 3.4 PEAK- TO- AVERAGE RATIO

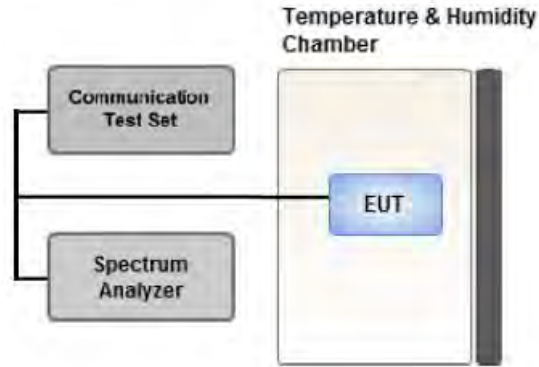

**Test setup**

① CCDF Procedure for PAPR

**Test Settings**

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

**Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

**Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6$  dB if the duty cycle is a constant 25%.

### 3.5 OCCUPIED BANDWIDTH.

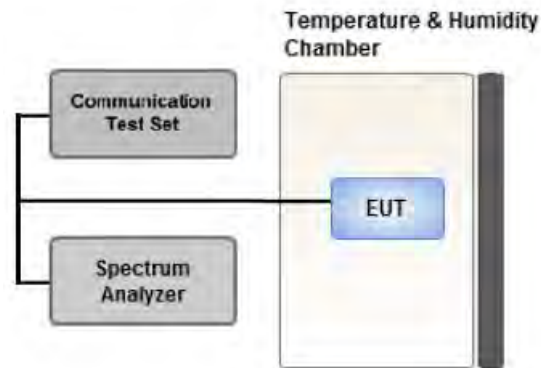

**Test setup**

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### **Test Settings**

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

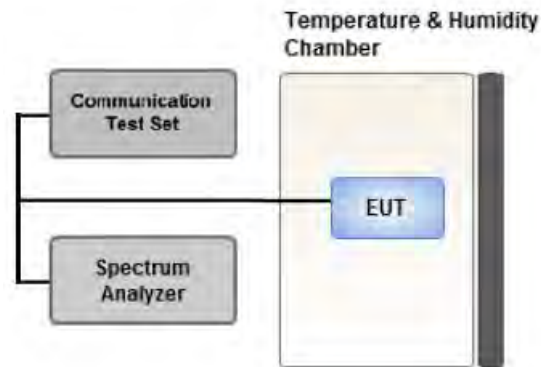

**Test setup**


#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 \* Span / RBW

### 3.7 BAND EDGE

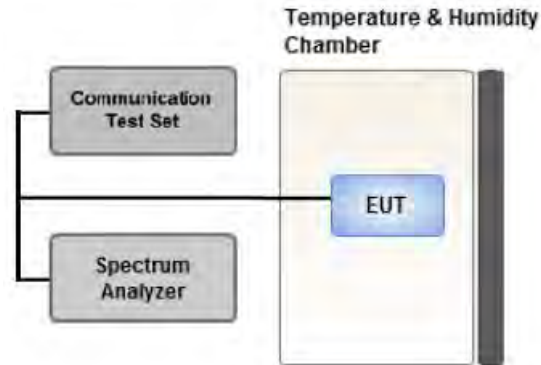

**Test setup**

#### **Test Overview**

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

**Test Limit**

§27.53(a)

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:


- (i) By a factor of not less than:  $43 + 10 \log (P)$  dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log (P)$  dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than  $61 + 10 \log (P)$  dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than  $67 + 10 \log (P)$  dB on all frequencies between 2328 and 2337 MHz;
- (ii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2300 and 2305 MHz,  $55 + 10 \log (P)$  dB on all frequencies between 2296 and 2300 MHz,  $61 + 10 \log (P)$  dB on all frequencies between 2292 and 2296 MHz,  $67 + 10 \log (P)$  dB on all frequencies between 2288 and 2292 MHz, and  $70 + 10 \log (P)$  dB below 2288 MHz;
- (iii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2360 and 2365 MHz, and not less than  $70 + 10 \log (P)$  dB above 2365 MHz

**Test Notes**

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

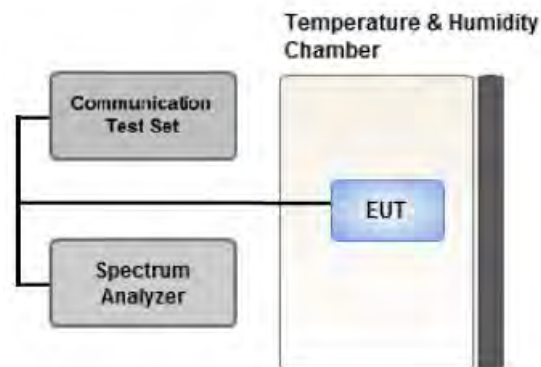

Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.



**3.9 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
  - All modes of operation were investigated and the worst case configuration results are reported.
  - The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
  - Please refer to the table below.
  - All modes of operation were investigated and the worst case configuration results are reported.
  - SM-A516U & additional models were tested and the worst case results are reported.
- (Worst case : SM-A516U)

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

**3.10 WORST CASE(CONDUCTED TEST)**

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

Conducted Output Power value can be confirmed on the SAR report.

-SM-A516U & additional models were tested and the worst case results are reported.

(Worst case : SM-A516U)

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
<b>Occupied Bandwidth</b>	QPSK, 16QAM, 64QAM	5, 10	Mid	Full RB	0
<b>Peak-To-Average Ratio</b>	QPSK, 16QAM, 64QAM	5, 10	Mid	Full RB	0
<b>Band Edge</b>	QPSK	5	Low, Mid, High	1	0, 24
		10	Mid	1	0, 49
		5	Low, Mid, High	Full RB	0
		10	Mid	Full RB	0
<b>Spurious and Harmonic Emissions at Antenna Terminal</b>	QPSK	5	Low, Mid, High	1	0
		10	Mid	1	0

#### 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	03/09/2020	Annual	03/09/2021
WAINWRIGHT INSTRUMENT	WHNX6.0/26.5G-6SS/H.P.F	1	03/19/2020	Annual	03/19/2021
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/27/2020	Annual	04/27/2021
Agilent	E3632A/DC Power Supply	MY40004326	07/01/2019	Annual	07/01/2020
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000717	08/14/2019	Annual	08/14/2020
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	04/27/2020	Annual	04/27/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2019	Annual	10/14/2020
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/27/2019	Annual	08/27/2020
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/26/2019	Biennial	04/26/2021
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/09/2019	Annual	08/09/2020
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/22/2020	Annual	01/22/2021
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/15/2019	Annual	07/15/2020
KEYSIGHT	E7515B / 5G Wireless Tester	MY58300756	01/07/2020	Annual	01/07/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
Mini-Circuits	ZC4PD-K1844+ / 4-Way Divider	942907	09/05/2019	Annual	09/05/2020
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).
3. Model : 8493C(S/N: 17280)
  - Use date of Equipment : May 07, 2020 ~ June 03, 2020
4. Model : N9030B(S/N: MY55480167)
  - Use date of Equipment : June 07, 2020 ~ June 18, 2020

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(a)	Section 3.7	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(a)(3)	< 0.25 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(a)	< 70 + 10log10 (P[Watts])	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
27710	2310.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW  
GSM BW = 249 kHz  
G = Phase Modulation  
X = Cases not otherwise covered  
W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W  
GSM BW = 249 kHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W  
WCDMA BW = 4.17 MHz  
F = Frequency Modulation  
9 = Composite Digital Info  
W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D  
LTE BW = 4.48 MHz  
G = Phase Modulation  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D  
LTE BW = 4.48 MHz  
W = Amplitude/Angle Modulated  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D  
LTE BW = 4.48 MHz  
W = Amplitude/Angle Modulated  
7 = Quantized/Digital Info  
D = Data transmission; telemetry; telecommand



## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2307.5	LTE B40/ 5 MHz	QPSK	-36.91	1.09	9.68	2.22	H	< 0.20	0.007	8.55
		16-QAM	-36.96	1.04	9.68	2.22	H		0.007	8.50
		64-QAM	-37.02	0.98	9.68	2.22	H		0.007	8.44
2310.0		QPSK	-36.90	1.10	9.68	2.22	H		0.007	8.56
		16-QAM	-37.05	0.95	9.68	2.22	H		0.007	8.41
		64-QAM	-37.18	0.82	9.68	2.22	H		0.007	8.28
2312.5		QPSK	-36.83	1.17	9.68	2.22	H		0.007	8.63
		16-QAM	-36.85	1.15	9.68	2.22	H		0.007	8.61
		64-QAM	-37.00	1.00	9.68	2.22	H		0.007	8.46

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2310.0	LTE B40/ 10 MHz	QPSK	-36.92	1.08	9.68	2.22	H	< 0.20	0.007	8.54
		16-QAM	-36.96	1.04	9.68	2.22	H		0.007	8.50
		64-QAM	-37.10	0.90	9.68	2.22	H		0.007	8.36

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2352.5	LTE B40/ 5 MHz	QPSK	-36.77	0.70	9.90	2.22	H	< 0.20	0.007	8.38
		16-QAM	-36.81	0.66	9.90	2.22	H		0.007	8.34
		64-QAM	-36.93	0.54	9.90	2.22	H		0.007	8.22
2355.0		QPSK	-36.81	0.59	9.94	2.23	H		0.007	8.30
		16-QAM	-36.90	0.50	9.94	2.23	H		0.007	8.21
		64-QAM	-37.00	0.40	9.94	2.23	H		0.006	8.11
2357.5		QPSK	-36.43	0.89	9.98	2.24	H		0.007	8.63
		16-QAM	-36.75	0.57	9.98	2.24	H		0.007	8.31
		64-QAM	-37.89	-0.57	9.98	2.24	H		0.005	7.17

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2355.0	LTE B40/ 10 MHz	QPSK	-30.80	6.60	9.94	2.23	H	< 0.20	0.007	8.36
		16-QAM	-30.95	6.45	9.94	2.23	H		0.007	8.28
		64-QAM	-36.91	0.49	9.94	2.23	H		0.007	8.20

### 8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY : 2312.50 MHz
- ▣ MEASURED OUTPUT POWER: 8.63 dBm = 0.007 W
- ▣ MODE: LTE B40
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10} (W) =$  33.63 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
38725 (2307.5)	4,615.00	-55.34	12.60	-67.71	3.22	H	-58.33	66.96
	6,922.50	-55.95	12.05	-60.79	4.07	H	-52.81	61.44
	9,230.00	-57.29	10.70	-55.70	4.79	V	-49.79	58.41
38750 (2310.0)	4,620.00	-55.34	12.60	-67.68	3.22	H	-58.30	66.93
	6,930.00	-53.83	12.05	-59.39	4.08	H	-51.42	60.04
	9,240.00	-57.86	10.70	-55.88	4.78	H	-49.96	58.58
38775 (2312.5)	4,625.00	-54.54	12.60	-66.89	3.22	H	-57.51	66.13
	6,937.50	-54.49	12.03	-60.37	4.08	H	-52.42	61.04
	9,250.00	-57.56	10.70	-54.80	4.79	H	-48.89	57.51

- ▣ OPERATING FREQUENCY : 2310.00 MHz
- ▣ MEASURED OUTPUT POWER: 8.54 dBm = 0.007 W
- ▣ MODE: LTE B40
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10} (W) =$  33.54 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
38750 (2310.0)	4,620.00	-54.64	12.60	-66.98	3.22	H	-57.60	66.23
	6,930.00	-55.58	12.05	-61.14	4.08	V	-53.17	61.79
	9,240.00	-57.42	10.70	-55.44	4.78	V	-49.52	58.14

- ▣ OPERATING FREQUENCY : 2357.50 MHz
- ▣ MEASURED OUTPUT POWER: 8.63 dBm = 0.007 W
- ▣ MODE: LTE B40
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10} (W) =$  33.63 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39175 (2352.5)	4,705.00	-55.37	12.42	-67.61	3.27	H	-58.46	67.09
	7,057.50	-56.13	11.45	-60.21	4.12	H	-52.88	61.51
	9,410.00	-57.49	10.75	-55.39	4.86	H	-49.50	58.13
39200 (2355.0)	4,710.00	-55.32	12.43	-67.45	3.26	H	-58.28	66.91
	7,065.00	-55.33	11.43	-59.05	4.12	V	-51.74	60.37
	9,420.00	-56.69	10.80	-54.85	4.88	H	-48.93	57.56
39225 (2357.5)	4,715.00	-53.77	12.44	-65.92	3.26	H	-56.74	65.36
	7,072.50	-55.88	11.40	-59.24	4.12	V	-51.96	60.59
	9,430.00	-57.28	10.80	-55.44	4.89	H	-49.53	58.16

- ▣ OPERATING FREQUENCY : 2355.00 MHz
- ▣ MEASURED OUTPUT POWER: 8.36 dBm = 0.007 W
- ▣ MODE: LTE B40
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10} (W) =$  33.36 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
39200 (2355.0)	4,710.00	-55.30	12.43	-67.43	3.26	V	-58.26	66.89
	7,065.00	-55.95	11.43	-59.67	4.12	V	-52.36	60.99
	9,420.00	-57.62	10.80	-55.78	4.88	H	-49.86	58.49

**8.3 PEAK-TO-AVERAGE RATIO**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB )
40	5 MHz	2310.0	QPSK	25	0	5.76
			16-QAM			6.39
			64-QAM			6.36
	10 MHz		QPSK	50		5.95
			16-QAM			6.39
			64-QAM			6.70

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB )
40	5 MHz	2355.0	QPSK	25	0	5.74
			16-QAM			6.25
			64-QAM			6.43
	10 MHz		QPSK	50		5.86
			16-QAM			6.30
			64-QAM			6.57

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 63 ~ 74.

**8.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
40	5 MHz	2310.0	QPSK	25	0	4.5248
			16-QAM			4.4978
			64-QAM			4.4929
	10 MHz		QPSK	50		9.0000
			16-QAM			8.9824
			64-QAM			9.0137

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
40	5 MHz	2355.0	QPSK	25	0	4.5392
			16-QAM			4.5078
			64-QAM			4.4855
	10 MHz		QPSK	50		8.9971
			16-QAM			8.9975
			64-QAM			8.9765

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 51 ~ 62.



**8.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
40	5	2307.5	3.5988	33.206	-78.752	-45.546	-40.00
		2310.0	3.1576	33.206	-78.753	-45.547	
		2312.5	3.1541	33.206	-78.519	-45.313	
	10	2310.0	6.0753	33.821	-78.730	-44.909	

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
40	5	2352.5	3.1686	33.206	-78.584	-45.378	-40.00
		2355.0	3.1451	33.206	-78.619	-45.413	
		2357.5	3.0335	33.206	-78.737	-45.531	
	10	2355.0	3.1436	33.206	-78.545	-45.339	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 299 ~ 314.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB) + Duty Cycle factor
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	30.500
1 – 5	33.206
5 – 10	33.821
10 – 15	34.346
15 – 20	34.719
Above 20	35.361

**8.6 BAND EDGE**

**8.6.1 Lower Side**

Band Width (MHz)	Frequency (MHz)	Modulation	RB (Size/ Offset)	Frequency Range (MHz)	Result (dBm)	Limit (dBm)
5	2307.5	QPSK	25/0	Below 2288	-49.761	-40
				2288 - 2292	-48.461	-37
				2292 - 2296	-45.507	-31
				2296 - 2300	-42.812	-25
				2300 - 2304	-41.449	-13
				2304 - 2305	-33.358	-13
				2315 - 2320	-42.606	-13
				2320 - 2324	-45.700	-25
				2324 - 2328	-48.636	-31
				2328 - 2337	-49.753	-37
				2337 - 2341	-49.985	-31
				2341 - 2345	-49.981	-25
				2345 - 2365	-49.920	-13
				Above 2365	-49.634	-40
	2310.0	QPSK	25/0	Below 2288	-50.094	-40
				2288 - 2292	-49.561	-37
				2292 - 2296	-47.091	-31
				2296 - 2300	-44.564	-25
				2300 - 2305	-42.271	-13
				2315 - 2320	-41.730	-13
				2320 - 2324	-44.118	-25
				2324 - 2328	-46.497	-31
				2328 - 2337	-48.972	-37
				2337 - 2341	-49.982	-31
				2341 - 2345	-49.999	-25
				2345 - 2365	-49.946	-13
				Above 2365	-49.657	-40
				2312.5	QPSK	25/0
	2288 - 2292	-49.950	-37			
	2292 - 2296	-48.879	-31			
	2296 - 2300	-45.853	-25			
	2300 - 2305	-42.571	-13			

				2315 - 2316	-34.272	-13
				2316 - 2320	-39.792	-13
				2320 - 2324	-42.445	-25
				2324 - 2328	-44.236	-31
				2328 - 2337	-47.621	-37
				2337 - 2341	-49.885	-31
				2341 - 2345	-49.978	-25
				2345 - 2365	-49.919	-13
				Above 2365	-49.669	-40
10	2310.0	QPSK	50/0	Below 2288	-49.928	-40
				2288 - 2292	-49.274	-37
				2292 - 2296	-47.019	-31
				2296 - 2300	-44.432	-25
				2300 - 2304	-40.791	-13
				2304 - 2305	-39.026	-13
				2315 - 2316	-37.870	-13
				2316 - 2320	-41.040	-13
				2320 - 2324	-43.372	-25
				2324 - 2328	-46.748	-31
				2328 - 2337	-49.156	-37
				2337 - 2341	-49.880	-31
				2341 - 2345	-49.957	-25
				2345 - 2365	-49.887	-13
				Above 2365	-49.638	-40

Note:

1. Duty Cycle factor already applied on the factor.
2. Duty Cycle factor(dB) = 5.23 dB
3. Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
4. Result(dBm) = Reading + Factor

Band Width (MHz)	Frequency (MHz)	Modulation	RB (Size/ Offset)	Frequency Range (MHz)	Result (dBm)	Limit (dBm)
5	2307.5	QPSK	1/0	Below 2288	-49.891	-40
				2288 - 2292	-48.259	-37
				2292 - 2296	-45.709	-31
				2296 - 2300	-42.514	-25
				2300 - 2304	-37.296	-13
				2304 - 2305	-32.303	-13
			1/24	2315 - 2320	-42.545	-13
				2320 - 2324	-45.325	-25
				2324 - 2328	-48.648	-31
				2328 - 2337	-49.487	-37
				2337 - 2341	-49.961	-31
				2341 - 2345	-49.937	-25
				2345 - 2365	-49.944	-13
				Above 2365	-49.667	-40
	2310.0	QPSK	1/0	Below 2288	-50.068	-40
				2288 - 2292	-49.506	-37
				2292 - 2296	-46.945	-31
				2296 - 2300	-44.271	-25
				2300 - 2305	-42.263	-13
				1/24	2315 - 2320	-42.076
			2320 - 2324		-43.192	-25
			2324 - 2328		-46.024	-31
			2328 - 2337		-49.107	-37
			2337 - 2341		-49.920	-31
			2341 - 2345		-49.967	-25
			2345 - 2365		-49.946	-13
			Above 2365		-49.660	-40
2312.5			QPSK	1/0	Below 2288	-50.141
	2288 - 2292	-49.811			-37	
	2292 - 2296	-48.679			-31	
	2296 - 2300	-46.072			-25	
	2300 - 2305	-43.106			-13	
	1/24	2315 - 2316			-33.330	-13
		2316 - 2320		-37.522	-13	

10	2310.0	QPSK	1/0	2320 - 2324	-43.319	-25
				2324 - 2328	-44.115	-31
				2328 - 2337	-47.547	-37
				2337 - 2341	-49.893	-31
				2341 - 2345	-49.925	-25
				2345 - 2365	-49.951	-13
				Above 2365	-49.656	-40
			1/49	Below 2288	-50.018	-40
				2288 - 2292	-49.430	-37
				2292 - 2296	-46.807	-31
				2296 - 2300	-44.410	-25
				2300 - 2304	-40.811	-13
				2304 - 2305	-41.561	-13
				2315 - 2316	-41.767	-13
2316 - 2320	-40.186	-13				
2320 - 2324	-43.209	-25				
2324 - 2328	-46.064	-31				
2328 - 2337	-49.064	-37				
2337 - 2341	-49.900	-31				
2341 - 2345	-49.898	-25				
2345 - 2365	-49.900	-13				
Above 2365	-49.621	-40				

Note:

1. Duty Cycle factor already applied on the factor.
2. Duty Cycle factor(dB) = 5.23 dB
3. Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
4. Result(dBm) = Reading + Factor

8.6.2 Upper Side

Band Width (MHz)	Frequency (MHz)	Modulation	RB (Size/ Offset)	Frequency Range (MHz)	Result (dBm)	Limit (dBm)
5	2352.5	QPSK	25/0	Below 2288	-50.217	-40
				2288 - 2292	-50.163	-37
				2292 - 2296	-50.143	-31
				2296 - 2300	-50.125	-25
				2300 - 2320	-50.073	-13
				2320 - 2324	-50.023	-25
				2324 - 2328	-49.913	-31
				2328 - 2337	-47.651	-37
				2337 - 2341	-43.229	-31
				2341 - 2345	-41.518	-25
				2345 - 2349	-39.154	-13
				2349 - 2350	-33.837	-13
				2360 - 2365	-42.664	-13
				Above 2365	-45.357	-40
	2355.0	QPSK	25/0	Below 2288	-50.208	-40
				2288 - 2292	-50.172	-37
				2292 - 2296	-50.153	-31
				2296 - 2300	-50.144	-25
				2300 - 2320	-50.075	-13
				2320 - 2324	-50.051	-25
				2324 - 2328	-50.027	-31
				2328 - 2337	-48.842	-37
				2337 - 2341	-45.718	-31
				2341 - 2345	-40.443	-25
				2345 - 2350	-39.911	-13
				2360 - 2365	-42.077	-13
				Above 2365	-43.988	-40
				2357.5	QPSK	25/0
	2288 - 2292	-50.140	-37			
	2292 - 2296	-50.131	-31			
	2296 - 2300	-50.124	-25			
	2300 - 2320	-49.997	-13			

				2320 - 2324	-50.026	-25
				2324 - 2328	-49.980	-31
				2328 - 2337	-49.593	-37
				2337 - 2341	-47.503	-31
				2341 - 2345	-43.907	-25
				2345 - 2350	-41.963	-13
				2360 - 2364	-34.738	-13
				2364 - 2365	-40.273	-13
				Above 2365	-42.703	-40
10	2355.0	QPSK	50/0	Below 2288	-50.187	-40
				2288 - 2292	-50.158	-37
				2292 - 2296	-50.125	-31
				2296 - 2300	-50.109	-25
				2300 - 2320	-50.028	-13
				2320 - 2324	-49.997	-25
				2324 - 2328	-49.977	-31
				2328 - 2337	-48.796	-37
				2337 - 2341	-46.213	-31
				2341 - 2345	-42.481	-25
				2345 - 2349	-40.318	-13
				2349 - 2350	-38.628	-13
				2360 - 2364	-36.671	-13
				2364 - 2365	-40.474	-13
				Above 2365	-43.269	-40

Note:

1. Duty Cycle factor already applied on the factor.
2. Duty Cycle factor(dB) = 5.23 dB
3. Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
4. Result(dBm) = Reading + Factor

Band Width (MHz)	Frequency (MHz)	Modulation	RB (Size/Offset)	Frequency Range (MHz)	Result (dBm)	Limit (dBm)
5	2352.5	QPSK	1/0	Below 2288	-50.192	-40
				2288 - 2292	-50.166	-37
				2292 - 2296	-50.133	-31
				2296 - 2300	-50.092	-25
				2300 - 2320	-50.082	-13
				2320 - 2324	-50.041	-25
				2324 - 2328	-49.948	-31
				2328 - 2337	-47.465	-37
				2337 - 2341	-43.033	-31
				2341 - 2345	-41.013	-25
				2345 - 2349	-37.403	-13
			2349 - 2350	-31.445	-13	
			1/24	2360 - 2365	-42.683	-13
	Above 2365	-45.008		-40		
	2355.0	QPSK	1/0	Below 2288	-50.214	-40
				2288 - 2292	-50.187	-37
				2292 - 2296	-50.150	-31
				2296 - 2300	-50.134	-25
				2300 - 2320	-50.064	-13
				2320 - 2324	-50.043	-25
				2324 - 2328	-49.990	-31
				2328 - 2337	-48.788	-37
				2337 - 2341	-45.331	-31
				2341 - 2345	-39.328	-25
				2345 - 2350	-40.387	-13
			1/24	2360 - 2365	-41.510	-13
				Above 2365	-43.229	-40
	2357.5	QPSK	1/0	Below 2288	-50.211	-40
				2288 - 2292	-50.179	-37
				2292 - 2296	-50.152	-31
				2296 - 2300	-50.095	-25
				2300 - 2320	-50.072	-13
				2320 - 2324	-50.051	-25



10	2355.0	QPSK		2324 - 2328	-50.025	-31
				2328 - 2337	-49.591	-37
				2337 - 2341	-47.656	-31
				2341 - 2345	-44.524	-25
				2345 - 2350	-42.127	-13
			1/24	2360 - 2361	-33.346	-13
			2361 - 2365	-37.528	-13	
			Above 2365	-42.650	-40	
			1/0	Below 2288	-50.178	-40
				2288 - 2292	-50.164	-37
				2292 - 2296	-50.127	-31
				2296 - 2300	-50.119	-25
				2300 - 2320	-50.060	-13
				2320 - 2324	-50.011	-25
2324 - 2328	-49.941	-31				
2328 - 2337	-48.634	-37				
2337 - 2341	-45.486	-31				
2341 - 2345	-42.707	-25				
1/49	2345 - 2349	-39.269	-13			
	2349 - 2350	-40.906	-13			
	2360 - 2361	-40.056	-13			
	2361 - 2365	-40.133	-13			
			Above 2365	-43.282	-40	

Note:


1. Duty Cycle factor already applied on the factor.
2. Duty Cycle factor(dB) = 5.23 dB
3. Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
4. Result(dBm) = Reading + Factor
5. Plots of the EUT's BandEdge(Lower & Upper) are shown Page 75 ~ 298.

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**

**8.7.1 Lower Side**


- ▣ MODE: LTE 40
- ▣ OPERATING FREQUENCY: 2307,500,000 Hz
- ▣ BANDWIDTH: 38725 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	2307 500 007	0.00	0.000 000	0.0000
100%		-30	2307 500 017	10.40	0.000 000	0.0045
100%		-20	2307 500 012	4.80	0.000 000	0.0021
100%		-10	2307 500 015	8.20	0.000 000	0.0036
100%		0	2307 500 013	6.20	0.000 000	0.0027
100%		+10	2307 500 016	8.80	0.000 000	0.0038
100%		+30	2307 500 014	6.80	0.000 000	0.0029
100%		+40	2307 500 014	6.70	0.000 000	0.0029
100%		+50	2307 500 016	9.30	0.000 000	0.0040
85%		3.400	+20	2307 500 015	7.80	0.000 000

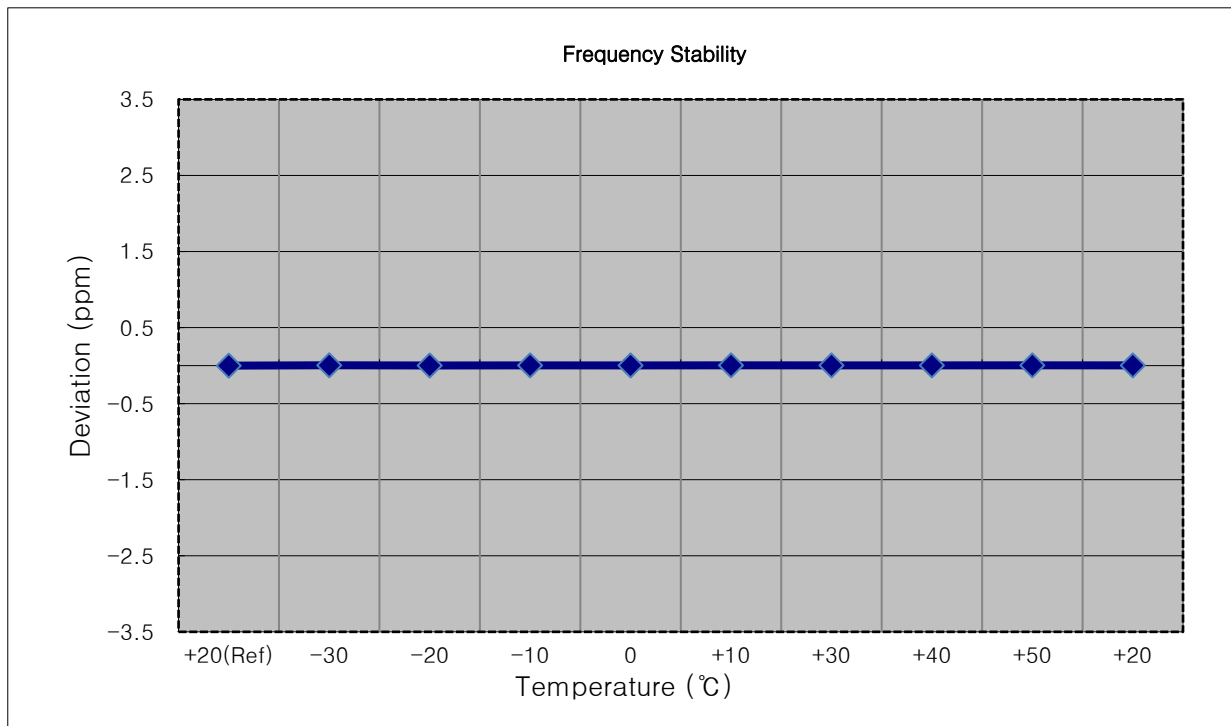


- ▣ MODE: LTE 40
- ▣ OPERATING FREQUENCY: 2310.000.000 Hz
- ▣ BANDWIDTH: 38750 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	2310 000 007	0.00	0.000 000	0.0000
100%		-30	2310 000 013	6.10	0.000 000	0.0026
100%		-20	2310 000 014	6.40	0.000 000	0.0028
100%		-10	2310 000 014	7.00	0.000 000	0.0030
100%		0	2310 000 013	5.50	0.000 000	0.0024
100%		+10	2310 000 014	6.90	0.000 000	0.0030
100%		+30	2310 000 013	6.00	0.000 000	0.0026
100%		+40	2310 000 014	6.60	0.000 000	0.0029
100%		+50	2310 000 012	5.20	0.000 000	0.0023
85%		3.400	+20	2310 000 013	5.90	0.000 000

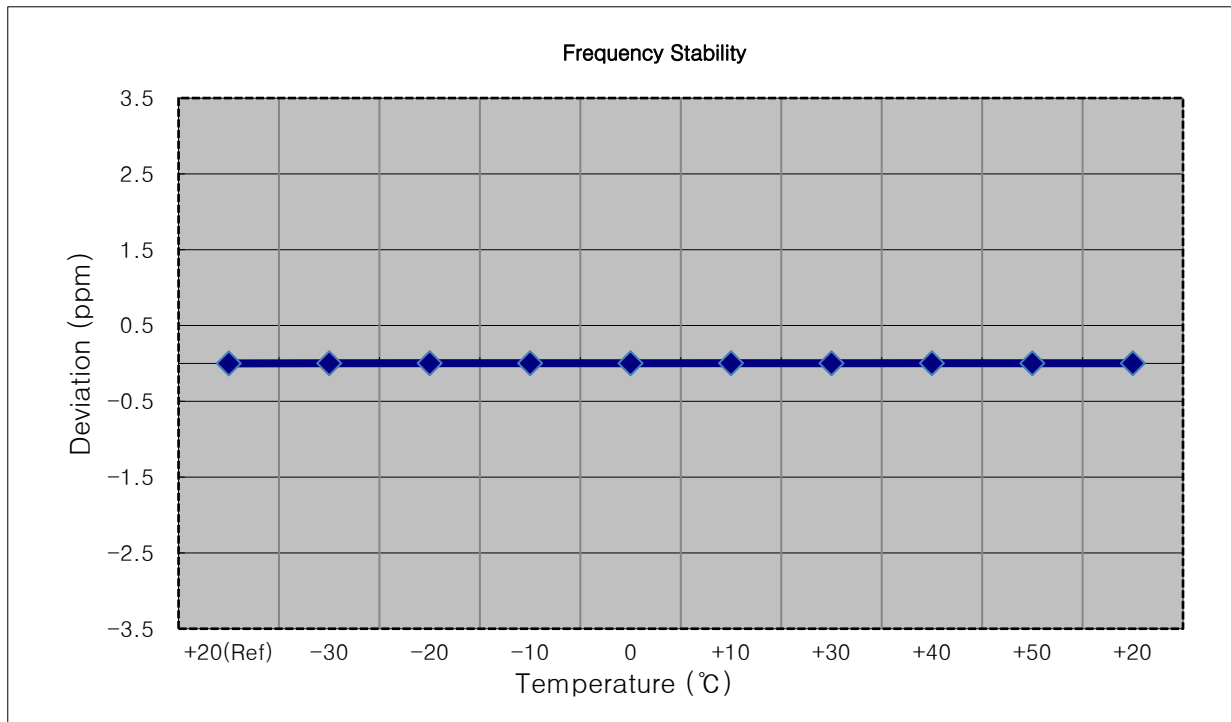


- ▣ MODE: LTE 40
- ▣ OPERATING FREQUENCY: 2312.500.000 Hz
- ▣ BANDWIDTH: 38775 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	2312 500 007	0.00	0.000 000	0.0000
100%		-30	2312 500 014	6.50	0.000 000	0.0028
100%		-20	2312 500 013	5.80	0.000 000	0.0025
100%		-10	2312 500 013	5.70	0.000 000	0.0025
100%		0	2312 500 015	7.40	0.000 000	0.0032
100%		+10	2312 500 015	7.70	0.000 000	0.0033
100%		+30	2312 500 012	4.90	0.000 000	0.0021
100%		+40	2312 500 015	7.40	0.000 000	0.0032
100%		+50	2312 500 014	7.20	0.000 000	0.0031
85%		3.400	+20	2312 500 015	7.40	0.000 000

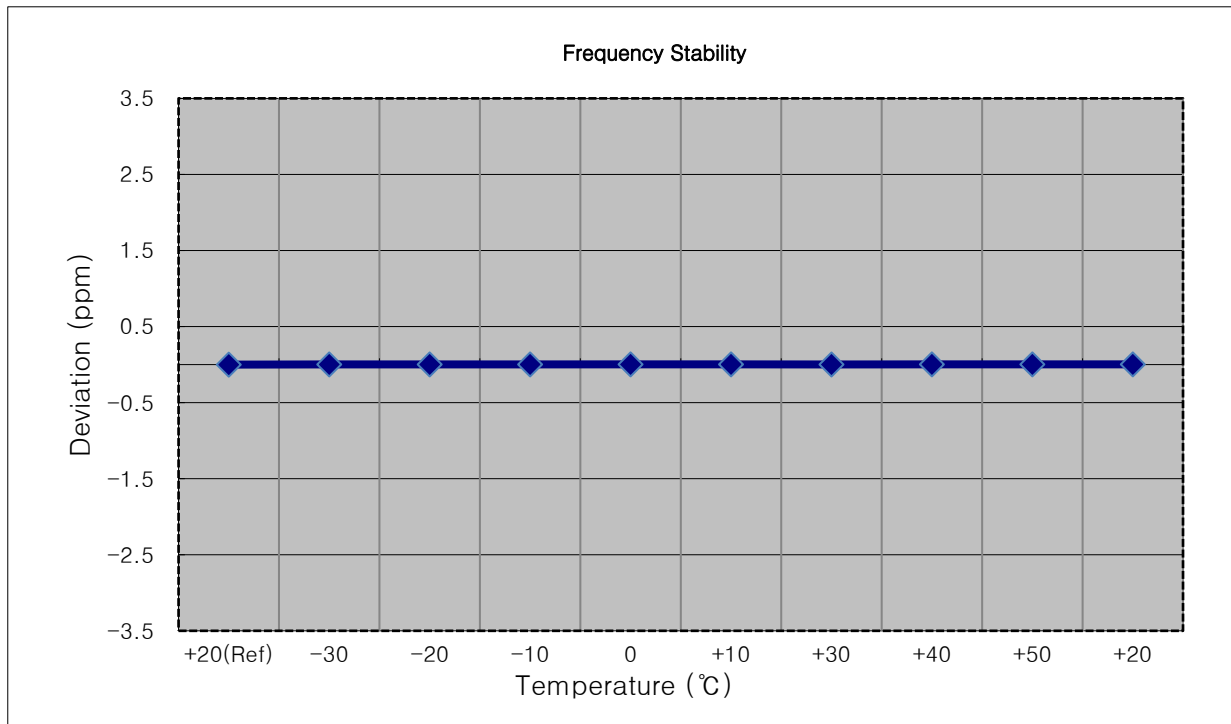

- ▣ MODE: LTE 40
- ▣ OPERATING FREQUENCY: 2310.000.000 Hz
- ▣ BANDWIDTH: 38750 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	2310 000 007	0.00	0.000 000	0.0000
100%		-30	2310 000 013	5.90	0.000 000	0.0026
100%		-20	2310 000 014	6.40	0.000 000	0.0028
100%		-10	2310 000 014	6.40	0.000 000	0.0028
100%		0	2310 000 012	4.90	0.000 000	0.0021
100%		+10	2310 000 014	6.40	0.000 000	0.0028
100%		+30	2310 000 013	6.00	0.000 000	0.0026
100%		+40	2310 000 014	6.90	0.000 000	0.0030
100%		+50	2310 000 012	5.00	0.000 000	0.0022
85%	3.400	+20	2310 000 013	5.70	0.000 000	0.0025

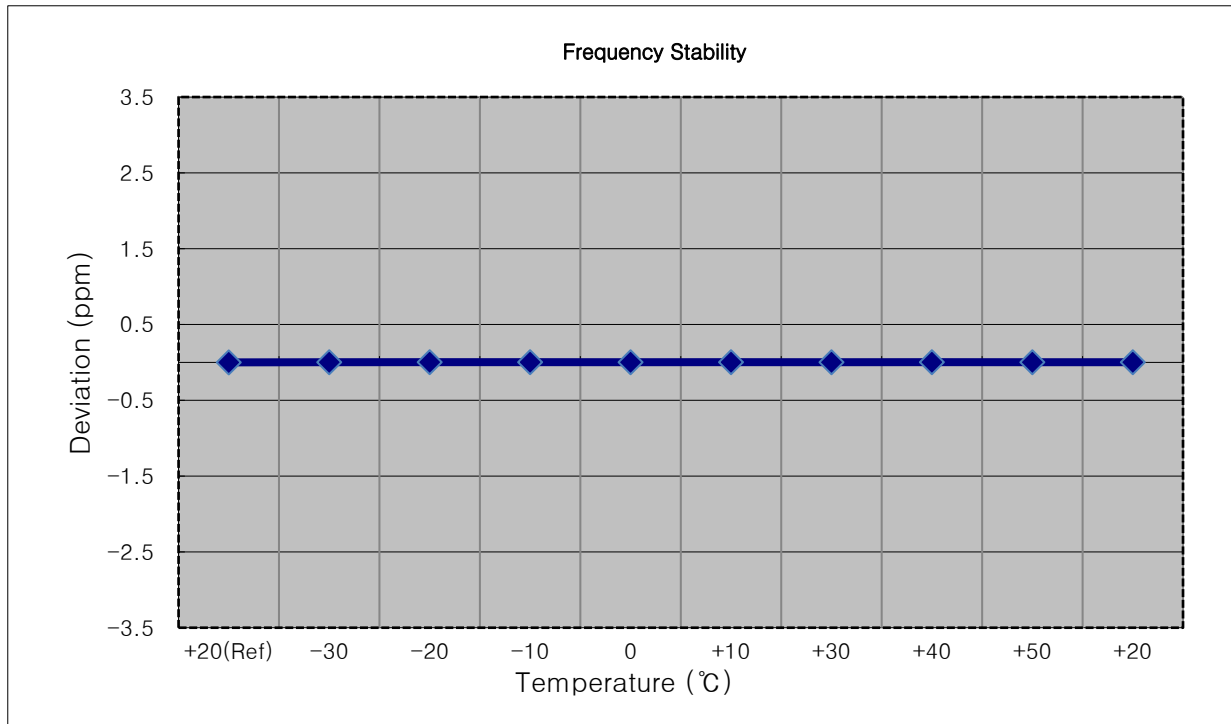

**8.7.2 Upper Side**


- ▣ MODE: LTE 40
- ▣ OPERATING FREQUENCY: 2352.500.000 Hz
- ▣ BANDWIDTH: 39175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	2352 500 006	0.00	0.000 000	0.0000
100%		-30	2352 500 015	9.10	0.000 000	0.0039
100%		-20	2352 500 014	8.60	0.000 000	0.0037
100%		-10	2352 500 013	7.30	0.000 000	0.0031
100%		0	2352 500 015	9.90	0.000 000	0.0042
100%		+10	2352 500 015	9.30	0.000 000	0.0040
100%		+30	2352 500 014	8.20	0.000 000	0.0035
100%		+40	2352 500 014	8.00	0.000 000	0.0034
100%		+50	2352 500 014	8.10	0.000 000	0.0034
85%		3.400	+20	2352 500 013	7.10	0.000 000

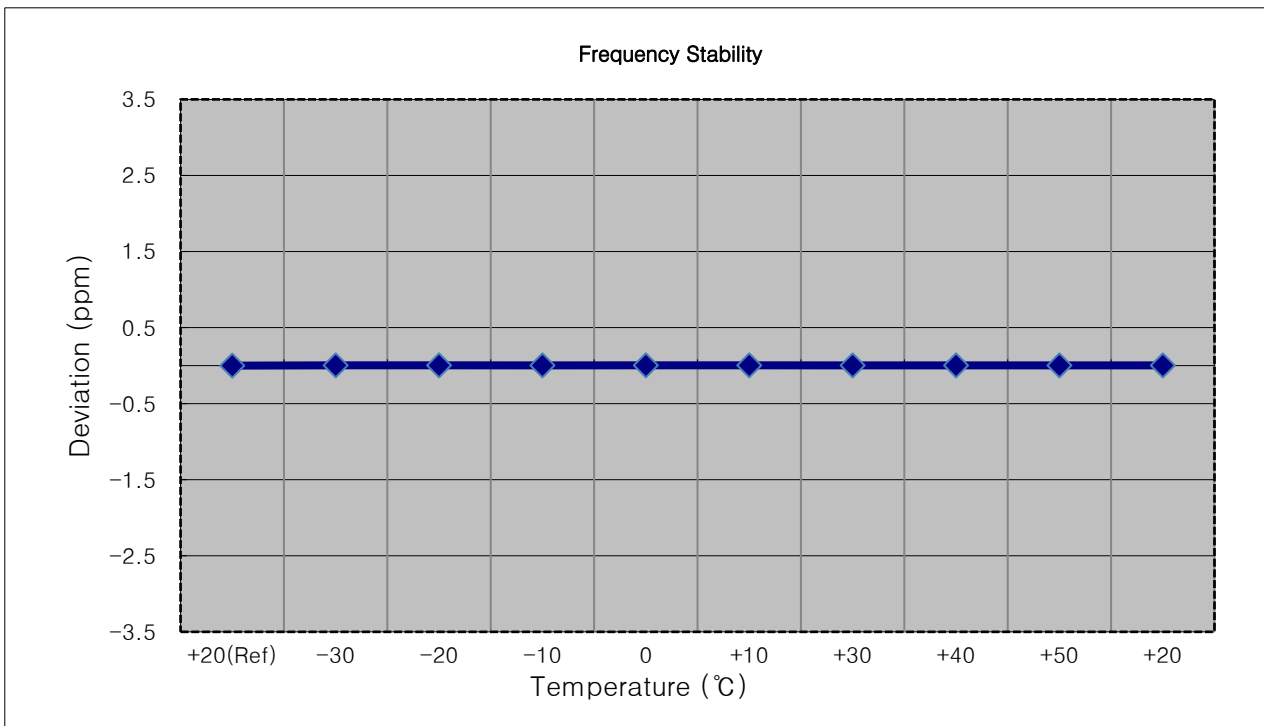


- ▣ MODE: LTE 40
- ▣ OPERATING FREQUENCY: 2355,000,000 Hz
- ▣ BANDWIDTH: 39200 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	2355 000 008	0.00	0.000 000	0.0000
100%		-30	2355 000 013	5.80	0.000 000	0.0025
100%		-20	2355 000 014	6.60	0.000 000	0.0028
100%		-10	2355 000 014	6.00	0.000 000	0.0025
100%		0	2355 000 014	6.10	0.000 000	0.0026
100%		+10	2355 000 014	6.20	0.000 000	0.0026
100%		+30	2355 000 013	5.80	0.000 000	0.0025
100%		+40	2355 000 013	5.40	0.000 000	0.0023
100%		+50	2355 000 014	6.90	0.000 000	0.0029
85%		3.400	+20	2355 000 015	7.60	0.000 000

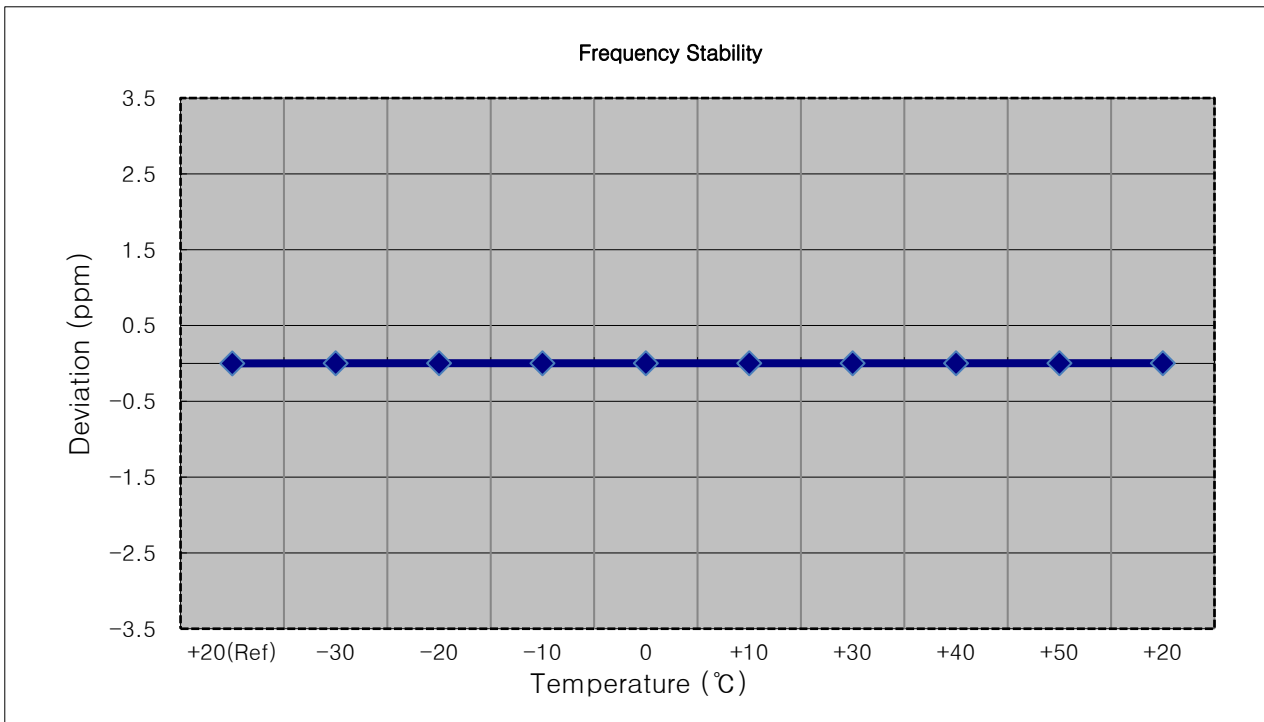

- ▣ MODE: LTE 40
- ▣ OPERATING FREQUENCY: 2357.500.000 Hz
- ▣ BANDWIDTH: 39225 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	2357 500 008	0.00	0.000 000	0.0000
100%		-30	2357 500 015	7.30	0.000 000	0.0031
100%		-20	2357 500 016	7.90	0.000 000	0.0034
100%		-10	2357 500 016	8.30	0.000 000	0.0035
100%		0	2357 500 017	8.90	0.000 000	0.0038
100%		+10	2357 500 013	5.20	0.000 000	0.0022
100%		+30	2357 500 016	8.40	0.000 000	0.0036
100%		+40	2357 500 015	7.20	0.000 000	0.0031
100%		+50	2357 500 017	8.90	0.000 000	0.0038
85%		3.400	+20	2357 500 015	7.10	0.000 000

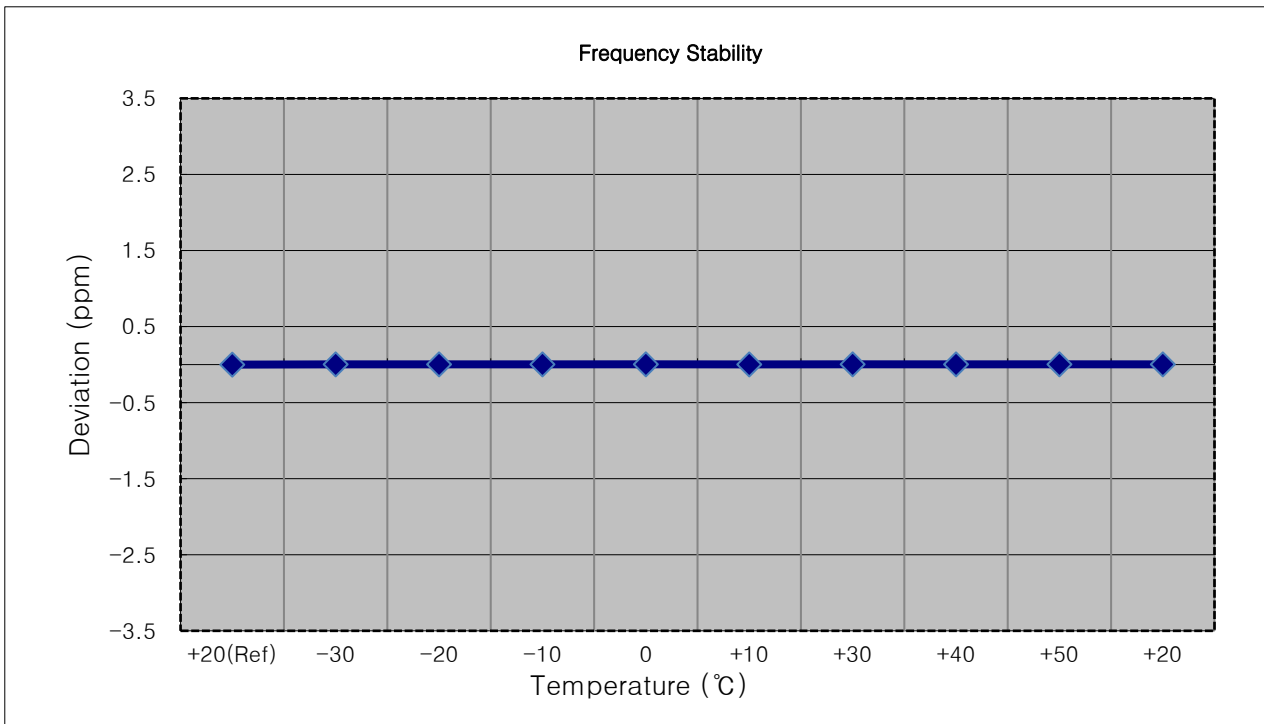




- ▣ MODE: LTE 40
- ▣ OPERATING FREQUENCY: 2355,000,000 Hz
- ▣ BANDWIDTH: 39200 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.86 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.860	+20(Ref)	2355 000 008	0.00	0.000 000	0.0000
100%		-30	2355 000 015	7.00	0.000 000	0.0030
100%		-20	2355 000 014	5.80	0.000 000	0.0025
100%		-10	2355 000 014	6.20	0.000 000	0.0026
100%		0	2355 000 014	6.20	0.000 000	0.0026
100%		+10	2355 000 014	5.60	0.000 000	0.0024
100%		+30	2355 000 014	5.30	0.000 000	0.0023
100%		+40	2355 000 015	6.40	0.000 000	0.0027
100%		+50	2355 000 015	6.80	0.000 000	0.0029
85%	3.400	+20	2355 000 014	6.10	0.000 000	0.0026

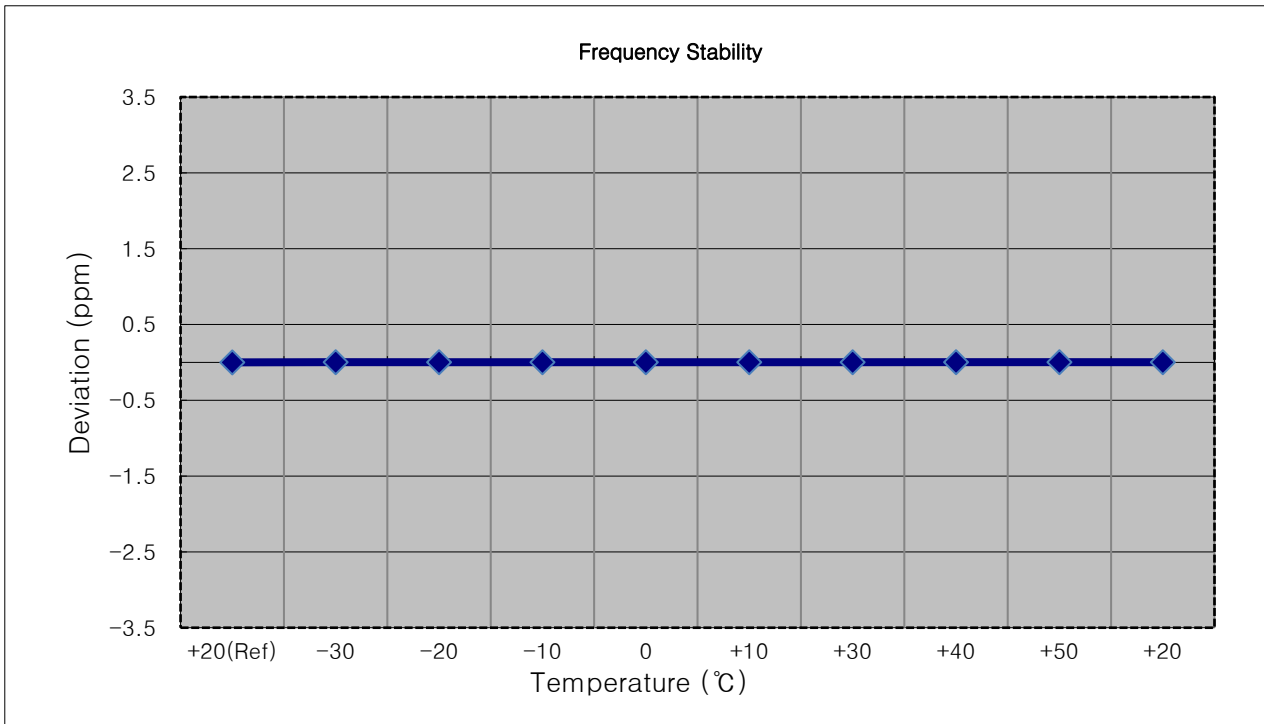


## 9. TEST PLOTS


BAND 40. Occupied Bandwidth Plot (5 MHz 2310MHz\_QPSK\_FullRB)

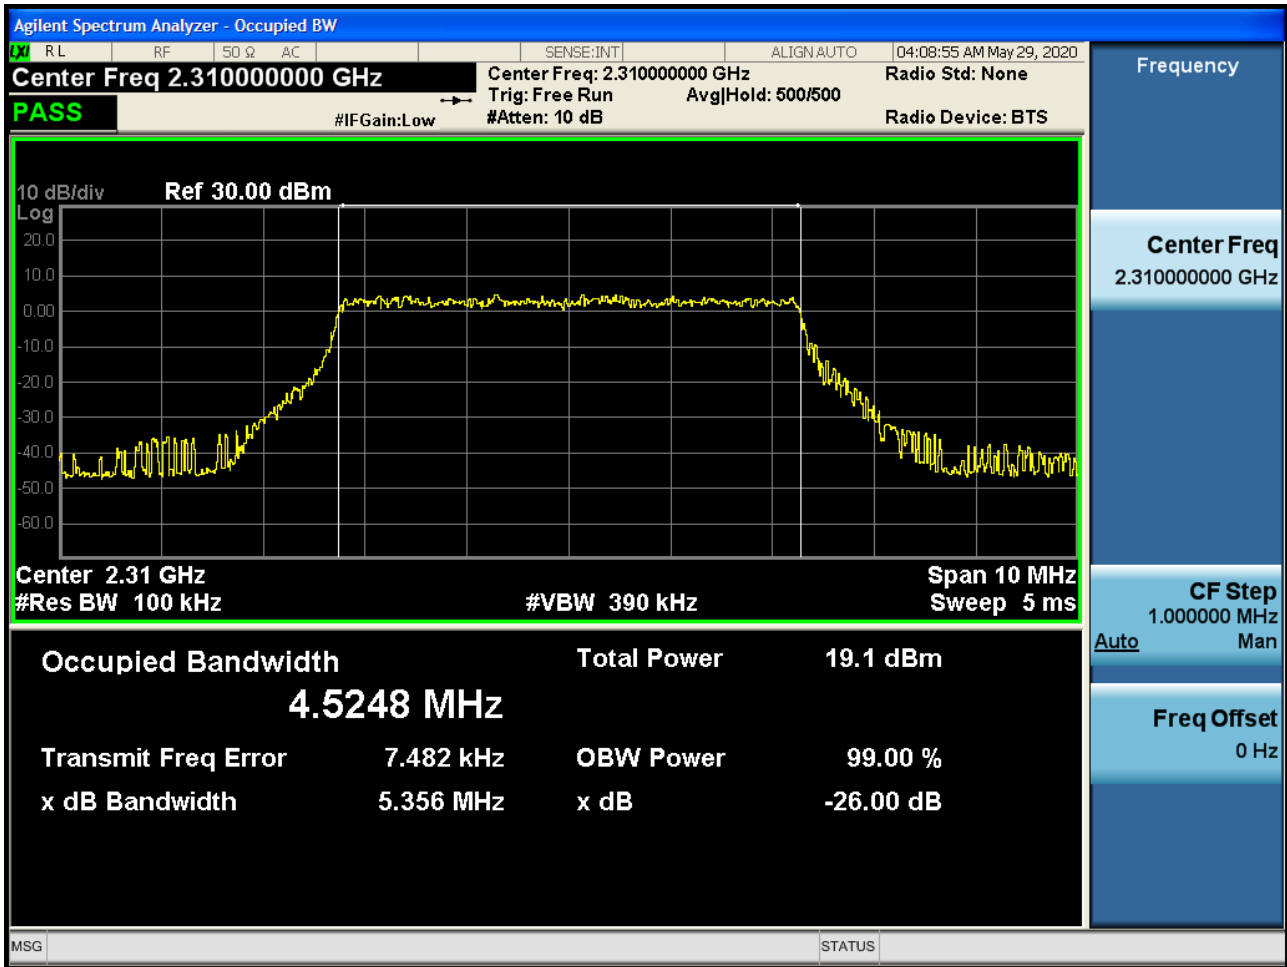


BAND 40. Occupied Bandwidth Plot (5 MHz 2310MHz\_16QAM\_FullIRB)

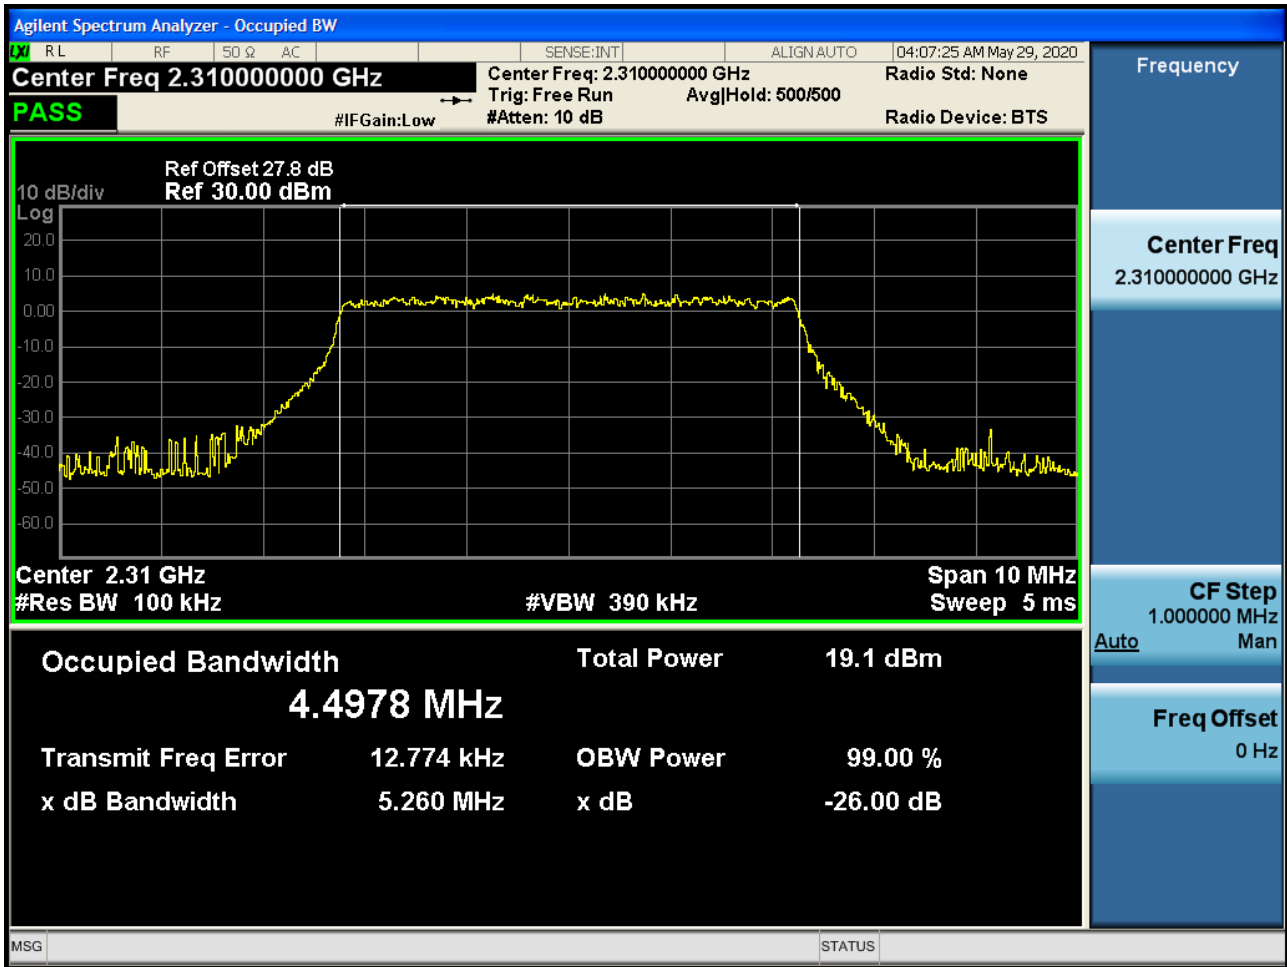


BAND 40. Occupied Bandwidth Plot (5 MHz 2310MHz\_64QAM\_FullIRB)

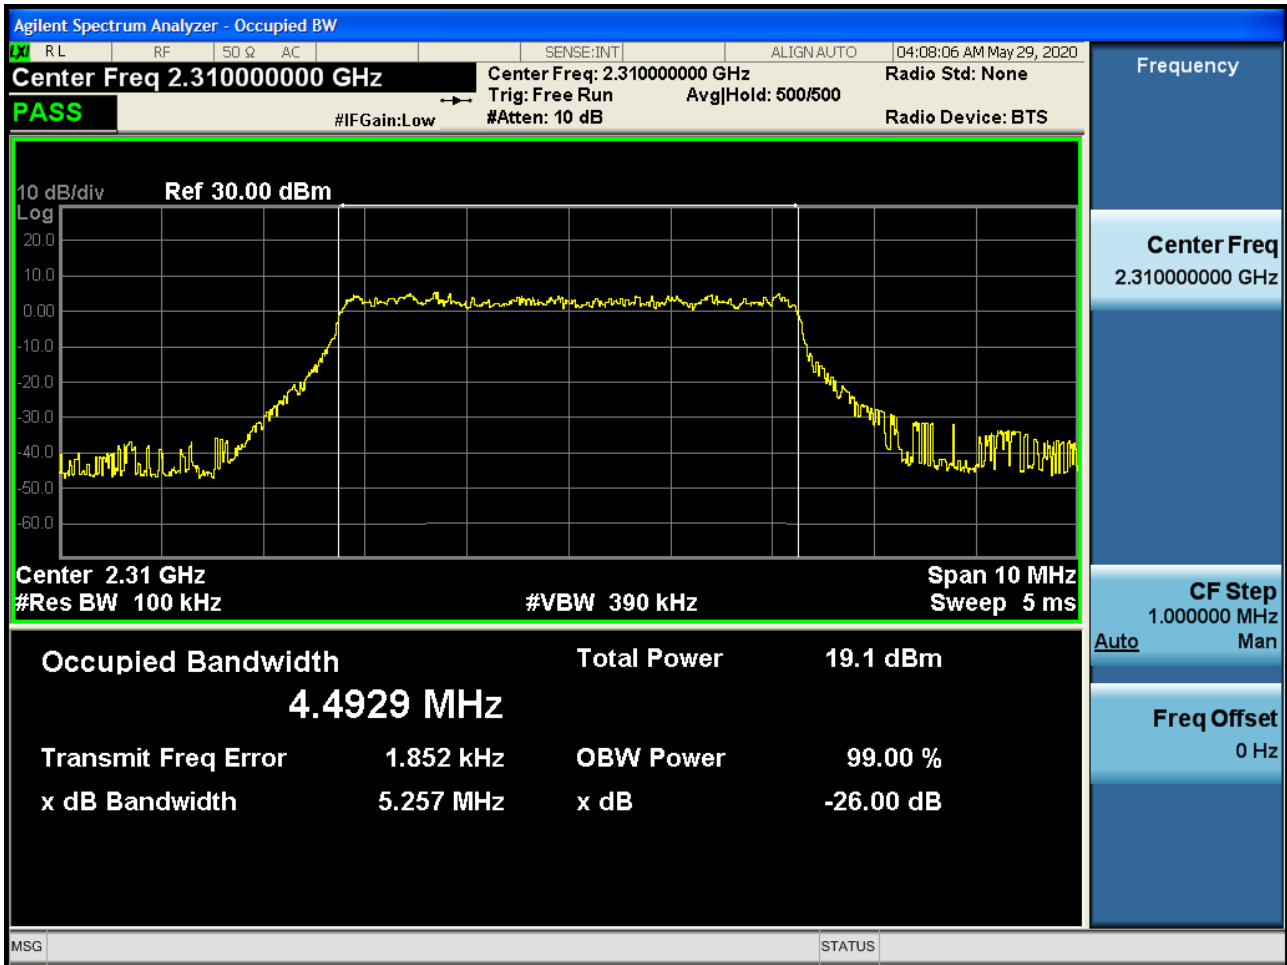


BAND 40. Occupied Bandwidth Plot (5 MHz 2355MHz\_QPSK\_FullRB)

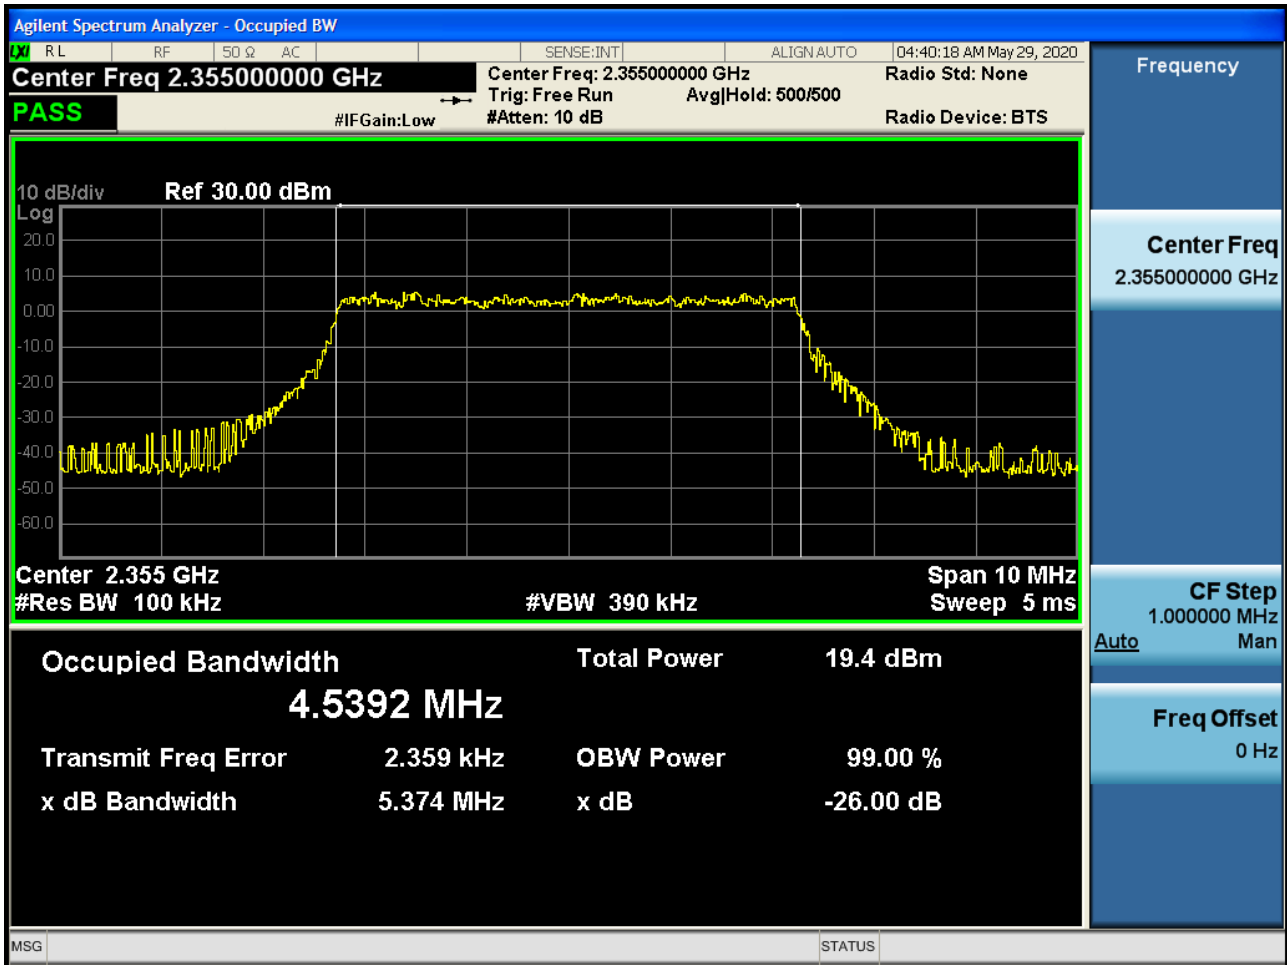

BAND 40. Occupied Bandwidth Plot (5 MHz 2355MHz\_16QAM\_FullIRB)

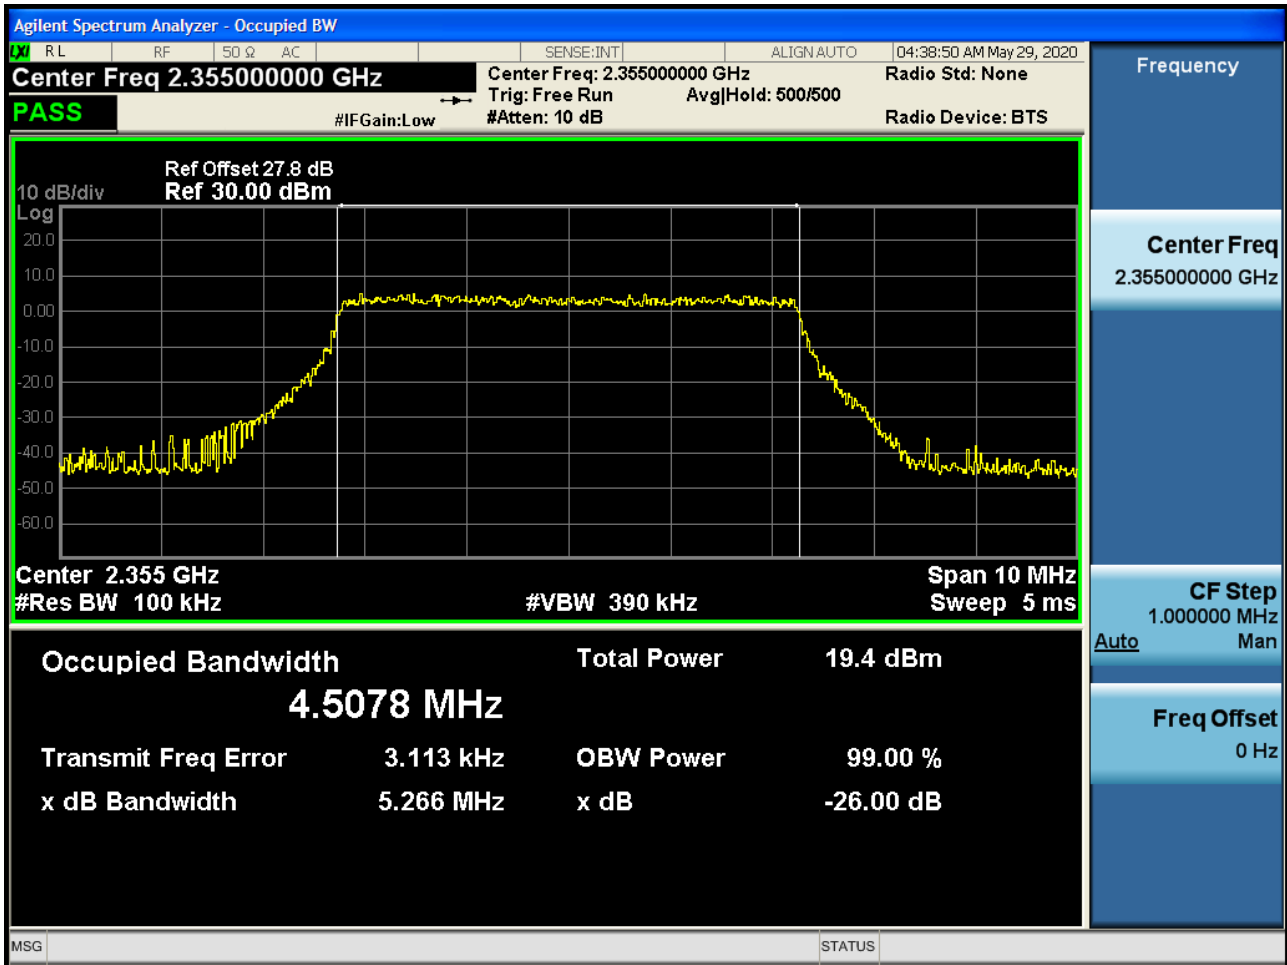


BAND 40. Occupied Bandwidth Plot (5 MHz 2355MHz\_64QAM\_FullIRB)

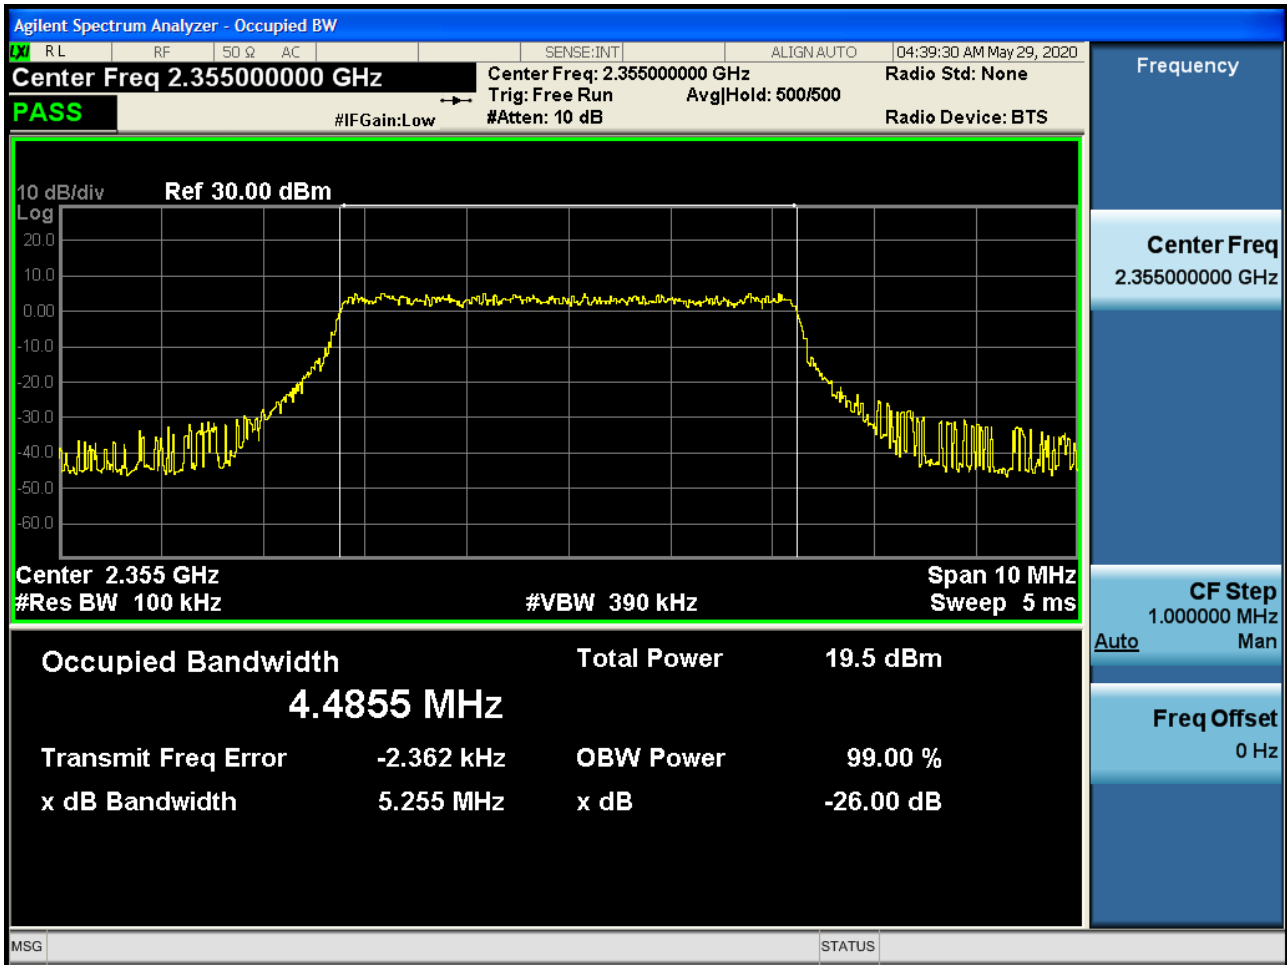





BAND 40. Occupied Bandwidth Plot (10 MHz 2310MHz\_QPSK\_FullIRB)

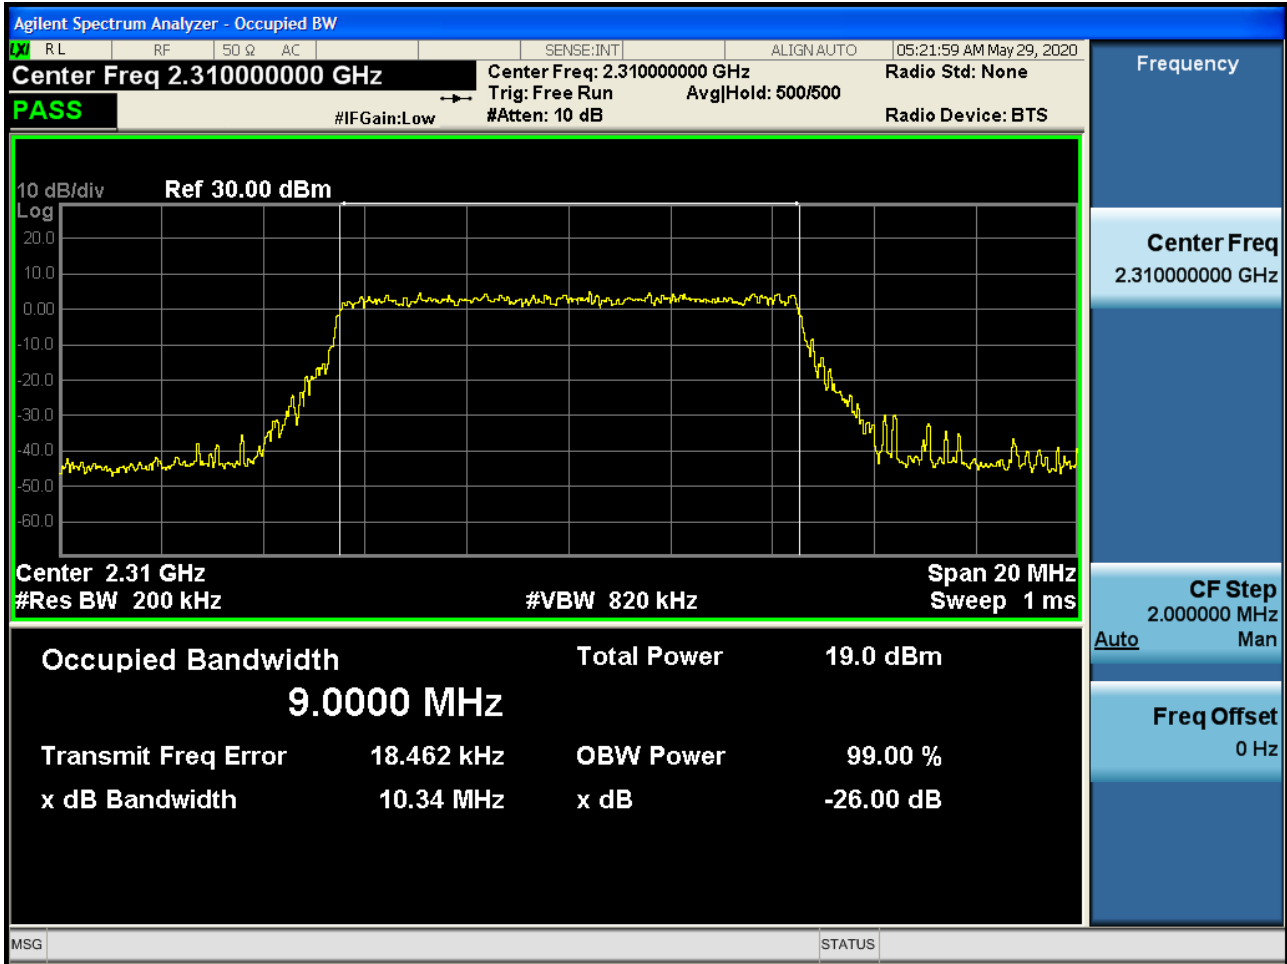


BAND 40. Occupied Bandwidth Plot (10 MHz 2310MHz\_16QAM\_FullIRB)

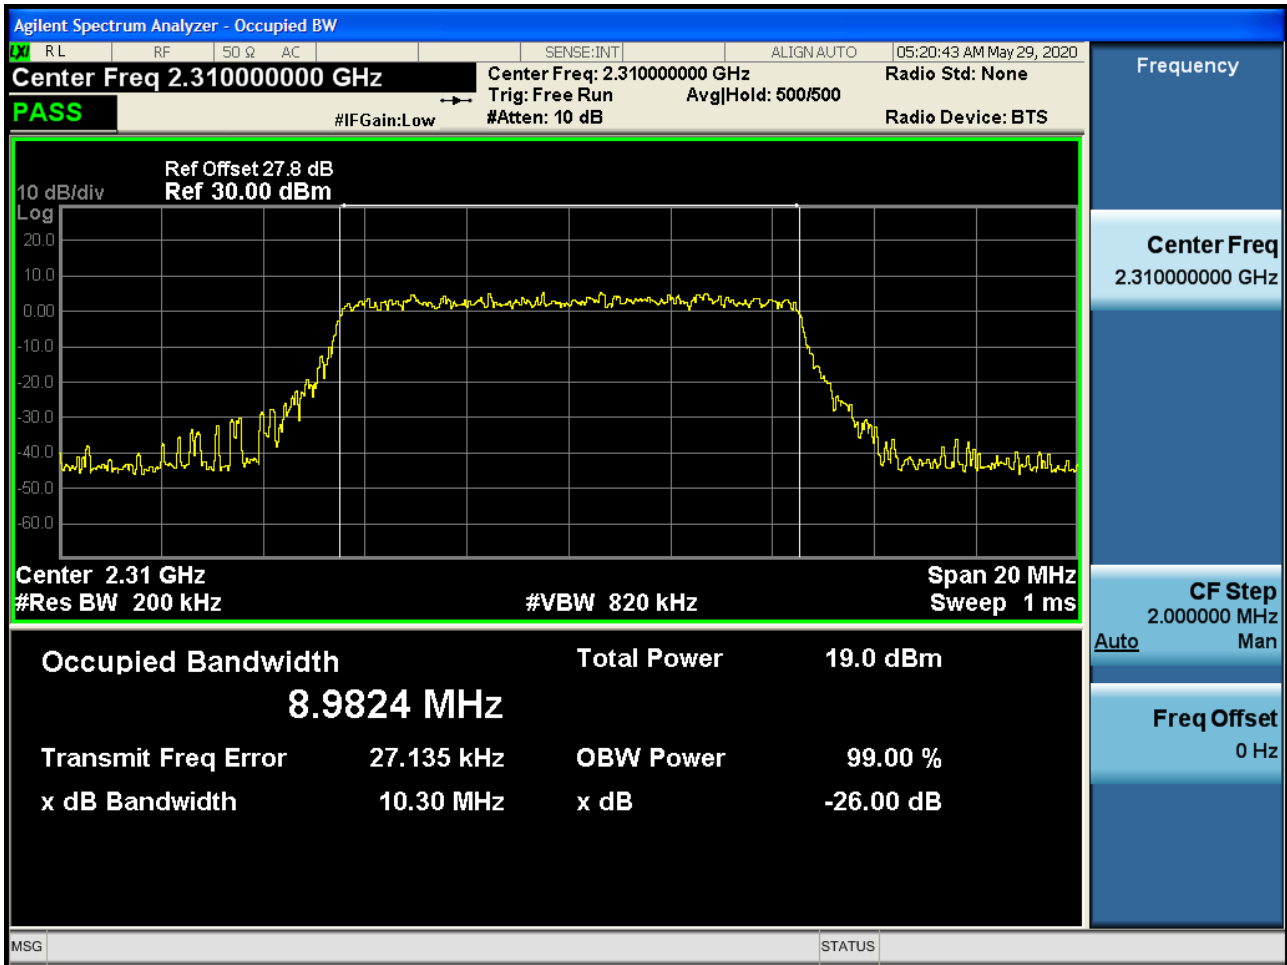


BAND 40. Occupied Bandwidth Plot (10 MHz 2310MHz\_64QAM\_FullIRB)

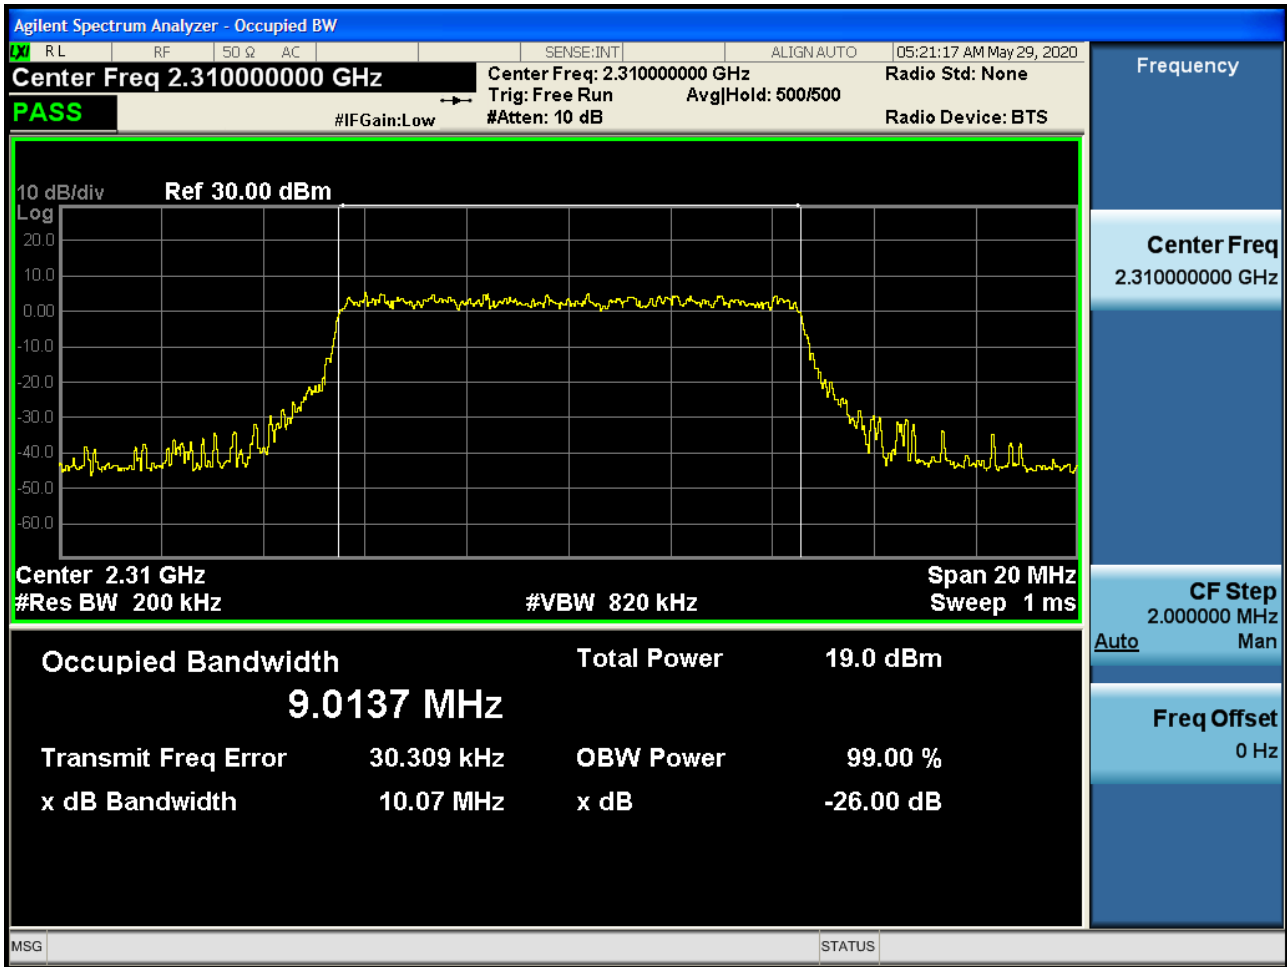


BAND 40. Occupied Bandwidth Plot (10 MHz 2355MHz\_QPSK\_FullIRB)

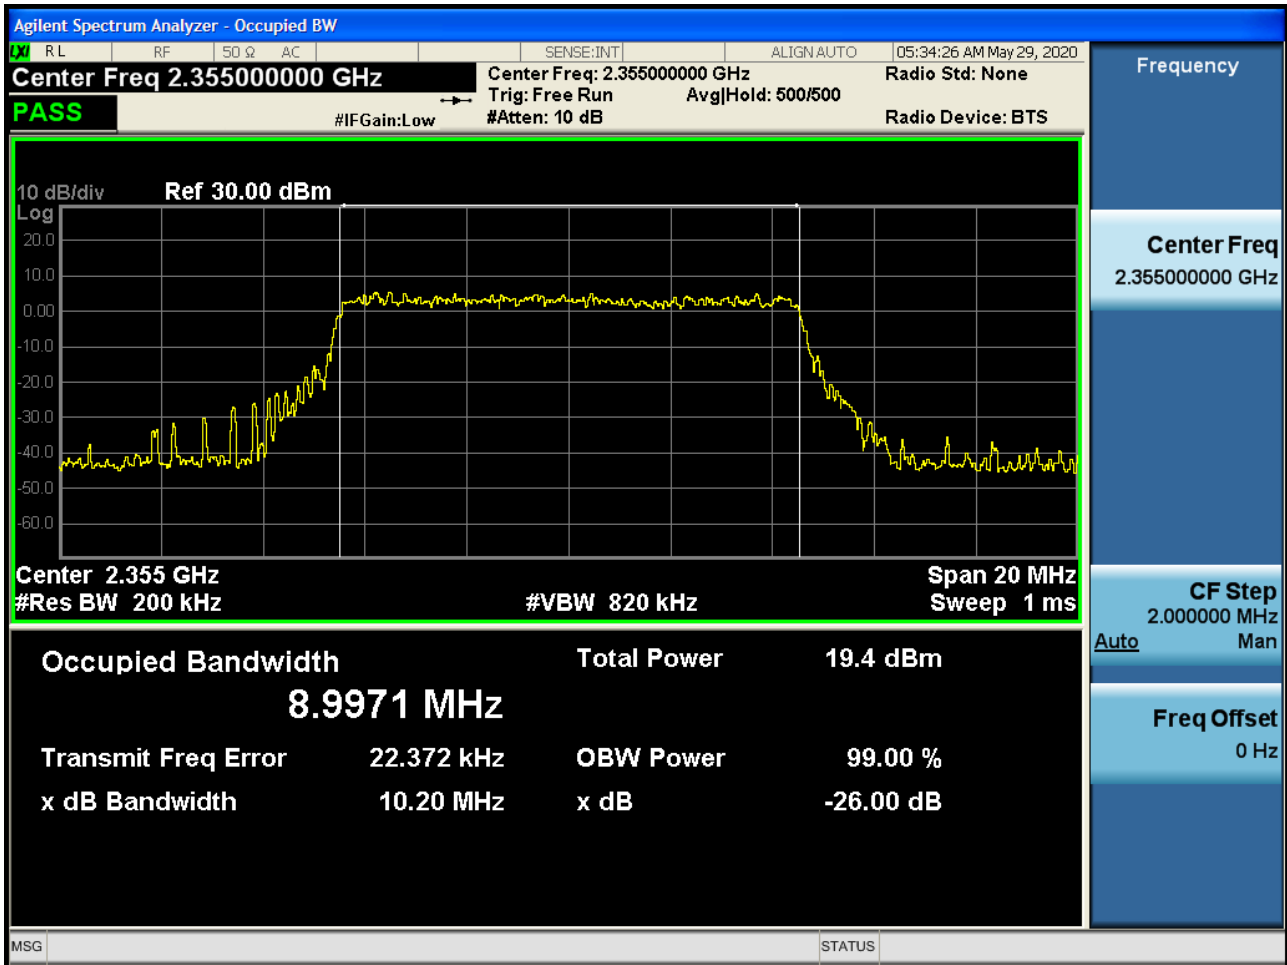


BAND 40. Occupied Bandwidth Plot (10 MHz 2355MHz\_16QAM\_FullIRB)

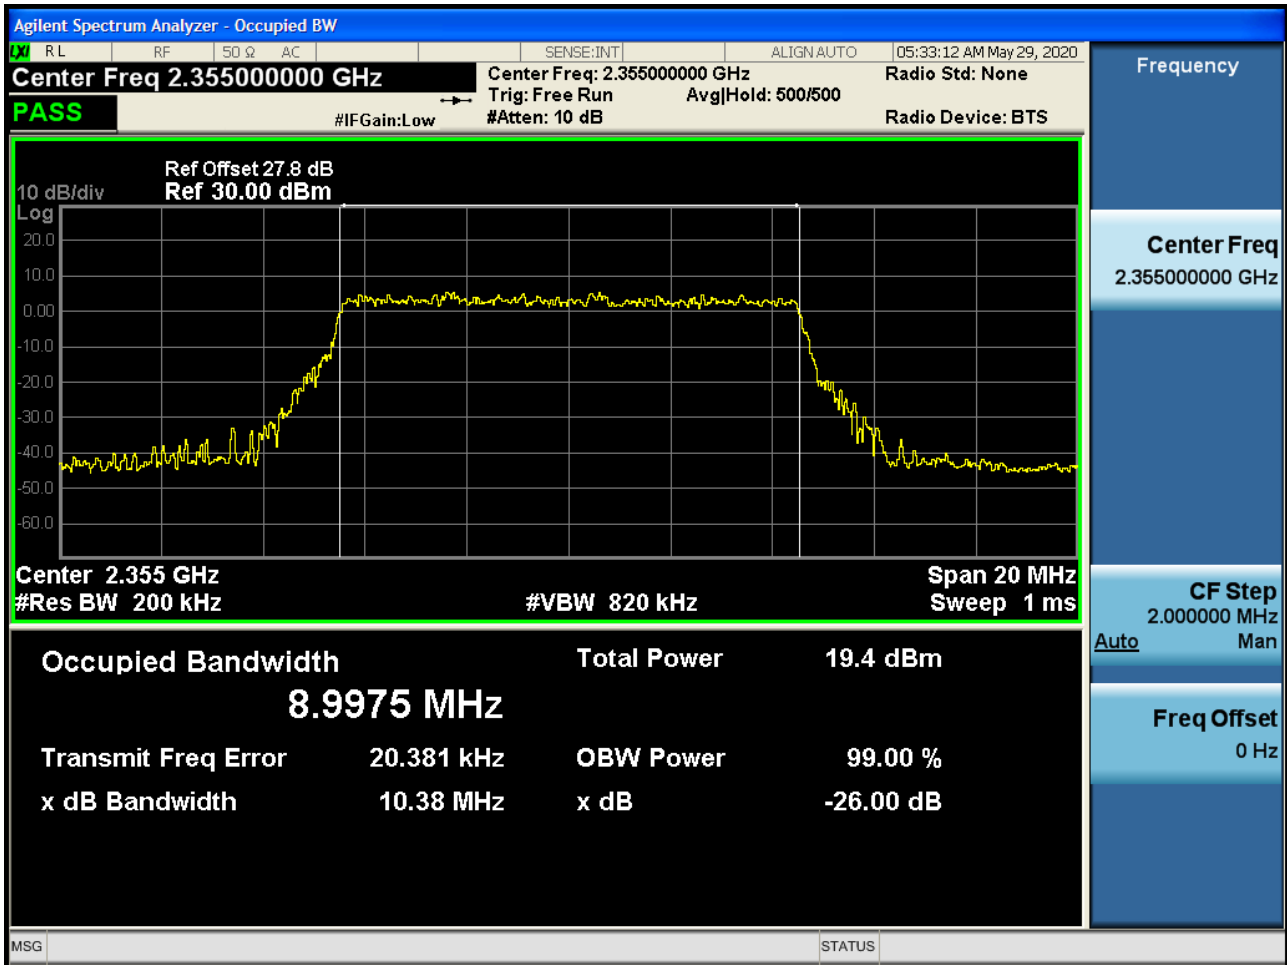


BAND 40. Occupied Bandwidth Plot (10 MHz 2355MHz\_64QAM\_FullIRB)

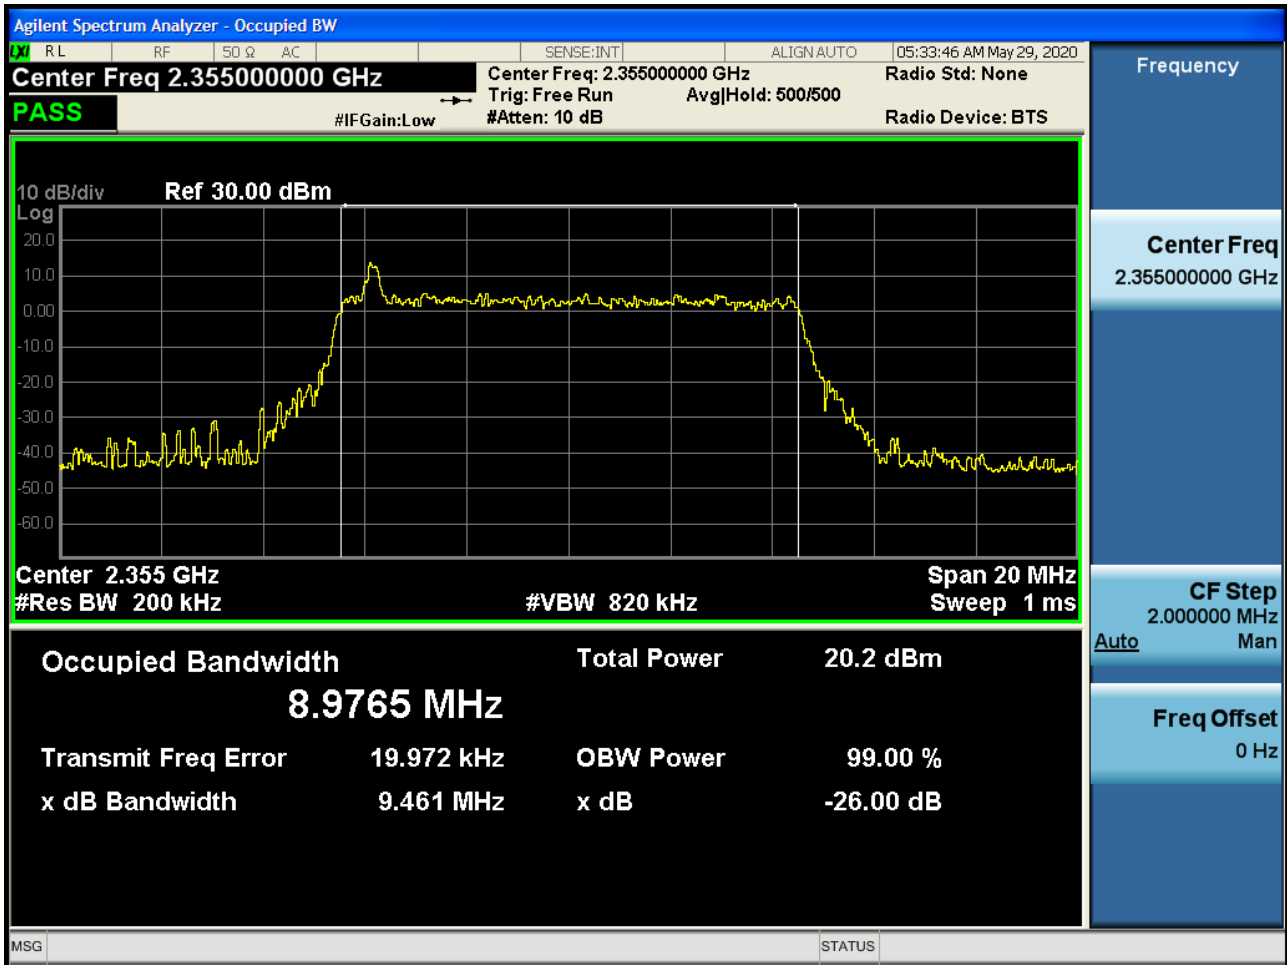

BAND 40. PAR Plot (5M BW\_2310MHz\_QPSK\_FullIRB)

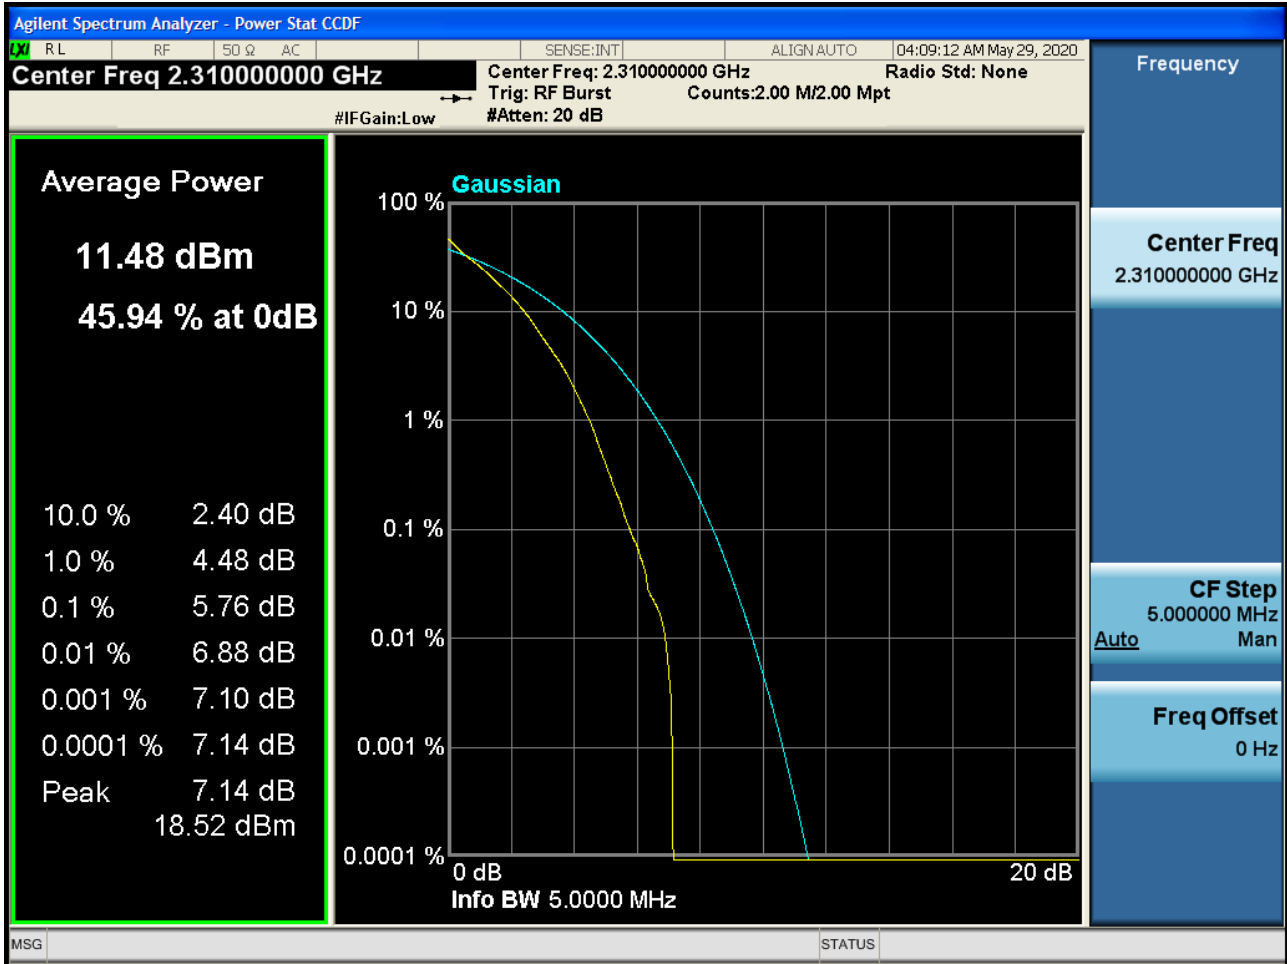


BAND 40. PAR Plot (5M BW\_2310MHz\_16QAM\_FullIRB)

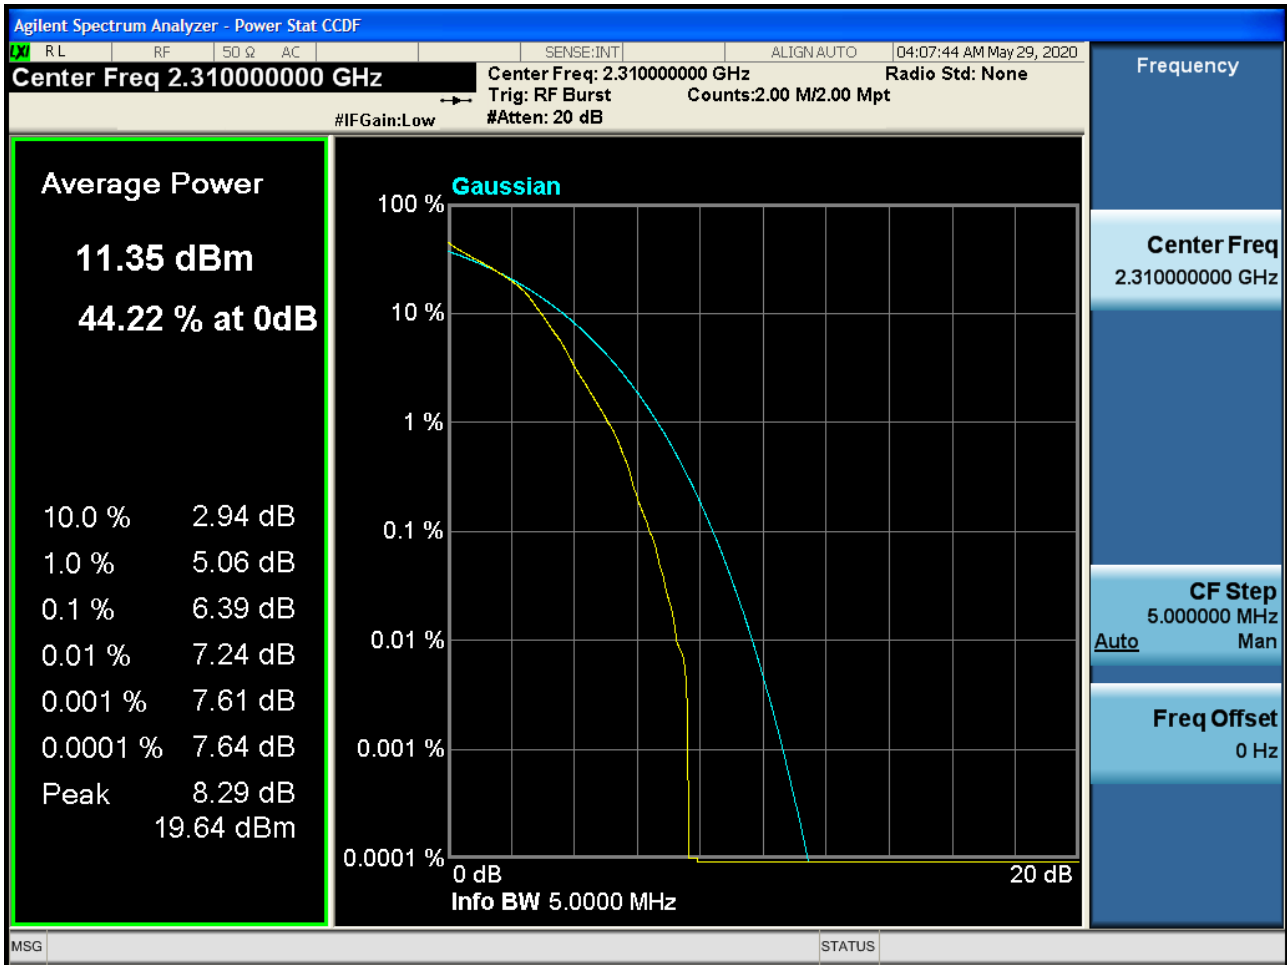





BAND 40. PAR Plot (5M BW\_2310MHz\_64QAM\_FullIRB)

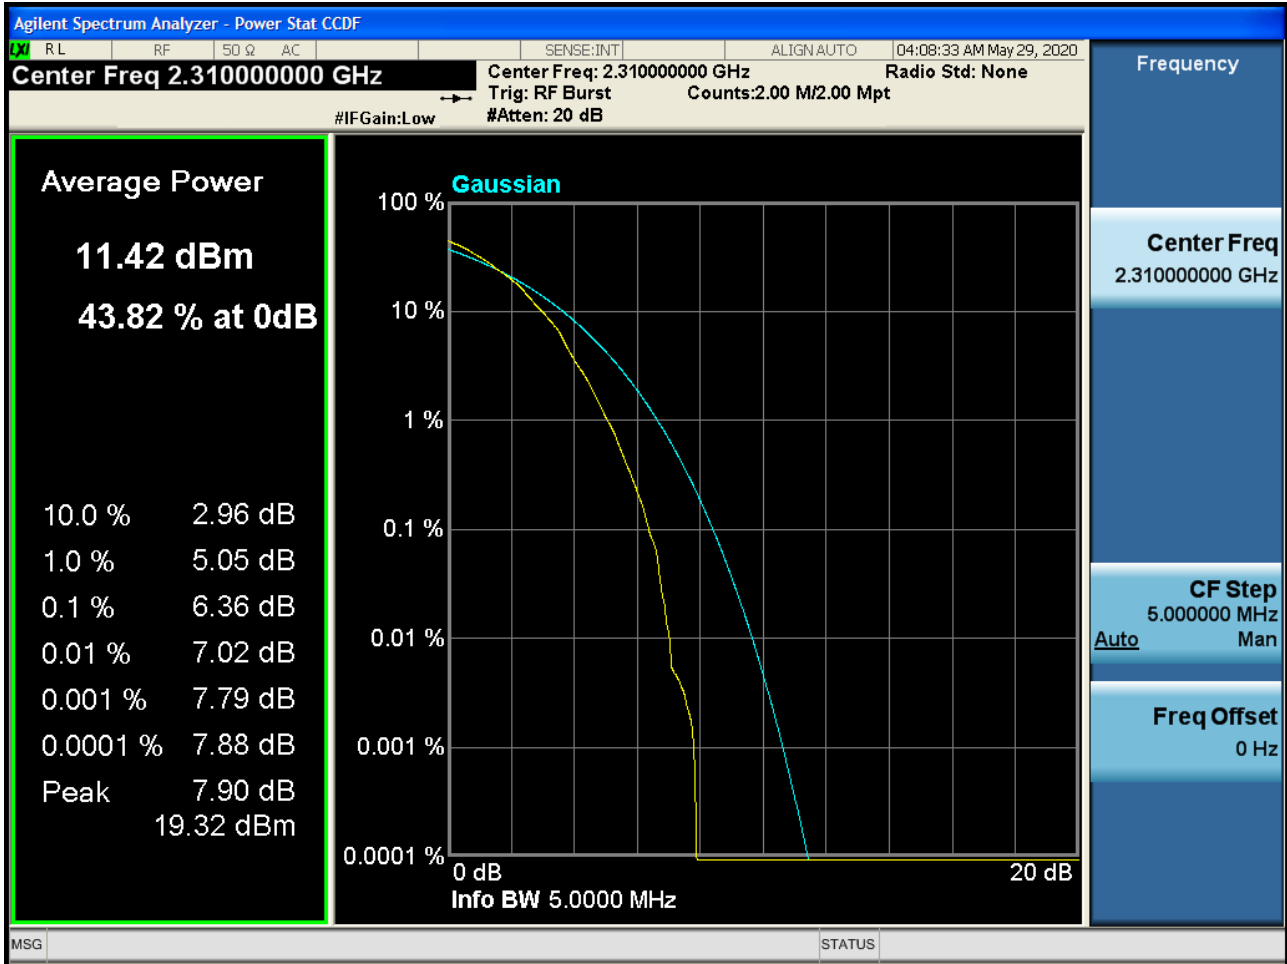


BAND 40. PAR Plot (5M BW\_2355MHz\_QPSK\_FullIRB)

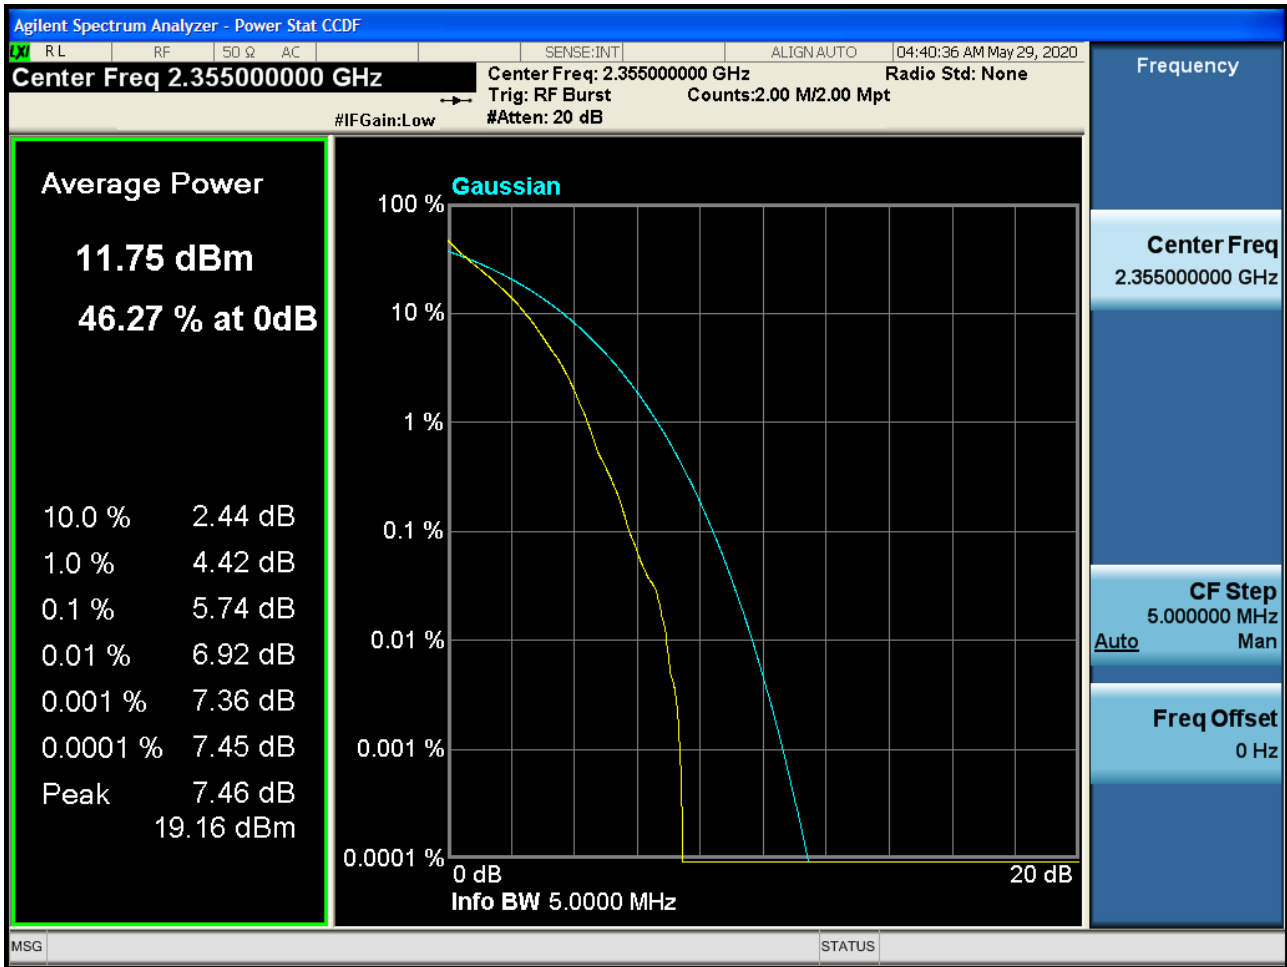


BAND 40. PAR Plot (5M BW\_2355MHz\_16QAM\_FullIRB)

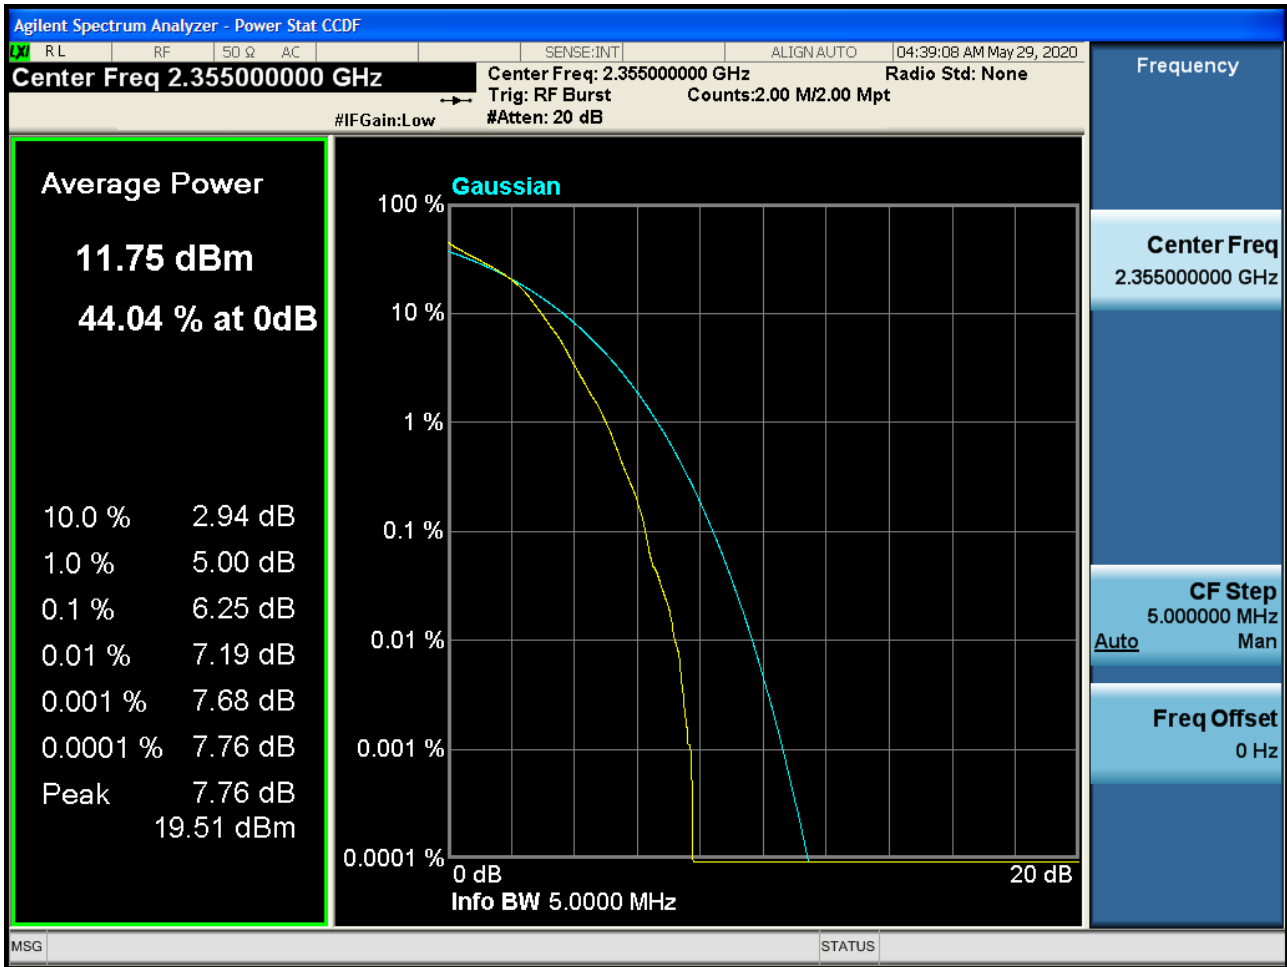


BAND 40. PAR Plot (5M BW\_2355MHz\_64QAM\_FullIRB)

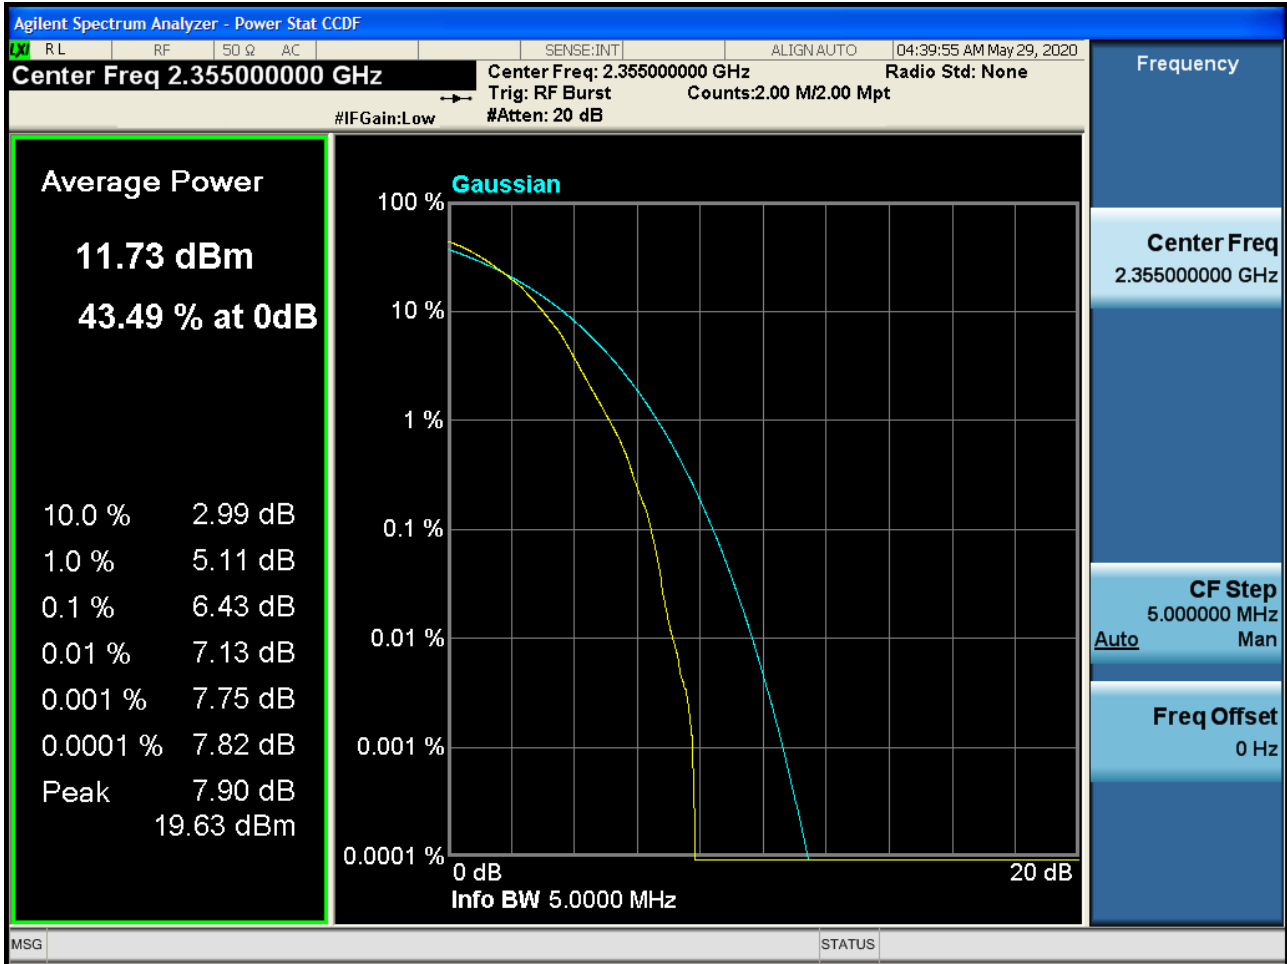


BAND 40. PAR Plot (10M BW\_ 2310MHz\_QPSK\_FullRB)

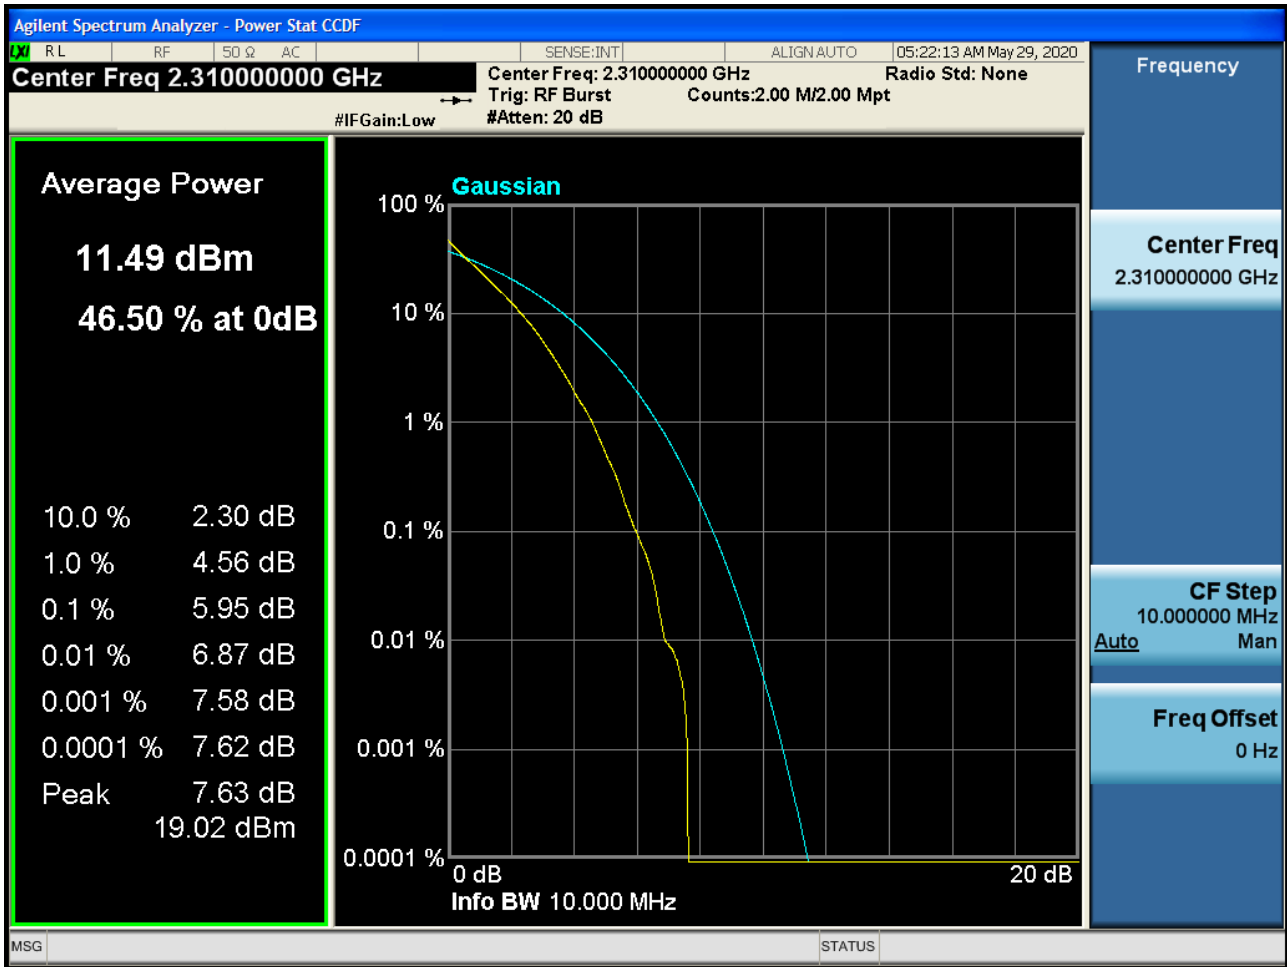


BAND 40. PAR Plot (10M BW\_ 2310MHz\_16QAM\_FullRB)

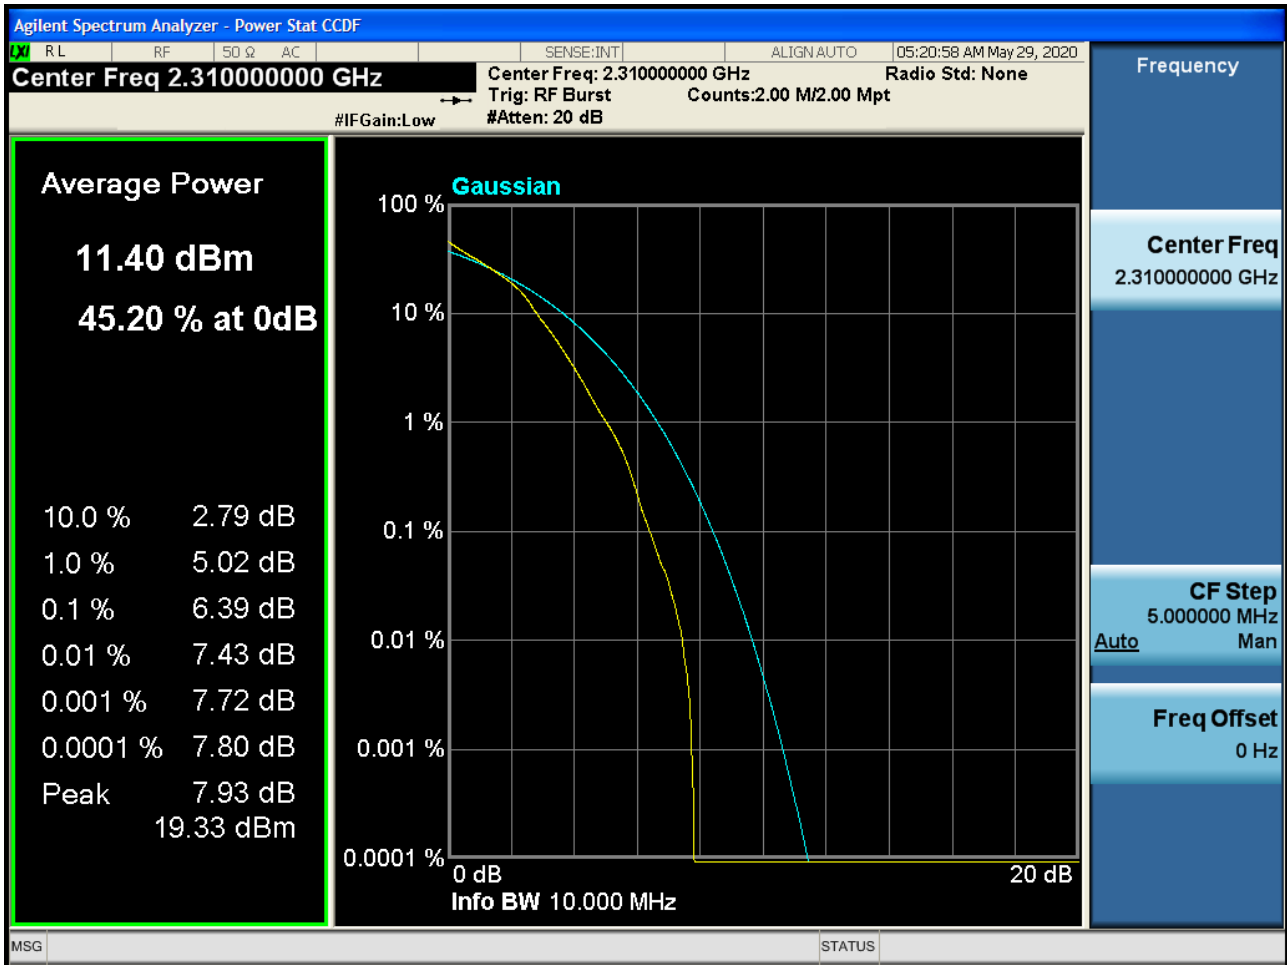

BAND 40. PAR Plot (10M BW\_ 2310MHz\_64QAM\_FullRB)

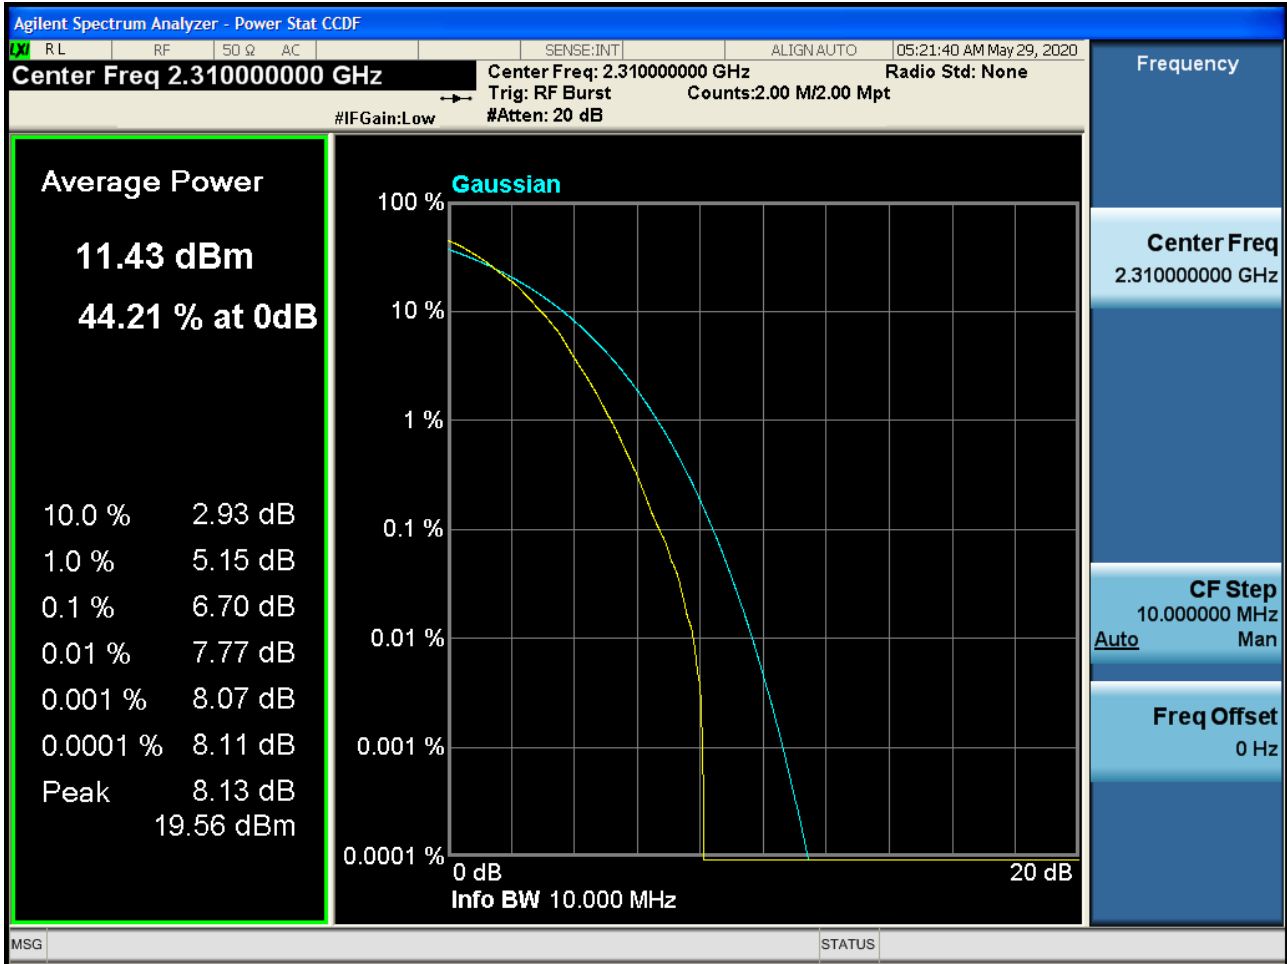


BAND 40. PAR Plot (10M BW\_ 2355MHz\_QPSK\_FullIRB)

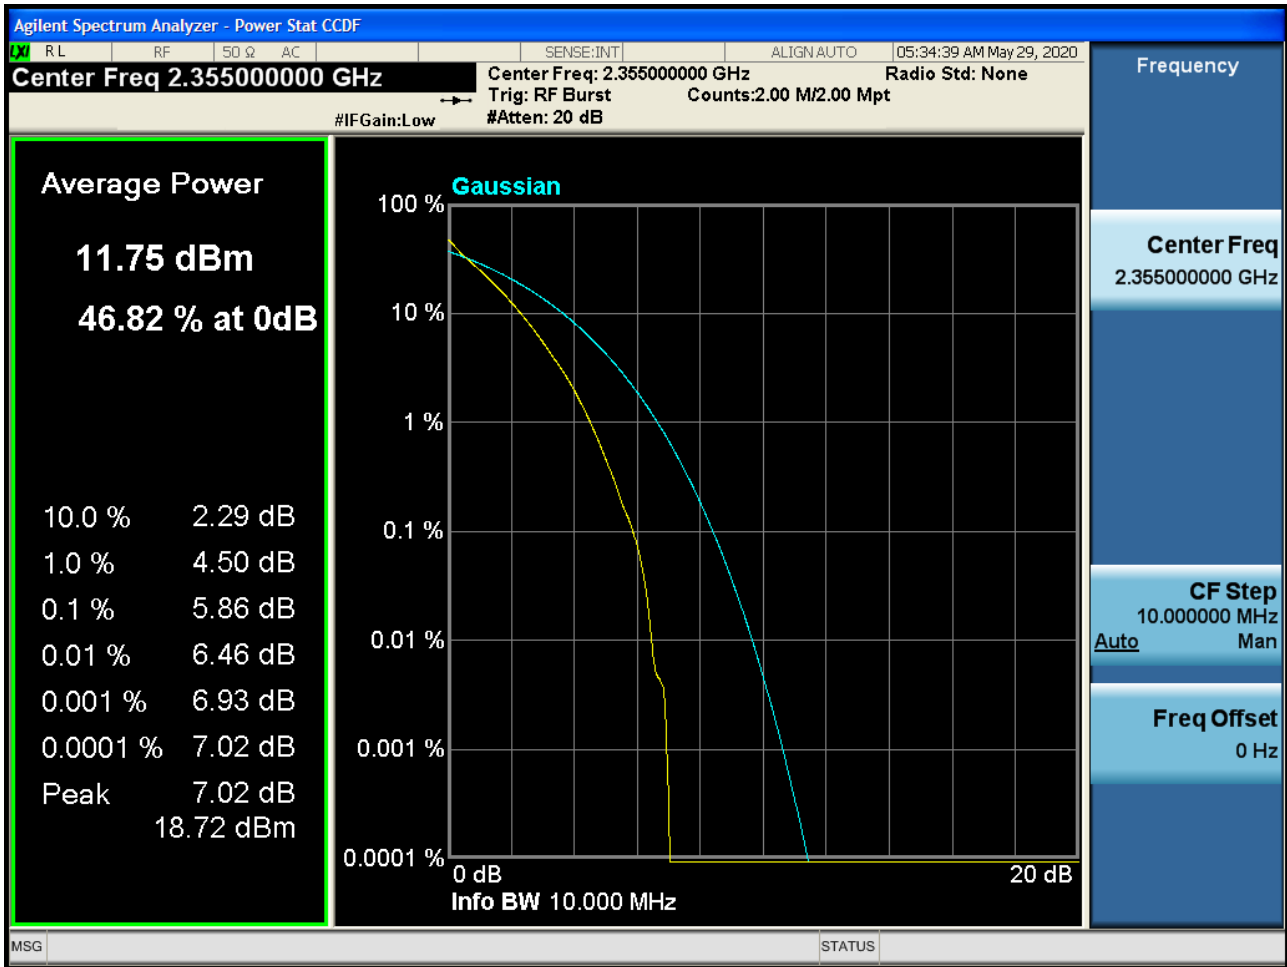




BAND 40. PAR Plot (10M BW\_ 2355MHz\_16QAM\_FullRB)

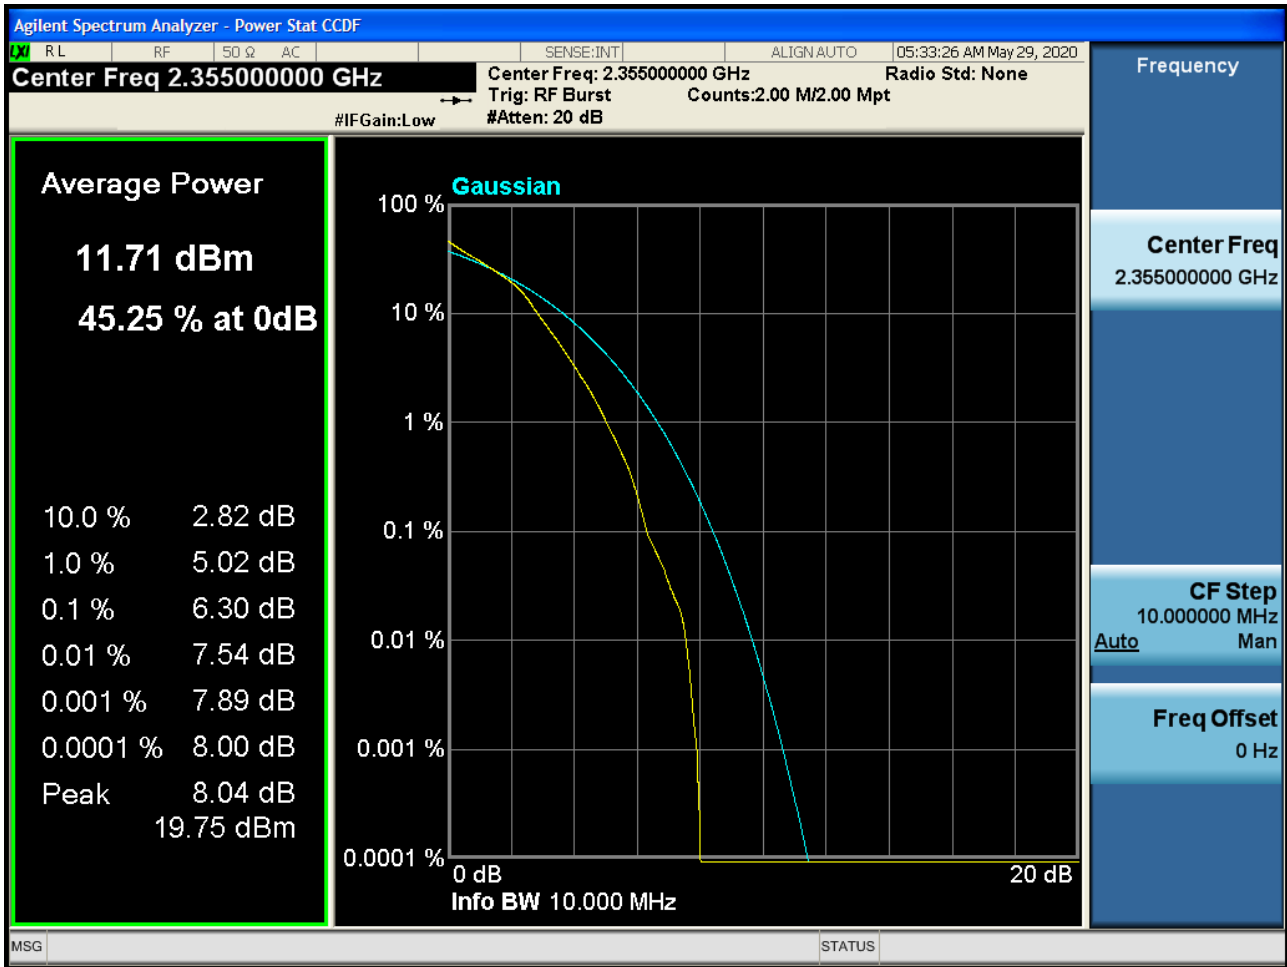


BAND 40. PAR Plot (10M BW\_ 2355MHz\_64QAM\_FullRB)

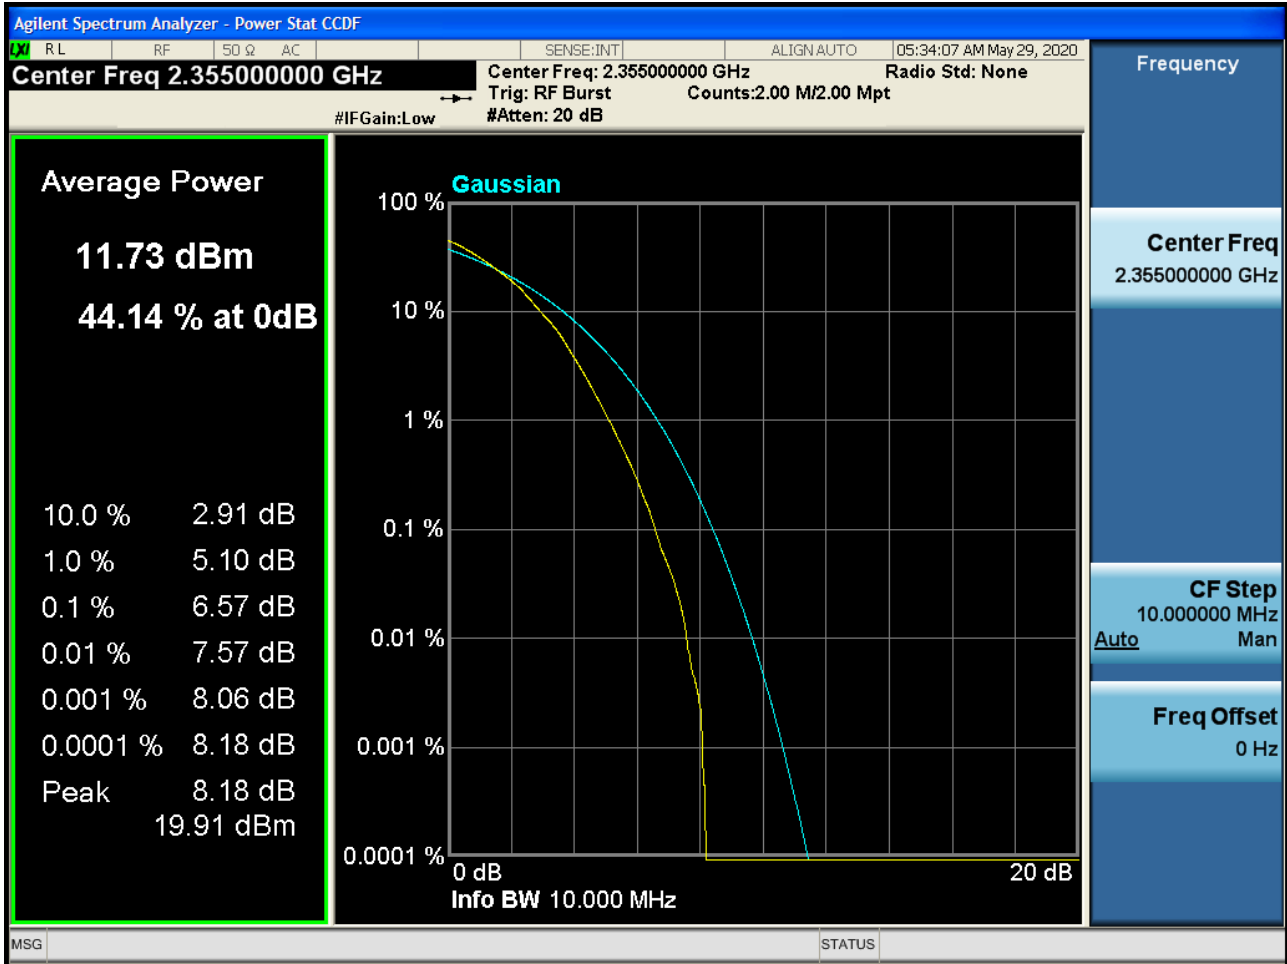


- Lower Side-


BAND 40. 5M\_BandEdge(2280MHz-2288MHz)\_2312.5MHz\_1RB

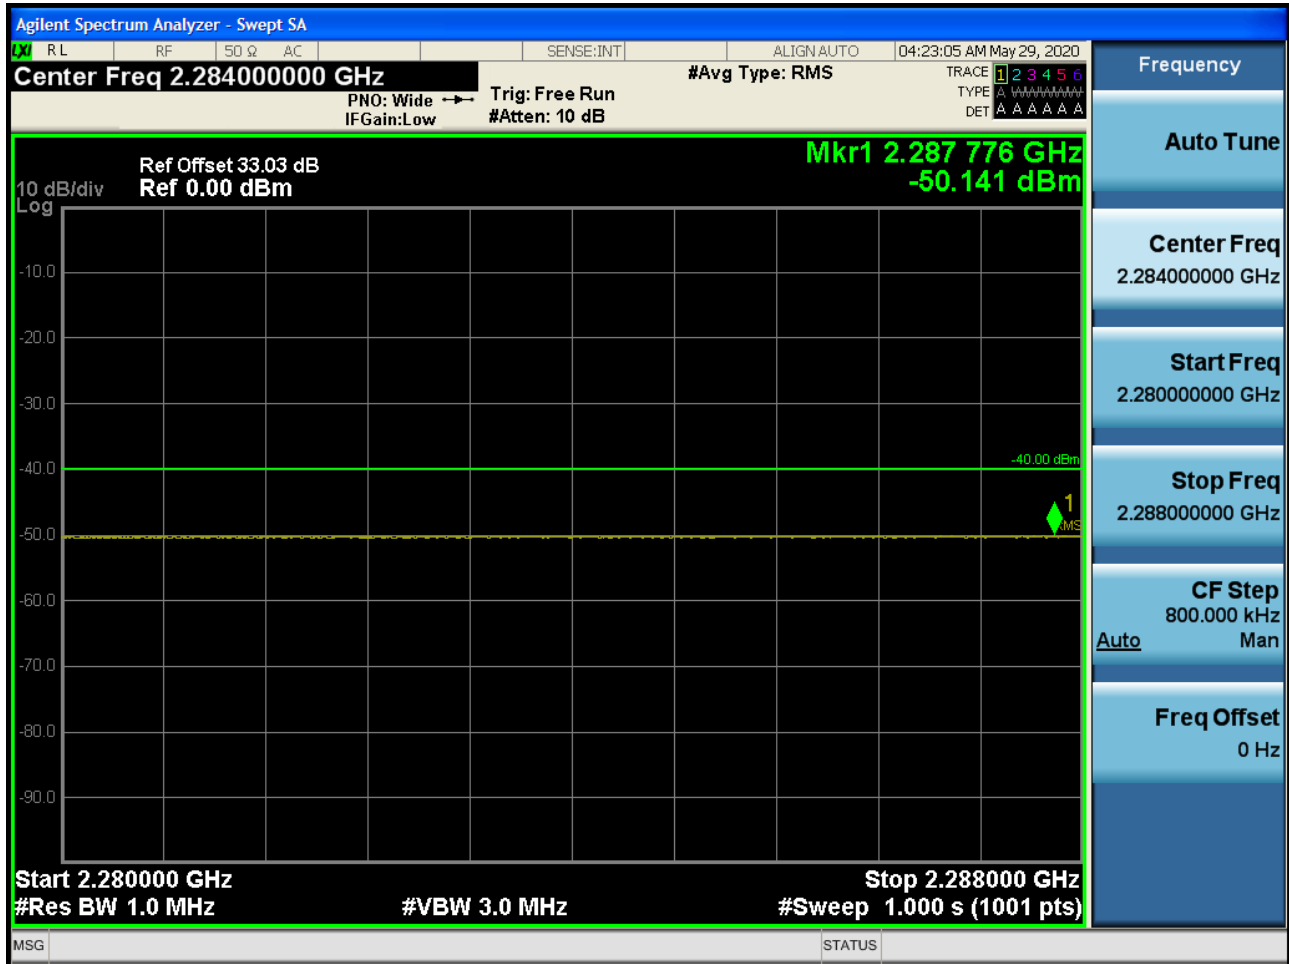


BAND 40. 5M\_BandEdge(2280MHz-2288MHz)\_2307.5MHz\_1RB

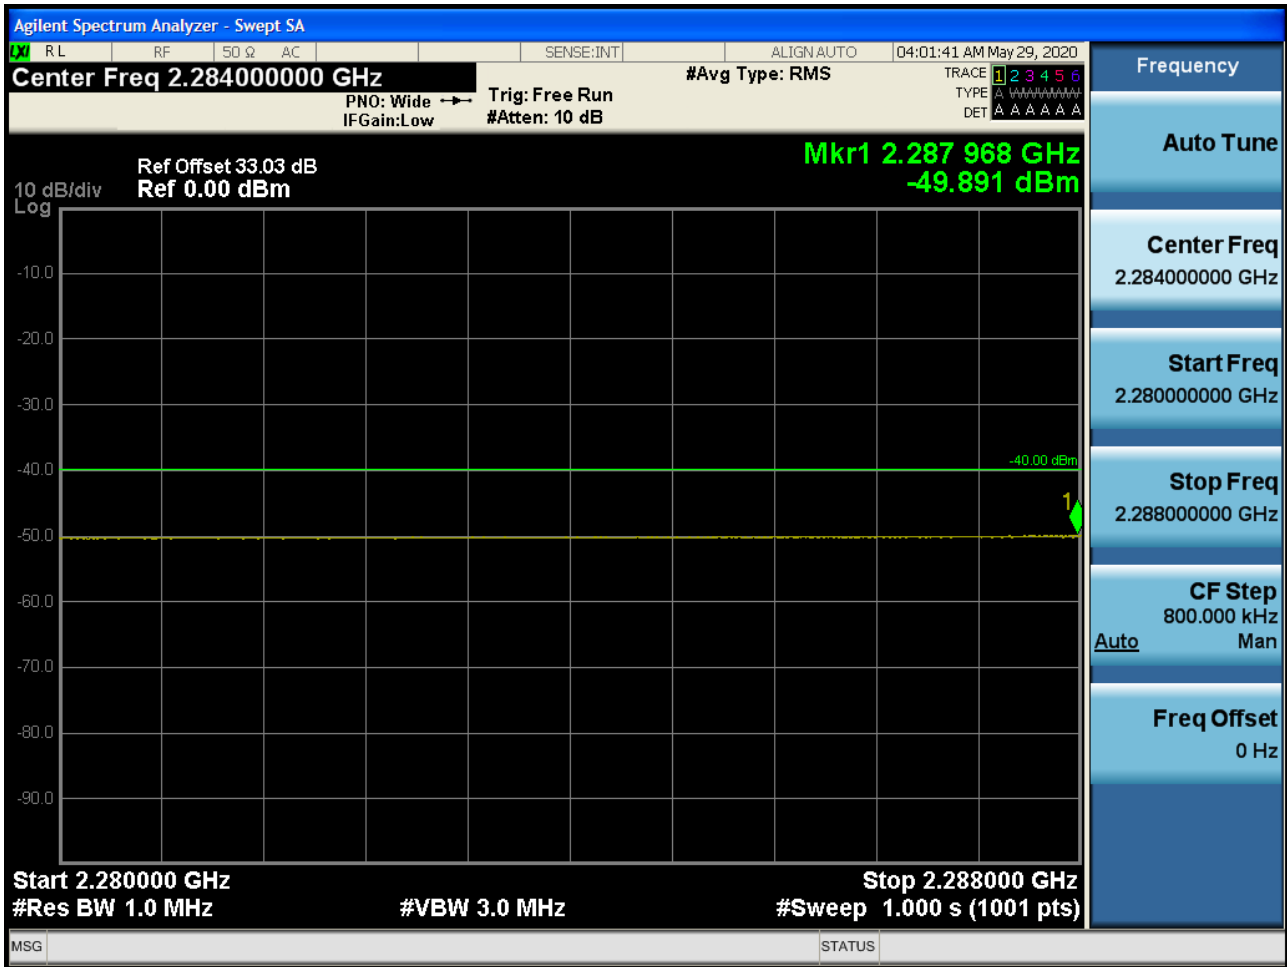


BAND 40. 5M\_BandEdge(2280MHz-2288MHz)\_2310MHz\_1RB

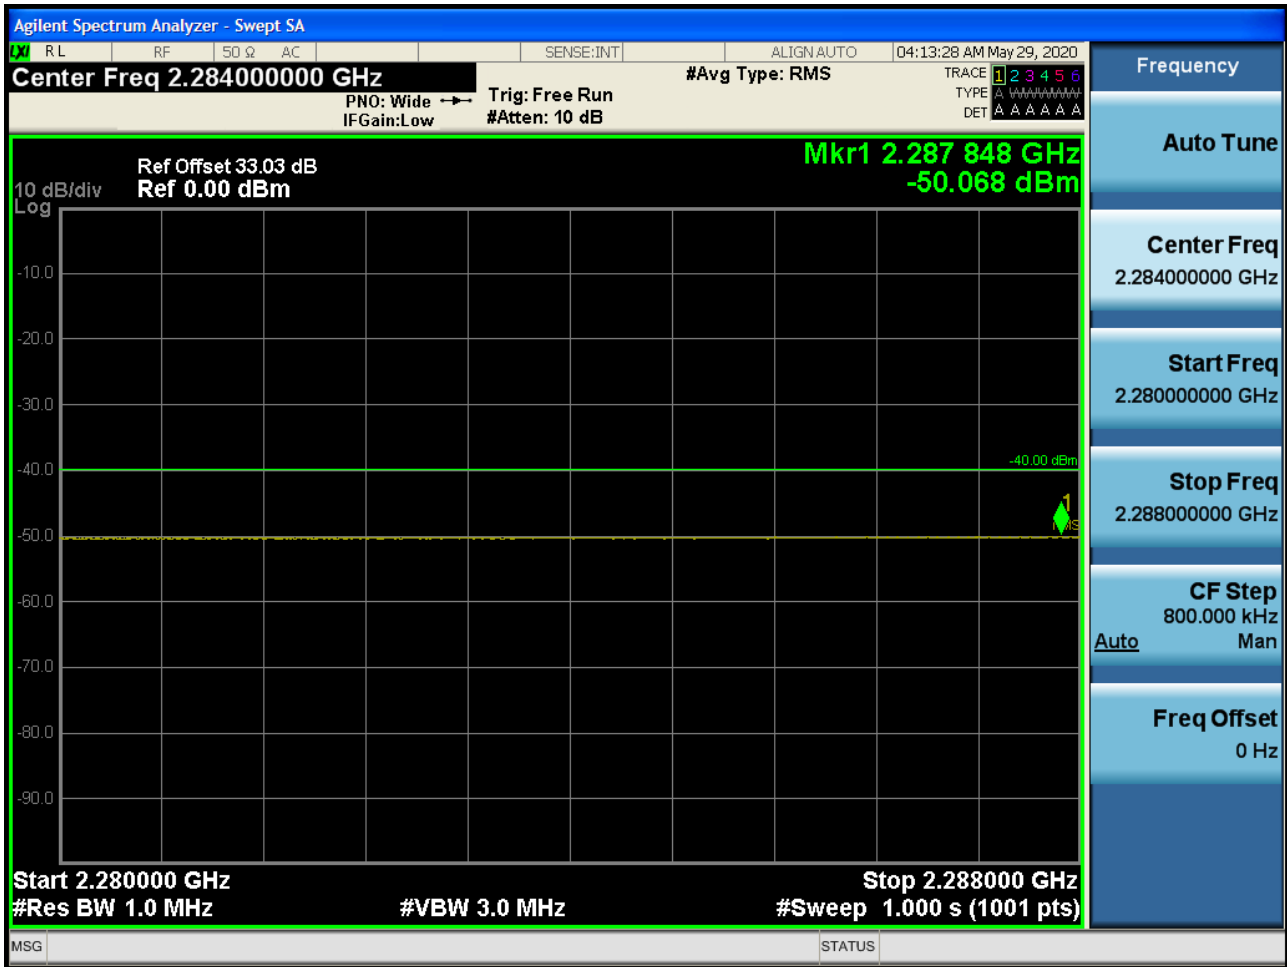


BAND 40. 5M\_BandEdge(2288MHz-2292MHz)\_2312.5MHz\_1RB

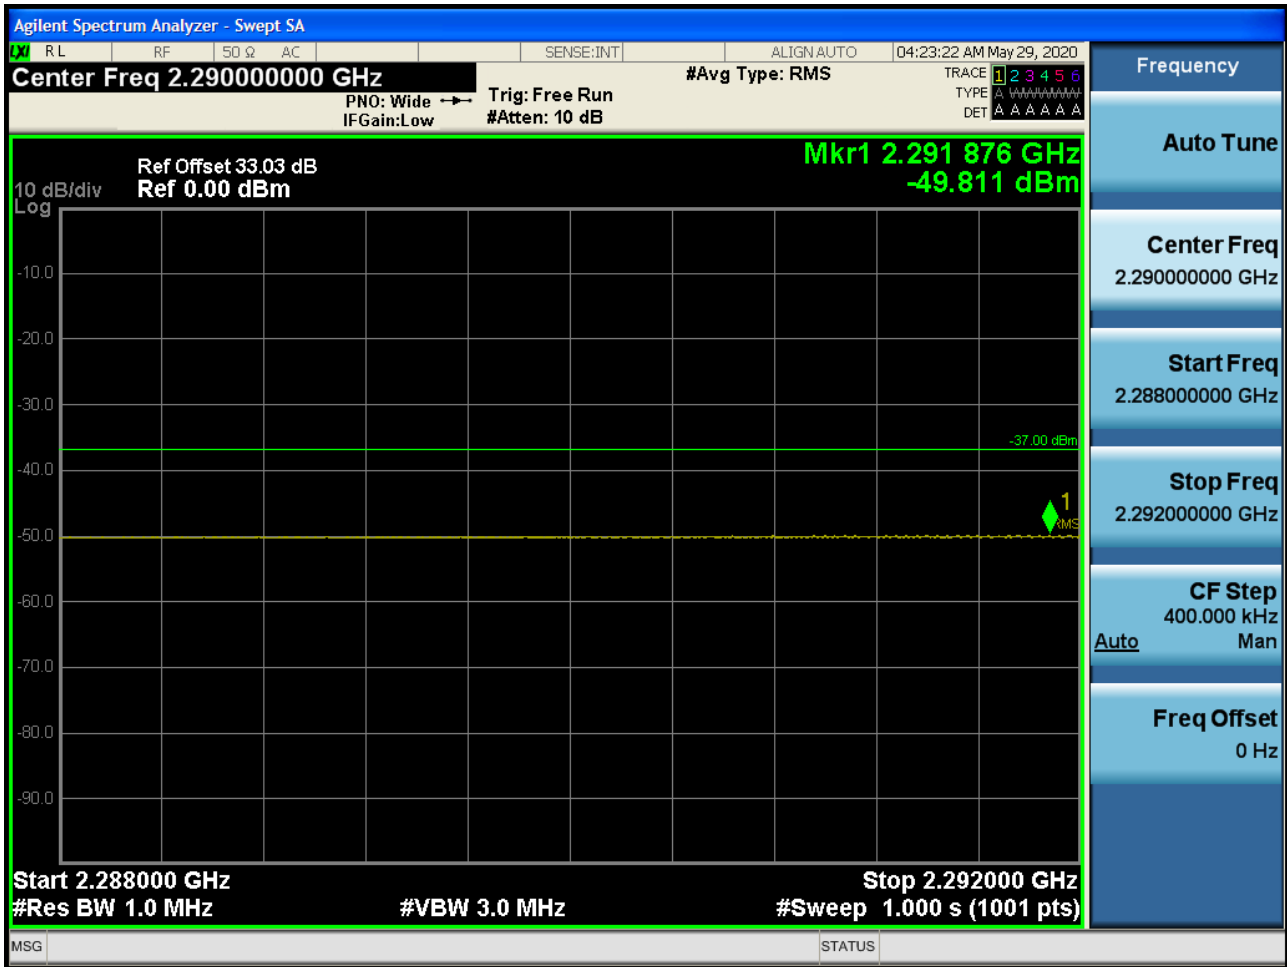

BAND 40. 5M\_BandEdge(2288MHz-2292MHz)\_2307.5MHz\_1RB

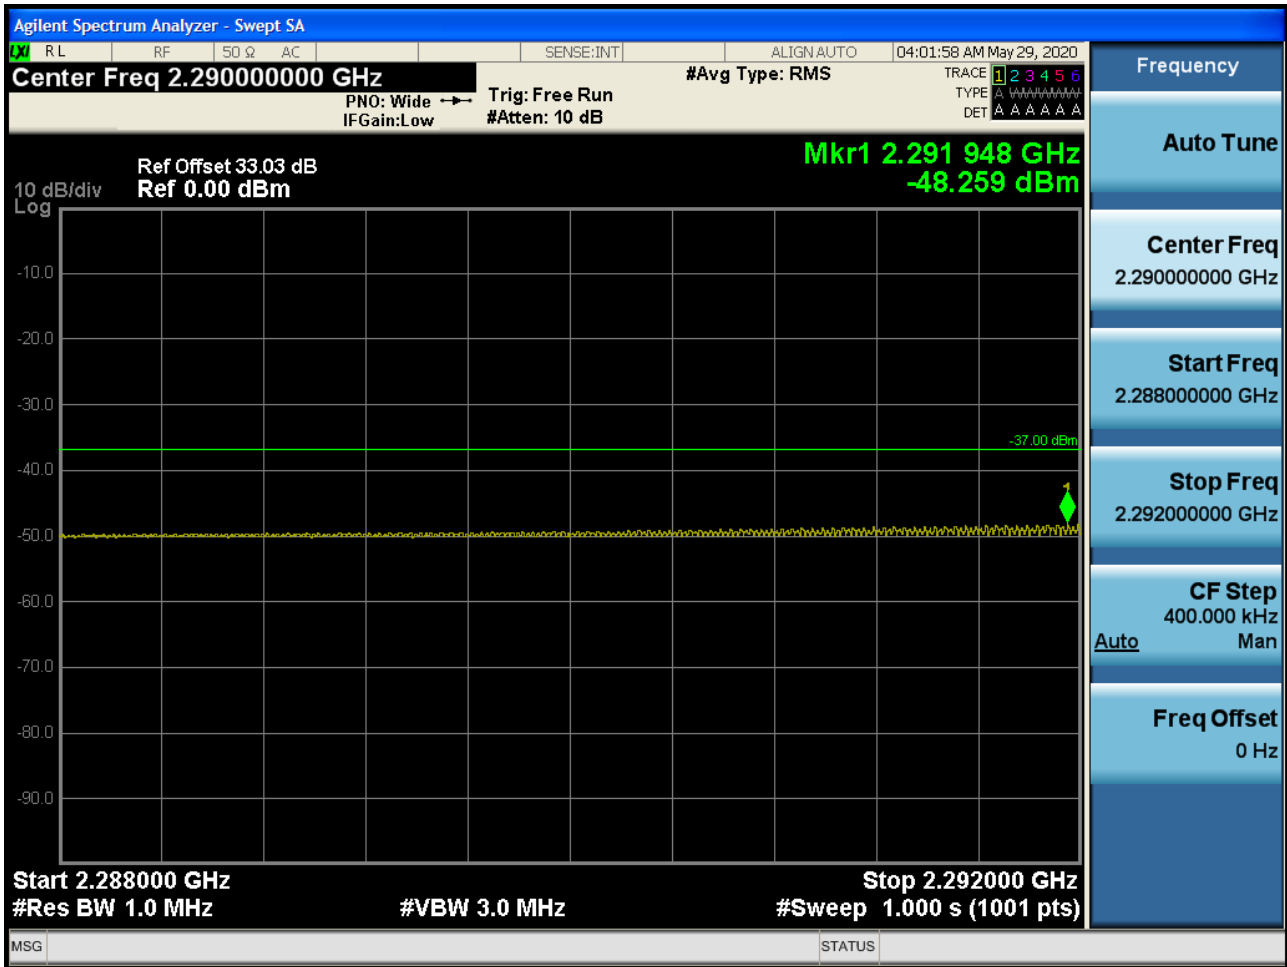


BAND 40. 5M\_BandEdge(2288MHz-2292MHz)\_2310MHz\_1RB

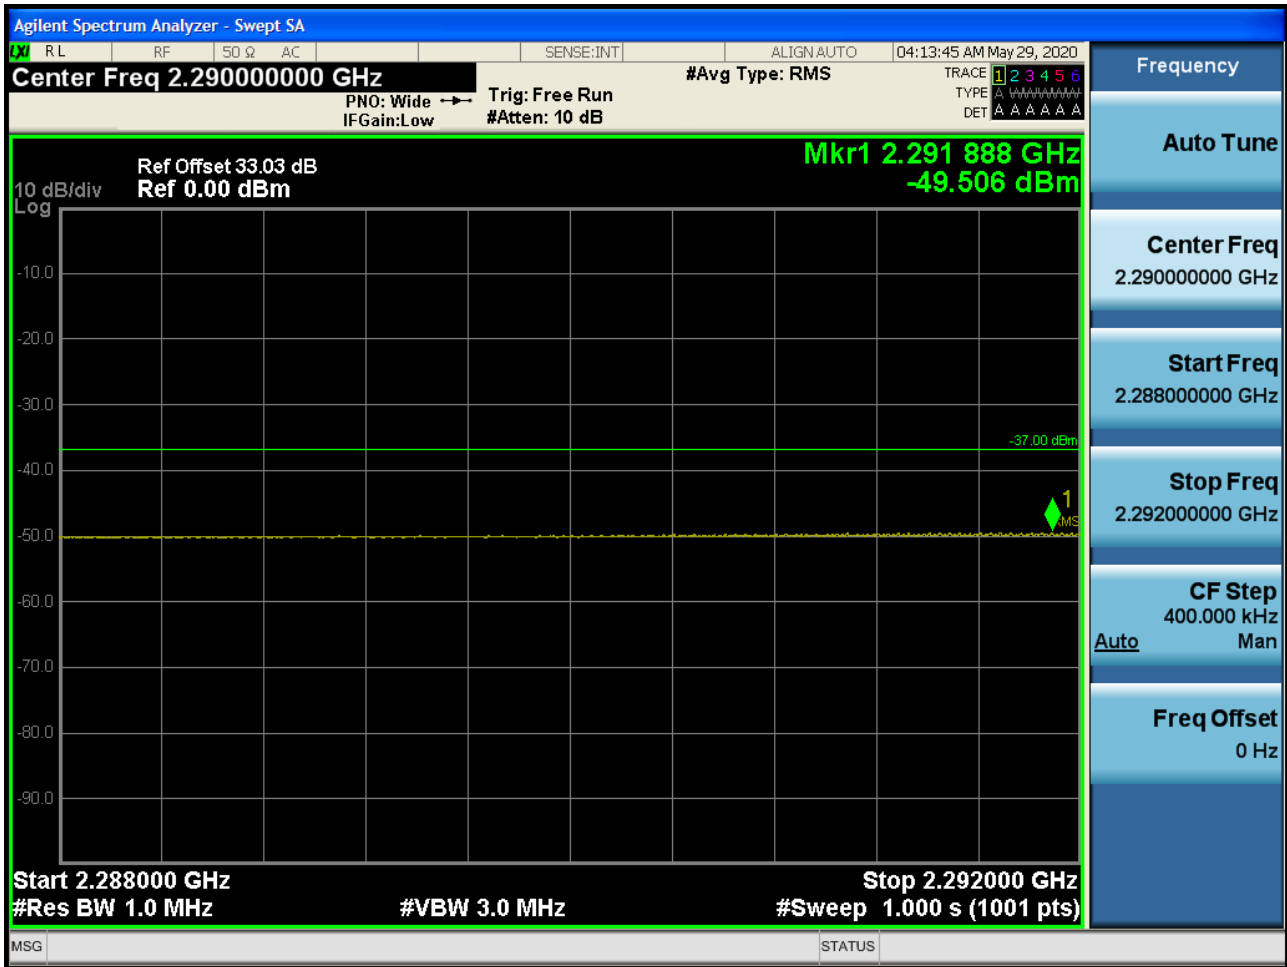





BAND 40. 5M\_BandEdge(2292MHz-2296MHz)\_2312.5MHz\_1RB

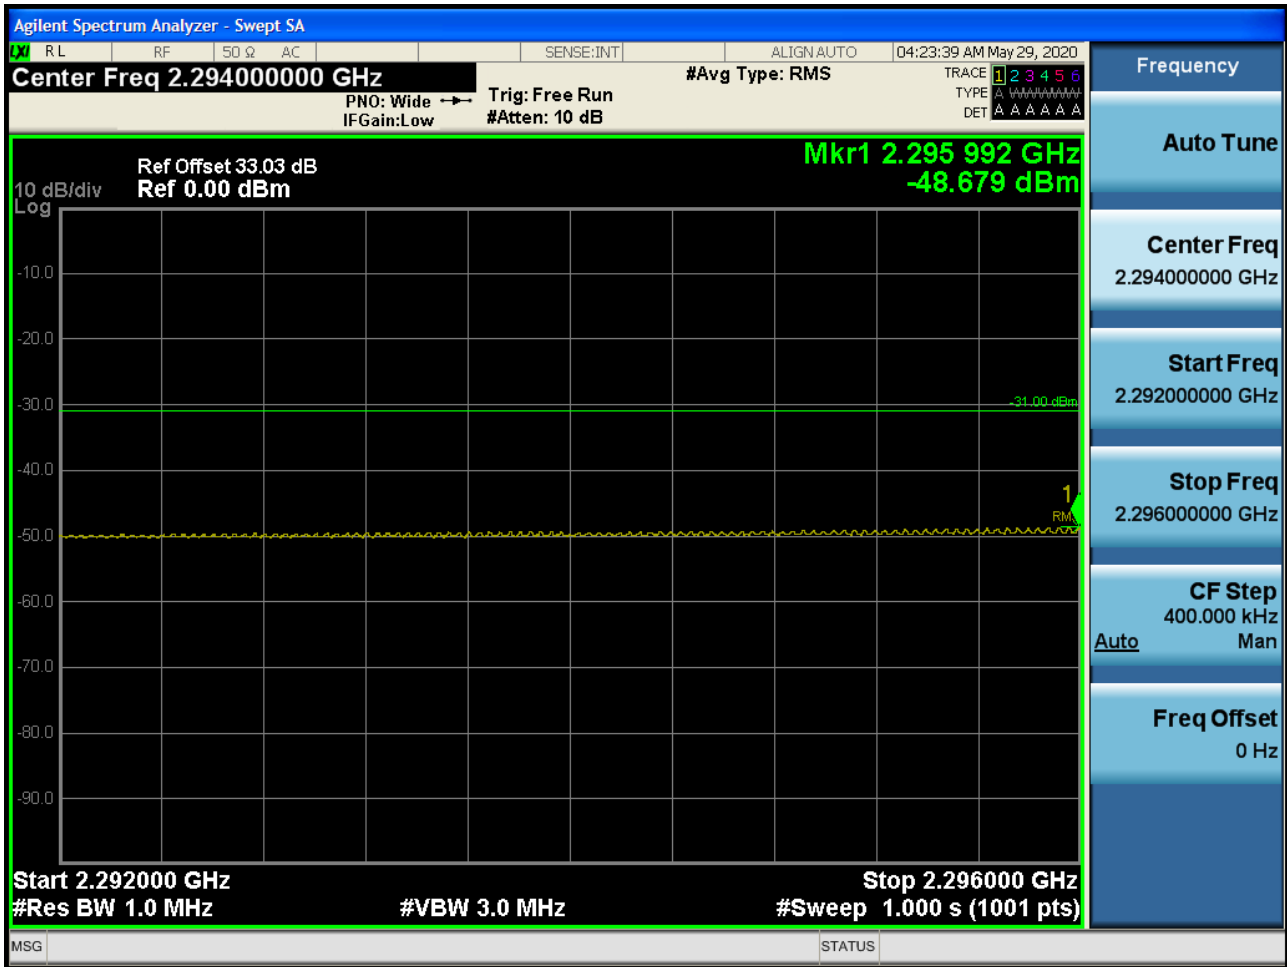


BAND 40. 5M\_BandEdge(2292MHz-2296MHz)\_2307.5MHz\_1RB

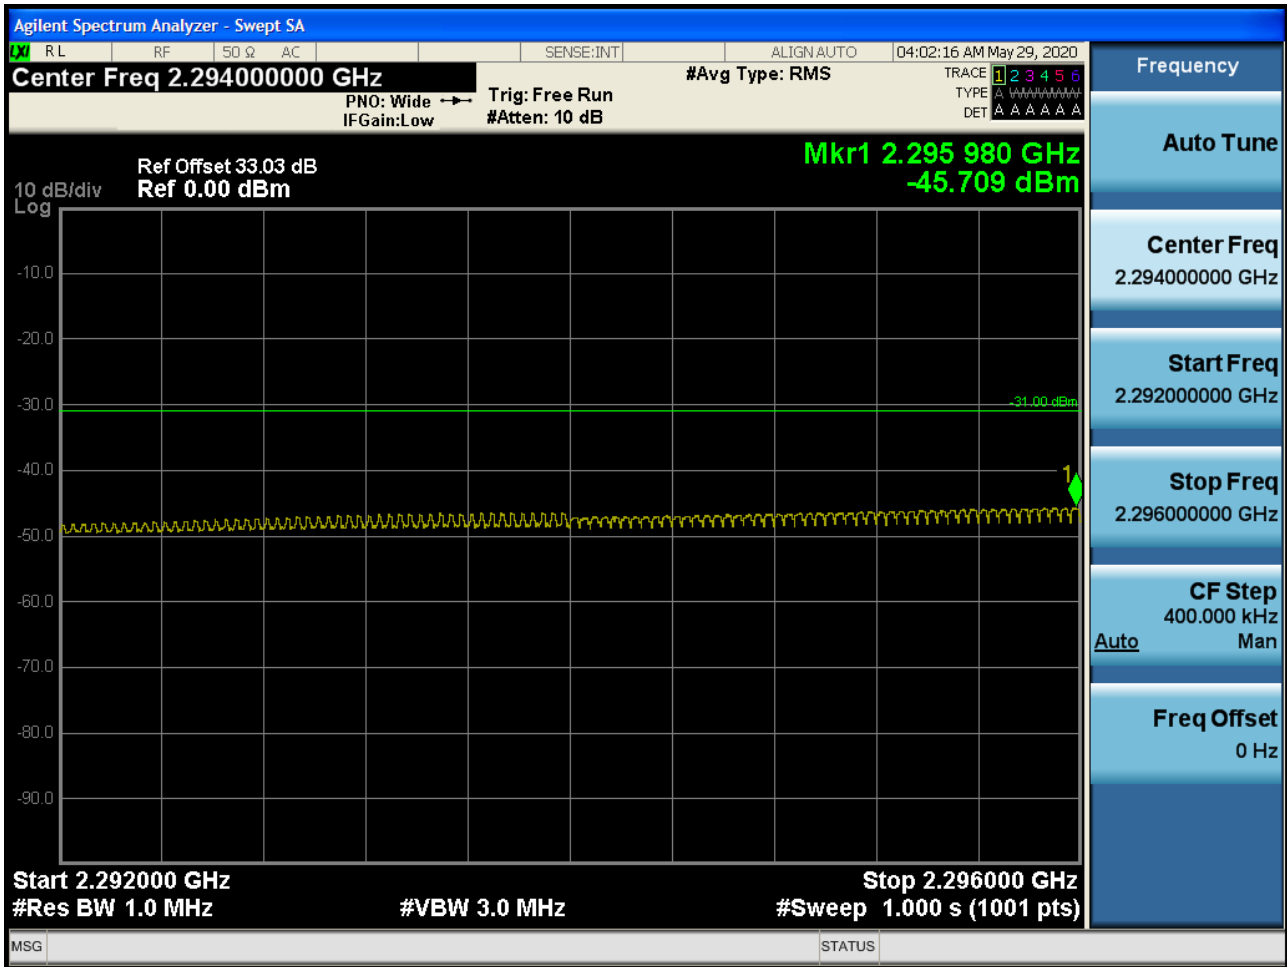


BAND 40. 5M\_BandEdge(2292MHz-2296MHz)\_2310MHz\_1RB

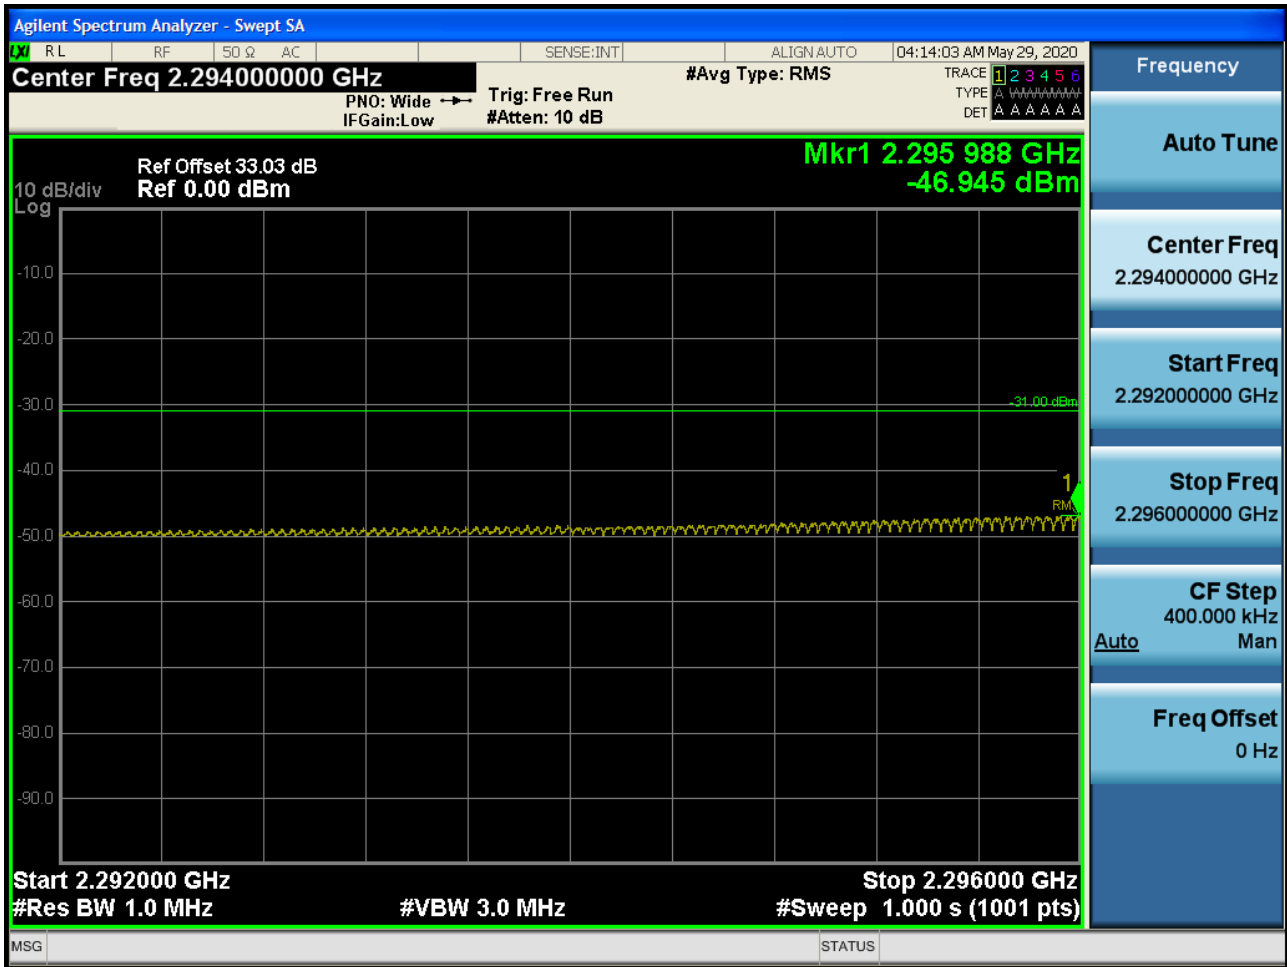


BAND 40. 5M\_BandEdge(2296MHz-2300MHz)\_2312.5MHz\_1RB

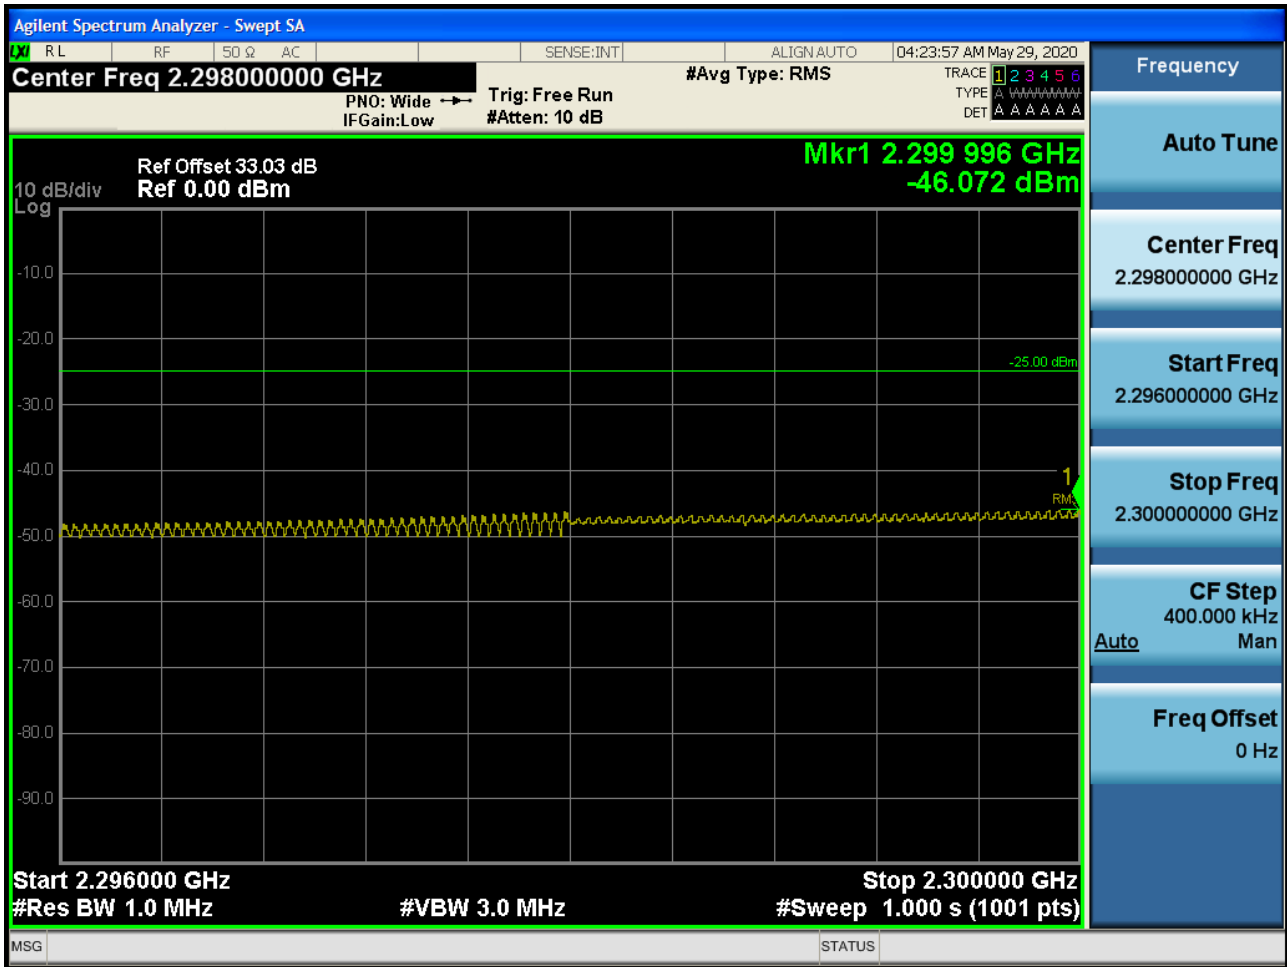


BAND 40. 5M\_BandEdge(2296MHz-2300MHz)\_2307.5MHz\_1RB

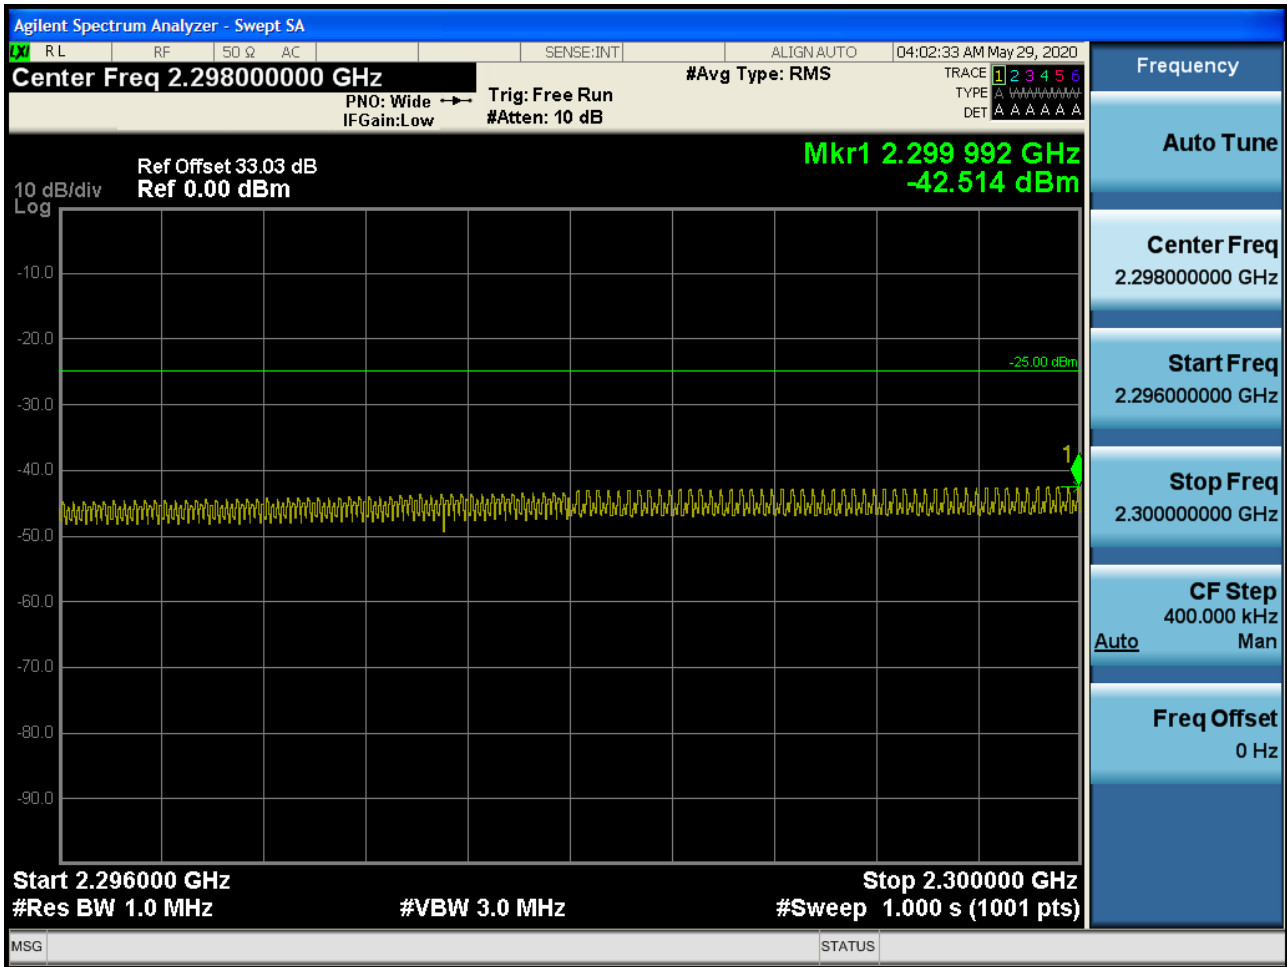


BAND 40. 5M\_BandEdge(2296MHz-2300MHz)\_2310MHz\_1RB

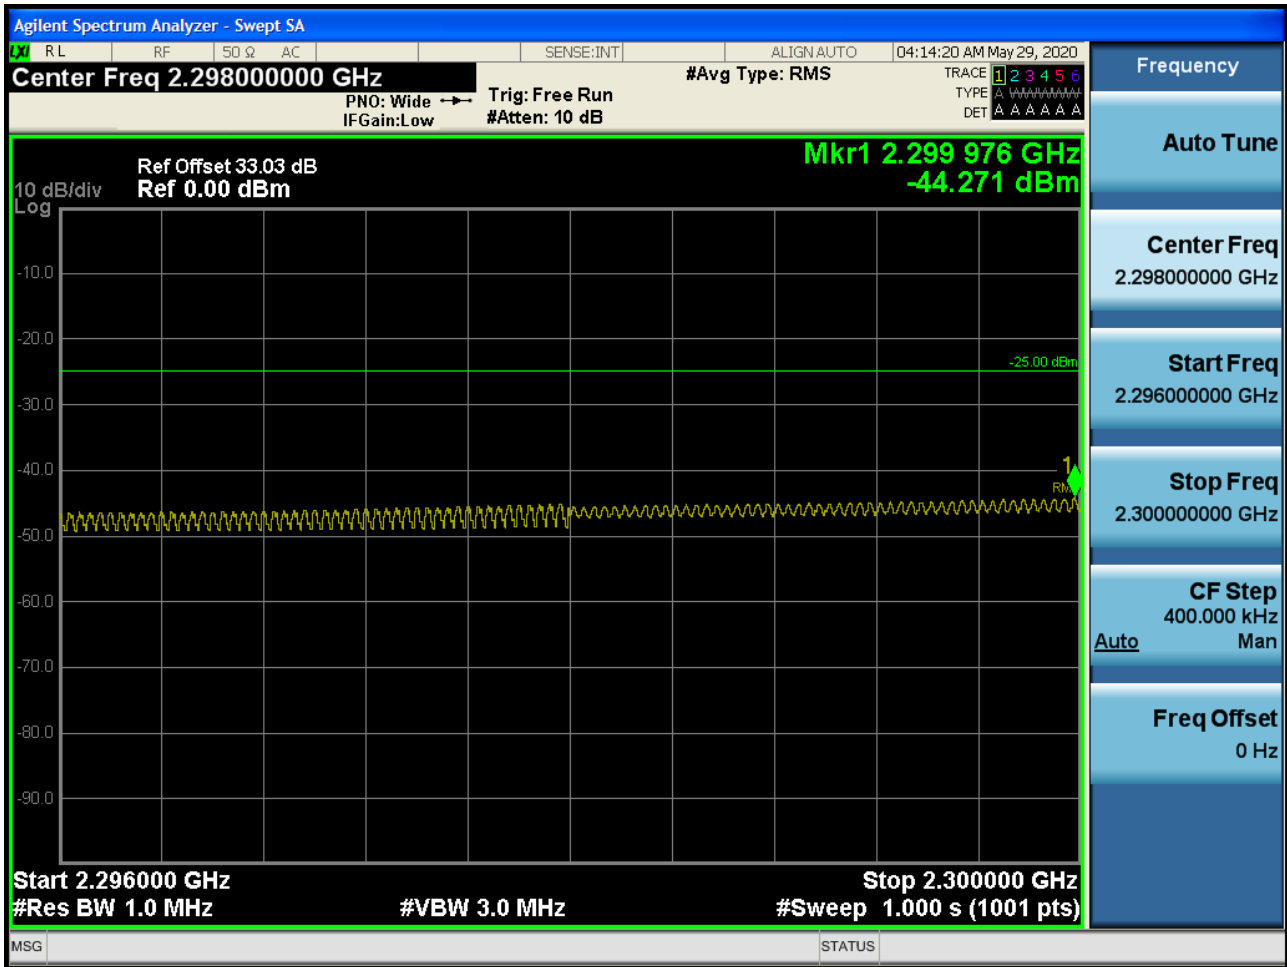

BAND 40. 5M\_BandEdge(2300MHz-2304MHz)\_2307.5MHz\_1RB

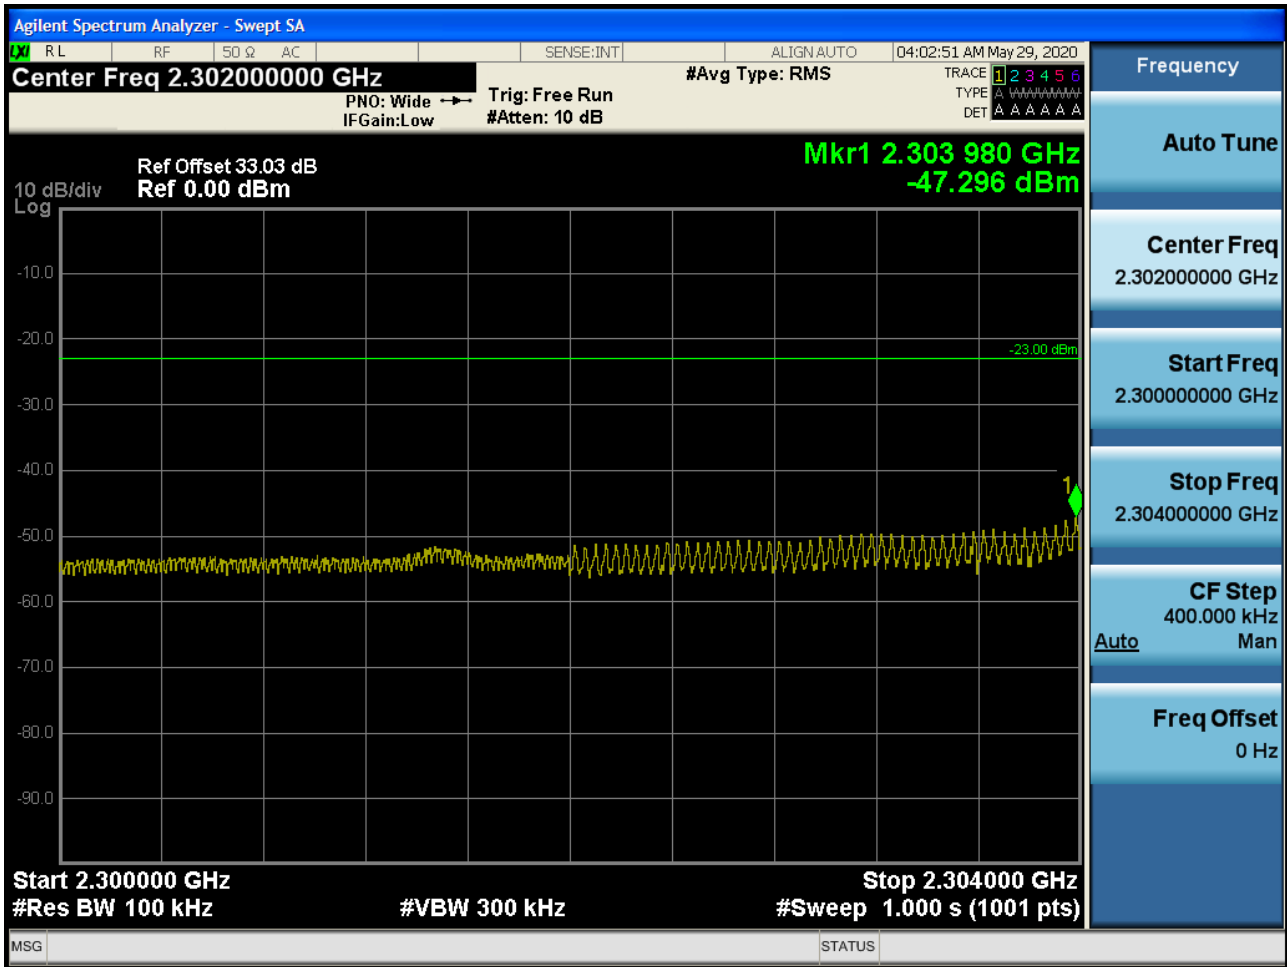


BAND 40. 5M\_BandEdge(2300MHz-2305MHz)\_2312.5MHz\_1RB

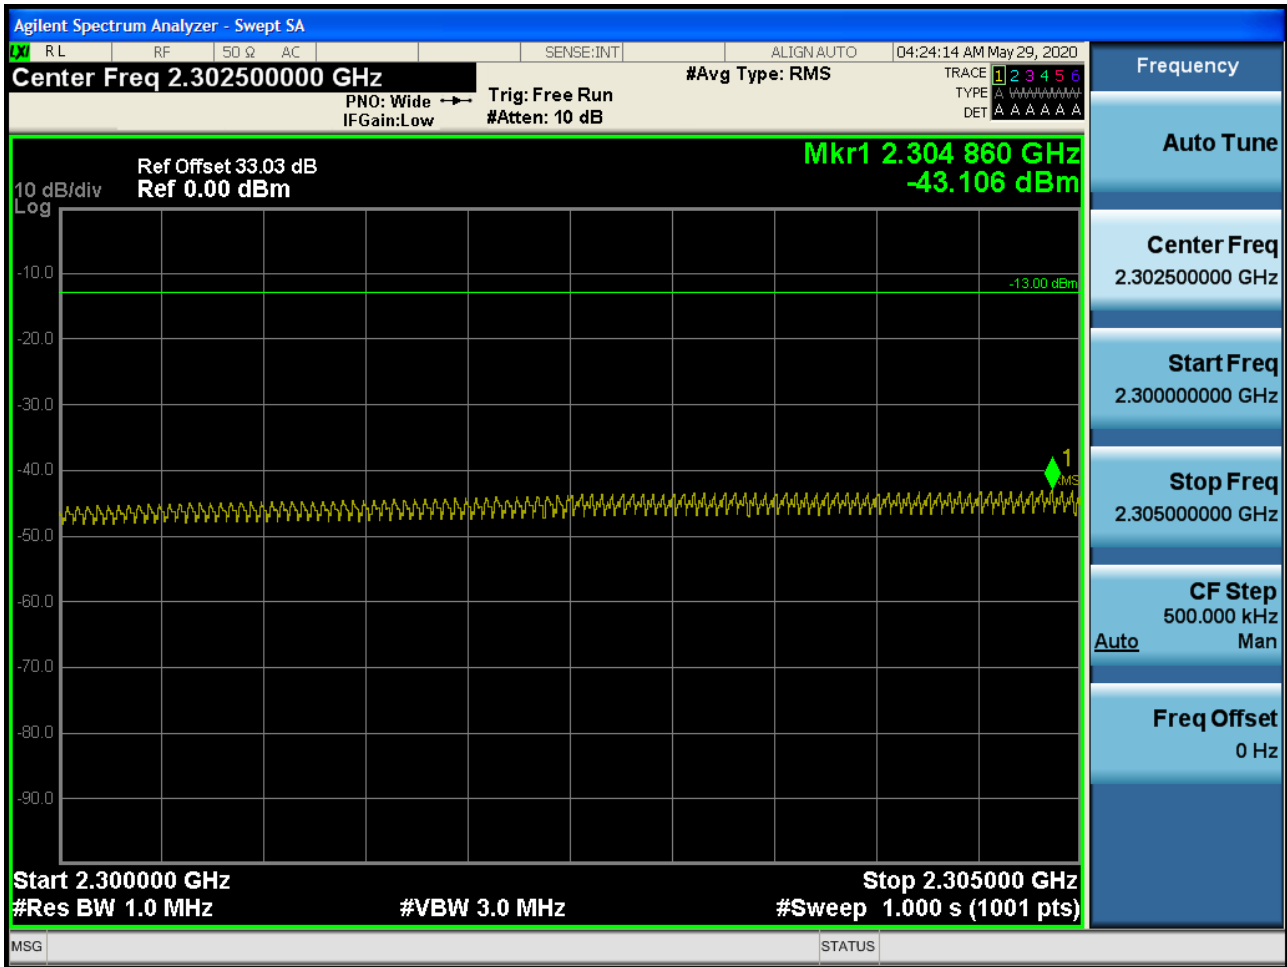





BAND 40. 5M\_BandEdge(2300MHz-2305MHz)\_2310MHz\_1RB

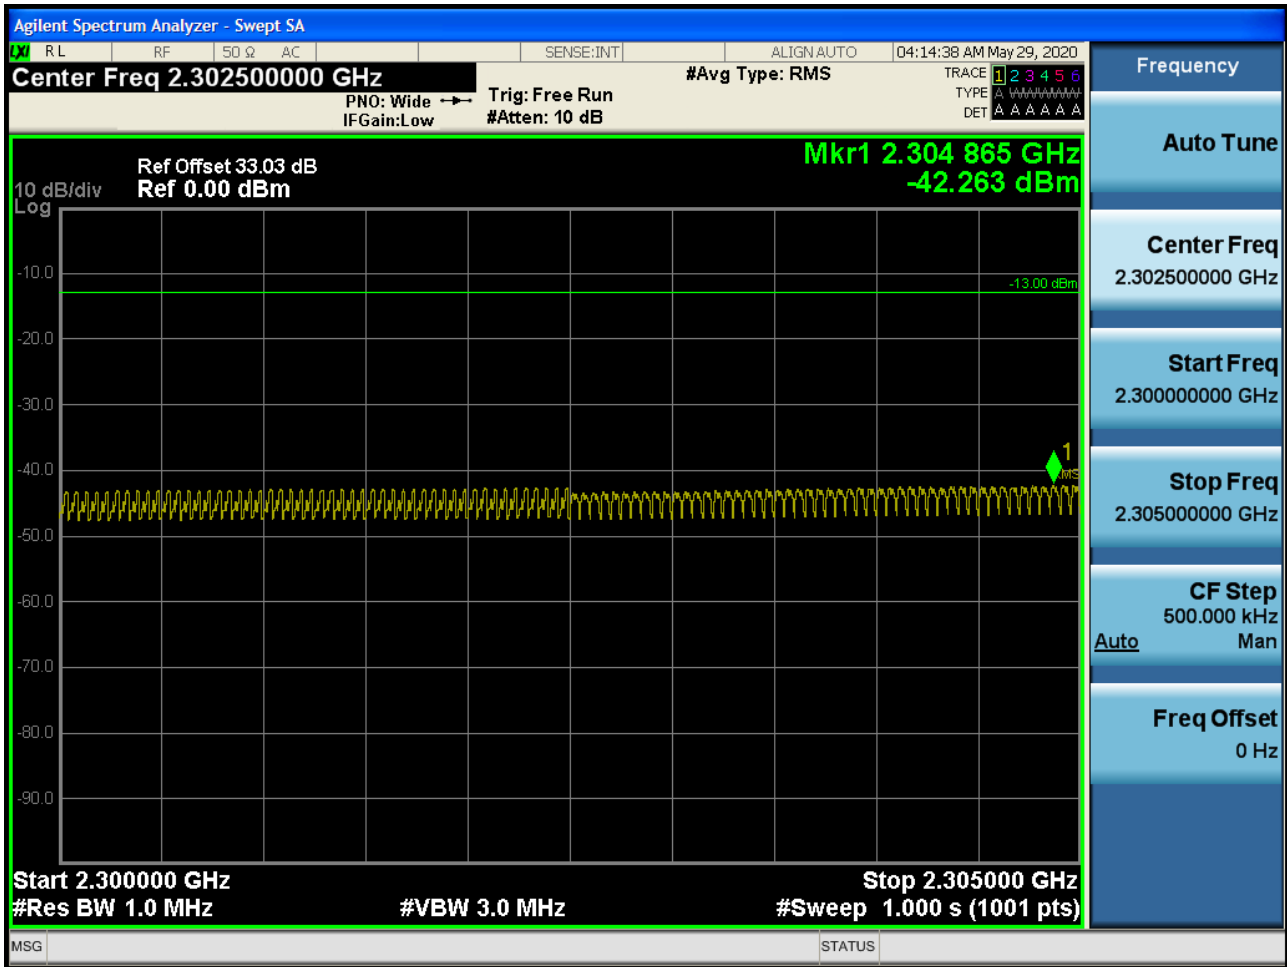


BAND 40. 5M\_BandEdge(2304MHz-2305MHz)\_2307.5MHz\_1RB

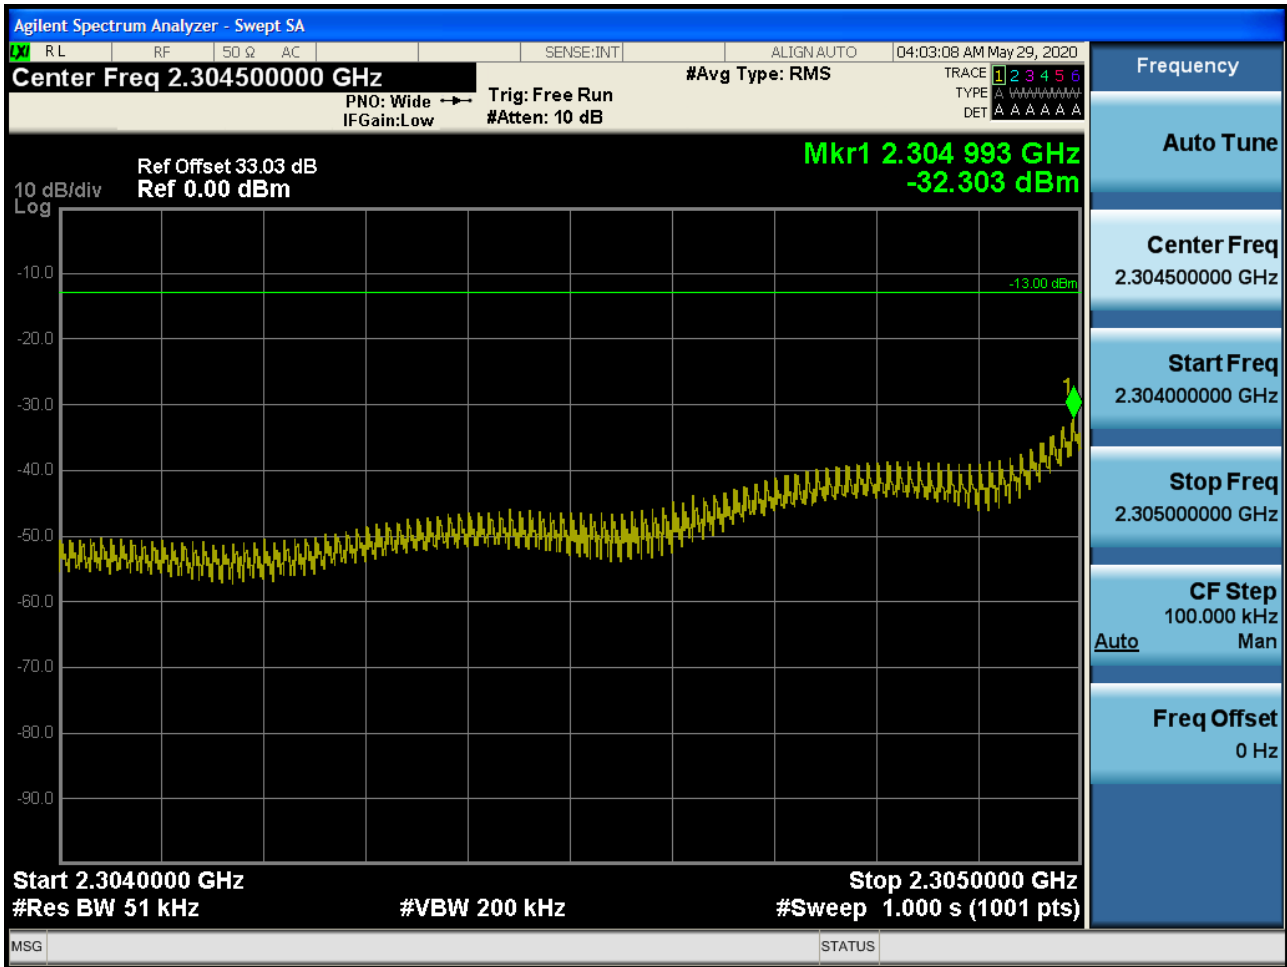


BAND 40. 5M\_BandEdge(2315MHz-2316MHz)\_2312.5MHz\_1RB

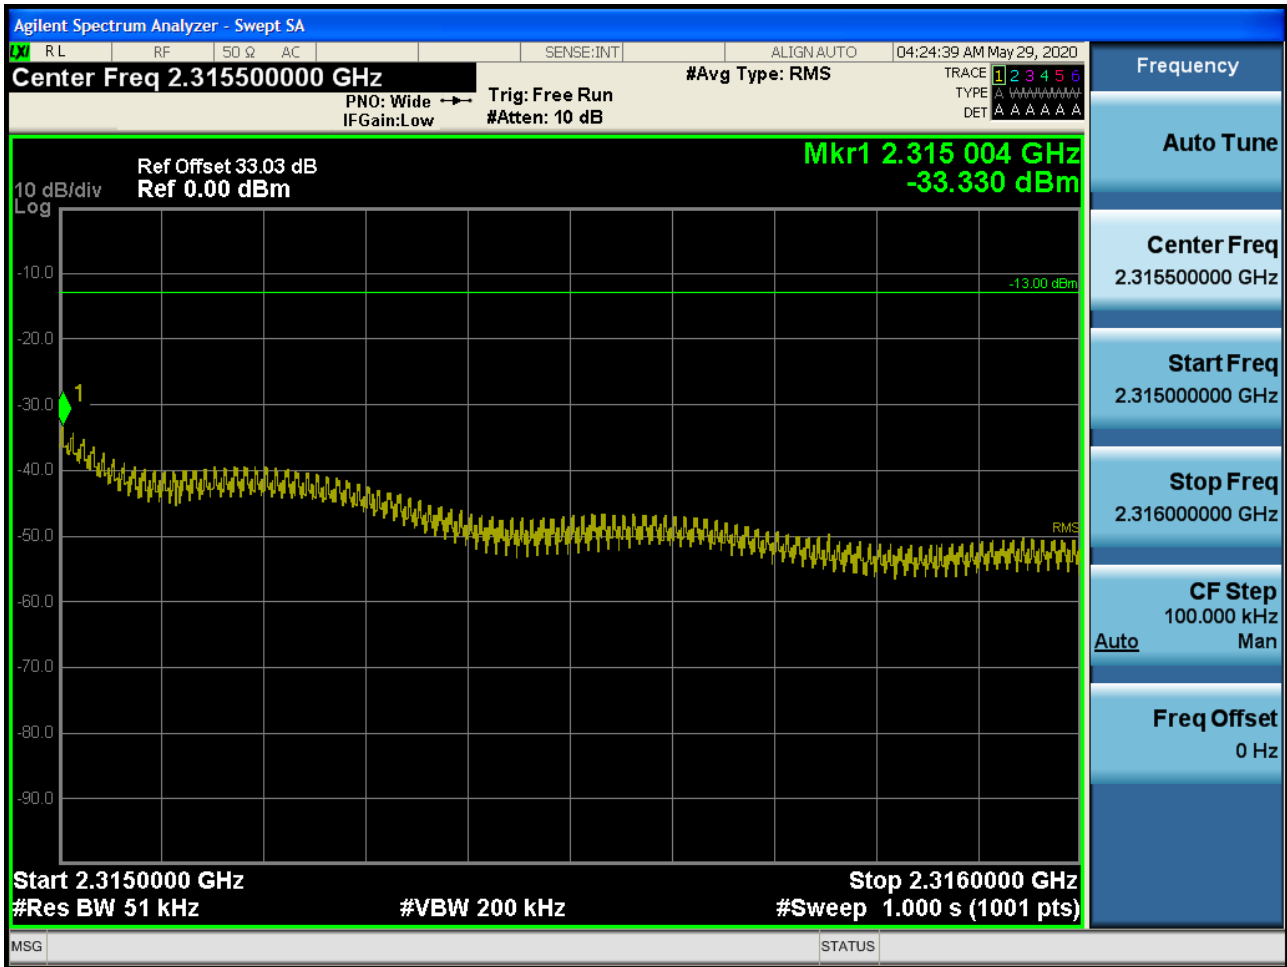


BAND 40. LTE40\_5M\_BandEdge(2315MHz-2320MHz)\_2307.5MHz\_1RB

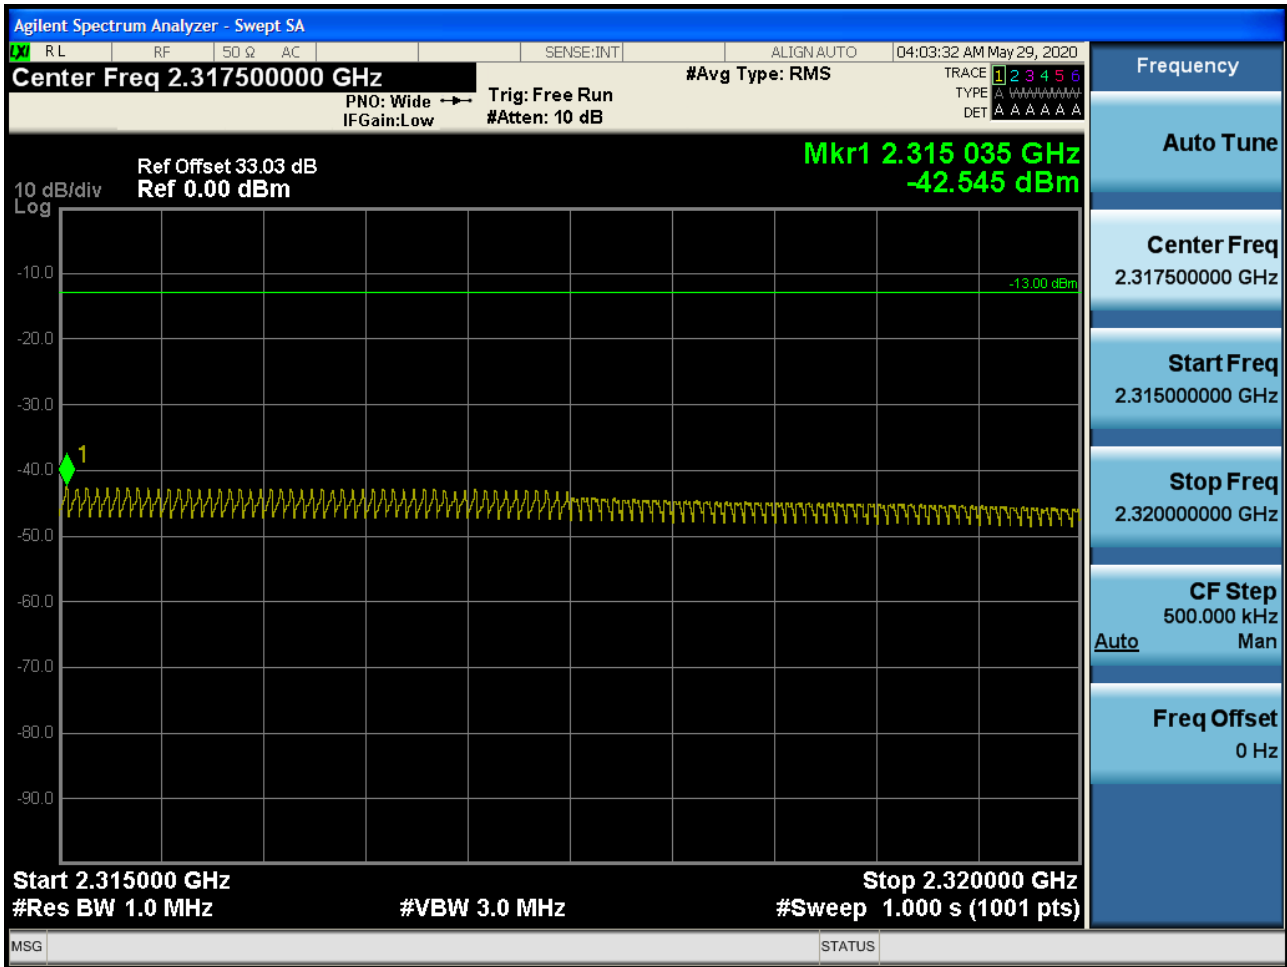


BAND 40. 5M\_BandEdge(2315MHz-2320MHz)\_2310MHz\_1RB

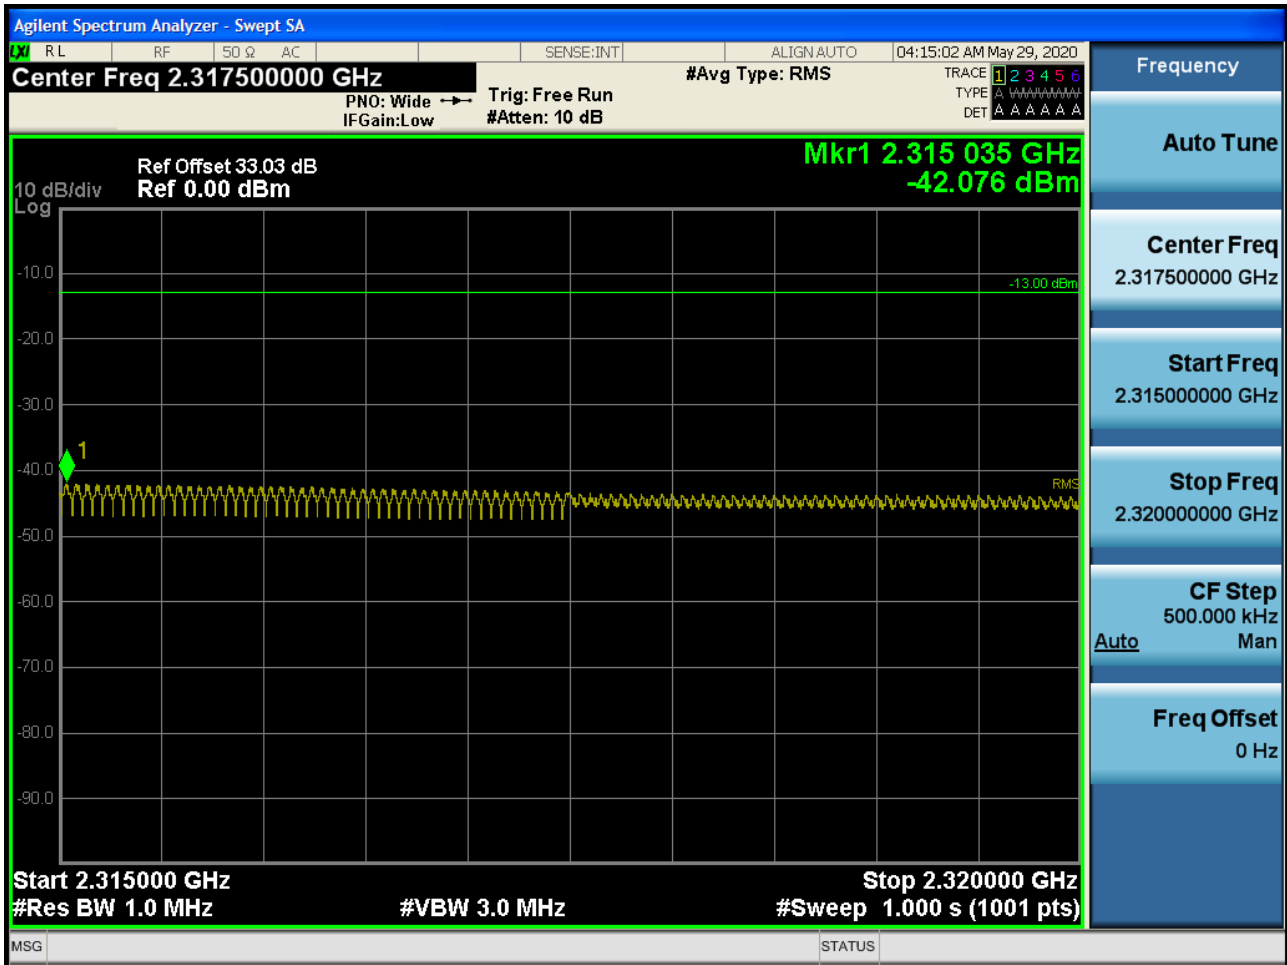


BAND 40. 5M\_BandEdge(2316MHz-2320MHz)\_2312.5MHz\_1RB

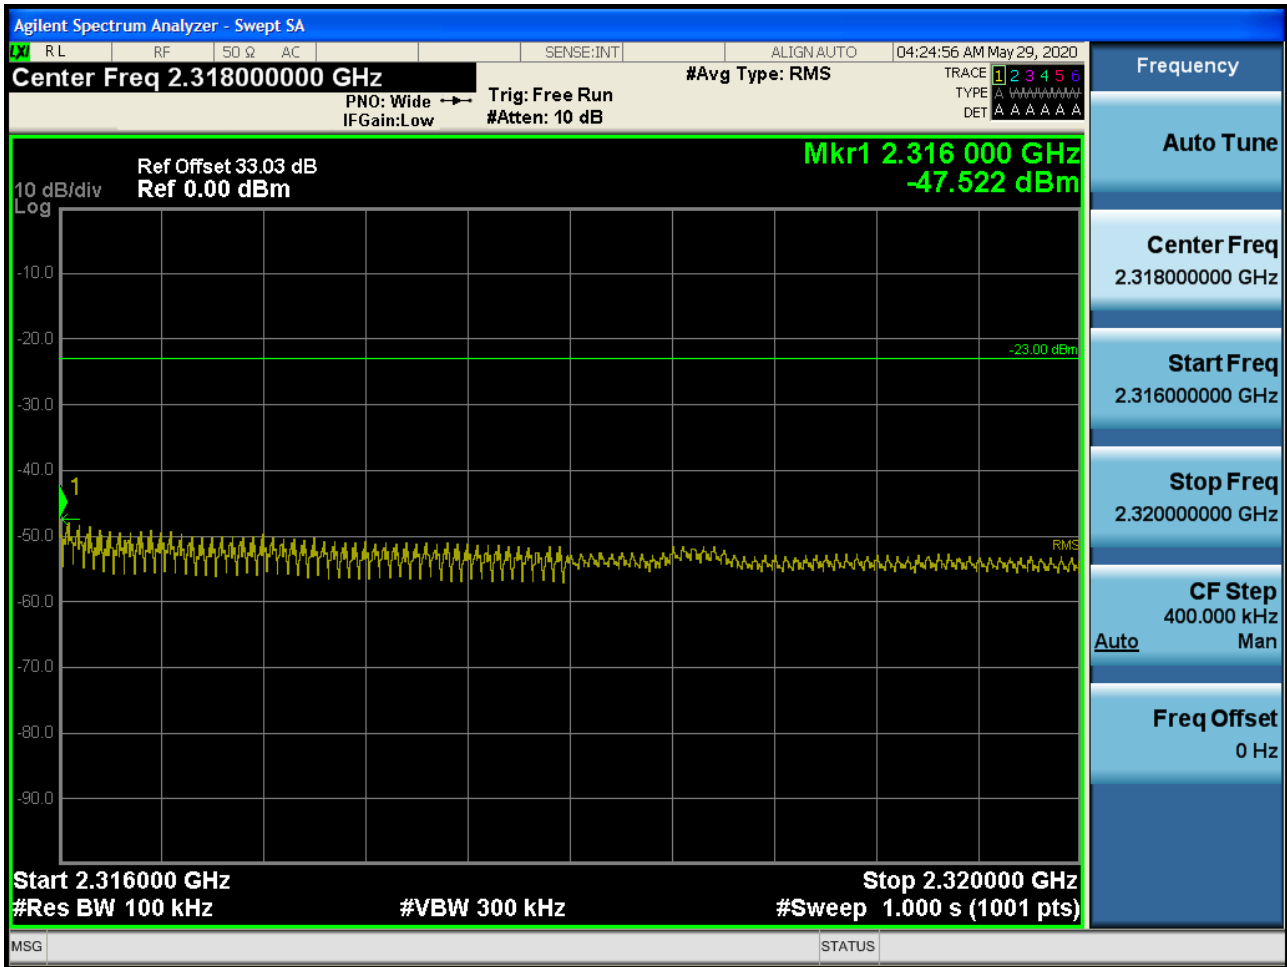

BAND 40. 5M\_BandEdge(2320MHz-2324MHz)\_2312.5MHz\_1RB

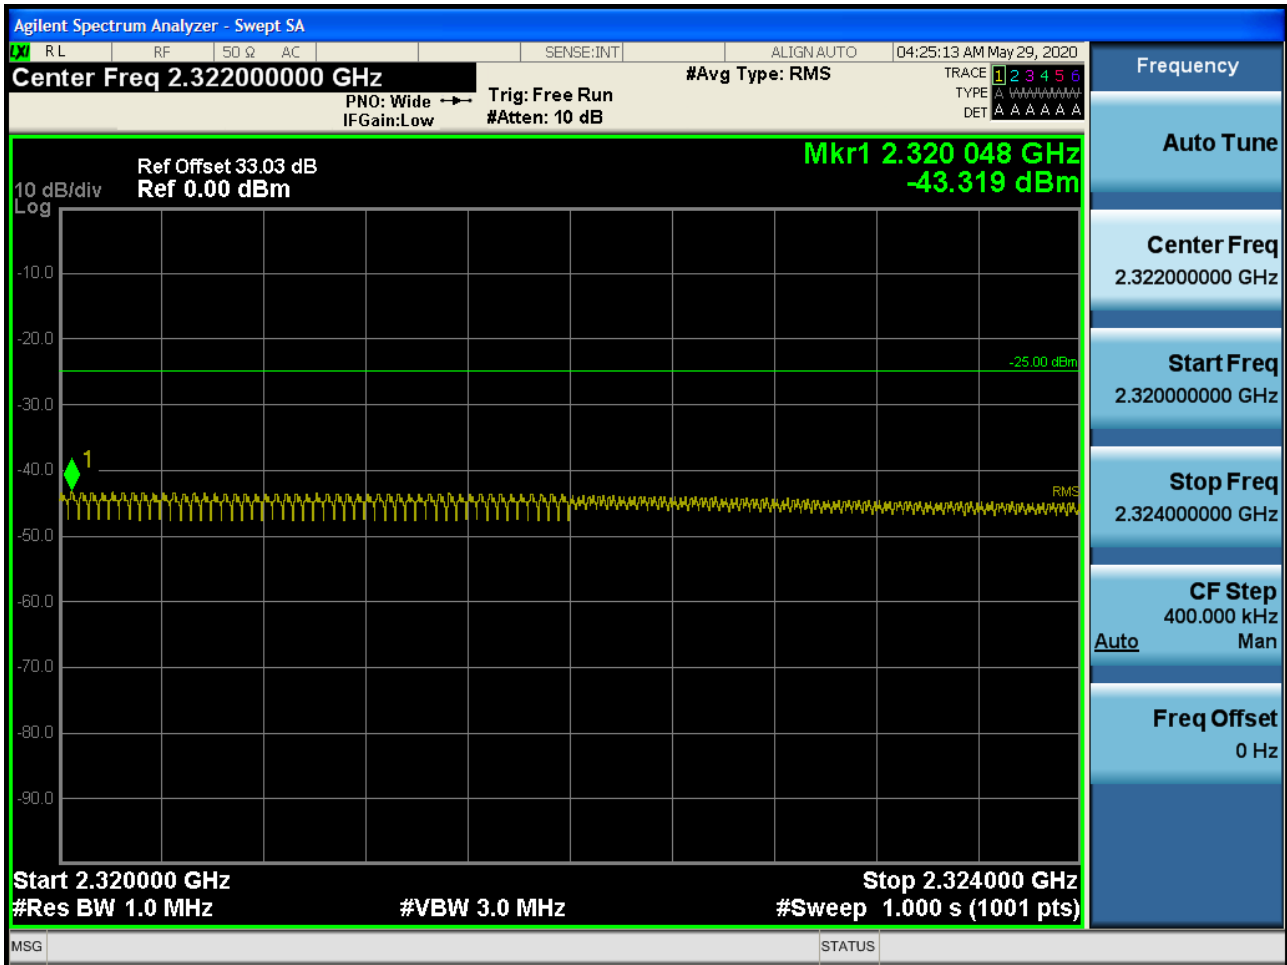


BAND 40. 5M\_BandEdge(2320MHz-2324MHz)\_2307.5MHz\_1RB

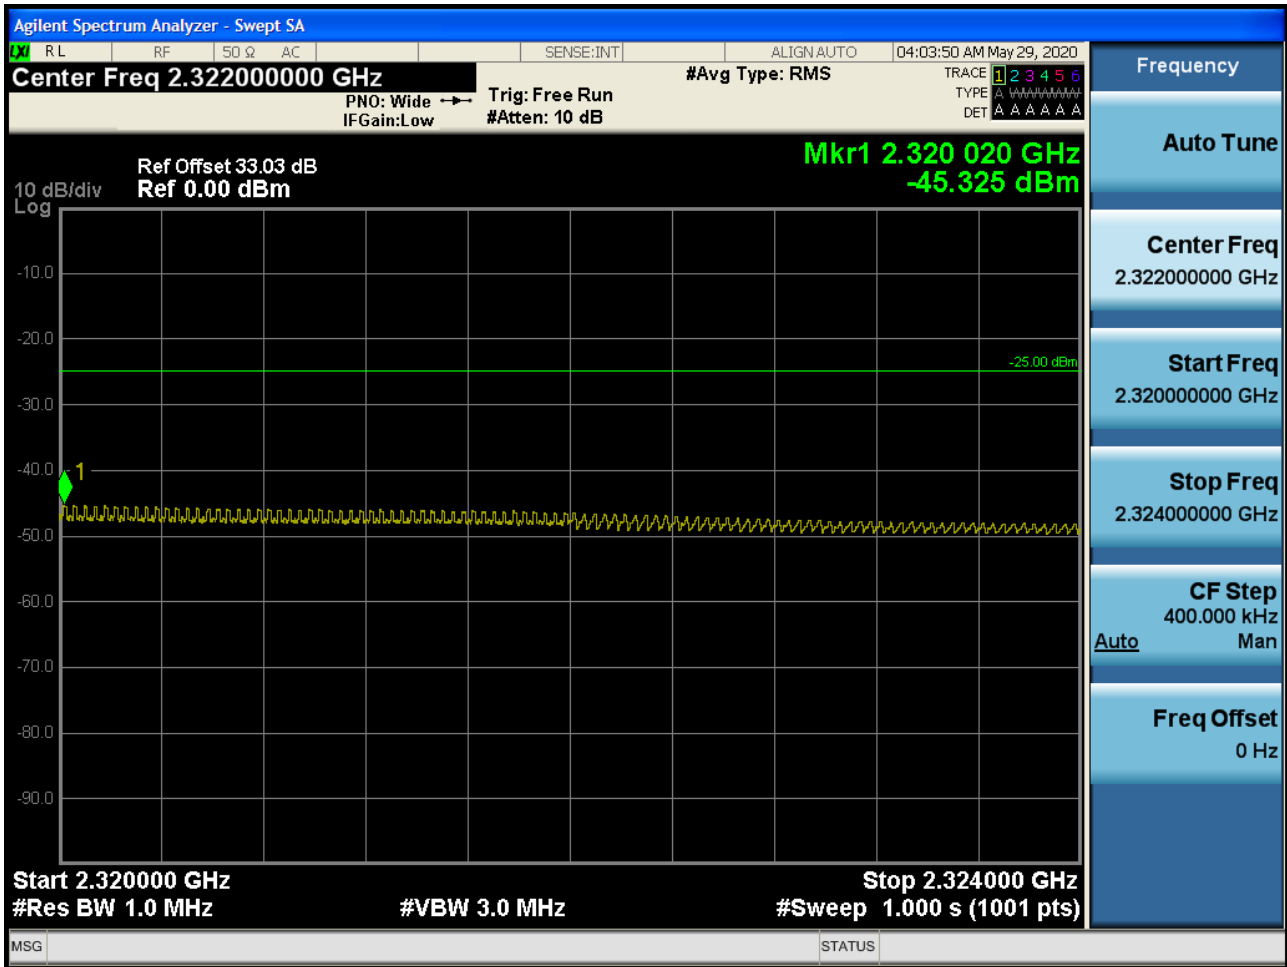





BAND 40. 5M\_BandEdge(2320MHz-2324MHz)\_2310MHz\_1RB

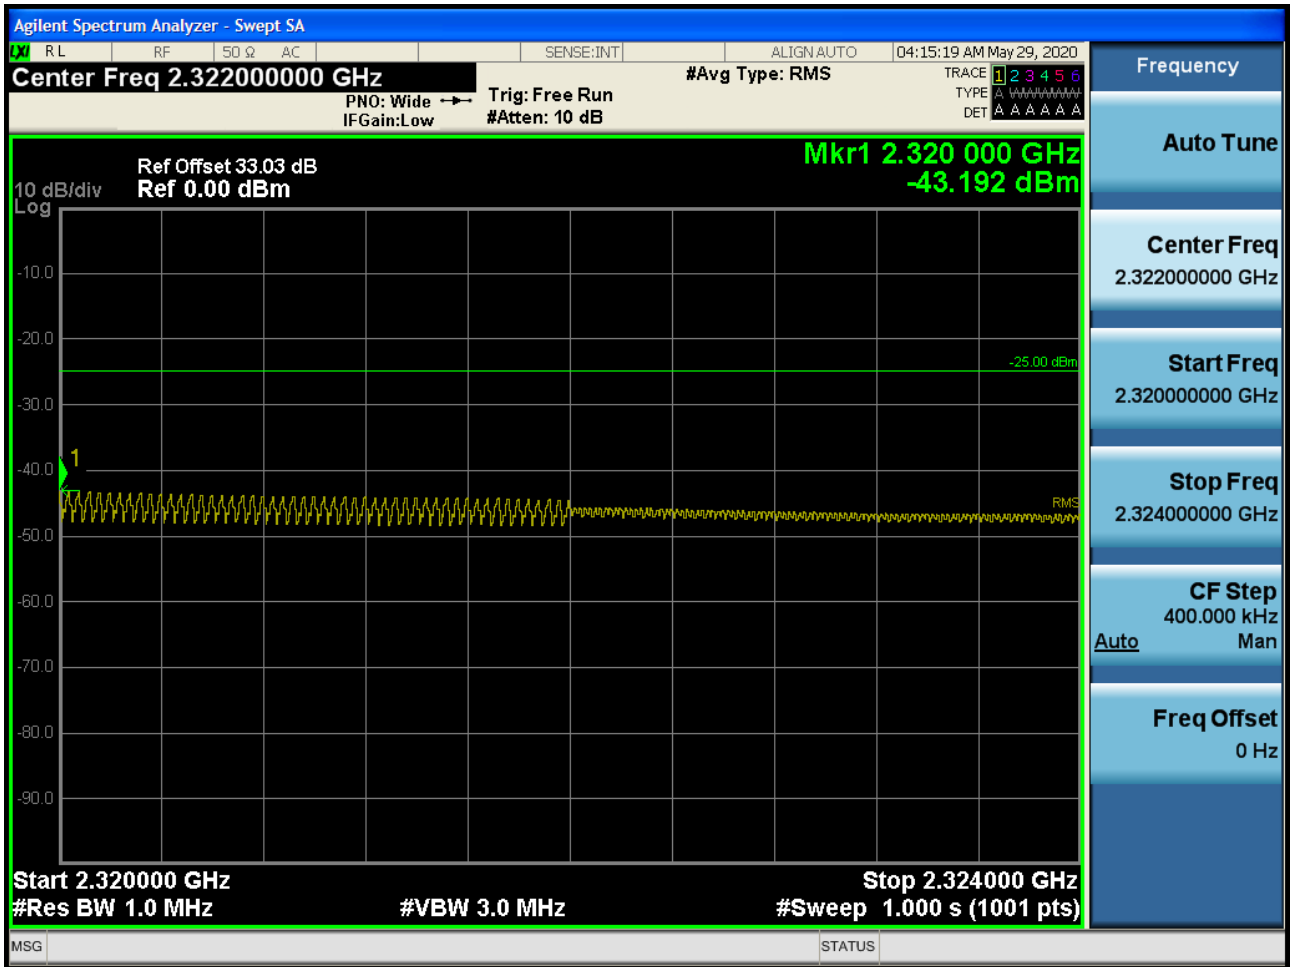


BAND 40. 5M\_BandEdge(2324MHz-2328MHz)\_2312.5MHz\_1RB

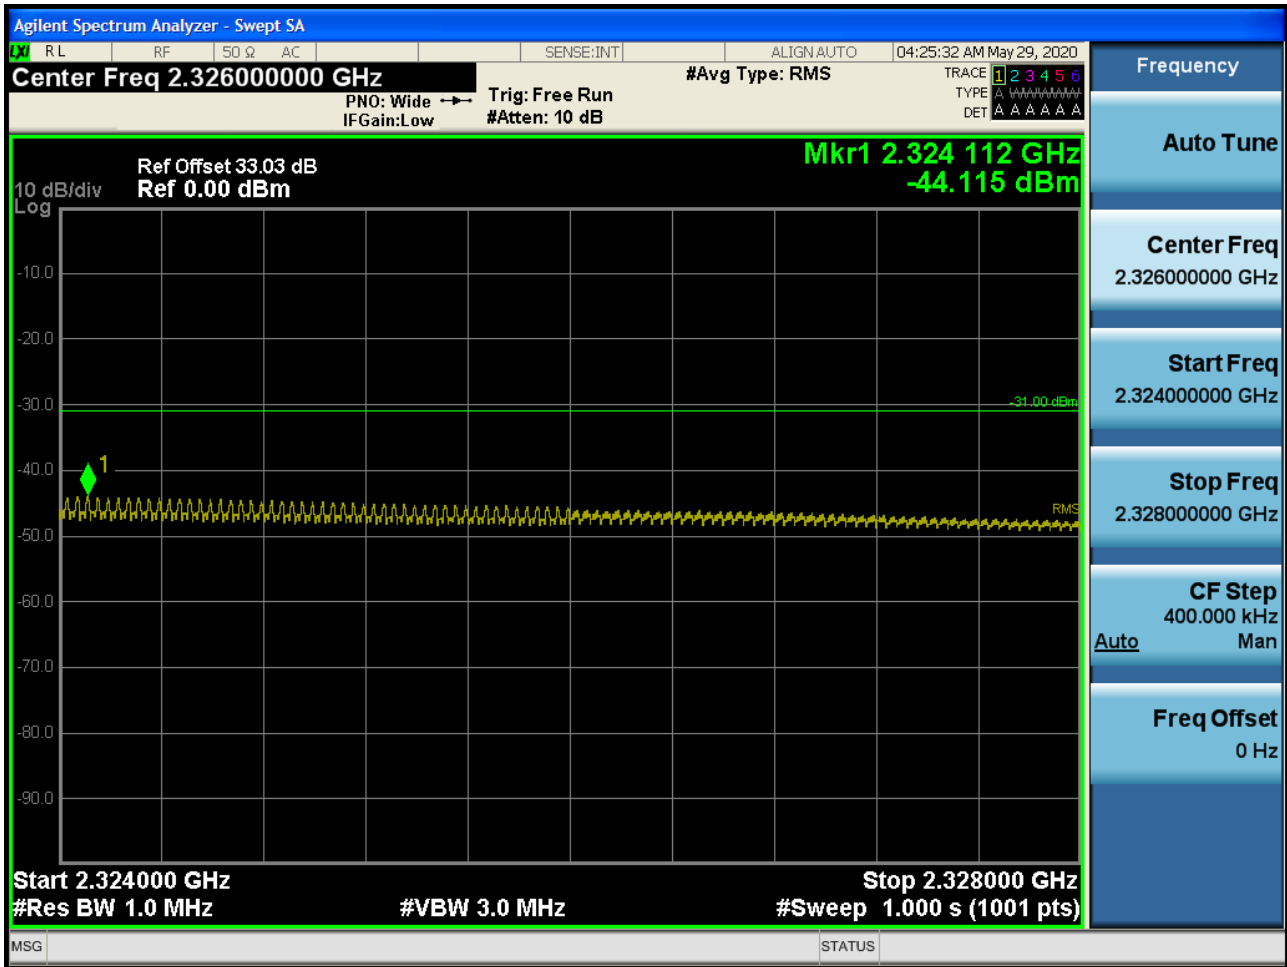


BAND 40. 5M\_BandEdge(2324MHz-2328MHz)\_2307.5MHz\_1RB

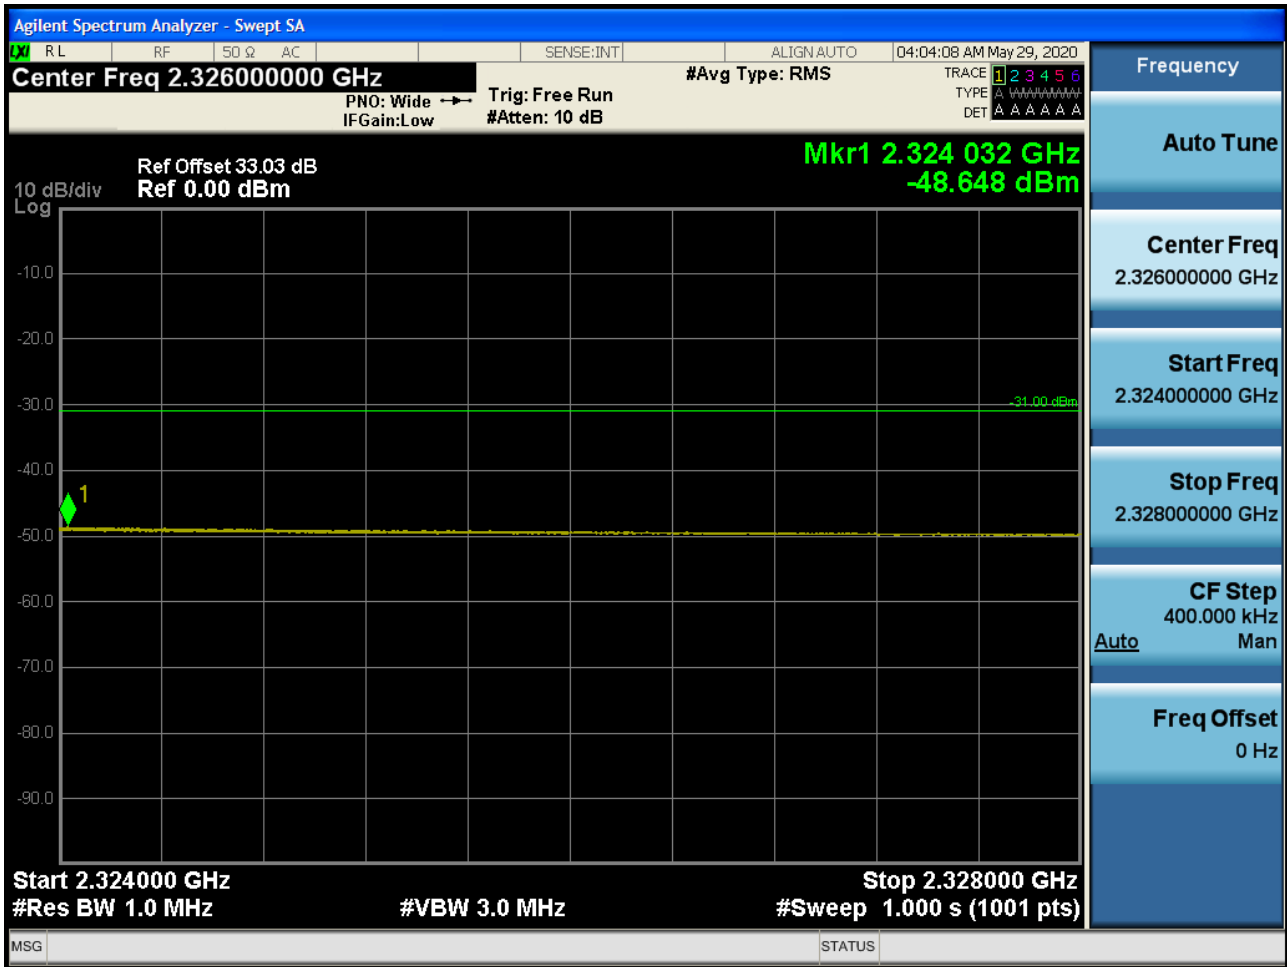


BAND 40. 5M\_BandEdge(2324MHz-2328MHz)\_ 2310MHz\_1RB

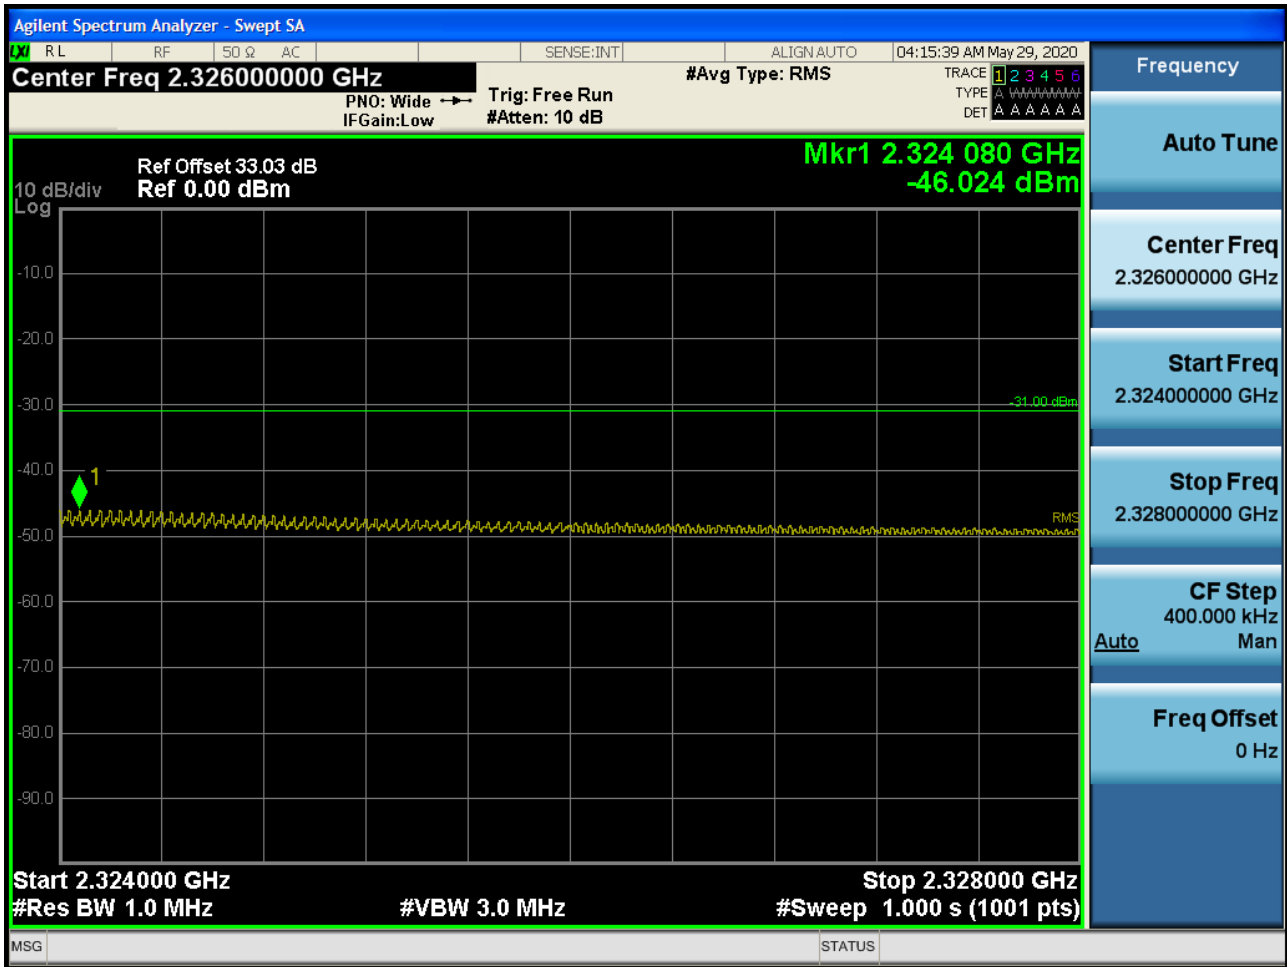


BAND 40. 5M\_BandEdge(2328MHz-2337MHz)\_2312.5MHz\_1RB

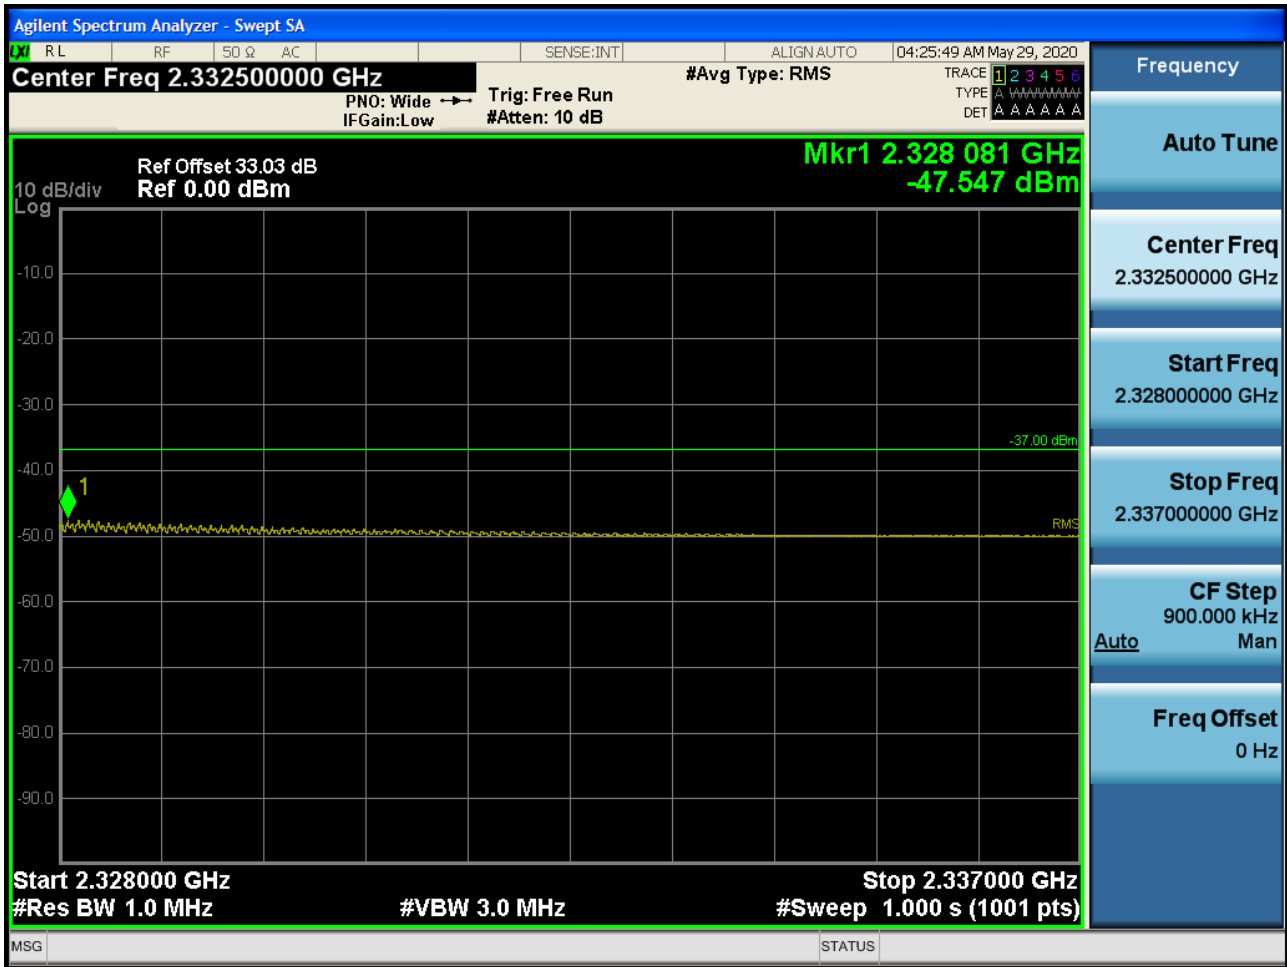


BAND 40. 5M\_BandEdge(2328MHz-2337MHz)\_2307.5MHz\_1RB

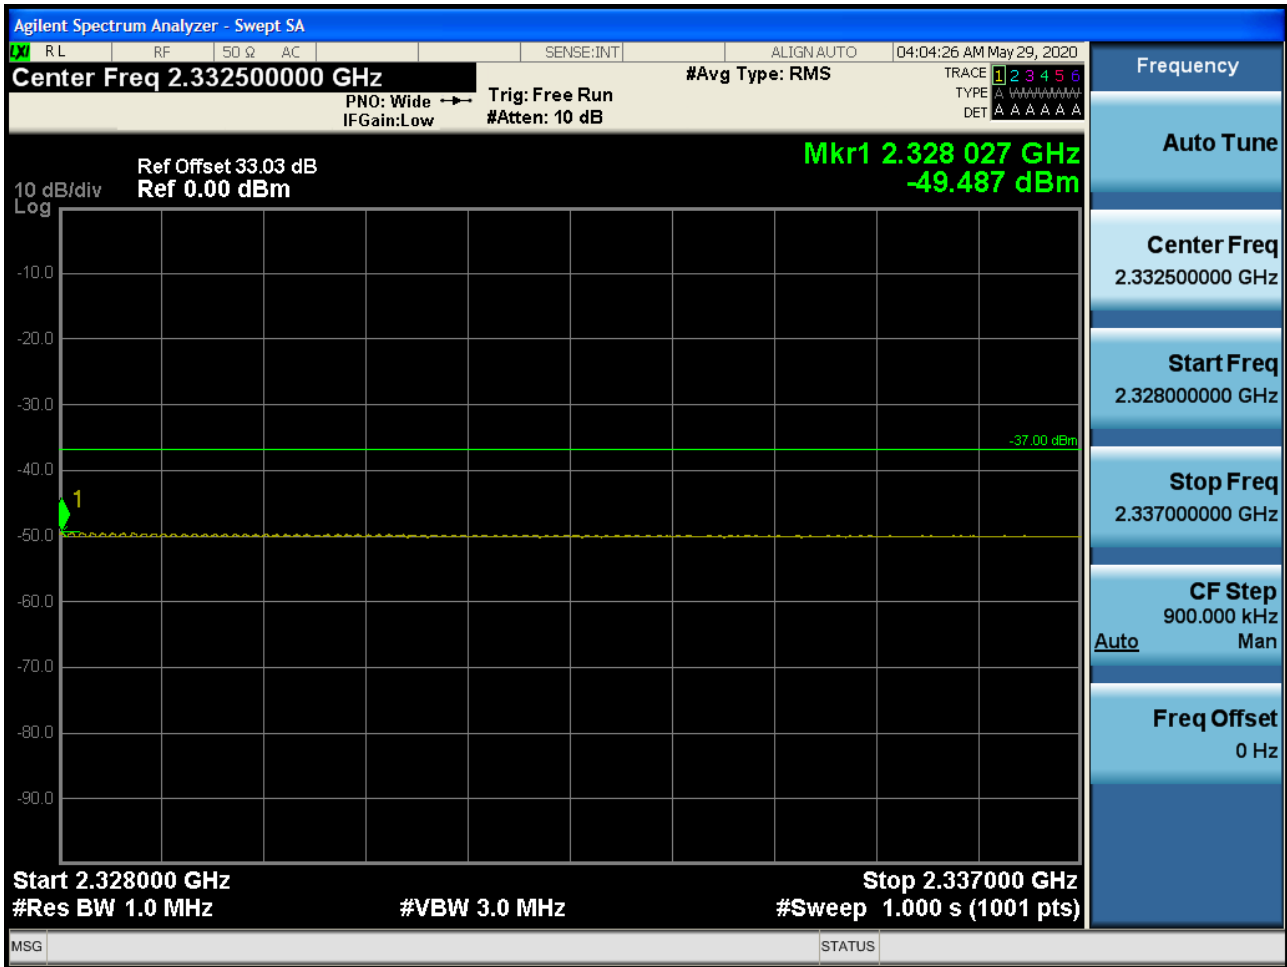

BAND 40. 5M\_BandEdge(2328MHz-2337MHz)\_2310MHz\_1RB

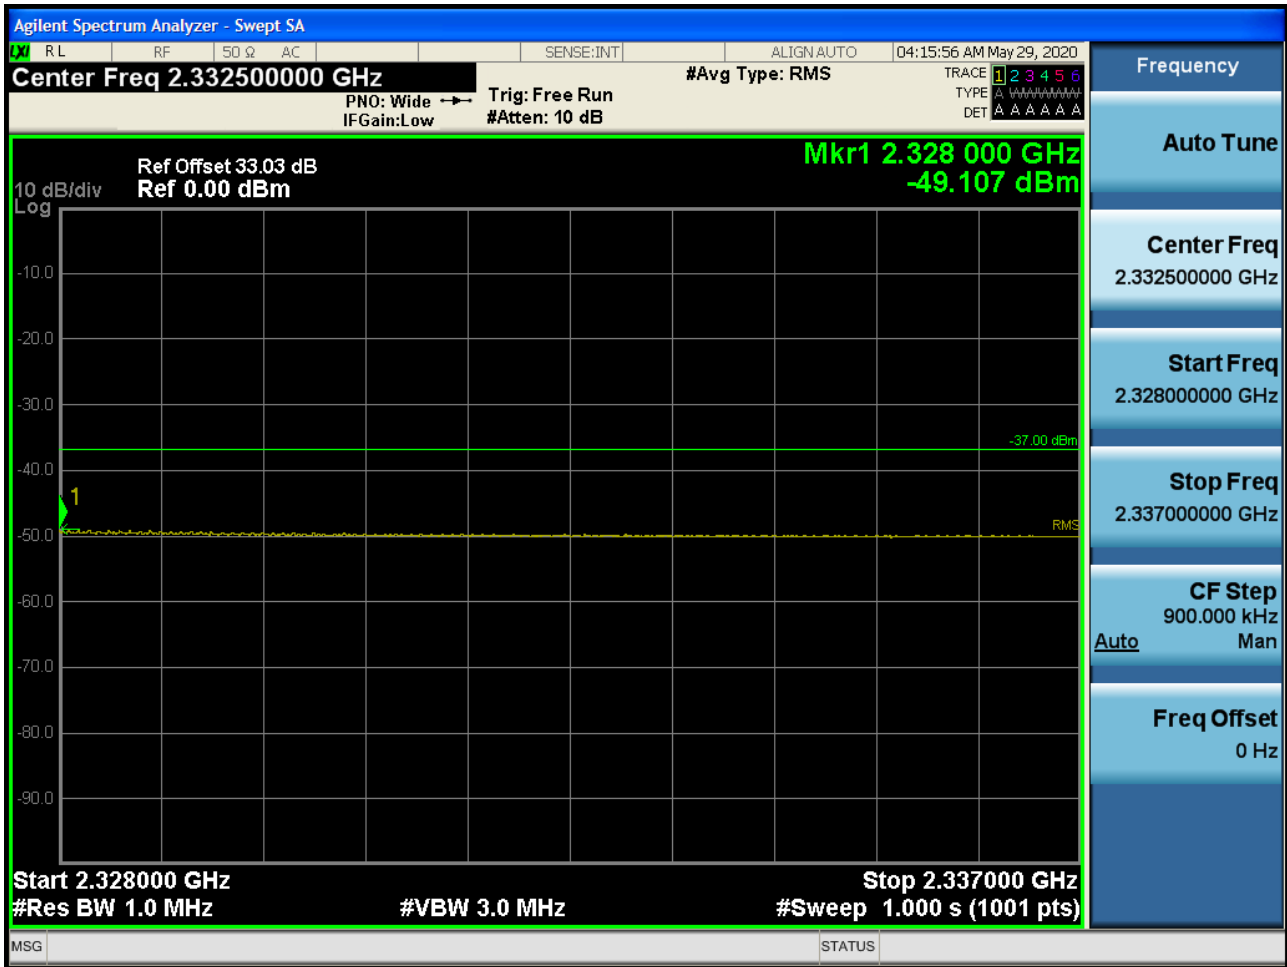


BAND 40. 5M\_BandEdge(2337MHz-2341MHz)\_2312.5MHz\_1RB

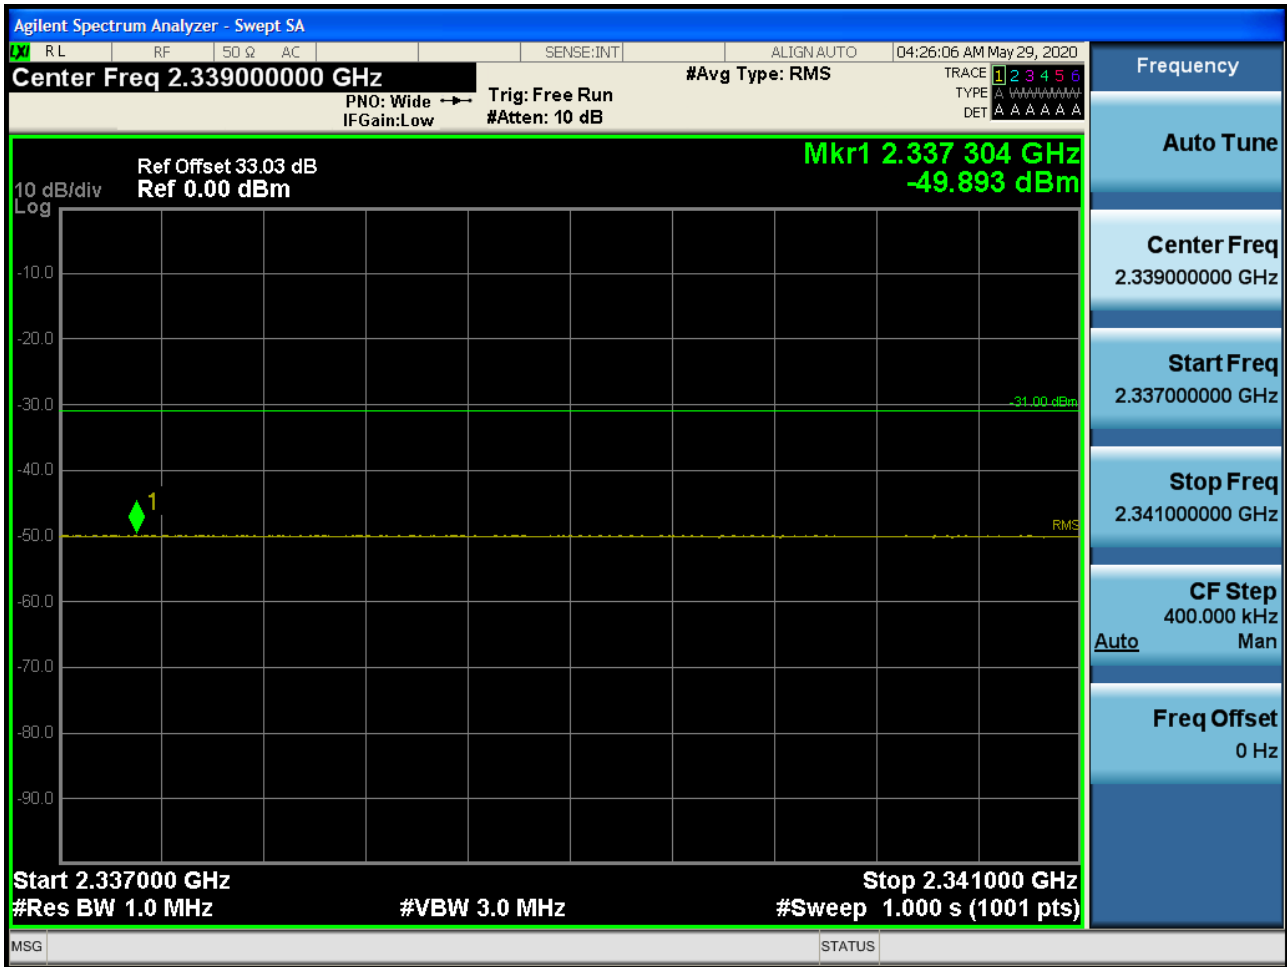





BAND 40. 5M\_BandEdge(2337MHz-2341MHz)\_2307.5MHz\_1RB

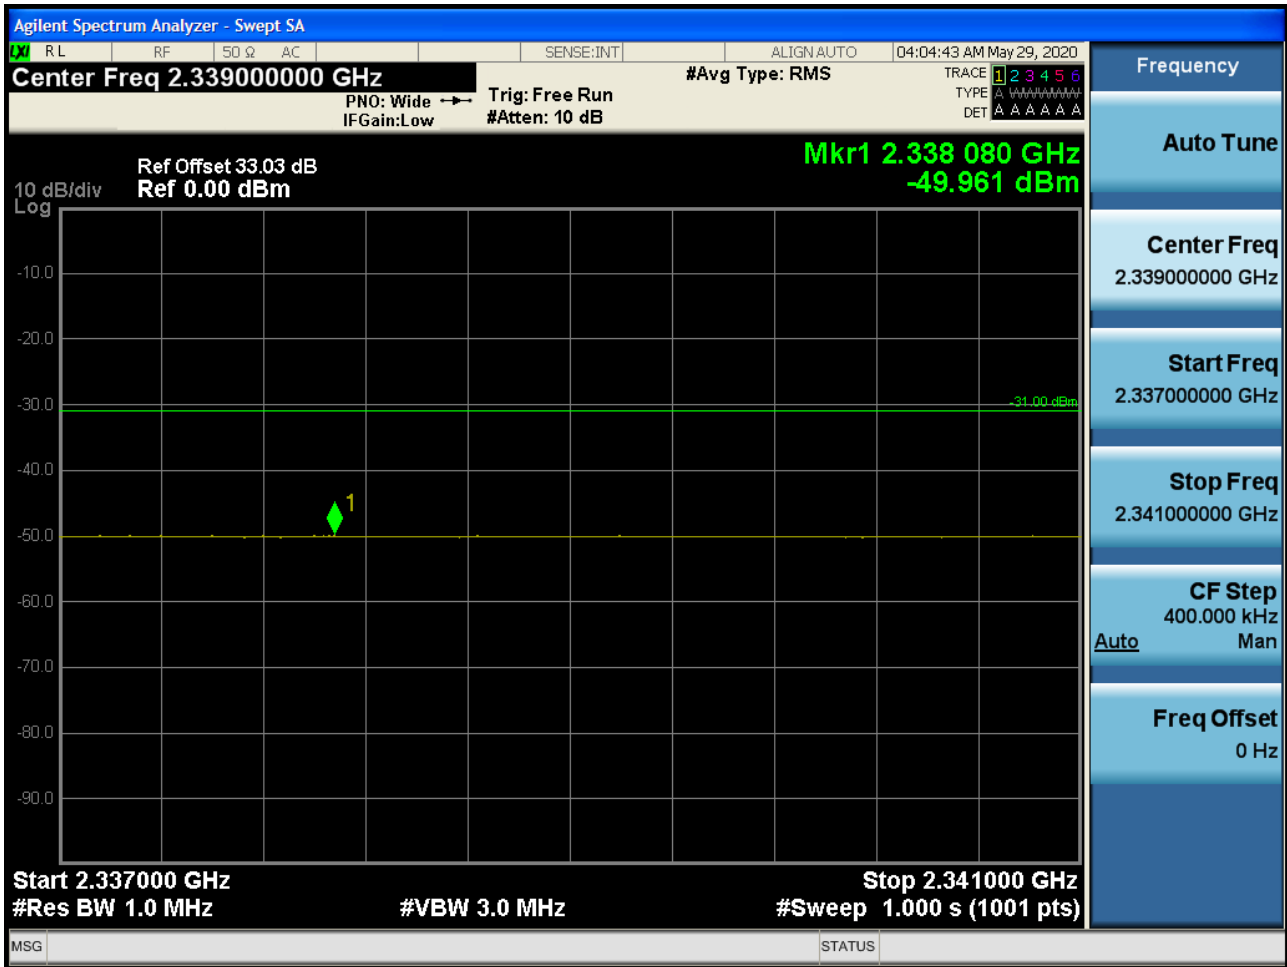


BAND 40. 5M\_BandEdge(2337MHz-2341MHz)\_2310MHz\_1RB

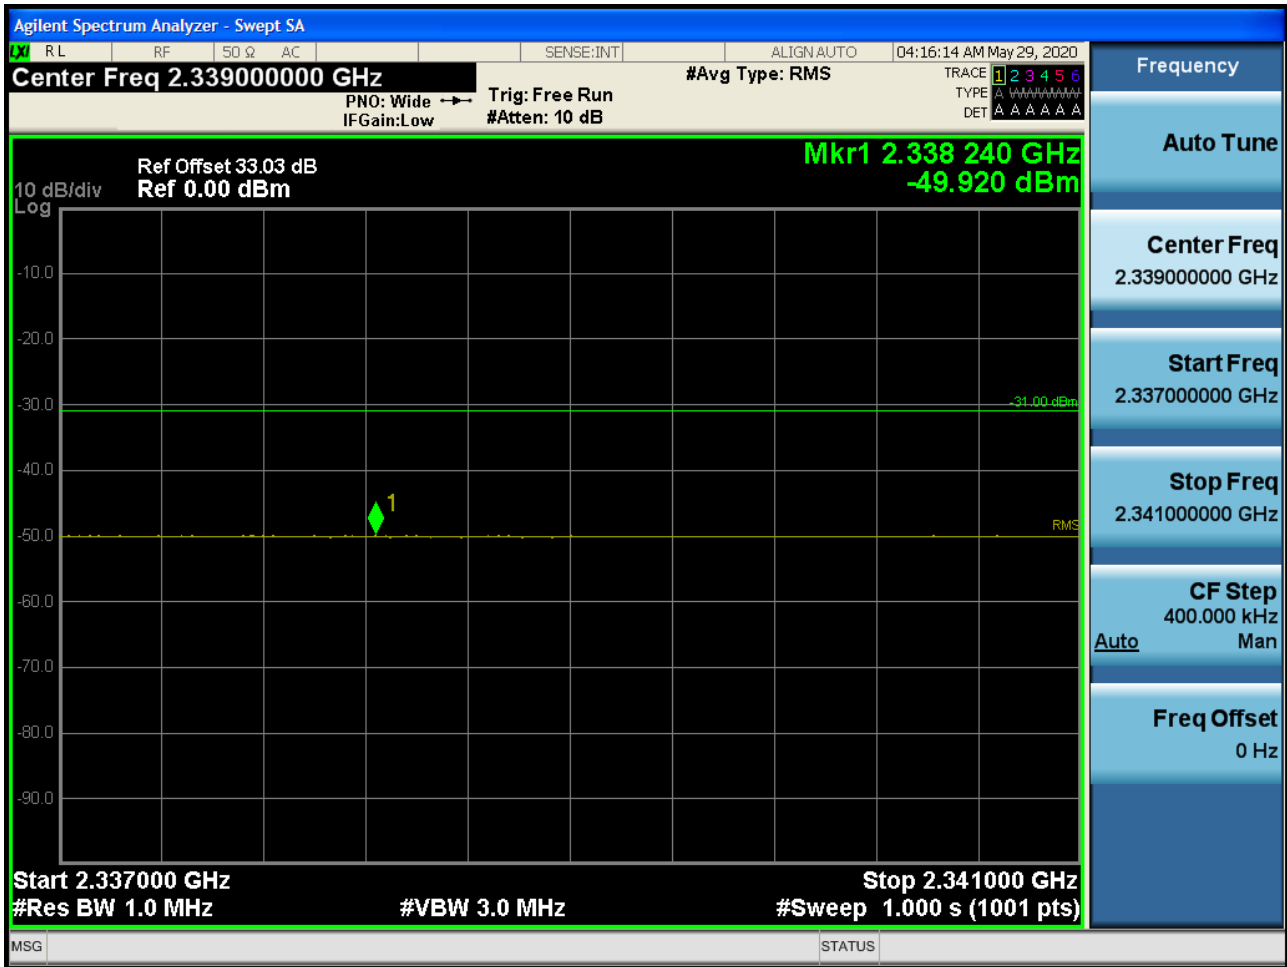


BAND 40. 5M\_BandEdge(2341MHz-2345MHz)\_2312.5MHz\_1RB

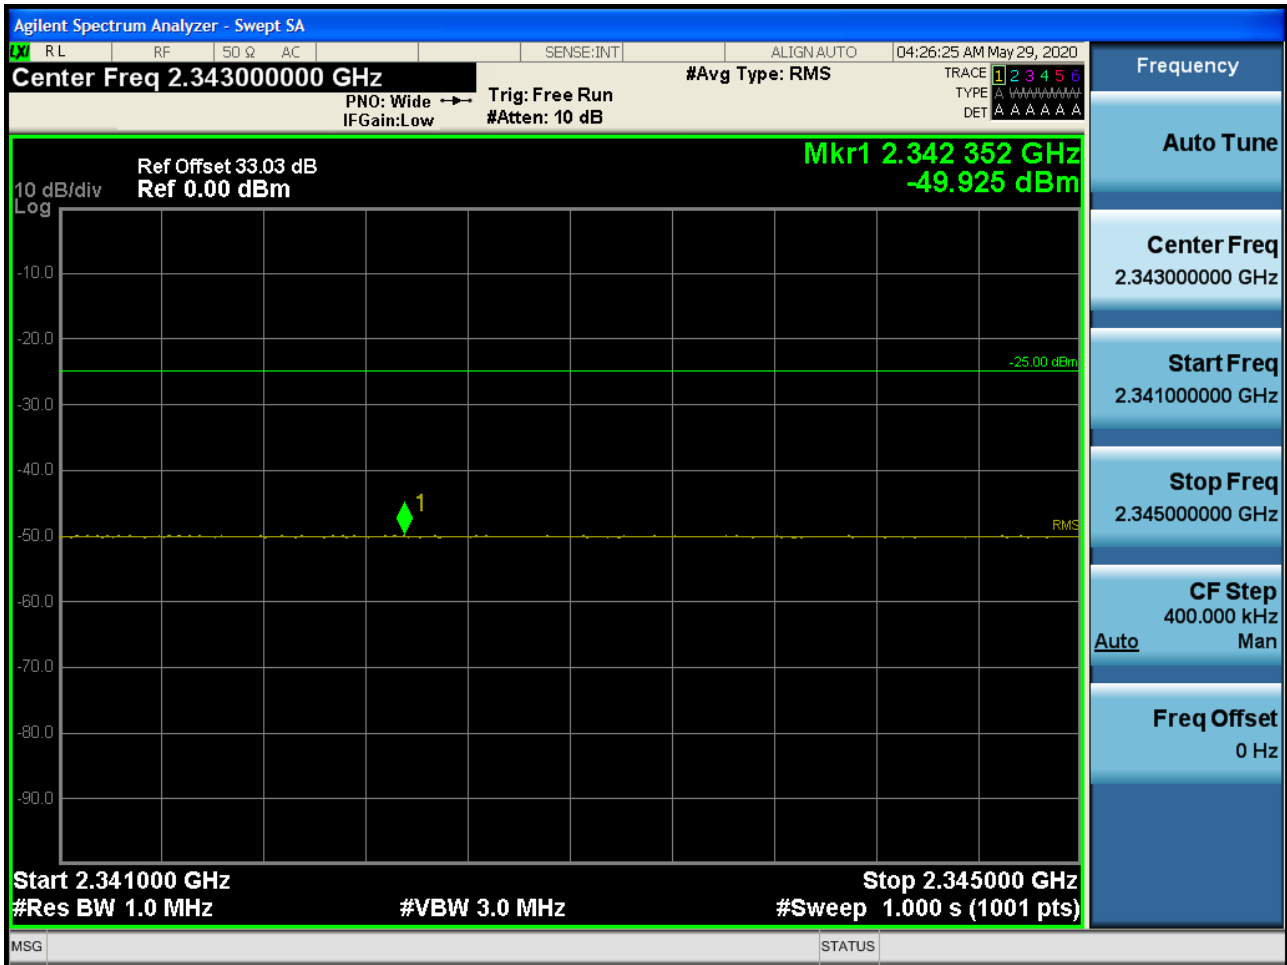


BAND 40. 5M\_BandEdge(2341MHz-2345MHz)\_2307.5MHz\_1RB

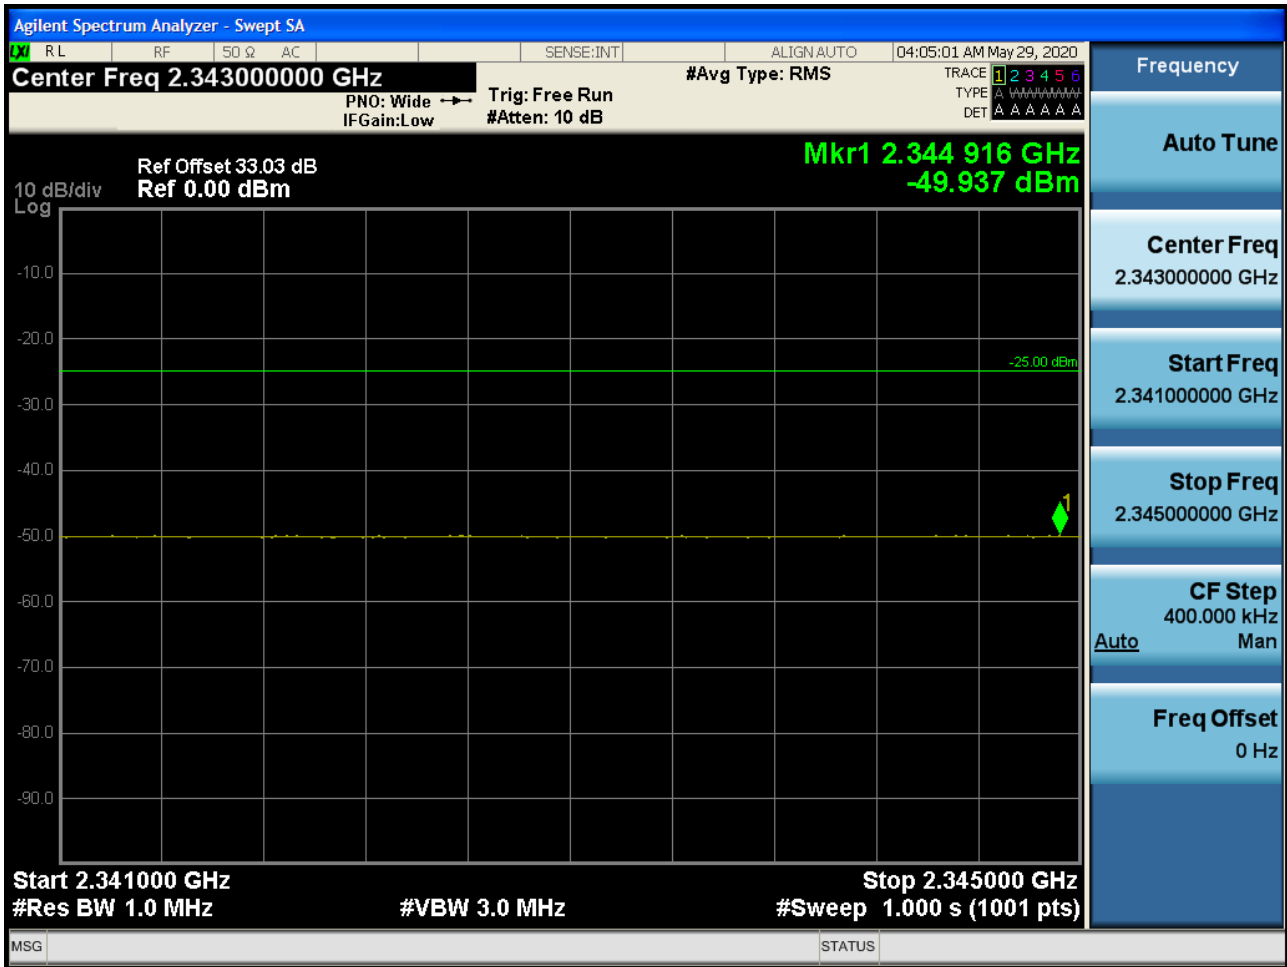


BAND 40. 5M\_BandEdge(2341MHz-2345MHz)\_2310MHz\_1RB

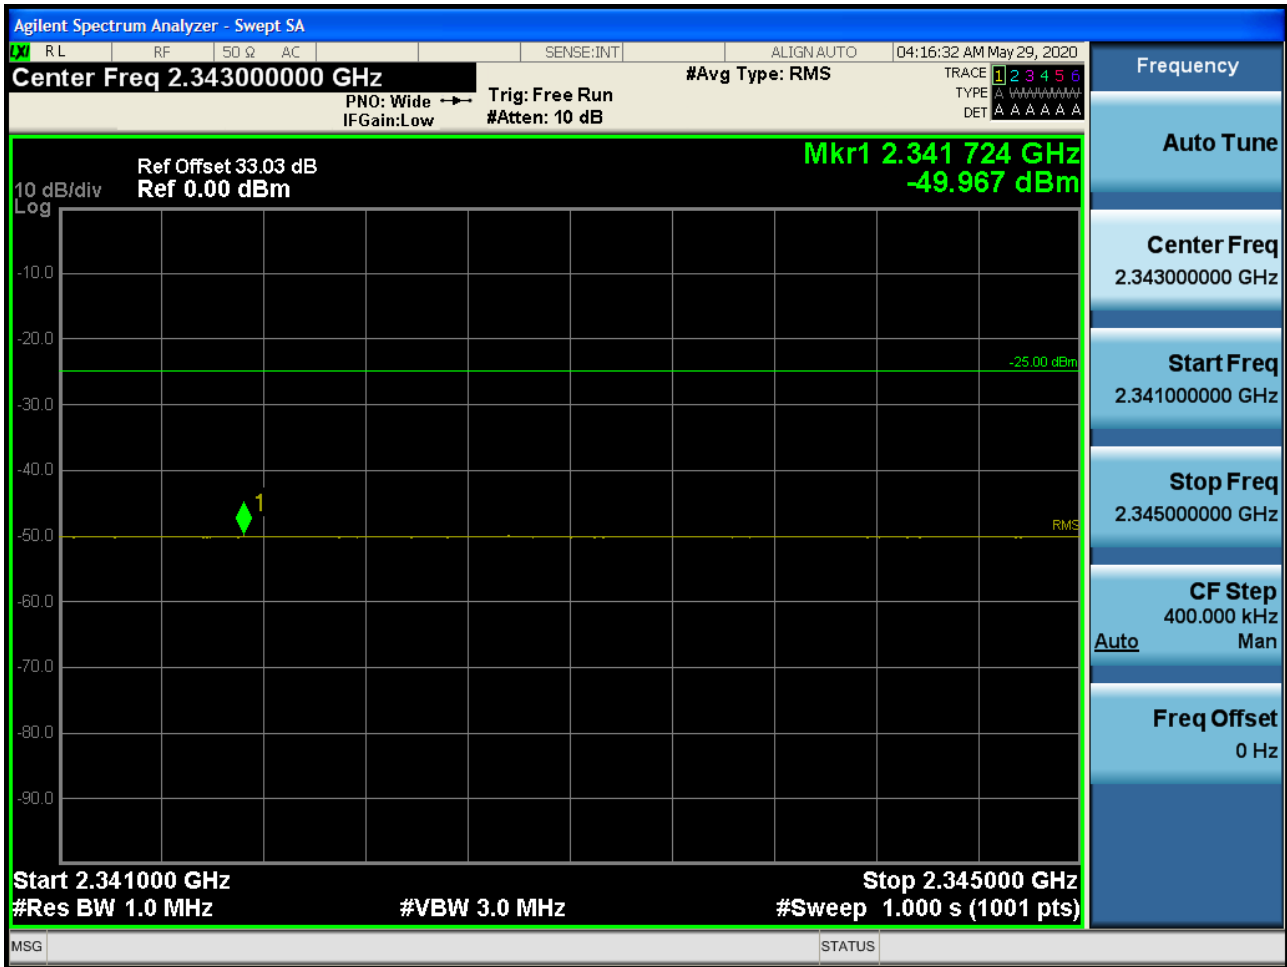


BAND 40. 5M\_BandEdge(2345MHz-2365MHz)\_2312.5MHz\_1RB

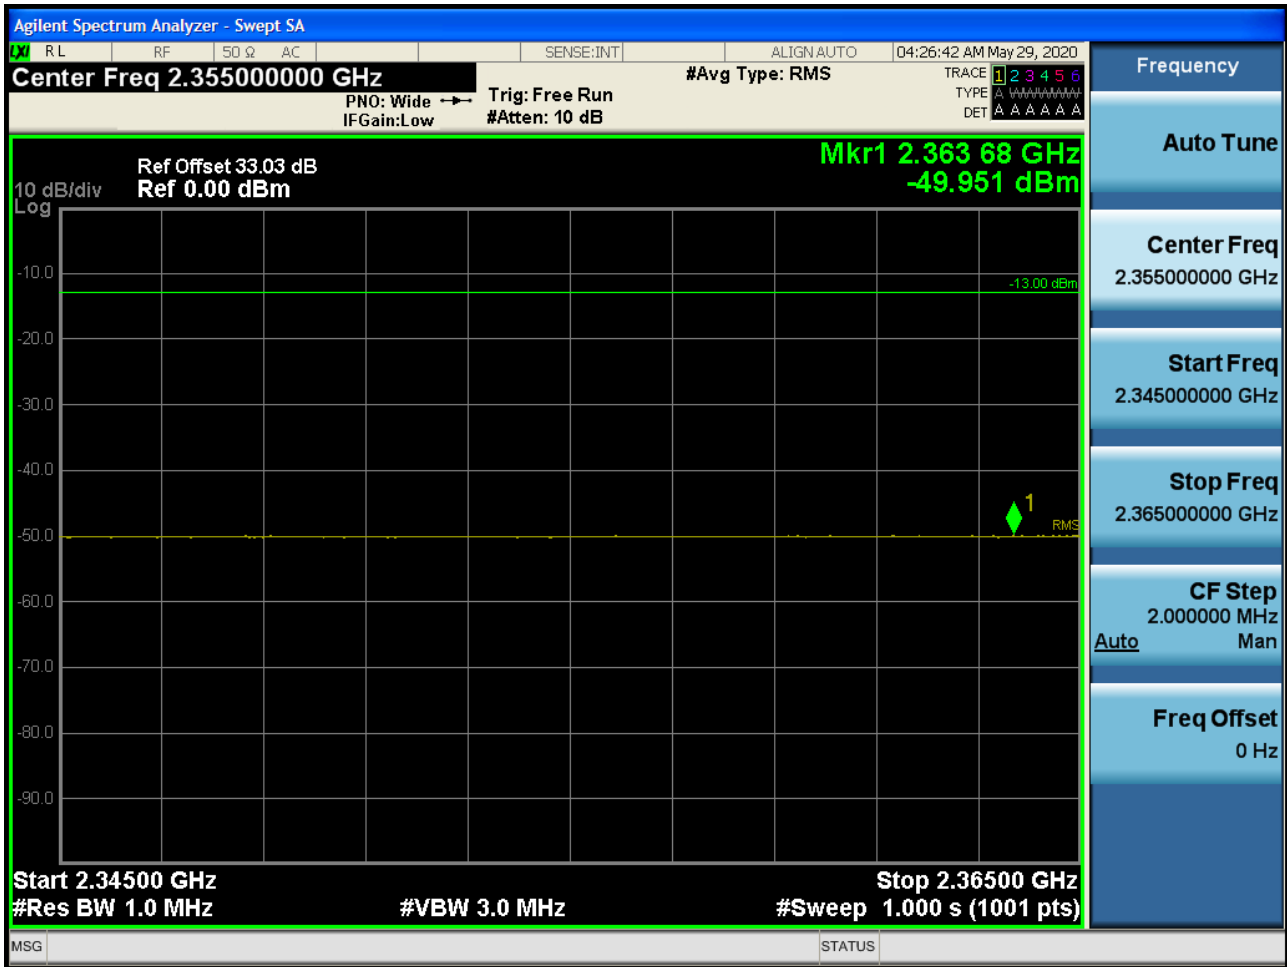

BAND 40. 5M\_BandEdge(2345MHz-2365MHz)\_2307.5MHz\_1RB

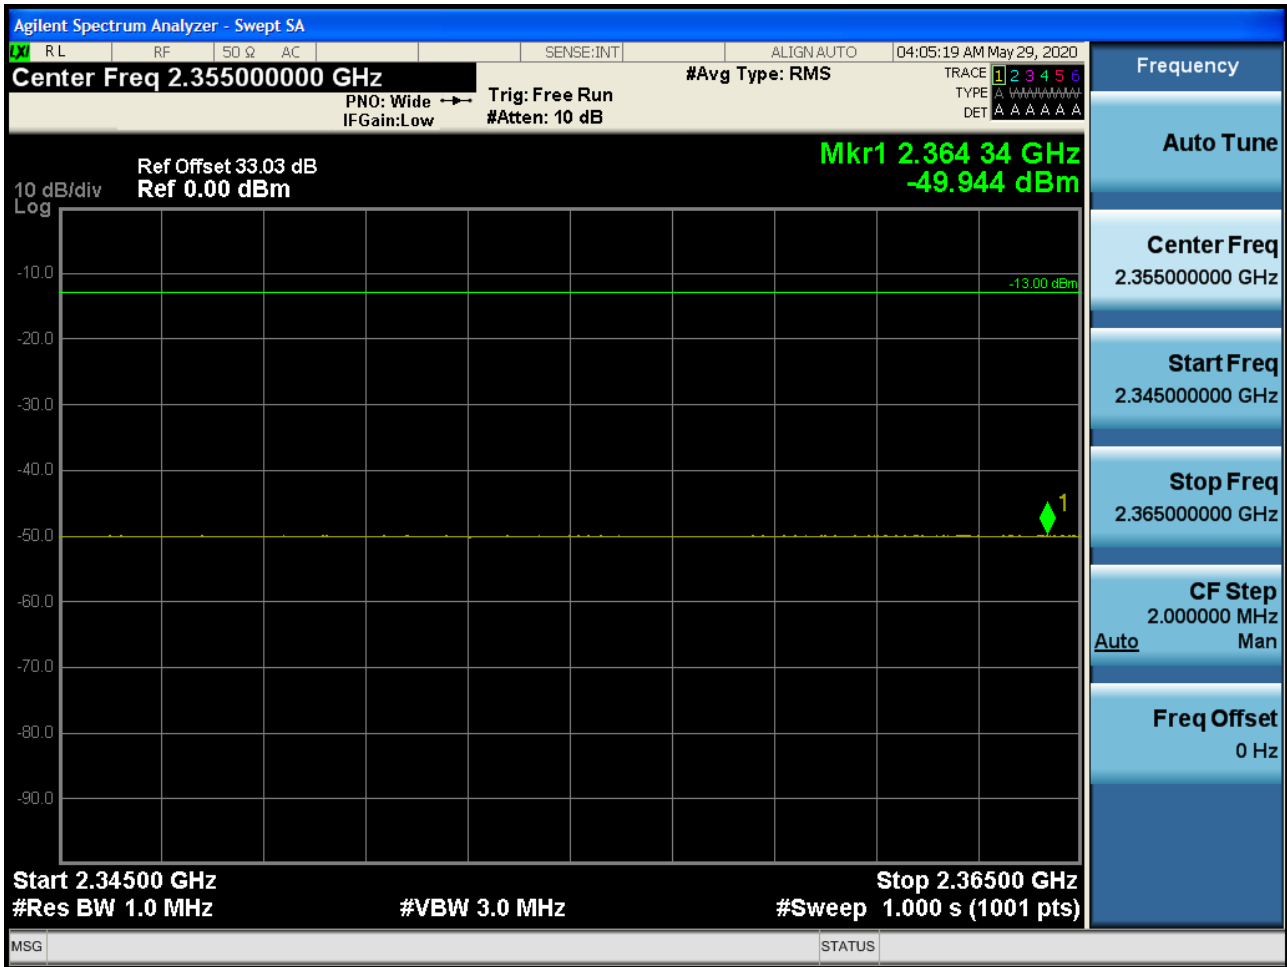


BAND 40. 5M\_BandEdge(2345MHz-2365MHz)\_2310MHz\_1RB

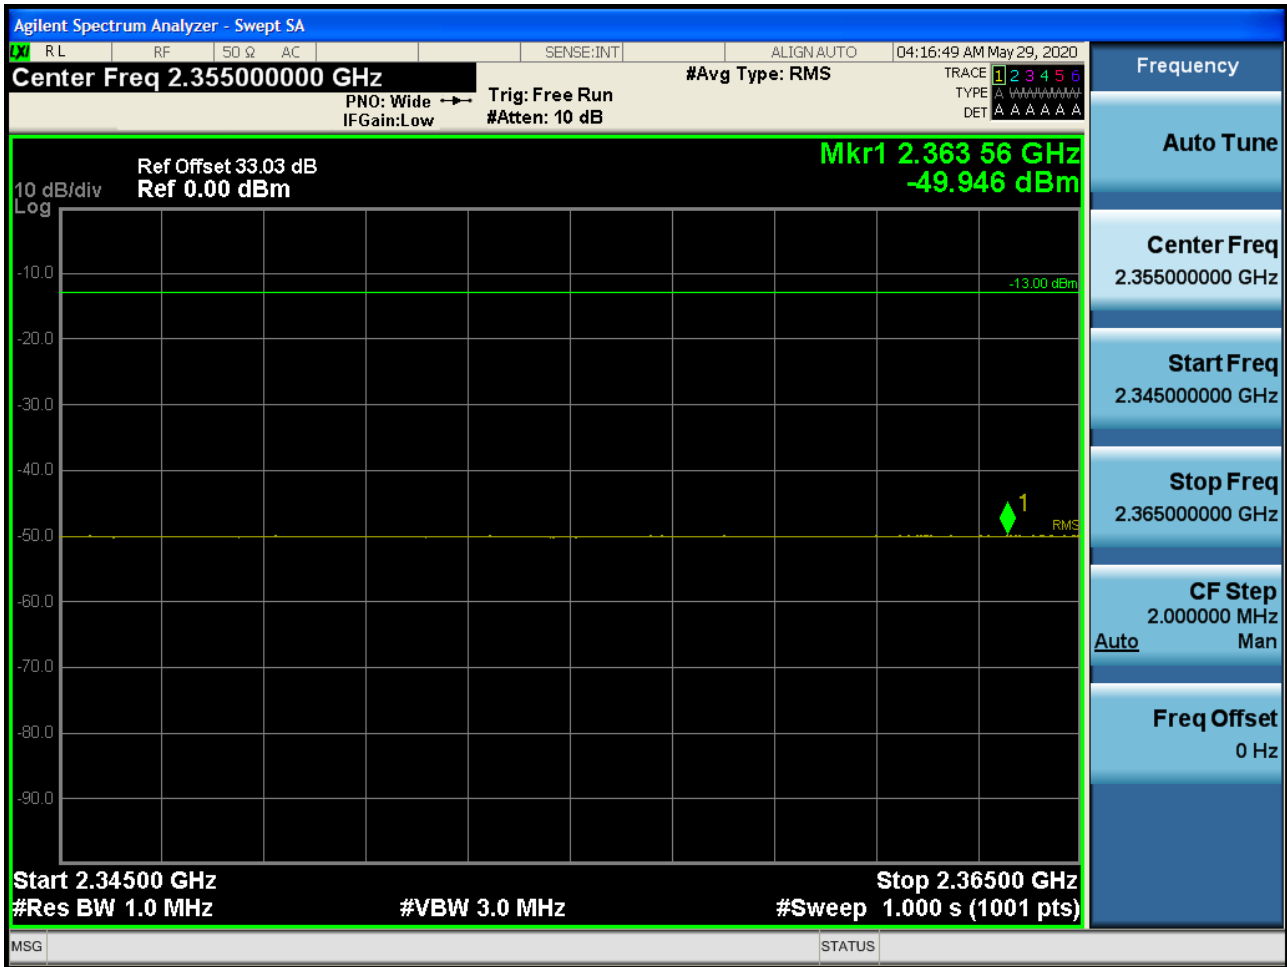





BAND 40. 5M\_BandEdge(2365MHz-2400MHz)\_2312.5MHz\_1RB

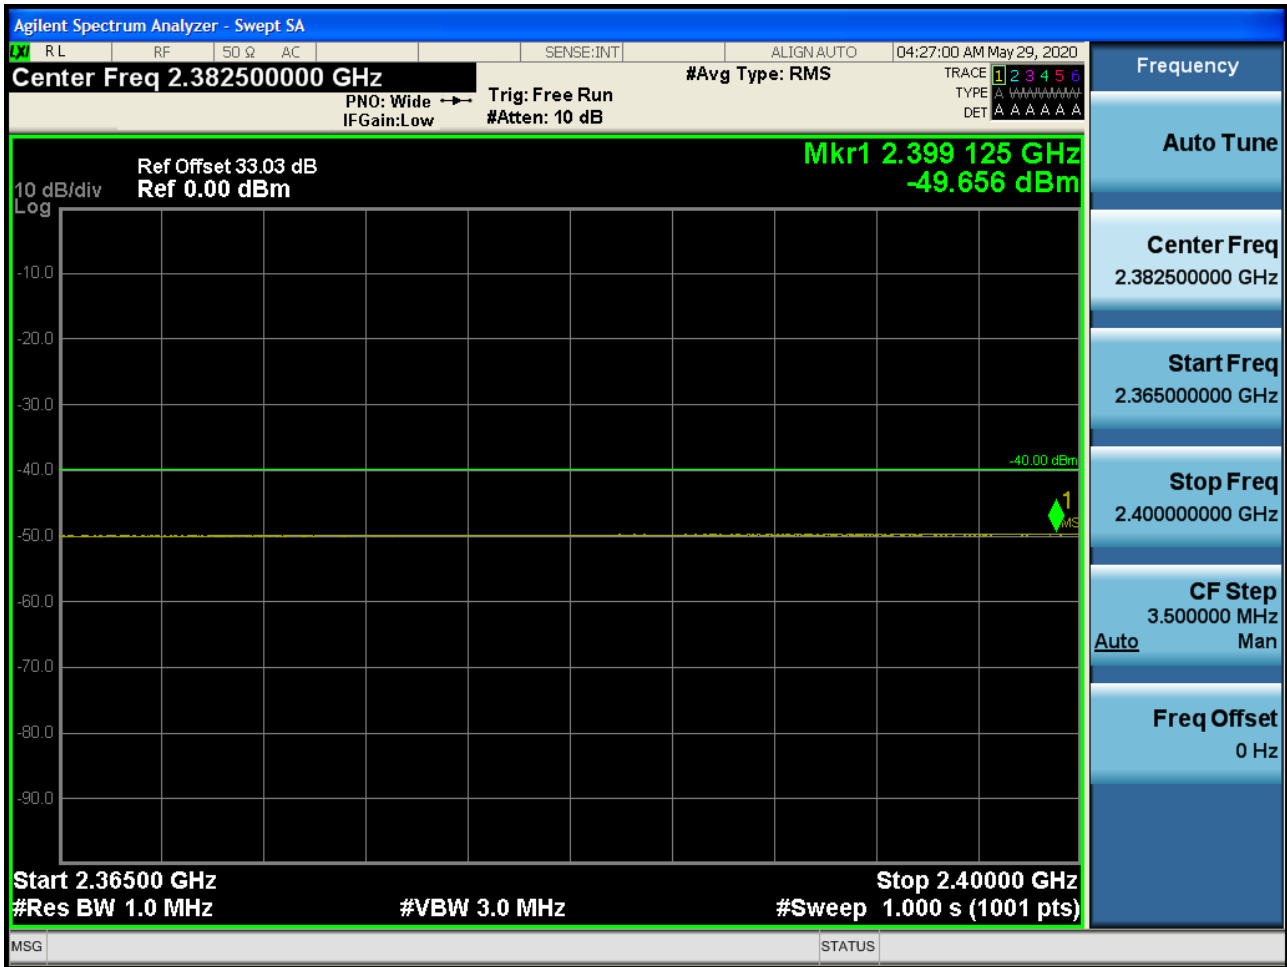


BAND 40. 5M\_BandEdge(2365MHz-2400MHz)\_2307.5MHz\_1RB

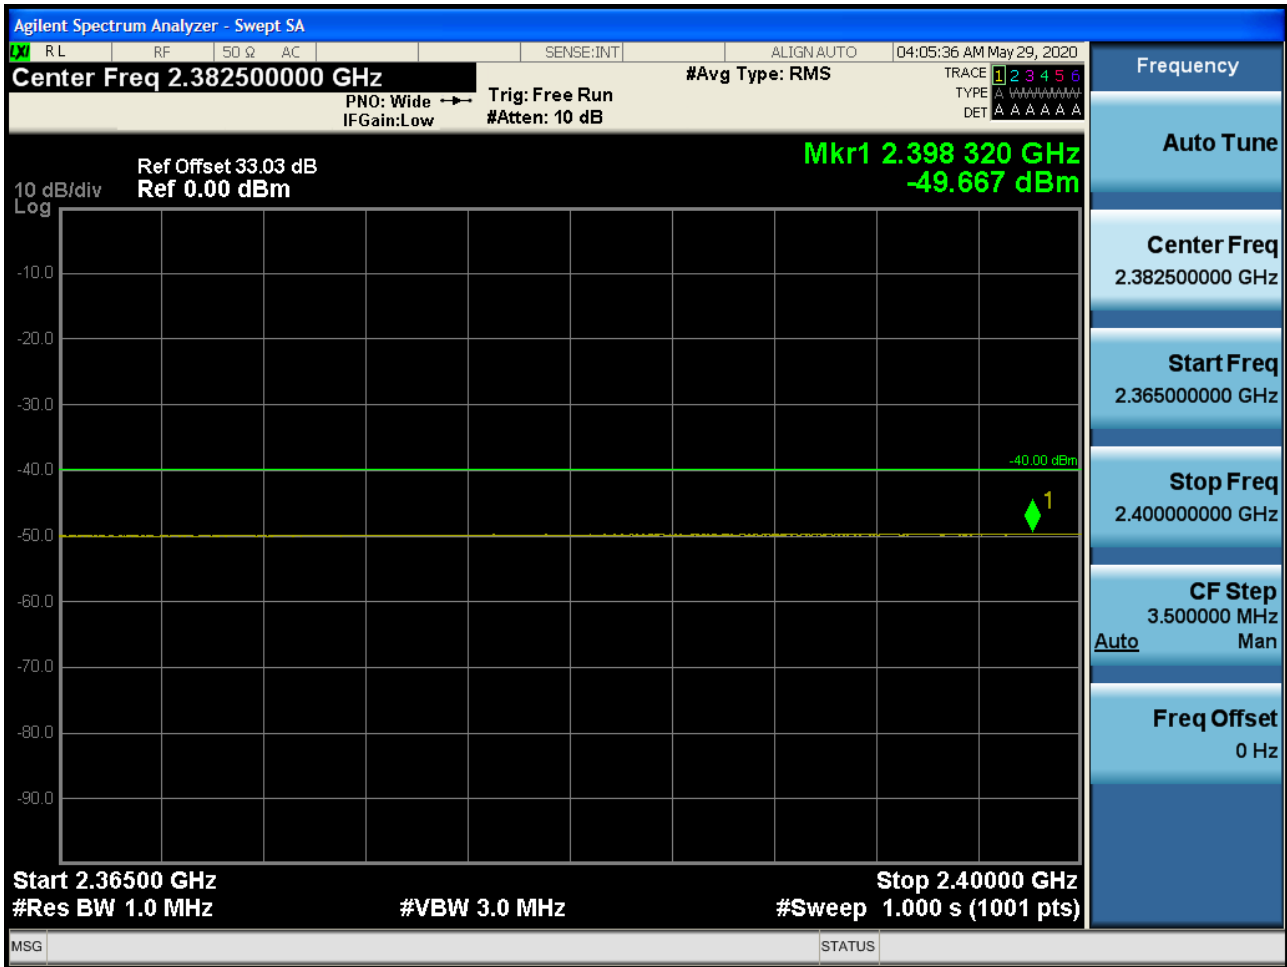


BAND 40. 5M\_BandEdge(2365MHz-2400MHz)\_2310MHz\_1RB

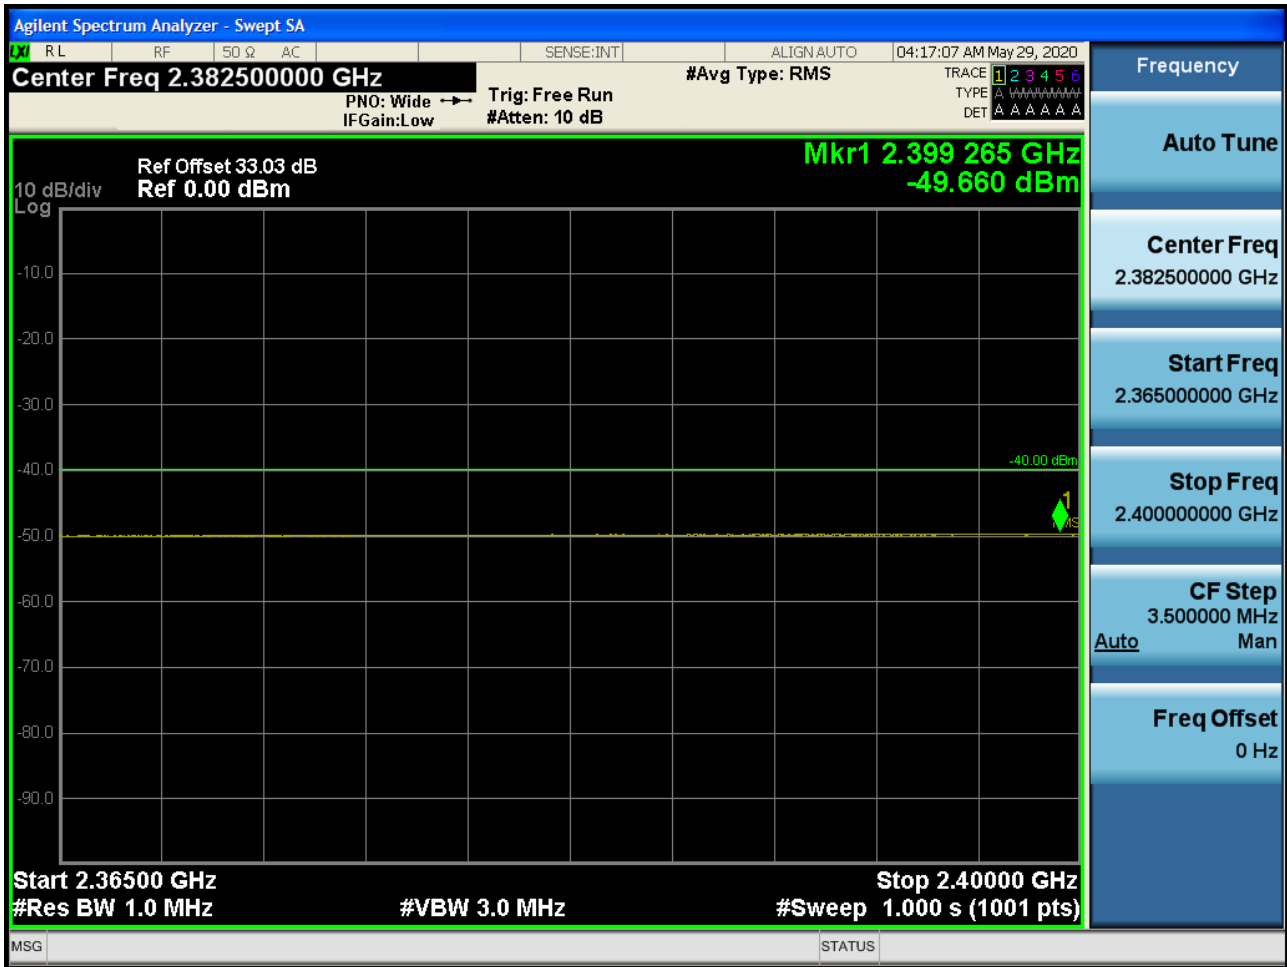


BAND 40. 10M\_BandEdge(2280MHz-2288MHz)\_2310MHz\_1RB

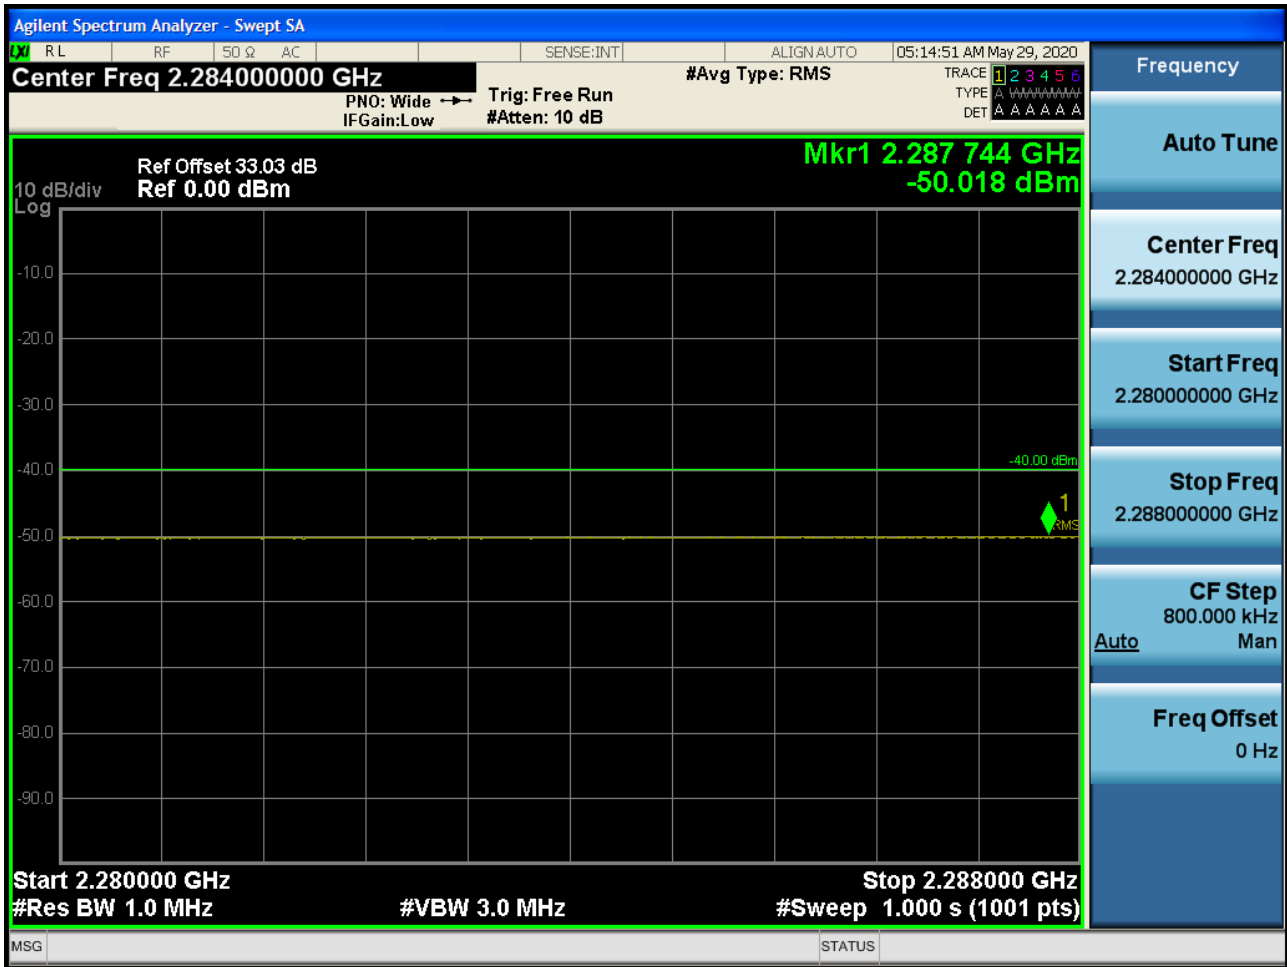


BAND 40. 10M\_BandEdge(2288MHz-2292MHz)\_2310MHz\_1RB

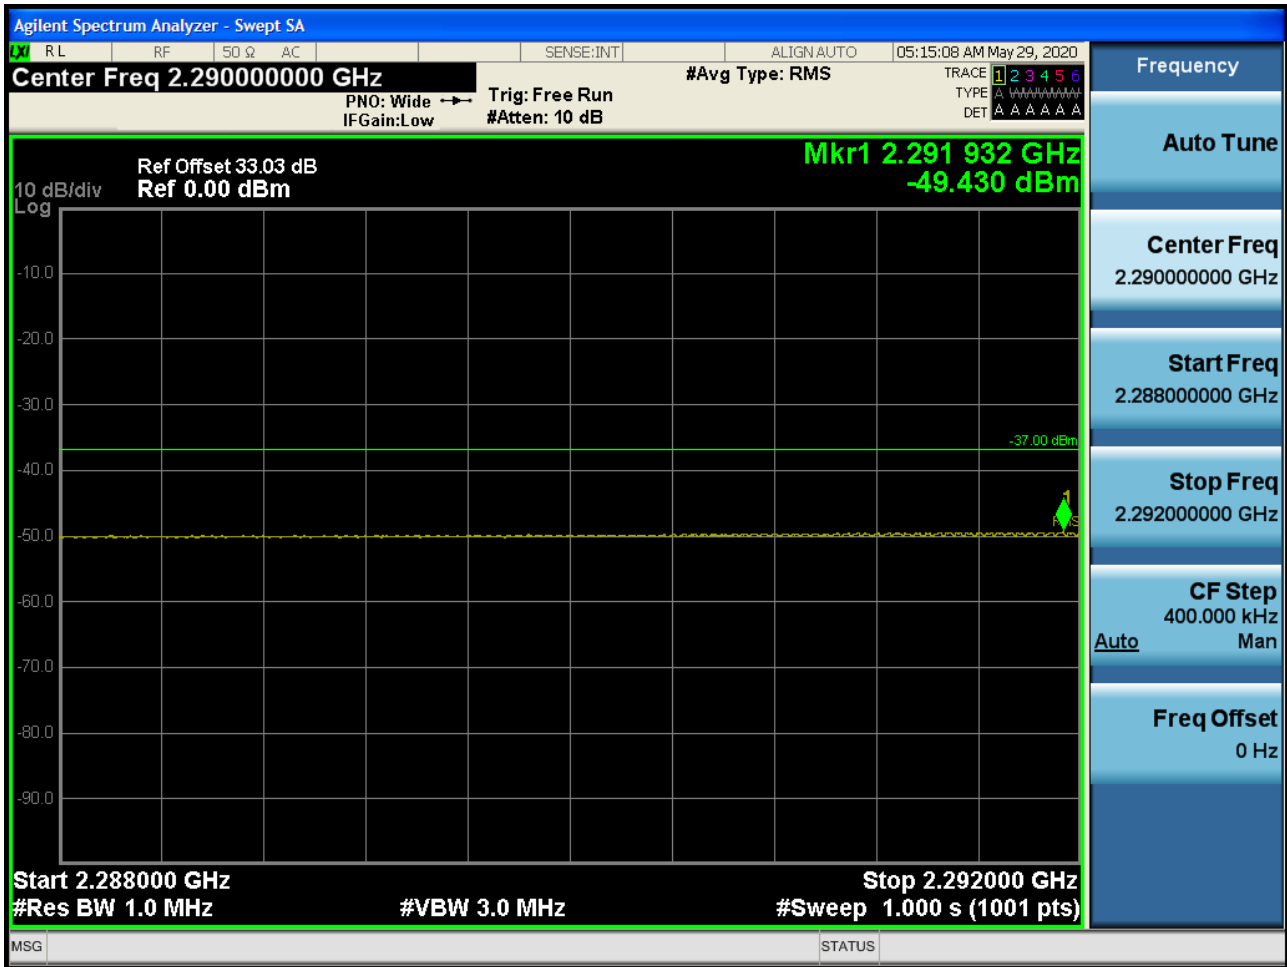


BAND 40. 10M\_BandEdge(2292MHz-2296MHz)\_2310MHz\_1RB

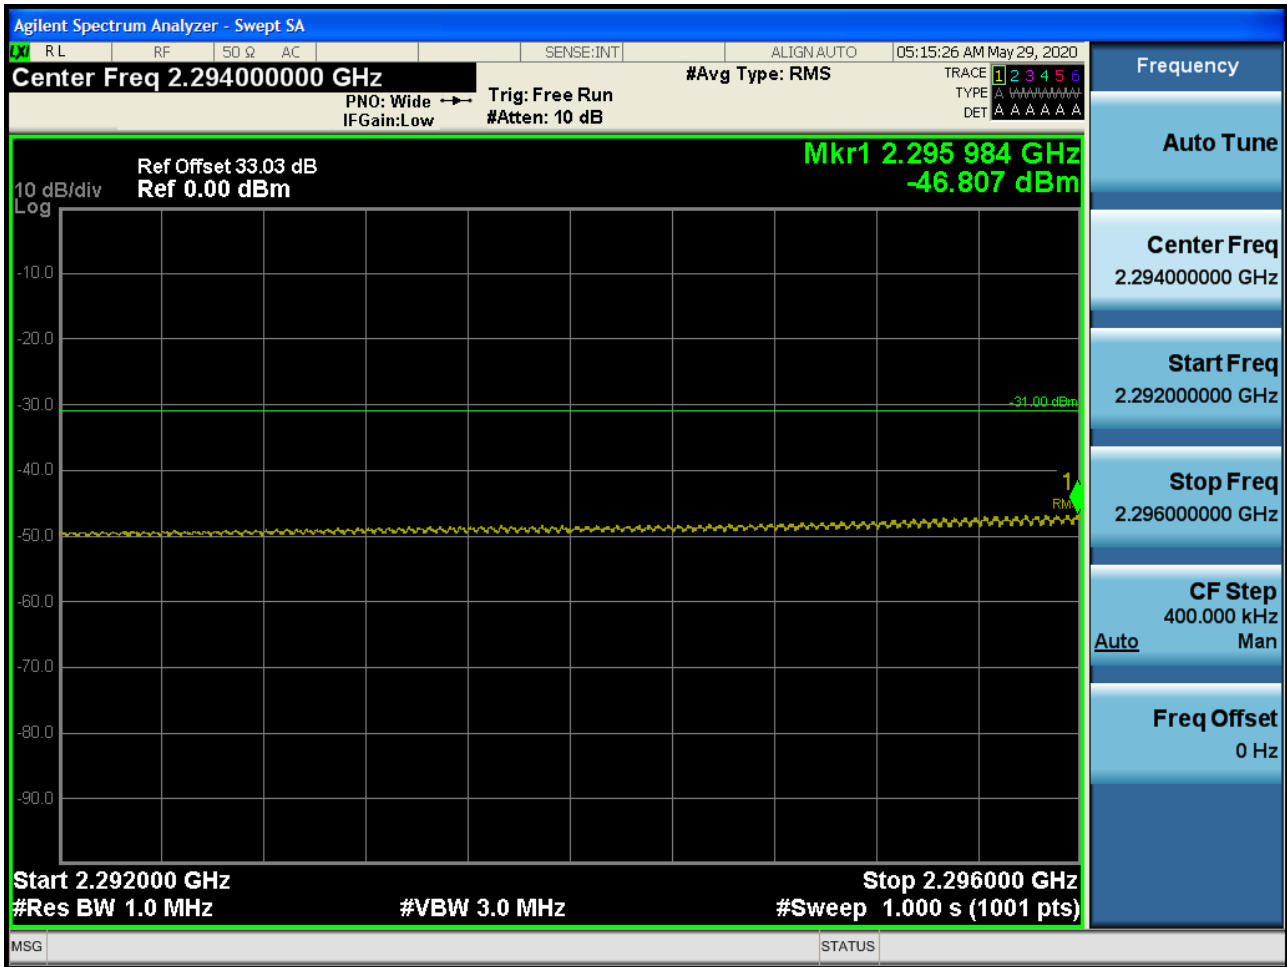

BAND 40. 10M\_BandEdge(2296MHz-2300MHz)\_2310MHz\_1RB

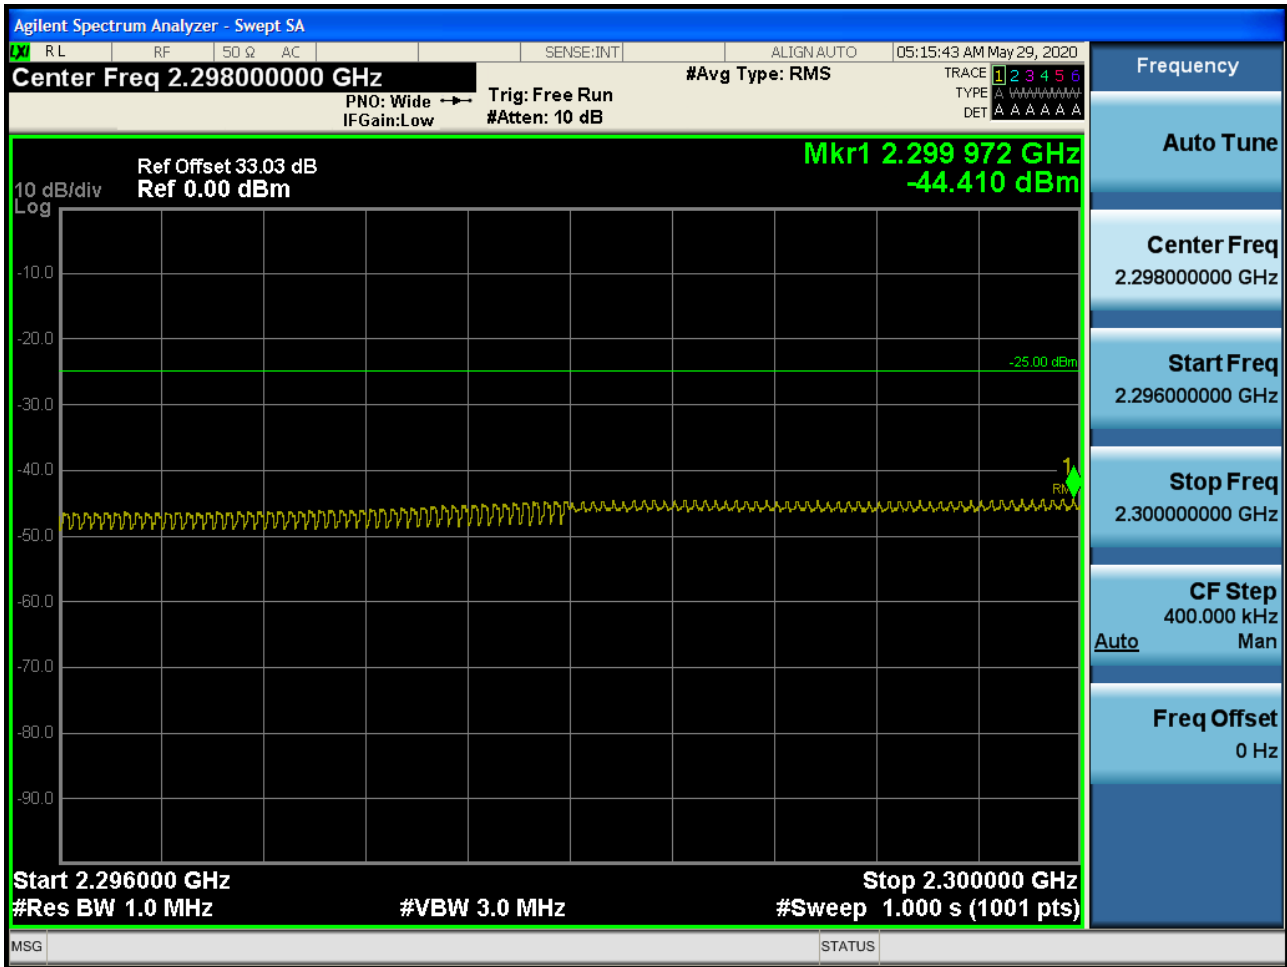


BAND 40. 10M\_BandEdge(2300MHz-2304MHz)\_2310MHz\_1RB

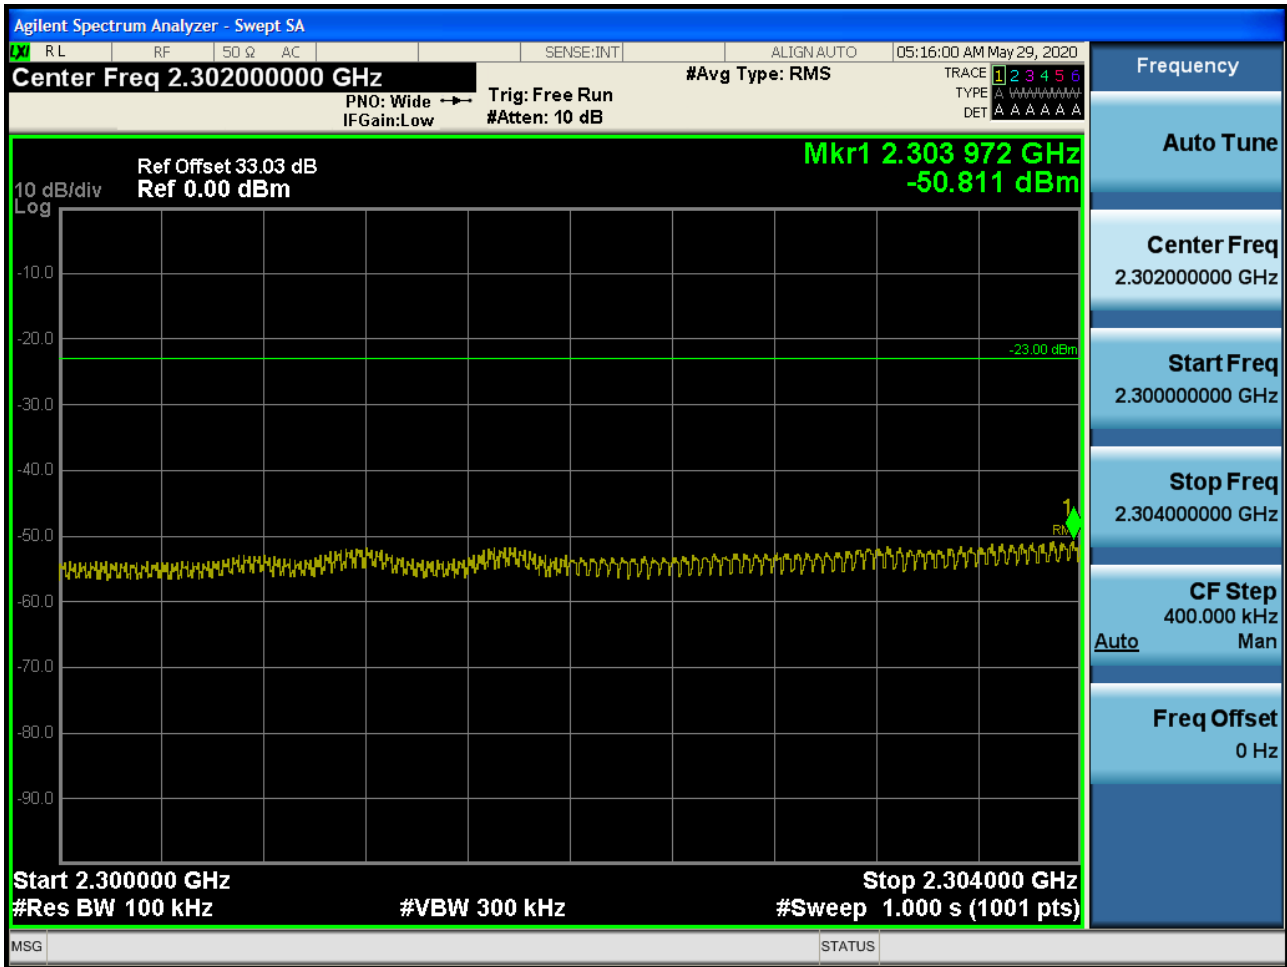





BAND 40. 10M\_BandEdge(2304MHz-2305MHz)\_2310MHz\_1RB

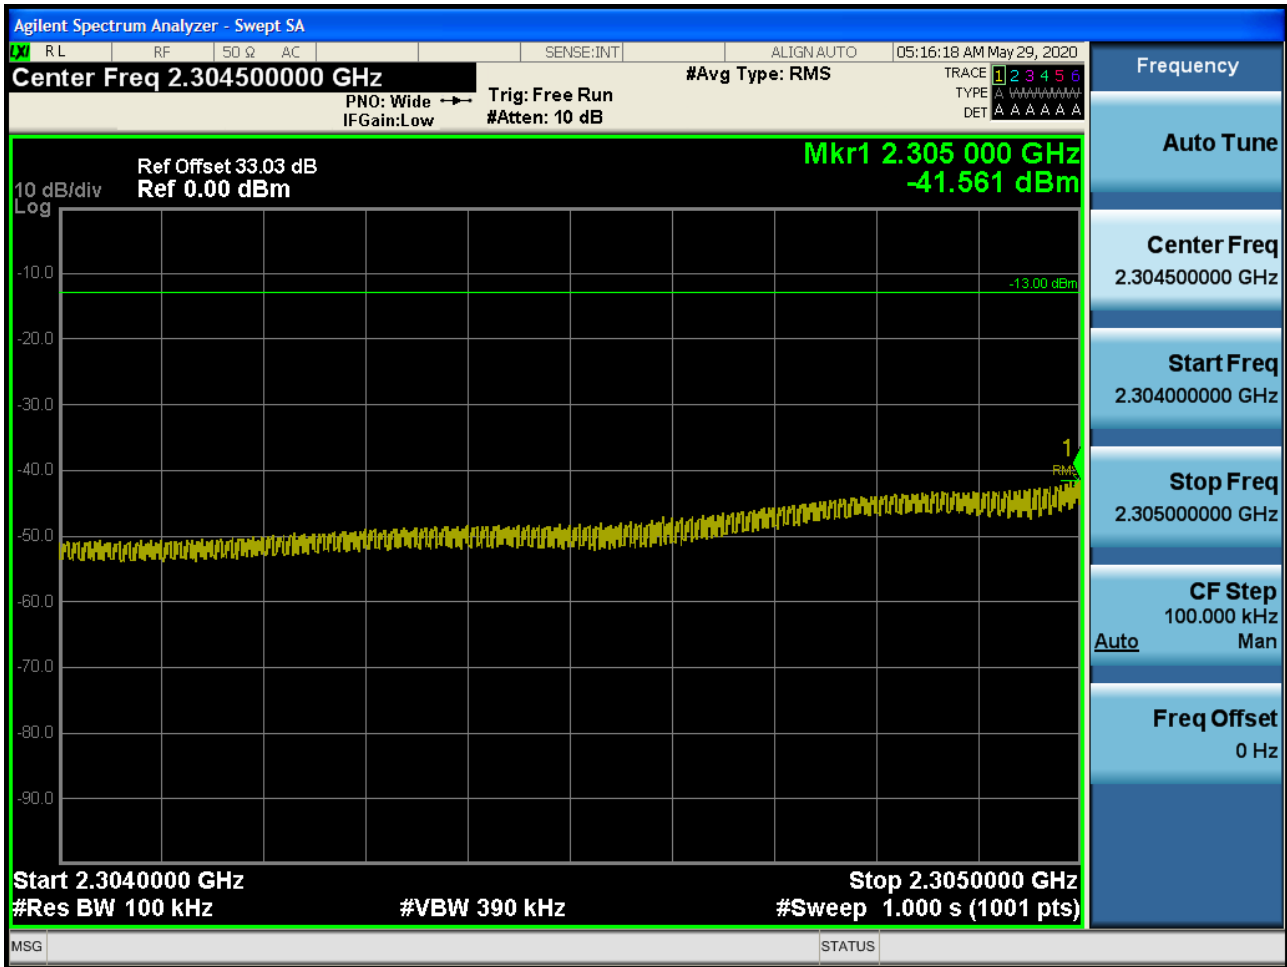


BAND 40. 10M\_BandEdge(2315MHz-2316MHz)\_2310MHz\_1RB

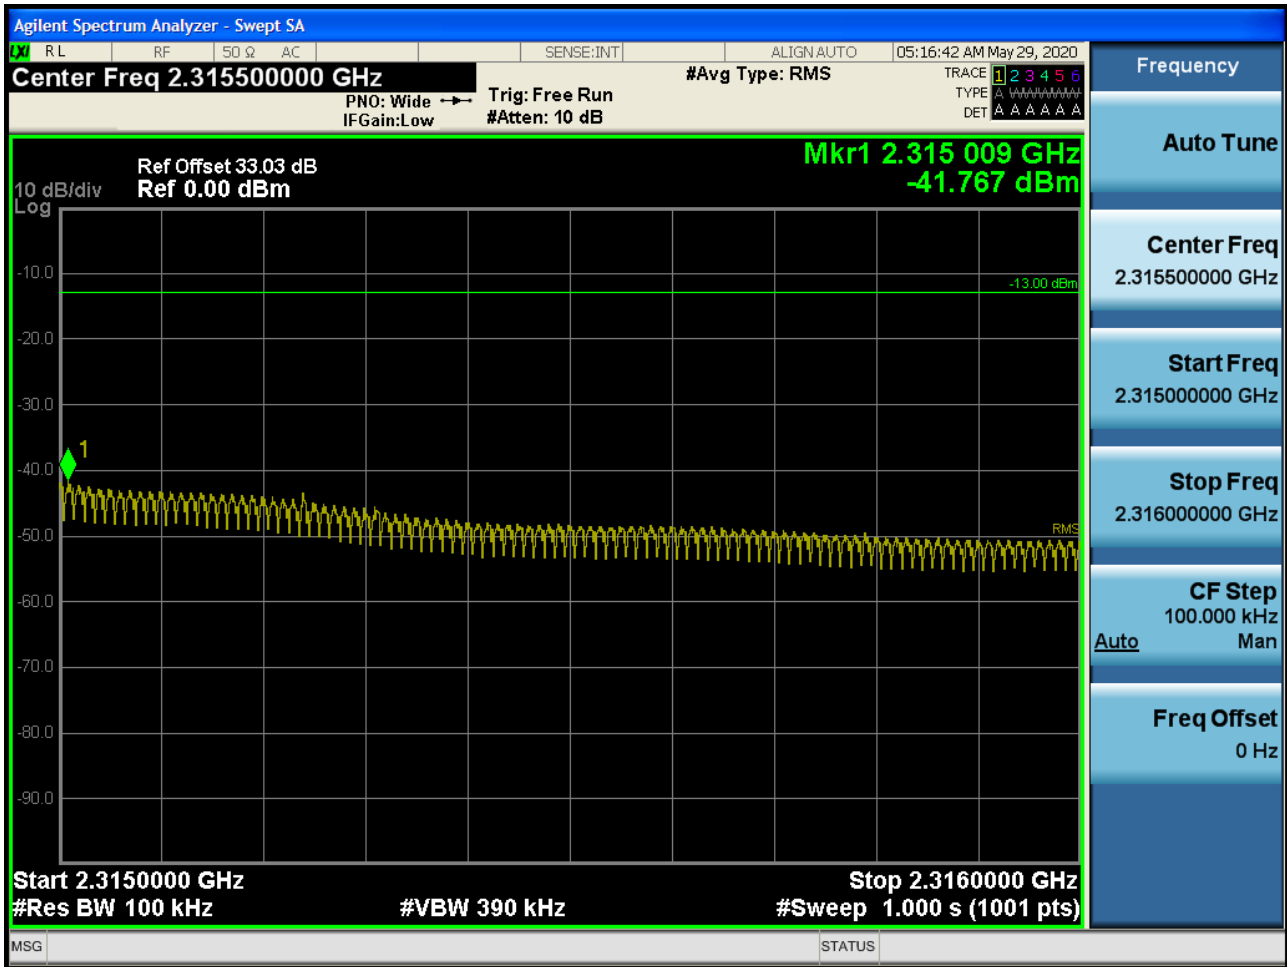


BAND 40. 10M\_BandEdge(2316MHz-2320MHz)\_2310MHz\_1RB

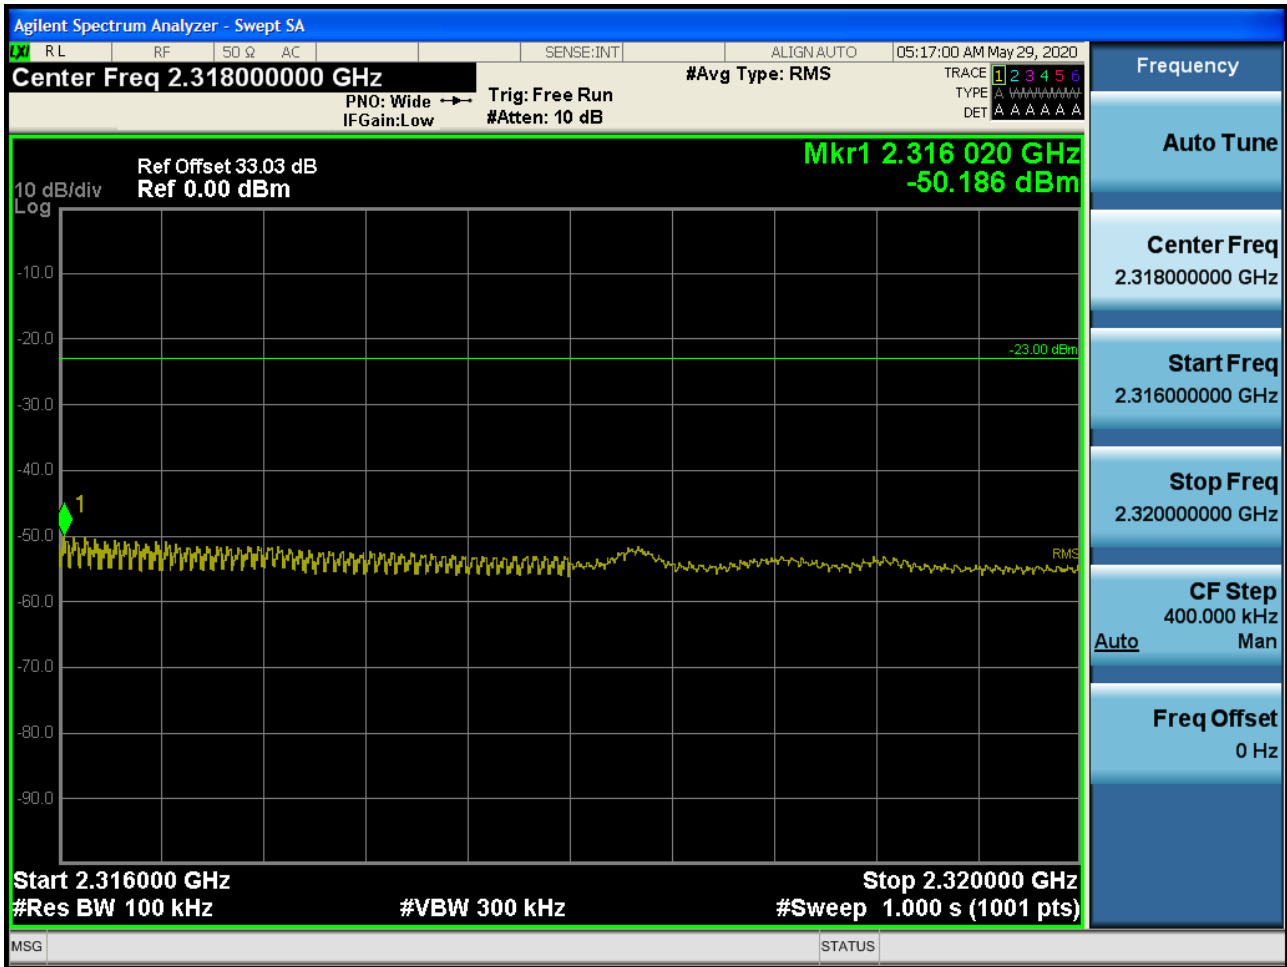


BAND 40. 10M\_BandEdge(2320MHz-2324MHz)\_2310MHz\_1RB

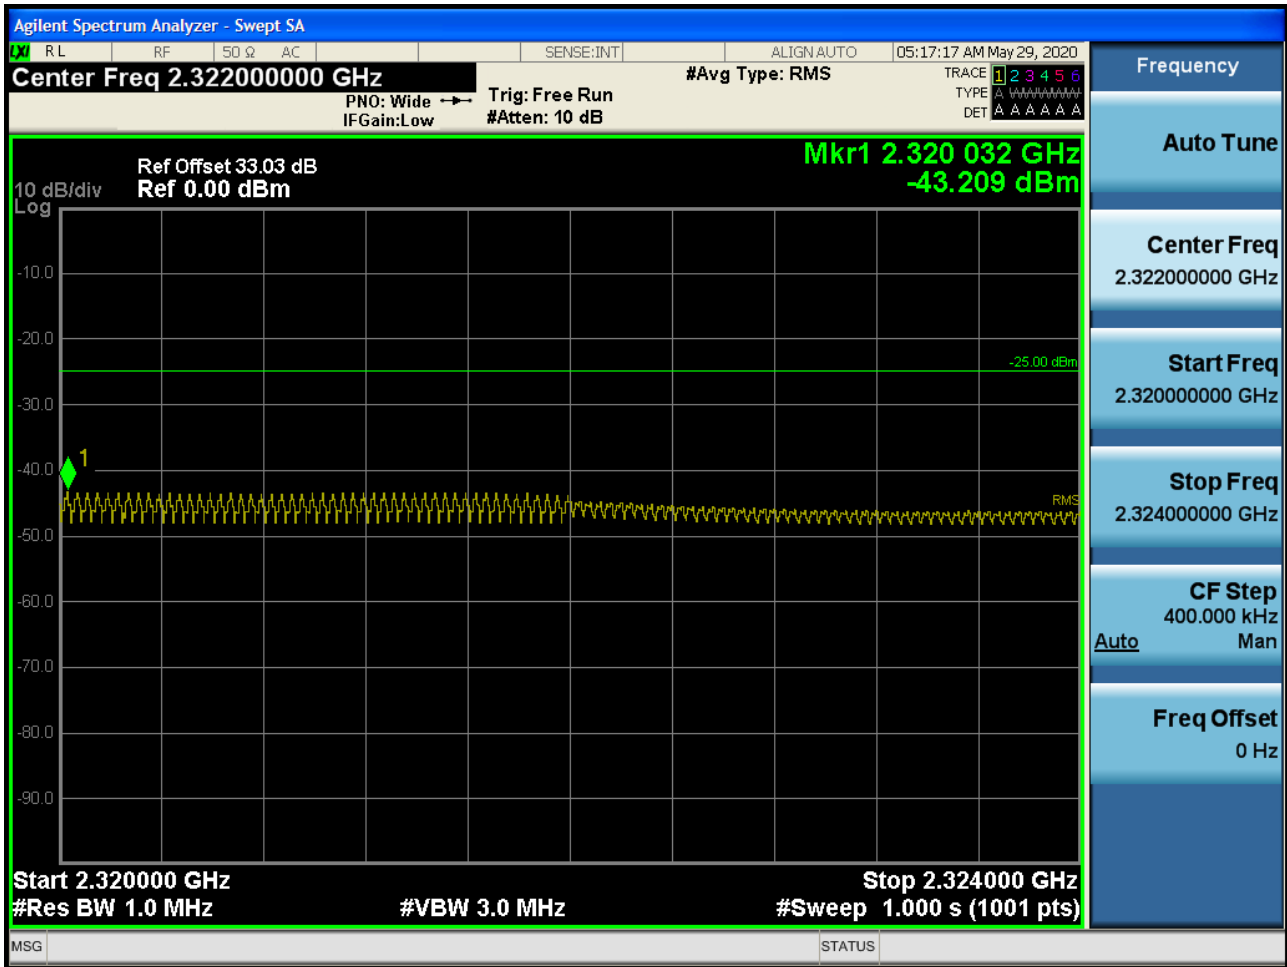


BAND 40. 10M\_BandEdge(2324MHz-2328MHz)\_2310MHz\_1RB

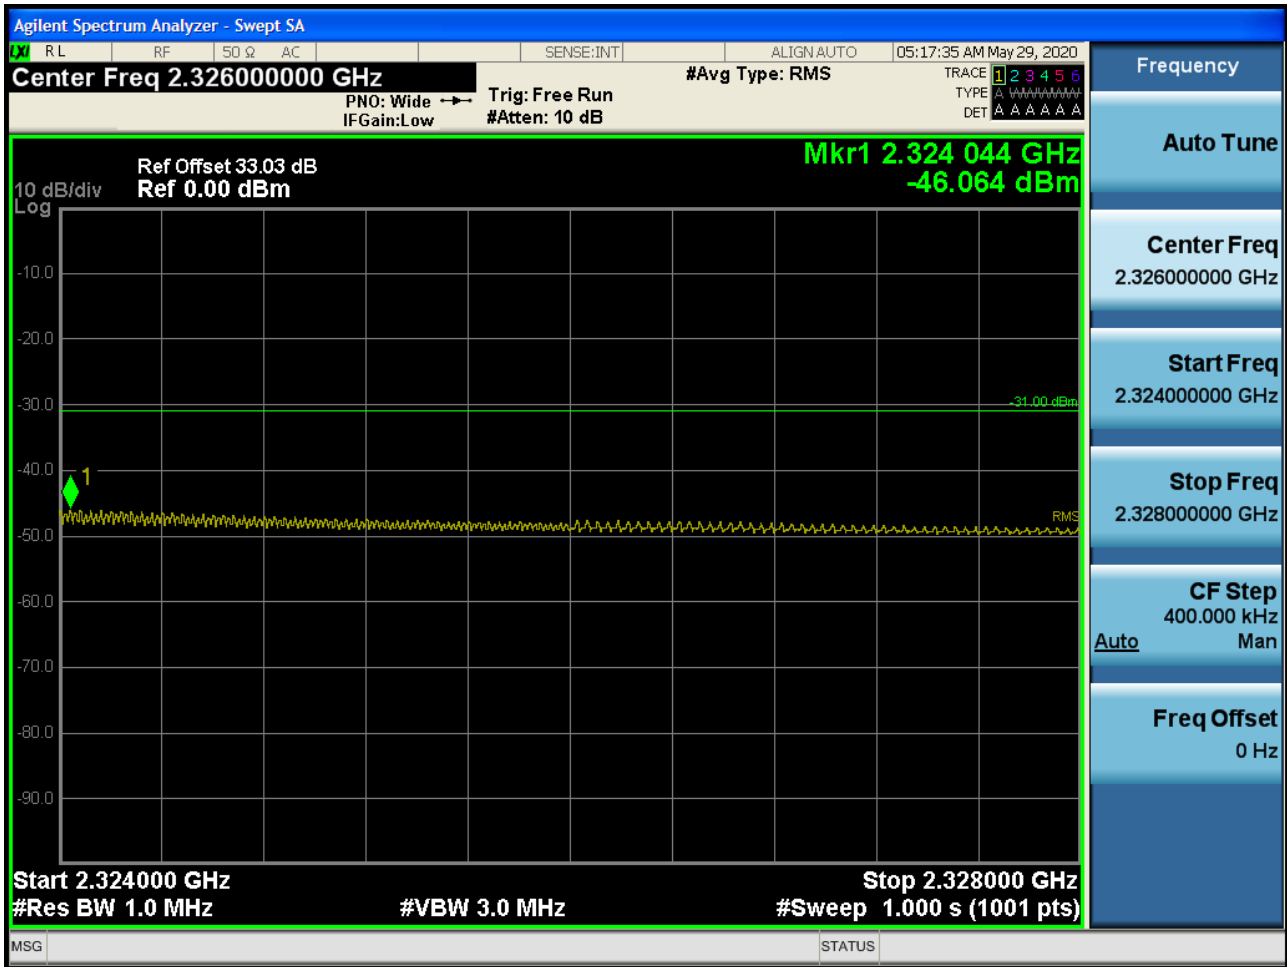


BAND 40. 10M\_BandEdge(2328MHz-2337MHz)\_2310MHz\_1RB

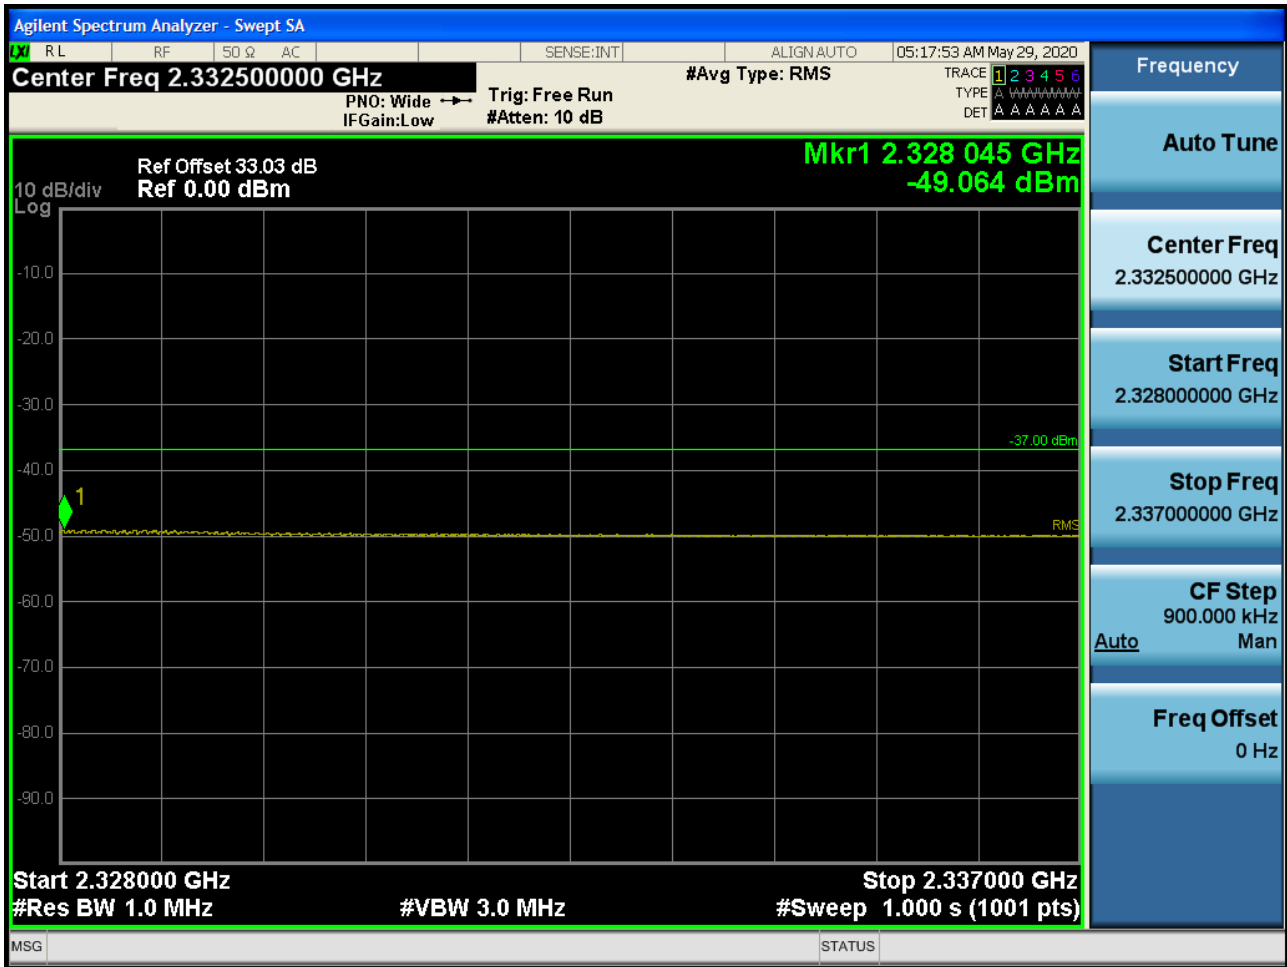

BAND 40. 10M\_BandEdge(2337MHz-2341MHz)\_2310MHz\_1RB

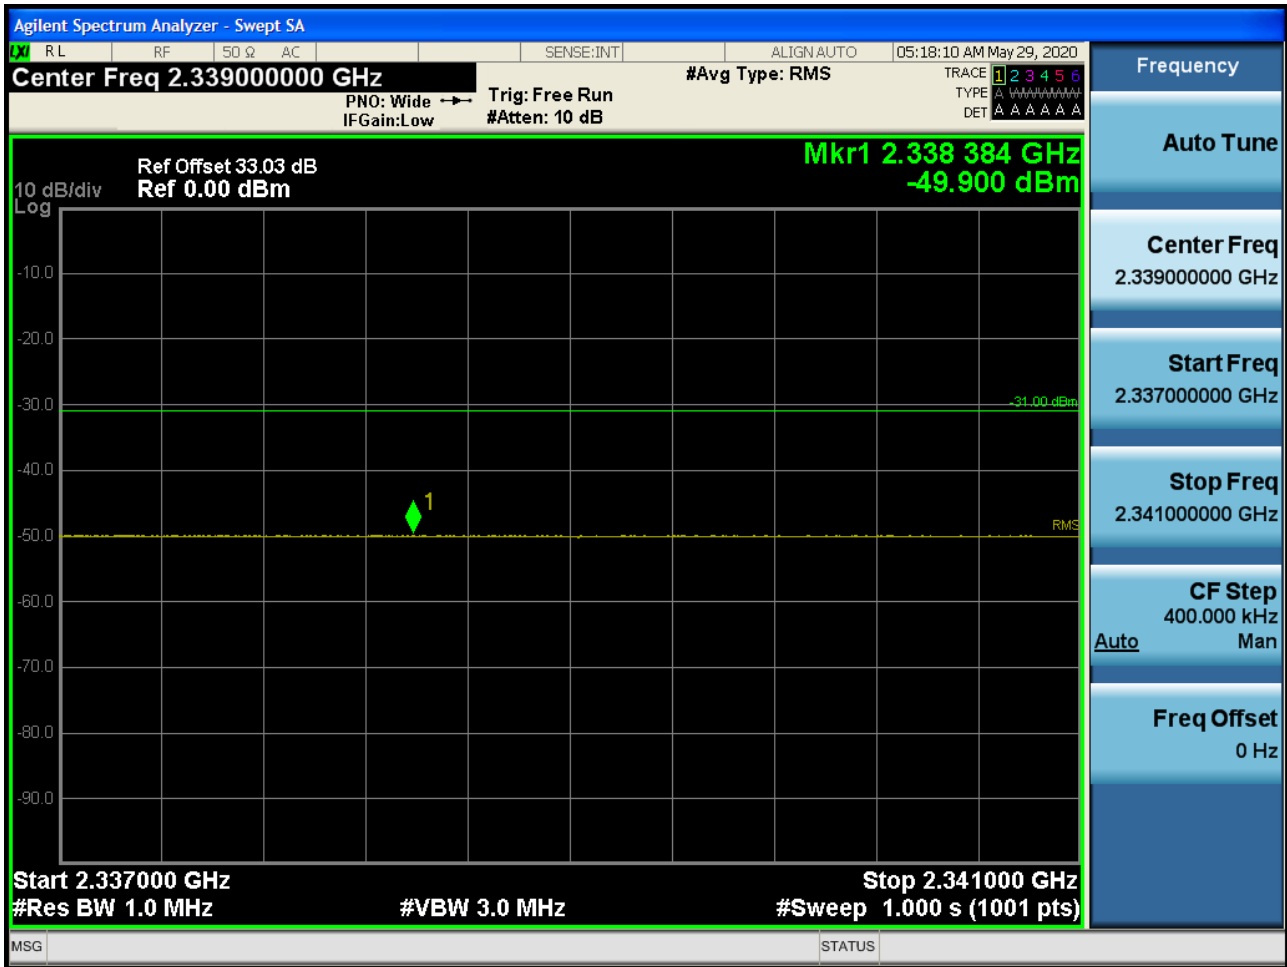


BAND 40. 10M\_BandEdge(2341MHz-2345MHz)\_2310MHz\_1RB

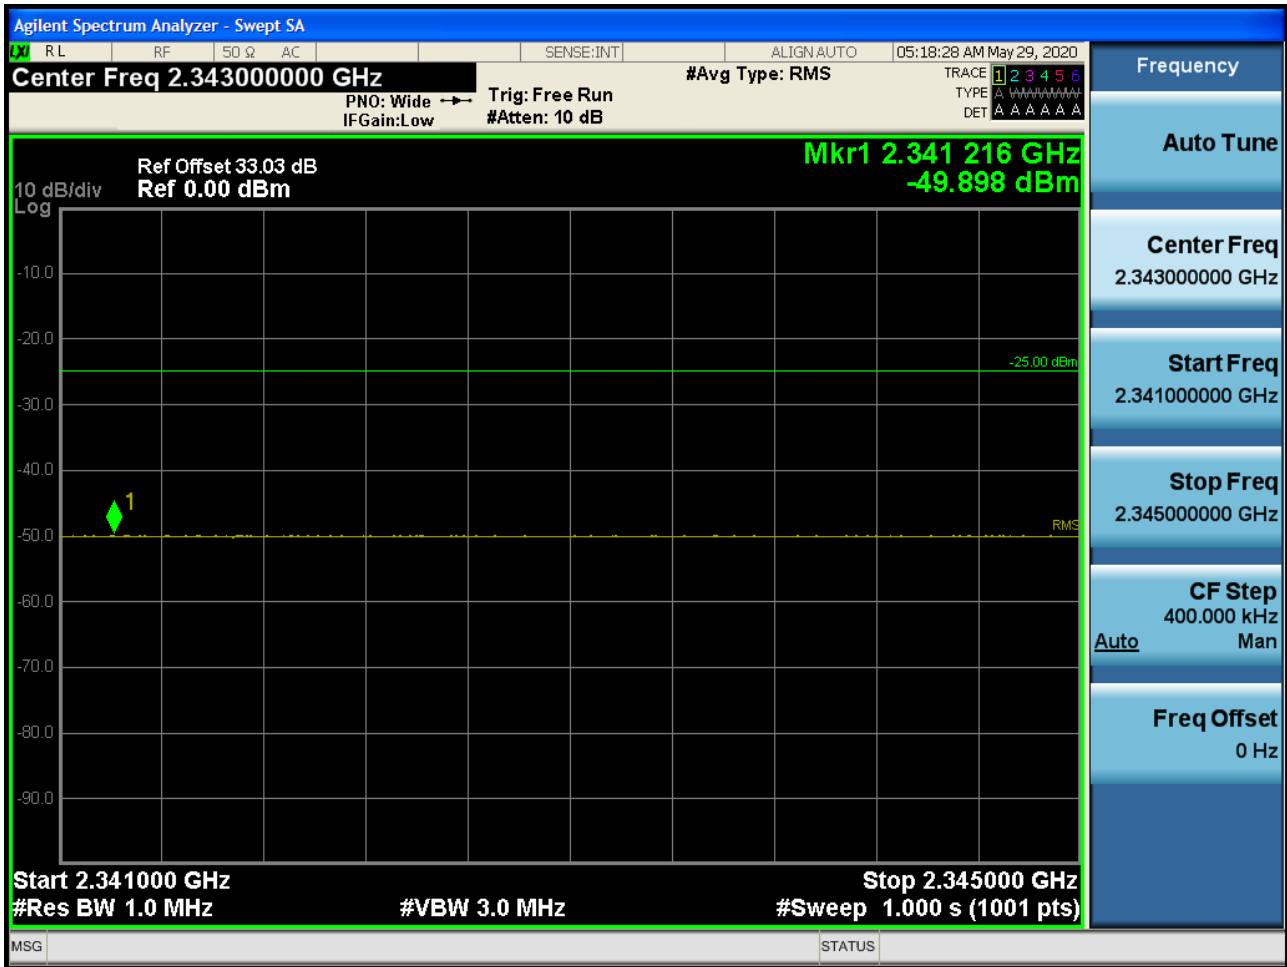





BAND 40. 10M\_BandEdge(2345MHz-2365MHz)\_2310MHz\_1RB

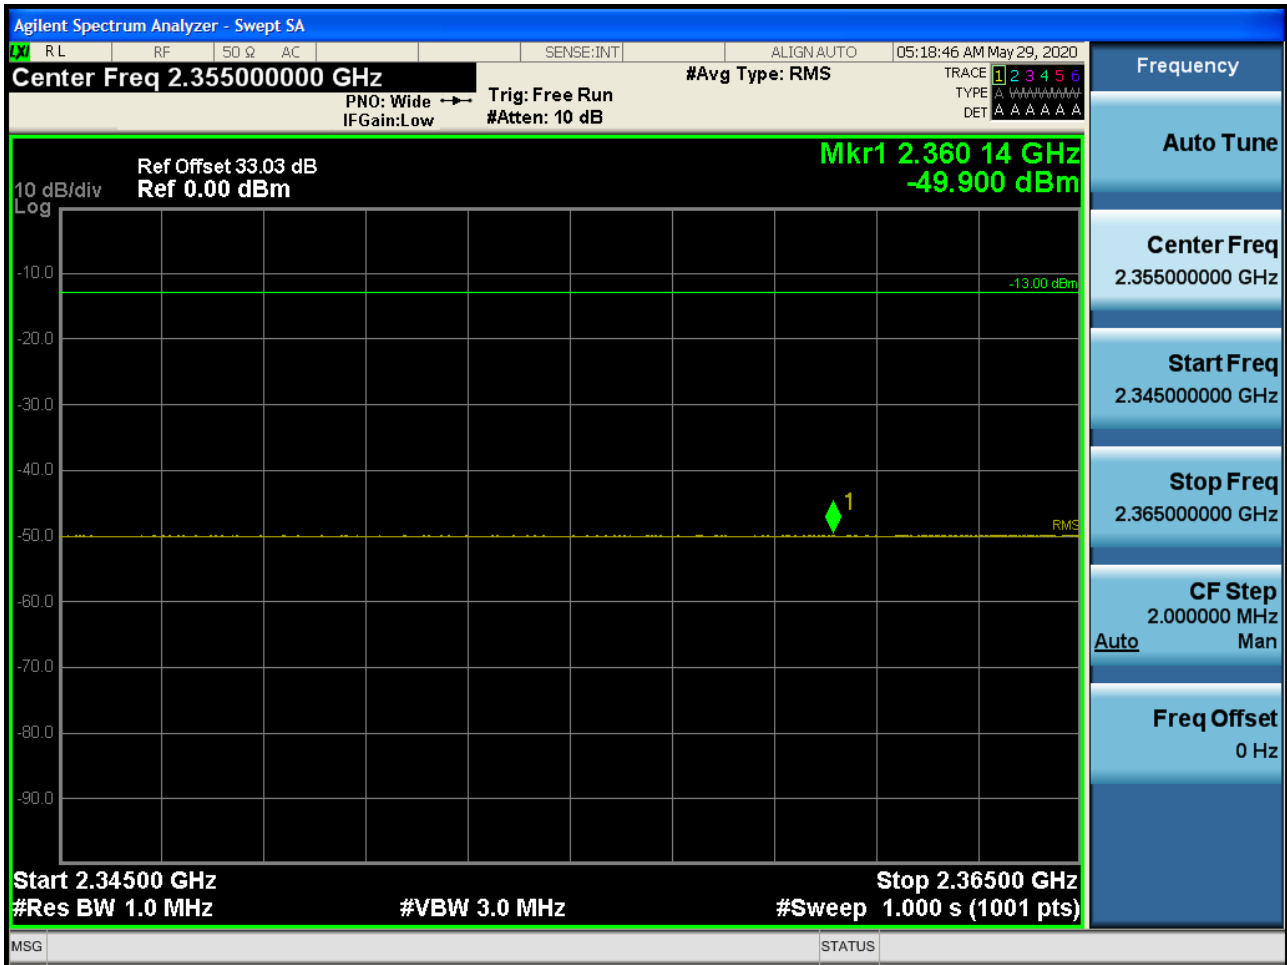


BAND 40. 10M\_BandEdge(2365MHz-2400MHz)\_2310MHz\_1RB

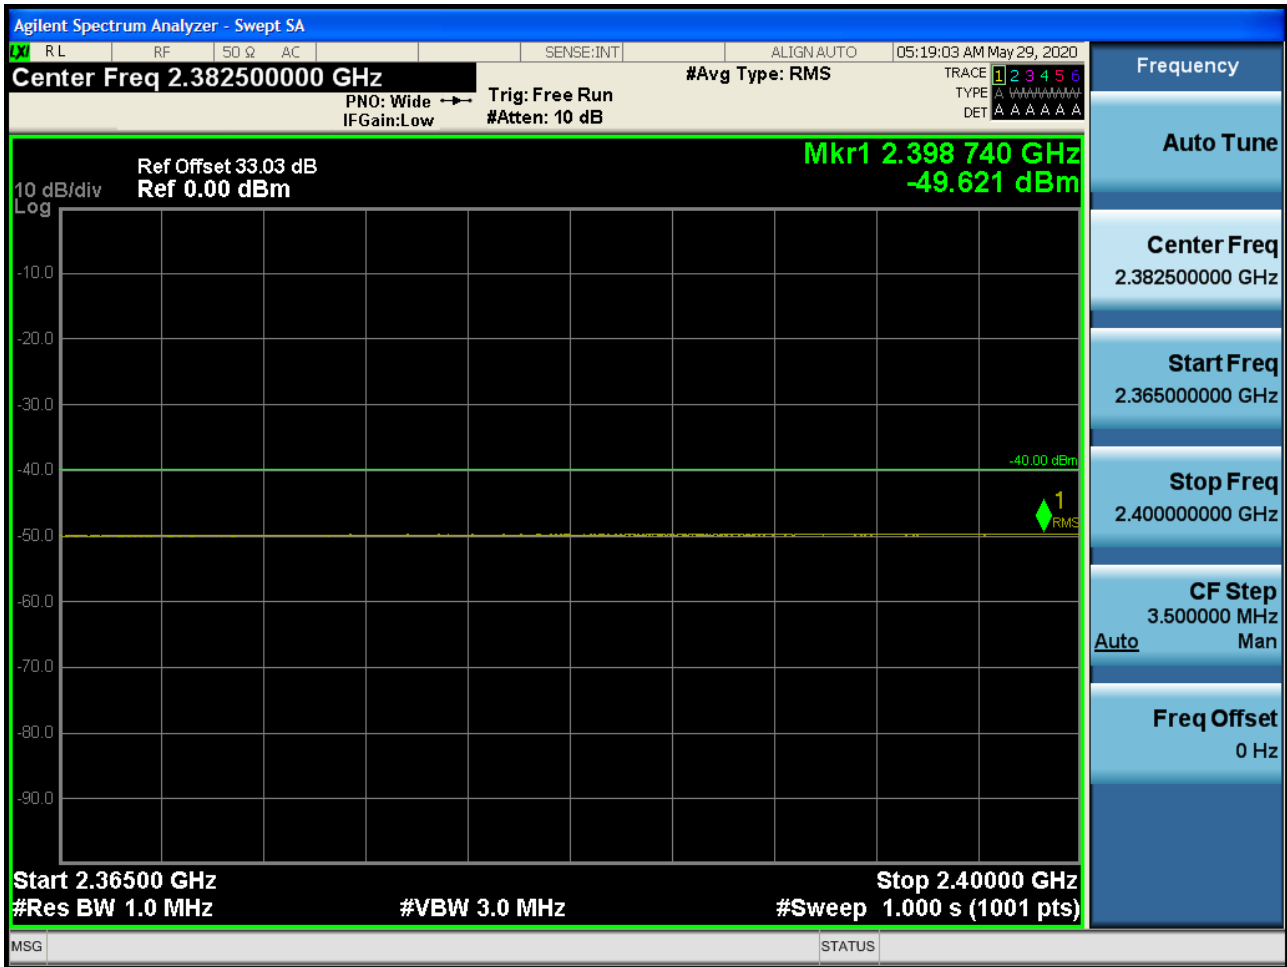


BAND 40. 5M\_BandEdge(2280MHz-2288MHz)\_2312.5MHz\_FullIRB

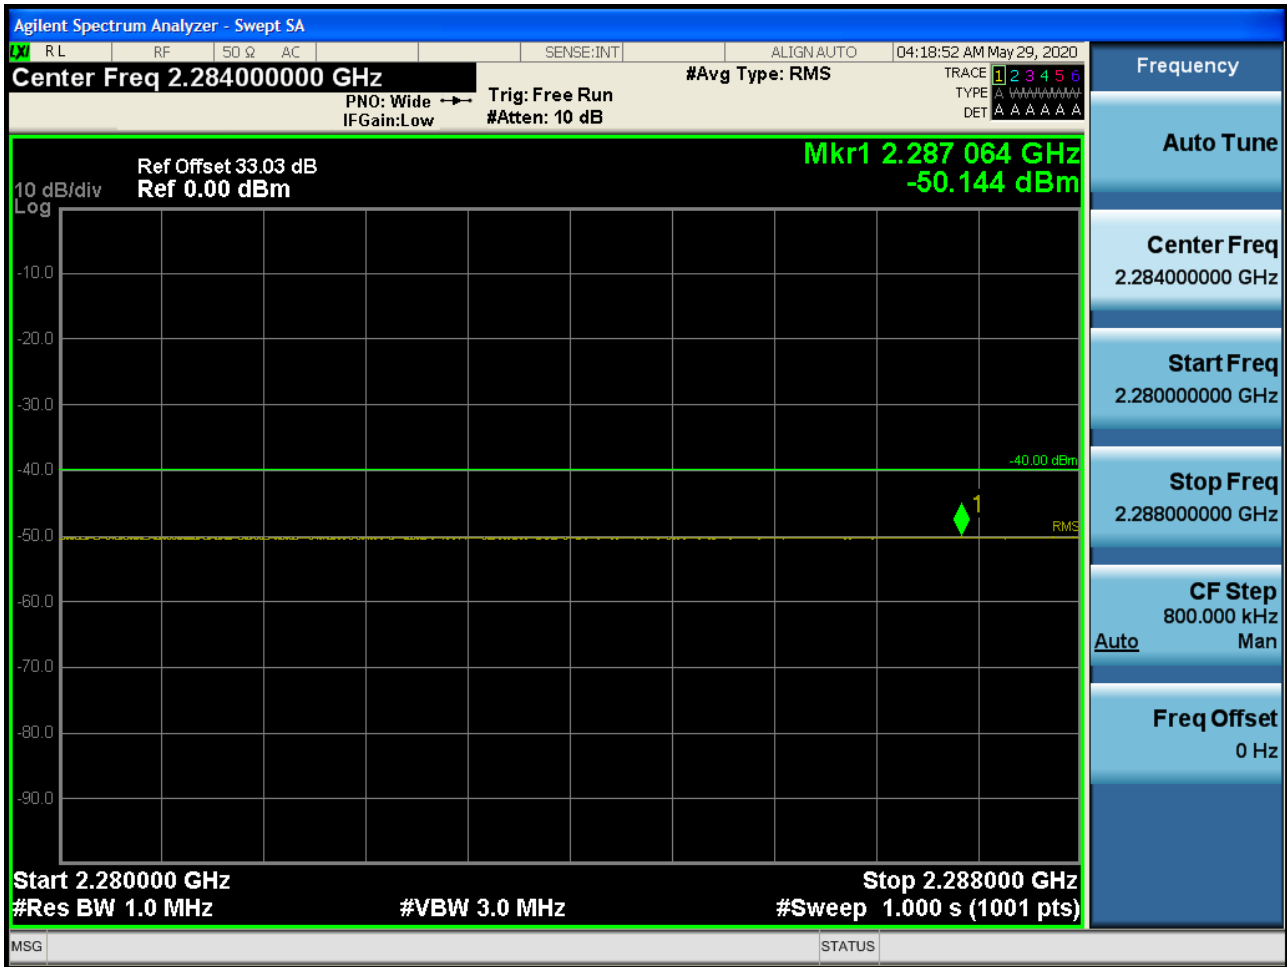


BAND 40. 5M\_BandEdge(2280MHz-2288MHz)\_2307.5MHz\_FullRB

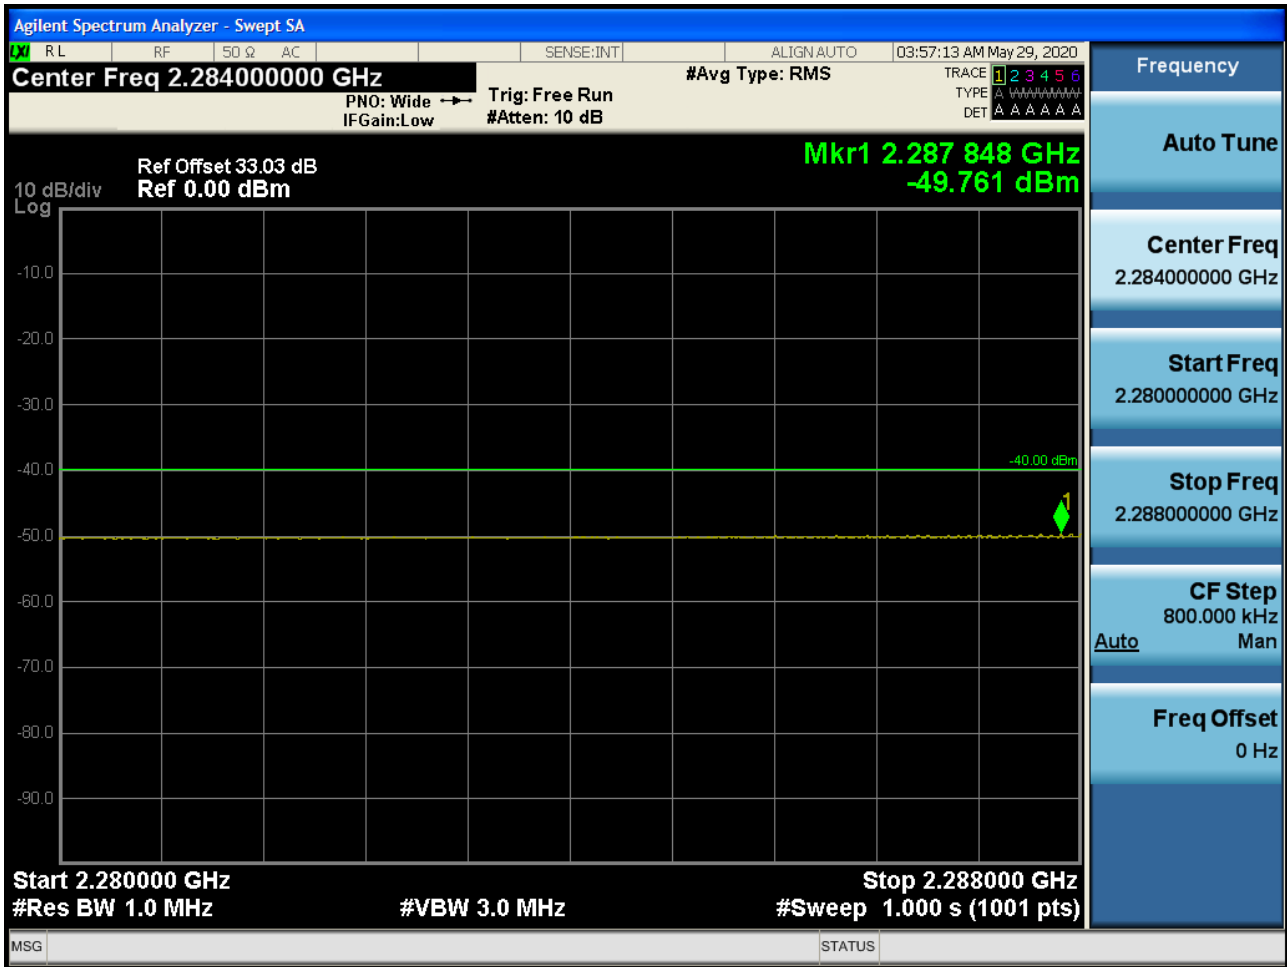


BAND 40. 5M\_BandEdge(2280MHz-2288MHz)\_2310MHz\_FullIRB

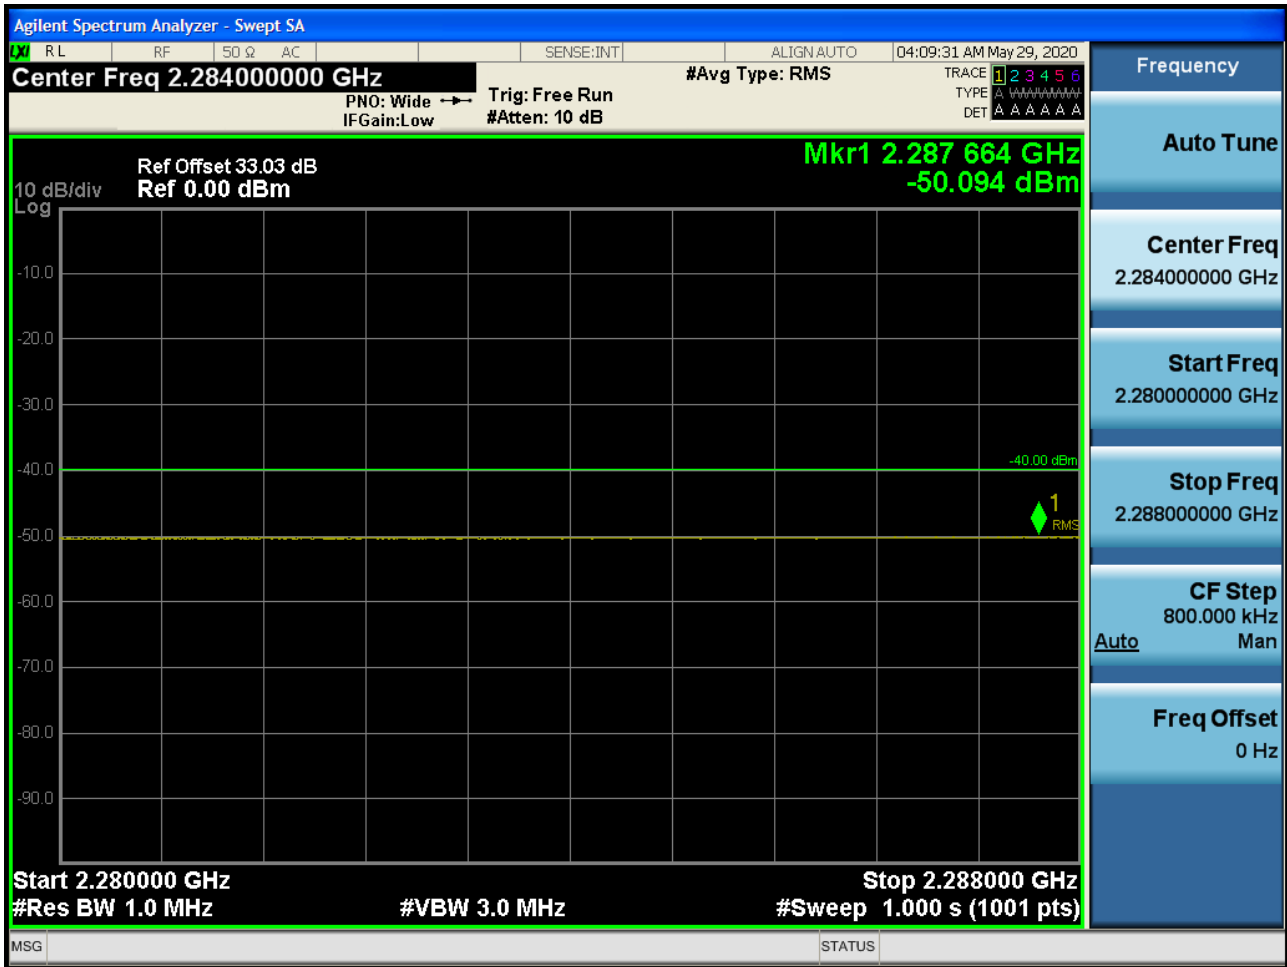


BAND 40. 5M\_BandEdge(2288MHz-2292MHz)\_2312.5MHz\_FullRB

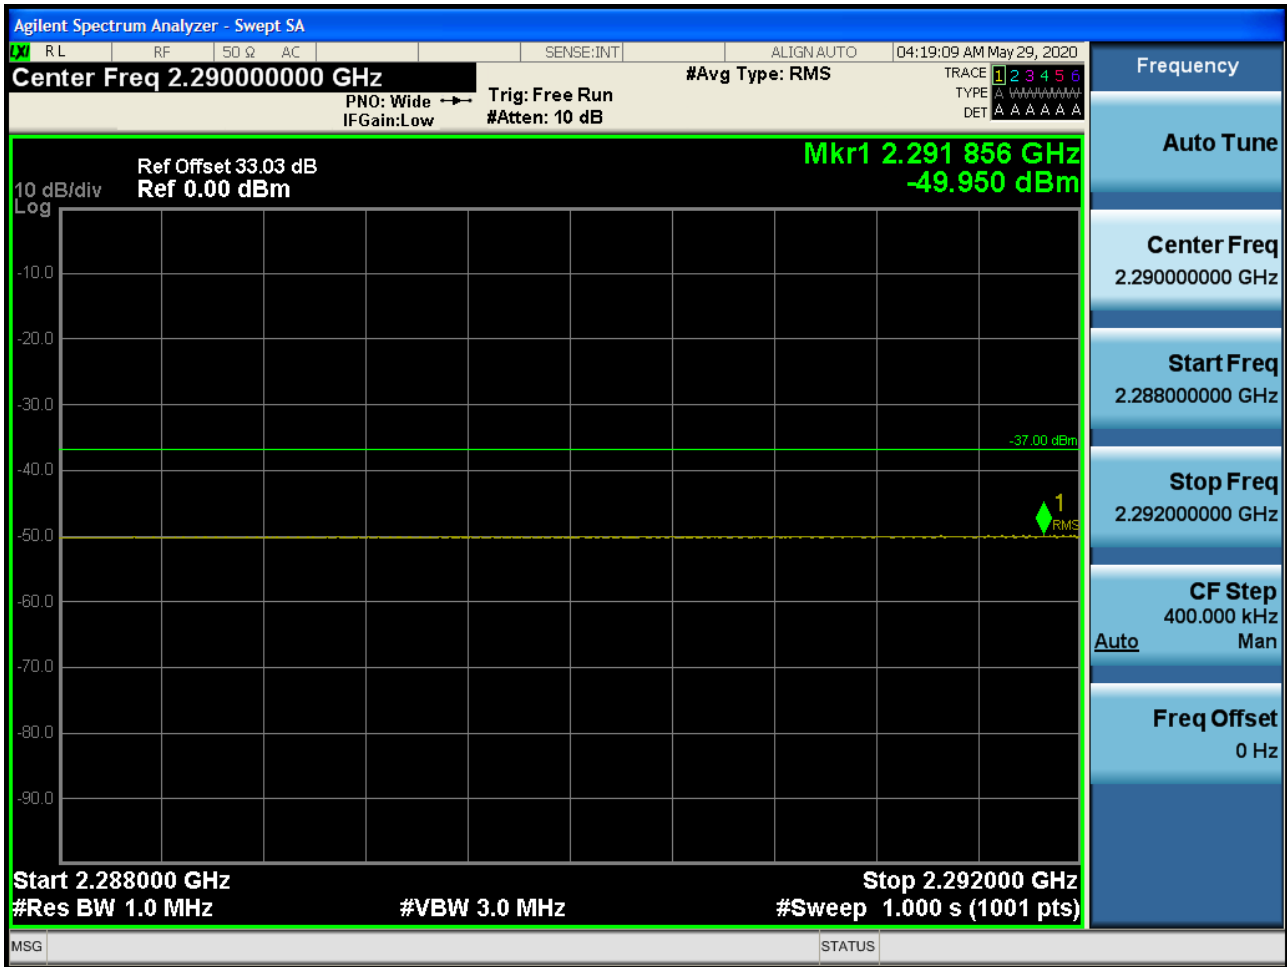

BAND 40. 5M\_BandEdge(2288MHz-2292MHz)\_2307.5MHz\_FullRB

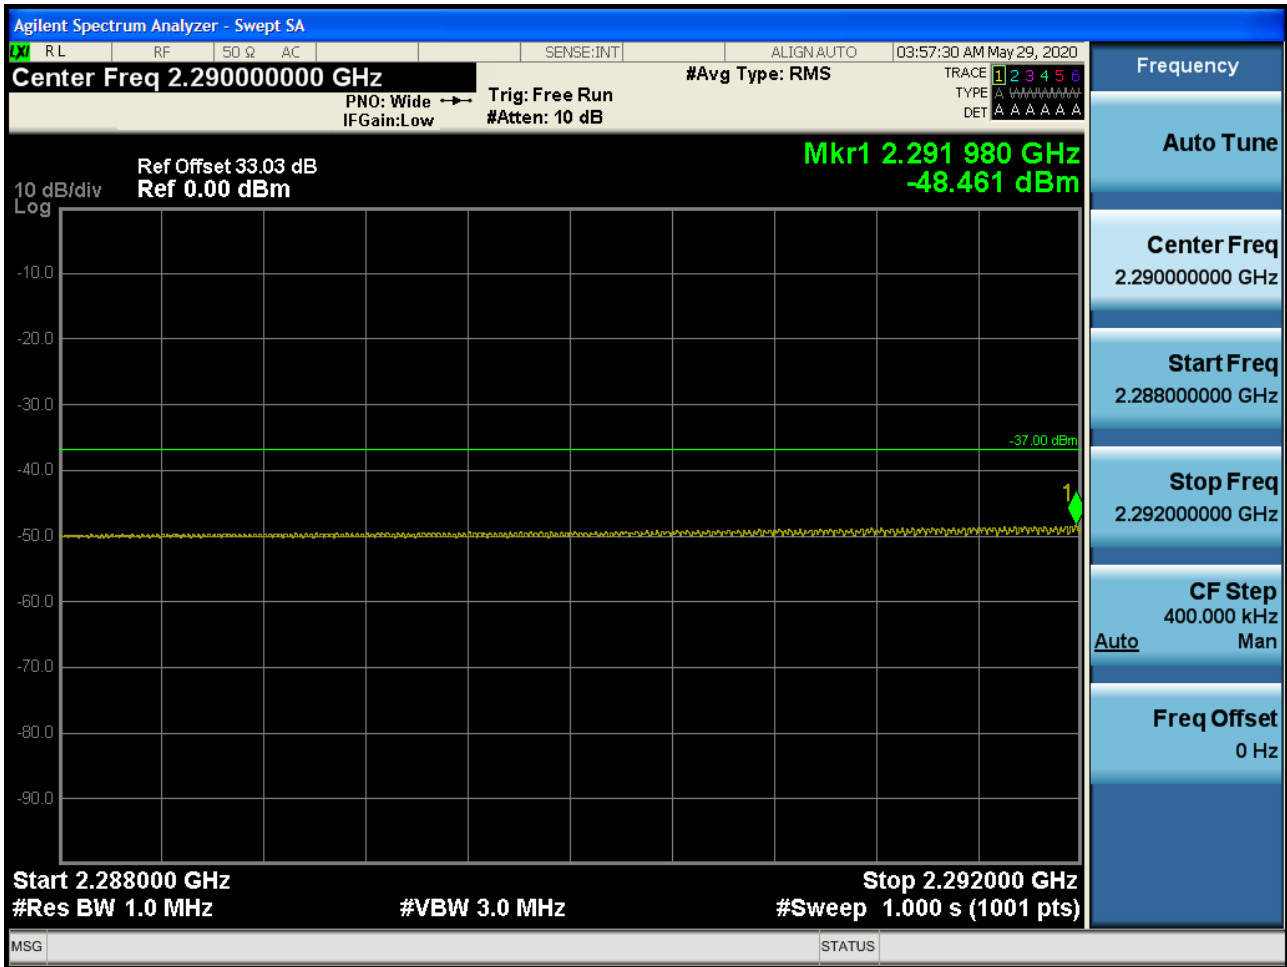


BAND 40. 5M\_BandEdge(2288MHz-2292MHz)\_2310MHz\_FullIRB

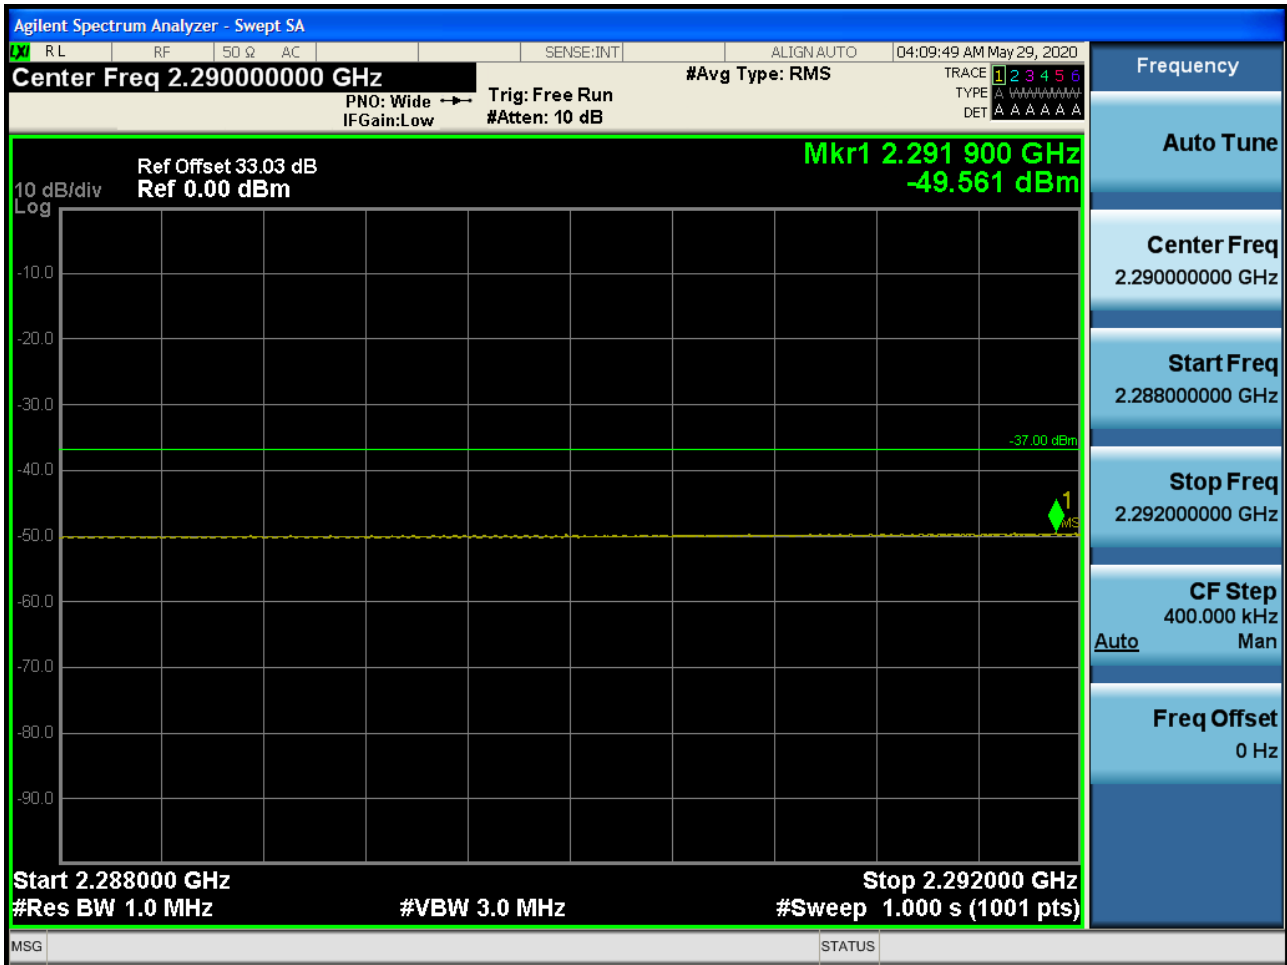





BAND 40. 5M\_BandEdge(2292MHz-2296MHz)\_2312.5MHz\_FullRB

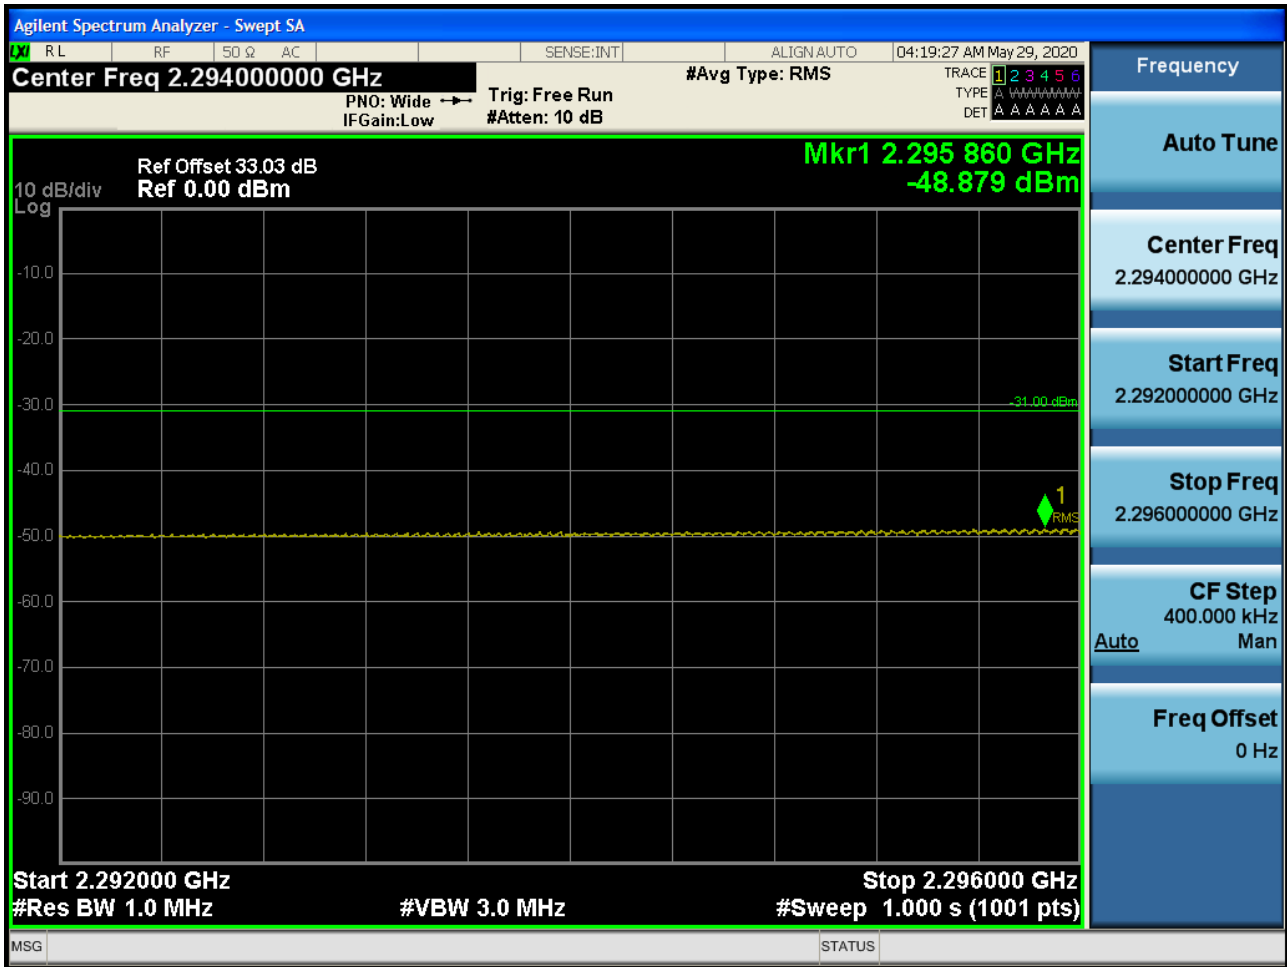


BAND 40. 5M\_BandEdge(2292MHz-2296MHz)\_2307.5MHz\_FullRB

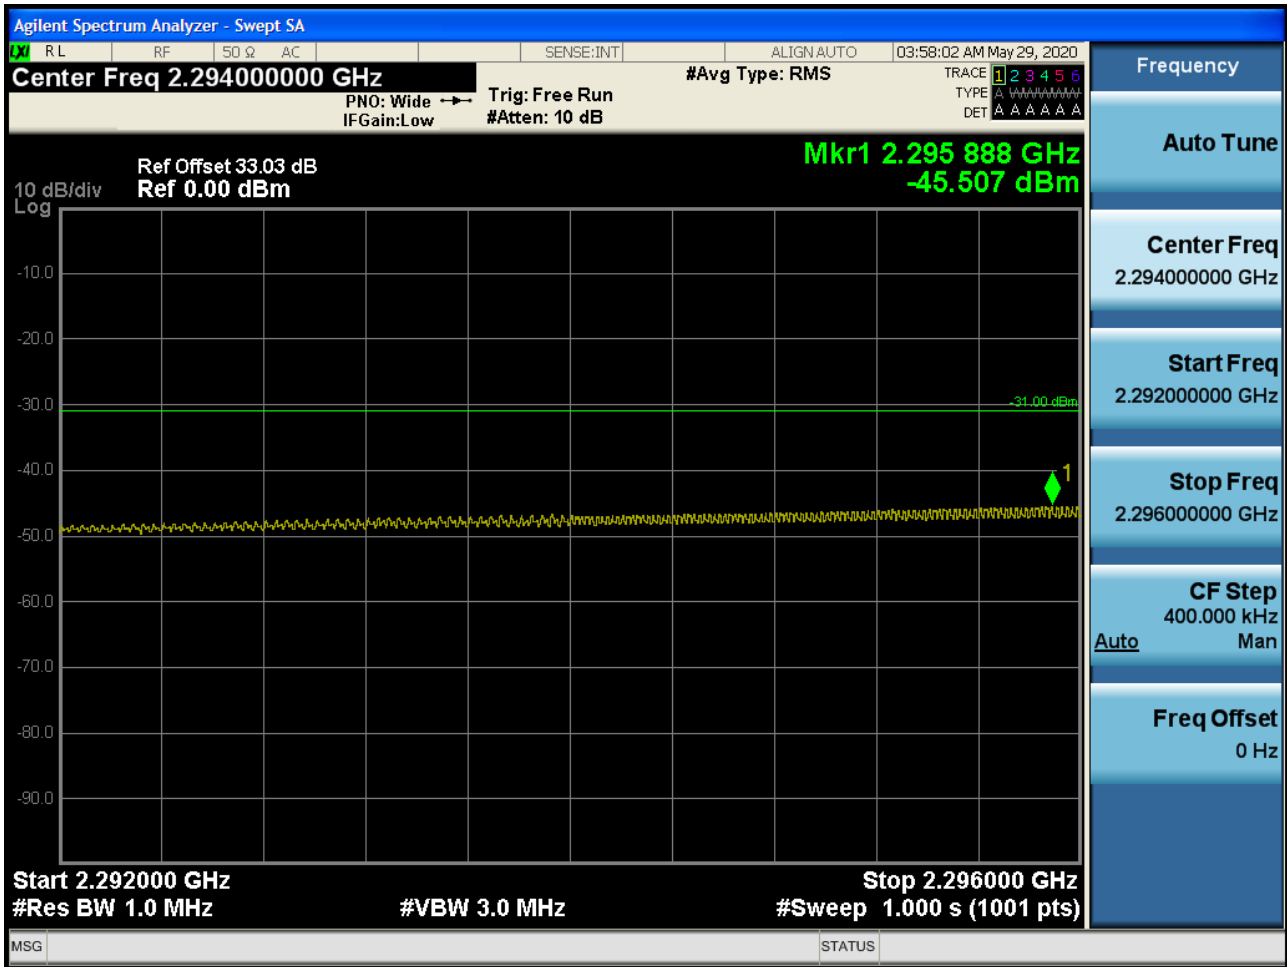


BAND 40. 5M\_BandEdge(2292MHz-2296MHz)\_2310MHz\_FullIRB

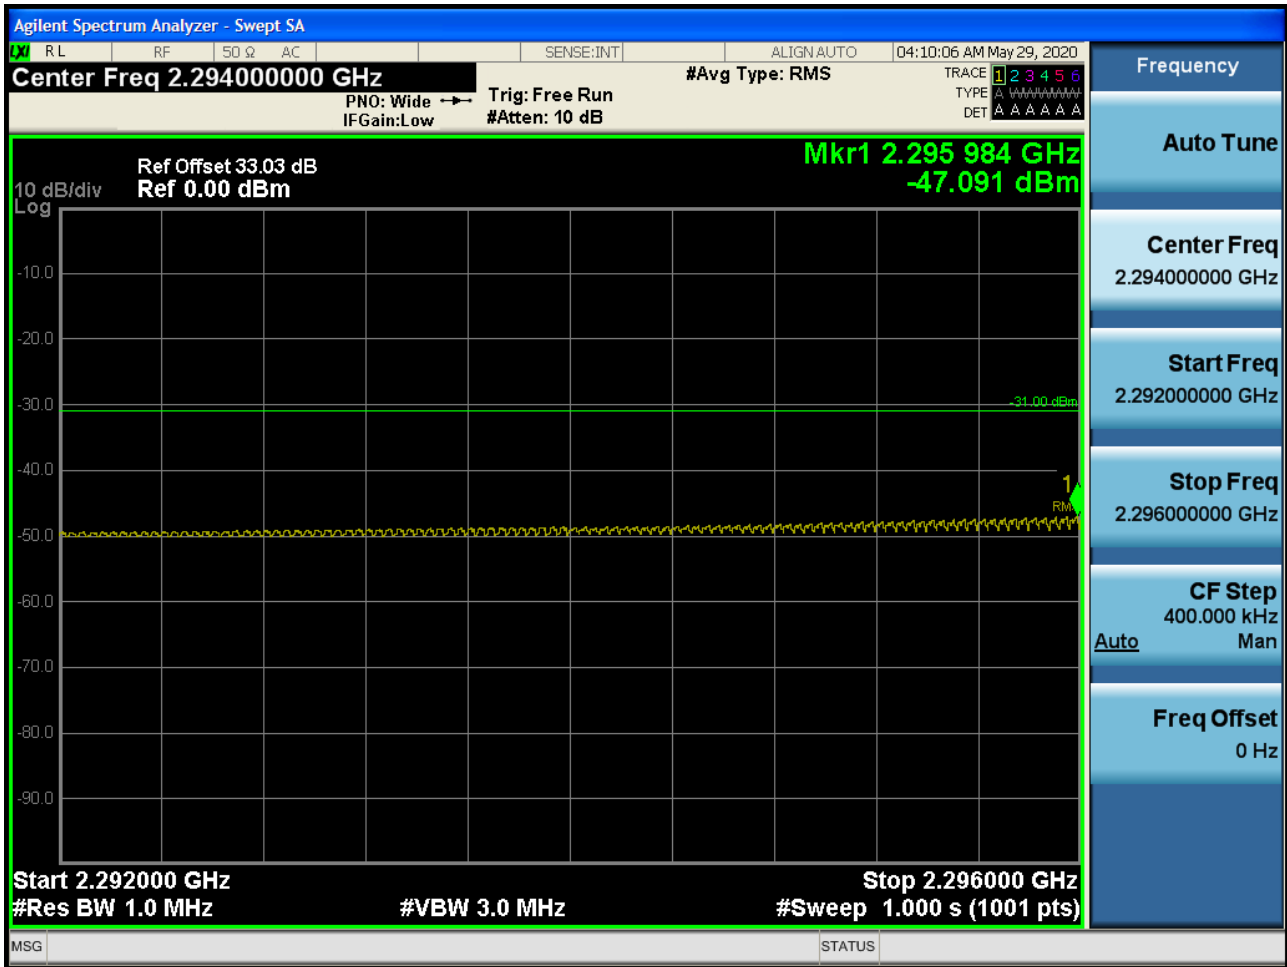


BAND 40. 5M\_BandEdge(2296MHz-2300MHz)\_2312.5MHz\_FullRB

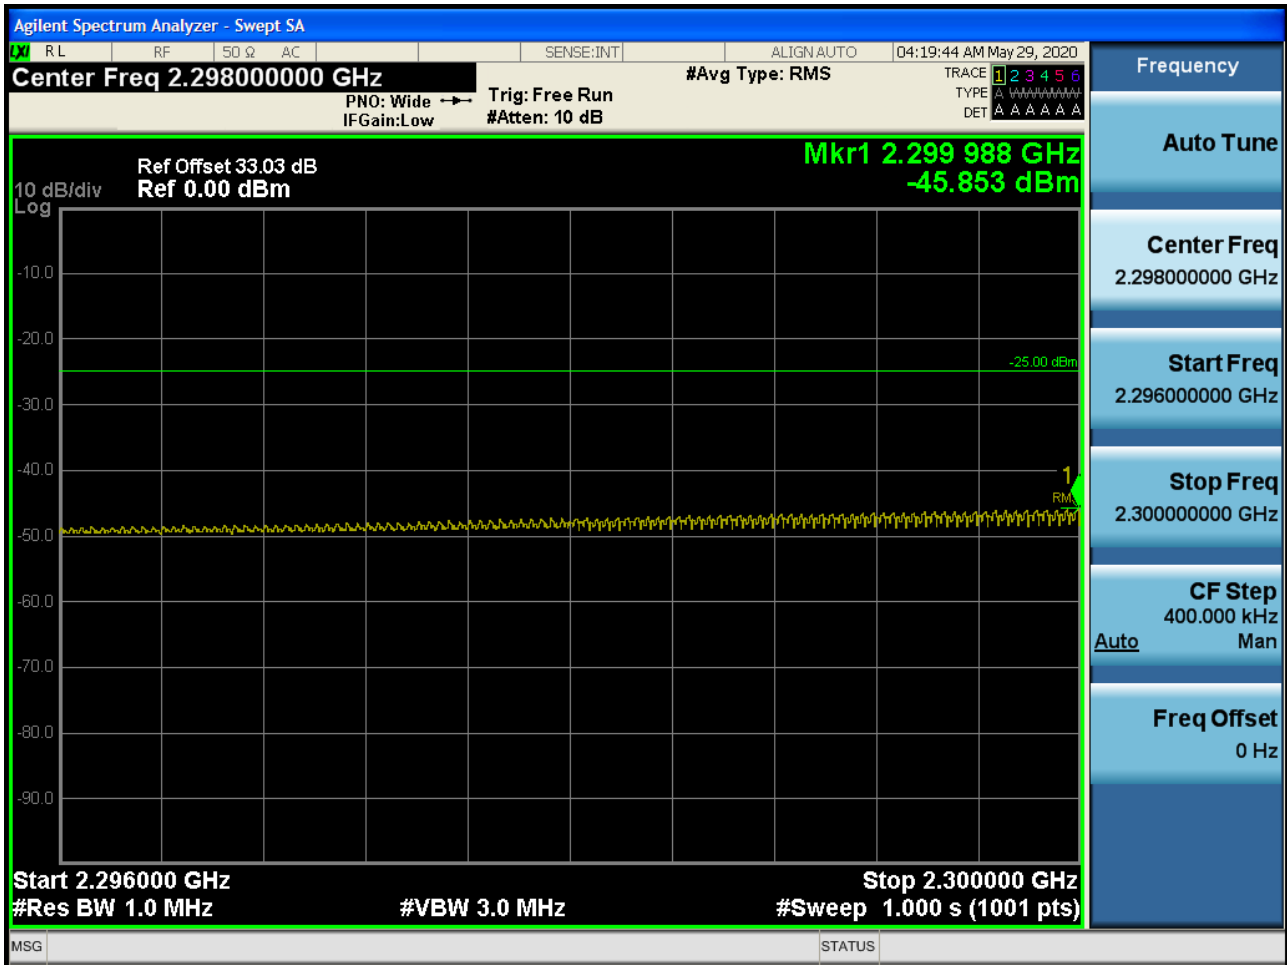


BAND 40. 5M\_BandEdge(2296MHz-2300MHz)\_2307.5MHz\_FullRB

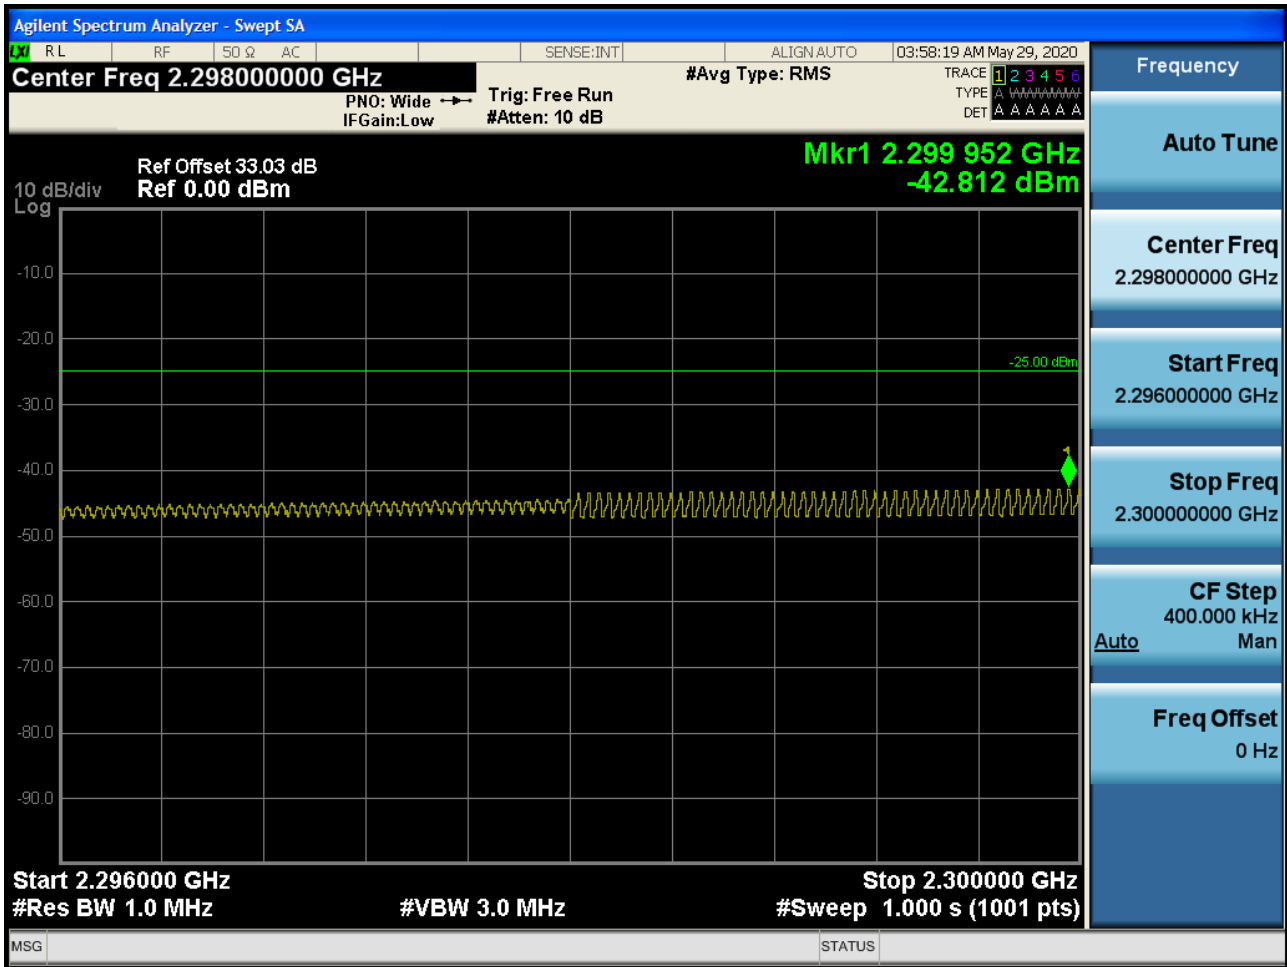


BAND 40. 5M\_BandEdge(2296MHz-2300MHz)\_2310MHz\_FullIRB

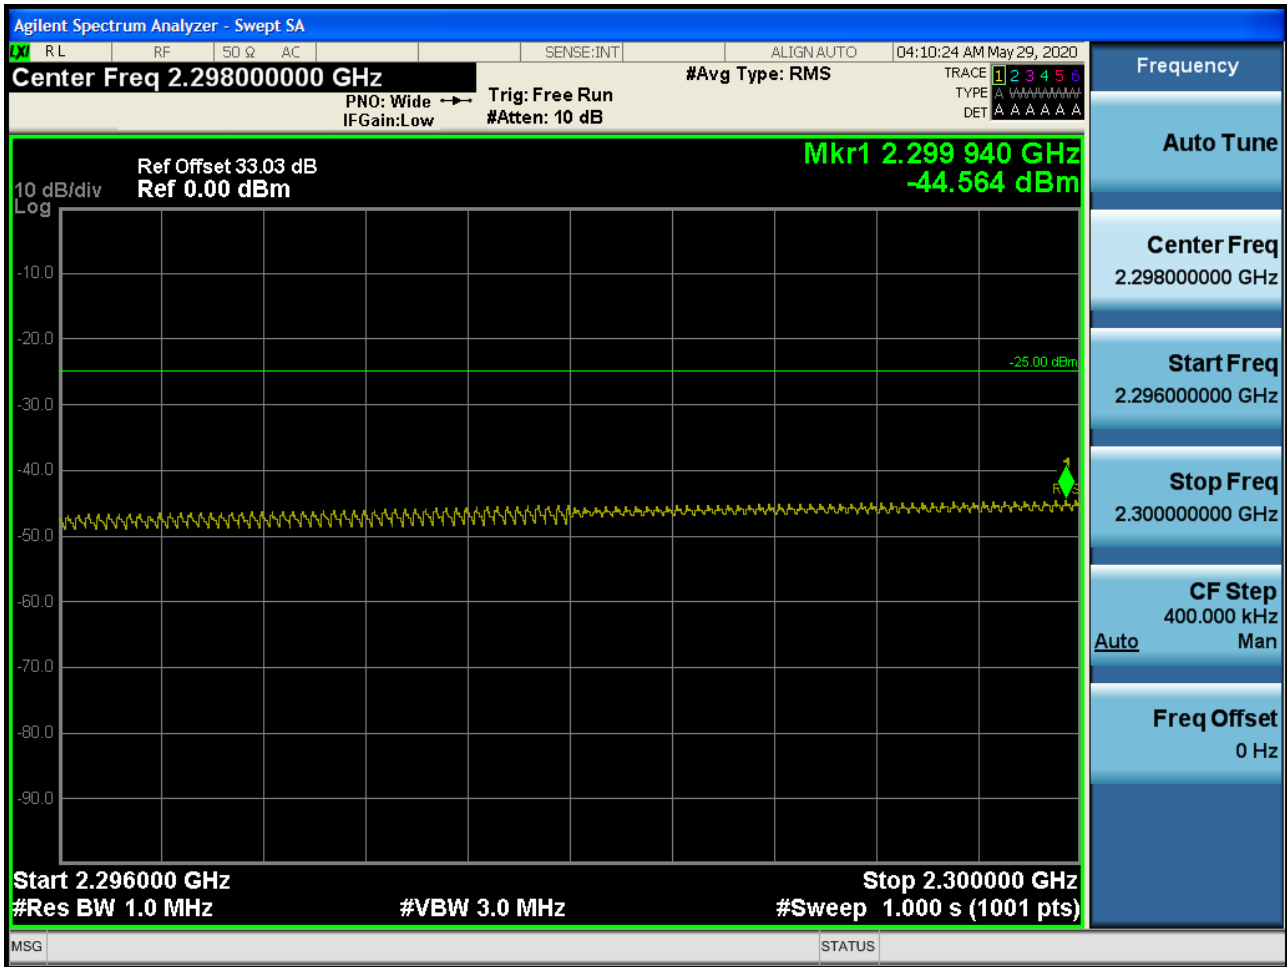

BAND 40. 5M\_BandEdge(2300MHz-2304MHz)\_2307.5MHz\_FullRB

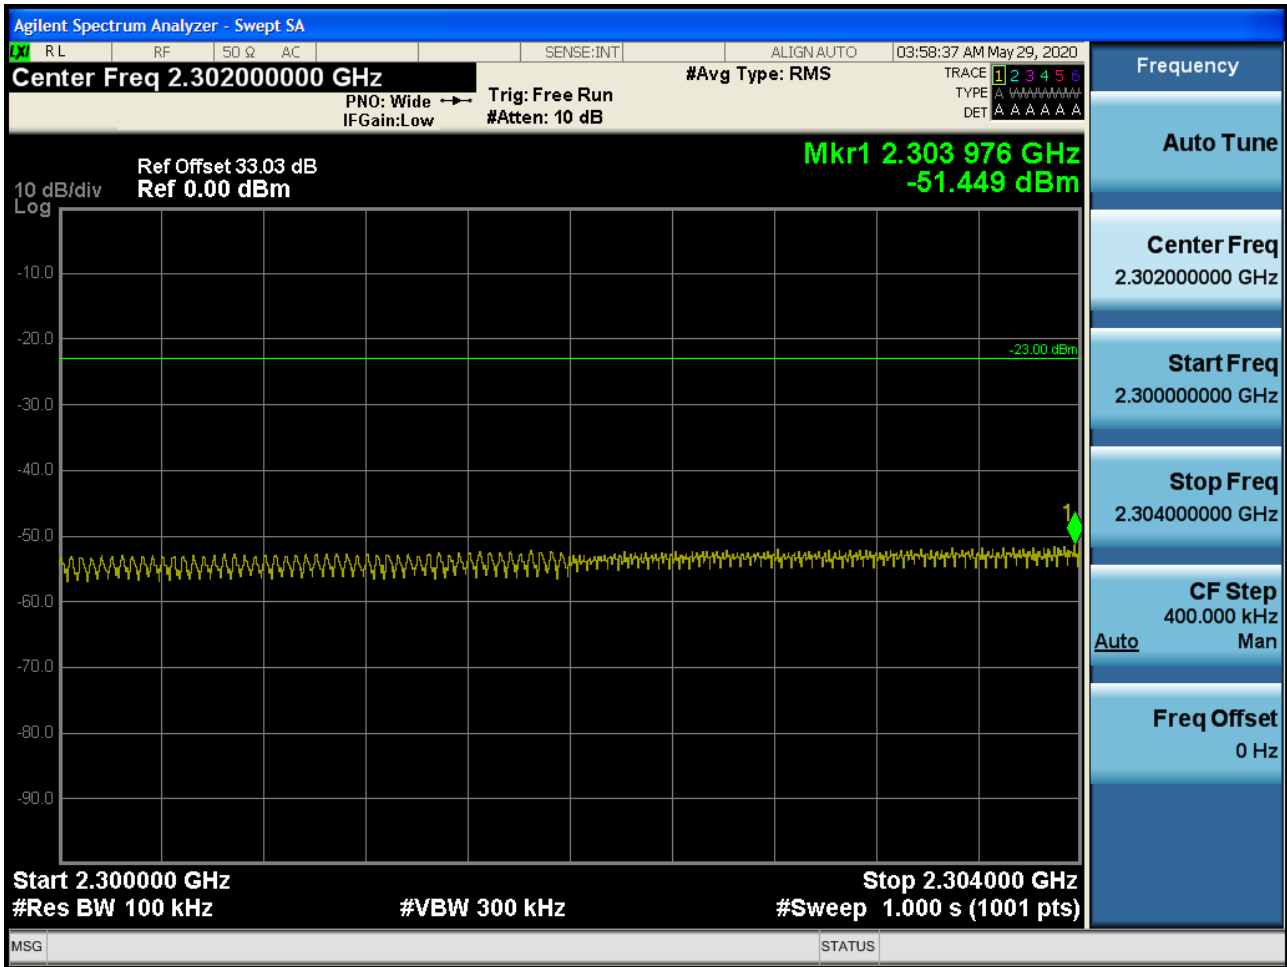


BAND 40. 5M\_BandEdge(2300MHz-2305MHz)\_2312.5MHz\_FullRB

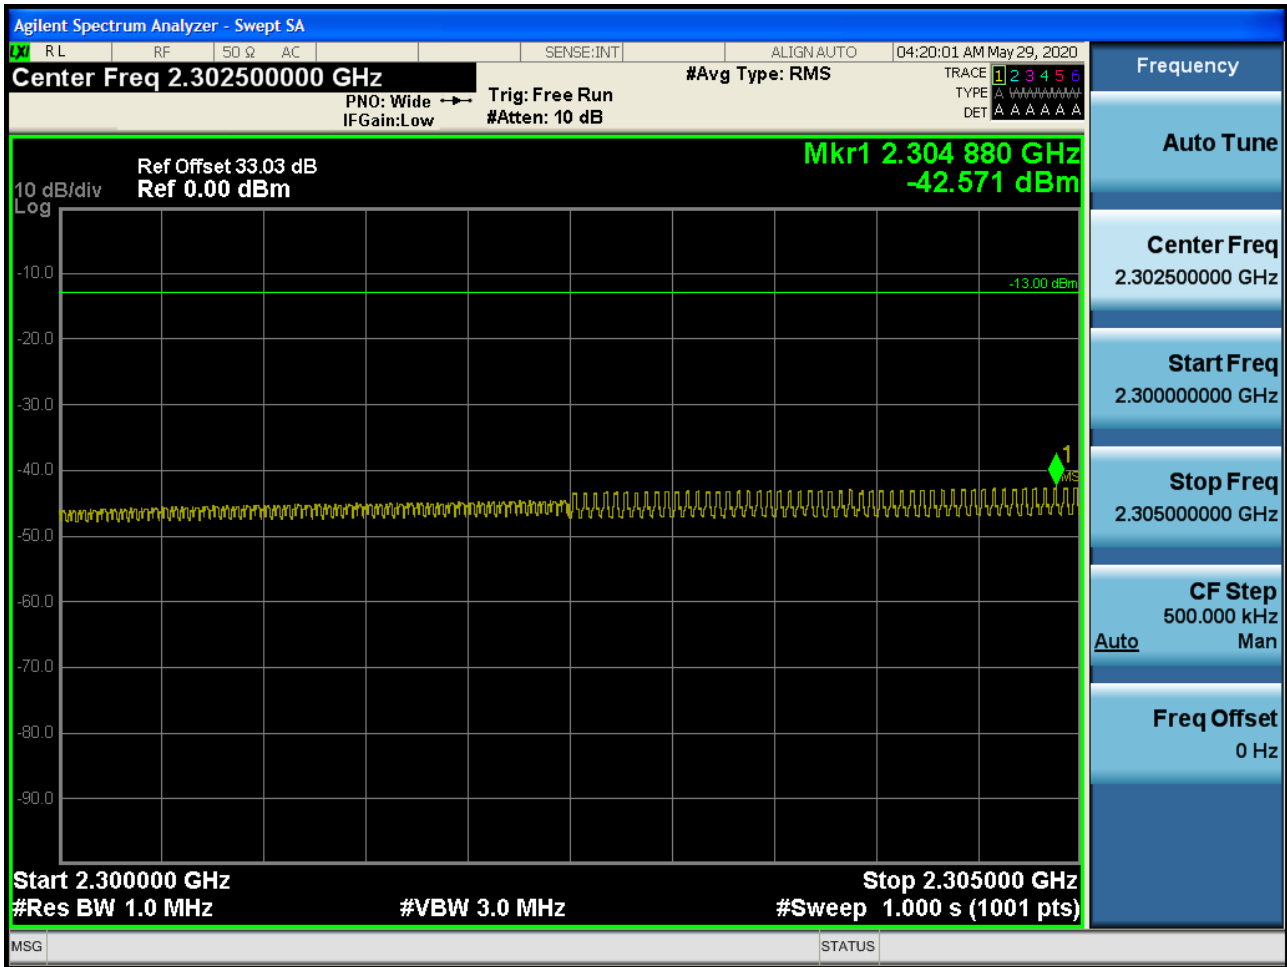





BAND 40. 5M\_BandEdge(2300MHz-2305MHz)\_2310MHz\_FullIRB

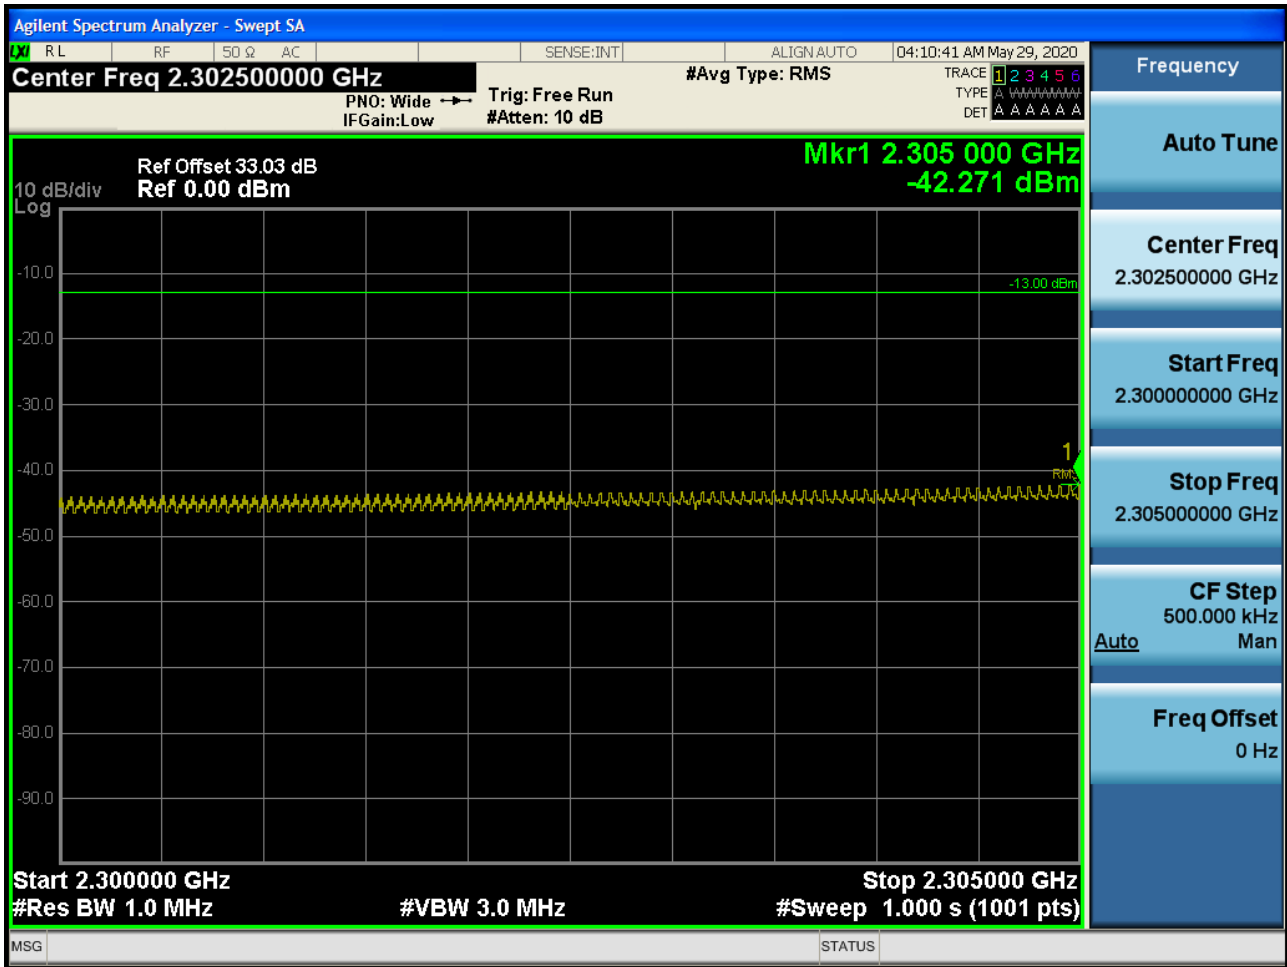


BAND 40. 5M\_BandEdge(2304MHz-2305MHz)\_ 2307.5MHz\_FullIRB

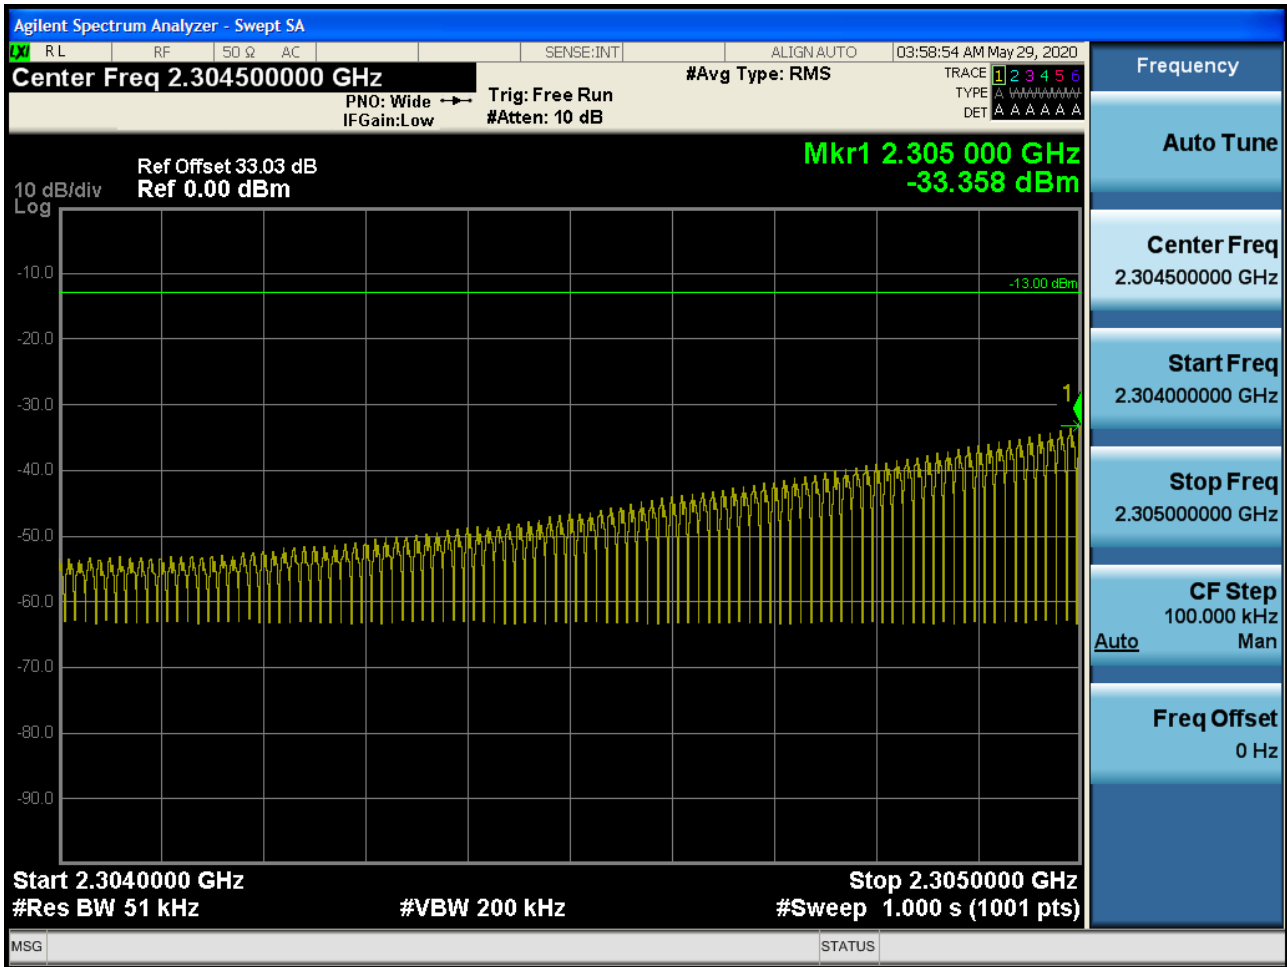


BAND 40. 5M\_BandEdge(2315MHz-2316MHz)\_2312.5MHz\_FullRB

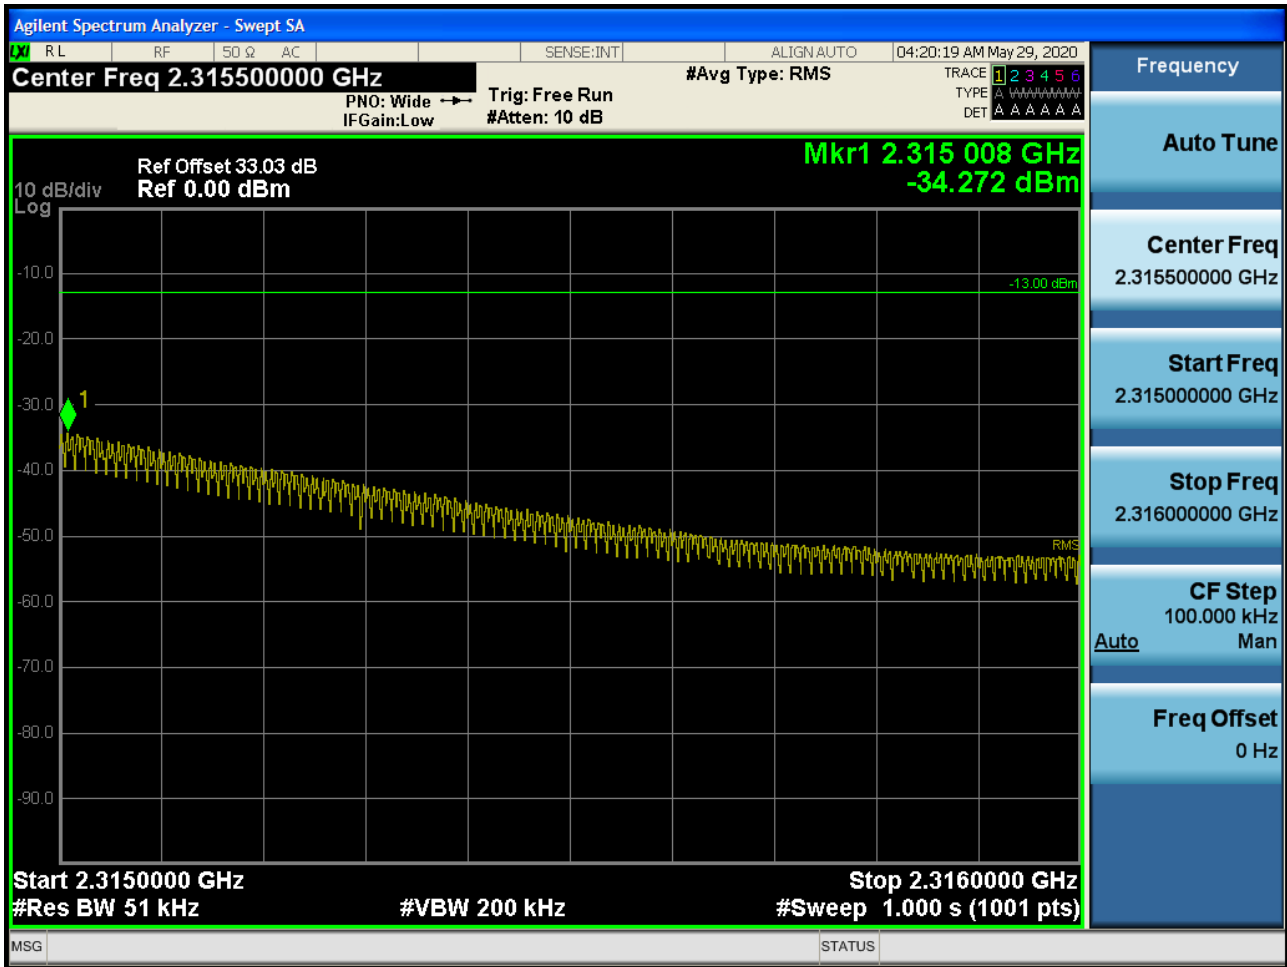


BAND 40. 5M\_BandEdge(2315MHz-2320MHz)\_2307.5MHz\_FullRB

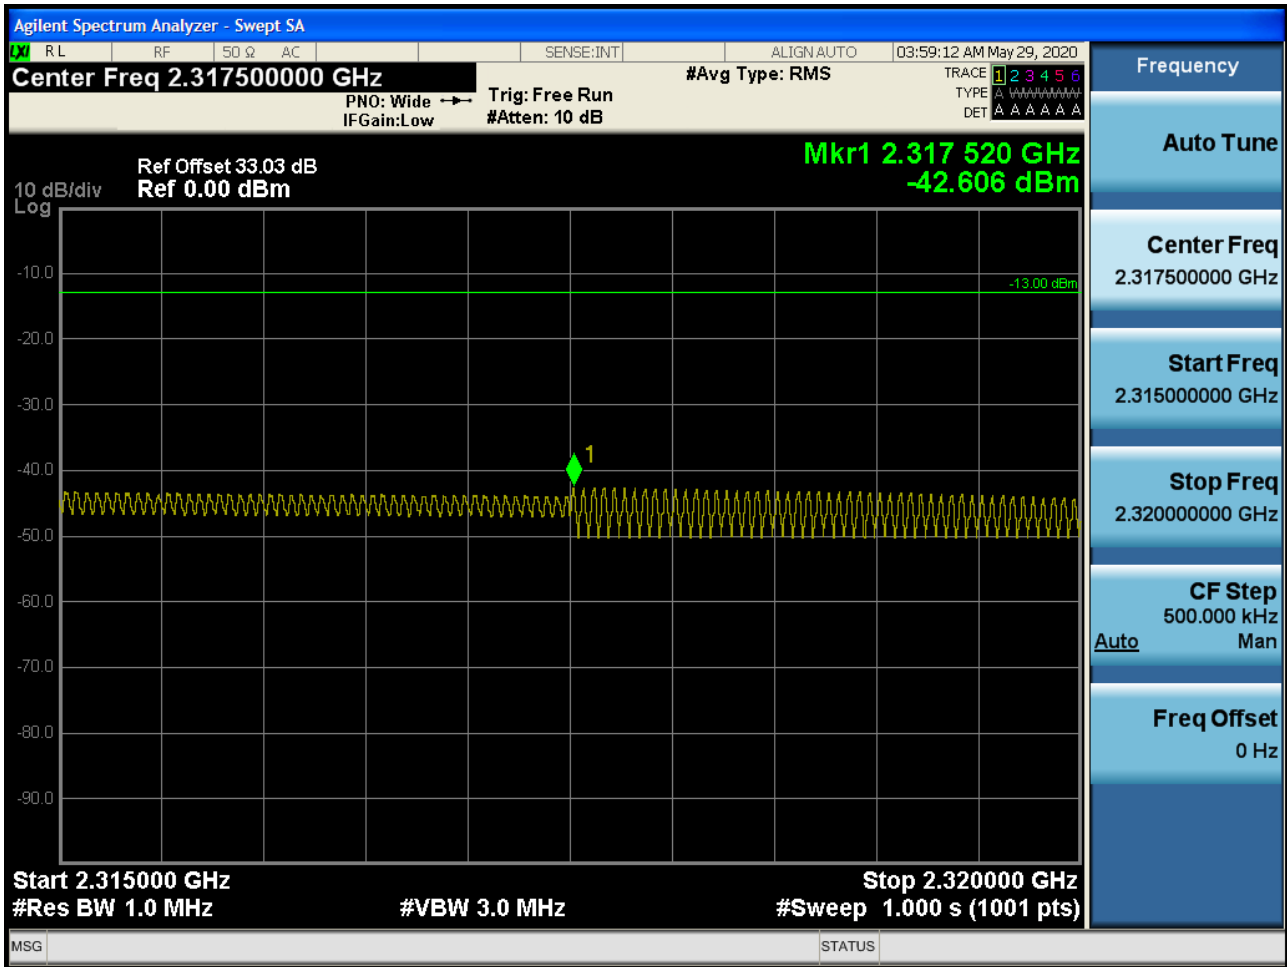


BAND 40. 5M\_BandEdge(2315MHz-2320MHz)\_2310MHz\_FullIRB

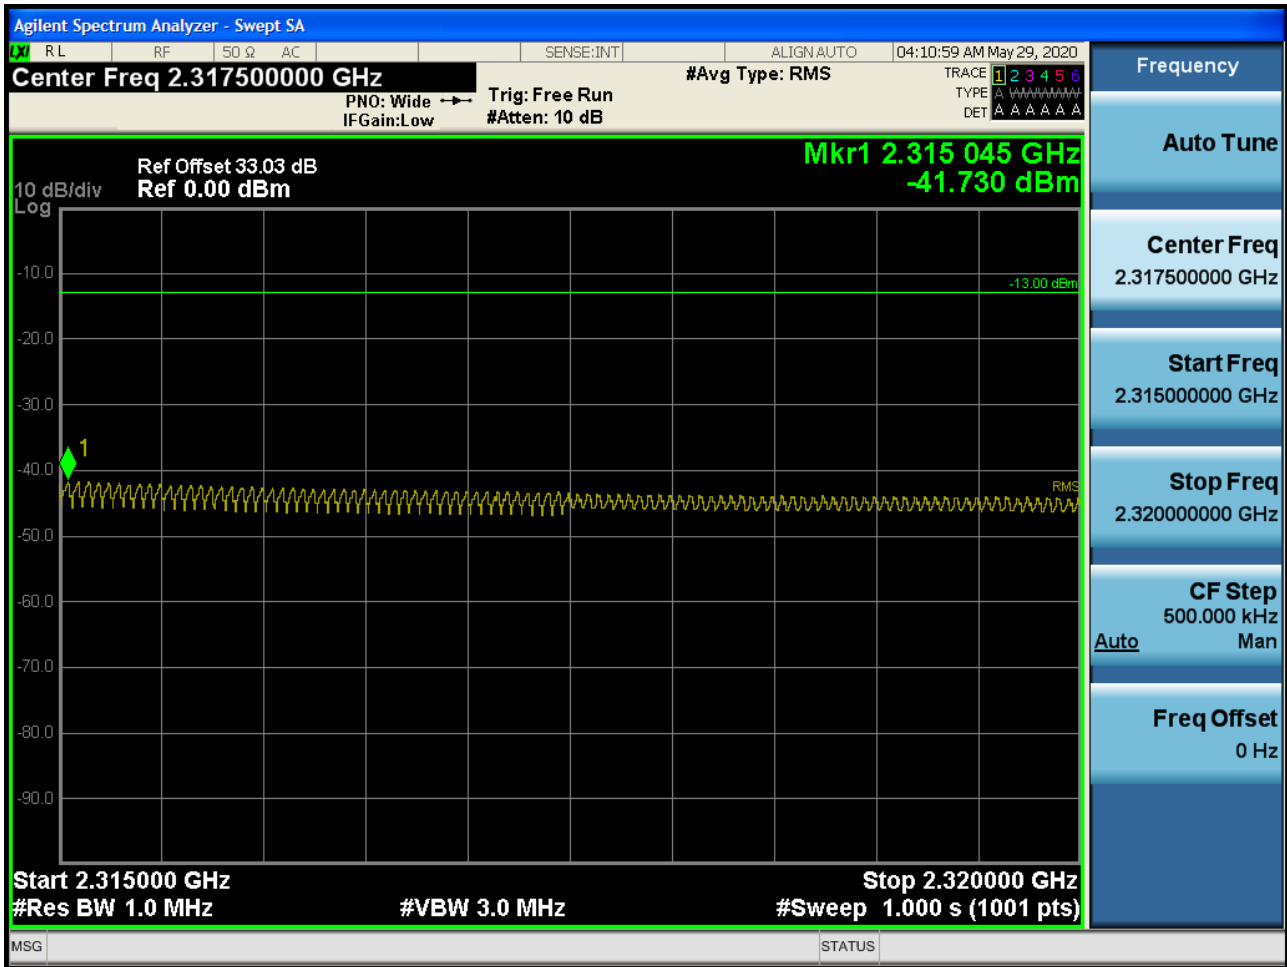


BAND 40. 5M\_BandEdge(2316MHz-2320MHz)\_2312.5MHz\_FullRB

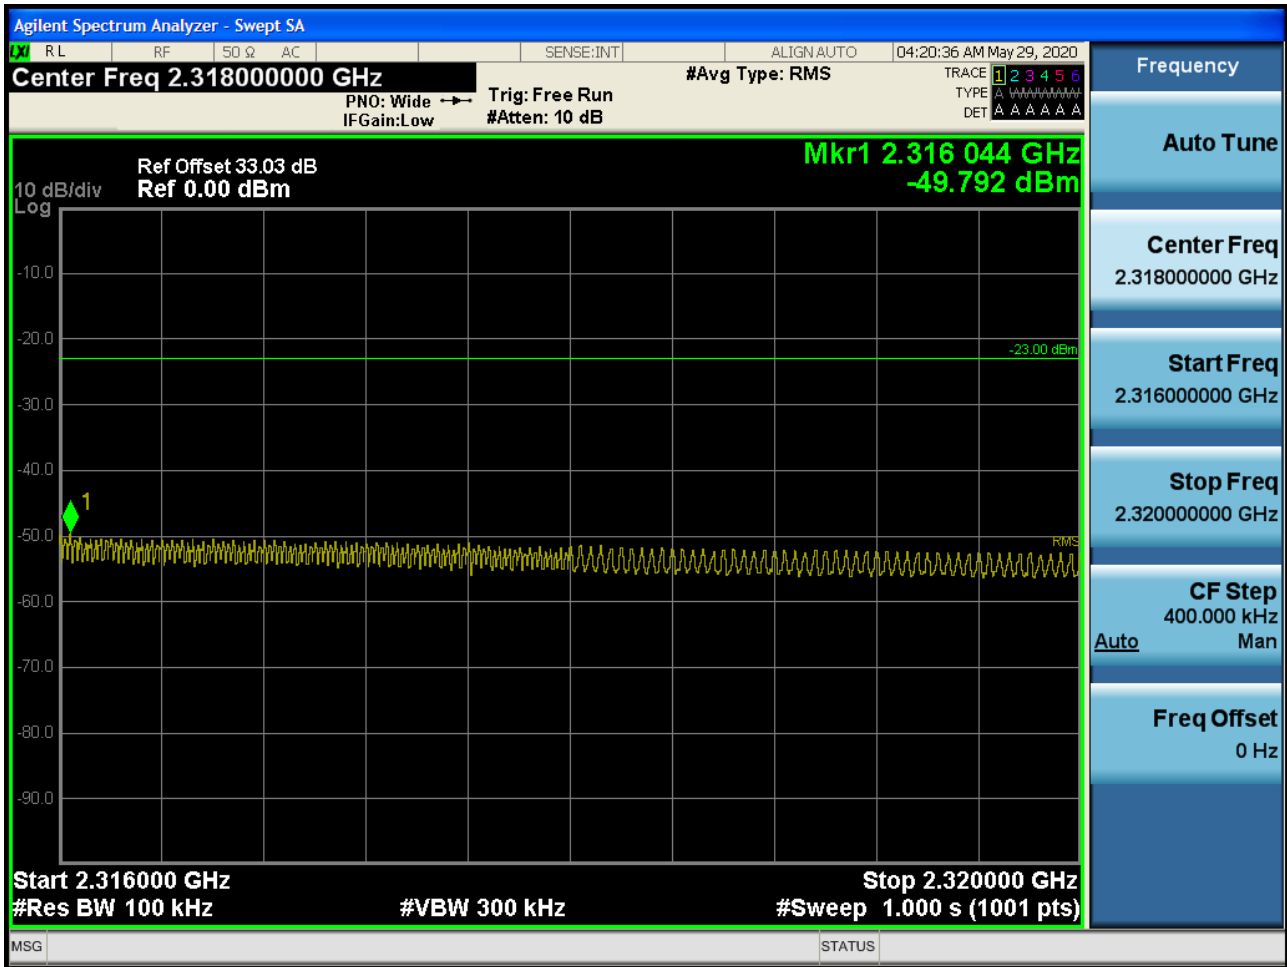

BAND 40. 5M\_BandEdge(2320MHz-2324MHz)\_2312.5MHz\_FullRB

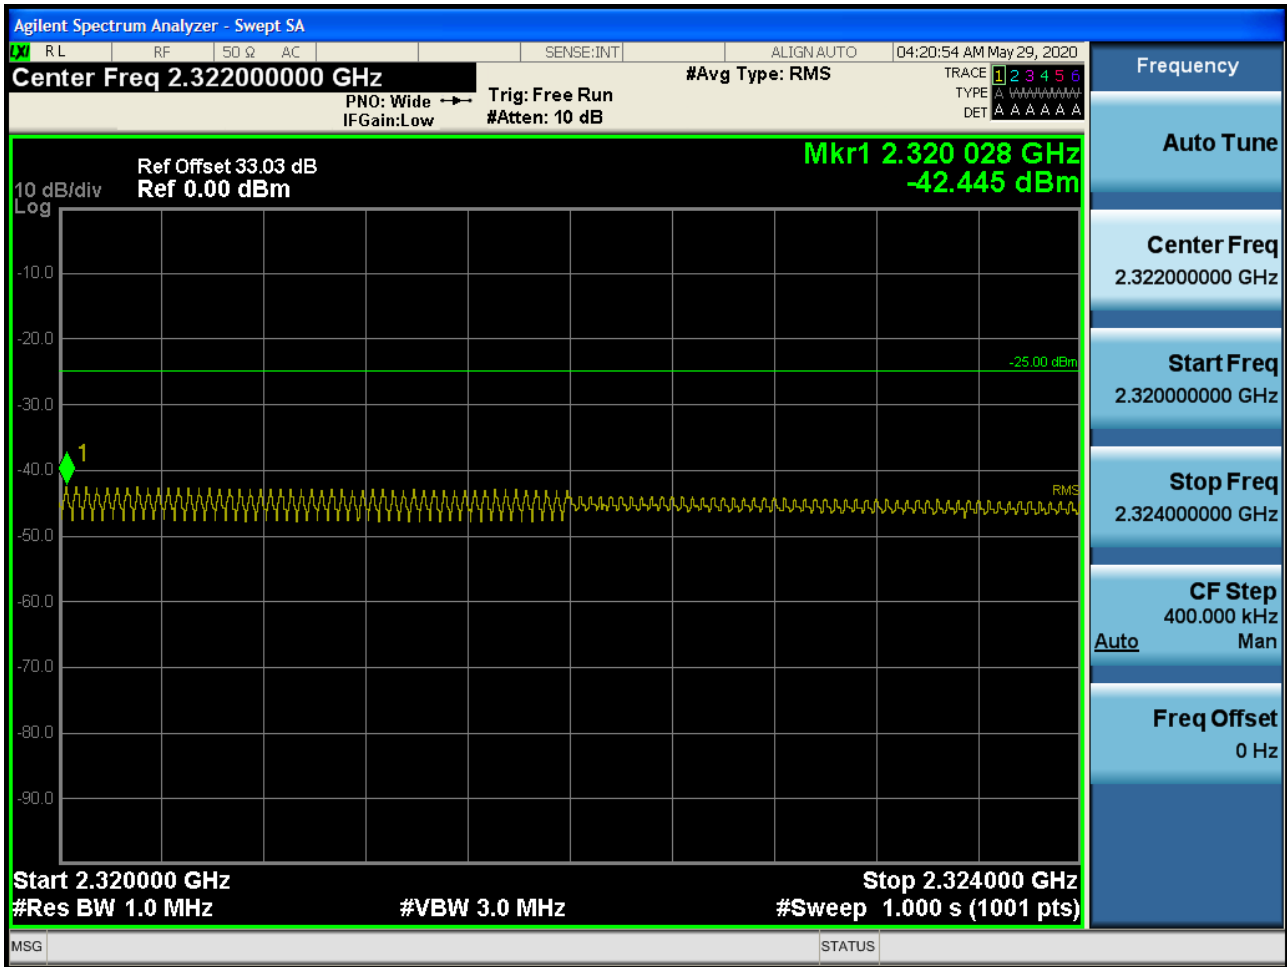


BAND 40. 5M\_BandEdge(2320MHz-2324MHz)\_2307.5MHz\_FullRB

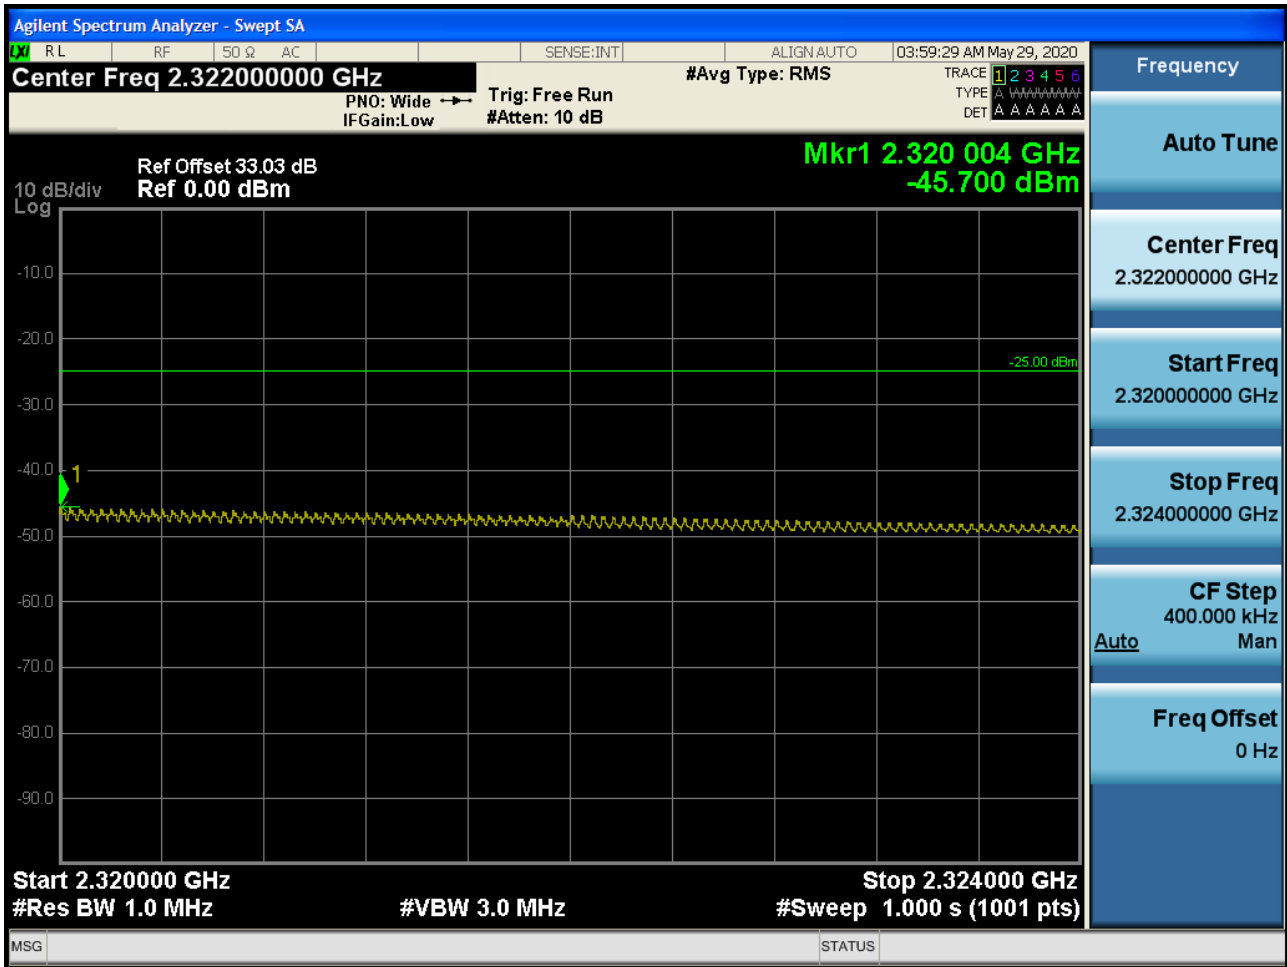





BAND 40. 5M\_BandEdge(2320MHz-2324MHz)\_2310MHz\_FullIRB

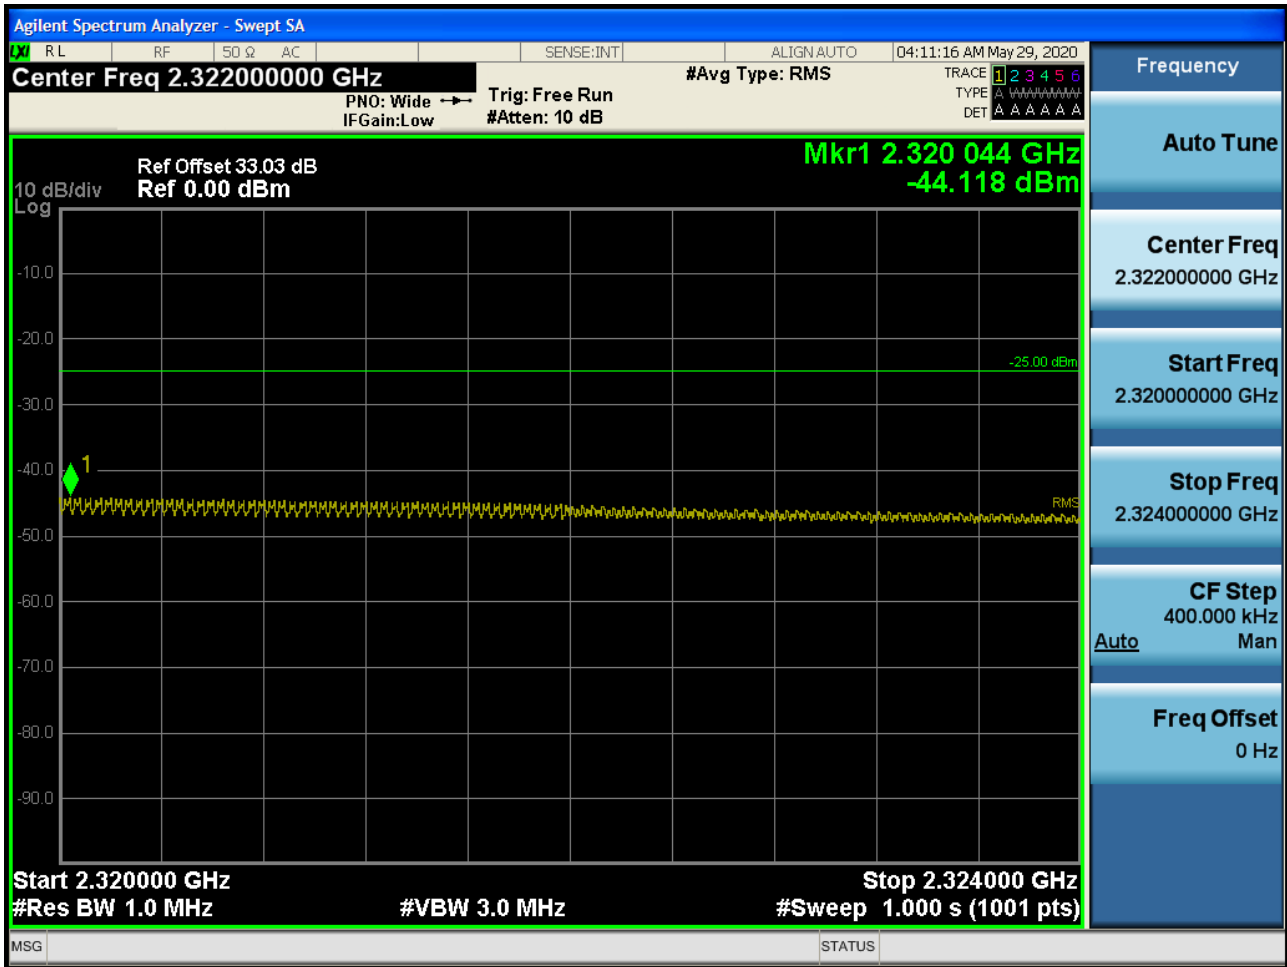

BAND 40. 5M\_BandEdge(2324MHz-2328MHz)\_2312.5MHz\_FullRB

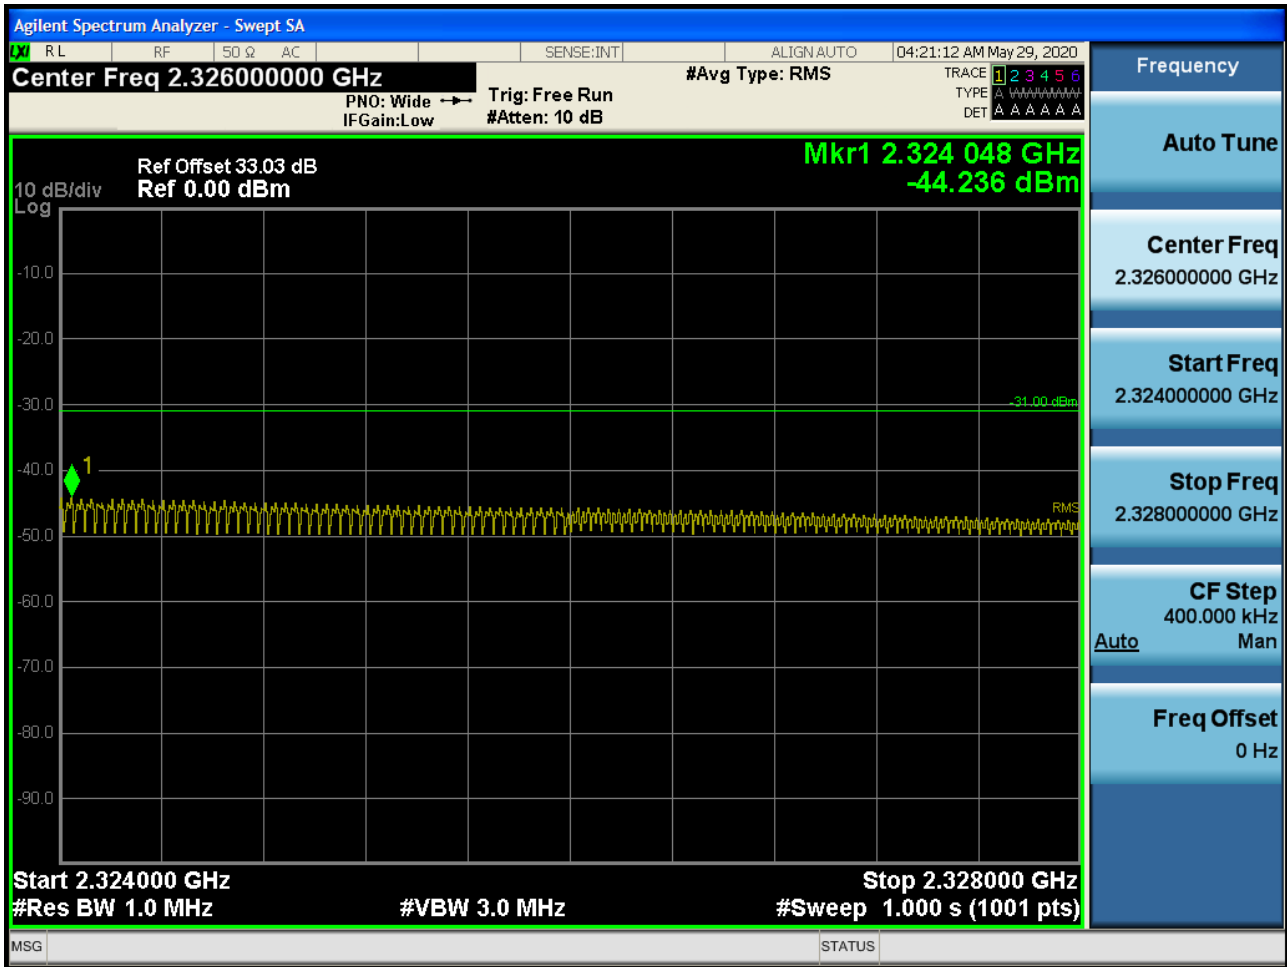


BAND 40. 5M\_BandEdge(2324MHz-2328MHz)\_2307.5MHz\_FullRB

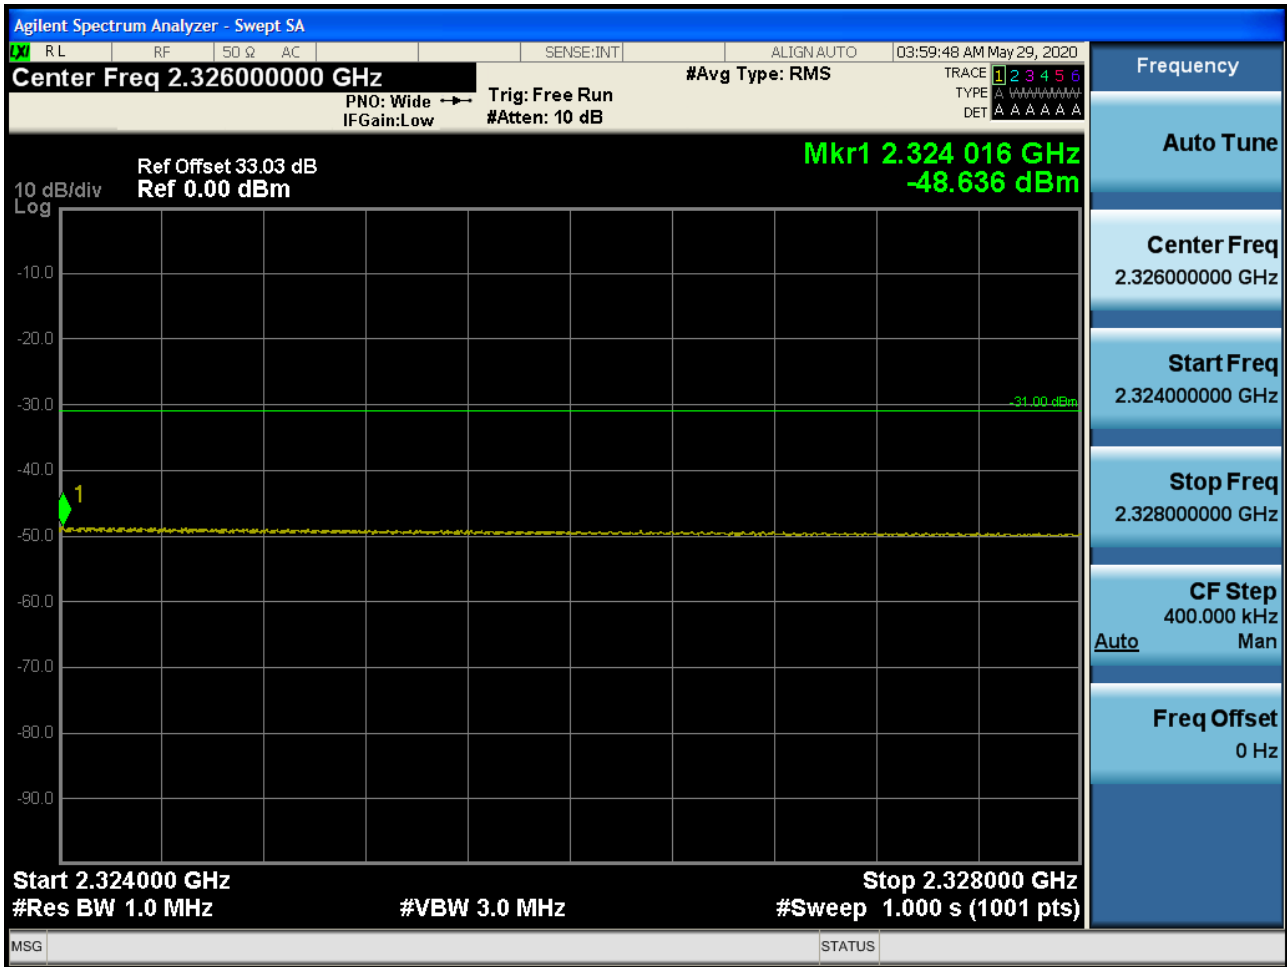


BAND 40. 5M\_BandEdge(2324MHz-2328MHz)\_2310MHz\_FullIRB




BAND 40. 5M\_BandEdge(2328MHz-2337MHz)\_2312.5MHz\_FullRB

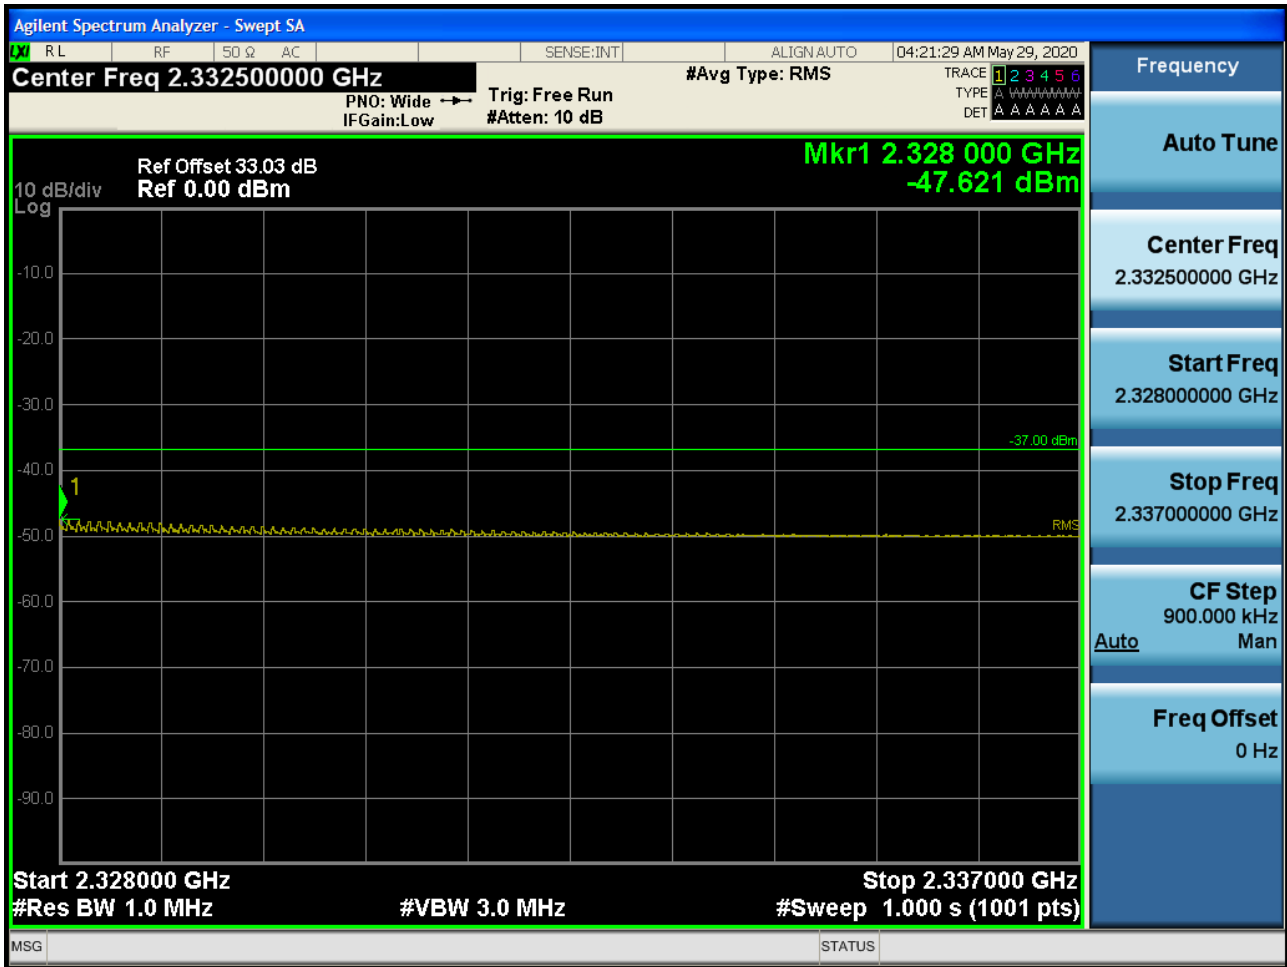


BAND 40. 5M\_BandEdge(2328MHz-2337MHz)\_2307.5MHz\_FullRB

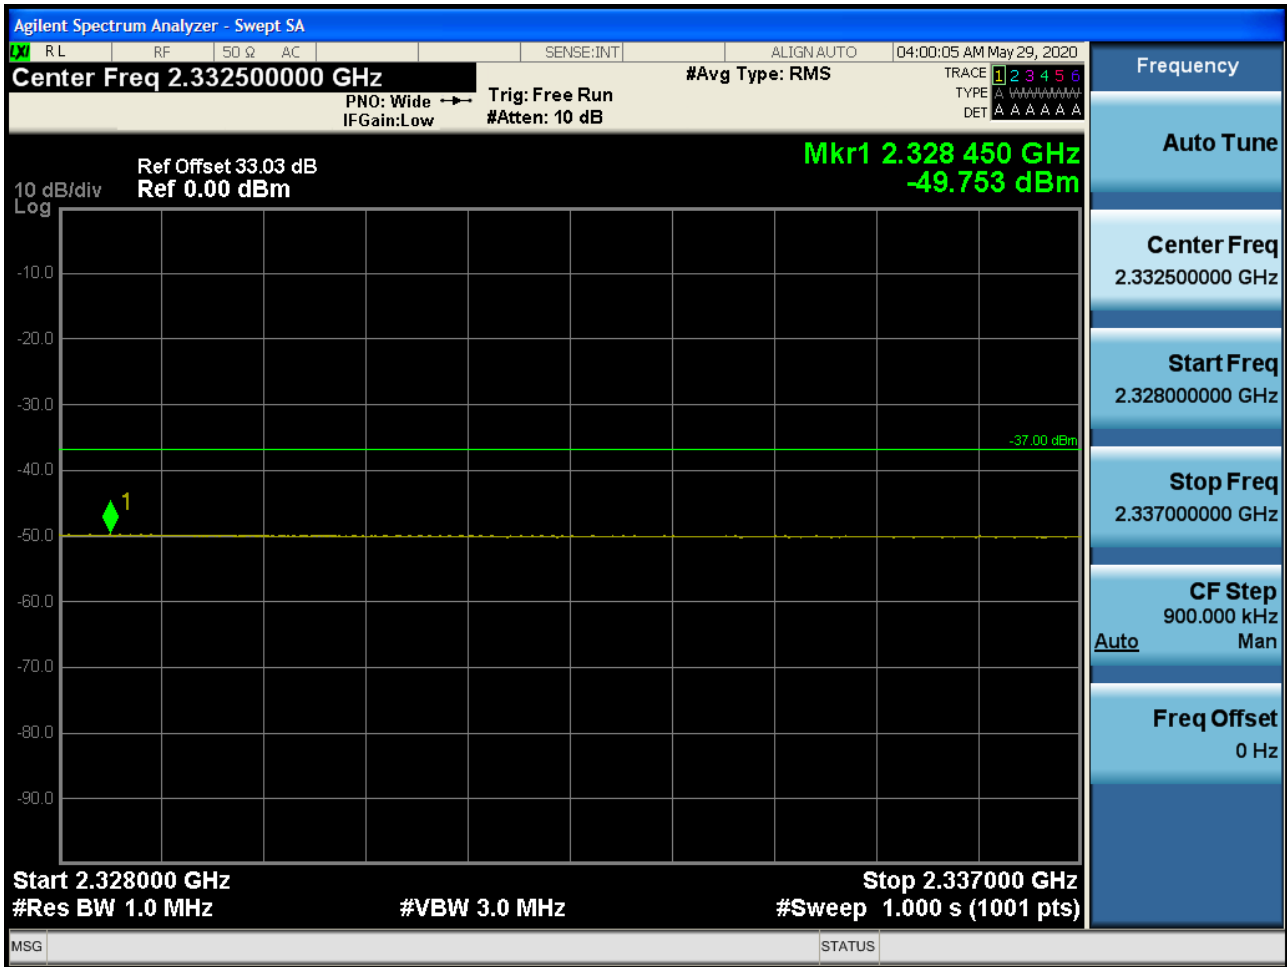

BAND 40. 5M\_BandEdge(2328MHz-2337MHz)\_2310MHz\_FullIRB

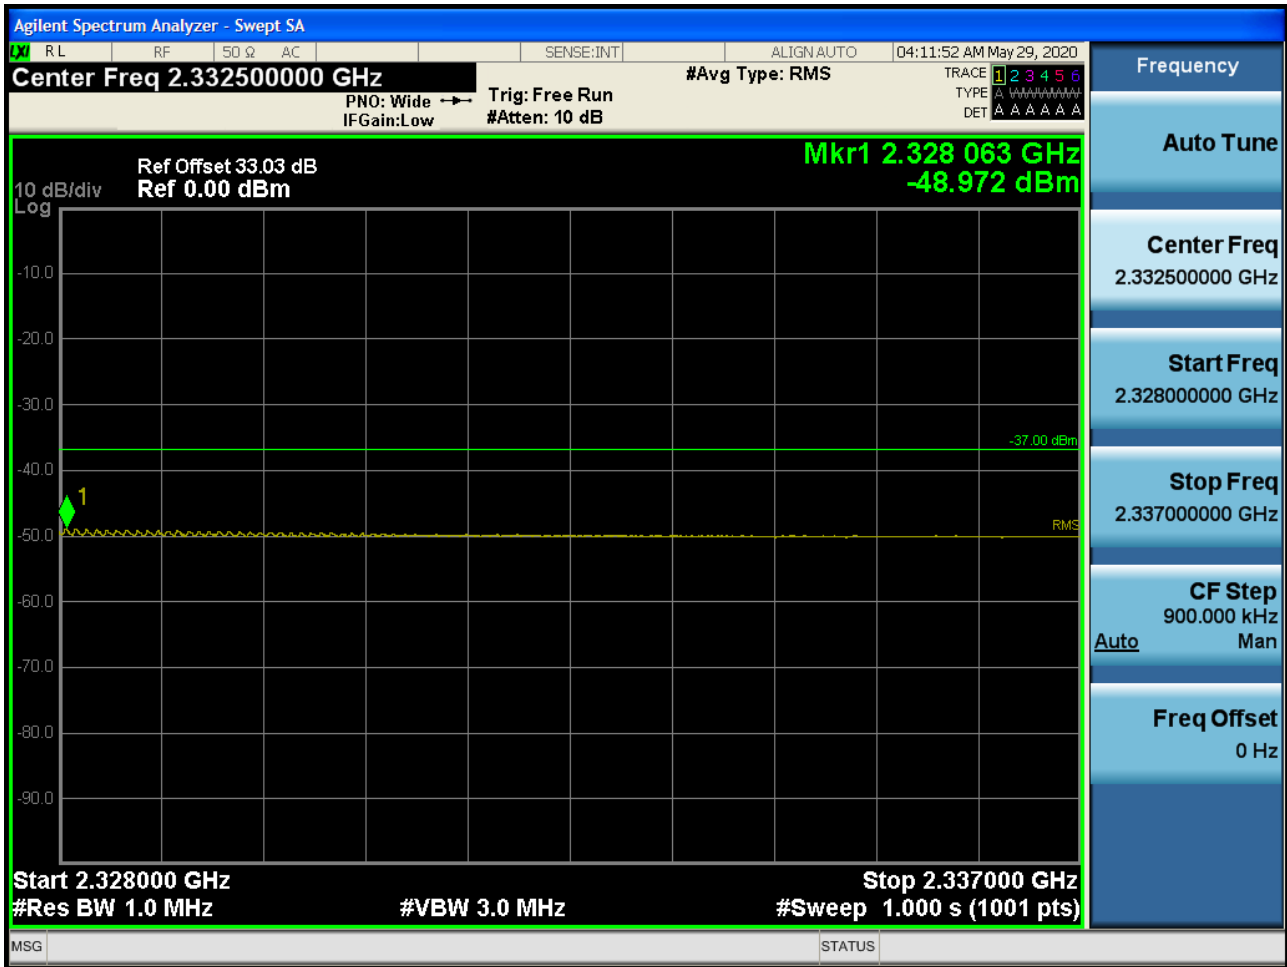


BAND 40. 5M\_BandEdge(2337MHz-2341MHz)\_2312.5MHz\_FullRB

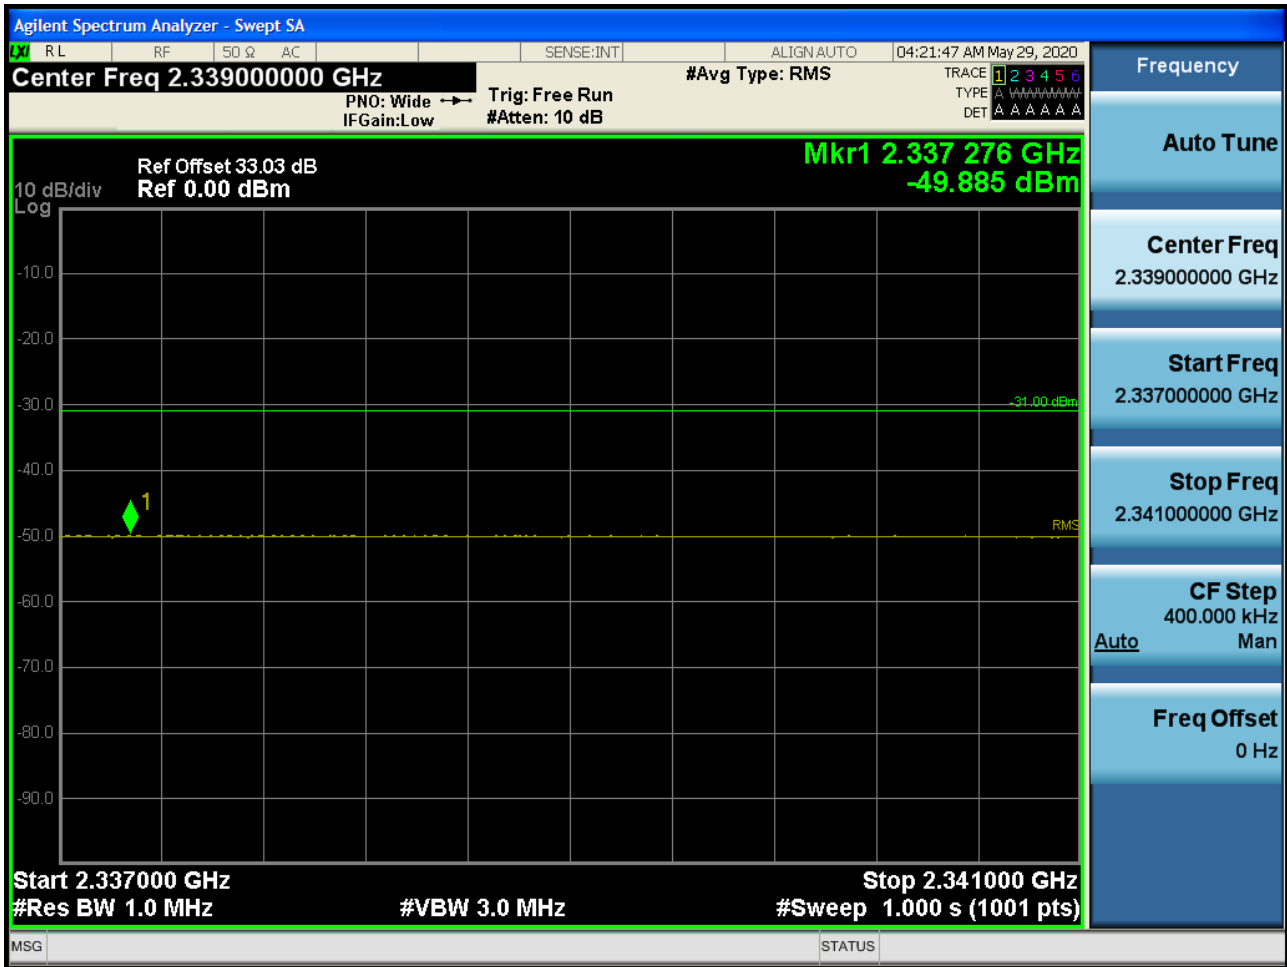





BAND 40. 5M\_BandEdge(2337MHz-2341MHz)\_2307.5MHz\_FullRB

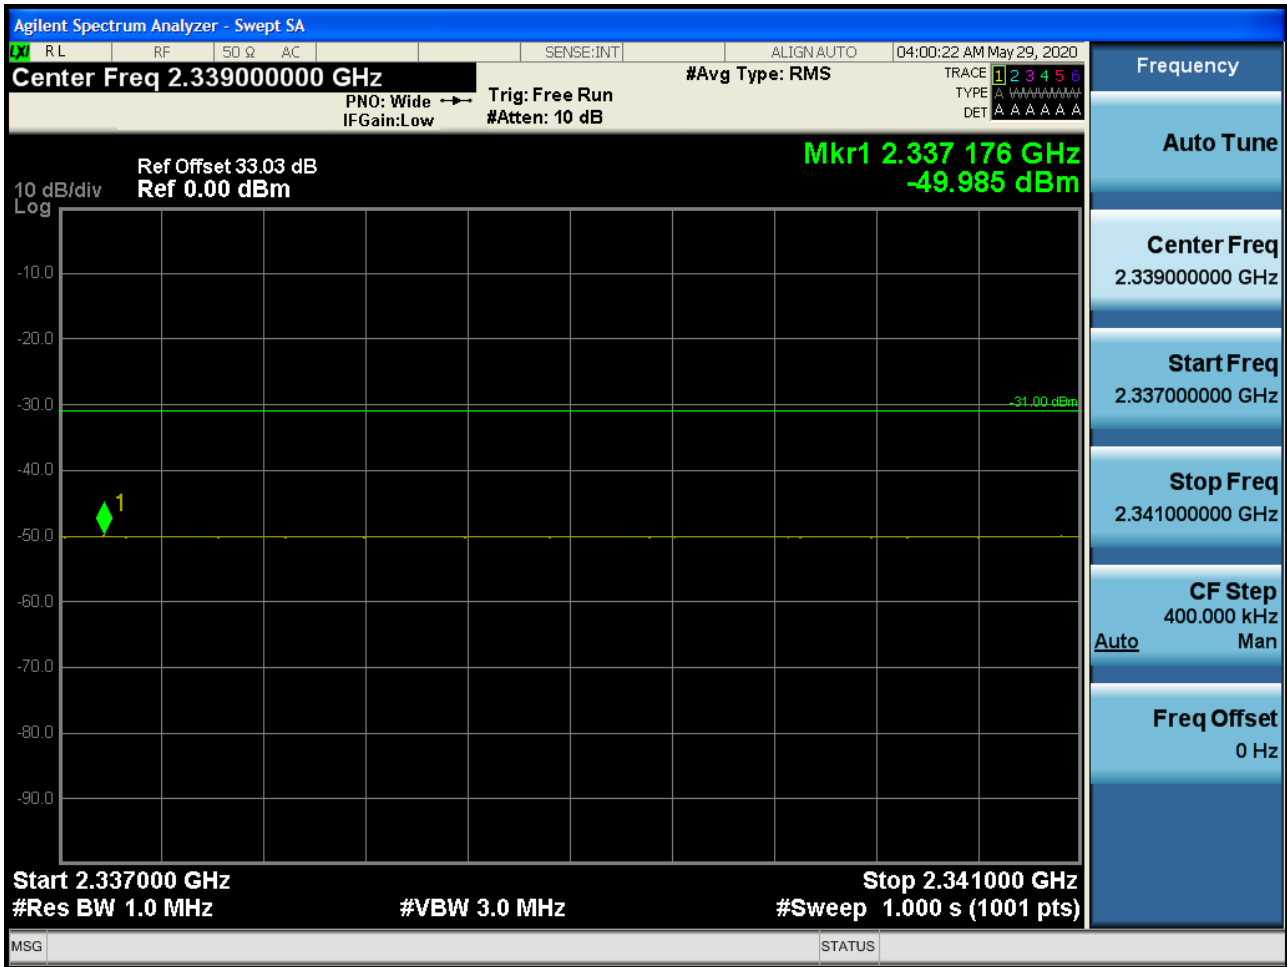


BAND 40. 5M\_BandEdge(2337MHz-2341MHz)\_2310MHz\_FullIRB

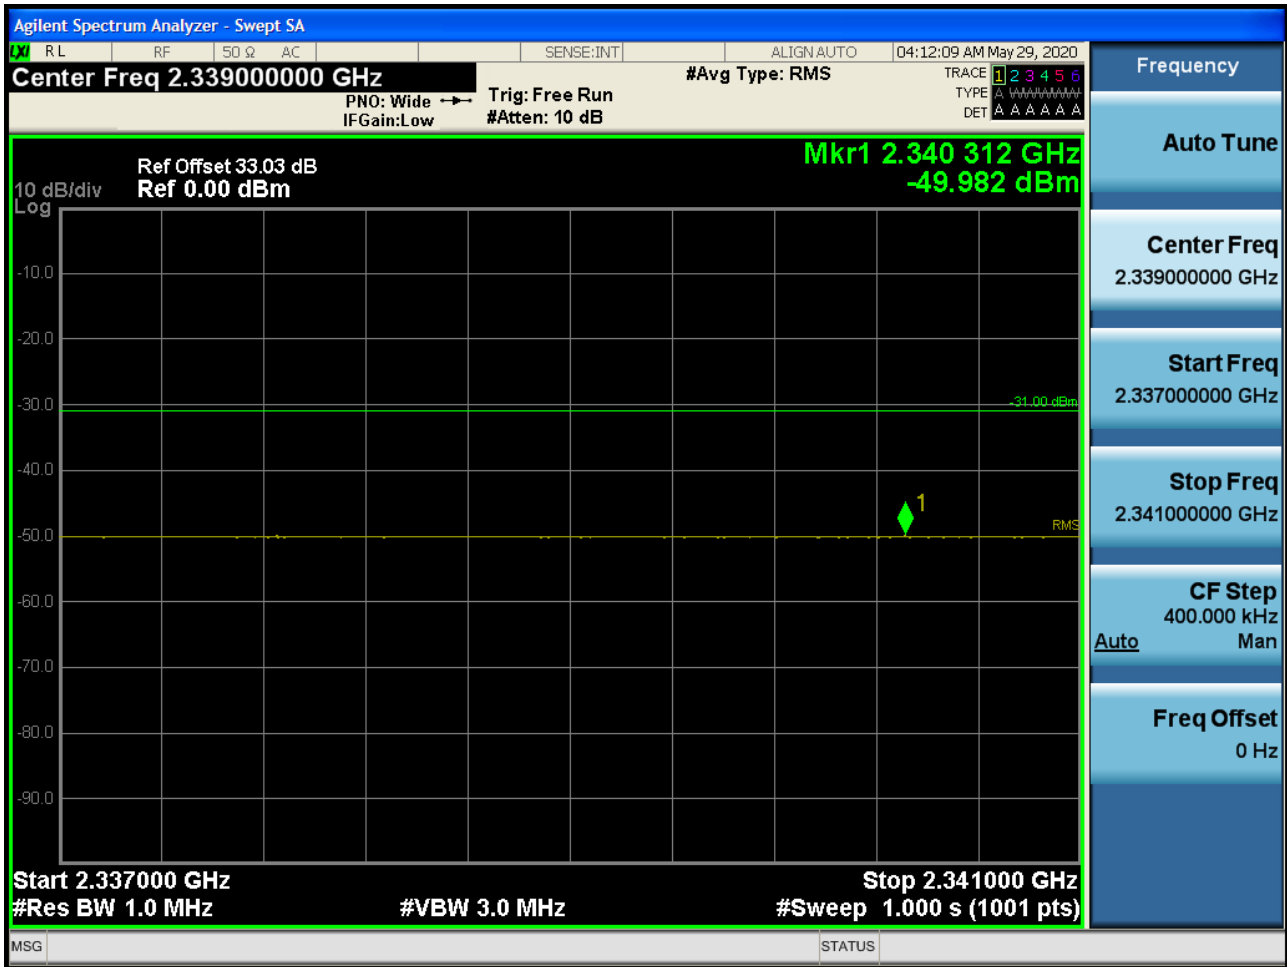


BAND 40. 5M\_BandEdge(2341MHz-2345MHz)\_2312.5MHz\_FullRB

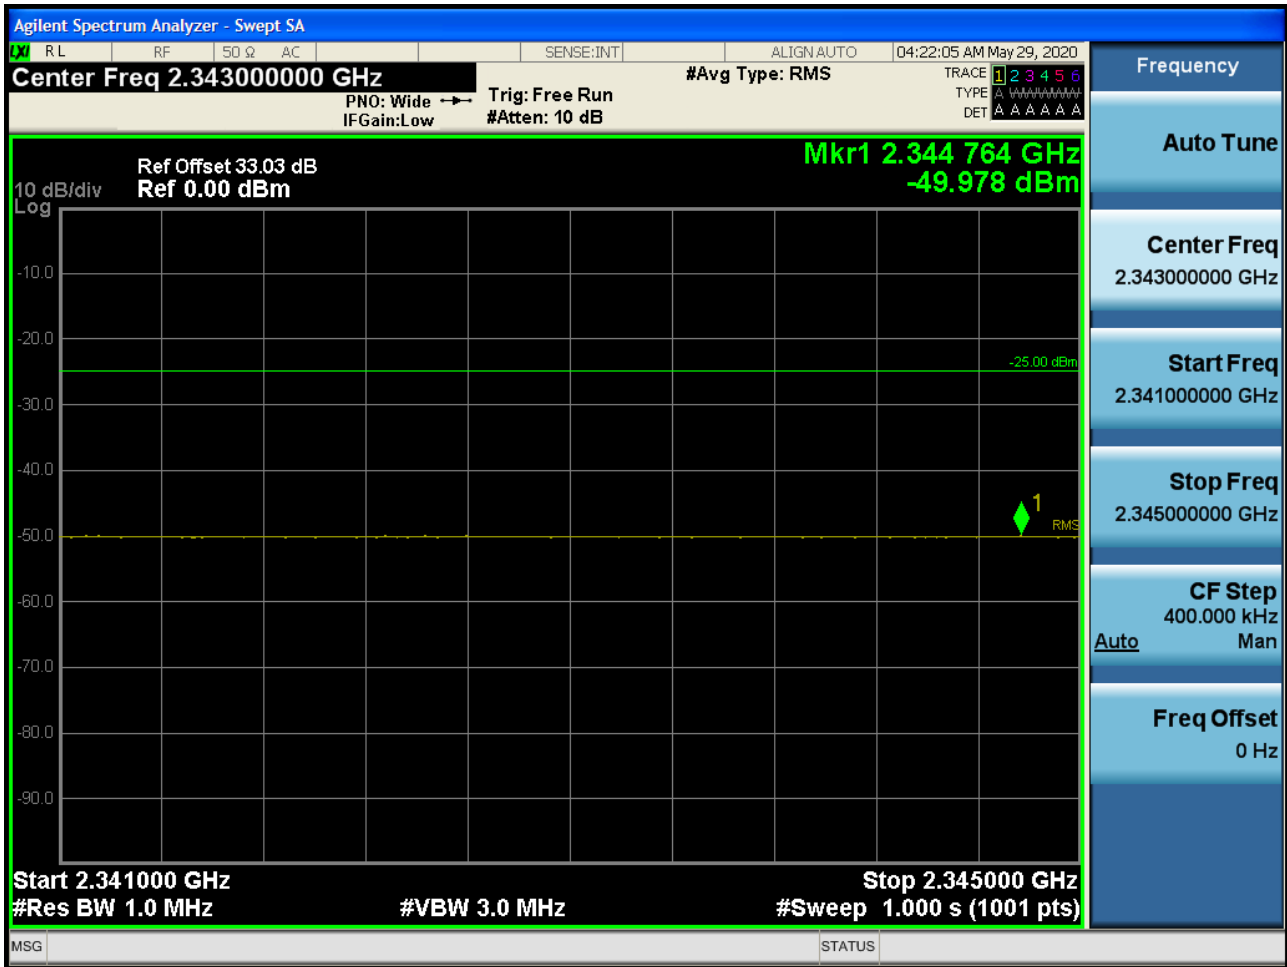


BAND 40. 5M\_BandEdge(2341MHz-2345MHz)\_2307.5MHz\_FullRB

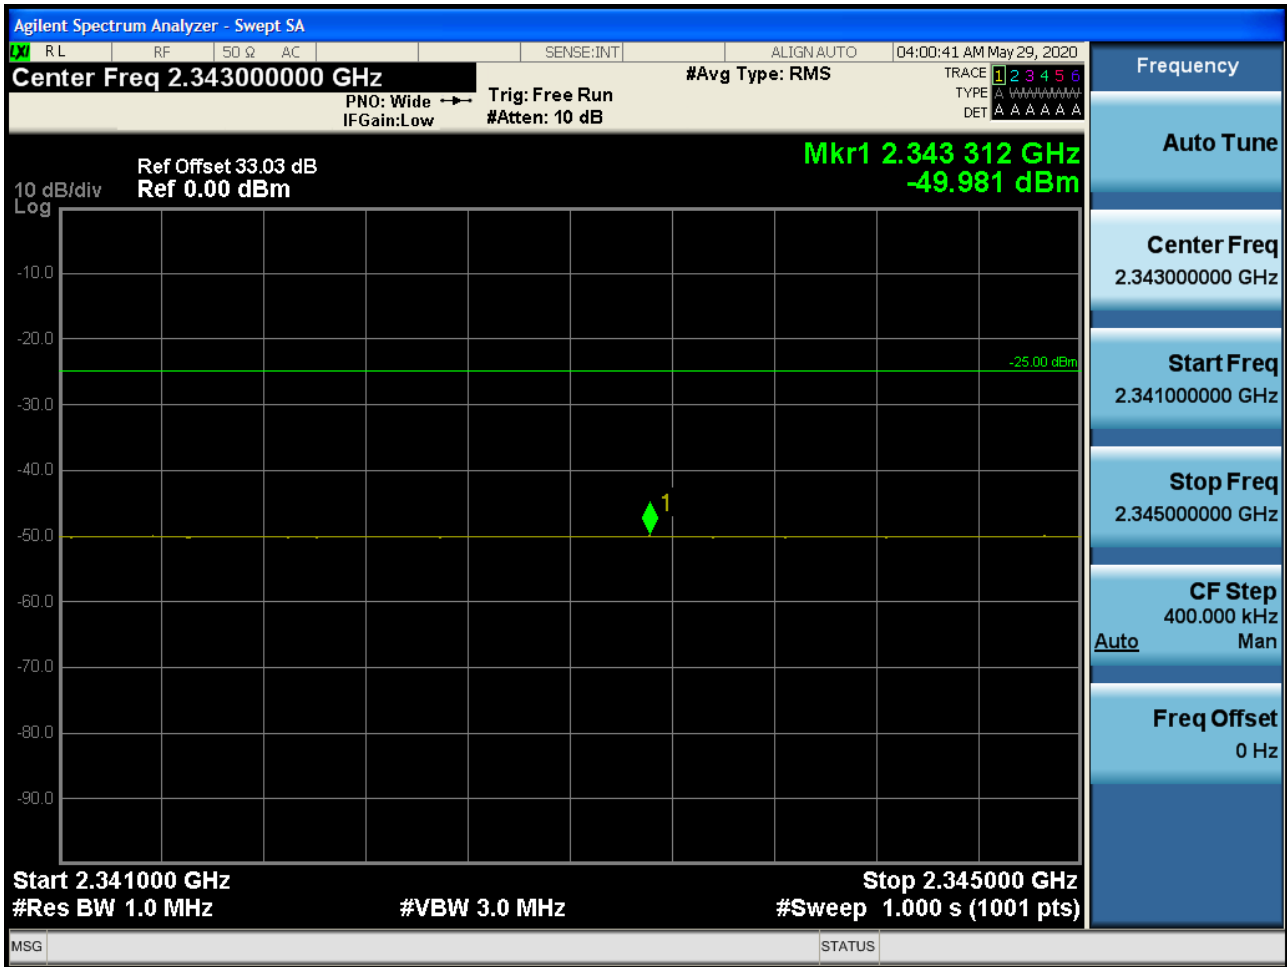


BAND 40. 5M\_BandEdge(2341MHz-2345MHz)\_2310MHz\_FullIRB

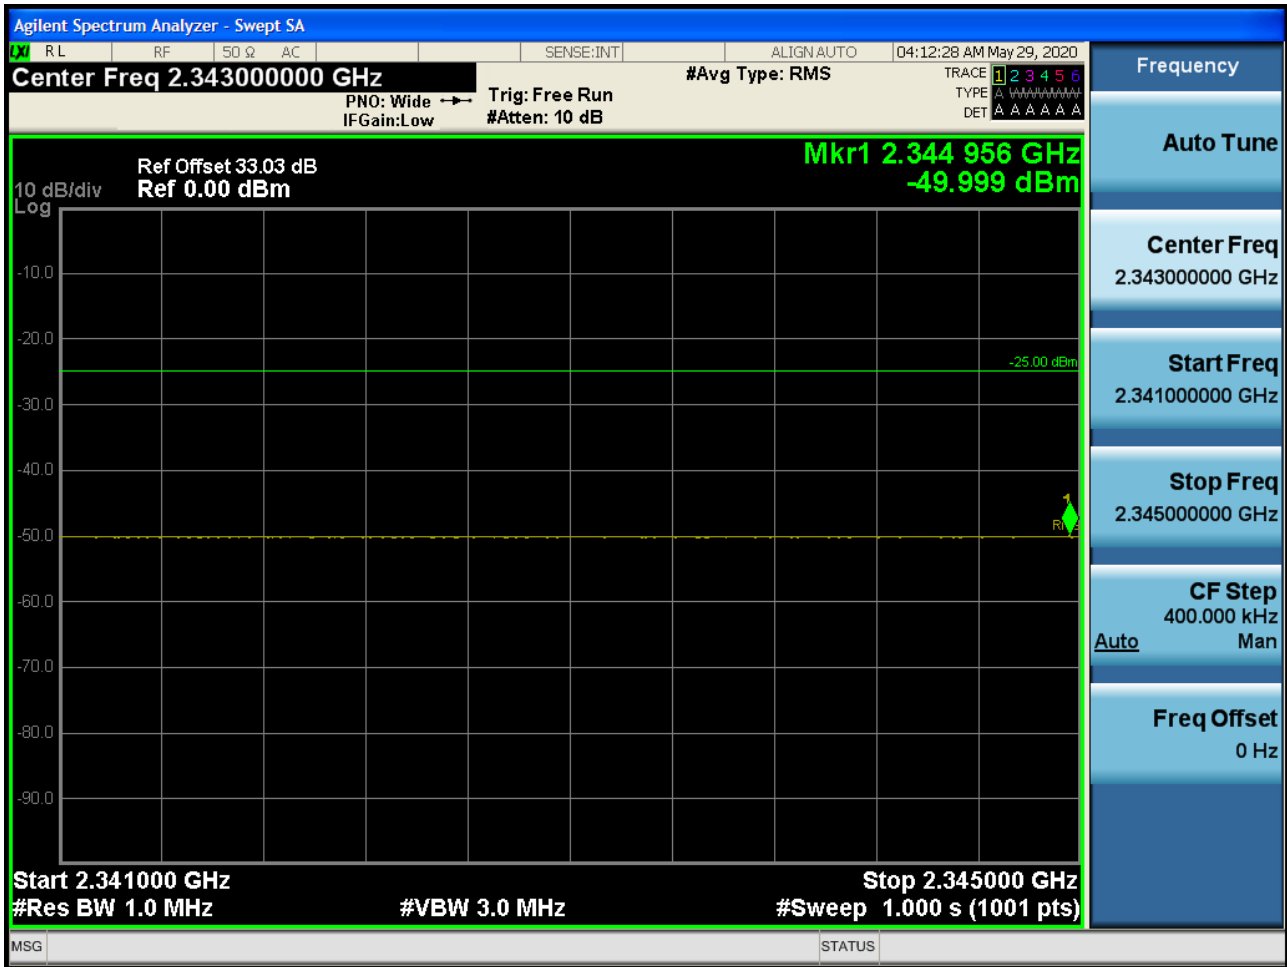


BAND 40. 5M\_BandEdge(2345MHz-2365MHz)\_2312.5MHz\_FullRB

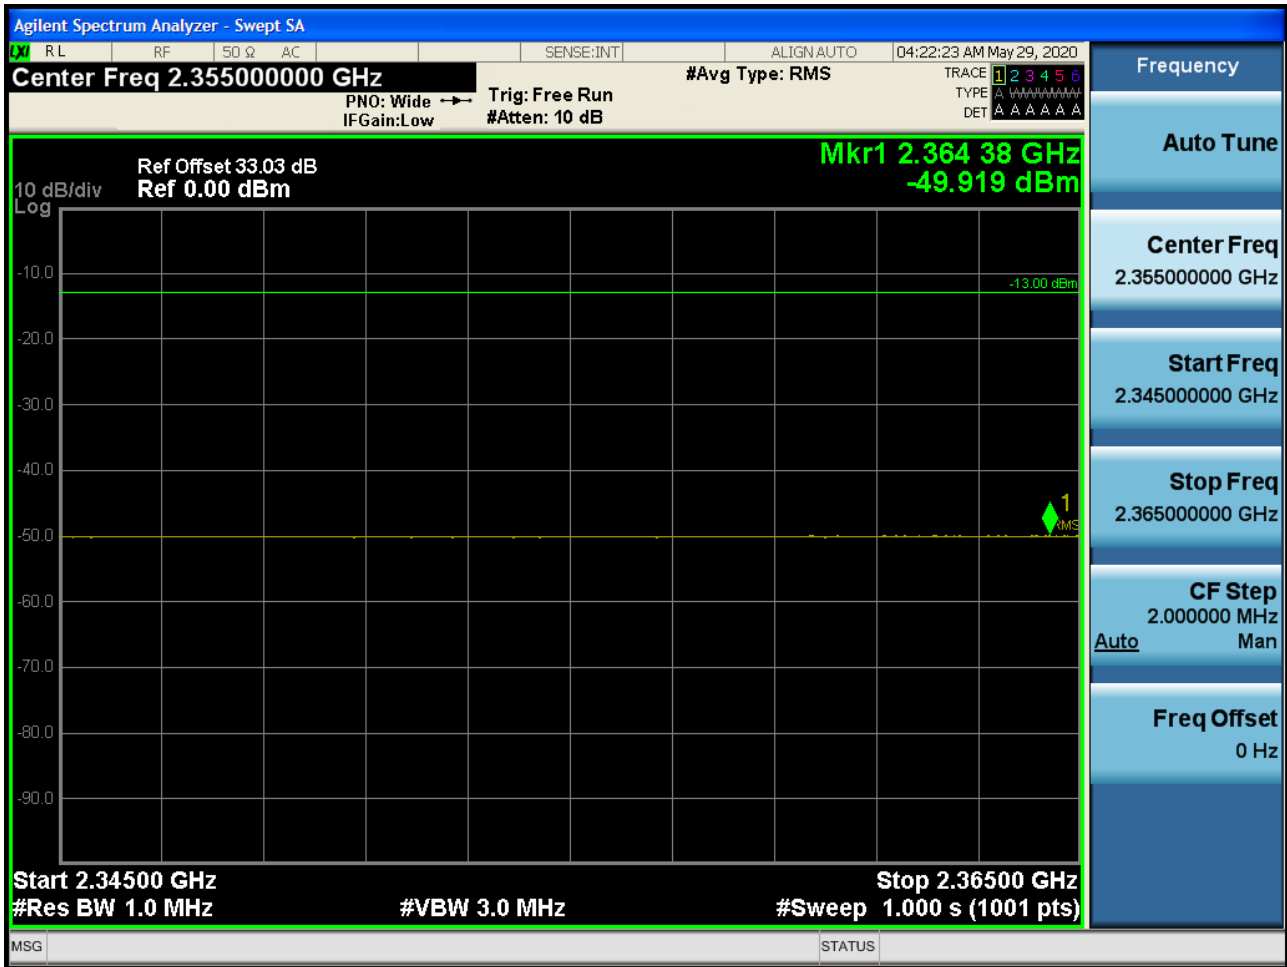

BAND 40. 5M\_BandEdge(2345MHz-2365MHz)\_2307.5MHz\_FullRB

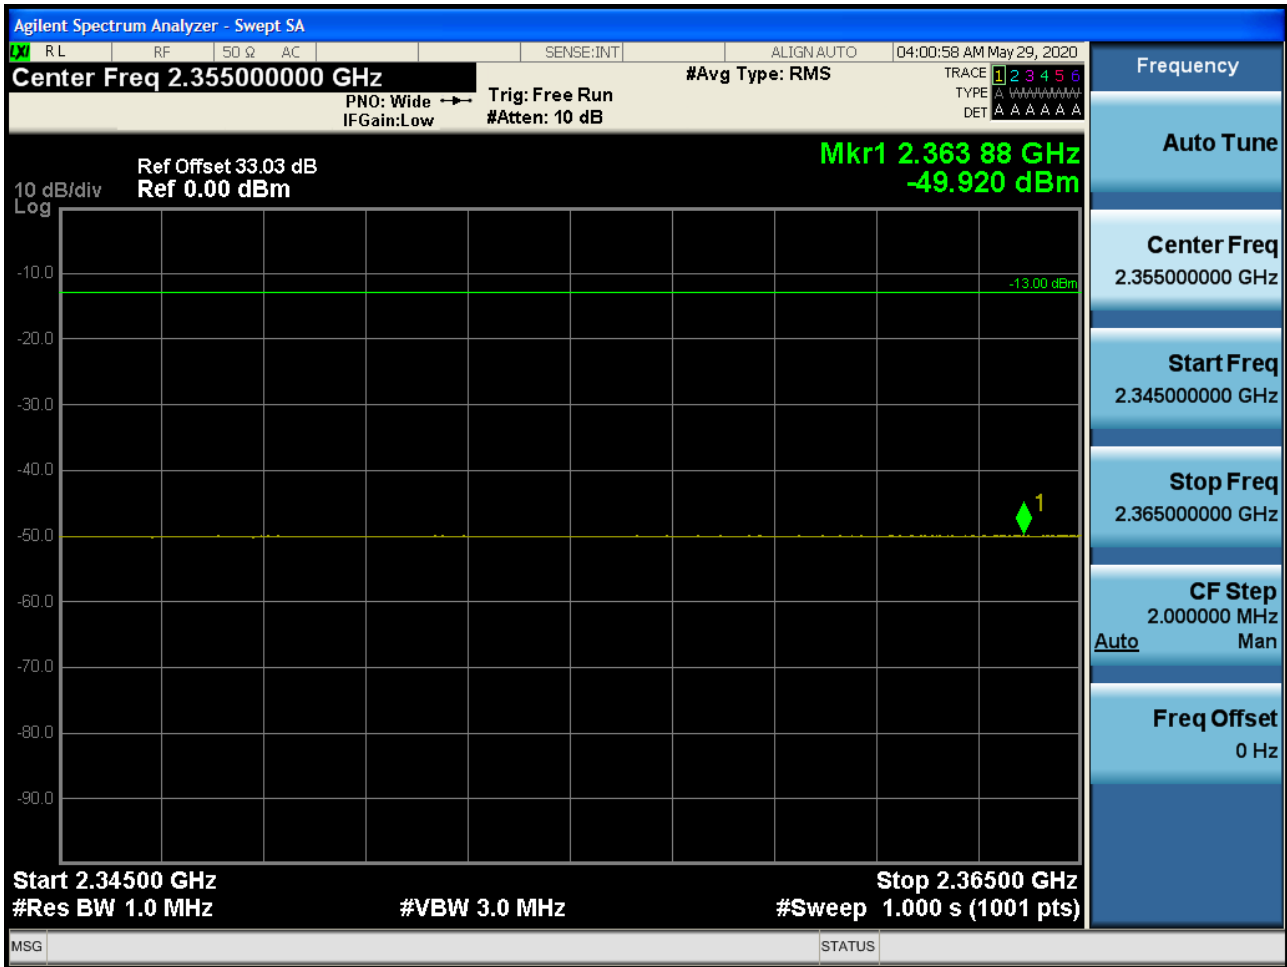


BAND 40. 5M\_BandEdge(2345MHz-2365MHz)\_2310MHz\_FullIRB

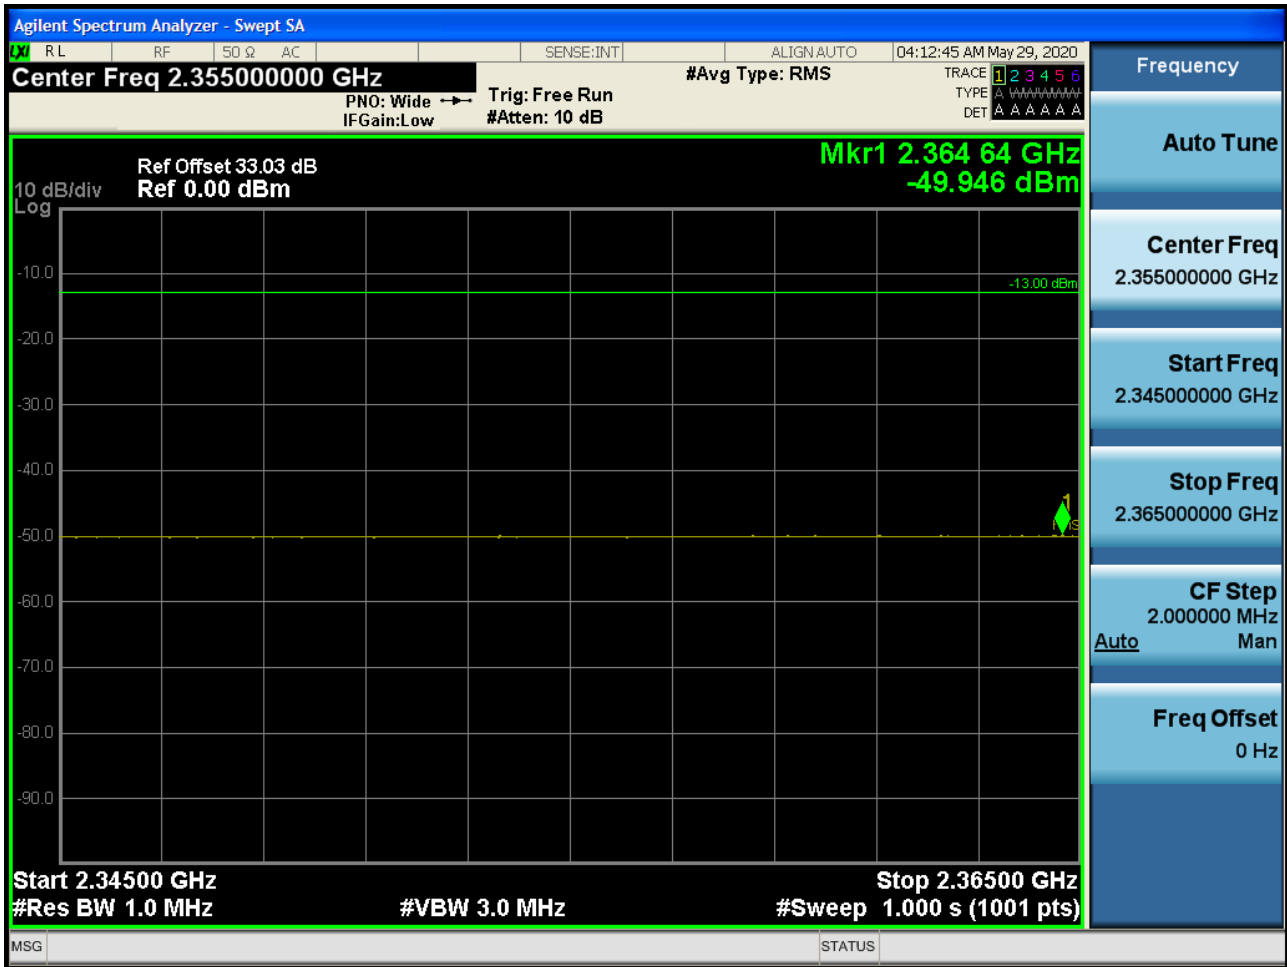





BAND 40. 5M\_BandEdge(2365MHz-2400MHz)\_2312.5MHz\_FullRB

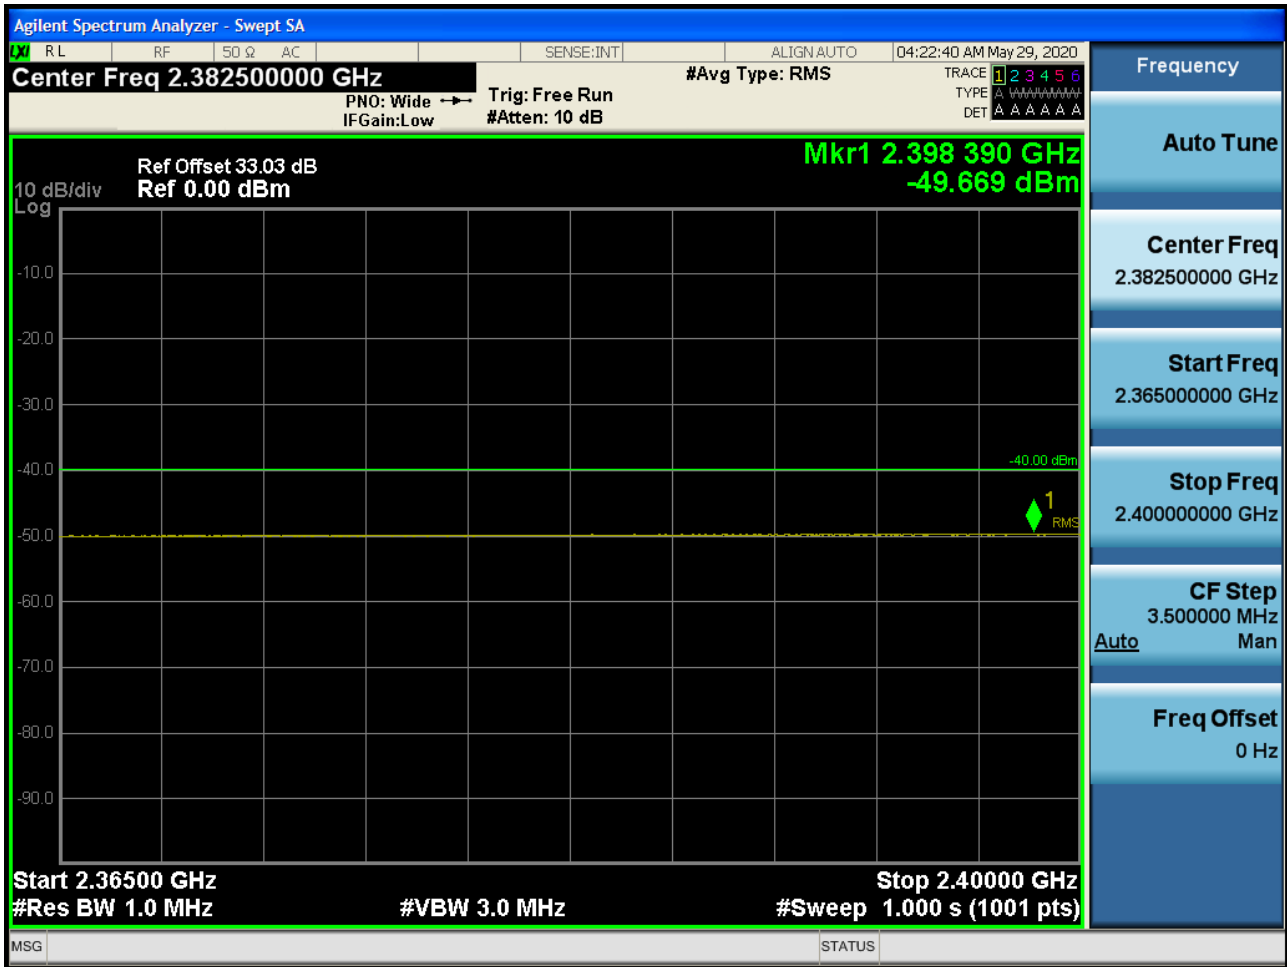


BAND 40. 5M\_BandEdge(2365MHz-2400MHz)\_2307.5MHz\_FullRB

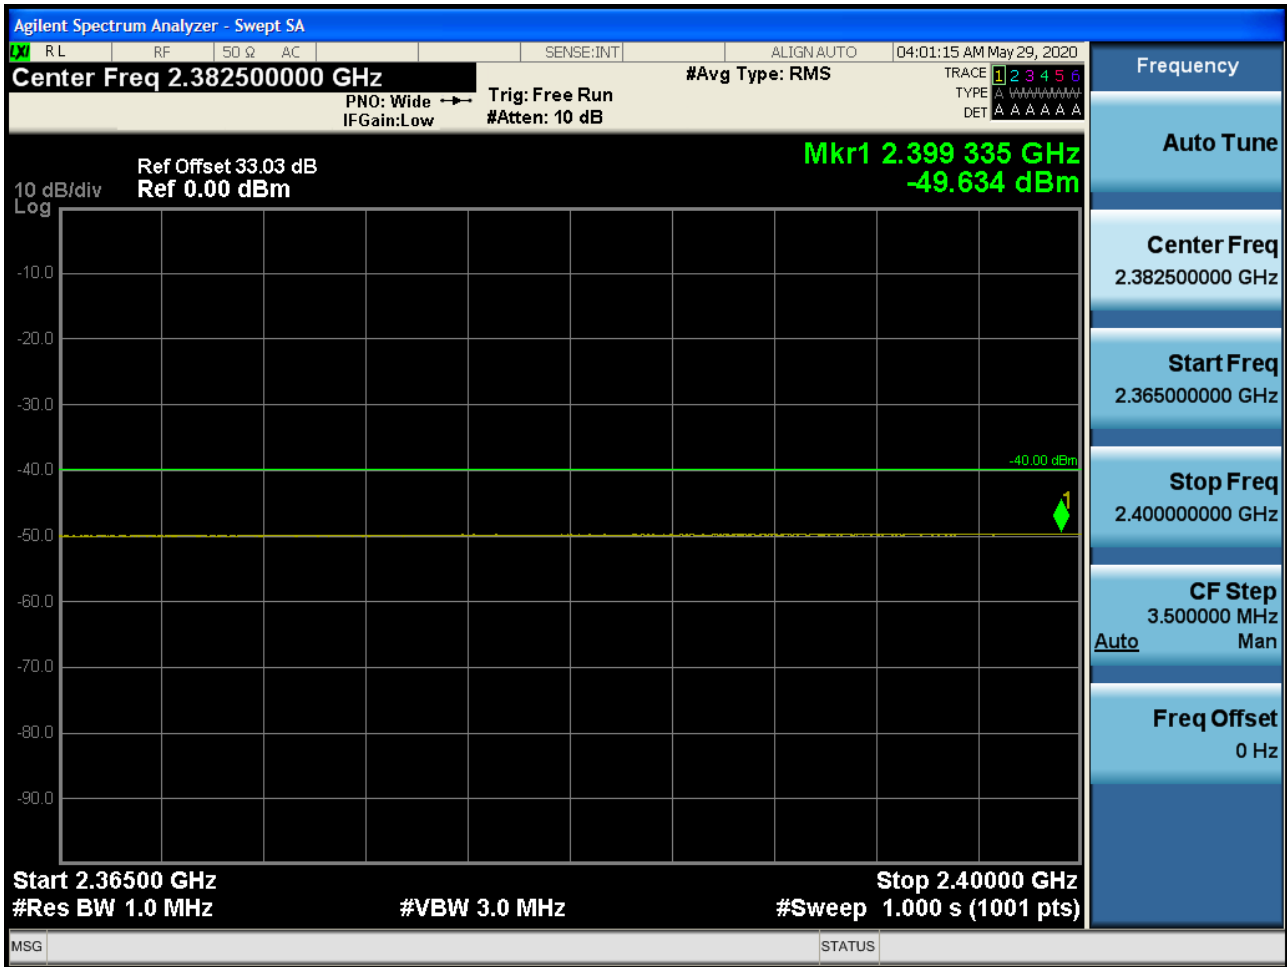


BAND 40. 5M\_BandEdge(2365MHz-2400MHz)\_2310MHz\_FullIRB

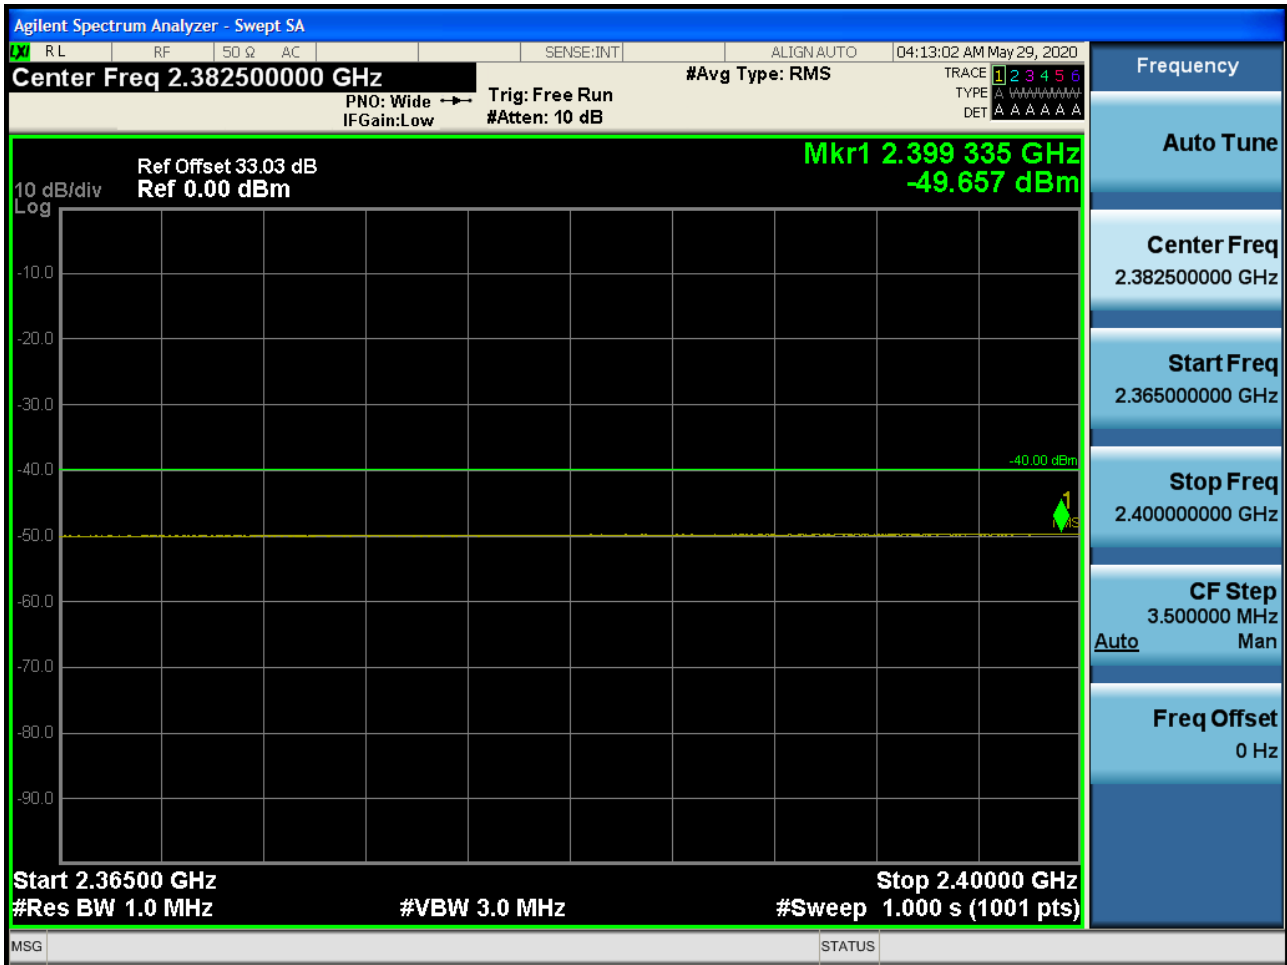

BAND 40. 10M\_BandEdge(2280MHz-2288MHz)\_2310MHz\_FullIRB

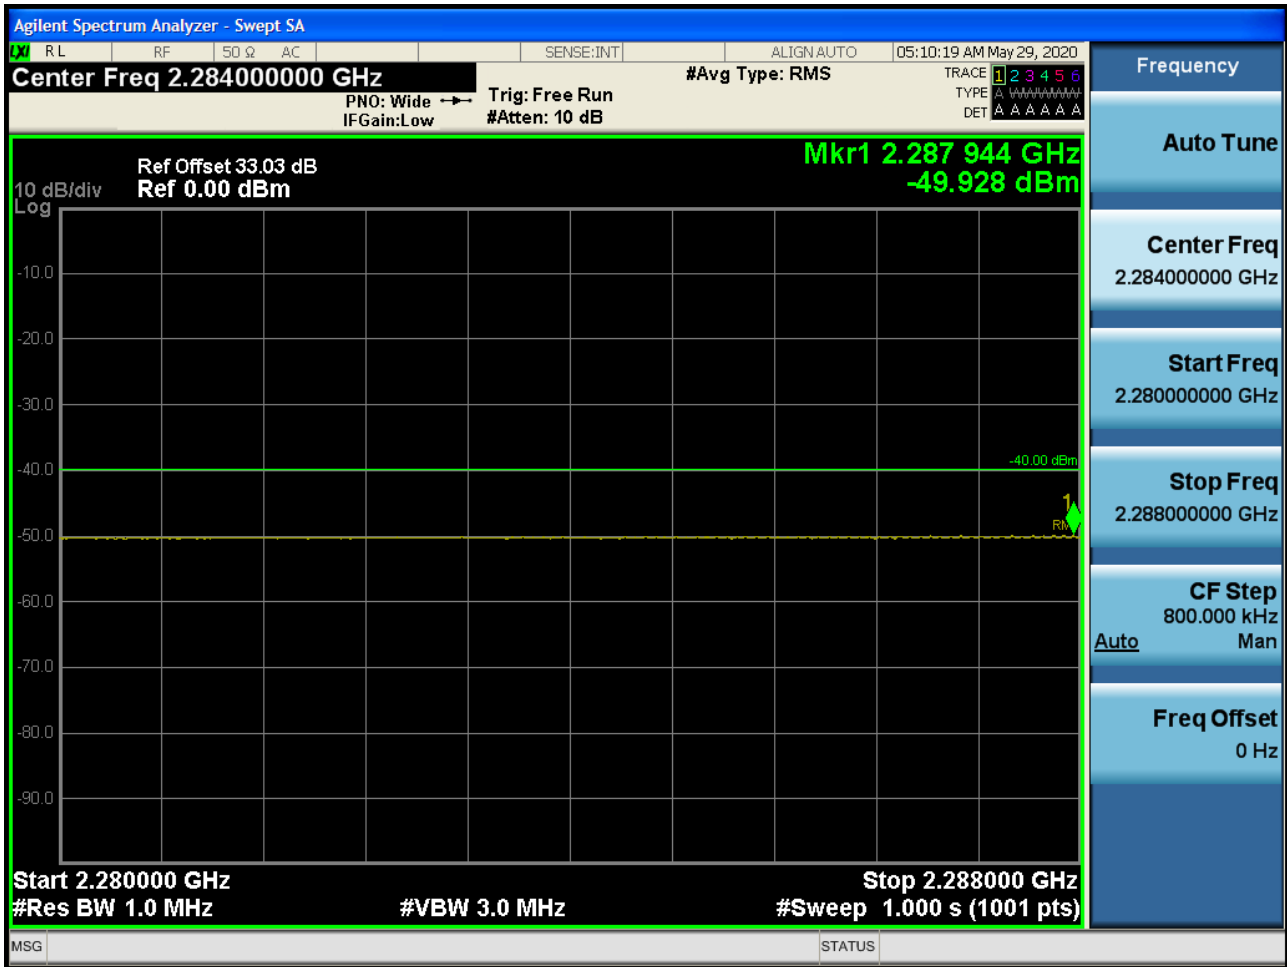


BAND 40. 10M\_BandEdge(2288MHz-2292MHz)\_2310MHz\_FullIRB

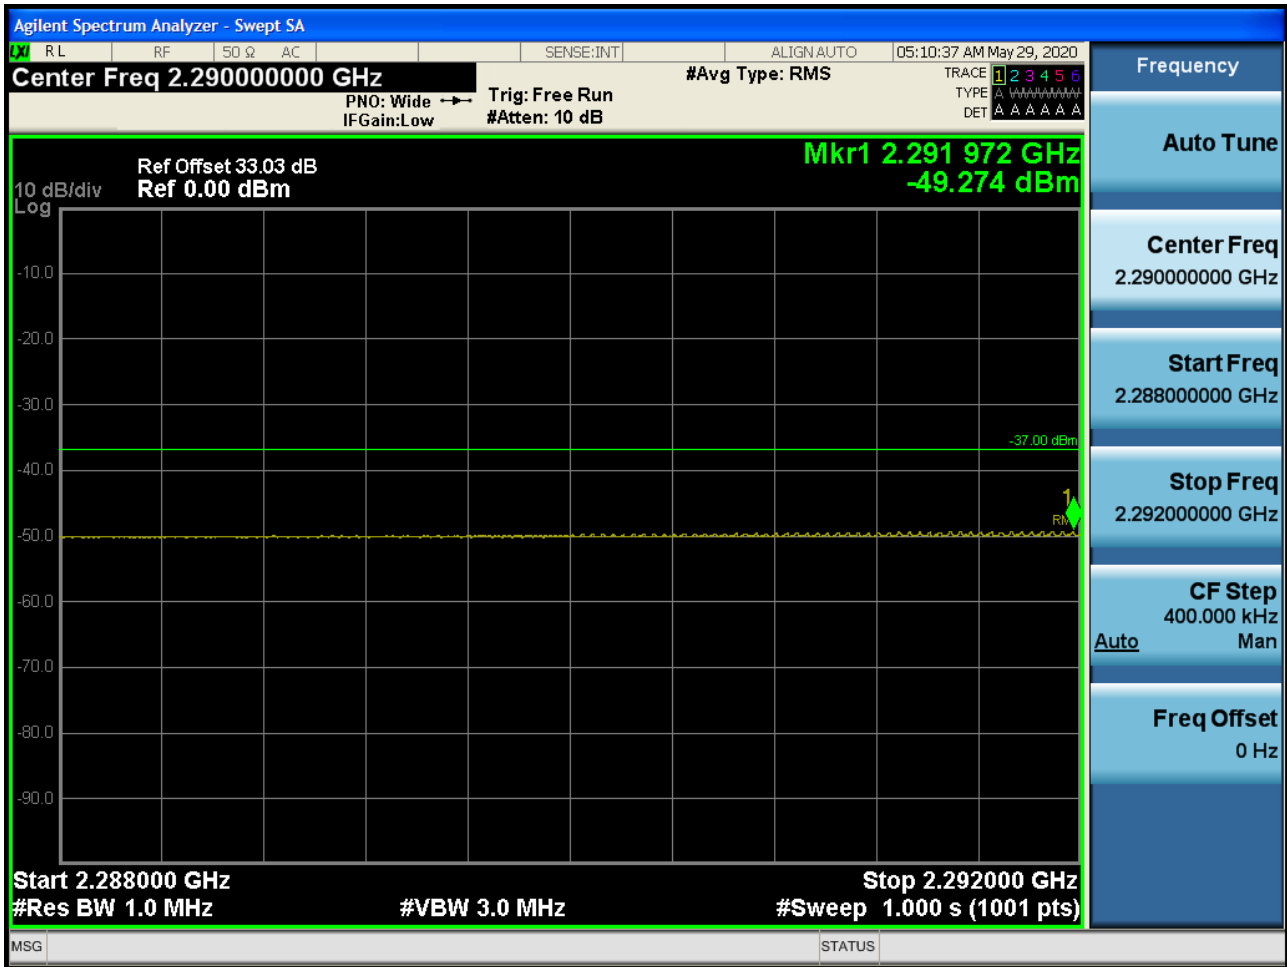


BAND 40. 10M\_BandEdge(2292MHz-2296MHz)\_2310MHz\_FullIRB



BAND 40. 10M\_BandEdge(2296MHz-2300MHz)\_2310MHz\_FullIRB

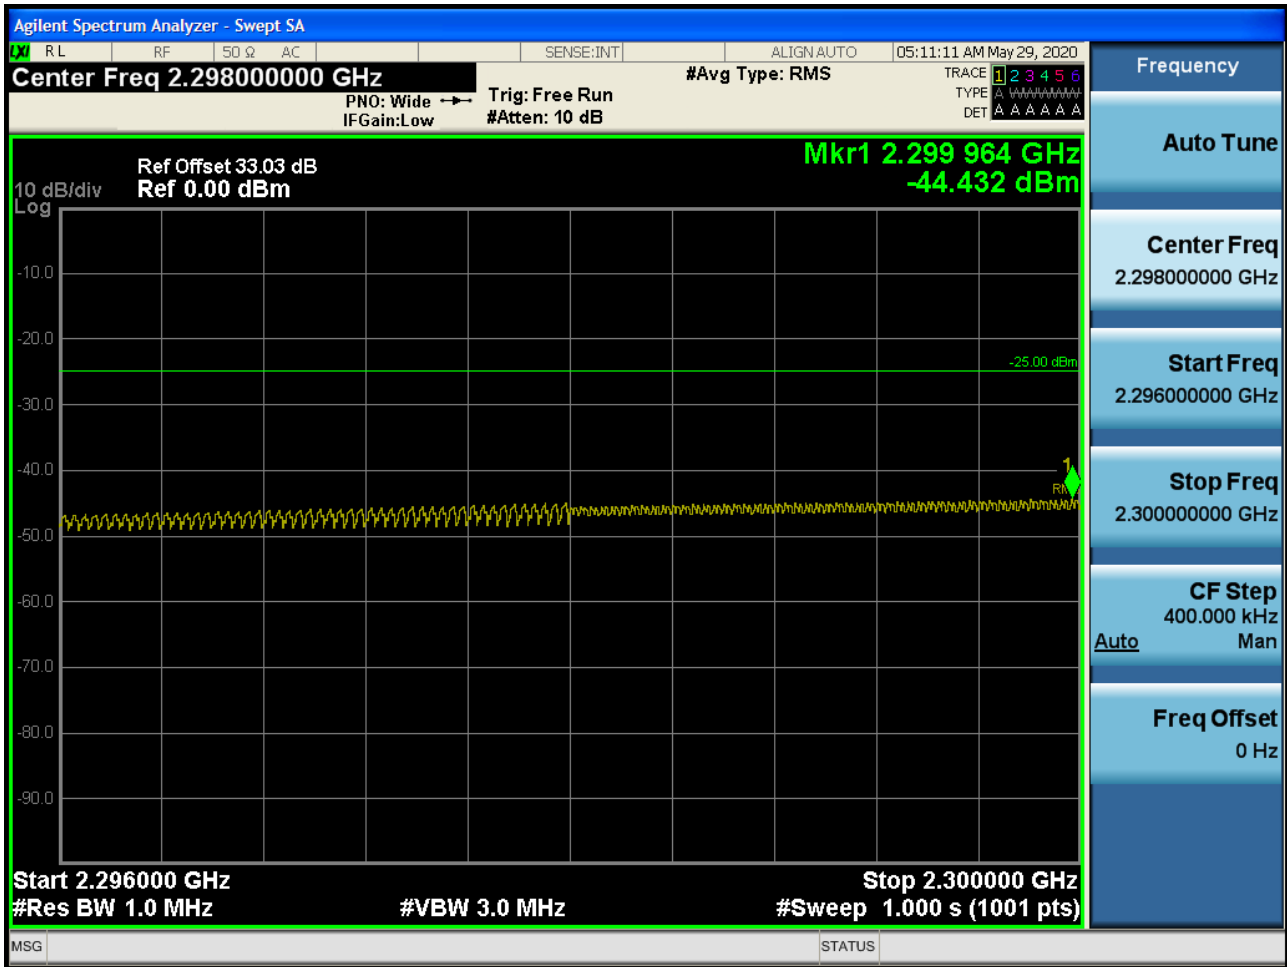


BAND 40. 10M\_BandEdge(2300MHz-2304MHz)\_2310MHz\_FullIRB

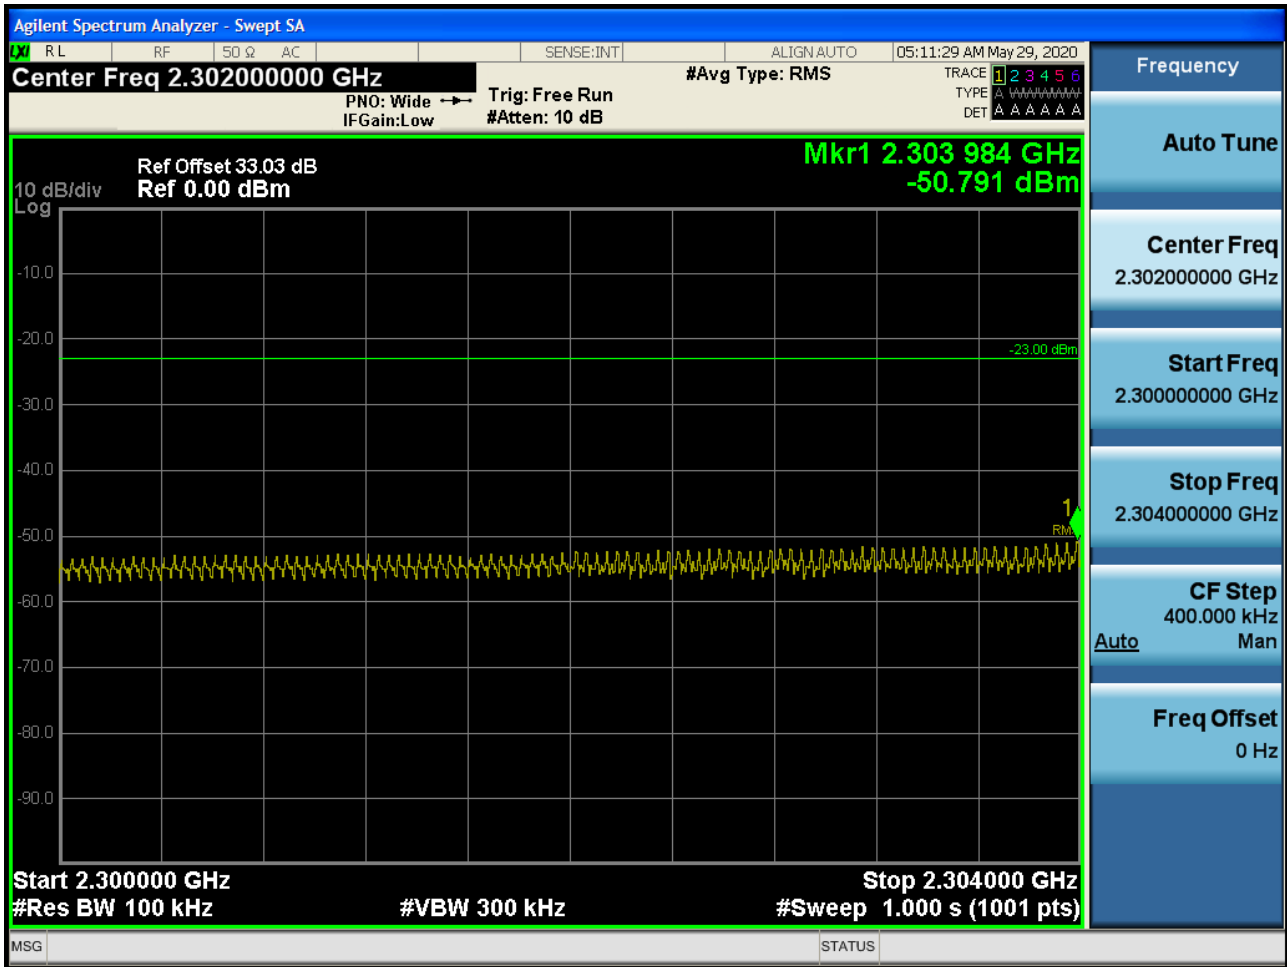





BAND 40. 10M\_BandEdge(2304MHz-2305MHz)\_2310MHz\_FullIRB

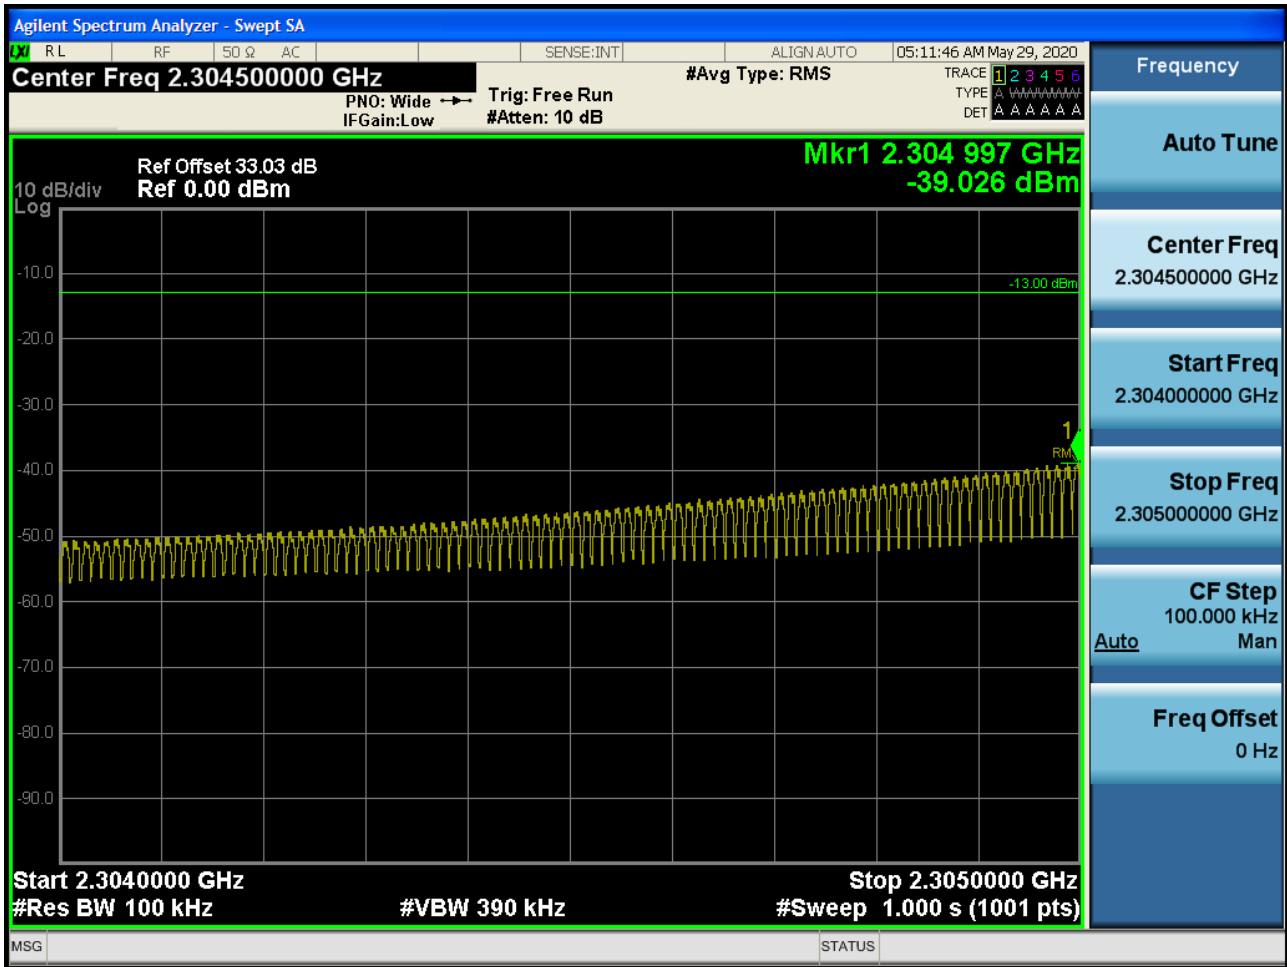

BAND 40. 10M\_BandEdge(2315MHz-2316MHz)\_2310MHz\_FullRB

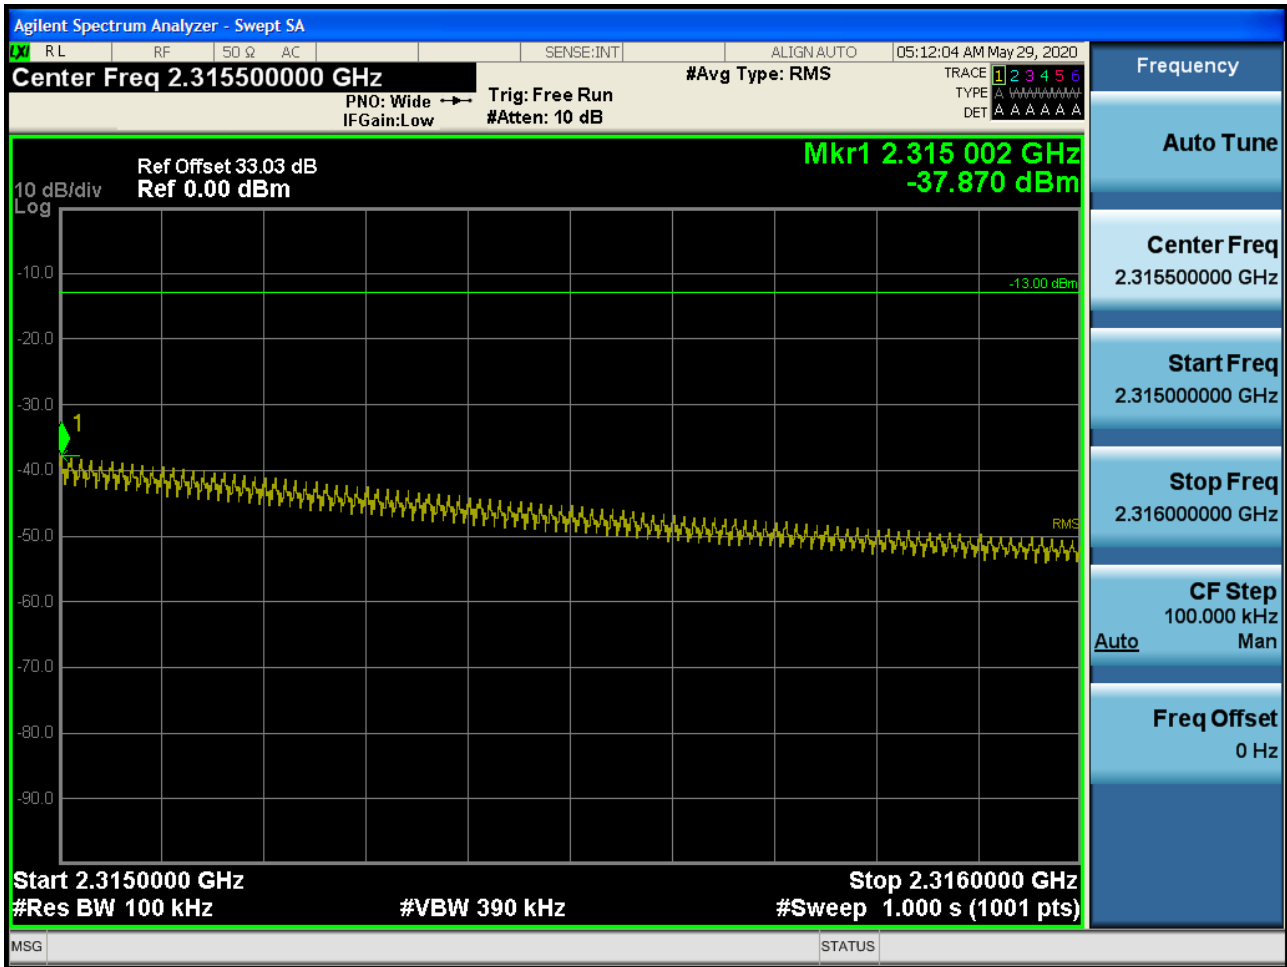

BAND 40. 10M\_BandEdge(2316MHz-2320MHz)\_2310MHz\_FullIRB

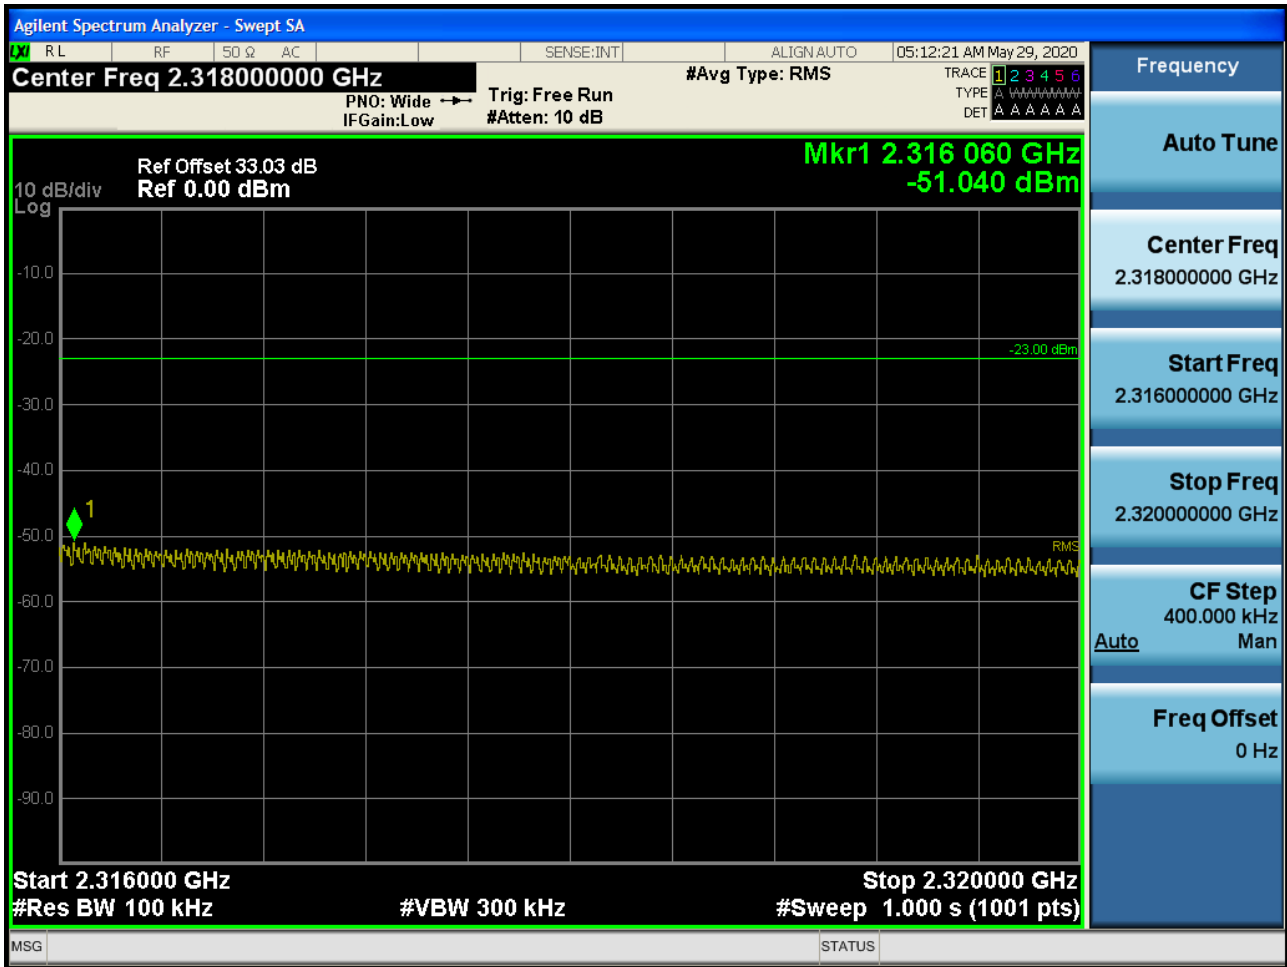

BAND 40. 10M\_BandEdge(2320MHz-2324MHz)\_2310MHz\_FullIRB

