

FCC DTS REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: June 18, 2020
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Test Site/Location: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
	Report No.: HCT-RF-2006-FC003

FCC ID:	A3LSMA516V
APPLICANT:	SAMSUNG Electronics Co., Ltd.
Model:	SM-A516V
EUT Type:	Mobile Phone
Average Output Power:	802.11b : 19.33 dBm / 802.11g : 17.16 dBm / 802.11n(HT20) : 19.06 dBm
Frequency Range:	2 412 MHz ~ 2 472 MHz
Modulation type:	CCK/DSSS/OFDM
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2006-FC003

REVIEWED BY



Report prepared by : Jin Gwan Lee
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2006-FC003	June 18, 2020	- First Approval Report

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	6
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS.....	9
8. SUMMARY TEST OF RESULTS	24
9. TEST RESULT	25
9.1 DUTY CYCLE.....	25
9.2 6dB BANDWIDTH.....	28
9.3 OUTPUT POWER	31
9.4 POWER SPECTRAL DENSITY	37
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	40
9.6 RADIATED SPURIOUS EMISSIONS	51
9.7 RADIATED RESTRICTED BAND EDGES	59
9.8 POWERLINE CONDUCTED EMISSIONS	62
9.9 CONFIRMATION OF GEO-LOCATION MECHANISM	66
10. LIST OF TEST EQUIPMENT	69
11. ANNEX A_ TEST SETUP PHOTO	71

1. EUT DESCRIPTION

Model	SM-A516V
Additional Model	-
EUT Type	Mobile Phone
Power Supply	DC 3.88 V
Battery Information	Model: EB-BA516AMY Type: Li-ion Battery
Travel Adapter Information	Model : EP-TA200 Manufacture: DONG YANG E&P
Data Cable Information	Model : EP-DR140ABZ Manufacture: RFTech
Ear-jack Information	Model : EHS64AVFWE Manufacture: ALMUS
Frequency Range	2 412 MHz ~ 2 472 MHz
Max. RF Output Power	Peak Power(For information only) 802.11b : 25.43 dBm 802.11g : 24.86 dBm 802.11n(HT20) : 27.19 dBm Average Power 802.11b : 19.33 dBm 802.11g : 17.16 dBm 802.11n(HT20) : 19.06 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n
Number of Channels	13 Channels
Antenna Specification	Antenna type: Metal + LDS Peak Gain : -0.10 dBi
Date(s) of Tests	May 12, 2020 ~ June 02, 2020

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (±dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

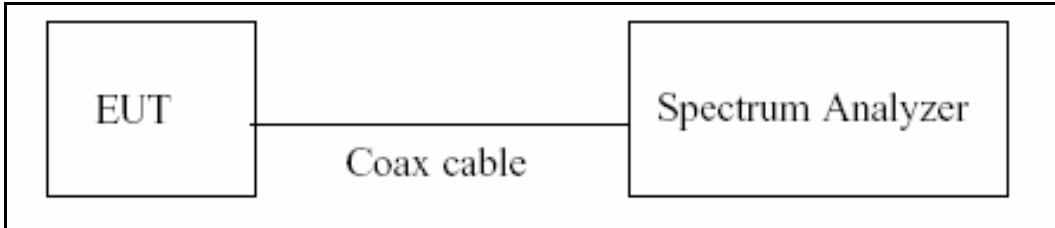

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/Duty\ Cycle)$

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

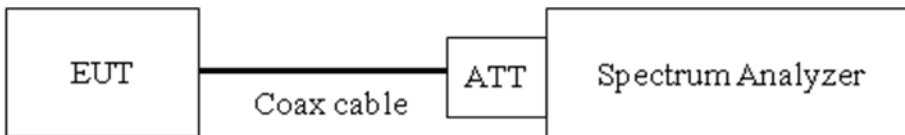

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration

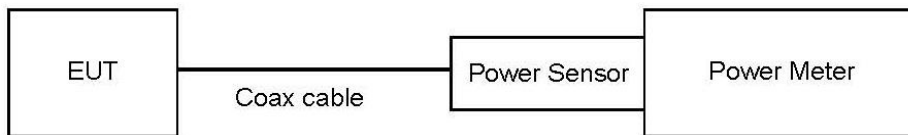

Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98%

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.07
100	20.11
200	20.15
300	20.22
400	20.25
500	20.23
600	20.26
700	20.28
800	20.30
900	20.32
1000	20.34
2000	20.49
2400	20.54
2412	20.55
2437	20.55
2462	20.55
2500	20.80
3000	21.93
4000	22.02
5000	22.02
5700	22.10
5800	22.10
6000	22.10
7000	22.20
8000	22.26
9000	22.33
10000	22.38
11000	22.41
12000	22.46
13000	22.52
14000	22.53
15000	22.56
16000	22.62
17000	22.63
18000	22.68
19000	22.70
20000	22.74
21000	22.87

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

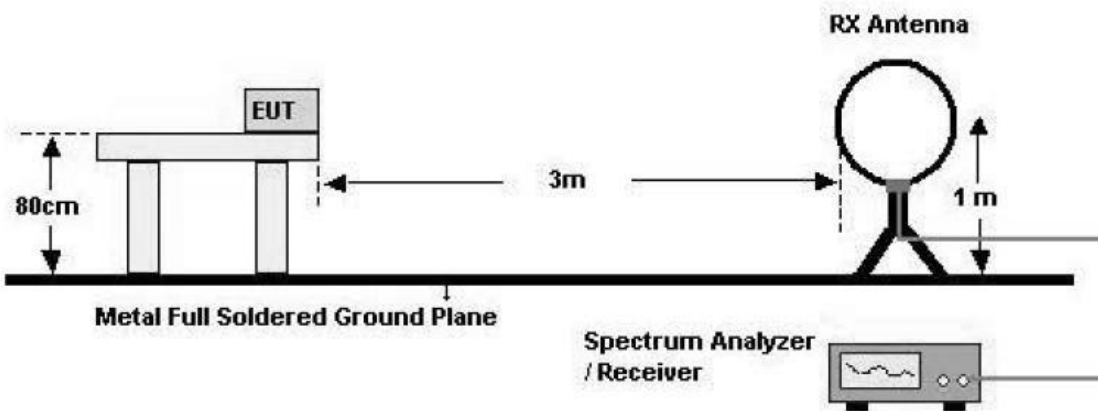

30 MHz - 1 GHz

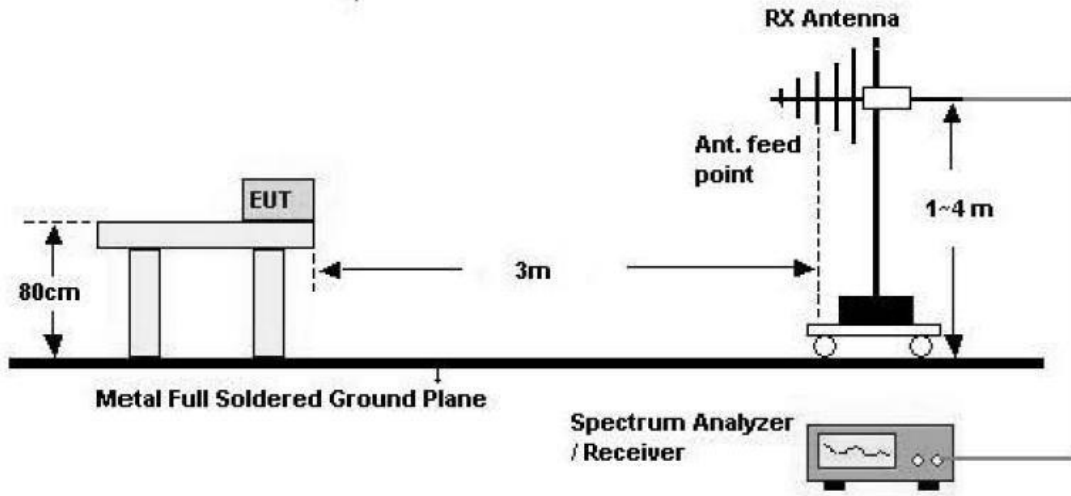

Above 1 GHz

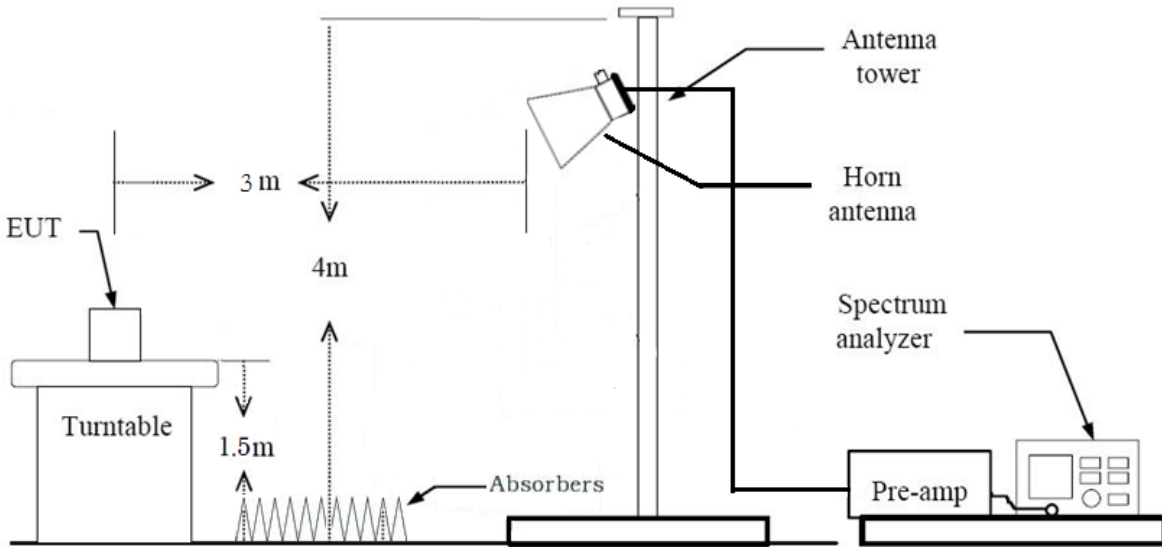

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
- ※ In general, (1) is used mainly
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log$ (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $< 98\%$)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average): Duty cycle \geq 98%,
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - (3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
 - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been

performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

+ Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X,Y
 - Radiated Restricted Band Edge : X
3. Duty cycle factor applies only 802.11g/n(Duty cycle < 98%).
4. All data rate of operation were investigated and the test results are worst case in lowest datarate of each mode.
 - 802.11b : 1Mbps
 - 802.11g : 6Mbps
 - 802.11n_HT20 : MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter,
Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter

Conducted test

1. The EUT was configured with data rate of highest power.

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.625	8.730	0.988	0.053
	2	4.317	4.347	0.993	0.030
	5.5	1.629	1.659	0.982	0.079
	11	0.863	0.894	0.966	0.151
802.11g	6	1.431	1.470	0.973	0.117
	9	0.960	0.996	0.964	0.160
	12	0.728	0.764	0.953	0.210
	18	0.492	0.529	0.930	0.315
	24	0.376	0.413	0.910	0.408
	36	0.256	0.292	0.877	0.571
	48	0.200	0.236	0.847	0.719
	54	0.180	0.217	0.831	0.802
802.11n (HT20)	6.5 (MCS0)	1.338	1.377	0.972	0.125
	13 (MCS1)	0.688	0.726	0.948	0.233
	19.5 (MCS2)	0.471	0.509	0.925	0.341
	26 (MCS3)	0.364	0.401	0.907	0.424
	39 (MCS4)	0.256	0.292	0.877	0.571
	52 (MCS5)	0.200	0.236	0.847	0.719
	58.5 (MCS6)	0.184	0.220	0.836	0.776
	65 (MCS7)	0.168	0.204	0.821	0.856

▣ Test Plots


Duty cycle plot (802.11b(1Mbps))

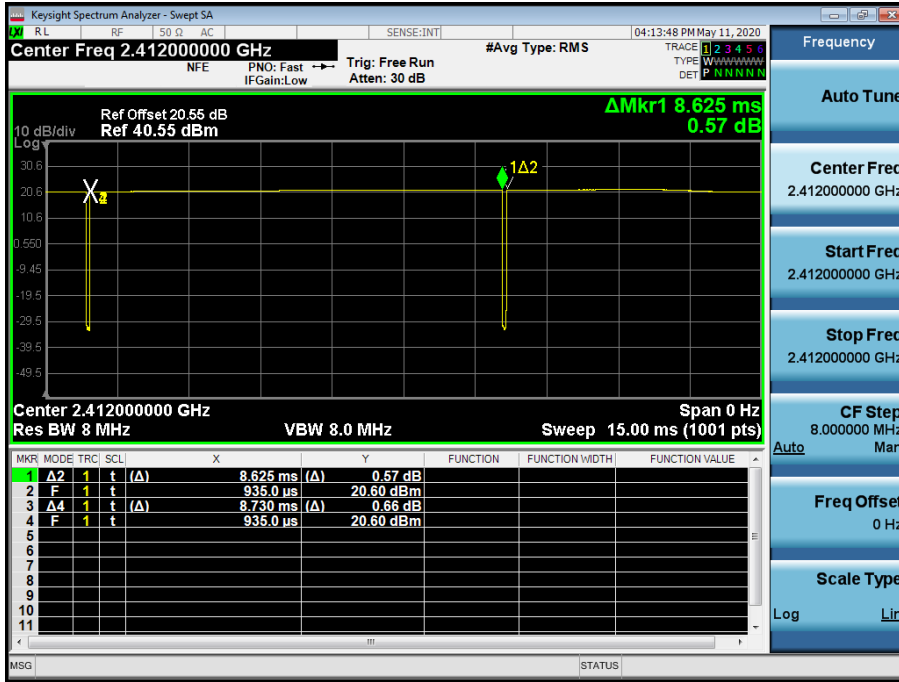

Duty cycle plot (802.11g(6Mbps))

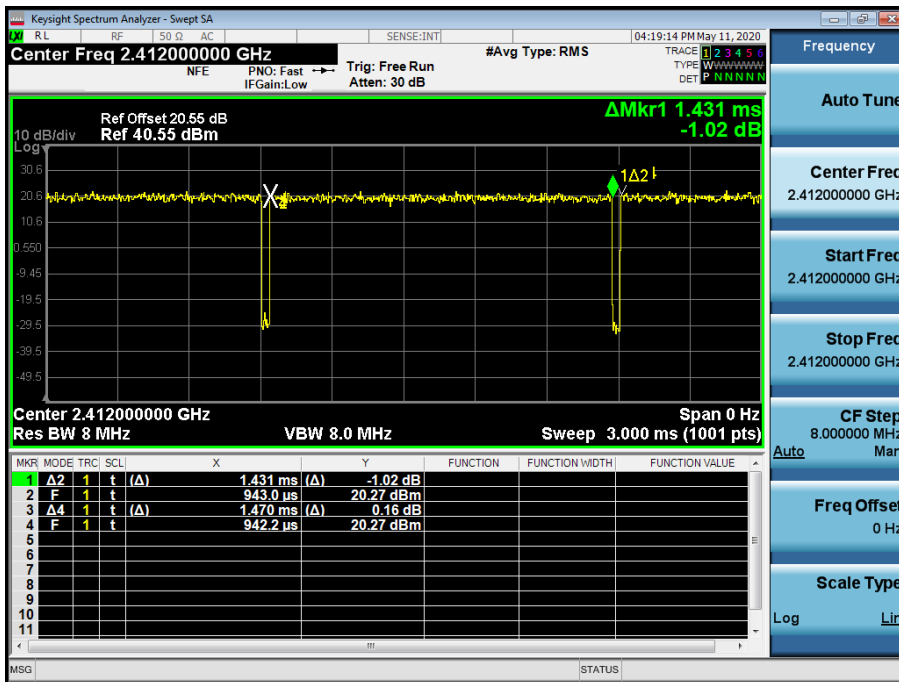

Duty cycle plot (802.11n(MCS0))

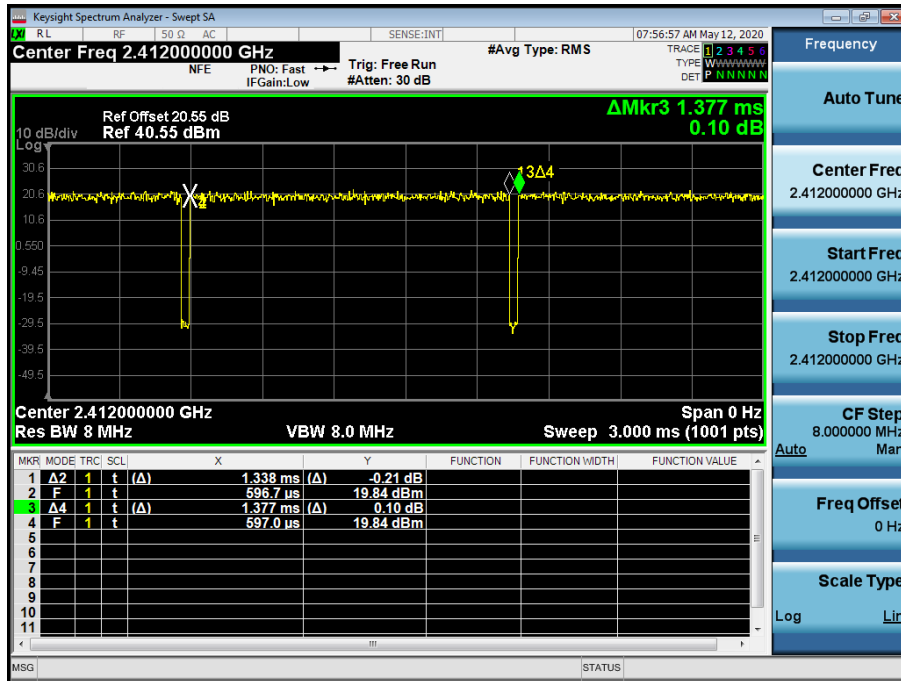

Note:

In order to simplify the report, attached plots were only the most lowest data rate.

9.2 6dB BANDWIDTH


802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	10.16	0.5
2437	6	10.16	0.5
2462	11	10.17	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.82	0.5
2437	6	15.01	0.5
2462	11	15.02	0.5


802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.77	0.5
2437	6	15.06	0.5
2462	11	15.07	0.5

Test Plots


6dB Bandwidth plot (802.11b-CH 6)

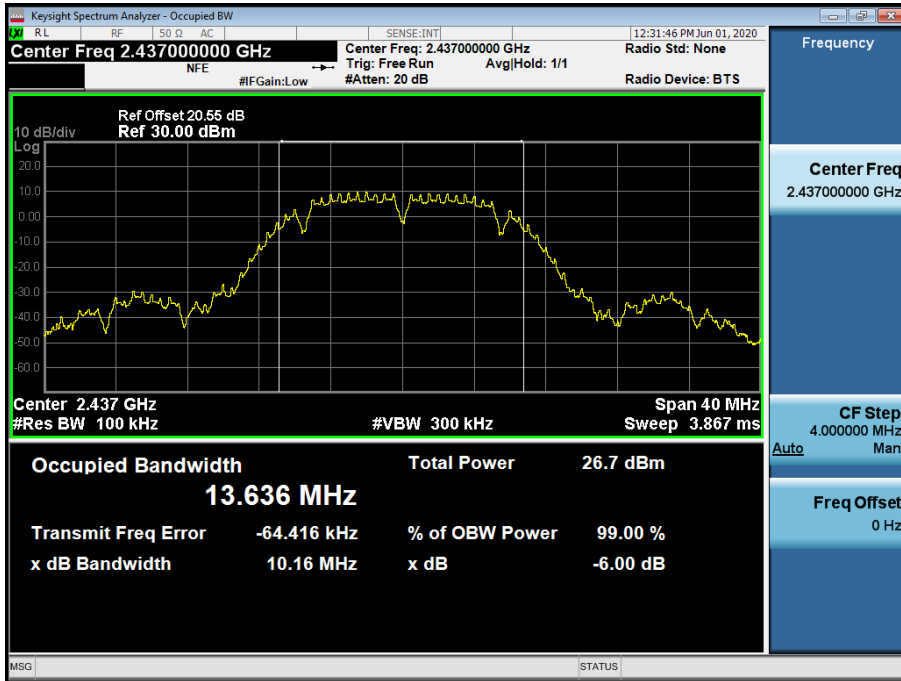

6dB Bandwidth plot (802.11g-CH 1)

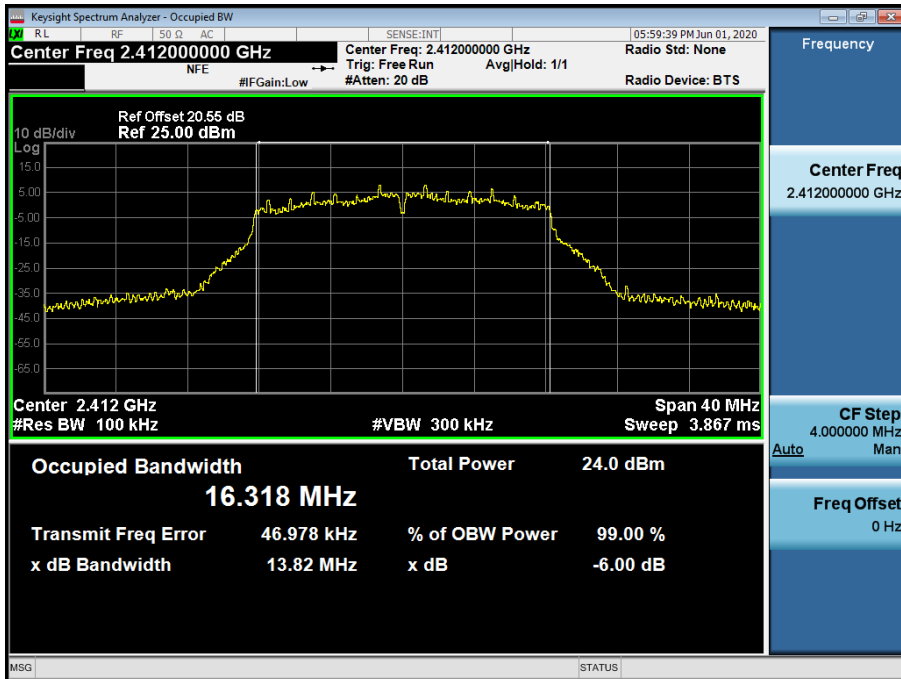

6dB Bandwidth plot (802.11n_HT20-CH 1)

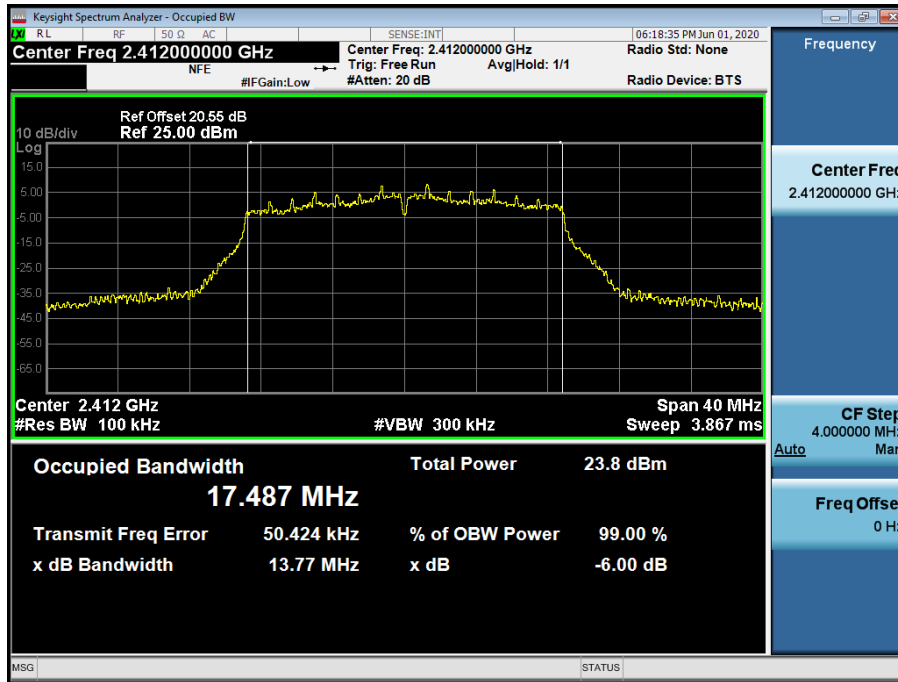

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss + Cable loss

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 20.55 dB is offset for 2.4 GHz Band

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	1	22.15	30	19
		2	22.47	30	
		5.5	23.65	30	
		11	25.43	30	
2437	6	1	21.89	30	
		2	22.24	30	
		5.5	24.25	30	
		11	25.24	30	
2462	11	1	22.04	30	
		2	22.36	30	
		5.5	23.57	30	
		11	25.35	30	

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	6	24.21	30	17
		9	24.24	30	
		12	23.94	30	
		18	24.72	30	
		24	23.34	30	15
		36	22.55	30	
		48	22.63	30	
		54	22.38	30	
2437	6	6	24.41	30	17
		9	24.39	30	
		12	24.25	30	
		18	24.86	30	
		24	23.36	30	15
		36	22.68	30	
		48	22.83	30	
		54	22.81	30	
2462	11	6	24.20	30	17
		9	24.19	30	
		12	23.97	30	
		18	24.43	30	
		24	23.14	30	15
		36	22.52	30	
		48	22.72	30	
		54	22.71	30	

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	0	23.77	30	17
		1	23.50	30	
		2	24.38	30	
		3	24.93	30	
		4	24.22	30	
		5	23.99	30	
		6	23.21	30	16
		7	23.05	30	
2437	6	0	26.13	30	19
		1	25.85	30	
		2	26.58	30	
		3	27.19	30	
		4	25.11	30	17.5
		5	24.94	30	
		6	23.45	30	16
		7	23.51	30	
2462	11	0	23.75	30	17
		1	23.47	30	
		2	24.24	30	
		3	24.79	30	
		4	24.26	30	
		5	24.26	30	
		6	23.27	30	16
		7	23.36	30	

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.55 dB is offset for 2.4 GHz Band.

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	1	19.01	0.053	19.06	30	19
		2	19.07	0.030	19.10	30	
		5.5	19.25	0.079	19.33	30	
		11	19.13	0.151	19.28	30	
2437	6	1	19.00	0.053	19.05	30	
		2	18.83	0.030	18.86	30	
		5.5	19.16	0.079	19.24	30	
		11	18.82	0.151	18.97	30	
2462	11	1	18.96	0.053	19.01	30	
		2	19.19	0.030	19.22	30	
		5.5	19.10	0.079	19.18	30	
		11	19.02	0.151	19.17	30	

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	16.26	0.117	16.38	30	17
		9	16.22	0.160	16.38	30	
		12	16.19	0.210	16.40	30	
		18	16.84	0.315	17.16	30	
		24	14.80	0.408	15.20	30	15
		36	14.04	0.571	14.62	30	
		48	13.99	0.719	14.71	30	
		54	13.69	0.802	14.49	30	
2437	6	6	16.27	0.117	16.39	30	17
		9	16.20	0.160	16.36	30	
		12	16.25	0.210	16.46	30	
		18	16.85	0.315	17.16	30	
		24	14.69	0.408	15.10	30	15
		36	13.94	0.571	14.51	30	
		48	13.82	0.719	14.53	30	
		54	13.77	0.802	14.57	30	
2462	11	6	16.08	0.117	16.19	30	17
		9	16.01	0.160	16.17	30	
		12	16.01	0.210	16.22	30	
		18	16.20	0.315	16.52	30	
		24	14.49	0.408	14.90	30	15
		36	13.71	0.571	14.28	30	
		48	13.50	0.719	14.22	30	
		54	13.68	0.802	14.48	30	

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	0	16.02	0.125	16.14	30	17
		1	15.93	0.233	16.16	30	
		2	16.56	0.341	16.91	30	
		3	16.47	0.424	16.89	30	
		4	16.03	0.571	16.60	30	
		5	15.62	0.719	16.34	30	
		6	14.93	0.776	15.70	30	16
		7	14.60	0.856	15.46	30	
2437	6	0	17.97	0.125	18.09	30	19
		1	18.10	0.233	18.33	30	
		2	18.62	0.341	18.96	30	
		3	18.64	0.424	19.06	30	
		4	16.52	0.571	17.09	30	17.5
		5	16.31	0.719	17.03	30	
		6	14.76	0.776	15.54	30	16
		7	14.76	0.856	15.62	30	
2462	11	0	15.68	0.125	15.81	30	17
		1	15.76	0.233	15.99	30	
		2	16.32	0.341	16.66	30	
		3	16.32	0.424	16.74	30	
		4	15.57	0.571	16.15	30	
		5	15.44	0.719	16.16	30	
		6	14.65	0.776	15.43	30	16
		7	14.54	0.856	15.40	30	

9.4 POWER SPECTRAL DENSITY

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	0.539	0.079	0.618	8
	2437	6	0.437	0.079	0.516	8
	2462	11	1.062	0.030	1.092	8
802.11g	2412	1	-0.882	0.315	-0.567	8
	2437	6	-0.662	0.315	-0.347	8
	2462	11	-1.013	0.315	-0.698	8
802.11n	2412	1	-0.898	0.341	-0.557	8
	2437	6	1.579	0.424	2.003	8
	2462	11	-2.301	0.424	-1.877	8

Note :

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss(1ea)


3. 20.55 dB is offset for 2.4 GHz Band.

▣ Test Plots


Power Spectral Density (802.11b-CH 11)



Power Spectral Density (802.11g-CH 6)

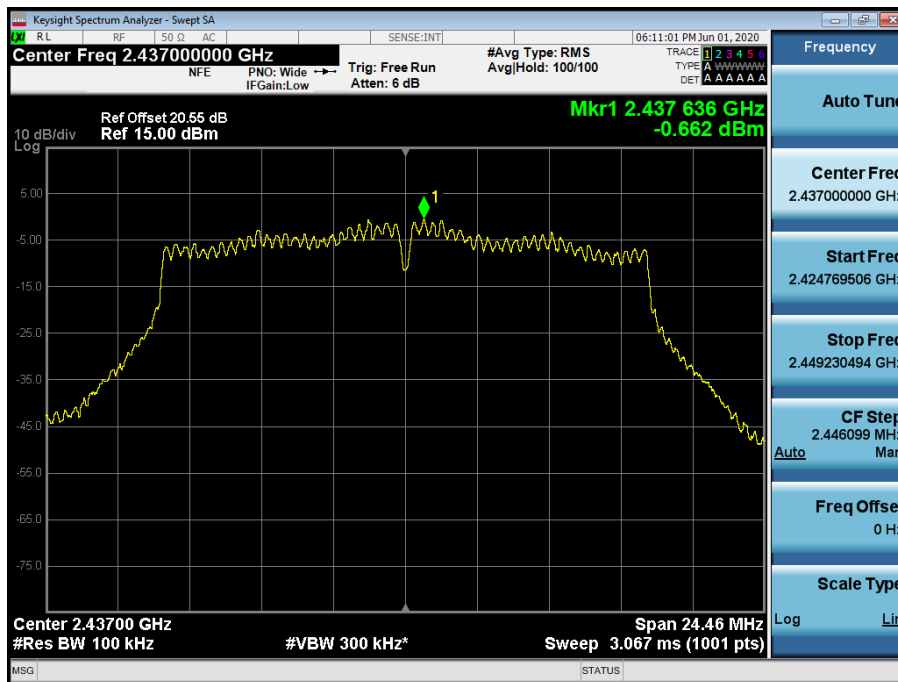

Power Spectral Density (802.11n_HT20 -CH 6)

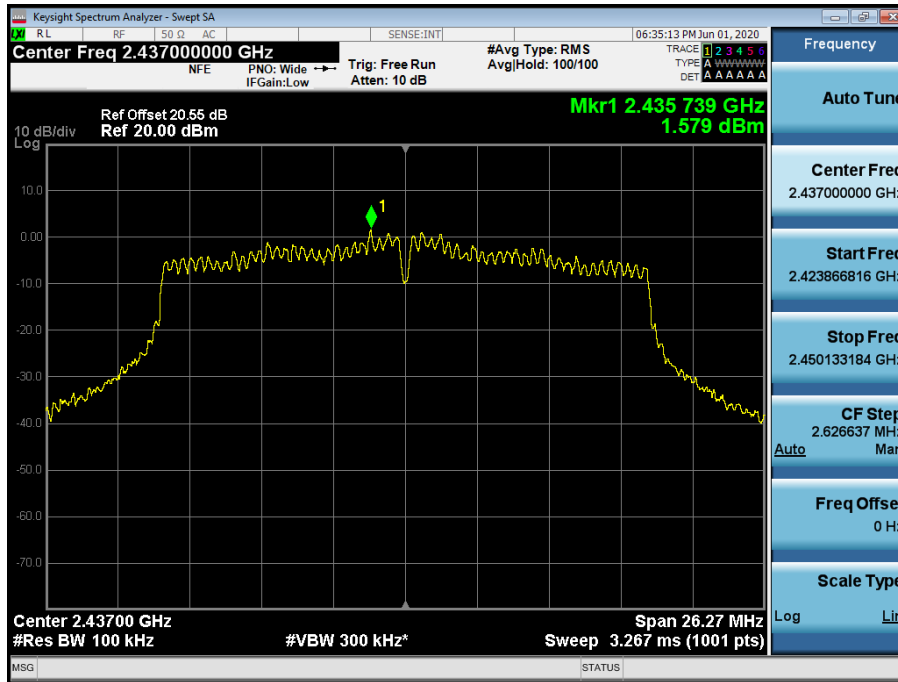

Note :

In order to simplify the report, attached plots were only the worst case PSD channel.


9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

▣ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

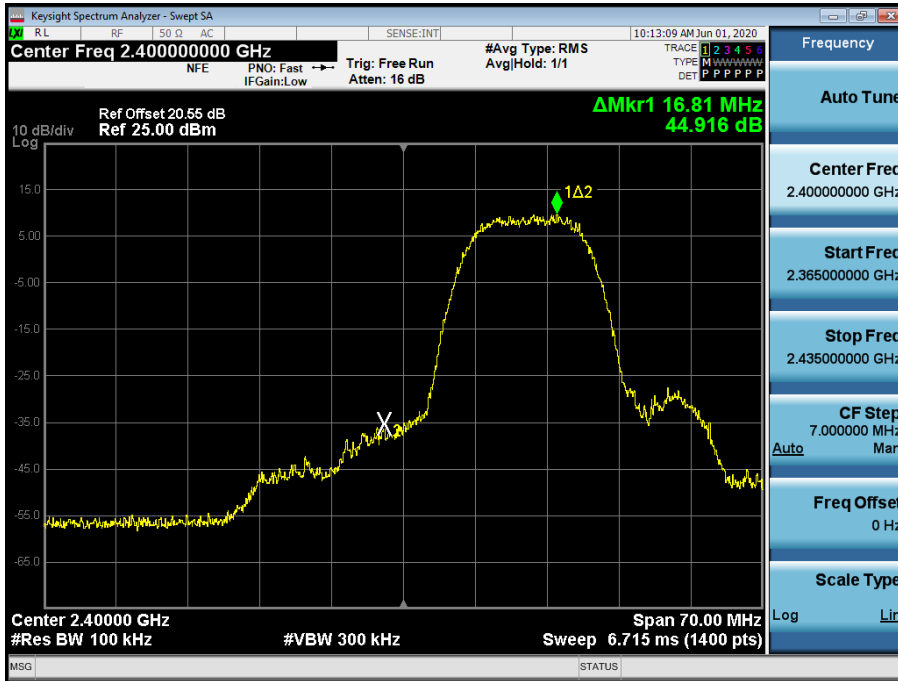


Band Edge (802.11b-CH11)

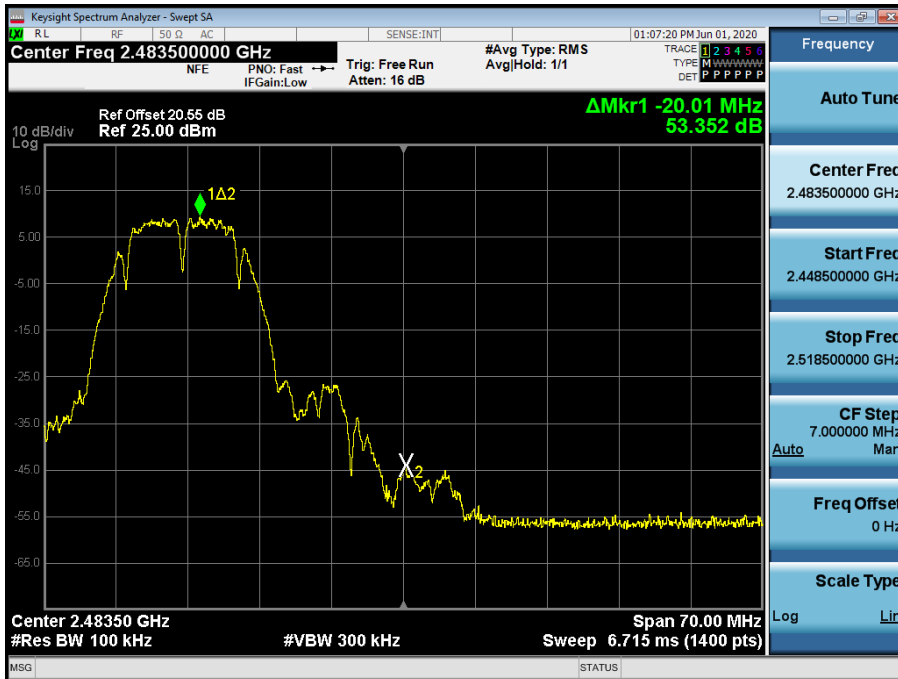


Band Edge (802.11g-CH1)

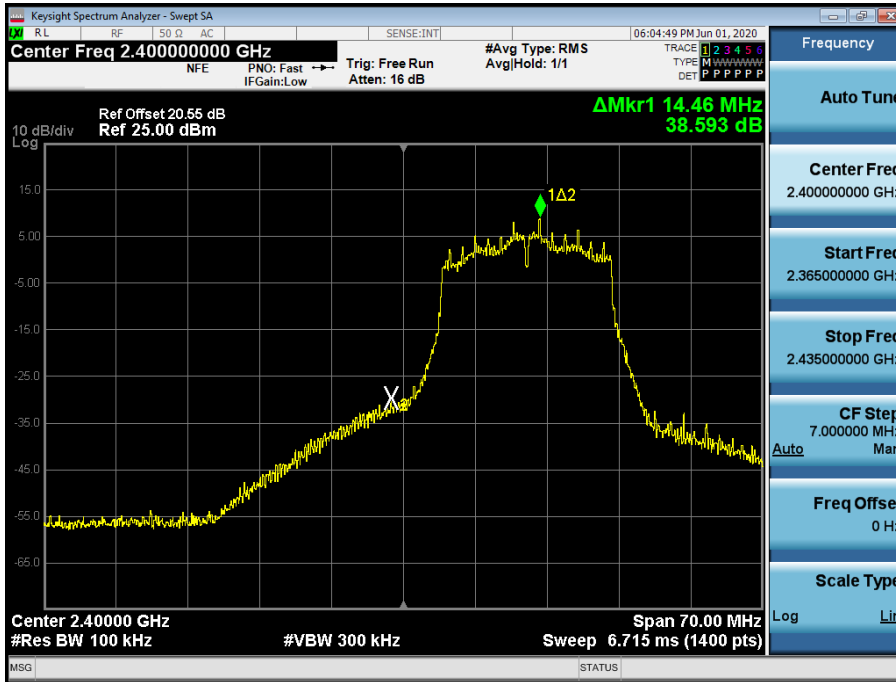


Band Edge (802.11g-CH11)

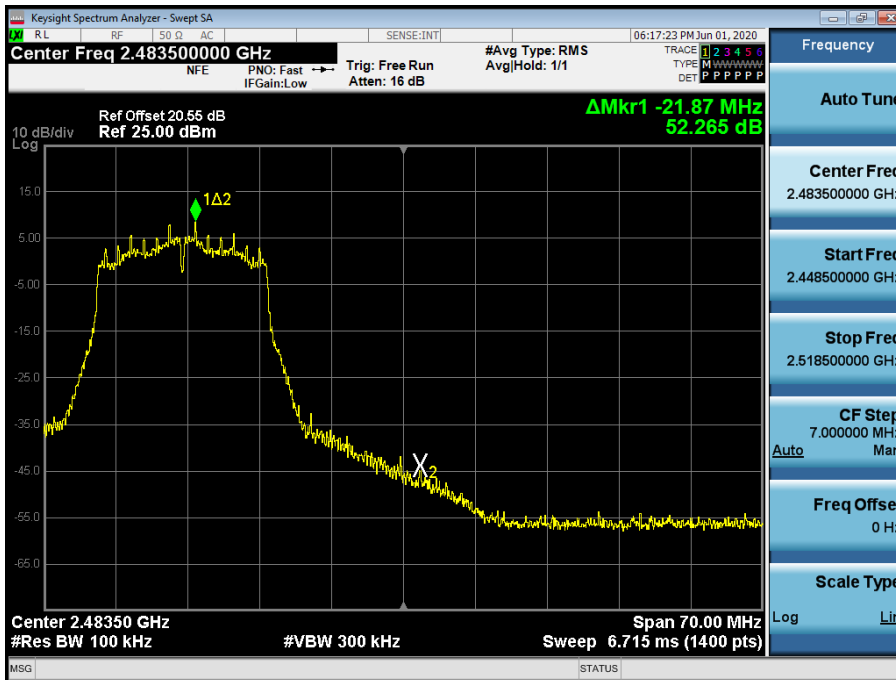

Band Edge (802.11n_HT20 -CH1)

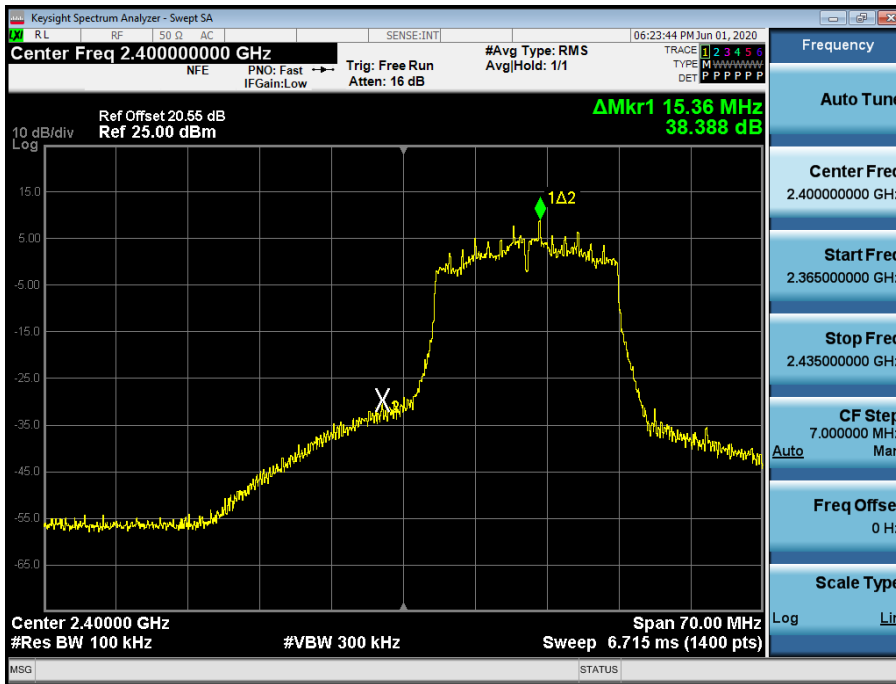


Band Edge (802.11n_HT20 -CH11)

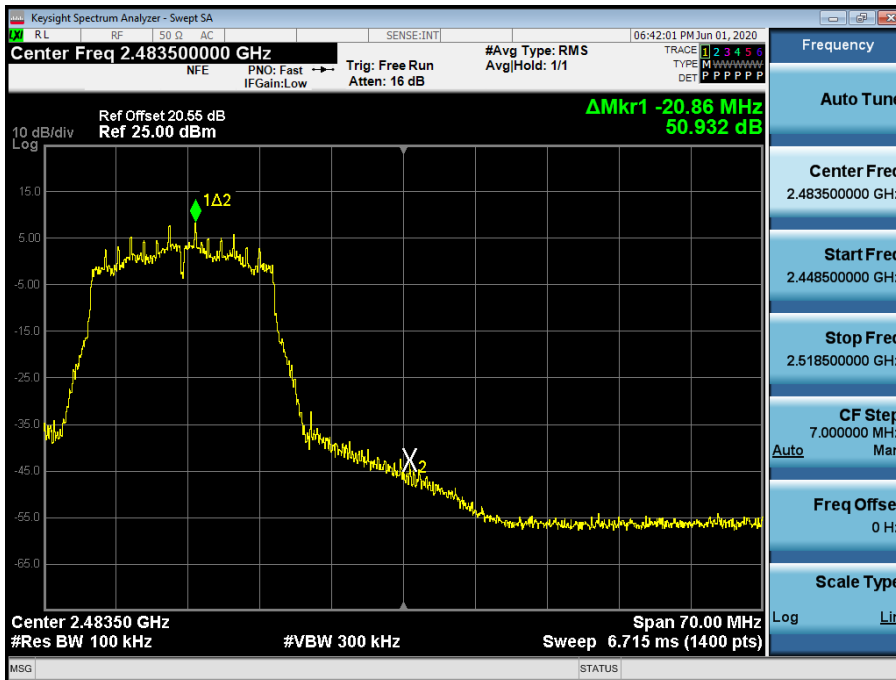

Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

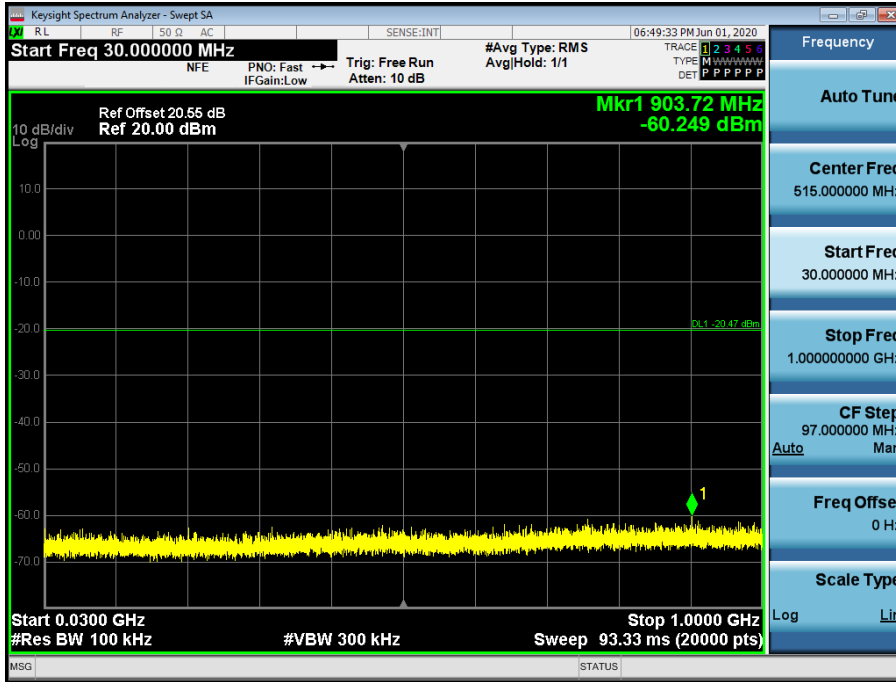


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

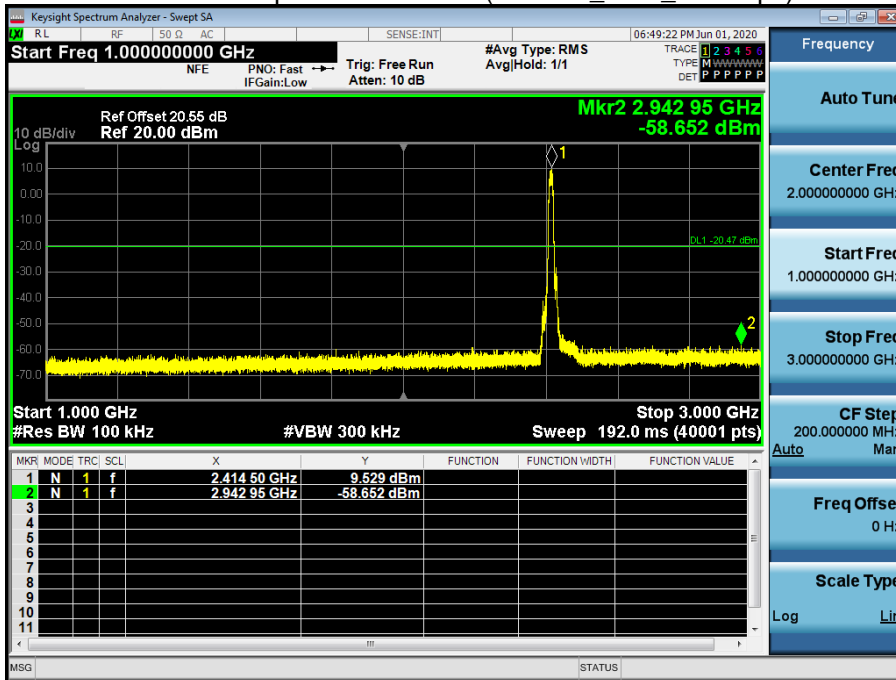


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

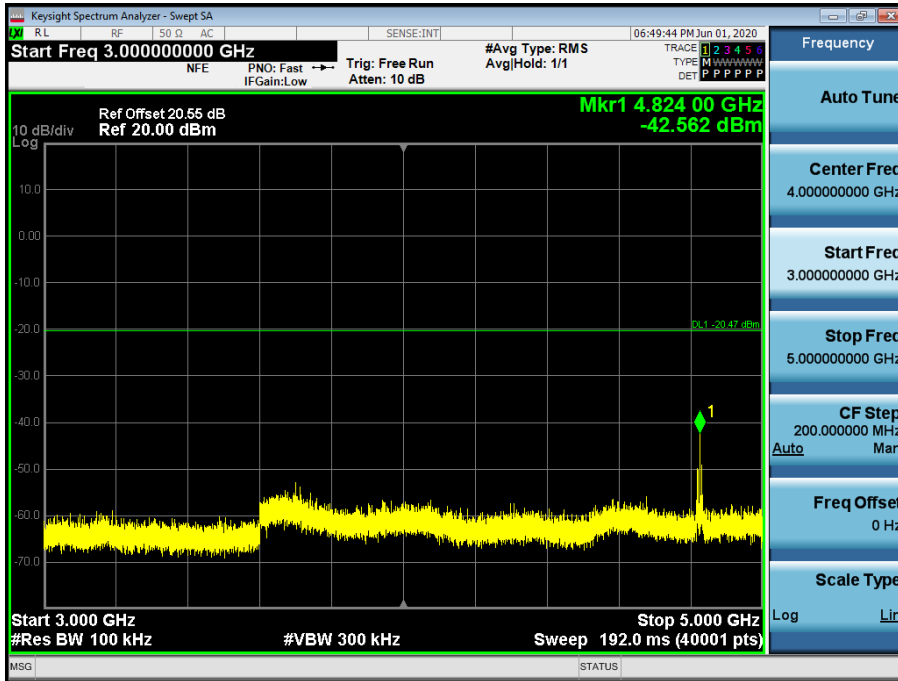


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

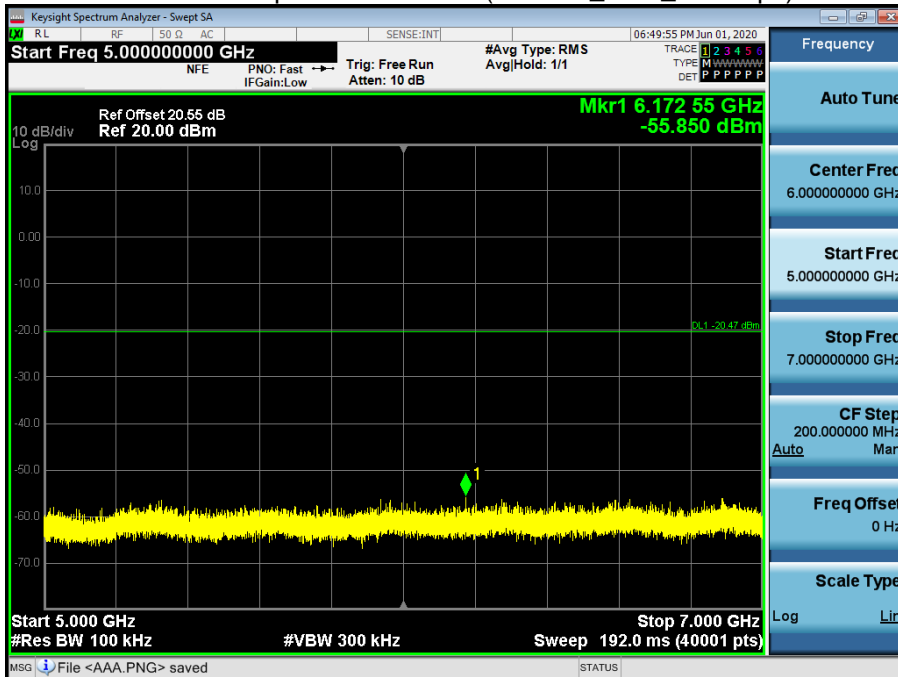


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

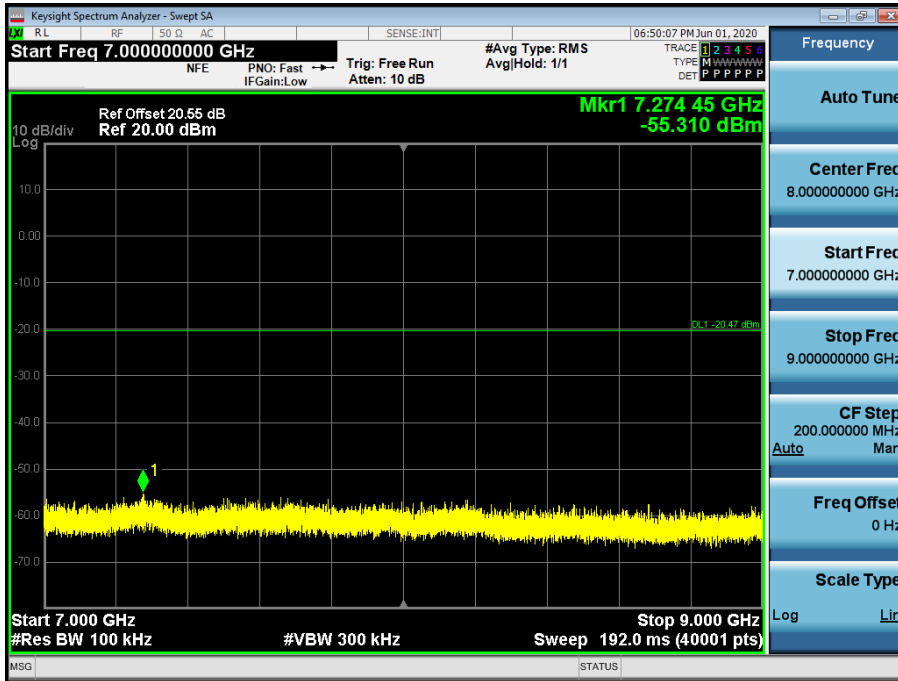


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

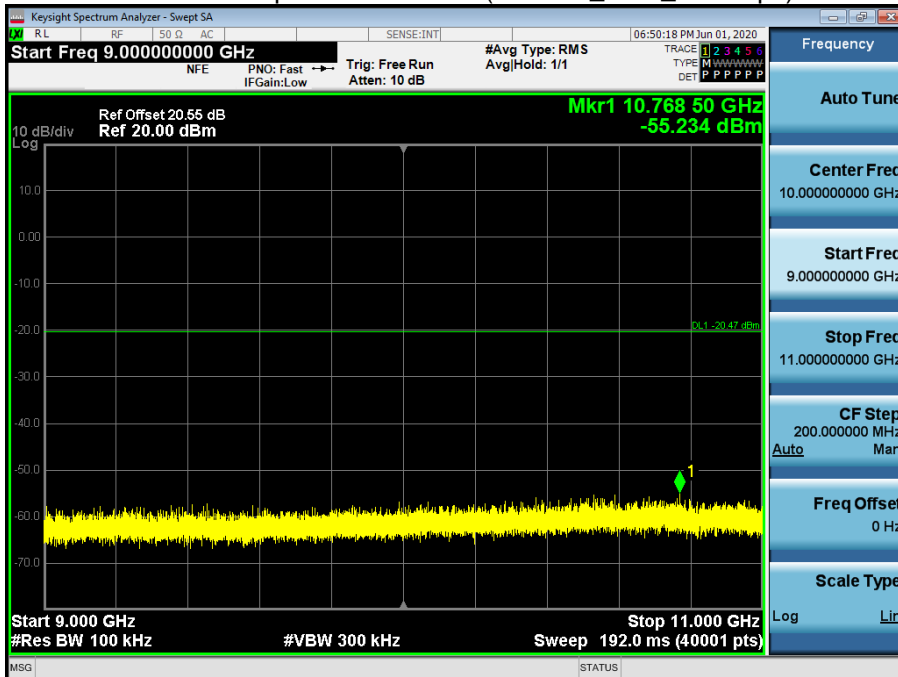


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

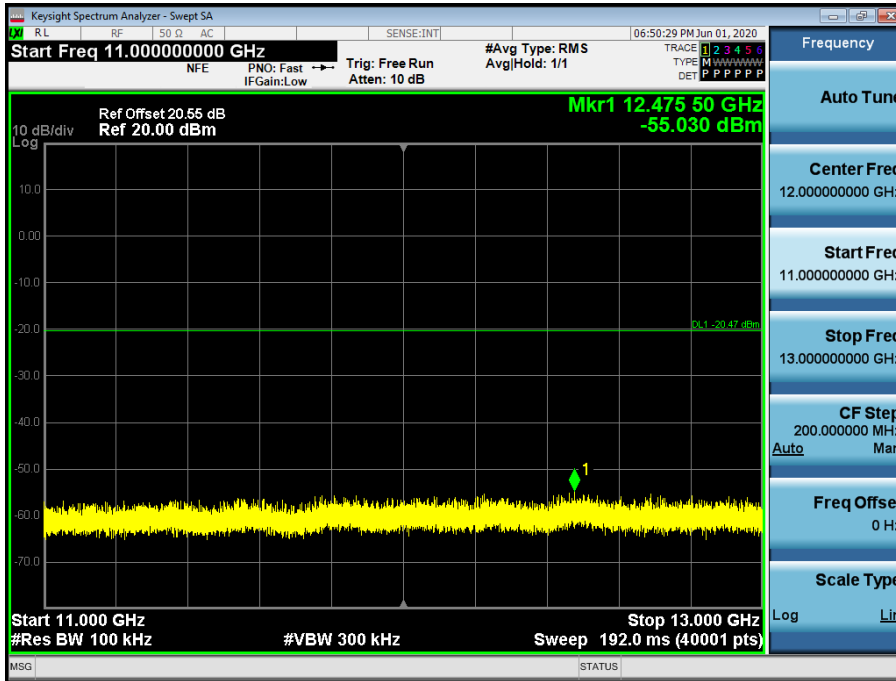


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

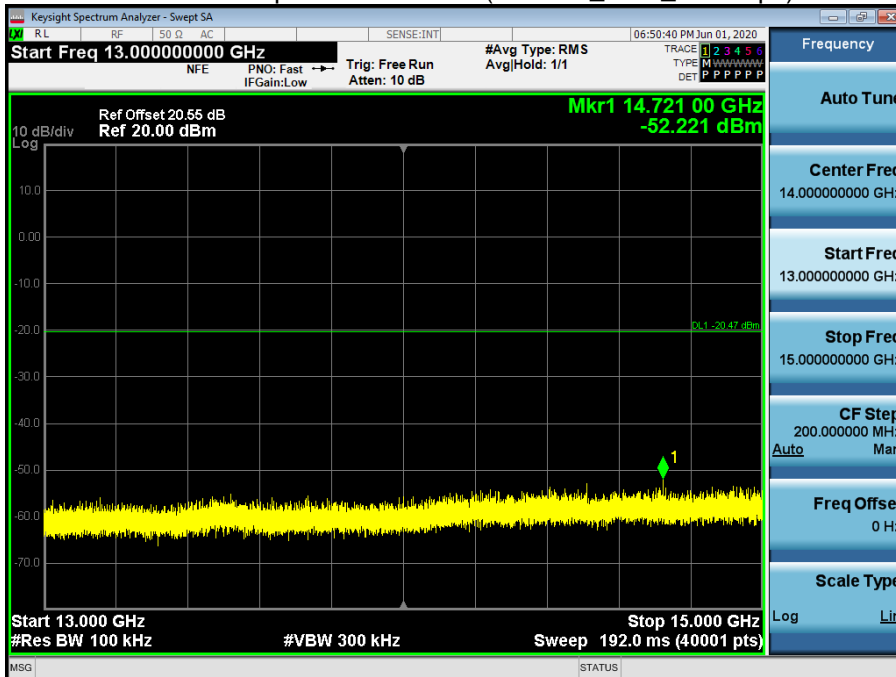


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

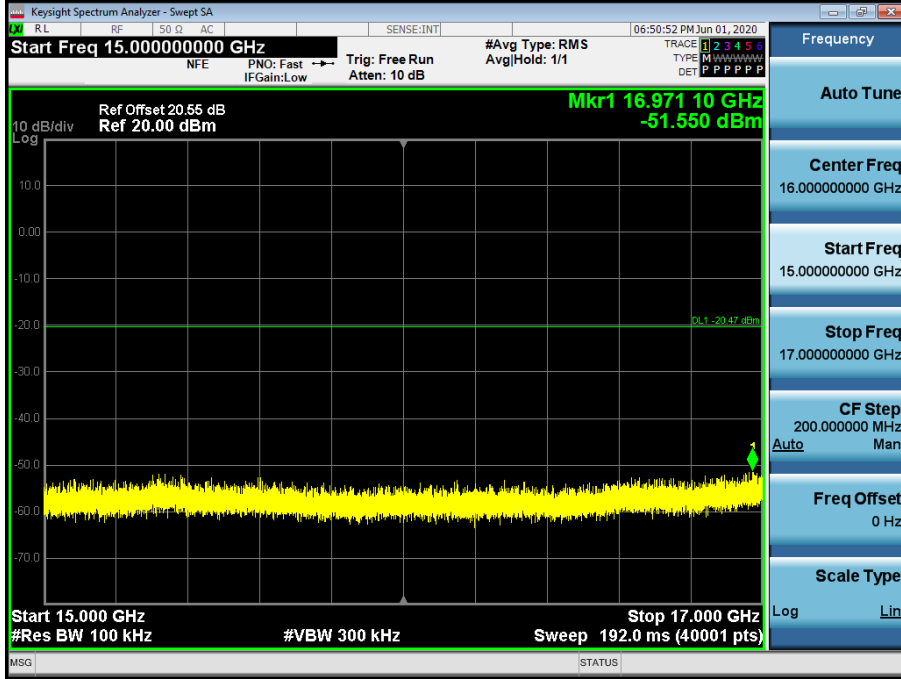


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

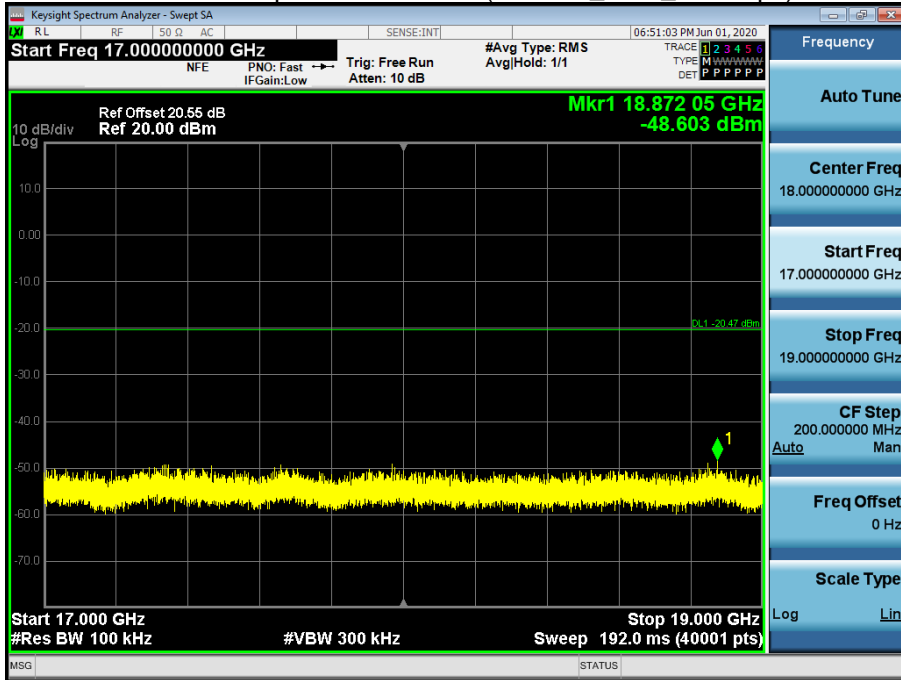


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

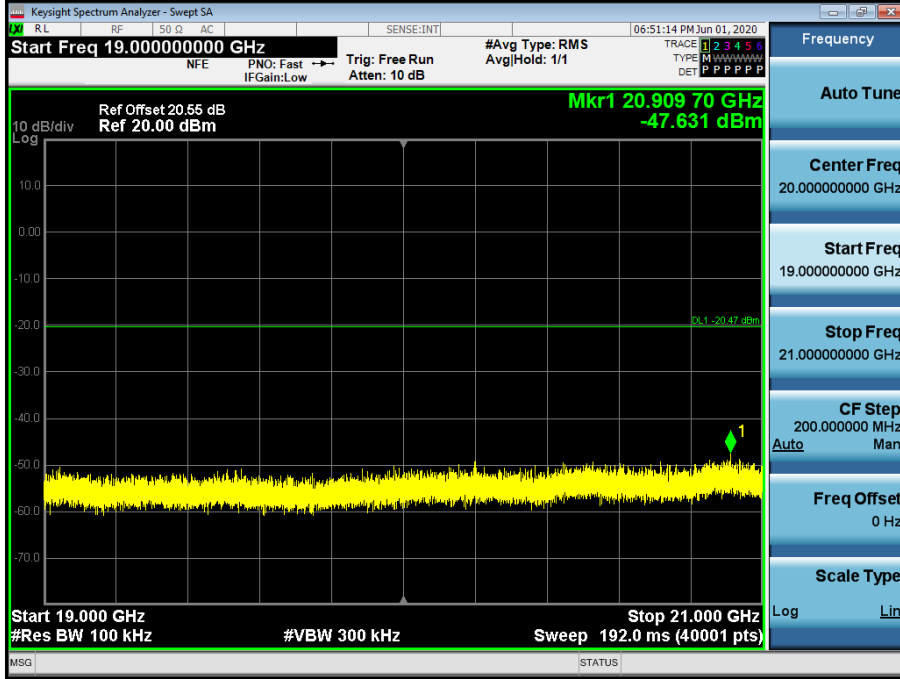


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

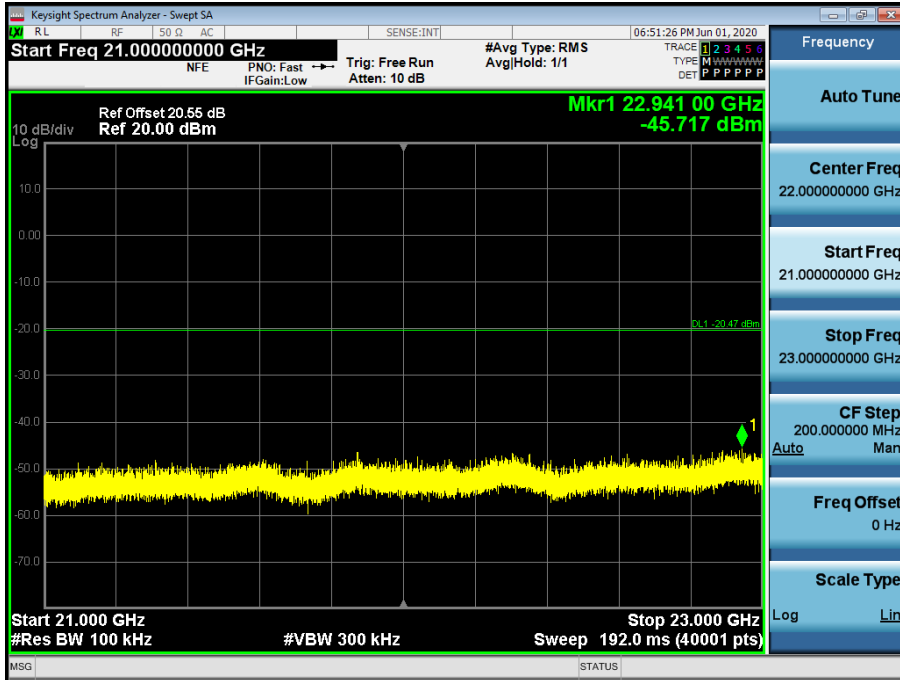

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

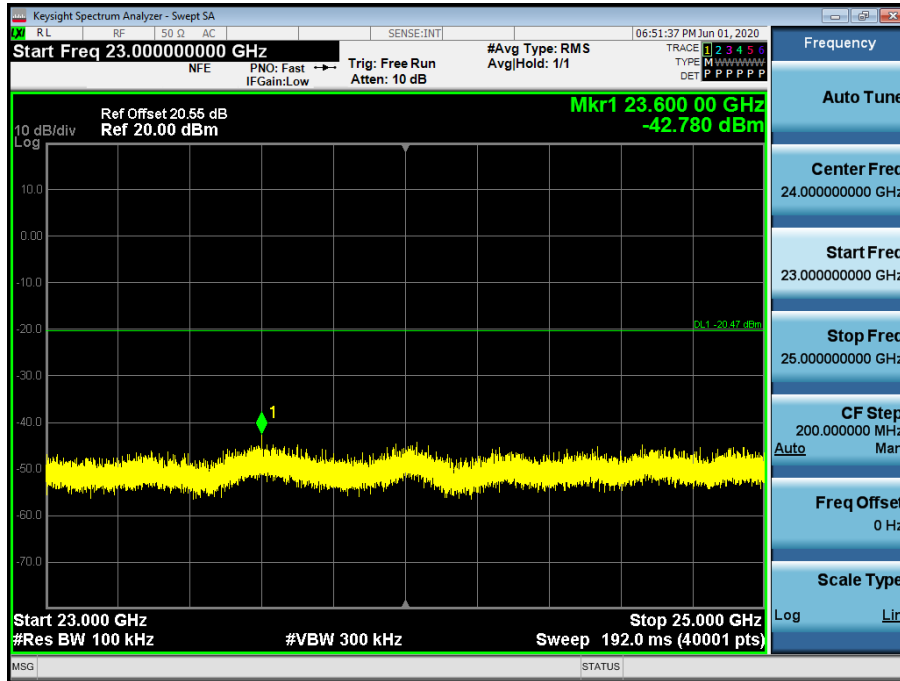

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	49.07	2.92	V	51.99	73.98	21.99	PK
4824	43.28	2.92	V	46.20	53.98	7.78	AV
7236	40.24	8.51	V	48.75	73.98	25.23	PK
7236	28.19	8.51	V	36.70	53.98	17.28	AV
4824	49.38	2.92	H	52.30	73.98	21.68	PK
4824	44.94	2.92	H	47.86	53.98	6.12	AV
7236	40.26	8.51	H	48.77	73.98	25.21	PK
7236	28.37	8.51	H	36.88	53.98	17.10	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	46.39	2.97	V	49.36	73.98	24.62	PK
4874	42.11	2.97	V	45.08	53.98	8.90	AV
7311	40.29	9.23	V	49.52	73.98	24.46	PK
7311	28.22	9.23	V	37.45	53.98	16.53	AV
4874	47.98	2.97	H	50.95	73.98	23.03	PK
4874	43.12	2.97	H	46.09	53.98	7.89	AV
7311	41.12	9.23	H	50.35	73.98	23.63	PK
7311	28.26	9.23	H	37.49	53.98	16.49	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	49.25	2.57	V	51.82	73.98	22.16	PK
4924	46.20	2.57	V	48.77	53.98	5.21	AV
7386	39.55	10.03	V	49.58	73.98	24.40	PK
7386	27.36	10.03	V	37.39	53.98	16.59	AV
4924	50.30	2.57	H	52.87	73.98	21.11	PK
4924	46.97	2.57	H	49.54	53.98	4.44	AV
7386	39.92	10.03	H	49.95	73.98	24.03	PK
7386	27.95	10.03	H	37.98	53.98	16.00	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4824	46.21	0.00	2.92	V	49.13	73.98	24.85	PK
4824	33.04	0.12	2.92	V	36.08	53.98	17.90	AV
7236	40.27	0.00	8.51	V	48.78	73.98	25.20	PK
7236	28.32	0.12	8.51	V	36.95	53.98	17.03	AV
4824	46.33	0.00	2.92	H	49.25	73.98	24.73	PK
4824	33.90	0.12	2.92	H	36.94	53.98	17.04	AV
7236	40.63	0.00	8.51	H	49.14	73.98	24.84	PK
7236	28.40	0.12	8.51	H	37.03	53.98	16.95	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4874	43.03	0.00	2.97	V	46.00	73.98	27.98	PK
4874	32.11	0.12	2.97	V	35.20	53.98	18.78	AV
7311	40.21	0.00	9.23	V	49.44	73.98	24.54	PK
7311	28.14	0.12	9.23	V	37.49	53.98	16.49	AV
4874	44.56	0.00	2.97	H	47.53	73.98	26.45	PK
4874	32.28	0.12	2.97	H	35.37	53.98	18.61	AV
7311	40.64	0.00	9.23	H	49.87	73.98	24.11	PK
7311	28.31	0.12	9.23	H	37.66	53.98	16.32	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4924	46.07	0.00	2.57	V	48.64	73.98	25.34	PK
4924	33.18	0.12	2.57	V	35.86	53.98	18.12	AV
7386	40.12	0.00	10.03	V	50.15	73.98	23.83	PK
7386	27.89	0.12	10.03	V	38.04	53.98	15.94	AV
4924	46.43	0.00	2.57	H	49.00	73.98	24.98	PK
4924	33.89	0.12	2.57	H	36.57	53.98	17.41	AV
7386	40.16	0.00	10.03	H	50.19	73.98	23.79	PK
7386	27.98	0.12	10.03	H	38.13	53.98	15.85	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	45.27	0.00	2.92	V	48.19	73.98	25.79	PK
4824	32.85	0.13	2.92	V	35.89	53.98	18.09	AV
7236	40.99	0.00	8.51	V	49.50	73.98	24.48	PK
7236	28.28	0.13	8.51	V	36.92	53.98	17.06	AV
4824	45.82	0.00	2.92	H	48.74	73.98	25.24	PK
4824	33.70	0.13	2.92	H	36.74	53.98	17.24	AV
7236	41.09	0.00	8.51	H	49.60	73.98	24.38	PK
7236	28.36	0.13	8.51	H	37.00	53.98	16.98	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2437
 Channel No.: 06 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	44.21	0.00	2.97	V	47.18	73.98	26.80	PK
4874	32.96	0.13	2.97	V	36.06	53.98	17.92	AV
7311	40.19	0.00	9.23	V	49.42	73.98	24.56	PK
7311	28.19	0.13	9.23	V	37.55	53.98	16.43	AV
4874	45.98	0.00	2.97	H	48.95	73.98	25.03	PK
4874	33.30	0.13	2.97	H	36.40	53.98	17.58	AV
7311	40.44	0.00	9.23	H	49.67	73.98	24.31	PK
7311	28.22	0.13	9.23	H	37.58	53.98	16.40	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.- A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measure ment Type
4924	44.58	0.00	2.57	V	47.15	73.98	26.83	PK
4924	33.17	0.13	2.57	V	35.86	53.98	18.12	AV
7386	40.10	0.00	10.03	V	50.13	73.98	23.85	PK
7386	27.69	0.13	10.03	V	37.85	53.98	16.13	AV
4924	45.81	0.00	2.57	H	48.38	73.98	25.60	PK
4924	33.53	0.13	2.57	H	36.22	53.98	17.76	AV
7386	40.41	0.00	10.03	H	50.44	73.98	23.54	PK
7386	27.84	0.13	10.03	H	38.00	53.98	15.98	AV


☑ **Test Plots (Worst case : X-H)**

Radiated Spurious Emissions plot – Average Reading (802.11b_1 Mbps, Ch.11 2nd Harmonic)

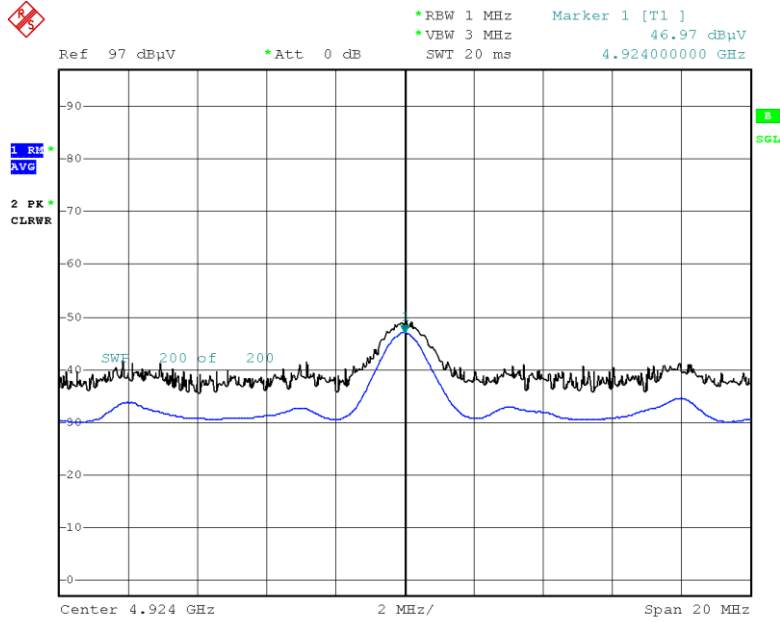

Date: 28.MAY.2020 08:53:22

Radiated Spurious Emissions plot – Peak Reading (802.11b_1 Mbps, Ch.11 2nd Harmonic)

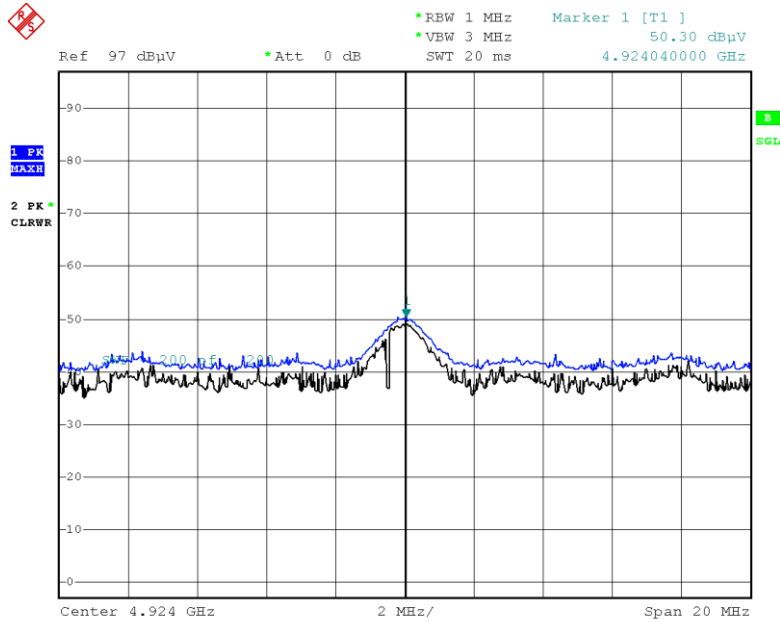

Date: 28.MAY.2020 08:53:36

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G +ATT+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	53.15	0.56	H	53.71	73.98	20.27	PK
2390.0	44.57	0.56	H	45.13	53.98	8.85	AV
2390.0	50.27	0.56	V	50.83	73.98	23.15	PK
2390.0	41.66	0.56	V	42.22	53.98	11.76	AV
2483.5	52.09	1.24	H	53.33	73.98	20.65	PK
2483.5	44.44	1.24	H	45.68	53.98	8.30	AV
2483.5	50.39	1.24	V	51.63	73.98	22.35	PK
2483.5	41.26	1.24	V	42.50	53.98	11.48	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G +ATT+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	61.65	0.00	0.56	H	62.21	73.98	11.77	PK
2390.0	45.43	0.12	0.56	H	46.10	53.98	7.88	AV
2390.0	56.87	0.00	0.56	V	57.43	73.98	16.55	PK
2390.0	40.45	0.12	0.56	V	41.12	53.98	12.86	AV
2483.5	59.69	0.00	1.24	H	60.93	73.98	13.05	PK
2483.5	43.46	0.12	1.24	H	44.81	53.98	9.17	AV
2483.5	57.99	0.00	1.24	V	59.23	73.98	14.75	PK
2483.5	40.36	0.12	1.24	V	41.71	53.98	12.27	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G +ATT+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	62.02	0.00	0.56	H	62.58	73.98	11.40	PK
2390.0	47.18	0.13	0.56	H	47.86	53.98	6.12	AV
2390.0	59.78	0.00	0.56	V	60.34	73.98	13.64	PK
2390.0	41.39	0.13	0.56	V	42.07	53.98	11.91	AV
2483.5	59.54	0.00	1.24	H	60.78	73.98	13.20	PK
2483.5	46.26	0.13	1.24	H	47.62	53.98	6.36	AV
2483.5	58.31	0.00	1.24	V	59.55	73.98	14.43	PK
2483.5	41.57	0.13	1.24	V	42.93	53.98	11.05	AV

Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2417 MHz, 2457 MHz
 Channel No. 02 Ch, 10 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G +ATT+D.F [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	51.88	0.00	0.56	H	52.44	73.98	21.54	PK
2390.0	40.38	0.13	0.56	H	41.06	53.98	12.92	AV
2390.0	47.78	0.00	0.56	V	48.34	73.98	25.64	PK
2390.0	36.89	0.13	0.56	V	37.57	53.98	16.41	AV
2483.5	57.98	0.00	1.24	H	59.22	73.98	14.76	PK
2483.5	45.68	0.13	1.24	H	47.04	53.98	6.94	AV
2483.5	50.04	0.00	1.24	V	51.28	73.98	22.70	PK
2483.5	38.36	0.13	1.24	V	39.72	53.98	14.26	AV


■ Test Plots (Worst case : Z-H)

Radiated Restricted Band Edges plot – Average Reading (802.11n (HT20)_ Ch.1)

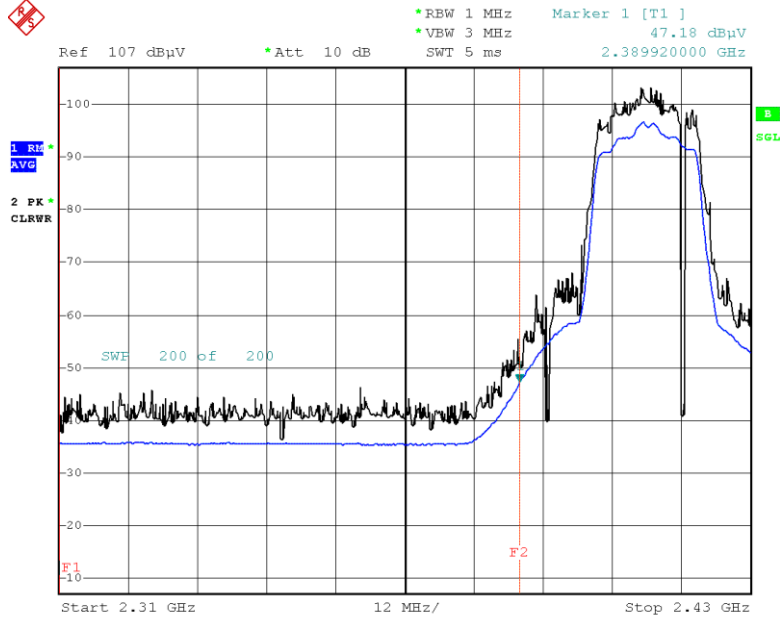

Date: 1.JUN.2020 02:50:26

Radiated Restricted Band Edges plot – Peak Reading (802.11n (HT20)_ Ch.1)

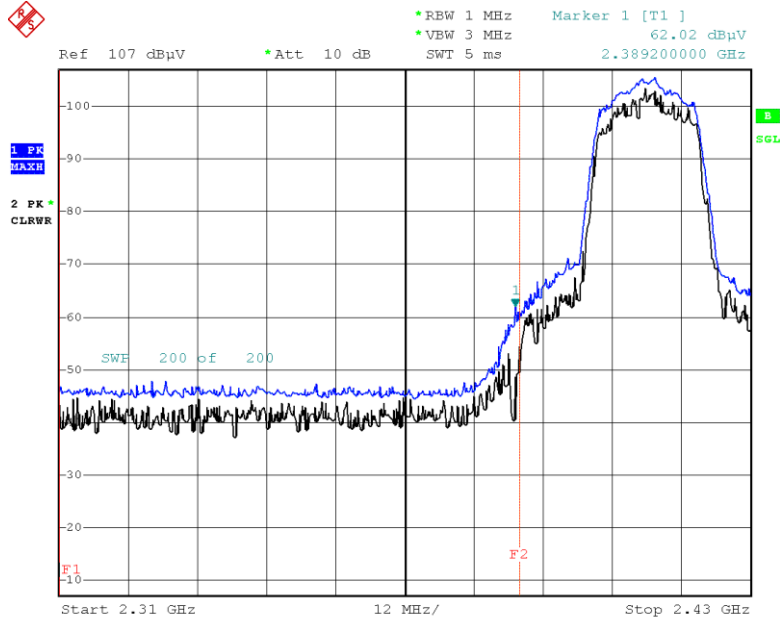

Date: 1.JUN.2020 02:50:42

Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

WLAN 2.4G MODE_L1


1 / 2

HCT TEST Report

Common Information

EUT: SM-A516V
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: WIFI 2.4G MODE_L1

FCC CLASS B_Exten Cable

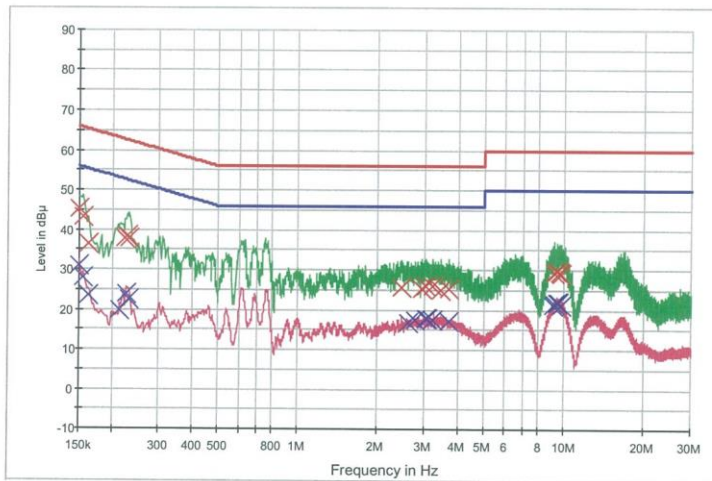

— FCC CLASS B_QP —×— Final Result 1-QPK —×— Preview Result 1-PK+
 —×— Preview Result 2-AVG —×— Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	45.1	9.000	Off	L1	9.8	20.9	66.0
0.156000	43.1	9.000	Off	L1	9.8	22.6	65.7
0.162000	36.3	9.000	Off	L1	9.8	29.0	65.4
0.224000	37.8	9.000	Off	L1	9.8	24.9	62.7
0.228000	38.5	9.000	Off	L1	9.8	24.0	62.5
0.232000	37.8	9.000	Off	L1	9.8	24.6	62.4
2.468000	25.6	9.000	Off	L1	9.9	30.4	56.0
2.926000	25.2	9.000	Off	L1	9.9	30.8	56.0
3.048000	26.1	9.000	Off	L1	9.9	29.9	56.0
3.230000	25.9	9.000	Off	L1	9.9	30.1	56.0
3.448000	25.1	9.000	Off	L1	9.9	30.9	56.0
3.690000	25.4	9.000	Off	L1	10.0	30.6	56.0
9.220000	29.3	9.000	Off	L1	10.2	30.7	60.0
9.450000	29.6	9.000	Off	L1	10.2	30.4	60.0
9.472000	29.6	9.000	Off	L1	10.2	30.4	60.0
9.662000	29.2	9.000	Off	L1	10.2	30.8	60.0
9.678000	29.4	9.000	Off	L1	10.2	30.6	60.0
9.750000	28.9	9.000	Off	L1	10.2	31.1	60.0

2020-06-02

오전 9:22:15

WLAN 2.4G MODE_L1

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	31.1	9.000	Off	L1	9.8	24.9	56.0
0.156000	27.9	9.000	Off	L1	9.8	27.8	55.7
0.162000	23.7	9.000	Off	L1	9.8	31.7	55.4
0.214000	19.9	9.000	Off	L1	9.8	33.2	53.0
0.226000	23.8	9.000	Off	L1	9.8	28.8	52.6
0.232000	22.5	9.000	Off	L1	9.8	29.8	52.4
2.588000	16.8	9.000	Off	L1	9.9	29.2	46.0
2.772000	17.3	9.000	Off	L1	9.9	28.7	46.0
3.048000	17.7	9.000	Off	L1	9.9	28.3	46.0
3.052000	17.8	9.000	Off	L1	9.9	28.2	46.0
3.230000	17.6	9.000	Off	L1	9.9	28.4	46.0
3.690000	17.0	9.000	Off	L1	10.0	29.0	46.0
9.118000	21.3	9.000	Off	L1	10.2	28.7	50.0
9.220000	21.6	9.000	Off	L1	10.2	28.4	50.0
9.450000	21.9	9.000	Off	L1	10.2	28.1	50.0
9.472000	21.7	9.000	Off	L1	10.2	28.3	50.0
9.558000	21.8	9.000	Off	L1	10.2	28.2	50.0
9.750000	21.1	9.000	Off	L1	10.2	28.9	50.0

2020-06-02

오전 9:22:15

Conducted Emissions (Line 2)

WLAN 2.4G MODE_N


1 / 2

HCT TEST Report

Common Information

EUT: SM-A516V
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: WIFI 2.4G MODE_N

FCC CLASS B_Exten Cable

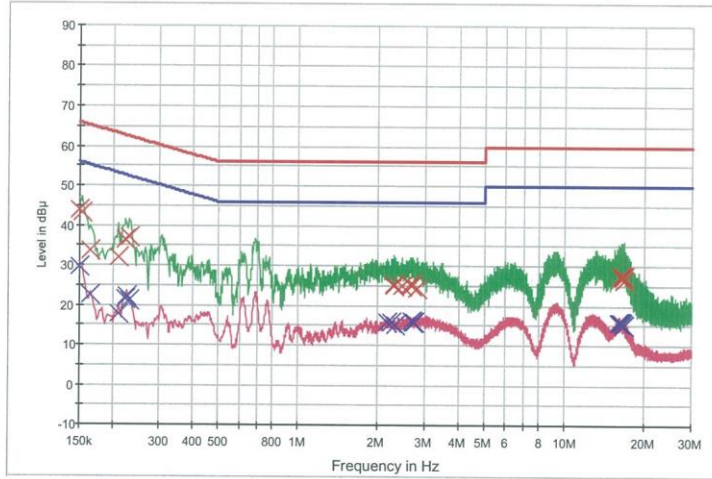

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG x Final Result 1-QPK x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	43.7	9.000	Off	N	9.8	22.3	66.0
0.154000	43.3	9.000	Off	N	9.8	22.5	65.8
0.164000	33.7	9.000	Off	N	9.8	31.6	65.3
0.210000	32.1	9.000	Off	N	9.8	31.1	63.2
0.224000	36.4	9.000	Off	N	9.8	26.2	62.7
0.230000	37.1	9.000	Off	N	9.8	25.4	62.4
2.278000	25.0	9.000	Off	N	9.9	31.0	56.0
2.290000	25.3	9.000	Off	N	9.9	30.7	56.0
2.450000	24.8	9.000	Off	N	9.9	31.2	56.0
2.642000	25.1	9.000	Off	N	9.9	30.9	56.0
2.656000	24.8	9.000	Off	N	9.9	31.2	56.0
2.782000	24.1	9.000	Off	N	9.9	31.9	56.0
16.288000	27.3	9.000	Off	N	10.5	32.7	60.0
16.362000	27.5	9.000	Off	N	10.5	32.5	60.0
16.544000	27.3	9.000	Off	N	10.5	32.7	60.0
16.654000	26.4	9.000	Off	N	10.5	33.6	60.0
16.706000	27.1	9.000	Off	N	10.5	32.9	60.0
16.750000	26.1	9.000	Off	N	10.5	33.9	60.0

2020-06-02

오전 9:31:09

WLAN 2.4G MODE_N

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	29.7	9.000	Off	N	9.8	26.3	56.0
0.164000	22.5	9.000	Off	N	9.8	32.8	55.3
0.210000	17.8	9.000	Off	N	9.8	35.5	53.2
0.222000	21.6	9.000	Off	N	9.8	31.1	52.7
0.226000	22.3	9.000	Off	N	9.8	30.3	52.6
0.232000	21.3	9.000	Off	N	9.8	31.1	52.4
2.166000	15.7	9.000	Off	N	9.9	30.3	46.0
2.228000	15.7	9.000	Off	N	9.9	30.3	46.0
2.310000	15.1	9.000	Off	N	9.9	30.9	46.0
2.656000	16.1	9.000	Off	N	9.9	29.9	46.0
2.690000	15.8	9.000	Off	N	9.9	30.2	46.0
2.732000	15.8	9.000	Off	N	9.9	30.2	46.0
15.878000	15.8	9.000	Off	N	10.5	34.2	50.0
15.996000	15.7	9.000	Off	N	10.5	34.3	50.0
16.218000	15.8	9.000	Off	N	10.5	34.2	50.0
16.288000	15.8	9.000	Off	N	10.5	34.2	50.0
16.544000	15.5	9.000	Off	N	10.5	34.5	50.0
16.706000	15.2	9.000	Off	N	10.5	34.8	50.0

2020-06-02

오전 9:31:09

9.9 CONFIRMATION OF GEO-LOCATION MECHANISM


The device uses MCC information obtained from the public cellular carrier to determine that it is operating outside the U.S. and then enable channels 12 and 13 only if a non-US MCC that supports channel 12 and 13 is confirmed.

The device uses a geo-location mechanism based on the Country in order to only enable certain WLAN DTS bands when the device is not in the USA.

WLAN	Country code = US	Country code = KR(Korea)
CH 12	Did not connect	Connected
CH 13	Did not connect	Connected

The verification tests confirmed the operational of the geo-location mechanism.

Test Setup

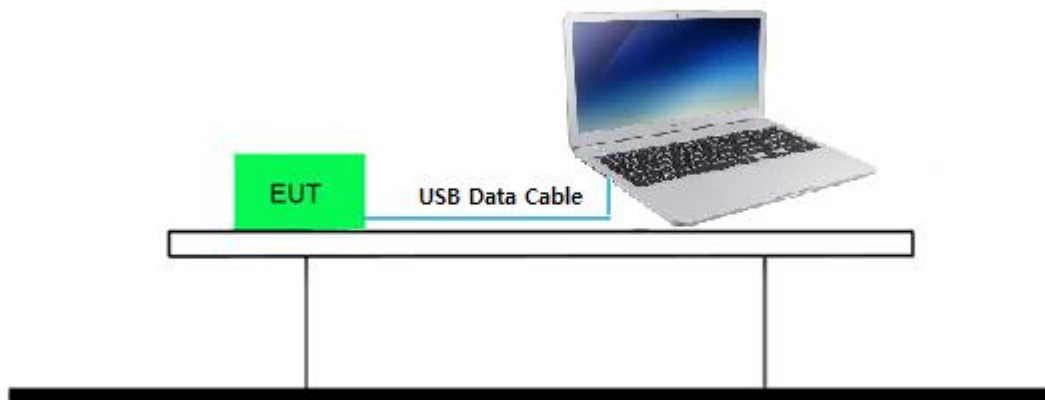

Test Procedure

In case of Country code

1. Open Command Prompt.
2. At the Command Prompt, enter the command.
 - C:\adb>adb remount
 - C:\adb>adb shell
 - gts4lv:/ # wpa_cli driver country US // Setting the country.
 - gts4lv:/ # iw list // Channel list is obtain.

In case of airplane mode

1. airplane mode on
 2. Wifi on
 3. Open Command Prompt.
 4. At the Command Prompt, enter the command.
- C:\adb>adb remount
 - C:\adb>adb shell
 - gts4lv:/ # iw reg get // support band in case of airplane mode

Setting the country for product

Country code = US	Country code = KR(Korea)
<pre> a51xq:/ # wpa_cli DRIVER_COUNTRY US Using interface 'wlan0' OK a51xq:/ # iw reg get global country 00: DFS-UNSET (2402 - 2472 @ 40), (N/A, 20), (N/A) (2457 - 2482 @ 40), (N/A, 20), (N/A), PASSIVE-SCAN (2474 - 2494 @ 20), (N/A, 20), (N/A), NO-OFDM, PASSIVE-SCAN (5170 - 5250 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5250 - 5330 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5490 - 5710 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5735 - 5835 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (57240 - 63720 @ 2160), (N/A, 0), (N/A) phy#0 (self-managed) country US: DFS-FCC (2402 - 2472 @ 40), (6, 30), (N/A) (5170 - 5250 @ 80), (6, 24), (N/A) (5250 - 5330 @ 80), (6, 24), (0 ms), DFS (5490 - 5730 @ 160), (6, 24), (0 ms), DFS (5735 - 5835 @ 80), (6, 30), (N/A) </pre>	<pre> a51xq:/ # wpa_cli DRIVER_COUNTRY KR Using interface 'wlan0' OK a51xq:/ # iw reg get global country 00: DFS-UNSET (2402 - 2472 @ 40), (N/A, 20), (N/A) (2457 - 2482 @ 40), (N/A, 20), (N/A), PASSIVE-SCAN (2474 - 2494 @ 20), (N/A, 20), (N/A), NO-OFDM, PASSIVE-SCAN (5170 - 5250 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5250 - 5330 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5490 - 5710 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5735 - 5835 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (57240 - 63720 @ 2160), (N/A, 0), (N/A) phy#0 (self-managed) country KR: DFS-UNSET (2402 - 2482 @ 40), (N/A, 20), (N/A) (5170 - 5250 @ 80), (6, 20), (N/A) (5250 - 5330 @ 80), (6, 23), (0 ms), DFS (5490 - 5730 @ 160), (6, 30), (0 ms), DFS (5735 - 5835 @ 80), (6, 30), (N/A) </pre>

Did not connect Airplane mode	
Airplane off	Airplane on
<pre> a51xq:/ # wpa_cli DRIVER COUNTRY US Using interface 'wlan0' OK a51xq:/ # iw reg get global country 00: DFS-UNSET (2402 - 2472 @ 40), (N/A, 20), (N/A) (2457 - 2482 @ 40), (N/A, 20), (N/A), PASSIVE-SCAN (2474 - 2494 @ 20), (N/A, 20), (N/A), NO-OFDM, PASSIVE-SCAN (5170 - 5250 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5250 - 5330 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5490 - 5710 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5735 - 5835 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (57240 - 63720 @ 2160), (N/A, 0), (N/A) phy#0 (self-managed) country US: DFS-FCC (2402 - 2472 @ 40), (6, 30), (N/A) (5170 - 5250 @ 80), (6, 24), (N/A) (5250 - 5330 @ 80), (6, 24), (0 ms), DFS (5490 - 5730 @ 160), (6, 24), (0 ms), DFS (5735 - 5835 @ 80), (6, 30), (N/A) a51xq:/ # iw reg get global country 00: DFS-UNSET (2402 - 2472 @ 40), (N/A, 20), (N/A) (2457 - 2482 @ 40), (N/A, 20), (N/A), PASSIVE-SCAN (2474 - 2494 @ 20), (N/A, 20), (N/A), NO-OFDM, PASSIVE-SCAN (5170 - 5250 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5250 - 5330 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5490 - 5710 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5735 - 5835 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (57240 - 63720 @ 2160), (N/A, 0), (N/A) phy#0 (self-managed) country KR: DFS-UNSET (2402 - 2482 @ 40), (N/A, 20), (N/A) (5170 - 5250 @ 80), (6, 20), (N/A) (5250 - 5330 @ 80), (6, 23), (0 ms), DFS (5490 - 5730 @ 160), (6, 30), (0 ms), DFS (5735 - 5835 @ 80), (6, 30), (N/A) </pre>	<pre> a51xq:/ # wpa_cli DRIVER COUNTRY US Using interface 'wlan0' OK a51xq:/ # iw reg get global country 00: DFS-UNSET (2402 - 2472 @ 40), (N/A, 20), (N/A) (2457 - 2482 @ 40), (N/A, 20), (N/A), PASSIVE-SCAN (2474 - 2494 @ 20), (N/A, 20), (N/A), NO-OFDM, PASSIVE-SCAN (5170 - 5250 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5250 - 5330 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5490 - 5710 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (5735 - 5835 @ 80), (N/A, 20), (N/A), PASSIVE-SCAN (57240 - 63720 @ 2160), (N/A, 0), (N/A) phy#0 (self-managed) country US: DFS-FCC (2402 - 2472 @ 40), (6, 30), (N/A) (5170 - 5250 @ 80), (6, 24), (N/A) (5250 - 5330 @ 80), (6, 24), (0 ms), DFS (5490 - 5730 @ 160), (6, 24), (0 ms), DFS (5735 - 5835 @ 80), (6, 30), (N/A) </pre>

Note : The frequency range is occupied band, not center frequency.

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/11/2019	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/18/2019	Annual	100033
ESPAC	SU-642 / Temperature Chamber	03/18/2020	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/11/2020	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	05/06/2020	Annual	MY53310623
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45101406
Agilent	N1921A / Power Sensor	03/23/2020	Annual	MY55220026
Agilent	87300B / Directional Coupler	11/11/2019	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/25/2020	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/18/2019	Annual	KR75303960
Weinschel	2-20 / Attenuator(20 dB)	07/02/2019	Annual	BR0592
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/16/2019	Annual	100422

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9160 / Hybrid Antenna	08/09/2018	Biennial	3368
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/31/2018	Biennial	00895
Schwarzbeck	BBHA 9120D / Horn Antenna	11/18/2019	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/11/2019	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/26/2019	Annual	101068-SZ
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/21/2020	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
CERNEX WEINSCHEL	CBLU1183540B-01/Broadband Bench Top LNA 56-10 / Attenuator(10 dB)	12/24/2019	Annual	N/A
CERNEX Api tech.	CBL06185030 / Broadband Low Noise Amplifier 18B-03 / Attenuator (3 dB)	12/24/2019	Annual	N/A
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	12/24/2019	Annual	N/A
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	12/24/2019	Annual	N/A
T&M SYSTEM	COAXIAL ATTENUATOR / Thru	12/24/2019	Annual	N/A
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/18/2020	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2006-FC003-P