

# FCC UNII REPORT

## Certification

<b>Applicant Name:</b> SAMSUNG Electronics Co., Ltd.	<b>Date of Issue:</b> June 25, 2020
<b>Address:</b> 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	<b>Test Site/Location:</b> 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
	<b>Report No.:</b> HCT-RF-2006-FC007-R1

<b>FCC ID:</b>	<b>A3LSMA516V</b>
<b>APPLICANT:</b>	<b>SAMSUNG Electronics Co., Ltd.</b>

<b>Model:</b>	SM-A516V
<b>EUT Type:</b>	Mobile Phone
<b>Modulation type</b>	OFDM
<b>FCC Classification:</b>	Unlicensed National Information Infrastructure(NII)
<b>FCC Rule Part(s):</b>	Part 15.407

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2006-FC007-R1

---

REVIEWED BY



---

Report prepared by : Jin Gwan Lee  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

This test results were applied only to the test methods required by the standard.

**This laboratory is not accredited for the test results marked \*.**

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2006-FC007	June 18, 2020	- First Approval Report
HCT-RF-2006-FC007-R1	June 25, 2020	- On Page 41, Revised 802.11a limit

# Table of Contents

REVIEWED BY .....	2
1. GENERAL INFORMATION .....	5
EUT DESCRIPTION .....	5
2. MAXIMUM OUTPUT POWER .....	6
3. TEST METHODOLOGY .....	7
EUT CONFIGURATION .....	7
EUT EXERCISE .....	7
GENERAL TEST PROCEDURES .....	7
DESCRIPTION OF TEST MODES .....	7
4. INSTRUMENT CALIBRATION .....	8
5. FACILITIES AND ACCREDITATIONS .....	8
5.1 FACILITIES .....	8
5.2 EQUIPMENT .....	8
6. ANTENNA REQUIREMENTS .....	8
7. MEASUREMENT UNCERTAINTY .....	9
8. DESCRIPTION OF TESTS .....	10
9. SUMMARY OF TEST RESULTS .....	26
10. TEST RESULT .....	27
10.1 DUTY CYCLE .....	27
10.2 26 dB BANDWIDTH .....	30
10.3 6dB BANDWIDTH .....	39
10.4 OUTPUT POWER MEASUREMENT .....	41
10.5 POWER SPECTRAL DENSITY .....	44
10.6 FREQUENCY STABILITY .....	53
10.6.1 80MHz BW .....	53
10.7 STRADDLE CHANNEL .....	69
10.7.1 26dB Bandwidth .....	69
10.7.2 6dB Bandwidth .....	72
10.7.3 Output Power .....	75
10.7.4 Power Spectral Density .....	78
10.8 RADIATED SPURIOUS EMISSIONS .....	81
10.9 RADIATED RESTRICTED BAND EDGE .....	113
10.10 POWERLINE CONDUCTED EMISSIONS .....	141
11. LIST OF TEST EQUIPMENT .....	145
12. ANNEX A_ TEST SETUP PHOTO .....	147

## 1. GENERAL INFORMATION

### EUT DESCRIPTION

<b>Model</b>	SM-A516V	
<b>Additional Model</b>	-	
<b>EUT Type</b>	Mobile Phone	
<b>Power Supply</b>	DC 3.88 V	
<b>Battery Information</b>	Model: EB-BA516AMY Type: Li-ion Battery	
<b>Travel Adapter Information</b>	Model : EP-TA200 Manufacture: DONG YANG E&P	
<b>Data Cable Information</b>	Model : EP-DR140ABZ Manufacture: RFTech	
<b>Ear-jack Information</b>	Model : EHS64AVFWE Manufacture: ALMUS	
<b>Modulation Type</b>	OFDM : 802.11a, 802.11n, 802.11ac	
<b>Frequency Range (MHz)</b>	U-NII-1	20MHz BW : 5180 - 5240
		40MHz BW : 5190 - 5230
		80MHz BW : 5210
	U-NII-2A	20MHz BW : 5260 - 5320
40MHz BW : 5270 - 5310		
80MHz BW : 5290		
U-NII-2C	20MHz BW : 5500 - 5720	
	40MHz BW : 5510 - 5710	
	80MHz BW : 5530 – 5690	
U-NII-3	20MHz BW : 5745 - 5825	
	40MHz BW : 5755 - 5795	
	80MHz BW : 5775	
<b>Antenna Specification</b>	Antenna type: Metal + LDS Peak Gain : 0.8 dBi(UNII 1), 1.0 dBi(UNII 2A), -0.20 dBi(UNII 2C), 1.40 dBi(UNII 3)	
<b>Straddle channel</b>	Supported	
<b>TDWR Band</b>	Supported	
<b>Dynamic Frequency Selection</b>	Slave without radar detection	
<b>Date(s) of Tests</b>	May 12, 2020 ~ June 02, 2020	

**2. MAXIMUM OUTPUT POWER**

The transmitter has a maximum total conducted average output power as follows:

Band	Mode	RF Output Power	
		(dBm)	(W)
UNII1	802.11a	17.92	0.062
	802.11n (HT20)	17.97	0.063
	802.11n (HT40)	14.92	0.031
	802.11ac (VHT20)	15.90	0.039
	802.11ac (VHT40)	14.93	0.031
	802.11ac (VHT80)	12.08	0.016
UNII2A	802.11a	17.89	0.062
	802.11n (HT20)	18.09	0.064
	802.11n (HT40)	14.89	0.031
	802.11ac (VHT20)	15.82	0.038
	802.11ac (VHT40)	14.83	0.030
	802.11ac (VHT80)	12.50	0.018
UNII2C	802.11a	16.94	0.049
	802.11n (HT20)	16.77	0.047
	802.11n (HT40)	14.29	0.027
	802.11ac (VHT20)	15.04	0.032
	802.11ac (VHT40)	14.40	0.028
	802.11ac (VHT80)	12.45	0.018
UNII3	802.11a	17.90	0.062
	802.11n (HT20)	17.76	0.060
	802.11n (HT40)	14.82	0.030
	802.11ac (VHT20)	15.99	0.040
	802.11ac (VHT40)	14.88	0.031
	802.11ac (VHT80)	12.65	0.018

### 3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E" and ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices' were used in the measurement.

#### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

#### GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

#### DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

#### 4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

#### 5. FACILITIES AND ACCREDITATIONS

##### 5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

##### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

#### 6. ANTENNA REQUIREMENTS

##### According to FCC 47 CFR §15.203, §15.407:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203, §15.407



## 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 8. DESCRIPTION OF TESTS

### 8.1. Duty Cycle

#### Test Configuration

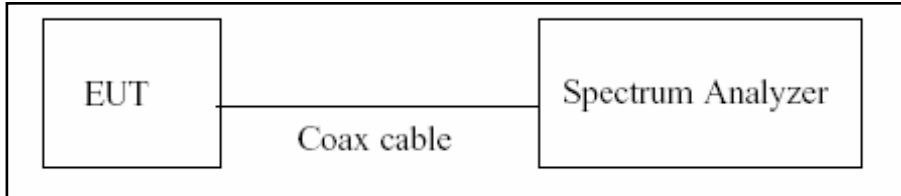

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on} / T_{total}$  and Duty Cycle Factor =  $10\log(1/\text{Duty Cycle})$

## 8.2. 6dB Bandwidth & 26dB Bandwidth

### Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### Test Configuration

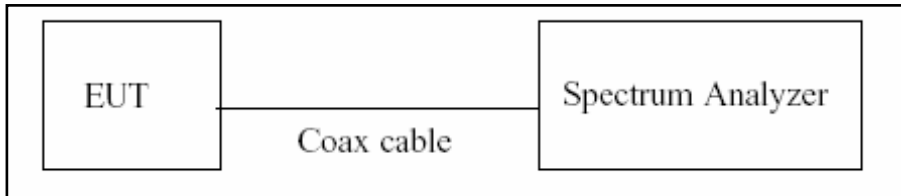

### Test Procedure(26dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.  
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

### Test Procedure (6dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW  $\geq 3 \times$  RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.


**8.3. Output Power Measurement**

**Limit**


Band	Limit
UNII 1	- Master : Not exceed 1 W(=30dBm) - Slave : Not exceed 250 mW(=23.98 dBm)
UNII 2A, 2C	Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)
UNII 3	Not exceed 1 W(=30dBm)

**Test Configuration**

Power Meter

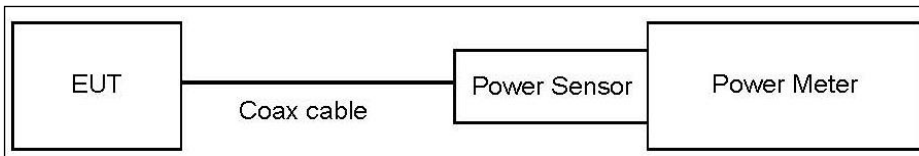

Spectrum Analyzer(Only Straddle Channel)

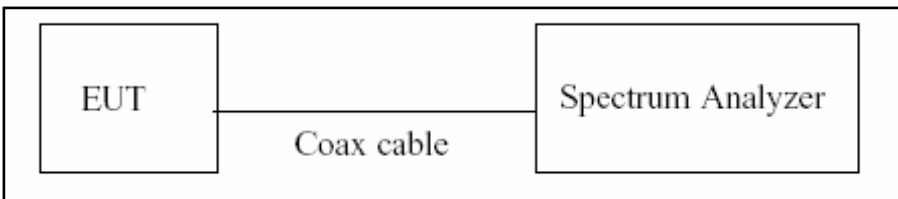

**Test Procedure(Power Meter)**

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

**Test Procedure(Spectrum Analyzer)**

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW ≥ 3 MHz.
5. Number of points in sweep ≥ 2 x span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to “free run”.
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add  $10\log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

**Sample Calculation**

Total Power(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

**Note**

1. Spectrum reading values are not plot data.  
The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss(10 dB) + Cable loss
3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	22.10
UNII 2A	22.10
UNII 2C	22.10
UNII 3	22.10


(Actual value of loss for the attenuator and cable combination)

**8.4. Power Spectral Density**

**Limit**

Band	Limit
UNII 1	11 dBm/MHz
UNII 2A, 2C	11 dBm/MHz
UNII 3	30 dBm/500 kHz

**Test Configuration**

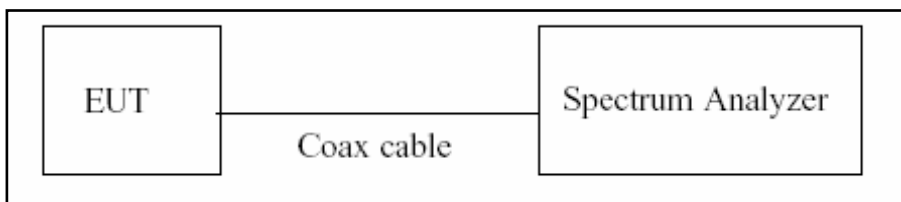

**Test Procedure**

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW  $\geq$  3 MHz
4. Number of points in sweep  $\geq$  2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add  $10 \log(1/x)$ , where x is the duty cycle, to the peak of the spectrum.

**Sample Calculation**

Total PSD(dBm) = Reading Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

**Note**

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(10 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

<b>Band</b>	<b>Loss(dB)</b>
UNII 1	22.10
UNII 2A	22.10
UNII 2C	22.10
UNII 3	22.10


(Actual value of loss for the attenuator and cable combination)

## 8.5. Frequency Stability

### Limit

Maintained within the band

### Test Configuration

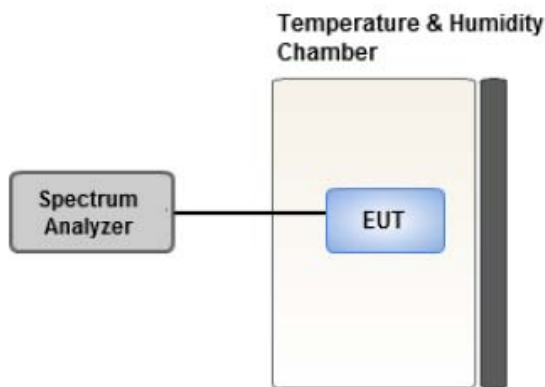

### Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.



## 8.6. AC Power line Conducted Emissions

### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

**8.7. Radiated Test**


**Limit**

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
3. UNII 3: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
4. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Test Configuration**


Below 30 MHz

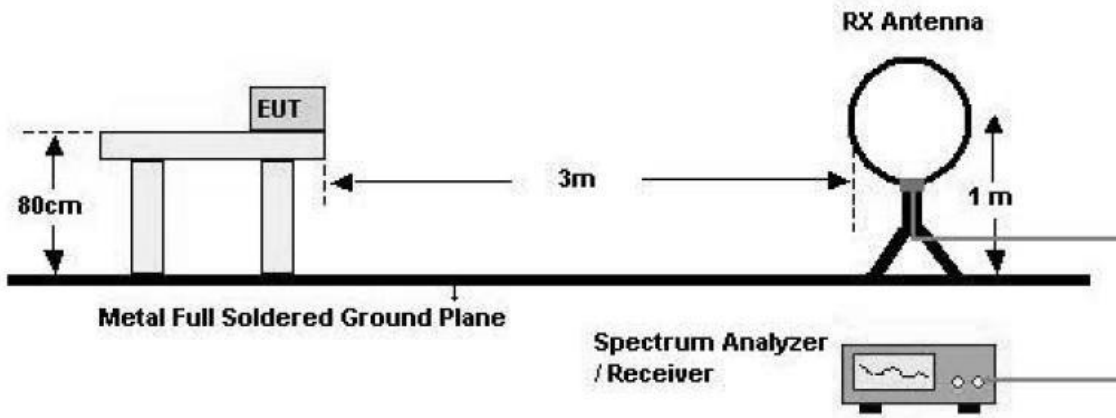

30 MHz - 1 GHz

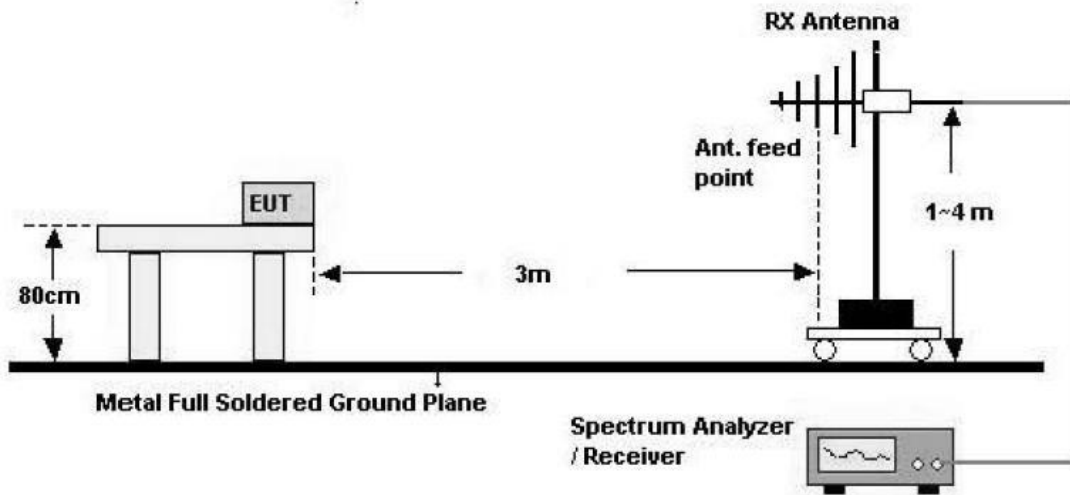

Above 1 GHz

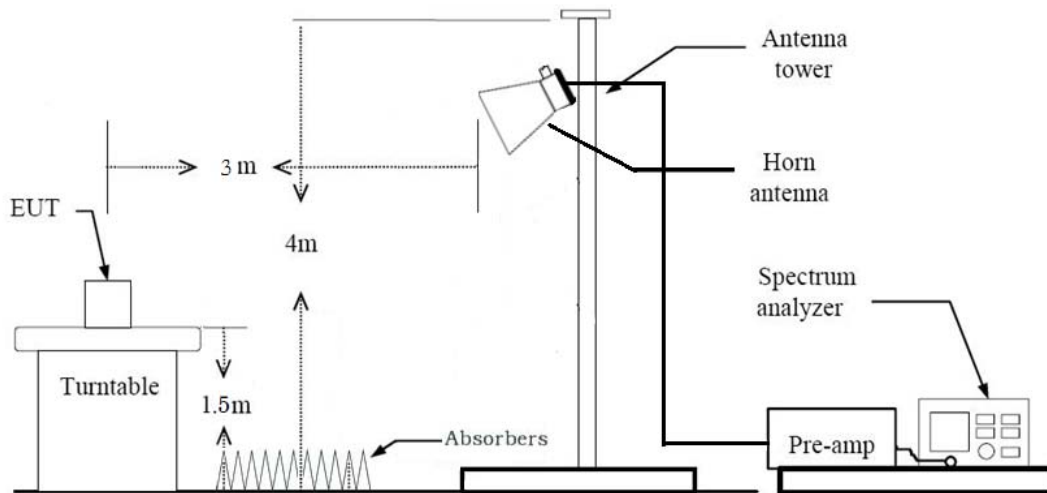**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 100 kHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Quasi-peak):
    - Measured Frequency Range : 30 MHz – 1 GHz
    - Detector = Quasi-Peak
    - RBW = 120 kHz
- ※ In general, (1) is used mainly
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

## (1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle.

## (2) Measurement Type (Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle  $\geq$  98 percent) = VBW  $\leq$  RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 percent) = VBW  $\geq$   $1/T$ , where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
12. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

### **Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
  - (1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep Time = auto
    - Trace mode = max hold
    - Allow sweeps to continue until the trace stabilizes.Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where x is the duty cycle.
  - (2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):
    - RBW = 1 MHz
    - VBW(Duty cycle  $\geq$  98 percent) =  $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.
    - VBW(Duty cycle is < 98 percent) =  $VBW \geq 1/T$ , where T is the minimum transmission duration.
    - The analyzer is set to linear detector mode.
    - Detector = Peak.
    - Sweep time = auto.
    - Trace mode = max hold.
    - Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where x is the duty cycle.

9. Measured Frequency Range :

- 4500MHz ~ 5150MHz
- 5350MHz ~ 5460MHz
- 5460MHz ~ 5470MHz
- (75 MHz or more below the 5725MHz) ~ 5725MHz
- 5850MHz ~ (75 MHz or more above the 5850MHz)

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Attenuator  
+ Distance Factor(D.F)

**The actual setting value of VBW**

Mode	Worst Data rate (Mbps)	Duty Cycle	Duty Cycle Factor (dB)	The actual setting value of VBW (Hz)
802.11a	6	0.976	0.105	1000
802.11n(HT20)	MCS 0	0.974	0.115	1000
802.11n(HT40)	MCS 0	0.949	0.229	2000
802.11ac(VHT20)	MCS 0	0.974	0.114	1000
802.11ac(VHT40)	MCS 0	0.950	0.222	2000
802.11ac(VHT80)	MCS 0	0.900	0.458	5000



## **8.8. Worst case configuration and mode**

### **Radiated test**

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
  - Worstcase : Stand alone
2. EUT Axis
  - Radiated Spurious Emissions : Z
  - Radiated Restricted Band Edge : Y
3. All datarate of operation were investigated and the worst case datarate results are reported
  - 802.11a : 6Mbps
  - 802.11n : MCS0
  - 802.11ac : MCS0
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

### **AC Power line Conducted Emissions**

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter,  
Stand alone + Travel Adapter
  - Worstcase : Stand alone + Travel Adapter

### **Conducted test**

1. All datarate of operation were investigated and the worst case datarate results are reported

**9. SUMMARY OF TEST RESULTS**

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26dB Bandwidth	§15.407 (for Power Measurement)	N/A	Conducted	PASS
6 dB Bandwidth	§15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§15.407(a)(1)	< 250 mW(5150-5250 MHz) < 250 mW or 11+10 log log <sub>10</sub> (BW) dBm (5250-5350 MHz) < 250 mW or 11+10 log log <sub>10</sub> (BW) dBm (5470-5725 MHz) <1 W(5725-5850 MHz)		PASS
Peak Power Spectral Density	§15.407(a)(1),(5)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§15.407(g) §2.1055	Maintained within the band		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	<FCC 15.207 limits		PASS
Undesirable Emissions	§15.407(b)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.7 (UNII 3)		Radiated
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	PASS	

## 10. TEST RESULT

### 10.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11a	6	1.435	1.470	0.976	0.105
	9	0.960	0.998	0.962	0.169
	12	0.726	0.764	0.950	0.222
	18	0.492	0.529	0.930	0.313
	24	0.375	0.413	0.908	0.419
	36	0.256	0.292	0.877	0.571
	48	0.200	0.236	0.847	0.719
	54	0.180	0.216	0.833	0.792


Mode	MCS Index	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11n (HT20)	0	1.341	1.377	0.974	0.115
	1	0.688	0.724	0.950	0.222
	2	0.472	0.509	0.928	0.326
	3	0.364	0.401	0.908	0.420
	4	0.256	0.292	0.877	0.571
	5	0.200	0.236	0.847	0.719
	6	0.183	0.220	0.833	0.795
	7	0.166	0.202	0.822	0.851
802.11n (HT40)	0	0.664	0.700	0.949	0.229
	1	0.351	0.388	0.905	0.433
	2	0.248	0.284	0.873	0.589
	3	0.196	0.232	0.845	0.732
	4	0.144	0.180	0.797	0.984
	5	0.116	0.152	0.760	1.193
	6	0.108	0.144	0.747	1.270
	7	0.100	0.137	0.733	1.351

Mode	MCS Index	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11ac (VHT20)	0	1.350	1.386	0.974	0.114
	1	0.696	0.734	0.948	0.231
	2	0.475	0.513	0.926	0.334
	3	0.368	0.405	0.909	0.416
	4	0.260	0.296	0.878	0.563
	5	0.203	0.240	0.847	0.723
	6	0.188	0.225	0.835	0.782
	7	0.172	0.209	0.825	0.836
	8	0.152	0.189	0.806	0.935
802.11ac (VHT40)	0	0.672	0.707	0.950	0.222
	1	0.355	0.392	0.906	0.431
	2	0.251	0.288	0.872	0.594
	3	0.200	0.236	0.845	0.730
	4	0.148	0.184	0.802	0.960
	5	0.120	0.156	0.766	1.158
	6	0.112	0.148	0.753	1.230
	7	0.104	0.140	0.739	1.312
	8	0.096	0.132	0.726	1.389
	9	0.088	0.124	0.707	1.506
802.11ac (VHT80)	0	0.331	0.368	0.900	0.458
	1	0.187	0.224	0.835	0.784
	2	0.140	0.176	0.795	0.994
	3	0.114	0.151	0.757	1.211
	4	0.092	0.128	0.715	1.458
	5	0.080	0.116	0.685	1.641
	6	0.076	0.112	0.674	1.713
	7	0.072	0.109	0.664	1.781
	8	0.068	0.104	0.651	1.862
	9	0.064	0.100	0.635	1.974


**Note:**

In order to simplify the report, attached plots were only lowest datarate.


802.11a

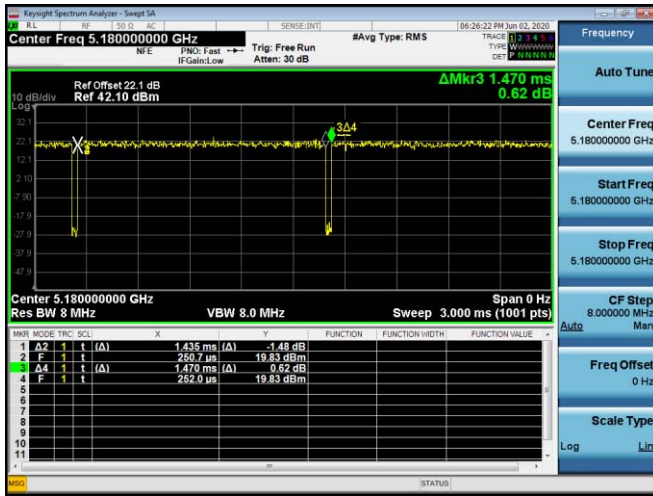


802.11n(HT20)

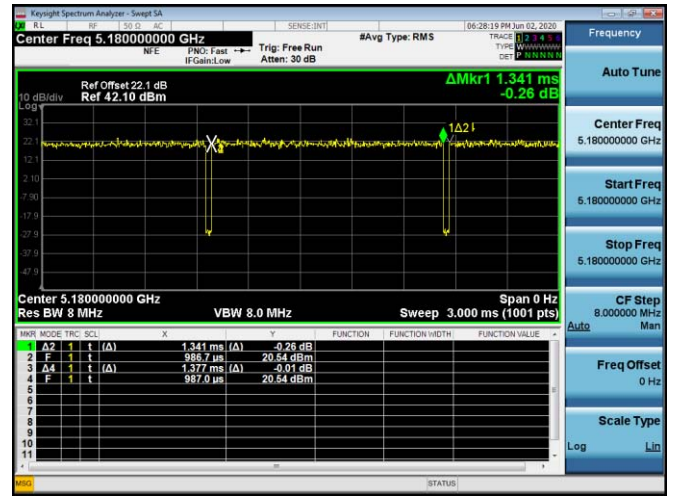


802.11n(HT40)

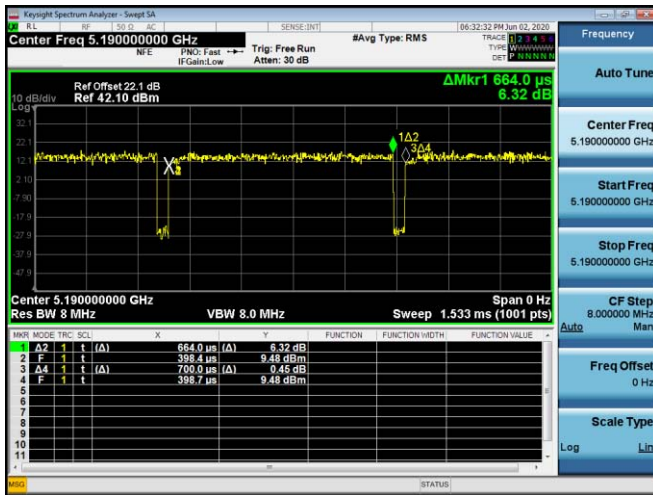


802.11ac(VHT20)

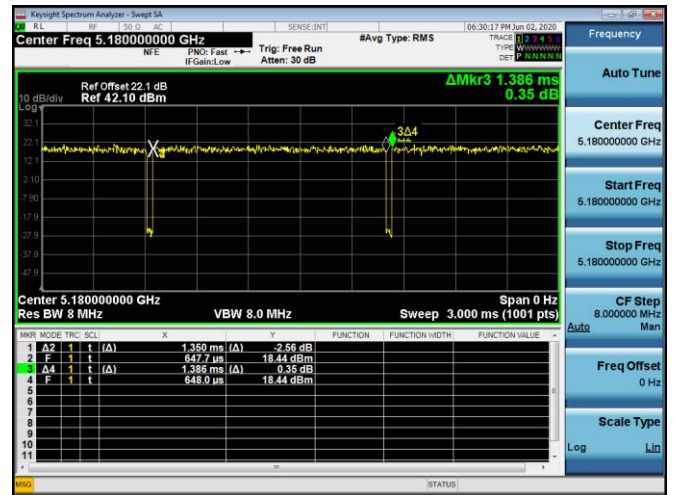

802.11ac(VHT40)

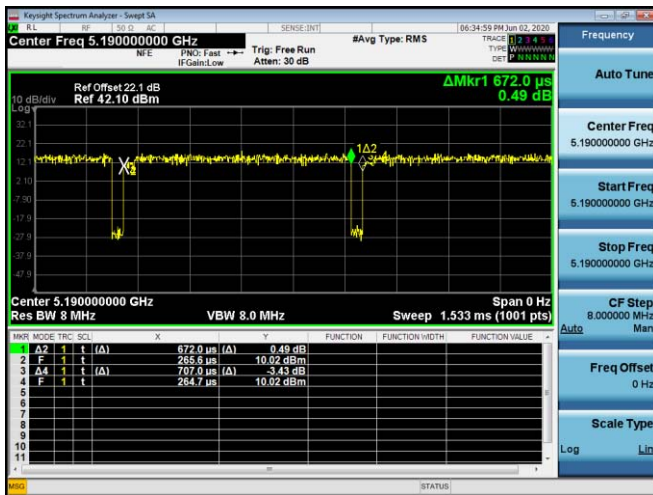

802.11ac(VHT80)

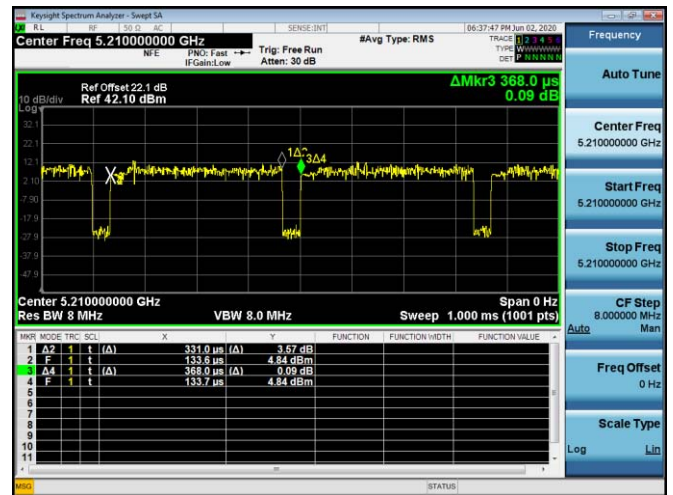

**10.2 26 dB BANDWIDTH**

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.7.1.

802.11a Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	20.32	16.378
5200	40	20.21	16.370
5240	48	19.17	16.387
5260	52	18.97	16.328
5300	60	20.33	16.354
5320	64	19.21	16.362
5500	100	20.76	16.366
5600	120	19.80	16.385
5720	144	18.62	16.343
5745	149	19.51	16.388
5785	157	19.43	16.376
5825	165	20.49	16.373

802.11n(HT20) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	21.05	17.572
5200	40	20.33	17.562
5240	48	20.11	17.523
5260	52	20.56	17.550
5300	60	20.52	17.550
5320	64	20.91	17.575
5500	100	20.84	17.574
5600	120	20.83	17.557
5720	144	20.94	17.568
5745	149	20.52	17.551
5785	157	20.43	17.562
5825	165	20.73	17.570

802.11n(HT40) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	40.03	35.948
5230	46	40.47	36.014
5270	54	39.71	35.978
5310	62	39.80	35.947
5510	102	39.78	35.982
5590	118	39.72	35.974
5710	142	40.01	35.983
5755	151	39.94	35.999
5795	159	40.07	35.929

802.11ac(VHT20) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5180	36	20.63	17.553
5200	40	20.44	17.567
5240	48	20.74	17.578
5260	52	21.28	17.565
5300	60	21.05	17.563
5320	64	20.47	17.560
5500	100	20.46	17.568
5600	120	22.01	17.581
5720	144	20.59	17.601
5745	149	21.06	17.586
5785	157	20.72	17.586
5825	165	19.80	17.547

802.11ac(VHT40) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5190	38	39.51	35.937
5230	46	40.08	35.986
5270	54	39.78	35.951
5310	62	39.81	35.947
5510	102	39.80	36.031
5590	118	39.78	35.892
5710	142	39.85	36.006
5755	151	40.59	35.940
5795	159	39.76	35.988

802.11ac(VHT80) Mode		26dB Bandwidth [MHz]	99% bandwidth [MHz]
Frequency [MHz]	Channel No.		
5210	42	81.07	75.034
5290	58	80.71	74.868
5530	106	81.93	75.173
5610	122	81.53	75.072
5690	138	81.24	75.185
5775	155	81.21	74.852



☐ Test Plots(802.11a)


Note:

In order to simplify the report, attached plots were only the most wide channel.

**802.11a UNII 1 BAND 26dB Bandwidth (CH 36)**



**802.11a UNII 2A BAND 26dB Bandwidth (CH 60)**

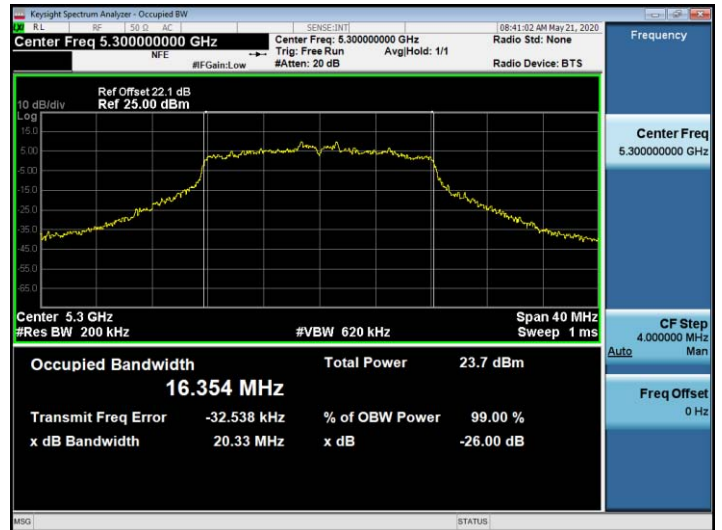

**802.11a UNII 2C BAND 26dB Bandwidth (CH 100)**



**802.11a UNII 3 BAND 26dB Bandwidth (CH 165)**




☐ Test Plots(802.11n(HT20))


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11n\_HT20 UNII 1 BAND 26dB Bandwidth(CH 36)

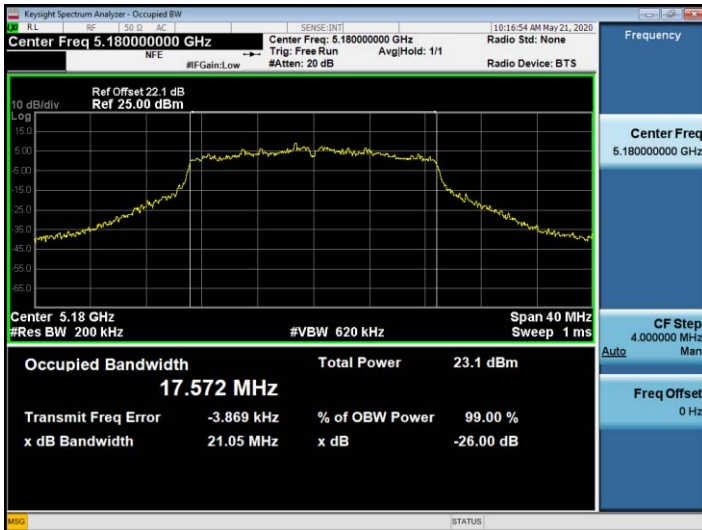

802.11n\_HT20 UNII 2A BAND 26dB Bandwidth(CH 64)

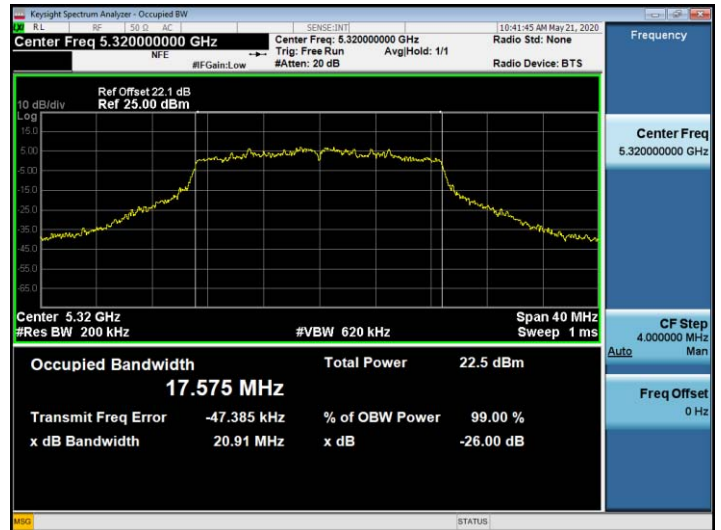

802.11n\_HT20 UNII 2C BAND 26dB Bandwidth(CH 144)



802.11n\_HT20 UNII 3 BAND 26dB Bandwidth(CH 165)




☐ Test Plots(802.11n(HT40))


Note:

In order to simplify the report, attached plots were only the most wide channel.


802.11n\_HT40 UNII 1 BAND 26dB Bandwidth(CH 46)

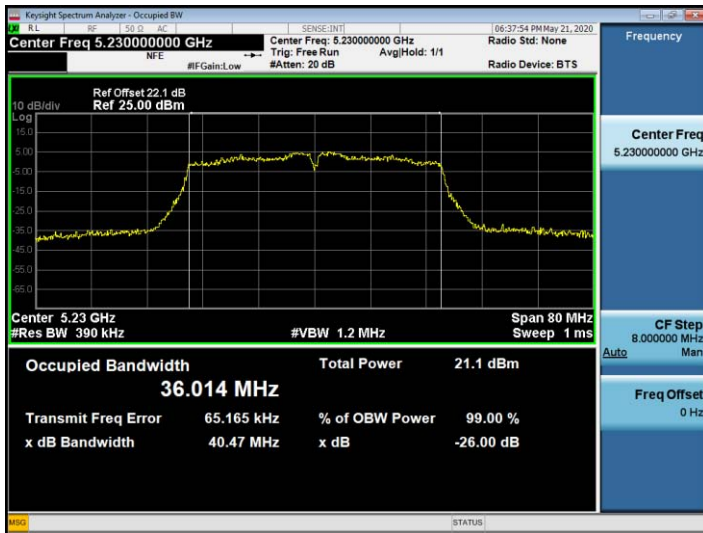


802.11n\_HT40 UNII 2A BAND 26dB Bandwidth (CH 62)

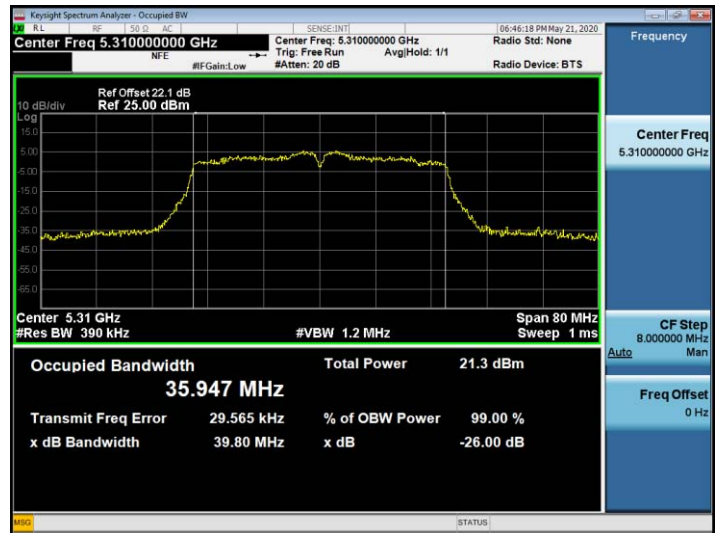

802.11n\_HT40 UNII 2C BAND 26dB Bandwidth(CH 142)

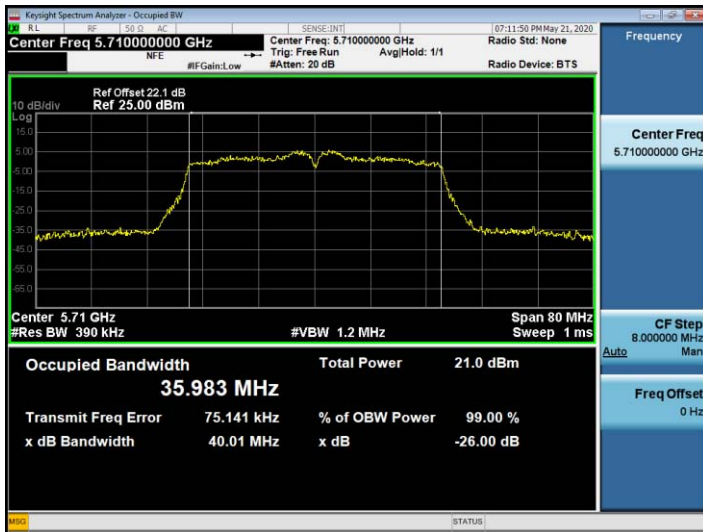

802.11n\_HT40 UNII 3 BAND 26dB Bandwidth (CH 159)

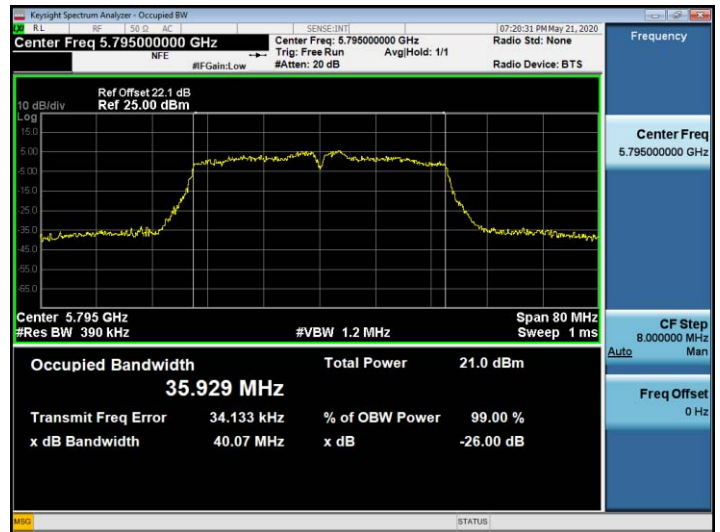


☐ Test Plots(802.11ac(VHT20))


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11ac\_VHT20 UNII 1 BAND 26dB Bandwidth(CH 48)

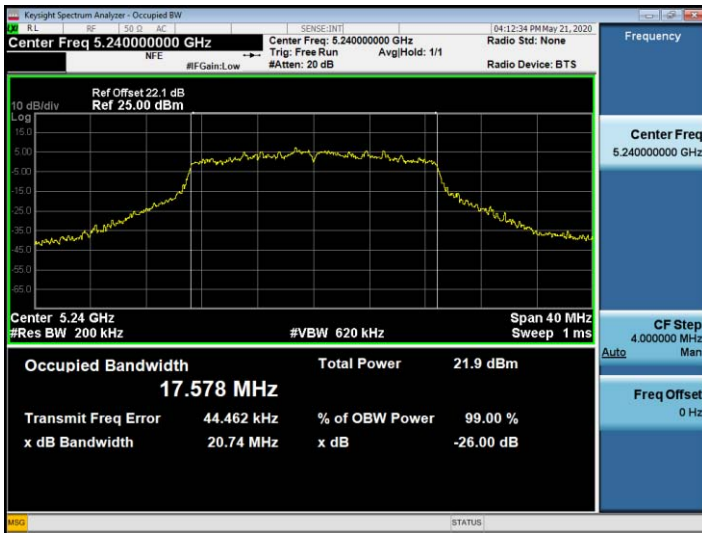

802.11ac\_VHT20 UNII 2A BAND 26dB Bandwidth(CH 52)

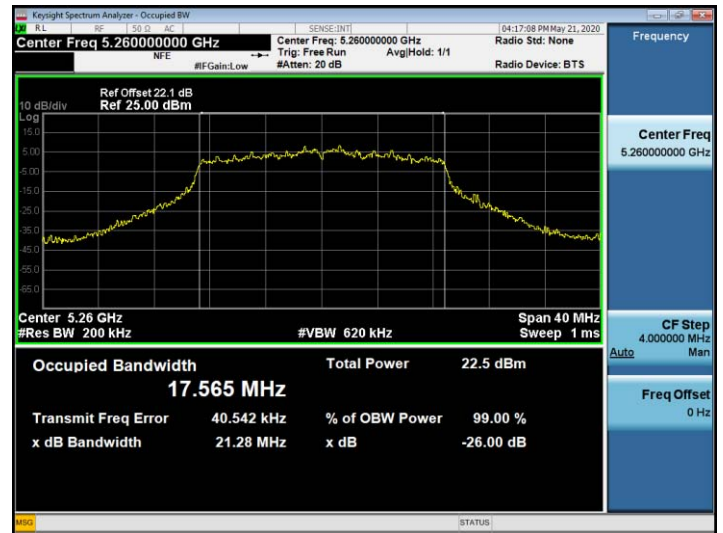

802.11ac\_VHT20 UNII 2C BAND 26dB Bandwidth(CH 120)



802.11ac\_VHT20 UNII 3 BAND 26dB Bandwidth(CH 149)




☐ Test Plots(802.11ac(VHT40))


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11ac\_VHT40 UNII 1 BAND 26dB Bandwidth(CH 46)

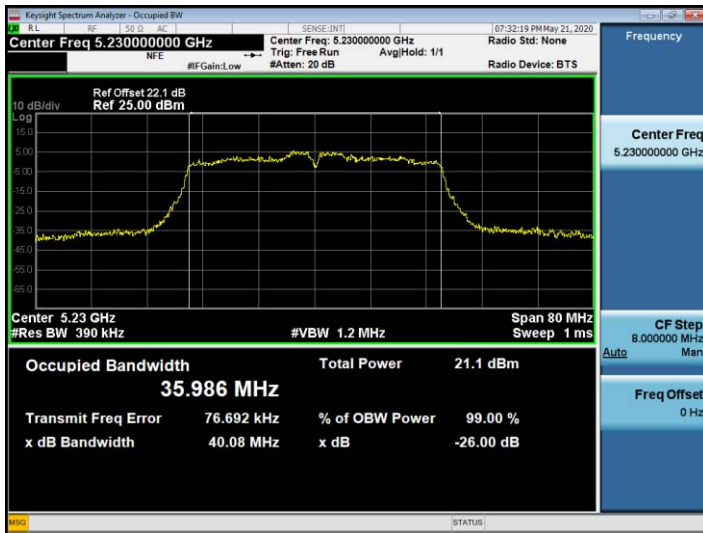


802.11ac\_VHT40 UNII 2A BAND 26dB Bandwidth (CH 62)

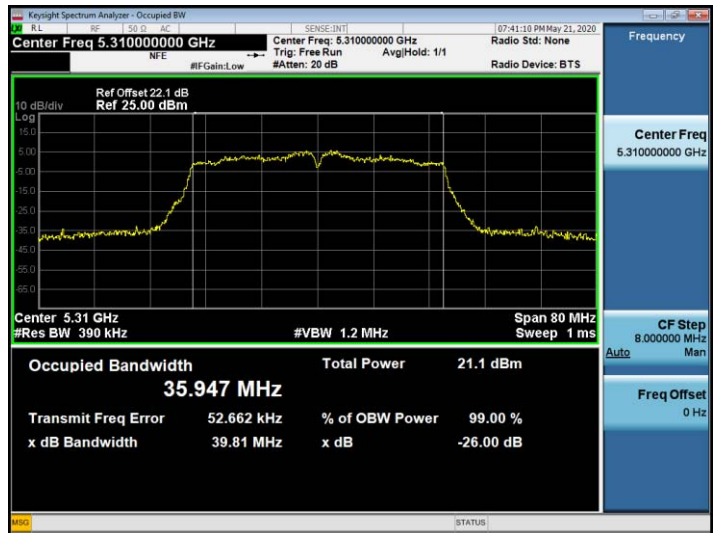

802.11ac\_VHT40 UNII 2C BAND 26dB Bandwidth(CH 142)



802.11ac\_VHT40 UNII 3 BAND 26dB Bandwidth (CH 151)

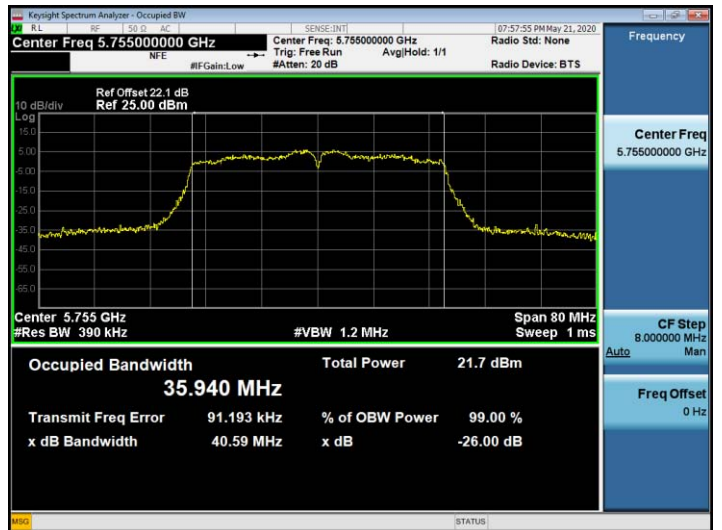


☐ Test Plots(802.11ac(VHT80))


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11ac\_VHT80 UNII 1 BAND 26dB Bandwidth(CH 42)

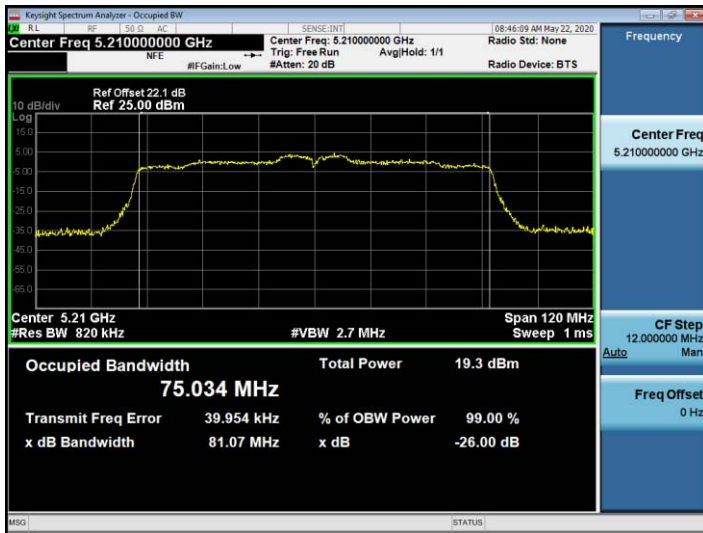


802.11ac\_VHT80 UNII 2A BAND 26dB Bandwidth (CH 58)

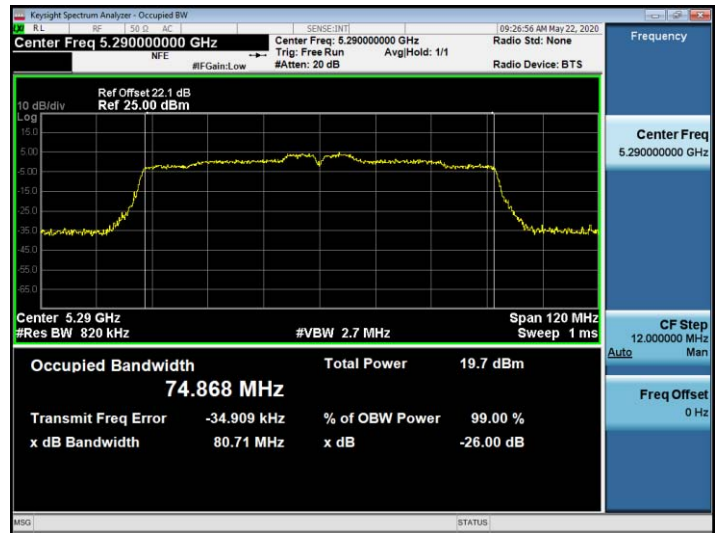

802.11ac\_VHT80 UNII 2C BAND 26dB Bandwidth(CH 106)



802.11ac\_VHT80 UNII 3 BAND 26dB Bandwidth (CH 155)

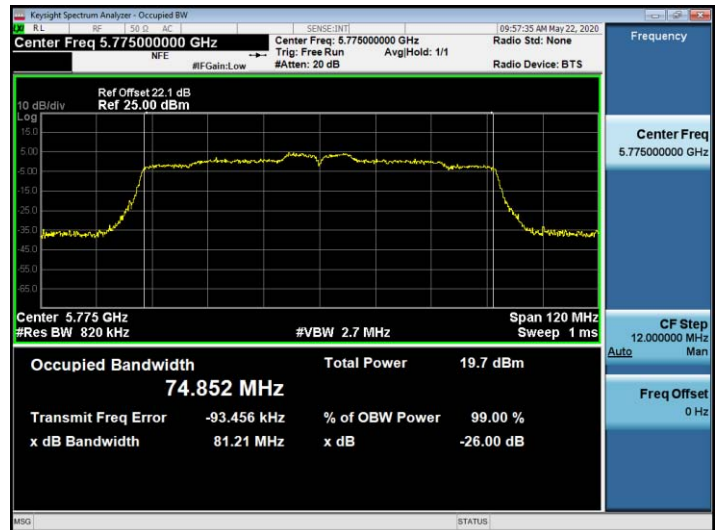

**10.3 6dB BANDWIDTH**

802.11a Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	13.78	> 0.5	Pass
5785	157	15.10	> 0.5	Pass
5825	165	12.55	> 0.5	Pass

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	15.03	> 0.5	Pass
5785	157	13.85	> 0.5	Pass
5825	165	10.17	> 0.5	Pass

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	30.14	> 0.5	Pass
5795	159	35.06	> 0.5	Pass


802.11ac(VHT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	13.89	> 0.5	Pass
5785	157	13.80	> 0.5	Pass
5825	165	13.86	> 0.5	Pass

802.11ac(VHT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	32.58	> 0.5	Pass
5795	159	35.08	> 0.5	Pass

802.11ac(VHT80) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	53.95	> 0.5	Pass

**Test Plots**

**Note:** In order to simplify the report, attached plots were only the most narrow channel.

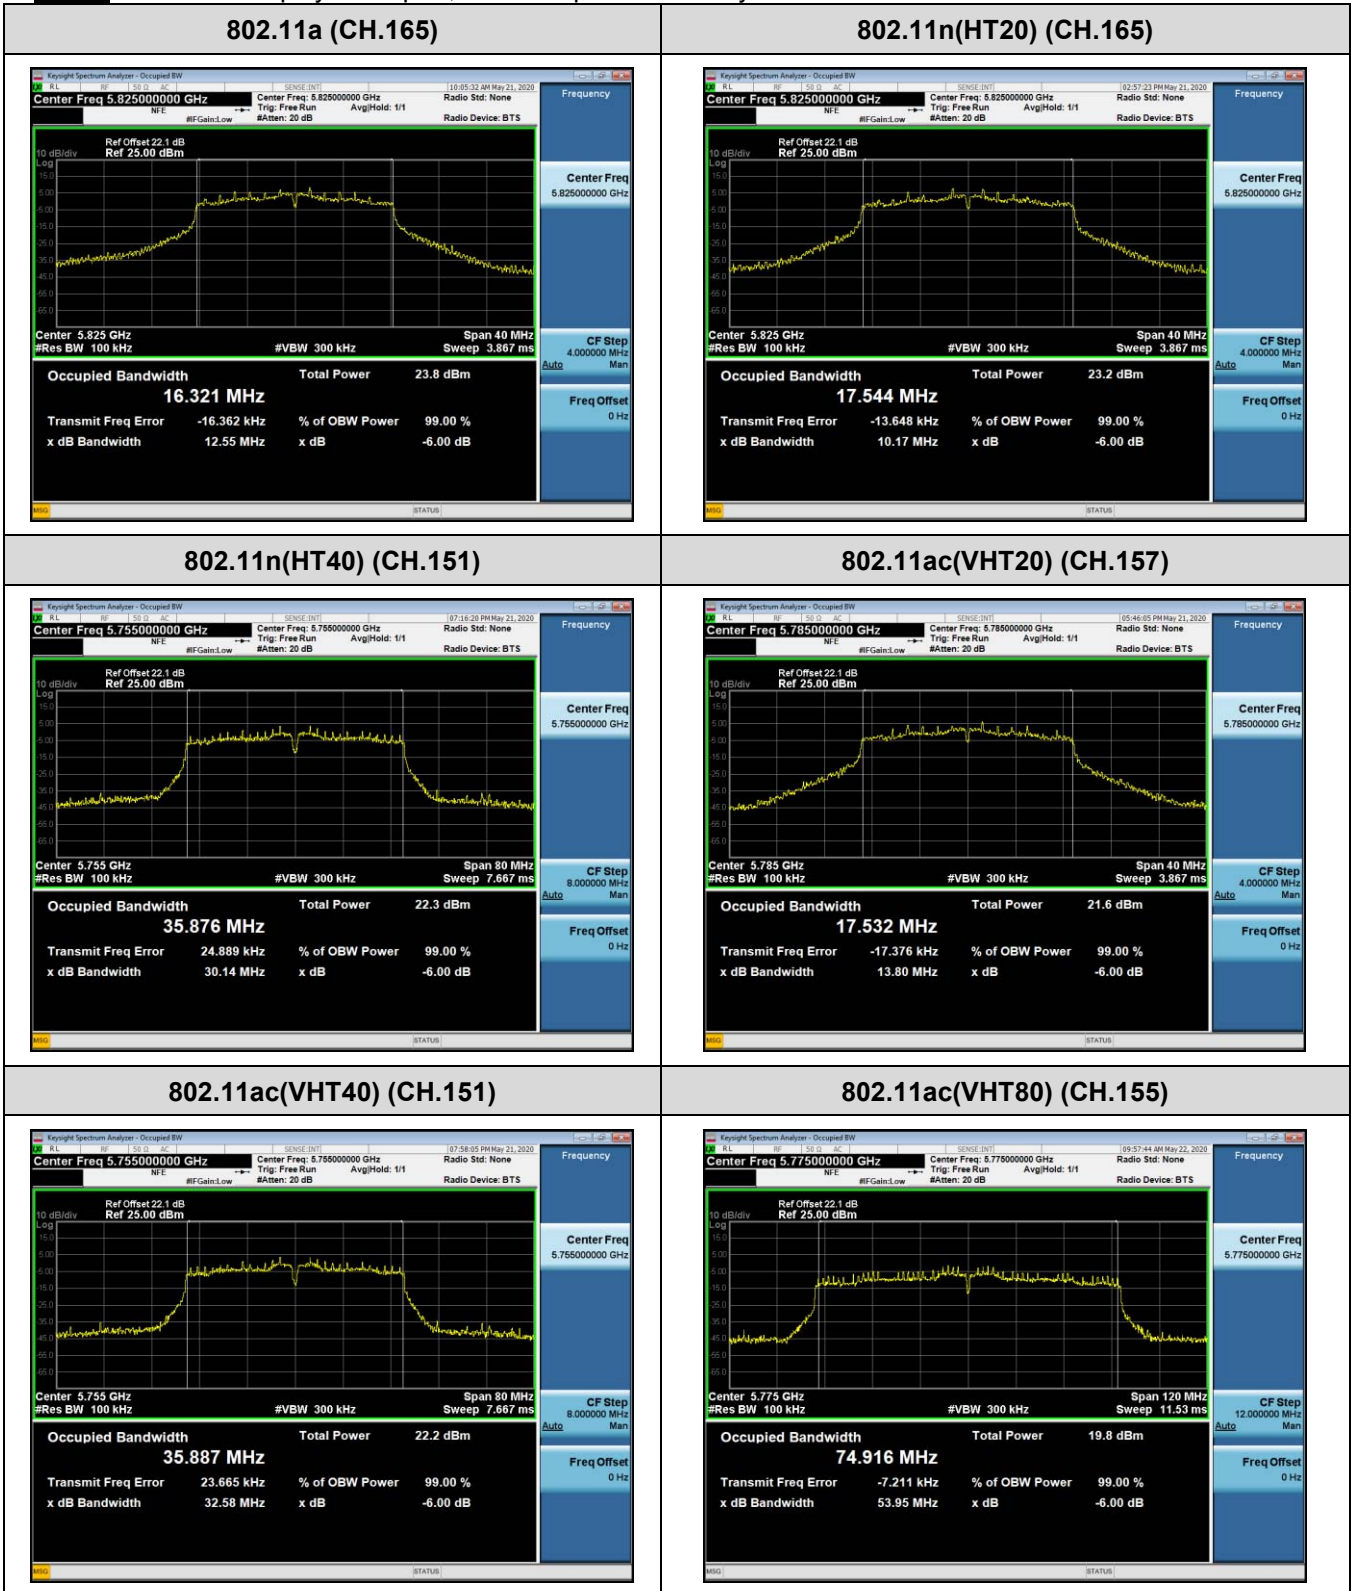



### 10.4 OUTPUT POWER MEASUREMENT

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.7.3.

802.11a Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	17.00	17.61	0.313	17.92	23.98
5200	40	17.00	17.18	0.313	17.49	23.98
5240	48	17.00	17.18	0.313	17.49	23.98
5260	52	17.00	17.58	0.313	17.89	23.78
5300	60	17.00	17.18	0.313	17.50	23.78
5320	64	17.00	17.25	0.313	17.56	23.78
5500	100	17.00	16.54	0.313	16.85	23.70
5600	120	17.00	16.63	0.313	16.94	23.70
5720	144	17.00	16.51	0.313	16.83	23.70
5745	149	17.00	17.59	0.313	17.90	30.00
5785	157	17.00	16.61	0.313	16.92	30.00
5825	165	17.00	17.20	0.313	17.51	30.00

802.11n(20MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	17.00	17.55	0.420	17.97	23.98
5200	40	17.00	17.15	0.326	17.48	23.98
5240	48	17.00	17.10	0.326	17.42	23.98
5260	52	17.00	17.67	0.420	18.09	23.98
5300	60	17.00	17.20	0.326	17.53	23.98
5320	64	17.00	16.98	0.420	17.40	23.98
5500	100	17.00	16.35	0.420	16.77	23.98
5600	120	17.00	16.33	0.420	16.75	23.98
5720	144	17.00	16.26	0.420	16.68	23.98
5745	149	17.00	17.32	0.420	17.74	30.00
5785	157	17.00	16.88	0.326	17.21	30.00
5825	165	17.00	17.34	0.420	17.76	30.00

802.11n(40MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	14.00	14.19	0.732	14.92	23.98
5230	46	14.00	14.02	0.589	14.61	23.98
5270	54	14.00	14.15	0.732	14.89	23.98
5310	62	14.00	14.03	0.732	14.76	23.98
5510	102	14.00	13.05	0.732	13.78	23.98
5590	118	14.00	13.38	0.589	13.97	23.98
5710	142	14.00	13.71	0.589	14.29	23.98
5755	151	14.00	14.23	0.589	14.82	30.00
5795	159	14.00	13.85	0.589	14.44	30.00

802.11ac(20MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	15.00	15.48	0.416	15.90	23.98
5200	40	15.00	15.38	0.416	15.79	23.98
5240	48	15.00	15.35	0.416	15.77	23.98
5260	52	15.00	15.40	0.416	15.82	23.98
5300	60	15.00	15.26	0.416	15.68	23.98
5320	64	15.00	15.47	0.334	15.80	23.98
5500	100	15.00	14.53	0.334	14.86	23.98
5600	120	15.00	14.43	0.334	14.76	23.98
5720	144	15.00	14.63	0.416	15.04	23.98
5745	149	15.00	15.57	0.416	15.99	30.00
5785	157	15.00	14.84	0.416	15.25	30.00
5825	165	15.00	15.35	0.334	15.68	30.00

802.11ac(40MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	14.00	14.20	0.730	14.93	23.98
5230	46	14.00	13.81	0.730	14.54	23.98
5270	54	14.00	14.10	0.730	14.83	23.98
5310	62	14.00	14.00	0.730	14.73	23.98
5510	102	14.00	13.10	0.730	13.83	23.98
5590	118	14.00	13.27	0.730	13.99	23.98
5710	142	14.00	13.67	0.730	14.40	23.98
5755	151	14.00	14.15	0.730	14.88	30.00
5795	159	14.00	13.73	0.730	14.46	30.00

802.11ac(80MHz) Mode		Power Level Setting	Measured Power [dBm]	Duty Cycle Factor (dB)	Total Power [dBm]	Limit (dBm)
Frequency [MHz]	Channel No.					
5210	42	12.00	10.86	1.211	12.08	23.98
5290	58	12.00	11.29	1.211	12.50	23.98
5530	106	12.00	9.60	1.458	11.06	23.98
5610	122	12.00	10.34	1.211	11.55	23.98
5690	138	12.00	11.24	1.211	12.45	23.98
5775	155	12.00	11.44	1.211	12.65	30.00

**10.5 POWER SPECTRAL DENSITY**

802.11a Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5180	36	8.716	0.313	9.029	11 dBm/MHz
5200	40	8.252	0.313	8.565	
5240	48	8.086	0.313	8.399	
5260	52	8.749	0.313	9.062	
5300	60	8.455	0.313	8.768	
5320	64	8.240	0.313	8.553	
5500	100	7.489	0.313	7.802	
5600	120	7.772	0.313	8.085	
5720	144	7.549	0.313	7.862	
5745	149	5.837	0.313	6.150	30 dBm/500kHz
5785	157	5.047	0.313	5.360	
5825	165	5.547	0.313	5.860	

802.11n(20MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5180	36	8.333	0.420	8.753	11 dBm/MHz
5200	40	7.877	0.326	8.203	
5240	48	8.057	0.326	8.383	
5260	52	8.421	0.420	8.841	
5300	60	7.897	0.326	8.223	
5320	64	7.806	0.420	8.226	
5500	100	6.977	0.420	7.397	
5600	120	7.076	0.420	7.496	
5720	144	7.243	0.420	7.663	
5745	149	5.671	0.420	6.091	30 dBm/500kHz z
5785	157	4.986	0.326	5.312	
5825	165	5.362	0.420	5.782	

802.11n(40MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5190	38	2.137	0.732	2.869	11 dBm/MHz
5230	46	2.066	0.589	2.655	
5270	54	2.721	0.732	3.453	
5310	62	2.259	0.732	2.991	
5510	102	1.216	0.732	1.948	
5590	118	1.345	0.589	1.934	
5710	142	1.895	0.589	2.484	
5755	151	-0.188	0.589	0.401	30 dBm /500kHz
5795	159	-0.180	0.589	0.409	

802.11ac(20MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5180	36	6.339	0.416	6.755	11 dBm/MHz
5200	40	6.227	0.416	6.643	
5240	48	5.981	0.416	6.397	
5260	52	6.409	0.416	6.825	
5300	60	6.294	0.416	6.710	
5320	64	6.276	0.334	6.610	
5500	100	5.365	0.334	5.699	
5600	120	5.154	0.334	5.488	
5720	144	5.518	0.416	5.934	
5745	149	3.743	0.416	4.159	
5785	157	3.032	0.416	3.448	30 dBm/500kHz
5825	165	3.524	0.334	3.858	


802.11ac(40MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5190	38	2.575	0.730	3.305	11 dBm/MHz
5230	46	2.204	0.730	2.934	
5270	54	2.430	0.730	3.160	
5310	62	2.173	0.730	2.903	
5510	102	1.046	0.730	1.776	
5590	118	1.375	0.730	2.105	
5710	142	1.858	0.730	2.588	30 dBm/500kHz
5755	151	-0.296	0.730	0.434	
5795	159	-0.642	0.730	0.088	

802.11ac(80MHz) Mode		Measured PSD [dBm]	Duty Cycle Factor (dB)	Total PSD [dBm]	Limit
Frequency [MHz]	Channel No.				
5210	42	-4.088	1.211	-2.877	11 dBm/MHz
5290	58	-2.684	1.211	-1.473	
5530	106	-8.242	1.458	-6.784	
5610	122	-4.357	1.211	-3.146	
5690	138	-3.407	1.211	-2.196	
5775	155	-5.579	1.211	-4.368	30 dBm/500kHz

☐ Test Plots(802.11a)

Note:


In order to simplify the report, attached plots were only channel of highest power.

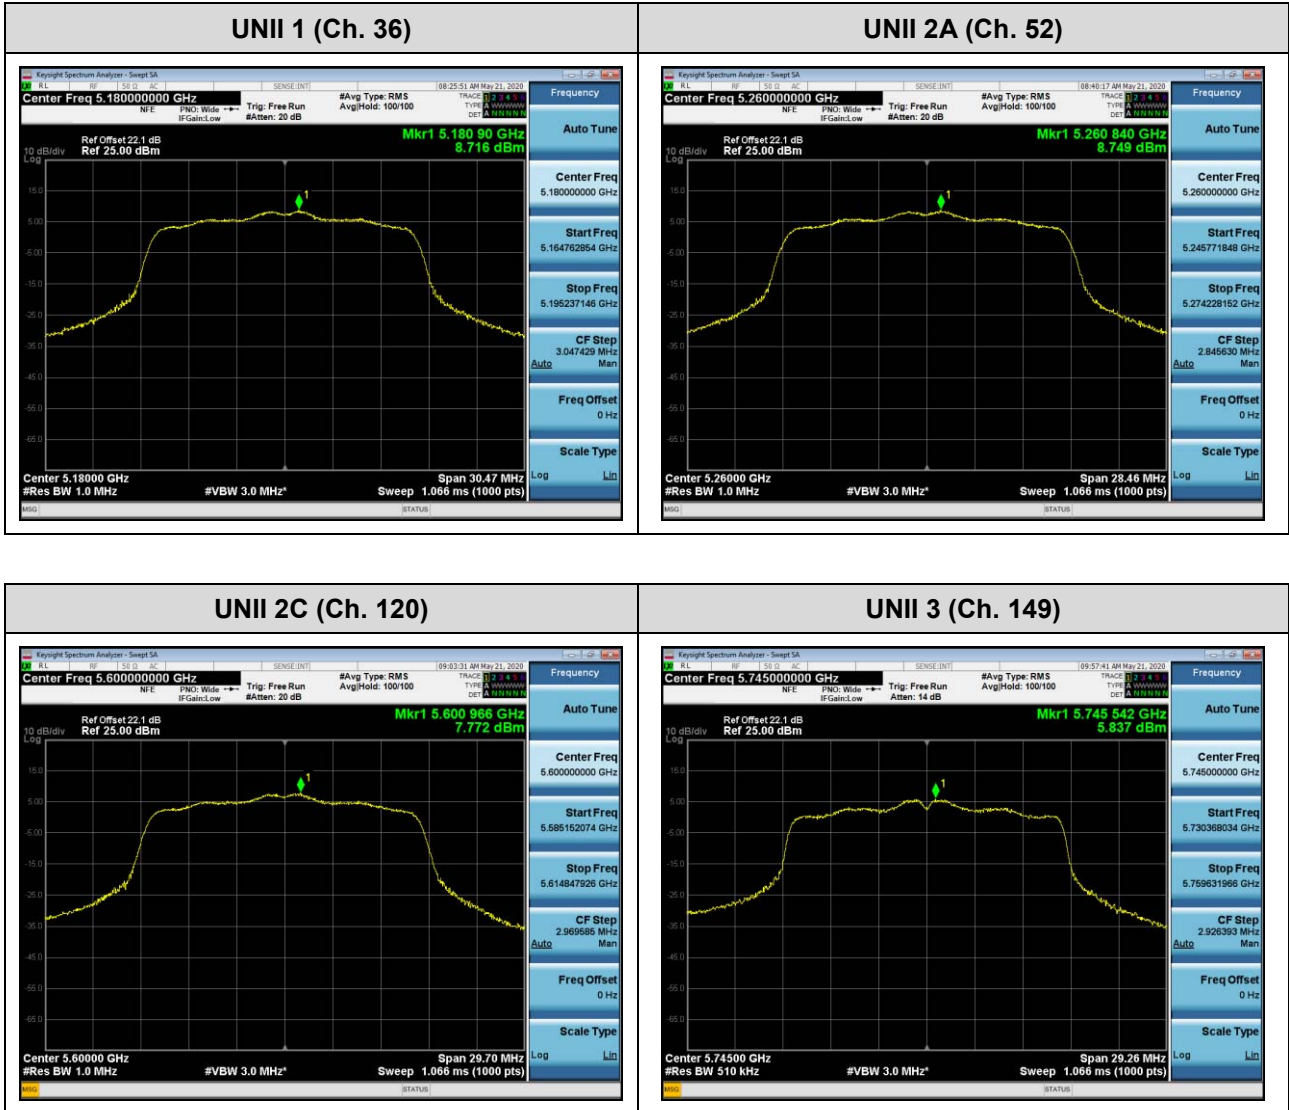

☐ Test Plots(802.11n(HT20))

Note:

In order to simplify the report, attached plots were only channel of highest power.

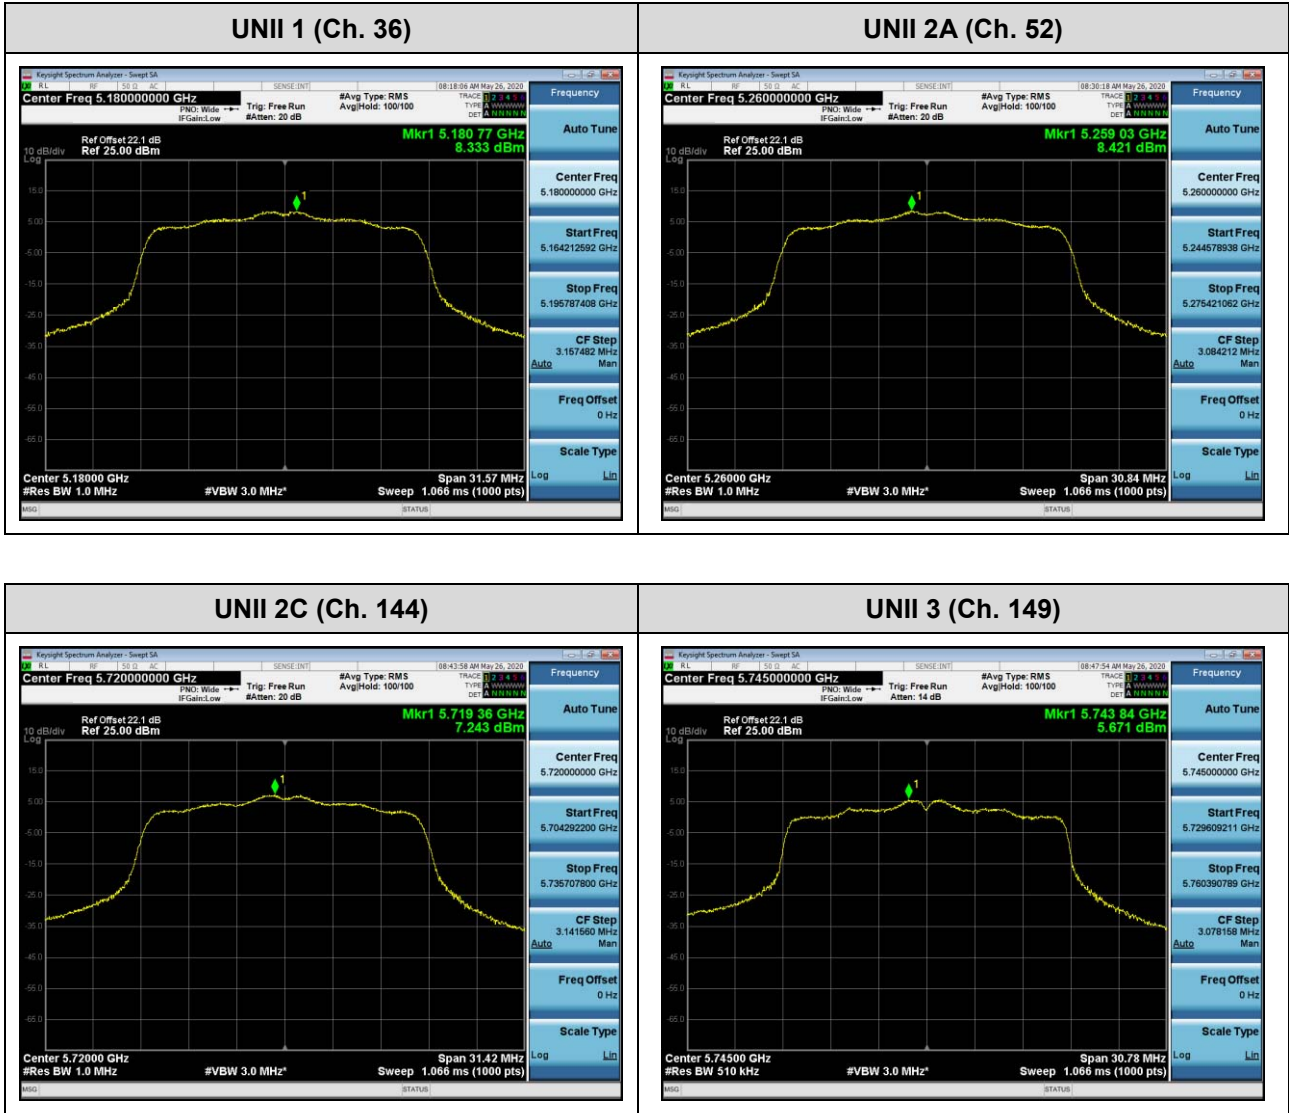




☐ Test Plots(802.11n(HT40))

Note:


In order to simplify the report, attached plots were only channel of highest power.

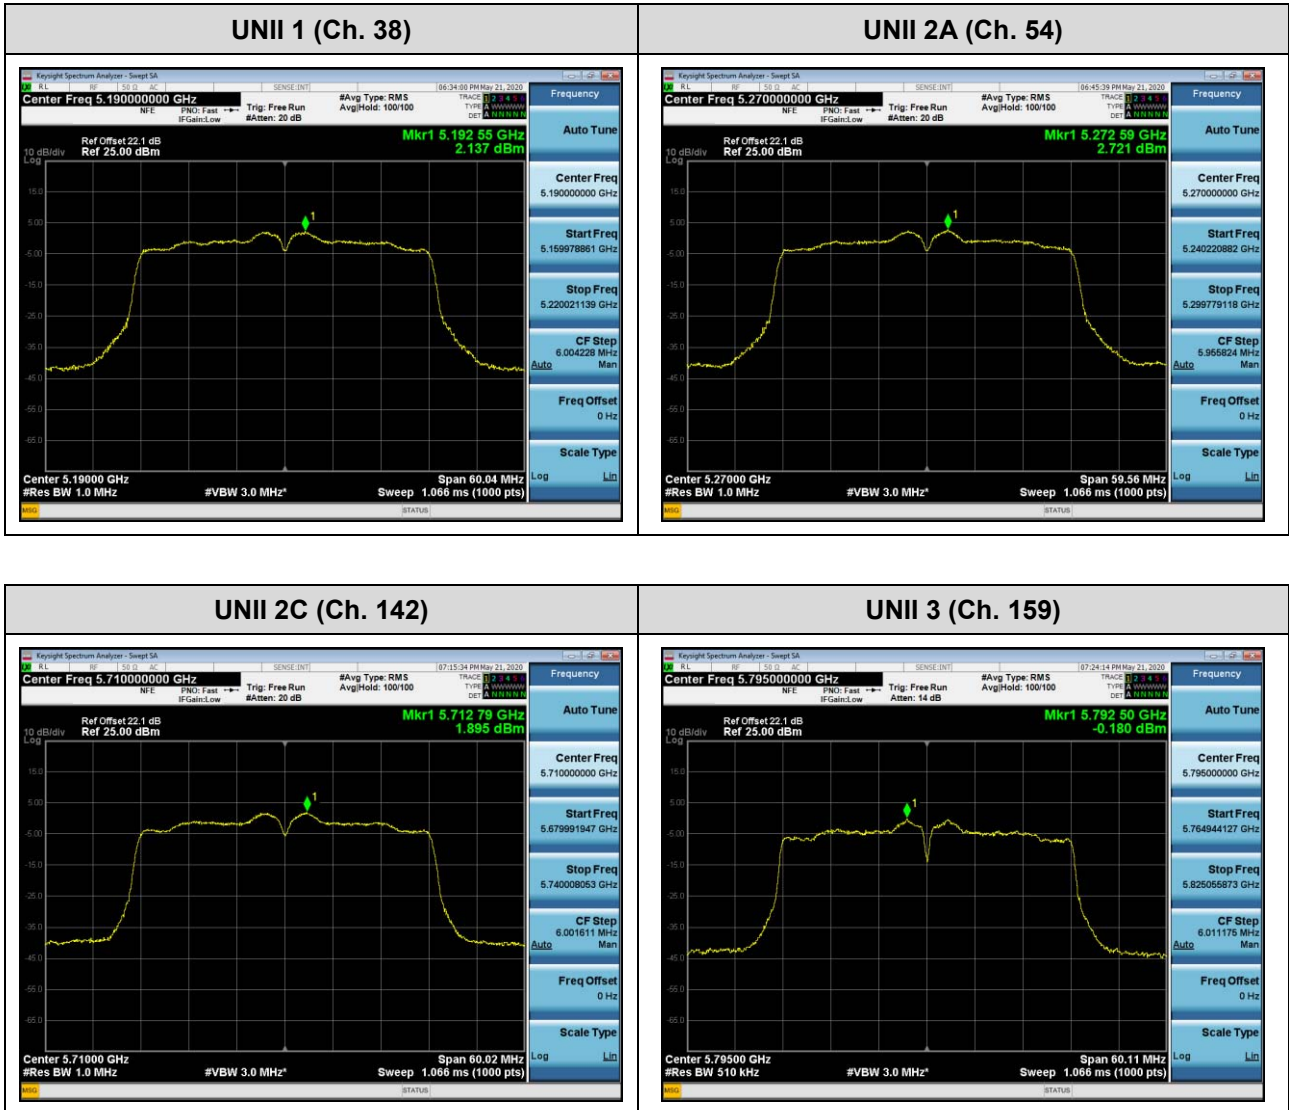

☐ Test Plots(802.11ac(VHT20))

Note:


In order to simplify the report, attached plots were only channel of highest power.

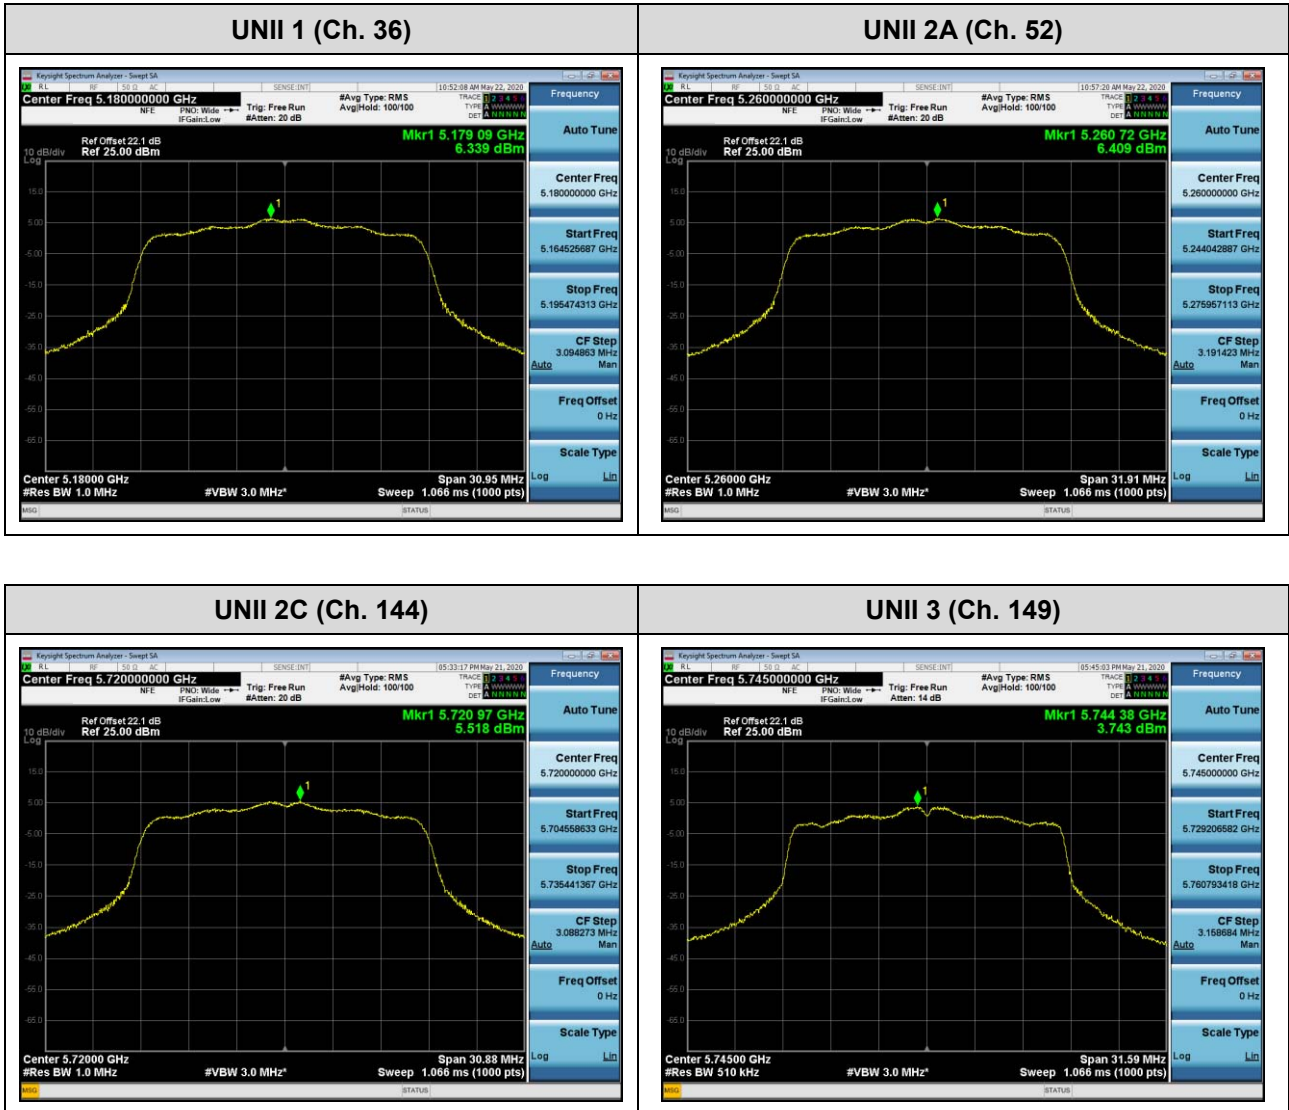

☐ Test Plots(802.11ac(VHT40))

Note:


In order to simplify the report, attached plots were only channel of highest power.

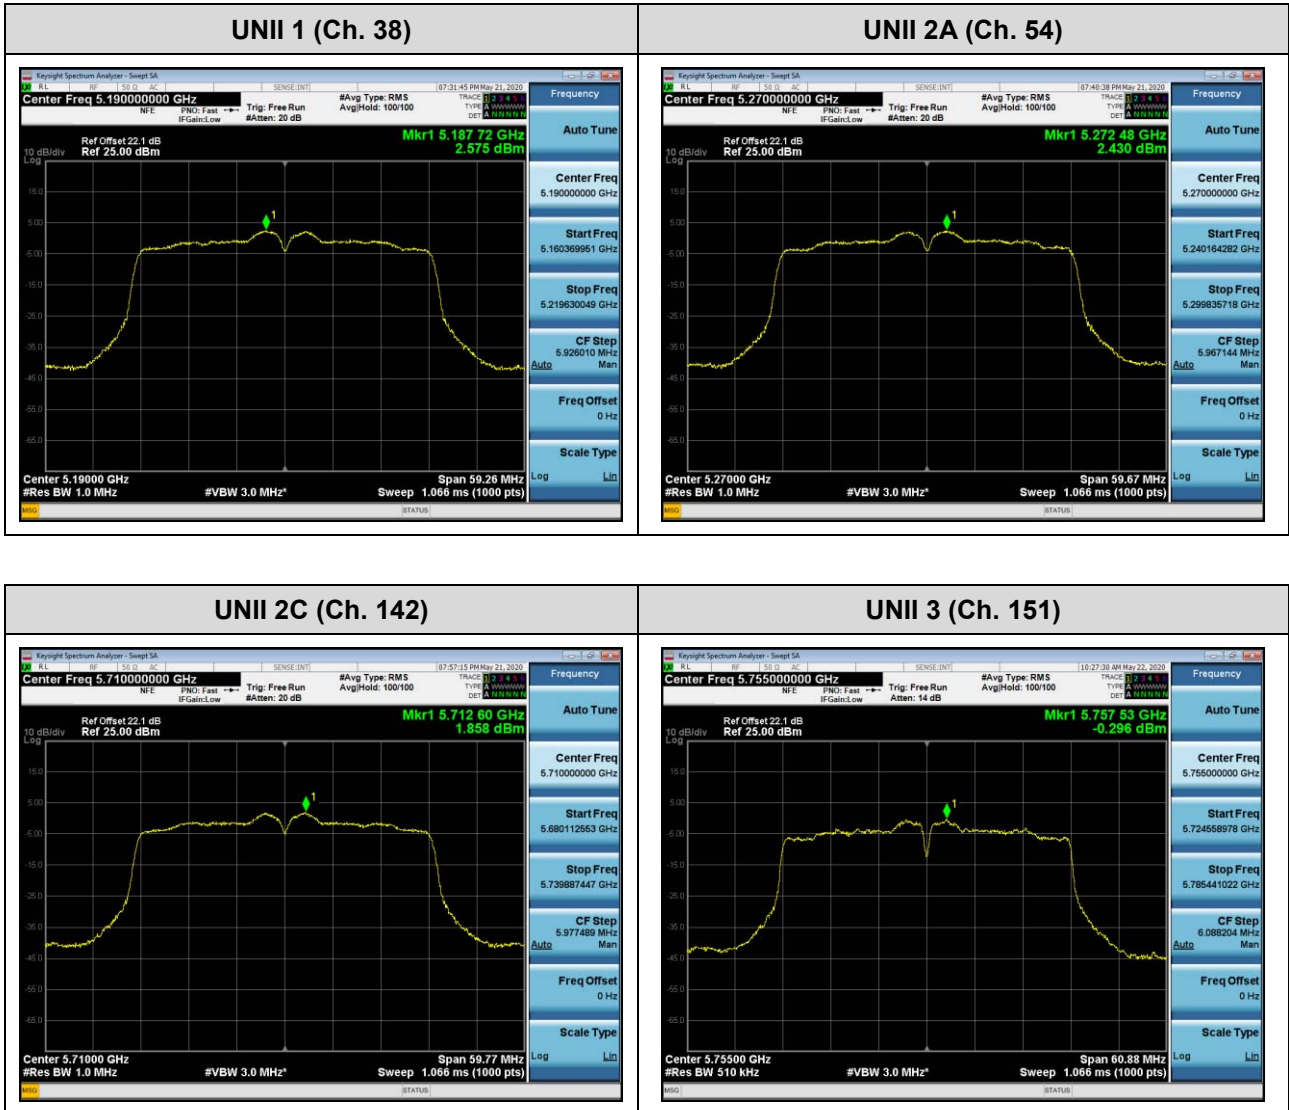

☐ Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only channel of highest power.

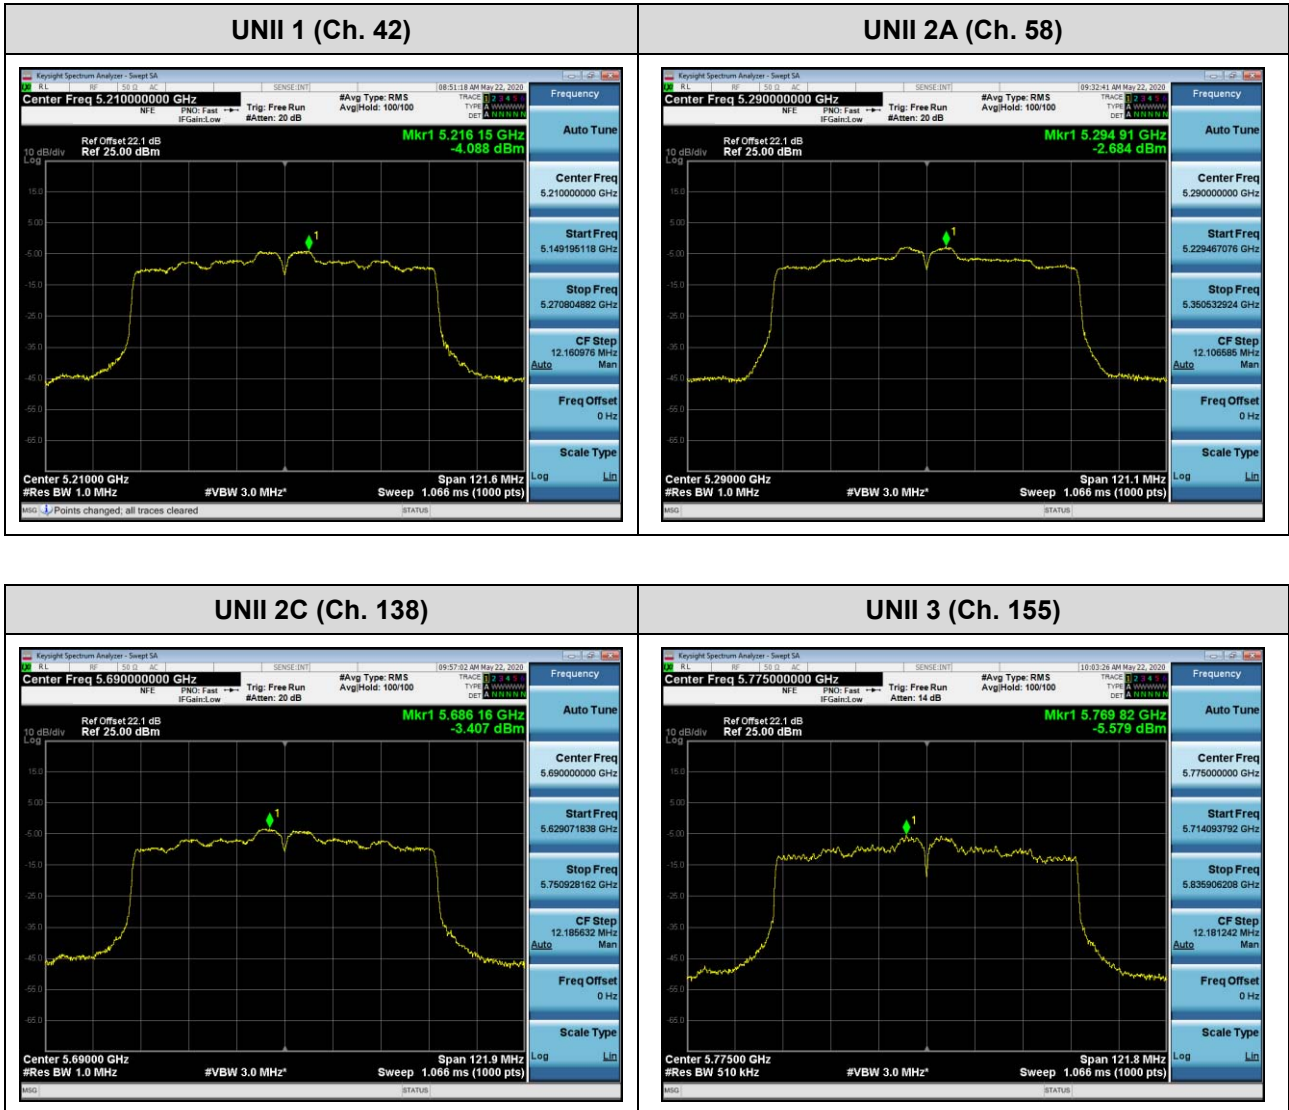

**10.6 FREQUENCY STABILITY.**

**10.6.1 80MHz BW**

**Startup after the EUT is energized**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 3.88 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.88	+20(Ref)	5210078.36	78.36
100%		-30	5210030.18	30.18
100%		-20	5210058.35	58.35
100%		-10	5210031.69	31.69
100%		0	5210038.88	38.88
100%		+10	5210018.71	18.71
100%		+30	5210084.22	84.22
100%		+40	5210040.27	40.27
100%		+50	5210085.16	85.16
HIGH		4.38	+20	5210039.28
LOW	3.68	+20	5210067.02	67.02

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 3.88 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.88	+20(Ref)	5290016.04	16.04
100%		-30	5290012.35	12.35
100%		-20	5290028.86	28.86
100%		-10	5290002.86	2.86
100%		0	5290076.29	76.29
100%		+10	5290044.59	44.59
100%		+30	5290034.22	34.22
100%		+40	5290037.63	37.63
100%		+50	5290045.52	45.52
HIGH		4.38	+20	5290030.69
LOW	3.68	+20	5290094.52	94.52

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 3.88 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.88	+20(Ref)	5530052.44	52.44
100%		-30	5530090.39	90.39
100%		-20	5530088.73	88.73
100%		-10	5530003.98	3.98
100%		0	5530009.24	9.24
100%		+10	5530065.89	65.89
100%		+30	5530015.73	15.73
100%		+40	5530074.32	74.32
100%		+50	5530049.21	49.21
HIGH		4.38	+20	5530009.20
LOW	3.68	+20	5530026.22	26.22

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 3.88 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.88	+20(Ref)	5775029.33	29.33
100%		-30	5775098.42	98.42
100%		-20	5775059.03	59.03
100%		-10	5775037.62	37.62
100%		0	5775049.28	49.28
100%		+10	5775014.12	14.12
100%		+30	5775028.81	28.81
100%		+40	5775042.81	42.81
100%		+50	5775083.49	83.49
HIGH		4.38	+20	5775028.84
LOW	3.68	+20	5775064.46	64.46

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



**2 minutes after the EUT is energized**

OPERATING BAND: UNII Band 1  
 OPERATING FREQUENCY: 5,210,000,000 Hz  
 CHANNEL: 42  
 REFERENCE VOLTAGE: 3.88 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.88	+20(Ref)	5210069.66	69.66
100%		-30	5210016.19	16.19
100%		-20	5210046.55	46.55
100%		-10	5210076.98	76.98
100%		0	5210049.36	49.36
100%		+10	5210068.84	68.84
100%		+30	5210066.23	66.23
100%		+40	5210052.93	52.93
100%		+50	5210055.33	55.33
HIGH		4.38	+20	5210001.33
LOW	3.68	+20	5210072.17	72.17

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A  
 OPERATING FREQUENCY: 5,290,000,000 Hz  
 CHANNEL: 58  
 REFERENCE VOLTAGE: 3.88 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.88	+20(Ref)	5290027.31	27.31
100%		-30	5290023.46	23.46
100%		-20	5290032.28	32.28
100%		-10	5290065.54	65.54
100%		0	5290082.11	82.11
100%		+10	5290039.21	39.21
100%		+30	5290066.20	66.2
100%		+40	5290008.08	8.08
100%		+50	5290005.97	5.97
HIGH		4.38	+20	5290023.58
LOW	3.68	+20	5290027.79	27.79

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2C  
 OPERATING FREQUENCY: 5,530,000,000 Hz  
 CHANNEL: 106  
 REFERENCE VOLTAGE: 3.88 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.88	+20(Ref)	5530069.27	69.27
100%		-30	5530062.41	62.41
100%		-20	5530047.64	47.64
100%		-10	5530084.71	84.71
100%		0	5530012.87	12.87
100%		+10	5530022.75	22.75
100%		+30	5530095.44	95.44
100%		+40	5530001.33	1.33
100%		+50	5530005.22	5.22
HIGH		4.38	+20	5530075.45
LOW	3.68	+20	5530057.35	57.35

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3  
 OPERATING FREQUENCY: 5,775,000,000 Hz  
 CHANNEL: 155  
 REFERENCE VOLTAGE: 3.88 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.88	+20(Ref)	5775097.76	97.76
100%		-30	5775015.84	15.84
100%		-20	5775080.94	80.94
100%		-10	5775066.77	66.77
100%		0	5775044.48	44.48
100%		+10	5775059.64	59.64
100%		+30	5775026.06	26.06
100%		+40	5775034.70	34.7
100%		+50	5775095.43	95.43
HIGH		4.38	+20	5775099.05
LOW	3.68	+20	5775096.65	96.65

**Note:**

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.