

# Power Density Simulation Report

FCC ID : A3LSMA516V

Revision : A

Date : Jun 19<sup>th</sup>, 2020

Innovative Product R&D Group 1

Seokjin Han

## 1. Simulation methodology for Power Density (PD)

### 1.1 Simulation tool

#### 1.1.1 Tool description

For the simulation approach to calculating power density (PD) evaluation for mobile phone with mmWave antenna modules, ANSYS Electromagnetics suite version 19.3 (HFSS) is used. ANSYS HFSS is one of several commercial tools for 3D full-wave electromagnetic simulation used for antenna and RF structure design of high frequency component. ANSYS Electromagnetics suite version 19.3 (HFSS) is implemented based on Finite Element Method (FEM), which operates in the frequency domain.

#### 1.1.2 Mesh and Convergence criteria

To solve the PD analysis using FEM, volume area containing simulated objects should be subdivided into electrically small parts that are called finite elements as the unknown functions. To subdivide system, the adaptive mesh technique in ANSYS Electromagnetics suite version 19.3 (HFSS) is used. ANSYS Electromagnetics suite version 19.3 (HFSS) starts to refine the initial mesh based on wavelength and calculate the error to iterative process for adaptive mesh refinement. The determination parameter of the number of iteration in ANSYS Electromagnetics suite version 19.3 (HFSS) is defined as convergence criteria, delta S, and the iterative adaptive mesh process repeats until the delta S is met. In ANSYS Electromagnetics suite version 19.3 (HFSS), the accuracy of converged results depends on the delta S. Figure 1 is an example of final adaptive mesh of the device (cross-section of top view).

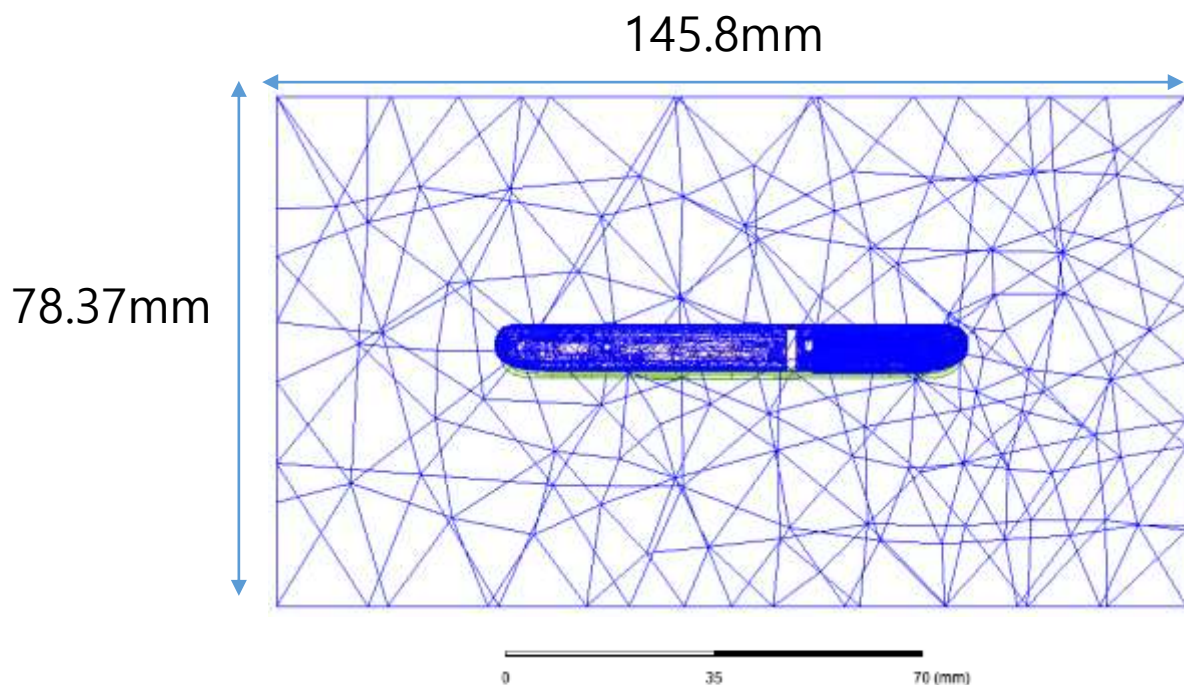


Figure 1 Example of the adaptive mesh technique (Top view)

### 1.1.3 Power density calculation

After solving 3D full-wave electromagnetic simulation, various kinds of physical quantities can be obtained. To calculate PD evaluation, two physical quantities, an electric field ( $\vec{E}$ ) and a magnetic field ( $\vec{H}$ ) are needed. The actual consumption power can be expressed as the real term of the Poynting vector ( $\vec{S}$ ) from the cross product of  $\vec{E}$  and complex conjugation of  $\vec{H}$  as shown below:

$$\langle \vec{S} \rangle = \text{Re} \left( \frac{1}{2} \vec{E} \times \vec{H}^* \right)$$

$\langle \vec{S} \rangle$  can be expressed as point power density based on a peak value of each spatial point on mesh grids, and obtained directly from ANSYS Electromagnetics suite version 19.3 (HFSS).

From the point power density  $\langle \vec{S} \rangle$ , the spatial-averaged power density ( $PD_{av}$ ) on an evaluated area (A) can be derived as shown below:

$$PD_{av} = \frac{1}{A} \int_A \langle \vec{S} \rangle \cdot ds = \frac{1}{2A_{av}} \iint_{A_{av}} \| \text{Re}\{E \times H^*\} \| dA$$

, where the spatial-averaged power density ( $PD_{av}$ ) is total power density value considering on x, y and z components of point power density  $\langle \vec{S} \rangle$  and the evaluated area (A) is  $4\text{cm}^2$ .

## 1.2 Simulation setup

### 1.2.1 3D modeling

Figure 2 shows the simulation model which is mounted three mmWave antenna modules. The simulation modeling includes most of the entire structure of device itself such as PCB, metal frame, battery, cables, and legacy antennas as well as mmWave antenna modules called as Ant K and Ant L. Ant K is placed on the left side and antennas are facing the left side, and Ant L is placed on the right side and antennas are facing the right side of the device.

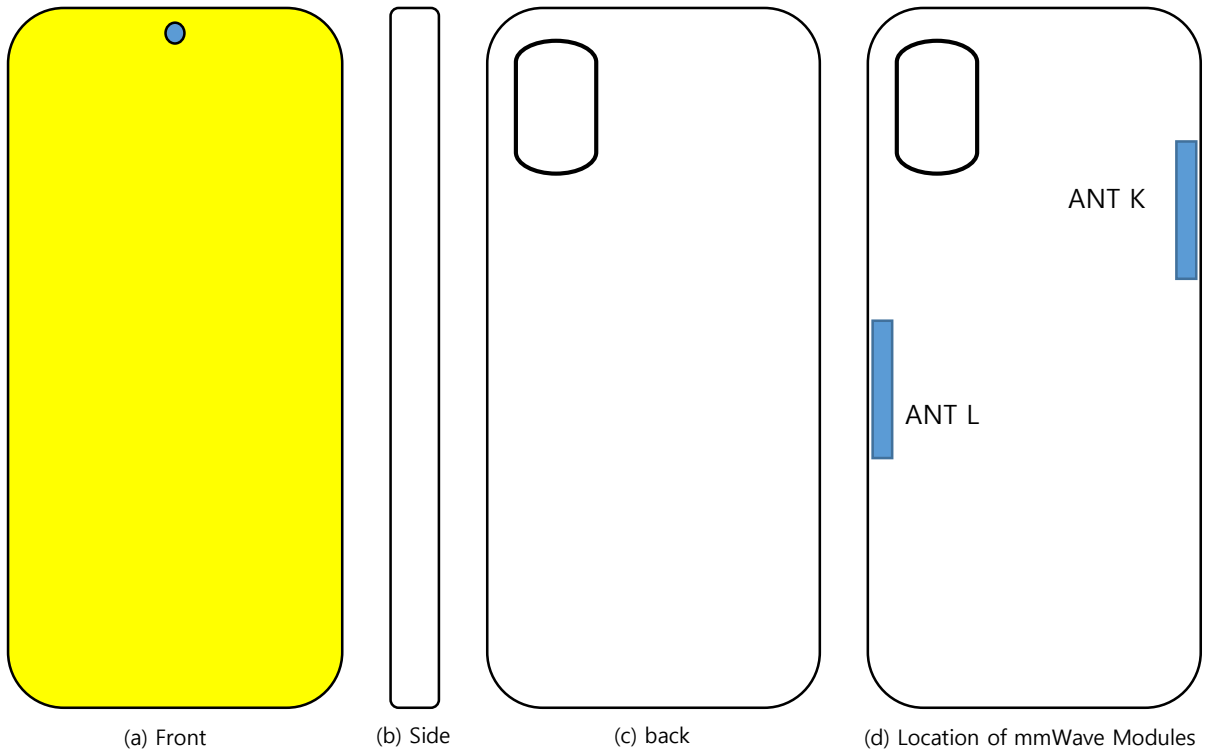


Figure 2 Simulation model which is mounted three mmWave antenna modules


### 1.2.2 PD evaluation planes

Table 1 shows the PD evaluation planes for each mmWave antenna module and Figure 3 shows the PD evaluation planes and truncation area of the simulation model to find worst case of beamforming cases. In Ant K cases, five PD evaluation planes except bottom side are set up. Ant K are placed at the upper of the device and the bottom side is excluded from the worst case because the distance from the bottom side is more than 10 lambda at 28GHz and 39 GHz. In Ant L case, five PD evaluation planes except top side are set up, Ant L is placed at the lower of the device and the top side is excluded from the worst case for the same reason as Ant K.


Please note that the “right” and “left” edge of mentioned in this report are defined from the perspective of looking at the device from the back side.

Table 1. PD evaluation planes

	Front	Back	Left From Front View	Right From Front View	Top	Bottom
	S1	S2	S3	S4	S5	S6
Ant K	O	O	O	O	O	X
Ant L	O	O	O	O	X	O

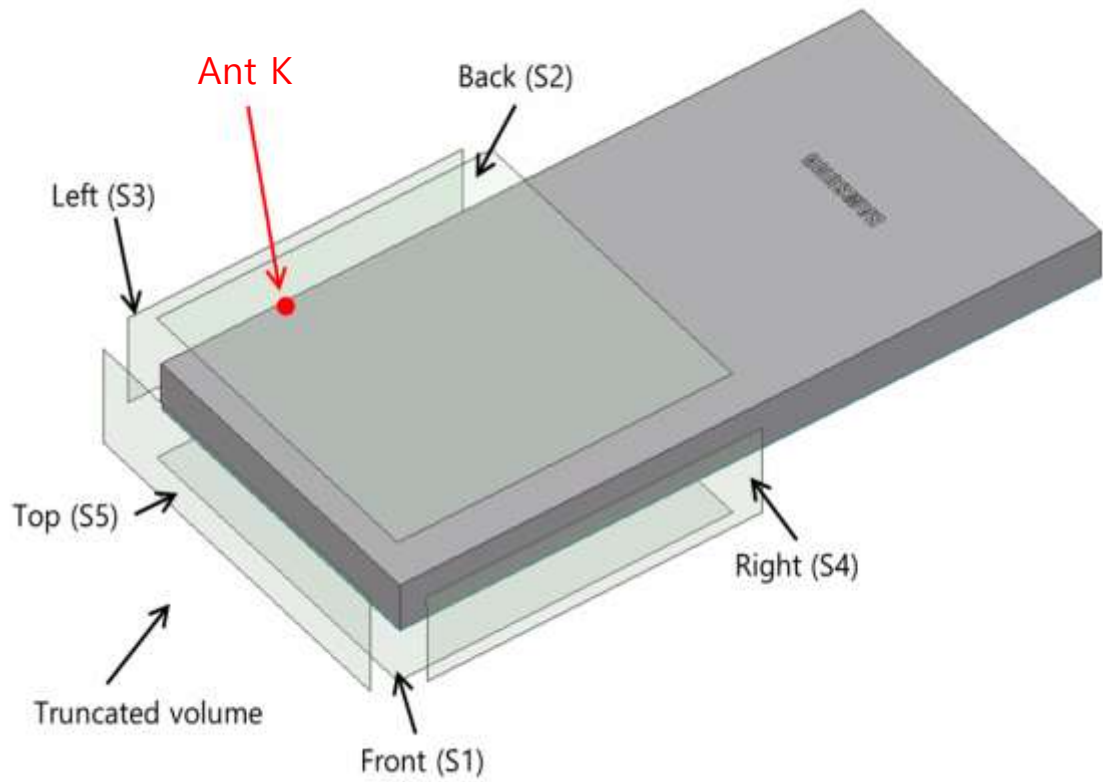

(a) Ant K

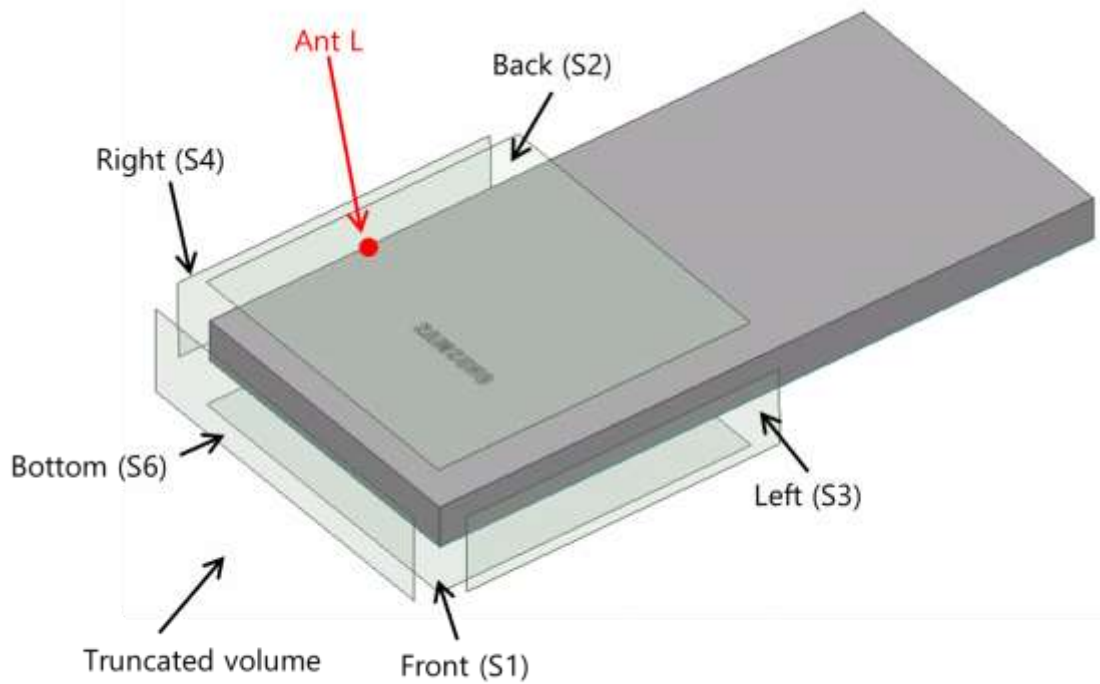

(b) Ant L

Figure 3. PD evaluation planes

### 1.2.3 Boundary condition

To simulate electromagnetic tool based on FEM, the boundary condition allows electromagnetic waves to be electrically open at the boundary and radiated far away without reflection. ANSYS Electromagnetics suite version 19.3 (HFSS) can support the absorbing boundary condition (ABC) for radiation boundary and make normally a quarter wave length from the radiating structure. In this report, to cover all beamforming cases of mmWave antenna modules, the three wavelength spacing from the device is used.

### 1.2.4 Source excitation condition

The number of antenna ports of ANT K, and ANT L for source excitation consists of 24, 16, and 16, respectively. The dipole array antennas consist of 4 antenna elements and each element uses two ports as a source excitation. All antenna ports of ANT K and ANT L are for patch array antennas.

After finishing 3D full wave electromagnetic simulation of modeling structure, the magnitude and phase information can be loaded for each port by using “Edit Sources” function in ANSYS Electromagnetics suite (HFSS). Since ANSYS Electromagnetics suite (HFSS) uses FEM solver based on frequency domain analysis method, the input source for the port excitation applies sinusoidal waveform for each frequency.

### 1.2.5 Condition of simulation completion

The simulation completion condition of ANSYS Electromagnetics suite (HFSS) is defined as delta S. The ANSYS Electromagnetics suite (HFSS) calculates the S-parameter for the mesh conditions of each step and determines whether to proceed with the operation of the next step by comparing the difference between the S-parameters in the previous step. A difference between the previous step and the current step of S-parameter is expressed as delta S, and the delta S generally sets 0.02. The simulation result of this report is the result of setting delta S to 0.02.

## 2. Simulation verification

### 2.1 Spatial-averaged power density

As mentioned in the previous chapter, the Poynting vector ( $\vec{S}$ ) can be obtained through cross product of an electric field ( $\vec{E}$ ) and complex conjugate of a magnetic field ( $\vec{H}$ ). The real term of the Poynting vector can be described as the point power density or peak power density. Using the point power density, the spatial-averaged power density can be obtained by the integral of  $4 \text{ cm}^2$  at  $2.5 \text{ mm}$  intervals of the point power density result. Figure 6 shows examples of the distribution plot of point power density and the averaged power density.

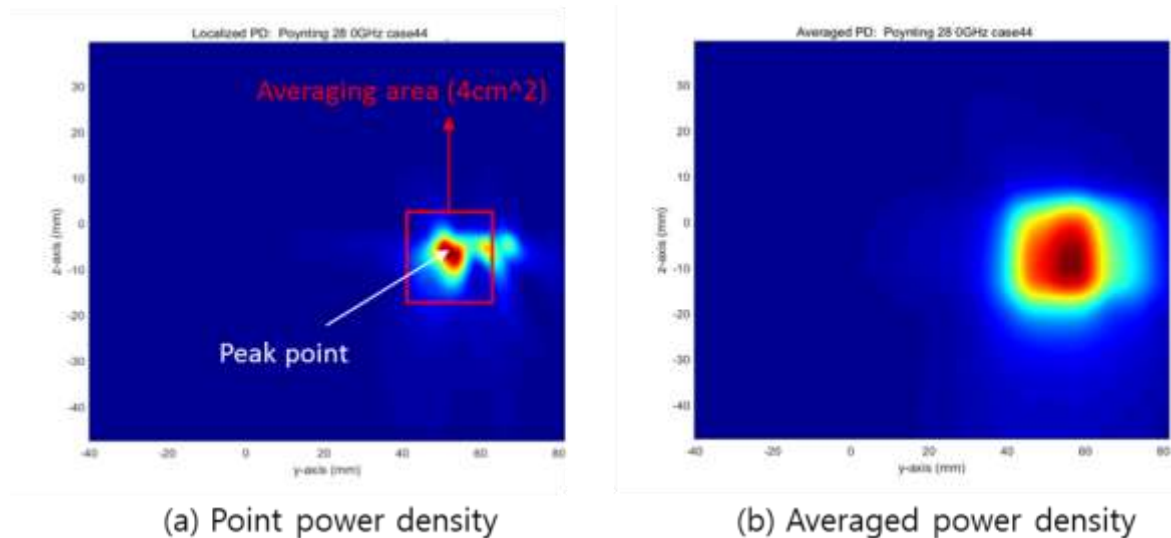


Figure 4. Power density distribution (Example)

### 2.2 Comparison between simulation and measurement

In this section, the simulated-power density distributions and measured-power density distributions are compared to each mmWave antenna.

Based on comparison of power density distributions, simulated power density and measured power density have a good correlation. The discrepancy in amplitude between simulated  $4\text{cm}^2$  averaged power density and measured  $4\text{cm}^2$  averaged power density is considered as housing influence and used in determining input power limit for each beam for RF exposure compliance (see RF Exposure Part 0 Report).

The input powers per each active port are listed below for both Simulation and Measurement validation and power density characterization. For Simulation, these values were entered directly into HFSS model. For measurement, FTM S/W was used to input these values for each active port also.


Mode/Band	Antenna	Input Power (dBm) SISO	Input Power (dBm) MIMO
n261	K Patch	6.0	6.0
	L Patch	6.0	6.0
n260	K Patch	6.0	6.0
	L Patch	6.0	6.0

\* The below simulation and measurement result were performed at 2mm evaluation distance and 28GHz / 38.5GHz. The *input.power.limit* was determined based on below results in RF Exposure Part 0 Report.

Band	Beam ID	Antenna	Surface	Channel	4cm <sup>2</sup> avg. PD (mW/cm <sup>2</sup> )		
					Meas.	Sim	
n261	28	K (patch)	Back (S2)	Mid	0.849	1.32	
			Left (S3)	Mid	0.771	1.48	
	155		Back (S2)	Mid	0.785	1.32	
			Left (S3)	Mid	0.829	1.52	
	24	L (patch)	Back (S2)	Mid	0.879	1.39	
			Right (S4)	Mid	0.843	1.53	
			142	Back (S2)	Mid	0.586	1.44
				Right (S4)	Mid	0.878	1.62
n260	28	K (patch)	Back (S2)	Mid	0.860	1.28	
			Left (S3)	Mid	0.112	1.58	
	157		Back (S2)	Mid	0.797	1.15	
			Left (S3)	Mid	0.954	1.60	
	24	L (patch)	Back (S2)	Mid	0.798	1.32	
			Right (S4)	Mid	0.884	1.59	
			143	Back (S2)	Mid	0.839	1.26
				Right (S4)	Mid	0.100	1.58




- n261 ANT K-Patch: Mid Channel, Beam ID 28, Back

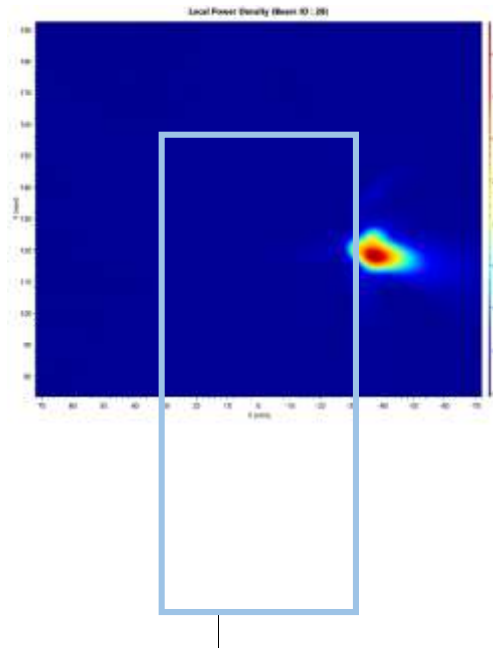


(a) simulation

ANT K-Patch: Mid Channel, Point power density

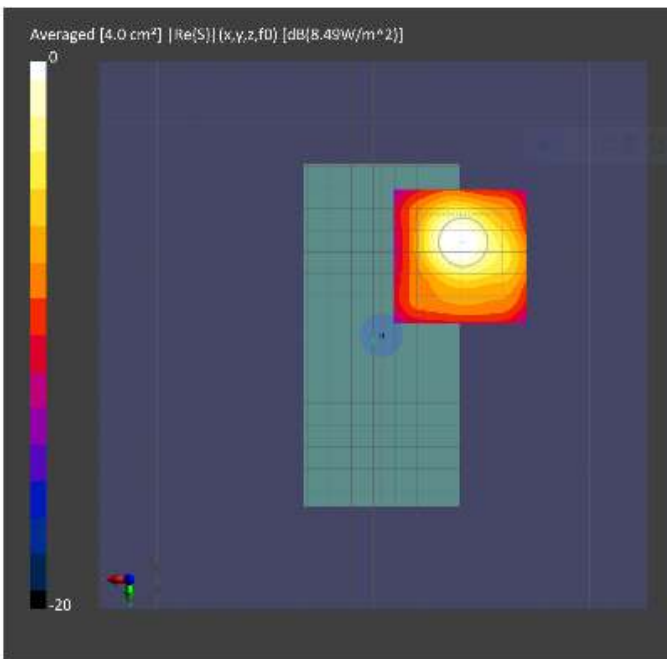



(a) measurement

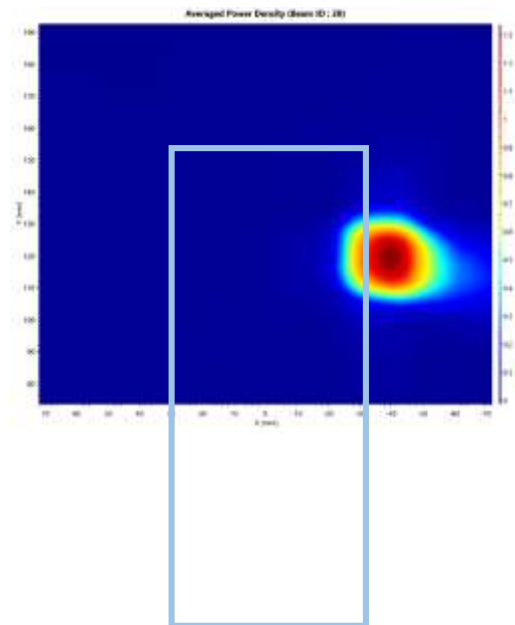

(b) simulation



ANT K-Patch: Mid Channel, 4cm² averaged power density

- n261 ANT K-Patch: Mid Channel, Beam ID 28, Left

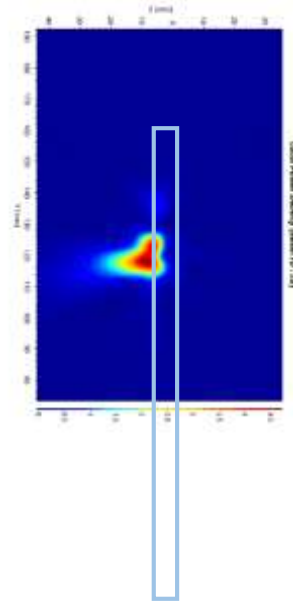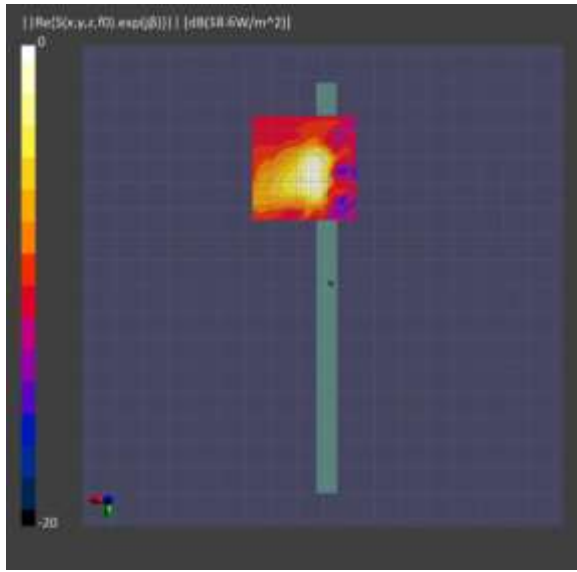

(b) simulation

ANT K-Patch: Mid Channel, Point power density

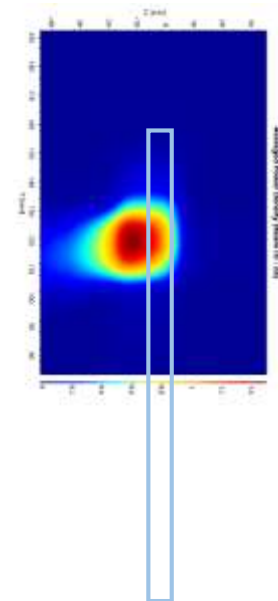
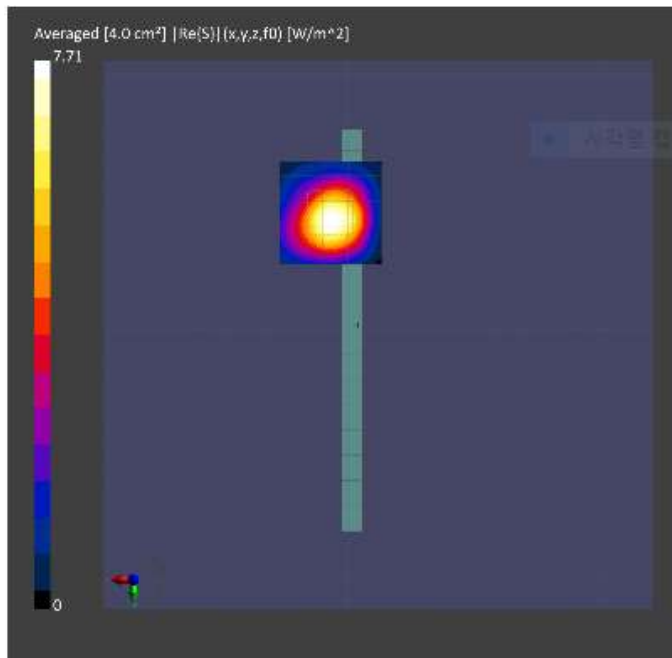


(a) measurement

(b) simulation



ANT K-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

n261 ANT K-Patch: Mid Channel, Beam ID 155, Back

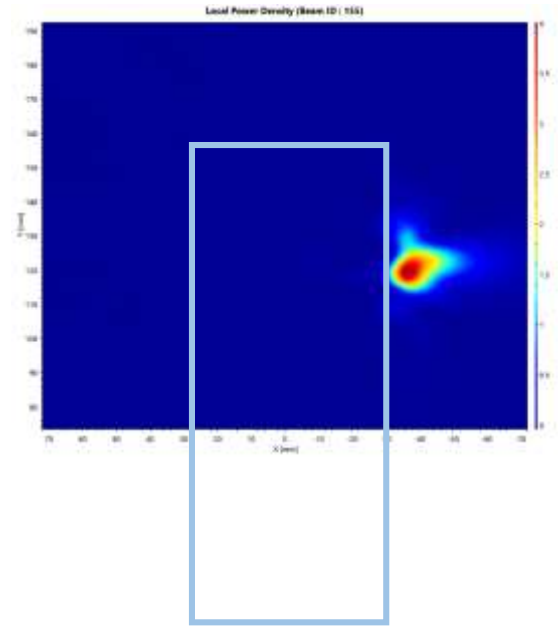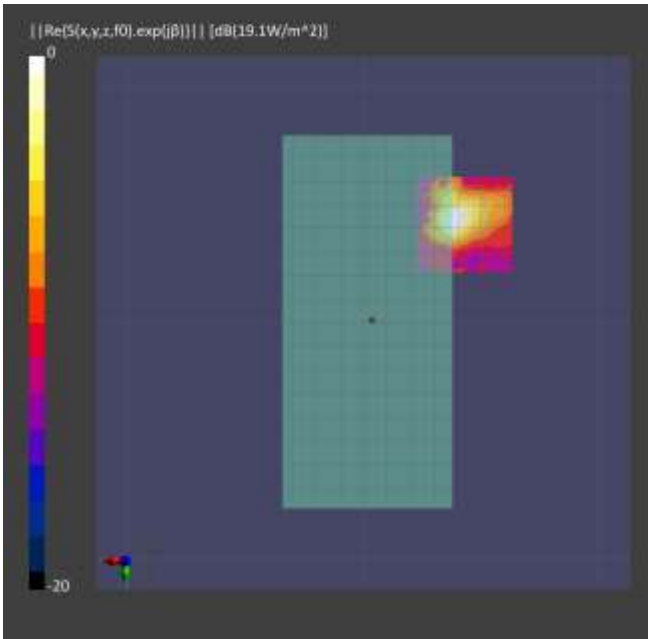

(a) simulation

ANT K-Patch: Mid Channel, Point power density

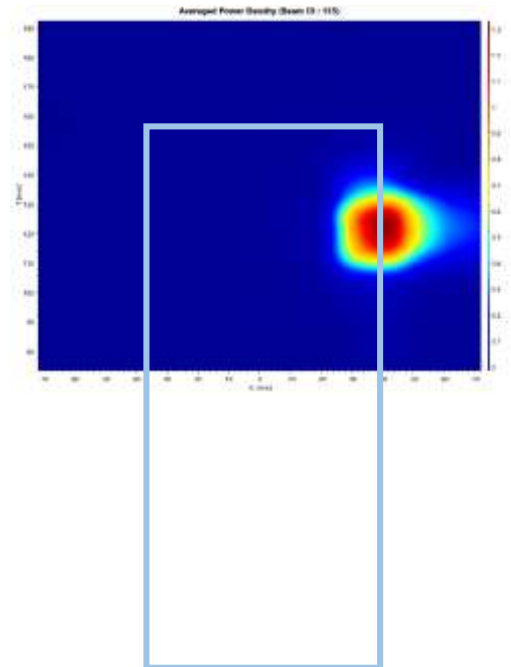
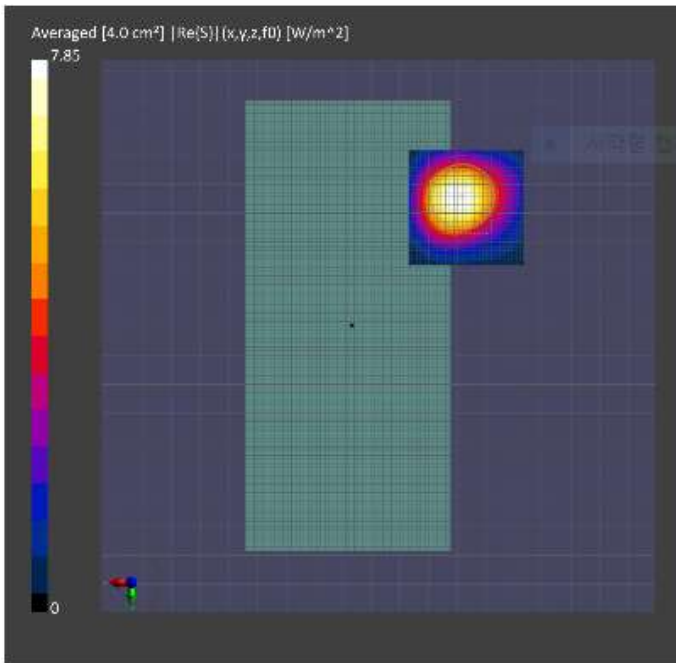


(a) measurement

(b) simulation



ANT K-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

n261 ANT K-Patch: Mid Channel, Beam ID 155, Left

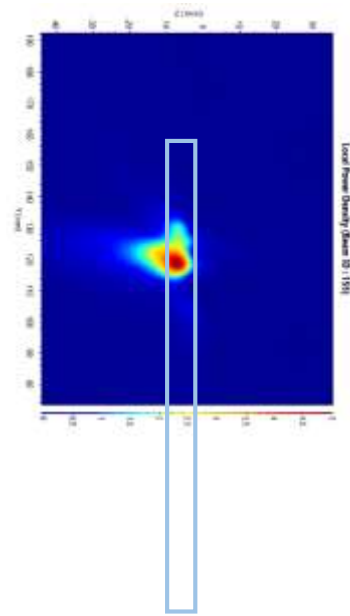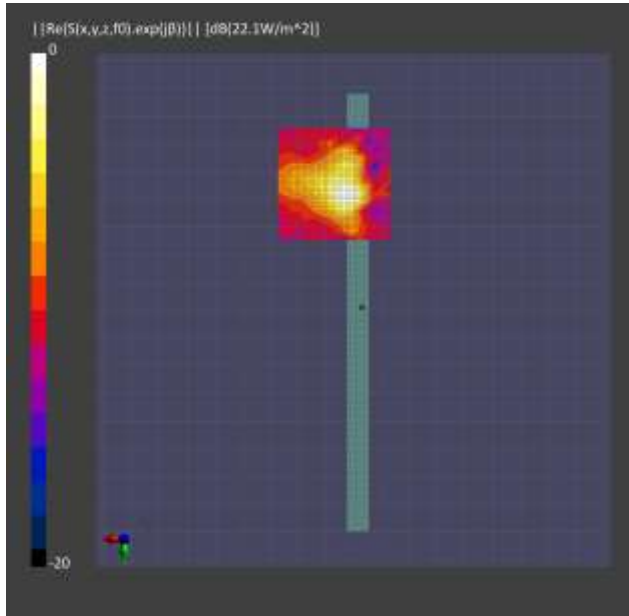

(b) simulation

ANT K-Patch: Mid Channel, Point power density

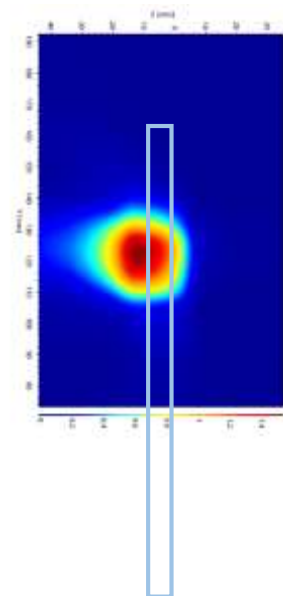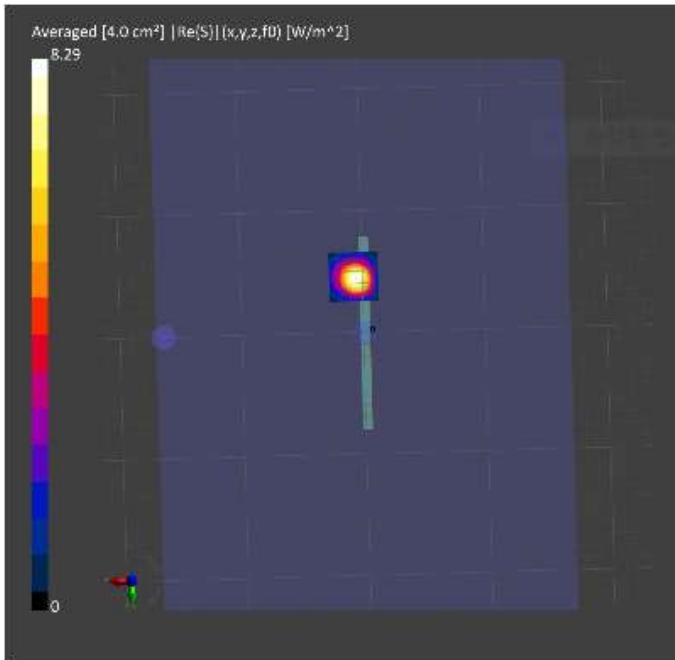


(a) measurement


(b) simulation

ANT K-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

- n261 ANT L-Patch: Mid Channel, Beam ID 24, Back

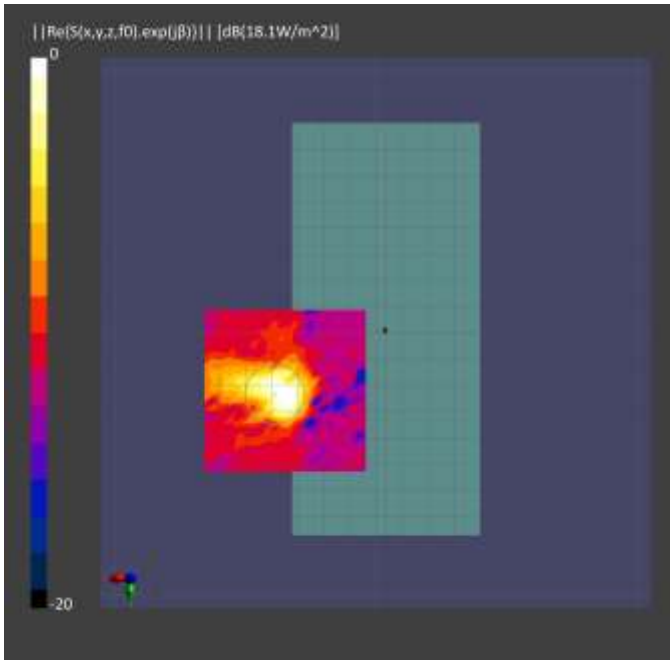


(a) measurement

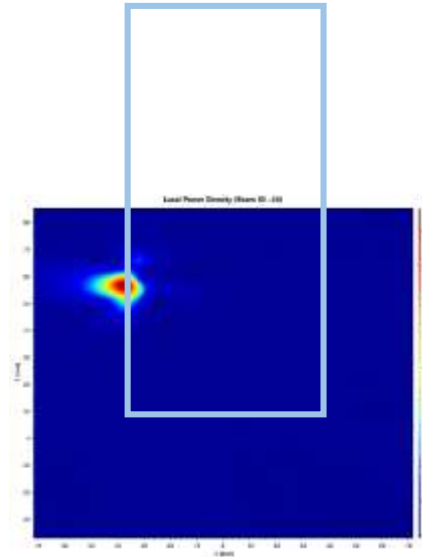


(b) simulation

ANT L-Patch: Mid Channel, Point power density

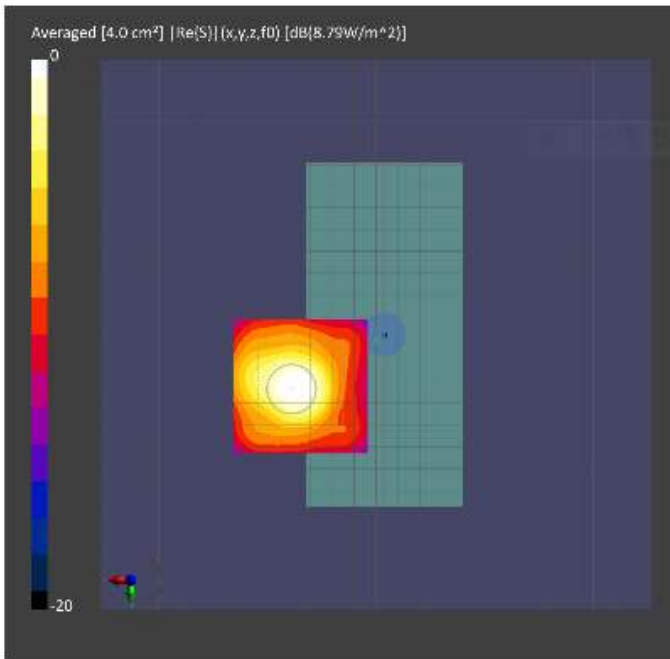


(a) measurement

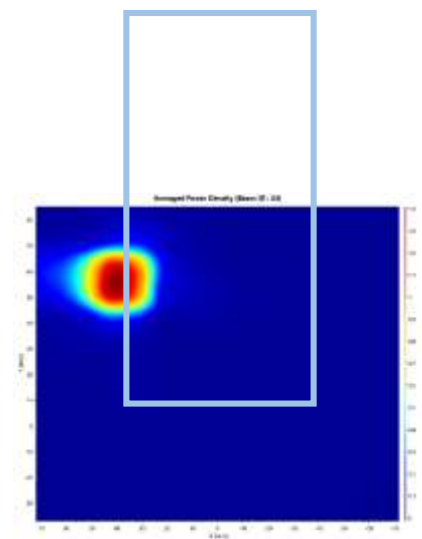


(b) simulation

ANT L-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

n261 ANT L-Patch: Mid Channel, Beam ID 24, Right

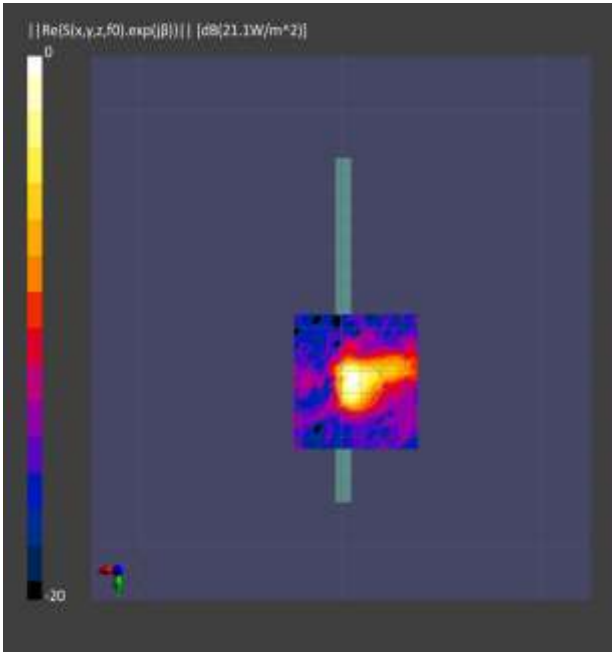


(a) measurement

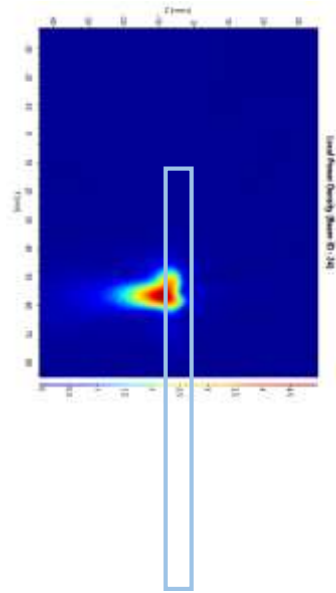


(b) simulation

ANT L-Patch: Mid Channel, Point power density

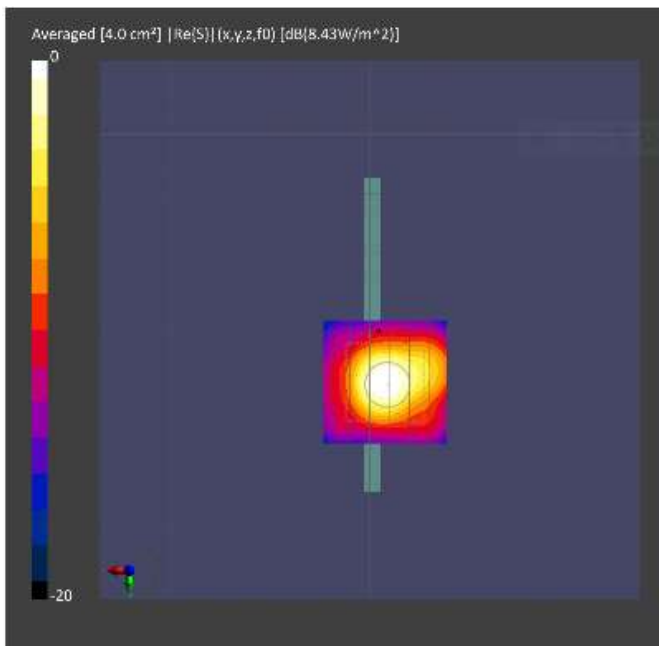


(a) measurement

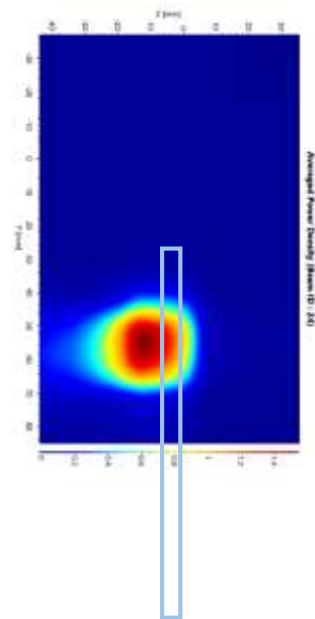


(b) simulation

ANT L-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

n261 ANT L-Patch: Mid Channel, Beam ID 142, Back

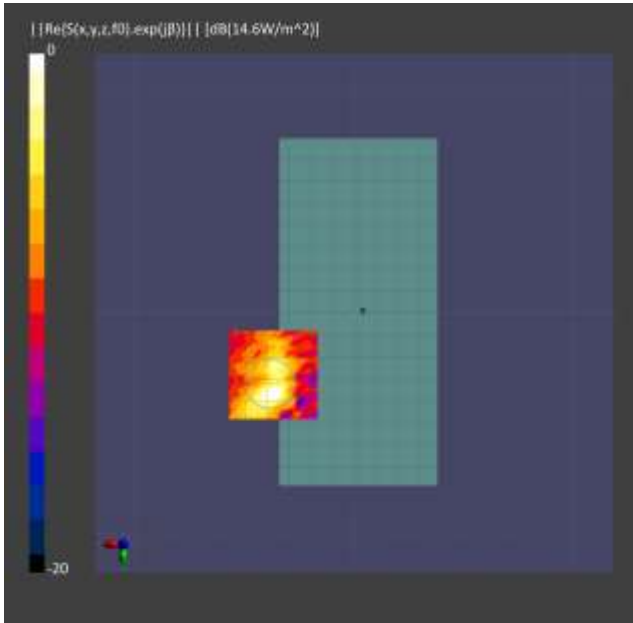


(a) measurement

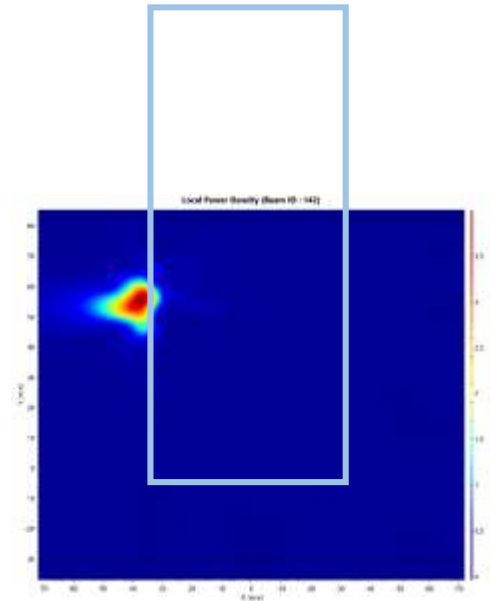


(b) simulation

ANT L-Patch: Mid Channel, Point power density

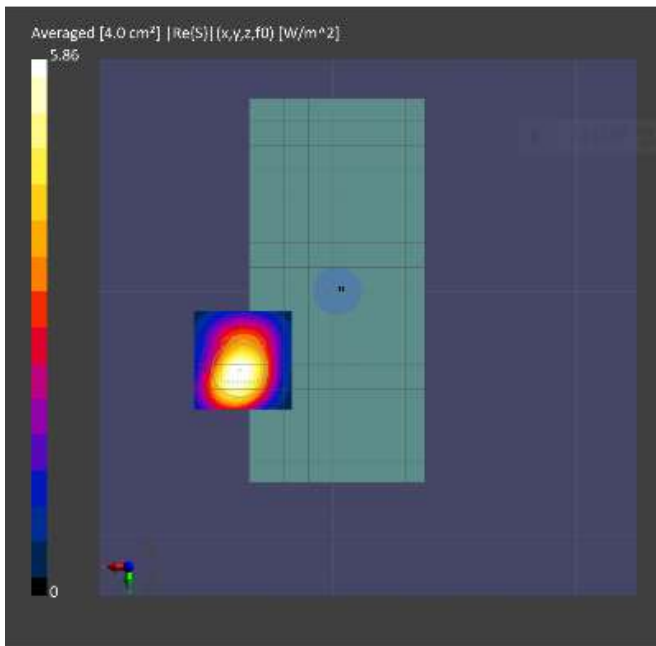


(a) measurement

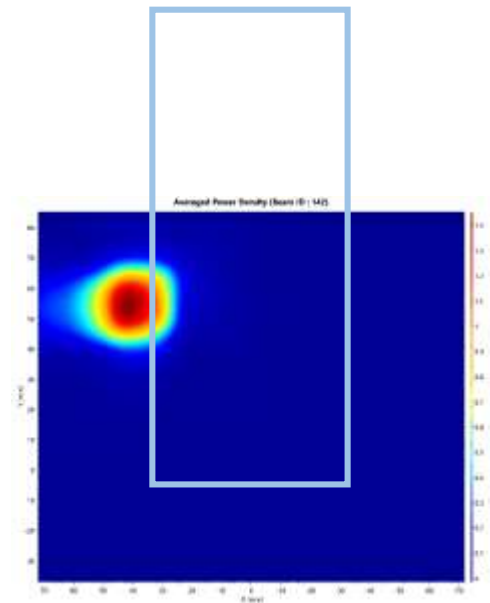


(b) simulation

ANT L-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

- n261 ANT L-Patch: Mid Channel, Beam ID 142, Right

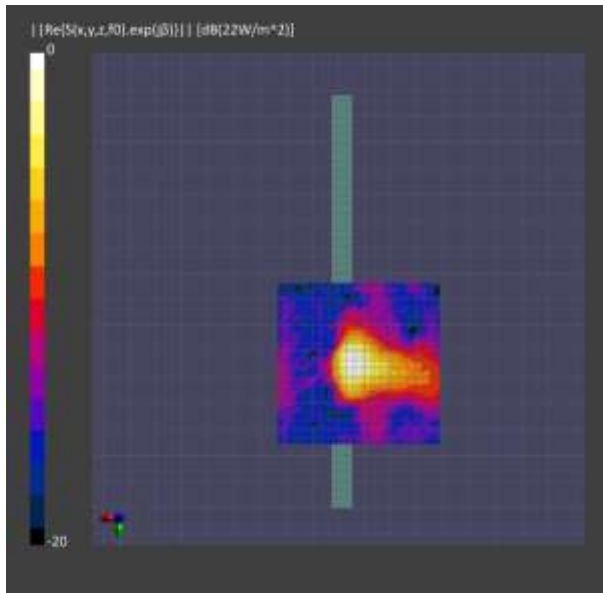


(a) measurement

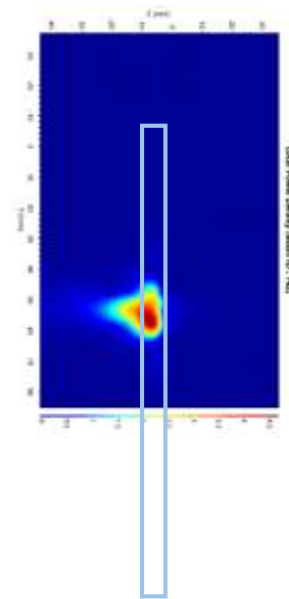


(b) simulation

ANT L-Patch: Mid Channel, Point power density

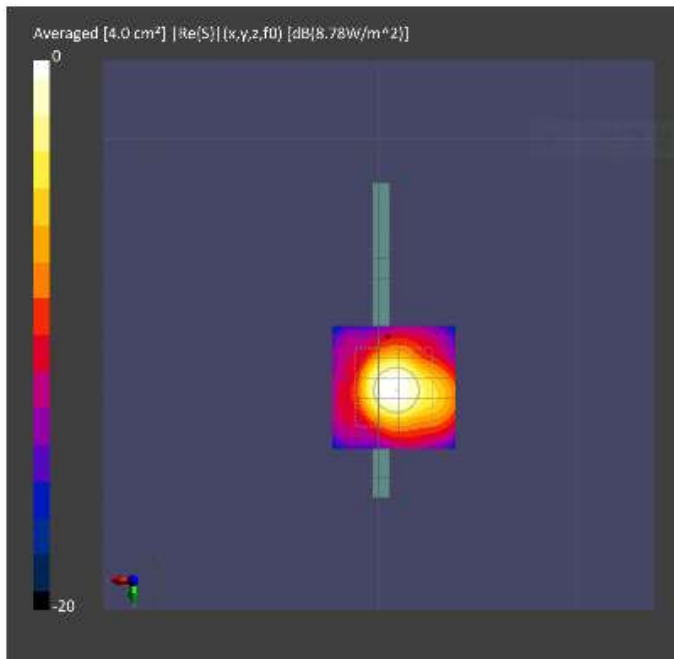

(a) measurement

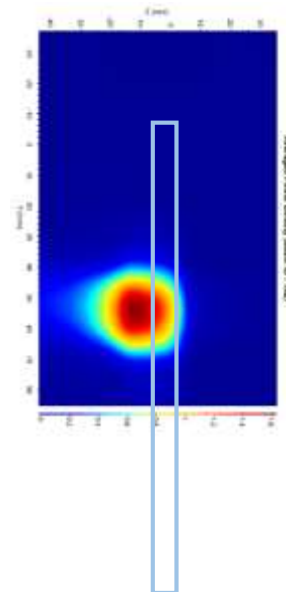


(b) simulation


ANT L-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density



n260 ANT K-Patch: Mid Channel, Beam ID 28, Back

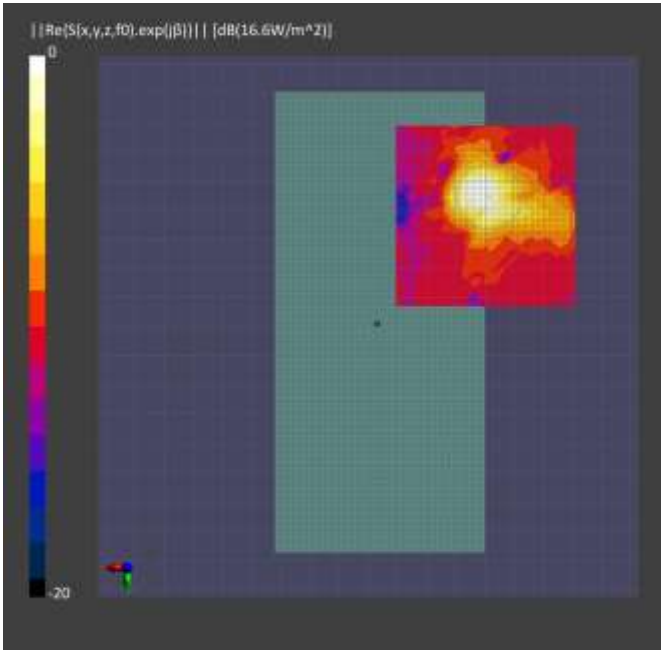


(a) measurement

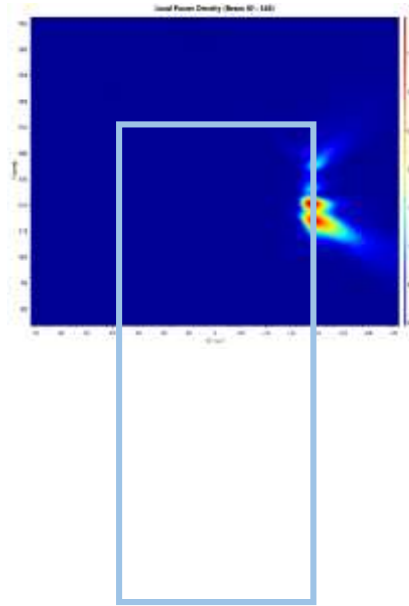


(b) simulation

ANT K-Patch: Mid Channel, Point power density

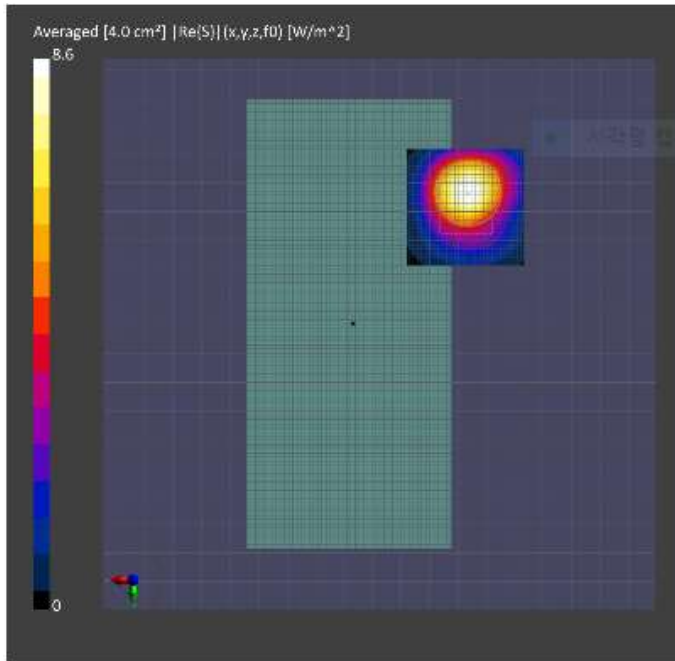


(a) measurement

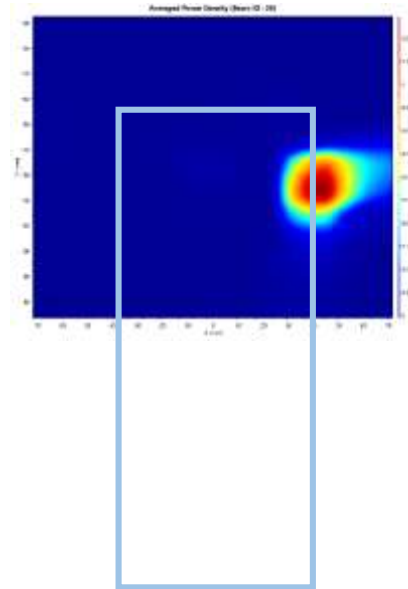


(b) simulation

ANT K-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

- n260 ANT K-Patch: Mid Channel, Beam ID 28, Left

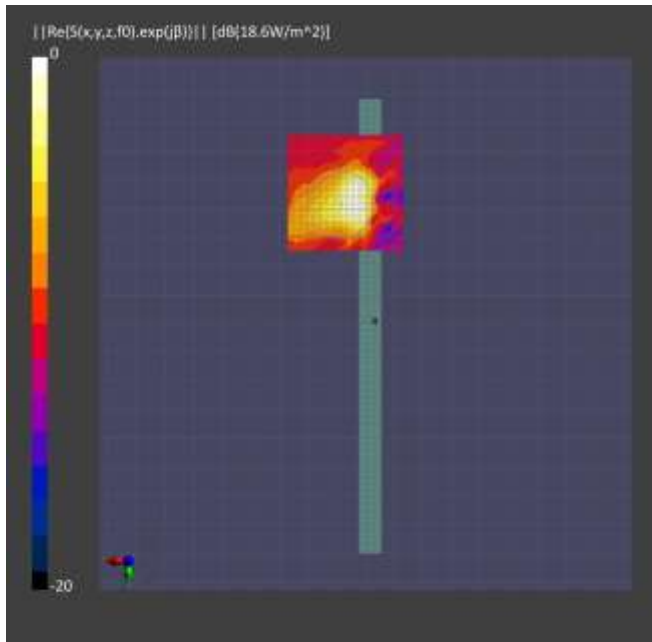


(a) measurement

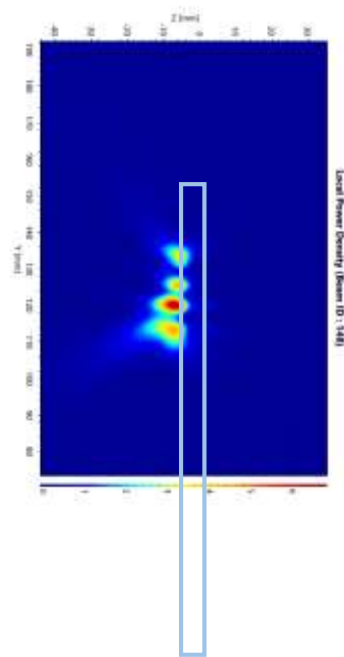


(b) simulation

ANT K-Patch: Mid Channel, Point power density

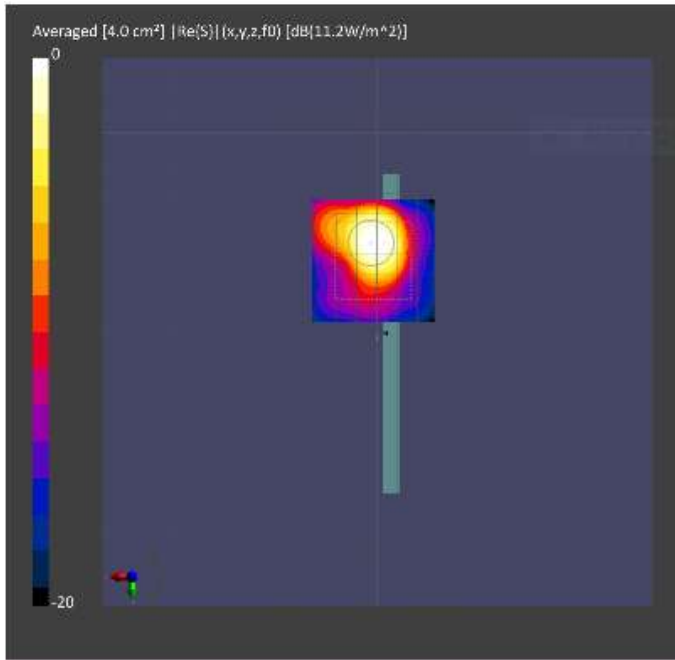


(a) measurement

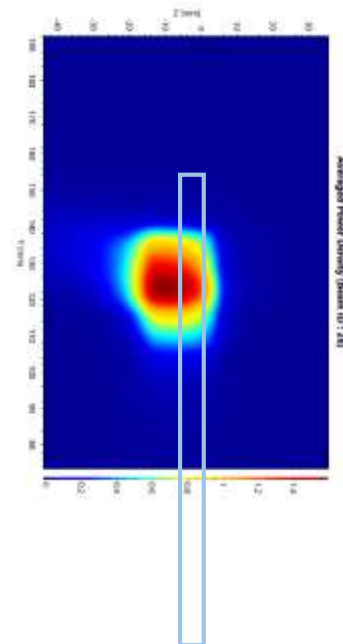


(b) simulation

ANT K-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

- n260 ANT K-Patch: Mid Channel, Beam ID 157, Back

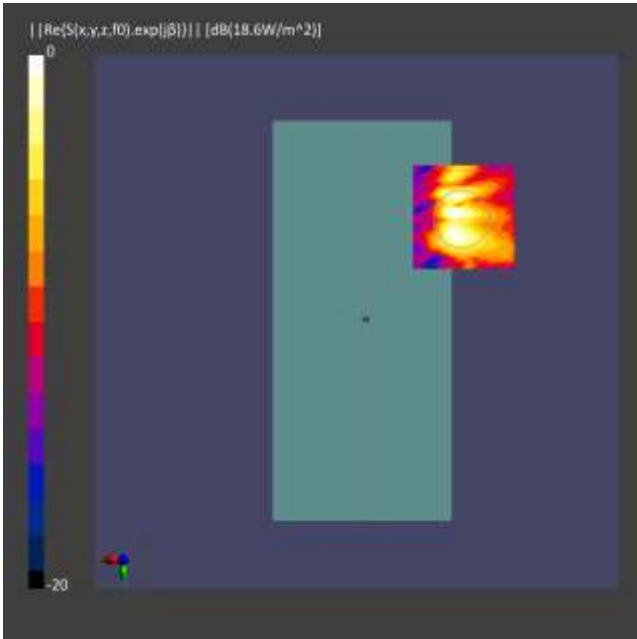


(a) measurement

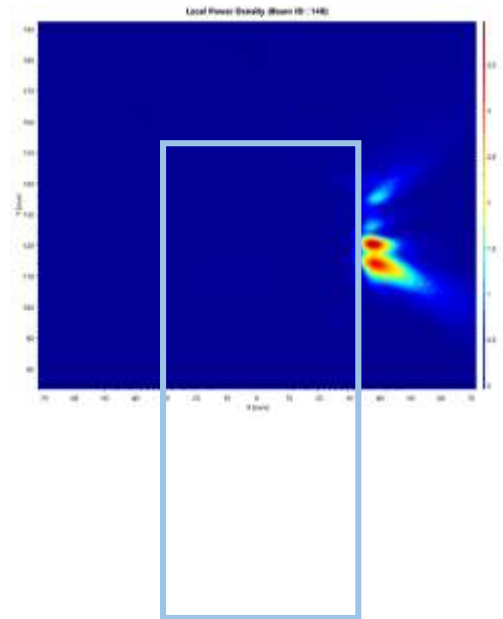


(b) simulation

ANT K-Patch: Mid Channel, Point power density

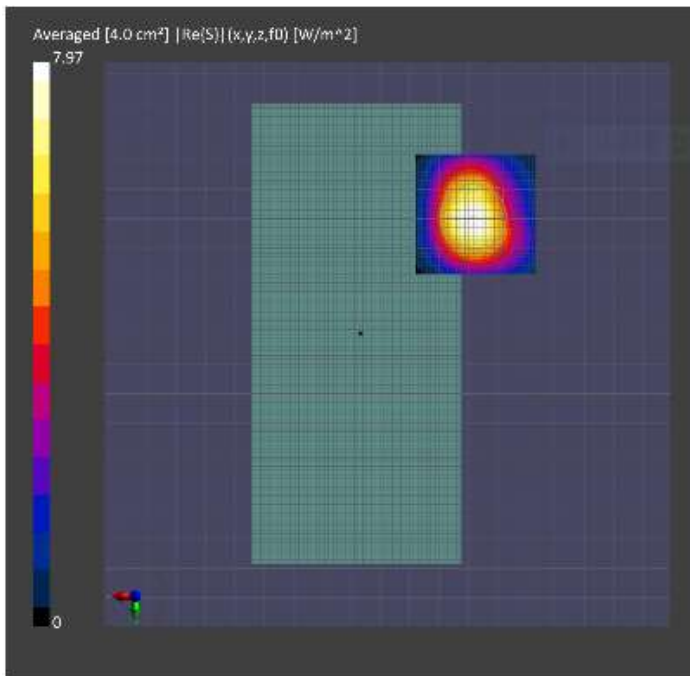


(a) measurement

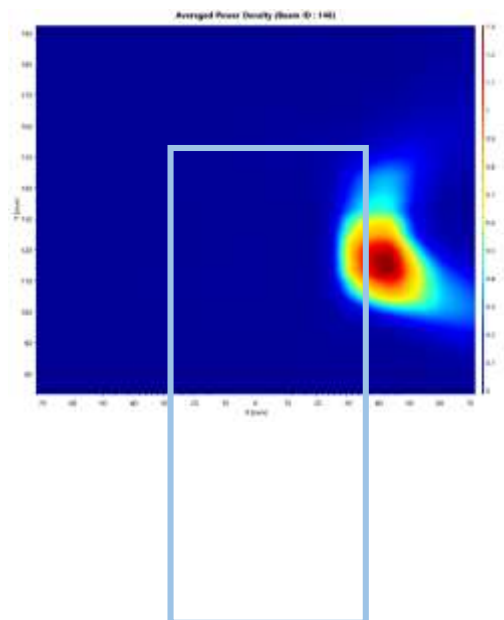


(b) simulation

ANT K-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

- n260 ANT K-Patch: Mid Channel, Beam ID 157, Left

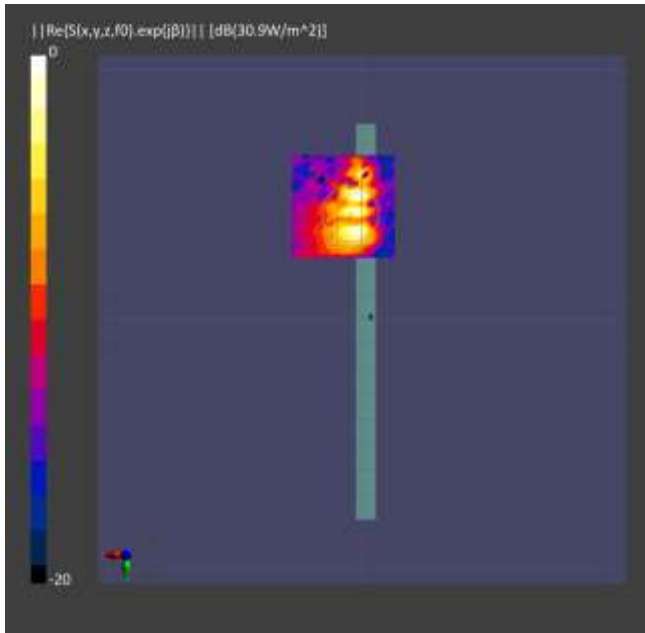


(a) measurement

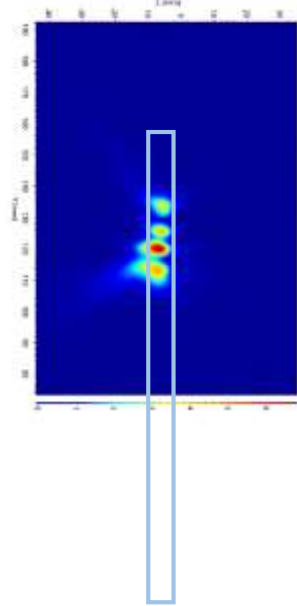


(b) simulation

ANT K-Patch: Mid Channel, Point power density

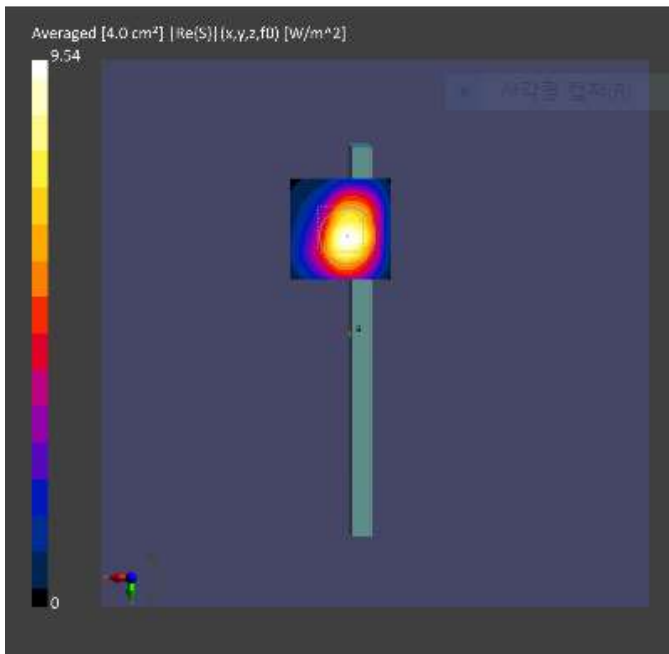


(a) measurement

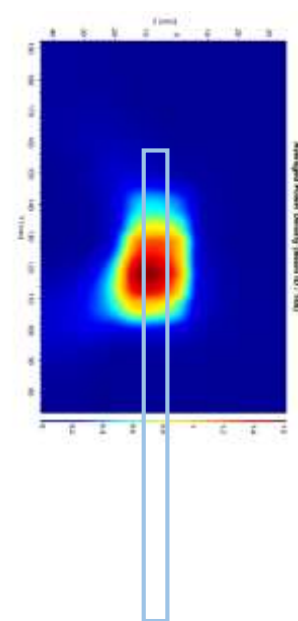


(b) simulation

ANT K-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

- n260 ANT L-Patch: Mid Channel, Beam ID 24, Back

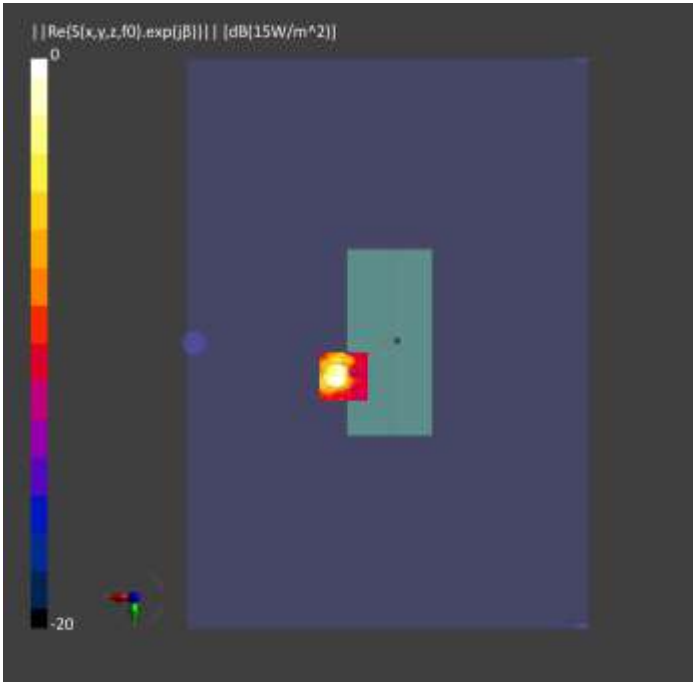


(a) measurement

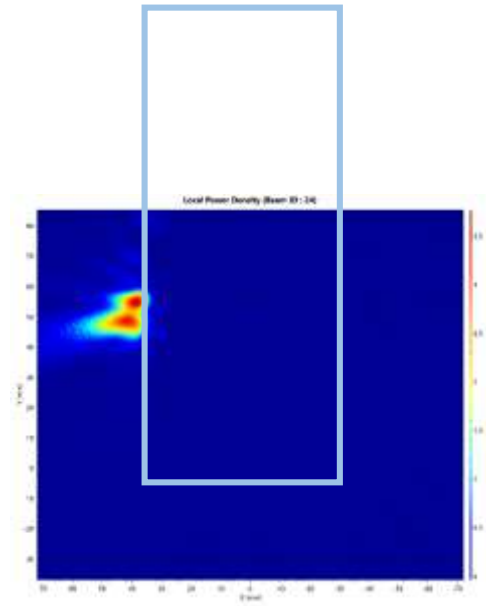


(b) simulation

ANT L-Patch: Mid Channel, Point power density

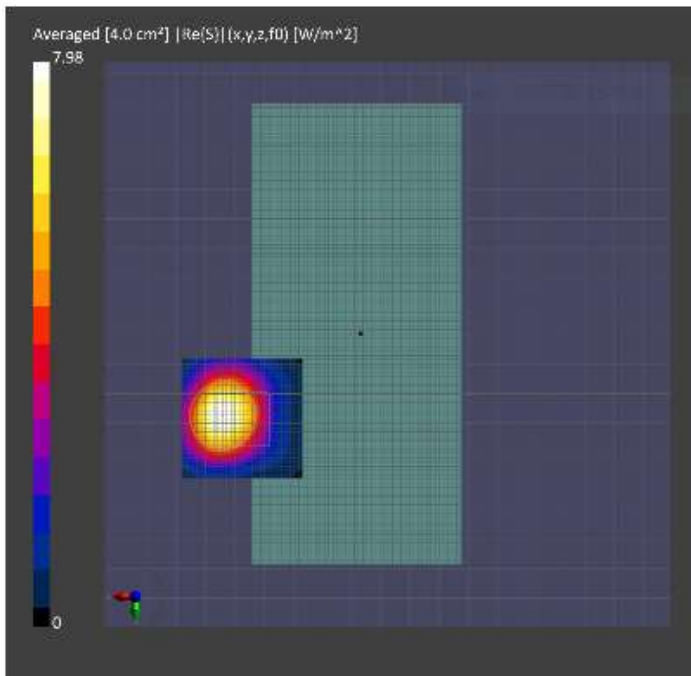


(a) measurement

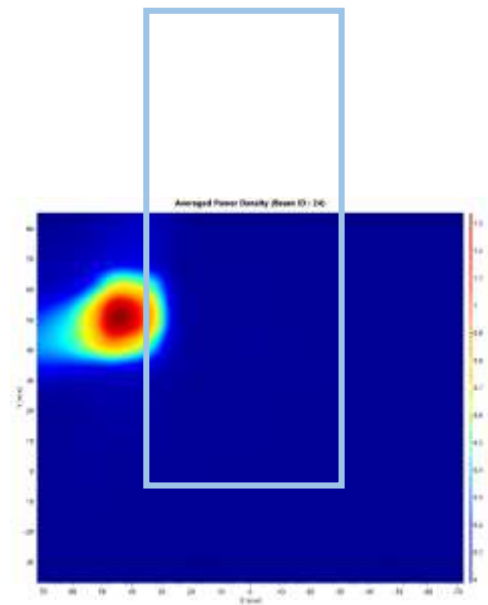


(b) simulation

ANT L-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

- n260 ANT L-Patch: Mid Channel, Beam ID 24, Right

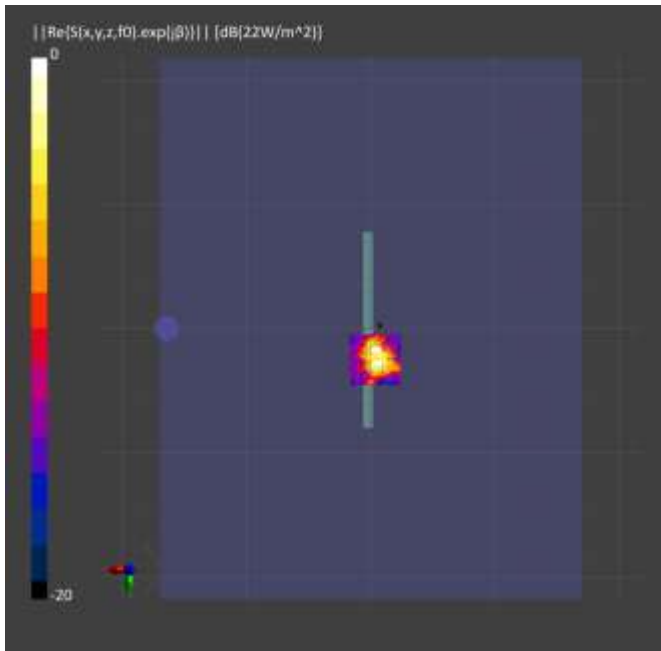


(a) measurement

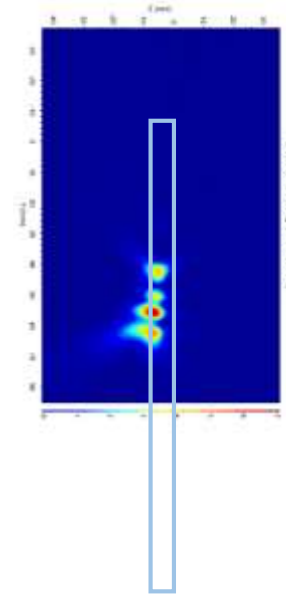


(b) simulation

ANT L-Patch: Mid Channel, Point power density

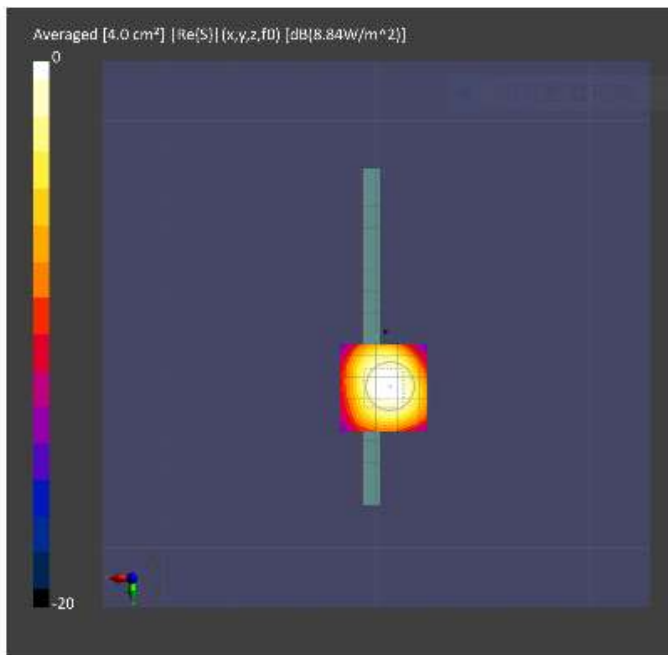


(a) simulation

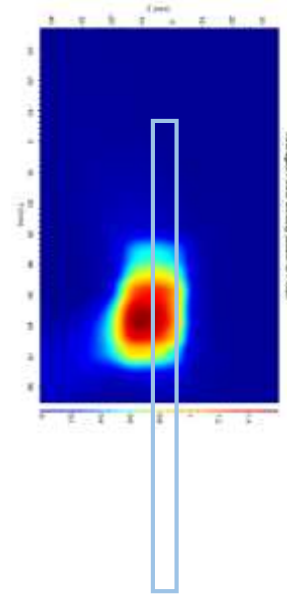


ANT L-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

- n260 ANT L-Patch: Mid Channel, Beam ID 143, Back

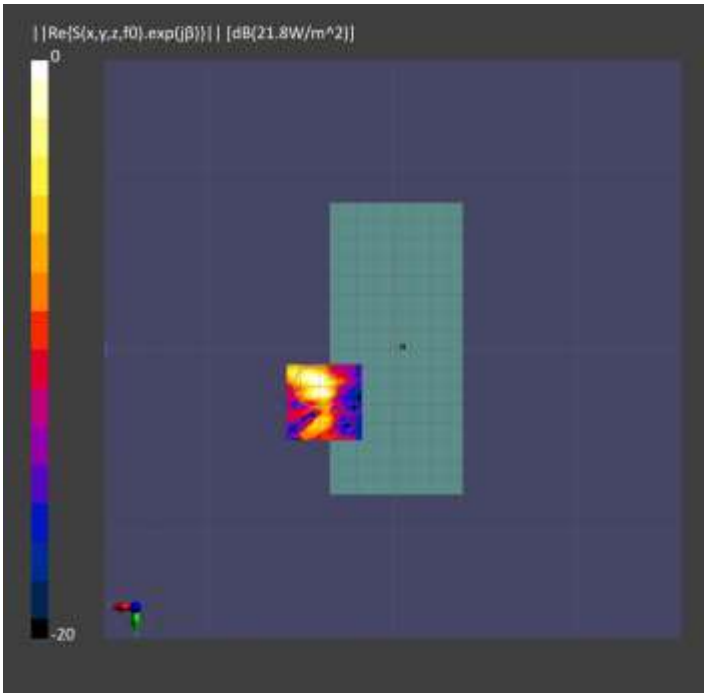


(a) measurement

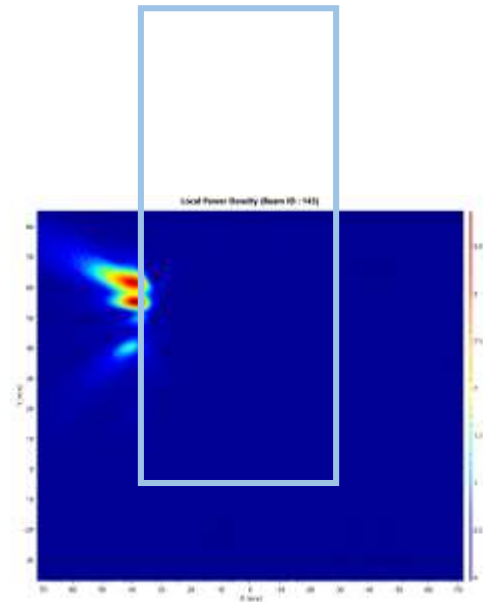


(b) simulation

ANT L-Patch: Mid Channel, Point power density

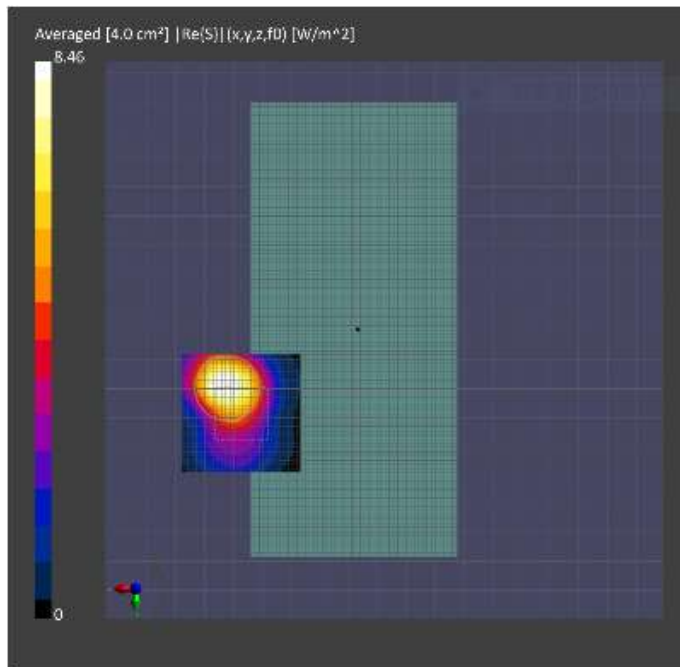


(a) measurement

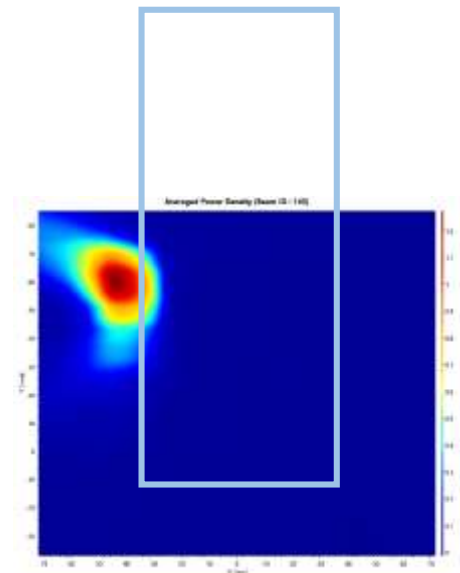


(b) simulation

ANT L-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density

- n260 ANT L-Patch: Mid Channel, Beam ID 143, Right

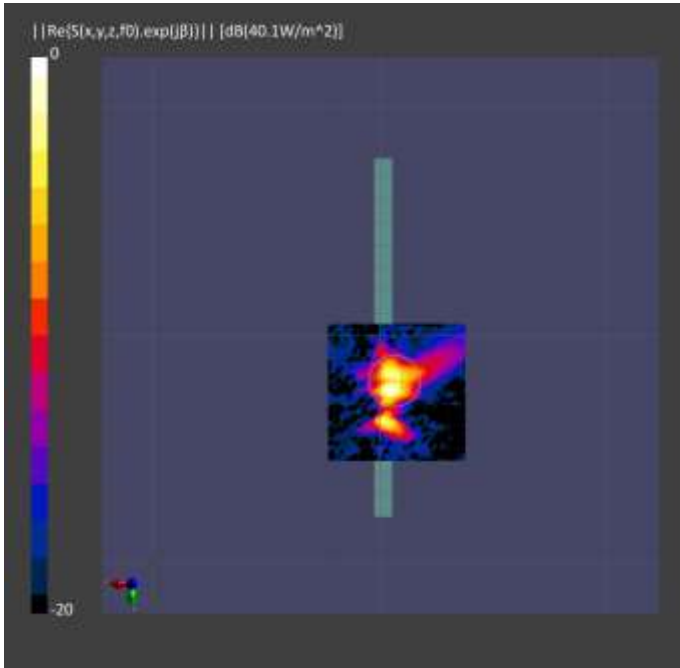


(a) measurement

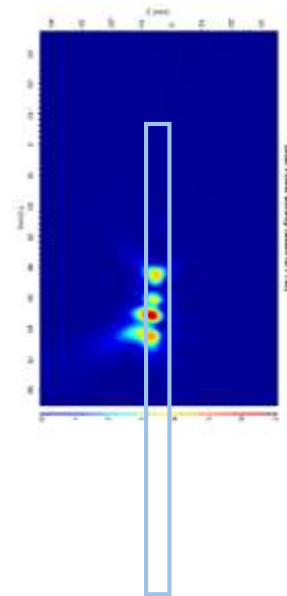


(b) simulation

ANT L-Patch: Mid Channel, Point power density

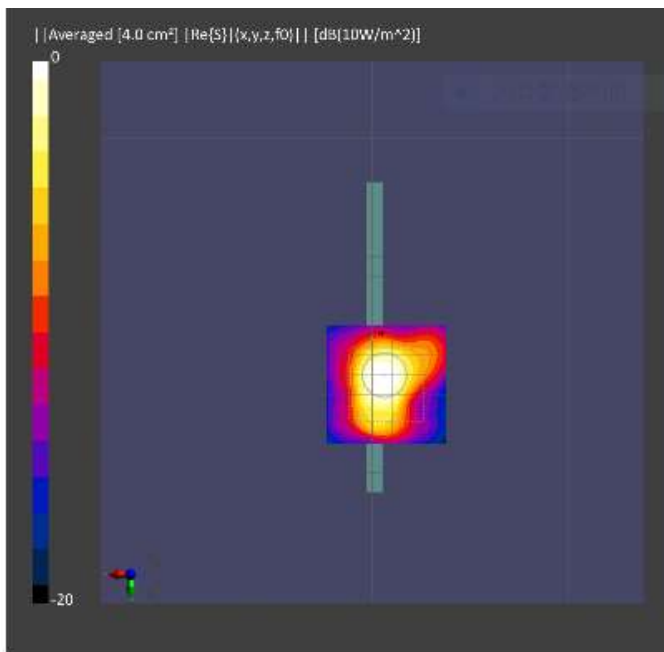

(a) simulation

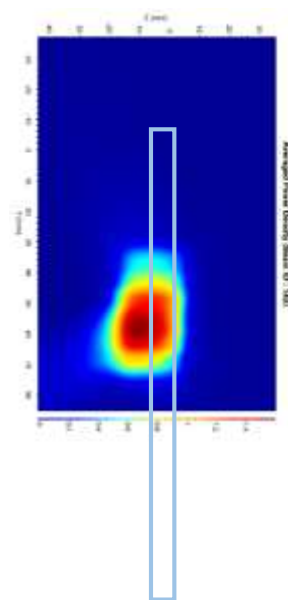

ANT L-Patch: Mid Channel, 4cm<sup>2</sup> averaged power density



### 3 Simulation results

This section shows the PD simulation results of Ant K and Ant L at 28GHz and 39GHz for each evaluation plane specified in Table 1 at two separation distances of 2mm and 10mm. The ratio of PD exposure from front surface to the worst surface at 2mm, and the ratio of PD exposure from 2mm to 10mm evaluation distance for each beam are also reported in this section to support RF exposure analysis for simultaneous transmission scenarios performed in Appendix D of Part 1 Near Field PD report.

The relative phase between beam pairs is not controlled in the chipset design. Therefore, the relative phase between each beam pair was considered mathematically to identify the worst case conditions. The below MIMO results represent the highest reported MIMO simulation results after sweeping across the relative phase between beams a 5° step interval from 0° to 360°.

The worst-case simulated PD determined from the tables in this section were used for conservativeness in *input.power.limit* determination in RF Exposure Part 0 Report.

#### 3.1 PD for Low/Mid/High Channel at 28GHz / 39GHz

##### 3.1.1 Ant K – Patch Antenna

Table 4 & Table 5 show the PD simulation evaluation of Ant K patch antenna at 28GHz / 39GHz for the corresponding evaluation planes specified in Table 1.

Table 4. PD of Ant K – patch antenna (28GHz – n261)

- K-patch Low CH

No.	Module	Type	Beam ID_1	Bema ID_2	Feed no.	4cm2 PD(mW/cm2)								max ratio out of all beams		max ratio out of all beams			
						4cm2 PD(mW/cm2)								ratio Front/worst-surface		ratio worst-surface (10mm/2mm)		ratio Back 10mm / worst-surface 2mm	
						S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	22.7%	15.1%	53.6%	53.6%				
109	K	Patch	1	1	0.00	0.30	0.01	0.00	0.05	0.29	15.1%	0.00	0.11	0.01	0.00	0.02	0.11	37.4%	37.4%
110			2	0.00	0.51	0.03	0.00	0.10	0.42	19.3%	0.00	0.23	0.02	0.00	0.04	0.19	44.5%	38.1%	
111			6	2	0.00	0.64	0.01	0.00	0.06	0.63	9.0%	0.00	0.29	0.01	0.00	0.02	0.29	45.5%	45.5%
112			7	2	0.00	0.44	0.03	0.00	0.07	0.42	16.4%	0.00	0.16	0.02	0.00	0.03	0.16	36.3%	36.3%
113			10	2	0.00	0.68	0.02	0.00	0.11	0.61	16.4%	0.00	0.32	0.01	0.00	0.05	0.30	46.9%	43.2%
114			11	2	0.00	0.57	0.01	0.00	0.05	0.60	9.1%	0.00	0.24	0.01	0.00	0.02	0.29	47.9%	47.9%
115			17	4	0.01	1.06	0.12	0.00	0.24	0.82	22.7%	0.01	0.50	0.09	0.00	0.10	0.38	46.8%	35.4%
116			18	4	0.01	1.23	0.06	0.00	0.21	1.14	17.2%	0.01	0.63	0.03	0.00	0.10	0.58	51.3%	47.0%
117			19	4	0.01	1.36	0.01	0.00	0.18	1.22	13.3%	0.00	0.70	0.01	0.00	0.09	0.69	51.4%	51.1%
118			20	4	0.01	1.35	0.03	0.00	0.11	1.32	8.0%	0.01	0.58	0.02	0.00	0.05	0.71	52.4%	52.4%
119			21	4	0.01	1.07	0.06	0.00	0.12	1.11	10.9%	0.01	0.33	0.03	0.00	0.04	0.43	38.5%	38.5%
120			26	4	0.01	1.26	0.10	0.00	0.23	1.11	18.6%	0.01	0.63	0.06	0.00	0.11	0.54	49.6%	43.1%
121			27	4	0.01	1.22	0.01	0.00	0.16	1.18	12.9%	0.01	0.64	0.01	0.00	0.08	0.62	52.2%	50.7%
122			28	4	0.01	1.42	0.02	0.00	0.19	1.25	13.5%	0.00	0.73	0.01	0.00	0.09	0.72	51.3%	51.0%
123			29	4	0.01	1.29	0.04	0.00	0.10	1.31	7.7%	0.01	0.51	0.02	0.00	0.04	0.62	47.1%	47.1%
124			129	1	0.00	0.37	0.01	0.00	0.05	0.35	12.5%	0.00	0.12	0.01	0.00	0.02	0.14	37.2%	37.2%
125			132	2	0.01	0.79	0.04	0.00	0.12	0.70	15.7%	0.00	0.35	0.02	0.00	0.05	0.36	45.5%	45.5%
126			134	2	0.00	0.84	0.04	0.00	0.09	0.81	10.8%	0.00	0.38	0.03	0.00	0.04	0.39	46.9%	46.9%
127			135	2	0.01	0.59	0.07	0.00	0.10	0.58	17.1%	0.01	0.19	0.05	0.00	0.05	0.22	37.5%	37.5%
128			138	2	0.00	0.92	0.01	0.00	0.12	0.84	13.1%	0.00	0.43	0.01	0.00	0.06	0.43	47.0%	47.0%
129			139	2	0.01	0.67	0.06	0.00	0.08	0.69	12.1%	0.01	0.27	0.04	0.00	0.04	0.30	42.9%	42.9%
130			145	4	0.02	1.13	0.05	0.00	0.20	1.01	17.6%	0.01	0.50	0.02	0.00	0.10	0.48	44.2%	42.8%
131			146	4	0.01	1.43	0.04	0.00	0.22	1.27	15.6%	0.01	0.72	0.02	0.00	0.12	0.69	50.2%	48.2%
132			147	4	0.01	1.50	0.03	0.00	0.15	1.34	9.9%	0.00	0.74	0.02	0.00	0.06	0.75	49.8%	49.8%
133			148	4	0.01	1.41	0.13	0.00	0.13	1.42	8.9%	0.01	0.62	0.08	0.00	0.05	0.72	50.5%	50.5%
134			149	4	0.02	1.12	0.21	0.00	0.12	1.29	9.4%	0.01	0.39	0.15	0.00	0.04	0.53	40.9%	40.9%
135			154	4	0.01	1.37	0.01	0.00	0.23	1.23	16.9%	0.00	0.67	0.01	0.00	0.12	0.63	48.6%	46.2%
136			155	4	0.01	1.50	0.04	0.00	0.18	1.32	12.2%	0.01	0.75	0.03	0.00	0.09	0.75	50.3%	50.3%
137			156	4	0.01	1.46	0.07	0.00	0.14	1.33	9.4%	0.00	0.70	0.02	0.00	0.05	0.72	49.3%	49.3%
138			157	4	0.01	1.24	0.19	0.00	0.12	1.38	8.3%	0.01	0.48	0.14	0.00	0.04	0.64	46.0%	46.0%
139	1	129	2	0.01	0.86	0.03	0.00	0.13	0.85	15.7%	0.00	0.31	0.02	0.00	0.05	0.35	41.3%	41.3%	
140	5	135	4	0.01	1.36	0.12	0.00	0.21	1.21	15.3%	0.01	0.54	0.10	0.00	0.09	0.54	40.1%	39.4%	
141	6	133	4	0.01	1.43	0.08	0.00	0.20	1.32	13.7%	0.01	0.66	0.04	0.00	0.08	0.71	50.0%	50.0%	
142	7	134	4	0.01	1.57	0.08	0.00	0.21	1.45	13.5%	0.01	0.70	0.06	0.00	0.07	0.72	45.8%	45.8%	
143	10	138	4	0.01	2.11	0.04	0.00	0.34	2.01	16.1%	0.01	0.96	0.03	0.00	0.15	1.07	50.7%	50.7%	
144	11	139	4	0.01	1.34	0.10	0.00	0.17	1.26	12.5%	0.01	0.45	0.07	0.00	0.07	0.47	34.9%	34.9%	
145	17	148	8	0.02	3.03	0.32	0.00	0.50	2.78	16.5%	0.02	1.42	0.21	0.00	0.20	1.46	48.1%	48.1%	
146	18	147	8	0.02	3.42	0.10	0.00	0.47	3.23	13.9%	0.02	1.65	0.06	0.00	0.20	1.71	49.9%	49.9%	
147	19	146	8	0.02	3.69	0.05	0.00	0.58	3.47	15.6%	0.01	1.82	0.03	0.00	0.31	1.97	53.6%	53.6%	
148	20	145	8	0.03	3.34	0.12	0.00	0.40	3.25	11.9%	0.02	1.51	0.06	0.00	0.18	1.77	52.8%	52.8%	
149	21	149	8	0.03	2.13	0.38	0.00	0.33	2.00	15.5%	0.03	0.71	0.26	0.00	0.10	0.86	40.4%	40.4%	
150	26	156	8	0.02	3.26	0.21	0.00	0.51	3.07	15.5%	0.01	1.57	0.09	0.00	0.19	1.63	50.1%	50.1%	
151	27	155	8	0.02	3.65	0.07	0.00	0.45	3.44	12.3%	0.02	1.82	0.05	0.00	0.23	1.89	51.8%	51.8%	
152	28	154	8	0.01	3.79	0.05	0.00	0.58	3.55	15.4%	0.01	1.85	0.02	0.00	0.30	2.03	53.5%	53.5%	
153	29	157	8	0.03	2.19	0.25	0.00	0.28	2.18	12.7%	0.02	0.83	0.17	0.00	0.12	0.97	44.4%	44.4%	



ELECTRONICS

Samsung Confidential

- K-patch Mid CH

No.	Module	Type	Beam ID_1	Bema ID_2	Feed no.	max ratio out of all beams																	
						4cm2 PD(mW/cm2)						20.7%		4cm2 PD(mW/cm2) at 10mm evaluation distance						53.9%		53.9%	
						S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio Front/(worst-surface)	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio worst-surface (10mm/2mm)	ratio Back 10mm / worst-surface 2mm			
109			1		1	0.00	0.28	0.01	0.00	0.05	0.26	17.5%	0.00	0.10	0.01	0.00	0.02	0.10	36.0%	36.0%			
110			5		2	0.00	0.52	0.03	0.00	0.09	0.43	18.3%	0.00	0.22	0.02	0.00	0.03	0.20	43.4%	37.9%			
111			6		2	0.01	0.74	0.01	0.00	0.07	0.72	9.4%	0.00	0.31	0.00	0.00	0.03	0.33	44.1%	44.1%			
112			7		2	0.00	0.42	0.03	0.00	0.07	0.38	15.6%	0.00	0.15	0.02	0.00	0.02	0.15	35.6%	34.6%			
113			10		2	0.00	0.69	0.02	0.00	0.12	0.61	16.8%	0.00	0.32	0.01	0.00	0.05	0.30	46.0%	43.6%			
114			11		2	0.00	0.51	0.01	0.00	0.06	0.53	10.4%	0.00	0.23	0.01	0.00	0.02	0.26	49.4%	49.4%			
115			17		4	0.01	1.07	0.12	0.00	0.22	0.87	20.7%	0.01	0.51	0.09	0.00	0.10	0.40	48.2%	37.7%			
116			18		4	0.00	1.38	0.05	0.00	0.24	1.25	17.6%	0.00	0.71	0.02	0.00	0.12	0.63	51.5%	45.5%			
117			19		4	0.01	1.42	0.01	0.00	0.20	1.26	13.9%	0.01	0.70	0.01	0.00	0.10	0.70	49.5%	49.5%			
118			20		4	0.01	1.31	0.03	0.00	0.10	1.30	7.6%	0.01	0.59	0.02	0.00	0.04	0.71	53.9%	53.9%			
119			21		4	0.01	1.06	0.08	0.00	0.13	1.04	12.3%	0.01	0.35	0.05	0.00	0.04	0.41	38.4%	38.4%			
120			26		4	0.00	1.32	0.09	0.00	0.23	1.19	17.3%	0.00	0.67	0.05	0.00	0.12	0.58	50.7%	43.6%			
121			27		4	0.01	1.33	0.01	0.00	0.20	1.23	15.1%	0.01	0.68	0.01	0.00	0.10	0.65	50.9%	49.2%			
122			28		4	0.01	1.48	0.02	0.00	0.21	1.32	14.0%	0.00	0.75	0.02	0.00	0.10	0.74	50.4%	50.1%			
123			29		4	0.01	1.26	0.04	0.00	0.09	1.26	7.5%	0.01	0.52	0.02	0.00	0.04	0.61	48.0%	48.0%			
124			129		1	0.00	0.36	0.01	0.00	0.05	0.32	13.9%	0.00	0.13	0.01	0.00	0.02	0.12	35.3%	34.9%			
125			132		2	0.00	0.85	0.03	0.00	0.15	0.73	17.8%	0.00	0.40	0.02	0.00	0.06	0.38	46.9%	44.3%			
126			134		2	0.01	0.79	0.03	0.00	0.09	0.75	11.6%	0.00	0.35	0.02	0.00	0.04	0.36	45.3%	45.3%			
127			135		2	0.01	0.57	0.07	0.00	0.09	0.55	15.6%	0.01	0.16	0.04	0.00	0.03	0.20	35.3%	35.3%			
128			138		2	0.00	0.94	0.01	0.00	0.14	0.83	15.0%	0.00	0.44	0.00	0.00	0.07	0.43	47.1%	45.5%			
129			139		2	0.01	0.61	0.06	0.00	0.07	0.64	10.7%	0.01	0.24	0.04	0.00	0.02	0.27	41.3%	41.3%			
130			145		4	0.01	1.21	0.04	0.00	0.21	1.09	17.4%	0.01	0.57	0.02	0.00	0.10	0.54	47.2%	44.9%			
131			146		4	0.01	1.42	0.03	0.00	0.23	1.24	16.3%	0.01	0.70	0.02	0.00	0.12	0.67	49.3%	47.3%			
132			147		4	0.00	1.43	0.04	0.00	0.17	1.24	12.1%	0.00	0.71	0.02	0.00	0.06	0.69	49.3%	48.2%			
133			148		4	0.01	1.35	0.12	0.00	0.13	1.32	9.9%	0.01	0.58	0.07	0.00	0.04	0.65	48.0%	48.0%			
134			149		4	0.02	1.00	0.20	0.00	0.11	1.25	9.0%	0.02	0.33	0.14	0.00	0.04	0.51	40.7%	40.7%			
135			154		4	0.01	1.37	0.02	0.00	0.24	1.22	17.9%	0.00	0.68	0.01	0.00	0.13	0.65	49.8%	47.8%			
136			155		4	0.01	1.52	0.04	0.00	0.21	1.32	13.5%	0.01	0.76	0.03	0.00	0.10	0.75	50.1%	49.5%			
137			156		4	0.01	1.38	0.06	0.00	0.15	1.22	11.1%	0.01	0.65	0.02	0.00	0.05	0.64	46.9%	46.3%			
138			157		4	0.02	1.15	0.19	0.00	0.12	1.32	9.3%	0.01	0.43	0.12	0.00	0.04	0.60	45.1%	45.1%			
139			1	129	2	0.01	0.81	0.03	0.00	0.14	0.79	17.7%	0.00	0.30	0.02	0.00	0.05	0.33	40.5%	40.5%			
140			5	135	4	0.02	1.31	0.13	0.00	0.18	1.16	13.4%	0.01	0.50	0.08	0.00	0.06	0.51	38.7%	38.7%			
141			6	133	4	0.01	1.57	0.06	0.00	0.25	1.43	15.7%	0.01	0.72	0.03	0.00	0.11	0.75	47.7%	47.7%			
142			7	134	4	0.01	1.49	0.07	0.00	0.18	1.35	12.1%	0.01	0.64	0.05	0.00	0.06	0.65	43.9%	43.9%			
143			10	138	4	0.01	2.07	0.04	0.00	0.36	1.95	17.4%	0.01	0.95	0.02	0.00	0.16	1.03	49.9%	49.9%			
144			11	139	4	0.02	1.26	0.10	0.00	0.14	1.17	11.5%	0.01	0.44	0.07	0.00	0.05	0.45	35.6%	35.6%			
145			17	148	8	0.02	3.02	0.31	0.00	0.44	2.76	14.5%	0.02	1.36	0.20	0.00	0.19	1.38	45.5%	45.5%			
146			18	147	8	0.01	3.39	0.11	0.00	0.55	3.22	16.3%	0.01	1.65	0.08	0.00	0.23	1.65	48.8%	48.8%			
147			19	146	8	0.02	3.51	0.05	0.00	0.63	3.30	17.9%	0.02	1.72	0.02	0.00	0.33	1.87	53.1%	53.1%			
148			20	145	8	0.03	3.19	0.09	0.00	0.36	3.09	11.4%	0.02	1.48	0.06	0.00	0.17	1.67	52.4%	52.4%			
149			21	149	8	0.04	2.01	0.36	0.00	0.27	1.87	13.2%	0.03	0.61	0.25	0.00	0.10	0.78	38.7%	38.7%			
150			26	156	8	0.02	3.19	0.20	0.00	0.48	3.01	15.1%	0.01	1.56	0.10	0.00	0.19	1.56	48.9%	48.9%			
151			27	155	8	0.02	3.50	0.07	0.00	0.57	3.33	16.3%	0.02	1.74	0.05	0.00	0.29	1.81	51.8%	51.8%			
152			28	154	8	0.01	3.68	0.03	0.00	0.64	3.44	17.3%	0.01	1.78	0.02	0.00	0.34	1.94	52.7%	52.7%			
153			29	157	8	0.03	2.03	0.22	0.00	0.26	2.09	12.7%	0.02	0.76	0.14	0.00	0.12	0.93	44.6%	44.6%			

- K-patch High CH

No.	Module	Type	Beam ID_1	Bema ID_2	Feed no.	max ratio out of all beams																	
						4cm2 PD(mW/cm2)						21.2%		4cm2 PD(mW/cm2) at 10mm evaluation distance						53.1%		53.1%	
						S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio Front/(worst-surface)	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio worst-surface (10mm/2mm)	ratio Back 10mm / worst-surface 2mm			
109			1		1	0.00	0.27	0.01	0.00	0.05	0.22	19.2%	0.00	0.09	0.01	0.00	0.02	0.09	35.4%	34.0%			
110			5		2	0.00	0.51	0.03	0.00	0.10	0.40	19.7%	0.00	0.22	0.02	0.00	0.04	0.18	42.5%	35.8%			
111			6		2	0.01	0.76	0.01	0.00	0.07	0.76	9.2%	0.00	0.34	0.00	0.00	0.03	0.34	44.3%	44.3%			
112			7		2	0.00	0.43	0.03	0.00	0.07	0.36	17.0%	0.00	0.15	0.02	0.00	0.03	0.13	35.8%	30.1%			
113			10		2	0.00	0.64	0.02	0.00	0.12	0.55	18.2%	0.00	0.29	0.01	0.00	0.05	0.27	45.8%	42.8%			
114			11		2	0.00	0.49	0.01	0.00	0.05	0.50	10.9%	0.00	0.21	0.01	0.00	0.02	0.24	47.9%	47.9%			
115			17		4	0.01	1.07	0.12	0.00	0.20	0.88	18.5%	0.00	0.50	0.09	0.00	0.09	0.42	47.0%	39.4%			
116			18		4	0.00	1.31	0.06	0.00	0.20	1.21	15.1%	0.00	0.68	0.02	0.00	0.09	0.61	51.8%	46.5%			
117			19		4	0.01	1.45	0.01	0.00	0.21	1.31	14.7%	0.00	0.73	0.01	0.00	0.11	0.71	50.4%	49.0%			
118			20		4	0.01	1.21	0.03	0.00	0.10	1.19	8.6%	0.01	0.54	0.02	0.00	0.04	0.64	53.1%	53.1%			
119			21		4	0.01	1.04	0.09	0.00	0.12	1.05	11.6%	0.01	0.37	0.05	0.00	0.04	0.39	37.1%	37.1%			
120			26		4	0.01	1.24	0.10	0.00	0.17	1.16	14.0%	0.00	0.64	0.05	0.00	0.08	0.57	51.7%	46.2%			
121			27		4	0.00	1.30	0.01	0.00	0.22	1.16	16.8%	0.00	0.66	0.01	0.00	0.11	0.60	50.8%	46.3%			
122			28		4	0.01	1.53	0.02	0.00	0.21	1.39	13.8%	0.01	0.78	0.02	0.00	0.10	0.77	50.8%	50.7%			
123			29		4	0.01	1.17	0.05	0.00	0.09	1.20	7.6%	0.01	0.49	0.02	0.00	0.04	0.57	47.2%	47.2%			
124			129		1	0.00	0.36	0.01	0.00	0.05	0.30	14.3%	0.00	0.13	0.01	0.00	0.02	0.12	35.1%	32.6%			
125			133		2	0.00	0.85	0.03	0.00	0.14	0.73	16.9%	0.00	0.40	0.02	0.00	0.06	0.38	47.5%	44.6%			
126			134		2	0.00	0.73	0.03	0.00	0.09	0.68	13.0%	0.00	0.32	0.02	0.00	0.04	0.30	43.4%	41.8%			
127			135		2	0.01	0.55	0.07	0.00	0.09	0.51	16.7%	0.00	0.17	0.05	0.00	0.03	0.17	31.7%	31.7%			
128			138		2	0.00	0.91	0.01	0.00	0.14	0.80	14.8%	0.00	0.43	0.01	0.00	0.06	0.41	47.2%	45.4%			
129			139		2	0.01	0.57	0.06	0.00	0.07	0.59	12.5%	0.01</										



Table 5. PD of Ant K – patch antenna (39GHz – n260)

- K\_patch Low CH

No.	Module	Type	Beam ID_1	Berna ID_2	Feed no.	4cm2 PD(mW/cm2)						max ratio out of all beams		4cm2 PD(mW/cm2) at 10mm evaluation distance						max ratio out of all beams		max ratio out of all beams	
						S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio Front/(worst-surface)	25.8%	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio worst-surface (10mm/2mm)	58.0%	ratio Back 10mm / worst-surface 2mm	47.0%
109	K	Patch	1	1	0.00	0.31	0.01	0.00	0.05	0.24	16.6%	0.00	0.12	0.01	0.00	0.02	0.09	39.3%		27.7%			
110			5	2	0.01	0.79	0.06	0.00	0.15	0.60	19.3%	0.01	0.35	0.04	0.00	0.07	0.28	44.6%		35.8%			
111			6	2	0.01	0.65	0.02	0.00	0.11	0.52	16.5%	0.00	0.35	0.02	0.00	0.05	0.25	54.1%		37.7%			
112			7	2	0.01	0.81	0.06	0.00	0.12	0.49	14.9%	0.00	0.27	0.04	0.00	0.05	0.20	33.6%		24.6%			
113			10	2	0.01	0.70	0.04	0.00	0.09	0.51	13.4%	0.00	0.30	0.03	0.00	0.04	0.22	43.1%		30.8%			
114			11	2	0.01	0.76	0.02	0.00	0.12	0.57	15.6%	0.01	0.33	0.02	0.00	0.05	0.25	43.1%		33.0%			
115			17	4	0.02	1.37	0.15	0.00	0.27	1.10	19.7%	0.01	0.69	0.08	0.00	0.14	0.56	50.2%		40.6%			
116			18	4	0.01	0.97	0.15	0.00	0.14	0.81	14.4%	0.01	0.51	0.10	0.00	0.07	0.39	52.6%		40.3%			
117			19	4	0.01	1.32	0.04	0.00	0.25	1.08	18.6%	0.01	0.72	0.03	0.00	0.12	0.50	54.4%		38.1%			
118			20	4	0.03	1.34	0.11	0.00	0.25	1.08	18.8%	0.02	0.69	0.04	0.00	0.13	0.56	51.2%		42.0%			
119			21	4	0.01	1.36	0.18	0.00	0.28	1.02	20.7%	0.01	0.55	0.13	0.00	0.12	0.45	40.2%		33.1%			
120			26	4	0.01	1.30	0.19	0.00	0.26	0.91	19.9%	0.01	0.46	0.13	0.00	0.10	0.35	35.7%		26.7%			
121			27	4	0.01	1.10	0.09	0.00	0.19	0.92	17.1%	0.01	0.59	0.04	0.00	0.09	0.43	54.3%		33.3%			
122			28	4	0.02	1.32	0.04	0.00	0.22	1.08	17.1%	0.02	0.70	0.02	0.00	0.12	0.53	53.1%		40.4%			
123			29	4	0.01	1.40	0.15	0.00	0.26	1.05	18.5%	0.01	0.59	0.10	0.00	0.13	0.48	42.1%		34.6%			
124			129	1	0.00	0.40	0.02	0.00	0.05	0.28	13.0%	0.00	0.15	0.01	0.00	0.02	0.10	36.9%		25.7%			
125			133	2	0.01	0.74	0.02	0.00	0.11	0.46	15.1%	0.01	0.29	0.02	0.00	0.05	0.22	38.7%		29.8%			
126			134	2	0.01	0.68	0.03	0.00	0.12	0.54	17.7%	0.00	0.37	0.02	0.00	0.06	0.26	54.0%		38.8%			
127			135	2	0.01	0.71	0.06	0.00	0.11	0.47	14.9%	0.00	0.24	0.04	0.00	0.04	0.19	34.1%		26.1%			
128			138	2	0.01	0.65	0.02	0.00	0.10	0.56	15.7%	0.01	0.38	0.01	0.00	0.05	0.31	58.0%		47.0%			
129			139	2	0.01	0.80	0.04	0.00	0.15	0.56	18.3%	0.01	0.35	0.03	0.00	0.07	0.26	44.4%		32.4%			
130			145	4	0.02	1.43	0.11	0.00	0.29	0.97	20.1%	0.01	0.49	0.08	0.00	0.12	0.32	42.2%		22.7%			
131			146	0.02	1.16	0.04	0.00	0.15	0.96	12.9%	0.01	0.62	0.03	0.00	0.07	0.30	53.7%		43.2%				
132			147	4	0.02	1.31	0.03	0.00	0.24	1.09	18.2%	0.01	0.75	0.01	0.00	0.12	0.58	57.5%		44.4%			
133			148	4	0.02	1.36	0.15	0.00	0.25	1.08	18.7%	0.01	0.69	0.11	0.00	0.13	0.52	50.5%		38.2%			
134			149	4	0.02	1.49	0.12	0.00	0.30	1.02	20.1%	0.01	0.55	0.10	0.00	0.14	0.39	37.1%		25.9%			
135			154	4	0.02	1.04	0.04	0.00	0.13	0.84	12.6%	0.01	0.55	0.03	0.00	0.06	0.44	53.0%		42.7%			
136			155	4	0.02	1.31	0.03	0.00	0.23	1.09	17.4%	0.01	0.75	0.02	0.00	0.12	0.60	57.2%		45.5%			
137			156	4	0.01	1.28	0.04	0.00	0.19	0.99	15.2%	0.01	0.61	0.03	0.00	0.08	0.44	47.7%		34.4%			
138			157	4	0.02	1.46	0.14	0.00	0.25	1.08	17.2%	0.01	0.63	0.10	0.00	0.13	0.47	43.0%		32.5%			
139			1	129	2	0.01	0.66	0.05	0.00	0.11	0.46	16.1%	0.00	0.28	0.04	0.00	0.04	0.21	42.2%		22.1%		
140			5	135	4	0.03	1.81	0.17	0.00	0.33	1.44	18.2%	0.02	0.66	0.11	0.00	0.16	0.59	36.6%		24.6%		
141			6	134	4	0.03	1.97	0.06	0.00	0.29	1.70	14.8%	0.01	1.13	0.05	0.00	0.14	0.85	57.4%		43.2%		
142			7	133	4	0.02	1.56	0.10	0.00	0.26	1.02	16.9%	0.01	0.53	0.07	0.00	0.11	0.38	34.1%		24.5%		
143			10	139	4	0.03	1.98	0.10	0.00	0.33	1.59	16.5%	0.02	0.93	0.08	0.00	0.16	0.71	47.0%		36.0%		
144			11	138	4	0.05	1.81	0.06	0.00	0.28	1.62	15.7%	0.02	0.99	0.03	0.00	0.13	0.82	54.7%		45.5%		
145			17	145	8	0.06	3.21	0.40	0.00	0.63	2.66	19.5%	0.04	1.53	0.22	0.00	0.32	1.36	47.8%		42.3%		
146			18	147	8	0.05	3.39	0.21	0.00	0.43	2.88	12.7%	0.03	1.88	0.15	0.00	0.22	1.51	55.4%		44.4%		
147			19	146	8	0.05	3.37	0.10	0.00	0.44	2.92	12.9%	0.04	1.90	0.07	0.00	0.22	1.48	56.4%		44.0%		
148			20	148	8	0.07	2.70	0.22	0.00	0.42	2.16	15.5%	0.03	1.04	0.16	0.00	0.18	0.77	38.3%		28.5%		
149			21	149	8	0.04	2.69	0.41	0.00	0.67	2.28	25.0%	0.02	1.15	0.30	0.00	0.34	1.04	42.8%		30.8%		
150			26	157	8	0.06	3.03	0.38	0.00	0.58	3.48	19.2%	0.03	1.44	0.27	0.00	0.31	1.24	47.4%		40.9%		
151			27	155	8	0.07	3.74	0.13	0.00	0.49	3.28	13.2%	0.04	2.12	0.06	0.00	0.27	1.69	56.7%		45.2%		
152			28	154	8	0.08	3.41	0.10	0.00	0.46	3.02	13.4%	0.06	1.88	0.07	0.00	0.24	1.55	55.0%		45.4%		
153			29	156	8	0.03	2.69	0.22	0.00	0.44	2.13	16.3%	0.02	1.16	0.15	0.00	0.20	0.80	43.1%		29.6%		

- K\_patch Mid CH

No.	Module	Type	Beam ID_1	Berna ID_2	Feed no.	4cm2 PD(mW/cm2)						max ratio out of all beams		4cm2 PD(mW/cm2) at 10mm evaluation distance						max ratio out of all beams		max ratio out of all beams	
						S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio Front/(worst-surface)	24.2%	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio worst-surface (10mm/2mm)	61.1%	ratio Back 10mm / worst-surface 2mm	45.9%
109	K	Patch	1	1	0.00	0.37	0.01	0.00	0.07	0.26	17.8%	0.00	0.15	0.01	0.00	0.03	0.10	41.2%		26.2%			
110			5	2	0.01	0.88	0.06	0.00	0.17	0.61	19.8%	0.01	0.39	0.04	0.00	0.08	0.27	44.1%		20.9%			
111			6	2	0.01	0.73	0.02	0.00	0.12	0.56	16.1%	0.01	0.40	0.02	0.00	0.05	0.28	54.8%		38.8%			
112			7	2	0.01	0.91	0.07	0.00	0.15	0.55	16.4%	0.01	0.32	0.05	0.00	0.06	0.23	35.6%		24.9%			
113			10	2	0.01	0.79	0.04	0.00	0.13	0.53	16.5%	0.01	0.35	0.03	0.00	0.05	0.25	43.9%		31.7%			
114			11	2	0.02	0.85	0.03	0.00	0.13	0.61	14.9%	0.01	0.37	0.02	0.00	0.06	0.28	43.2%		33.0%			
115			17	4	0.02	1.47	0.16	0.00	0.29	1.12	19.4%	0.01	0.74	0.08	0.00	0.15	0.59	50.6%		40.1%			
116			18	4	0.02	1.19	0.14	0.00	0.21	0.92	17.4%	0.01	0.65	0.09	0.00	0.10	0.46	55.1%		39.1%			
117			19	4	0.02	1.43	0.03	0.00	0.22	1.18	15.6%	0.02	0.79	0.02	0.00	0.10	0.59	55.3%		40.9%			
118			20	4	0.03	1.48	0.10	0.00	0.27	1.16	18.2%	0.02	0.76	0.04	0.00	0.14	0.61	51.6%		41.0%			
119			21	149	8	0.04	2.69	0.41	0.00	0.67	2.28	25.0%	0.02	1.15	0.30	0.00	0.34	1.04	42.8%		30.8%		
120			26	157	8	0.06	3.03	0.38	0.00	0.58	3.48	19.2%	0.03	1.44	0.27	0.00	0.31	1.24	47.4%		40.9%		
121			27	155	8	0.07	3.74	0.13	0.00	0.49	3.28	13.2%	0.04	2.12	0.06	0.00	0.27	1.69	56.7%		45.2%		
122			28	154	8	0.08	3.41	0.10	0.00	0.46	3.02	13.4%	0.06	1.88	0.07	0.00	0.24	1.55	55.0%		45.4%		
123			29	156	8	0.03	2.69	0.22	0.00	0.44	2.13	16.3%	0.02	1.16	0.15	0.00	0.20	0.80	43.1%		29.6%		
124			129	1	0.00	0.40	0.02	0.00	0.05	0.28	13.0%	0.00	0.15	0.01	0.00	0.02	0.10	36.9%		25.7%			
125			133	2	0.01	0.74	0.02	0.00	0.11	0.46	15.1%	0.01	0.29	0.02	0.00	0.05	0.22	38.7%		29.8%			
126			134	2	0.01	0.68	0.03	0.00	0.12	0.54	17.7%	0.00	0.37	0.02	0.00	0.06	0.26	54.0%		38.8%			
127			135	2	0.01	0.71	0.06	0.00	0.11	0.47	14.9%	0.00	0.24	0.04	0.00	0.04	0.19	34.1%		26.1%			
128			138	2	0.01	0.65	0.02	0.00	0.10	0.56	15.7%	0.01	0.38	0.01	0.00	0.05	0.31	58.0%		47.0%			
129			139	2	0.01	0.80	0.04	0.00	0.15	0.56	18.3%	0.01	0.35	0.03	0.00	0.07	0.26	44.4%		32.4%			
130			145	4	0.02	1.43	0.11	0.00	0.29	0.97	20.1%	0.01	0.49	0.08	0.00	0.12	0.32	42.2%		22.7%			
131			146	0.02	1.16	0.04	0.00	0.15	0.96														

- K-patch High CH

No.	Module	Type	Beam ID_1	Bema ID_2	Feed no.	4cm2 PD(mW/cm2)						max ratio out of all beams		4cm2 PD(mW/cm2) at 10mm evaluation distance						max ratio out of all beams		max ratio out of all beams	
						S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio Front/(worst-surface)		S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio worst-surface (10mm/2mm)		ratio Back 10mm / worst-surface 2mm	
109			1		1	0.00	0.34	0.01	0.00	0.07	0.25	21.0%	0.00	0.14	0.01	0.00	0.03	0.09	42.6%	28.1%			
110			5		2	0.01	0.77	0.04	0.00	0.13	0.46	17.4%	0.00	0.28	0.02	0.00	0.06	0.19	35.9%	24.6%			
111			6		2	0.02	0.66	0.02	0.00	0.13	0.54	19.9%	0.01	0.39	0.01	0.00	0.06	0.28	58.9%	42.7%			
112			7		2	0.01	0.89	0.06	0.00	0.13	0.59	14.0%	0.00	0.36	0.04	0.00	0.06	0.26	40.3%	28.6%			
113			10		2	0.01	0.74	0.03	0.00	0.14	0.51	19.3%	0.01	0.31	0.02	0.00	0.06	0.23	42.1%	31.2%			
114			11		2	0.02	0.79	0.02	0.00	0.15	0.55	19.1%	0.01	0.37	0.02	0.00	0.06	0.24	46.5%	30.4%			
115			17		4	0.01	1.33	0.10	0.00	0.27	0.96	20.3%	0.01	0.63	0.04	0.00	0.14	0.45	47.5%	33.6%			
116			18		4	0.02	1.20	0.10	0.00	0.26	0.95	21.4%	0.01	0.67	0.07	0.00	0.10	0.50	56.3%	41.7%			
117			19		4	0.05	1.29	0.04	0.00	0.30	0.99	23.0%	0.03	0.67	0.02	0.00	0.15	0.46	51.5%	35.8%			
118			20		4	0.02	1.29	0.05	0.00	0.25	0.99	19.1%	0.01	0.65	0.02	0.00	0.13	0.46	50.7%	36.1%			
119			21		4	0.01	1.44	0.16	0.00	0.27	0.98	18.5%	0.01	0.58	0.11	0.00	0.14	0.45	40.3%	31.2%			
120			26		4	0.01	1.36	0.15	0.00	0.24	1.00	17.6%	0.01	0.65	0.11	0.00	0.11	0.48	47.4%	35.5%			
121			27		4	0.03	1.21	0.04	0.00	0.27	1.02	22.1%	0.02	0.74	0.03	0.00	0.13	0.55	61.6%	45.4%			
122			28		4	0.04	1.26	0.02	0.00	0.28	1.00	21.9%	0.02	0.69	0.01	0.00	0.14	0.50	54.9%	39.4%			
123			29		4	0.01	1.41	0.13	0.00	0.27	0.95	18.9%	0.01	0.54	0.07	0.00	0.14	0.39	38.6%	27.8%			
124			129		1	0.01	0.37	0.02	0.00	0.06	0.26	16.2%	0.00	0.15	0.01	0.00	0.02	0.10	39.9%	25.7%			
125			133		2	0.01	0.81	0.05	0.00	0.12	0.56	14.8%	0.01	0.39	0.03	0.00	0.05	0.28	48.0%	34.3%			
126			134		2	0.01	0.72	0.03	0.00	0.15	0.55	21.6%	0.01	0.39	0.02	0.00	0.06	0.26	54.5%	35.8%			
127			135		2	0.01	0.81	0.06	0.00	0.13	0.49	15.8%	0.00	0.27	0.04	0.00	0.05	0.18	33.9%	22.5%			
128			138		2	0.01	0.72	0.02	0.00	0.15	0.59	21.4%	0.01	0.39	0.01	0.00	0.07	0.29	54.3%	39.9%			
129			139		2	0.01	0.90	0.04	0.00	0.18	0.58	19.8%	0.00	0.38	0.04	0.00	0.07	0.26	42.7%	28.8%			
130			145		4	0.01	1.43	0.16	0.00	0.23	0.99	15.9%	0.01	0.67	0.08	0.00	0.10	0.46	46.4%	32.3%			
131			146		4	0.02	1.22	0.02	0.00	0.25	0.99	20.4%	0.02	0.65	0.01	0.00	0.11	0.50	53.4%	41.2%			
132			147		4	0.02	1.19	0.04	0.00	0.28	0.95	23.4%	0.02	0.68	0.01	0.00	0.14	0.49	57.1%	41.5%			
133			148		4	0.01	1.33	0.14	0.00	0.28	0.99	20.9%	0.01	0.67	0.10	0.00	0.13	0.48	50.7%	36.3%			
134			149		4	0.01	1.51	0.17	0.00	0.26	0.95	17.4%	0.00	0.63	0.11	0.00	0.13	0.42	41.8%	28.0%			
135			154		4	0.02	1.21	0.03	0.00	0.23	0.97	19.1%	0.01	0.64	0.02	0.00	0.10	0.50	52.9%	41.6%			
136			155		4	0.02	1.24	0.04	0.00	0.31	1.01	25.1%	0.02	0.72	0.02	0.00	0.16	0.52	57.7%	41.9%			
137			156		4	0.02	1.25	0.04	0.00	0.23	0.93	18.0%	0.01	0.62	0.03	0.00	0.09	0.41	49.5%	33.0%			
138			157		4	0.01	1.43	0.15	0.00	0.26	0.94	18.5%	0.01	0.58	0.11	0.00	0.12	0.41	40.7%	28.7%			
139			1	129	2	0.01	0.67	0.05	0.00	0.13	0.49	19.9%	0.01	0.31	0.04	0.00	0.06	0.19	45.6%	28.8%			
140			5	135	4	0.02	1.87	0.16	0.00	0.34	1.30	18.4%	0.01	0.69	0.10	0.00	0.17	0.53	36.9%	28.1%			
141			6	134	4	0.05	1.93	0.06	0.00	0.42	1.65	21.6%	0.03	1.17	0.04	0.00	0.18	0.85	60.7%	43.8%			
142			7	133	4	0.02	1.73	0.13	0.00	0.28	1.21	16.4%	0.01	0.65	0.09	0.00	0.11	0.48	37.2%	27.8%			
143			10	139	4	0.03	2.07	0.12	0.00	0.49	1.52	23.7%	0.02	0.99	0.09	0.00	0.18	0.72	48.0%	34.9%			
144			11	138	4	0.05	1.85	0.05	0.00	0.42	1.55	22.4%	0.03	1.06	0.03	0.00	0.19	0.76	57.0%	40.8%			
145			17	145	8	0.04	3.48	0.44	0.00	0.64	2.81	18.3%	0.02	1.86	0.19	0.00	0.33	1.40	53.4%	40.2%			
146			18	147	8	0.06	3.28	0.15	0.00	0.61	2.81	18.7%	0.04	2.00	0.10	0.00	0.29	1.46	60.9%	44.5%			
147			19	146	8	0.11	3.30	0.08	0.00	0.72	2.74	21.9%	0.07	1.84	0.06	0.00	0.37	1.35	55.8%	41.0%			
148			20	148	8	0.04	2.78	0.18	0.00	0.47	1.99	17.1%	0.02	1.16	0.12	0.00	0.20	0.70	41.9%	25.3%			
149			21	149	8	0.04	3.28	0.51	0.00	0.64	2.40	19.7%	0.02	1.45	0.37	0.00	0.29	1.20	44.2%	36.5%			
150			26	157	8	0.04	3.51	0.44	0.00	0.72	2.63	20.4%	0.03	1.76	0.33	0.00	0.33	1.36	49.8%	38.7%			
151			27	155	8	0.09	3.45	0.12	0.00	0.80	3.10	23.2%	0.06	2.17	0.05	0.00	0.40	1.62	62.9%	46.9%			
152			28	154	8	0.09	3.60	0.06	0.00	0.68	2.99	18.8%	0.05	2.07	0.05	0.00	0.33	1.54	57.5%	42.8%			
153			29	156	8	0.03	2.74	0.22	0.00	0.47	2.16	17.0%	0.03	1.16	0.14	0.00	0.19	0.88	42.4%	32.0%			

### 3.1.2 Ant L – Patch Antenna

Table 6 & Table 7 show the PD simulation evaluation of Ant L patch antenna at 28GHz / 39GHz for the corresponding evaluation plane specified in Table 1.

Table 6. PD of Ant L – patch antenna (28GHz – n261)

- L-patch Low CH

No.	Module	Type	Beam ID_1	Bema ID_2	Feed no.	4cm <sup>2</sup> PD(mW/cm <sup>2</sup> )						max ratio out of all beams		4cm <sup>2</sup> PD(mW/cm <sup>2</sup> ) at 10mm evaluation distance						max ratio out of all beams	
						S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	22.1%		S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	74.3%	
												ratio Front/(worst-surface)	ratio Back 10mm / worst-surface							ratio worst-surface (10mm/2mm)	ratio Back 10mm / worst-surface
64			0		1	0.38	0.00	0.00	0.00	0.04	<b>0.39</b>	9.3%	0.09	0.00	0.00	0.00	0.02	<b>0.10</b>	24.5%	24.5%	
65			2		2	<b>0.61</b>	0.00	0.00	0.02	0.12	0.51	20.4%	<b>0.26</b>	0.00	0.00	0.01	0.04	0.21	42.3%	35.3%	
66			3		2	<b>0.67</b>	0.01	0.00	0.01	0.10	0.62	14.9%	<b>0.29</b>	0.00	0.00	0.00	0.04	0.27	43.7%	39.9%	
67			4		2	0.46	0.00	0.00	0.01	0.04	<b>0.51</b>	8.7%	<b>0.18</b>	0.00	0.00	0.01	0.02	0.18	34.7%	34.6%	
68			8		2	<b>0.47</b>	0.00	0.00	0.01	0.08	0.43	16.6%	<b>0.31</b>	0.00	0.00	0.01	0.03	0.30	66.8%	64.2%	
69			9		2	0.69	0.01	0.00	0.00	0.08	<b>0.70</b>	11.4%	0.22	0.00	0.00	0.01	0.03	<b>0.28</b>	40.6%	40.6%	
70			12		4	0.62	0.01	0.00	0.04	0.15	<b>0.87</b>	17.4%	<b>0.65</b>	0.01	0.00	0.04	0.13	0.58	74.3%	67.2%	
71			13		4	<b>1.34</b>	0.01	0.00	0.03	0.28	1.21	20.6%	<b>0.67</b>	0.01	0.00	0.01	0.11	0.64	49.9%	48.1%	
72			14		4	<b>1.37</b>	0.01	0.00	0.01	0.19	1.27	13.8%	0.69	0.01	0.00	0.01	0.09	<b>0.70</b>	51.5%	51.5%	
73			15		4	<b>1.46</b>	0.01	0.00	0.01	0.17	1.36	11.4%	0.56	0.01	0.00	0.01	0.04	0.64	44.2%	44.2%	
74			16		4	1.27	0.01	0.00	0.03	0.12	<b>1.33</b>	8.8%	0.43	0.01	0.00	0.02	0.04	<b>0.46</b>	34.6%	34.6%	
75			22		4	<b>1.13</b>	0.01	0.00	0.04	0.25	0.98	22.1%	<b>0.67</b>	0.01	0.00	0.02	0.13	0.62	59.1%	54.9%	
76			23		4	<b>1.32</b>	0.01	0.00	0.01	0.22	1.23	17.0%	<b>0.68</b>	0.01	0.00	0.00	0.08	0.67	51.5%	51.0%	
77			24		4	<b>1.52</b>	0.01	0.00	0.01	0.20	1.39	13.2%	0.65	0.00	0.00	0.00	0.08	<b>0.68</b>	44.8%	44.8%	
78			25		4	1.32	0.02	0.00	0.01	0.09	<b>1.42</b>	6.6%	0.49	0.01	0.00	0.02	0.04	<b>0.55</b>	38.6%	38.6%	
79			128		1	<b>0.36</b>	0.00	0.00	0.01	0.05	0.34	12.9%	<b>0.13</b>	0.00	0.00	0.00	0.02	0.12	35.6%	31.9%	
80			130		2	<b>0.75</b>	0.01	0.00	0.03	0.13	0.64	17.1%	<b>0.22</b>	0.00	0.00	0.02	0.03	0.19	29.2%	24.8%	
81			131		2	<b>0.91</b>	0.00	0.00	0.01	0.13	0.84	14.8%	<b>0.39</b>	0.00	0.00	0.00	0.06	0.37	43.2%	40.7%	
82			132		2	0.69	0.01	0.00	0.04	0.10	<b>0.72</b>	13.7%	0.21	0.01	0.00	0.02	0.03	<b>0.26</b>	36.2%	36.2%	
83			136		2	<b>0.89</b>	0.00	0.00	0.01	0.15	0.79	16.9%	<b>0.41</b>	0.00	0.00	0.00	0.05	0.38	45.4%	42.4%	
84			137		2	<b>0.81</b>	0.01	0.00	0.03	0.09	0.79	10.7%	0.31	0.00	0.00	0.01	0.04	<b>0.33</b>	40.4%	40.4%	
85			140		4	<b>1.11</b>	0.02	0.00	0.06	0.23	1.02	20.4%	<b>0.54</b>	0.01	0.00	0.03	0.10	0.51	48.8%	46.3%	
86			141		4	<b>1.45</b>	0.01	0.00	0.01	0.25	1.37	17.2%	<b>0.73</b>	0.01	0.00	0.00	0.13	0.67	50.5%	46.1%	
87			142		4	<b>1.62</b>	0.01	0.00	0.01	0.23	1.45	14.0%	<b>0.76</b>	0.00	0.00	0.01	0.09	0.76	47.0%	46.9%	
88			143		4	<b>1.57</b>	0.01	0.00	0.01	0.14	1.49	8.8%	0.59	0.01	0.00	0.01	0.06	<b>0.63</b>	40.5%	40.5%	
89			144		4	1.34	0.01	0.00	0.10	0.13	<b>1.47</b>	9.2%	0.44	0.02	0.00	0.04	0.03	<b>0.56</b>	38.1%	38.1%	
90			150		4	<b>1.30</b>	0.02	0.00	0.02	0.21	1.24	16.2%	<b>0.67</b>	0.01	0.00	0.01	0.11	0.63	51.7%	48.8%	
91			151		4	<b>1.57</b>	0.01	0.00	0.00	0.29	1.41	18.2%	<b>0.78</b>	0.01	0.00	0.00	0.10	0.74	49.8%	47.1%	
92			152		4	<b>1.63</b>	0.01	0.00	0.01	0.17	1.50	10.3%	0.70	0.01	0.00	0.01	0.08	<b>0.72</b>	44.0%	44.0%	
93			153		4	<b>1.46</b>	0.01	0.00	0.05	0.13	1.45	8.7%	0.52	0.01	0.00	0.03	0.05	<b>0.61</b>	42.0%	42.0%	
94			0	128	2	<b>0.78</b>	0.01	0.00	0.02	0.09	0.73	11.7%	0.12	0.00	0.00	0.01	0.02	<b>0.12</b>	15.8%	15.8%	
95			2	132	4	<b>1.41</b>	0.01	0.00	0.08	0.21	1.34	14.8%	<b>0.29</b>	0.01	0.00	0.03	0.05	0.28	20.4%	20.0%	
96			3	131	4	<b>2.10</b>	0.02	0.00	0.02	0.32	2.01	15.3%	<b>0.52</b>	0.01	0.00	0.01	0.08	0.48	25.0%	23.1%	
97			4	130	4	<b>1.46</b>	0.02	0.00	0.05	0.23	1.36	16.0%	0.26	0.00	0.00	0.03	0.03	<b>0.27</b>	18.2%	18.2%	
98			8	137	4	<b>1.69</b>	0.01	0.00	0.06	0.18	1.57	10.7%	<b>0.35</b>	0.01	0.00	0.02	0.05	0.26	20.4%	15.5%	
99			9	136	4	<b>2.07</b>	0.01	0.00	0.02	0.34	2.02	16.5%	0.38	0.01	0.00	0.01	0.04	<b>0.49</b>	25.7%	23.7%	
100			12	144	8	<b>2.66</b>	0.03	0.00	0.18	0.40	2.47	14.9%	0.65	0.01	0.00	0.07	0.15	0.53	24.6%	19.9%	
101			13	143	8	<b>3.76</b>	0.02	0.00	0.04	0.46	3.58	12.1%	<b>0.90</b>	0.01	0.00	0.02	0.13	0.79	24.0%	21.0%	
102			14	142	8	<b>4.08</b>	0.03	0.00	0.02	0.55	3.80	13.5%	1.05	0.01	0.00	0.01	0.11	<b>1.17</b>	28.6%	28.6%	
103			15	141	8	<b>3.99</b>	0.03	0.00	0.02	0.53	3.79	13.2%	0.90	0.01	0.00	0.04	0.09	<b>1.13</b>	28.4%	28.4%	
104			16	140	8	<b>3.18</b>	0.04	0.00	0.16	0.55	2.84	17.4%	0.51	0.01	0.00	0.03	0.08	<b>0.53</b>	16.5%	16.5%	
105			22	153	8	<b>3.36</b>	0.03	0.00	0.10	0.49	3.20	14.5%	<b>0.67</b>	0.01	0.00	0.03	0.15	0.57	20.0%	17.0%	
106			23	152	8	<b>3.92</b>	0.02	0.00	0.02	0.46	3.67	11.7%	<b>1.05</b>	0.01	0.00	0.01	0.12	0.92	26.9%	23.4%	
107			24	151	8	<b>4.16</b>	0.03	0.00	0.02	0.68	3.88	16.5%	0.99	0.01	0.00	0.02	0.10	<b>1.28</b>	30.8%	30.8%	
108			25	150	8	<b>3.52</b>	0.07	0.00	0.04	0.41	3.44	11.7%	0.50	0.01	0.00	0.04	0.07	<b>0.51</b>	14.4%	14.4%	

- L-patch Mid CH

No.	Module	Type	Beam ID_1	Bema ID_2	Feed no.	4cm2 PD(mW/cm2)						max ratio out of all beams		4cm2 PD(mW/cm2) at 10mm evaluation distance						max ratio out of all beams		max ratio out of all beams	
						S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio Front/(worst-surface)	23.2%	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio worst-surface / (10mm/2mm)	78.7%	ratio Back 10mm / worst-surface 2mm	71.1%
64			0		1	0.38	0.00	0.00	0.00	0.03	0.39	8.0%	0.09	0.00	0.00	0.00	0.02	0.10	24.5%	24.5%			
65			2		2	0.63	0.01	0.00	0.02	0.12	0.51	18.6%	0.26	0.00	0.01	0.04	0.21	40.8%	34.0%				
66			3		2	0.67	0.01	0.00	0.01	0.10	0.61	15.3%	0.29	0.00	0.00	0.00	0.04	0.27	43.7%	39.9%			
67			4		2	0.46	0.01	0.00	0.01	0.05	0.46	10.7%	0.18	0.00	0.00	0.01	0.02	0.18	38.2%	38.0%			
68			8		2	0.50	0.00	0.00	0.01	0.08	0.42	17.0%	0.31	0.00	0.00	0.01	0.03	0.30	62.4%	60.0%			
69			9		2	0.65	0.01	0.00	0.00	0.07	0.65	10.8%	0.22	0.00	0.00	0.01	0.03	0.28	43.5%	43.5%			
70			12		4	0.82	0.01	0.00	0.06	0.19	0.78	23.2%	0.65	0.01	0.00	0.04	0.13	0.58	78.7%	71.1%			
71			13		4	1.29	0.01	0.00	0.02	0.22	1.17	17.3%	0.67	0.01	0.00	0.01	0.11	0.64	51.7%	49.8%			
72			14		4	1.45	0.01	0.00	0.01	0.19	1.30	13.1%	0.69	0.01	0.00	0.01	0.09	0.70	48.7%	48.7%			
73			15		4	1.50	0.01	0.00	0.01	0.16	1.44	10.9%	0.56	0.01	0.00	0.01	0.04	0.64	42.8%	42.8%			
74			16		4	1.23	0.01	0.00	0.03	0.11	1.30	8.4%	0.43	0.01	0.00	0.02	0.04	0.46	35.3%	35.3%			
75			22		4	1.10	0.01	0.00	0.04	0.22	0.96	19.7%	0.67	0.01	0.00	0.02	0.13	0.62	60.8%	56.4%			
76			23		4	1.43	0.01	0.00	0.01	0.23	1.31	15.8%	0.68	0.01	0.00	0.00	0.08	0.67	47.4%	46.9%			
77			24		4	1.53	0.01	0.00	0.01	0.18	1.39	11.7%	0.65	0.00	0.00	0.00	0.08	0.68	44.6%	44.6%			
78			25		4	1.30	0.01	0.00	0.01	0.09	1.39	6.6%	0.49	0.01	0.00	0.02	0.04	0.55	39.6%	39.6%			
79			128		1	0.37	0.00	0.00	0.01	0.05	0.32	14.0%	0.13	0.00	0.00	0.00	0.02	0.12	35.4%	31.7%			
80			130		2	0.78	0.00	0.00	0.02	0.12	0.68	15.8%	0.22	0.00	0.00	0.02	0.03	0.19	28.0%	23.8%			
81			131		2	0.90	0.00	0.00	0.01	0.12	0.82	13.3%	0.39	0.00	0.00	0.00	0.06	0.37	43.0%	41.1%			
82			132		2	0.67	0.01	0.00	0.04	0.10	0.68	14.6%	0.21	0.01	0.00	0.02	0.03	0.26	38.3%	38.3%			
83			136		2	0.91	0.00	0.00	0.01	0.13	0.81	14.7%	0.41	0.00	0.00	0.00	0.05	0.38	44.5%	41.6%			
84			137		2	0.80	0.00	0.00	0.03	0.09	0.75	11.3%	0.31	0.00	0.00	0.01	0.04	0.33	41.1%	41.1%			
85			140		4	1.10	0.02	0.00	0.06	0.21	0.98	18.8%	0.54	0.01	0.00	0.03	0.10	0.51	49.2%	46.7%			
86			141		4	1.46	0.01	0.00	0.01	0.21	1.38	14.5%	0.73	0.01	0.00	0.00	0.13	0.67	50.3%	45.9%			
87			142		4	1.62	0.01	0.00	0.01	0.20	1.44	12.5%	0.76	0.00	0.00	0.01	0.09	0.76	47.1%	47.0%			
88			143		4	1.48	0.01	0.00	0.01	0.15	1.36	10.4%	0.59	0.01	0.00	0.01	0.06	0.63	43.0%	43.0%			
89			144		4	1.26	0.01	0.00	0.09	0.11	1.42	8.0%	0.44	0.02	0.00	0.04	0.03	0.56	39.3%	39.3%			
90			150		4	1.35	0.02	0.00	0.02	0.21	1.27	15.7%	0.67	0.01	0.00	0.01	0.11	0.63	49.7%	46.9%			
91			151		4	1.54	0.00	0.00	0.01	0.23	1.40	14.6%	0.78	0.01	0.00	0.00	0.10	0.74	50.8%	48.0%			
92			152		4	1.58	0.01	0.00	0.01	0.18	1.41	11.5%	0.70	0.01	0.00	0.01	0.08	0.72	45.4%	45.4%			
93			153		4	1.40	0.01	0.00	0.04	0.13	1.40	9.5%	0.52	0.01	0.00	0.03	0.05	0.61	43.5%	43.5%			
94			0	128	2	0.77	0.01	0.00	0.02	0.09	0.71	11.8%	0.12	0.00	0.00	0.01	0.02	0.12	15.9%	15.9%			
95			2	132	4	1.41	0.02	0.00	0.07	0.21	1.27	14.6%	0.29	0.01	0.00	0.03	0.05	0.28	20.3%	19.9%			
96			3	131	4	1.62	0.01	0.00	0.01	0.20	1.44	12.5%	0.76	0.00	0.00	0.01	0.08	0.48	25.6%	23.6%			
97			4	130	4	1.51	0.01	0.00	0.05	0.23	1.35	15.0%	0.26	0.00	0.00	0.03	0.03	0.27	17.6%	17.6%			
98			8	137	4	1.73	0.01	0.00	0.06	0.21	1.54	12.2%	0.35	0.01	0.00	0.02	0.05	0.26	20.0%	15.1%			
99			9	136	4	2.05	0.01	0.00	0.02	0.30	1.97	14.7%	0.38	0.01	0.00	0.01	0.04	0.49	23.9%	23.9%			
100			12	144	8	2.84	0.04	0.00	0.18	0.42	2.48	14.9%	0.65	0.01	0.00	0.07	0.15	0.53	23.0%	18.6%			
101			13	143	8	3.64	0.02	0.00	0.04	0.40	3.41	11.0%	0.90	0.01	0.00	0.02	0.13	0.79	24.9%	21.8%			
102			14	142	8	4.00	0.02	0.00	0.03	0.53	3.68	13.3%	1.05	0.01	0.00	0.01	0.11	1.17	29.1%	29.1%			
103			15	141	8	3.96	0.03	0.00	0.02	0.47	3.71	11.9%	0.90	0.01	0.00	0.04	0.09	1.13	28.6%	28.6%			
104			16	140	8	3.18	0.04	0.00	0.17	0.49	2.84	15.4%	0.51	0.01	0.00	0.03	0.08	0.53	16.5%	16.5%			
105			22	153	8	3.46	0.03	0.01	0.11	0.41	3.15	12.3%	0.67	0.01	0.00	0.03	0.15	0.57	19.0%	16.8%			
106			23	152	8	3.91	0.03	0.00	0.03	0.53	3.61	13.5%	1.05	0.01	0.00	0.01	0.12	0.92	27.0%	23.5%			
107			24	151	8	4.01	0.02	0.00	0.02	0.56	3.71	14.0%	0.99	0.01	0.00	0.02	0.10	1.28	31.9%	31.9%			
108			25	150	8	3.47	0.06	0.00	0.04	0.37	3.35	10.7%	0.50	0.01	0.00	0.04	0.07	0.51	14.6%	14.6%			

- L-patch High CH

No.	Module	Type	Beam ID_1	Bema ID_2	Feed no.	4cm2 PD(mW/cm2)						max ratio out of all beams		4cm2 PD(mW/cm2) at 10mm evaluation distance						max ratio out of all beams		max ratio out of all beams	
						S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio Front/(worst-surface)	21.5%	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio worst-surface / (10mm/2mm)	67.1%	ratio Back 10mm / worst-surface 2mm	59.6%
64			0		1	0.37	0.00	0.00	0.01	0.03	0.37	9.2%	0.09	0.00	0.00	0.00	0.02	0.09	24.9%	24.9%			
65			2		2	0.63	0.01	0.00	0.02	0.10	0.50	16.2%	0.24	0.00	0.00	0.01	0.04	0.20	38.5%	31.5%			
66			3		2	0.61	0.00	0.00	0.01	0.09	0.55	14.4%	0.29	0.00	0.00	0.00	0.03	0.24	47.2%	39.7%			
67			4		2	0.43	0.01	0.00	0.01	0.06	0.42	13.2%	0.16	0.00	0.00	0.01	0.02	0.16	38.0%	37.1%			
68			8		2	0.49	0.00	0.00	0.01	0.09	0.39	17.9%	0.31	0.00	0.00	0.01	0.03	0.28	63.3%	57.9%			
69			9		2	0.59	0.01	0.00	0.00	0.06	0.59	10.0%	0.22	0.00	0.00	0.01	0.02	0.28	46.9%	46.9%			
70			12		4	0.89	0.01	0.00	0.07	0.19	0.72	21.9%	0.59	0.01	0.00	0.04	0.13	0.28	49.6%	49.6%			
71			13		4	1.25	0.01	0.00	0.02	0.21	1.13	16.7%	0.65	0.01	0.00	0.01	0.10	0.63	52.0%	50.1%			
72			14		4	1.40	0.00	0.00	0.01	0.19	1.22	13.6%	0.69	0.01	0.00	0.01	0.08	0.69	49.1%	49.1%			
73			15		4	1.46	0.01	0.00	0.01	0.13	1.41	9.2%	0.51	0.01	0.00	0.01	0.04	0.57	39.2%	39.2%			
74			16		4	1.09	0.01	0.00	0.03	0.09	1.24	7.5%	0.42	0.01	0.00	0.02	0.04	0.47	38.0%	38.0%			
75			22		4	1.11	0.01	0.00	0.04	0.20	0.98	17.9%	0.62	0.01	0.00	0.02	0.11	0.58	55.5%	51.9%			
76			23		4	1.39	0.01	0.00	0.01	0.23	1.24	16.2%	0.70	0.01	0.00	0.00	0.09	0.66	50.0%	47.1%			
77			24		4	1.47	0.01	0.00	0.01	0.16	1.32	10.7%	0.62	0.01	0.00	0.01	0.07	0.65	44.4%	44.4%			
78			25		4	1.18	0.01	0.00	0.01	0.09	1.27	6.8%	0.46	0.01	0.00	0.02	0.03	0.52	41.2%	41.2%			
79			128		1	0.36	0.00	0.00	0.01	0.04	0.31	12.3%	0.13	0.00	0.00	0.00	0.02	0.11	35.7%	32.2%			
80			130		2	0.77	0.00	0.00	0.02	0.11	0.67	13.8%	0.22	0.00	0.00	0.01	0.03	0.19	28.8%	25.2%			
81			131		2	0.84	0.00	0.00	0.01	0.11	0.75	12.5%	0.38	0.00	0.00	0.00	0.05	0.36	45.0%	43.0%			
82			132		2	0.61	0.0																



Table 7. PD of Ant L – patch antenna (39GHz – n260)

- L-patch Low CH

No.	Module	Type	Beam ID_1	Bema ID_2	Feed no.	4cm2 PD(mW/cm2)						max ratio out of all beams		4cm2 PD(mW/cm2) at 10mm evaluation distance						max ratio out of all beams		max ratio out of all beams	
						S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio Front/(worst-surface)	27.8%	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio worst-surface (10mm/2mm)	59.6%	ratio Back 10mm / worst-surface 2mm	47.0%
64	L	Patch	0	1	0.43	0.00	0.00	0.01	0.06	0.31	14.9%	0.17	0.00	0.00	0.01	0.02	0.12	38.8%	26.9%				
65			2	0.68	0.01	0.00	0.02	0.11	0.42	16.0%	0.27	0.00	0.00	0.02	0.05	0.18	39.3%	26.3%					
66			3	0.67	0.00	0.00	0.00	0.13	0.52	19.8%	0.34	0.00	0.00	0.00	0.06	0.25	50.9%	37.3%					
67			4	0.87	0.01	0.00	0.04	0.14	0.57	16.8%	0.32	0.00	0.00	0.02	0.06	0.23	36.2%	26.7%					
68			8	0.62	0.01	0.00	0.01	0.13	0.47	20.4%	0.32	0.00	0.00	0.01	0.05	0.23	51.8%	37.2%					
69			9	0.78	0.00	0.00	0.02	0.12	0.52	15.1%	0.28	0.00	0.00	0.01	0.04	0.21	36.6%	27.4%					
70			12	4	1.19	0.01	0.00	0.08	0.19	0.80	16.2%	0.44	0.01	0.00	0.06	0.07	0.35	36.8%	29.1%				
71			13	4	0.96	0.01	0.00	0.02	0.22	0.78	22.6%	0.56	0.01	0.00	0.02	0.11	0.40	57.6%	41.9%				
72			14	4	1.24	0.01	0.00	0.01	0.25	0.99	20.4%	0.67	0.01	0.00	0.01	0.12	0.50	53.7%	40.4%				
73			15	4	1.38	0.01	0.00	0.02	0.27	1.14	19.6%	0.72	0.01	0.00	0.01	0.14	0.57	52.2%	41.5%				
74			16	4	1.40	0.01	0.00	0.12	0.29	1.09	20.8%	0.59	0.01	0.00	0.09	0.13	0.48	42.0%	34.2%				
75			22	4	1.00	0.01	0.00	0.05	0.18	0.77	18.5%	0.52	0.01	0.00	0.03	0.09	0.41	51.8%	40.8%				
76			23	4	1.11	0.01	0.00	0.02	0.25	0.89	22.4%	0.63	0.01	0.00	0.01	0.12	0.46	56.8%	41.4%				
77			24	4	1.28	0.01	0.00	0.01	0.25	1.03	19.9%	0.66	0.01	0.00	0.01	0.13	0.50	51.9%	39.5%				
78			25	4	1.42	0.01	0.00	0.09	0.29	1.14	20.5%	0.62	0.01	0.00	0.06	0.14	0.52	44.0%	36.9%				
79			128	1	0.40	0.00	0.00	0.01	0.05	0.27	13.6%	0.14	0.00	0.00	0.00	0.02	0.10	35.5%	24.3%				
80			130	2	0.75	0.00	0.00	0.01	0.10	0.55	12.9%	0.29	0.00	0.00	0.01	0.04	0.23	38.0%	30.1%				
81			131	2	0.67	0.01	0.00	0.01	0.12	0.54	17.5%	0.37	0.00	0.00	0.01	0.05	0.27	54.8%	40.3%				
82			132	2	0.72	0.01	0.00	0.01	0.10	0.44	13.6%	0.21	0.00	0.00	0.01	0.04	0.14	28.7%	19.8%				
83			136	2	0.65	0.00	0.00	0.01	0.12	0.53	18.1%	0.37	0.00	0.00	0.00	0.05	0.28	56.4%	43.1%				
84			137	2	0.81	0.01	0.00	0.01	0.16	0.57	19.1%	0.35	0.00	0.00	0.01	0.07	0.26	42.9%	32.3%				
85			140	4	1.49	0.02	0.00	0.02	0.36	1.01	24.1%	0.64	0.01	0.00	0.01	0.16	0.46	43.1%	30.7%				
86			141	4	1.12	0.01	0.00	0.01	0.18	0.92	16.0%	0.61	0.01	0.00	0.01	0.09	0.50	54.2%	44.5%				
87			142	4	1.28	0.01	0.00	0.01	0.24	1.03	18.8%	0.70	0.01	0.00	0.01	0.11	0.54	54.9%	42.3%				
88			143	4	1.34	0.01	0.00	0.05	0.25	1.08	18.9%	0.69	0.01	0.00	0.04	0.13	0.55	51.1%	41.2%				
89			144	4	1.48	0.01	0.00	0.04	0.34	1.05	23.0%	0.61	0.01	0.00	0.02	0.18	0.45	41.1%	30.6%				
90			150	4	1.10	0.01	0.00	0.01	0.19	0.73	17.6%	0.47	0.01	0.00	0.01	0.07	0.38	42.6%	34.8%				
91			151	4	1.17	0.01	0.00	0.01	0.25	0.96	21.6%	0.67	0.00	0.00	0.01	0.12	0.48	57.7%	40.9%				
92			152	4	1.27	0.02	0.00	0.02	0.21	0.99	16.9%	0.63	0.01	0.00	0.02	0.11	0.52	49.9%	40.6%				
93			153	4	1.46	0.01	0.00	0.05	0.29	1.08	19.9%	0.65	0.01	0.00	0.04	0.15	0.50	44.6%	34.1%				
94			0	128	2	1.13	0.01	0.00	0.02	0.16	0.90	14.2%	0.46	0.01	0.00	0.02	0.06	0.33	41.1%	29.2%			
95			2	130	4	1.49	0.01	0.00	0.04	0.23	1.13	15.3%	0.59	0.01	0.00	0.03	0.10	0.44	39.4%	29.8%			
96			3	131	4	1.89	0.01	0.00	0.02	0.30	1.63	16.0%	1.09	0.01	0.00	0.02	0.13	0.80	57.5%	42.3%			
97			4	132	4	1.66	0.01	0.00	0.07	0.31	1.16	19.0%	0.60	0.01	0.00	0.05	0.15	0.50	36.0%	30.0%			
98			8	136	4	1.87	0.01	0.00	0.02	0.33	1.65	17.5%	1.09	0.01	0.00	0.02	0.14	0.85	58.1%	45.3%			
99			9	137	4	1.78	0.02	0.00	0.03	0.36	1.37	20.5%	0.57	0.01	0.00	0.03	0.19	0.52	32.3%	29.5%			
100			12	143	8	3.22	0.05	0.00	0.19	0.55	2.64	17.1%	1.68	0.03	0.00	0.16	0.28	1.40	52.0%	43.4%			
101			13	142	8	3.53	0.04	0.00	0.06	0.58	3.12	16.4%	2.09	0.03	0.00	0.03	0.28	1.62	59.3%	46.0%			
102			14	141	8	3.68	0.04	0.00	0.03	0.67	3.20	18.3%	2.09	0.03	0.00	0.02	0.28	1.69	56.9%	46.0%			
103			15	140	8	3.09	0.06	0.00	0.05	0.73	2.54	23.5%	1.56	0.04	0.00	0.02	0.37	1.33	50.5%	43.0%			
104			16	144	8	2.76	0.04	0.00	0.20	0.75	2.37	27.0%	1.26	0.02	0.00	0.15	0.39	1.06	45.1%	30.6%			
105			25	152	8	3.40	0.06	0.00	0.09	0.52	2.89	15.3%	1.87	0.04	0.00	0.06	0.28	1.52	55.0%	44.7%			
106			23	151	8	3.56	0.03	0.00	0.04	0.66	3.17	18.5%	2.12	0.02	0.00	0.03	0.30	1.65	59.6%	46.3%			
107			24	150	8	3.37	0.04	0.00	0.04	0.50	2.77	14.7%	1.74	0.02	0.00	0.03	0.27	1.40	51.7%	41.6%			
108			25	153	8	3.04	0.03	0.00	0.18	0.75	2.44	24.6%	1.26	0.02	0.00	0.13	0.41	1.10	41.4%	36.2%			

- L-patch Mid CH

No.	Module	Type	Beam ID_1	Bema ID_2	Feed no.	4cm2 PD(mW/cm2)						max ratio out of all beams		4cm2 PD(mW/cm2) at 10mm evaluation distance						max ratio out of all beams		max ratio out of all beams	
						S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio Front/(worst-surface)	24.8%	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio worst-surface (10mm/2mm)	62.5%	ratio Back 10mm / worst-surface 2mm	47.9%
64	L	Patch	0	1	0.49	0.00	0.00	0.01	0.07	0.34	14.1%	0.19	0.00	0.00	0.01	0.03	0.13	39.8%	25.9%				
65			2	0.79	0.01	0.00	0.02	0.12	0.53	15.0%	0.36	0.01	0.00	0.02	0.05	0.24	45.7%	30.7%					
66			3	0.78	0.00	0.00	0.01	0.14	0.64	17.3%	0.44	0.00	0.00	0.00	0.06	0.33	56.4%	41.6%					
67			4	0.96	0.01	0.00	0.03	0.18	0.58	18.5%	0.31	0.00	0.00	0.02	0.08	0.21	32.2%	22.0%					
68			8	0.73	0.00	0.00	0.01	0.12	0.58	16.9%	0.41	0.00	0.00	0.01	0.06	0.29	56.2%	40.3%					
69			9	0.93	0.01	0.00	0.01	0.12	0.63	13.3%	0.37	0.00	0.00	0.01	0.05	0.26	39.7%	28.5%					
70			12	4	1.29	0.02	0.00	0.07	0.24	0.88	18.8%	0.63	0.01	0.00	0.06	0.11	0.45	47.2%	35.0%				
71			13	4	1.25	0.01	0.00	0.03	0.23	1.07	18.3%	0.78	0.01	0.00	0.02	0.12	0.60	62.2%	47.9%				
72			14	4	1.56	0.01	0.00	0.02	0.28	1.34	18.1%	0.94	0.01	0.00	0.02	0.14	0.69	59.9%	44.0%				
73			15	4	1.44	0.02	0.00	0.01	0.28	1.14	19.5%	0.77	0.01	0.00	0.01	0.14	0.57	53.7%	39.4%				
74			16	4	1.44	0.01	0.00	0.09	0.34	0.98	23.5%	0.62	0.01	0.00	0.07	0.16	0.48	43.1%	33.0%				
75			22	4	1.21	0.01	0.00	0.04	0.21	0.96	17.7%	0.68	0.01	0.00	0.03	0.10	0.50	56.0%	41.6%				
76			25	4	1.36	0.01	0.00	0.01	0.22	1.20	16.1%	0.85	0.01	0.00	0.01	0.11	0.65	62.5%	47.7%				
77			24	4	1.59	0.02	0.00	0.02	0.29	1.32	18.8%	0.92	0.01	0.00	0.02	0.14	0.67	57.6%	42.1%				
78			25	4	1.49	0.01	0.00	0.06	0.33	0.98	22.4%	0.63	0.01	0.00	0.04	0.17	0.48	42.3%	32.4%				
79			128	1	0.44	0.00	0.00	0.01	0.05	0.31	11.1%	0.17	0.00	0.00	0.00	0.02	0.11	38.7%	25.1%				
80			130	2	0.85	0.01	0.00	0.01	0.10	0.61	12.1%	0.33	0.00	0.00	0.01	0.04	0.26	38.6%	30.2%				
81			131	2	0.77	0.01	0.00	0.01	0.12	0.61	15.8%	0.43	0.01	0.00	0.01	0.05	0.32	56.3%	41.8%				
82			132	2	0.80	0.00	0.00	0.01	0.11	0.51	13.5%	0.26	0.00	0.00	0.01	0.05	0.17	33.0%	21.2%				
83			136	2	0.70	0.00	0.00	0.01	0.11	0.58	15.2%	0.40	0.00	0.00	0.01	0.05	0.31	56.8%	43.7%				
84			137	2	0.96	0.01	0.00	0.02	0.17	0.64	17.9%	0.42	0.01	0.00	0.01	0.07	0.29	43.6%	30.2%				
85			140	4	1.38	0.02	0.00	0.02	0.31	0.94	22.4%	0.59	0.01	0.00	0.01	0.13	0.46	42.9%	33.6%				
86			141	4	1.14	0.01	0.00	0.02	0.19	0.91	16.5%	0.64	0.01	0.00	0.01	0.09	0.50	55.9%	43.3%				
87			142	4	1.42	0.01	0.00	0.01	0.25	1.20	17.3%	0.84	0.01	0.00	0.00	0.13	0.59	59.1%	41.8%				
88			143	4	1.58	0.01	0.00	0.04	0.27	1.26	17.1%	0.87	0.01	0.00	0.03	0.14	0.64	55.0%					

- L-patch High CH

No.	Module	Type	Beam ID_1	Bema ID_2	Feed no.	4cm2 PD(mW/cm2)												max ratio out of all beams		4cm2 PD(mW/cm2) at 10mm evaluation distance												max ratio out of all beams		max ratio out of all beams	
						S4(Right)						S3(Left)						25.0%		S4(Right)						S3(Left)						63.4%		47.4%	
						S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio Front/(worst-surface)	S4(Right)	S3(Left)	S5(Top)	S6(Bottom)	S1(Front)	S2(Rear)	ratio worst-surface (10mm/2mm)	ratio Back 10mm / worst-surface 2mm															
64			0		1	0.45	0.00	0.00	0.01	0.07	0.29	15.7%	0.18	0.00	0.00	0.01	0.02	0.10	38.8%	21.6%															
65			2		2	0.75	0.01	0.00	0.01	0.10	0.50	13.8%	0.33	0.01	0.00	0.01	0.04	0.22	43.5%	28.9%															
66			3		2	0.69	0.01	0.00	0.01	0.12	0.59	17.5%	0.42	0.00	0.00	0.01	0.05	0.28	61.0%	40.6%															
67			4		2	0.90	0.01	0.00	0.03	0.17	0.54	18.5%	0.30	0.00	0.00	0.02	0.08	0.21	33.4%	23.0%															
68			8		2	0.67	0.01	0.00	0.01	0.11	0.56	16.7%	0.42	0.01	0.00	0.01	0.05	0.29	62.7%	43.8%															
69			9		2	0.81	0.01	0.00	0.01	0.14	0.53	17.2%	0.36	0.00	0.00	0.01	0.06	0.22	44.3%	27.7%															
70			12		4	1.33	0.02	0.00	0.05	0.19	0.91	14.0%	0.64	0.02	0.00	0.04	0.10	0.44	48.1%	32.8%															
71			13		4	1.32	0.01	0.00	0.02	0.23	1.13	17.8%	0.84	0.01	0.00	0.02	0.11	0.63	65.4%	47.4%															
72			14		4	1.20	0.02	0.00	0.02	0.24	0.96	19.9%	0.70	0.01	0.00	0.01	0.11	0.49	58.3%	40.8%															
73			15		4	1.28	0.02	0.00	0.01	0.28	0.94	22.2%	0.66	0.01	0.00	0.01	0.15	0.42	51.4%	33.1%															
74			16		4	1.42	0.01	0.00	0.06	0.31	0.90	21.6%	0.58	0.01	0.00	0.04	0.15	0.42	41.0%	30.0%															
75			22		4	1.24	0.02	0.00	0.03	0.18	1.01	14.8%	0.73	0.01	0.00	0.03	0.07	0.54	59.0%	43.6%															
76			23		4	1.33	0.01	0.00	0.01	0.27	1.09	20.1%	0.81	0.01	0.00	0.01	0.13	0.57	60.4%	43.0%															
77			24		4	1.19	0.02	0.00	0.02	0.21	0.96	17.4%	0.68	0.01	0.00	0.01	0.09	0.47	57.7%	40.0%															
78			25		4	1.44	0.01	0.00	0.04	0.35	0.89	24.6%	0.62	0.00	0.00	0.02	0.19	0.42	42.8%	28.9%															
79			128		1	0.38	0.00	0.00	0.01	0.05	0.25	13.9%	0.15	0.00	0.00	0.00	0.02	0.10	40.6%	26.0%															
80			130		2	0.86	0.01	0.00	0.01	0.10	0.63	12.1%	0.34	0.00	0.00	0.00	0.04	0.26	40.0%	29.9%															
81			131		2	0.72	0.01	0.00	0.02	0.12	0.55	16.2%	0.39	0.01	0.00	0.01	0.04	0.26	54.9%	36.6%															
82			132		2	0.73	0.01	0.00	0.01	0.11	0.44	14.4%	0.26	0.00	0.00	0.01	0.05	0.17	35.0%	23.9%															
83			136		2	0.71	0.01	0.00	0.01	0.12	0.57	17.5%	0.39	0.01	0.00	0.00	0.05	0.28	55.6%	39.7%															
84			137		2	0.88	0.01	0.00	0.03	0.15	0.58	17.5%	0.39	0.01	0.00	0.02	0.08	0.26	44.8%	29.3%															
85			140		4	1.35	0.01	0.00	0.01	0.26	0.88	19.5%	0.59	0.01	0.00	0.01	0.13	0.45	43.9%	33.4%															
86			141		4	1.24	0.02	0.00	0.02	0.19	1.01	15.1%	0.69	0.01	0.00	0.01	0.09	0.55	55.8%	44.6%															
87			142		4	1.17	0.01	0.00	0.01	0.20	0.98	17.0%	0.69	0.01	0.00	0.01	0.09	0.47	58.7%	39.9%															
88			143		4	1.24	0.02	0.00	0.06	0.23	0.95	18.8%	0.66	0.02	0.00	0.04	0.13	0.44	53.5%	35.9%															
89			144		4	1.48	0.01	0.00	0.04	0.32	0.92	21.9%	0.59	0.01	0.00	0.02	0.18	0.44	40.0%	29.7%															
90			150		4	1.18	0.02	0.00	0.01	0.16	0.88	13.5%	0.58	0.01	0.00	0.01	0.08	0.46	49.7%	33.3%															
91			151		4	1.21	0.02	0.00	0.02	0.22	0.97	18.4%	0.70	0.01	0.00	0.01	0.11	0.52	57.7%	42.7%															
92			152		4	1.25	0.02	0.00	0.02	0.17	1.03	13.7%	0.71	0.02	0.00	0.02	0.08	0.48	56.5%	38.2%															
93			153		4	1.44	0.01	0.00	0.07	0.33	0.93	22.8%	0.65	0.01	0.00	0.04	0.19	0.45	45.1%	31.3%															
94			0	128	2	1.05	0.01	0.00	0.02	0.17	0.79	16.0%	0.48	0.01	0.00	0.01	0.06	0.28	46.0%	26.7%															
95			2	130	4	1.70	0.01	0.00	0.03	0.25	1.19	14.7%	0.70	0.01	0.00	0.02	0.12	0.46	41.3%	27.0%															
96			3	131	4	1.79	0.02	0.00	0.03	0.27	1.56	15.3%	1.11	0.02	0.00	0.02	0.11	0.75	62.1%	47.8%															
97			4	132	4	1.66	0.02	0.00	0.06	0.37	1.21	22.2%	0.76	0.01	0.00	0.04	0.19	0.55	46.1%	33.4%															
98			8	136	4	1.92	0.02	0.00	0.02	0.28	1.68	14.6%	1.20	0.02	0.00	0.01	0.12	0.84	62.7%	43.7%															
99			9	137	4	1.96	0.02	0.00	0.04	0.34	1.41	17.5%	0.74	0.01	0.00	0.03	0.21	0.54	37.6%	27.8%															
100			12	143	8	3.54	0.09	0.00	0.16	0.53	2.81	15.1%	1.98	0.07	0.00	0.13	0.33	1.40	55.9%	39.4%															
101			13	142	8	3.36	0.04	0.00	0.04	0.49	2.95	14.6%	2.08	0.03	0.00	0.03	0.22	1.48	62.0%	43.9%															
102			14	141	8	3.48	0.06	0.00	0.06	0.57	2.98	16.5%	2.11	0.04	0.00	0.04	0.27	1.50	60.6%	43.1%															
103			15	140	8	3.40	0.04	0.00	0.03	0.65	2.75	19.9%	1.89	0.04	0.00	0.02	0.39	1.42	55.7%	41.7%															
104			16	144	8	3.24	0.03	0.00	0.16	0.81	2.38	25.0%	1.52	0.01	0.00	0.10	0.44	1.21	47.0%	37.2%															
105			22	152	8	3.42	0.06	0.00	0.09	0.42	2.86	12.2%	2.03	0.05	0.00	0.07	0.19	1.44	59.2%	42.0%															
106			23	151	8	3.46	0.05	0.00	0.04	0.63	3.07	18.2%	2.18	0.04	0.00	0.02	0.31	1.53	63.1%	44.3%															
107			24	150	8	3.45	0.07	0.00	0.05	0.46	2.84	13.2%	2.00	0.05	0.00	0.04	0.21	1.46	58.1%	42.3%															
108			25	153	8	3.49	0.02	0.00	0.16	0.77	2.48	22.1%	1.49	0.01	0.00	0.10	0.44	1.22	42.8%	34.8%															