

FCC Sub6 REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
February 25, 2021

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-2102-FC059

FCC ID: A3LSMA526U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-A526U
Additional Model(s): SM-A526U1
EUT Type: Mobile Phone
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n41 (20)	2506.020 – 2679.990	17M9G7D	PI/2 BPSK	0.161	22.07
		18M0G7D	QPSK	0.161	22.06
		17M9W7D	16QAM	0.125	20.98
		18M0W7D	64QAM	0.079	18.96
		17M9W7D	256QAM	0.055	17.41
Sub6 n41 (30)	2511.000 – 2674.980	26M9G7D	PI/2 BPSK	0.168	22.26
		26M9G7D	QPSK	0.163	22.13
		27M0W7D	16QAM	0.127	21.03
		27M0W7D	64QAM	0.085	19.32
		27M0W7D	256QAM	0.058	17.60
Sub6 n41 (40)	2516.010 – 2670.000	35M9G7D	PI/2 BPSK	0.153	21.84
		35M9G7D	QPSK	0.148	21.70
		35M9W7D	16QAM	0.119	20.77
		35M9W7D	64QAM	0.077	18.87
		35M8W7D	256QAM	0.053	17.23
Sub6 n41 (50)	2521.020 – 2664.990	46M1G7D	PI/2 BPSK	0.139	21.43
		45M8G7D	QPSK	0.137	21.38
		45M8W7D	16QAM	0.109	20.38
		45M9W7D	64QAM	0.072	18.55
		45M9W7D	256QAM	0.049	16.89
Sub6 n41 (60)	2526.000 – 2659.980	57M8G7D	PI/2 BPSK	0.143	21.55
		58M0G7D	QPSK	0.143	21.54
		57M9W7D	16QAM	0.114	20.57
		57M9W7D	64QAM	0.074	18.68
		57M8W7D	256QAM	0.051	17.06
Sub6 n41 (80)	2536.020 – 2649.990	76M9G7D	PI/2 BPSK	0.135	21.29
		77M1G7D	QPSK	0.134	21.28
		77M1W7D	16QAM	0.109	20.39
		77M0W7D	64QAM	0.071	18.50

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
		77M1W7D	256QAM	0.049	16.89
Sub6 n41 (90)	2541.000 – 2644.980	86M8G7D	PI/2 BPSK	0.130	21.15
		87M0G7D	QPSK	0.131	21.19
		87M0W7D	16QAM	0.107	20.28
		86M7W7D	64QAM	0.069	18.41
		86M5W7D	256QAM	0.047	16.76
Sub6 n41 (100)	2546.010 – 2640.000	96M3G7D	PI/2 BPSK	0.129	21.10
		96M3G7D	QPSK	0.127	21.05
		96M3W7D	16QAM	0.102	20.10
		96M6W7D	64QAM	0.067	18.28
		96M2W7D	256QAM	0.046	16.59

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report No.: HCT-RF-2102-FC059

REVIEWED BY



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2102-FC059	February 25, 2021	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	3
1. GENERAL INFORMATION	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER.....	9
3.3 RADIATED SPURIOUS EMISSIONS	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH.	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	14
3.7 CHANNEL EDGE	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.9 WORST CASE(RADIATED TEST)	18
3.10 WORST CASE(CONDUCTED TEST)	19
4. LIST OF TEST EQUIPMENT	21
5. MEASUREMENT UNCERTAINTY	22
6. SUMMARY OF TEST RESULTS	23
7. SAMPLE CALCULATION	24
8. TEST DATA	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	26
8.2 RADIATED SPURIOUS EMISSIONS	34
8.3 PEAK-TO-AVERAGE RATIO.....	43
8.4 OCCUPIED BANDWIDTH	44
8.5 CONDUCTED SPURIOUS EMISSIONS	45
8.6 CHANNEL EDGE	47
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	50
9. TEST PLOTS.....	58
10. ANNEX A_ TEST SETUP PHOTO.....	243

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMA526U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile Phone
Model(s):	SM-A526U
Additional Model(s):	SM-A526U1
SCS(kHz):	30
Bandwidth(MHz):	20, 30, 40, 50, 60, 80, 90, 100
Waveform:	CP-OFDM, DFT-S-OFDM
Modulation:	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
Tx Frequency(SCS 30kHz):	2506.020 – 2679.990 : 20 MHz 2511.000 – 2674.980 : 30 MHz 2516.010 – 2670.000 : 40 MHz 2521.020 – 2664.990 : 50 MHz 2526.000 – 2659.980 : 60 MHz 2536.020 – 2649.990 : 80 MHz 2541.000 – 2644.980 : 90 MHz 2546.010 – 2640.000 : 100 MHz
Date(s) of Tests:	January 19, 2021 ~ February 24, 2021
Serial number:	Radiated: R3CR10D79NE Conducted: 49aab440f11d7ece

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS, CDMA(BC0, 1, 10) and LTE, Sub6. It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed NormalHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and NormalHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

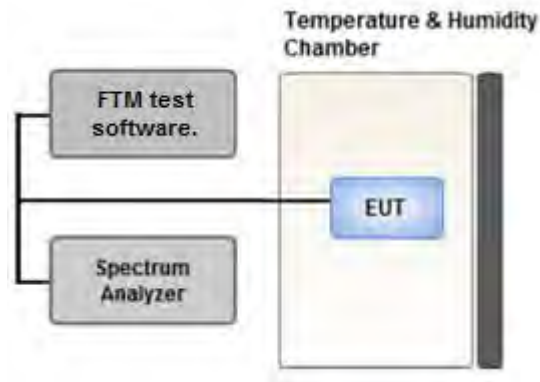

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.


Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:

Set $\geq [10 \times$ (number of points in sweep) \times (transmission period)] for single sweep

(automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.

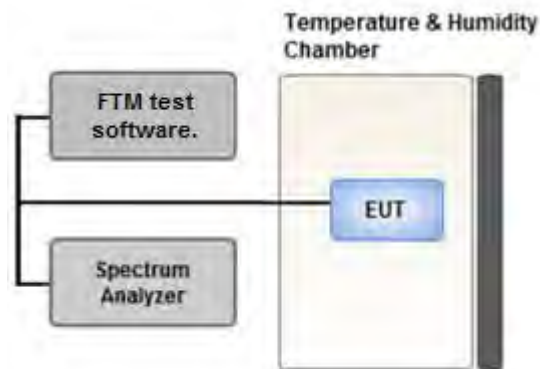

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

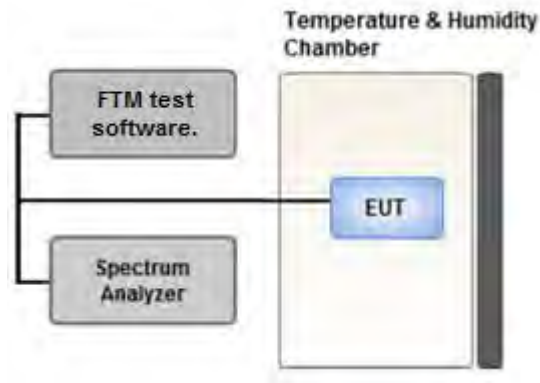

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 CHANNEL EDGE

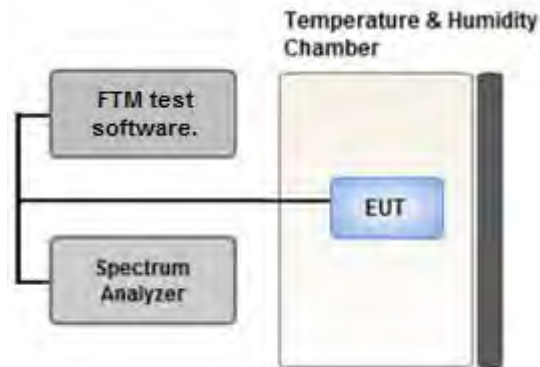

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum power and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1MHz of the channel edge the RBW should be 2% of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2. $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3. $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz.
5. $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

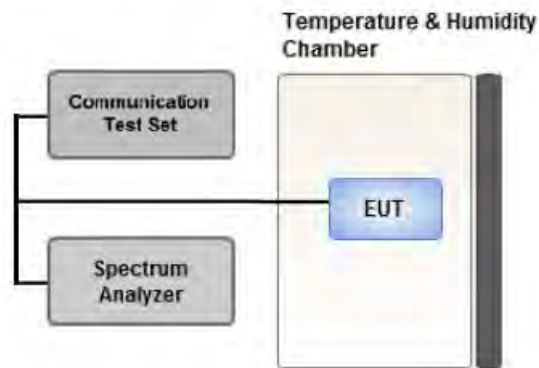

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.
(Worst case: DFT-S-OFDM)
- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- All power classes were tested, and the results were reported for the worst case PC2.
- Radiated Spurious emissions are measured while operating in EN-DC mode with Sub 6 NR carrier as well as an LTE carrier (anchor).
All EN-DC mode of operation were investigated and the worst case configuration results are reported.
(Worst case: 2A-n41A)
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.
Please refer to the table below.
- SM-A526U & additional models were tested and the worst case results are reported.
(Worst case : SM-A526U)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1	1	X
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	1	1	Z

3.10 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.

(Worst case: PI/2 BPSK)

- All power classes were tested, and the results were reported for the worst case PC2.

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

- SM-A526U & additional models were tested and the worst case results are reported.

(Worst case : SM-A526U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset		
Occupied Bandwidth, Peak-To-Average Ratio	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	20, 30, 40, 50, 60, 80, 90, 100	Mid	Full RB	0		
Channel Edge	PI/2 BPSK	20	Low	1	0		
			High	1	50		
		30	Low	1	0		
			High	1	77		
		40	Low	1	0		
			High	1	105		
		50	Low	1	0		
			High	1	132		
		60	Low	1	0		
			High	1	161		
		80	Low	1	0		
			High	1	216		
		90	Low	1	0		
			High	1	244		
		100	Low	1	0		
			High	1	272		
				20, 30, 40, 50, 60, 80, 90, 100	Low, Mid High	Full RB	0
		Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	20, 30, 40, 50, 60, 80, 90, 100	Low, Mid, High	1	1

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
Wainwright Instruments	WHKX10-900-1000-15000-40SS/ High Pass Filter	5	07/13/2020	Annual	07/13/2021
Wainwright Instruments	WHKX10-2700-3000-18000-40SS/ High Pass Filter	145	09/03/2020	Annual	09/03/2021
Wainwright Instruments	WHNX6-4740-6000-26500-40CC/ High Pass Filter	11	09/03/2020	Annual	09/03/2021
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	04/27/2020	Annual	04/27/2021
CERNEX	LOW NOISE AMP (100MHz ~ 18GHz)	26822	06/04/2020	Annual	06/04/2021
CERNEX	CBL18265035 / Power Amplifier	22966	12/04/2020	Annual	12/04/2021
CERNEX	CBL26405040 / Power Amplifier	25956	03/23/2020	Annual	03/23/2021
Hewlett Packard	E3632A/DC Power Supply	MY40004427	09/16/2020	Annual	09/16/2021
Schwarzbeck	UHAP / Precision Dipole Antenna	01273	05/30/2020	Biennial	05/30/2022
Schwarzbeck	UHAP / Precision Dipole Antenna	01274	05/30/2020	Biennial	05/30/2022
ESPEC	SU-642 / Chamber	93008124	03/18/2020	Annual	03/18/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	02289	05/08/2020	Biennial	05/08/2022
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1299	05/10/2019	Biennial	05/10/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	02/11/2020	Biennial	02/11/2022
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	04/27/2020	Annual	04/27/2021
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2020	Annual	06/04/2021
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	101436	03/16/2020	Annual	03/16/2021
Rohde & Schwarz	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	05/18/2020	Biennial	05/18/2022
Schwarzbeck	VULB9160/ Bilog Antenna	3150	03/12/2019	Biennial	03/12/2021
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6262116770	07/22/2020	Annual	07/22/2021
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/13/2020	Annual	07/13/2021
KEYSIGHT	N9030B / Signal Analyzer(5Hz~40.0GHz)	MY55480167	06/04/2020	Annual	06/04/2021
KEYSIGHT	E7515B / 5G Wireless Tester	MY60101126	05/28/2020	Annual	05/28/2021
Mini-Circuits	ZC4PD-K1844+ / 4-Way Divider	942907	09/14/2020	Annual	09/14/2021
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	<ul style="list-style-type: none"> ■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz 	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. All conducted tests were tested using 5G Wireless Tester.

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$	PASS

Note:

1. Radiated tests were tested using FTM test software.

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
518598	2593.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

PSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		EIRP	
								W		W	dBm
2506.020	Sub6 41/ 20 MHz [30 kHz]	PI/2 BPSK	-22.40	12.62	10.24	2.30	H	< 2.00	0.114	20.56	
		QPSK	-22.45	12.57	10.24	2.30	H		0.113	20.51	
		16-QAM	-23.48	11.54	10.24	2.30	H		0.089	19.48	
		64-QAM	-25.48	9.54	10.24	2.30	H		0.056	17.48	
		256-QAM	-26.94	8.08	10.24	2.30	H		0.040	16.02	
2592.990		PI/2 BPSK	-21.36	13.98	10.42	2.33	H		0.161	22.07	
		QPSK	-21.37	13.97	10.42	2.33	H		0.161	22.06	
		16-QAM	-22.45	12.89	10.42	2.33	H		0.125	20.98	
		64-QAM	-24.47	10.87	10.42	2.33	H		0.079	18.96	
		256-QAM	-26.02	9.32	10.42	2.33	H		0.055	17.41	
2679.990	PI/2 BPSK	-24.26	10.97	10.34	2.40	H	0.078	18.91			
	QPSK	-24.33	10.90	10.34	2.40	H	0.077	18.84			
	16-QAM	-25.22	10.01	10.34	2.40	H	0.062	17.95			
	64-QAM	-27.30	7.93	10.34	2.40	H	0.039	15.87			
	256-QAM	-28.80	6.43	10.34	2.40	H	0.027	14.37			

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2511.000	Sub6 41/ 30 MHz [30 kHz]	PI/2 BPSK	-21.80	13.29	10.20	2.30	H	< 2.00	0.132	21.19
		QPSK	-21.79	13.30	10.20	2.30	H		0.132	21.20
		16-QAM	-22.88	12.21	10.20	2.30	H		0.103	20.11
		64-QAM	-24.76	10.33	10.20	2.30	H		0.067	18.23
		256-QAM	-26.31	8.78	10.20	2.30	H		0.047	16.68
2592.990		PI/2 BPSK	-21.17	14.17	10.42	2.33	H		0.168	22.26
		QPSK	-21.30	14.04	10.42	2.33	H		0.163	22.13
		16-QAM	-22.40	12.94	10.42	2.33	H		0.127	21.03
		64-QAM	-24.11	11.23	10.42	2.33	H		0.085	19.32
		256-QAM	-25.83	9.51	10.42	2.33	H		0.058	17.60
2674.980	PI/2 BPSK	-23.82	11.47	10.30	2.37	H	0.087	19.40		
	QPSK	-23.86	11.43	10.30	2.37	H	0.086	19.36		
	16-QAM	-24.77	10.52	10.30	2.37	H	0.070	18.45		
	64-QAM	-26.56	8.73	10.30	2.37	H	0.046	16.66		
	256-QAM	-28.41	6.88	10.30	2.37	H	0.030	14.81		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2516.010	Sub6 41/ 40 MHz [30 kHz]	PI/2 BPSK	-21.76	13.26	10.32	2.30	H	< 2.00	0.134	21.28
		QPSK	-21.88	13.14	10.32	2.30	H		0.131	21.16
		16-QAM	-22.83	12.19	10.32	2.30	H		0.105	20.21
		64-QAM	-24.73	10.29	10.32	2.30	H		0.068	18.31
		256-QAM	-26.23	8.79	10.32	2.30	H		0.048	16.81
2592.990		PI/2 BPSK	-21.59	13.75	10.42	2.33	H		0.153	21.84
		QPSK	-21.73	13.61	10.42	2.33	H		0.148	21.70
		16-QAM	-22.66	12.68	10.42	2.33	H		0.119	20.77
		64-QAM	-24.56	10.78	10.42	2.33	H		0.077	18.87
		256-QAM	-26.20	9.14	10.42	2.33	H		0.053	17.23
2670.000	PI/2 BPSK	-23.46	11.94	10.26	2.37	H	0.096	19.83		
	QPSK	-23.47	11.93	10.26	2.37	H	0.096	19.82		
	16-QAM	-24.38	11.02	10.26	2.37	H	0.078	18.91		
	64-QAM	-26.18	9.22	10.26	2.37	H	0.051	17.11		
	256-QAM	-28.00	7.40	10.26	2.37	H	0.034	15.29		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit		
								W	W	dBm
2521.020	Sub6 41/ 50 MHz [30 kHz]	PI/2 BPSK	-22.00	13.03	10.36	2.30	H	< 2.00	0.128	21.09
		QPSK	-22.08	12.95	10.36	2.30	H		0.126	21.01
		16-QAM	-23.02	12.01	10.36	2.30	H		0.102	20.07
		64-QAM	-24.85	10.18	10.36	2.30	H		0.067	18.24
		256-QAM	-26.50	8.53	10.36	2.30	H		0.046	16.59
2592.990		PI/2 BPSK	-22.00	13.34	10.42	2.33	H		0.139	21.43
		QPSK	-22.05	13.29	10.42	2.33	H		0.137	21.38
		16-QAM	-23.05	12.29	10.42	2.33	H		0.109	20.38
		64-QAM	-24.88	10.46	10.42	2.33	H		0.072	18.55
		256-QAM	-26.54	8.80	10.42	2.33	H		0.049	16.89
2664.990	PI/2 BPSK	-23.55	11.87	10.22	2.37	H	0.094	19.72		
	QPSK	-23.58	11.84	10.22	2.37	H	0.093	19.69		
	16-QAM	-24.61	10.81	10.22	2.37	H	0.073	18.66		
	64-QAM	-26.56	8.86	10.22	2.37	H	0.047	16.71		
	256-QAM	-28.00	7.42	10.22	2.37	H	0.034	15.27		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2526.000	Sub6 41/ 60 MHz [30 kHz]	PI/2 BPSK	-22.15	12.84	10.40	2.30	H	< 2.00	0.124	20.94
		QPSK	-22.17	12.82	10.40	2.30	H		0.124	20.92
		16-QAM	-23.11	11.88	10.40	2.30	H		0.100	19.98
		64-QAM	-24.96	10.03	10.40	2.30	H		0.065	18.13
		256-QAM	-26.52	8.47	10.40	2.30	H		0.045	16.57
2592.990		PI/2 BPSK	-21.88	13.46	10.42	2.33	H		0.143	21.55
		QPSK	-21.89	13.45	10.42	2.33	H		0.143	21.54
		16-QAM	-22.86	12.48	10.42	2.33	H		0.114	20.57
		64-QAM	-24.75	10.59	10.42	2.33	H		0.074	18.68
		256-QAM	-26.37	8.97	10.42	2.33	H		0.051	17.06
2659.980	PI/2 BPSK	-23.10	12.33	10.18	2.37	H	0.103	20.14		
	QPSK	-23.12	12.31	10.18	2.37	H	0.103	20.12		
	16-QAM	-24.08	11.35	10.18	2.37	H	0.082	19.16		
	64-QAM	-25.97	9.46	10.18	2.37	H	0.053	17.27		
	256-QAM	-27.53	7.90	10.18	2.37	H	0.037	15.71		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
									W	W
2536.020	Sub6 41/ 80 MHz [30 kHz]	PI/2 BPSK	-22.27	12.67	10.48	2.31	H	< 2.00	0.121	20.84
		QPSK	-22.32	12.62	10.48	2.31	H		0.120	20.79
		16-QAM	-23.32	11.62	10.48	2.31	H		0.095	19.79
		64-QAM	-25.13	9.81	10.48	2.31	H		0.063	17.98
		256-QAM	-26.63	8.31	10.48	2.31	H		0.044	16.48
2592.990		PI/2 BPSK	-22.14	13.20	10.42	2.33	H		0.135	21.29
		QPSK	-22.15	13.19	10.42	2.33	H		0.134	21.28
		16-QAM	-23.04	12.30	10.42	2.33	H		0.109	20.39
		64-QAM	-24.93	10.41	10.42	2.33	H		0.071	18.50
		256-QAM	-26.54	8.80	10.42	2.33	H		0.049	16.89
2649.990	PI/2 BPSK	-23.09	12.25	10.10	2.34	H	0.100	20.01		
	QPSK	-23.18	12.16	10.10	2.34	H	0.098	19.92		
	16-QAM	-24.12	11.22	10.10	2.34	H	0.079	18.98		
	64-QAM	-25.88	9.46	10.10	2.34	H	0.053	17.22		
	256-QAM	-27.62	7.72	10.10	2.34	H	0.035	15.48		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2541.000	Sub6 41/ 90 MHz [30 kHz]	PI/2 BPSK	-22.27	12.63	10.52	2.31	H	< 2.00	0.121	20.84
		QPSK	-22.28	12.62	10.52	2.31	H		0.121	20.83
		16-QAM	-23.29	11.61	10.52	2.31	H		0.096	19.82
		64-QAM	-25.15	9.75	10.52	2.31	H		0.062	17.96
		256-QAM	-26.70	8.20	10.52	2.31	H		0.044	16.41
2592.990		PI/2 BPSK	-22.28	13.06	10.42	2.33	H		0.130	21.15
		QPSK	-22.24	13.10	10.42	2.33	H		0.131	21.19
		16-QAM	-23.15	12.19	10.42	2.33	H		0.107	20.28
		64-QAM	-25.02	10.32	10.42	2.33	H		0.069	18.41
		256-QAM	-26.67	8.67	10.42	2.33	H		0.047	16.76
2644.980	PI/2 BPSK	-23.23	12.16	10.13	2.33	H	0.099	19.96		
	QPSK	-23.22	12.17	10.13	2.33	H	0.099	19.97		
	16-QAM	-24.21	11.18	10.13	2.33	H	0.079	18.98		
	64-QAM	-26.02	9.37	10.13	2.33	H	0.052	17.17		
	256-QAM	-27.63	7.76	10.13	2.33	H	0.036	15.56		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2546.010	Sub6 41/ 100 MHz [30 kHz]	PI/2 BPSK	-22.27	12.70	10.56	2.31	H	< 2.00	0.124	20.95
		QPSK	-22.29	12.68	10.56	2.31	H		0.124	20.93
		16-QAM	-23.25	11.72	10.56	2.31	H		0.099	19.97
		64-QAM	-25.13	9.84	10.56	2.31	H		0.064	18.09
		256-QAM	-26.65	8.32	10.56	2.31	H		0.045	16.57
2592.990		PI/2 BPSK	-22.33	13.01	10.42	2.33	H		0.129	21.10
		QPSK	-22.38	12.96	10.42	2.33	H		0.127	21.05
		16-QAM	-23.33	12.01	10.42	2.33	H		0.102	20.10
		64-QAM	-25.15	10.19	10.42	2.33	H		0.067	18.28
		256-QAM	-26.84	8.50	10.42	2.33	H		0.046	16.59
2640.000	PI/2 BPSK	-22.90	12.57	10.16	2.33	H	0.110	20.40		
	QPSK	-22.96	12.51	10.16	2.33	H	0.108	20.34		
	16-QAM	-23.94	11.53	10.16	2.33	H	0.086	19.36		
	64-QAM	-25.80	9.67	10.16	2.33	H	0.056	17.50		
	256-QAM	-27.58	7.89	10.16	2.33	H	0.037	15.72		

8.2 RADIATED SPURIOUS EMISSIONS

- NR Band: N41
- LTE Band(Anchor): B2
- Bandwidth: 20 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
501204 (2506.020)	5 012.04	-45.78	10.92	-48.71	3.28	H	-41.07	-25.00
	7 518.06	-56.63	11.54	-49.68	4.12	H	-42.26	-25.00
	10 024.08	-48.18	11.75	-39.58	4.78	H	-32.61	-25.00
	12 530.10	-60.38	12.94	-50.89	5.23	H	-43.18	-25.00
	15 036.12	-56.35	14.54	-50.09	5.98	V	-41.53	-25.00
518598 (2592.990)	5 185.98	-49.00	11.47	-51.08	3.39	V	-43.00	-25.00
	7 778.97	-58.08	11.28	-51.08	4.21	H	-44.01	-25.00
	10 371.96	-55.10	11.80	-45.27	4.95	H	-38.42	-25.00
	12 964.95	-56.95	12.70	-46.91	5.41	V	-39.62	-25.00
	15 557.94	-54.85	16.22	-48.85	6.12	H	-38.75	-25.00
535998 (2679.990)	5 359.98	-48.24	11.82	-50.70	3.45	V	-42.33	-25.00
	8 039.97	-49.37	11.28	-42.17	4.31	H	-35.20	-25.00
	10 719.96	-52.53	11.70	-41.59	4.91	H	-34.80	-25.00
	13 399.95	-60.75	12.50	-50.57	5.67	V	-43.74	-25.00
	16 079.94	-60.77	16.50	-52.99	6.31	V	-42.80	-25.00

- NR Band: N41
- LTE Band(Anchor): B2
- Bandwidth: 30 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
502200 (2511.000)	5 022.00	-45.66	10.94	-47.93	3.29	H	-40.28	-25.00
	7 533.00	-56.24	11.56	-49.18	4.15	H	-41.77	-25.00
	10 044.00	-47.58	11.71	-38.87	4.87	H	-32.03	-25.00
	12 555.00	-59.67	12.90	-50.24	5.35	H	-42.69	-25.00
	15 066.00	-55.19	14.66	-49.34	5.95	H	-40.63	-25.00
518598 (2592.990)	5 185.98	-47.26	11.47	-49.34	3.39	H	-41.26	-25.00
	7 778.97	-53.98	11.28	-46.98	4.21	H	-39.91	-25.00
	10 371.96	-54.53	11.80	-44.70	4.95	H	-37.85	-25.00
	12 964.95	-59.72	12.70	-49.68	5.41	H	-42.39	-25.00
	15 557.94	-58.46	16.22	-52.46	6.12	H	-42.36	-25.00
534996 (2674.980)	5 349.96	-47.36	11.80	-49.65	3.44	H	-41.29	-25.00
	8 024.94	-51.40	11.25	-44.34	4.30	H	-37.38	-25.00
	10 699.92	-56.12	11.70	-45.04	4.98	H	-38.32	-25.00
	13 374.90	-61.99	12.60	-52.24	5.59	H	-45.23	-25.00
	16 049.88	-63.81	16.50	-56.20	6.29	H	-45.99	-25.00

- NR Band: N41
- LTE Band(Anchor): B2
- Bandwidth: 40 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
503202 (2516.010)	5 032.02	-46.07	10.96	-48.18	3.33	H	-40.55	-25.00
	7 548.03	-56.83	11.58	-49.76	4.17	H	-42.35	-25.00
	10 064.04	-45.97	11.67	-37.74	4.89	H	-30.96	-25.00
	12 580.05	-57.79	12.90	-48.53	5.49	H	-41.12	-25.00
	15 096.06	-56.36	14.78	-49.60	6.06	H	-40.88	-25.00
518598 (2592.990)	5 185.98	-47.42	11.47	-49.50	3.39	H	-41.42	-25.00
	7 778.97	-53.53	11.28	-46.53	4.21	H	-39.46	-25.00
	10 371.96	-51.60	11.80	-41.77	4.95	H	-34.92	-25.00
	12 964.95	-63.19	12.70	-53.15	5.41	H	-45.86	-25.00
	15 557.94	-56.45	16.22	-50.45	6.12	H	-40.35	-25.00
534000 (2670.000)	5 340.00	-48.28	11.78	-50.73	3.43	H	-42.38	-25.00
	8 010.00	-52.92	11.22	-45.73	4.26	H	-38.77	-25.00
	10 680.00	-55.90	11.70	-45.17	5.02	H	-38.49	-25.00
	13 350.00	-62.62	12.70	-52.06	5.52	H	-44.88	-25.00
	16 020.00	-60.33	16.50	-53.02	6.28	H	-42.80	-25.00

- NR Band: N41
- LTE Band(Anchor): B2
- Bandwidth: 50 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
504204 (2521.020)	5 042.04	-47.42	10.98	-49.42	3.34	H	-41.78	-25.00
	7 563.06	-51.88	11.60	-45.26	4.16	H	-37.82	-25.00
	10 084.08	-48.01	11.63	-39.68	4.83	H	-32.88	-25.00
	12 605.10	-60.08	12.90	-50.45	5.50	H	-43.05	-25.00
	15 126.12	-56.44	14.85	-50.43	6.10	H	-41.68	-25.00
518598 (2592.990)	5 185.98	-49.45	11.47	-51.53	3.39	H	-43.45	-25.00
	7 778.97	-51.38	11.28	-44.38	4.21	H	-37.31	-25.00
	10 371.96	-49.93	11.80	-40.10	4.95	H	-33.25	-25.00
	12 964.95	-61.81	12.70	-51.77	5.41	H	-44.48	-25.00
	15 557.94	-55.78	16.22	-49.78	6.12	H	-39.68	-25.00
532998 (2664.990)	5 329.98	-48.43	11.76	-50.81	3.42	H	-42.47	-25.00
	7 994.97	-53.08	11.19	-45.92	4.23	H	-38.96	-25.00
	10 659.96	-57.22	11.70	-46.69	5.04	H	-40.03	-25.00
	13 324.95	-61.26	12.75	-51.13	5.59	H	-43.97	-25.00
	15 989.94	-63.19	16.50	-56.08	6.23	H	-45.81	-25.00

- NR Band: N41
- LTE Band(Anchor): B2
- Bandwidth: 60 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
505200 (2526.000)	5 052.00	-45.68	11.00	-47.84	3.34	H	-40.18	-25.00
	7 578.00	-49.16	11.60	-42.66	4.13	H	-35.19	-25.00
	10 104.00	-46.43	11.60	-37.60	4.79	H	-30.79	-25.00
	12 630.00	-60.05	12.90	-50.91	5.44	H	-43.45	-25.00
	15 156.00	-56.12	14.91	-49.65	6.03	H	-40.77	-25.00
518598 (2592.990)	5 185.98	-52.04	11.47	-54.12	3.39	H	-46.04	-25.00
	7 778.97	-47.97	11.28	-40.97	4.21	H	-33.90	-25.00
	10 371.96	-50.86	11.80	-41.03	4.95	H	-34.18	-25.00
	12 964.95	-60.08	12.70	-50.04	5.41	H	-42.75	-25.00
	15 557.94	-56.96	16.22	-50.96	6.12	H	-40.86	-25.00
531996 (2659.980)	5 319.96	-47.95	11.74	-50.84	3.41	H	-42.51	-25.00
	7 979.94	-49.35	11.16	-41.96	4.23	H	-35.03	-25.00
	10 639.92	-57.46	11.70	-47.04	4.96	H	-40.30	-25.00
	13 299.90	-62.50	12.80	-52.54	5.66	H	-45.40	-25.00
	15 959.88	-60.16	16.50	-53.07	6.22	H	-42.79	-25.00

- NR Band: N41
- LTE Band(Anchor): B2
- Bandwidth: 80 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
507204 (2536.020)	5 072.04	-46.09	11.08	-48.36	3.34	H	-40.62	-25.00
	7 608.06	-56.34	11.60	-49.38	4.14	H	-41.92	-25.00
	10 144.08	-46.97	11.60	-38.17	4.85	H	-31.42	-25.00
	12 680.10	-59.24	12.78	-49.12	5.43	H	-41.77	-25.00
	15 216.12	-59.66	15.03	-53.39	6.12	H	-44.48	-25.00
518598 (2592.990)	5 185.98	-48.53	11.47	-50.61	3.39	H	-42.53	-25.00
	7 778.97	-55.94	11.28	-48.94	4.21	H	-41.87	-25.00
	10 371.96	-48.98	11.80	-39.15	4.95	H	-32.30	-25.00
	12 964.95	-63.12	12.70	-53.08	5.41	H	-45.79	-25.00
	15 557.94	-57.07	16.22	-51.07	6.12	H	-40.97	-25.00
529998 (2649.990)	5 299.98	-46.55	11.70	-49.43	3.41	H	-41.14	-25.00
	7 949.97	-53.38	11.10	-46.54	4.29	H	-39.73	-25.00
	10 599.96	-56.84	11.70	-45.98	4.89	H	-39.17	-25.00
	13 249.95	-58.61	12.90	-48.47	5.53	H	-41.10	-25.00
	15 899.94	-57.97	16.40	-50.31	6.25	H	-40.16	-25.00

- NR Band: N41
- LTE Band(Anchor): B2
- Bandwidth: 90 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
508200 (2541.000)	5 082.00	-46.40	11.12	-48.69	3.34	H	-40.91	-25.00
	7 623.00	-54.98	11.60	-48.29	4.16	H	-40.85	-25.00
	10 164.00	-46.99	11.60	-38.20	4.91	H	-31.51	-25.00
	12 705.00	-59.27	12.69	-49.49	5.46	H	-42.26	-25.00
	15 246.00	-55.97	15.09	-50.18	6.10	H	-41.19	-25.00
518598 (2592.990)	5 185.98	-48.23	11.47	-50.31	3.39	H	-42.23	-25.00
	7 778.97	-54.60	11.28	-47.60	4.21	H	-40.53	-25.00
	10 371.96	-48.45	11.80	-38.62	4.95	H	-31.77	-25.00
	12 964.95	-59.20	12.70	-49.16	5.41	H	-41.87	-25.00
	15 557.94	-56.88	16.22	-50.88	6.12	H	-40.78	-25.00
528996 (2644.980)	5 289.96	-47.39	11.68	-49.91	3.40	H	-41.63	-25.00
	7 934.94	-58.73	11.07	-51.59	4.27	H	-44.79	-25.00
	10 579.92	-54.54	11.70	-44.17	4.98	H	-37.45	-25.00
	13 224.90	-56.97	12.90	-46.39	5.54	H	-39.03	-25.00
	15 869.88	-54.48	16.40	-47.64	6.18	H	-37.42	-25.00

- NR Band: N41
- LTE Band(Anchor): B2
- Bandwidth: 100 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
509202 (2546.010)	5 092.02	-46.00	11.16	-48.15	3.33	H	-40.32	-25.00
	7 638.03	-56.46	11.60	-50.01	4.19	H	-42.60	-25.00
	10 184.04	-46.25	11.60	-37.38	4.86	H	-30.64	-25.00
	12 730.05	-58.71	12.64	-48.52	5.36	H	-41.24	-25.00
	15 276.06	-59.07	15.20	-53.05	6.03	H	-43.88	-25.00
518598 (2592.990)	5 185.98	-48.08	11.47	-50.16	3.39	H	-42.08	-25.00
	7 778.97	-54.92	11.28	-47.92	4.21	H	-40.85	-25.00
	10 371.96	-45.00	11.80	-35.17	4.95	H	-28.32	-25.00
	12 964.95	-58.66	12.70	-48.62	5.41	H	-41.33	-25.00
	15 557.94	-61.89	16.22	-55.89	6.12	H	-45.79	-25.00
528000 (2640.000)	5 280.00	-47.18	11.66	-49.85	3.41	H	-41.60	-25.00
	7 920.00	-57.22	11.04	-49.71	4.26	H	-42.93	-25.00
	10 560.00	-52.50	11.70	-42.12	5.00	H	-35.42	-25.00
	13 200.00	-58.30	12.90	-48.06	5.60	H	-40.76	-25.00
	15 840.00	-59.57	16.40	-52.24	6.23	H	-42.07	-25.00

All ENDC of operation were investigated and the worst case configuration results are reported.

(Worst case: 2A-n41A(100MHz))

- ▣ NR Band: N41
- ▣ LTE Band(Anchor): B2
- ▣ Bandwidth: 100 MHz
- ▣ Modulation: PI/2 BPSK
- ▣ Distance: 1 meters
- ▣ SCS: 30 kHz

ENDC-Mode: 2A – n41A

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
18900 (1880.0)	3,760.00	-58.24	11.64	-61.23	2.85	H	-52.44	-13.00
	5,640.00	-58.79	12.00	-55.57	3.54	V	-47.11	-13.00
	7,520.00	-59.31	11.54	-46.96	4.12	V	-39.54	-13.00

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n41	20 MHz	2592.990	BPSK	51	0	3.71
			QPSK			4.56
			16-QAM			5.43
			64-QAM			5.79
			256-QAM			6.30
	30 MHz		BPSK	78		3.52
			QPSK			4.40
			16-QAM			5.27
			64-QAM			5.64
			256-QAM			6.49
	40 MHz		BPSK	106		3.57
			QPSK			4.41
			16-QAM			5.30
			64-QAM			5.65
			256-QAM			6.47
	50 MHz		BPSK	133		4.18
			QPSK			4.71
			16-QAM			5.63
			64-QAM			5.90
			256-QAM			6.44
	60 MHz		BPSK	162		3.81
			QPSK			4.74
			16-QAM			5.62
			64-QAM			5.96
			256-QAM			6.40
	80 MHz		BPSK	217		4.22
			QPSK			4.76
			16-QAM			5.58
			64-QAM			6.00
			256-QAM			6.49
	90 MHz		BPSK	245		4.13
			QPSK			4.89
16-QAM		5.67				
64-QAM		5.99				
256-QAM		6.46				
100 MHz	BPSK	273	4.05			
	QPSK		4.91			
	16-QAM		5.74			
	64-QAM		5.99			
	256-QAM		6.53			

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 99 ~ 138.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n41	20 MHz	2592.990	BPSK	51	0	17.929
			QPSK			17.967
			16-QAM			17.930
			64-QAM			17.992
			256-QAM			17.919
	30 MHz		BPSK	78		26.926
			QPSK			26.929
			16-QAM			26.955
			64-QAM			27.015
			256-QAM			26.959
	40 MHz		BPSK	106		35.846
			QPSK			35.898
			16-QAM			35.876
			64-QAM			35.854
			256-QAM			35.747
	50 MHz		BPSK	133		46.139
			QPSK			45.826
			16-QAM			45.834
			64-QAM			45.892
			256-QAM			45.869
	60 MHz		BPSK	162		57.789
			QPSK			57.982
			16-QAM			57.910
			64-QAM			57.939
			256-QAM			57.827
	80 MHz		BPSK	217		76.920
			QPSK			77.129
			16-QAM			77.053
			64-QAM			77.018
			256-QAM			77.108
90 MHz	BPSK	245	86.777			
	QPSK		87.000			
	16-QAM		86.962			
	64-QAM		86.665			
	256-QAM		86.529			
100 MHz	BPSK	273	96.275			
	QPSK		96.340			
	16-QAM		96.282			
	64-QAM		96.613			
	256-QAM		96.168			

Note:


1. Plots of the EUT's Occupied Bandwidth are shown Page 59 ~ 98.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n41	20	2506.020	8.0180	32.721	-71.609	-38.888	-25.00
		2592.990	8.5324	32.721	-72.065	-39.344	
		2679.990	8.5833	32.721	-71.750	-39.029	
	30	2511.000	5.7657	32.721	-72.158	-39.437	
		2592.990	5.4587	32.721	-72.301	-39.580	
		2674.980	8.0100	32.721	-72.057	-39.336	
	40	2516.010	7.4671	32.721	-72.611	-39.890	
		2592.990	4.0898	32.111	-72.720	-40.609	
		2670.000	5.4866	32.721	-71.279	-38.558	
	50	2521.020	7.9995	32.721	-72.870	-40.149	
		2592.990	8.0514	32.721	-72.443	-39.722	
		2664.990	3.7847	32.111	-72.488	-40.377	
	60	2526.000	8.0225	32.721	-72.229	-39.508	
		2592.990	8.6197	32.721	-70.716	-37.995	
		2659.980	9.7139	32.721	-71.943	-39.222	
	80	2536.020	7.9736	32.721	-72.106	-39.385	
		2592.990	5.4676	32.721	-71.848	-39.127	
		2649.990	7.1934	32.721	-72.643	-39.922	
	90	2541.000	8.0105	32.721	-72.081	-39.360	
		2592.990	4.0644	32.111	-72.541	-40.430	
		2644.980	6.0344	32.721	-72.100	-39.379	
100	2546.010	3.7702	32.111	-71.461	-39.350		
	2592.990	5.2194	32.721	-71.815	-39.094		
	2640.000	8.0269	32.721	-72.767	-40.046		

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 195 ~ 242.
2. Duty Cycle factor already applied on the factor.
 - Duty Cycle Factor(dB) = 3.01

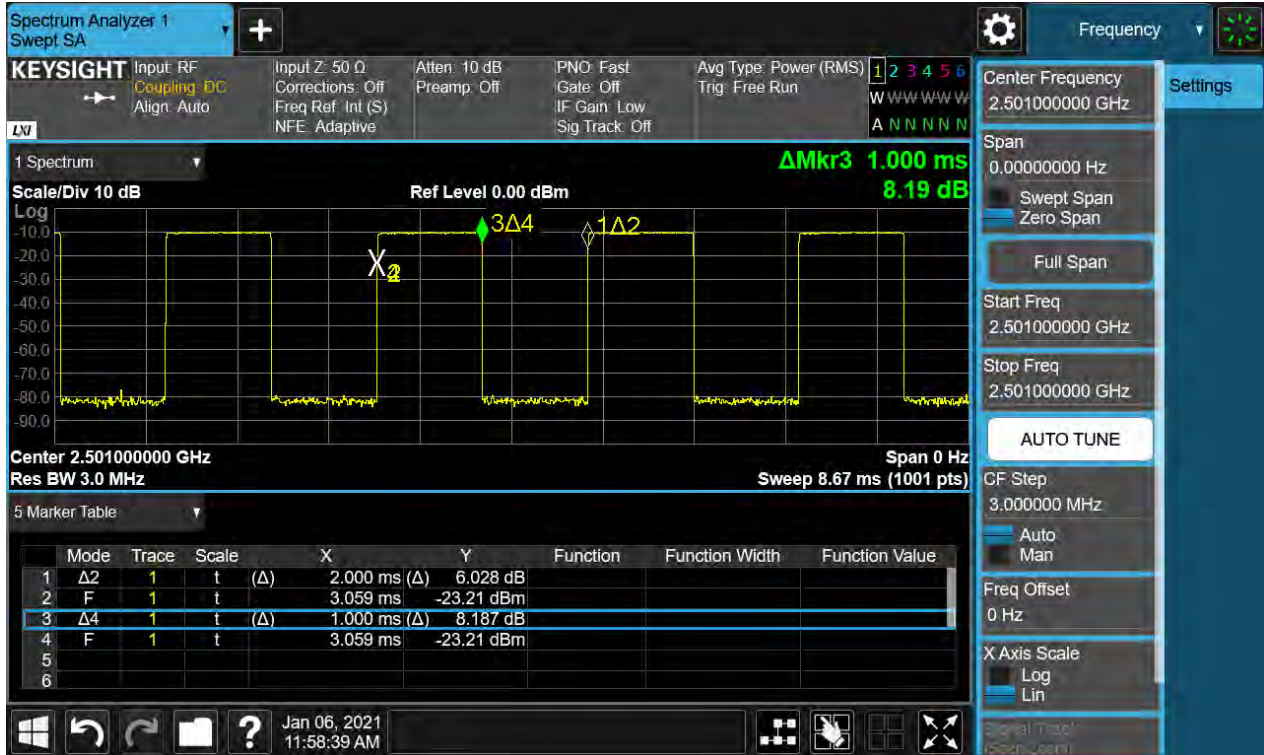

- Factor(dB) = Duty Cycle factor + Cable Loss + Divider + Ext. Attenuator

- Result(dBm) = Reading + Factor

3. Factor(dB)

Frequency Range (GHz)	Factor [dB]
0.03 – 1	29.623
1 – 5	32.111
5 – 10	32.721
10 – 15	33.246
15 – 20	33.619
Above 20	34.261

8.6 CHANNEL EDGE

BW (MHz)	Frequency (MHz)	Mod	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +NormalHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
20	2506.020	BPSK	Full RB	-23.87	-24.98	-23.07	-23.60	-28.10	-23.78	-36.39
30	2511.000	BPSK	Full RB	-25.22	-27.36	-25.39	-27.19	-34.16	-26.55	-40.44
40	2520.000	BPSK	Full RB	-25.56	-27.42	-26.49	-27.70	-32.40	-26.47	-40.18
50	2525.010	BPSK	Full RB	-24.42	-24.81	-25.68	-24.07	-28.55	-24.19	-35.03
60	2530.020	BPSK	Full RB	-18.45	-18.18	-27.02	-25.88	-32.44	-26.31	-41.35
80	2540.010	BPSK	Full RB	-25.62	-26.25	-28.23	-26.72	-33.60	-26.51	-39.09
90	2545.020	BPSK	Full RB	-24.13	-26.46	-30.02	-26.71	-34.01	-27.53	-41.45
100	2550.000	BPSK	Full RB	-21.40	-26.37	-26.71	-26.63	-29.08	-26.61	-36.37
Limit				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resoure Block Offset	C.E ~ (C.E ± 1 MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
20 MHz	2592.990	BPSK	Full RB	0	-22.75	-25.09	-21.40	-23.06
	2679.990	BPSK	Full RB	0	-24.66	-28.56	-24.28	-26.21
30 MHz	2592.990	BPSK	Full RB	0	-21.11	-23.90	-20.33	-23.19
	2679.990	BPSK	Full RB	0	-23.71	-28.45	-24.14	-27.77
40 MHz	2592.990	BPSK	Full RB	0	-20.14	-24.56	-20.97	-24.78
	2670.000	BPSK	Full RB	0	-23.28	-29.32	-24.30	-29.31
50 MHz	2592.990	BPSK	Full RB	0	-23.74	-25.67	-25.31	-24.62
	2664.990	BPSK	Full RB	0	-24.77	-29.02	-26.76	-26.90
60 MHz	2592.990	BPSK	Full RB	0	-17.52	-19.49	-28.54	-28.39
	2659.980	BPSK	Full RB	0	-17.96	-20.21	-28.44	-31.23
80 MHz	2592.990	BPSK	Full RB	0	-24.51	-30.02	-28.76	-29.69
	2649.990	BPSK	Full RB	0	-23.80	-31.28	-28.75	-32.59
90 MHz	2592.990	BPSK	Full RB	0	-23.00	-28.77	-30.32	-28.59
	2644.980	BPSK	Full RB	0	-22.65	-30.92	-27.76	-30.99
100 MHz	2592.990	BPSK	Full RB	0	-20.84	-29.10	-28.06	-28.86
	2640.000	BPSK	Full RB	0	-19.62	-29.53	-26.12	-29.64
Limit					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz)		Above (C.E ± X MHz)	
					~		Lower	Upper
					(C.E ± X MHz)			
					Lower	Upper	Lower	Upper
20 MHz	2592.990	BPSK	Full RB	0	-24.88	-25.60	-35.26	-37.08
	2679.990	BPSK	Full RB	0	-26.97	-29.12	-38.93	-43.54
30 MHz	2592.990	BPSK	Full RB	0	-24.22	-25.17	-38.07	-37.52
	2679.990	BPSK	Full RB	0	-27.62	-29.99	-41.42	-51.62
40 MHz	2592.990	BPSK	Full RB	0	-24.04	-25.40	-39.49	-38.23
	2670.000	BPSK	Full RB	0	-27.64	-31.12	-41.65	-51.60
50 MHz	2592.990	BPSK	Full RB	0	-24.70	-24.26	-39.42	-37.48
	2664.990	BPSK	Full RB	0	-24.95	-26.99	-39.86	-51.45
60 MHz	2592.990	BPSK	Full RB	0	-31.27	-28.89	-44.37	-41.95
	2659.980	BPSK	Full RB	0	-31.03	-32.88	-43.37	-51.91
80 MHz	2592.990	BPSK	Full RB	0	-25.53	-25.56	-52.17	-51.67
	2649.990	BPSK	Full RB	0	-27.91	-32.43	-44.53	-51.97
90 MHz	2592.990	BPSK	Full RB	0	-31.93	-28.26	-52.30	-51.93
	2644.980	BPSK	Full RB	0	-30.37	-30.72	-42.06	-51.96
100 MHz	2592.990	BPSK	Full RB	0	-27.74	-28.53	-52.35	-51.87
	2640.000	BPSK	Full RB	0	-26.17	-29.61	-44.41	-51.40
Limit					-13.0		-25.0	

Note:

1. C.E = Channel Edge
2. X = X is the greater of 6MHz or the actual emission bandwidth
3. Duty Cycle factor already applied on the factor.
 - Factor(dB) = Duty Cycle factor + Cable Loss + Divider + Ext. Attenuator
 - Result(dBm) = Reading + Factor
 - Duty Cycle Factor(dB) = 3.01
4. Plots of the EUT's Channel Edge are shown Page 139 ~ 194. (1RB & Full RB)

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 20 MHz
- ▣ Voltage(100%): 3.860 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2506.020	100%	+20(Ref)	2506 020 013	0.0	0.000 000	0.000
	100%	-30	2506 020 022	8.3	0.000 000	0.003
	100%	-20	2506 020 018	5.1	0.000 000	0.002
	100%	-10	2506 020 024	10.3	0.000 000	0.004
	100%	0	2506 020 026	12.9	0.000 001	0.005
	100%	+10	2506 020 027	14.1	0.000 001	0.006
	100%	+30	2506 020 022	8.6	0.000 000	0.003
	100%	+40	2506 020 017	3.9	0.000 000	0.002
	100%	+50	2506 020 030	16.5	0.000 001	0.007
	Batt. Endpoint	+20	2506 020 017	3.4	0.000 000	0.001
2679.990	100%	+20(Ref)	2679 990 012	0.0	0.000 000	0.000
	100%	-30	2679 990 018	5.9	0.000 000	0.002
	100%	-20	2679 990 026	13.2	0.000 000	0.005
	100%	-10	2679 990 027	14.1	0.000 001	0.005
	100%	0	2679 990 020	8.0	0.000 000	0.003
	100%	+10	2679 990 029	16.9	0.000 001	0.006
	100%	+30	2679 990 028	15.6	0.000 001	0.006
	100%	+40	2679 990 027	14.4	0.000 001	0.005
	100%	+50	2679 990 021	8.5	0.000 000	0.003
	Batt. Endpoint	+20	2679 990 022	9.6	0.000 000	0.004

- ▣ BandWidth: 30 MHz
- ▣ Voltage(100%): 3.860 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2511.000	100%	+20(Ref)	2511 000 003	0.0	0.000 000	0.000
	100%	-30	2511 000 019	15.7	0.000 001	0.006
	100%	-20	2511 000 015	12.3	0.000 000	0.005
	100%	-10	2511 000 014	11.3	0.000 000	0.004
	100%	0	2511 000 020	16.7	0.000 001	0.007
	100%	+10	2511 000 013	10.1	0.000 000	0.004
	100%	+30	2511 000 016	12.5	0.000 000	0.005
	100%	+40	2511 000 019	16.3	0.000 001	0.006
	100%	+50	2511 000 009	6.1	0.000 000	0.002
	Batt. Endpoint	+20	2511 000 011	8.1	0.000 000	0.003
2674.980	100%	+20(Ref)	2674 980 015	0.0	0.000 000	0.000
	100%	-30	2674 980 029	14.3	0.000 001	0.005
	100%	-20	2674 980 031	15.7	0.000 001	0.006
	100%	-10	2674 980 024	9.6	0.000 000	0.004
	100%	0	2674 980 019	3.9	0.000 000	0.001
	100%	+10	2674 980 021	6.2	0.000 000	0.002
	100%	+30	2674 980 018	3.5	0.000 000	0.001
	100%	+40	2674 980 030	14.8	0.000 001	0.006
	100%	+50	2674 980 030	15.0	0.000 001	0.006
	Batt. Endpoint	+20	2674 980 026	11.5	0.000 000	0.004

- ▣ BandWidth: 40 MHz
- ▣ Voltage(100%): 3.860 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2516.010	100%	+20(Ref)	2516 010 005	0.0	0.000 000	0.000
	100%	-30	2516 010 010	5.3	0.000 000	0.002
	100%	-20	2516 010 018	12.6	0.000 001	0.005
	100%	-10	2516 010 015	9.9	0.000 000	0.004
	100%	0	2516 010 012	6.5	0.000 000	0.003
	100%	+10	2516 010 022	16.7	0.000 001	0.007
	100%	+30	2516 010 019	13.9	0.000 001	0.006
	100%	+40	2516 010 009	3.7	0.000 000	0.001
	100%	+50	2516 010 019	14.2	0.000 001	0.006
	Batt. Endpoint	+20	2516 010 015	10.0	0.000 000	0.004
2670.000	100%	+20(Ref)	2670 000 005	0.0	0.000 000	0.000
	100%	-30	2670 000 021	16.6	0.000 001	0.006
	100%	-20	2670 000 013	8.2	0.000 000	0.003
	100%	-10	2670 000 016	11.7	0.000 000	0.004
	100%	0	2670 000 019	14.1	0.000 001	0.005
	100%	+10	2670 000 010	5.7	0.000 000	0.002
	100%	+30	2670 000 019	14.6	0.000 001	0.005
	100%	+40	2670 000 010	5.3	0.000 000	0.002
	100%	+50	2670 000 015	10.8	0.000 000	0.004
	Batt. Endpoint	+20	2670 000 012	7.2	0.000 000	0.003

- ▣ BandWidth: 50 MHz
- ▣ Voltage(100%): 3.860 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2521.020	100%	+20(Ref)	2521 020 011	0.0	0.000 000	0.000
	100%	-30	2521 020 015	4.4	0.000 000	0.002
	100%	-20	2521 020 022	11.5	0.000 000	0.005
	100%	-10	2521 020 026	15.3	0.000 001	0.006
	100%	0	2521 020 024	13.0	0.000 001	0.005
	100%	+10	2521 020 024	12.7	0.000 001	0.005
	100%	+30	2521 020 021	9.9	0.000 000	0.004
	100%	+40	2521 020 024	13.6	0.000 001	0.005
	100%	+50	2521 020 027	15.8	0.000 001	0.006
	Batt. Endpoint	+20	2521 020 017	6.5	0.000 000	0.003
2664.990	100%	+20(Ref)	2664 990 007	0.0	0.000 000	0.000
	100%	-30	2664 990 015	8.7	0.000 000	0.003
	100%	-20	2664 990 015	8.9	0.000 000	0.003
	100%	-10	2664 990 017	10.3	0.000 000	0.004
	100%	0	2664 990 018	11.3	0.000 000	0.004
	100%	+10	2664 990 015	8.3	0.000 000	0.003
	100%	+30	2664 990 012	5.5	0.000 000	0.002
	100%	+40	2664 990 015	8.4	0.000 000	0.003
	100%	+50	2664 990 012	5.9	0.000 000	0.002
	Batt. Endpoint	+20	2664 990 011	4.4	0.000 000	0.002

- ▣ BandWidth: 60 MHz
- ▣ Voltage(100%): 3.860 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2526.000	100%	+20(Ref)	2526 000 014	0.0	0.000 000	0.000
	100%	-30	2526 000 029	15.1	0.000 001	0.006
	100%	-20	2526 000 018	4.2	0.000 000	0.002
	100%	-10	2526 000 030	15.8	0.000 001	0.006
	100%	0	2526 000 028	13.9	0.000 001	0.005
	100%	+10	2526 000 019	4.6	0.000 000	0.002
	100%	+30	2526 000 030	16.1	0.000 001	0.006
	100%	+40	2526 000 026	12.5	0.000 000	0.005
	100%	+50	2526 000 021	6.5	0.000 000	0.003
	Batt. Endpoint	+20	2526 000 023	9.5	0.000 000	0.004
2659.980	100%	+20(Ref)	2659 980 009	0.0	0.000 000	0.000
	100%	-30	2659 980 022	13.0	0.000 000	0.005
	100%	-20	2659 980 016	6.8	0.000 000	0.003
	100%	-10	2659 980 013	3.7	0.000 000	0.001
	100%	0	2659 980 023	13.9	0.000 001	0.005
	100%	+10	2659 980 021	11.2	0.000 000	0.004
	100%	+30	2659 980 013	3.1	0.000 000	0.001
	100%	+40	2659 980 016	6.4	0.000 000	0.002
	100%	+50	2659 980 020	10.9	0.000 000	0.004
	Batt. Endpoint	+20	2659 980 018	8.8	0.000 000	0.003

- ▣ BandWidth: 80 MHz
- ▣ Voltage(100%): 3.860 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2536.020	100%	+20(Ref)	2536 020 005	0.0	0.000 000	0.000
	100%	-30	2536 020 013	8.0	0.000 000	0.003
	100%	-20	2536 020 012	6.8	0.000 000	0.003
	100%	-10	2536 020 010	5.1	0.000 000	0.002
	100%	0	2536 020 014	9.4	0.000 000	0.004
	100%	+10	2536 020 019	14.3	0.000 001	0.006
	100%	+30	2536 020 009	3.8	0.000 000	0.001
	100%	+40	2536 020 016	11.4	0.000 000	0.004
	100%	+50	2536 020 008	3.3	0.000 000	0.001
	Batt. Endpoint	+20	2536 020 011	6.3	0.000 000	0.003
2649.990	100%	+20(Ref)	2649 990 013	0.0	0.000 000	0.000
	100%	-30	2649 990 025	11.7	0.000 000	0.004
	100%	-20	2649 990 018	4.7	0.000 000	0.002
	100%	-10	2649 990 028	14.6	0.000 001	0.006
	100%	0	2649 990 020	6.6	0.000 000	0.002
	100%	+10	2649 990 019	6.3	0.000 000	0.002
	100%	+30	2649 990 019	5.6	0.000 000	0.002
	100%	+40	2649 990 019	6.2	0.000 000	0.002
	100%	+50	2649 990 021	7.6	0.000 000	0.003
	Batt. Endpoint	+20	2649 990 017	4.3	0.000 000	0.002

- ▣ BandWidth: 90 MHz
- ▣ Voltage(100%): 3.860 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band


Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2541.000	100%	+20(Ref)	2541 000 015	0.0	0.000 000	0.000
	100%	-30	2541 000 023	7.6	0.000 000	0.003
	100%	-20	2541 000 023	8.1	0.000 000	0.003
	100%	-10	2541 000 019	3.6	0.000 000	0.001
	100%	0	2541 000 025	10.4	0.000 000	0.004
	100%	+10	2541 000 024	8.8	0.000 000	0.003
	100%	+30	2541 000 025	10.0	0.000 000	0.004
	100%	+40	2541 000 022	7.0	0.000 000	0.003
	100%	+50	2541 000 025	9.7	0.000 000	0.004
	Batt. Endpoint	+20	2541 000 029	14.1	0.000 001	0.006
2644.980	100%	+20(Ref)	2644 980 003	0.0	0.000 000	0.000
	100%	-30	2644 980 017	13.4	0.000 001	0.005
	100%	-20	2644 980 019	15.2	0.000 001	0.006
	100%	-10	2644 980 013	9.9	0.000 000	0.004
	100%	0	2644 980 016	12.6	0.000 000	0.005
	100%	+10	2644 980 010	6.4	0.000 000	0.002
	100%	+30	2644 980 017	14.1	0.000 001	0.005
	100%	+40	2644 980 009	5.4	0.000 000	0.002
	100%	+50	2644 980 011	7.8	0.000 000	0.003
	Batt. Endpoint	+20	2644 980 008	4.8	0.000 000	0.002

- ▣ BandWidth: 100 MHz
- ▣ Voltage(100%): 3.860 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band


Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
2546.010	100%	+20(Ref)	2546 010 012	0.0	0.000 000	0.000
	100%	-30	2546 010 025	13.2	0.000 001	0.005
	100%	-20	2546 010 022	10.1	0.000 000	0.004
	100%	-10	2546 010 027	14.6	0.000 001	0.006
	100%	0	2546 010 028	15.9	0.000 001	0.006
	100%	+10	2546 010 026	14.3	0.000 001	0.006
	100%	+30	2546 010 017	5.2	0.000 000	0.002
	100%	+40	2546 010 016	4.0	0.000 000	0.002
	100%	+50	2546 010 028	15.7	0.000 001	0.006
	Batt. Endpoint	+20	2546 010 026	13.8	0.000 001	0.005
2640.000	100%	+20(Ref)	2640 000 007	0.0	0.000 000	0.000
	100%	-30	2640 000 013	5.8	0.000 000	0.002
	100%	-20	2640 000 011	4.0	0.000 000	0.002
	100%	-10	2640 000 012	5.3	0.000 000	0.002
	100%	0	2640 000 022	14.4	0.000 001	0.005
	100%	+10	2640 000 015	8.3	0.000 000	0.003
	100%	+30	2640 000 022	15.0	0.000 001	0.006
	100%	+40	2640 000 015	8.3	0.000 000	0.003
	100%	+50	2640 000 024	16.7	0.000 001	0.006
	Batt. Endpoint	+20	2640 000 011	3.7	0.000 000	0.001

9. TEST PLOTS


Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 BPSK)

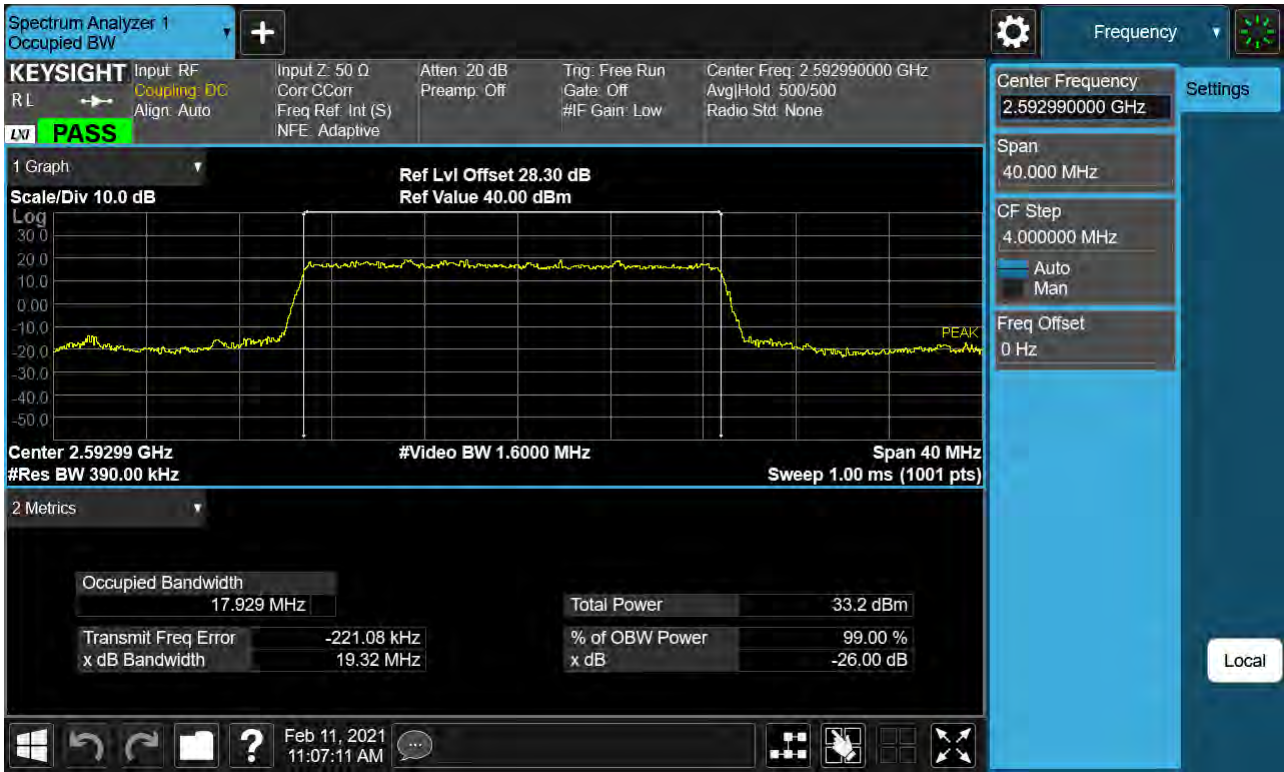


Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 QPSK)

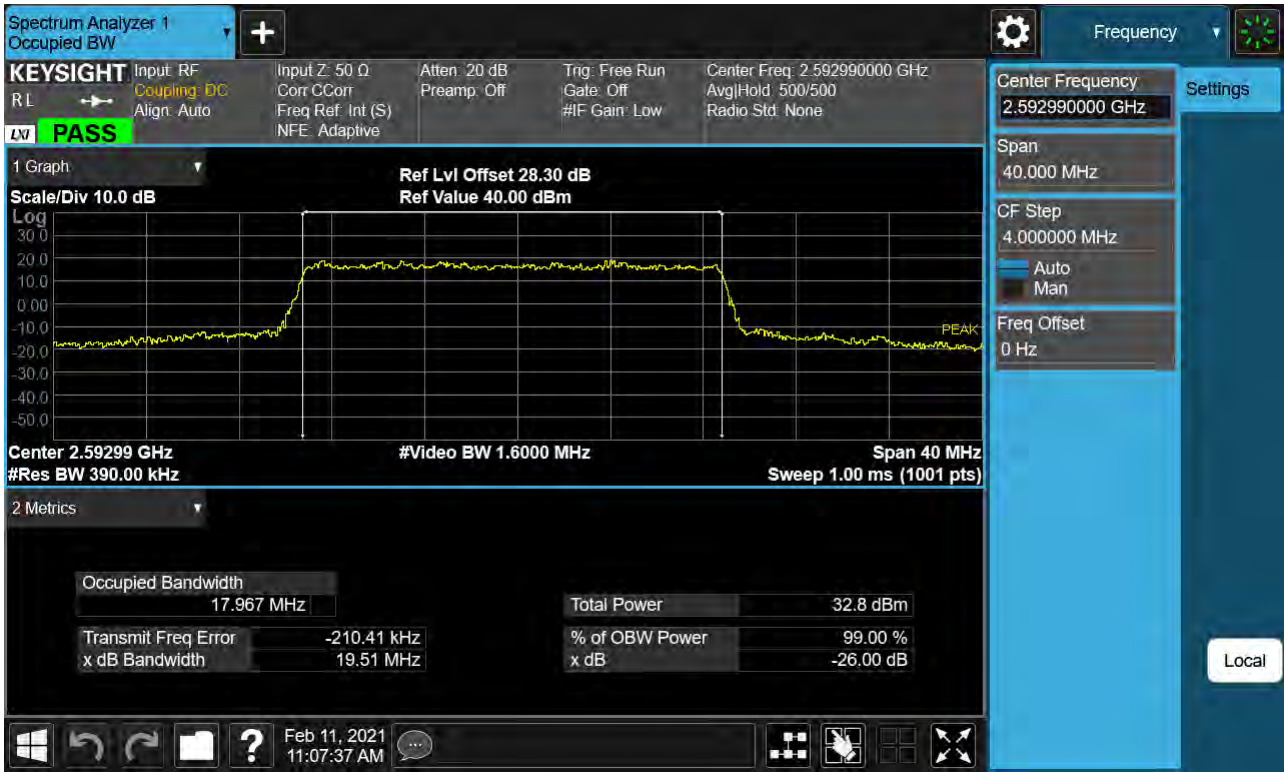


Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 16-QAM)

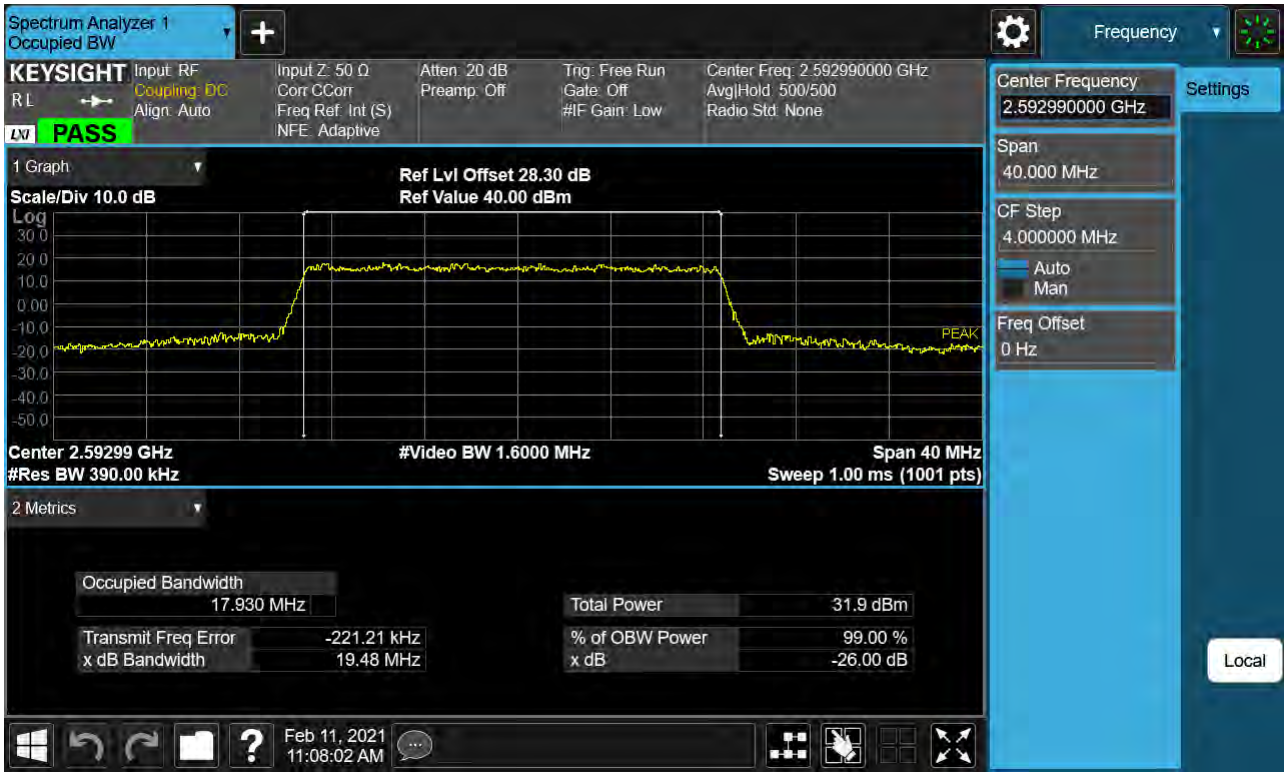


Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 64-QAM)

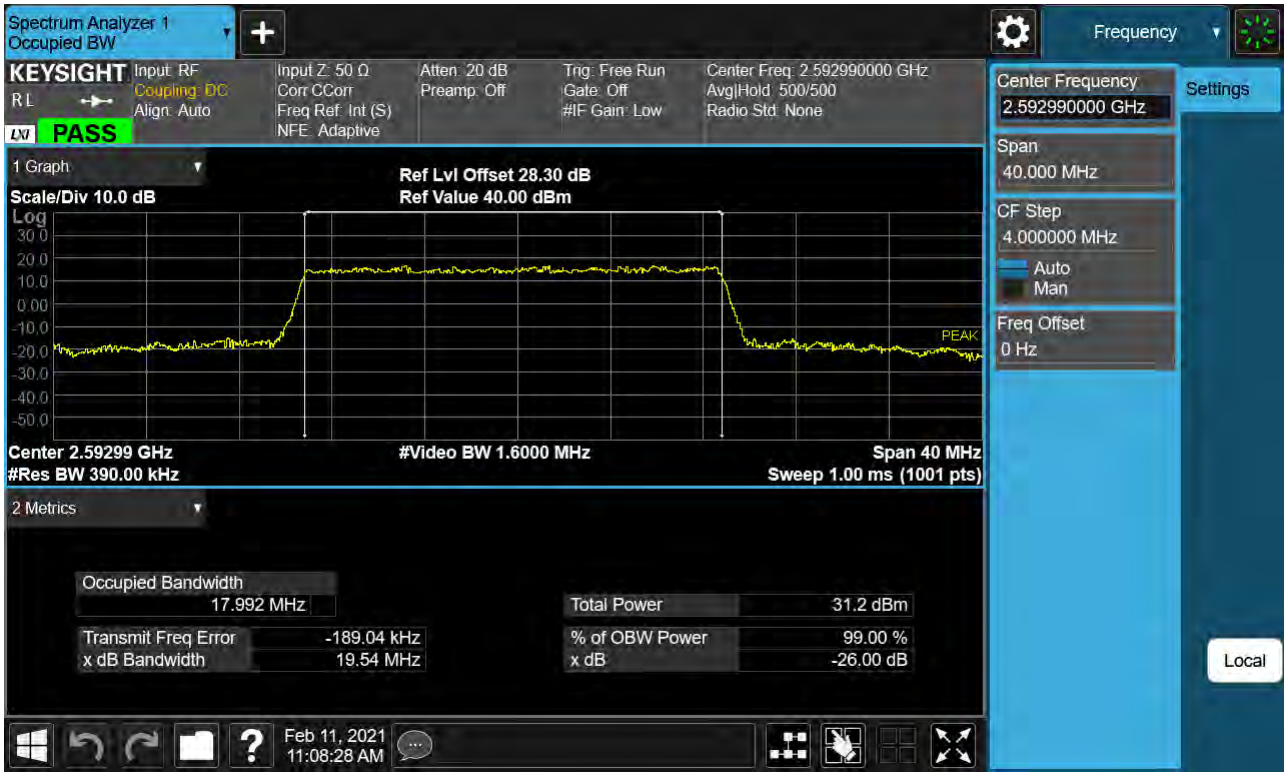


Sub6 n41. Occupied Bandwidth Plot (20 MHz Ch.518598 256-QAM)

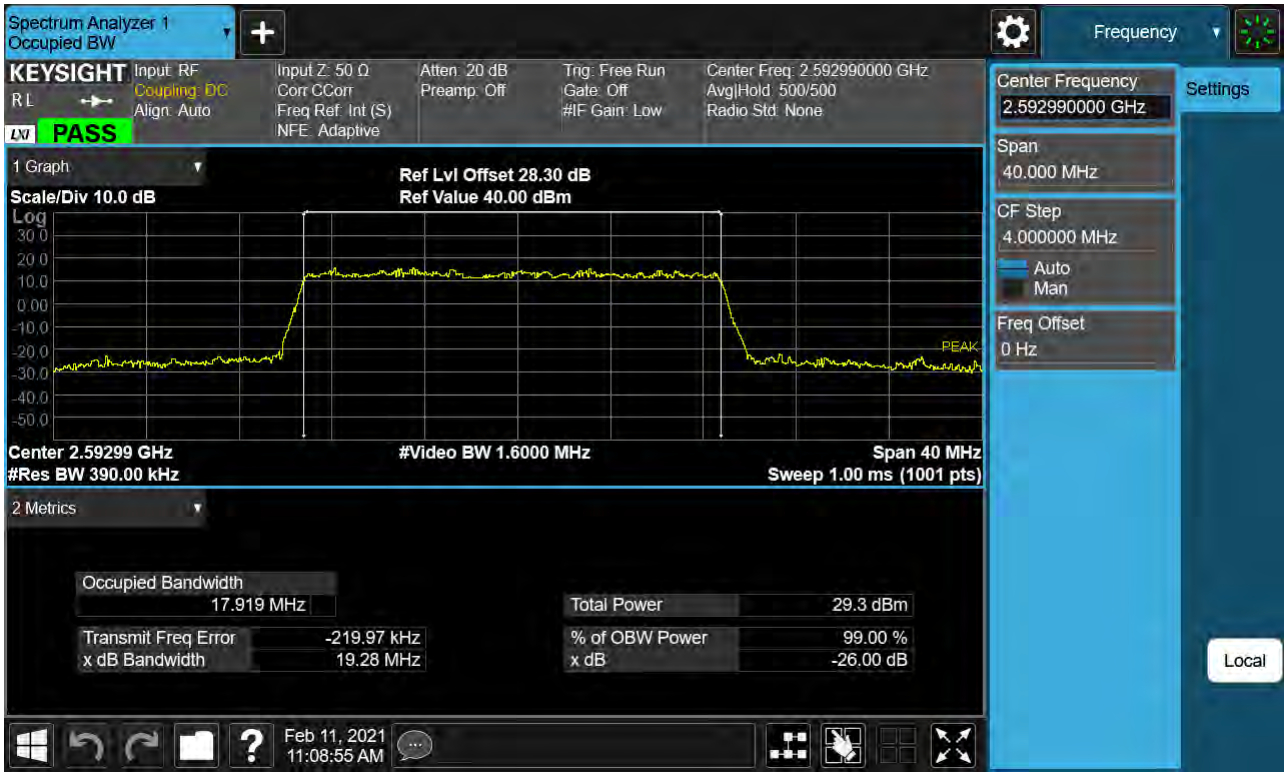


Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 BPSK)

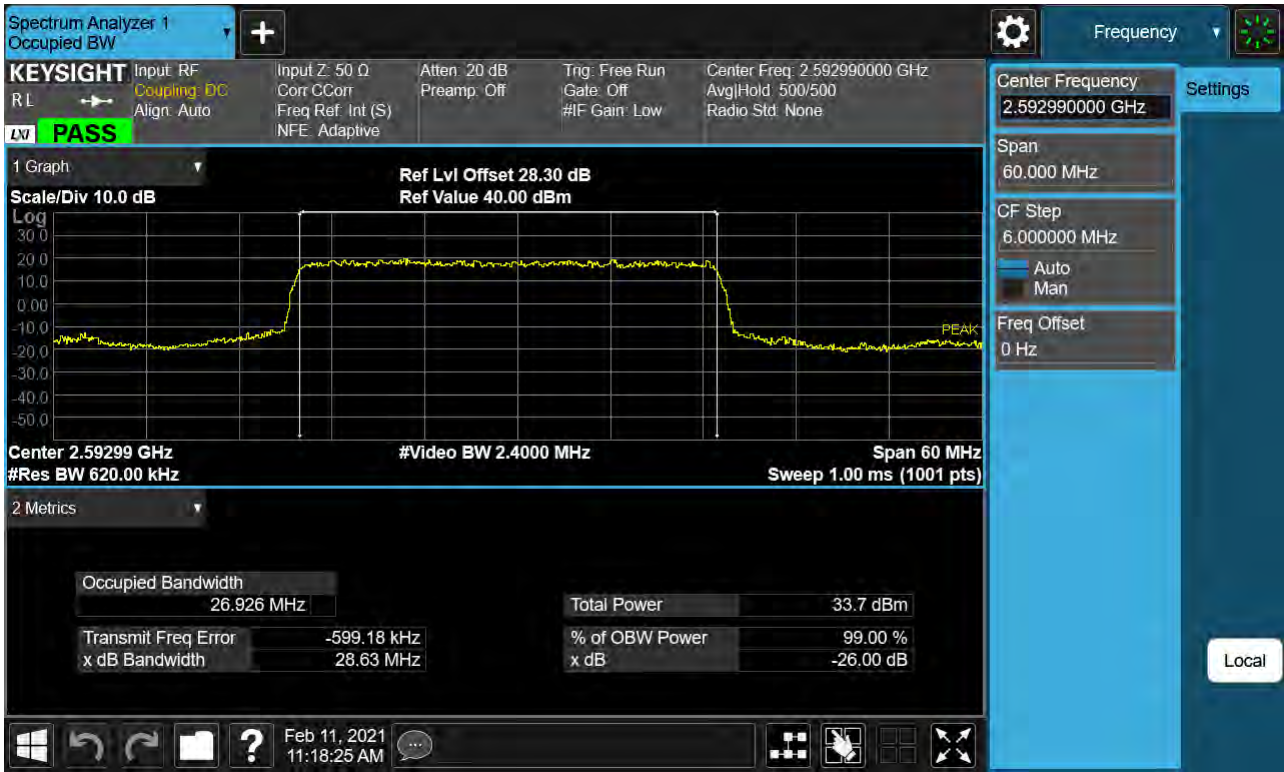


Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 QPSK)

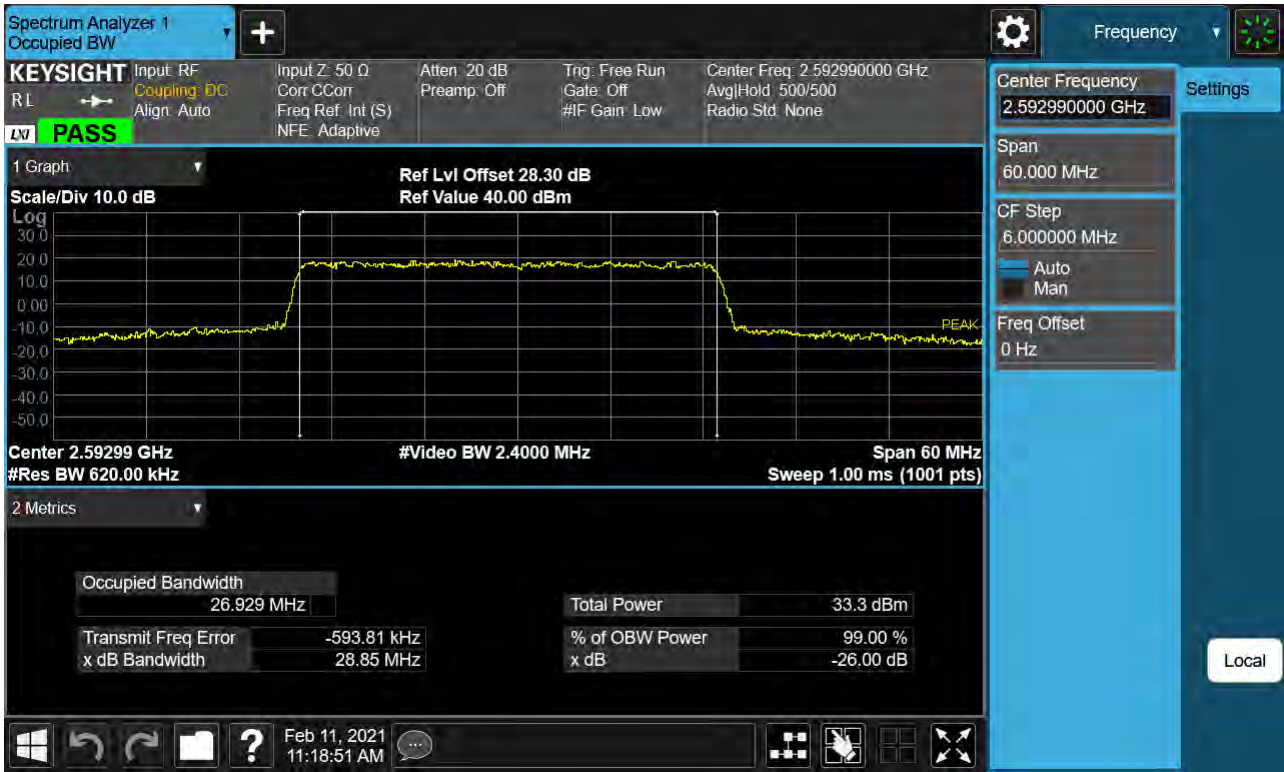


Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 16-QAM)

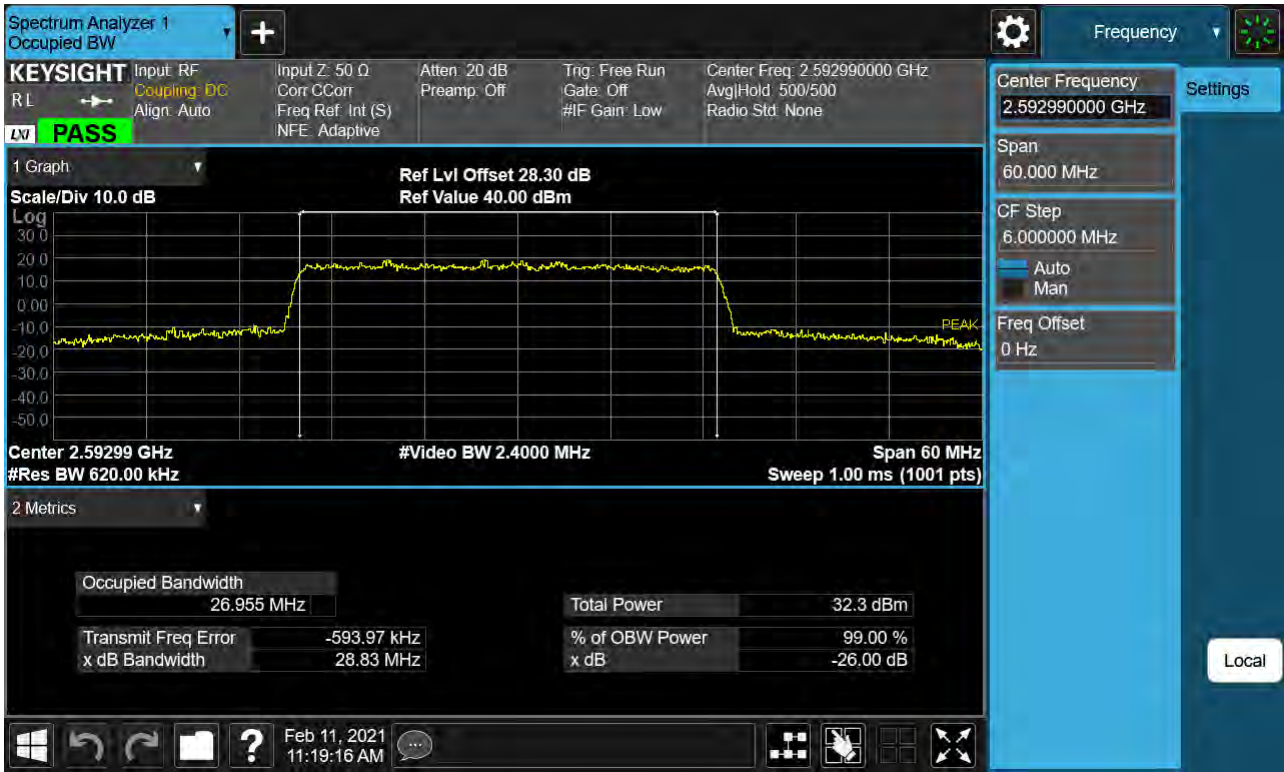


Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 64-QAM)

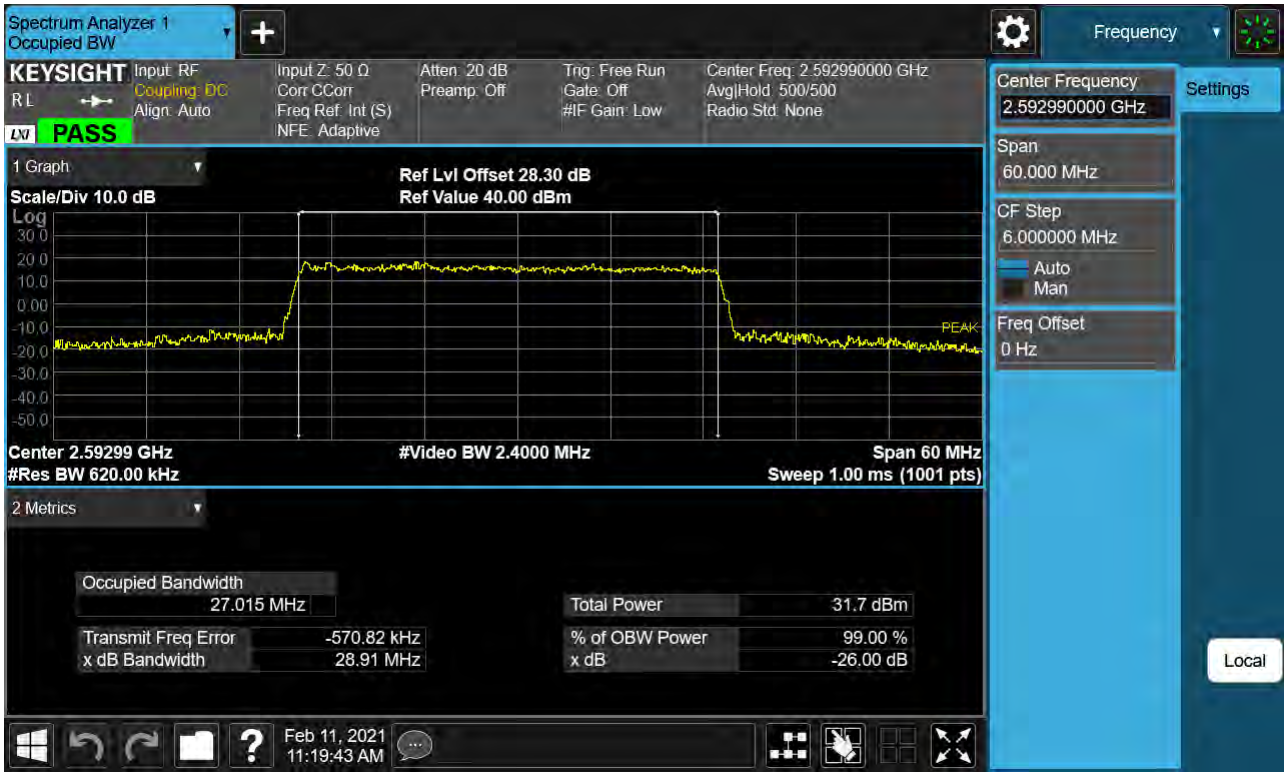

Sub6 n41. Occupied Bandwidth Plot (30 MHz Ch.518598 256-QAM)

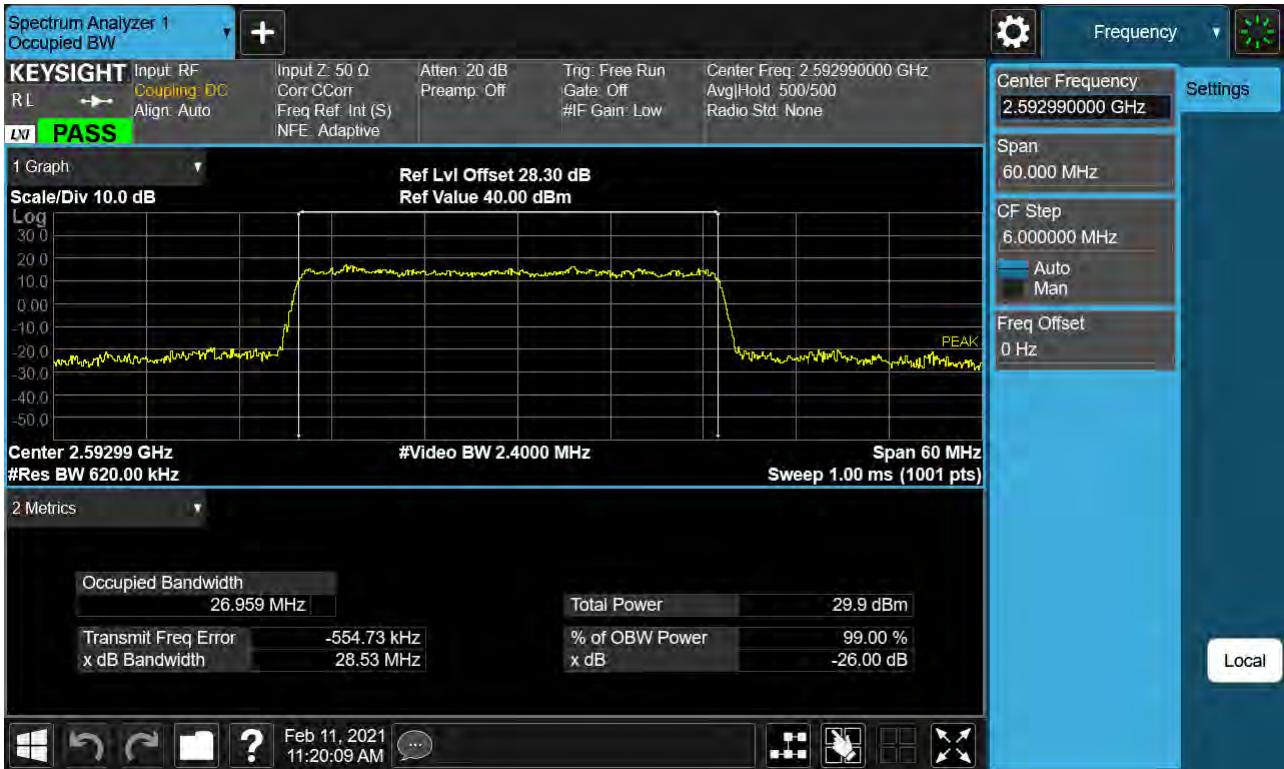


Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 BPSK)

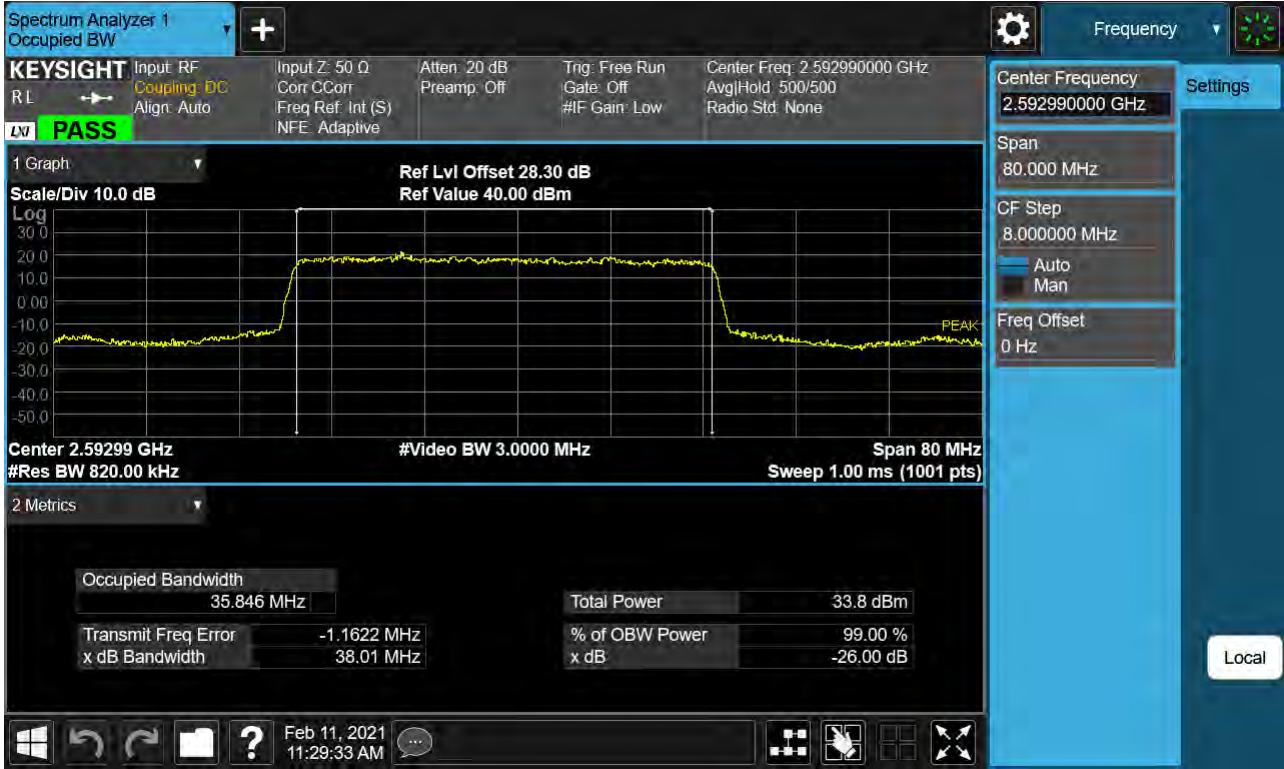


Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 QPSK)




Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 16-QAM)

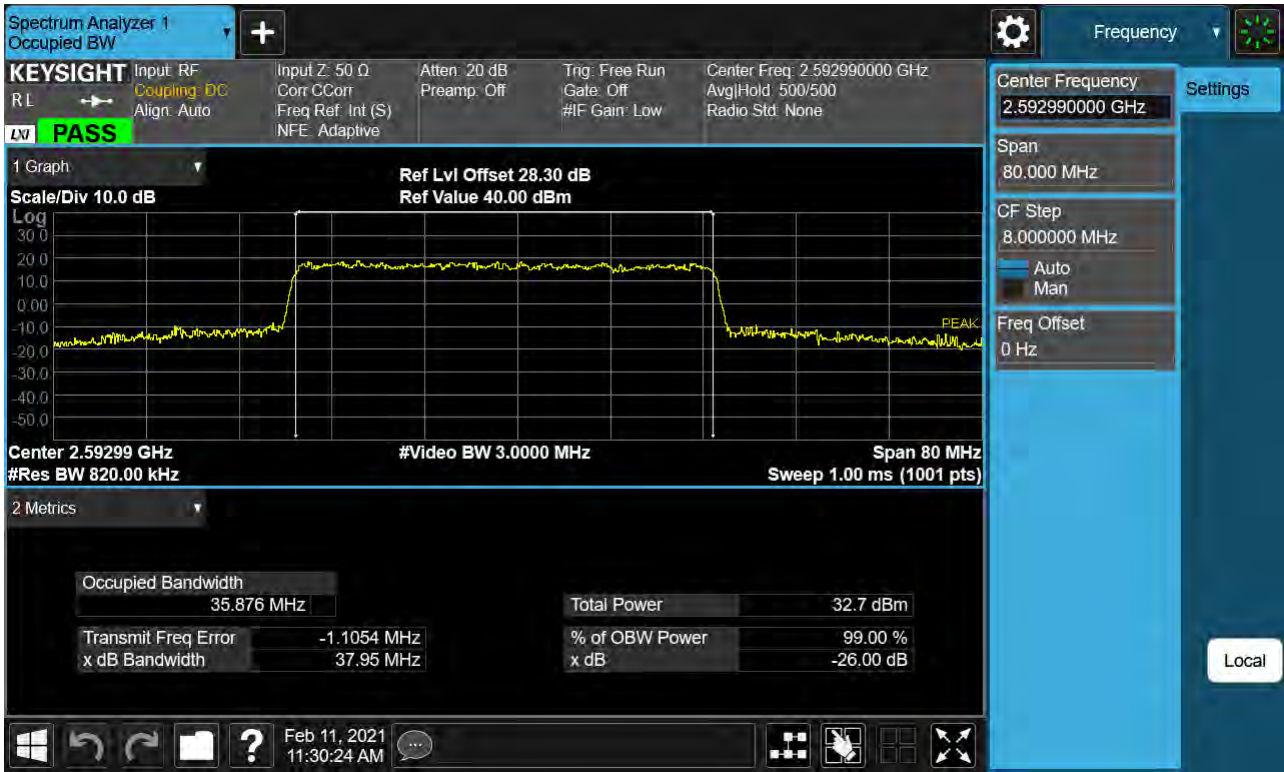


Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 64-QAM)

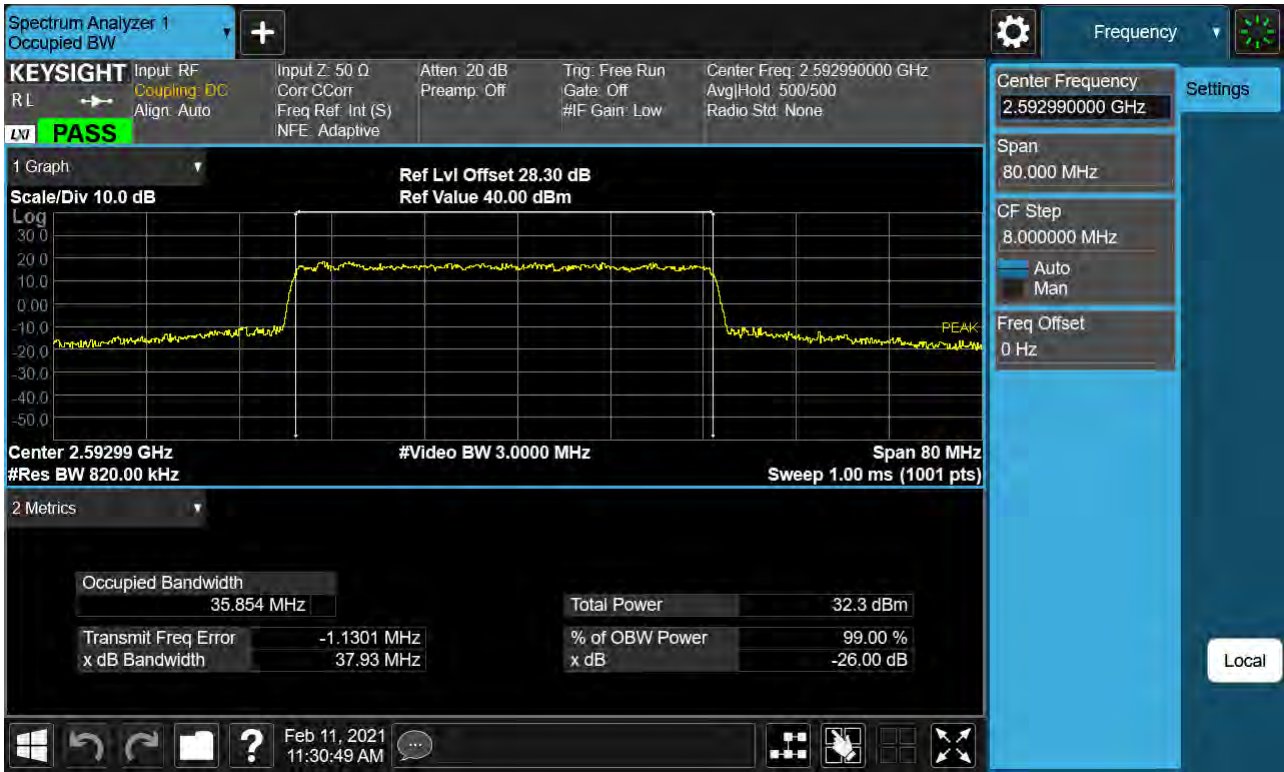


Sub6 n41. Occupied Bandwidth Plot (40 MHz Ch.518598 256-QAM)

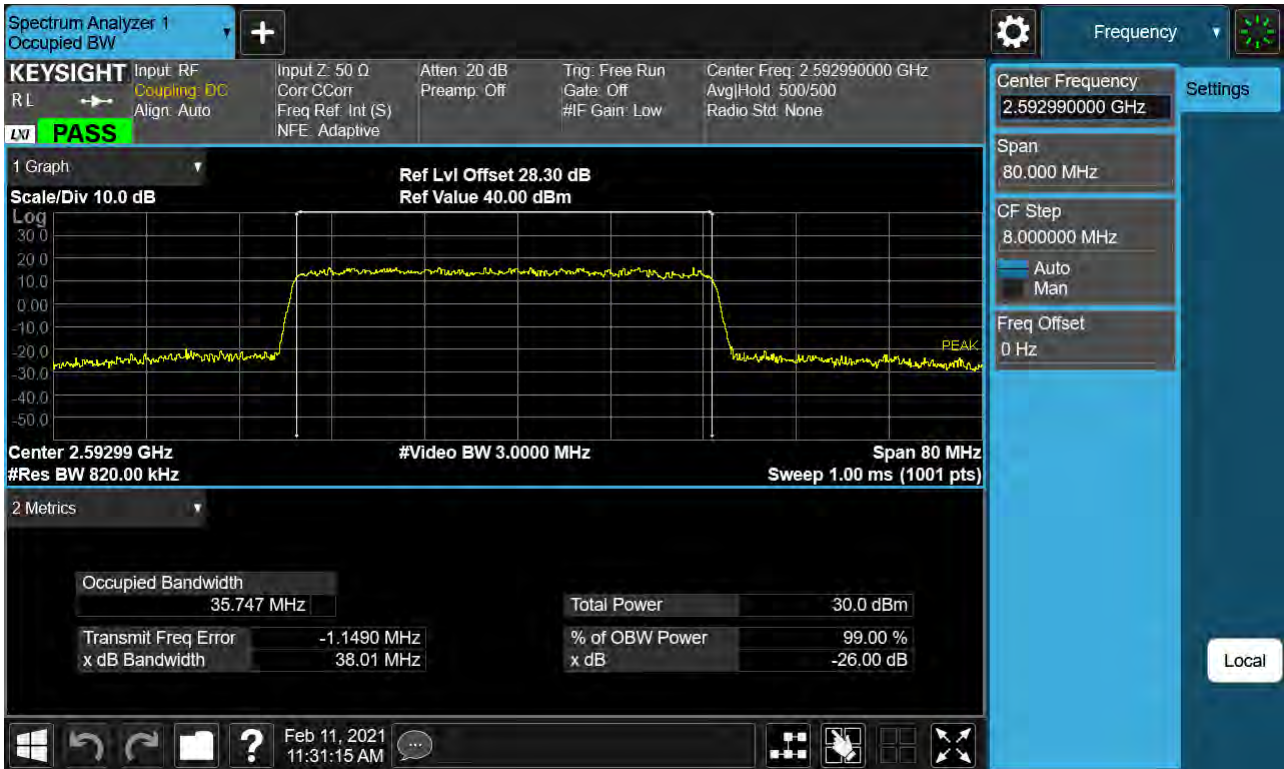


Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 BPSK)

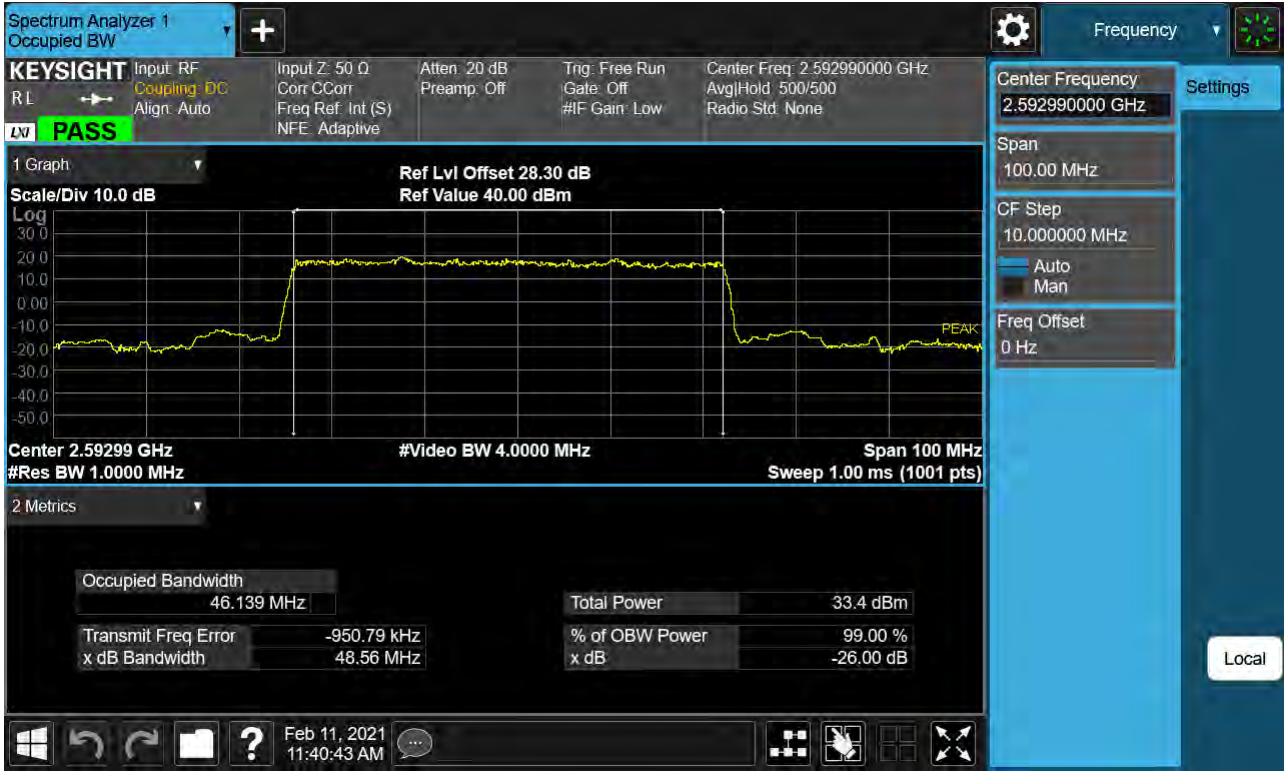


Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 QPSK)

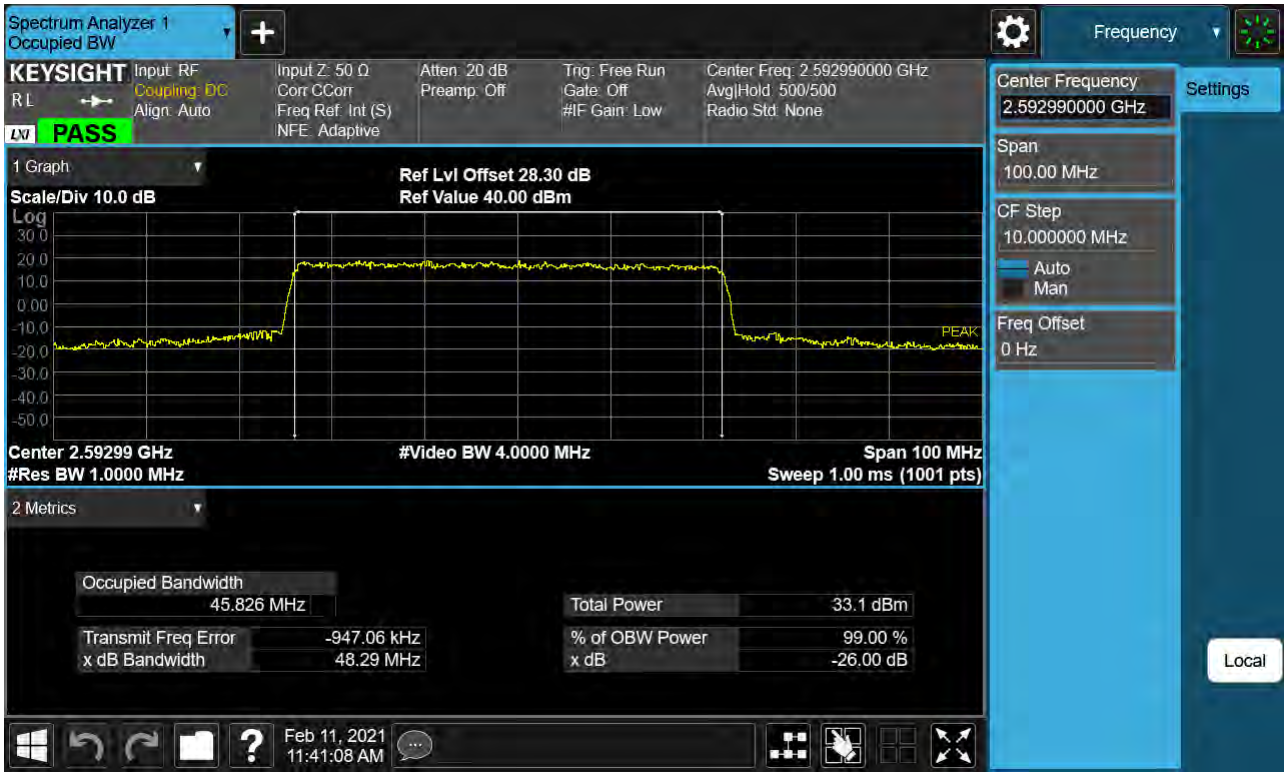


Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 16-QAM)

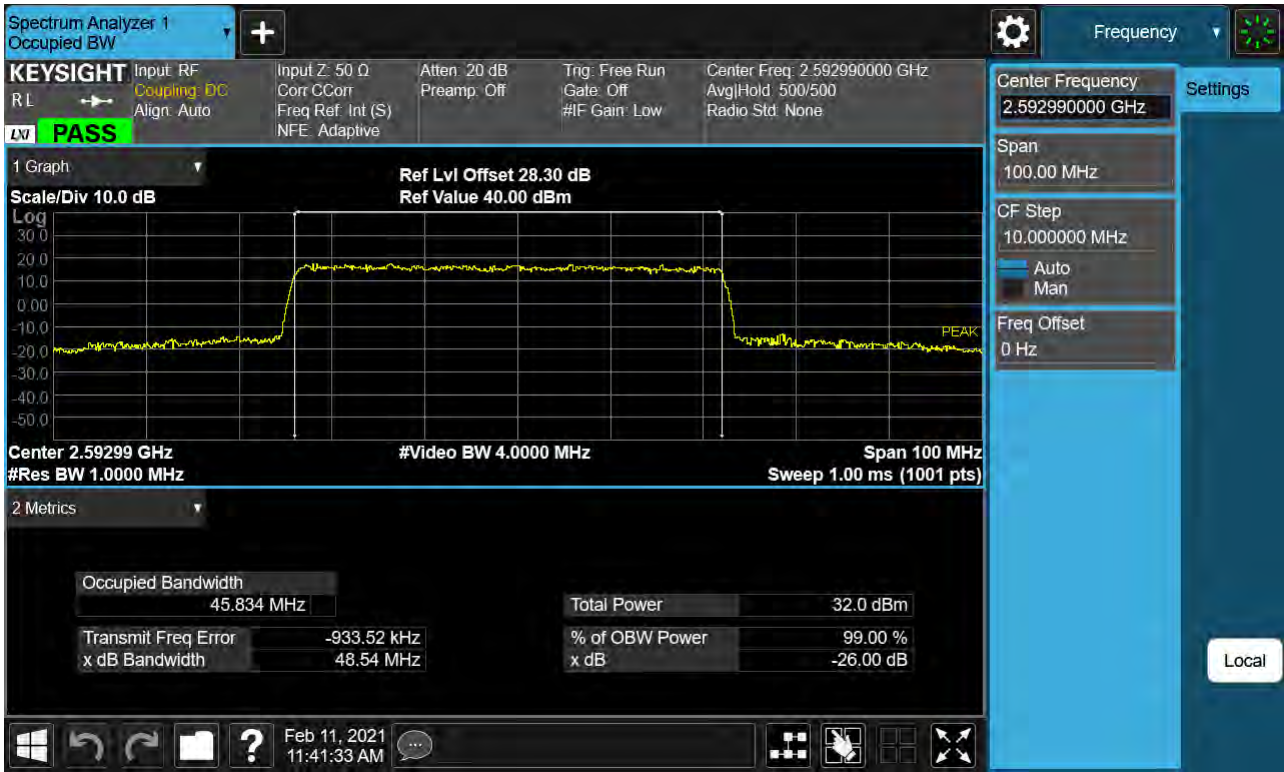


Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 64-QAM)

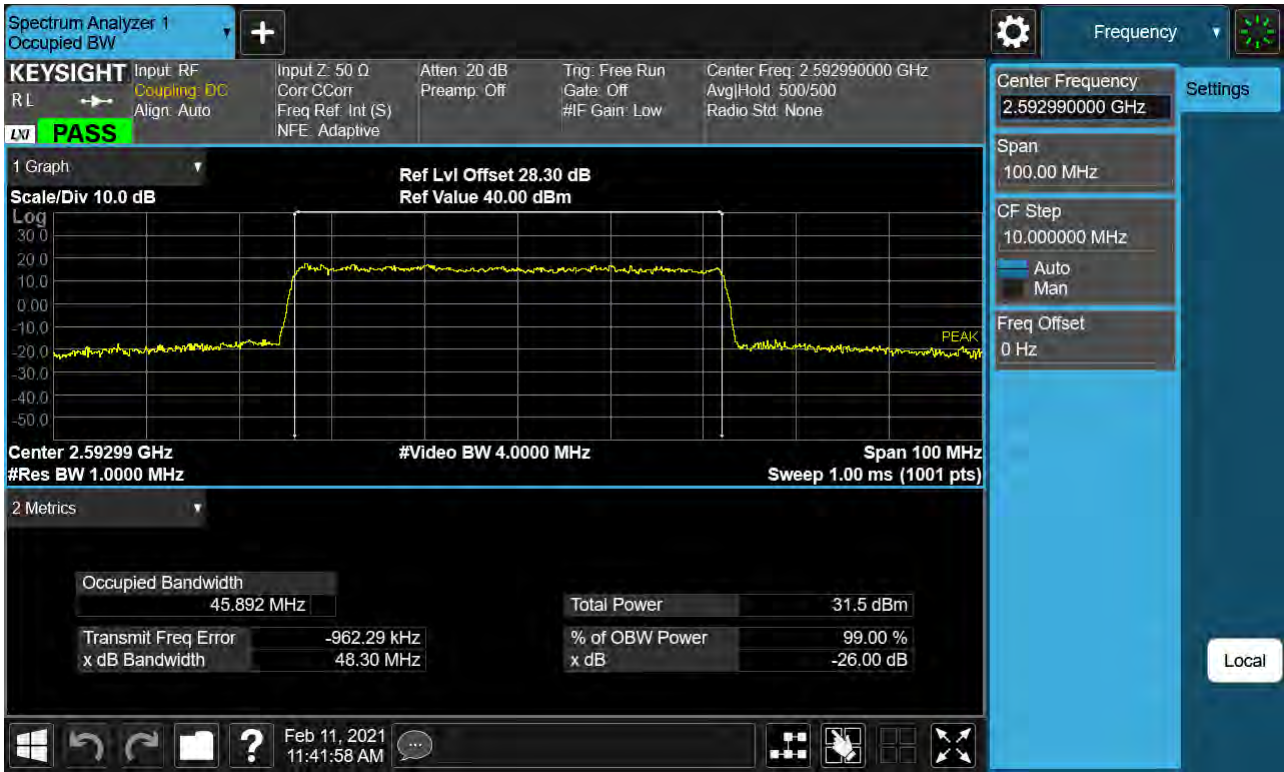


Sub6 n41. Occupied Bandwidth Plot (50 MHz Ch.518598 256-QAM)

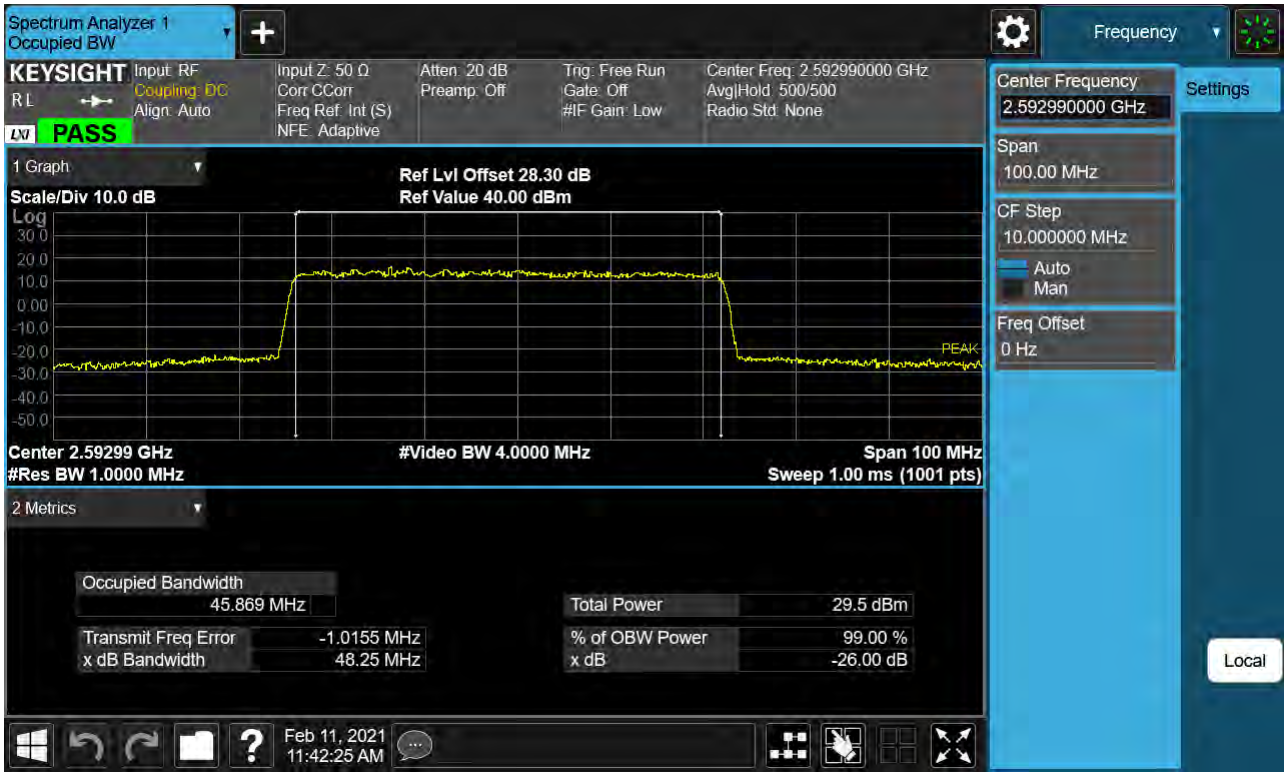


Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 BPSK)

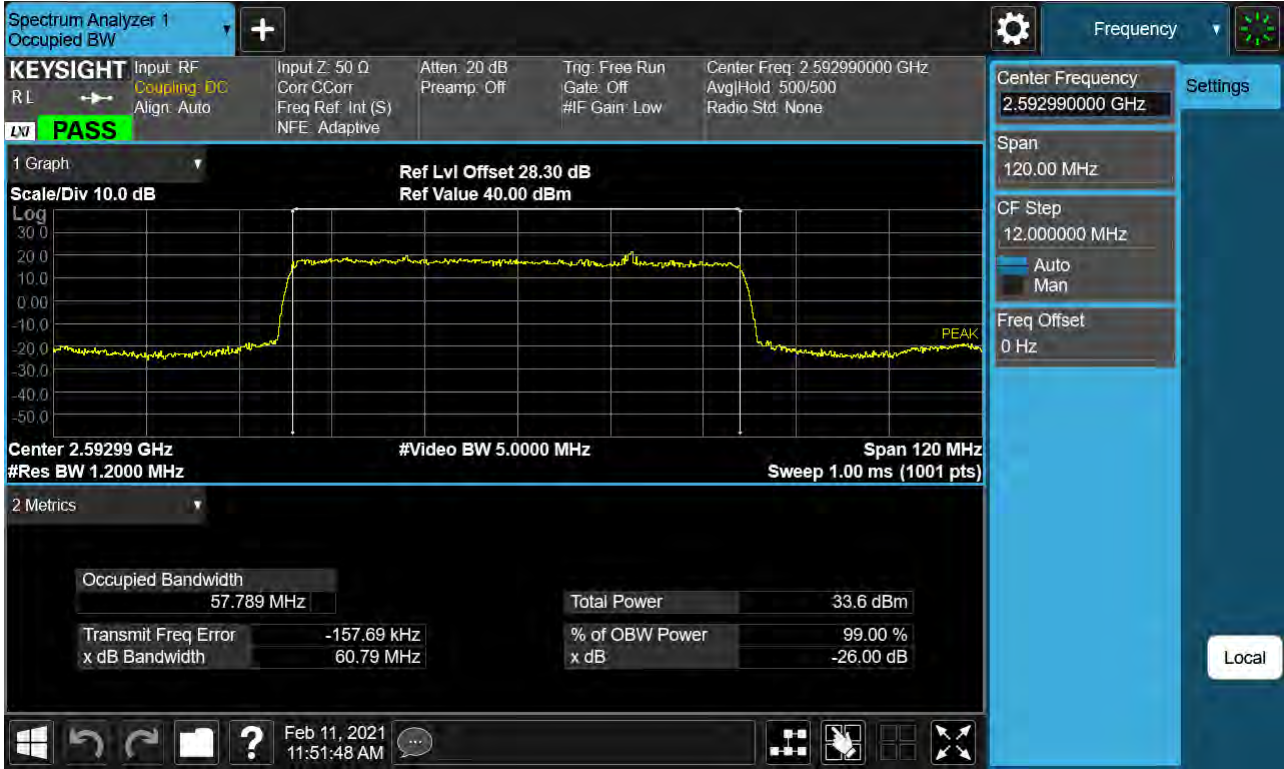


Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 QPSK)

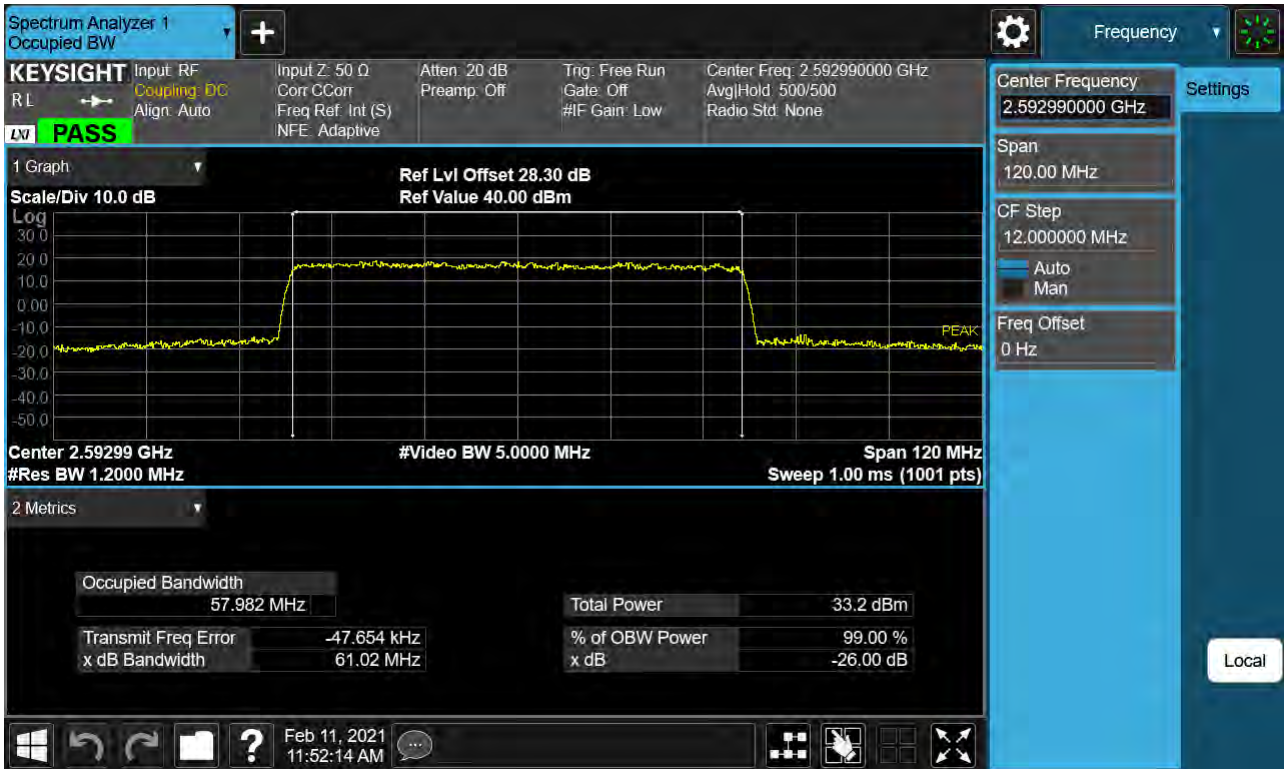


Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 16-QAM)

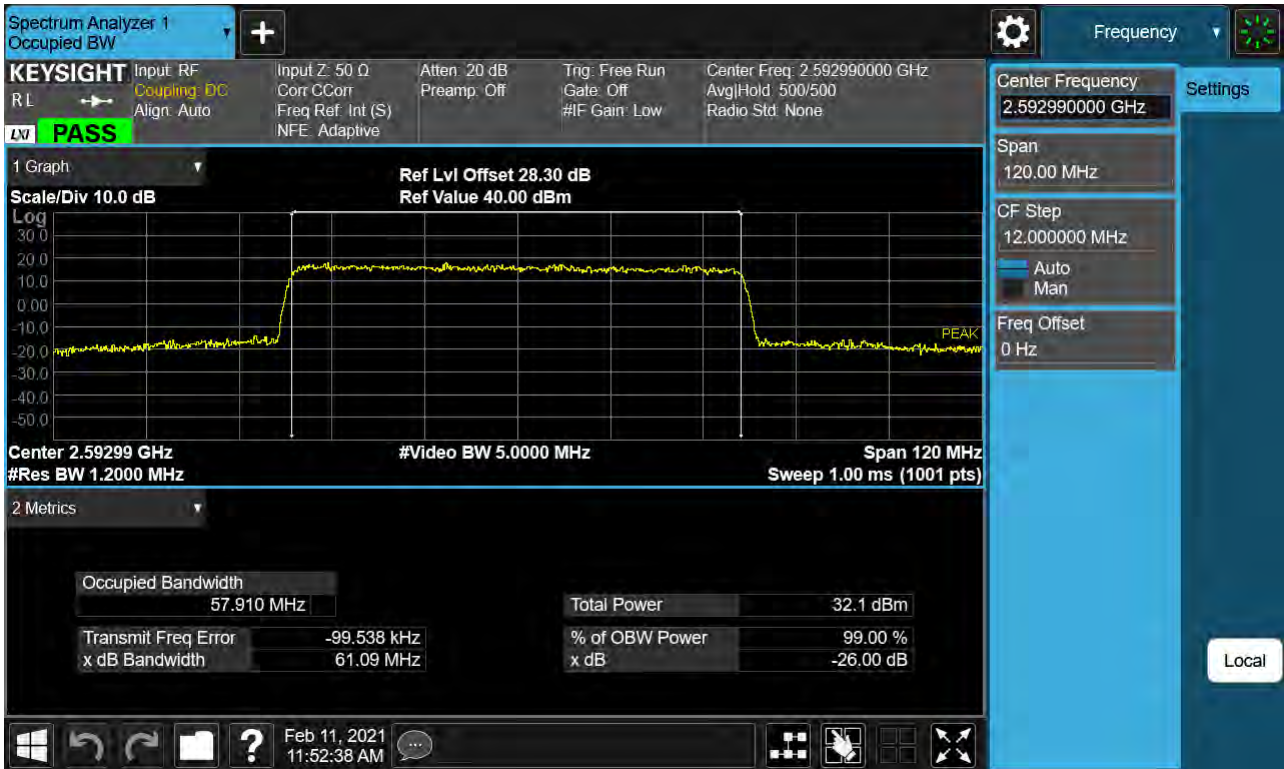


Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 64-QAM)

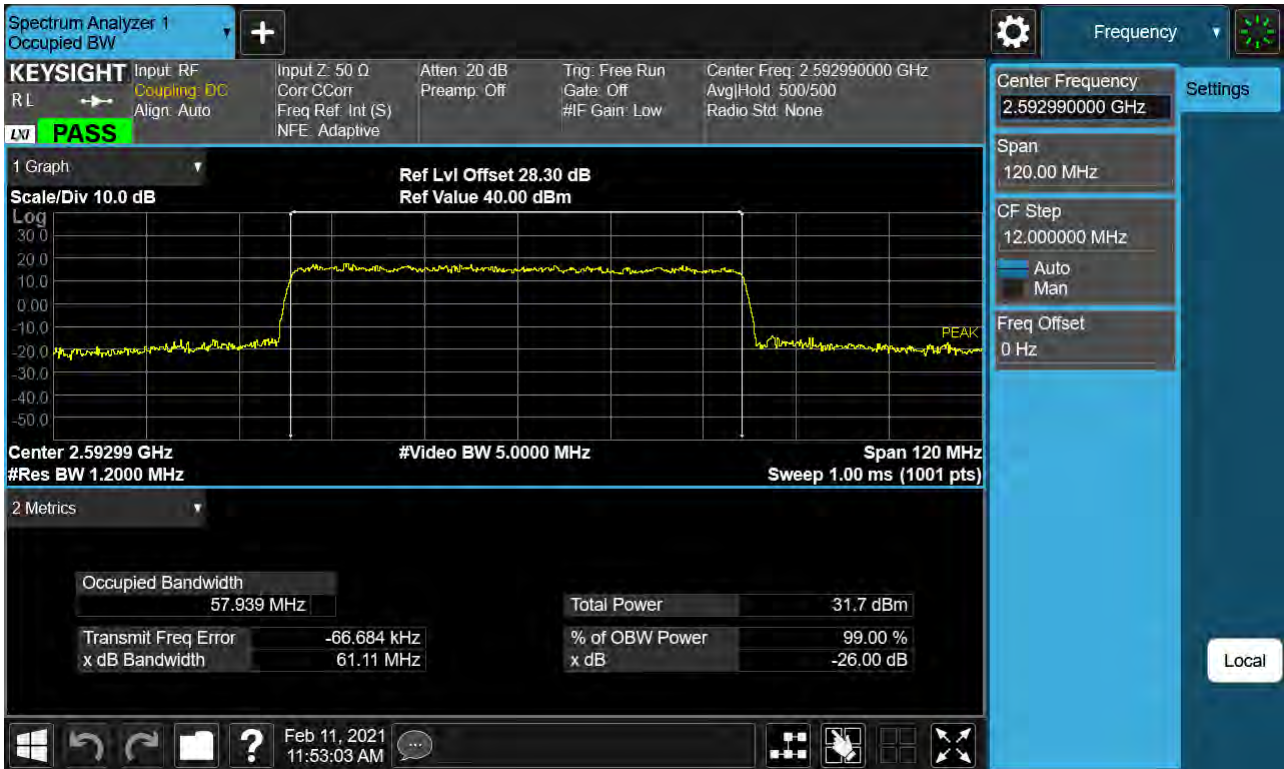


Sub6 n41. Occupied Bandwidth Plot (60 MHz Ch.518598 256-QAM)

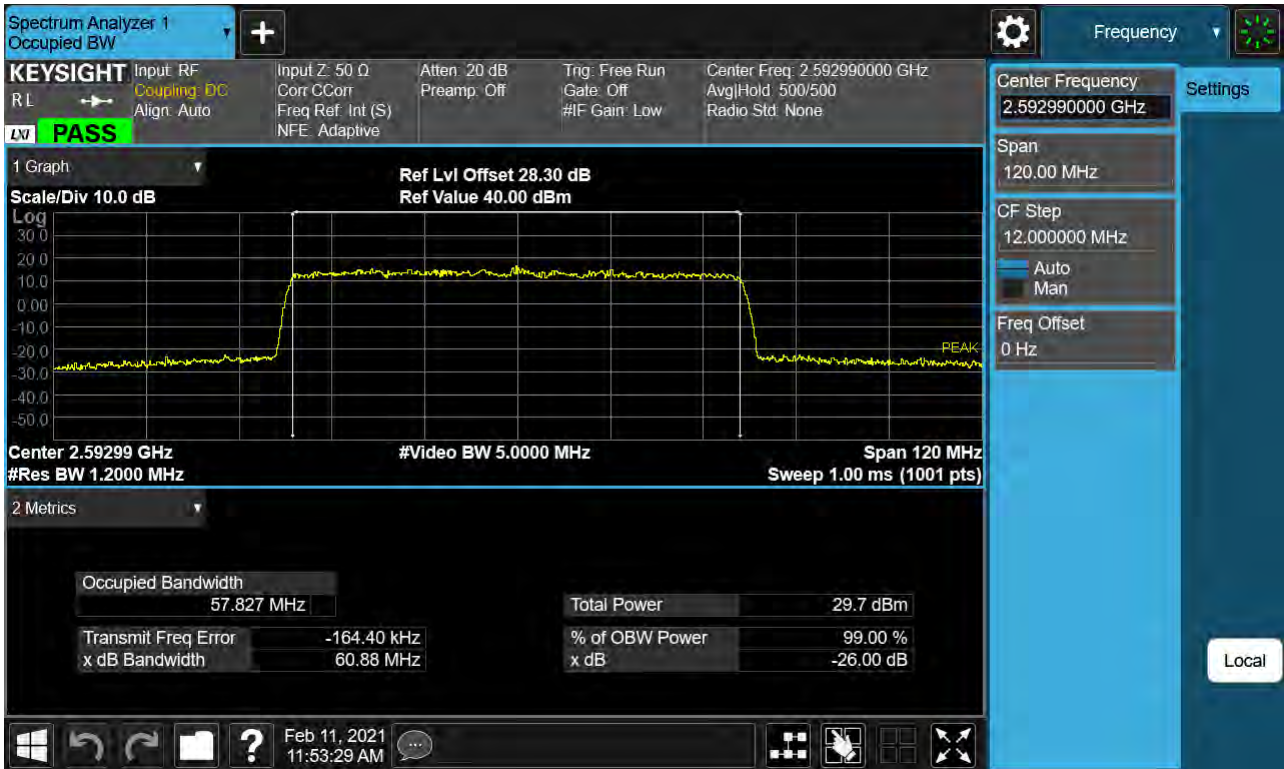


Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 BPSK)

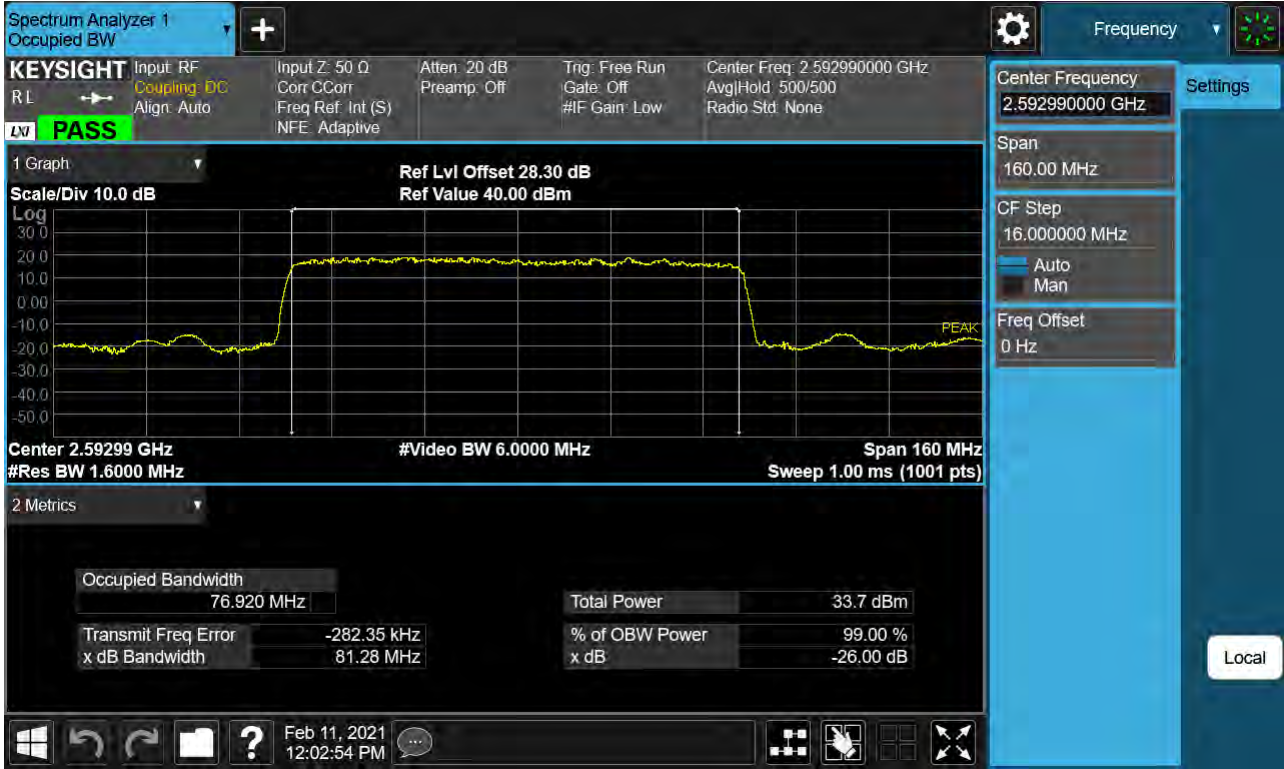


Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 QPSK)

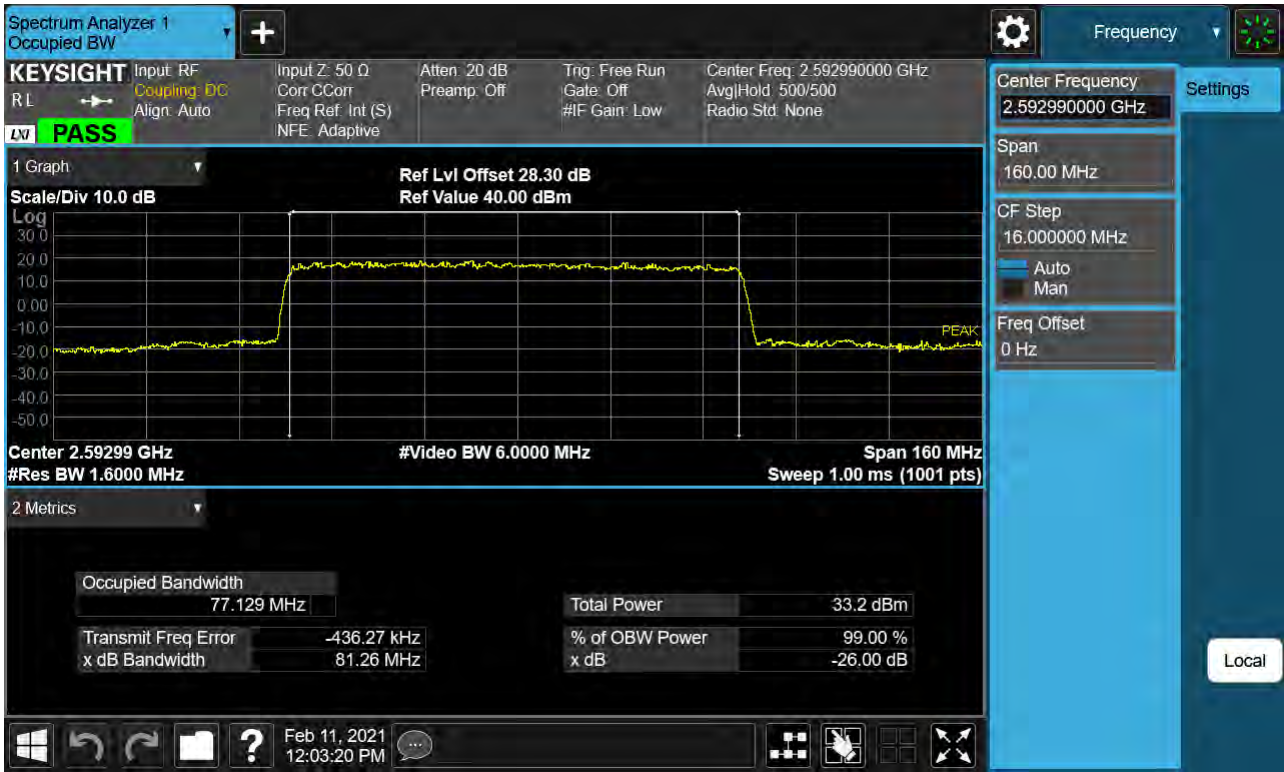


Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 16-QAM)

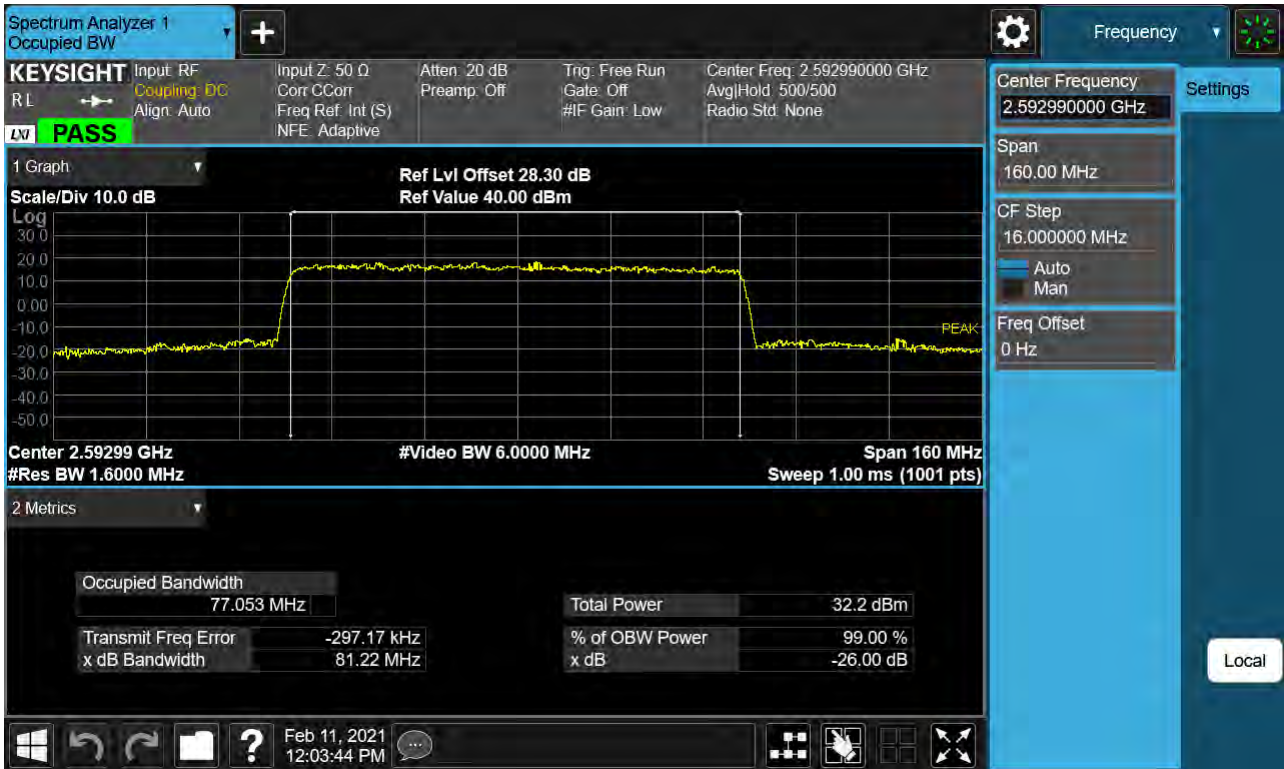


Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 64-QAM)

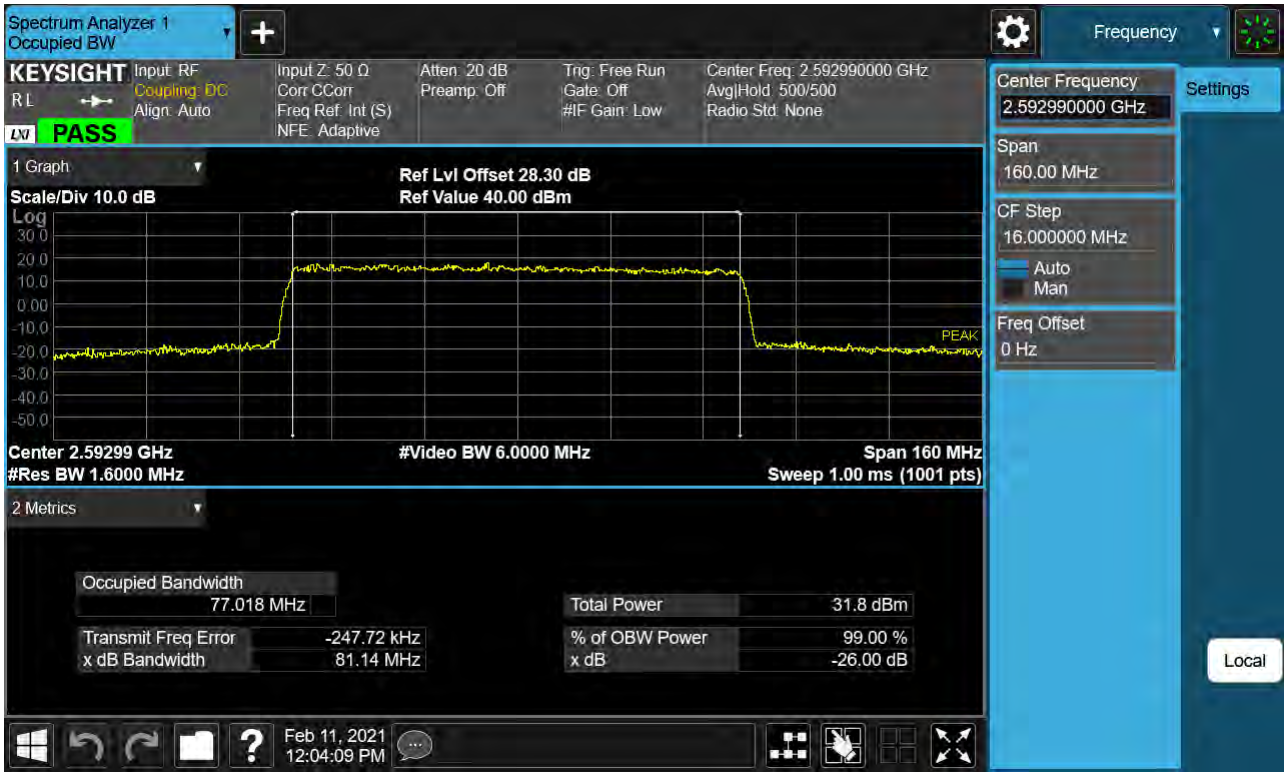


Sub6 n41. Occupied Bandwidth Plot (80 MHz Ch.518598 256-QAM)

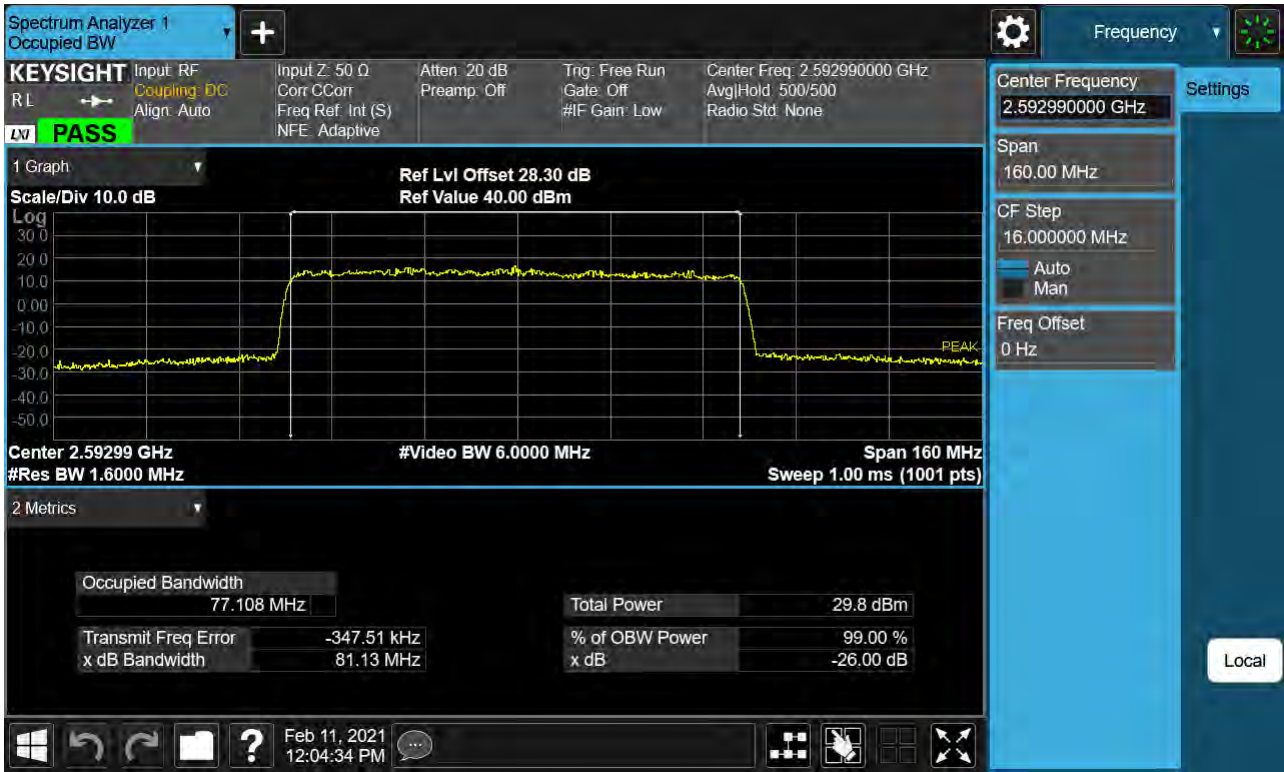


Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 BPSK)

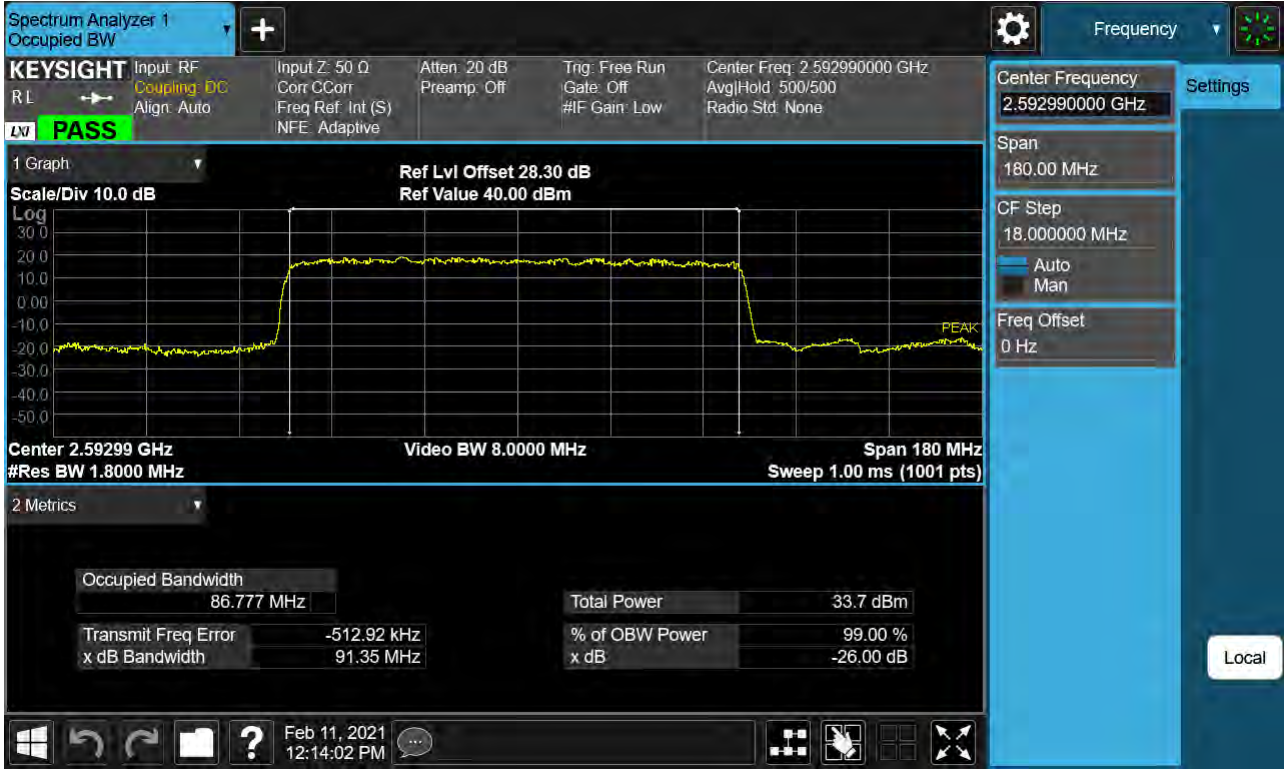


Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 QPSK)

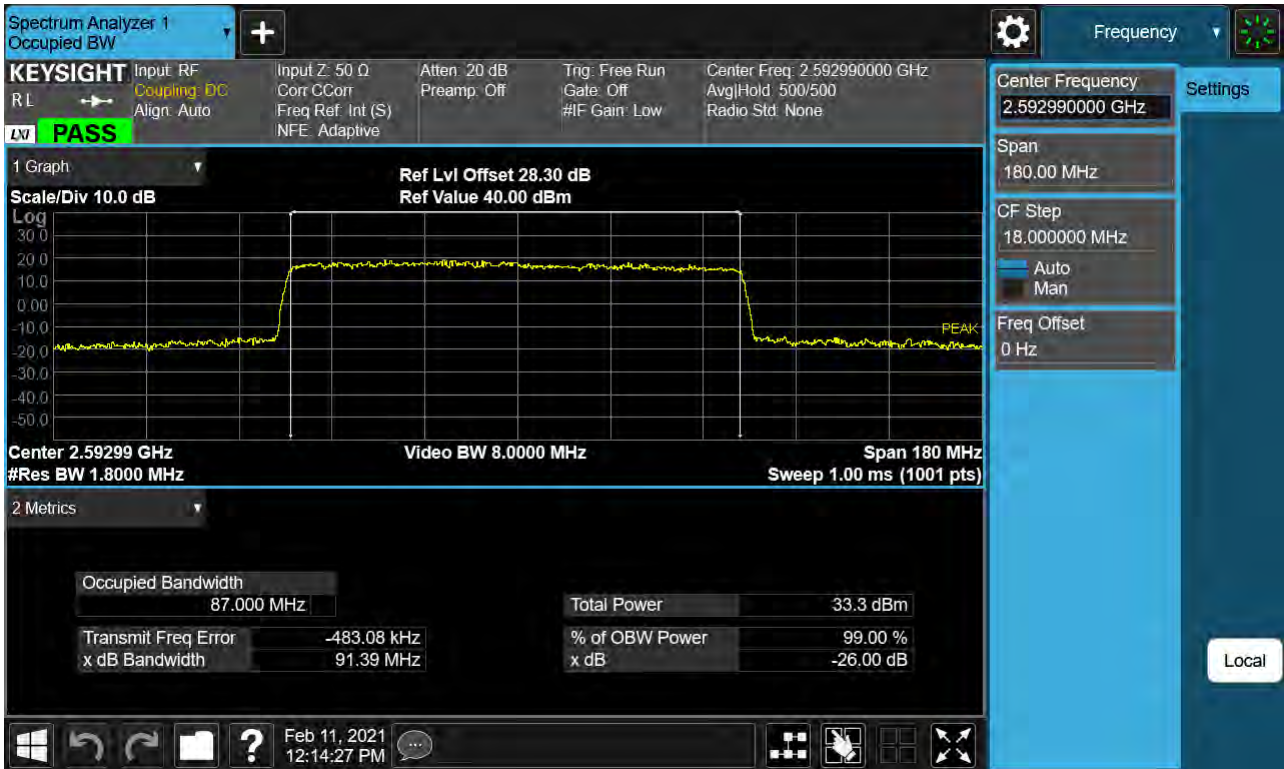

Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 16-QAM)

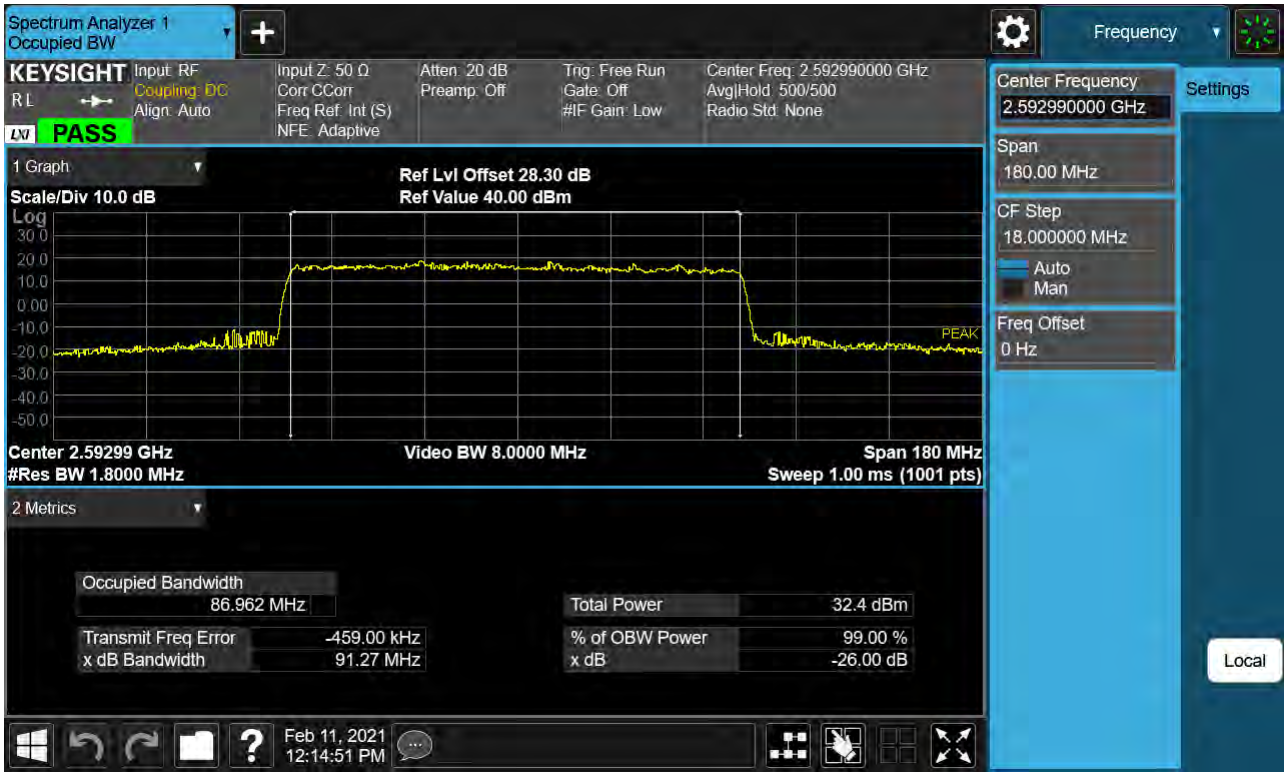


Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 64-QAM)

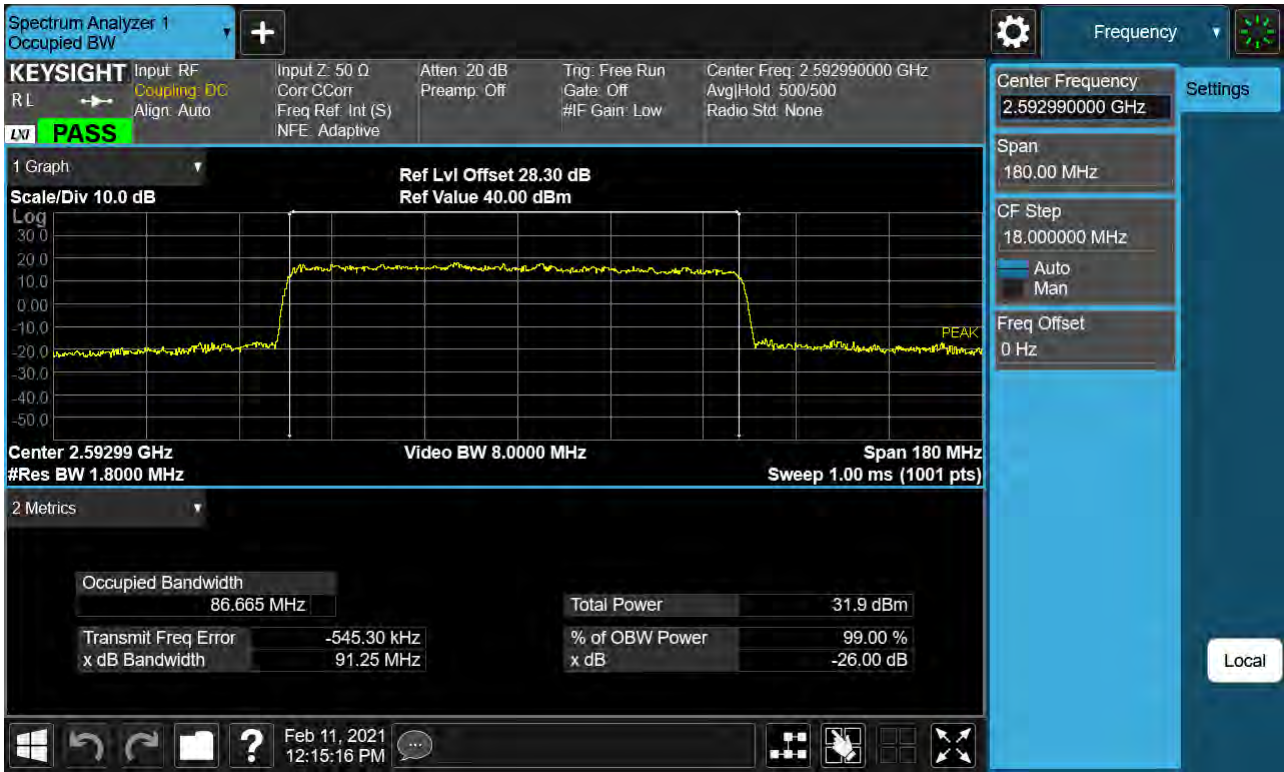


Sub6 n41. Occupied Bandwidth Plot (90 MHz Ch.518598 256-QAM)




Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 BPSK)

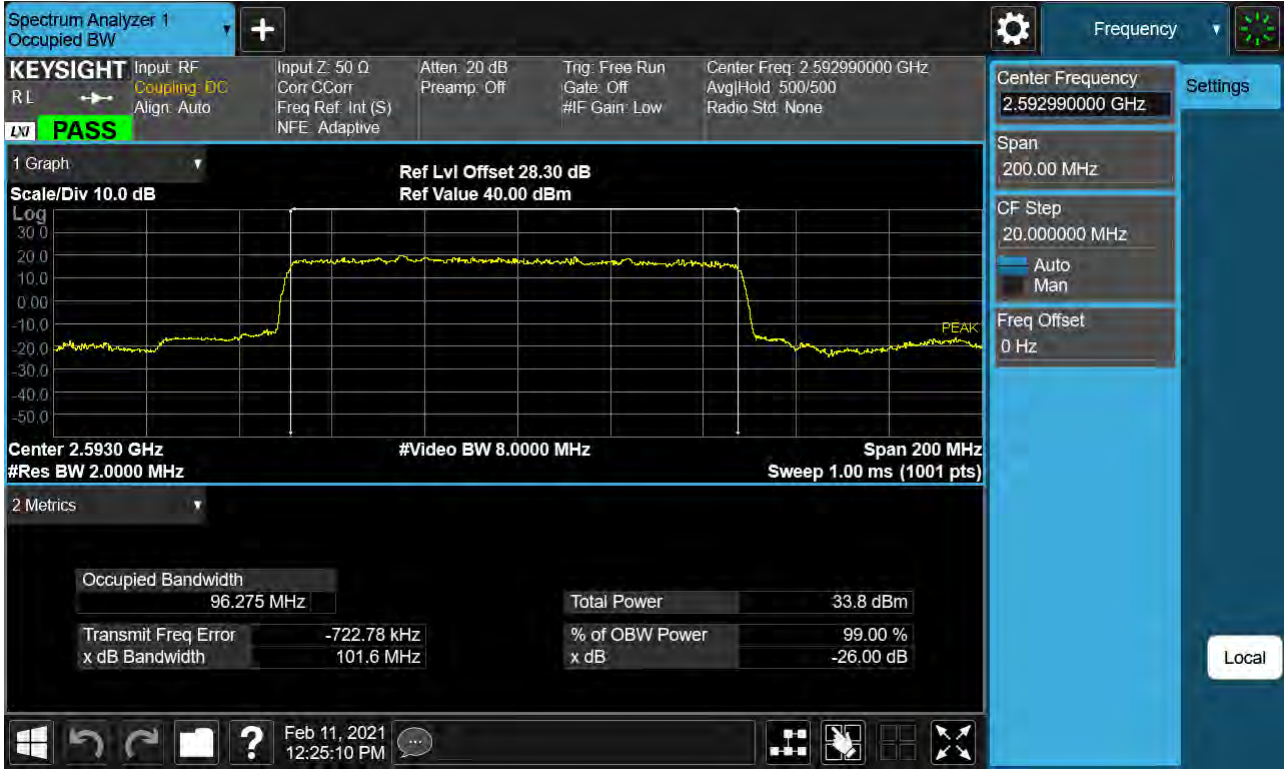


Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 QPSK)

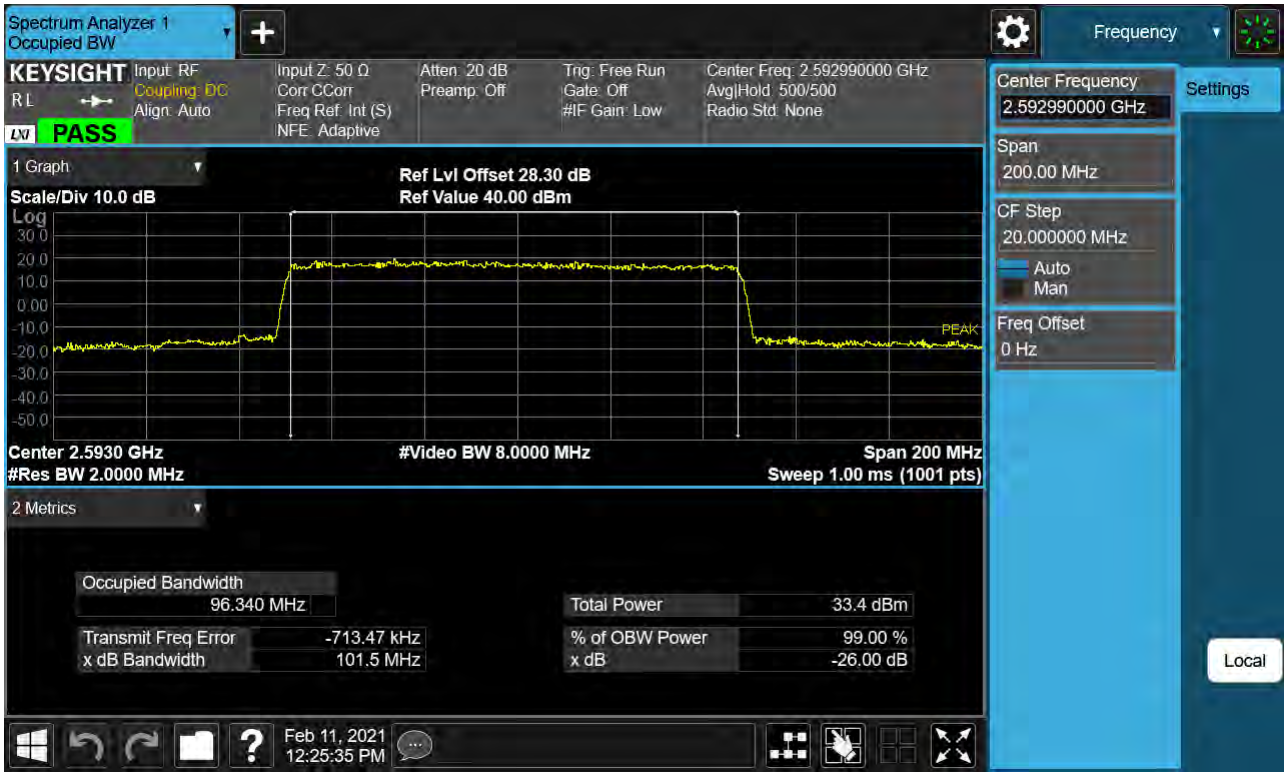


Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 16-QAM)

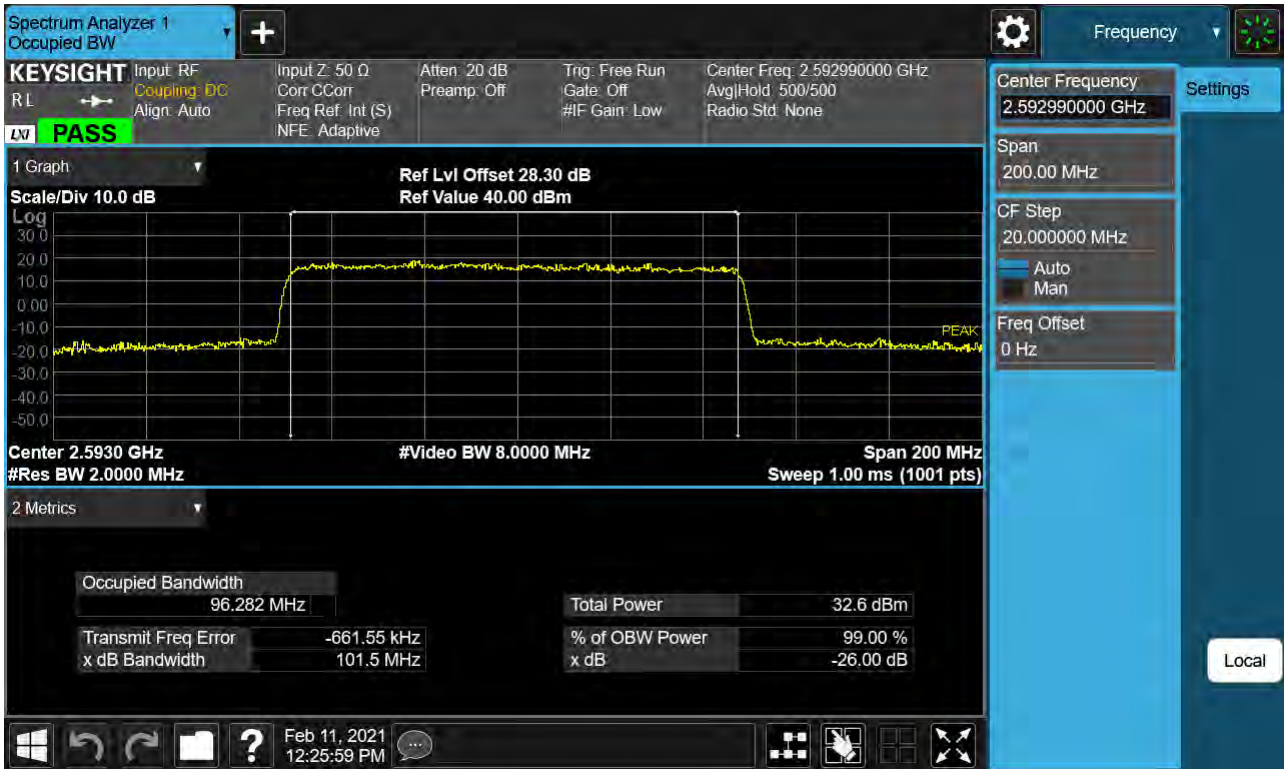

Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 64-QAM)

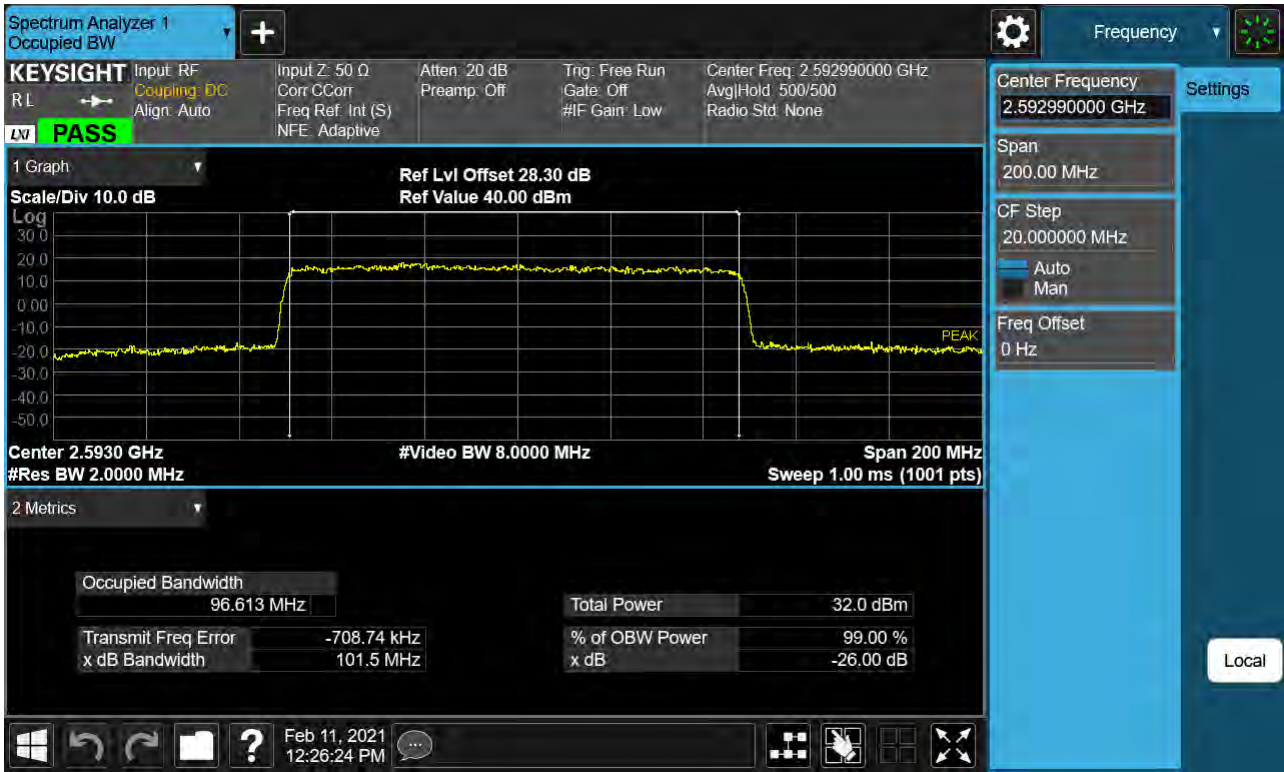

Sub6 n41. Occupied Bandwidth Plot (100 MHz Ch.518598 256-QAM)

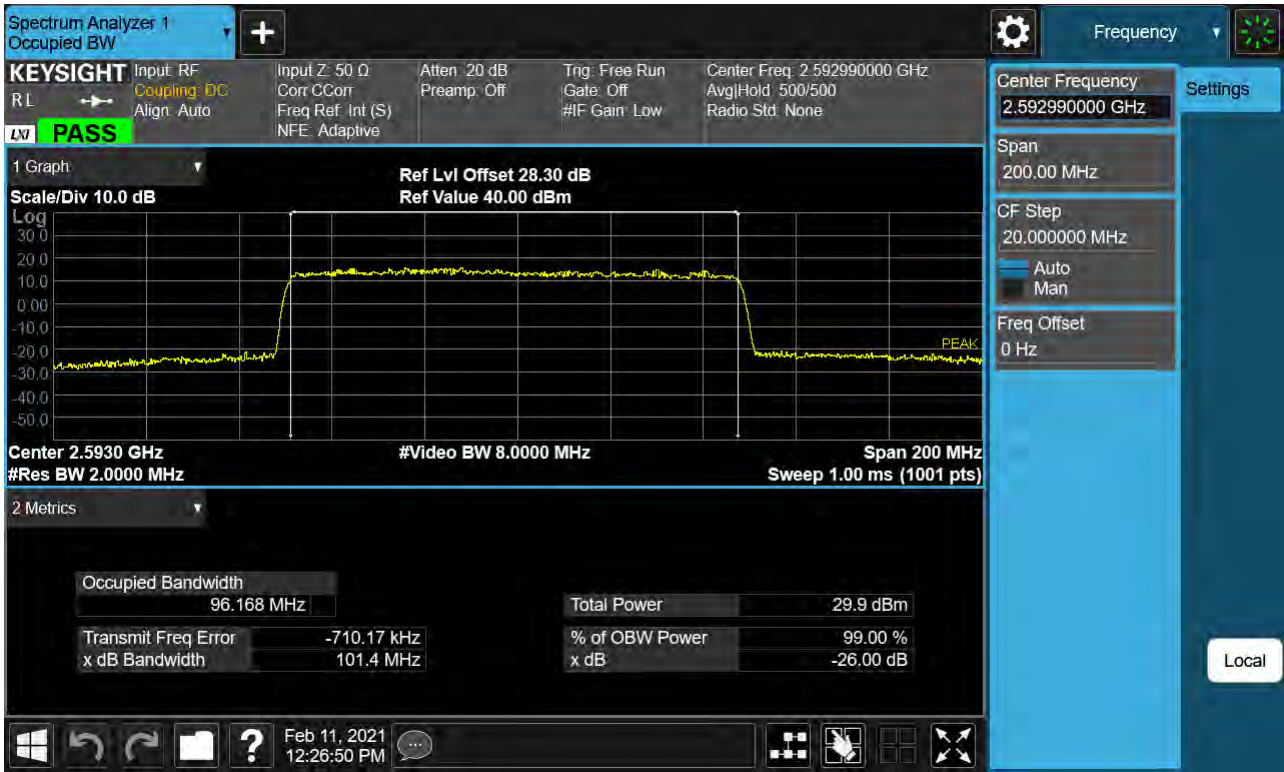

Sub6 n41. PAR Plot (20M BW_Ch.518598_BPSK)




Sub6 n41. PAR Plot (20M BW_Ch.518598_QPSK)



Sub6 n41. PAR Plot (20M BW_Ch.518598_16QAM)




Sub6 n41. PAR Plot (20M BW_Ch.518598_64QAM)

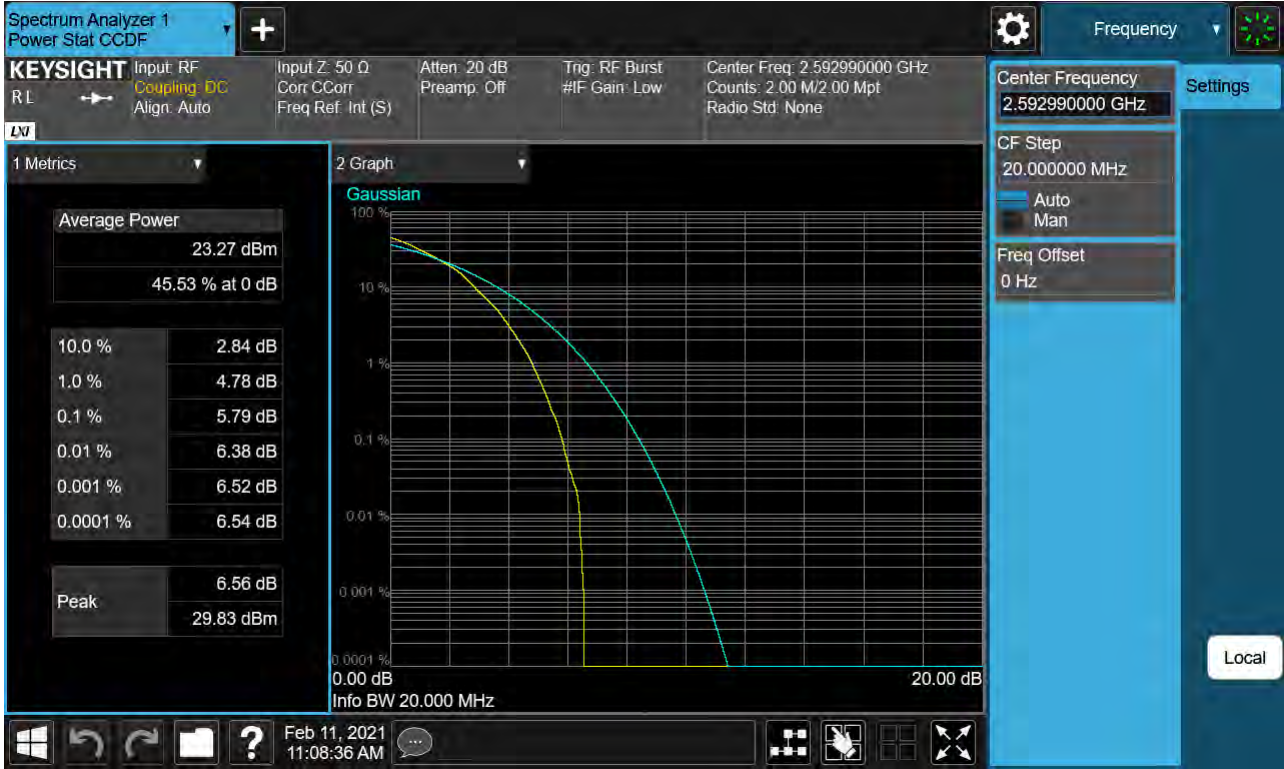

Sub6 n41. PAR Plot (20M BW_Ch.518598_256QAM)



Sub6 n41. PAR Plot (30M BW_Ch.518598_BPSK)

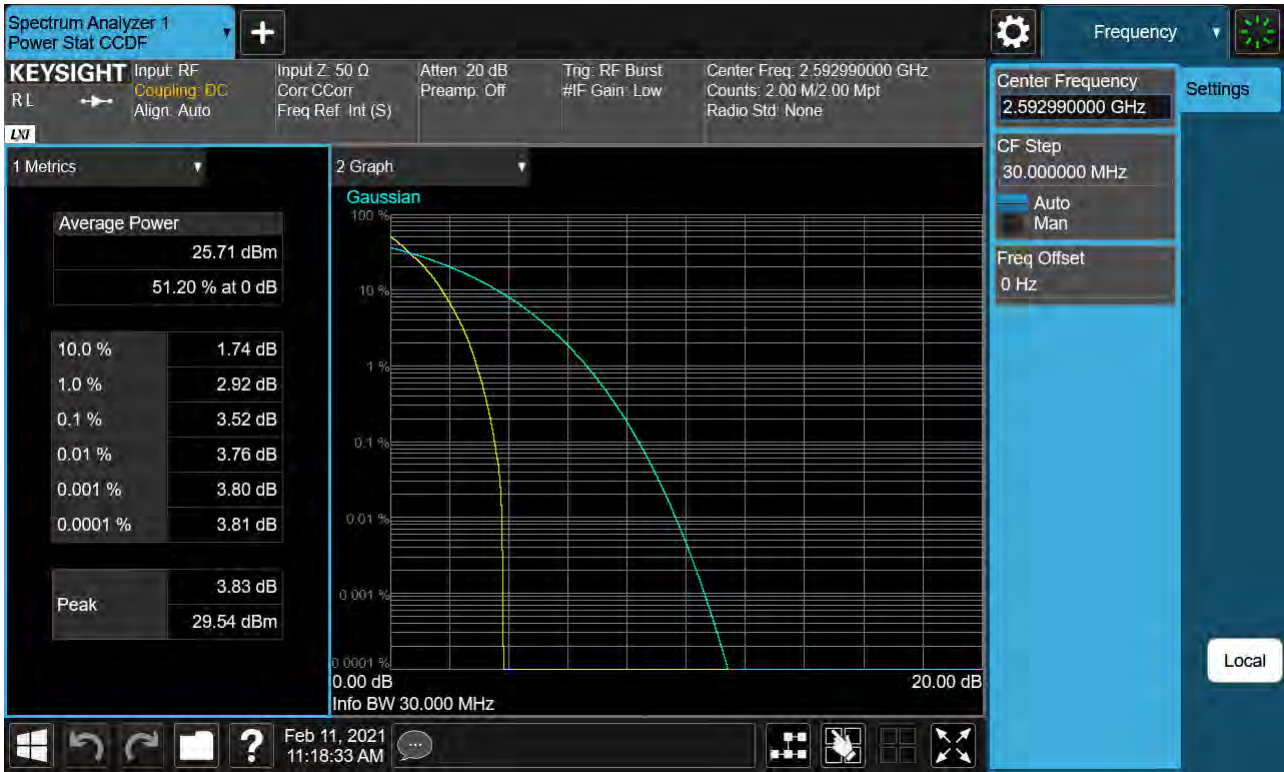


Sub6 n41. PAR Plot (30M BW_Ch.518598_QPSK)



Sub6 n41. PAR Plot (30M BW_Ch.518598_16QAM)




Sub6 n41. PAR Plot (30M BW_Ch.518598_64QAM)

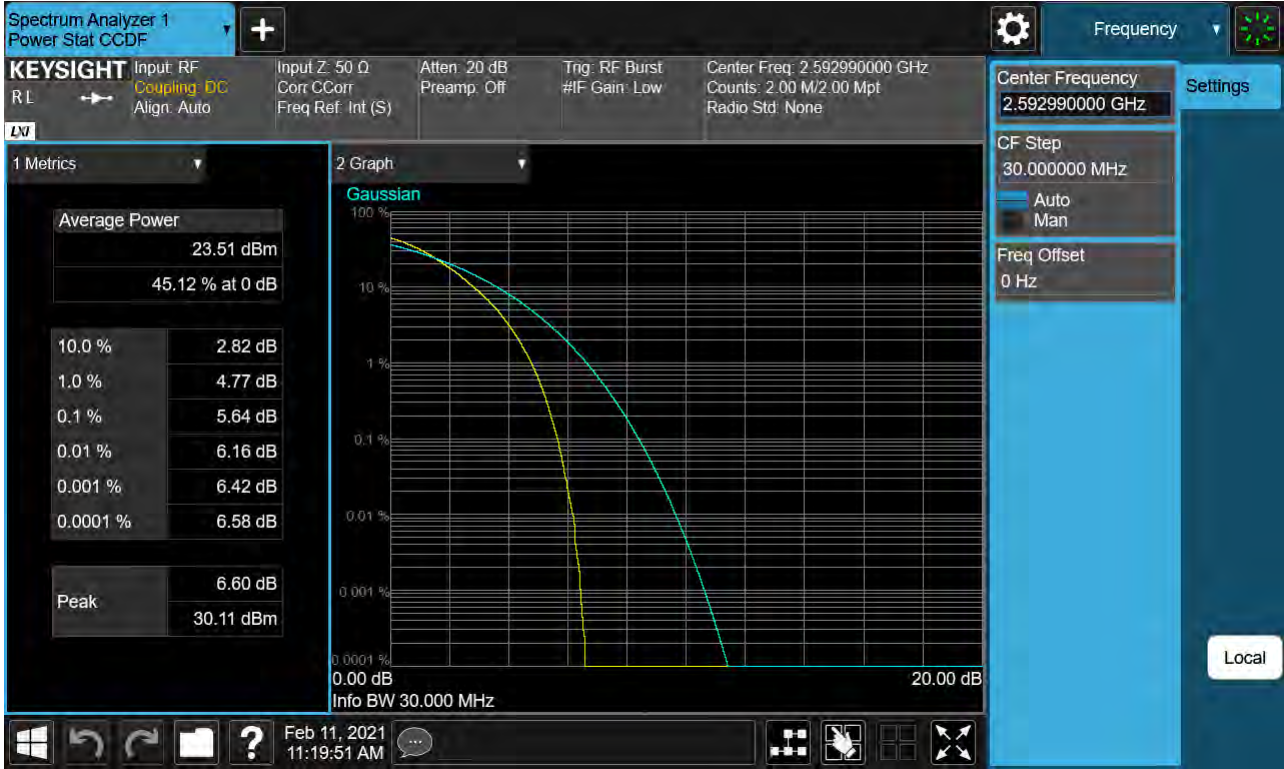


Sub6 n41. PAR Plot (30M BW_Ch.518598_256QAM)




Sub6 n41. PAR Plot (40M BW_Ch.518598_BPSK)

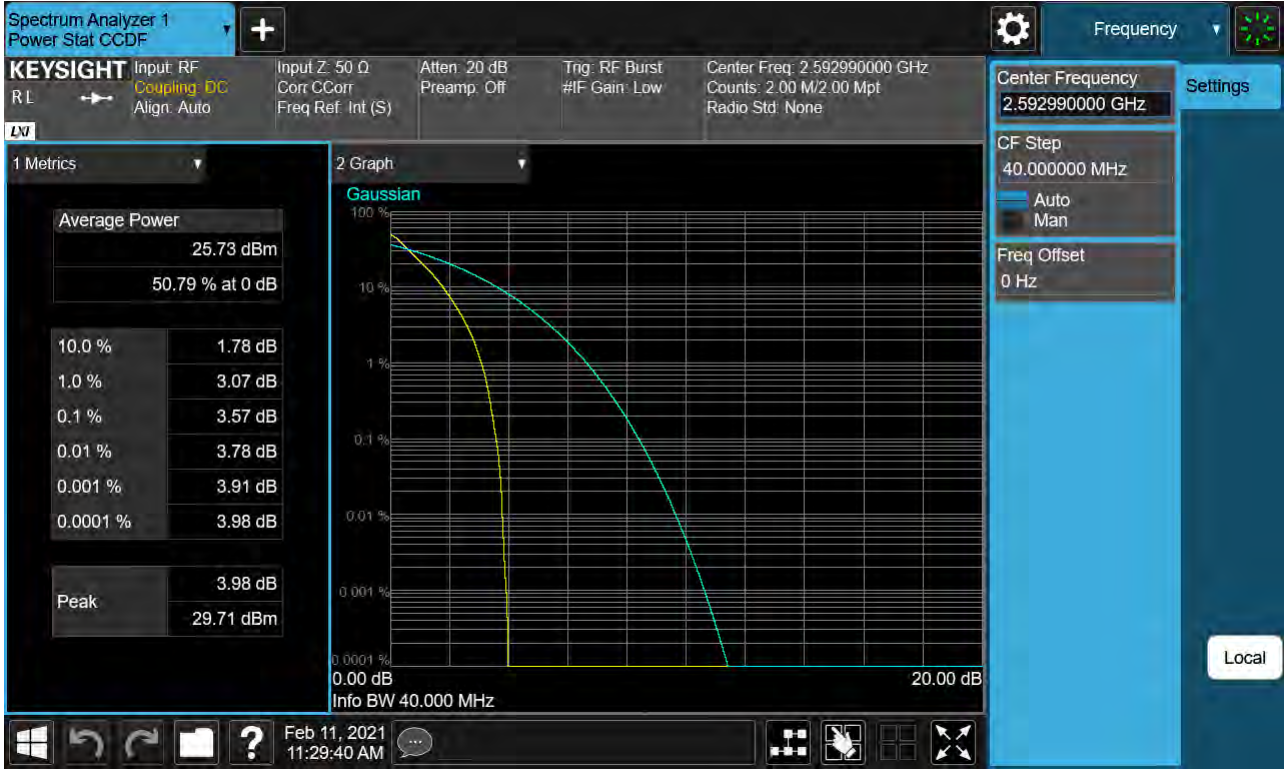


Sub6 n41. PAR Plot (40M BW_Ch.518598_QPSK)

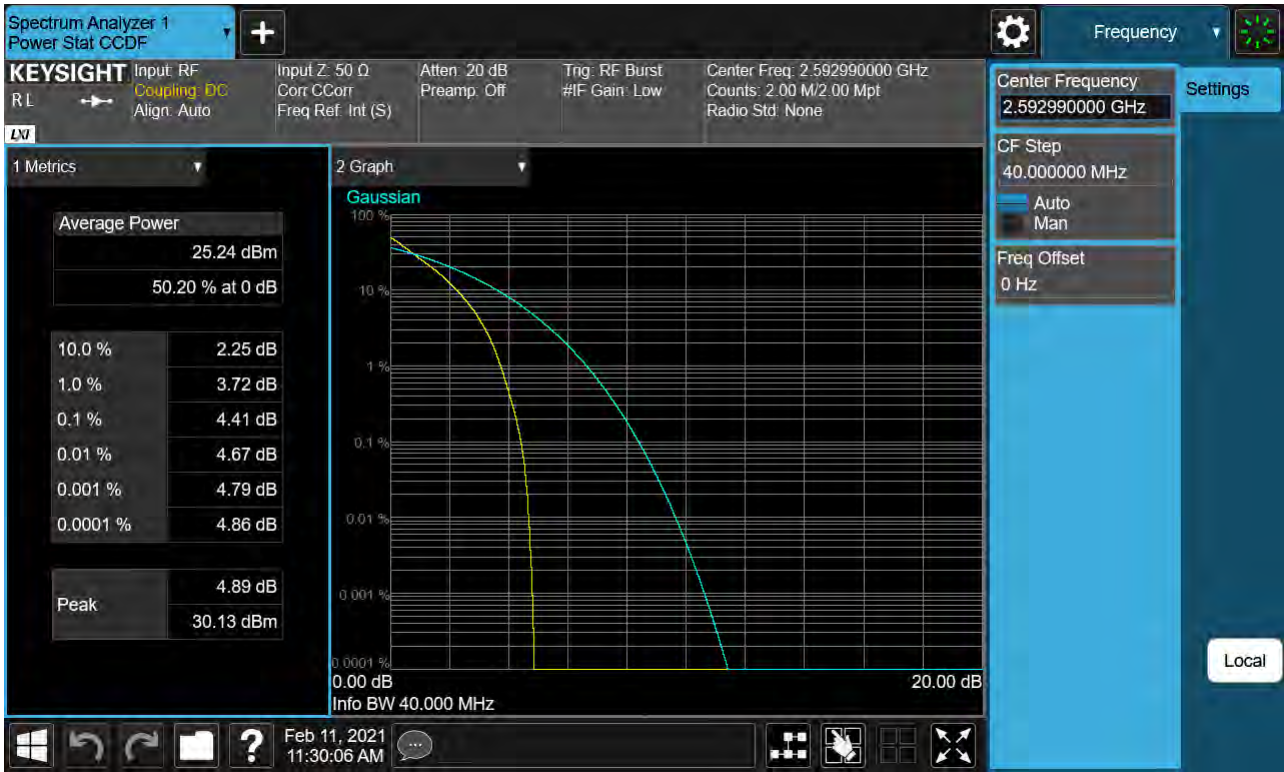

Sub6 n41. PAR Plot (40M BW_Ch.518598_16QAM)

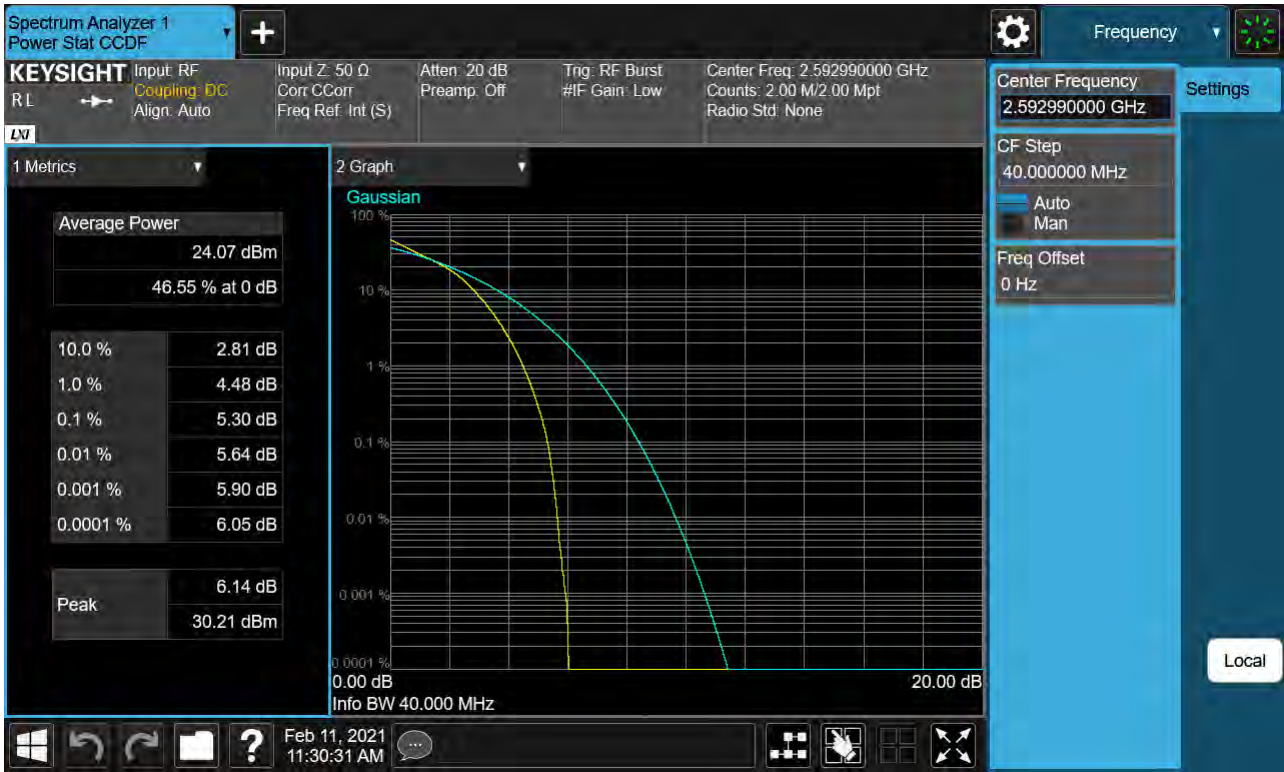

Sub6 n41. PAR Plot (40M BW_Ch.518598_64QAM)

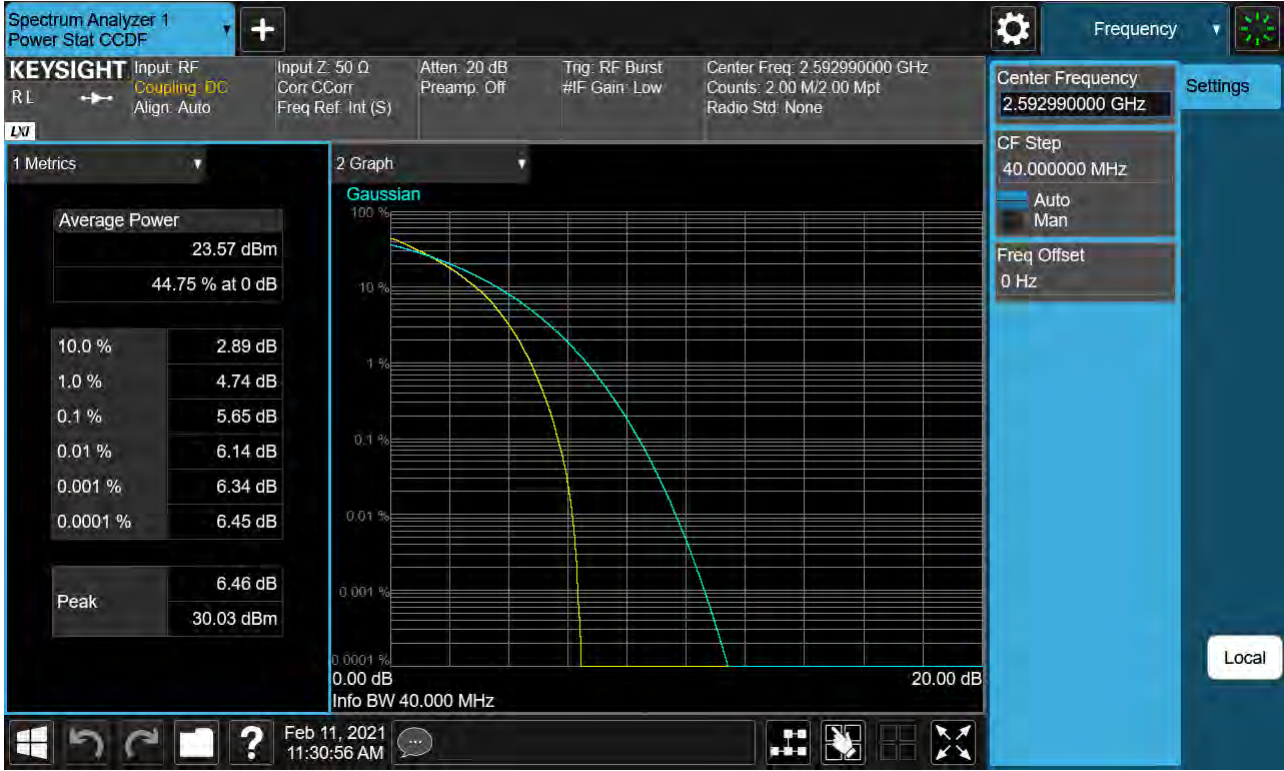


Sub6 n41. PAR Plot (40M BW_Ch.518598_256QAM)



Sub6 n41. PAR Plot (50M BW_Ch.518598_BPSK)



Sub6 n41. PAR Plot (50M BW_Ch.518598_QPSK)

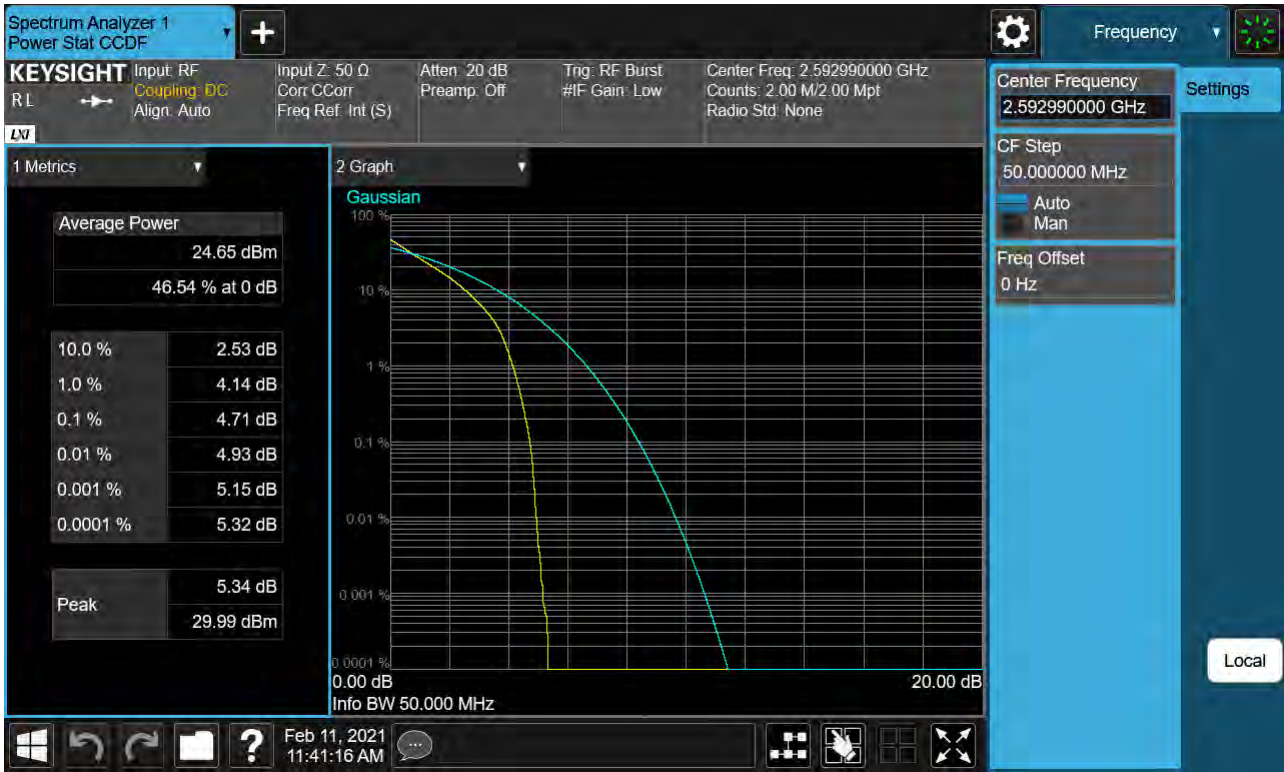


Sub6 n41. PAR Plot (50M BW_Ch.518598_16QAM)




Sub6 n41. PAR Plot (50M BW_Ch.518598_64QAM)




Sub6 n41. PAR Plot (50M BW_Ch.518598_256QAM)

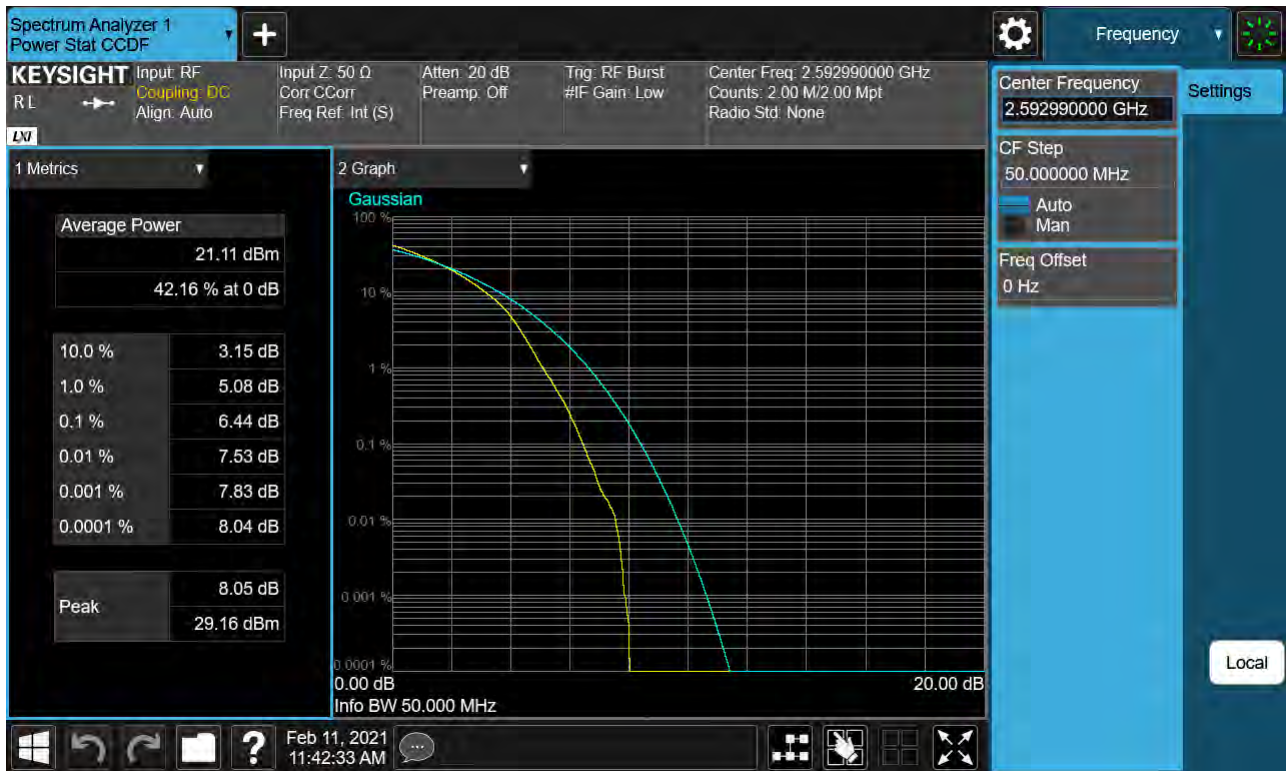


Sub6 n41. PAR Plot (60M BW_Ch.518598_BPSK)

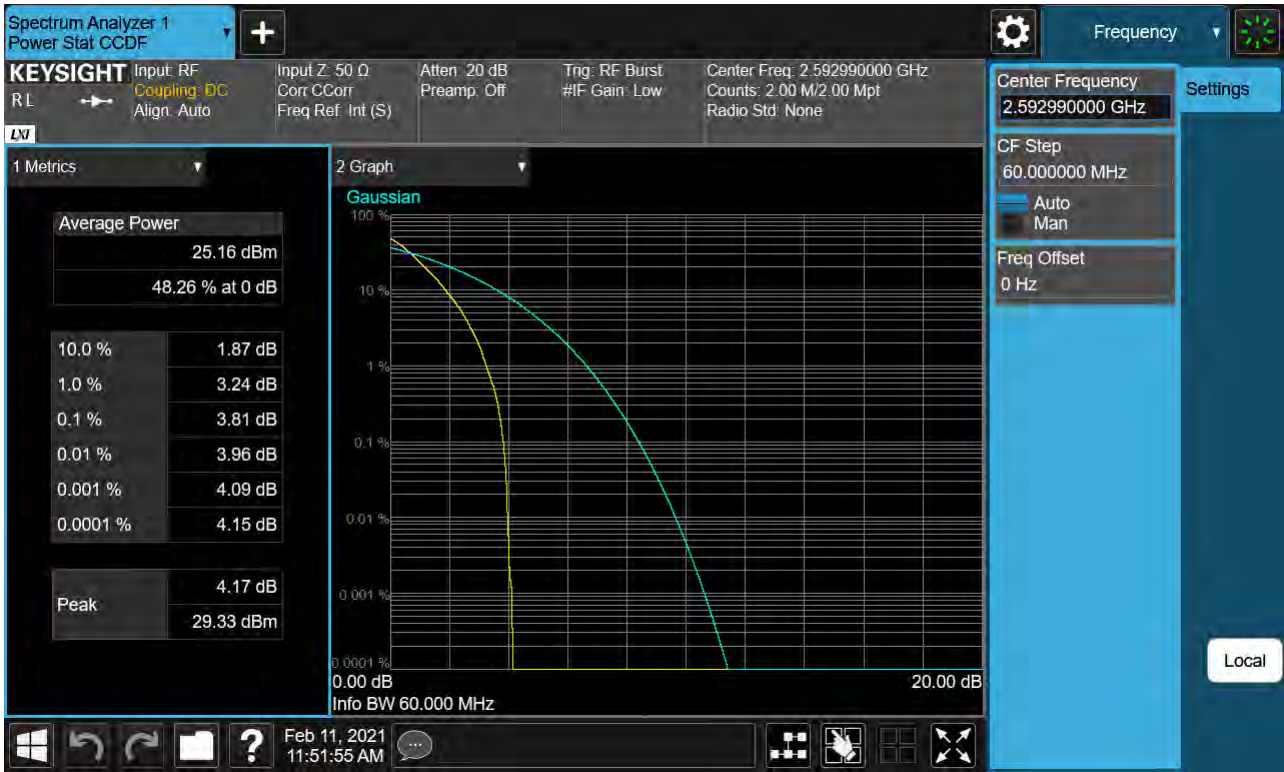

Sub6 n41. PAR Plot (60M BW_Ch.518598_QPSK)

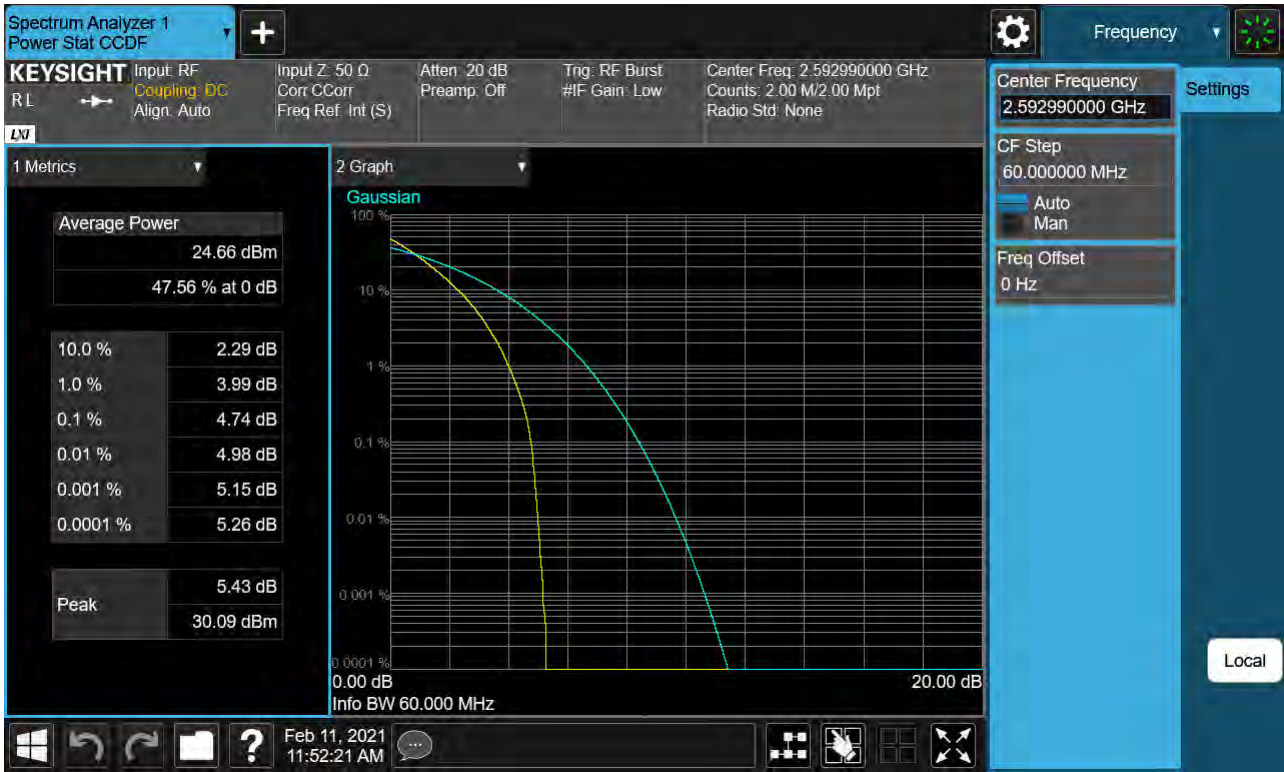

Sub6 n41. PAR Plot (60M BW_Ch.518598_16QAM)

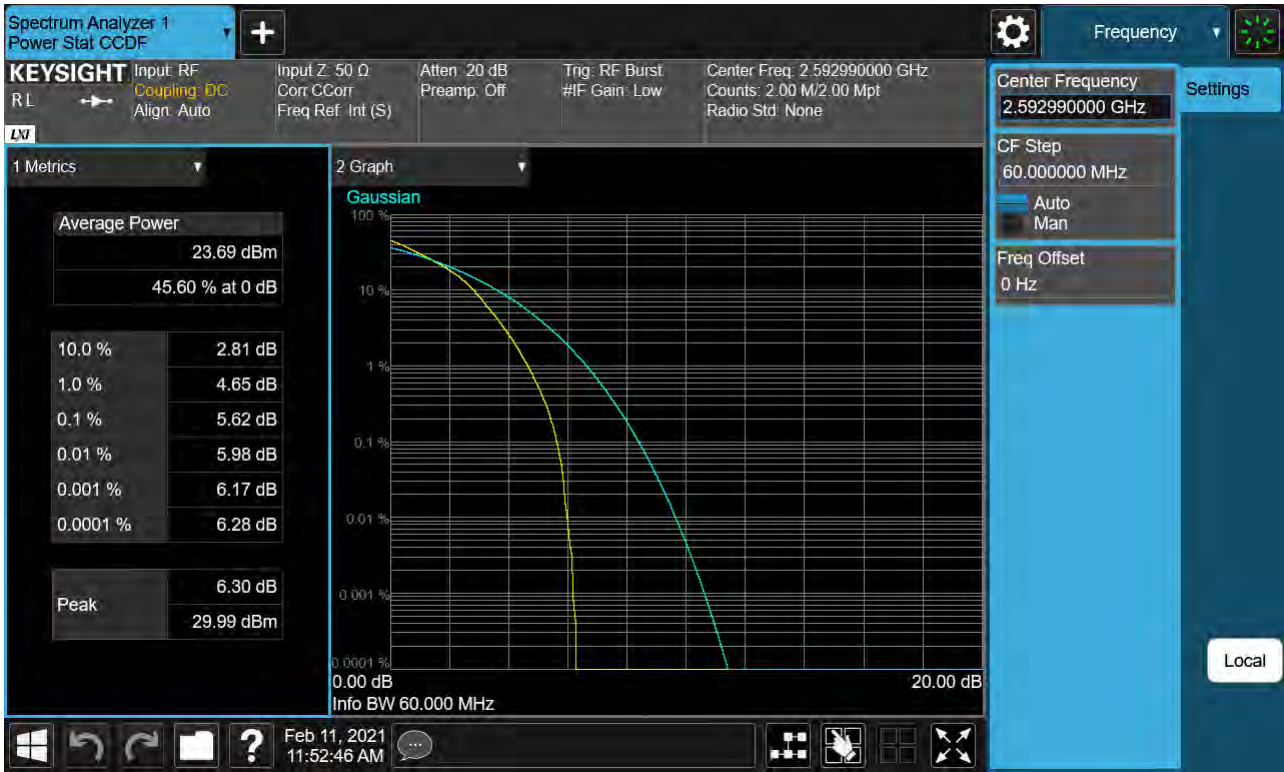


Sub6 n41. PAR Plot (60M BW_Ch.518598_64QAM)




Sub6 n41. PAR Plot (60M BW_Ch.518598_256QAM)



Sub6 n41. PAR Plot (80M BW_Ch.518598_BPSK)

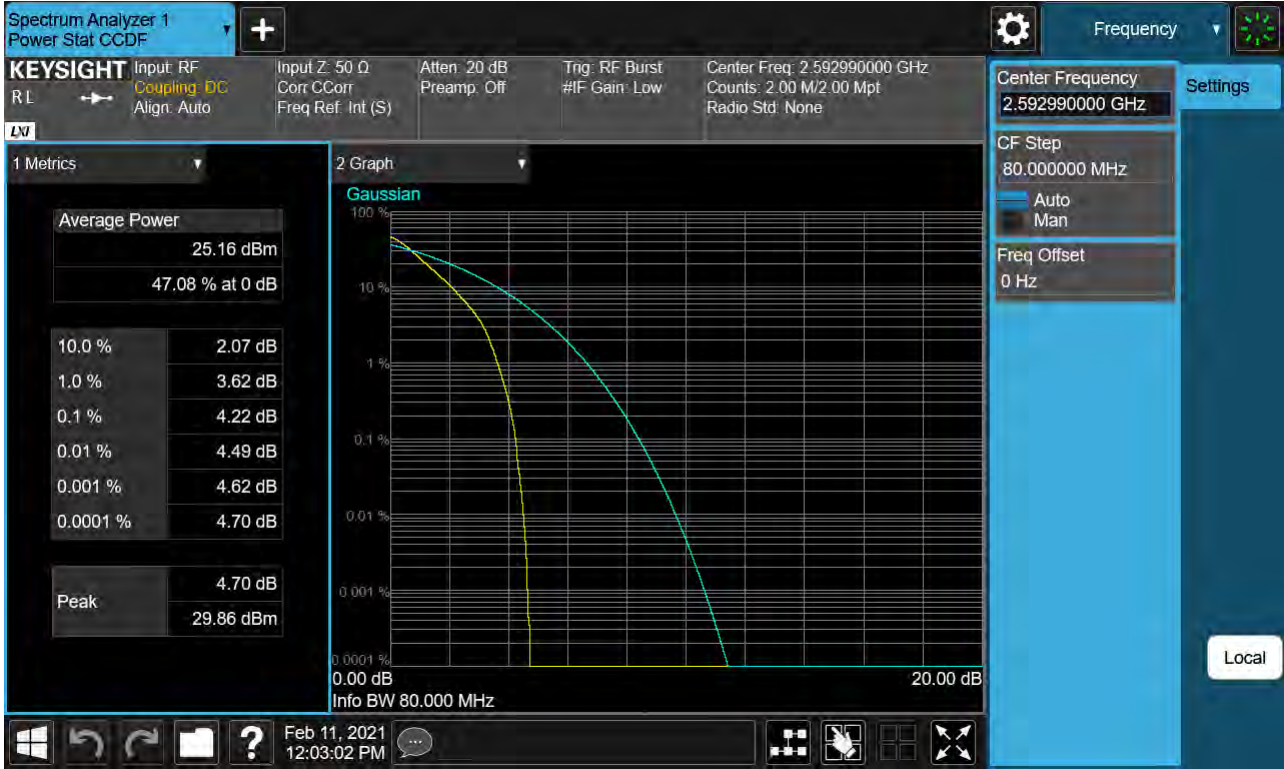

Sub6 n41. PAR Plot (80M BW_Ch.518598_QPSK)

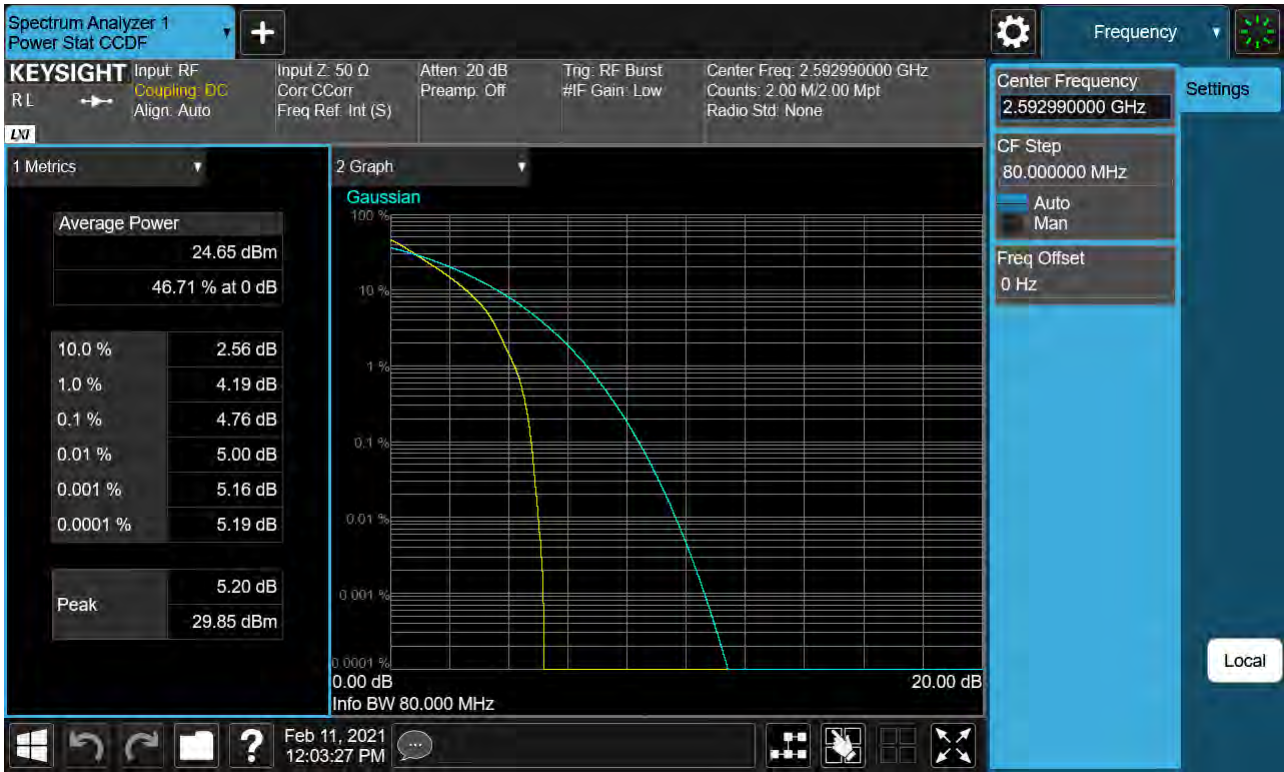

Sub6 n41. PAR Plot (80M BW_Ch.518598_16QAM)




Sub6 n41. PAR Plot (80M BW_Ch.518598_64QAM)



Sub6 n41. PAR Plot (80M BW_Ch.518598_256QAM)



Sub6 n41. PAR Plot (90M BW_Ch.518598_BPSK)

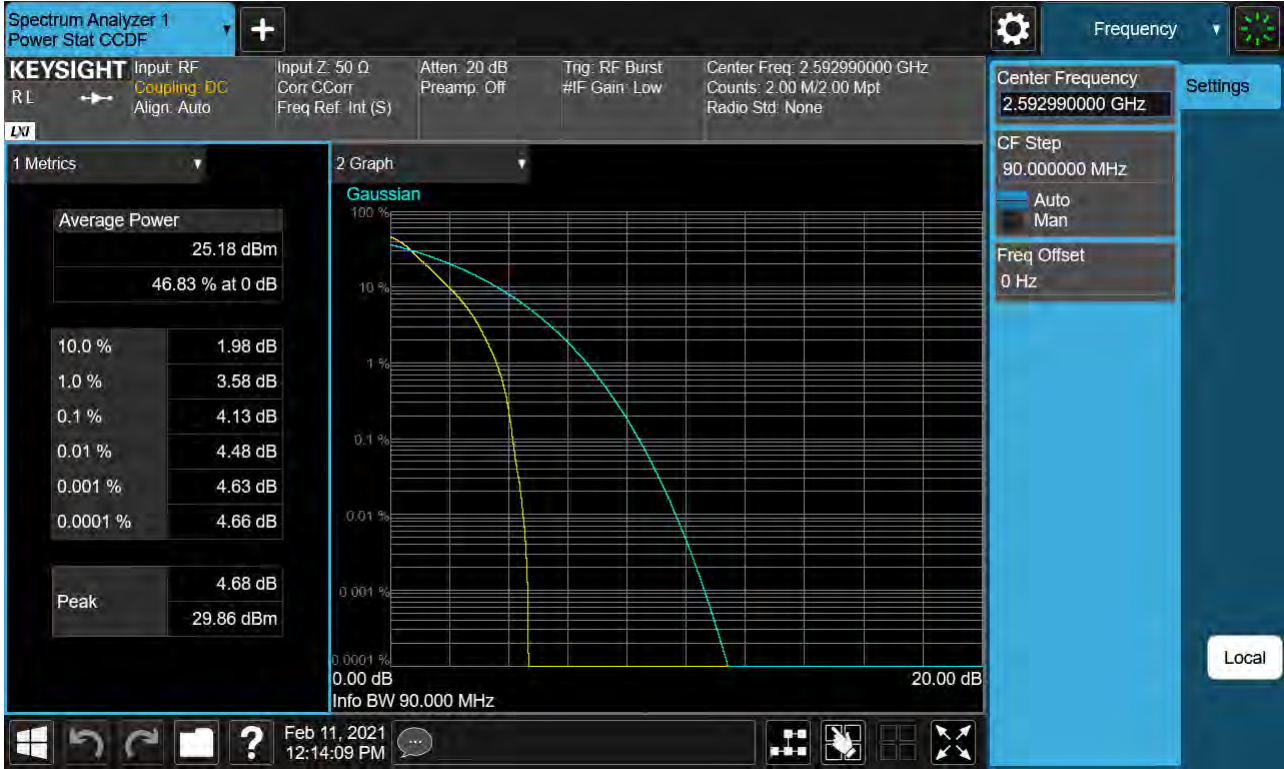

Sub6 n41. PAR Plot (90M BW_Ch.518598_QPSK)




Sub6 n41. PAR Plot (90M BW_Ch.518598_16QAM)




Sub6 n41. PAR Plot (90M BW_Ch.518598_64QAM)




Sub6 n41. PAR Plot (90M BW_Ch.518598_256QAM)

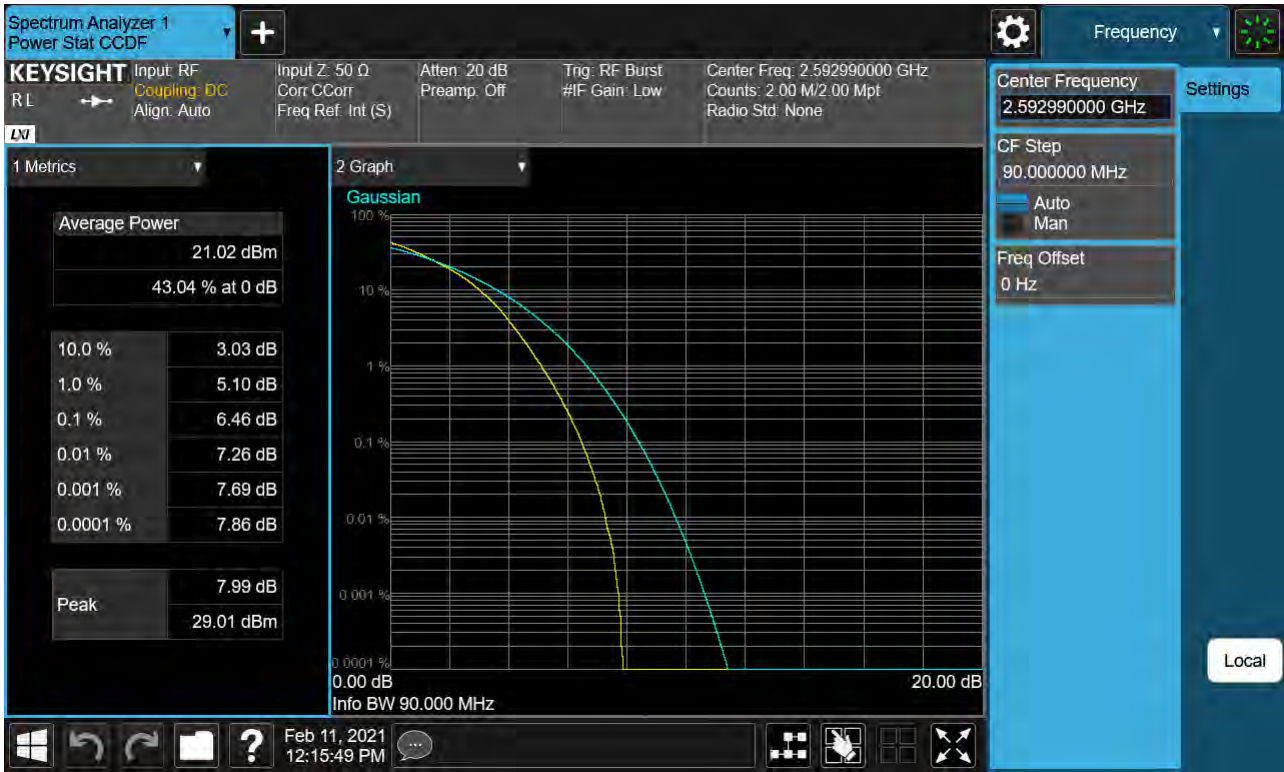

Sub6 n41. PAR Plot (100M BW_Ch.518598_BPSK)

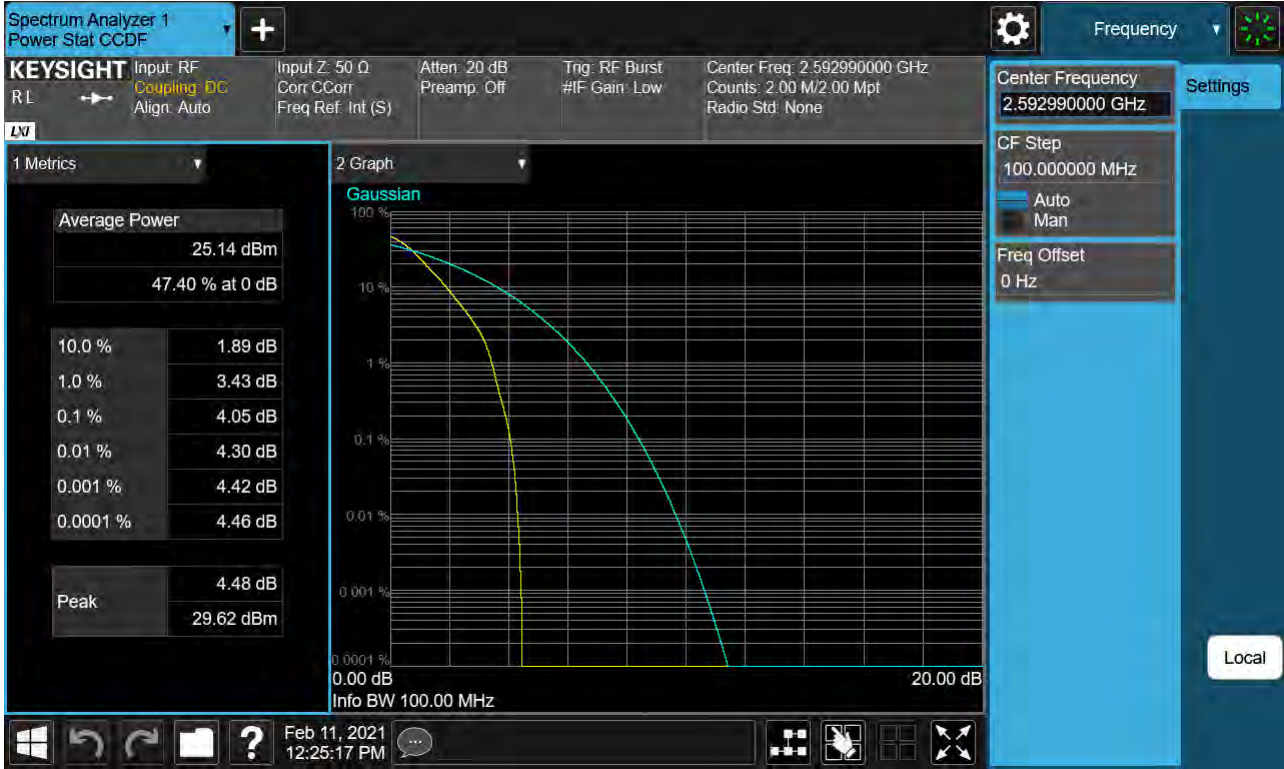

Sub6 n41. PAR Plot (100M BW_Ch.518598_QPSK)

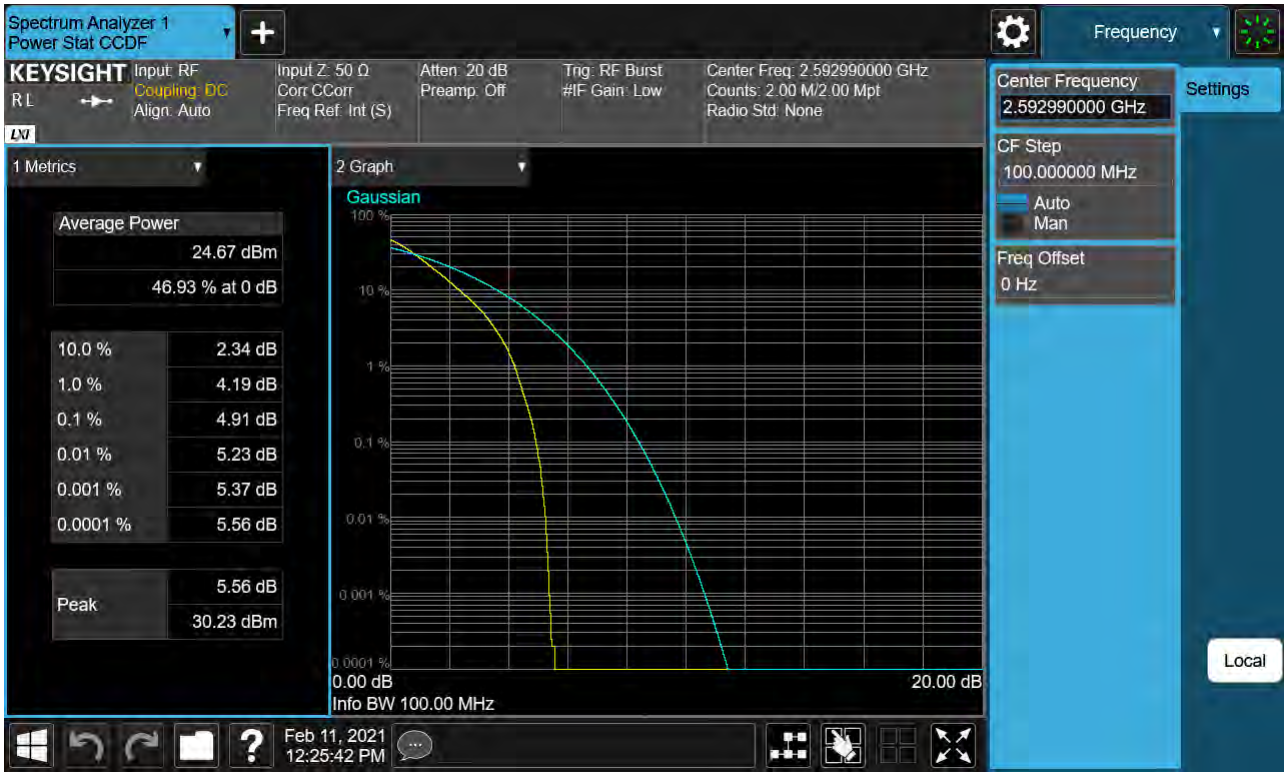

Sub6 n41. PAR Plot (100M BW_Ch.518598_16QAM)




Sub6 n41. PAR Plot (100M BW_Ch.518598_64QAM)



Sub6 n41. PAR Plot (100M BW_Ch.518598_256QAM)




Sub6 n41. Low Channel Edge Plot (20 MHz Ch.501204 BPSK RB 1)-1

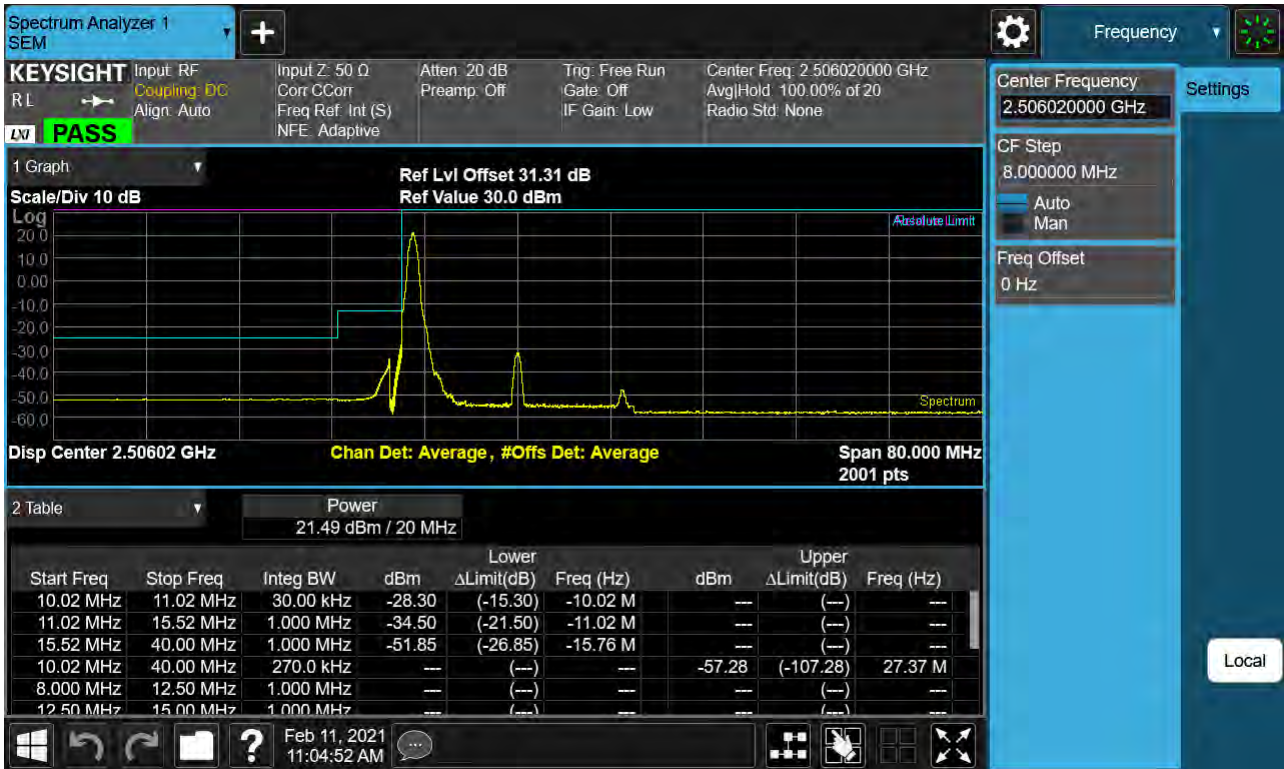

Sub6 n41. Low Channel Edge Plot (20 MHz Ch.501204 BPSK)-1



Sub6 n41. Low Channel Edge Plot (20 MHz Ch.501204 BPSK_RB1)-2

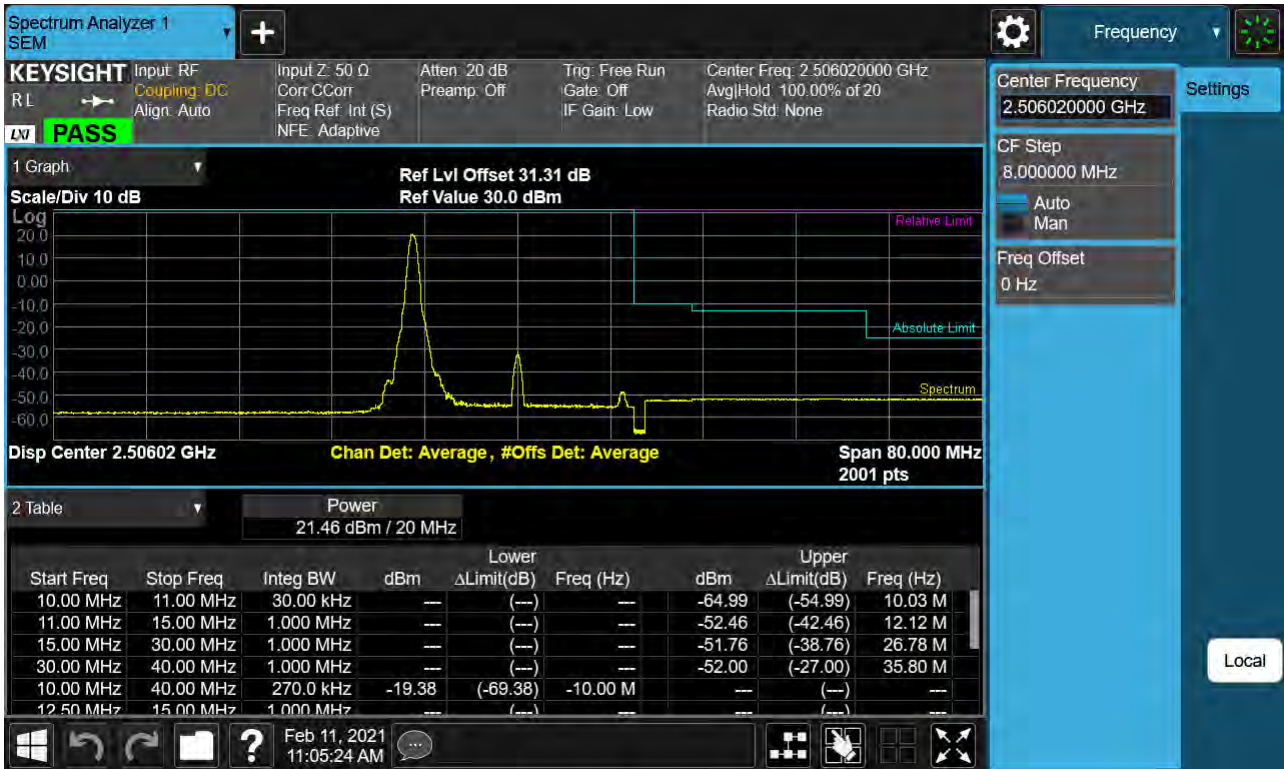


Sub6 n41. Low Channel Edge Plot (20 MHz Ch.501204 BPSK)-2



Sub6 n41. Mid Channel Edge Plot (20 MHz Ch.518598 BPSK)




Sub6 n41. High Channel Edge Plot (20 MHz Ch.535998 BPSK RB 1)

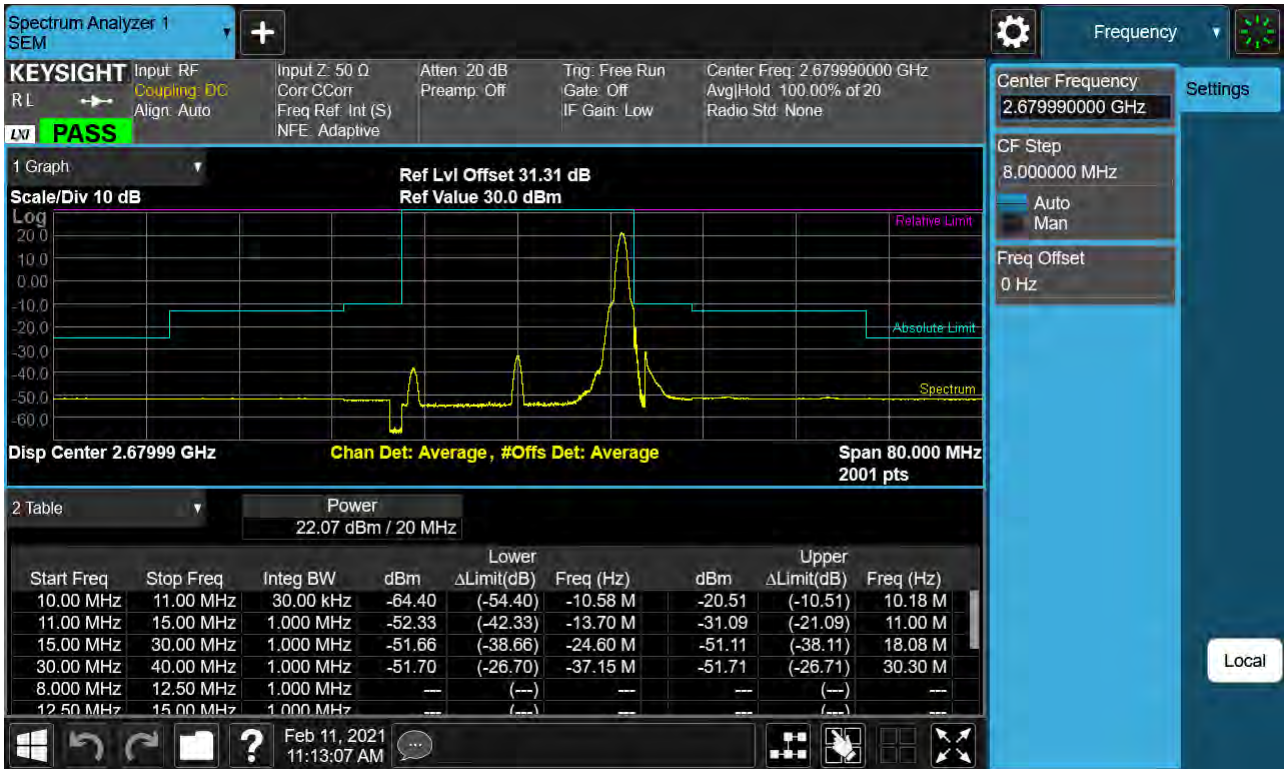

Sub6 n41. High Channel Edge Plot (20 MHz Ch.535998 BPSK)




Sub6 n41. Low Channel Edge Plot (30 MHz Ch.502200 BPSK RB 1)-1

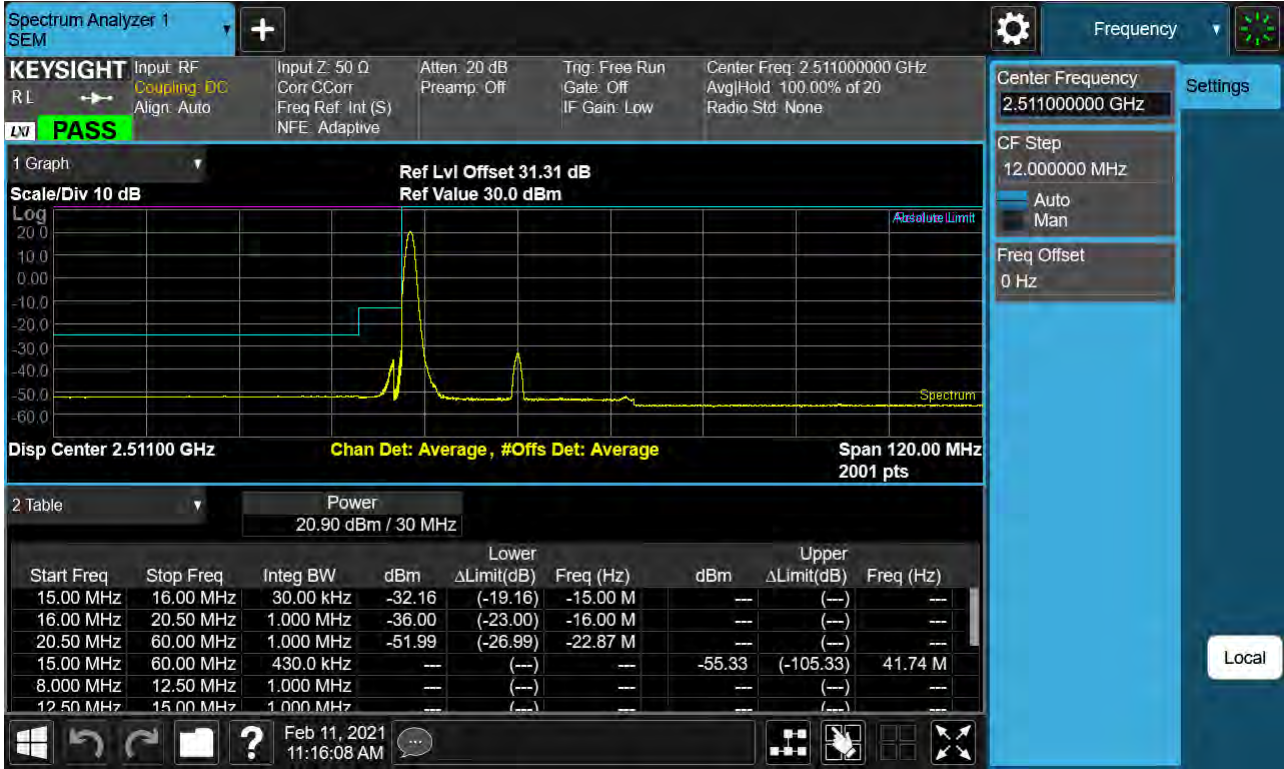

Sub6 n41. Low Channel Edge Plot (30 MHz Ch.502200 BPSK)-1



Sub6 n41. Low Channel Edge Plot (30 MHz Ch.502200 BPSK_RB1)-2

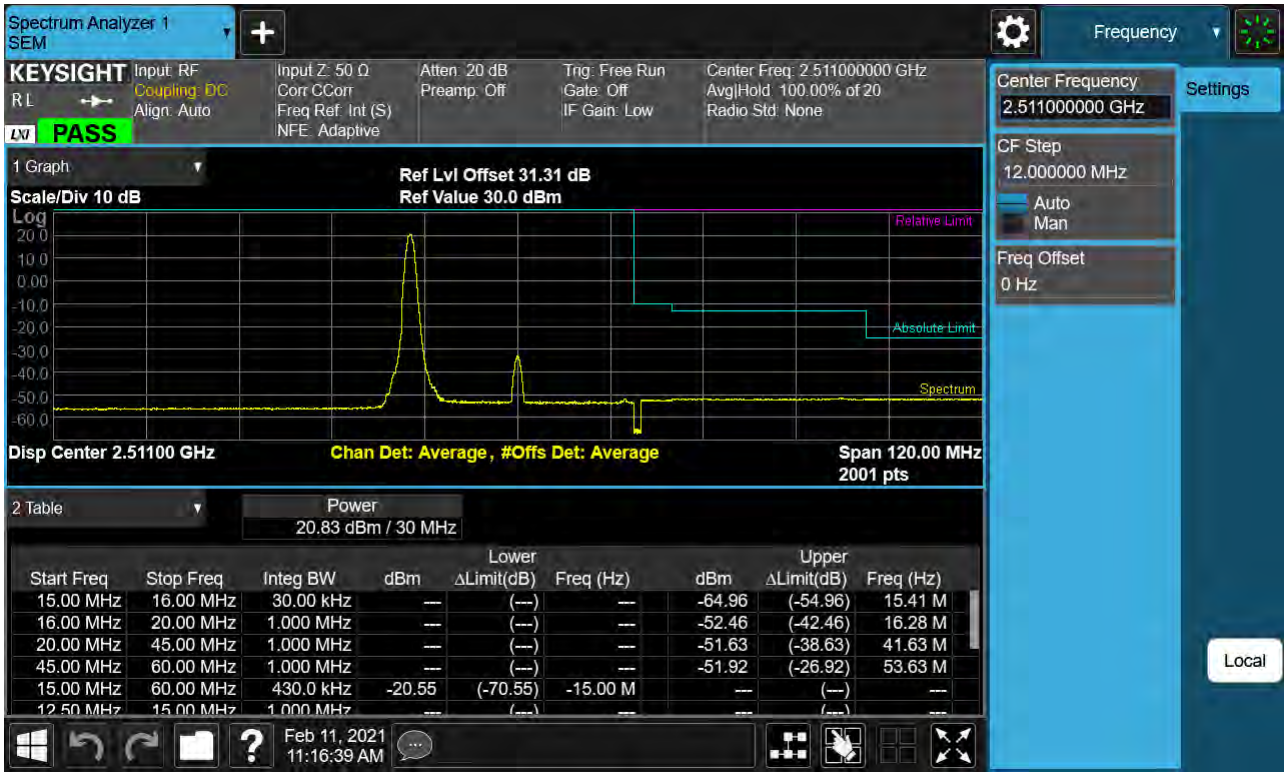

Sub6 n41. Low Channel Edge Plot (30 MHz Ch.502200 BPSK)-2



Sub6 n41. Mid Channel Edge Plot (30 MHz Ch.518598 BPSK)



Sub6 n41. High Channel Edge Plot (30 MHz Ch.534996 BPSK RB 1)



Sub6 n41. High Channel Edge Plot (30 MHz Ch.534996 BPSK)

