



CERTIFICATION TEST REPORT

Report Number. : 4790160839-E5V1

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-A536B/DS

FCC ID : A3LSMA536B

EUT Description : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac
and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

2021-12-29

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2021-12-29	Initial issue	Hyunsik Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
1.1. INTRODUCTION OF TEST DATA REUSE	6
1.2. DIFFERENCE	6
1.3. SPOT CHECK VERIFICATION DATA	6
1.4. REFERENCE DETAIL	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. DECISION RULES AND MEASUREMENT UNCERTAINTY	9
4.1. METROLOGICAL TRACEABILITY	9
4.2. SAMPLE CALCULATION	9
4.3. MEASUREMENT UNCERTAINTY	9
4.4. DECISION RULES	9
5. EQUIPMENT UNDER TEST	10
5.1. EUT DESCRIPTION	10
5.2. MAXIMUM OUTPUT POWER	10
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.4. WORST-CASE CONFIGURATION AND MODE	11
5.5. DESCRIPTION OF TEST SETUP	11
6. TEST AND MEASUREMENT EQUIPMENT	13
7. TEST RESULTS SUMMARY	14
8. MEASUREMENT METHODS	15
9. ANTENNA PORT TEST RESULTS	16
9.1. ON TIME AND DUTY CYCLE	16
9.2. 20 dB BANDWIDTH	17
9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	17
9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	17
9.3. HOPPING FREQUENCY SEPARATION	19
9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	20
9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	20
9.4. NUMBER OF HOPPING CHANNELS	21
9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	22
9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	23
9.5. AVERAGE TIME OF OCCUPANCY	24
9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	25

9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	27
9.6. OUTPUT POWER.....	29
9.6.1. BASIC DATA RATE GFSK MODULATION.....	29
9.6.2. ENHANCED DATA RATE PI/4-DPSK MODULATION	29
9.6.3. ENHANCED DATA RATE 8PSK MODULATION	29
9.6.4. OUTPUT POWER PLOTS.....	30
9.7. AVERAGE POWER	33
9.7.1. BASIC DATA RATE GFSK MODULATION.....	33
9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION	33
9.7.3. ENHANCED DATA RATE 8PSK MODULATION	33
9.8. CONDUCTED SPURIOUS EMISSIONS.....	34
9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	35
9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....	37
10. RADIATED TEST RESULTS	39
10.1. TRANSMITTER ABOVE 1 GHz.....	41
10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	41
10.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	48
10.2. WORST CASE BELOW 1 GHZ.....	55
11. AC POWER LINE CONDUCTED EMISSIONS	56
11.1.1. AC Power Line.....	57

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, and NFC

MODEL: SM-A536B/DS

SERIAL NUMBER: R3CRA0RNS7M, R3CRA0RNQHP (CONDUCTED, Original);
R3CRA0RNRAJ, R3CRA0RNTME (RADIATED, Original);
R3CRA0RS3CF (RADIATED, Spot-check);

DATE TESTED: 2021-11-19 ~ 2021-12-29(Original);
2021-12-17 ~ 2021-12-28(Spot-Check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Seokhwan Hong
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Dexter(Hyunsik) Yun
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMA536E DSS BT(FCC CFR 47 Part 15C). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMA536B shares the same enclosure and circuit board as FCC ID: A3LSMA536E. The BT antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMA536E remains representative of FCC ID: A3LSMA536B. The test data of FCC ID: A3LSMA536E being submitted for this application to cover BT features.

1.3. SPOT CHECK VERIFICATION DATA

(Worst case of the radiated band-edge and radiated spurious emissions)

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-A536E/DS Results	SM-A536B/DS Results		
					FCC ID : A3LSMA536E	FCC ID : A3LSMA536B		
DSS BT (2.4GHz)	Band Edge	GFSK 2480 MHz	2480 MHz	54 dBuV/m	44.37 dBuV/m	39.21 dBuV/m	-5.16 dB	
	RSE	GFSK 2402 MHz	9608 MHz	74 dBuV/m	47.27 dBuV/m	45.92 dBuV/m	-1.35 dB	

Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data in the individual test reports:

Equipment Class	Reference FCC ID (Parent)	Application Type	Reference Test report number	Exhibit Type	Variant Test Report Number	Data Re-used
PCE	A3LSMA536E	Original Grant	4790160849-E2	Test Report	4790160839-E2	All
DTS	A3LSMA536E	Original Grant	4790160849-E3 (802.11b/g/n)	Test Report	4790160839-E3 (802.11b/g/n)	All
			4790160849-E4 Bluetooth LE	Test Report	4790160839-E4 Bluetooth LE	All
DSS	A3LSMA536E	Original Grant	4790160849-E5 (Bluetooth)	Test Report	4790160839-E5 (Bluetooth)	All
NII	A3LSMA536E	Original Grant	4790160849-E6 (802.11a/n/ac)	Test Report	4790160839-E6 (802.11a/n/ac)	All
DXX	A3LSMA536E	Original Grant	4790160849-E7 (NFC)	Test Report	4790160839-E7 (NFC)	All

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2013.
5. KDB 484596 D01 Referencing Test Data v01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input checked="" type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. DECISION RULES AND MEASUREMENT UNCERTAINTY

4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.02 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.05 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.78 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.58 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULES

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE/5G NR Tablet + BT/BLE, DTS/UNII a/b/g/n/ac and NFC. This test report addresses the BT(DSS) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	Basic GFSK	Peak	16.762	47.446
		Average	16.424	43.893
	Enhanced Pi/4-DPSK	Peak	14.644	29.134
		Average	11.993	15.823
	Enhanced 8PSK	Peak	15.507	35.539
		Average	12.000	15.849

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.
 Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antennas, with ANT maximum gain of -5.00 dBi

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37N3MAH988DK3	N/A
Data Cable	SAMSUNG	EP-DN980	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. Test software enable BT communications.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

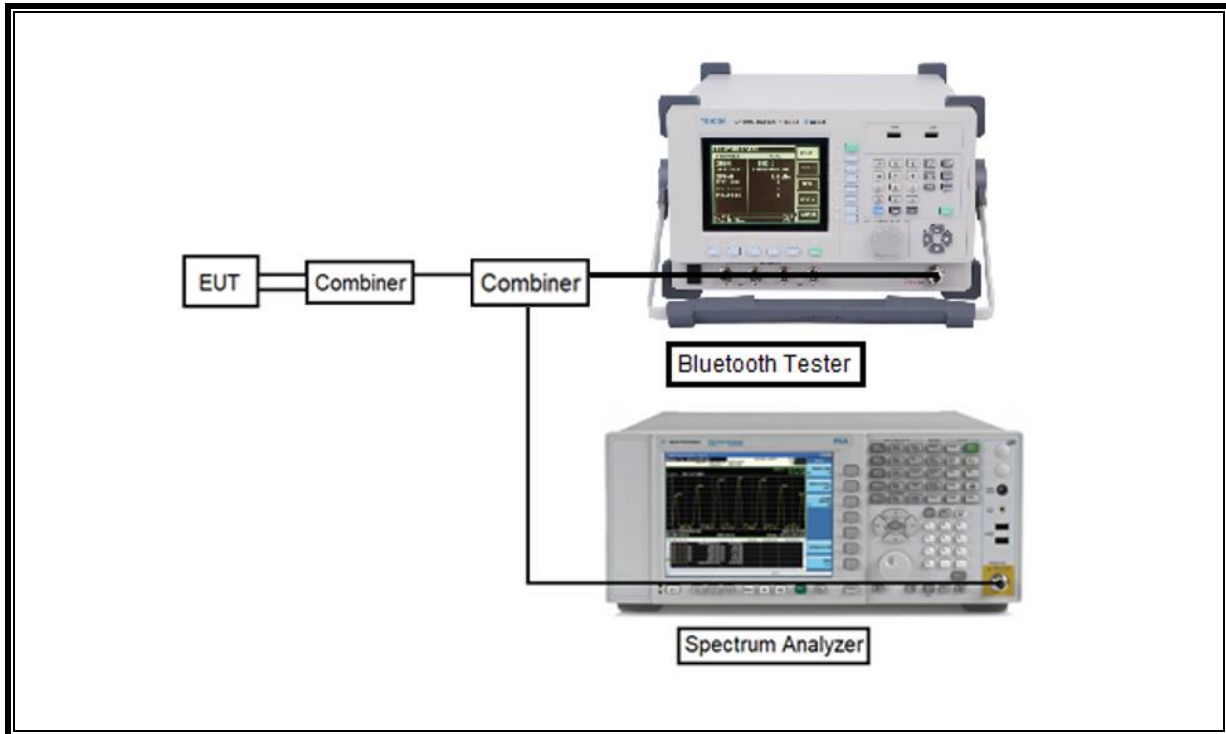

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

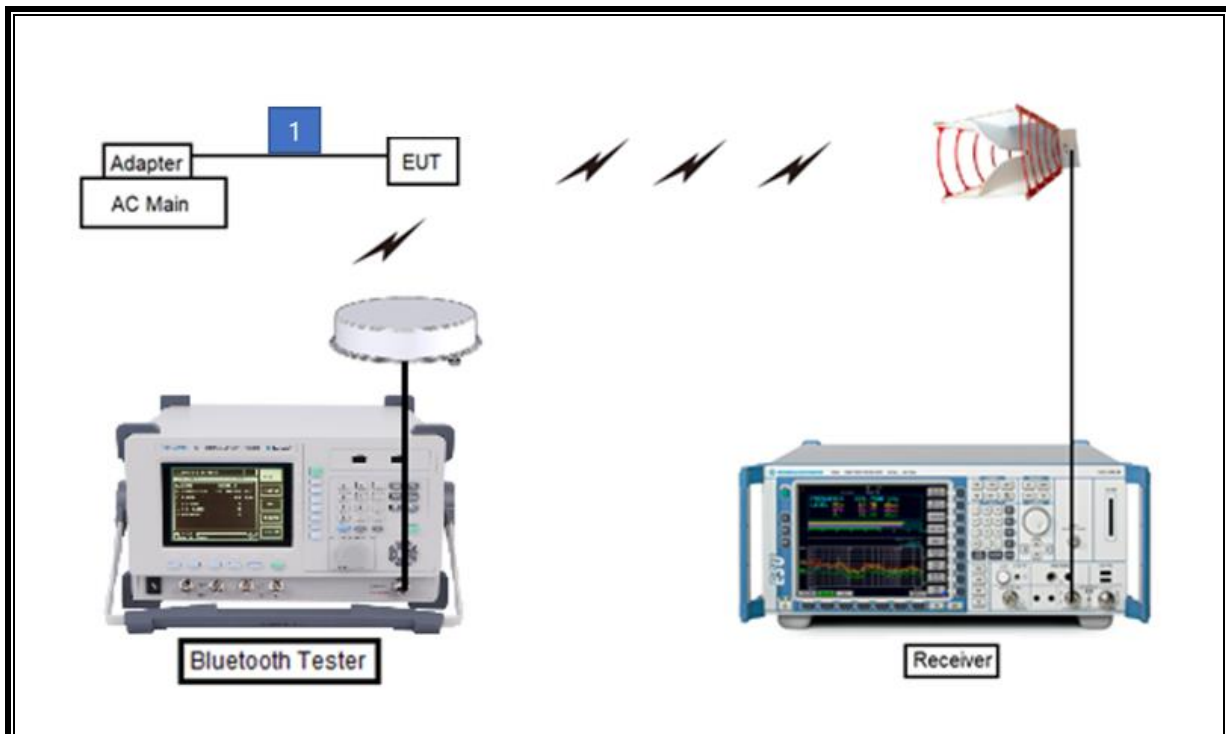

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2022-08-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2022-08-13
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2022-08-13
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2023-10-06
Antenna, Horn, 18 GHz	ETS	3115	00167211	2022-07-27
Antenna, Horn, 18 GHz	ETS	3115	00161451	2022-08-15
Antenna, Horn, 18 GHz	ETS	3117	00168724	2022-07-27
Antenna, Horn, 18 GHz	ETS	3117	00168717	2022-08-15
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2022-08-04
Preamplifier	ETS	3116C-PA	00168841	2022-08-04
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	80108-0004	N/A
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	110367-0003	N/A
Preamplifier, 1000 MHz	Sonoma	310N	341282	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2022-08-02
Preamplifier, 1000 MHz	Sonoma	310N	370599	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2022-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029168	2022-08-02
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2022-08-04
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	2022-08-04
Average Power Sensor	Agilent / HP	U2000	MY54270007	2022-08-04
Average Power Sensor	Agilent / HP	U2000	MY54260010	2022-08-04
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	2022-08-04
Power Splitter	MINI-CIRCUITS	WA1534	UL001	2022-01-27
Power Splitter	MINI-CIRCUITS	WA1534	UL002	2022-01-27
Attenuator	PASTERNAK	PE7087-10	A009	2022-08-03
Attenuator	PASTERNAK	PE7087-10	A001	2022-08-03
Attenuator	PASTERNAK	PE7087-10	A008	2022-08-03
Attenuator	PASTERNAK	PE7004-10	2	2022-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2022-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	2022-08-02
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	019	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	2022-08-02
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	2022-08-02
High Pass Filter 6GHz	Micro-Tronics	HPS17542	020	2022-08-02
LISN	R&S	ENV-216	101837	2022-08-05
Termination	WEINSCHEL	M1406A	T09	2022-08-03
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. TEST RESULTS SUMMARY

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1051, 15.247(d)	Band Edge / Conducted Spurious Emission	-20 dBc	Conducted	PASS
15.247 (b)(1)	TX conducted output power	< 21 dBm		PASS
15.247 (a)(1)	Hopping frequency separation	> two-thirds of the 20 dB bandwidth		PASS
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		PASS
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 8 dBm		PASS
15.207(a)	AC Power Line conducted emissions	Section 11	Power Line conducted	PASS
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	PASS

8. MEASUREMENT METHODS

20dB BW : ANSI C63.10, Section 6.9.2

99% BW : ANSI C63.10, Section 6.9.3

HOPPING FREQUENCY SEPARATION : ANSI C63.10, Section 7.8.2

NUMBER OF HOPPING CHANNELS : ANSI C63.10, Section 7.8.3

AVERAGE TIME OF OCCUPANCY : ANSI C63.10, Section 7.8.4

OUTPUT POWER : ANSI C63.10, Section 7.8.5.

Out-of-band EMISSIONS (Conducted) : ANSI C63.10, Section 7.8.6, 7.8.8

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: ANSI C63.10, Section 6.

Out-of-band EMISSIONS IN RESTRICTED BANDS : ANSI C63.10, Section 6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	On time [msec]	Period [msec]	Duty Cycle [%]	Duty Cycle Correction Factor[dB]	1/T Minimum VBW [kHz]
2 400 ~ 2 483.5 MHz Band					
Bluetooth	2.878	3.751	76.73	1.15	0.35

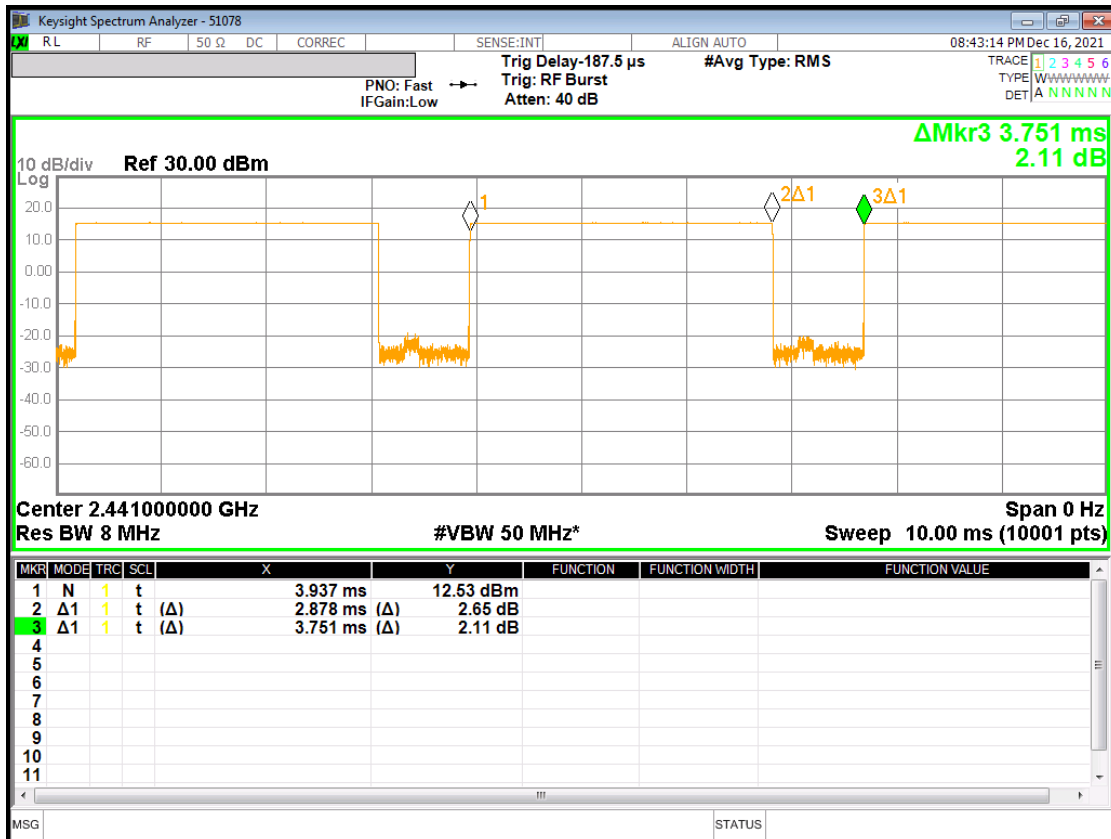

9.2. 20 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.


RESULTS

9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
0	2 402	959.5
39	2 441	955.7
78	2 480	957.0
Worst		959.5

9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
0	2 402	1306.0
39	2 441	1309.0
78	2 480	1306.0
Worst		1309.0

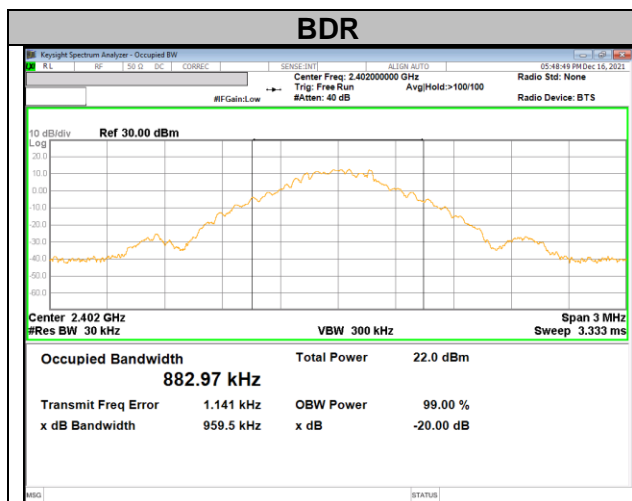


20 dB bandwidth / 0 CHANNEL

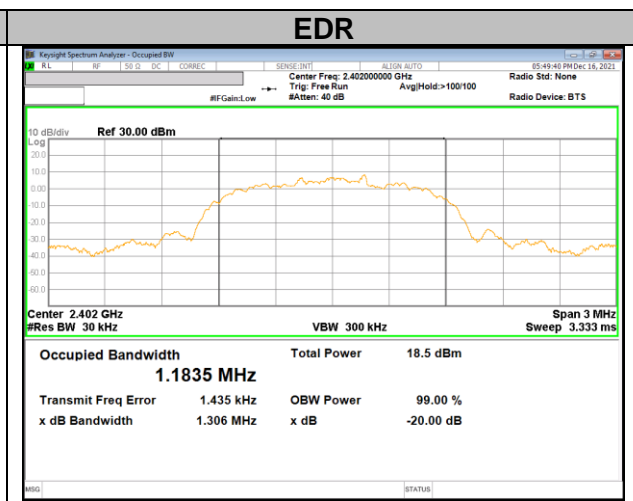


20 dB bandwidth / 0 CHANNEL

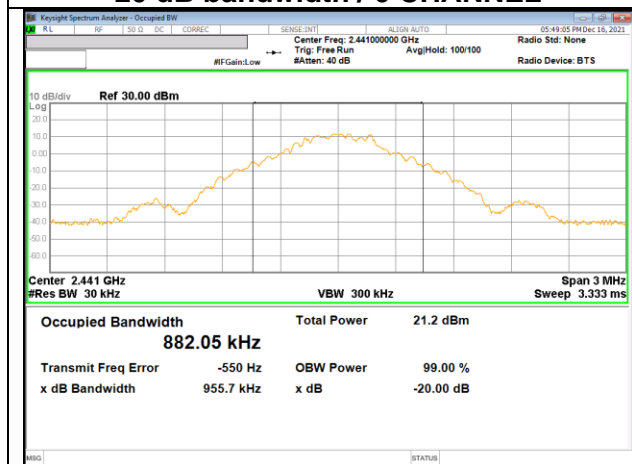


20 dB bandwidth / 39 CHANNEL

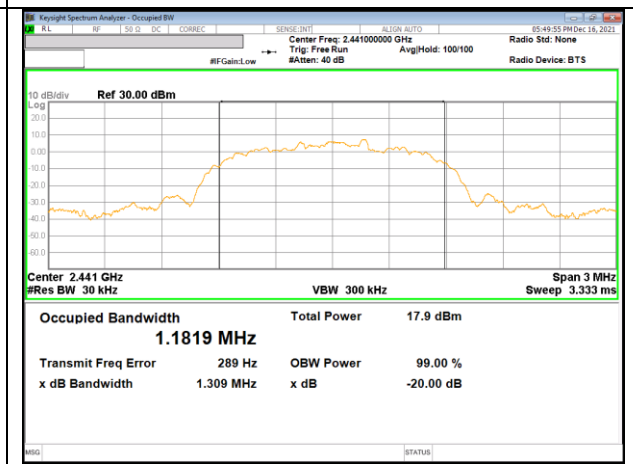

20 dB bandwidth / 39 CHANNEL

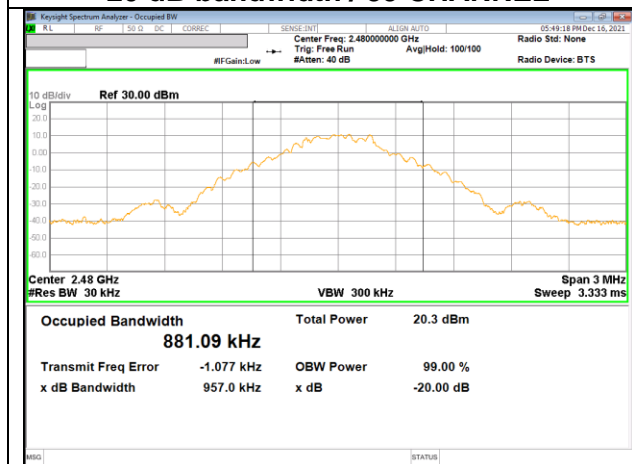

20 dB bandwidth / 78 CHANNEL

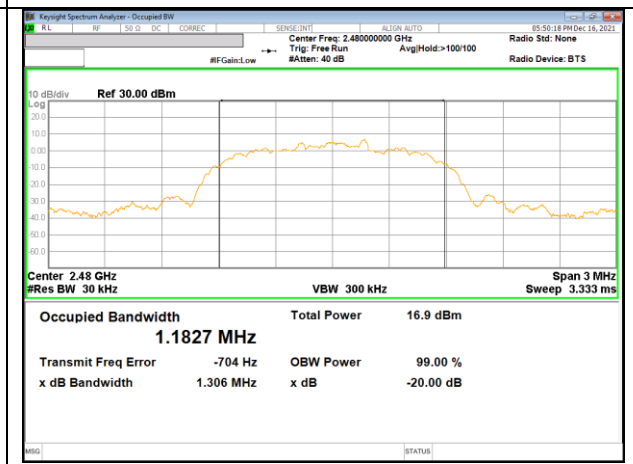

20 dB bandwidth / 78 CHANNEL

9.3. HOPPING FREQUENCY SEPARATION

LIMITS

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to $VBW \geq RBW$. The sweep time is coupled.

RESULTS

9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

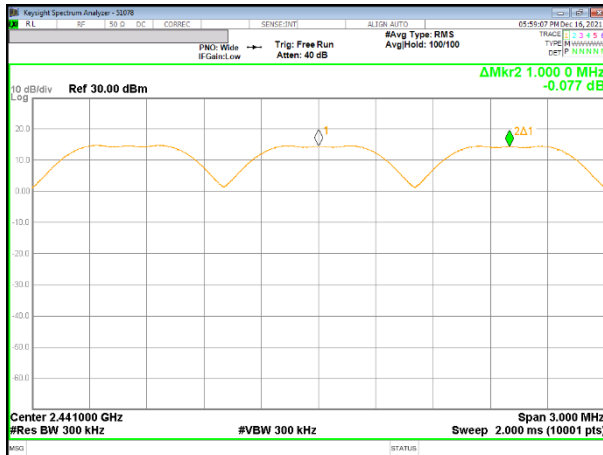

9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

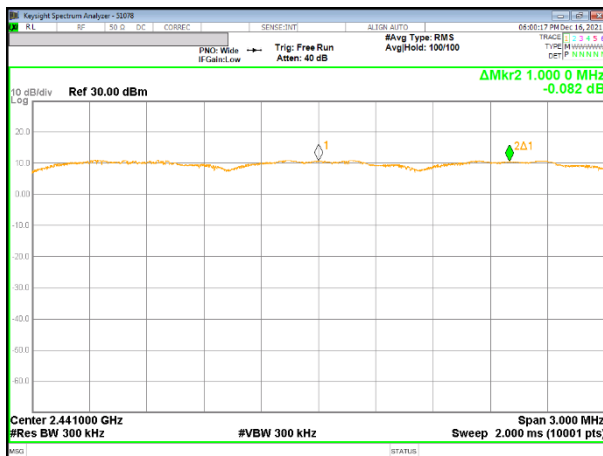

9.4. NUMBER OF HOPPING CHANNELS

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS

Normal Mode: All Channels Observed


9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

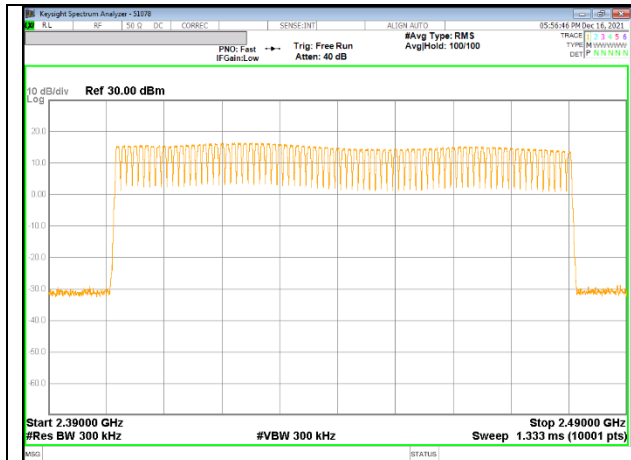


100 MHz Span

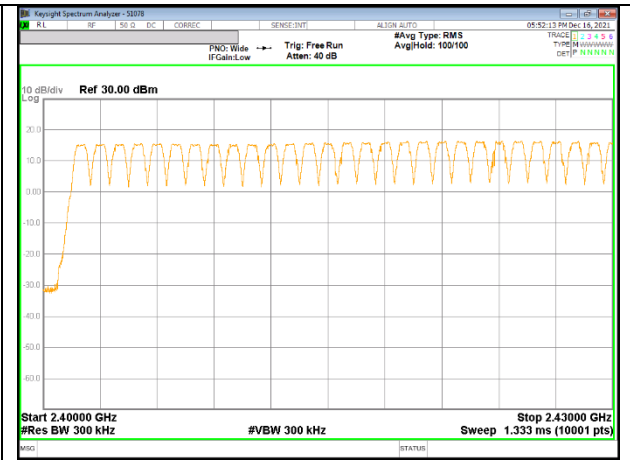

30MHz SPAN, SEGMENT 1 OF 3

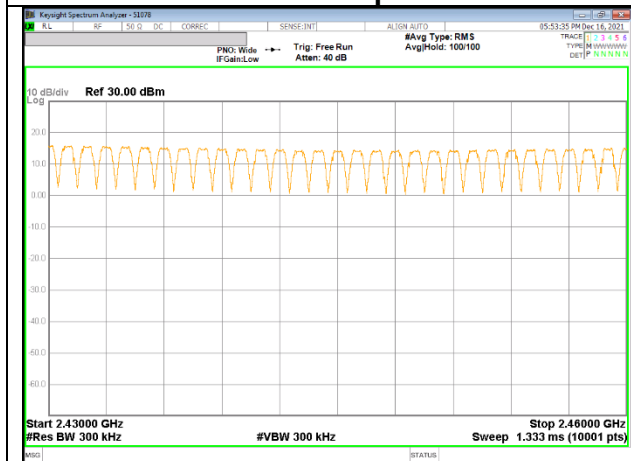


30MHz SPAN, SEGMENT 2 OF 3

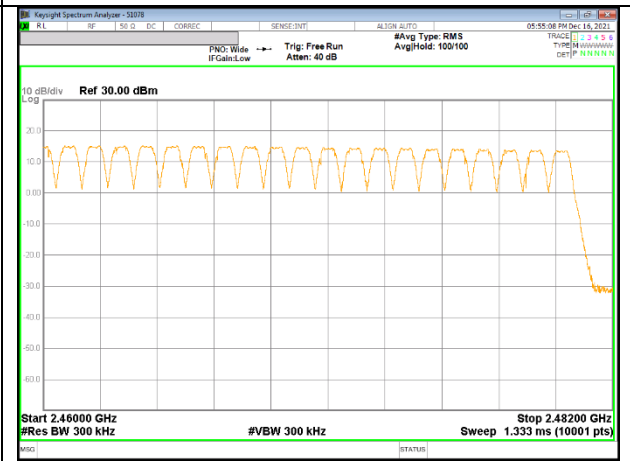


30MHz SPAN, SEGMENT 3 OF 3


9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

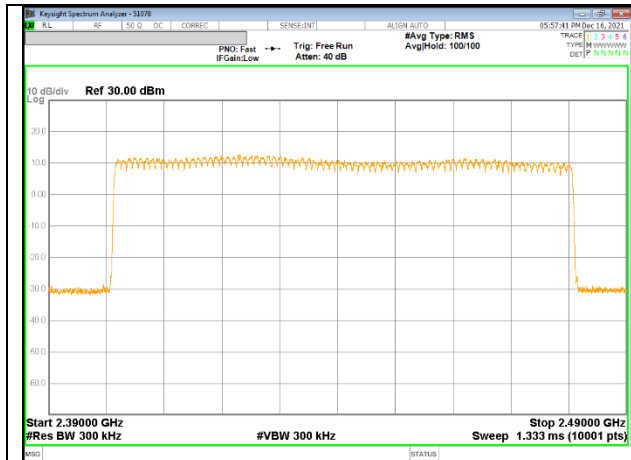


100 MHz Span

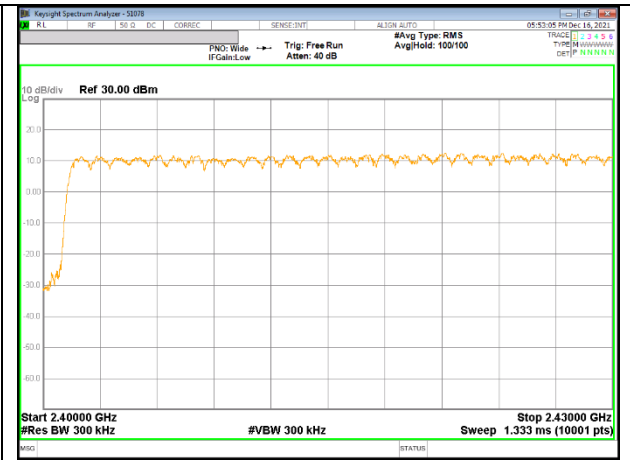

30MHz SPAN, SEGMENT 1 OF 3

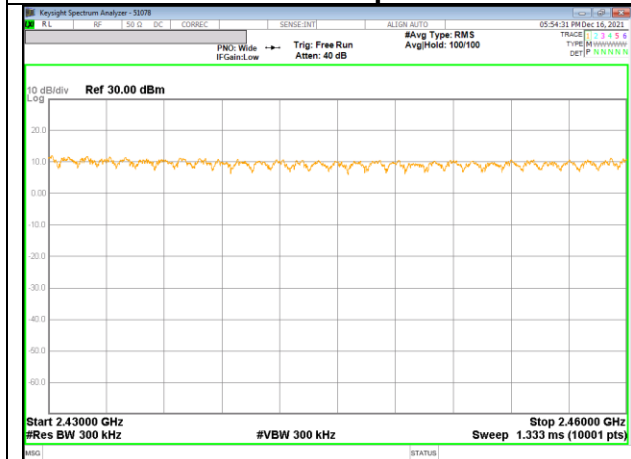

30MHz SPAN, SEGMENT 2 OF 3

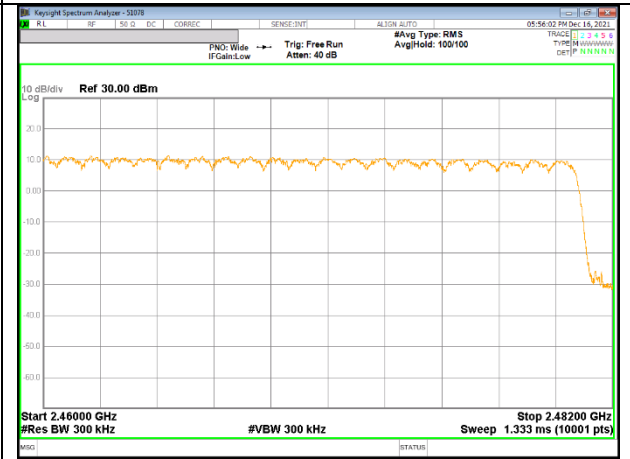

30MHz SPAN, SEGMENT 3 OF 3

9.5. AVERAGE TIME OF OCCUPANCY

LIMITS

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.


RESULTS

9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK ANT1 Normal					
DH1	0.373	32	0.119	0.4	-0.281
DH3	1.629	15	0.244	0.4	-0.156
DH5	2.877	11	0.316	0.4	-0.084
GFSK ANT1 AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK ANT1 AFH					
DH1	0.373	8	0.030	0.4	-0.370
DH3	1.629	4	0.061	0.4	-0.339
DH5	2.877	3	0.079	0.4	-0.321




PULSE WIDTH – DH1

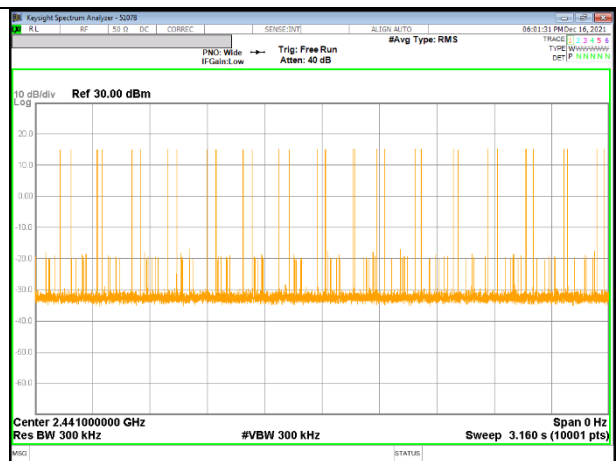


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

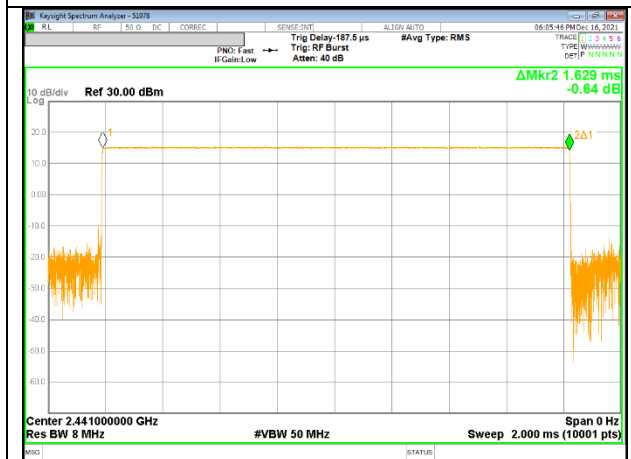

PULSE WIDTH – DH3

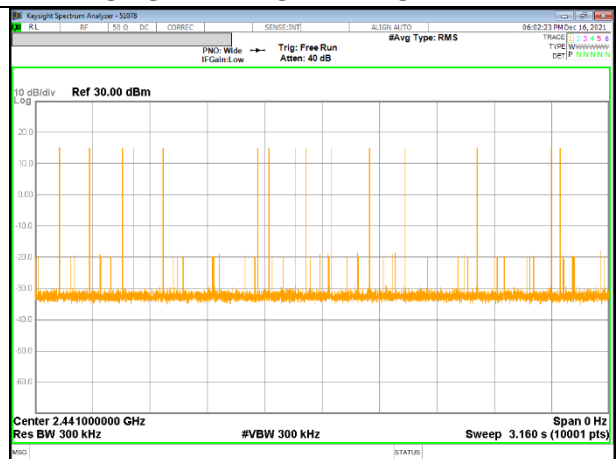

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

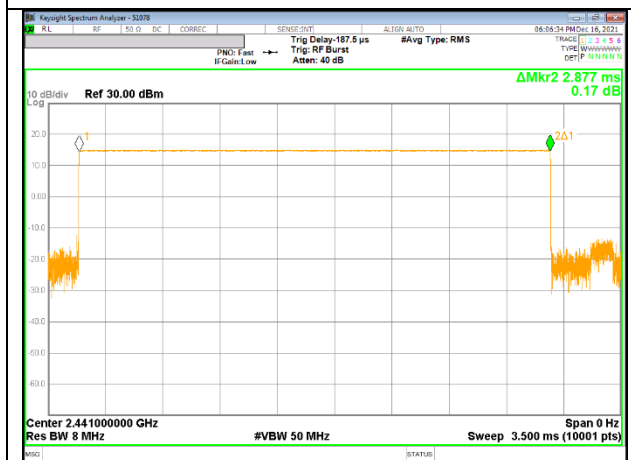

PULSE WIDTH – DH5



NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK ANT1 Normal					
DH1	0.386	32	0.124	0.4	-0.276
DH3	1.635	15	0.245	0.4	-0.155
DH5	2.885	11	0.317	0.4	-0.083
8PSK ANT1 AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK ANT1 AFH					
DH1	0.386	8	0.031	0.4	-0.369
DH3	1.635	4	0.061	0.4	-0.339
DH5	2.885	3	0.079	0.4	-0.321



PULSE WIDTH – 3-DH1




**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3-DH1**




PULSE WIDTH – 3-DH3



**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3-DH3**

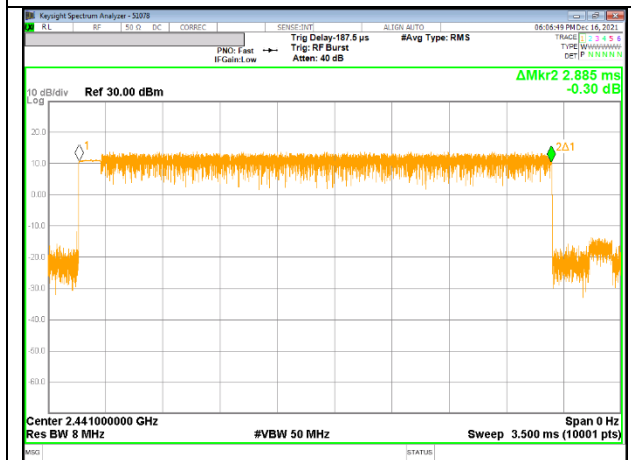

PULSE WIDTH – 3-DH5

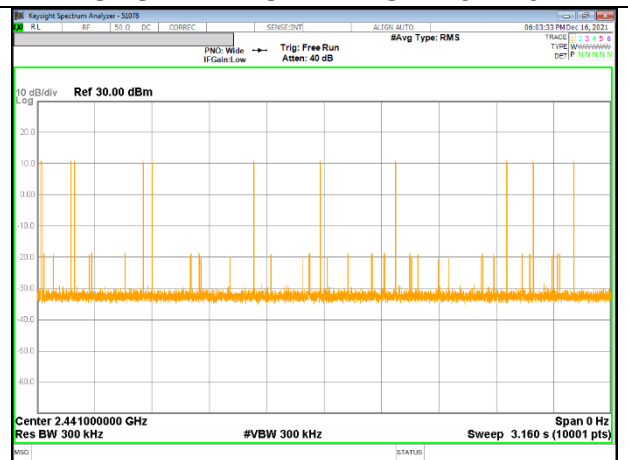

**NUMBER OF PULSES IN 3.16 SECOND
 OBSERVATION PERIOD – 3-DH5**

9.6. OUTPUT POWER

LIMITS

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

9.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
0	2 402	16.762	21.000	-4.238
39	2 441	16.456		-4.544
78	2 480	15.553		-5.447
Worst		16.762		-4.238

9.6.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION


Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
0	2 402	14.644	21.000	-6.356
39	2 441	14.216		-6.784
78	2 480	13.305		-7.695
Worst		14.644		-6.356


9.6.3. ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
0	2 402	15.507	21.000	-5.493
39	2 441	15.071		-5.929
78	2 480	14.099		-6.901
Worst		15.507		-5.493

9.6.4. OUTPUT POWER PLOTS

PEAK OUTPUT POWER

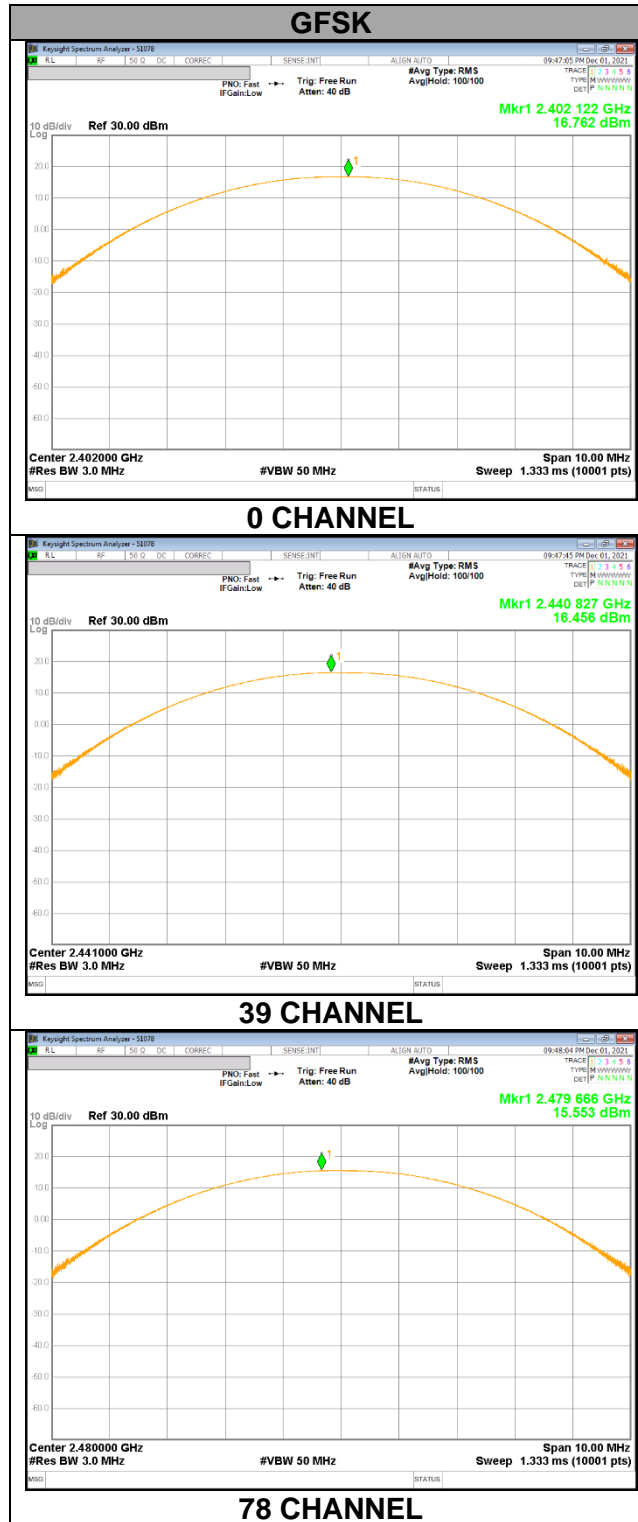

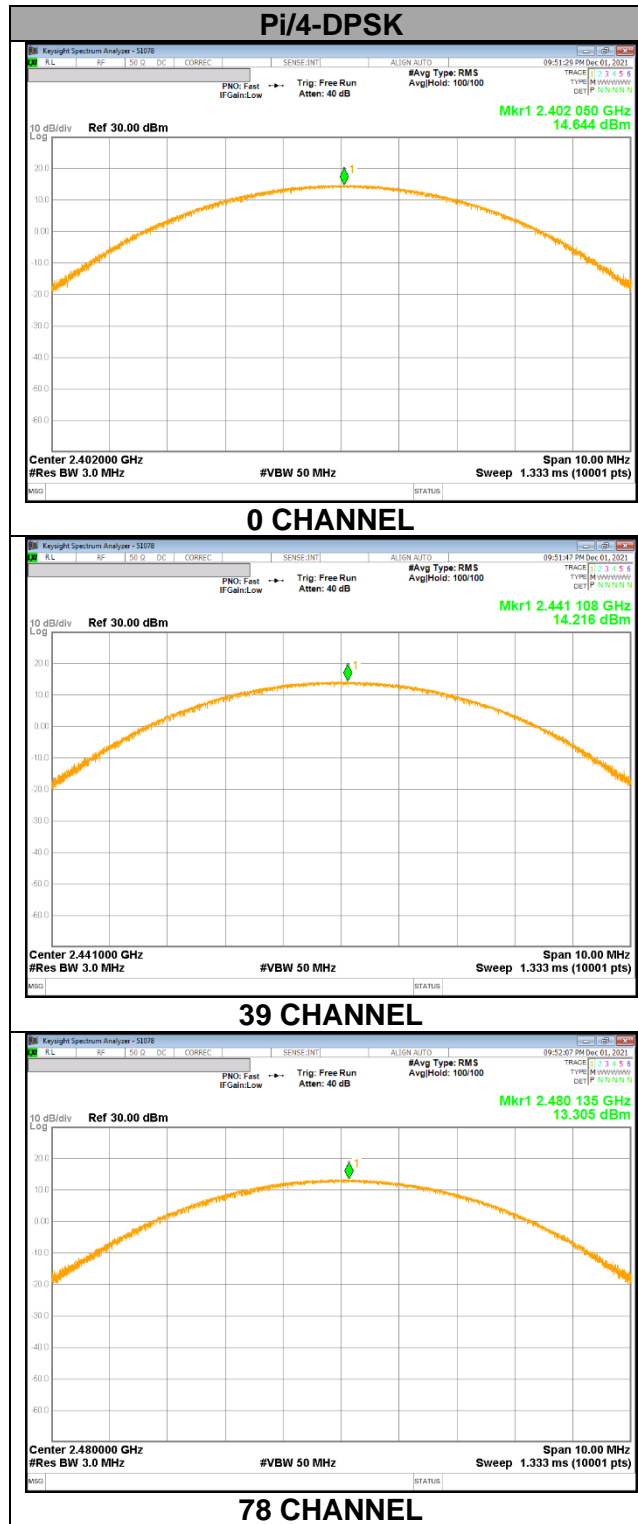

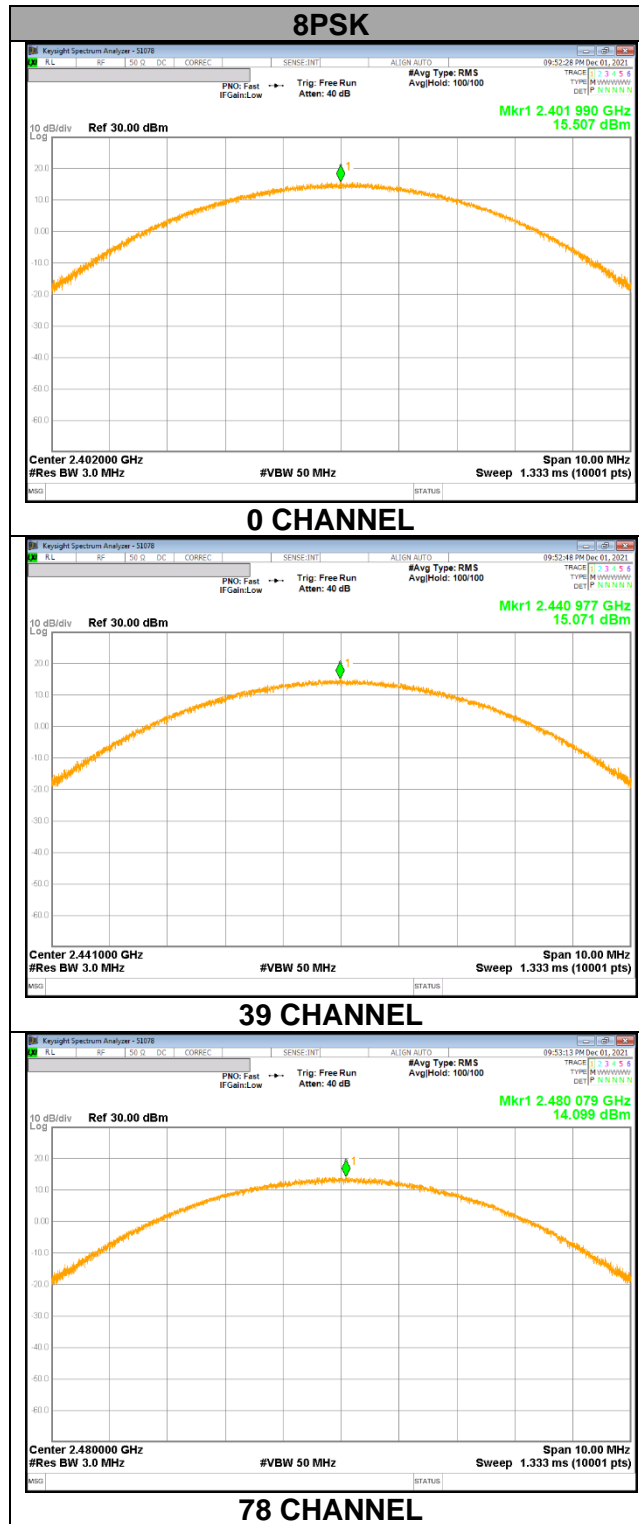

9.7. AVERAGE POWER

LIMITS

None; for reporting purposes only

TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.
 The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

9.7.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
0	2 402	16.424	43.893
39	2 441	16.149	41.200
78	2 480	15.198	33.098

9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
0	2 402	11.993	15.823
39	2 441	11.515	14.174
78	2 480	10.566	11.392

9.7.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
0	2 402	12.000	15.849
39	2 441	11.523	14.200
78	2 480	10.571	11.405

9.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band-edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS

9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION


SPURIOUS EMISSIONS, NON-HOPPING

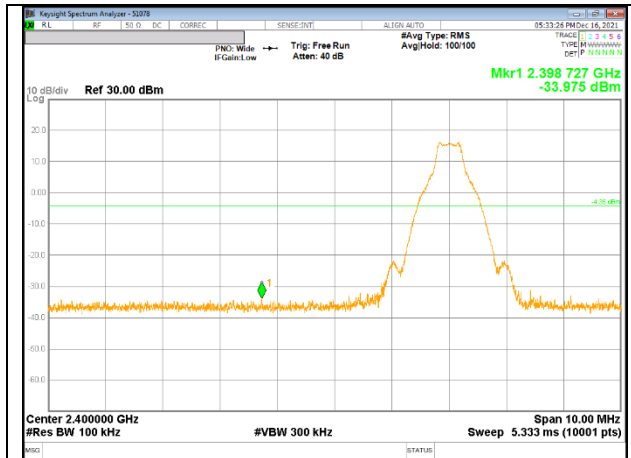


0 CHANNEL BANDEDGE

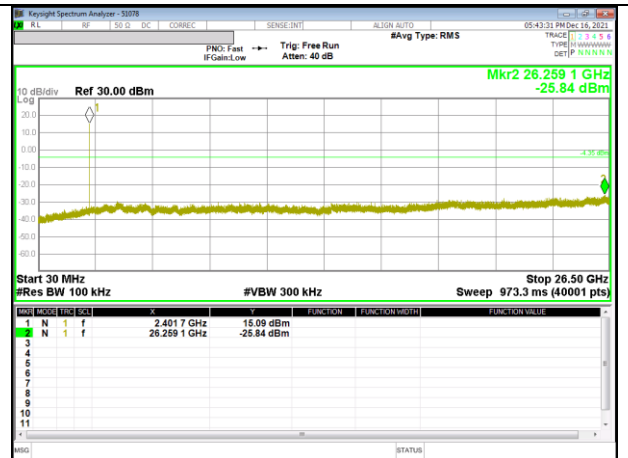


OUT-OF-BAND 0 CHANNEL

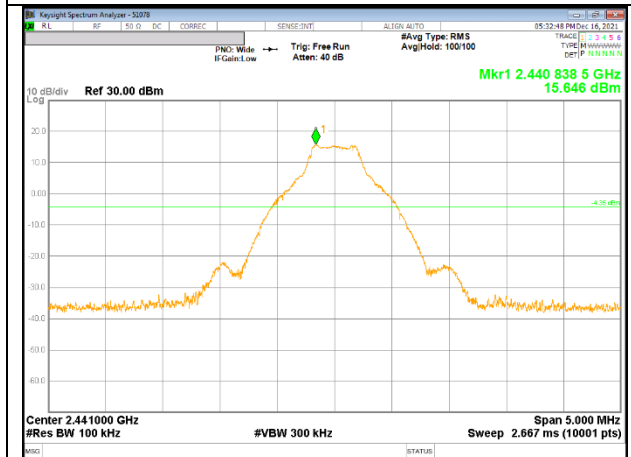


IN-BAND REFERENCE LEVEL

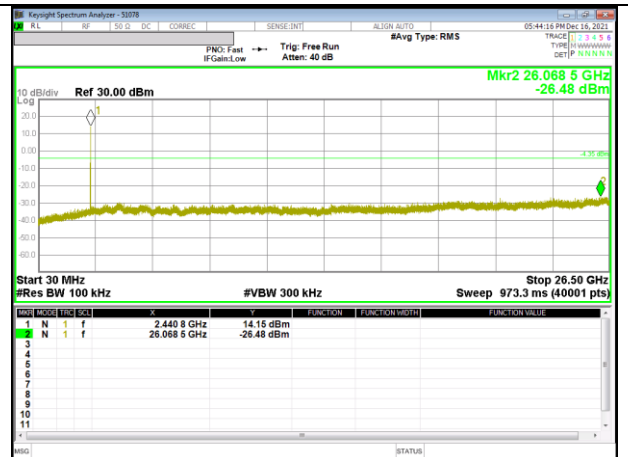

OUT-OF-BAND 39 CHANNEL

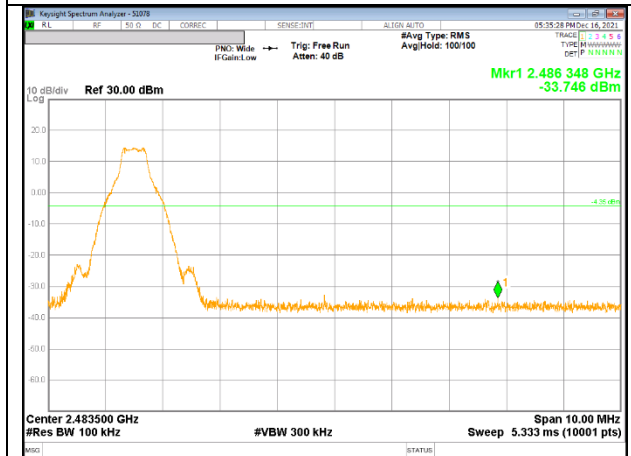


78 CHANNEL BANDEDGE

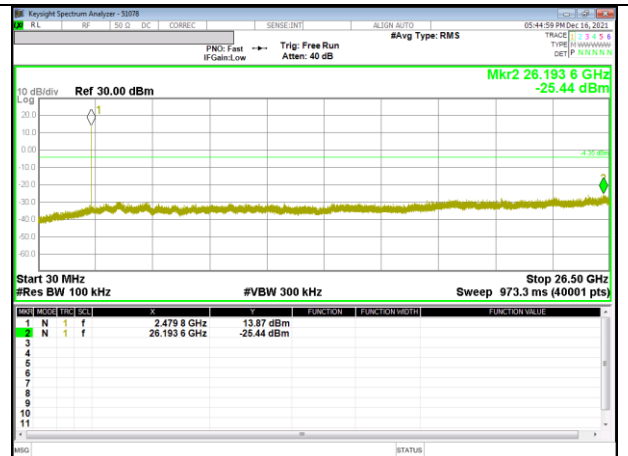


OUT-OF-BAND 78 CHANNEL

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

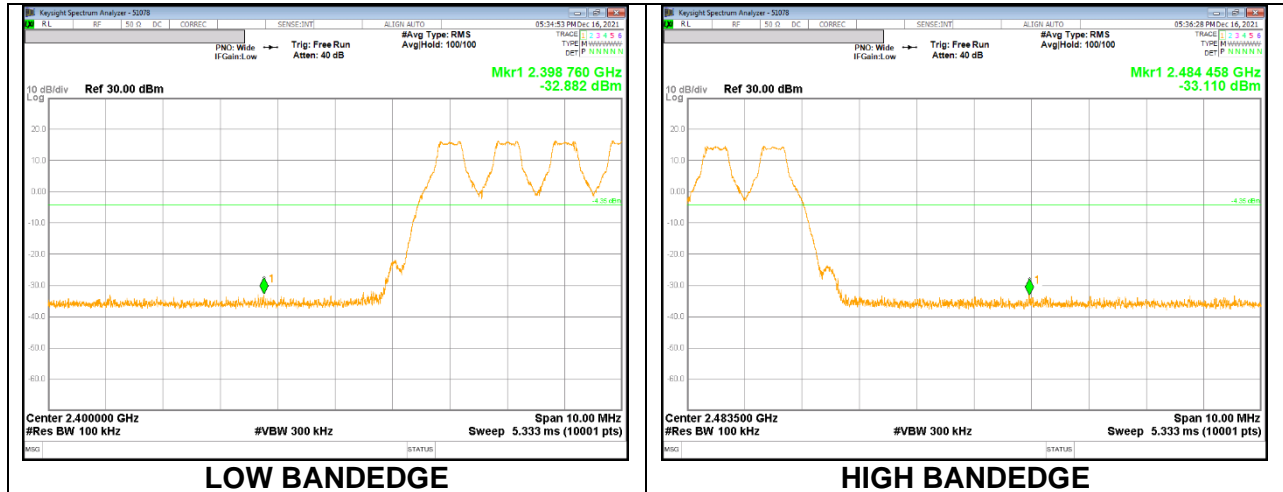


9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


SPURIOUS EMISSIONS, NON-HOPPING

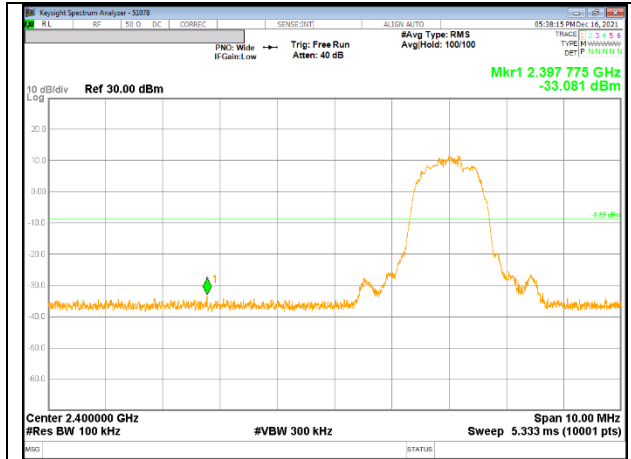


0 CHANNEL BANDEDGE

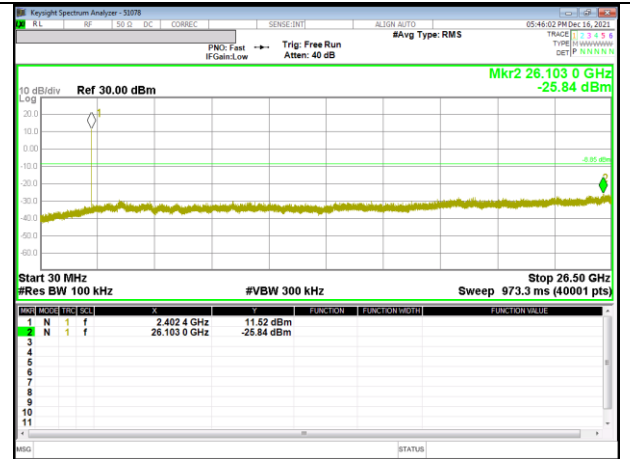


OUT-OF-BAND 0 CHANNEL

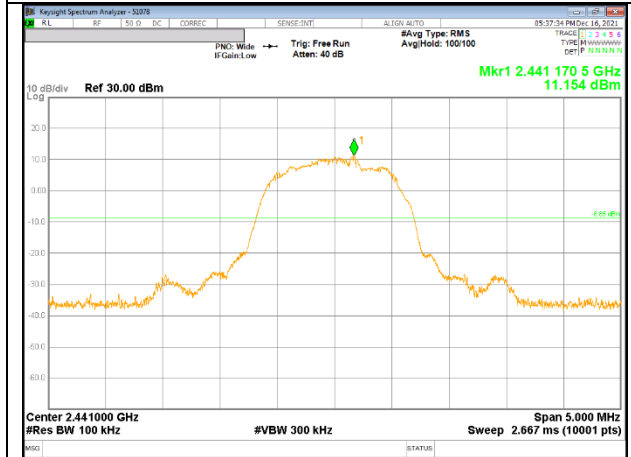


IN-BAND REFERENCE LEVEL

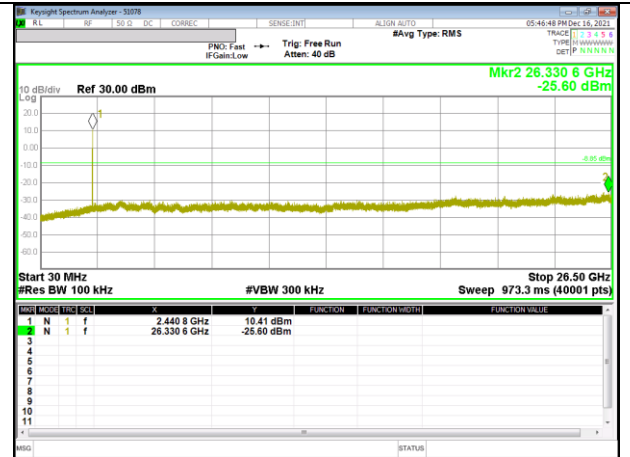

OUT-OF-BAND 39 CHANNEL

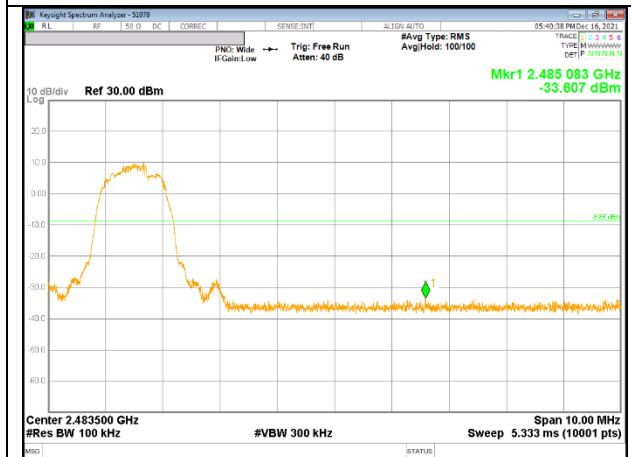


78 CHANNEL BANDEDGE

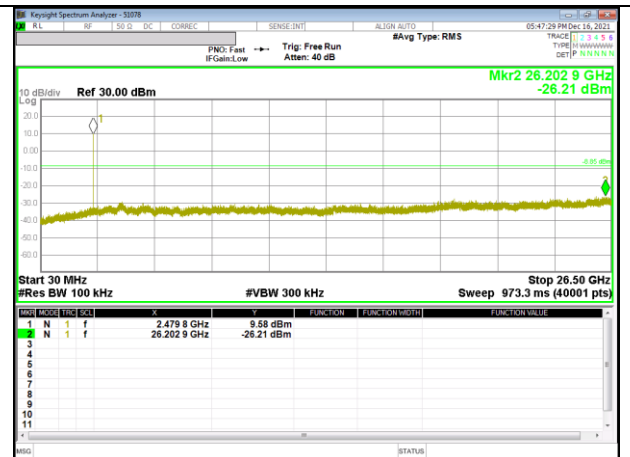

OUT-OF-BAND 78 CHANNEL

SPURIOUS BANDEGE EMISSIONS WITH HOPPING ON

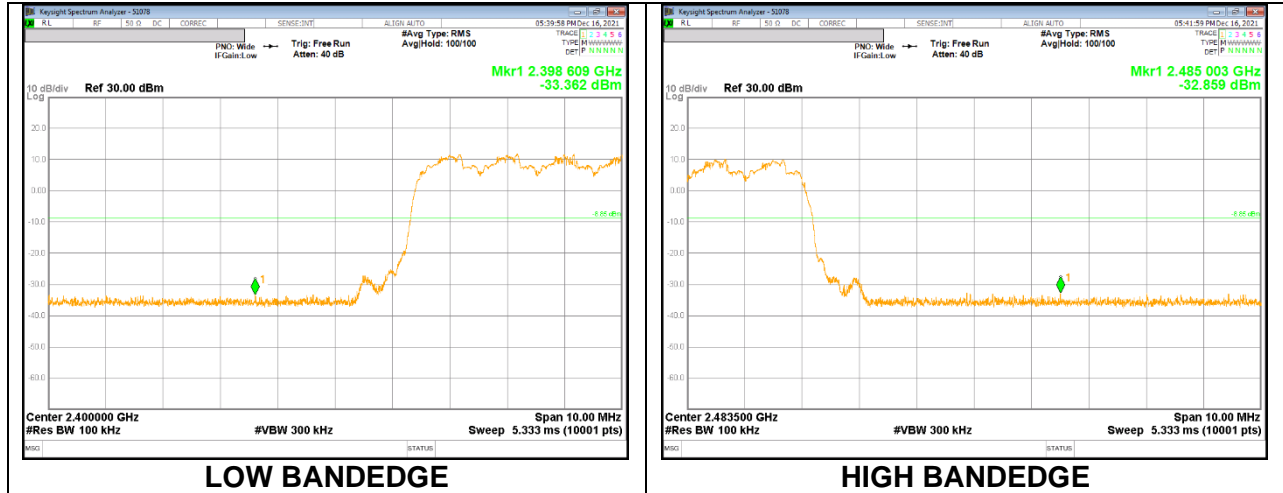

10. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a) : Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 – 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 – 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.17	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	167.72 ~ 173.2	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	240 ~ 285	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	322 ~ 335.4	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	399.90 ~ 410	3345.8 ~ 3358		
		608 ~ 614	3600 ~ 4400		
		960 ~ 1240			

▪ FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.(Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.)

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.00288\text{s} = 347\text{Hz}.$$

The minimum VBW was 347Hz, but test receiver(ESU40) couldn't set value 347Hz. Due to this reason, testing VBW was set to 500Hz(Worst cases).

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.


Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

10.1. TRANSMITTER ABOVE 1 GHz

10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

BANDEDGE (0 CHANNEL)

HORIZONTAL RESULT

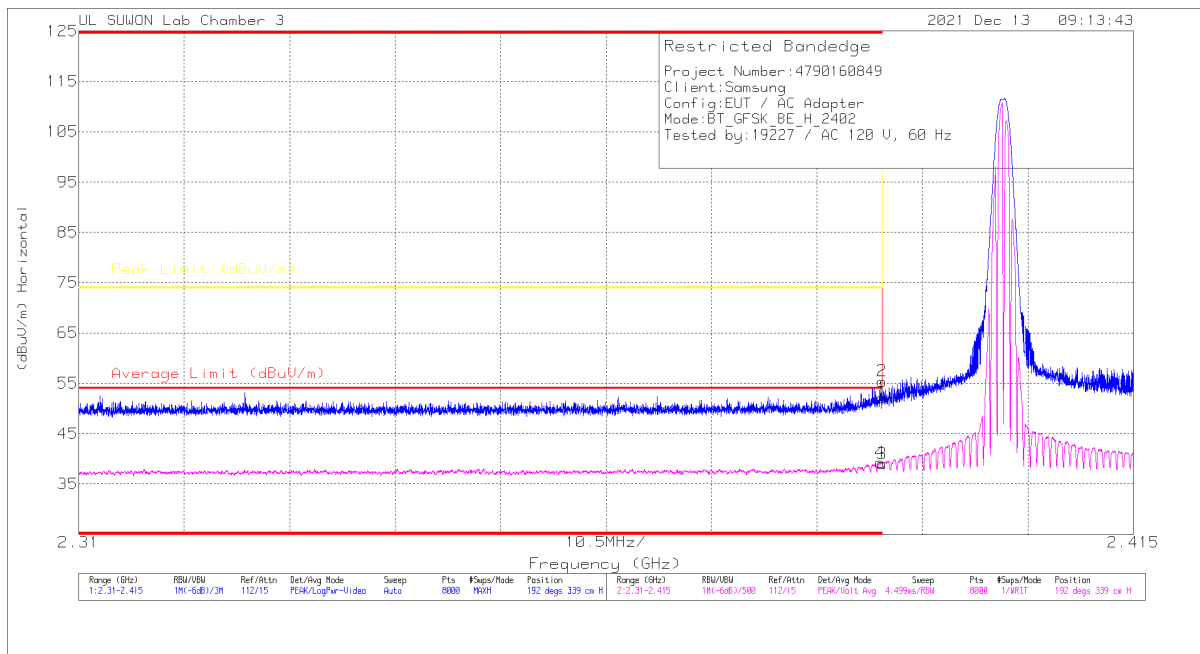

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	44.73	Pk	32.8	-25.4	52.13	-	-	74	-21.87	192	339	H
2	* 2.38997	48.03	Pk	32.8	-25.4	55.43	-	-	74	-18.57	192	339	H
3	* 2.39	31.67	VA1T	32.8	-25.4	39.07	54	-14.93	-	-	192	339	H
4	* 2.38979	31.93	VA1T	32.8	-25.4	39.33	54	-14.67	-	-	192	339	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL RESULT

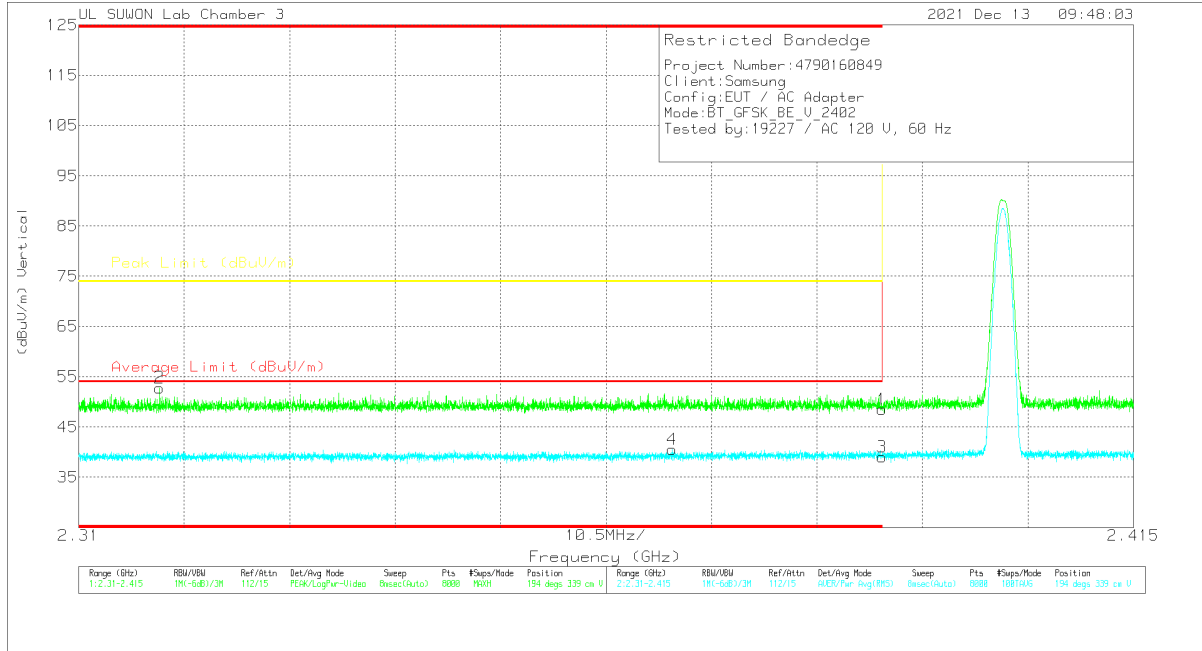


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.13	Pk	32.8	-25.4	48.53	-	-	74	-25.47	194	339	V
2	* 2.31806	45.71	Pk	32.5	-25.4	52.81	-	-	74	-21.19	194	339	V
3	* 2.39	31.61	RMS	32.8	-25.4	39.01	54	-14.99	-	-	194	339	V
4	* 2.3691	33.29	RMS	32.7	-25.4	40.59	54	-13.41	-	-	194	339	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (78 CHANNEL)

HORIZONTAL RESULT

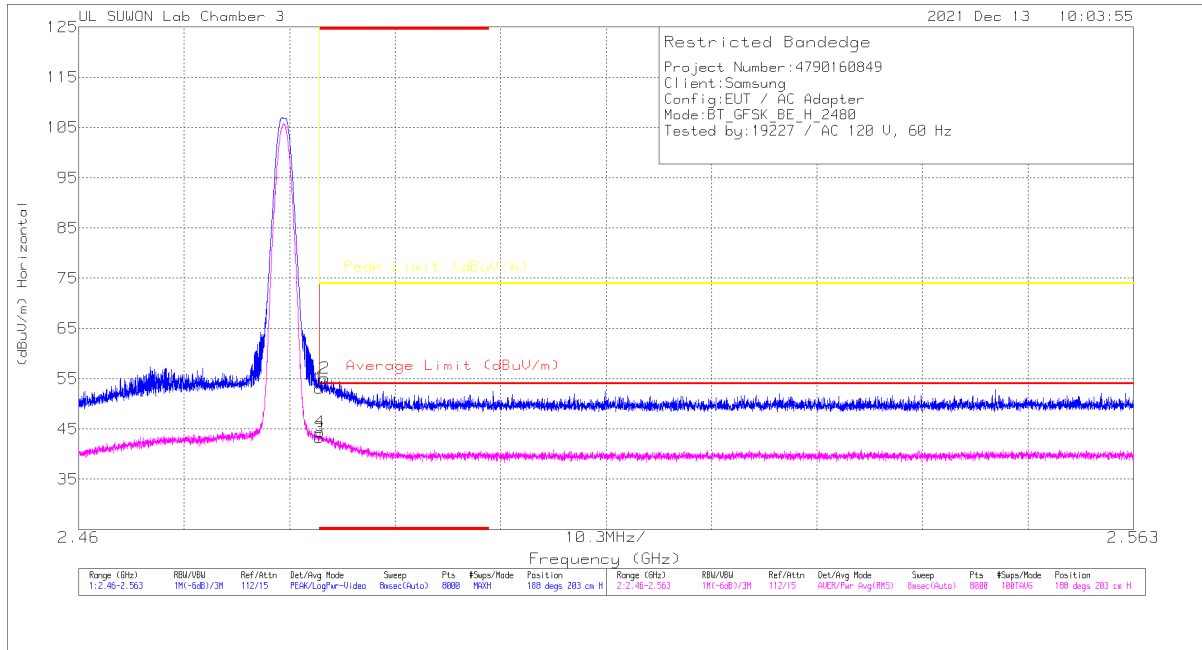


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	45.58	Pk	32.9	-25.3	53.18	-	-	74	-20.82	188	203	H
2	* 2.48402	47.56	Pk	32.9	-25.3	55.16	-	-	74	-18.84	188	203	H
3	* 2.4835	35.65	RMS	32.9	-25.3	43.25	54	-10.75	-	-	188	203	H
4	* 2.48356	36.77	RMS	32.9	-25.3	44.37	54	-9.63	-	-	188	203	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

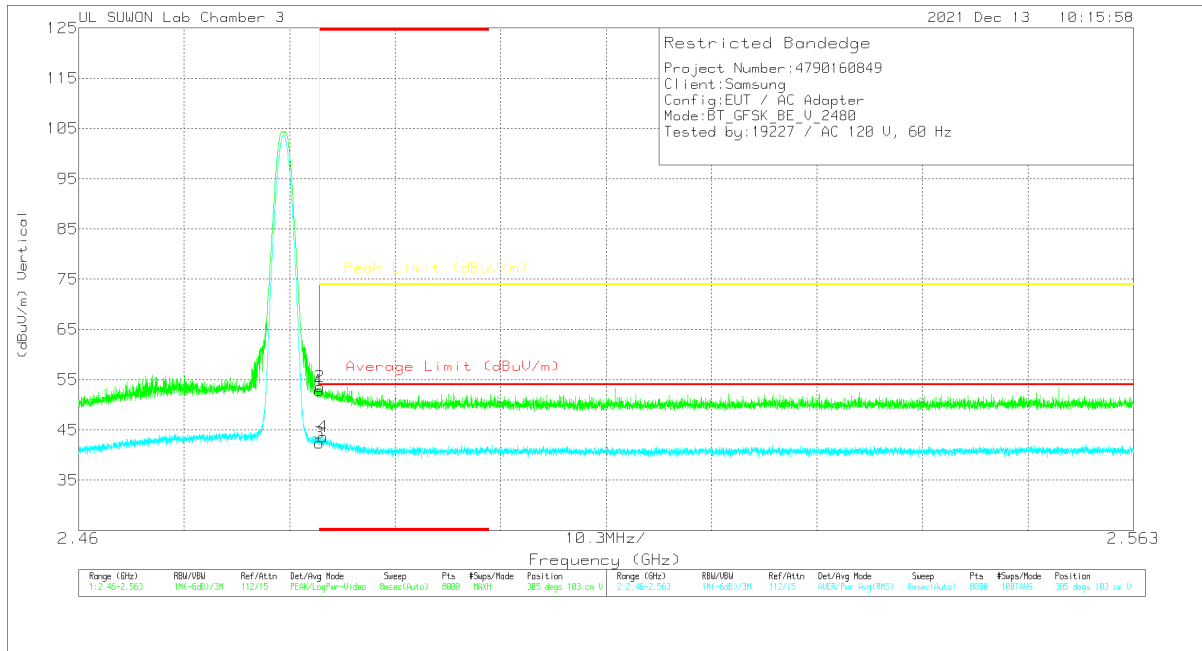


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	DC Cor (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	45.24	Pk	32.9	-25.3	0	52.84	-	-	74	-21.16	305	103	V
2	* 2.48354	46.03	Pk	32.9	-25.3	0	53.63	-	-	74	-20.37	305	103	V
3	* 2.4835	33.72	RMS	32.9	-25.3	1.13	42.45	54	-11.55	-	-	305	103	V
4	* 2.48389	34.80	RMS	32.9	-25.3	1.13	43.62	54	-10.38	-	-	305	103	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

0 CHANNEL RESULTS

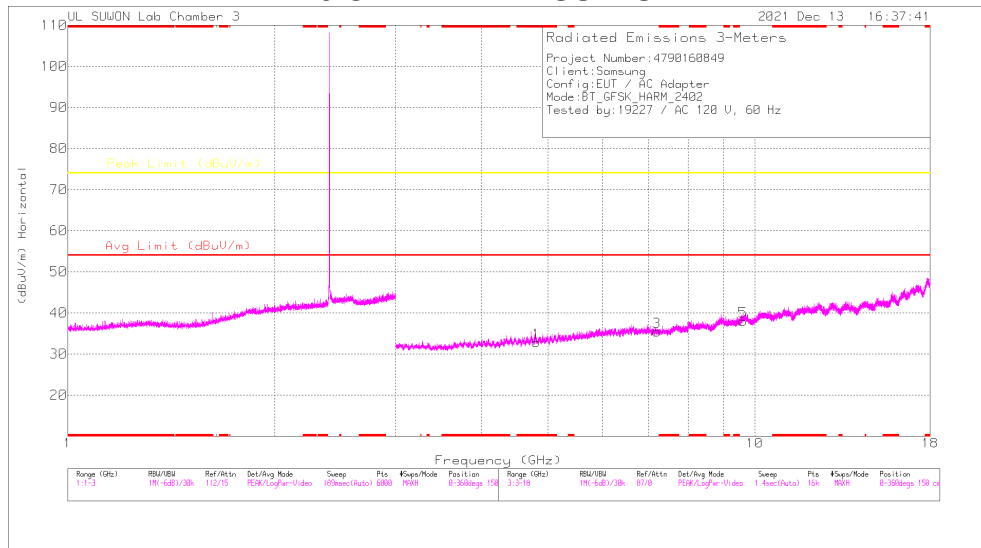

HORIZONTAL

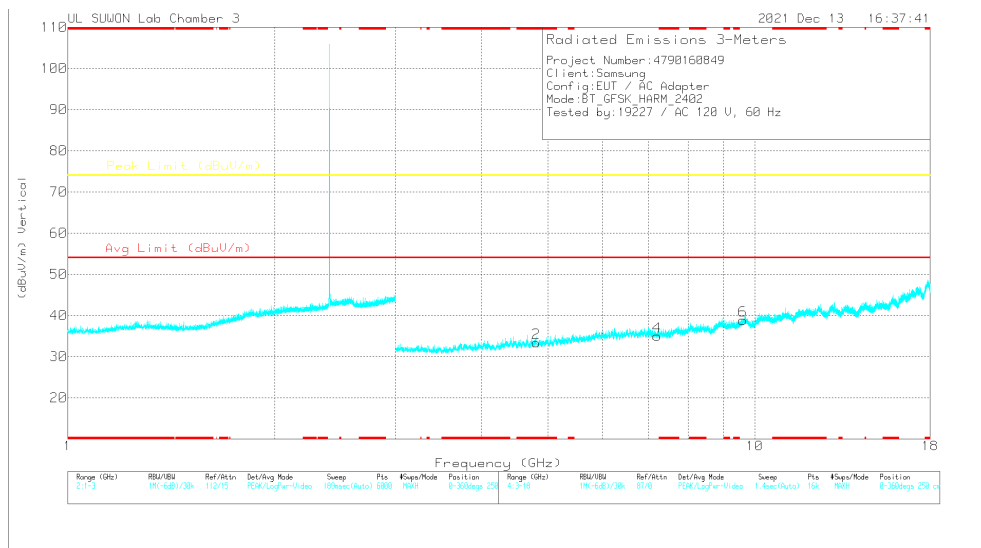


VERTICAL

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.80533	38.24	PKFH	34.6	-30.5	42.34	-	-	74	-31.66	360	100	H
* 4.80667	37.35	PKFH	34.6	-30.5	41.45	-	-	74	-32.55	360	100	V
7.20436	33.3	PKFH	36.1	-26.1	43.3	-	-	74	-30.7	360	100	V
7.20771	34.5	PKFH	36.1	-26.1	44.5	-	-	74	-29.5	360	100	H
9.60801	31.19	PKFH	37.3	-22.1	46.39	-	-	74	-27.61	360	100	H
9.60993	32.07	PKFH	37.3	-22.1	47.27	-	-	74	-26.73	360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

39 CHANNEL RESULTS

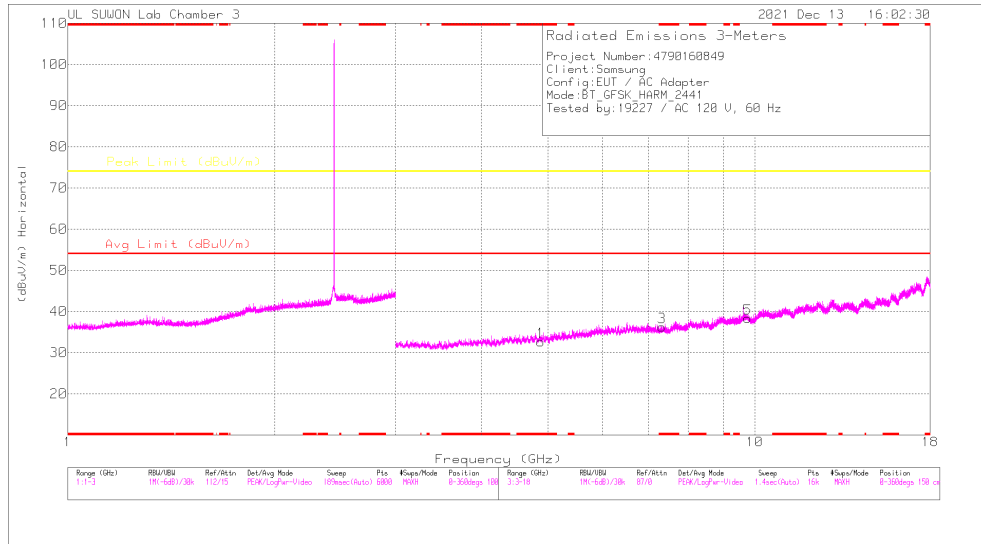

HORIZONTAL

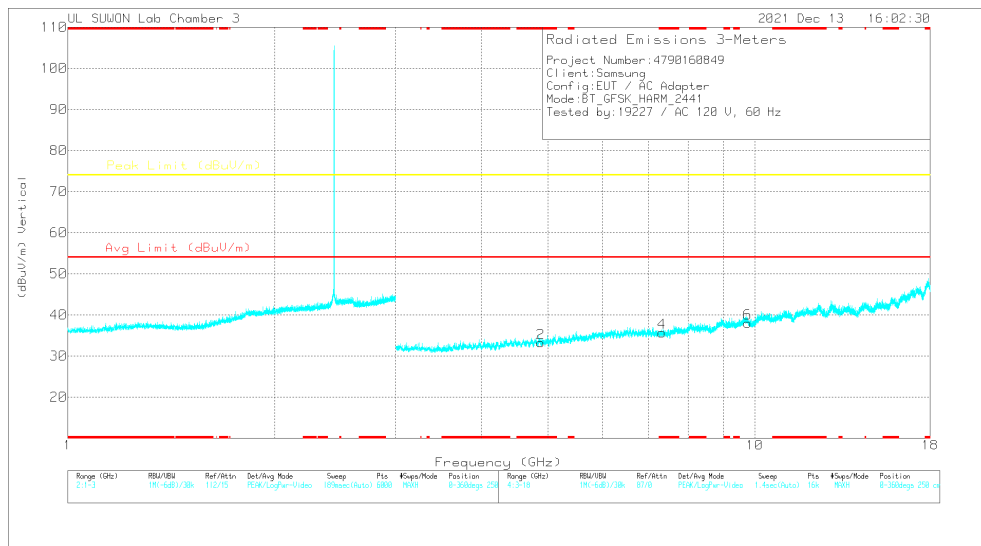

VERTICAL


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	3GHz_HP(dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.8807	37.44	PKFH	34.7	-31.2	40.94	-	-	74	-33.06	360	100	H
* 4.88247	37.56	PKFH	34.7	-31.3	40.96	-	-	74	-33.04	360	100	V
* 7.32243	33.76	PKFH	36	-25.5	44.26	-	-	74	-29.74	360	100	H
* 7.32374	33.39	PKFH	36	-25.5	43.89	-	-	74	-30.11	360	100	V
9.76501	31.52	PKFH	37.5	-21.8	47.22	-	-	74	-26.78	360	100	H
9.76233	30.73	PKFH	37.5	-21.7	46.53	-	-	74	-27.47	360	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

78 CHANNEL RESULTS

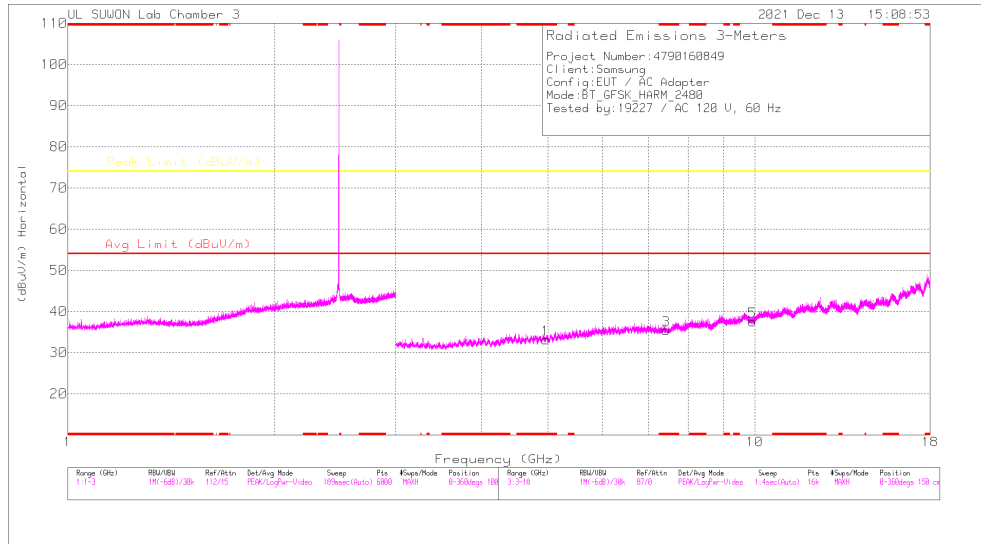

HORIZONTAL

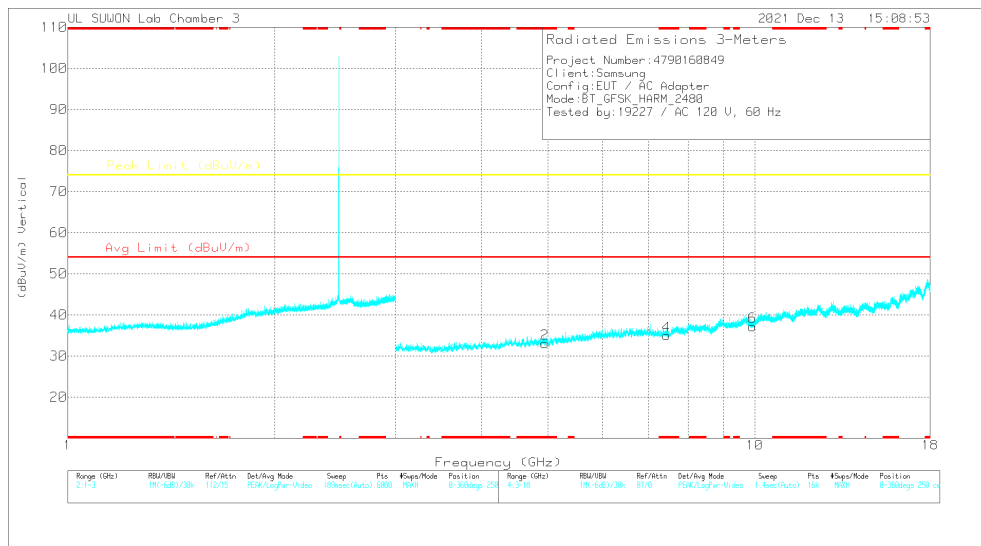

VERTICAL

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	3GHz_HP(dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96017	37.68	PKFH	34.7	-31	41.38	-	-	74	-32.62	360	100	H
* 4.96241	37.21	PKFH	34.7	-30.9	41.01	-	-	74	-32.99	360	100	V
* 7.43395	32.72	PKFH	36	-25.3	43.42	-	-	74	-30.58	360	100	H
* 7.43338	33.06	PKFH	36	-25.3	43.76	-	-	74	-30.24	360	100	V
9.92032	30.7	PKFH	37.7	-21.9	46.5	-	-	74	-27.5	360	100	H
9.92028	29.51	PKFH	37.7	-21.9	45.31	-	-	74	-28.69	360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

10.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

BANDEDGE (0 CHANNEL)

HORIZONTAL RESULT

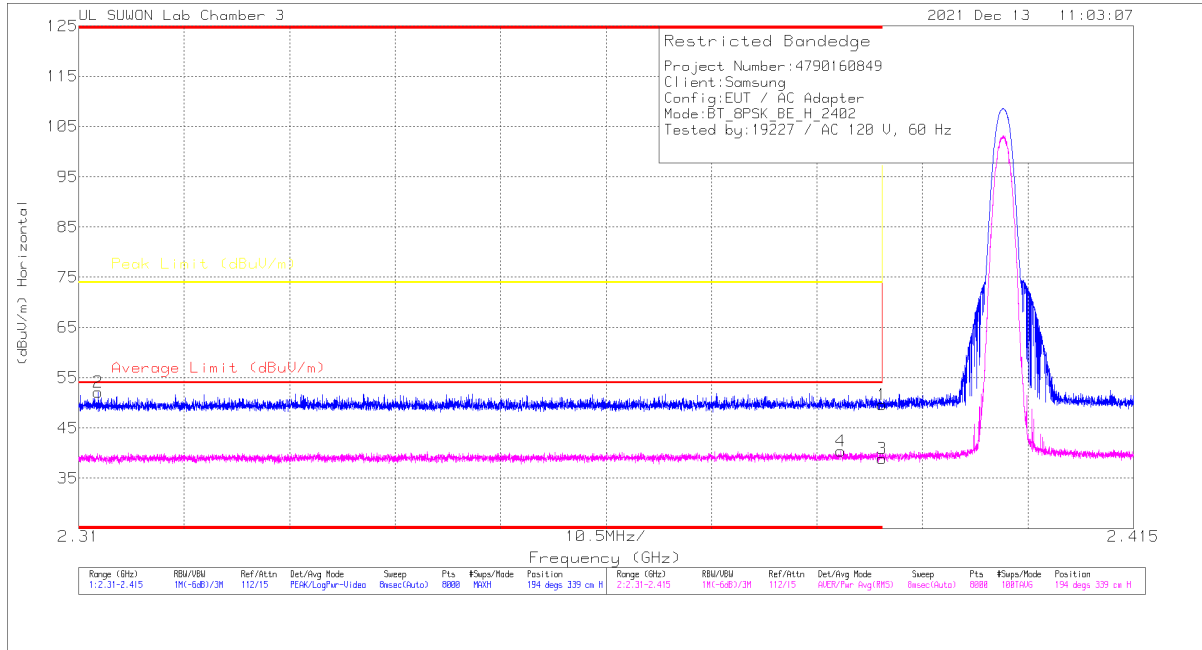


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.21	Pk	32.8	-25.4	49.61	-	-	74	-24.39	194	339	H
2	* 2.31196	44.99	Pk	32.4	-25.3	52.09	-	-	74	-21.91	194	339	H
3	* 2.39	31.57	RMS	32.8	-25.4	38.97	54	-15.03	-	-	194	339	H
4	* 2.38585	33.16	RMS	32.7	-25.4	40.46	54	-13.54	-	-	194	339	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

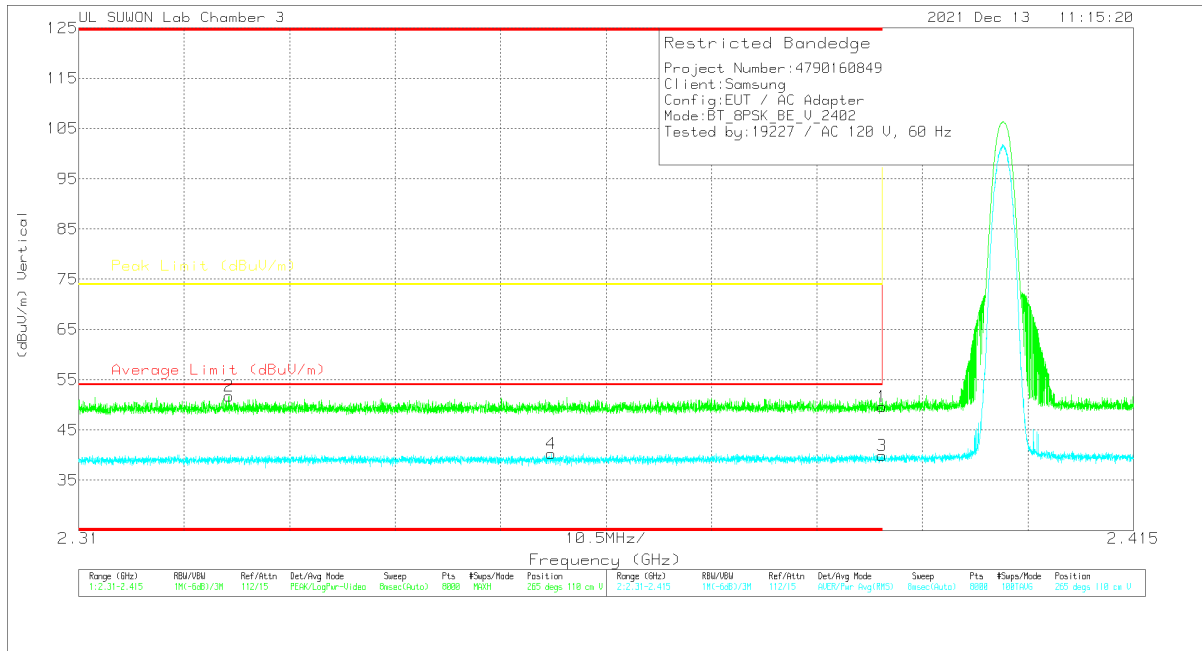


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.25	Pk	32.8	-25.4	49.65	-	-	74	-24.35	265	110	V
2	* 2.32494	44.64	Pk	32.5	-25.4	51.74	-	-	74	-22.26	265	110	V
3	* 2.39	32.53	RMS	32.6	-25.4	39.93	54	-14.07	-	-	265	110	V
4	* 2.35702	33.23	RMS	32.6	-25.5	40.33	54	-13.67	-	-	265	110	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (78 CHANNEL)

HORIZONTAL RESULT

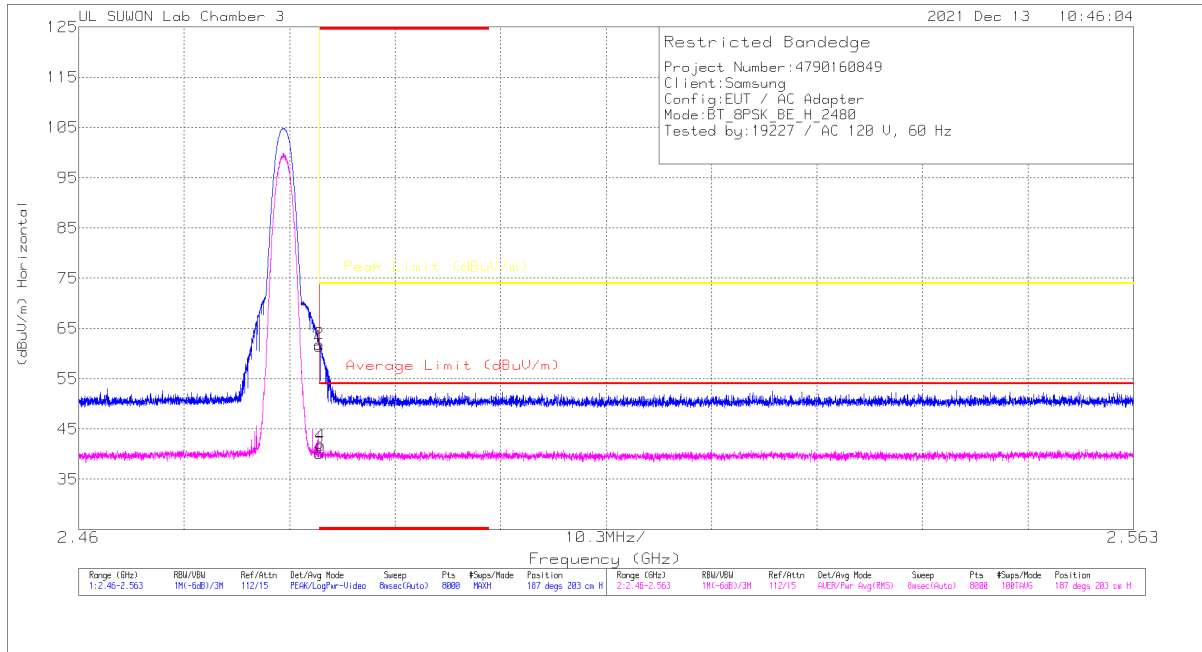


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	53.89	Pk	32.9	-25.3	61.49	-	-	74	-12.51	187	203	H
2	* 2.48351	54.31	Pk	32.9	-25.3	61.91	-	-	74	-12.09	187	203	H
3	* 2.4835	32.61	RMS	32.9	-25.3	40.21	54	-13.79	-	-	187	203	H
4	* 2.4836	34.22	RMS	32.9	-25.3	41.82	54	-12.18	-	-	187	203	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

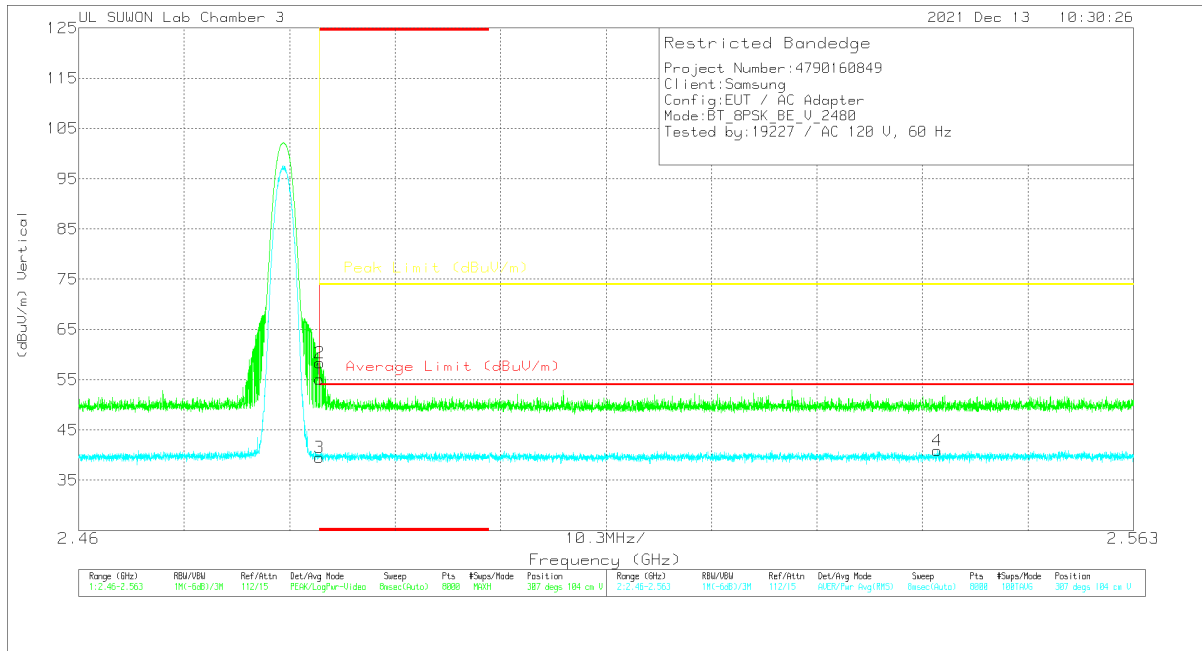


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.4835	47.48	Pk	32.9	-25.3	55.08	-	-	74	-18.92	307	104	V
2	* 2.48353	50.72	Pk	32.9	-25.3	58.32	-	-	74	-15.68	307	104	V
3	* 2.4835	31.94	RMS	32.9	-25.3	39.54	54	-14.46	-	-	307	104	V
4	2.54382	33.22	RMS	32.9	-25.2	40.92	54	-13.08	-	-	307	104	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

0 CHANNEL RESULTS

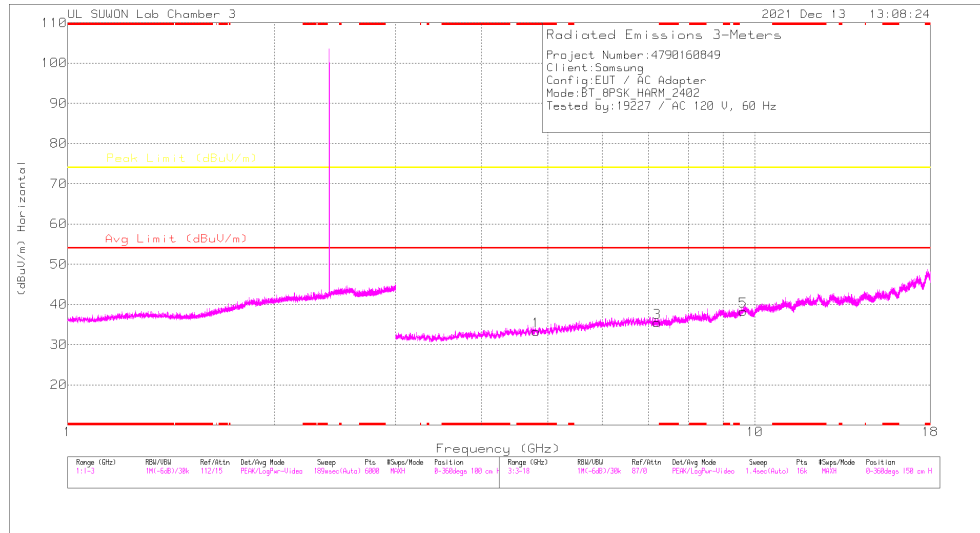

HORIZONTAL

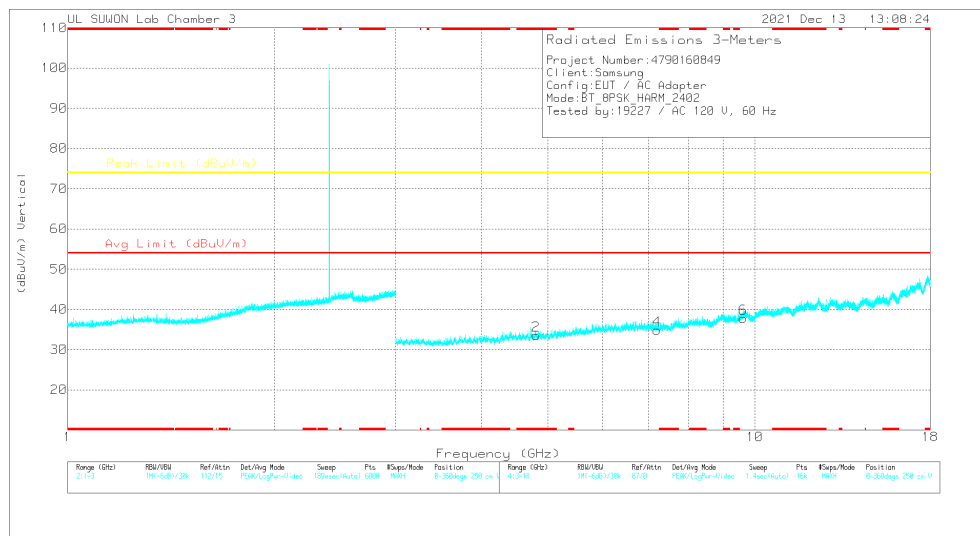


VERTICAL

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.80652	37.6	PKFH	34.6	-30.5	41.7	-	-	74	-32.3	360	100	H
* 4.80496	37.51	PKFH	34.6	-30.5	41.61	-	-	74	-32.39	360	100	V
7.205	33.71	PKFH	36.1	-26.1	43.71	-	-	74	-30.29	360	100	H
7.20618	33.91	PKFH	36.1	-26.1	43.91	-	-	74	-30.09	360	100	V
9.60911	31.02	PKFH	37.3	-22.1	46.22	-	-	74	-27.78	360	100	H
9.60923	31.08	PKFH	37.3	-22.1	46.28	-	-	74	-27.72	360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

39 CHANNEL RESULTS

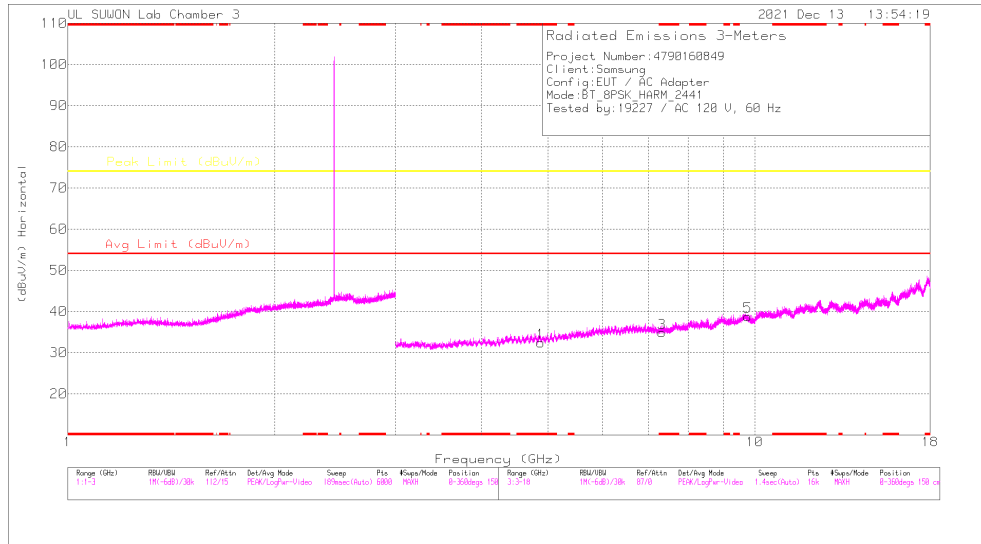

HORIZONTAL

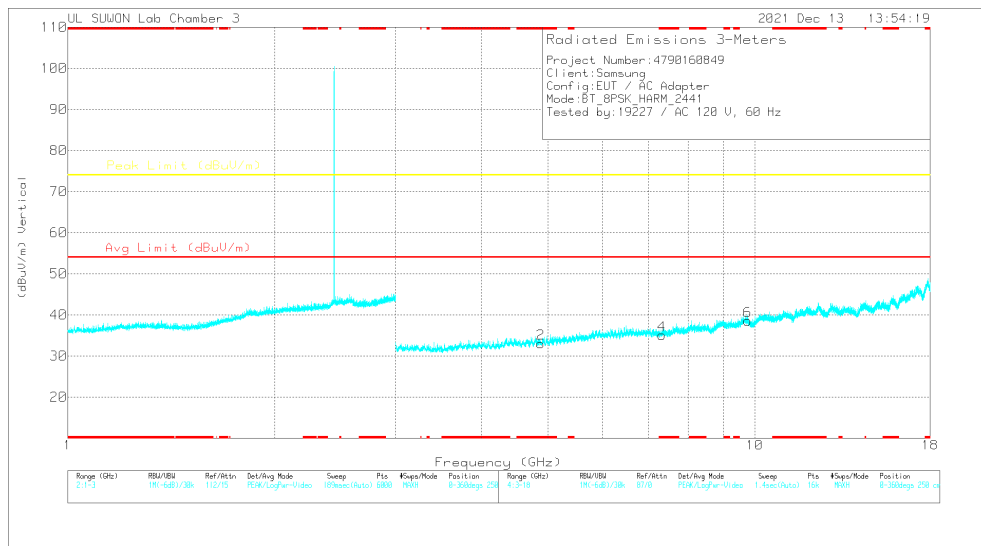

VERTICAL


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	3GHz_HP(dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.88262	37.21	PKFH	34.7	-31.3	40.61	-	-	74	-33.39	360	100	H
* 4.88247	37.18	PKFH	34.7	-31.3	40.58	-	-	74	-33.42	360	100	V
* 7.32564	33.35	PKFH	36	-25.4	43.95	-	-	74	-30.05	360	100	H
* 7.32484	32.88	PKFH	36	-25.5	43.38	-	-	74	-30.62	360	100	V
9.76412	30.33	PKFH	37.5	-21.7	46.13	-	-	74	-27.87	360	100	H
9.76359	30.46	PKFH	37.5	-21.7	46.26	-	-	74	-27.74	360	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

78 CHANNEL RESULTS

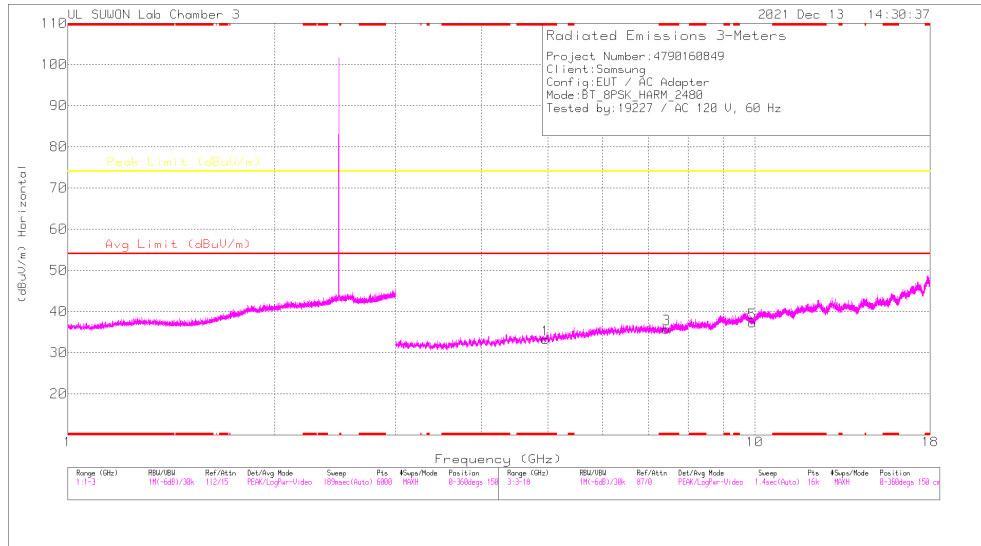

HORIZONTAL

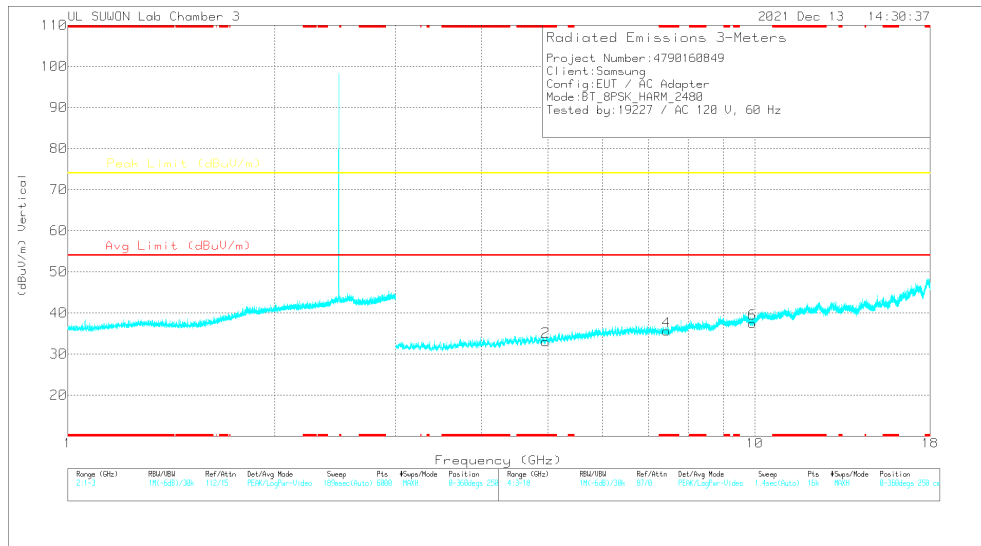

VERTICAL


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00218957	3GHz_HP(dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96051	37.72	PKFH	34.7	-30.9	41.52	-	-	74	-32.48	360	100	H
* 4.96058	37.94	PKFH	34.7	-30.9	41.74	-	-	74	-32.26	360	100	V
* 7.43895	33.44	PKFH	36	-25.3	44.14	-	-	74	-29.86	360	100	H
* 7.43971	33.02	PKFH	36	-25.3	43.72	-	-	74	-30.28	360	100	V
9.92112	30.05	PKFH	37.7	-21.9	45.85	-	-	74	-28.15	360	100	H
9.92081	31.31	PKFH	37.7	-21.9	47.11	-	-	74	-26.89	360	100	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PKFH FHSS/BT RB=100k for Frequencies<1GHz / RB=1MHz for Frequencies>1GHz, VB=3 x RB, Peak

10.2. WORST CASE BELOW 1 GHZ SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

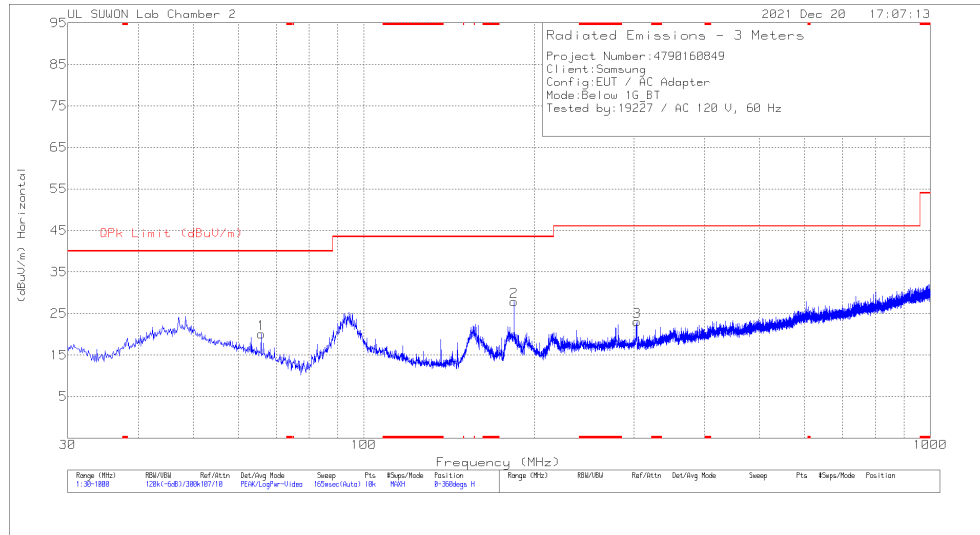

HORIZONTAL

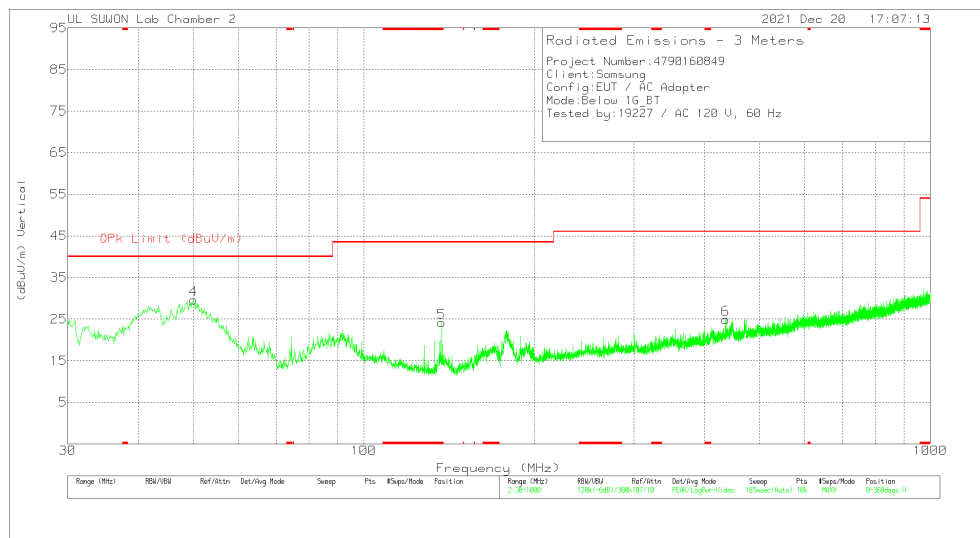

VERTICAL

Below 1GHz Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_749	Below 1G[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	OPK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	65.89	34.88	Pk	16.8	-31.6	0	20.08	40	-19.92	0-360	100	H
2	184.133	42.94	Pk	15.7	-30.8	0	27.84	43.52	-15.68	0-360	100	H
3	303.346	34.14	Pk	19.2	-30.3	0	23.04	46.02	-22.98	0-360	100	H
4	50.079	41.35	Pk	19.9	-31.7	0	29.55	40	-10.45	0-360	100	V
5	* 137.379	41.41	Pk	13.8	-31.1	0	24.11	43.52	-19.41	0-360	100	V
6	435.266	32.71	Pk	22.1	-29.9	0	24.91	46.02	-21.11	0-360	100	V

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 8.8

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10:2013.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

11.1.1. AC Power Line

LINE 1 RESULTS

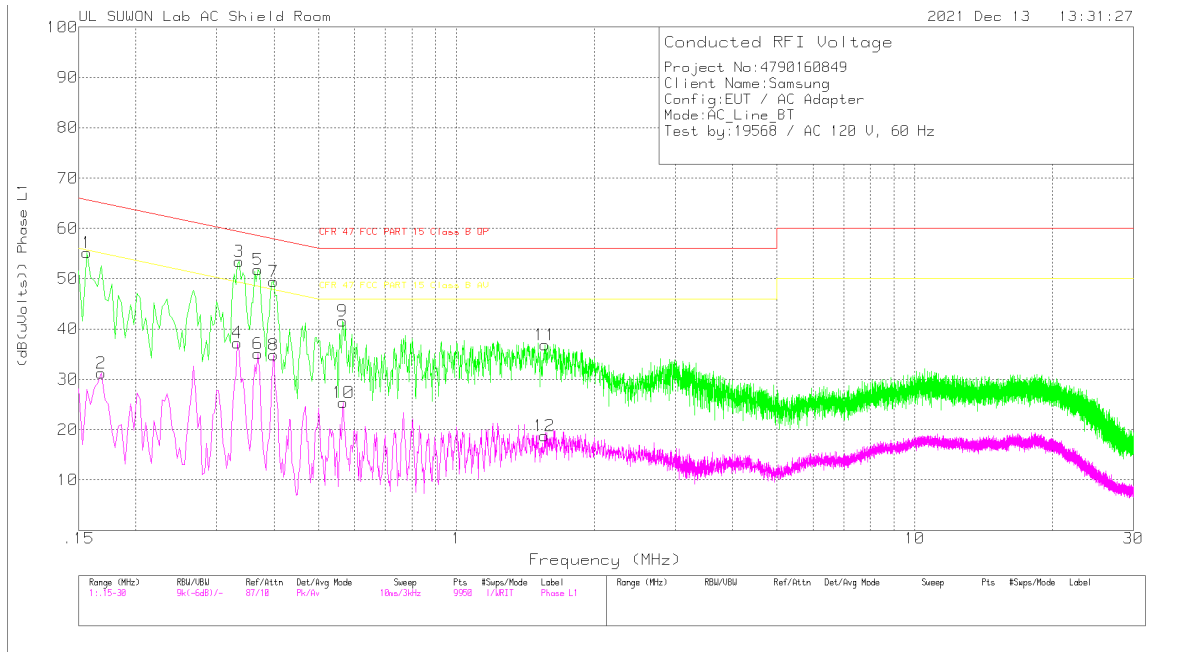

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.156	45.3	Pk	9.8	.1	55.2	65.67	-10.47	-	-
2	.168	21.13	Av	10	.1	31.23	-	-	55.06	-23.83
3	.336	43.45	Pk	9.8	.2	53.45	59.3	-5.85	-	-
4	.333	27.28	Av	9.8	.2	37.28	-	-	49.38	-12.1
5	.369	41.76	Pk	9.8	.2	51.76	58.52	-6.76	-	-
6	.369	25.1	Av	9.8	.2	35.1	-	-	48.52	-13.42
7	.399	39.46	Pk	9.8	.2	49.46	57.87	-8.41	-	-
8	.399	24.85	Av	9.8	.2	34.85	-	-	47.87	-13.02
9	.564	31.57	Pk	9.8	.2	41.57	56	-14.43	-	-
10	.567	15.39	Av	9.8	.2	25.39	-	-	46	-20.61
11	1.56	26.86	Pk	9.7	.3	36.86	56	-19.14	-	-
12	1.557	8.78	Av	9.7	.3	18.78	-	-	46	-27.22

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.33375	41.46	Qp	9.8	.2	51.46	59.36	-7.9	-	-
.36825	39.9	Qp	9.8	.2	49.9	58.54	-8.64	-	-
.39915	37.68	Qp	9.8	.2	47.68	57.87	-10.19	-	-

Qp - Quasi-Peak detector

LINE 2 RESULTS

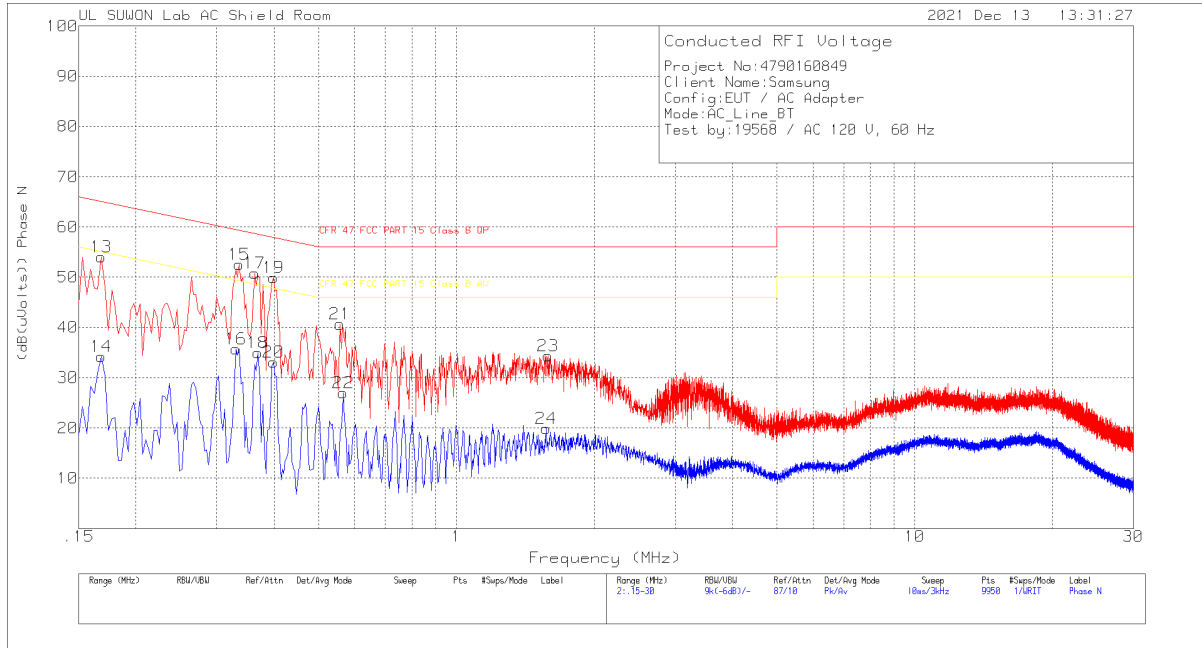

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.168	43.99	Pk	10	.1	54.09	65.06	-10.97	-	-
14	.168	24.14	Av	10	.1	34.24	-	-	55.06	-20.82
15	.336	42.5	Pk	9.8	.2	52.5	59.3	-6.8	-	-
16	.33	25.77	Av	9.8	.2	35.77	-	-	49.45	-13.68
17	.363	40.79	Pk	9.8	.2	50.79	58.66	-7.87	-	-
18	.369	24.92	Av	9.8	.2	34.92	-	-	48.52	-13.6
19	.399	39.9	Pk	9.8	.2	49.9	57.87	-7.97	-	-
20	.399	23.15	Av	9.8	.2	33.15	-	-	47.87	-14.72
21	.558	30.55	Pk	9.9	.2	40.65	56	-15.35	-	-
22	.567	16.89	Av	9.9	.2	26.99	-	-	46	-19.01
23	1.587	24.35	Pk	9.7	.3	34.35	56	-21.65	-	-
24	1.572	9.86	Av	9.7	.3	19.86	-	-	46	-26.14

Pk - Peak detector
 Av - Average detection

Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.36375	37.85	Qp	9.8	.2	47.85	58.64	-10.79	-	-
.36825	39.06	Qp	9.8	.2	49.06	58.54	-9.48	-	-
.39915	37.28	Qp	9.8	.2	47.28	57.87	-10.59	-	-

Qp - Quasi-Peak detector

END OF TEST REPORT