



TEST REPORT

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0029-B
Page (1) of (121)



KCTL

1. Client

- Name : Samsung Electronics Co., Ltd.
- Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
- Date of Receipt : 2022-02-03

2. Use of Report : Certification

3. Name of Product / Model : Mobile phone / SC-53C, SCG15

4. Manufacturer / Country of Origin: Samsung Electronics Co., Ltd. / Vietnam

5. FCC ID : A3LSMA536JPN

6. Date of Test : 2022-02-17 to 2022-03-23

7. Location of Test : Permanent Testing Lab On Site Testing
(Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

8. Test method used : FCC Part 15 Subpart E, 15.407



9. Test Result : Refer to the test result in the test report

Affirmation	Tested by	Technical Manager
	Name : Kwonse Kim (Signature)	Name : Seungyong Kim (Signature)

2022-03-28

KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

<p align="center">KCTL Inc. 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr</p>	<p align="center">Report No.: KR22-SRF0029-B Page (2) of (121)</p>	 
---	--	---

REPORT REVISION HISTORY

Date	Revision	Page No
2022-03-21	Originally issued	-
2022-03-24	Updated	14, 30, 36, 40
2022-03-28	Remove the notes	40

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

Note. The report No. KR22-SRF0029-A is superseded by the report No. KR22-SRF0029-B.

General remarks for test reports

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the testing laboratory that conducted the testing.

Statement not required by the standard or client used for type testing

CONTENTS

1.	General information	4
2.	Device information	4
2.1.	Frequency/channel operations.....	6
2.2.	Simultaneous Tx Condition	7
2.3.	Duty Cycle Factor	7
3.	Antenna requirement	9
4.	Summary of tests	10
5.	Measurement uncertainty	11
6.	Measurement results explanation example	12
7.	Test results	13
7.1.	Maximum conducted output power	13
7.2.	Maximum Power Spectral Density	18
7.3.	26 dB Bandwidth & 99% Bandwidth.....	27
7.4.	6 dB Bandwidth.....	37
7.5.	Straddle channel.....	40
7.6.	Spurious Emission, Band Edge and Restricted bands.....	47
7.7.	AC Conducted emission	119
8.	Measurement equipment.....	121

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0029-B
Page (4) of (121)



1. General information

Client : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Manufacturer : Samsung Electronics Co., Ltd.
Address : 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
Factory : Samsung Electronics Vietnam Thai Nguyen Co., Ltd.
Address : Yen Binh Industrial Park, Dong Tien Ward, Pho Yen Town, Thai Nguyen Province, Vietnam
Laboratory : KCTL Inc.
Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea
Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132
VCCI Registration No. : R-20080, G-20078, C-20059, T-20056
CAB Identifier: KR0040
ISED Number: 8035A
KOLAS No.: KT231

2. Device information

Equipment under test : Mobile phone
Model : SC-53C, SCG15
Modulation technique : Bluetooth(BDR/EDR)_GFSK, $\pi/4$ DQPSK, 8DPSK
Bluetooth(BLE)_GFSK
WIFI(802.11a/b/g/n/ac)_DSSS, OFDM
LTE_QPSK, 16QAM, 64QAM
WCDMA_QPSK
GSM_GMSK, 8-PSK
NFC_ASK
Number of channels : Bluetooth(BDR/EDR)_79 ch / Bluetooth(BLE)_40 ch
802.11b/g/n_HT20 : 13 ch
UNII-1: 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
UNII-2A: 4 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
UNII-2C: 12 ch (20 MHz), 6 ch (40 MHz), 3 ch (80 MHz)
UNII-3: 5 ch (20 MHz), 2 ch (40 MHz), 1 ch (80 MHz)
NFC: 1 ch
Power source : DC 3.88 V
Antenna specification : LTE/WCDMA/GSM_Metal Antenna
WIFI(2.4G)/Bluetooth(BDR/EDR/BLE)_Metal Antenna
WIFI(5G)/NFC_LDS Antenna

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0029-B
Page (5) of (121)



KCTL

Antenna gain : WIFI/Bluetooth(BDR/EDR/BLE)_-7.11 dBi
UNII-1 : -9.23 dBi
UNII-2A : -9.29 dBi
UNII-2C : -9.01 dBi
UNII-3 : -9.12 dBi

Frequency range : Bluetooth(BDR/EDR/BLE)_2 402 MHz ~ 2 480 MHz
2 412 MHz ~ 2 472 MHz (802.11b/g/n_HT20)
UNII-1: 5 180 MHz ~ 5 240 MHz (802.11a/n/ac_HT20/VHT20)
UNII-1: 5 190 MHz ~ 5 230 MHz (802.11n/ac_HT40/VHT40)
UNII-1: 5 210 MHz (802.11ac_VHT80)
UNII-2A: 5 260 MHz ~ 5 320 MHz (802.11a/n/ac_HT20/VHT20)
UNII-2A: 5 270 MHz ~ 5 310 MHz (802.11n/ac_HT40/VHT40)
UNII-2A: 5 290 MHz (802.11ac_VHT80)
UNII-2C: 5 500 MHz ~ 5 720 MHz (802.11a/n/ac_HT20/VHT20)
UNII-2C: 5 510 MHz ~ 5 710 MHz (802.11n/ac_HT40/VHT40)
UNII-2C: 5 530 MHz ~ 5 690 MHz (802.11ac_VHT80)
UNII-3: 5 745 MHz ~ 5 825 MHz (802.11a/n/ac_HT20/VHT20)
UNII-3: 5 755 MHz ~ 5 795 MHz (802.11n/ac_HT40/VHT40)
UNII-3: 5 775 MHz (802.11ac_VHT80)
LTE Band 5_824.7 MHz ~ 848.3 MHz
LTE Band 12_699.7 MHz ~ 715.3 MHz
LTE Band 41_2 498.5 MHz ~ 2 687.5 MHz
GSM 850_824.2 MHz ~ 848.8 MHz
GSM 1900_1 850.2 MHz ~ 1 909.8 MHz
WCDMA 850_826.4 MHz ~ 846.6 MHz
NFC_13.56 MHz

Software version : SC-53C(A536D.001) / SCG15(A536J.001)
Hardware version : REV1.0
Test device serial No. : Conducted(R3CRC0HREYX)
Radiated(R3CRC0HRF7K)
Operation temperature : -30 °C ~ 50 °C

2.1. Frequency/channel operations

This device contains the following capabilities:

WiFi (802.11a/b/g/n/ac), Bluetooth (BDR/EDR/BLE), NFC, LTE Band 5, LTE Band 12, LTE Band 41
GSM 850, GSM 1900, WCDMA 850

UNII-1

Ch.	Frequency (MHz)
36	5 180
40	5 200
48	5 240

UNII-2A

Ch.	Frequency (MHz)
52	5 260
56	5 280
64	5 320

UNII-2C

Ch.	Frequency (MHz)
100	5 500
120	5 600
140	5 700
144	5 720

UNII-3

Ch.	Frequency (MHz)
149	5 745
157	5 785
165	5 825

Table 2.1-1. 802.11a/n/ac_HT20/VHT20 mode

UNII-1

Ch.	Frequency (MHz)
38	5 190
46	5 230

UNII-2A

Ch.	Frequency (MHz)
54	5 270
62	5 310

UNII-2C

Ch.	Frequency (MHz)
102	5 510
118	5 590
134	5 670
142	5 710

UNII-3

Ch.	Frequency (MHz)
151	5 755
159	5 795

Table 2.1-2. 802.11n/ac_HT40/VHT40 mode

UNII-1

Ch.	Frequency (MHz)
42	5 210

UNII-2A

Ch.	Frequency (MHz)
58	5 290

UNII-2C

Ch.	Frequency (MHz)
106	5 530
122	5 610
138	5 690

UNII-3

Ch.	Frequency (MHz)
155	5 775

Table 2.1-3. 802.11ac_VHT80 mode

2.2. Simultaneous Tx Condition

Mode	Bluetooth LE	WLAN 5 GHz
WLAN 5 GHz + Bluetooth LE	O	O

2.3. Duty Cycle Factor

Test mode	Period (ms)	T _{on} time (ms)	Duty cycle		Duty cycle factor (dB)
			(Linear)	(%)	
802.11a	1.518 3	1.428 0	0.940 5	94.05	0.27
802.11n_HT20	1.452 0	1.334 4	0.919 0	91.90	0.37
802.11n_HT40	0.771 6	0.663 6	0.860 0	86.00	0.65
802.11ac_VHT20	1.469 4	1.342 8	0.913 8	91.38	0.39
802.11ac_VHT40	0.775 6	0.668 0	0.861 3	86.13	0.65
802.11ac_VHT80	0.439 4	0.332 0	0.755 6	75.56	1.22


Notes.

1. Duty cycle (Linear) = T_{on} time / Period
2. DCF(Duty cycle factor) = 10log(1/duty cycle)
3. DCF is not compensated to average result if duty cycle is more than 98%

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0029-B
Page (8) of (121)

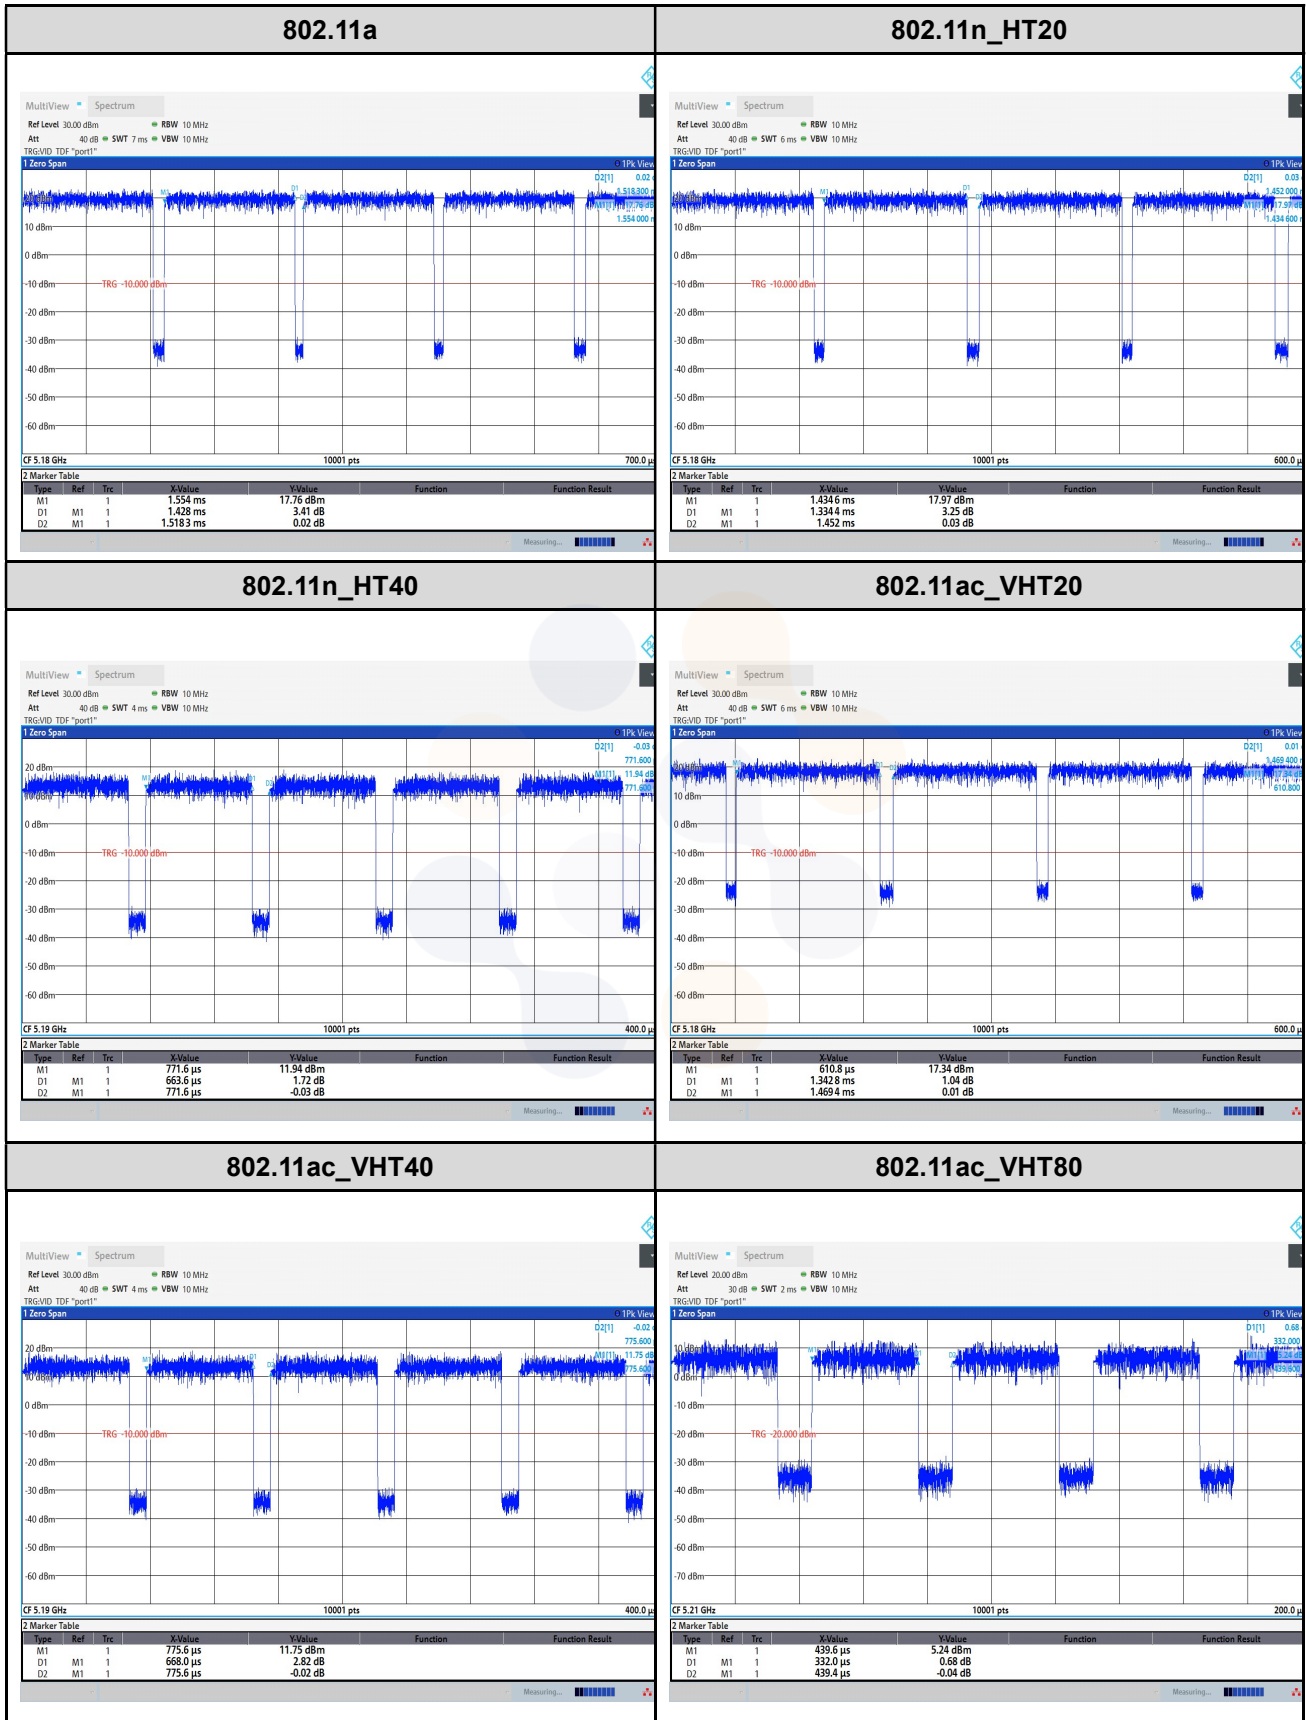

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0029-B
Page (9) of (121)



3. Antenna requirement

Requirement of FCC part section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The transmitter has permanently attached LDS Antenna (Internal antenna) on board.



4. Summary of tests

FCC Part section(s)	Parameter	Test Condition	Test results
15.407(a)	Maximum conducted output power	Conducted	Pass
15.407(a)	Maximum power spectral density		Pass
15.407(a)	26 dB Channel Bandwidth		Pass
15.407(e)	6 dB Channel Bandwidth		Pass
15.207(a)	AC Conducted Emissions		Pass
15.407(b), 15.205(a), 15.209(a)	Spurious emission	Radiated	Pass
	Band-edge, restricted band		Pass

Notes:

- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
- The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that **X** orientation was worst-case orientation. Therefore, all final radiated testing was performed with the EUT in **X** orientation.
- All the radiated tests have been performed several case.
 (Stand-alone, with accessories (TA etc.))
 Worst case: Stand-alone
- The test procedure(s) in this report were performed in accordance as following.
 - ANSI C63.10-2013
 - KDB 789033 D02 v02r01
- Based on the baseline scan, the worst-case data rates were:
 - 802.11a mode: 6Mbps
 - 802.11n HT20 mode: MCS0
 - 802.11n HT40 mode: MCS0
 - 802.11ac VHT20 mode: MCS0
 - 802.11ac VHT40 mode: MCS0
 - 802.11ac VHT80 mode: MCS0

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0029-B
Page (11) of (121)

**5. Measurement uncertainty**

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded uncertainty (\pm)	
Conducted RF power	0.9 dB	
Conducted spurious emissions	1.1 dB	
Radiated spurious emissions	9 kHz ~ 30 MHz:	2.4 dB
	30 MHz ~ 1 000 MHz	2.3 dB
	1 000 MHz ~ 18 000 MHz	5.6 dB
	Above 18 000 MHz	5.7 dB
Conducted emissions	9 kHz ~ 150 kHz	1.6 dB
	150 kHz ~ 30 MHz	1.7 dB

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0029-B
Page (12) of (121)



6. Measurement results explanation example

The offset level is set in the spectrum analyzer to compensate the RF cable loss factor between EUT conducted output port and spectrum analyzer.

With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Frequency (MHz)	Factor(dB)	Frequency (MHz)	Factor(dB)
30	9.72	9000	13.63
50	9.77	10000	13.11
100	9.82	11000	13.30
200	9.90	12000	13.18
300	10.04	13000	13.34
400	10.07	14000	13.49
500	10.12	15000	13.54
600	10.11	16000	13.76
700	10.16	17000	13.70
800	10.14	18000	13.93
900	10.32	19000	14.01
1000	10.33	20000	14.28
2000	10.81	21000	14.26
3000	11.14	22000	14.54
4000	11.43	23000	14.55
5000	11.69	24000	14.75
6000	11.87	25000	14.78
7000	12.19	26000	14.86
8000	13.15	26500	14.99

Notes:

Offset(dB) = RF cable loss(dB) + Attenuator(dB)

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0029-B
Page (13) of (121)



7. Test results

7.1. Maximum conducted output power

Test setup



Limit

According to §15.407(a),

Band	EUT category		Conducted output power limit
UNII-1		Outdoor access point	1 W (30 dBm)
		Indoor access point	
		Fixed point-to-point access point	
	√	Client device	250 mW (23.98 dBm)
UNII-2A		√	250 mW or 11 dBm + 10logB ¹⁾
UNII-2C		√	250 mW or 11 dBm + 10logB ¹⁾
UNII-3		√	1 W (30 dBm)

Note:

1) Conducted output power limit B is the 26 dB emission bandwidth.

Test procedure

ANSI C63.10-2013-Section 12.3.3.2 and 14.2
KDB 789033 D02 v02r01 - Section E.3.a)

Test settings**Used test method is Section E.3.a)**◆ **KDB 789033 D02 v02r01****Section E.2.d)****Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction):**

- (i) Measure the duty cycle, x , of the transmitter output signal as described in II.B..
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz
- (iv) Set RBW \geq 3 MHz
- (v) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = power averaging (rms), if available. Otherwise use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run.”
- (ix) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (xi) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log(1/0,25) = 6 \text{ dB}$ if the duty cycle is 25%.

Section E.2.e)**Method SA-2 Alternative (power averaging(rms) detection with slow sweep with each spectrum bin averaging across on and off times of the EUT transmissions, followed by duty cycle correction):**

- (i) Measure the duty cycle, x , of the transmitter output signal as described in II.B..
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz
- (iv) Set RBW \geq 3 MHz
- (v) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- (vi) Manually set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$.
- (vii) Set detector = power averaging (rms)
- (viii) Perform a single sweep.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If

the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

- (x) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25%.

Section E.3.a)**Method PM (Measurement using an RF average power meter):**

- (xi) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.
- The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five
- (xii) If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in II
- (xiii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (xiv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25%).

Section E.3.b)**Method PM-G (Measurement using a gated RF average power meter):**

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0029-B
Page (16) of (121)



KCTL

Test results

Test mode	Band	Frequency (MHz)	Measured output power			Limit (dBm)
			Reading (dBm)	DCF (dB)	Result (dBm)	
802.11a	UNII 1	5 180	14.68	0.27	14.95	23.98
		5 200	16.06		16.33	
		5 240	16.47		16.74	
	UNII 2A	5 260	16.15		16.42	23.98
		5 280	16.10		16.37	
		5 320	15.27		15.54	
	UNII 2C	5 500	15.79		16.06	23.98
		5 600	16.70		16.97	
		5 700	13.17		13.44	
	UNII 3	5 745	16.37		16.64	30.00
		5 785	16.11		16.38	
		5 825	16.62		16.89	
802.11n HT20	UNII 1	5 180	15.21	0.37	15.58	23.98
		5 200	16.08		16.45	
		5 240	16.49		16.86	
	UNII 2A	5 260	16.04		16.41	23.98
		5 280	16.24		16.61	
		5 320	15.53		15.90	
	UNII 2C	5 500	15.94		16.31	23.98
		5 600	16.85		17.22	
		5 700	13.18		13.55	
	UNII 3	5 745	16.63		17.00	30.00
		5 785	16.45		16.82	
		5 825	16.61		16.98	
802.11n HT40	UNII 1	5 190	11.16	0.65	11.81	23.98
		5 230	14.64		15.29	
	UNII 2A	5 270	13.86		14.51	23.98
		5 310	10.63		11.28	
	UNII 2C	5 510	13.26		13.91	23.98
		5 590	14.56		15.21	
		5 670	14.72		15.37	
	UNII 3	5 755	14.32		14.97	30.00
		5 795	14.20		14.85	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0029-B
Page (17) of (121)



KCTL


Test mode	Band	Frequency (MHz)	Measured output power			Limit (dBm)
			Reading (dBm)	DCF (dB)	Result (dBm)	
802.11ac VHT20	UNII 1	5 180	14.40	0.39	14.79	23.98
		5 200	16.23		16.62	
		5 240	16.66		17.05	
	UNII 2A	5 260	16.42		16.81	23.98
		5 280	16.41		16.80	
		5 320	15.43		15.82	
	UNII 2C	5 500	16.01		16.40	23.98
		5 600	16.79		17.18	
		5 700	12.70		13.09	
	UNII 3	5 745	16.45		16.84	30.00
		5 785	16.44		16.83	
		5 825	16.61		17.00	
802.11ac VHT40	UNII 1	5 190	11.90	0.65	12.55	23.98
		5 230	14.62		15.27	
	UNII 2A	5 270	13.89		14.54	23.98
		5 310	11.14		11.79	
	UNII 2C	5 510	13.29		13.94	23.98
		5 590	14.52		15.17	
		5 670	14.67		15.32	
	UNII 3	5 755	14.32		14.97	30.00
5 795		14.12	14.77			
802.11ac VHT80	UNII 1	5 210	8.53	1.22	9.75	23.98
	UNII 2A	5 290	8.50		9.72	23.98
	UNII 2C	5 530	8.90		10.12	23.98
		5 610	10.56		11.78	
	UNII 3	5 775	10.11		11.33	30.00

Note.

1. Result(dBm) = Reading Power + D.C.F

7.2. Maximum Power Spectral Density

Test setup



Limit

According to §15.407(a)

Band	EUT category	Limit
UNII-1	Outdoor access point	17 dBm/MHz
	Indoor access point	
	Fixed point-to-point access point	
	√ Client device	11 dBm /MHz
UNII-2A	√	11 dBm /MHz
UNII-2C	√	11 dBm /MHz
UNII-3	√	30 dBm /500 kHz

Notes:

If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain if the antenna exceed 6 dBi

Test procedure

ANSI C63.10-2013 Section 12.3.2.2, 14.3.2.2
 KDB 789033 D02 v02r01 - Section F

Test settings

Section F

The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission. Refer to III.A for additional guidance for devices that use channel aggregation.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power....” (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Search function on the instrument to find the peak of the spectrum and record its value.
3. Adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA-3 Alternative was used and the linear mode was used in II.E.2.g) (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1MHz reference bandwidth

5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the preceding procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
- Set $RBW \geq 1/T$, where T is defined in II.B.I.a).
 - Set $VBW \geq 3 RBW$.
 - If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz} / RBW)$ to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log(1 \text{ MHz} / RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the II.F.5.c) and II.F.5.d), since RBW=100 kHz is available on nearly all spectrum analyzers.

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0029-B
Page (20) of (121)



KCTL

Test results

Test mode	Band	Frequency (MHz)	Measured PSD (dBm/MHz)	DCF (dB)	Maximum PSD (dB m/MHz)	Limit (dBm/MHz)
802.11a	UNII 1	5 180	3.78	0.27	4.05	11
		5 200	5.57	0.27	5.84	
		5 240	5.84	0.27	6.11	
	UNII 2A	5 260	5.28	0.27	5.55	11
		5 280	5.58	0.27	5.85	
		5 320	4.70	0.27	4.97	
	UNII 2C	5 500	5.01	0.27	5.28	11
		5 600	5.95	0.27	6.22	
		5 700	2.51	0.27	2.78	
802.11n HT20	UNII 1	5 180	4.13	0.37	4.50	11
		5 200	5.30	0.37	5.67	
		5 240	5.86	0.37	6.23	
	UNII 2A	5 260	5.02	0.37	5.39	11
		5 280	5.42	0.37	5.79	
		5 320	2.47	0.37	2.84	
	UNII 2C	5 500	5.06	0.37	5.43	11
		5 600	6.17	0.37	6.54	
		5 700	2.11	0.37	2.48	
802.11n HT40	UNII 1	5 190	-2.60	0.65	-1.95	11
		5 230	0.32	0.65	0.97	
	UNII 2A	5 270	-0.34	0.65	0.31	11
		5 310	-3.76	0.65	-3.11	
	UNII 2C	5 510	-0.86	0.65	-0.21	11
		5 590	0.13	0.65	0.78	
		5 670	0.28	0.65	0.93	
802.11ac VHT20	UNII 1	5 180	3.22	0.39	3.61	11
		5 200	5.30	0.39	5.69	
		5 240	5.90	0.39	6.29	
	UNII 2A	5 260	5.29	0.39	5.68	11
		5 280	5.23	0.39	5.62	
		5 320	4.82	0.39	5.21	
	UNII 2C	5 500	5.29	0.39	5.68	11
		5 600	5.86	0.39	6.25	
		5 700	1.73	0.39	2.12	

KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0029-B
Page (21) of (121)



KCTL

Test mode	Band	Frequency (MHz)	Measured PSD (dBm/MHz)	DCF (dB)	Maximum PSD (dBm/MHz)	Limit (dBm/MHz)
802.11ac VHT40	UNII 1	5 190	-2.55	0.65	-1.90	11
		5 230	0.28	0.65	0.93	
	UNII 2A	5 270	-0.07	0.65	0.58	11
		5 310	-3.37	0.65	-2.72	
	UNII 2C	5 510	-0.87	0.65	-0.22	11
		5 590	0.17	0.65	0.82	
5 670		0.38	0.65	1.03		
802.11ac VHT80	UNII 1	5 210	-8.43	1.22	-7.21	11
	UNII 2A	5 290	-8.47	1.22	-7.25	11
	UNII 2C	5 530	-8.55	1.22	-7.33	11
		5 610	-5.40	1.22	-4.18	

Test mode	Band	Frequency (MHz)	Measured PSD (dBm /500 kHz)	DCF (dB)	Maximum PSD (dBm /500 kHz)	Limit (dBm /500 kHz)
802.11a	UNII 3	5 745	2.73	0.27	3.00	30
		5 785	2.50	0.27	2.77	
		5 825	3.20	0.27	3.47	
802.11n HT20		5 745	3.25	0.37	3.62	
		5 785	2.58	0.37	2.95	
		5 825	3.00	0.37	3.37	
802.11n HT40		5 755	-2.92	0.65	-2.27	
		5 795	-2.97	0.65	-2.32	
802.11ac VHT20		5 745	2.77	0.39	3.16	
		5 785	2.80	0.39	3.19	
		5 825	3.05	0.39	3.44	
802.11ac VHT40		5 755	-2.81	0.65	-2.16	
		5 795	-2.59	0.65	-1.94	
802.11ac VHT80		5 775	-8.17	1.22	-6.95	

Notes:

- Maximum PSD calculation
- Maximum PSD = Measured PSD + D.C.F

KCTL Inc.


65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr

Report No.:
KR22-SRF0029-B
Page (22) of (121)



Power Spectral Density

In order to simplify the report, attached plots were only the Worst Case per bandwidth.

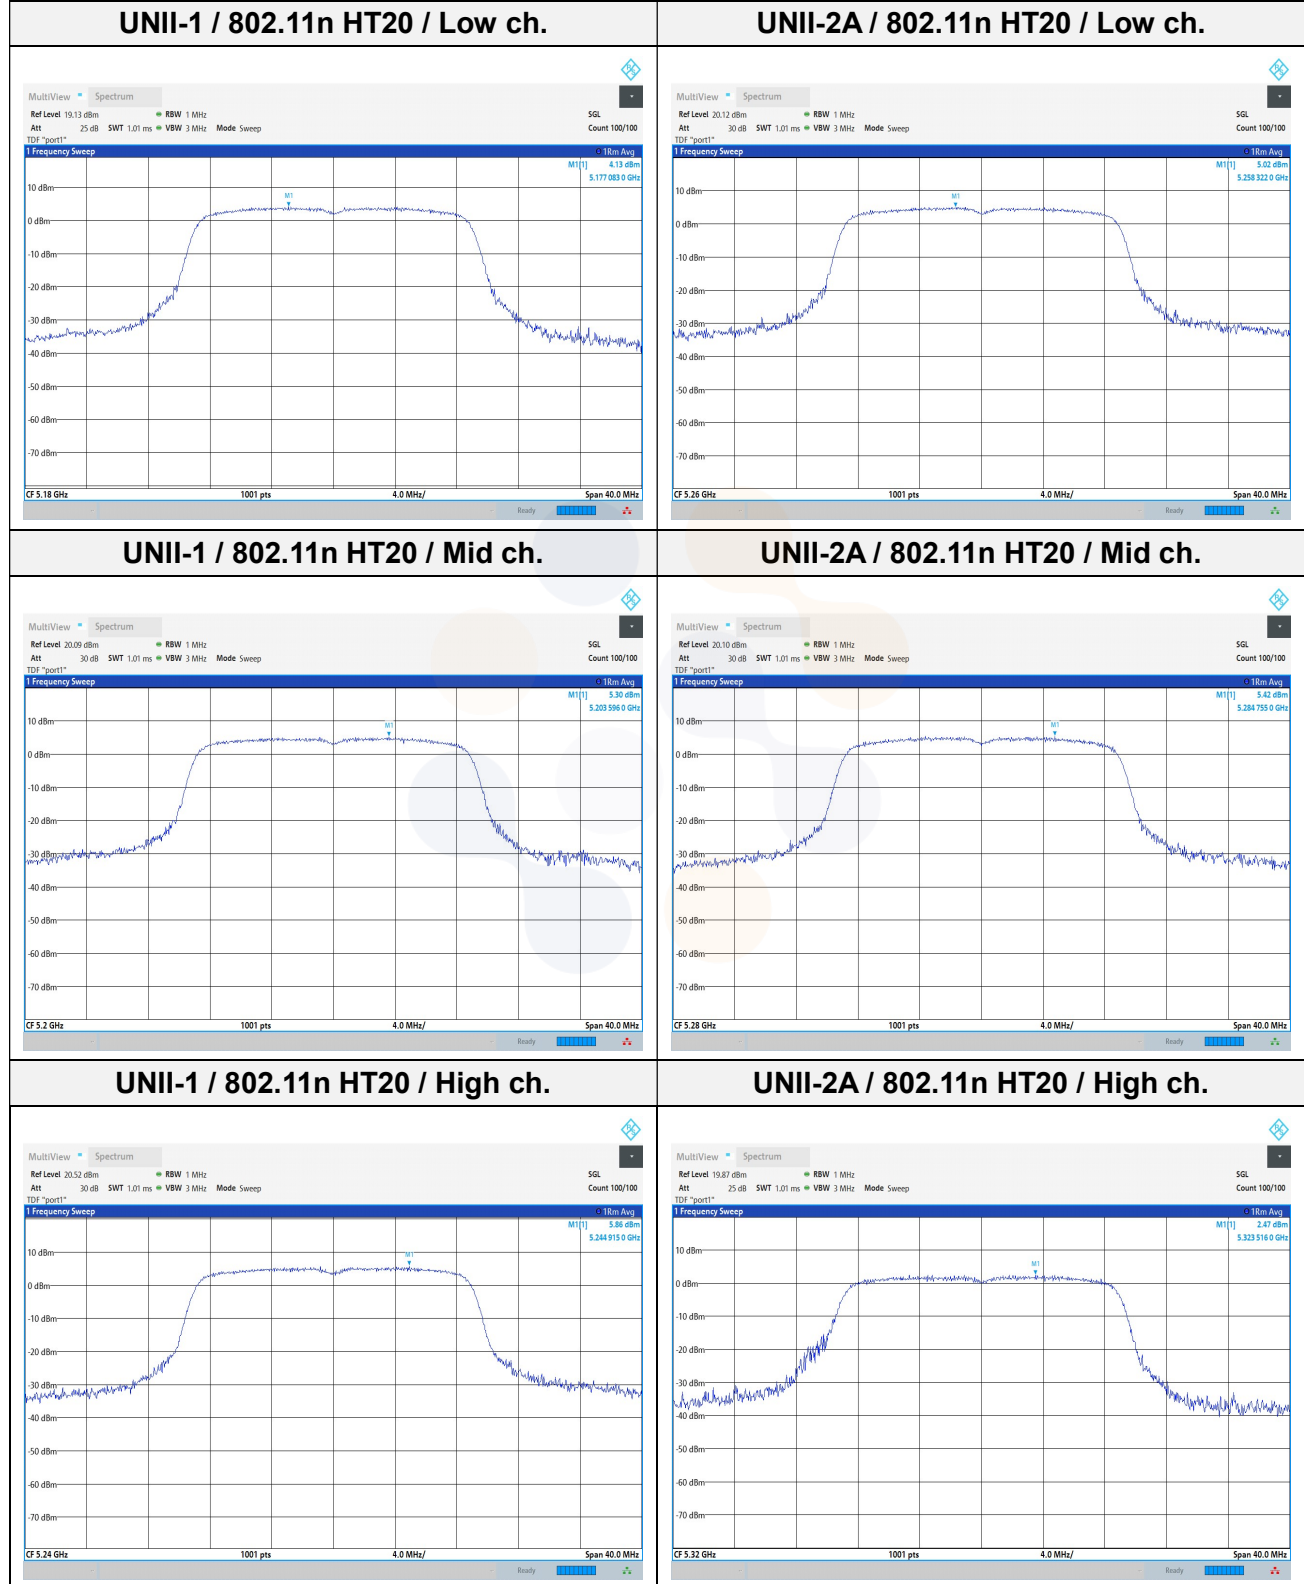


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0029-B
Page (23) of (121)




UNII-2C / 802.11n HT20 / Low ch.

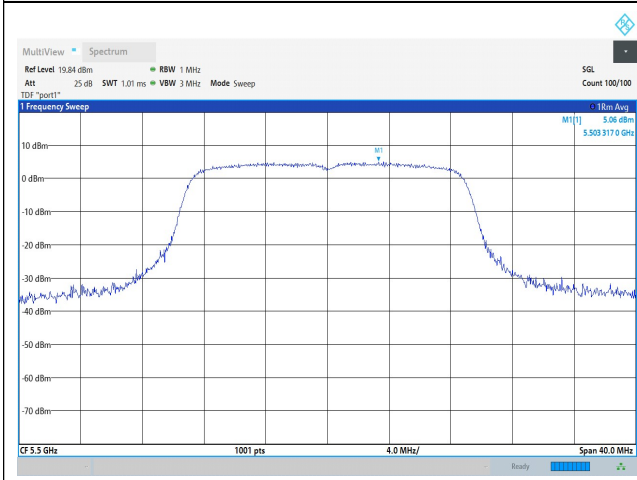


UNII-3 / 802.11n HT20 / Low ch.

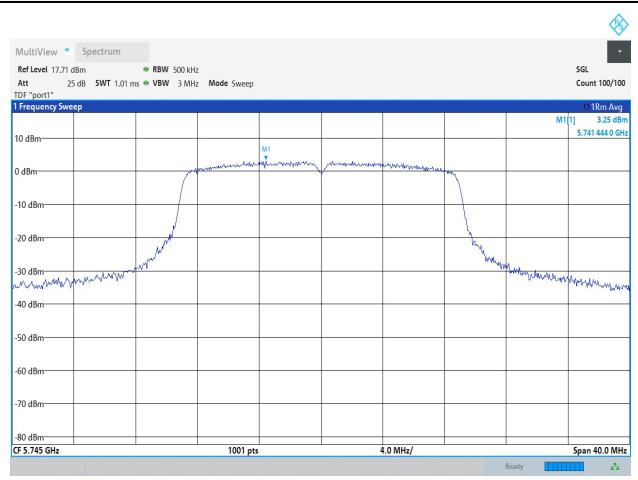


UNII-2C / 802.11n HT20 / Mid ch.

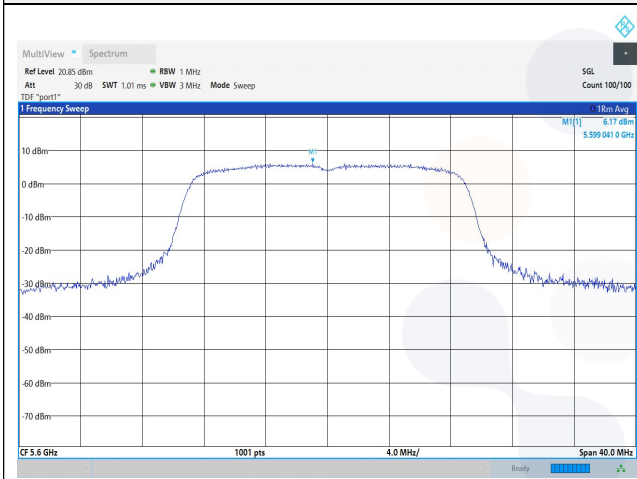


UNII-3 / 802.11n HT20 / Mid ch.

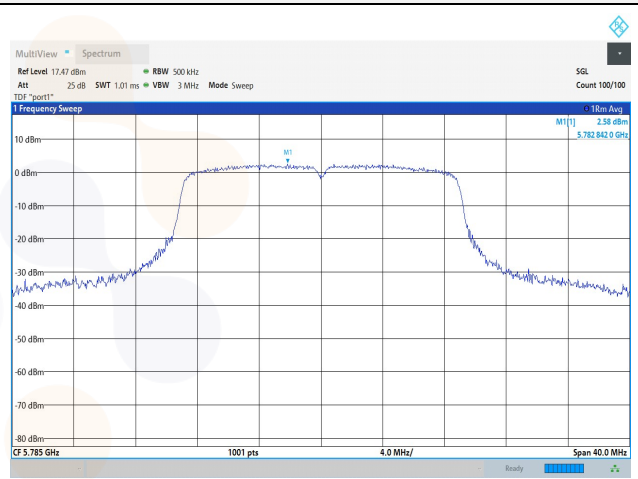

UNII-2C / 802.11n HT20 / High ch.

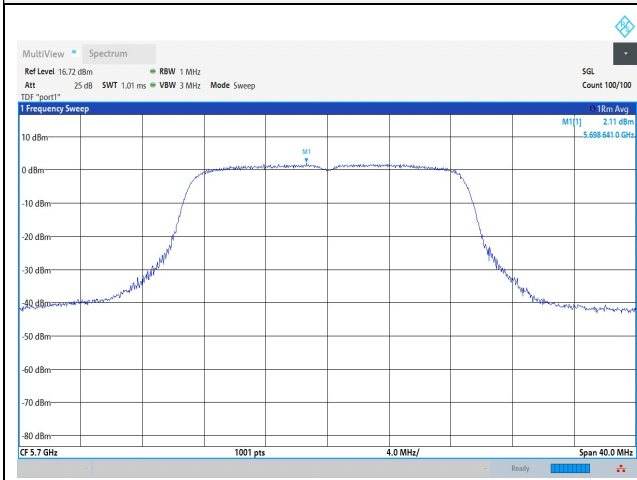

UNII-3 / 802.11n HT20 / High ch.

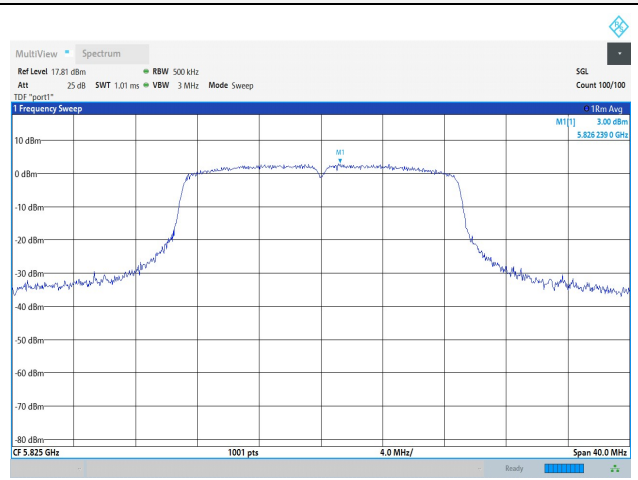


KCTL Inc.

65, Sinwon-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Korea
TEL: 82-31-285-0894 FAX: 82-505-299-8311
www.kctl.co.kr


Report No.:
KR22-SRF0029-B
Page (24) of (121)




UNII-1 / 802.11ac VHT40 / Low ch.

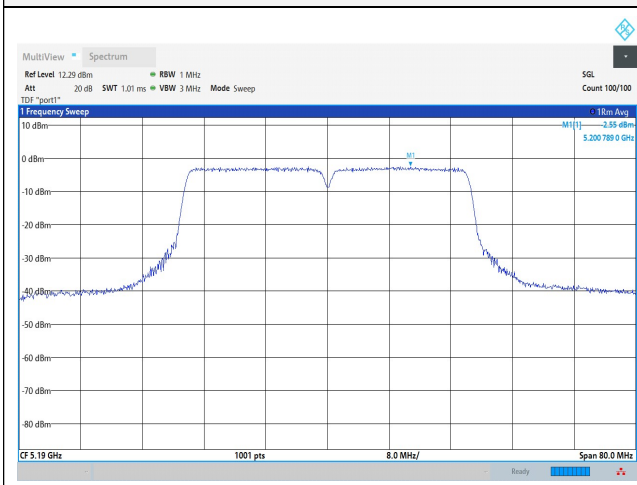

UNII-2A / 802.11ac VHT40 / Low ch.

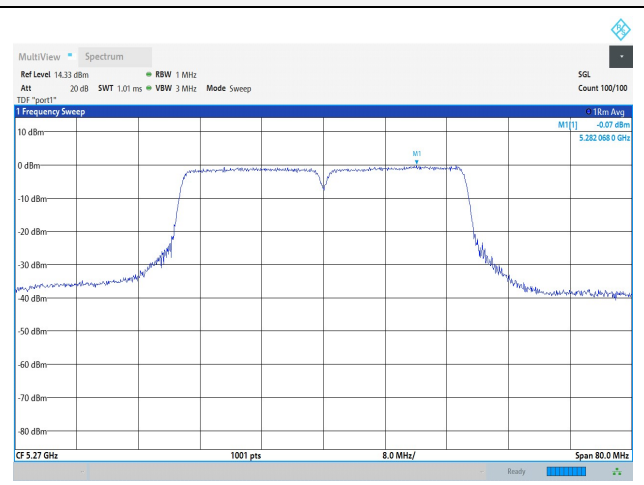

UNII-1 / 802.11ac VHT40 / High ch.

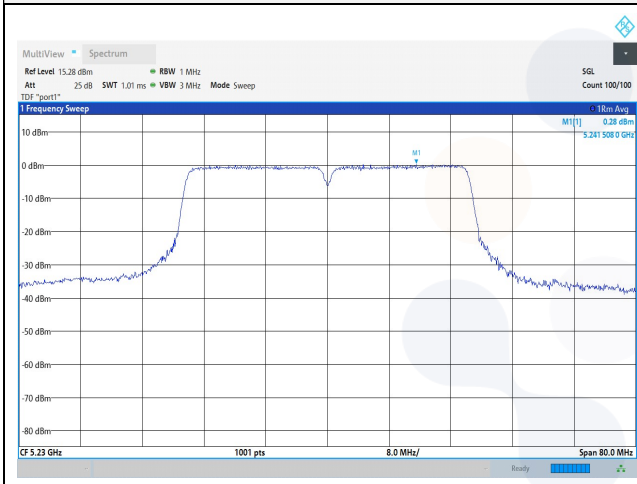

UNII-2A / 802.11ac VHT40 / High ch.

