# TEST REPORT



## KCTL Inc.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (1) of (212)



1. Client

Name

: Samsung Electronics Co., Ltd.

Address

129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677

Rep. of Korea

Date of Receipt

: 2022-02-03

2. Use of Report

: Certification

3. Name of Product and Model

: Mobile Phone

Model Name

: SC-53C, SCG15

Manufacturer and Country of Origin : Samsung Electronics Co., Ltd. / VIETNAM

4. FCC ID

: A3LSMA536JPN

5. Date of Test

: 2022-02-24 ~ 2022-03-10

6. Location of Test

■ Permanent Testing Lab □ On Site Testing

(Address: 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea)

7. Test Standards

: IEEE 1528-2013, ANSI/IEEE C95.1, KDB Publication

8. Test Results

: Refer to the test result in the test report

Tested by Technical Manager **Affirmation** Name: Mungi Jeong Jongwon Ma

2022-03-18

## KCTL Inc.

As a test result of the sample which was submitted from the client, this report does not guarantee the whole product quality. This test report should not be used and copied without a written agreement by KCTL Inc.

KCTL-TIA002-004/5 KP22-00654

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (2) of (212)



### REPORT REVISION HISTORY

Date	Revision	Page No
2022-03-18	Originally issued	-

This report shall not be reproduced except in full, without the written approval of KCTL Inc. This document may be altered or revised by KCTL Inc. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by KCTL Inc. will constitute fraud and shall nullify the document. This test report is a general report that does not use the KOLAS accreditation mark and is not related to KS Q ISO/IEC 17025 and KOLAS accreditation.

## G

eneral remarks for test reports
Statement concerning the uncertainty of the measurement systems used for the tests
(may be required by the product standard or client)
Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:
Procedure number, issue date and title: Calculations leading to the reported values are on file with the testing lab <mark>oratory th</mark> at conducted the testing.
☑ Statement not required by the standard or client used for type testing
1. Identification when information is provided by the customer: Information marked "#" is provided by the customer Disclaimer: This information is provided by the customer and can affect the validity of results.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (3) of (212)



**KCTL** 

## **CONTENTS**

1.	General information	4
2.	Device information	5
3.	#LTE Information	14
4.	Specific Absorption Rate	15
5.	SAR Measurement Procedures	16
6.	SAR Measurement Configurations	17
7.	RF Exposure Limits	21
8.	FCC SAR General Measurement Procedures	22
9.	RF Average Conducted Output Power	29
10.	System Verification	42
11.	SAR Test Results	45
12.	Simultaneous Transmission	58
13.	SAR Measurement Variability	62
14.	Measurement Uncertainty	63
15.	Test Equipment Information	64
16.	Test System Verification Results	65
17.	Test Results	77
App	endixes List	109
App	endix A. Calibration certificate	110
App	endix B. SAR Tissue Specification	198
App	endix C. #Antenna Location & Distance	199
App	endix D. EUT Photo	202
App	endix E. Test Setup Photo	205
End	of test report	212

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (4) of (212)



## General information

Client : Samsung Electronics Co., Ltd.

Address 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677,

Rep. of Korea

Manufacturer : Samsung Electronics Co., Ltd.

Address 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677,

Rep. of Korea

Factory : Samsung Electronics Vietnam Thai Nguyen Co., Ltd

Address Yen Binh Industrial Park, Dong Tien Ward, Pho Yen Town, Thai Nguyen

Province, Vietnam

Laboratory : KCTL Inc.

Address : 65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea Accreditations : FCC Site Designation No: KR0040, FCC Site Registration No: 687132

VCCI Registration No.: R-3327, G-198, C-3706, T-1849

CAB Identifier: KR0040, ISED Number: 8035A

KOLAS No.: KT231

## 1.1 Report Overview

This report details the results of testing carried out on the samples listed in section 2, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this test report is used in any configuration other than that detailed in the test report, the manufacturer must ensure the new configuration complies with all relevant standards and certification requirements. Any mention of KCTL Inc. Wireless lab or testing done by KCTL Inc. Wireless lab made in connection with the distribution or use of the tested product must be approved in writing by KCTL Inc. Wireless lab.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (5) of (212)



## 2. Device information

## 2.1 Basic description

Product Name		Mobile Phone					
Product Mod	del Name	SC-53C, SCG15					
Product Mar	nufacturer	Samsung Electronics Co., I	_td.				
	Radiation	R3CRC0HRFSK, R3CRC0	HR47Z, R3CRC0HR	GEA			
Product Serial	WWAN Conduction	R3CRC0HRG8E					
Number	WLAN Conduction	R3CRC0HRE8A, R3CRC0I	HREYX				
		Band & Mode	Operating Modes	Tx Frequency (₩z)			
		GSM/GPRS/EDGE 850	Voice/Data	824.2 ~ 848.8			
		GSM/GPRS/EDGE 1900	Voice/Data	1 850.2 ~ 1 909.8			
		WCDMA Band V	Voice/Data	826.4 ~ 846.6			
		LTE Band 5	Voice/Data	824.7 ~ 848.3			
		LTE Band 12	Voi <mark>ce/Data</mark>	699.7 ~ 715.3			
Device Over	wiow	LTE Band 41	Voi <mark>ce/Data</mark>	2 498.5 ~ 2 687.5			
Device Over	VIEW	2.4 GHz WLAN	Voice/Data	2 412.0 ~ 2 472.0			
		U-NII-1	Voice/Data	5 180.0 ~ 5 240.0			
		U-NII-2A	Voice/Data	5 260.0 ~ 5 320.0			
		U-NII-2C	Voice/Data	5 500.0 ~ 5 720.0			
		U-NII-3	Voice/Data	5 745.0 ~ 5 825.0			
		Bluetooth	Data	2 402.0 ~ 2 480.0			
		NFC	Data	13.56			
TDWR Infor	mation	5.60 ଖz∼ 5.65 ଖz band (TDWR) is supported by the device.					

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (6) of (212)



2.2 Summary of SAR Test Results

			Highest Reported					
Band	Equipment Class		10g SAR (W/kg)					
		Head	Body-Worn	Hotspot	Phablet			
GSM/GPRS/EDGE 850	PCE	0.19	0.30	0.53	N/A			
GSM/GPRS/EDGE 1900	PCE	< 0.10	0.33	1.12	N/A			
WCDMA Band V	PCE	0.19	0.22	0.45	N/A			
LTE Band 5	PCE	0.28	0.28	0.56	N/A			
LTE Band 12	PCE	0.19	0.29	0.36	N/A			
LTE Band 41	PCE	0.26	0.24	0.98	N/A			
2.46Hz WLAN	DTS	0.27	0.12	0.22	N/A			
U-NII-1	NII	N/A	N/A	N/A	N/A			
U-NII-2A	NII	0.15	< 0.10	N/A	0.85			
U-NII-2C	NII	0.40	0.25	N/A	1.83			
U-NII-3	NII	0.51	0.29	N/A	1.94			
Bluetooth	DSS	0.28	N/A	< 0.10	N/A			
Simultaneous SAR per KDB 690783 D01v01r03		1.07	0.96	1.12	N/A			

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (7) of (212)



## 2.3 Power Reduction for SAR

This device uses an independent fixed level power reduction mechanism for WLAN operations during VoWIFI held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the Head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

## 2.4 #Maximum Tune-up power

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for U NII band 2A is ≤ 1.2W/kg, SAR is not required for U-NII-1 band for that configuration; otherwise, each band is tested independently for SAR.



65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (8) of (212)



**KCTL** 

## 2.4.1 Maximum 2G/3G/4G Output Power

Band	Mode		Output Power (dBm)					
Ballu	IVIC	ue	Target	Max. Allowed	SAR Test			
	GSM Voice		33.00	34.00	Yes			
	GPRS	S 1 TX	33.00	34.00	No			
	GPRS	S 2 TX	31.00	32.00	No			
	GPRS	S 3 TX	29.50	30.50	Yes			
GSM 850	GPRS	S 4 TX	27.50	28.50	No			
	EGPR	S1TX	27.00	28.00	No			
	EGPR	S 2 TX	25.00	26.00	No			
	EGPR	S 3 TX	23.50	24.50	No			
	EGPR	S 4 TX	22.00	23.00	No			
	GSM	Voice	29.50	30.50	Yes			
	GPRS	S 1 TX	29.50	30.50	No			
	GPRS	S 2 TX	26.50	27.50	No			
	GPRS	S 3 TX	25.00	26.00	No			
GSM 1900	GPRS	S 4 TX	24.00	25.00	Yes			
	EGPRS 1 TX		25.00	26.00	No			
	EGPRS 2 TX		23.00	24.00	No			
	EGPRS 3 TX		21.00	22.00	No			
	EGPRS 4 TX		20.00	21.00	No			
	RMC		23.00	24.00	Yes			
	AMR		23.00	24.00	No			
		Subtest 1	22.00	23.00				
	HSDPA	Subtest 2	22.00	23.00	No			
	HODEA	Subtest 3	21.50	22.50	INO			
		Subtest 4	21.50	22.50				
		Subtest 1	22.00	23.00				
WCDMA Band V		Subtest 2	18.50	19.50				
	HSUPA	Subtest 3	21.00	22.00	No			
		Subtest 4	18.50	19.50				
		Subtest 5	22.00	23.00				
		Subtest 1	22.00	23.00				
	DC HSDD4	Subtest 2	22.00	23.00	NIC			
	DC-HSDPA	Subtest 3	21.50	22.50	No			
		Subtest 4	21.50	22.50				
	LTE Band 5		24.50	25.50	Yes			
	LTE Band 12		24.50	25.50	Yes			
	LTE Band 41		23.00	24.00	Yes			

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (9) of (212)



**KCTL** 

## 2.4.2 Maximum WLAN and Bluetooth Output Power

			Output Power(dBm)																		
Band	Mode	Channel	Noi	rmal	SAR	Back-off (RCV)		SAR													
			Target	Max. Allowed	Test	Target	Max. Allowed	Test													
	802.11b	1 ~ 11	18.00	19.00	Yes	15.00	16.00	Yes													
	002.110	12,13	7.00	8.00	163	7.00	8.00	163													
		1 ~ 11	17.00	18.00		15.00	16.00														
WLAN	802.11g	12	7.00	8.00	No	7.00	8.00	No													
2.4 GHz		13	5.00	6.00		5.00	6.00														
		1 ~ 11	17.00	18.00		15.00	16.00														
	802.11n(HT20)	12	5.00	6.00	No	5.00	6.00	No													
		13	3.00	4.00		3.00	4.00														
	802.11a	36,64	15.00	16.00	Yes	12.00	14.00	No													
	002.11a	Except 36,64	17.00	18.00	162	13.00	14.00	NO													
	000 44p/UT00)	36,64	15.00	16.00	No	12.00	14.00	No													
	802.11n(HT20)	Except 36,64	17.00	18.00	No	13.00	14.00	No													
	802.11n(HT40)	38,62	12.00	13.00	No	12.00	13.00	Voc													
U-NII-1 U-NII-2A		Except 38,62	15.00	16.00	No	13.00	14.00	Yes													
U-INII-ZA	802.11ac(VHT20)	36,64	15.00	16.00	No	12.00	44.00	Ma													
		Except 36,64	17.00	18.00	No	13.00	14.00	No													
	000 44 00() (LIT40)	38,62	12.00	13.00	No	12.00	13.00	Ma													
	802.11ac(VHT40)	Except 38,62	15.00	16.00		13.00	14.00	No													
	802.11ac(VHT80)	All Channel	10.00	11.00	No	10.00	11.00	No													
	802.11a	140	13.00	14.00	Yes	13.00	14.00	No													
	002.11a	Except 140	17.00	18.00	162	13.00	14.00	110													
	000 44 (LITOO)	140	13.00	14.00	No 13	40.00	44.00	NI-													
	802.11n(HT20)	Except 140	17.00	18.00		No	NO	NO	INO	No	INO	IVO	NO	NO	IVO	INO	INO	INO	INO	13.00	14.00
	000 44 m/LIT40)	102	14.00	15.00	Ma	42.00	44.00	Vac													
U-NII-2C	802.11n(HT40)	Except 102	15.00	16.00	No	No	INO	No	INO	NO	INO	No	INO	13.00	14.00	Yes					
0-1111-20	000 44cc(\/LIT00\	140	13.00	14.00	Ma	42.00	44.00	Na													
	802.11ac(VHT20)	Except 140	17.00	18.00	No	13.00	14.00	No													
	802.11ac(VHT40)	102	14.00	15.00	No	13.00	14.00	No													
	002.11d0(V11110)	Except 102	15.00	16.00	140	10.00	14100	140													
	802.11ac(VHT80)	106	10.00	11.00	No	10.00	11.00	No													
	002.1140(111100)	Except 106	12.00	13.00	140	12.00	13.00	140													
	802.11a	All Channel	17.00	18.00	Yes	13.00	14.00	No													
	802.11n(HT20)	All Channel	17.00	18.00	No	13.00	14.00	No													
U-NII-3	802.11n(HT40)	All Channel	15.00	16.00	No	13.00	14.00	Yes													
U-INII-U	802.11ac(VHT20)	All Channel	17.00	18.00	No	13.00	14.00	No													
	802.11ac(VHT40)	All Channel	15.00	16.00	No	13.00	14.00	No													
	802.11ac(VHT80)	All Channel	12.00	13.00	No	12.00	13.00	No													

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr

-do, 16677, Korea KR22-SPF0012 FAX: 82-505-299-8311 Page (10) of (212)



Band	Mode	Channel	Output Power (dB m)			
Dallu	Wode	Cilaliliei	Target	Max. Allowed	SAR Test	
	BDR(GFSK)	All Channel	13.00	14.00	Yes	
Bluetooth	EDR (π/4DQPSK)	All Channel	10.00	11.00	No	
Bidelootii	EDR(8DPSK)	All Channel	10.00	11.00	No	
	LE(GFSK)	All Channel	7.00	8.00	No	

Report No.:

## 2.5 #DUT Antenna Locations

The overall dimensions of this device are  $> 9 \times 5$  cm. A diagram showing the location of the device antennas can be found in Appendix C. Since the diagonal dimension of this device is > 160 mm and < 200 mm, it is considered a "Phablet".

Mode	Device Edge for SAR Testing (Front View)								
Mode	Front	Rear	Left Edge	Right Edge	Тор	Bottom			
GPRS 850	Yes	Yes	Yes	Yes	No	Yes			
GPRS 1900	Yes	Yes	Yes	Yes	No	Yes			
WCDMA Band V	Yes	Yes	Yes	Yes	No	Yes			
LTE Band 5	Yes	Yes	Yes	Yes	No	Yes			
LTE Band 12	Yes	Yes	Yes	Yes	No	Yes			
LTE Band 41	Yes	Yes	Yes	No	No	Yes			
2.4 GHz WLAN	Yes	Yes	Yes	No	Yes	No			
5 GHz WLAN	Yes	Yes	Yes	No	Yes	No			
Bluetooth	Yes	Yes	Yes	No	Yes	No			

Note: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 and FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device. When Wireless Router mode is enabled U-NII bands operations is disabled.

## 2.6 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for the model. Therefore, all SAR test were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix C.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (11) of (212)



## 2.7 #Simultaneous Transmission Configurations

According to FCC KDB 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

N-	Samuel.	RF Exposure Condition					
No.	Scenario	Head	Body-Worn	Hotspot	Phablet		
1	GSM Voice + WLAN 2.4 GHz	Yes	Yes	No	Yes		
2	GSM Voice + WLAN 5 GHz	Yes	Yes	No	Yes		
3	GSM Voice + 2.4 에z Bluetooth	Yes	Yes	No	Yes		
4	GSM Voice + 2.4 Hz Bluetooth + WLAN 5 Hz	Yes	Yes	No	Yes		
5	WCDMA + WLAN 2.4 6Hz	Yes	Yes	Yes	Yes		
6	WCDMA + WLAN 5 GHz	Yes	Yes	Yes	Yes		
7	WCDMA + 2.4 6Hz Bluetooth	Yes	Yes	Yes	Yes		
8	WCDMA + 2.4 6Hz Bluetooth + WLAN 5 6Hz	Yes	Yes	Yes	Yes		
9	LTE + WLAN 2.4 GHz	Yes	Yes	Yes	Yes		
10	LTE + WLAN 5 GHz	Yes	Yes	Yes	Yes		
11	LTE + 2.4 GHz Bluetooth	Yes	Yes	Yes	Yes		
12	LTE + 2.4 GHz Bluetooth + WLAN 5 GHz	Yes	Yes	Yes	Yes		
13	GPRS/EDGE + WLAN 2.4 6Hz	Yes	Yes	Yes	Yes		
14	GPRS/EDGE + WLAN 5 GHz	Yes	Yes	Yes	Yes		
15	GPRS/EDGE + 2.4 6Hz Bluetooth	Yes	Yes	Yes	Yes		
16	GPRS/EDGE + 2.4 6Hz Bluetooth + WLAN 5 6Hz	Yes	Yes	Yes	Yes		
17	WLAN 2.4 에z + Bluetooth	No					
18	WLAN 2.4 GHz + WLAN 5 GHz (RSDB Scenario)	No					

## Notes:

- It does not to transmit simultaneously the Bluetooth and 2.4 GHz WLAN.
- It is to use the Bluetooth and 2.4 GHz WLAN same antenna path.
- This device supports Bluetooth Tethering.
- This device supports VoLTE.
- This device supports VoWIFI.
- WLAN Hotspot is supported for 2.4 GHz WLAN.
- 5 6tz Wireless Router mode is not supported, therefore U-NII bands were not evaluated for Hotspot mode conditions.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr

Report No.: KR22-SPF0012 Page (12) of (212)



#### Miscellaneous SAR Test Considerations 2.8

## (A) WIFI/Bluetooth

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII Band, only 2.46tl WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Phablet SAR was not evaluated for 2.4 GHz WLAN, Bluetooth operations since wireless router 1g SAR was < 1.2 W/kg.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel(mW)}}{\text{Test Separation Distance(mm)}} \times \sqrt{\text{Frequency(GHz)}} \leq 3.0(1\text{g} - \text{SAR}), 7.5(10\text{g} - \text{SAR})$$

Mode	Position	Frequency	Maximum Allowed Power	Separation Distance	≤ <b>3.0</b> Not Required	≤ <b>7.5</b> Not Required
		MHz	mW	mm	1g-SAR	10g-SAR
	Head	2 480.0	25	5	7.9	N/A
Bluetooth BDR	Body-Worn	2 480.0	25	15	2.6	N/A
Diuelootii DDK	Hotspot	2 480.0	25	10	3.9	N/A
	Phablet	2 480.0	25	5	N/A	<u>*7.9</u>
	Head	2 480.0	6	5	1.9	N/A
Divistanth I C	Body-Worn	2 480.0	6	15	0.6	N/A
Bluetooth LE	Hotspot	2 480.0	6	10	0.9	N/A
	Phablet	2 480.0	6	5	N/A	1.9

Note: \*The Bluetooth BDR Phablet test is not measured because the Hotspot value is less than 1.2 W/kg.

Formulas round separation distance to nearest mm and power to nearest mw before calculating thresholds or exemption values.

KCTL-TIA002-004/5 KP22-00654

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (13) of (212)



(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the lager transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

#### 2.9 SAR Test Methods and Procedures

The tests documented in this report were performed in accordance with IEEE 1528-2013 and the following published KDB procedures:

- IEEE 1528-2013
- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 648474 D04 Handset SAR v01r03
- 865664 D01 SAR measurement 100 Mb to 6 Gb v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01
- October 2014 TCB Workshop Notes (Other LTE Considerations)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2019 TCB Workshop Notes (Tissue Simulation Liquids)

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (14) of (212)



## 3. #LTE Information

LTE Information							
Form Factor	Portable Hands	et					
	LTE Band 5 (82	4.7 ~ 848.3)	MHz				
Frequency Range of each LTE transmission band	LTE Band 12 (6	99.7 ~ 715.3	B) MHz				
	LTE Band 41 (2	498.5 ~ 2 6	87.5)	MHz			
	LTE Band 5: 1.4	1 MHz, 3 MHz, 5	MHz, 1	1 O MHz			
Channel Bandwidths	LTE Band 12: 1						
	LTE Band 41: 5	MHz, 10 MHz,	15 MHz	, 20 MHz	l		Т
Channel Numbers and Frequencies (Mtz)	Low	Low-Mi	d	Mid	M	lid-High	High
LTE Band 5: 1.4 MHz	824.7 (20	407)		836.5 (20 525)		848.	3 (20 643)
LTE Band 5: 3 MHz	825.5 (20	415)		836.5 (20 525)		847.	5 (20 635)
LTE Band 5: 5 MHz	826.5 (20	425)		836.5 (20 525)		846.	5 (20 625)
LTE Band 5: 10 MHz	829.0 (20	450)		836.5 (20 525)		844.	0 (20 600)
LTE Band 12: 1.4 MHz	699.7 (23	017)		707.5 (23 095)		715.	3 (23 173)
LTE Band 12: 3 Mbz	700.5 (23	025)		707.5 (23 095)		714.	5 (23 655)
LTE Band 12: 5 Mbz	701.5 (23	035)	<mark>707.5 (23</mark> 095)		713.5 (23 155)		
LTE Band 12: 10 Mb	704.0 (23	060)		707.5 (23 095)		711.	0 (23 130)
LTE Band 41: 5 MHz	2 506.0 (39 750)	2 549.5 (40	185)	2 593.0 (40 620)	2 636	6.5 (41 055)	2 680.0 (41 490)
LTE Band 41: 10 Mb	2 506.0 (39 750)	2 549.5 (40	185)	2 593.0 (40 620)	2 636	6.5 (41 055)	2 680.0 (41 490)
LTE Band 41: 15 Mb	2 506.0 (39 750)	2 549.5 (40	185)	2 593.0 (40 620)	2 636	6.5 (41 055)	2 680.0 (41 490)
LTE Band 41: 20 Mb	2 506.0 (39 750)	2 549.5 (40	185)	2 593.0 (40 620)	2 636	6.5 (41 055)	2 680.0 (41 490)
UE Category	6						
Modulations Supported in UL	QPSK, 16QAM,	64QAM					
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3 ~ 6.2.5?(manufacturer attestation to be provided)	YES						
A-MPR(Additional MPR) disabled for SAR Testing?	YES						
LTE Carrier Aggregation Possible Combinations	This device not						
LTE Additional Information				ures are not suppo H, eMBMS, Cross-			

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (15) of (212)



## 4. Specific Absorption Rate

### 4.1 Introduction

The SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational / controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

#### 4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)
SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C\left(\frac{\delta T}{\delta t}\right)$$

Where: C is the specific head capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |\mathbf{E}|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (16) of (212)



## SAR Measurement Procedures

#### 5.1 SAR Scan Procedures

#### **Step 1: Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 1.4 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties.

#### Step 2: Area Scan & Zoom Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot and Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing1 g and 10 g of simulated tissue. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly. Area Scan & Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04.

			10.64	0 (11		
			≤ 3 GHz	> 3 GHz		
Maximum distance from (geometric center of prol			5 mm ±1 mm	½·δ·ln(2) mm 0.5 mm		
Maximum probe angle fr normal at the measurem			30° ± 1°	20° ± 1°		
			≤ 2 GHz: ≤ 15 mm	3 — 4 GHz: ≤ 12 mm		
			2 - 3 GHz: ≤ 12 mm	4 - 6 GHz: ≤ 10 mm		
Maximum area scan spa	itial resolutio	on: <mark>Δx<sub>Area</sub>, Δy</mark> <sub>Area</sub>	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.			
Maximum zoom scan sp	atial resolut	ion: Ayzaan Ayzaan	≤ 2 GHz: ≤ 8 mm	3 — 4 GHz: ≤ 5 mm*		
Maximum 200m 30an 3p	aliai icsolul	1011. AX200m, Ay200m	2 - 3 GHz: ≤ 5 mm*	4 — 6 GHz: ≤ 4 mm*		
				3 — 4 GHz: ≤ 4 mm		
	uni	form grid: Δz <sub>Zoom</sub> (n)	≤5 mm	4 — 5 GHz: ≤ 3 mm		
Maximum zoom scan				5 — 6 GHz: ≤ 2 mm		
spatial resolution, normal to phantom		$\Delta z_{Zoom}(1)$ : between 1st		3 — 4 GHz: ≤ 3 mm		
surface	graded	two points closest to	≤ 4 mm	$4-5$ GHz: $\leq 2.5$ mm		
	grid	phantom surface		5 — 6 GHz: ≤ 2 mm		
		Δz <sub>Zoom</sub> (n>1): between subsequent points	≤ 1.5·∆z <sub>Zoom</sub> (n-1) mm			
N dissipances and a second				3 — 4 GHz: ≥ 28 mm		
Minimum zoom scan volume		x, y, z	≥ 30 mm	4 — 5 GHz: ≥ 25 mm		
-				5 — 6 GHz: ≥ 22 mm		

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

#### Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

<sup>\*</sup> When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is  $\leq$  1.4 W/kg,  $\leq$  8 mm,  $\leq$  7 mm and  $\leq$  5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (17) of (212)



## 6. SAR Measurement Configurations

### 6.1 Ear Reference Point

Figure 1shows the front, back and side views of the SAM phantom. The "M" is the reference point for the center of the mouth, "LE" is the left ear reference point (ERP), and "RE" is the right ERP. The ERPs are 15 mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck – Front) is perpendicular to the reference plane and passing through the LE (or RE) is called the Reference Pivoting Line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.




Figure 1
Close-Up Side view of ERP

## 6.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Figure 3). The acoustic output was than located at the same level as the center of the ear reference point. The test device was positioned so that the "vertical centerline" was bisecting the front surface of the handset at its top and bottom edges, positioning the "ear reference point" on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 2
Front, back and side view of SAM Twin Phantom

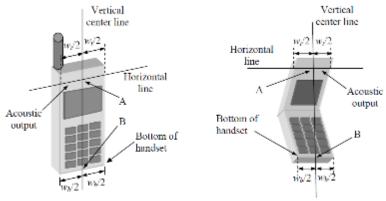


Figure 3
Handset Vertical Center & Horizontal Line Reference Points

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 Report No.: KR22-SPF0012 Page (18) of (212)



www.kctl.co.kr

#### 6.3 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\varepsilon = 3$  and loss tangent  $\delta = 0.02$ .

## 6.4 Positioning for Cheek/Touch

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 4), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 4: Front, Side and Top View of Cheek Position

- 2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
- 3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
- 4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical was respect to the line NF.
- 5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 5).

## 6.5 Positioning for Ear / 15° Tilt

With the test device aligned in the "Cheek Position":

- 1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
- 2. The phone was then rotated around the horizontal line by 15 degrees.
- 3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 5).










Figure 5: Front, Side and Top View of Ear/ 15° Tilt

Figure 6: Side view w/ relevant markings

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (19) of (212)



## 6.6 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 7). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible



Figure 7 Sample Body-Worn Diagram

with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a bodyworn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

#### 6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets (L x W  $\geq$  9 cm x 5 cm) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (20) of (212)



## 6.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna <=25 mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR > 1.2 W/kg.



65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (21) of (212)



## 7. RF Exposure Limits

**UNCONTROLLED ENVIRONMENTS** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**CONTROLLED ENVIRONMENTS** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Partial Peak SAR 1) (Partial)	1.60 mW/g	8.00 mW/g
Partial Average SAR <sup>2)</sup> (Whole Body)	0.08 mW/g	0.40 mW/g
Partial Peak SAR 3) (Hands/Feet/Ankle/Wrist)	4.00 m <mark>W/g</mark>	20.00 mW/g

- 1) The spatial Peak value of the SAR averaged over any 1g gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- 2) The spatial Average value of the SAR averaged over the whole body.
- 3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (22) of (212)



## FCC SAR General Measurement Procedures

#### 8.1 **Measured and Reported SAR**

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. Test highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

## **3G SAR Test Reduction Procedure**

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

#### 8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 "3G SAR Measurement Procedures."

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a "point SAR" at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

#### **SAR Measurement Conditions for UMTS**

## 8.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in sec. 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

KCTL-TIA002-004/5 KP22-00654

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (23) of (212)



## 8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

### 8.4.3 Body SAR measurements

SAR for body exposure configurations is measured using the 12.2kbps RMC with the TPC bits all "1s". the 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using and applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported SAR configuration in 12.2kbps RMC.

## 8.4.4 SAR Measurements with Rel. 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using and FRC with H-SET 1 in Sub-test and a 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to release 6 HSPA test procedures. 8.4.5 SAR Measurement with Rel.6 HSUPA The 3G SAR test Reduction Procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, Using H-Set 1 and QPSK for FRC and a 12.2kbps RMC configured in Test Loop Mode 1 and Power Control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

## 8.4.5 SAR Measurements with Rel. 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

#### 8.4.6 SAR Measurements with Rel. 8 DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable

65. Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (24) of (212)



#### **SAR Measurement Conditions for LTE** 8.5

LTE modes are tested according to FCC KDB 941225 D05v02r05 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluation SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

#### 8.5.1 **Spectrum Plots for RB Configurations**

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

#### 8.5.2 **MPR**

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

#### 8.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator

## 8.5.4 Required RB Size and RB offsets for SAR testing

According to FCC KDB 941225 D05v02r05

- 1. Per sec 4.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - a. The required channel and offset combination with the highest maximum output power is required for SAR.
  - b. When the reported SAR is ≤ 0.8 W/Kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - c. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel
- 2. Per Sec 4.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Sec 4.2.1.
- 3. Per Sec. 4.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- 4. Per Sec. 4.2.4 and 4.3, SAR test for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sec. 4.2.1 through 4.2.3 is less than or equal to 1/2 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/Kg.

KCTL-TIA002-004/5 KP22-00654

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (25) of (212)



## 8.5.5 LTE(TDD) Considerations

According to KDB 941225 D05v02r05, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33 %) using Uplink-downlink configuration 0 and Special sub-frame configuration 6.

LTE TDD Band supports 3GPP TS 36.211 section 4.2 for Type 2 Frame and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special sub frame configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Cuasial	Ne	ormal cyclic prefix in	downlink	Ext	tended cyclic prefix i	n downlink	
Special subframe	DwPTS	Upf	PTS	DwPTS	Upl	PTS	
configuratio n		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	
0	6592 · T <sub>s</sub>			7680 · T <sub>s</sub>			
1	19760∙ <i>T</i> <sub>s</sub>			20480 · T <sub>s</sub>	$(1+X)\cdot 2192\cdot T_{\varsigma}$	(1± <b>V</b> ), 2560, T	
2	21952 · T <sub>s</sub>	$(1+X)\cdot 2192\cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	23040 · T <sub>s</sub>	$(1+X)\cdot 2192\cdot I_5$	(1+X)·2300·1 <sub>5</sub>	
3	24144·T <sub>s</sub>			25600 · T <sub>s</sub>			
4	26336·T <sub>s</sub>			7680 · T <sub>s</sub>			
5	6592 · T <sub>s</sub>			20480·T <sub>s</sub>	(2   X) 2102 T	$(2+X)\cdot 2560\cdot T_s$	
6	19760·T <sub>s</sub>			23040 · T <sub>s</sub>	$(2+\Lambda)\cdot 2192\cdot I_s$	$(2+\Lambda)\cdot 2300\cdot I_s$	
7	21952 · T <sub>s</sub>	$(2+X)\cdot 2192\cdot T_s$	$(2+X)\cdot 2560\cdot T_s$	12800 · T <sub>s</sub>			
8	24144·T <sub>s</sub>			-	-	-	
9	13168 · T <sub>s</sub>			-	-	-	
10	13168 · T <sub>s</sub>	13152 ⋅ T <sub>s</sub>	12800 ⋅ T <sub>s</sub>	-	-	-	

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink Downlink-to-Uplink				Subframe number								
configuration	Switch-point periodicity	0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	
1	5 ms	D	S	U	U	D	D	S	U	U	D	
2	5 ms	D	S	U	D	D	D	S	U	D	D	
3	10 ms	D	S	U	U	U	D	D	D	D	D	
4	10 ms	D	S	U	U	D	D	D	D	D	D	
5	10 ms	D	S	U	D	D	D	D	D	D	D	
6	5 ms	D	S	U	U	U	D	S	U	U	D	

Calculated Duty Cycle – Extended cyclic prefix in uplink x (Ts) x # of S + # of U Example for calculated Duty Cycle for Uplink-Downlink Configuration 0: Calculated Duty Cycle =  $(5120 \times [1/(15000 \times 2048)] \times 2 + 0.006)/0.01 = 63.33 \%$  Ts =  $1/(15000 \times 2048)$  seconds

KCTL-TIA002-004/5 KP22-00654

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (26) of (212)



## 8.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 a/b/g transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable.

## 8.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 – 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

## 8.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47-5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60-5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency point requirements.

#### 8.6.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (27) of (212)



## 8.6.5 2.4 🛍 SAR Test Requirement

SAR is measured for 2.4 6Hz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following.

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel; i.e., all channels require testing.
- 2.4 (Hz 802.11g/n OFDM are additionally evaluated for SAR if highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 (Hz band, the Initial Test Configuration Procedures should be followed.

#### 8.6.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 6Hz and 5 6Hz band, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel band width, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

## 8.6.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 6Hz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. If the average RF output powers of the highest identical transmission modes are within 0.25 dB of each other, mid channel of the transmission mode with highest average RF output power is the initial test channel. Otherwise, the channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq$  0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq$  1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (28) of (212)



## 8.6.8 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.



65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

Gyeonggi-do, 16677, Korea KR22-SPF0012
-0894 FAX: 82-505-299-8311 Page (29) of (212)

www.kctl.co.kr



## 9. RF Average Conducted Output Power

## 9.1 GSM Average Conducted Output Power

	Maximum Burst-Average Output Power (dB m)											
Pand	Channal	GSM		GPRS (	GMSK)			<b>EGPRS</b>	(8-PSK)			
Band	Channel	Voice	1Tx	2Tx	3Tx	4Tx	1Tx	2Tx	3Tx	4Tx		
	128	33.15	33.25	30.93	29.48	27.79	27.18	24.57	23.63	22.07		
GSM 850	190	33.26	33.29	30.73	29.36	27.65	27.09	24.46	23.45	21.83		
	251	32.90	32.96	30.63	28.89	27.19	26.67	24.12	23.17	21.78		
	512	29.26	29.20	26.65	25.03	24.19	24.91	22.89	21.46	19.93		
GSM 1900	661	29.30	29.23	26.59	24.81	23.89	24.95	22.76	21.21	19.81		
	810	29.27	29.23	26.29	24.25	23.35	24.64	22.50	21.11	19.39		

Report No.:

	Maximum Frame-Average Output Power (dB m)											
Band	Channal	GSM	GPRS (GMSK)			EGPRS (8-PSK)						
Band	Channel	Voice	1Tx	2Tx	3Тх	4Tx	1Tx	2Tx	3Tx	4Tx		
	128	24.12	24.22	24.91	25.22	24.78	18.15	18.55	19.37	19.06		
GSM 850	190	24.23	24.26	24.71	25.10	24.64	18.06	18.44	19.19	18.82		
	251	23.87	23.93	24.61	24.63	24.18	17.64	18.10	18.91	18.77		
	512	20.23	20.17	20.63	20.77	21.18	15.88	16.87	17.20	16.92		
GSM 1900	661	20.27	20.20	20.57	20.55	20.88	15.92	16.74	16.95	16.80		
	810	20.24	20.20	20.27	19.99	20.34	15.61	16.48	16.85	16.38		
GSM 850	Frame	24.97	24.97	25.98	26.24	25.49	18.97	19.98	20.24	19.99		
GSM 1900	Avg, Target	21.47	21.47	21.48	21.74	21.99	16.97	17.98	17.74	17.99		

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (30) of (212)



**KCTL** 

## 9.2 WCDMA Average Conducted Output Power

		Average (	Conducted Po	wer (dBm)	
Band	Mode		Channel		MPR
Danu	Wiode	4 132	4 183	4 233	[dB]
		826.4 MHz	836.6 MHz	846.6 MHz	
	RMC	22.98	22.97	22.70	-
	AMR	22.91	22.87	22.63	-
	HSDPA-Subtest 1	22.89	22.91	22.38	0
	HSDPA-Subtest 2	21.78	21.90	21.23	0
	HSDPA-Subtest 3	21.90	21.72	21.17	0.5
	HSDPA-Subtest 4	20.66	20.67	20.58	0.5
	HSUPA-Subtest 1	22.03	22.03	21.44	0
WCDMA V	HSUPA-Subtest 2	17.96	17.94	17.55	3.5
	HSUPA-Subtest 3	20.95	20.96	20.41	1
	HSUPA-Subtest 4	17.94	17.96	17.62	3.5
	HSUPA-Subtest 5	22.76	22.78	22.34	0
	DC-HSDPA-Subtest 1	22.97	22.96	22.65	0
	DC-HSDPA-Subtest 2	22.05	22.07	21.70	0
	DC-HSDPA-Subtest 3	21.01	20.97	20.65	0.5
	DC-HSDPA-Subtest 4	21.01	21.03	20.65	0.5

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (31) of (212)



**KCTL** 

## 9.3 LTE Average Conducted Output Power

## 9.3.1 LTE Band 5

				Maximum Average Power				
Band width	Modulation	RB Size	RB offset	20 525	MPR			
				836.5 MHz				
		1	0	24.34	0			
		1	25	24.32	0			
		1	49	24.33	0			
	QPSK	25	0	21.42	2.5			
		25	12	21.41	2.5			
		25	25	21.40	2.5			
		50	0	21.38	2.5			
		1	0	21.42	2.5			
	16QAM	1	25	21.41	2.5			
					1	49	21.38	2.5
10 MHz		25	0	20.38	3.5			
		25	12	20.35	3.5			
		25	25	20.36	3.5			
		50	0	20.43	3.5			
		1	0	20.30	3.5			
		1	25	20.32	3.5			
		1	49	20.29	3.5			
	64QAM	25	0	19.28	4.5			
		25	12	19.30	4.5			
		25	25	19.23	4.5			
		50	0	19.27	4.5			

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

					num Average i	Power	
Band width	Modulation	RB Size	RB offset	20 425	20 525	20 625	MPR
				826.5 MHz	836.5 MHz	846.5 MHz	
		1	0	24.42	24.30	24.01	0
		1	12	24.40	24.09	23.95	0
		1	24	24.46	24.30	23.97	0
	QPSK	12	0	21.45	21.44	21.10	2.5
		12	7	21.51	21.41	21.06	2.5
		12	13	21.47	21.41	21.08	2.5
		25	0	21.47	21.43	21.10	2.5
		1	0	21.70	21.35	21.10	2.5
	16QAM	1	12	21.46	21.17	21.00	2.5
		1	24	21.62	21.52	21.33	2.5
5 MHz		12	0	20.46	20.39	20.10	3.5
		12	7	20.42	20.41	20.04	3.5
		12	13	20.38	20.35	20.10	3.5
		25	0	20.49	20.35	20.06	3.5
		1	0	20.56	20.46	20.11	3.5
		1	12	20.59	20.37	20.13	3.5
		1	24	20.49	20.37	20.11	3.5
	64QAM	12	0	19.46	19.25	19.04	4.5
		12	7	19.37	19.20	19.02	4.5
		12	13	19.35	19.24	19.00	4.5
		25	0	19.46	19.22	19.08	4.5

KCTL-TIA002-004/5 KP22-00654

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

KR22-SPF0012

Syeonggi-do, 16677, Korea

-0894 FAX: 82-505-299-8311

www.kctl.co.kr



**KCTL** 

				Maxir	num Average I	Power	
Band width	Modulation	RB Size	RB offset	20 407	20 525	20 643	MPR
				824.7 MHz	836.5 MHz	848.3 MHz	
		1	0	24.43	24.31	24.11	0
		1	8	24.28	24.26	24.01	0
		1	14	24.42	24.32	24.06	0
	QPSK	8	0	21.44	21.37	21.10	2.5
		8	4	21.45	21.36	21.02	2.5
		8	7	21.48	21.32	21.04	2.5
		15	0	21.49	21.38	21.09	2.5
	16QAM	1	0	21.92	21.34	21.23	2.5
		1	8	21.60	21.21	21.18	2.5
		1	14	21.79	21.25	21.06	2.5
3 MHz		8	0	20.52	20.38	20.07	3.5
		8	4	20.48	20.32	20.06	3.5
		8	7	20.49	20.39	20.05	3.5
		15	0	20.46	20.34	20.08	3.5
		1	0	20.47	20.42	20.07	3.5
		1	8	20.52	20.17	20.05	3.5
		1	14	20.42	20.28	20.05	3.5
	64QAM	8	0	19.46	19.25	19.03	4.5
		8	4	19.25	19.24	19.02	4.5
		8	7	19.29	19.17	19.10	4.5
		15	0	19.44	19.30	19.08	4.5

Report No.:

				Maxir	num Average I	Power	
Band width	Modulation	RB Size	RB offset	20 407	20 525	20 643	MPR
				824.7 MHz	836.5 MHz	848.3 MHz	
		1	0	24.31	24.35	23.92	0
		1	3	24.32	24.18	24.00	0
		1	5	24.34	24.35	24.01	0
	QPSK	3	0	24.44	24.38	24.13	0
		3	1	24.44	24.37	24.01	0
		3	3	24.49	24.42	24.13	0
		6	0	21.46	21.39	21.37	2.5
		1	0	21.72	21.44	21.03	2.5
	16QAM	1	3	21.70	21.44	21.07	2.5
		1	5	21.72	21.46	21.07	2.5
1.4 MHz		3	0	21.57	21.26	21.15	2.5
		3	1	21.45	21.34	21.18	2.5
		3	3	21.38	21.29	21.06	2.5
		6	0	20.51	20.35	20.02	3.5
		1	0	20.52	20.30	20.17	3.5
		1	3	20.38	20.11	20.01	3.5
		1	5	20.37	20.22	20.10	3.5
	64QAM	3	0	20.41	20.26	20.03	3.5
		3	1	20.45	20.31	20.03	3.5
		3	3	20.46	20.24	20.07	3.5
		6	0	19.37	19.16	19.05	4.5

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (33) of (212)



**KCTL** 

## 9.3.2 LTE Band 12

0.0.2 212				Maximum Average Power		
Band width	Modulation	RB Size	RB offset	23 095	MPR	
				707.5 MHz		
		1	0	24.52	0	
		1	25	24.45	0	
		1	49	24.41	0	
	QPSK	25	0	21.45	2.5	
		25	12	21.42	2.5	
		25	25	21.39	2.5	
		50	0	21.41	2.5	
		1	0	21.33	2.5	
			1	25	21.29	2.5
			1	49	21.22	2.5
10 MHz	16QAM	25	0	20.47	3.5	
		25	12	20.45	3.5	
		25	25	20.42	3.5	
		50	0	20.44	3.5	
		1	0	20.75	3.5	
		1	25	20.56	3.5	
		1	49	20.37	3.5	
	64QAM	25	0	19.61	4.5	
		25	12	<b>19.57</b>	4.5	
		25	25	<b>1</b> 9.61	4.5	
		50	0	19.62	4.5	

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

				Maxir			
Band width	Modulation	RB Size	RB offset	23 035	23 095	23 155	MPR
				701.5 MHz	707.5 MHz	713.5 MHz	
		1	0	24.40	24.41	24.35	0
		1	12	24.36	24.27	24.35	0
		1	24	24.37	24.41	24.25	0
	QPSK	12	0	21.39	21.45	21.39	2.5
		12	7	21.38	21.46	21.36	2.5
		12	13	21.38	21.44	21.38	2.5
		25	0	21.42	21.44	21.41	2.5
	16QAM	1	0	21.45	21.56	21.55	2.5
		1	12	21.27	21.34	21.36	2.5
		1	24	21.43	21.34	21.51	2.5
5 MHz		12	0	20.37	20.48	20.38	3.5
		12	7	20.31	20.46	20.37	3.5
		12	13	20.33	20.45	20.36	3.5
		25	0	20.40	20.39	20.40	3.5
		1	0	20.62	20.77	20.62	3.5
		1	12	20.59	20.66	20.65	3.5
		1	24	20.61	20.71	20.60	3.5
	64QAM	12	0	19.56	19.56	19.57	4.5
		12	7	19.49	19.62	19.56	4.5
		12	13	19.51	19.53	19.55	4.5
		25	0	19.52	19.57	19.54	4.5

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

Syeonggi-do, 16677, Korea

-0894 FAX: 82-505-299-8311

www.kctl.co.kr



**KCTL** 

				Maxir			
Band width	Modulation	RB Size	RB offset	23 025	23 095	23 655	MPR
				700.5 MHz	707.5 MHz	714.5 MHz	
		1	0	24.36	24.54	24.51	0
		1	8	24.24	24.40	24.36	0
		1	14	24.30	24.50	24.48	0
	QPSK	8	0	21.36	21.46	21.43	2.5
		8	4	21.37	21.44	21.39	2.5
		8	7	21.36	21.39	21.39	2.5
		15	0	21.37	21.44	21.39	2.5
	16QAM	1	0	21.49	21.17	21.25	2.5
		1	8	21.38	21.62	21.51	2.5
		1	14	21.65	21.67	21.54	2.5
3 MHz		8	0	20.49	20.46	20.43	3.5
		8	4	20.45	20.38	20.36	3.5
		8	7	20.42	20.38	20.40	3.5
		15	0	20.36	20.39	20.38	3.5
		1	0	20.50	20.55	20.60	3.5
		1	8	20.55	20.62	20.58	3.5
		1	14	20.61	20.53	20.61	3.5
	64QAM	8	0	19.45	19.54	19.51	4.5
		8	4	19.45	19.58	19.59	4.5
		8	7	19.46	19.55	19.48	4.5
		15	0	19.47	<del>19</del> .58	19.59	4.5

Report No.:

				Maxin			
Band width	Modulation	RB Size	RB offset	23 017	23 095	23 173	MPR
				699.7 MHz	707.5 MHz	715.3 MHz	
		1	0	24.34	24.43	24.35	0
		1	3	24.28	24.31	24.38	0
		1	5	24.31	24.37	24.36	0
	QPSK	3	0	24.31	24.41	24.42	0
		3	1	24.32	24.40	24.28	0
		3	3	24.36	24.44	24.39	0
		6	0	21.32	21.43	21.38	2.5
	16QAM	1	0	21.37	21.67	21.40	2.5
		1	3	21.35	21.47	21.47	2.5
		1	5	21.47	21.65	21.42	2.5
1.4 MHz		3	0	21.42	21.49	21.37	2.5
		3	1	21.36	21.50	21.35	2.5
		3	3	21.28	21.46	21.30	2.5
		6	0	20.32	20.37	20.39	3.5
		1	0	20.58	20.67	20.50	3.5
		1	3	20.42	20.64	20.47	3.5
		1	5	20.48	20.61	20.55	3.5
	64QAM	3	0	20.46	20.48	20.48	3.5
		3	1	20.45	20.57	20.44	3.5
		3	3	20.38	20.55	20.43	3.5
		6	0	19.42	19.53	19.47	4.5

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (35) of (212)



## 9.3.3 LTE Band 41

					Maxim	num Average	Power		
Band	Modulation	RB Size	RB	39 750	40 185	40 620	41 055	41 490	MPR
width			offset	2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
		1	0	22.47	22.56	23.61	22.95	23.30	0
		1	49	23.38	23.27	23.63	23.24	23.35	0
		1	99	23.49	22.63	23.57	22.93	22.24	0
	QPSK	50	0	21.53	21.49	21.71	21.09	21.66	2
		50	24	21.55	21.44	21.72	21.27	21.66	2
		50	50	21.52	21.50	21.69	21.19	21.47	2
		100	0	21.55	21.48	21.69	21.12	21.63	2
	16QAM	1	0	20.43	21.22	21.68	20.54	21.62	2
		1	49	21.56	21.40	21.74	21.25	21.54	2
		1	99	21.50	21.43	21.67	20.89	20.38	2
20 MHz		50	0	20.62	20.46	20.82	20.55	20.65	3
		50	24	20.64	20.40	20.76	20.71	20.66	3
		50	50	20.64	20.43	20.82	20.73	20.65	3
		100	0	20.63	20.50	20.78	20.68	20.72	3
		1	0	20.44	20.88	20.99	20.96	20.90	3
		1	49	20.28	20.68	20.89	20.74	20.75	3
		1	99	20.31	20.75	20.87	20.80	20.73	3
	64QAM	50	0	19.59	19.83	19.98	19.95	19.95	4
		50	24	19.60	19.82	19.96	19.96	19.91	4
		50	50	19.57	19.82	19.92	19.87	19.93	4
		100	0	19.58	19.76	19.93	19.88	19.97	4

					Maxim	num Average	Power		
Band	Modulation	RB Size	RB offset	39 750	40 185	40 620	41 055	41 490	MPR
width			Oliset	2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
		1	0	22.39	22.78	23.60	22.22	23.53	0
		1	36	23.48	23.10	23.54	22.47	23.30	0
		1	74	23.52	22.84	23.52	22.17	22.78	0
	QPSK	36	0	21.54	21.46	21.64	21.19	21.64	2
		36	18	21.48	21.45	21.65	21.33	21.69	2
		36	37	21.52	21.47	21.65	21.30	21.68	2
		75	0	21.53	21.41	21.67	21.21	21.68	2
		1	0	21.22	21.38	21.64	20.95	21.52	2
		1	36	21.54	21.29	21.60	21.42	21.54	2
		1	74	21.62	21.43	21.64	21.21	20.94	2
15 MHz	16QAM	36	0	20.59	20.49	20.61	20.65	20.66	3
		36	18	20.57	20.51	20.68	20.67	20.69	3
		36	37	20.58	20.45	20.70	20.68	20.65	3
		75	0	20.61	20.43	20.71	20.70	20.65	3
		1	0	20.31	20.67	20.99	20.93	20.92	3
		1	36	20.32	20.50	20.87	20.72	20.86	3
		1	74	20.32	20.54	20.93	20.74	20.82	3
	64QAM	36	0	19.54	19.75	19.98	19.95	19.96	4
		36	18	19.53	19.76	19.94	19.95	19.95	4
		36	37	19.55	19.77	19.95	19.89	19.92	4
		75	0	19.51	19.74	19.92	19.87	19.87	4

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (36) of (212)



**KCTL** 

								Maxim	num Average	Power		
Band	Modulation	RB Size	RB	39 750	40 185	40 620	41 055	41 490	MPR			
width			offset	2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz				
		1	0	23.37	23.33	23.61	23.90	23.60	0			
		1	25	23.44	23.20	23.51	23.37	23.54	0			
		1	49	23.47	23.33	23.56	23.27	22.91	0			
	QPSK	25	0	21.51	21.44	21.69	21.80	21.66	2			
		25	12	21.54	21.47	21.65	21.71	21.66	2			
		25	25	21.56	21.46	21.69	21.73	21.68	2			
		50	0	21.59	21.43	21.70	21.71	21.62	2			
		1	0	21.63	21.35	21.58	21.66	21.57	2			
		1	25	21.58	21.32	21.48	21.66	21.44	2			
		1	49	21.67	21.53	21.57	21.70	21.65	2			
10 MHz	16QAM	25	0	20.56	20.45	20.73	20.71	20.71	3			
		25	12	20.54	20.46	20.72	20.69	20.70	3			
		25	25	20.57	20.46	20.78	20.73	20.70	3			
		50	0	20.64	20.44	20.76	20.74	20.71	3			
		1	0	20.62	20.74	20.94	20.85	20.96	3			
		1	25	20.36	20.66	20.83	20.62	20.81	3			
		1	49	20.55	20.60	20.70	20.64	20.79	3			
	64QAM	25	0	19.59	19.79	19.93	19.91	19.96	4			
		25	12	19.52	19.74	19.92	19.86	19.93	4			
		25	25	19.55	19.75	19.89	19.88	19.97	4			
		50	0	19.50	19.77	19.90	19.87	19.96	4			

					Maxim	num Average	Power		
Band width	Modulation	RB Size	RB offset	39 750	40 185	40 620	41 055	41 490	MPR
wiath			onset	2 506.0 MHz	2 549.5 MHz	2 593.0 MHz	2 636.5 MHz	2 680.0 MHz	
		1	0	23.45	23.46	23.64	22.81	23.61	0
		1	12	23.36	23.36	23.51	22.72	23.36	0
		1	24	23.45	23.36	23.58	22.65	23.09	0
	QPSK	12	0	21.52	21.44	21.70	21.59	21.60	2
		12	7	21.52	21.40	21.74	21.60	21.63	2
		12	13	21.49	21.37	21.70	21.61	21.60	2
		25	0	21.51	21.53	21.71	21.57	21.60	2
	16QAM	1	0	21.53	21.28	21.63	21.60	21.48	2
		1	12	21.25	21.29	21.52	21.62	21.42	2
		1	24	21.47	21.36	21.62	21.59	21.53	2
5 MHz		12	0	20.67	20.43	20.79	20.75	20.64	3
		12	7	20.61	20.48	20.78	20.77	20.67	3
		12	13	20.67	20.46	20.79	20.75	20.64	3
		25	0	20.64	20.55	20.80	20.72	20.67	3
		1	0	20.67	20.72	20.91	20.95	20.96	3
		1	12	20.57	20.60	20.95	20.63	20.79	3
		1	24	20.42	20.58	20.98	20.66	20.72	3
	64QAM	12	0	19.62	19.80	19.92	19.88	19.98	4
		12	7	19.59	19.76	19.99	19.88	19.91	4
		12	13	19.60	19.74	19.96	19.81	19.97	4
		25	0	19.56	19.75	19.98	19.83	19.96	4

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (37) of (212)




### 9.4 WLAN Average Conducted Output Power

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.

Power Measurement Setup

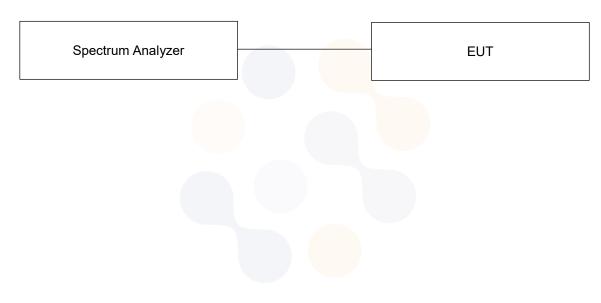

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (38) of (212)



# 9.4.1 WLAN Average Conducted Output Power(Maximum Average Power)

Donal	- ruu -	Observat		Mode	
Band	Freq. [MHz]	Channel	802.11b	802.11g	802.11n
	2 412.0	1	18.24	17.87	17.24
	2 437.0	6	18.26	16.88	16.45
WLAN 2.4 GHz	2 462.0	11	18.02	17.52	16.15
	2 467.0	12	7.40	7.38	4.79
	2 472.0	13	7.21	4.85	2.61
Band	Cros (WI-1	Channel		Mode	
Dallu	Freq. [MHz]	Chamilei	802.11a	802.11n	802.11ac
_	5 180.0	36	14.95	15.58	14.79
	5 200.0	40	16.33	16.45	16.62
	5 220.0	44	16.67	16.78	16.88
	5 240.0	48	16.74	16.86	17.05
	5 260.0	52	16.42	16.41	16.81
	5 280.0	56	16.37	16.61	16.80
NII	5 300.0	60	16.30	16.57	16.57
(20 MHz)	5 320.0	64	15.54	15.90	15.82
(ZU MITZ)	5 500.0	100	16.06	16.31	16.40
	5 600.0	120	16.97	17.22	17.18
	5 620.0	124	16.96	17.21	17.22
	5 720.0	144	16.94	17.19	17.31
-	5 745.0	149	16.64	17.00	16.84
-	5 785.0	157	16.38	16.82	16.83
-	5 825.0	165	16.89	16.98	17.00
Dand	F	Channal		Mode	
Band	Freq. [MHz]	Channel	802.11n		802.11ac
	5 190.0	38	11.81		12.55
	5 230.0	46	15.29		15.27
	5 270.0	54	14.51		14.54
	5 310.0	62	11.28		11.79
NII	5 510.0	102	13.91		13.94
(40 MHz)	5 590.0	118	15.21		15.17
	5 630.0	126	15.32		15.31
	5 710.0	142	15.33		15.37
	5 755.0	151	14.97		14.97
	5 795.0	159	14.85		14.77
Pand	Even run.	Channal		Mode	
Band	Freq. [MHz]	Channel		802.11ac	
	5 210.0	42		9.75	
	5 290.0	58		9.72	
NII	5 530.0	106		10.12	
(80 MHz)	5 610.0	122		11.78	
	5 690.0	138		12.00	
	5 775.0	155		11.33	

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (39) of (212)



# 9.4.2 WLAN Average Conducted Output Power(Reduced Average Power)(RCV)

Donal	- ruu -	Ob annual		Mode	
Band	Freq. [MHz]	Channel	802.11b	802.11g	802.11n
	2 412.0	1	15.45	15.75	15.86
	2 437.0	6	14.37	14.83	14.83
WLAN 2.4 GHz	2 462.0	11	14.75	15.56	15.47
	2 467.0	12	7.40	7.38	4.79
	2 472.0	13	7.21	4.85	2.61
Band	Eroa [WJ]	Channel		Mode	
Dallu	Freq. [MHz]	Chamilei	802.11a	802.11n	802.11ac
	5 180.0	36	13.42	13.88	13.89
	5 200.0	40	13.88	13.78	13.99
	5 220.0	44	13.94	13.87	13.93
	5 240.0	48	13.56	13.71	13.75
	5 260.0	52	13.00	13.36	13.33
	5 280.0	56	13 <mark>.15</mark>	13.38	13.28
NII	5 300.0	60	13 <mark>.49</mark>	13.15	13.06
(20 MHz)	5 320.0	64	13.05	12.96	13.07
(ZU MITZ)	5 500.0	100	12.87	13.32	13.01
	5 600.0	120	12.91	12.92	13.00
	5 620.0	124	13.10	13.08	13.08
	5 720.0	144	13.53	13.02	13.18
	5 745.0	149	12.77	12.88	12.96
	5 785.0	157	12.38	12.58	12.51
	5 825.0	165	12.73	12.87	12.93
Dand	- ruu 3	Ob annual		Mode	-
Band	Freq. [MHz]	Channel	802.11n		802.11ac
	5 190.0	38	11.82		12.55
	5 230.0	46	13.97		13.93
	5 270.0	54	13.23		13.34
	5 310.0	62	11.29		11.79
NII	5 510.0	102	12.79		12.77
(40 MHz)	5 590.0	118	12.97		12.96
	5 630.0	126	13.08		13.20
	5 710.0	142	13.42		13.48
	5 755.0	151	12.78		12.71
	5 795.0	159	12.76		12.75
Bana'	Fee or Full 3			Mode	
Band	Freq. [MHz]	Channel		802.11ac	
	5 210.0	42		9.75	
	5 290.0	58		9.72	
NII	5 530.0	106		10.12	
(80 MHz)	5 610.0	122		11.78	
ļ	5 690.0	138		12.00	
ļ	5 775.0	155		11.33	

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (40) of (212)



# 9.5 Bluetooth Average Conducted Output Power

Mode	Freq. [Mtz]	Channel	Conducted Powers (dBm)
DDD D115	2 402.0	0	12.48
BDR_DH5 (1 Mbps)	2 441.0	39	12.98
(1 Mbps)	2 480.0	78	12.21
EDD 0 DUE	2 402.0	0	9.19
EDR_2-DH5 (2 Mbps)	2 441.0	39	9.74
(Z MDP3)	2 480.0	78	9.08
EDD o DUE	2 402.0	0	9.17
EDR_3-DH5 (3 Mbps)	2 441.0	39	9.72
(o wops)	2 480.0	78	9.00
1.5	2 402.0	0	7.26
LE (1 Mbps 37)	2 440.0	19	7.33
(1 10000 07)	2 480.0	39	7.09
1.5	2 402.0	0	7.20
LE (1 Mbps 255)	2 440.0	19	7.25
(1 Mbps 255)	2 480.0	39	7.00
	2 402.0	0	6.91
LE (2 Mbps 37)	2 440.0	19	6.88
(2 MDp3 37)	2 480.0	39	6.62
1.5	2 402.0	0	6.83
LE (2 Mbps 255)	2 440.0	19	6.76
(Z MDP3 200)	2 480.0	39	6.49

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr


Report No.: KR22-SPF0012 Page (41) of (212)



**KCTL** 

### 9.6 Wireless Band Duty Cycle

Wireless Bands	Frequenc	y Bands	M	ode	Duty Cy	ycle (%)	
					Voice	: 12.5	
	0.5	-0	\/-: OD	DO(OMOK)	(E)GPRS 1Tx : 12.5		
GSM	85	00	·	RS <b>(</b> GMSK), S(8PSK)	(E)GPRS	2Tx : 25.0	
		00	LOTIK	S(01 S11)	(E)GPRS	3Tx : 37.5	
					(E)GPRS	4Tx : 50.0	
WCDMA	Ban	d V	,	R, HSDPA, DC-HSDPA	10	00	
	FDD E	Band 5			100		
LTE	TE FDD Ban		QPSK, 160	QAM, 64QAM	100		
	TDD B	and 41		63.33			
	2.4	GHz	802	2.11b	99	0.2	
WLAN	N		802	2.11a	94	l.1	
	l N	11	802.11	n(HT40)	86	5.0	
	Frequenc	y Bands	M	<mark>od</mark> e	Duty	Cycle	
Wireless Bands	Mode	Packet	On Time (ms)	On-Off Time (ms)	Duty Cycle (%)	Duty Cycle Compensate Factor	
Bluetooth	BDR(GFSK)	DH5	2.88	3.75	76.8	1.302	

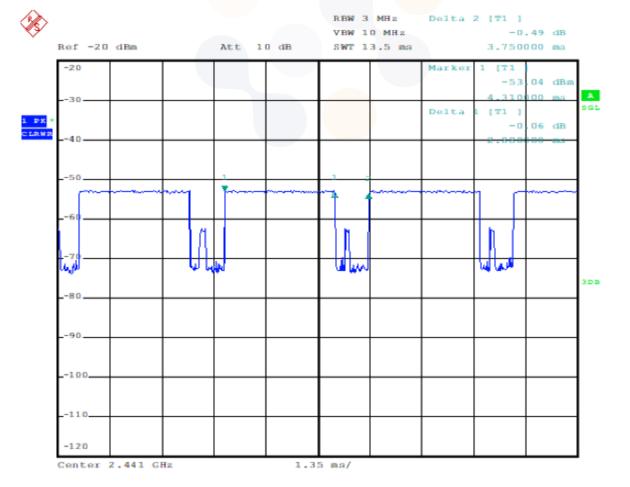

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (42) of (212)



**KCTL** 

## 10. System Verification

#### 10.1 Tissue Verification

The dielectric properties for this Tissue Simulant Liquids were measured by using the SPEAG Model DAK3.5 Dielectric Probe in conjunction with Agilent E5071B Network Analyzer (300  $\,$  kHz - 8 500  $\,$  MHz). The Conductivity ( $\sigma$ ) and Permittivity ( $\rho$ ) are listed in Table 1.For the SAR measurement given in this report. The temperature variation of the Tissue Simulant Liquids was (22 ± 2)  $\,$  °C.

Freq. (MHz)	Limit/N	leasured	Permittivity (ρ)	Conductivity (σ)	Temp. (°C)
750.0	Recommo	ended Limit	41.90 ± 5 % (39.81 ~ 44.00)	0.89 ± 5 % (0.85 ~ 0.93)	22 ± 2
	Measured	2022-02-25	43.30	0.90	20.72
850.0	Recommo	ended Limit	41.50 ± 5 % (39.43 ~ 43.58)	0.92 ± 5 % (0.87 ~ 0.97)	22 ± 2
	Measured	2022-02-24	41.11	0.93	20.48
850.0	Recommo	ended Limit	41.50 ± 5 % (39.43 ~ 43.58)	0.92 ± 5 % (0.87 ~ 0.97)	22 ± 2
	Measured	2022-03-07	40.45	0.92	20.63
1 900.0	Recommended Limit		40.00 ± 5 % (38.00 ~ 42.00)	1.40 ± 5 % (1.33 ~ 1.47)	22 ± 2
	Measured 2022-03-08		38.98	1.41	20.89
2 450.0	Recomm	ended Limit	39.20 ± 5 % (37.24 ~ 41.16)	1.80 ± 5 % (1.71 ~ 1.89)	22 ± 2
	Measured	2022-03-07	38.60	1.79	20.76
2 450.0	Recomm	ended Limit	39.20 ± 5 % (37.24 ~ 41.16)	1.80 ± 5 % (1.71 ~ 1.89)	22 ± 2
	Measured	2022-03-10	38.77	1.79	20.62
2 600.0	Recommo	ended Limit	39.00 ± 5 % (37.05 ~ 40.95)	1.96 ± 5 % (1.86 ~ 2.06)	22 ± 2
	Measured	2022-02-28	38.41	2.03	20.91
2 600.0	Recommo	ended Limit	39.00 ± 5 % (37.05 ~ 40.95)	1.96 ± 5 % (1.86 ~ 2.06)	22 ± 2
	Measured	2022-03-03	38.28	1.99	20.74
5 300.0	Recommo	ended Limit	35.90 ± 5 % (34.11~37.70)	4.76 ± 5 % (4.52~5.00)	22 ± 2
	Measured	2022-02-25	37.32	4.83	21.12
5 600.0	Recommo	ended Limit	35.50 ± 5 % (33.73~37.28)	5.07 ± 5 % (4.82~5.32)	22 ± 2
	Measured	2022-02-28	36.23	5.06	20.99
5 800.0	Recommo	ended Limit	35.30 ± 5 % (33.54~37.07)	5.27 ± 5 % (5.01~5.53)	22 ± 2
	Measured	2022-02-28	35.94	5.26	20.99
5 800.0	Recommo	ended Limit	35.30 ± 5 % (33.54~37.07)	5.27 ± 5 % (5.01~5.53)	22 ± 2
	Measured	2022-03-02	35.41	5.29	20.85

<Table 1. Measurement result Tissue electric parameters>

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894


FAX: 82-505-299-8311 www.kctl.co.kr

Report No.: KR22-SPF0012 Page (43) of (212)



#### 10.2 **Test System Verification**

The microwave circuit arrangement for system verification is sketched below picture. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within ± 10% from the t arget SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the Table 2. During the tests, the ambient temperature of the laboratory was in the range (22 ± 2) °C, th e relative humidity was in the range(50 ± 20)% and the liquid depth Above the ear/grid refer ence points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

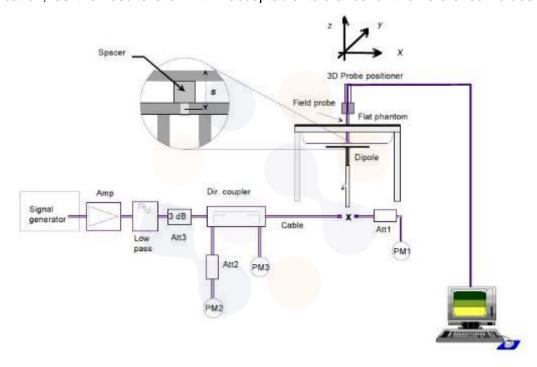

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (44) of (212)



**KCTL** 

Verification Kit	Probe S/N	Frequency (MHz)	Tissue Type	Limit/Measured (Nor	malized to 1 W)
D750V2	EX3DV4	750.0	HSL	Recommended Limit 1g (Normalized)	8.36 ± 10 % (7.52~9.20)
SN: 1183	SN: 7540			Measured 2022-02-25	8.68
D850V2 SN: 1006	EX3DV4 SN: 7540	850.0	HSL	Recommended Limit 1g (Normalized)	9.95 ± 10 % (8.96~10.95)
3N. 1000	3N. 7340			Measured 2022-02-24	10.12
D850V2 SN: 1006	EX3DV4 SN: 7540	850.0	HSL	Recommended Limit 1g (Normalized)	9.95 ± 10 % (8.96~10.95)
014. 1000	OIV. 7040			Measured 2022-03-07	9.68
D1900V2 SN: 5d160	EX3DV4 SN: 7540	1 900.0	HSL	Recommended Limit 1g (Normalized)	39.40 ± 10 % (35.46~43.34)
O11. 00100				Measured 2022-03-08	41.60
D2450V2 SN: 895	EX3DV4 SN: 7541	2 450.0	HSL	Recommended Limit 1g (Normalized)	52.40 ± 10 % (47.16 ~ 57.64)
011.000				Measured 2022-03-07	49.60
D2450V2 SN: 895	EX3DV4 SN: 7541	2 450.0	HSL	Recommended Limit 1g (Normalized)	52.40 ± 10 % (47.16 ~ 57.64)
J 333				Measured 2022-03-10	52.30
D2600V2 SN: 1050	EX3DV4 SN: 7540	2 600.0	HSL	Recommended Limit 1g (Normalized)	56.20 ± 10 % (50.58 ~ 61.82)
014. 1000	OIV. 7040			Measured 2022-02-28	58.00
D2600V2 SN: 1050	EX3DV4 SN: 7540	2 600.0	HSL	Recommended Limit 1g (Normalized)	56.20 ± 10 % (50.58 ~ 61.82)
014: 1000	OIV. 7040			Measured 2022-03-03	57.60
				Recommended Limit 1g (Normalized)	82.30 ± 10 % (74.07 ~ 90.53)
D5GHzV2	EX3DV4	5 300.0	HSL	Measured 2022-02-25	87.00
SN: 1293	SN: 7541	3 300.0		Recommended Limit 10g (Normalized)	23.60 ± 10 % (21.24 ~ 25.96)
				Measured 2022-02-25	24.50
				Recommended Limit 1g (Normalized)	83.80 ± 10 % (75.42 ~ 92.18)
D5GHzV2	EX3DV4	5 600.0	HSL	Measured 2022-02-28	83.90
SN: 1293	SN: 7541	0 000.0	1102	Recommended Limit 10g (Normalized)	23.90 ± 10 % (21.51 ~ 26.29)
				Measured 2022-02-28	23.80
				Recommended Limit 1g (Normalized)	80.60 ± 10 % (72.54 ~ 88.66)
D5GHzV2	EX3DV4	5 800.0	HSL	Measured 2022-02-28	76.90
SN: 1293	SN: 7541	3 000.0	HOL	Recommended Limit 10g (Normalized)	22.90 ± 10 % (20.61 ~ 25.19)
				Measured 2022-02-28	21.80
				Recommended Limit 1g (Normalized)	80.60 ± 10 % (72.54 ~ 88.66)
D5GHzV2	EX3DV4	5 000 0	ПОІ	Measured 2022-03-02	78.80
SN: 1293	SN: 7541	5 800.0	HSL	Recommended Limit 10g (Normalized)	22.90 ± 10 % (20.61 ~ 25.19)
				Measured 2022-03-02	22.40

<Table 2. System Verification Result>

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (45) of (212)



# 11. SAR Test Results

#### 11.1 Standalone Head SAR Test Results

				GSM 8	50 Band				
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
	Right Cheek	0	836.6	33.26	34.00	1.186	0.157	0.186	
Voice	Right Tilt	0	836.6	33.26	34.00	1.186	0.075	0.089	
voice	Left Cheek	0	836.6	33.26	34.00	1.186	0.137	0.162	
	Left Tilt	0	836.6	33.26	34.00	1.186	0.084	0.100	
	Right Cheek	0	824.2	29.48	30.50	1.265	0.153	0.194	1
GPRS	Right Tilt	0	824.2	29.48	30.50	1.265	0.072	0.091	
3Tx	Left Cheek	0	824.2	29.48	30.50	1.265	0.140	0.177	
	Left Tilt	0	824.2	29.48	30.50	1.265	0.084	0.106	

				GSM 19	000 Band				
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
	Right Cheek	0	1 880.0	29.30	30.50	1.318	0.014	0.018	
Voice	Right Tilt	0	1 880.0	29.30	30.50	1.318	0.005	0.007	
voice	Left Cheek	0	1 880.0	29.30	30.50	1.318	0.011	0.014	
	Left Tilt	0	1 880.0	29.30	30.50	1.318	0.008	0.011	
	Right Cheek	0	1 850.2	24.19	25.00	1.205	0.062	0.075	2
GPRS	Right Tilt	0	1 850.2	24.19	25.00	1.205	0.026	0.031	
4Tx	Left Cheek	0	1 850.2	24.19	25.00	1.205	0.042	0.051	
	Left Tilt	0	1 850.2	24.19	25.00	1.205	0.042	0.051	

	WCDMA Band V												
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.				
	Right Cheek	0	836.6	22.97	24.00	1.268	0.153	0.194	3				
RMC	Right Tilt	0	836.6	22.97	24.00	1.268	0.075	0.095					
RIVIC	Left Cheek	0	836.6	22.97	24.00	1.268	0.143	0.181					
	Left Tilt	0	836.6	22.97	24.00	1.268	0.086	0.109					

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (46) of (212)



**KCTL** 

	LTE Band 5												
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.				
QPSK 10M 1RB 0Offset	Right Cheek	0	836.5	24.34	25.50	1.306	0.217	0.283	4				
QPSK 10M 25RB 0Offset	Right Cheek	0	836.5	21.42	23.00	1.439	0.102	0.147					
QPSK 10M 1RB 0Offset	Right Tilt	0	836.5	24.34	25.50	1.306	0.101	0.132					
QPSK 10M 25RB 0Offset	Right Tilt	0	836.5	21.42	23.00	1.439	0.051	0.073					
QPSK 10M 1RB 0Offset	Left Cheek	0	836.5	24.34	25.50	1.306	0.172	0.225					
QPSK 10M 25RB 0Offset	Left Cheek	0	836.5	21.42	23.00	1.439	0.088	0.127					
QPSK 10M 1RB 0Offset	Left Tilt	0	836.5	24.34	25.50	1.306	0.104	0.136					
QPSK 10M 25RB 0Offset	Left Tilt	0	836.5	21.42	23.00	1.439	0.053	0.076					

				LTE Ba	nd 12				
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 0Offset	Right Cheek	0	707.5	24.52	25.50	1.253	0.154	0.193	5
QPSK 10M 25RB 0Offset	Right Cheek	0	707.5	21.45	23.00	1.429	0.078	0.111	
QPSK 10M 1RB 0Offset	Right Tilt	0	707.5	24.52	25.50	1.253	0.081	0.101	
QPSK 10M 25RB 0Offset	Right Tilt	0	707.5	21.45	23.00	1.429	0.040	0.057	
QPSK 10M 1RB 0Offset	Left Cheek	0	707.5	24.52	25.50	1.253	0.137	0.172	
QPSK 10M 25RB 0Offset	Left Cheek	0	707.5	21.45	23.00	1.429	0.069	0.099	
QPSK 10M 1RB 0Offset	Left Tilt	0	707.5	24.52	25.50	1.253	0.087	0.109	
QPSK 10M 25RB 0Offset	Left Tilt	0	707.5	21.45	23.00	1.429	0.042	0.060	

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

Report No.: KR22-SPF0012 Page (47) of (212)



**KCTL** 

www.kctl.co.kr

	LTE Band 41											
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.			
QPSK 20M 1RB 49Offset	Right Cheek	0	2 593.0	23.63	24.00	1.089	0.152	0.166				
QPSK 20M 50RB 24Offset	Right Cheek	0	2 593.0	21.72	22.00	1.067	0.095	0.101				
QPSK 20M 1RB 49Offset	Right Tilt	0	2 593.0	23.63	24.00	1.089	0.119	0.130				
QPSK 20M 50RB 24Offset	Right Tilt	0	2 593.0	21.72	22.00	1.067	0.081	0.086				
QPSK 20M 1RB 49Offset	Left Cheek	0	2 593.0	23.63	24.00	1.089	0.239	0.260	6			
QPSK 20M 50RB 24Offset	Left Cheek	0	2 593.0	21.72	22.00	1.067	0.153	0.163				
QPSK 20M 1RB 49Offset	Left Tilt	0	2 593.0	23.63	24.00	1.089	0.108	0.118				
QPSK 20M 50RB 24Offset	Left Tilt	0	2 593.0	21.72	22.00	1.067	0.071	0.076				

					2.4 GHz V	VLAN					
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Area Scan Max SAR (W/kg)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
	Right Cheek	0	2 412.0	15.45	16.00	1.135	1.008	0.365	0.233	0.267	7
902 11h	Right Tilt	0	2 412.0	15.45	16.00	1.135	1.008	0.350	-	-	
802.11b	Left Cheek	0	2 412.0	15.45	16.00	1.135	1.008	0.181	-	-	
	Left Tilt	0	2 412.0	15.45	16.00	1.135	1.008	0.214	-	-	

					NII						
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Area Scan Max SAR (W/kg)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
	Right Cheek	0	5 270.0	13.23	14.00	1.194	1.163	0.229	0.111	0.154	8
802.11n	Right Tilt	0	5 270.0	13.23	14.00	1.194	1.163	0.177	-	-	
(HT40)	Left Cheek	0	5 270.0	13.23	14.00	1.194	1.163	0.047	-	-	
	Left Tilt	0	5 270.0	13.23	14.00	1.194	1.163	0.028	-	-	
	Right Cheek	0	5 710.0	13.42	14.00	1.143	1.163	0.664	0.298	0.396	9
802.11n	Right Tilt	0	5 710.0	13.42	14.00	1.143	1.163	0.327	-	-	
(HT40)	Left Cheek	0	5 710.0	13.42	14.00	1.143	1.163	0.099	-	-	
	Left Tilt	0	5 710.0	13.42	14.00	1.143	1.163	0.060	-	-	
	Right Cheek	0	5 755.0	12.78	14.00	1.324	1.163	0.622	0.330	0.508	10
802.11n	Right Tilt	0	5 755.0	12.78	14.00	1.324	1.163	0.278	0.113	0.174	
(HT40)	Left Cheek	0	5 755.0	12.78	14.00	1.324	1.163	0.139	-	=	
	Left Tilt	0	5 755.0	12.78	14.00	1.324	1.163	0.083	-	=	

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (48) of (212)



				В	Bluetooth					
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
	Right Cheek	0	2 441.0	12.98	14.00	1.265	1.302	0.168	0.277	11
BDR	Right Tilt	0	2 441.0	12.98	14.00	1.265	1.302	0.156	0.257	
DH5	Left Cheek	0	2 441.0	12.98	14.00	1.265	1.302	0.077	0.127	
	Left Tilt	0	2 441.0	12.98	14.00	1.265	1.302	0.115	0.189	



65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311



# 11.2 Standalone Body-Worn SAR Test Results

	GSM 850 Band												
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.				
Voice	Front	15	836.6	33.26	34.00	1.186	0.168	0.199					
Voice	Rear	15	836.6	33.26	34.00	1.186	0.223	0.264					
GPRS	Front	15	824.2	29.48	30.50	1.265	0.188	0.238					
ЗТх	Rear	15	824.2	29.48	30.50	1.265	0.236	0.299	12				

Report No.:

	GSM 1900 Band												
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.				
Voice	Front	15	1 880.0	29.30	30.50	1.318	0.039	0.051					
voice	Rear	15	1 880.0	29.30	30.50	1.318	0.079	0.104					
GPRS	Front	15	1 850.2	24.19	25.00	1.205	0.163	0.196					
4Tx	Rear	15	1 85 <mark>0.2</mark>	24.19	25.00	1.205	0.270	0.325	13				

WCDMA Band V												
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.			
RMC	Front	15	836.6	22.97	24.00	1.268	0.150	0.190				
RIVIC	Rear	15	836.6	22.97	24.00	1.268	0.176	0.223	14			

				LTE Ba	ınd 5				
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 0Offset	Front	15	836.5	24.34	25.50	1.306	0.192	0.251	
QPSK 10M 25RB 0Offset	Front	15	836.5	21.42	23.00	1.439	0.095	0.137	
QPSK 10M 1RB 0Offset	Rear	15	836.5	24.34	25.50	1.306	0.211	0.276	15
QPSK 10M 25RB 0Offset	Rear	15	836.5	21.42	23.00	1.439	0.106	0.153	

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

Gyeonggi-do, 16677, Korea KR22-SPF0012
-0894 FAX: 82-505-299-8311 Page (50) of (212)

www.kctl.co.kr



LTE Band 12 Measured Max. **Power** Measured Scaled Frequency Tune-up **EUT** Distance Conducted Plot 1 g SAR (W/kg) Mode Scaling 1 g SAR **Position** (mm) (MHz) Power **Power** No. **Factor** (W/kg) (dBm) (dBm) QPSK 10M 24.52 Front 15 707.5 25.50 1.253 0.180 0.226 1RB 0Offset QPSK 10M Front 15 707.5 21.45 23.00 1.429 0.097 0.139 25RB 0Offset QPSK 10M 25.50 0.286 Rear 15 707.5 24.52 1.253 0.228 16 1RB 0Offset QPSK 10M 0.118 Rear 15 707.5 21.45 23.00 1.429 0.169 25RB 0Offset

Report No.:

	LTE Band 41													
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.					
QPSK 20M 1RB 49Offset	Front	15	2 593.0	23.63	24.00	1.089	0.174	0.189						
QPSK 20M 50RB 24Offset	Front	15	2 593.0	21.72	22.00	1.067	0.114	0.122						
QPSK 20M 1RB 49Offset	Rear	15	2 593.0	23.63	24.00	1.089	0.220	0.240	17					
QPSK 20M 50RB 24Offset	Rear	15	2 593.0	21.72	22.00	1.067	0.145	0.155						

					2.4 GHz W	LAN					
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor		Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11b	Front	15	2 437.0	18.26	19.00	1.186	1.008	0.090	-	•	
602.110	Rear	15	2 437.0	18.26	19.00	1.186	1.008	0.141	0.096	0.115	18

					NII						
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Area Scan Max SAR (W/kg)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.
802.11a	Front	15	5 260.0	16.42	18.00	1.439	1.063	0.065	•		
002.11a	Rear	15	5 260.0	16.42	18.00	1.439	1.063	0.147	0.060	0.092	19
902.110	Front	15	5 600.0	16.97	18.00	1.268	1.063	0.139	-	-	
802.11a	Rear	15	5 600.0	16.97	18.00	1.268	1.063	0.392	0.183	0.247	20
902.110	Front	15	5 825.0	16.89	18.00	1.291	1.063	0.186	-	-	
802.11a	Rear	15	5 825.0	16.89	18.00	1.291	1.063	0.475	0.208	0.285	21

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (51) of (212)



# 11.3 Standalone Hotspot SAR Test Results

				GSM 8	50 Band				
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
	Front	10	824.2	29.48	30.50	1.265	0.261	0.330	
	Rear	10	824.2	29.48	30.50	1.265	0.415	0.525	22
GPRS 3Tx	Left	10	824.2	29.48	30.50	1.265	0.090	0.114	
	Right	10	824.2	29.48	30.50	1.265	0.243	0.307	
	Bottom	10	824.2	29.48	30.50	1.265	0.197	0.249	

				GSM 19	00 Band				
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
	Front	10	1 850.2	24.19	25.00	1.205	0.311	0.375	
	Rear	10	1 850.2	24.19	25.00	1.205	0.521	0.628	
	Left	10	1 850.2	24.19	25.00	1.205	0.096	0.116	
GPRS 4Tx	Right	10	1 850.2	24.19	25.00	1.205	0.061	0.074	
117	Bottom	10	1 850.2	24.19	25.00	1.205	0.718	0.865	
	Bottom	10	1 880.0	23.89	25.00	1.291	0.795	1.026	
	Bottom	10	1 909.8	23.35	25.00	1.462	0.765	1.118	23

	WCDMA Band V												
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.				
	Front	10	836.6	22.97	24.00	1.268	0.192	0.243					
	Rear	10	836.6	22.97	24.00	1.268	0.351	0.445	24				
RMC	Left	10	836.6	22.97	24.00	1.268	0.108	0.137					
	Right	10	836.6	22.97	24.00	1.268	0.169	0.214					
	Bottom	10	836.6	22.97	24.00	1.268	0.105	0.133					

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (52) of (212)



**KCTL** 

	LTE Band 5											
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.			
QPSK 10M 1RB 0Offset	Front	10	836.5	24.34	25.50	1.306	0.225	0.294				
QPSK 10M 25RB 0Offset	Front	10	836.5	21.42	23.00	1.439	0.118	0.170				
QPSK 10M 1RB 0Offset	Rear	10	836.5	24.34	25.50	1.306	0.432	0.564	25			
QPSK 10M 25RB 0Offset	Rear	10	836.5	21.42	23.00	1.439	0.227	0.327				
QPSK 10M 1RB 0Offset	Left	10	836.5	24.34	25.50	1.306	0.136	0.178				
QPSK 10M 25RB 0Offset	Left	10	836.5	21.42	23.00	1.439	0.067	0.096				
QPSK 10M 1RB 0Offset	Right	10	836.5	24.34	25.50	1.306	0.206	0.269				
QPSK 10M 25RB 0Offset	Right	10	836.5	21.42	23.00	1.439	0.103	0.148				
QPSK 10M 1RB 0Offset	Bottom	10	836.5	24.34	25.50	1.306	0.138	0.180				
QPSK 10M 25RB 0Offset	Bottom	10	836.5	21.42	23.00	1.439	0.071	0.102				

				LTE Ba	nd 12				
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.
QPSK 10M 1RB 0Offset	Front	10	707.5	24.52	25.50	1.253	0.213	0.267	
QPSK 10M 25RB 0Offset	Front	10	707.5	21.45	23.00	1.429	0.112	0.160	
QPSK 10M 1RB 0Offset	Rear	10	707.5	24.52	25.50	1.253	0.290	0.363	26
QPSK 10M 25RB 0Offset	Rear	10	707.5	21.45	23.00	1.429	0.143	0.204	
QPSK 10M 1RB 0Offset	Left	10	707.5	24.52	25.50	1.253	0.126	0.158	
QPSK 10M 25RB 0Offset	Left	10	707.5	21.45	23.00	1.429	0.070	0.100	
QPSK 10M 1RB 0Offset	Right	10	707.5	24.52	25.50	1.253	0.175	0.219	
QPSK 10M 25RB 0Offset	Right	10	707.5	21.45	23.00	1.429	0.095	0.136	
QPSK 10M 1RB 0Offset	Bottom	10	707.5	24.52	25.50	1.253	0.129	0.162	
QPSK 10M 25RB 0Offset	Bottom	10	707.5	21.45	23.00	1.429	0.067	0.096	

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

KR22-SPF0012

Syeonggi-do, 16677, Korea

-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.:



**KCTL** 

LTE Band 41											
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.		
QPSK 20M 1RB 49Offset	Front	10	2 593.0	23.63	24.00	1.089	0.343	0.374			
QPSK 20M 50RB 24Offset	Front	10	2 593.0	21.72	22.00	1.067	0.217	0.232			
QPSK 20M 1RB 49Offset	Rear	10	2 593.0	23.63	24.00	1.089	0.413	0.450			
QPSK 20M 50RB 24Offset	Rear	10	2 593.0	21.72	22.00	1.067	0.273	0.291			
QPSK 20M 1RB 49Offset	Left	10	2 593.0	23.63	24.00	1.089	0.336	0.366			
QPSK 20M 50RB 24Offset	Left	10	2 593.0	21.72	22.00	1.067	0.223	0.238			
QPSK 20M 1RB 49Offset	Bottom	10	2 593.0	23.63	24.00	1.089	0.903	0.983	27		
QPSK 20M 1RB 99Offset	Bottom	10	2 506.0	23.49	24.00	1.125	0.663	0.746			
QPSK 20M 1RB 49Offset	Bottom	10	2 549.5	23.27	24.00	1.183	0.673	0.796			
QPSK 20M 1RB 49Offset	Bottom	10	2 636.5	23.24	24.00	1.191	0.688	0.819			
QPSK 20M 1RB 49Offset	Bottom	10	2 680.0	23.35	24.00	1.161	0.543	0.630			
QPSK 20M 50RB 24Offset	Bottom	10	2 593.0	21.72	22.00	1.067	0.591	0.631			
QPSK 20M 50RB 24Offset	Bottom	10	2 506.0	21.55	22.00	1.109	0.415	0.460			
QPSK 20M 50RB 50Offset	Bottom	10	2 549.5	21.50	22.00	1.122	0.443	0.497			
QPSK 20M 50RB 24Offset	Bottom	10	2 636.5	21.27	22.00	1.183	0.450	0.532			
QPSK 20M 50RB 24Offset	Bottom	10	2 680.0	21.66	22.00	1.081	0.363	0.392			
QPSK 20M 100RB 0Offset	Bottom	10	2 593.0	21.69	22.00	1.074	0.595	0.639			
Repeated SAF	•	•									
QPSK 20M 1RB 49Offset	Bottom	10	2 593.0	23.63	24.00	1.089	0.881	0.959			

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (54) of (212)



	2.4 GHz WLAN												
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Area Scan Max SAR (W/kg)	Measured 1g SAR (W/kg)	Scaled 1g SAR (W/kg)	Plot No.		
	Front	10	2 437.0	18.26	19.00	1.186	1.008	0.165	-	-			
000 11h	Rear	10	2 437.0	18.26	19.00	1.186	1.008	0.239	-	-			
802.11b	Left	10	2 437.0	18.26	19.00	1.186	1.008	0.131	-	-			
	Тор	10	2 437.0	18.26	19.00	1.186	1.008	0.303	0.187	0.224	28		

	Bluetooth												
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Plot No.			
	Front	10	2 441.0	12.98	14.00	1.265	1.302	0.021	0.035				
BDR	Rear	10	2 441.0	12.98	14.00	1.265	1.302	0.035	0.058				
DH5	Left	10	2 441.0	12.98	14.00	1.265	1.302	0.018	0.030				
	Тор	10	2 441.0	12.98	14.00	1.265	1.302	0.053	0.087	29			

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (55) of (212)



### 11.4 Standalone Phablet SAR Test Results

					NII						
Mode	EUT Position	Distance (mm)	Frequency (MHz)	Measured Conducted Power (dBm)	Max. Tune-up Power (dBm)	Power Scaling Factor	Duty Cycle Compensate Factor		Measured 10g SAR (W/kg)	Scaled 10g SAR (W/kg)	Plot No.
	Front	0	5 260.0	16.42	18.00	1.439	1.063	0.791	-	•	
802.11a	Rear	0	5 260.0	16.42	18.00	1.439	1.063	1.216		•	
602.11a	Left	0	5 260.0	16.42	18.00	1.439	1.063	5.764	0.556	0.850	30
	Тор	0	5 260.0	16.42	18.00	1.439	1.063	0.312	-	-	
	Front	0	5 600.0	16.97	18.00	1.268	1.063	1.577	-	-	
802.11a	Rear	0	5 600.0	16.97	18.00	1.268	1.063	2.379	0.492	0.663	
002.11a	Left	0	5 600.0	16.97	18.00	1.268	1.063	8.452	1.360	1.833	31
	Тор	0	5 600.0	16.97	18.00	1.268	1.063	0.715	-	1	
	Front	0	5 825.0	16.89	18.00	1.291	1.063	1.904	-	-	
902 110	Rear	0	5 825.0	16.89	18.00	1.291	1.063	3.211	0.495	0.679	
802.11a	Left	0	5 825.0	16.89	18.00	1.291	1.063	9.523	1.410	1.935	32
	Тор	0	5 825.0	16.89	18.00	1.291	1.063	0.767	-	-	

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (56) of (212)



#### **General Notes:**

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
- 2. All modes of operation were investigated, and worst-case results are reported.
- 3. Battery is fully charged for all readings and the standard batteries are the only options.
- Liquid tissue depth was at least 15 cm.
- 5. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- 6. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
- 7. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
- 8. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was ≤ 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were required.
- 9. This device utilizes power reduction for some wireless modes, as outlined in Section 2.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.

#### **GSM Notes:**

- 1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- 2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
- 3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
- 4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not > ½ dB, the middle channel was used for testing.

#### **WCDMA Notes:**

- 1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
- 2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s).

KCTL-TIA002-004/5 KP22-00654

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (57) of (212)



#### **LTE Notes:**

- 1. Justification Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- 2. When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- 3. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- 4. Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- 5. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- 6. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator.
- 7. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
- 8. TDD LTE was tested using UL-DL configuration 0 with 6 UL sub frames and 2S sub-frames using extended cyclic prefix only and special sub frame configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Sec. 4, the duty factor using extended cyclic prefix is 0.633(cf=1.58).
- 9. For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

#### **WLAN & Bluetooth Notes:**

- 1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 cm WIFI operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 cm 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
- 2. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance.
- 3. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- 4. When the specified maximum output power is the same for both UNII Band1 and UNII Band 2A, begins SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is ≤ 1.2W/kg, SAR is not required for UNII band1 > 1.2W/kg, both bands should be tested independently for SAR.
- 5. When the maximum reported 1g averaged SAR is ≤0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
- 6. When the reported SAR is ≤ 0.4 W/kg, further SAR measurement within this exposure condition are not required Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR is ≤ 0.8 W/kg or all test positions are measured.

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (58) of (212)



### 12. Simultaneous Transmission

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g or 10g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is within SAR limits. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

#### 12.1 Estimated SAR

When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2 b), the following equation must be used to estimate the standalone 1g or 10g SAR for simultaneous transmission assessment involving that transmitter.

Estimated SAR = 
$$\frac{\sqrt{f(GHz)}}{7.5} \times \frac{\text{(Max Power of channel, mW)}}{\text{Min. Separation Distance, mm}}$$

Mode	Position	Frequency	Maximum Allowed Power	Separation Distance	Estimated 1g SAR	
		MHz	mW	mm	W/kg	
Bluetooth	Body-Worn	2 480.0	25	15	0.350	

#### Note:

- Bluetooth SAR was not required to be measured per FCC KDB Publication 447498 D01v06.
- Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

This test report shall not be reproduced, except in full, without the written approval KCTL-TIA002-004/5 KP22-00654

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (59) of (212)



**KCTL** 

# 12.2 Simultaneous Transmission Analysis

			WL	.AN		0				
	Condition	licensed	<b>2.4</b> GHz	<b>5</b> GHz	Bluetooth		Sumn	nation		
/P0	sition	[①]	[②]	[3]	[4]	[①+②]	[①+3]	[1+4]	[1+3+4]	
GSM/GPRS	850 Band								1	
	Right Cheek	0.194	0.267	0.508	0.277	0.461	0.702	0.471	0.979	
	Right Tilt	0.091	0.267	0.174	0.257	0.358	0.265	0.348	0.522	
Head	Left Cheek	0.177	0.267	0.508	0.127	0.444	0.685	0.304	0.812	
	Left Tilt	0.106	0.267	0.508	0.189	0.373	0.614	0.295	0.803	
Dody Wor	Front	0.238	0.115	0.285	0.350	0.353	0.523	0.588	0.873	
Body-Worn	Rear	0.299	0.115	0.285	0.350	0.414	0.584	0.649	0.934	
	Front	0.330	0.224	N/A	0.035	0.554	0.330	0.365	0.365	
	Rear	0.525	0.224	N/A	0.058	0.749	0.525	0.583	0.583	
Hetemat	Left	0.114	0.224	N/A	0.030	0.338	0.114	0.144	0.144	
Hotspot	Right	0.307	-	N/A	-	0.307	0.307	0.307	0.307	
	Тор	-	0.224	N/A	0.087	0.224	-	0.087	0.087	
	Bottom	0.249	-	N/A	-	0.249	0.249	0.249	0.249	
GSM/GPRS	1900 Band									
	Right Cheek	0.075	0.267	0.508	0.277	0.342	0.583	0.352	0.860	
Поод	Right Tilt	0.031	0.267	0.174	0.257	0.298	0.205	0.288	0.462	
Head	Left Cheek	0.051	0.267	0.508	0.127	0.318	0.559	0.178	0.686	
	Left Tilt	0.051	0.267	0.508	0.189	0.318	0.559	0.240	0.748	
Dady Mara	Front	0.196	0.115	0.285	0.350	0.311	0.481	0.546	0.831	
Body-Worn	Rear	0.325	0.115	0.285	0.350	0.440	0.610	0.675	0.960	
	Front	0.375	0.224	N/A	0.035	0.599	0.375	0.410	0.410	
	Rear	0.628	0.224	N/A	0.058	0.852	0.628	0.686	0.686	
Hotopot	Left	0.116	0.224	N/A	0.030	0.340	0.116	0.146	0.146	
Hotspot	Right	0.074	-	N/A	-	0.074	0.074	0.074	0.074	
	Тор	-	0.224	N/A	0.087	0.224	-	0.087	0.087	
	Bottom	1.118	-	N/A	-	1.118	1.118	1.118	1.118	
WCDMA Ba	and V						•			
	Right Cheek	0.194	0.267	0.508	0.277	0.461	0.702	0.471	0.979	
Head	Right Tilt	0.095	0.267	0.174	0.257	0.362	0.269	0.352	0.526	
пеац	Left Cheek	0.181	0.267	0.508	0.127	0.448	0.689	0.308	0.816	
	Left Tilt	0.109	0.267	0.508	0.189	0.376	0.617	0.298	0.806	
Dady Ware	Front	0.190	0.115	0.285	0.350	0.305	0.475	0.540	0.825	
Body-Worn	Rear	0.223	0.115	0.285	0.350	0.338	0.508	0.573	0.858	
	Front	0.243	0.224	N/A	0.035	0.467	0.243	0.278	0.278	
	Rear	0.445	0.224	N/A	0.058	0.669	0.445	0.503	0.503	
Uctor of	Left	0.137	0.224	N/A	0.030	0.361	0.137	0.167	0.167	
Hotspot	Right	0.214	-	N/A	-	0.214	0.214	0.214	0.214	
	Тор	-	0.224	N/A	0.087	0.224	-	0.087	0.087	
	Bottom	0.133	-	N/A	-	0.133	0.133	0.133	0.133	

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (60) of (212)



**KCTL** 

			WL	.AN					
	Condition sition	licensed	<b>2.4</b> GHz	<b>5</b> GHz	Bluetooth		Sumn	nation	
7 0 3	Sition	[①]	[2]	[3]	[4]	[1+2]	[1+3]	[1+4]	[1+3+4]
LTE Band 5	5								
	Right Cheek	0.283	0.267	0.508	0.277	0.550	0.791	0.560	1.068
Hand	Right Tilt	0.132	0.267	0.174	0.257	0.399	0.306	0.389	0.563
Head	Left Cheek	0.225	0.267	0.508	0.127	0.492	0.733	0.352	0.860
	Left Tilt	0.136	0.267	0.508	0.189	0.403	0.644	0.325	0.833
D . I . W/	Front	0.251	0.115	0.285	0.350	0.366	0.536	0.601	0.886
Body-Worn	Rear	0.276	0.115	0.285	0.350	0.391	0.561	0.626	0.911
	Front	0.294	0.224	N/A	0.035	0.518	0.294	0.329	0.329
	Rear	0.564	0.224	N/A	0.058	0.788	0.564	0.622	0.622
11.44	Left	0.178	0.224	N/A	0.030	0.402	0.178	0.208	0.208
Hotspot	Right	0.269	-	N/A	-	0.269	0.269	0.269	0.269
	Тор	-	0.224	N/A	0.087	0.224	-	0.087	0.087
	Bottom	0.180	-	N/A	-	0.180	0.180	0.180	0.180
LTE Band 1	12						<del>!</del>	<u> </u>	1
	Right Cheek	0.193	0.267	0.508	0.277	0.460	0.701	0.470	0.978
	Right Tilt	0.101	0.267	0.174	0.257	0.368	0.275	0.358	0.532
Head	Left Cheek	0.172	0.267	0.508	0.127	0.439	0.680	0.299	0.807
-	Left Tilt	0.109	0.267	0.508	0.189	0.376	0.617	0.298	0.806
	Front	0.226	0.115	0.285	0.350	0.341	0.511	0.576	0.861
Body-Worn	Rear	0.286	0.115	0.285	0.350	0.401	0.571	0.636	0.921
	Front	0.267	0.224	N/A	0.035	0.491	0.267	0.302	0.302
	Rear	0.363	0.224	N/A	0.058	0.587	0.363	0.421	0.421
	Left	0.158	0.224	N/A	0.030	0.382	0.158	0.188	0.188
Hotspot	Right	0.219	-	N/A	_	0.219	0.219	0.219	0.219
	Тор	-	0.224	N/A	0.087	0.224	-	0.087	0.087
	Bottom	0.162	-	N/A	-	0.162	0.162	0.162	0.162
LTE Band 4	11			-	•		<del>!</del>	<u> </u>	1
	Right Cheek	0.166	0.267	0.508	0.277	0.433	0.674	0.443	0.951
Hand	Right Tilt	0.130	0.267	0.174	0.257	0.397	0.304	0.387	0.561
Head	Left Cheek	0.260	0.267	0.508	0.127	0.527	0.768	0.387	0.895
	Left Tilt	0.118	0.267	0.508	0.189	0.385	0.626	0.307	0.815
Dady Ware	Front	0.189	0.115	0.285	0.350	0.304	0.474	0.539	0.824
Body-Worn	Rear	0.240	0.115	0.285	0.350	0.355	0.525	0.590	0.875
	Front	0.374	0.224	N/A	0.035	0.598	0.374	0.409	0.409
	Rear	0.450	0.224	N/A	0.058	0.674	0.450	0.508	0.508
Hotonot	Left	0.366	0.224	N/A	0.030	0.590	0.366	0.396	0.396
Hotspot	Right	-	-	N/A	-	-	-	-	-
	Тор	-	0.224	N/A	0.087	0.224	-	0.087	0.087
	Bottom	0.983	-	N/A	-	0.983	0.983	0.983	0.983

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (61) of (212)



Notes: Simultaneous transmission SAR test exclusion considerations

- Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneously transmitting antenna. When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration. Per KDB Publication 447498 D01v06.
- When the sum of SAR1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR1g 1.6 W/kg), the SPLSR procedures is not required. When the sum of SAR1g is greater than the SAR limit (SAR1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.
- "N/A"=Not supported, " " = SAR test exclusion



65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr

Report No.: KR22-SPF0012 Page (62) of (212)



### **SAR Measurement Variability**

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissueequivalent medium used for the device measurements. When both head and body tissueequivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was remounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

RF Exposure Conditions	Band	Mode	Frequency (Mt/z)	EUT Position	Separation Distance (mm)	Measured 1 g SAR (W/kg)	Repeated 1g SAR (W/kg)	Ratio
Hotspot	LTE Band 41	QPSK 20M 1RB 49Offset	2 593.0	Bottom	10	0.903	0.881	1.02

KCTL-TIA002-004/5 KP22-00654

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (63) of (212)



### 14. Measurement Uncertainty

Per KDB 865664 D01 SAR measurement 100 Mb to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of k=2. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Standard 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5 W/kg and highest measured 10-g SAR is less 3.75 W/kg. Therefore, the measurement uncertainty table is not required in this report.



65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (64) of (212)



**KCTL** 

# 15. Test Equipment Information

Test Platform	SPEAG DASY5 System			
Version		SEMCAD: 14.6.14 (7501	)	
Location		o, Yeongtong-gu, Suwon-s	,	rea
Manufacture	SPEAG	· 0 00 ·	, <b>,</b> 00 ,	
	Hard	ware Reference		
Equipment	Model	Serial Number	Date of	Due date of
			Calibration	next Calibration
Shield Room	-	8F - 3	-	-
Shield Room	-	8F - 4	-	-
DASY6 Robot	TX60 Lspeag	F/19/0007289/A/001	-	-
DASY6 Robot	TX90XL speag	F/18/0004968/A/001	-	-
Phantom	Twin SAM Phantom	1974	-	-
Phantom	Twin SAM Phantom	1983	-	-
Mounting Device	Mounting Device	-	-	-
DAE	DAE4	1342	2021-06-02	2022-06-02
DAE	DAE4	1587	2021-07-26	2022-07-26
Probe	EX3DV4	7540	2021-04-29	2022-04-29
Probe	EX3DV4	7541	2021-07-30	2022-07-30
ESG Vector Signal Generator	E4438C	MY4208048 <mark>6</mark>	2021-05-10	2022-05-10
Dual Power Meter	EPM-442A	GB3748068 <mark>0</mark>	2021-05-11	2022-05-11
Power Sensor	8481H	2703A11902	2021-05-11	2022-05-11
Power Sensor	8481H	3318A18090	2021-05-11	2022-05-11
Attenuator	8491A	21552	2021-05-10	2022-05-10
Attenuator	8491A	35560	2021-05-10	2022-05-10
Attenuator	8491A	35934	2021-05-10	2022-05-10
Dual Directional Coupler	778D	17236	2021-05-31	2022-05-31
Dual Directional Coupler	772D	2839A160504	2021-05-10	2022-05-10
Power Amplifier	AMP2027	10010	2021-05-10	2022-05-10
Low Pass Filter	NLP-1000+	VUU79701846	2021-05-10	2022-05-10
Low Pass Filter	VLF-1500+	31835	2021-05-10	2022-05-10
Low Pass Filter	VLF-3000+	31831	2021-05-10	2022-05-10
Low Pass Filter	VLF-6000+	31838	2021-05-10	2022-05-10
Dipole Validation Kits	D750V3	1183	2020-09-15	2022-09-15
Dipole Validation Kits	D850V2	1006	2020-04-21	2022-04-21
Dipole Validation Kits	D1900V2	5d160	2020-04-22	2022-04-22
Dipole Validation Kits	D2450V2	895	2020-07-21	2022-07-21
Dipole Validation Kits	D2600V2	1050	2020-07-21	2022-07-21
Dipole Validation Kits	D5GHzV2	1293	2021-07-22	2023-07-22
Network Analyzer	E5071B	MY42403524	2022-02-15	2023-02-15
Dielectric Assessment Kit	DAK-3.5	1078	2021-05-26	2022-05-26
Humidity/Temp	MHB-382SD	23107	2021-05-13	2022-05-13
Humidity/Temp	MHB-382SD	73871	2021-05-13	2022-05-13
Wideband Radio				
Communication Tester	CMW500	132120	2021-05-10	2022-05-10
Spectrum Analyzer	FSP7	100289	2021-12-21	2022-12-21
Bluetooth Tester	TC-3000C	3000C00027	2021-07-28	2022-07-28

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (65) of (212)



### 16. Test System Verification Results

Date: 2/25/2022

**Test Laboratory: KCTL Inc.** 

File Name: 750 MHz Verification Input Power 250 mW 2022-02-25.da53:0

DUT: Dipole 750 MHz D750V3, Type: D750V3, Serial: D750V3 - SN:1183

Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1 Medium parameters used: f = 750 MHz;  $\sigma = 0.901$  S/m;  $\varepsilon_r = 43.303$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7540; ConvF(10, 10, 10) @ 750 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

• Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/750 MHz Verification Input Power 250 mW 2022-02-25/Area Scan (7x15x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.86 W/kg

#### Configuration/750 MHz Verification Input Power 250 mW 2022-02-25/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 59.12 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 2.17 W/kg; SAR(10 g) = 1.42 W/kg

Smallest distance from peaks to all points 3 dB below = 18.7 mm

Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 2.94 W/kg

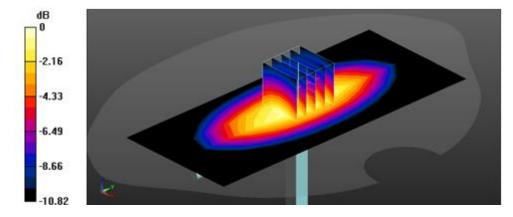

0 dB = 2.94 W/kg = 4.68 dBW/kg

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (66) of (212)



Date: 2/24/2022

Test Laboratory: KCTL Inc.

File Name: 850 MHz Verification Input Power 250 mW 2022-02-24.da52:0

DUT: Dipole 850 MHz D850V2, Type: D850V2, Serial: D850V2 - SN:1006

Communication System: UID 0, CW (0); Frequency: 850 MHz; Duty Cycle: 1:1 Medium parameters used: f = 850 MHz;  $\sigma = 0.927$  S/m;  $\varepsilon_r = 41.108$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7540; ConvF(9.6, 9.6, 9.6) @ 850 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

• Phantom: Twin-SAM V8.0 Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

System Performance Check/850 MHz Verification Input Power 250 mW 2022-02-24/Area Scan

(7x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 3.31 W/kg

System Performance Check/850 MHz Verification Input Power 250 mW 2022-02-24/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 62.54 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 3.96 W/kg

SAR(1 g) = 2.53 W/kg; SAR(10 g) = 1.63 W/kg

Smallest distance from peaks to all points 3 dB below =  $\frac{16 \text{ mm}}{1}$ 

Ratio of SAR at M2 to SAR at M1 = 63.7%

Maximum value of SAR (measured) = 3.47 W/kg

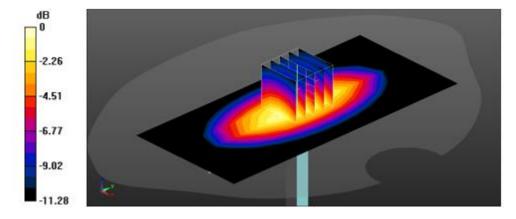

0 dB = 3.47 W/kg = 5.40 dBW/kg

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (67) of (212)



Date: 3/7/2022

Test Laboratory: KCTL Inc.

File Name: 850 MHz Verification Input Power 250 mW 2022-03-07.da52:0

DUT: Dipole 850 MHz D850V2, Type: D850V2, Serial: D850V2 - SN:1006

Communication System: UID 0, CW (0); Frequency: 850 MHz; Duty Cycle: 1:1 Medium parameters used: f = 850 MHz;  $\sigma = 0.924$  S/m;  $\varepsilon_r = 40.451$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7540; ConvF(9.6, 9.6, 9.6) @ 850 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

• Phantom: Twin-SAM V8.0 Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

System Performance Check/850 MHz Verification Input Power 250 mW 2022-03-07/Area Scan

(7x14x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 3.16 W/kg

System Performance Check/850 MHz Verification Input Power 250 mW 2022-03-07/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 61.63 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 3.75 W/kg

SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.57 W/kg

Smallest distance from peaks to all points 3 dB below = 17.6 mm

Ratio of SAR at M2 to SAR at M1 = 64.5%

Maximum value of SAR (measured) = 3.29 W/kg

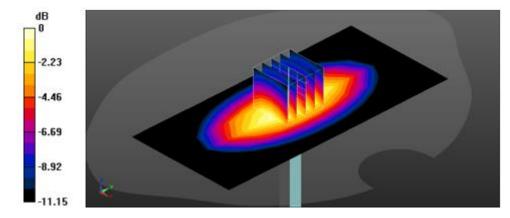

0 dB = 3.29 W/kg = 5.17 dBW/kg

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (68) of (212)



Date: 3/8/2022

Test Laboratory: KCTL Inc.

File Name: 1900 MHz Verification Input Power 250 mW 2022-03-08.da52:0

#### DUT: Dipole 1900 MHz D1900V2, Type: D1900V2, Serial: D1900V2 - SN:5d160

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1900 MHz;  $\sigma = 1.413$  S/m;  $\varepsilon_r = 38.976$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7540; ConvF(8.25, 8.25, 8.25) @ 1900 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

• Phantom: Twin-SAM V8.0 Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### System Performance Check/1900 MHz Verification Input Power 250 mW 2022-03-08/Area Scan

(8x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 13.4 W/kg

#### System Performance Check/1900 MHz Verification Input Power 250 mW 2022-03-08/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 108.2 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 19.3 W/kg

#### SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.39 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 16.1 W/kg

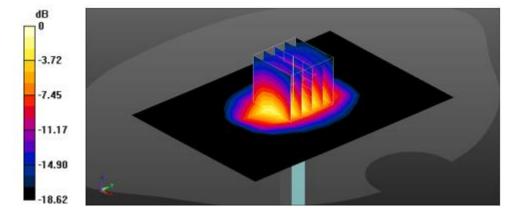

0 dB = 16.1 W/kg = 12.07 dBW/kg

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr

Report No.: KR22-SPF0012 Page (69) of (212)



Date: 3/7/2022

Test Laboratory: KCTL Inc.

File Name: 2450 MHz Verification Iuput Power 100 mW 2022-03-07.da52:0

DUT: Dipole 2450 MHz D2450V2, Type: D2450V2, Serial: D2450V2 - SN:895

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2450 MHz;  $\sigma = 1.793 \text{ S/m}$ ;  $\varepsilon_r = 38.602$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7541;ConvF(7.69, 7.69, 7.69) @ 2450 MHz; Calibrated: 7/30/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

Phantom: Back Left Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/2450 MHz Verification Input Power 100 mW 2022-03-07/Area Scan (9x12x1):

Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 8.04 W/kg

#### Configuration/2450 MHz Verification Input Power 100 mW 2022-03-07/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 70.71 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 10.9 W/kg


SAR(1 g) = 4.96 W/kg; SAR(10 g) = 2.26 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 45.4%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 8.61 W/kg

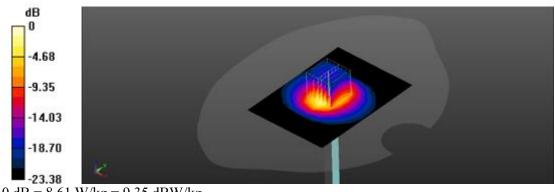

0 dB = 8.61 W/kg = 9.35 dBW/kg

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (70) of (212)



Date: 3/10/2022

Test Laboratory: KCTL Inc.

File Name: 2450 MHz Verification Iuput Power 100 mW 2022-03-10.da52:0

DUT: Dipole 2450 MHz D2450V2, Type: D2450V2, Serial: D2450V2 - SN:895

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2450 MHz;  $\sigma = 1.791 \text{ S/m}$ ;  $\varepsilon_r = 38.773$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7541;ConvF(7.69, 7.69, 7.69) @ 2450 MHz; Calibrated: 7/30/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

Phantom: Back Left Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/2450 MHz Verification Input Power 100 mW 2022-03-10/Area Scan (9x12x1):

Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 8.25 W/kg

#### Configuration/2450 MHz Verification Input Power 100 mW 2022-03-10/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 72.51 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 11.5 W/kg


SAR(1 g) = 5.23 W/kg; SAR(10 g) = 2.37 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 45.3%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.06 W/kg

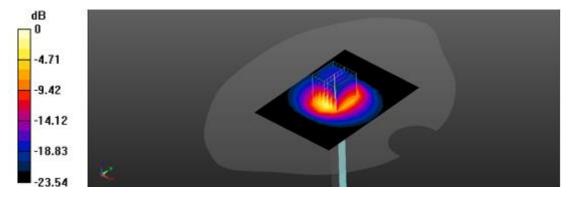

0 dB = 9.06 W/kg = 9.57 dBW/kg

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (71) of (212)



Date: 2/28/2022

Test Laboratory: KCTL Inc.

File Name: 2600 MHz Verification Input Power 100 mW 2022-02-28.da5:0

DUT: Dipole 2600 MHz D2600V2, Type: D2600V2, Serial: D2600V2 - SN:1050

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2600 MHz;  $\sigma = 2.027$  S/m;  $\varepsilon_r = 38.411$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7540; ConvF(7.26, 7.26, 7.26) @ 2600 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

• Phantom: Twin-SAM V8.0 Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/2600 MHz Verification Input Power 100 mW 2022-02-28/Area Scan (10x11x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 9.16 W/kg

#### Configuration/2600 MHz Verification Input Power 100 mW 2022-02-28/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 70.10 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 12.5 W/kg

SAR(1 g) = 5.8 W/kg; SAR(10 g) = 2.59 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 46.5%

Maximum value of SAR (measured) = 9.94 W/kg

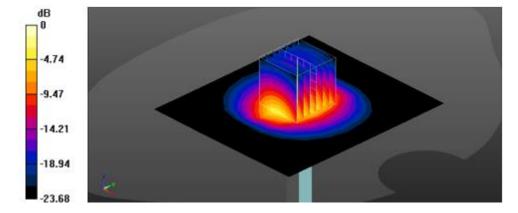

0 dB = 9.94 W/kg = 9.97 dBW/kg

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (72) of (212)



Date: 3/3/2022

Test Laboratory: KCTL Inc.

File Name: 2600 MHz Verification Input Power 100 mW 2022-03-03.da5:0

DUT: Dipole 2600 MHz D2600V2, Type: D2600V2, Serial: D2600V2 - SN:1050

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2600 MHz;  $\sigma = 1.99$  S/m;  $\varepsilon_r = 38.276$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7540; ConvF(7.26, 7.26, 7.26) @ 2600 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

• Phantom: Twin-SAM V8.0 Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/2600 MHz Verification Input Power 100 mW 2022-03-03/Area Scan (10x11x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 9.12 W/kg

#### Configuration/2600 MHz Verification Input Power 100 mW 2022-03-03/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 70.26 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 12.4 W/kg

#### SAR(1 g) = 5.76 W/kg; SAR(10 g) = 2.58 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 9.91 W/kg

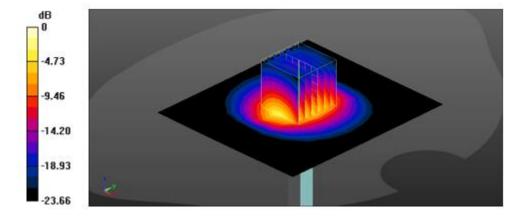

0 dB = 9.91 W/kg = 9.96 dBW/kg

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (73) of (212)



Date: 2/25/2022

Test Laboratory: KCTL Inc.

File Name: 5300 MHz Verification Input Power 100 mW 2022-02-25.da5:0

DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293

Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 5300 MHz;  $\sigma = 4.833 \text{ S/m}$ ;  $\varepsilon_r = 37.316$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7541; ConvF(5.37, 5.37, 5.37) @ 5300 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/5300 MHz Verification Input Power 100 mW 2022-02-25/Area Scan (11x11x1):

Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 21.2 W/kg

#### Configuration/5300 MHz Verification Input Power 100 mW 2022-02-25/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 72.87 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 38.0 W/kg


SAR(1 g) = 8.7 W/kg; SAR(10 g) = 2.45 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.6%

### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 22.7 W/kg

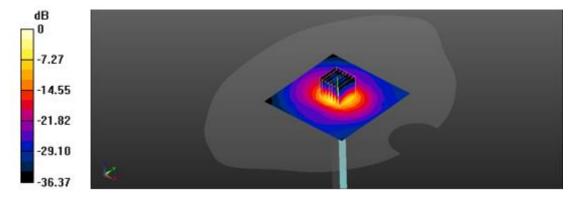

0 dB = 22.7 W/kg = 13.56 dBW/kg

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (74) of (212)



Date: 2/28/2022

Test Laboratory: KCTL Inc.

File Name: 5600 MHz Verification Input Power 100 mW 2022-02-28.da5:0

DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5600 MHz;  $\sigma = 5.056$  S/m;  $\varepsilon_r = 36.226$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7541; ConvF(4.65, 4.65, 4.65) @ 5600 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/5600 MHz Verification Input Power 100 mW 2022-02-28/Area Scan (11x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 21.1 W/kg

#### Configuration/5600 MHz Verification Input Power 100 mW 2022-02-28/Zoom Scan (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.75 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 42.6 W/kg

### SAR(1 g) = 8.39 W/kg; SAR(10 g) = 2.38 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.8%

Maximum value of SAR (measured) = 22.8 W/kg

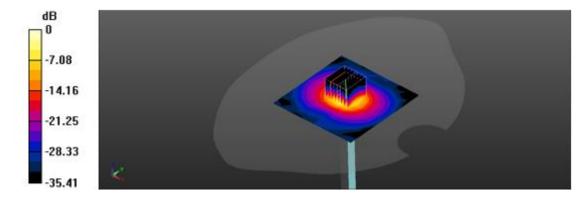

0 dB = 22.8 W/kg = 13.58 dBW/kg

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr

Report No.: KR22-SPF0012 Page (75) of (212)



Date: 2/28/2022

Test Laboratory: KCTL Inc.

File Name: 5800 MHz Verification Input Power 100 mW 2022-02-28.da5:0

DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5800 MHz;  $\sigma = 5.257$  S/m;  $\varepsilon_r = 35.94$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7541; ConvF(4.7, 4.7, 4.7) @ 5800 MHz; Calibrated: 7/30/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

Phantom: Back Left Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/5800 MHz Verification Input Power 100 mW 2022-02-28/Area Scan (11x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 19.5 W/kg

#### Configuration/5800 MHz Verification Input Power 100 mW 2022-02-28/Zoom Scan (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.48 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 38.6 W/kg

### SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.18 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 20.6 W/kg

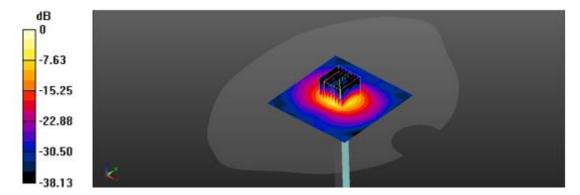

0 dB = 20.6 W/kg = 13.14 dBW/kg

This test report shall not be reproduced, except in full, without the written approval KCTL-TIA002-004/5 KP22-00654

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (76) of (212)



Date: 3/2/2022

Test Laboratory: KCTL Inc.

File Name: 5800 MHz Verification Input Power 100 mW 2022-03-02.da5:0

DUT: Dipole D5GHzV2, Type: D5GHzV2, Serial: D5GHzV2 - SN:1293

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5800 MHz;  $\sigma = 5.287$  S/m;  $\varepsilon_r = 35.412$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7541;ConvF(4.7, 4.7, 4.7) @ 5800 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/5800 MHz Verification Input Power 100 mW 2022-03-02/Area Scan (11x11x1):

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 20.1 W/kg

#### Configuration/5800 MHz Verification Input Power 100 mW 2022-03-02/Zoom Scan (8x8x7)/Cube 0:

Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.93 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 39.8 W/kg

#### SAR(1 g) = 7.88 W/kg; SAR(10 g) = 2.24 W/kg

Smallest distance from peaks to all points 3 dB below = 7.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.9%

Maximum value of SAR (measured) = 21.3 W/kg

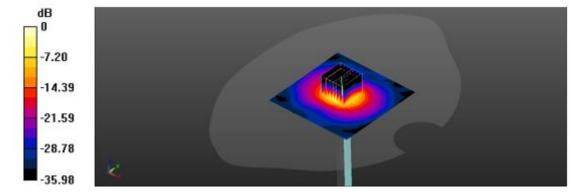

0 dB = 21.3 W/kg = 13.28 dBW/kg

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (77) of (212)



## 17. Test Results

1)

Date: 3/7/2022

Test Laboratory: KCTL Inc.

File Name: 1. GSM850\_Head.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, GSM850\_3TX (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.76694

Medium parameters used: f = 824.2 MHz;  $\sigma = 0.904 \text{ S/m}$ ;  $\varepsilon_r = 40.724$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7540; ConvF(9.6, 9.6, 9.6) @ 824.2 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

• Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/GSM850\_GPRS 3Tx\_CH128\_Right Cheek/Area Scan (9x13x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.187 W/kg

#### Configuration/GSM850\_GPRS 3Tx\_CH128\_Right Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.81 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.202 W/kg

## SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 76.8%

Maximum value of SAR (measured) = 0.184 W/kg

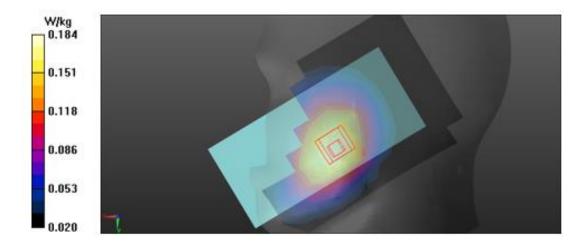

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (78) of (212)



2)

Date: 3/8/2022

Test Laboratory: KCTL Inc.

File Name: 1. GSM1900\_Head.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, GSM 1900\_4Tx (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.07491

Medium parameters used: f = 1850.2 MHz;  $\sigma = 1.361$  S/m;  $\varepsilon_r = 39.177$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7540; ConvF(8.25, 8.25, 8.25) @ 1850.2 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

## Configuration/GSM1900\_GPRS 4Tx\_CH512\_Right Cheek/Area Scan (9x10x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0775 W/kg

#### Configuration/GSM1900\_GPRS 4Tx\_CH512\_Right Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.242 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.038 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 65.8%

Maximum value of SAR (measured) = 0.0835 W/kg

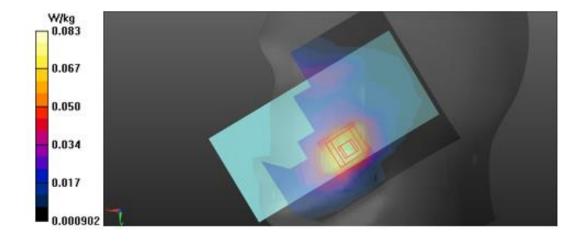

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (79) of (212)



3)

Date: 3/7/2022

Test Laboratory: KCTL Inc.

File Name: 4. WCDMA FDD V\_Head.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, W-CDMA 850 (Band 5) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: f = 836.6 MHz;  $\sigma = 0.916$  S/m;  $\varepsilon_r = 40.604$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7540; ConvF(9.6, 9.6, 9.6) @ 836.6 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/WCDMA FDD V\_CH4183\_Right Cheek/Area Scan (9x13x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.176 W/kg

#### Configuration/WCDMA FDD V\_CH4183\_Right Cheek/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.75 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 0.202 W/kg

## SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 76.2%

Maximum value of SAR (measured) = 0.185 W/kg

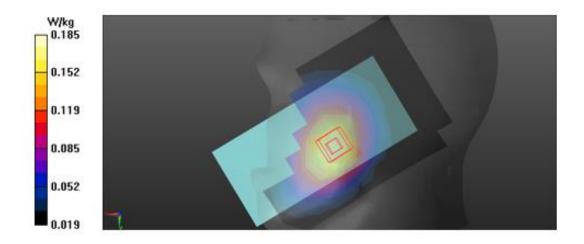

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (80) of (212)



4)

Date: 2/24/2022

Test Laboratory: KCTL Inc.

File Name: 1. LTE Band 5 QPSK 10 MHz Head.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): f = 836.5 MHz;  $\sigma = 0.912$  S/m;  $\epsilon_r = 41.23$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7540; ConvF(9.6, 9.6, 9.6) @ 836.5 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

## Configuration/LTE Band 5\_QPSK\_10MHz\_1RB\_0offset\_CH20525\_Right Cheek/Area Scan (9x13x1):

Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.252 W/kg

#### Configuration/LTE Band 5\_QPSK\_10MHz\_1RB\_0offset\_CH20525\_Right Cheek/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.19 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.284 W/kg


SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.165 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 77%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.260 W/kg

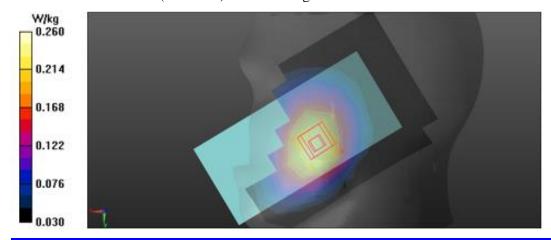

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (81) of (212)



5)

Date: 2/25/2022

Test Laboratory: KCTL Inc.

File Name: 1. LTE Band 12\_QPSK\_10 MHz\_Head.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1 Medium parameters used: f = 707.5 MHz;  $\sigma = 0.861$  S/m;  $\varepsilon_r = 43.611$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7540; ConvF(10, 10, 10) @ 707.5 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/LTE Band 12\_QPSK\_10MHz\_1RB\_0offset\_CH23095\_Right Cheek/Area Scan (9x13x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.183 W/kg

#### Configuration/LTE Band 12\_QPSK\_10MHz\_1RB\_0offset\_CH23095\_Right Cheek/Zoom Scan

(6x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.78 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.198 W/kg

## SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.119 W/kg

Smallest distance from peaks to all points 3 dB below = 24.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.1%

Maximum value of SAR (measured) = 0.182 W/kg

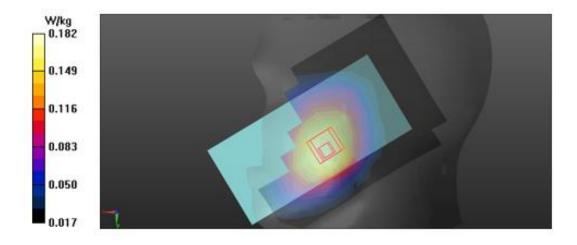

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (82) of (212)



6)

Date: 2/28/2022

Test Laboratory: KCTL Inc.

File Name: 1. LTE Band 41\_QPSK\_20 MHz\_Head.da53:1

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, LTE Band 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58016 Medium parameters used (interpolated): f = 2593 MHz;  $\sigma = 2.023$  S/m;  $\epsilon_r = 38.419$ ;  $\rho = 1000$  kg/m<sup>3</sup> Phantom section: Left Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN7540; ConvF(7.26, 7.26, 7.26) @ 2593 MHz; ; Calibrated: 4/29/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/26/2021
- Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983
- Measurement SW: DASY52, Version 52.10 (4);

## Configuration 2/LTE Band 41\_QPSK\_20MHz\_1RB\_49offset\_CH40620\_Left Cheek/Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.343 W/kg

#### Configuration 2/LTE Band 41\_QPSK\_20MHz\_1RB\_49offset\_CH40620\_Left Cheek/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.674 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.446 W/kg


SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 53.1%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.364 W/kg

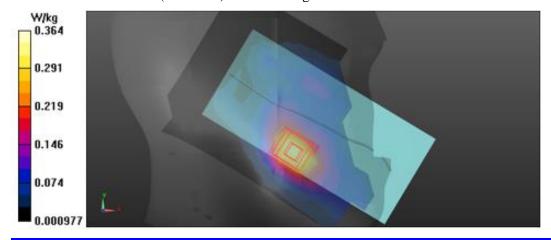

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (83) of (212)



7)

Date: 3/7/2022

Test Laboratory: KCTL Inc.

File Name: 1. WLAN 2.4 GHz\_Head.da53:0

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HR47Z

Communication System: UID 0, 2.4GWLAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: f = 2412 MHz;  $\sigma = 1.829$  S/m;  $\varepsilon_r = 37.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7541; ConvF(7.69, 7.69, 7.69) @ 2412 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

**Configuration/802.11 b\_CH1\_Right Cheek/Area Scan (8x10x1): Measurement grid:** dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.365 W/kg

Configuration/802.11 b\_CH1\_Right Cheek/Zoom Scan (7x8x7)/Cube 0: Measurement grid: dx=5mm,

dy=5mm, dz=5mm

Reference Value = 9.831 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.544 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 42.5%

Maximum value of SAR (measured) = 0.423 W/kg

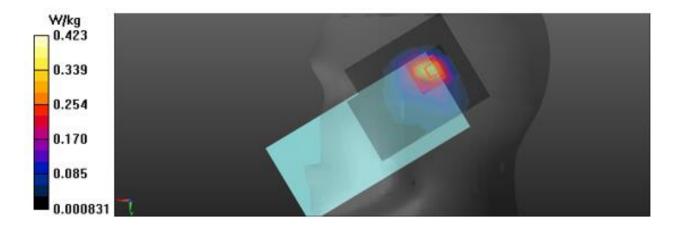

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (84) of (212)



8)

Date: 2/25/2022

Test Laboratory: KCTL Inc.

File Name: 1. WLAN 5.3 GHz\_Head.da53:0

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HR47Z

Communication System: UID 0, 5GWLAN (0); Frequency: 5270 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5270 MHz;  $\sigma = 4.8$  S/m;  $\varepsilon_r = 37.337$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7541; ConvF(5.37, 5.37, 5.37) @ 5270 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

## Configuration/802.11 n\_HT40\_CH54\_Right Cheek/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.229 W/kg

#### Configuration/802.11 n\_HT40\_CH54\_Right Cheek/Zoom Scan (8x8x7)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.759 W/kg

## SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.031 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 46.9%

Maximum value of SAR (measured) = 0.322 W/kg

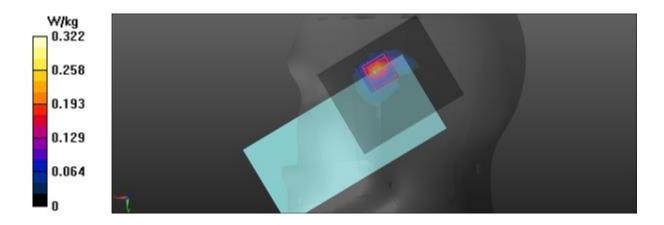

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (85) of (212)



9)

Date: 2/28/2022

Test Laboratory: KCTL Inc.

File Name: 1. WLAN 5.6 GHz\_Head.da53:0

DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HR47Z

Communication System: UID 0, 5GWLAN (0); Frequency: 5710 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5710 MHz;  $\sigma = 5.183$  S/m;  $\epsilon_r = 36.099$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

## DASY5 Configuration:

Probe: EX3DV4 - SN7541; ConvF(4.7, 4.7, 4.7) @ 5710 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back Left Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

Configuration/802.11 n\_HT40\_CH142\_Right Cheek/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.664 W/kg

#### Configuration/802.11 n\_HT40\_CH142\_Right Cheek/Zoom Scan (9x9x7)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.250 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 2.13 W/kg

SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.089 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 0.861 W/kg

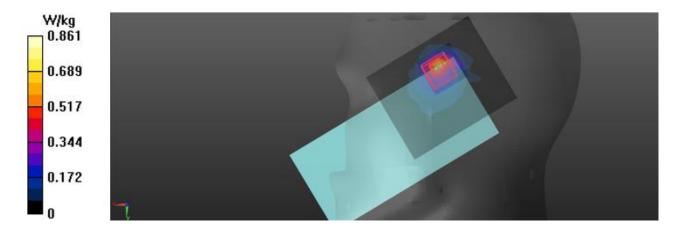

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (86) of (212)



10)

Date: 3/2/2022

Test Laboratory: KCTL Inc.

File Name: 1. WLAN 5.8 GHz\_Head.da53:0

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HR47Z

Communication System: UID 0, 5GWLAN (0); Frequency: 5755 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 5755 MHz;  $\sigma = 5.249$  S/m;  $\varepsilon_r = 35.534$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7541; ConvF(4.7, 4.7, 4.7) @ 5755 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

## Configuration/802.11 n\_HT40\_CH151\_Right Cheek/Area Scan (9x11x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.622 W/kg

#### Configuration/802.11 n\_HT40\_CH151\_Right Cheek/Zoom Scan (9x9x7)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.42 W/kg


SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.100 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 47.6%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.922 W/kg

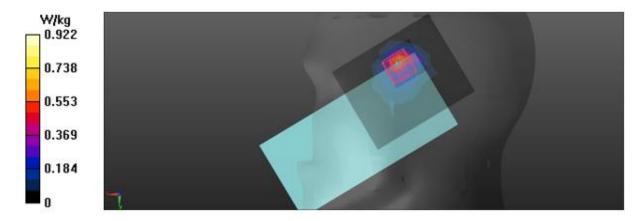

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (87) of (212)



11)

Date: 3/10/2022

Test Laboratory: KCTL Inc.

File Name: 1. Bluetooth\_BDR\_DH5\_Head.da53:0

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HRGEA

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30167 Medium parameters used (interpolated): f = 2441 MHz;  $\sigma = 1.783$  S/m;  $\epsilon_r = 38.801$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7541; ConvF(7.69, 7.69, 7.69) @ 2441 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

# Configuration/Bluetooth\_BDR\_DH5\_CH39\_Right Cheek 0 mm/Area Scan (11x13x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.280 W/kg

#### Configuration/Bluetooth\_BDR\_DH5\_CH39\_Right Cheek 0 mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.553 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.405 W/kg


SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 40.1%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.300 W/kg

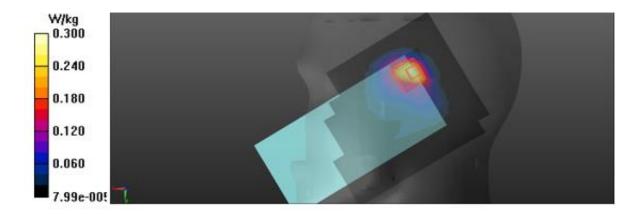

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (88) of (212)



12)

Date: 3/7/2022

Test Laboratory: KCTL Inc.

File Name: 2. GSM850\_Body.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, GSM850\_3TX (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.76694

Medium parameters used: f = 824.2 MHz;  $\sigma = 0.904$  S/m;  $\varepsilon_r = 40.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7540; ConvF(9.6, 9.6, 9.6) @ 824.2 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/GSM850\_GPRS 3Tx\_CH128\_Rear\_15 mm/Area Scan (9x14x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.290 W/kg

#### Configuration/GSM850\_GPRS 3Tx\_CH128\_Rear\_15 mm/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.99 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.333 W/kg

## SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 69.1%

Maximum value of SAR (measured) = 0.295 W/kg

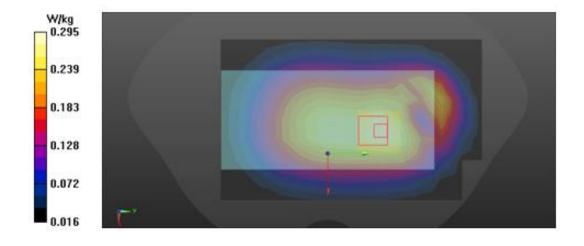

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (89) of (212)



13)

Date: 3/8/2022

Test Laboratory: KCTL Inc.

File Name: 2. GSM1900\_Body.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, GSM 1900\_4Tx (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.07491

Medium parameters used: f = 1850.2 MHz;  $\sigma = 1.361$  S/m;  $\varepsilon_r = 39.177$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7540; ConvF(8.25, 8.25, 8.25) @ 1850.2 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

## Configuration/GSM1900\_GPRS 4Tx\_CH512\_Rear\_15 mm/Area Scan (9x10x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.365 W/kg

#### Configuration/GSM1900\_GPRS 4Tx\_CH512\_Rear\_15 mm/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.47 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.450 W/kg

SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.155 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 0.385 W/kg

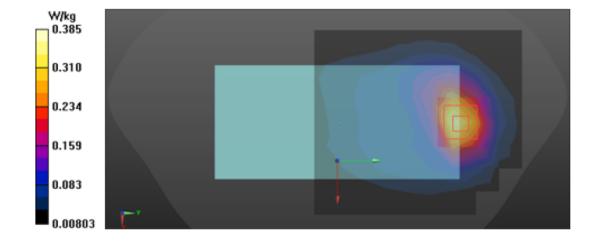

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (90) of (212)



14)

Date: 3/7/2022

Test Laboratory: KCTL Inc.

File Name: 5. WCDMA FDD V\_Body.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, W-CDMA 850 (Band 5) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: f = 836.6 MHz;  $\sigma = 0.916$  S/m;  $\varepsilon_r = 40.604$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7540; ConvF(9.6, 9.6, 9.6) @ 836.6 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/WCDMA FDD V\_CH4183\_Rear\_15 mm/Area Scan (9x14x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.218 W/kg

#### Configuration/WCDMA FDD V\_CH4183\_Rear\_15 mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.89 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.243 W/kg

## SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.131 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 72.5%

Maximum value of SAR (measured) = 0.217 W/kg

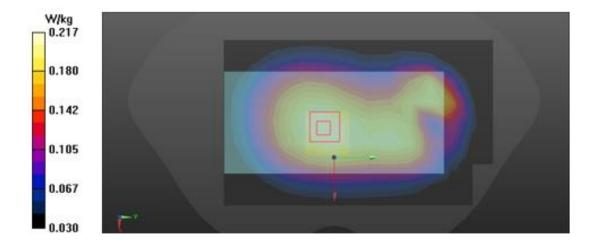

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (91) of (212)



15)

Date: 2/24/2022

Test Laboratory: KCTL Inc.

File Name: 2. LTE Band 5\_QPSK\_10 MHz\_Body.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): f = 836.5 MHz;  $\sigma = 0.912$  S/m;  $\epsilon_r = 41.23$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7540; ConvF(9.6, 9.6, 9.6) @ 836.5 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

## Configuration/LTE Band 5\_QPSK\_10MHz\_1RB\_0offset\_CH20525\_Rear\_15 mm/Area Scan (9x14x1):

Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.258 W/kg

#### Configuration/LTE Band 5\_QPSK\_10MHz\_1RB\_0offset\_CH20525\_Rear\_15 mm/Zoom Scan

(6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.43 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.291 W/kg


SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 20 mm)

Ratio of SAR at M2 to SAR at M1 = 72.1%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.261 W/kg

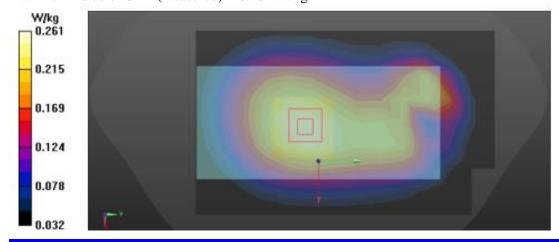

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (92) of (212)



16)

Date: 2/25/2022

Test Laboratory: KCTL Inc.

File Name: 2. LTE Band 12\_QPSK\_10 MHz\_Body.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: f = 707.5 MHz;  $\sigma = 0.861$  S/m;  $\varepsilon_r = 43.611$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7540; ConvF(10, 10, 10) @ 707.5 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/LTE Band 12 QPSK 10MHz 1RB 0offset CH23095 Rear 15 mm/Area Scan (9x14x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.274 W/kg

#### Configuration/LTE Band 12\_QPSK\_10MHz\_1RB\_0offset\_CH23095\_Rear\_15 mm/Zoom Scan

(6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.73 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.315 W/kg

## SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.172 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 20 mm)

Ratio of SAR at M2 to SAR at M1 = 72.2%

Maximum value of SAR (measured) = 0.283 W/kg

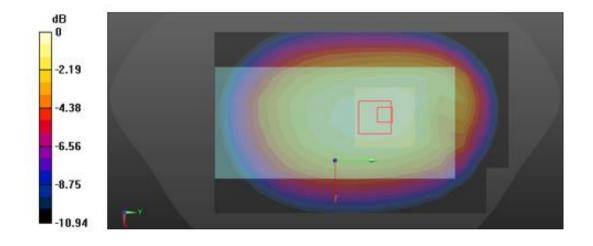

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (93) of (212)



17)

Date: 2/28/2022

Test Laboratory: KCTL Inc.

File Name: 2. LTE Band 41\_QPSK\_20 MHz\_Body.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, LTE Band 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58016 Medium parameters used (interpolated): f = 2593 MHz;  $\sigma = 2.023$  S/m;  $\epsilon_r = 38.419$ ;  $\rho = 1000$  kg/m<sup>3</sup> Phantom section: Flat Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN7540; ConvF(7.26, 7.26, 7.26) @ 2593 MHz; ; Calibrated: 4/29/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/26/2021
- Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983
- Measurement SW: DASY52, Version 52.10 (4);

## Configuration/LTE Band 41\_QPSK\_20MHz\_1RB\_49offset\_CH40620\_Rear\_15 mm/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.313 W/kg

#### Configuration/LTE Band 41\_QPSK\_20MHz\_1RB\_49offset\_CH40620\_Rear\_15 mm/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.46 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.432 W/kg


SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 13.3 mm

Ratio of SAR at M2 to SAR at M1 = 50.7%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.350 W/kg

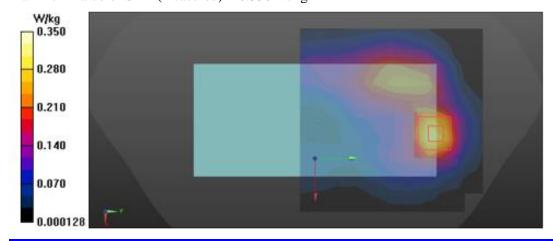

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (94) of (212)



18)

Date: 3/7/2022

Test Laboratory: KCTL Inc.

File Name: 2. WLAN 2.4 GHz\_Body.da53:0

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HR47Z

Communication System: UID 0, 2.4GWLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.848$  S/m;  $\varepsilon_r = 37.772$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7541; ConvF(7.69, 7.69, 7.69) @ 2437 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

## Configuration/802.11 b\_CH6\_Rear\_15 mm/Area Scan (13x11x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.141 W/kg

#### Configuration/802.11 b\_CH6\_Rear\_15 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dy=5mm, dz=5mm

Reference Value = 6.066 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.174 W/kg


SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.142 W/kg

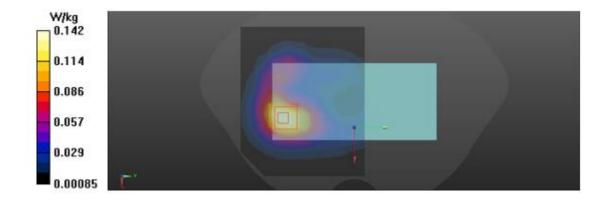

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (95) of (212)



19)

Date: 2/25/2022

Test Laboratory: KCTL Inc.

File Name: 2. WLAN 5.3 GHz\_Body.da53:0

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HR47Z

Communication System: UID 0, 5GWLAN (0); Frequency: 5260 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5260 MHz;  $\sigma = 4.786$  S/m;  $\epsilon_r = 37.368$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7541; ConvF(5.37, 5.37, 5.37) @ 5260 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

## Configuration/802.11 a\_CH52\_Rear\_15 mm/Area Scan (13x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.147 W/kg

## Configuration/802.11 a\_CH52\_Rear\_15 mm/Zoom Scan (10x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.777 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.230 W/kg

### SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.020 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 63%

Maximum value of SAR (measured) = 0.148 W/kg

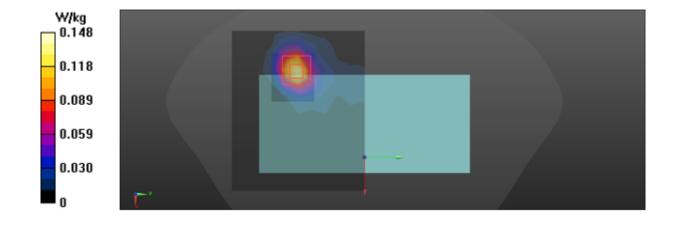

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (96) of (212)



20)

Date: 2/28/2022

Test Laboratory: KCTL Inc.

File Name: 2. WLAN 5.6 GHz\_Body.da53:0

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HR47Z

Communication System: UID 0, 5GWLAN (0); Frequency: 5600 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5600 MHz;  $\sigma = 5.056$  S/m;  $\epsilon_r = 36.226$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7541; ConvF(4.65, 4.65, 4.65) @ 5600 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

# Configuration/802.11 a\_CH120\_Rear\_15 mm/Area Scan (13x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.392 W/kg

## **Configuration/802.11 a\_CH120\_Rear\_15 mm/Zoom Scan (10x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.945 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.778 W/kg

### SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.067 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

Maximum value of SAR (measured) = 0.434 W/kg

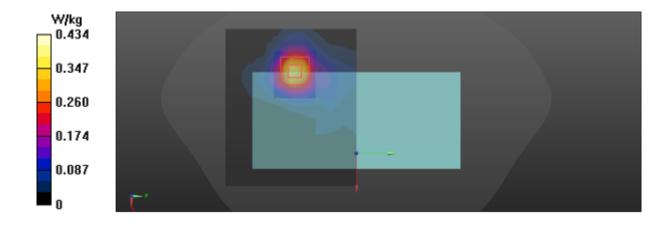

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (97) of (212)



21)

Date: 3/2/2022

Test Laboratory: KCTL Inc.

File Name: 2. WLAN 5.8 GHz\_Body.da53:0

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HR47Z

Communication System: UID 0, 5GWLAN (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 5825 MHz;  $\sigma = 5.313$  S/m;  $\varepsilon_r = 35.404$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7541;ConvF(4.7, 4.7, 4.7) @ 5825 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

# Configuration/802.11 a\_CH165\_Rear\_15 mm/Area Scan (13x11x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.475 W/kg

#### Configuration/802.11 a\_CH165\_Rear\_15 mm/Zoom Scan (10x9x7)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=1.4mm

Reference Value = 10.73 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.919 W/kg


SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.079 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.503 W/kg

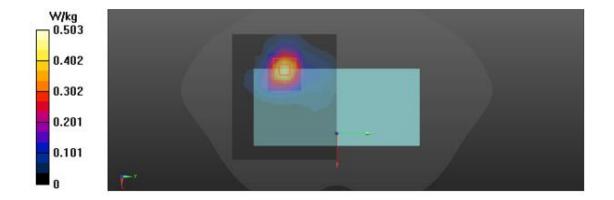

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (98) of (212)



22)

Date: 3/7/2022

Test Laboratory: KCTL Inc.

File Name: 3. GSM850\_Hotspot.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, GSM850\_3TX (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.76694

Medium parameters used: f = 824.2 MHz;  $\sigma = 0.904$  S/m;  $\varepsilon_r = 40.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7540; ConvF(9.6, 9.6, 9.6) @ 824.2 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/GSM850\_GPRS 3Tx\_CH128\_Rear\_10 mm/Area Scan (9x14x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.592 W/kg

#### Configuration/GSM850\_GPRS 3Tx\_CH128\_Rear\_10 mm/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.54 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.234 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 0.637 W/kg

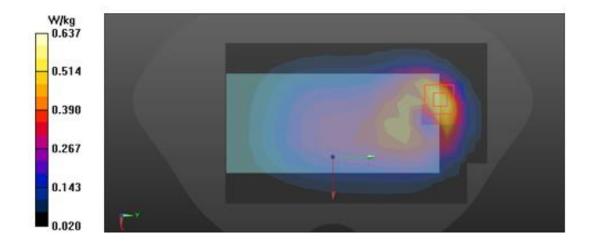

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (99) of (212)



23)

Date: 3/8/2022

Test Laboratory: KCTL Inc.

File Name: 3. GSM1900\_Hotspot.da53:2

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, GSM 1900\_4Tx (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.07491 Medium parameters used (interpolated): f = 1909.8 MHz;  $\sigma = 1.426$  S/m;  $\epsilon_r = 38.924$ ;  $\rho = 1000$  kg/m<sup>3</sup> Phantom section: Flat Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN7540; ConvF(8.25, 8.25, 8.25) @ 1909.8 MHz; ; Calibrated: 4/29/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/26/2021
- Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983
- Measurement SW: DASY52, Version 52.10 (4);

# **Configuration 3/GSM1900\_GPRS 4Tx\_CH810\_Bottom\_10 mm/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.05 W/kg

#### Configuration 3/GSM1900\_GPRS 4Tx\_CH810\_Bottom\_10 mm/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.68 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.40 W/kg


SAR(1 g) = 0.765 W/kg; SAR(10 g) = 0.395 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.18 W/kg

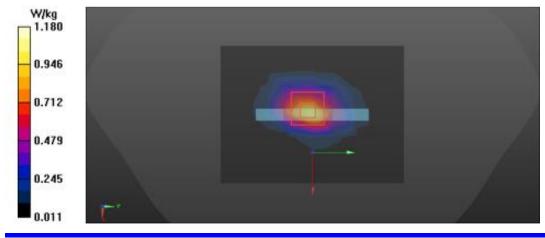

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (100) of (212)



24)

Date: 3/7/2022

Test Laboratory: KCTL Inc.

File Name: 6. WCDMA FDD V Hotspot.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, W-CDMA 850 (Band 5) (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: f = 836.6 MHz;  $\sigma = 0.916$  S/m;  $\varepsilon_r = 40.604$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7540; ConvF(9.6, 9.6, 9.6) @ 836.6 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/WCDMA FDD V\_CH4183\_Rear\_10 mm/Area Scan (9x14x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.448 W/kg

#### Configuration/WCDMA FDD V\_CH4183\_Rear\_10 mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.44 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.681 W/kg

SAR(1 g) = 0.351 W/kg; SAR(10 g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 53.2%

Maximum value of SAR (measured) = 0.537 W/kg

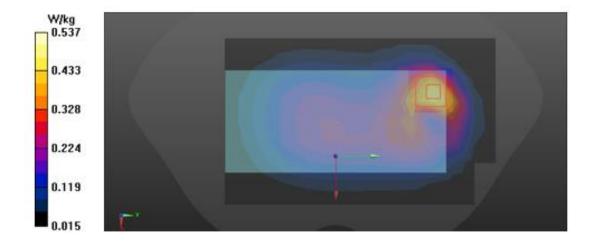

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (101) of (212)



25)

Date: 2/24/2022

Test Laboratory: KCTL Inc.

File Name: 3. LTE Band 5\_QPSK\_10 MHz\_Hotspot.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): f = 836.5 MHz;  $\sigma = 0.912$  S/m;  $\epsilon_r = 41.23$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7540; ConvF(9.6, 9.6, 9.6) @ 836.5 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

## Configuration/LTE Band 5\_QPSK\_10MHz\_1RB\_0offset\_CH20525\_Rear\_10 mm/Area Scan (9x14x1):

Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.562 W/kg

#### Configuration/LTE Band 5\_QPSK\_10MHz\_1RB\_0offset\_CH20525\_Rear\_10 mm/Zoom Scan

(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.82 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.840 W/kg


SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.239 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.663 W/kg

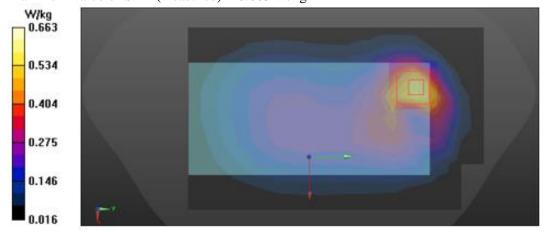

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (102) of (212)



26)

Date: 2/25/2022

Test Laboratory: KCTL Inc.

File Name: 3. LTE Band 12 QPSK 10 MHz Hotspot.da53:0

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, LTE Band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: f = 707.5 MHz;  $\sigma = 0.861$  S/m;  $\varepsilon_r = 43.611$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY5 Configuration:

Probe: EX3DV4 - SN7540; ConvF(10, 10, 10) @ 707.5 MHz; ; Calibrated: 4/29/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1587; Calibrated: 7/26/2021

Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983

• Measurement SW: DASY52, Version 52.10 (4);

#### Configuration/LTE Band 12 QPSK 10MHz 1RB 0offset CH23095 Rear 10 mm/Area Scan (9x14x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.383 W/kg

#### Configuration/LTE Band 12\_QPSK\_10MHz\_1RB\_0offset\_CH23095\_Rear\_10 mm/Zoom Scan

(8x10x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.60 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.210 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 0.420 W/kg

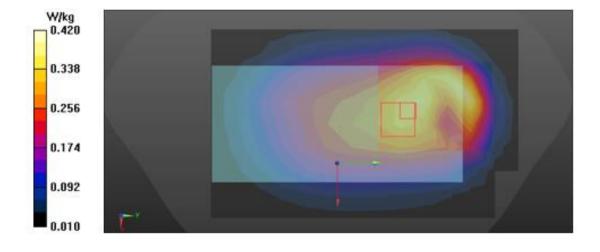

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (103) of (212)



27)

Date: 3/3/2022

Test Laboratory: KCTL Inc.

File Name: 3. LTE Band 41 QPSK 20 MHz Hotspot.da53:2

#### DUT: SC-53C, SCG15, Type: Mobile Phone, Serial: R3CRC0HRFSK

Communication System: UID 0, LTE Band 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58016 Medium parameters used (interpolated): f = 2593 MHz;  $\sigma = 1.993$  S/m;  $\epsilon_r = 38.277$ ;  $\rho = 1000$  kg/m<sup>3</sup> Phantom section: Flat Section

#### DASY5 Configuration:

- Probe: EX3DV4 SN7540; ConvF(7.26, 7.26, 7.26) @ 2593 MHz; ; Calibrated: 4/29/2021
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1587; Calibrated: 7/26/2021
- Phantom: Twin-SAM V8.0\_Left; Type: QD 000 P41 Ax; Serial: 1983
- Measurement SW: DASY52, Version 52.10 (4);

## Configuration 3/LTE Band 41\_QPSK\_20MHz\_1RB\_49offset\_CH40620\_Bottom\_10 mm/Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.22 W/kg

#### Configuration 3/LTE Band 41\_QPSK\_20MHz\_1RB\_49offset\_CH40620\_Bottom\_10 mm/Zoom Scan

(7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.45 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.89 W/kg


SAR(1 g) = 0.903 W/kg; SAR(10 g) = 0.417 W/kg

Smallest distance from peaks to all points 3 dB below = 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 48.7%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.52 W/kg

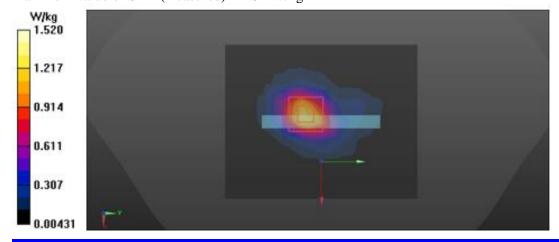

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (104) of (212)



28)

Date: 3/7/2022

Test Laboratory: KCTL Inc.

File Name: 3. WLAN 2.4 GHz\_Hotspot.da53:2

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HR47Z

Communication System: UID 0, 2.4GWLAN (0); Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 2437 MHz;  $\sigma = 1.848$  S/m;  $\varepsilon_r = 37.772$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7541; ConvF(7.69, 7.69, 7.69) @ 2437 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

## Configuration 3/802.11 b\_CH6\_Top\_10 mm/Area Scan (8x10x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.303 W/kg

#### Configuration 3/802.11 b\_CH6\_Top\_10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dv=5mm, dz=5mm

Reference Value = 12.24 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.366 W/kg


SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.096 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 51%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.299 W/kg

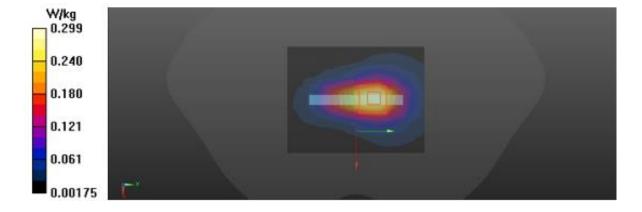

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (105) of (212)



29)

Date: 3/10/2022

Test Laboratory: KCTL Inc.

File Name: 2. Bluetooth\_BDR\_DH5\_Hotspot.da53:2

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HRGEA

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.30167 Medium parameters used (interpolated): f = 2441 MHz;  $\sigma = 1.783$  S/m;  $\epsilon_r = 38.801$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7541; ConvF(7.69, 7.69, 7.69) @ 2441 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

# Configuration 3/Bluetooth\_BDR\_DH5\_CH39\_Top\_10 mm/Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0735 W/kg

#### Configuration 3/Bluetooth\_BDR\_DH5\_CH39\_Top\_10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement

grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.638 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.112 W/kg


SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.026 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 46.6%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.0892 W/kg

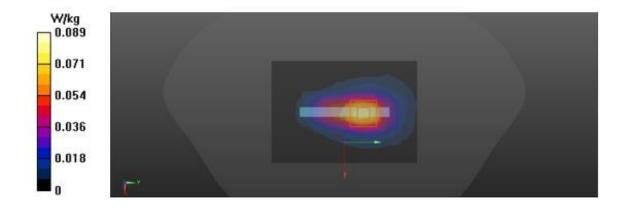

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr

Report No.: KR22-SPF0012 Page (106) of (212)



30)

Date: 2/25/2022

Test Laboratory: KCTL Inc.

File Name: 3. WLAN 5.3 GHz Phablet.da53:1

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HR47Z

Communication System: UID 0, 5GWLAN (0); Frequency: 5260 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5260 MHz;  $\sigma = 4.786 \text{ S/m}$ ;  $\varepsilon_r = 37.368$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7541;ConvF(5.37, 5.37, 5.37) @ 5260 MHz; Calibrated: 7/30/2021

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

Measurement SW: DASY52, Version 52.10 (4);

#### Configuration 2/802.11 a\_CH52\_Left\_0 mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 5.76 W/kg

#### Configuration 2/802.11 a\_CH52\_Left\_0 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dv=4mm, dz=1.4mm

Reference Value = 5.947 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 15.8 W/kg

## SAR(1 g) = 2.52 W/kg; SAR(10 g) = 0.556 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 8.40 W/kg

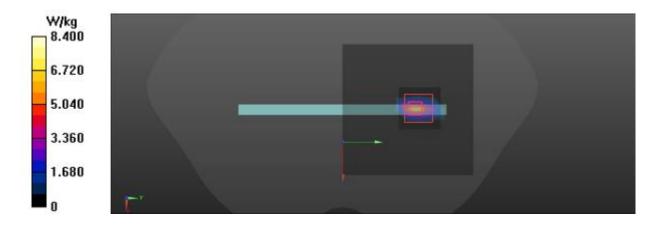

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (107) of (212)



31)

Date: 2/28/2022

Test Laboratory: KCTL Inc.

File Name: 3. WLAN 5.6 GHz\_Phablet.da53:1

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HR47Z

Communication System: UID 0, 5GWLAN (0); Frequency: 5600 MHz; Duty Cycle: 1:1 Medium parameters used: f = 5600 MHz;  $\sigma = 5.056$  S/m;  $\epsilon_r = 36.226$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7541; ConvF(4.65, 4.65, 4.65) @ 5600 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

## Configuration 2/802.11 a\_CH120\_Left\_0 mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 8.45 W/kg

## **Configuration 2/802.11 a\_CH120\_Left\_0 mm/Zoom Scan (9x10x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 6.449 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 46.1 W/kg

#### SAR(1 g) = 5.39 W/kg; SAR(10 g) = 1.36 W/kg

Smallest distance from peaks to all points 3 dB below = 4 mm

Ratio of SAR at M2 to SAR at M1 = 51.4%

Maximum value of SAR (measured) = 16.8 W/kg

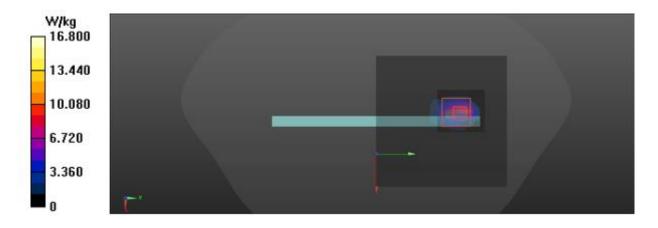

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311 www.kctl.co.kr Report No.: KR22-SPF0012 Page (108) of (212)



32)

Date: 3/2/2022

Test Laboratory: KCTL Inc.

File Name: 3. WLAN 5.8 GHz\_Phablet.da53:1

#### DUT: SC-53, SCG15, Type: Mobile Phone, Serial: R3CRC0HR47Z

Communication System: UID 0, 5GWLAN (0); Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): f = 5825 MHz;  $\sigma = 5.313$  S/m;  $\varepsilon_r = 35.404$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### **DASY5** Configuration:

Probe: EX3DV4 - SN7541; ConvF(4.7, 4.7, 4.7) @ 5825 MHz; Calibrated: 7/30/2021

• Sensor-Surface: 1.4mm (Mechanical Surface Detection)

• Electronics: DAE4 Sn1342; Calibrated: 6/2/2021

• Phantom: Back\_Left\_Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 1974

• Measurement SW: DASY52, Version 52.10 (4);

## Configuration 2/802.11 a\_CH165\_Left\_0 mm/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 9.52 W/kg

#### Configuration 2/802.11 a\_CH165\_Left\_0 mm/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm,

dy=4mm, dz=1.4mm

Reference Value = 7.182 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 64.3 W/kg


SAR(1 g) = 5.68 W/kg; SAR(10 g) = 1.41 W/kg

Smallest distance from peaks to all points 3 dB below = 3.2 mm

Ratio of SAR at M2 to SAR at M1 = 39.5%

#### Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 20.0 W/kg

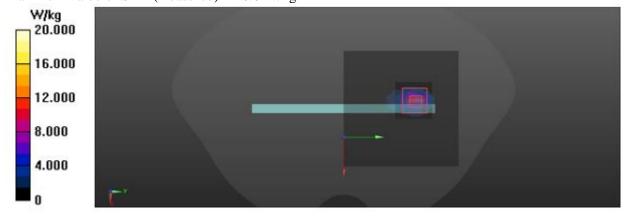

65, Sinwon-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea TEL: 82-31-285-0894 FAX: 82-505-299-8311

www.kctl.co.kr

Report No.: KR22-SPF0012 Page (109) of (212)



## **Appendixes List**

	A.1 Probe Calibration certificate (EX3DV4_7540)
	A.2 Probe Calibration certificate (EX3DV4_7541)
	A.3 Dipole Calibration certificate (D750V3_1183)
	A.4 Dipole Calibration certificate (D850V2_1006)
Appendix A	A.5 Dipole Calibration certificate (D1900V2_5d160)
	A.6 Dipole Calibration certificate (D2450V2_895)
	A.7 Dipole Calibration certificate (D2600V2_1050)
	A.8 Dipole Calibration certificate (D5GHzV2_1293)
	A.9 Justification for Extended SAR Dipole Calibrations
Appendix B	SAR Tissue Specification
Appendix C	#Antenna Location & Distance
Appendix D	EUT Photo
Appendix E	Test Setup Photo