

# FCC NFC REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Address:**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,  
16677, Rep. of Korea

**Date of Issue:**  
January 21, 2022

**Test Site/Location:**  
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-  
si, Gyeonggi-do, 17383 KOREA

**Report No.:** HCT-RF-2201-FC058-R1

**FCC ID:** A3LSMA536U

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

According to the Evaluation report, all of the data contained herein is reused from the reference  
FCC ID : A3LSMA536V report.

**Model:** SM-A536U  
**Additional Model:** SM-A536U1/DS, SM-S536DL, SM-A536W  
**EUT Type:** Mobile phone  
**RF Output Field Strength:** 11.74 dBμV/m @30 m  
**Frequency of Operation:** 13.56 MHz  
**Modulation type:** ASK  
**FCC Classification:** Low Power Communication Device Transmitter (DXX)  
**FCC Rule Part(s):** FCC Part 15.225 Subpart C

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2201-FC058-R1

---

REVIEWED BY



---

Report prepared by : Woong Jin Kim  
Engineer of Telecommunication Testing Center



---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2201-FC058	January 19, 2022	- First Approval Report
HCT-RF-2201-FC058-R1	January 21, 2022	- Added the Additional Model.

# **Table of Contents**

REVIEWED BY .....	2
1. EUT DESCRIPTION .....	5
2. TEST METHODOLOGY .....	6
EUT CONFIGURATION .....	6
EUT EXERCISE .....	6
GENERAL TEST PROCEDURES .....	6
DESCRIPTION OF TEST MODES .....	6
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS .....	7
FACILITIES .....	7
EQUIPMENT .....	7
5. ANTENNA REQUIREMENTS .....	7
6. MEASUREMENT UNCERTAINTY .....	8
7. DESCRIPTION OF TESTS.....	9
8. TEST SUMMARY .....	17
9. TEST RESULT .....	18
9.1. Operation within the band 13.110 MHz – 14.010 MHz.....	18
9.2. Radiated Emission 9 kHz – 30 MHz .....	20
9.3. Radiated Emission 30 MHz – 1000 MHz .....	21
9.4. 20 dB Bandwidth .....	22
9.5. Frequency Stability .....	23
9.6. POWERLINE CONDUCTED EMISSIONS .....	27
10. LIST OF TEST EQUIPMENT .....	35
11. ANNEX A_ TEST SETUP PHOTO .....	37

## 1. EUT DESCRIPTION

<b>Model</b>	SM-A536U
<b>Additional Model</b>	SM-A536U1/DS, SM-S536DL, SM-A536W
<b>EUT Type</b>	Mobile phone
<b>Power Supply</b>	DC 4.20 V
<b>Frequency of Operation</b>	13.56 MHz
<b>Transmit Power</b>	11.74 dBμV/m @30 m
<b>Modulation Type</b>	ASK
<b>Date(s) of Tests</b>	November 05, 2021 ~ January 05, 2022
<b>Serial number</b>	Radiated: R3CRA0X73GW Conducted: R3CRA0KM0NM

## 2. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

## GENERAL TEST PROCEDURES

### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013).

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

### 4. FACILITIES AND ACCREDITATIONS

#### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

#### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5. ANTENNA REQUIREMENTS

#### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 ( Confidence level about 95 %, k=2)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 ( Confidence level about 95 %, k=2)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 ( Confidence level about 95 %, k=2)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 ( Confidence level about 95 %, k=2)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 ( Confidence level about 95 %, k=2)



## 7. DESCRIPTION OF TESTS

### 7.1. Radiated Test

#### Limit (Operation within the band 13.110 MHz – 14.010 MHz)

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
13.553 – 13.567	15,848	30
13.410 $\leq f \leq$ 13.553 13.567 $\leq f \leq$ 13.710	334	30
13.110 $\leq f \leq$ 13.410 13.710 $\leq f \leq$ 14.010	106	30

Note:

1. 15,848  $\mu\text{V/m}$  = 84.0 dB $\mu\text{V/m}$
2. 334  $\mu\text{V/m}$  = 50.47 dB $\mu\text{V/m}$
3. 106  $\mu\text{V/m}$  = 40.51 dB $\mu\text{V/m}$

#### Limit (Radiated Spurious Emissions)


Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	* 100	3
88-216	* 150	3
216-960	* 200	3
Above 960	500	3

※.


Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

### Test Configuration

Below 30 MHz

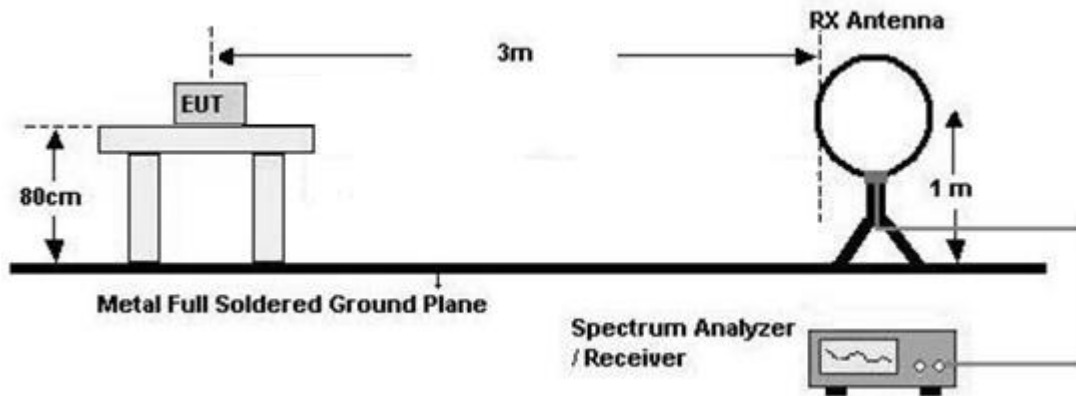

30 MHz - 1 GHz

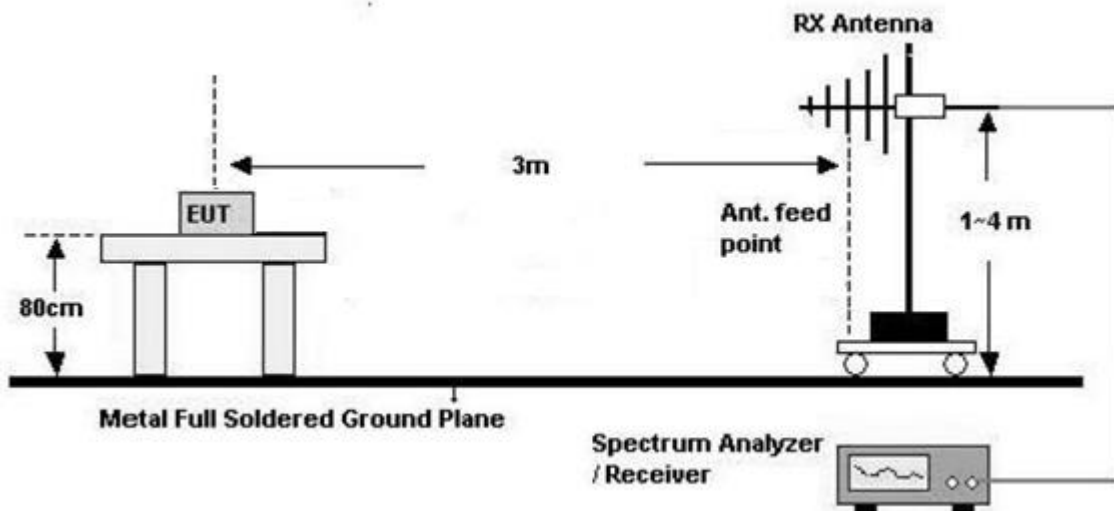

### Test Procedure of in-band

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor =  $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$   
Measurement Distance : 3 m (Below 30 MHz)

## 7. Spectrum Setting

- Detector = Peak
- Trace = Max Hold
- RBW = 9 kHz
- VBW  $\geq 3 \times$  RBW

8. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Max hold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.


OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Above 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
  - Frequency Range = 30 MHz ~ 1 GHz
  - Detector = Peak
  - Trace = Max hold
  - RBW = 100 kHz
  - VBW  $\geq 3 \times$  RBW
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

## 7.2. 20 dB Bandwidth

### Test Configuration

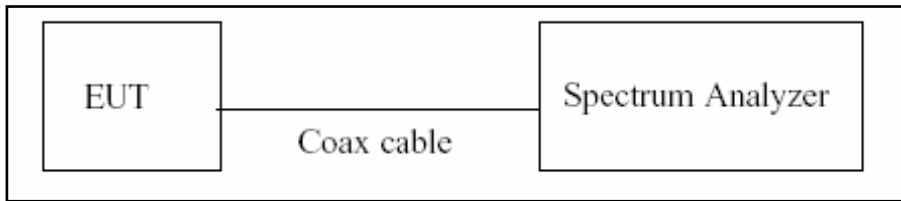

### Test Procedure

The 20 dB bandwidth was measured by using a spectrum analyzer.

(Procedure 6.9.2 in ANSI 63.10-2013)

- 1) RBW = 1 % ~ 5 % of the OBW
- 2) VBW = approximately three times RBW
- 3) Span = between two times and five times the OBW
- 4) Detector = Peak
- 5) Trace mode = Max hold
- 6) Allow the trace to stabilize

Note :


We tested Occupied Bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Frequency Stability

#### Limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01$  % of the operating frequency.

#### Test Configuration

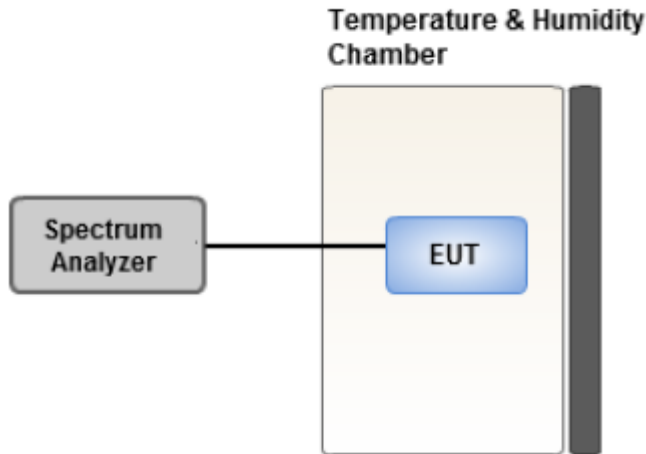

#### Test Procedure.

For battery operated equipment, the equipment tests shall be performed using a new battery.

- 1) Turn the EUT OFF and place it inside the environmental temperature chamber.  
For devices that have oscillator heaters, energize only the heater circuit.
- 2) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- 3) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- 4) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01$  % of the operating frequency.

#### Note:

- 1) Temperature:  
The temperature is varied from  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  using an environmental chamber.
- 2) Primary Supply Voltage :  
The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment.  
For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

#### 7.4. AC Power line Conducted Emissions

##### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

##### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

##### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
  - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
  - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

##### Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

## 7.5. Worst case configuration and mode

### **Radiated test**

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + external accessories(Earphone, etc)
  - Worstcase : Stand alone
2. EUT Axis : Y
3. All type and bitrate were investigated and the worst case results are reported.
  - Worstcase : Type A, 106 kbps
4. All mode of without tag and with tag were investigated and the worst case configuration results are reported.
  - Worstcase : Without Tag
5. All position of loop antenna were investigated and the worst case configuration results are reported.
  - Position : Horizontal, Vertical, Parallel to the ground plane
  - Worstcase : Horizontal
6. SM-A536U, SM-A536U1/DS, SM-S536DL, SM-A536W were tested and the worst case results are reported.  
(Worst case : SM-A536U)

### **AC Power line Conducted Emissions**

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + Earphone + Travel Adapter, Stand alone + Travel Adapter
  - Worstcase : Stand alone + Travel Adapter
2. All modes(For unterminated the Antenna, terminated the Antenna) of operation were investigated and the worst case configuration results are reported.
  - Worstcase : Unterminated the Antenna
3. SM-A536U, SM-A536U1/DS, SM-S536DL, SM-A536W were tested and the worst case results are reported.  
(Worst case : SM-A536U)

### **20 dB Bandwidth & Frequency Stability**

1. All type and bitrate were investigated and the worst case results are reported.
  - Worstcase : Type A, 106 kbps
2. SM-A536U, SM-A536U1/DS, SM-S536DL, SM-A536W were tested and the worst case results are reported.  
(Worst case : SM-A536U)



## 8. TEST SUMMARY

Regulation	Requirement	Result
Part 15.225 (a)	Radiated Electric Field Emissions (13.553 MHz to 13.567 MHz)	Pass
Part 15.225 (b)	Radiated Electric Field Emissions ( $13.410 \leq f \leq 13.553$ , $13.567 \leq f \leq 13.710$ )	Pass
Part 15.225 (c)	Radiated Electric Field Emissions ( $13.110 \leq f \leq 13.410$ , $13.710 \leq f \leq 14.010$ )	Pass
Part 15.209	Radiated Electric Field Emissions (9 kHz to 30 MHz)	Pass
Part 15.209	Radiated Electric Field Emissions (30 MHz to 1 GHz)	Pass
Part 15.225 (e)	Frequency Stability	Pass
Part 15.207	AC power conducted emissions (150 kHz to 30 MHz)	Pass
Part 15.215 (c)	20 dB Bandwidth	Pass

## 9. TEST RESULT

### 9.1. Operation within the band 13.110 MHz – 14.010 MHz


Measured Frequency Range : 13.553 MHz-13.567 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant.Factor + Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @30 m	Limit (dBμV/m) @30 m	Margin (dB)
13.5611	31.61	20.13	-40.00	H	11.74	84.00	72.26
13.5609	26.54	20.13	-40.00	V	6.67	84.00	77.33

Measured Frequency Range : 13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant.Factor + Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @30 m	Limit (dBμV/m) @30 m	Margin (dB)
13.5529	25.31	20.13	-40.00	H	5.44	50.47	45.03
13.5671	27.07	20.13	-40.00	H	7.20	50.47	43.27


Measured Frequency Range : 13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant.Factor + Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @30 m	Limit (dBμV/m) @30 m	Margin (dB)
13.3490	18.31	20.13	-40.00	H	-1.56	40.51	42.07
13.7723	18.02	20.13	-40.00	H	-1.85	40.51	42.36

## Test Plot

13.553 MHz ~ 13.567 MHz

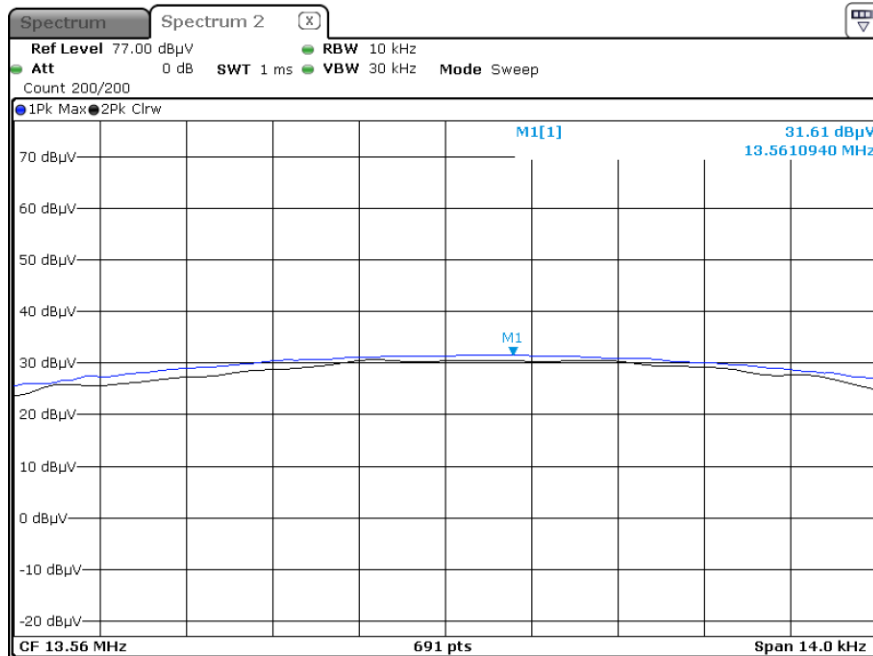

Worst Case (13.567 MHz-13.710 MHz)

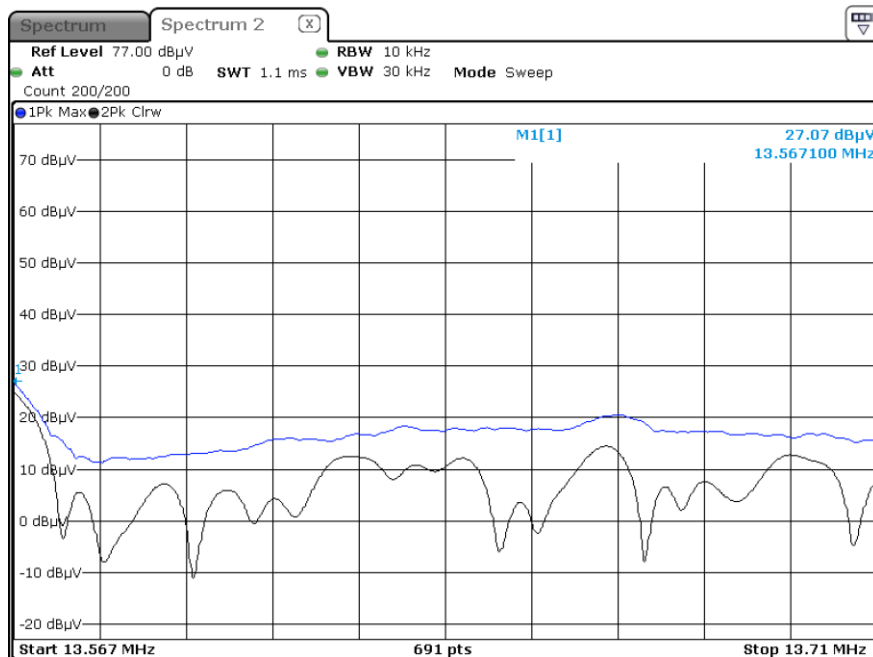

### Note:

Plot of worst case are only reported.

**9.2. Radiated Emission 9 kHz – 30 MHz**

Measured Frequency Range : 9 kHz - 30 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant.Factor + Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @30 m	Limit (dBμV/m) @30 m	Margin (dB)
8.7030	14.27	20.13	-40.00	H	-5.60	29.54	35.14
14.0835	11.05	20.13	-40.00	H	-8.82	29.54	38.36
27.5892	9.55	20.63	-40.00	H	-9.82	29.54	39.36
27.1493	9.23	20.63	-40.00	V	-10.14	29.54	39.68


## 9.3. Radiated Emission 30 MHz – 1000 MHz

Measured Frequency Range : 30 MHz - 1000 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant.Factor (dB/m)	Cable Loss (dB)	Ant. Pol (H/V)	Total (dBμV/m)	Limit (dBμV/m)	Margin (dB)
# 37.8465	8.054	19.50	0.49	H	28.044	40.00	11.96
51.190	7.934	20.23	0.56	H	28.724	40.00	11.28
100.800	7.744	15.54	0.78	V	24.064	43.50	19.44
#119.152	8.649	17.32	0.86	H	26.829	43.50	16.67
#123.300	9.082	19.25	0.91	H	29.242	43.50	14.26
159.684	7.821	20.16	0.98	V	28.961	43.50	14.54

### Note:

- # is the result for restricted band.

### Test Plot

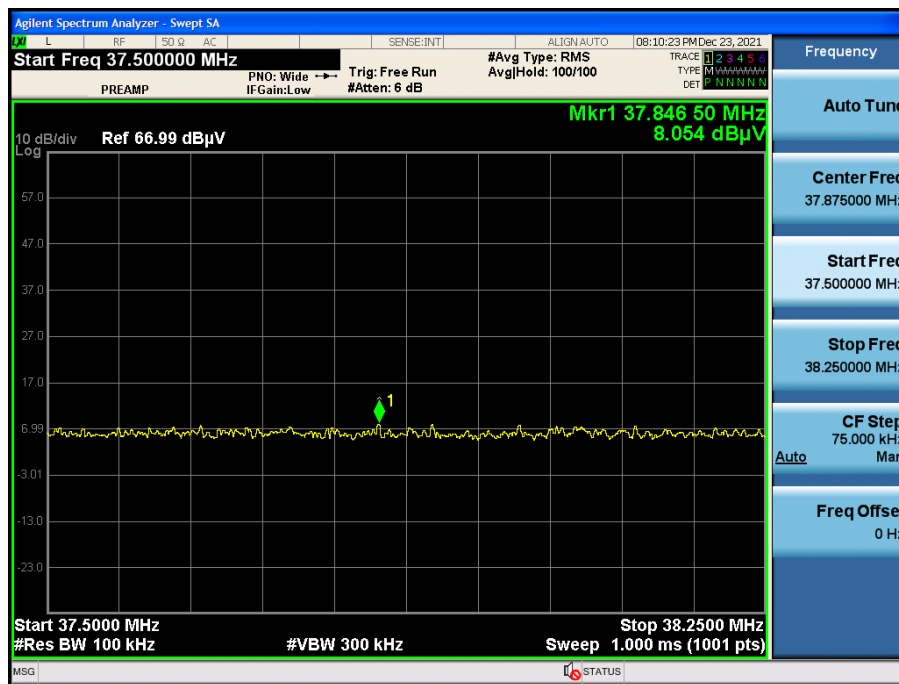

### Note:

Plot of worst case are only reported

## 9.4. 20 dB Bandwidth



## 9.5. Frequency Stability

### Startup

PERATING FREQUENCY: 13.56 MHz  
 REFERENCE VOLTAGE: 4.20 VDC  
 DEVIATION LIMIT:  $\pm 0.01 \% = \pm 1356 \text{ Hz}$

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	4.20	-20	13.560050	50	0.0003694
100%		-10	13.560054	54	0.0003955
100%		0	13.560050	50	0.0003671
100%		+10	13.560051	51	0.0003765
100%		+20(Ref.)	13.560040	40	0.0002950
100%		+30	13.560046	46	0.0003359
100%		+40	13.560048	48	0.0003526
100%		+50	13.560058	58	0.0004305
LOW	3.80	+20	13.560056	56	0.0004165
HIGH	4.40	+20	13.560035	35	0.0002598

## 2 minutes

PERATING FREQUENCY: 13.56 MHz  
 REFERENCE VOLTAGE: 4.20 VDC  
 DEVIATION LIMIT:  $\pm 0.01 \% = \pm 1356 \text{ Hz}$

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	4.20	-20	13.560061	61	0.0004503
100%		-10	13.560063	63	0.0004665
100%		0	13.560056	56	0.0004096
100%		+10	13.560050	50	0.0003654
100%		+20(Ref.)	13.560047	47	0.0003468
100%		+30	13.560049	49	0.0003644
100%		+40	13.560048	48	0.0003543
100%		+50	13.560054	54	0.0003988
LOW	3.80	+20	13.560044	44	0.0003250
HIGH	4.40	+20	13.560053	53	0.0003872



**5 minutes**

PERATING FREQUENCY: 13.56 MHz  
REFERENCE VOLTAGE: 4.20 VDC  
DEVIATION LIMIT:  $\pm 0.01 \% = \pm 1356 \text{ Hz}$

Voltage (%)	Power (VDC)	Temp. (℃)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	4.20	-20	13.560064	64	0.0004720
100%		-10	13.560060	60	0.0004425
100%		0	13.560058	58	0.0004277
100%		+10	13.560051	51	0.0003761
100%		+20(Ref.)	13.560050	50	0.0003687
100%		+30	13.560053	53	0.0003909
100%		+40	13.560054	54	0.0003982
100%		+50	13.560037	37	0.0002729
LOW	3.80	+20	13.560046	46	0.0003392
HIGH	4.40	+20	13.560051	51	0.0003761

# 10 minutes

OPERATING FREQUENCY: 13.56 MHz

REFERENCE VOLTAGE: 4.20 VDC

DEVIATION LIMIT:  $\pm 0.01 \% = \pm 1356 \text{ Hz}$ 

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	4.20	-20	13.560065	65	0.0004794
100%		-10	13.560061	61	0.0004499
100%		0	13.560057	57	0.0004204
100%		+10	13.560053	53	0.0003909
100%		+20(Ref.)	13.560051	51	0.0003761
100%		+30	13.560051	51	0.0003761
100%		+40	13.560047	47	0.0003466
100%		+50	13.560039	39	0.0002876
LOW	3.80	+20	13.560052	52	0.0003835
HIGH	4.40	+20	13.560050	50	0.0003687

## 9.6. POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)

NFC T L1


1 / 2

## Test Report

### Common Information

EUT : SM-A536V  
 Manufacturer : SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions : NFC T L1  
 Operator Name:  
 Comment:

Full Spectrum

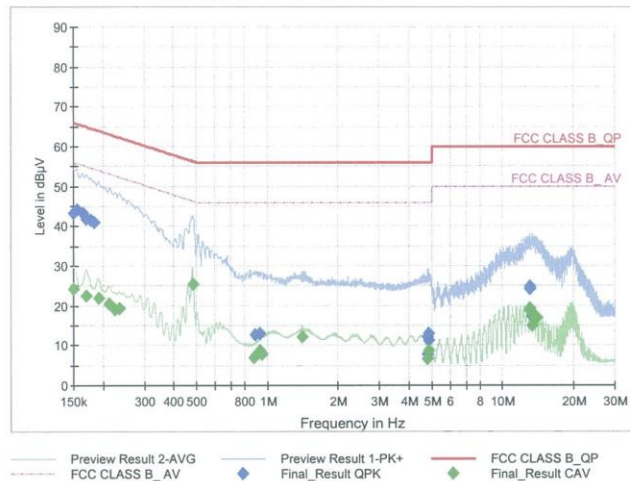

### Final Result QPK

Frequency (MHz)	QuasiPeak	Limit (dBuV)	Margin	Bandwidth	Line	Filter	Corr. (dB)
0.1500	43.17	66.00	22.83	9.000	L1	OFF	9.6
0.1545	44.24	65.75	21.51	9.000	L1	OFF	9.6
0.1635	43.19	65.28	22.10	9.000	L1	OFF	9.6
0.1703	41.69	64.95	23.26	9.000	L1	OFF	9.6
0.1770	41.63	64.63	23.00	9.000	L1	OFF	9.6
0.1838	41.09	64.31	23.22	9.000	L1	OFF	9.6
0.8915	12.60	56.00	43.40	9.000	L1	OFF	9.7
0.9230	12.93	56.00	43.07	9.000	L1	OFF	9.7
4.7728	7.65	56.00	48.35	9.000	L1	OFF	9.8
4.8155	11.99	56.00	44.01	9.000	L1	OFF	9.8
4.8380	11.14	56.00	44.86	9.000	L1	OFF	9.8
4.8493	13.11	56.00	42.89	9.000	L1	OFF	9.8
13.0145	24.19	60.00	35.81	9.000	L1	OFF	10.1
13.0370	24.71	60.00	35.29	9.000	L1	OFF	10.1
13.0595	24.83	60.00	35.17	9.000	L1	OFF	10.1
13.3250	17.36	60.00	42.64	9.000	L1	OFF	10.2
13.3475	17.72	60.00	42.28	9.000	L1	OFF	10.2
13.3700	18.31	60.00	41.69	9.000	L1	OFF	10.2

### Final\_Result\_CAV

2022-01-05

오전 9:43:00

NFC T L1

2 / 2

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	24.23	56.00	31.77	9.000	L1	OFF	9.6
0.1703	22.43	54.95	32.52	9.000	L1	OFF	9.6
0.1928	21.99	53.92	31.93	9.000	L1	OFF	9.6
0.2130	20.50	53.09	32.59	9.000	L1	OFF	9.6
0.2243	19.01	52.66	33.65	9.000	L1	OFF	9.6
0.2355	19.38	52.25	32.88	9.000	L1	OFF	9.6
0.4808	25.44	46.33	20.88	9.000	L1	OFF	9.7
0.8803	6.94	46.00	39.06	9.000	L1	OFF	9.7
0.9253	8.55	46.00	37.45	9.000	L1	OFF	9.7
0.9478	7.72	46.00	38.28	9.000	L1	OFF	9.7
1.4113	12.20	46.00	33.80	9.000	L1	OFF	9.7
4.7728	6.52	46.00	39.48	9.000	L1	OFF	9.8
4.8358	8.60	46.00	37.40	9.000	L1	OFF	9.8
13.0573	19.45	50.00	30.55	9.000	L1	OFF	10.1
13.0820	18.61	50.00	31.39	9.000	L1	OFF	10.1
13.3903	14.88	50.00	35.12	9.000	L1	OFF	10.2
13.6580	17.06	50.00	32.94	9.000	L1	OFF	10.2
13.9888	17.10	50.00	32.90	9.000	L1	OFF	10.2

2022-01-05

오전 9:43:00

NFC UnT L1


1 / 2

## Test Report

### Common Information

EUT : SM-A536V  
 Manufacturer : SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions : NFC UnT L1  
 Operator Name:  
 Comment:

Full Spectrum

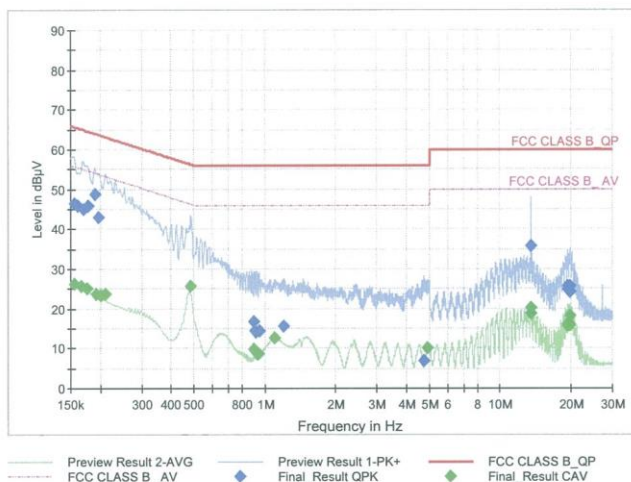

### Final Result QPK

Frequency (MHz)	QuasiPeak	Limit (dBμV)	Margin	Bandwidth	Line	Filter	Corr. (dB)
0.1545	46.43	65.75	19.32	9.000	L1	OFF	9.6
0.1613	45.74	65.40	19.66	9.000	L1	OFF	9.6
0.1703	44.95	64.95	19.99	9.000	L1	OFF	9.6
0.1770	45.82	64.63	18.80	9.000	L1	OFF	9.6
0.1905	48.82	64.02	15.20	9.000	L1	OFF	9.6
0.1973	43.03	63.73	20.69	9.000	L1	OFF	9.6
0.9005	16.59	56.00	39.41	9.000	L1	OFF	9.7
0.9050	14.37	56.00	41.63	9.000	L1	OFF	9.7
0.9208	14.11	56.00	41.89	9.000	L1	OFF	9.7
0.9478	14.41	56.00	41.59	9.000	L1	OFF	9.7
1.1998	15.53	56.00	40.47	9.000	L1	OFF	9.7
4.7480	7.02	56.00	48.98	9.000	L1	OFF	9.8
13.5613	35.68	60.00	24.32	9.000	L1	OFF	10.2
19.2808	25.80	60.00	34.20	9.000	L1	OFF	10.4
19.3033	24.79	60.00	35.21	9.000	L1	OFF	10.4
19.7240	24.29	60.00	35.71	9.000	L1	OFF	10.4
19.7465	24.16	60.00	35.84	9.000	L1	OFF	10.4
19.7668	25.56	60.00	34.44	9.000	L1	OFF	10.4

### Final\_Result\_CAV

2022-01-05

오전 10:01:43

NFC UnT L1

2 / 2

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	26.37	55.75	29.38	9.000	L1	OFF	9.6
0.1658	25.66	55.17	29.51	9.000	L1	OFF	9.6
0.1748	25.06	54.73	29.67	9.000	L1	OFF	9.6
0.1928	23.75	53.92	30.17	9.000	L1	OFF	9.6
0.2018	23.28	53.54	30.25	9.000	L1	OFF	9.6
0.2108	23.78	53.18	29.40	9.000	L1	OFF	9.6
0.4808	25.77	46.33	20.56	9.000	L1	OFF	9.7
0.9005	9.87	46.00	36.13	9.000	L1	OFF	9.7
0.9253	8.62	46.00	37.38	9.000	L1	OFF	9.7
0.9433	8.72	46.00	37.28	9.000	L1	OFF	9.7
1.1030	12.78	46.00	33.22	9.000	L1	OFF	9.7
4.9100	10.12	46.00	35.88	9.000	L1	OFF	9.8
13.5590	20.28	50.00	29.72	9.000	L1	OFF	10.2
13.5658	18.74	50.00	31.26	9.000	L1	OFF	10.2
19.2605	15.65	50.00	34.35	9.000	L1	OFF	10.4
19.3235	16.24	50.00	33.76	9.000	L1	OFF	10.4
19.7263	15.87	50.00	34.13	9.000	L1	OFF	10.4
19.7443	18.10	50.00	31.90	9.000	L1	OFF	10.4

2022-01-05

오전 10:01:43

## Conducted Emissions (Line 2)

NFC T N


1 / 2

## Test Report

### Common Information

EUT : SM-A536V  
 Manufacturer : SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions : NFC T N  
 Operator Name:  
 Comment:

Full Spectrum

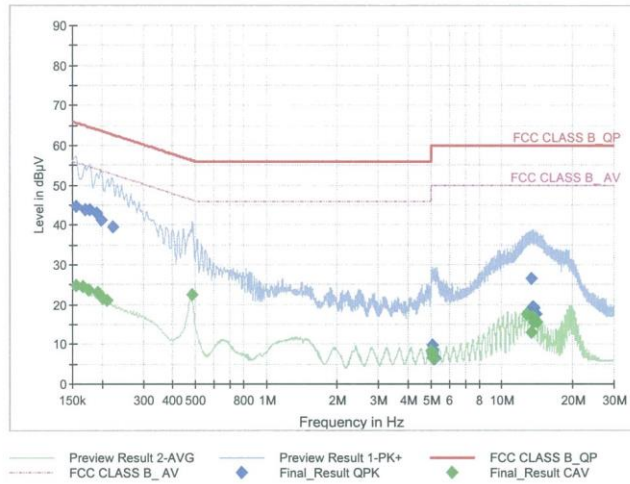

### Final Result QPK

Frequency (MHz)	QuasiPeak	Limit (dBμV)	Margin	Bandwidth	Line	Filter	Corr. (dB)
0.1545	44.82	65.75	20.94	9.000	N	OFF	9.6
0.1703	43.72	64.95	21.23	9.000	N	OFF	9.6
0.1770	43.93	64.63	20.69	9.000	N	OFF	9.6
0.1905	42.98	64.02	21.03	9.000	N	OFF	9.6
0.1995	41.34	63.63	22.29	9.000	N	OFF	9.6
0.2220	39.61	62.74	23.13	9.000	N	OFF	9.6
5.0473	9.71	60.00	50.29	9.000	N	OFF	9.9
5.0698	8.58	60.00	51.42	9.000	N	OFF	9.9
5.0743	8.41	60.00	51.59	9.000	N	OFF	9.9
5.1305	6.66	60.00	53.34	9.000	N	OFF	9.9
5.1620	6.50	60.00	53.50	9.000	N	OFF	9.9
5.1733	6.31	60.00	53.69	9.000	N	OFF	9.9
13.4128	26.50	60.00	33.50	9.000	N	OFF	10.2
13.4420	19.20	60.00	40.80	9.000	N	OFF	10.2
13.6603	19.00	60.00	41.00	9.000	N	OFF	10.2
13.6738	19.45	60.00	40.55	9.000	N	OFF	10.2
13.7030	17.17	60.00	42.83	9.000	N	OFF	10.2
14.0338	17.73	60.00	42.27	9.000	N	OFF	10.2

### Final\_Result\_CAV

2022-01-05

오전 9:50:00

NFC T N

2 / 2

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	24.70	55.75	31.06	9.000	N	OFF	9.6
0.1658	24.38	55.17	30.79	9.000	N	OFF	9.6
0.1748	23.80	54.73	30.93	9.000	N	OFF	9.6
0.1928	23.07	53.92	30.85	9.000	N	OFF	9.6
0.2018	21.63	53.54	31.91	9.000	N	OFF	9.6
0.2108	21.03	53.18	32.15	9.000	N	OFF	9.6
0.4808	22.58	46.33	23.74	9.000	N	OFF	9.7
5.0293	8.44	50.00	41.56	9.000	N	OFF	9.9
5.0473	7.91	50.00	42.09	9.000	N	OFF	9.9
5.0563	7.44	50.00	42.56	9.000	N	OFF	9.9
5.0743	6.76	50.00	43.24	9.000	N	OFF	9.9
5.1013	6.35	50.00	43.65	9.000	N	OFF	9.9
12.8165	17.53	50.00	32.47	9.000	N	OFF	10.2
13.3048	12.91	50.00	37.09	9.000	N	OFF	10.2
13.4713	17.03	50.00	32.97	9.000	N	OFF	10.2
13.6715	16.56	50.00	33.44	9.000	N	OFF	10.2
13.6895	15.58	50.00	34.42	9.000	N	OFF	10.2
14.0653	15.44	50.00	34.56	9.000	N	OFF	10.2

2022-01-05

오전 9:50:00



NFC UnT N


1 / 2

## Test Report

### Common Information

EUT : SM-A536V  
 Manufacturer : SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions : NFC UnT N  
 Operator Name:  
 Comment:

Full Spectrum

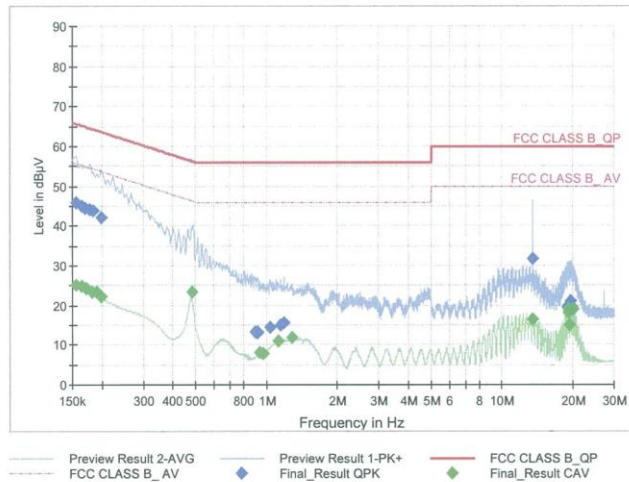

### Final Result QPK

Frequency (MHz)	QuasiPeak	Limit (dBμV)	Margin	Bandwidth	Line	Filter	Corr. (dB)
0.1545	45.86	65.75	19.89	9.000	N	OFF	9.6
0.1635	44.99	65.28	20.29	9.000	N	OFF	9.6
0.1703	44.50	64.95	20.45	9.000	N	OFF	9.6
0.1770	44.14	64.63	20.48	9.000	N	OFF	9.6
0.1838	43.93	64.31	20.38	9.000	N	OFF	9.6
0.1995	42.13	63.63	21.50	9.000	N	OFF	9.6
0.9005	13.34	56.00	42.66	9.000	N	OFF	9.7
0.9140	13.28	56.00	42.72	9.000	N	OFF	9.7
0.9208	12.88	56.00	43.12	9.000	N	OFF	9.7
1.0333	14.38	56.00	41.62	9.000	N	OFF	9.7
1.1525	15.14	56.00	40.86	9.000	N	OFF	9.7
1.1885	15.60	56.00	40.40	9.000	N	OFF	9.7
13.5613	31.83	60.00	28.17	9.000	N	OFF	10.2
18.9163	19.54	60.00	40.46	9.000	N	OFF	10.4
19.3213	19.95	60.00	40.05	9.000	N	OFF	10.4
19.3393	20.17	60.00	39.83	9.000	N	OFF	10.4
19.5103	21.19	60.00	38.81	9.000	N	OFF	10.4
19.7443	19.49	60.00	40.51	9.000	N	OFF	10.4

### Final\_Result\_CAV

2022-01-05

오전 9:55:45

NFC UnT N

2 / 2

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	25.15	55.75	30.60	9.000	N	OFF	9.6
0.1635	24.72	55.28	30.56	9.000	N	OFF	9.6
0.1725	24.16	54.84	30.68	9.000	N	OFF	9.6
0.1815	23.37	54.42	31.05	9.000	N	OFF	9.6
0.1905	23.45	54.02	30.56	9.000	N	OFF	9.6
0.1995	22.13	53.63	31.51	9.000	N	OFF	9.6
0.4808	23.28	46.33	23.05	9.000	N	OFF	9.7
0.9343	8.15	46.00	37.85	9.000	N	OFF	9.7
0.9703	7.79	46.00	38.21	9.000	N	OFF	9.7
1.1188	10.90	46.00	35.10	9.000	N	OFF	9.7
1.1278	10.95	46.00	35.05	9.000	N	OFF	9.7
1.2898	11.79	46.00	34.21	9.000	N	OFF	9.7
13.5590	16.49	50.00	33.51	9.000	N	OFF	10.2
13.5680	16.31	50.00	33.69	9.000	N	OFF	10.2
19.0265	18.92	50.00	31.08	9.000	N	OFF	10.4
19.0513	18.26	50.00	31.74	9.000	N	OFF	10.4
19.3393	14.93	50.00	35.07	9.000	N	OFF	10.4
19.9153	19.16	50.00	30.84	9.000	N	OFF	10.5

2022-01-05

오전 9:55:45

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/17/2022	Annual
Temperature Chamber	SU-642	ESPACE	0093008124	03/15/2022	Annual
Signal Analyzer	N9030A	Agilent	MY49431210	01/11/2022	Annual
DC Power Supply	E3632A	Hewlett Packard	MY50360067	02/16/2022	Annual
Attenuator(10 dB)	8493C	Hewlett Packard	07560	06/18/2022	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/19/2022	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	760	02/22/2023	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	02299	05/19/2022	Biennial
Spectrum Analyzer	FSV40-N	Rohde & Schwarz	102168	07/05/2022	Annual
Signal Analyzer	N9030A	Agilent	MY49431210	01/11/2022	Annual
Attenuator (3 dB)	18B-03	Api tech.	1	02/03/2022	Annual
Attenuator(10 dB)	8493C-10	Agilent	08285	02/03/2022	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2201-FC058-P