

FCC Carrier Aggregation REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: January 20, 2022
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-2201-FC063-R2	

FCC ID:	A3LSMA536V
APPLICANT:	SAMSUNG Electronics Co., Ltd.

Model(s): SM-A536V
 EUT Type: Mobile Phone
 FCC Classification: Citizens Band End User Devices (CBE)
 FCC Rule Part(s): §96, §2

Mode (PCC+SCC)	Tx Frequency (MHz)	Modulation	Emission Designator	EIRP	
				Max. Power (dBm)	Max. Power (W)
5 MHz+20 MHz	3553.3 - 3690.0	QPSK	22M9G7D	11.68	0.015
		16QAM	22M9W7D	11.53	0.014
		64QAM	22M8W7D	11.33	0.014
		256QAM	22M8W7D	11.30	0.013
10 MHz+20 MHz	3555.5 - 3690.0	QPSK	27M7G7D	11.21	0.013
		16QAM	27M7W7D	11.15	0.013
		64QAM	27M6W7D	11.13	0.013
		256QAM	27M7W7D	10.89	0.012
15 MHz+20 MHz	3557.8 - 3690.0	QPSK	32M6G7D	11.42	0.014
		16QAM	32M5W7D	11.38	0.014
		64QAM	32M6W7D	11.28	0.013
		256QAM	32M5W7D	11.09	0.013
20 MHz+5 MHz	3560.0 - 3696.7	QPSK	22M9G7D	12.20	0.017
		16QAM	23M0W7D	12.16	0.016
		64QAM	22M9W7D	11.94	0.016
		256QAM	22M9W7D	11.93	0.016
20 MHz+10 MHz	3560.0 - 3694.5	QPSK	27M7G7D	11.74	0.015
		16QAM	27M6W7D	11.64	0.015
		64QAM	27M8W7D	11.46	0.014
		256QAM	27M7W7D	11.36	0.014
20 MHz+15 MHz	3560.0 - 3692.2	QPSK	32M7G7D	11.32	0.014
		16QAM	32M7W7D	11.31	0.014
		64QAM	32M7W7D	11.28	0.013
		256QAM	32M6W7D	11.08	0.013
20 MHz+20 MHz	3560.0 - 3690.0	QPSK	37M7G7D	11.54	0.014
		16QAM	37M4W7D	11.50	0.014
		64QAM	37M5W7D	11.35	0.014
		256QAM	37M6W7D	11.12	0.013

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2201-FC063-R2

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2201-FC063	January 14, 2022	- First Approval Report
HCT-RF-2201-FC063-R1	January 19, 2022	- Revised the 5 page. (Tx Frequency)
HCT-RF-2201-FC063-R2	January 20, 2022	- Revised the 5 page. (Test date) - Revised the 29 page. (Conducted power)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 BAND EDGE	14
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
3.9 End User Device Additional Requirement (CBSD Protocol).....	17
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
7. SAMPLE CALCULATION	22
8. TEST DATA	24
8.1 Conducted Power	27
8.2 Equivalent Isotropic Radiated Power	30
8.3 Conducted Spurious Emissions	33
8.4 Channel Edge.....	58
8.5 Frequency Stability / Variation Of Ambient Temperature	78
8.6 Radiated Spurious Emissions.....	86
8.7 Occupied Bandwidth.....	89
8.8 Peak- to- Average Ratio	95
9. ANNEX A_ TEST SETUP PHOTO.....	101

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMA536V
Application Type:	Certification
FCC Classification:	Citizens Band End User Devices (CBE)
FCC Rule Part(s):	§96, §2
EUT Type:	Mobile Phone
Model(s):	SM-A536V
Tx Frequency:	3553.3 - 3690.0: 5 MHz+20 MHz 3555.5 - 3690.0: 10 MHz+20 MHz 3557.8 - 3690.0: 15 MHz+20 MHz 3560.0 - 3696.7: 20 MHz+5 MHz 3560.0 - 3694.5: 20 MHz+10 MHz 3560.0 - 3692.2: 20 MHz+15 MHz 3560.0 - 3690.0: 20 MHz+20 MHz
Date(s) of Tests:	January 14, 2022 ~ January 20, 2022
Serial number:	Radiated: R3CRA0Y5T7E Conducted: R3CRA0Y5SND
LTE CA :	CA 48C (Uplink)

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80), Bluetooth, BT LE, NFC, mmWave(n260/261).

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

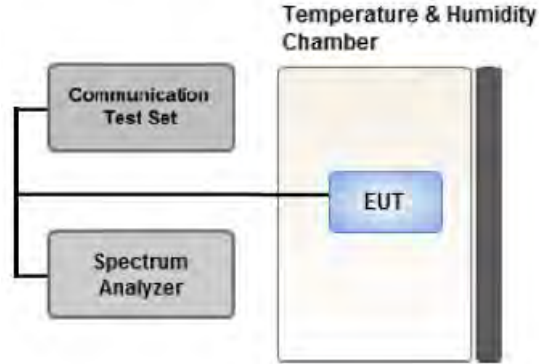

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .
Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

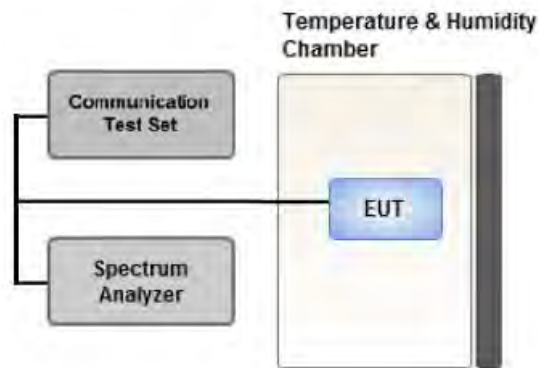

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

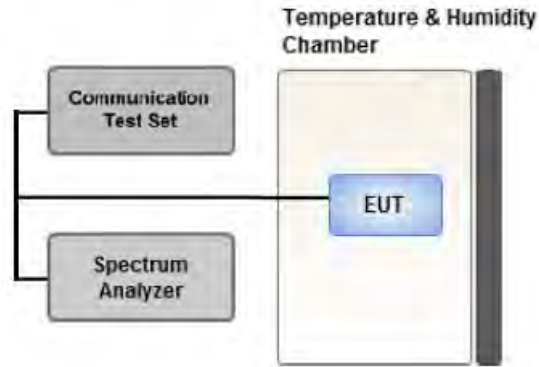

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

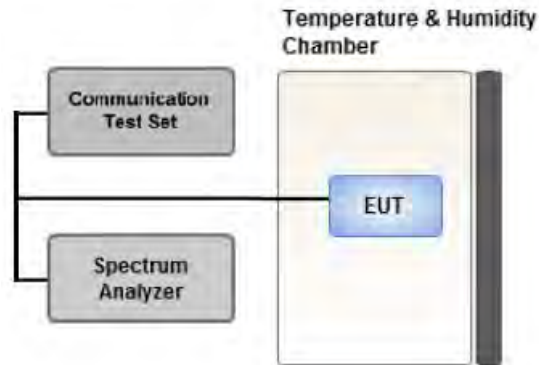

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

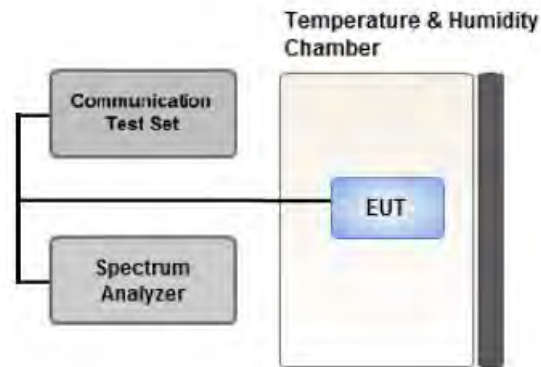

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:


- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 End User Device Additional Requirement (CBSD Protocol)

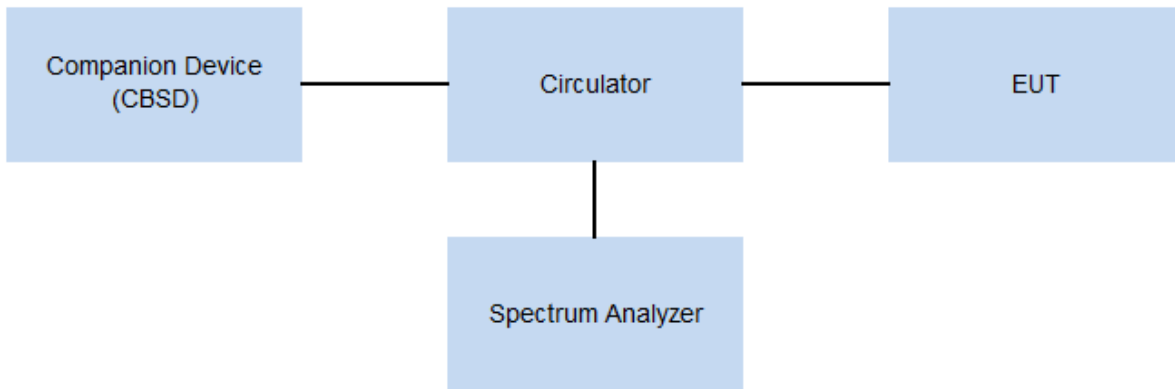

Test setup

Test Overview

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified CBSD (FCC ID: 2AS48SC-220) as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

Test Settings

- a. Setup companion device with 3570 MHz & 3610 MHz.
- b. Enable AP service from companion device.
- c. EUT is connected to a companion device.
- c. Check EUT Tx frequency and power.
- d. Disable AP service from companion device and check EUT stop transmission within 10 s .

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	02/11/2022	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §96.41(e)	<ul style="list-style-type: none"> ■ -13 dBm/Mhz at frequencies within 0-10 MHz of channel edge ■ -25 dBm/MHz at frequencies greater than 10 MHz above and below channel edge ■ -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz 	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055,	Emission must remain in band	PASS
End User Device Additional Requirements (CBSD Protocol)	§96.47	<p>End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.</p> <p>An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.</p>	PASS (See Note3)

Note:

1. See SAR Report
2. The EUT is an End User Device
3. See RF Test Report LTE B48 Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§96.41(b)	23 dBm/10 MHz	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §96.41(e)	-40 dBm/MHz	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Note

1. All tests were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. Channel bandwidth is shown in the tables below based only on the channel bandwidths that were supported in this device.

Channel Bandwidth (PCC)	Channel Bandwidth (SCC)	Maximum aggregated bandwidth (MHz)
5	20	25
10	20	30
15	20	35
20	5	25
20	10	30
20	15	35
20	20	40

3. All modes of operation were investigated and the worst case configuration results are reported in this section.

Please refer to the table below.

- Worst case(Conducted Spurious Emissions, BandEdge)
: We have selected higher of the Conduction Output Power.
- Worst case(Radiated Spurious Emissions) : We have selected higher of the EIRP.
- Worst case(OBW, PAR, Frequency stability)
: All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
Conducted Spurious Emissions/ Band Edge	QPSK	Low	15	3557.8	55318	1	74	20	3574.9	55489	1	0
	QPSK	Mid	20	3622.5	55965	1	99	5	3634.2	56082	1	0
	QPSK	High	20	3680.1	56541	1	99	10	3694.5	56685	1	0
	QPSK	Low	15	3557.8	55318	1	0	20	3574.9	55489	1	99
	QPSK	Mid	20	3622.5	55965	1	0	5	3634.2	56082	1	99
	QPSK	High	20	3680.1	56541	1	0	10	3694.5	56685	1	99
	QPSK	Low	5	3553.3	55273	25	0	20	3565.0	55390	50	0
	QPSK	Mid	20	3622.5	55965	100	0	5	3634.2	56082	25	0
	QPSK	High	5	3678.3	56523	25	0	20	3690.0	56640	50	0
	QPSK	Low	20	3560.0	55340	100	0	20	3579.8	55538	100	0
	QPSK	Mid	20	3615.1	55891	100	0	20	3634.9	56089	100	0
	QPSK	High	20	3670.2	56442	100	0	20	3690.0	56640	100	0
Radiated Spurious Emissions	QPSK	Low	20	3560.0	55340	1	99	20	3579.8	55538	1	0
	QPSK	Mid	20	3615.1	55891	1	99	20	3634.9	56089	1	0
	QPSK	High	20	3685.0	56590	1	99	5	3696.7	56707	1	0

[Worst case]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
OBW, PAR	QPSK, 16QAM 64QAM 256QAM	Mid	5	3615.8	55898	25	0	20	3627.5	56015	100	0
			10	3615.6	55896	50	0	20	3630.0	56040	100	0
			15	3615.3	55893	75	0	20	3632.4	56064	100	0
			20	3622.5	55965	100	0	5	3634.2	56082	25	0
			20	3620.1	55941	100	0	10	3634.5	56085	50	0
			20	3617.6	55916	100	0	15	3634.7	56087	75	0
			20	3615.1	55891	100	0	20	3634.9	56089	100	0
Frequency stability	QPSK	Low	5	3553.3	55273	25	0	20	3565.0	55390	100	0
			10	3555.5	55295	50	0	20	3569.9	55439	100	0
			15	3557.8	55318	75	0	20	3574.9	55489	50	0
			20	3560.0	55340	100	0	20	3579.8	55538	100	0
		High	5	3678.3	56523	25	0	20	3690.0	56640	100	0
			10	3675.6	56496	50	0	20	3690.0	56640	100	0
			15	3672.9	56469	75	0	20	3690.0	56640	50	0
			20	3670.2	56442	100	0	20	3690.0	56640	100	0

8.1 Conducted Power

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	3553.3	55273	1	24	20	3565.0	55390	1	0	13.51
	10	3555.5	55295	1	49	20	3569.9	55439	1	0	13.51
	15	3557.8	55318	1	74	20	3574.9	55489	1	0	13.55
	20	3560.0	55340	1	99	5	3571.7	55457	1	0	13.44
	20	3560.0	55340	1	99	10	3574.4	55484	1	0	13.48
	20	3560.0	55340	1	99	15	3577.1	55511	1	0	13.47
	20	3560.0	55340	1	99	20	3579.8	55538	1	0	13.46
Mid	5	3615.8	55898	1	24	20	3627.5	56015	1	0	13.00
	10	3615.6	55896	1	49	20	3630.0	56040	1	0	13.05
	15	3615.3	55893	1	74	20	3632.4	56064	1	0	12.98
	20	3622.5	55965	1	99	5	3634.2	56082	1	0	13.13
	20	3620.1	55941	1	99	10	3634.5	56085	1	0	13.03
	20	3617.6	55916	1	99	15	3634.7	56087	1	0	12.99
	20	3615.1	55891	1	99	20	3634.9	56089	1	0	12.99
High	5	3678.3	56523	1	24	20	3690.0	56640	1	0	14.00
	10	3675.6	56496	1	49	20	3690.0	56640	1	0	13.94
	15	3672.9	56469	1	74	20	3690.0	56640	1	0	13.94
	20	3685.0	56590	1	99	5	3696.7	56707	1	0	14.13
	20	3680.1	56541	1	99	10	3694.5	56685	1	0	14.17
	20	3675.1	56491	1	99	15	3692.2	56662	1	0	13.99
	20	3670.2	56442	1	99	20	3690.0	56640	1	0	13.84

Note:

Modulation : QPSK(1RB)

Operating frequency	PCC					SCC					Conducted.
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Power [dBm]
Low	5	3553.3	55273	25	0	20	3565.0	55390	100	0	13.63
	10	3555.5	55295	50	0	20	3569.9	55439	100	0	13.61
	15	3557.8	55318	75	0	20	3574.9	55489	100	0	13.52
	20	3560.0	55340	100	0	5	3571.7	55457	25	0	13.52
	20	3560.0	55340	100	0	10	3574.4	55484	50	0	13.52
	20	3560.0	55340	100	0	15	3577.1	55511	75	0	13.52
	20	3560.0	55340	100	0	20	3579.8	55538	100	0	13.49
Mid	5	3615.8	55898	25	0	20	3627.5	56015	100	0	13.17
	10	3615.6	55896	50	0	20	3630.0	56040	100	0	13.16
	15	3615.3	55893	75	0	20	3632.4	56064	100	0	13.12
	20	3622.5	55965	100	0	5	3634.2	56082	25	0	13.20
	20	3620.1	55941	100	0	10	3634.5	56085	50	0	13.16
	20	3617.6	55916	100	0	15	3634.7	56087	75	0	13.11
	20	3615.1	55891	100	0	20	3634.9	56089	100	0	13.08
High	5	3678.3	56523	25	0	20	3690.0	56640	100	0	14.22
	10	3675.6	56496	50	0	20	3690.0	56640	100	0	14.00
	15	3672.9	56469	75	0	20	3690.0	56640	100	0	13.91
	20	3685.0	56590	100	0	5	3696.7	56707	25	0	14.09
	20	3680.1	56541	100	0	10	3694.5	56685	50	0	14.10
	20	3675.1	56491	100	0	15	3692.2	56662	75	0	13.93
	20	3670.2	56442	100	0	20	3690.0	56640	100	0	13.81

Note:

Modulation : QPSK(Full RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	15	3557.8	55318	1	74	20	3574.9	55489	1	0	14.22
Mid	20	3622.5	55965	1	99	5	3634.2	56082	1	0	13.74
High	20	3680.1	56541	1	99	10	3694.5	56685	1	0	14.35
Low	5	3553.3	55273	25	0	20	3565.0	55390	100	0	13.73
Mid	20	3622.5	55965	100	0	5	3634.2	56082	25	0	13.22
High	5	3678.3	56523	25	0	20	3690.0	56640	100	0	14.34

Note:

Modulation : 16QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	15	3557.8	55318	1	74	20	3574.9	55489	1	0	13.94
Mid	20	3622.5	55965	1	99	5	3634.2	56082	1	0	13.40
High	20	3680.1	56541	1	99	10	3694.5	56685	1	0	14.31
Low	5	3553.3	55273	25	0	20	3565.0	55390	100	0	13.75
Mid	20	3622.5	55965	100	0	5	3634.2	56082	25	0	13.24
High	5	3678.3	56523	25	0	20	3690.0	56640	100	0	14.29

Note:

Modulation : 64QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	15	3557.8	55318	1	74	20	3574.9	55489	1	0	13.23
Mid	20	3622.5	55965	1	99	5	3634.2	56082	1	0	12.87
High	20	3680.1	56541	1	99	10	3694.5	56685	1	0	13.79
Low	5	3553.3	55273	25	0	20	3565.0	55390	100	0	13.21
Mid	20	3622.5	55965	100	0	5	3634.2	56082	25	0	12.73
High	5	3678.3	56523	25	0	20	3690.0	56640	100	0	13.51

Note:

Modulation : 256QAM

8.2 Equivalent Isotropic Radiated Power

	PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
	BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
Low	5	55273	1/24	20	55390	1/0	-36.91	1.63	12.38	3.01	H	0.013	11.00
	10	55295	1/49	20	55439	1/0	-36.70	1.84	12.38	3.01	H	0.013	11.21
	15	55318	1/74	20	55489	1/0	-36.87	1.74	12.37	3.02	H	0.013	11.09
	20	55340	1/99	5	55457	1/0	-36.93	1.68	12.37	3.02	H	0.013	11.03
	20	55340	1/99	10	55484	1/0	-36.82	1.86	12.36	3.02	H	0.013	11.20
	20	55340	1/99	15	55511	1/0	-36.95	1.73	12.36	3.02	H	0.013	11.07
	20	55340	1/99	20	55538	1/0	-36.48	2.20	12.36	3.02	H	0.014	11.54
Mid	5	55898	1/24	20	56015	1/0	-36.94	1.71	12.26	3.04	H	0.012	10.93
	10	55896	1/49	20	56040	1/0	-36.89	1.76	12.26	3.04	H	0.013	10.98
	15	55893	1/74	20	56064	1/0	-36.97	1.68	12.26	3.04	H	0.012	10.90
	20	55965	1/99	5	56082	1/0	-36.86	1.74	12.24	3.05	H	0.012	10.93
	20	55941	1/99	10	56085	1/0	-36.89	1.71	12.24	3.05	H	0.012	10.90
	20	55916	1/99	15	56087	1/0	-36.87	1.76	12.25	3.05	H	0.012	10.96
	20	55891	1/99	20	56089	1/0	-36.38	2.25	12.25	3.05	H	0.014	11.45
High	5	56523	1/24	20	56640	1/0	-36.40	2.48	12.27	3.07	H	0.015	11.68
	10	56496	1/49	20	56640	1/0	-36.76	1.98	12.26	3.06	H	0.013	11.18
	15	56469	1/74	20	56640	1/0	-36.52	2.22	12.26	3.06	H	0.014	11.42
	20	56590	1/99	5	56707	1/0	-36.01	2.99	12.28	3.07	H	0.017	12.20
	20	56541	1/99	10	56685	1/0	-36.47	2.53	12.28	3.07	H	0.015	11.74
	20	56491	1/99	15	56662	1/0	-36.62	2.12	12.26	3.06	H	0.014	11.32
	20	56442	1/99	20	56640	1/0	-36.62	2.12	12.26	3.06	H	0.014	11.32

Note:

1. Modulation : QPSK
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
20	55340	1/99	20	55538	1/0	-36.52	2.16	12.36	3.02	H	0.014	11.50
20	55891	1/99	20	56089	1/0	-36.55	2.08	12.25	3.05	H	0.013	11.28
5	56523	1/24	20	56640	1/0	-36.55	2.33	12.27	3.07	H	0.014	11.53
10	56496	1/49	20	56640	1/0	-36.79	1.95	12.26	3.06	H	0.013	11.15
15	56469	1/74	20	56640	1/0	-36.56	2.18	12.26	3.06	H	0.014	11.38
20	56590	1/99	5	56707	1/0	-36.05	2.95	12.28	3.07	H	0.016	12.16
20	56541	1/99	10	56685	1/0	-36.57	2.43	12.28	3.07	H	0.015	11.64
20	56491	1/99	15	56662	1/0	-36.63	2.11	12.26	3.06	H	0.014	11.31
20	56442	1/99	20	56640	1/0	-36.75	1.99	12.26	3.06	H	0.013	11.19

Note:

1. Modulation : 16QAM
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
20	55340	1/99	20	55538	1/0	-36.67	2.01	12.36	3.02	H	0.014	11.35
20	55891	1/99	20	56089	1/0	-36.63	2.00	12.25	3.05	H	0.013	11.20
5	56523	1/24	20	56640	1/0	-36.75	2.13	12.27	3.07	H	0.014	11.33
10	56496	1/49	20	56640	1/0	-36.81	1.93	12.26	3.06	H	0.013	11.13
15	56469	1/74	20	56640	1/0	-36.66	2.08	12.26	3.06	H	0.013	11.28
20	56590	1/99	5	56707	1/0	-36.27	2.73	12.28	3.07	H	0.016	11.94
20	56541	1/99	10	56685	1/0	-36.75	2.25	12.28	3.07	H	0.014	11.46
20	56491	1/99	15	56662	1/0	-36.66	2.08	12.26	3.06	H	0.013	11.28
20	56442	1/99	20	56640	1/0	-36.81	1.93	12.26	3.06	H	0.013	11.13

Note:

1. Modulation : 64QAM
2. Limit : < 2 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
20	55340	1/99	20	55538	1/0	-37.06	1.62	12.36	3.02	H	0.012	10.96
20	55891	1/99	20	56089	1/0	-36.71	1.92	12.25	3.05	H	0.013	11.12
5	56523	1/24	20	56640	1/0	-36.78	2.10	12.27	3.07	H	0.013	11.30
10	56496	1/49	20	56640	1/0	-37.05	1.69	12.26	3.06	H	0.012	10.89
15	56469	1/74	20	56640	1/0	-36.85	1.89	12.26	3.06	H	0.013	11.09
20	56590	1/99	5	56707	1/0	-36.28	2.72	12.28	3.07	H	0.016	11.93
20	56541	1/99	10	56685	1/0	-36.85	2.15	12.28	3.07	H	0.014	11.36
20	56491	1/99	15	56662	1/0	-36.86	1.88	12.26	3.06	H	0.013	11.08
20	56442	1/99	20	56640	1/0	-36.87	1.87	12.26	3.06	H	0.013	11.07

Note:

1. Modulation : 256QAM
2. Limit : < 2 Watts

8.3 Conducted Spurious Emissions

Operating frequency	PCC				SCC				Measurement	Factor (dB)	Measurement	Result (dBm)
	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	Maximum Frequency (GHz)		Maximum Data (dBm)	
Low	15	55318	3557.8	1/74	20	55489	3574.9	1/0	8.0150	28.591	-75.11	-46.52
Mid	20	55965	3622.5	1/99	5	56082	3634.2	1/0	8.0115	28.591	-75.72	-47.13
High	20	56541	3680.1	1/99	10	56685	3694.5	1/0	6.0304	28.591	-75.04	-46.45
Low	15	55318	3557.8	1/0	20	55489	3574.9	1/99	8.6411	28.591	-75.84	-47.25
Mid	20	55965	3622.5	1/0	5	56082	3634.2	1/99	4.9008	27.976	-75.58	-47.61
High	20	56541	3680.1	1/0	10	56685	3694.5	1/99	2.4019	27.976	-71.64	-43.66
Low	5	55273	3553.3	25/0	20	55390	3565.0	50/0	5.4866	28.591	-75.60	-47.01
Mid	20	55965	3622.5	100/0	5	56082	3634.2	25/0	8.2538	28.591	-75.76	-47.17
High	5	56523	3678.3	25/0	20	56640	3690.0	50/0	4.9676	27.976	-75.45	-47.47
Low	20	55340	3560.0	100/0	20	55538	3579.8	100/0	4.0554	27.976	-75.36	-47.38
Mid	20	55891	3615.1	100/0	20	56089	3634.9	100/0	6.0245	28.591	-75.71	-47.12
High	20	56442	3670.2	100/0	20	56640	3690.0	100/0	4.0524	27.976	-74.88	-46.90

Note:


1. Modulation : QPSK
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


4. Limit : -40.0 dBm

Frequency Range : 30 MHz ~ 10 GHz


PCC 5 MHz Ch55273 RB25 Offset0 SCC 20 MHz Ch55390 RB50 Offset0

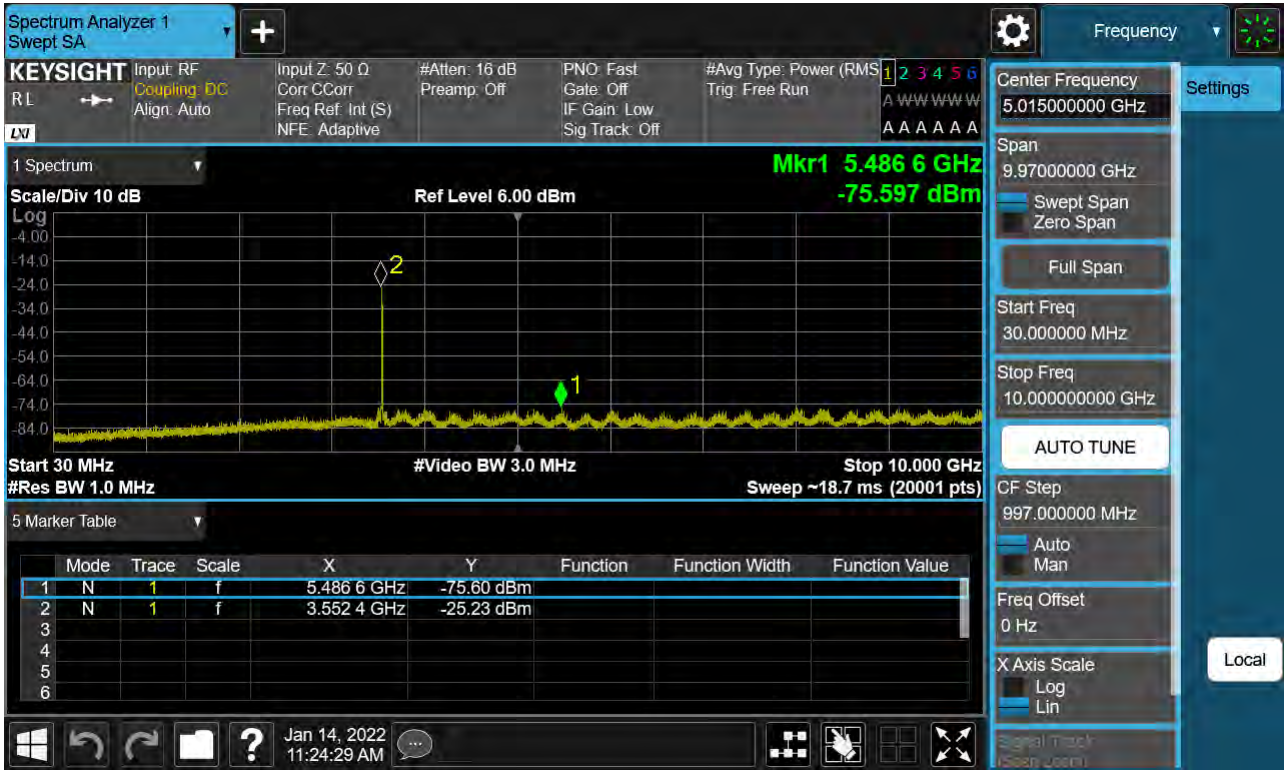


PCC 5 MHz Ch56523 RB25 Offset0 SCC 20 MHz Ch56640 RB50 Offset0

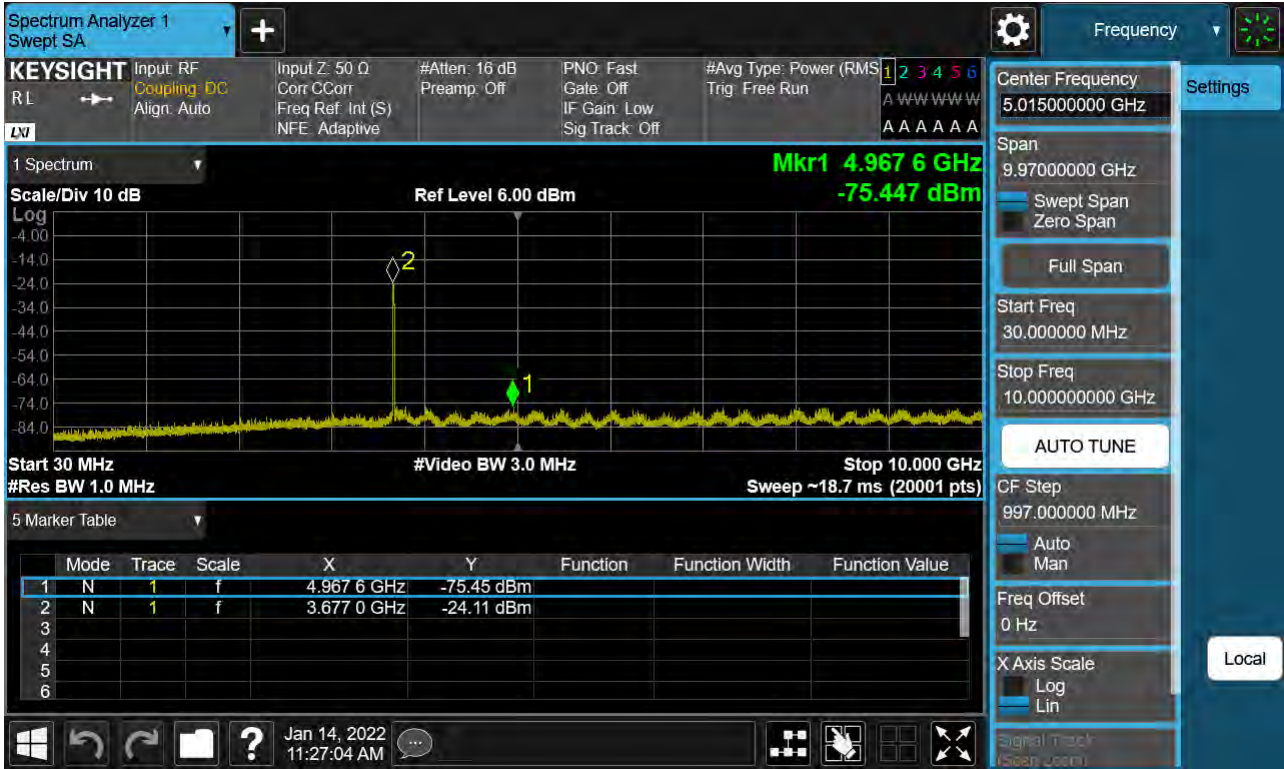


PCC 15 MHz Ch55318 RB1 Offset0 SCC 20 MHz Ch55489 RB1 Offset99

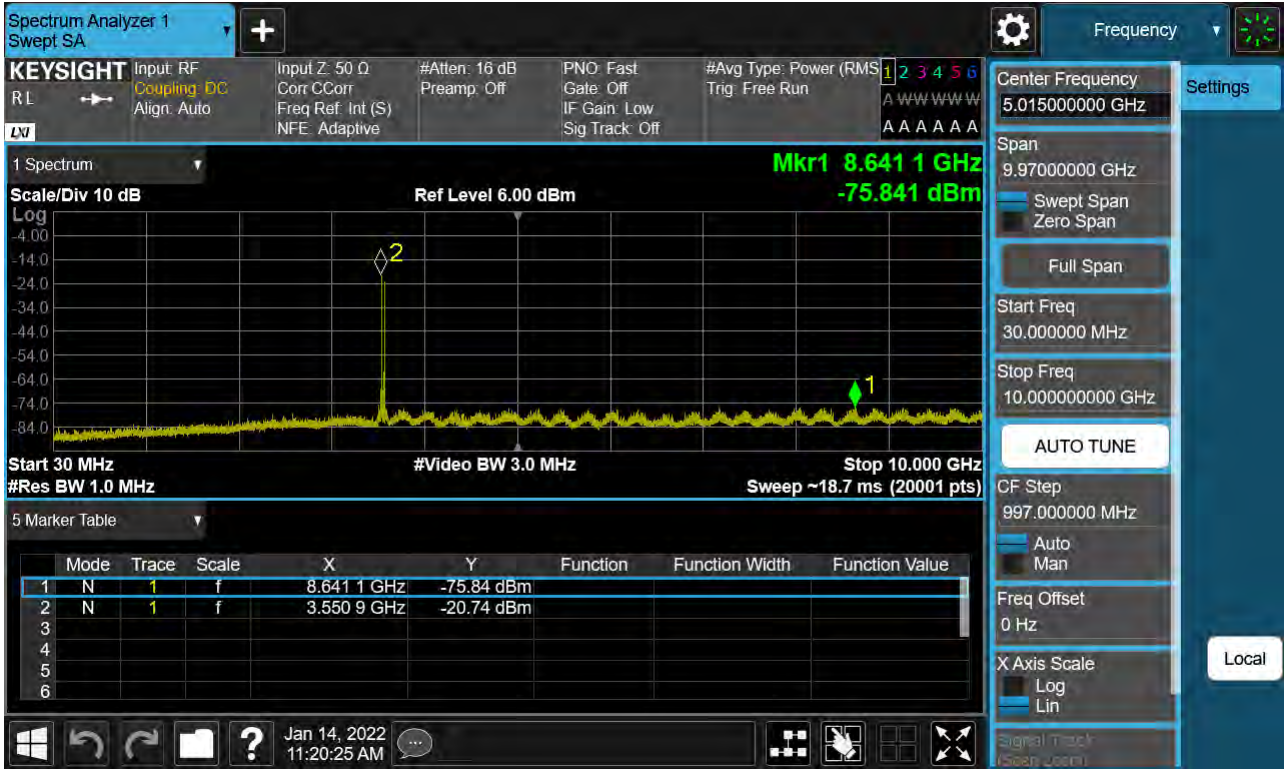


PCC 15 MHz Ch55318 RB1 Offset74 SCC 20 MHz Ch55489 RB1 Offset0

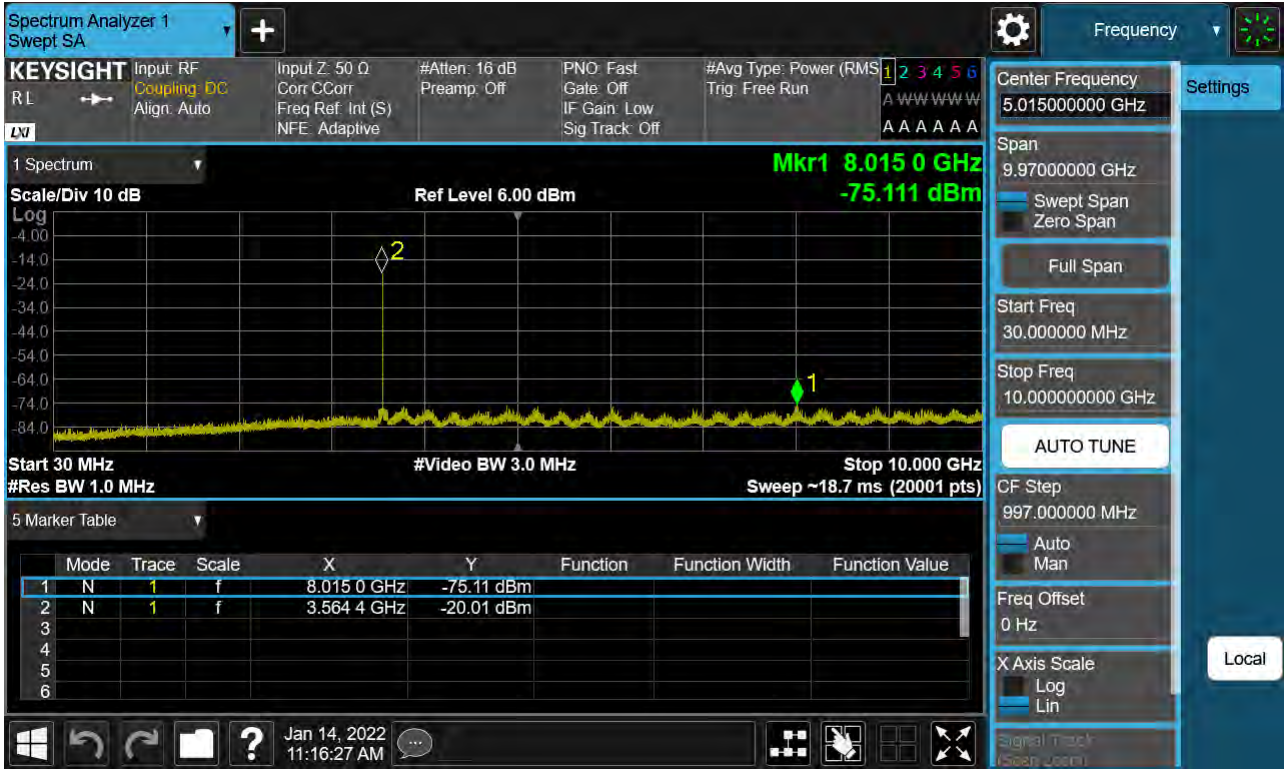


PCC 20 MHz Ch55340 RB100 Offset0 SCC 20 MHz Ch55538 RB100 Offset0

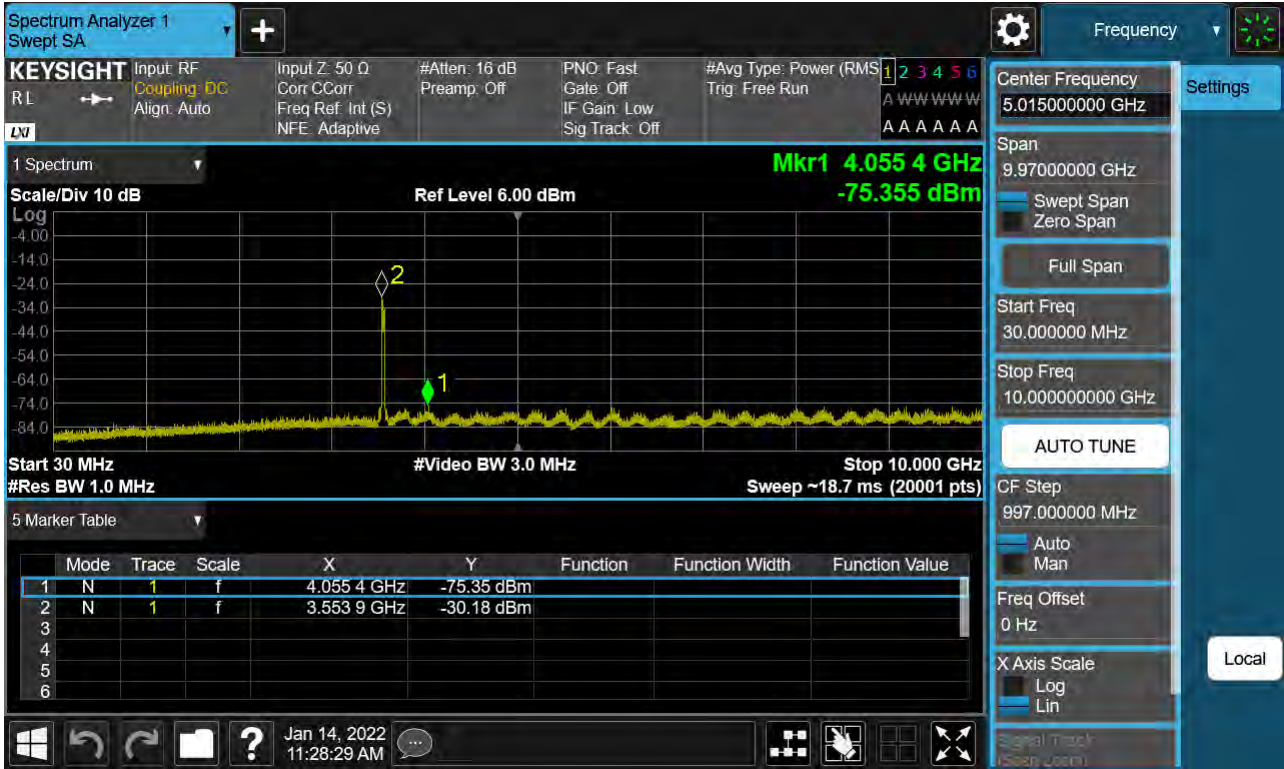


PCC 20 MHz Ch55891 RB100 Offset0 SCC 20 MHz Ch56089 RB100 Offset0

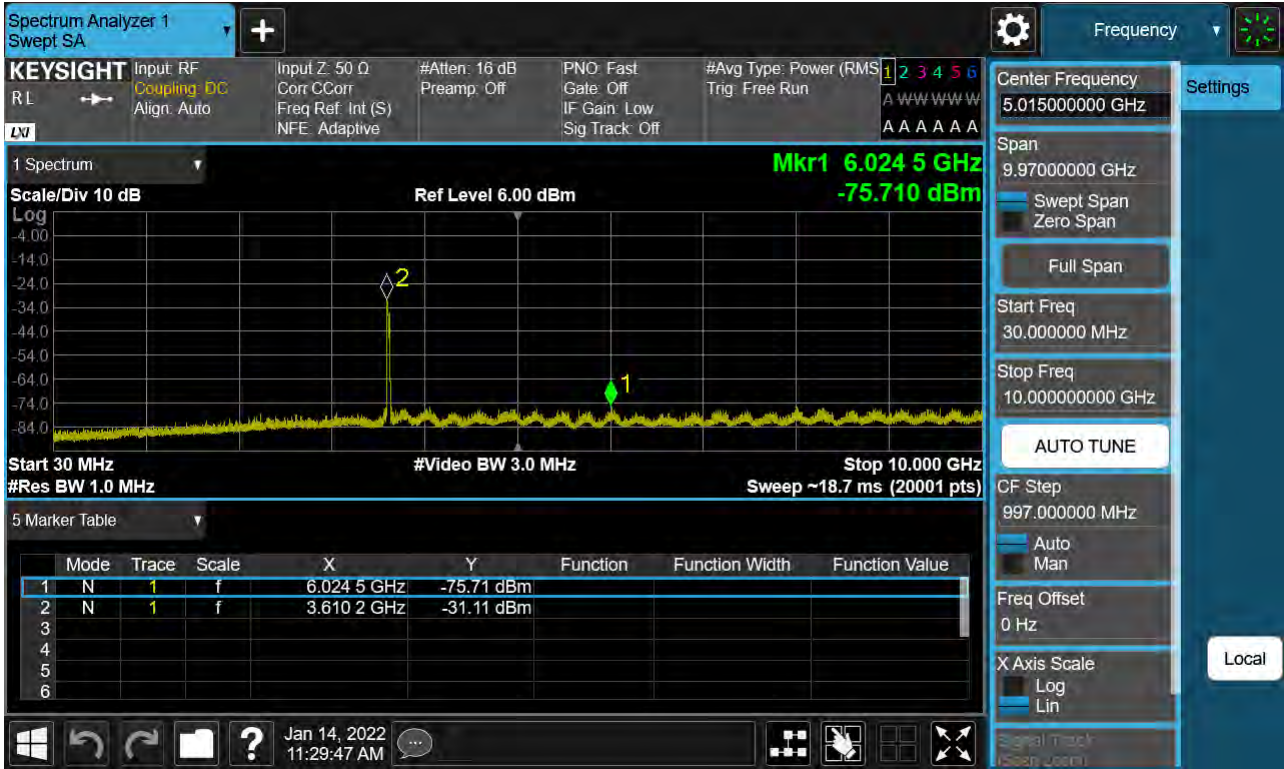


PCC 20 MHz Ch55965 RB1 Offset0 SCC 5 MHz Ch56082 RB1 Offset99

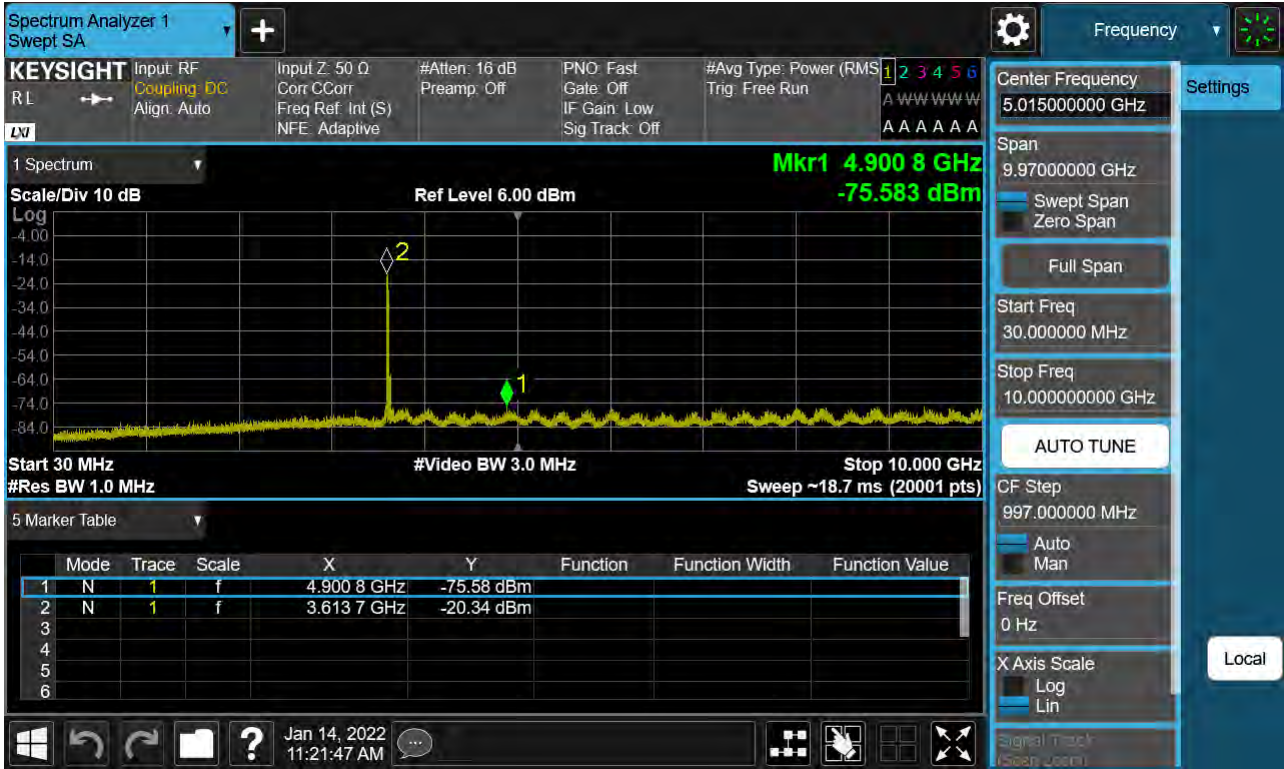


PCC 20 MHz Ch55965 RB1 Offset99 SCC 5 MHz Ch56082 RB1 Offset0

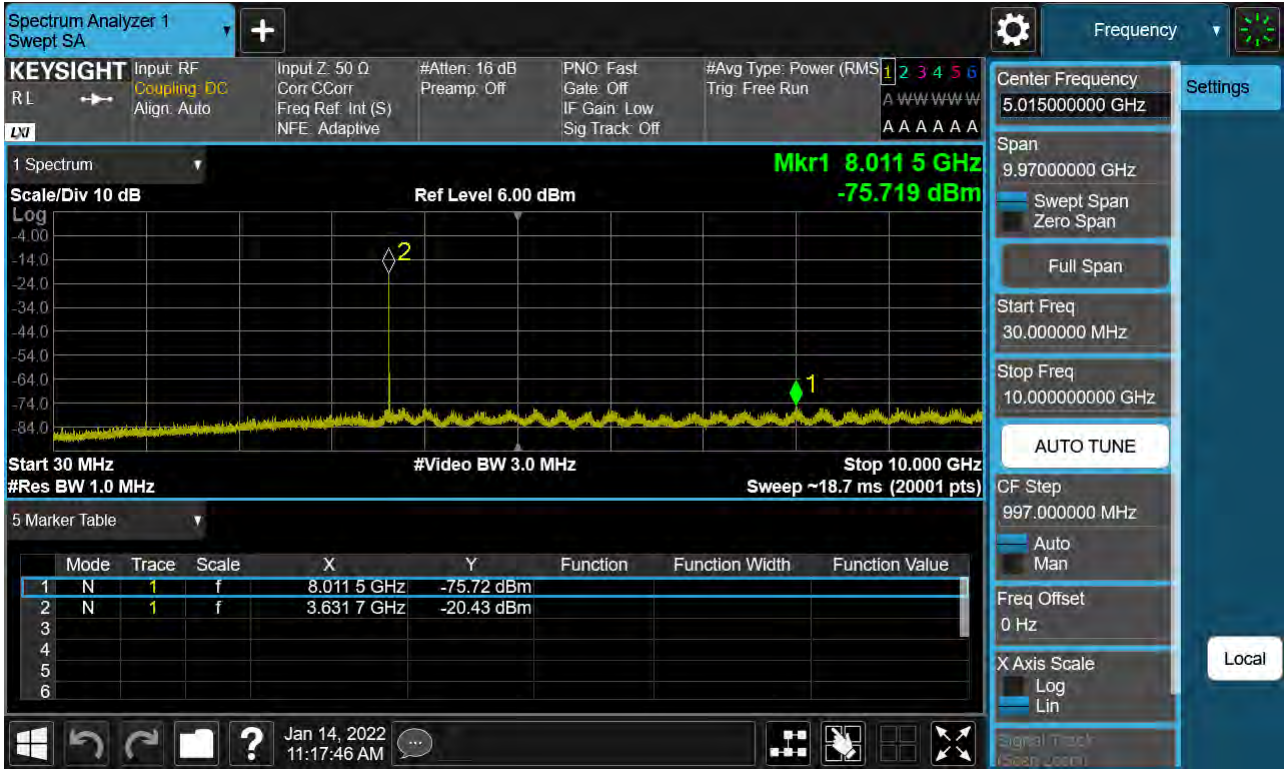


PCC 20 MHz Ch55965 RB100 Offset0 SCC 5 MHz Ch56082 RB25 Offset0

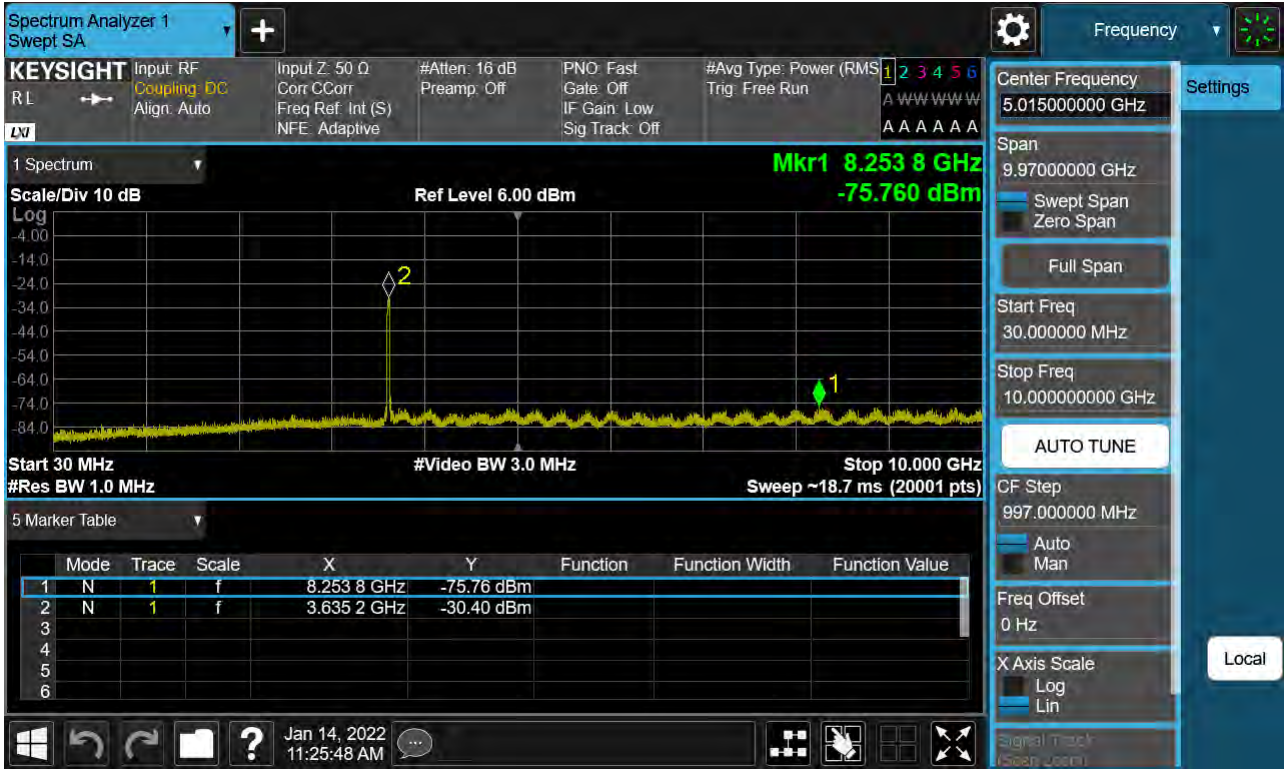


PCC 20 MHz Ch56442 RB100 Offset0 SCC 20 MHz Ch56640 RB100 Offset0

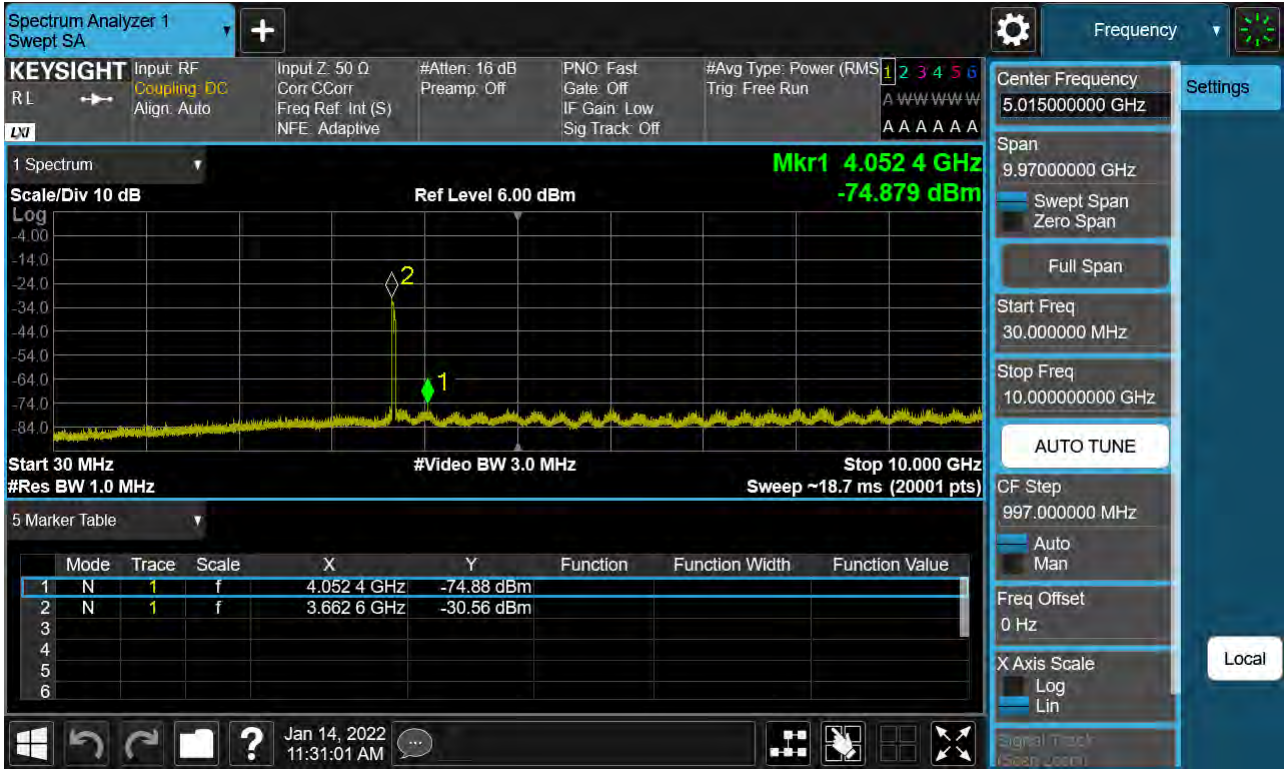

PCC 20 MHz Ch56541 RB1 Offset0 SCC 10 MHz Ch56685 RB1 Offset99

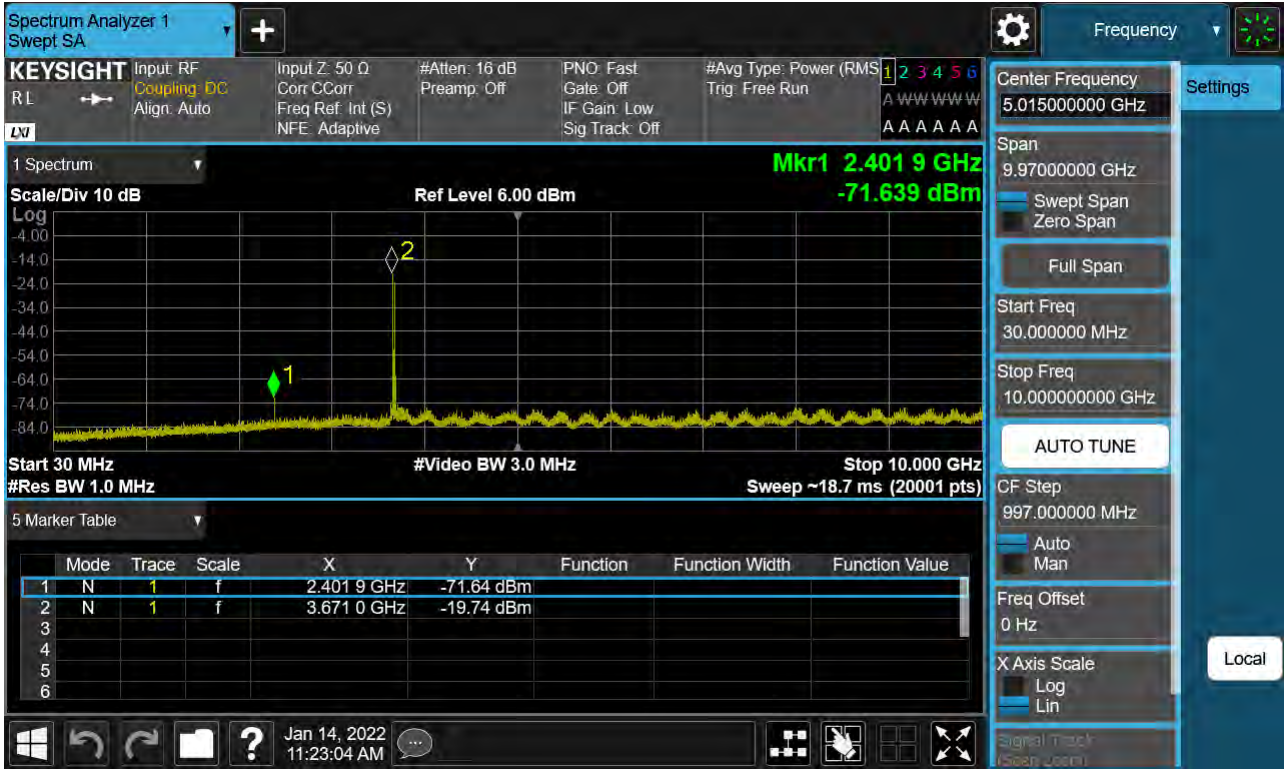


PCC 20 MHz Ch56541 RB1 Offset99 SCC 10 MHz Ch56685 RB1 Offset0

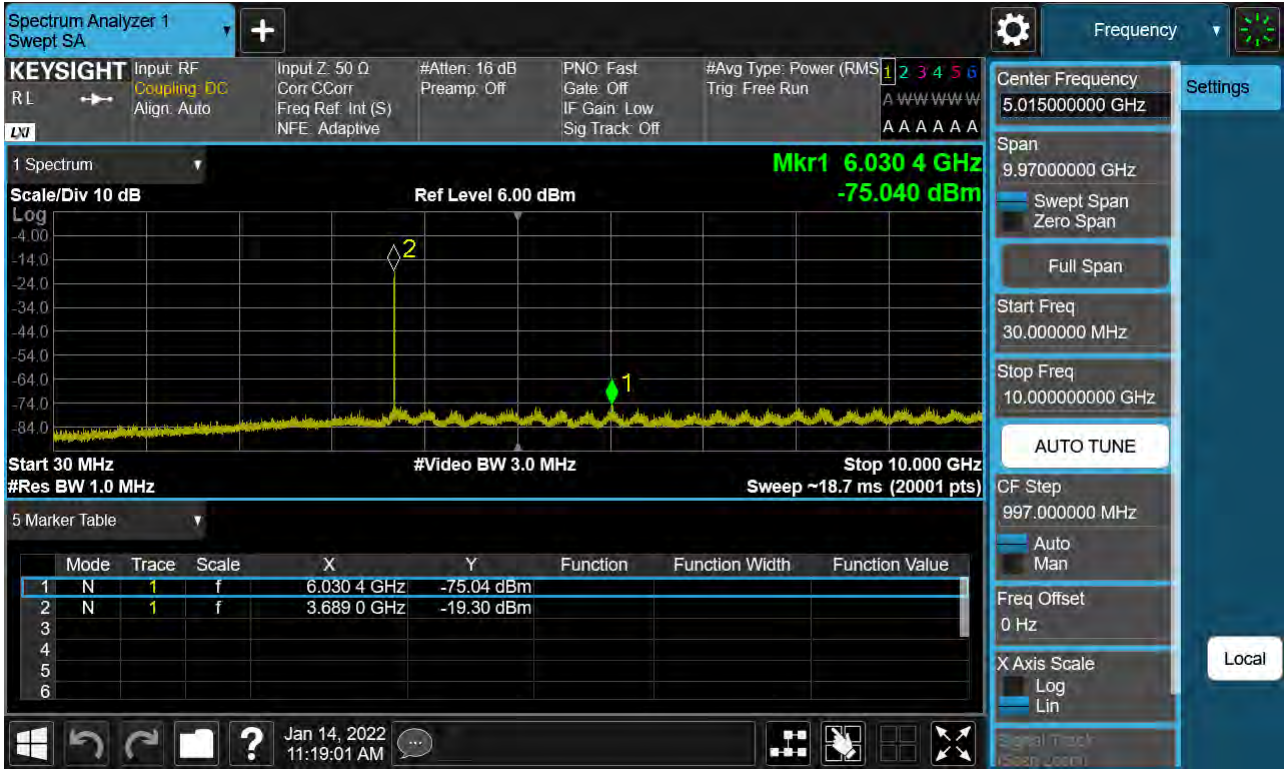

Frequency Range : 10 GHz ~ 37 GHz


PCC 5 MHz Ch55273 RB25 Offset0, SCC 20 MHz Ch55390 RB50 Offset0

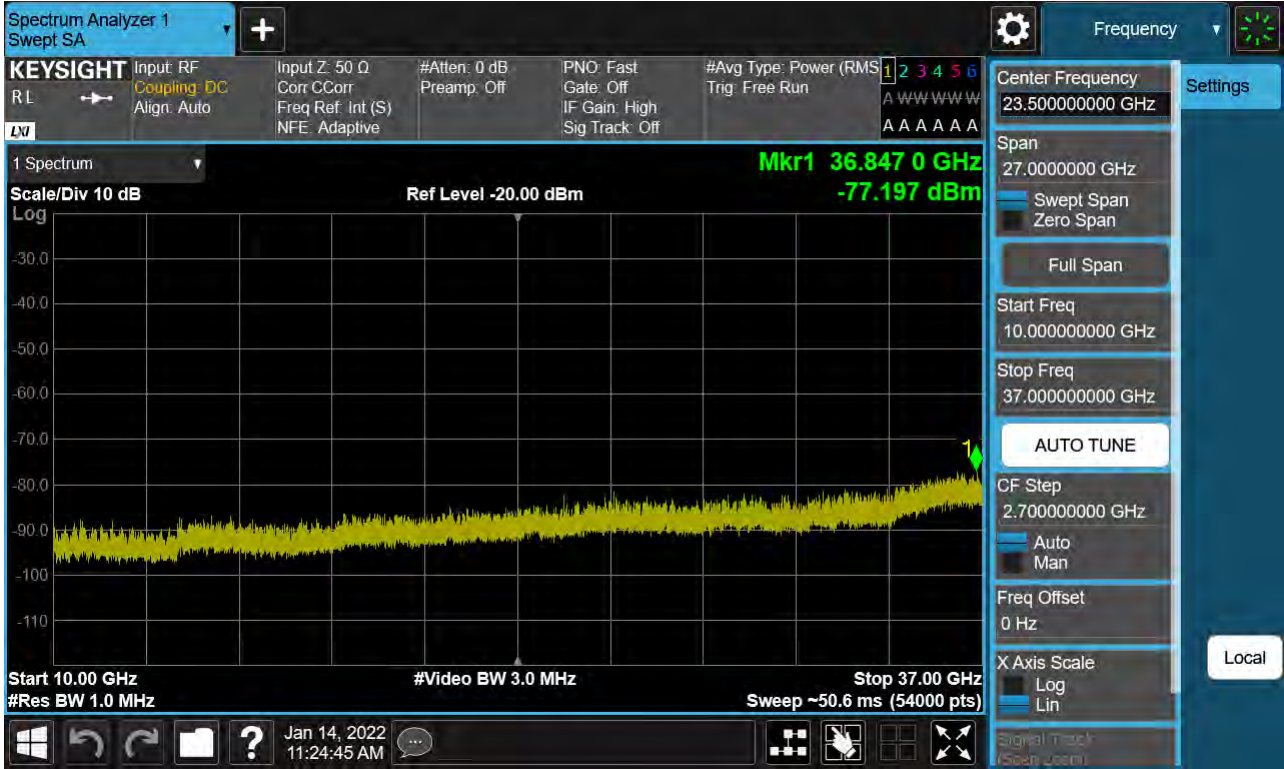


PCC 5 MHz Ch56523 RB25 Offset0, SCC 20 MHz Ch56640 RB50 Offset0




PCC 15 MHz Ch55318 RB1 Offset0, SCC 20 MHz Ch55489 RB1 Offset99

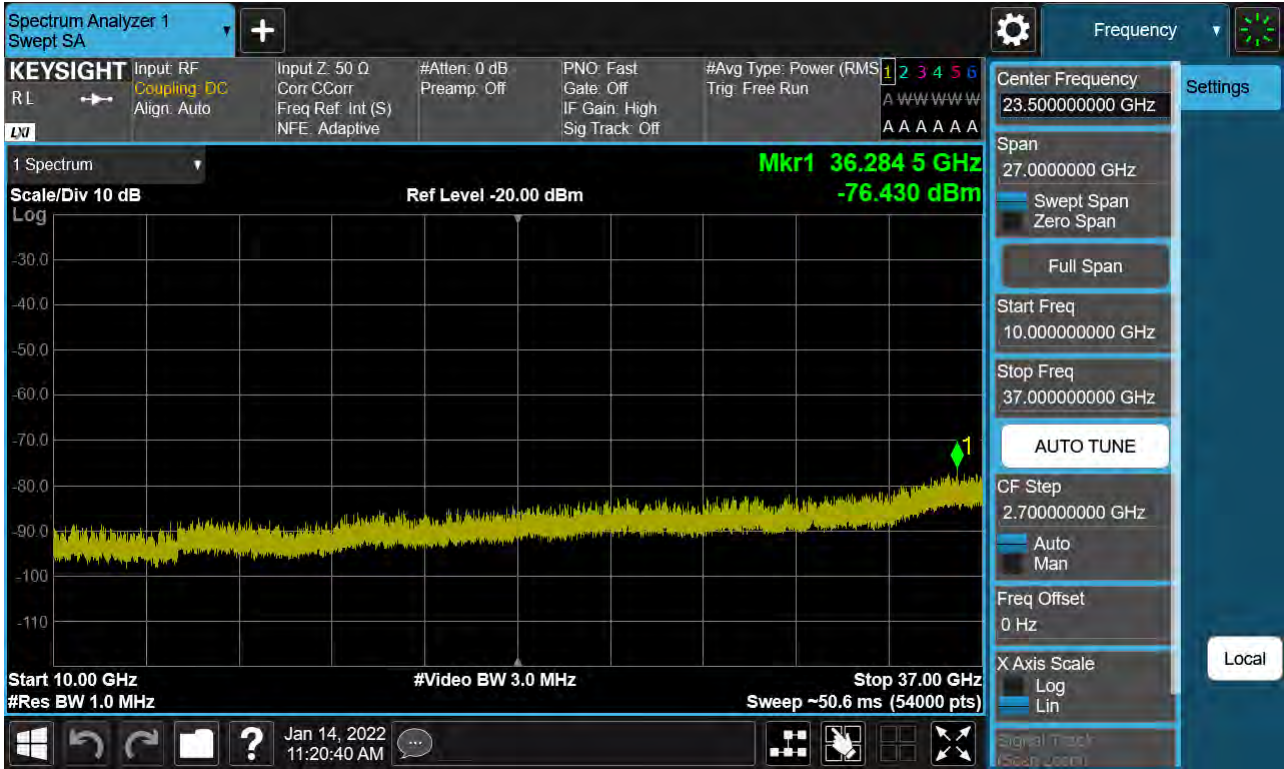


PCC 15 MHz Ch55318 RB1 Offset74, SCC 20 MHz Ch55489 RB1 Offset0

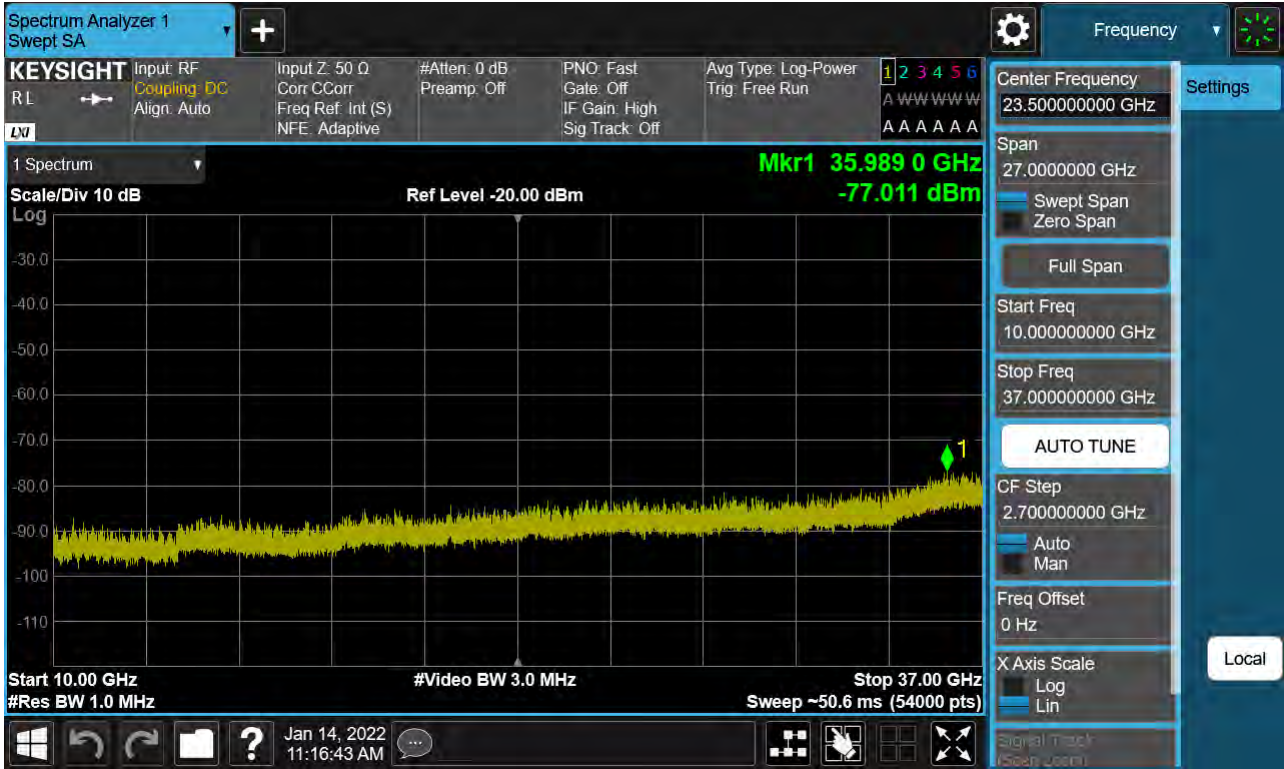


PCC 20 MHz Ch55340 RB100 Offset0, SCC 20 MHz Ch55538 RB100 Offset0

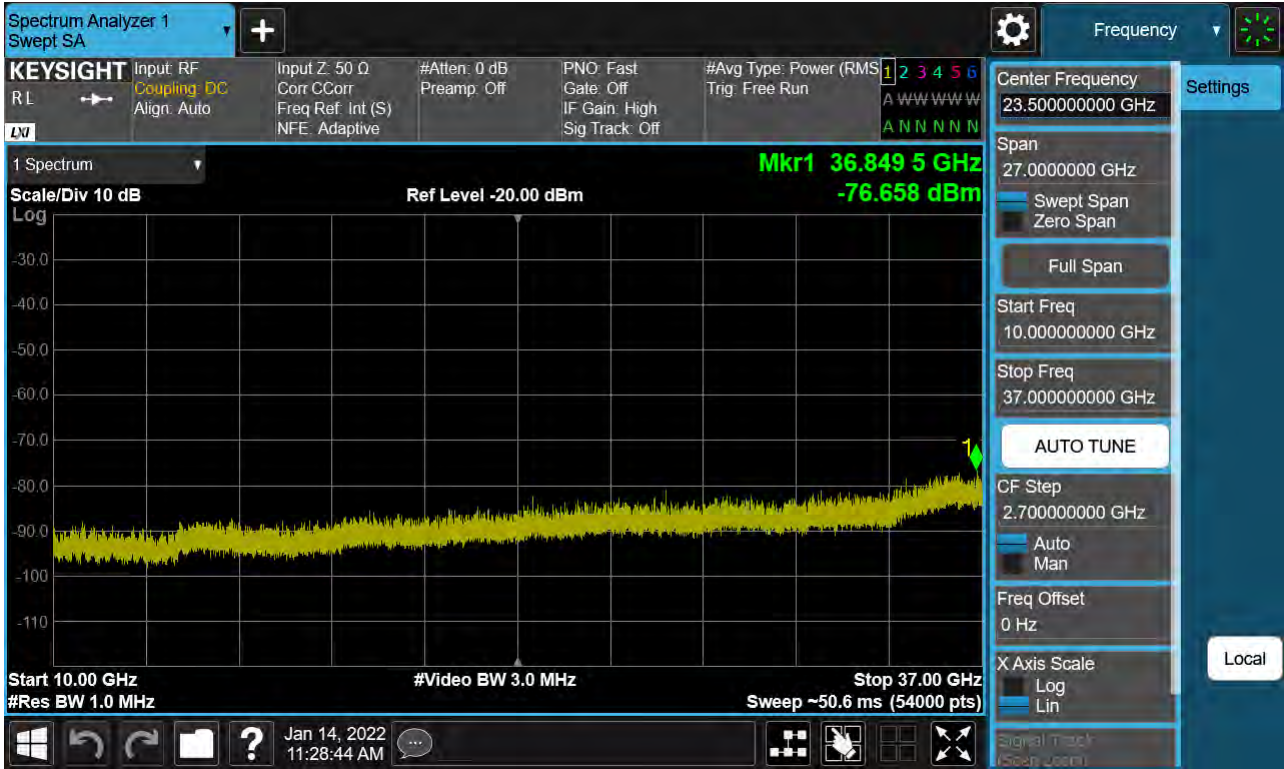


PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0

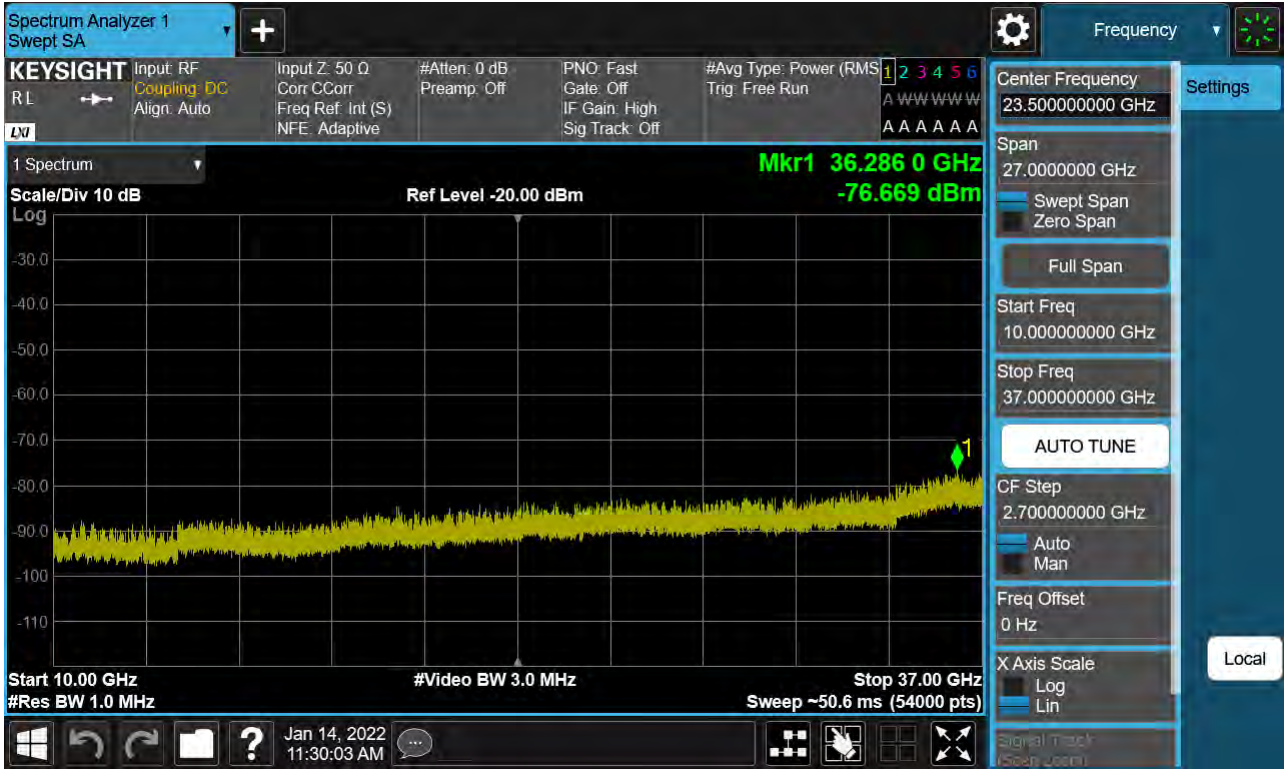


PCC 20 MHz Ch55965 RB1 Offset0, SCC 5 MHz Ch56082 RB1 Offset99

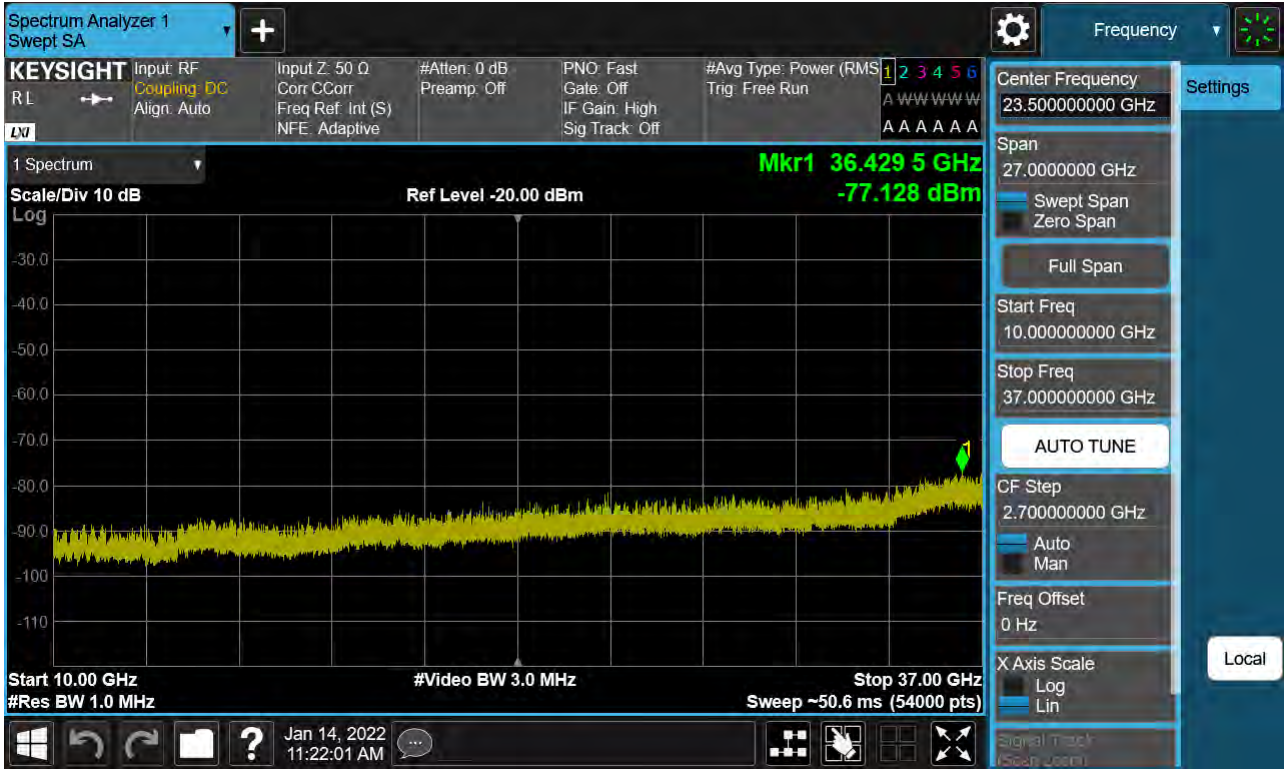


PCC 20 MHz Ch55965 RB1 Offset99, SCC 5 MHz Ch56082 RB1 Offset0

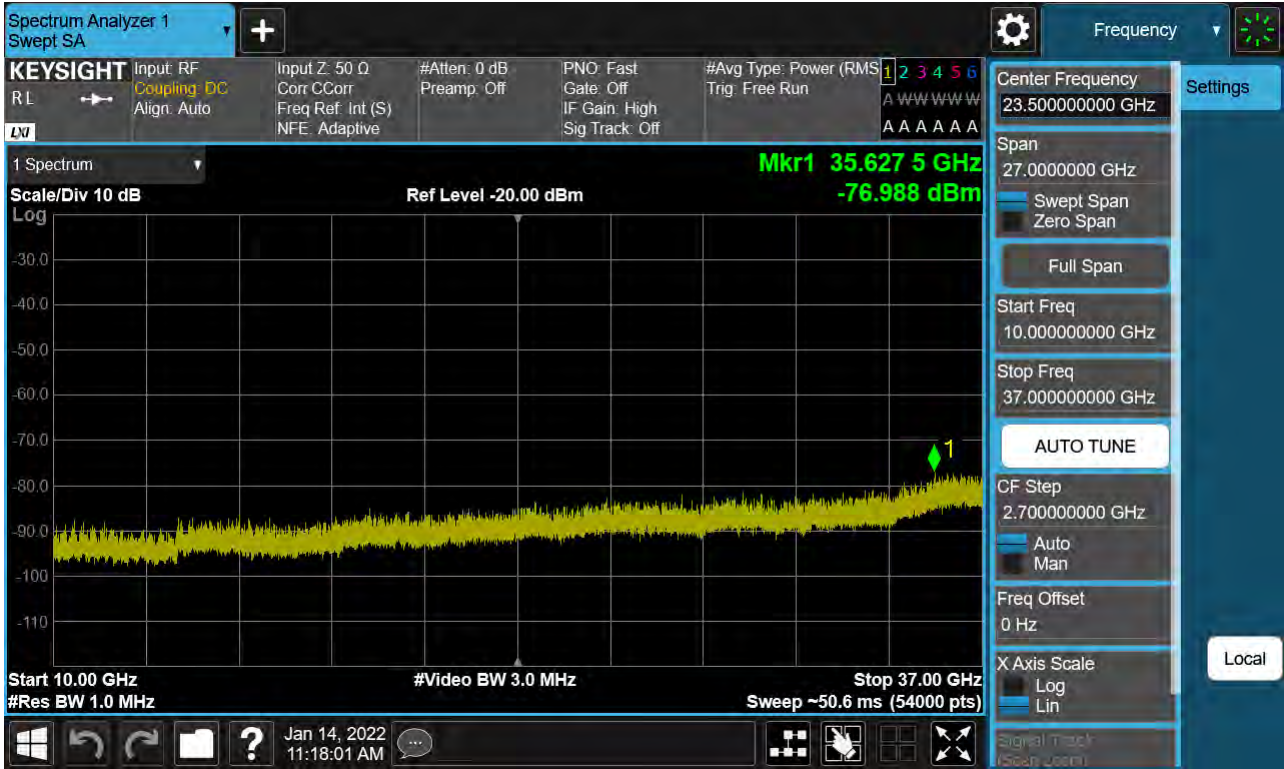


PCC 20 MHz Ch55965 RB100 Offset0, SCC 5 MHz Ch56082 RB25 Offset0

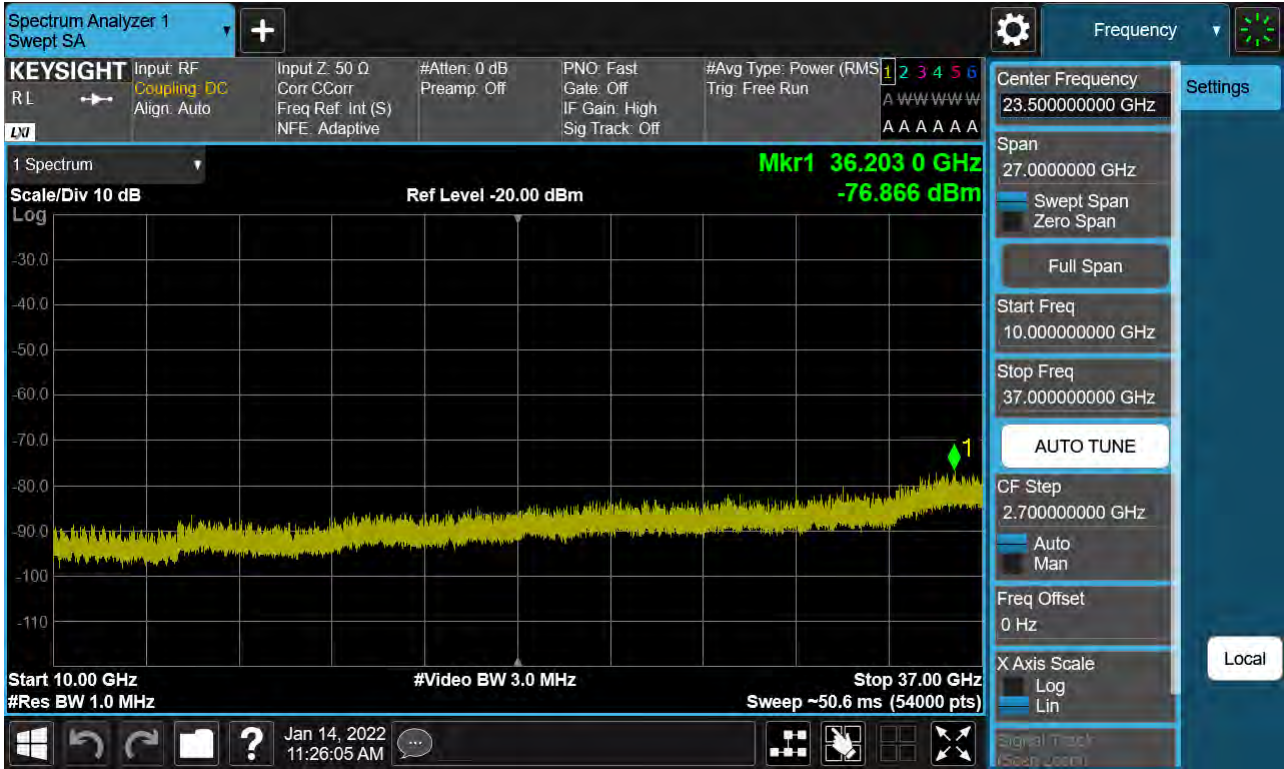


PCC 20 MHz Ch56442 RB100 Offset0, SCC 20 MHz Ch56640 RB100 Offset0

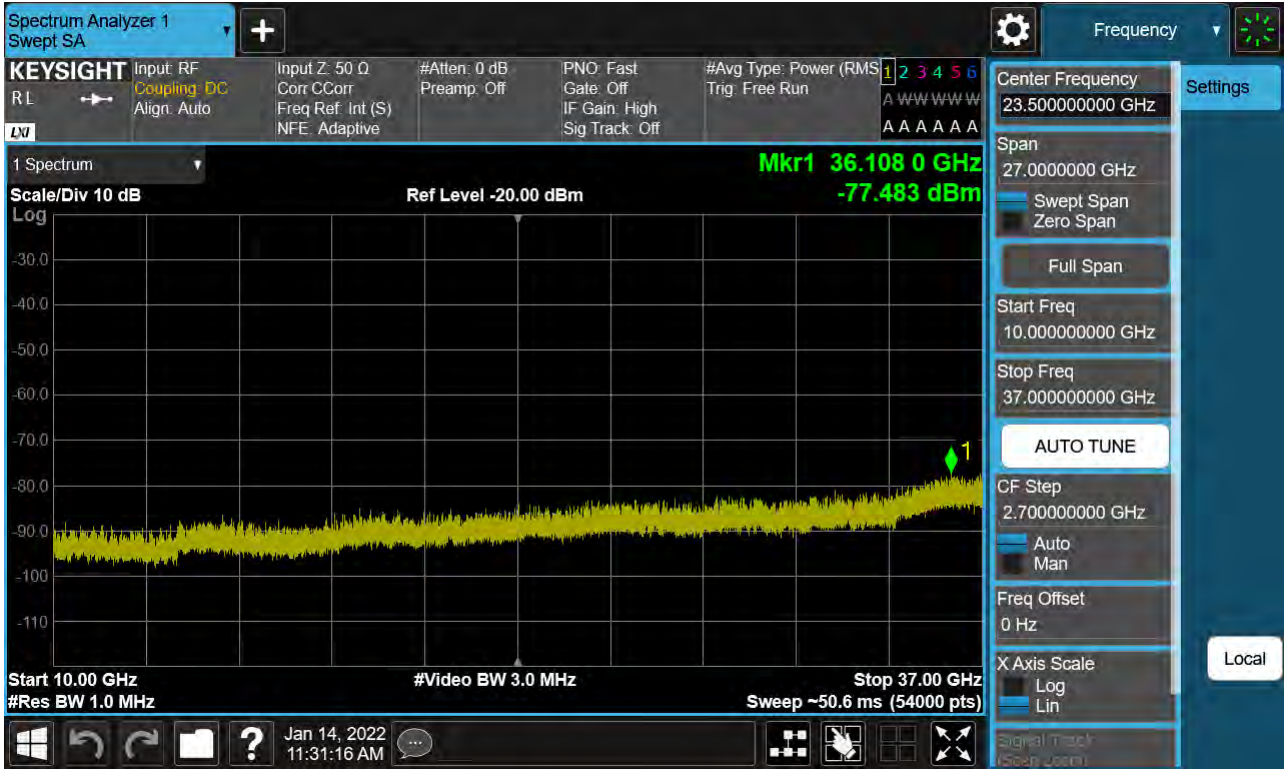

PCC 20 MHz Ch56541 RB1 Offset0, SCC 10 MHz Ch56685 RB1 Offset99

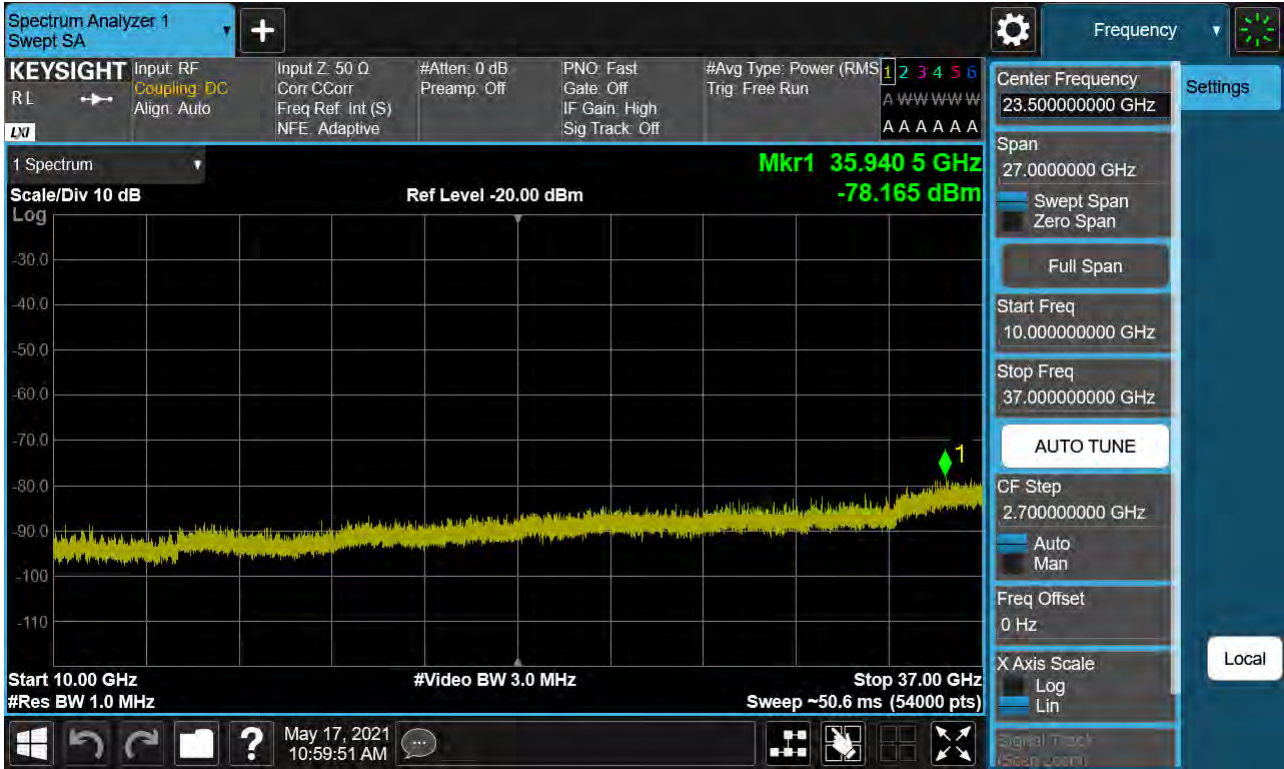


PCC 20 MHz Ch56541 RB1 Offset99, SCC 10 MHz Ch56685 RB1 Offset0

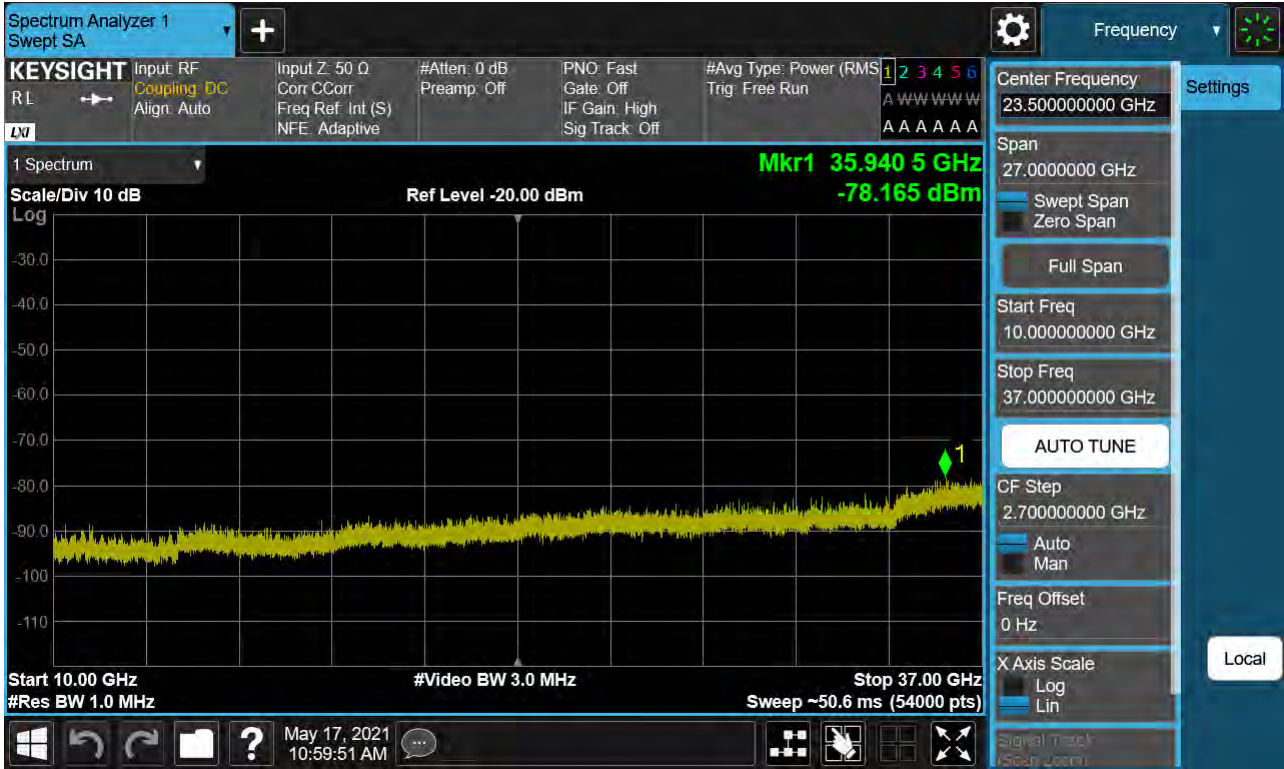


8.4 Channel Edge


PCC 5 MHz Ch55273 RB25 Offset0, SCC 20 MHz Ch55390 RB50 Offset0-1

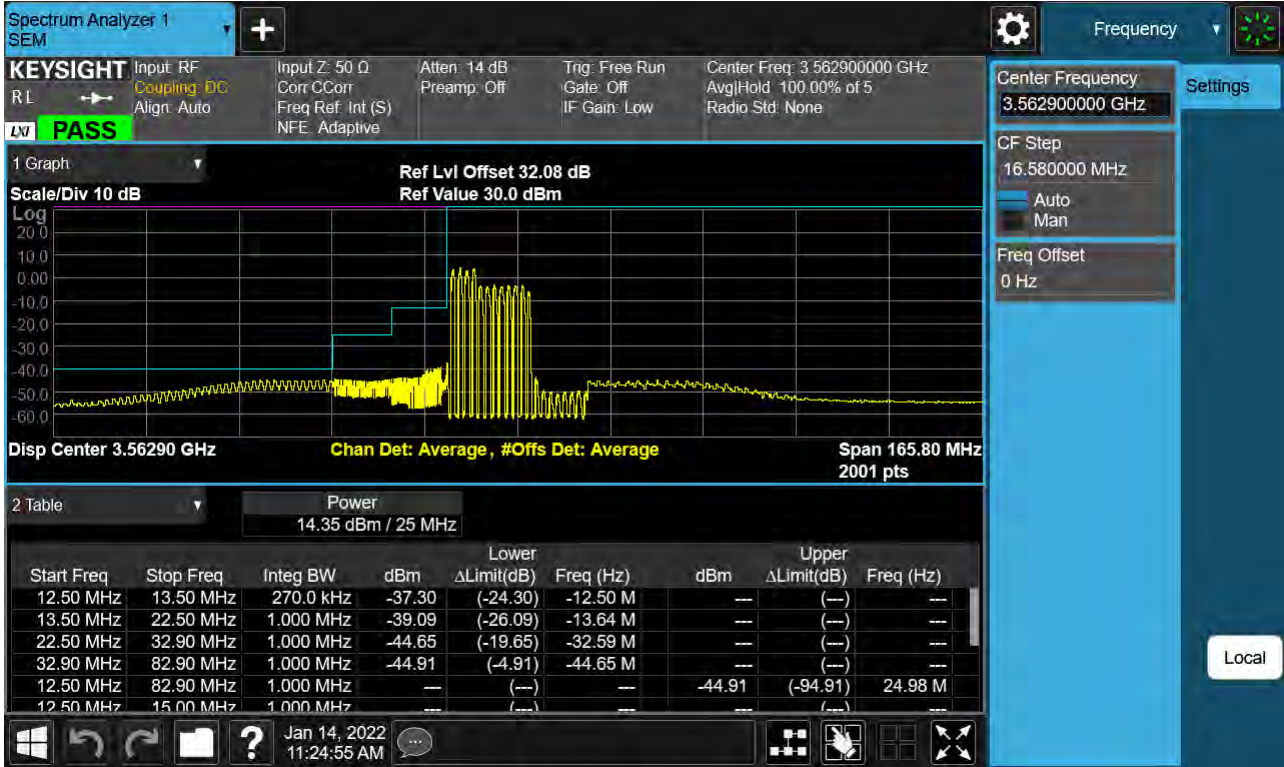


PCC 5 MHz Ch55273 RB25 Offset0, SCC 20 MHz Ch55390 RB50 Offset0-2

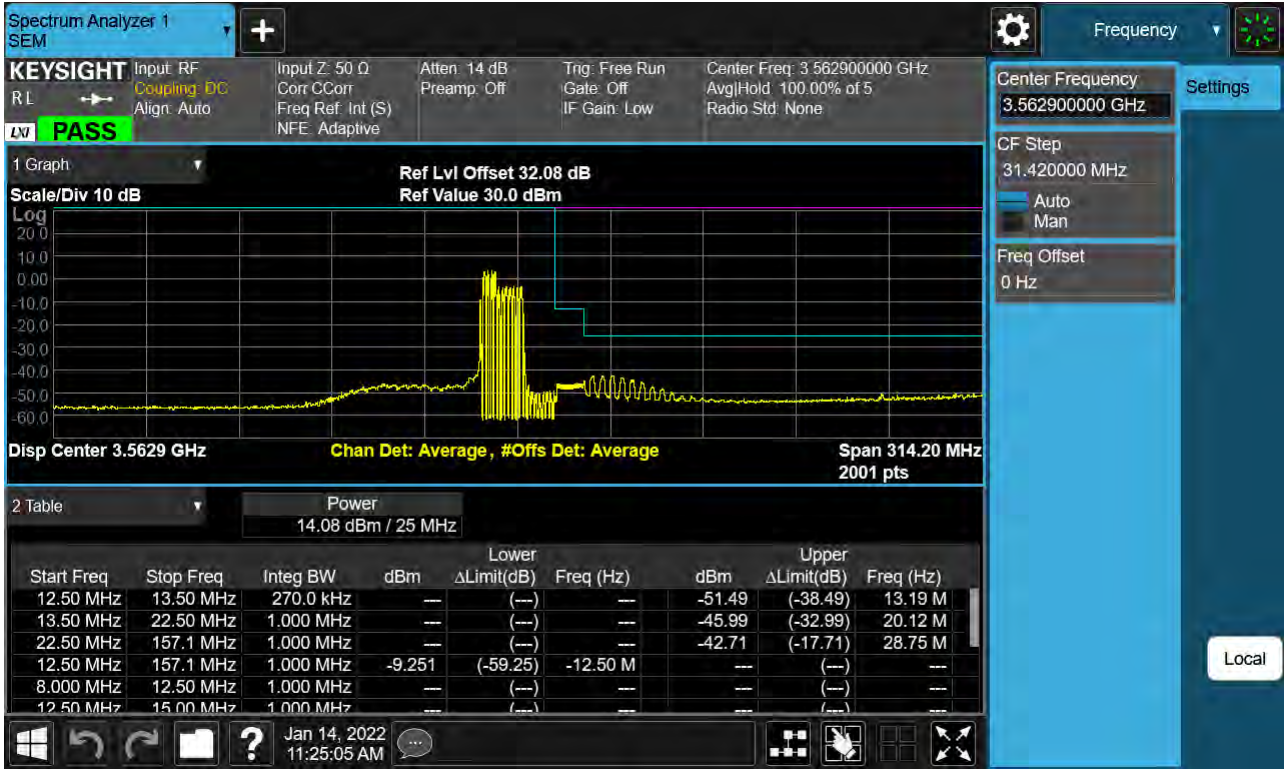


PCC 5 MHz Ch56523 RB25 Offset0, SCC 20 MHz Ch56640 RB50 Offset0-1

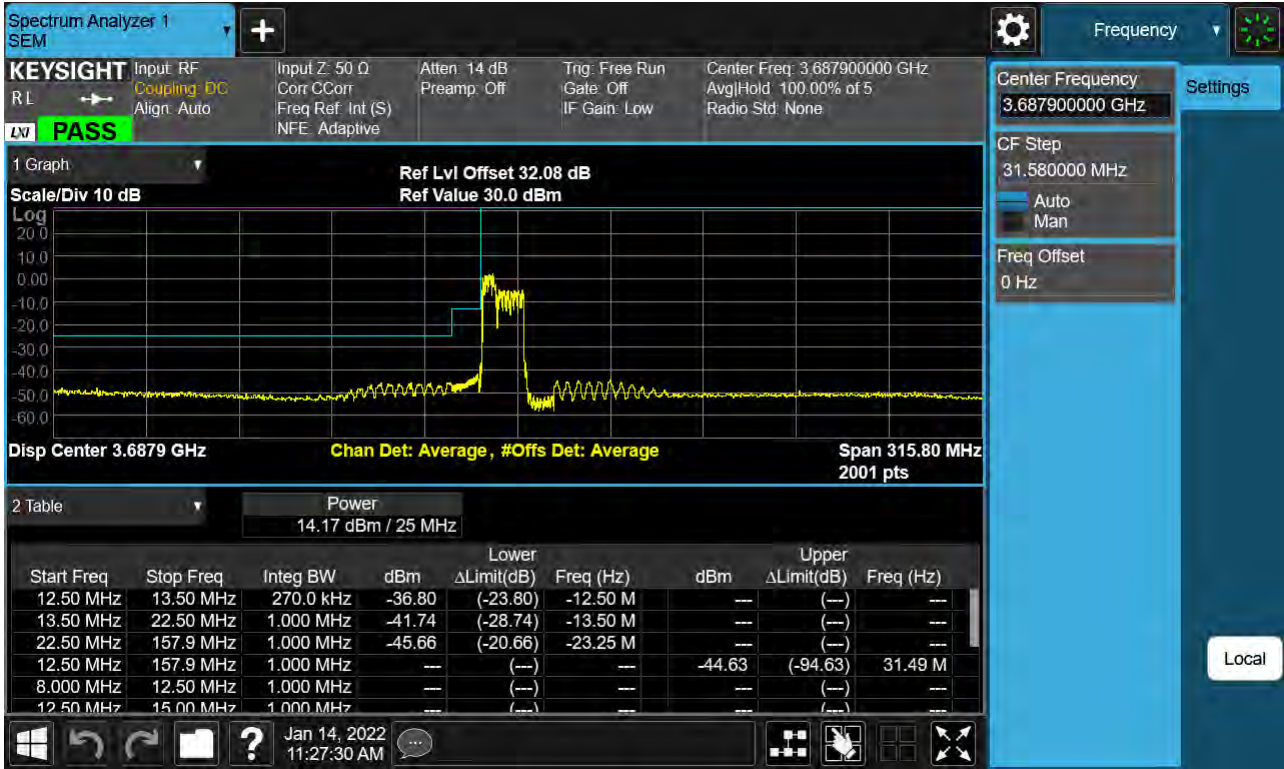


PCC 5 MHz Ch56523 RB25 Offset0, SCC 20 MHz Ch56640 RB50 Offset0-2

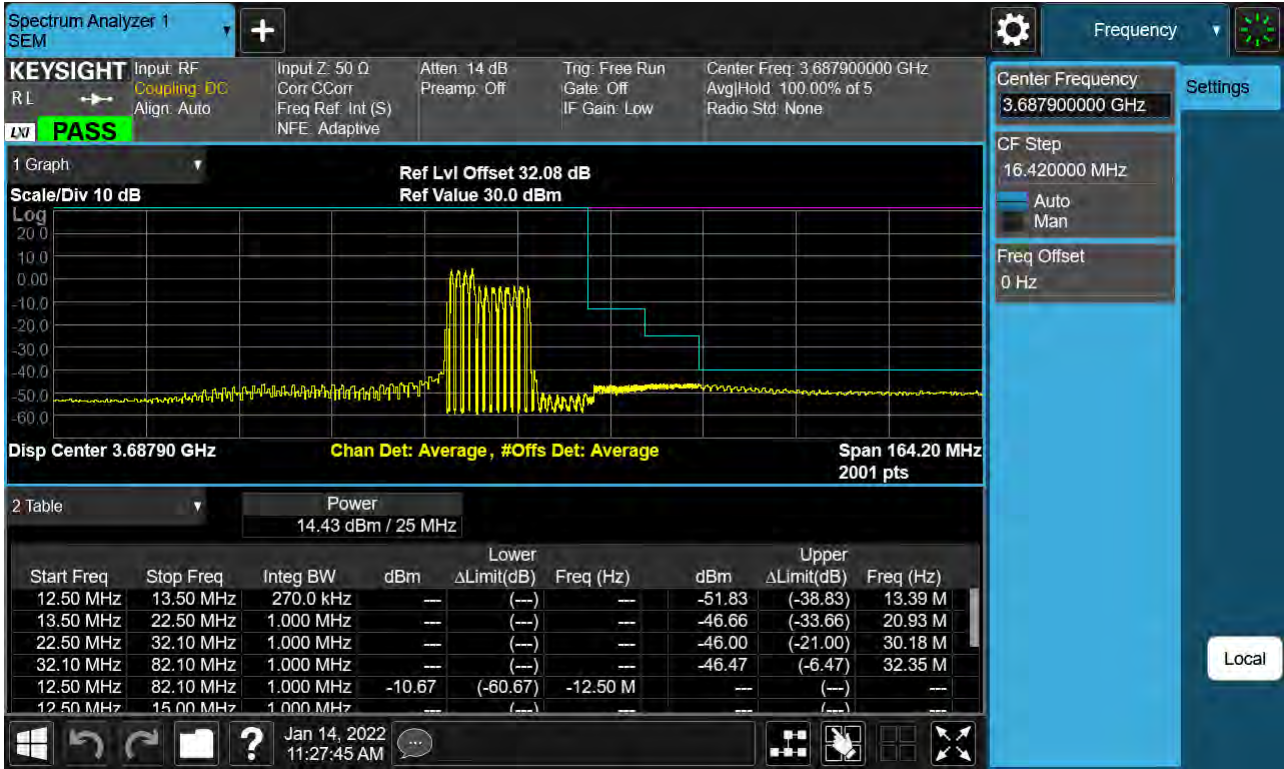


PCC 15 MHz Ch55318 RB1 Offset0, SCC 20 MHz Ch55489 RB1 Offset99-1

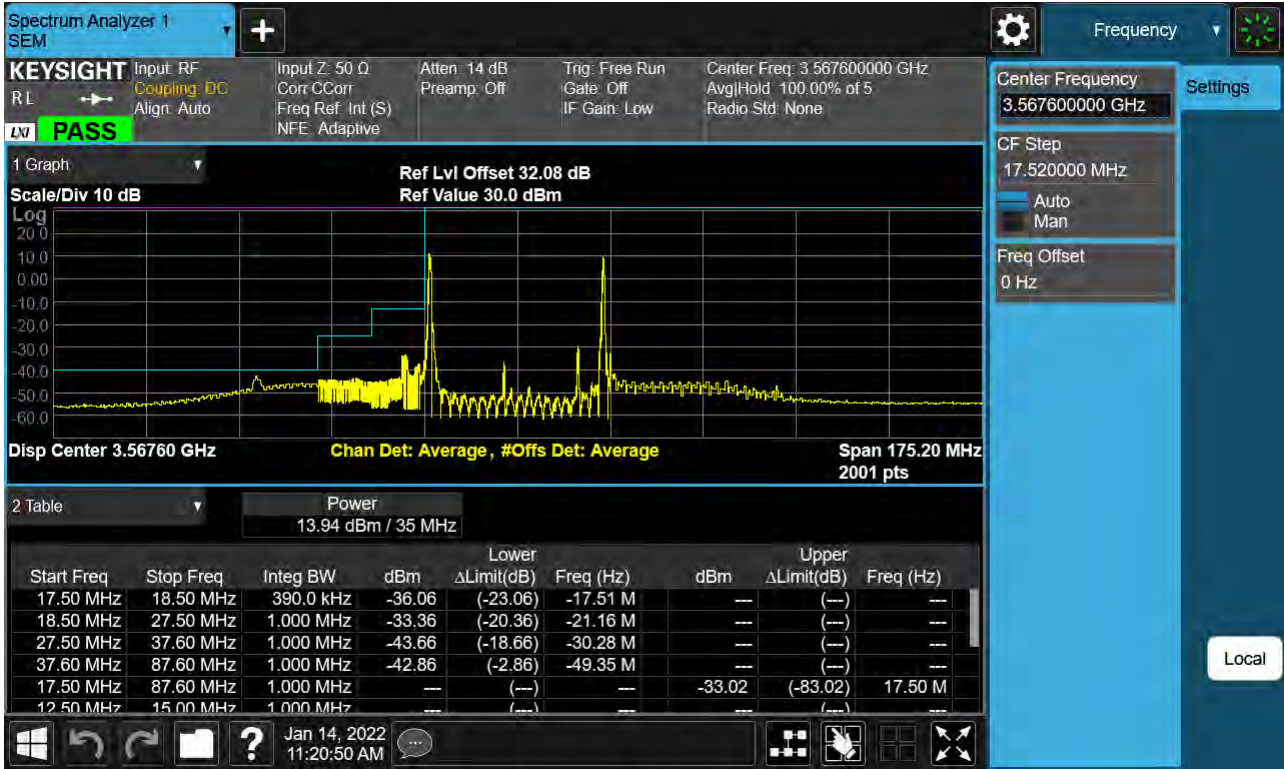


PCC 15 MHz Ch55318 RB1 Offset0, SCC 20 MHz Ch55489 RB1 Offset99-2

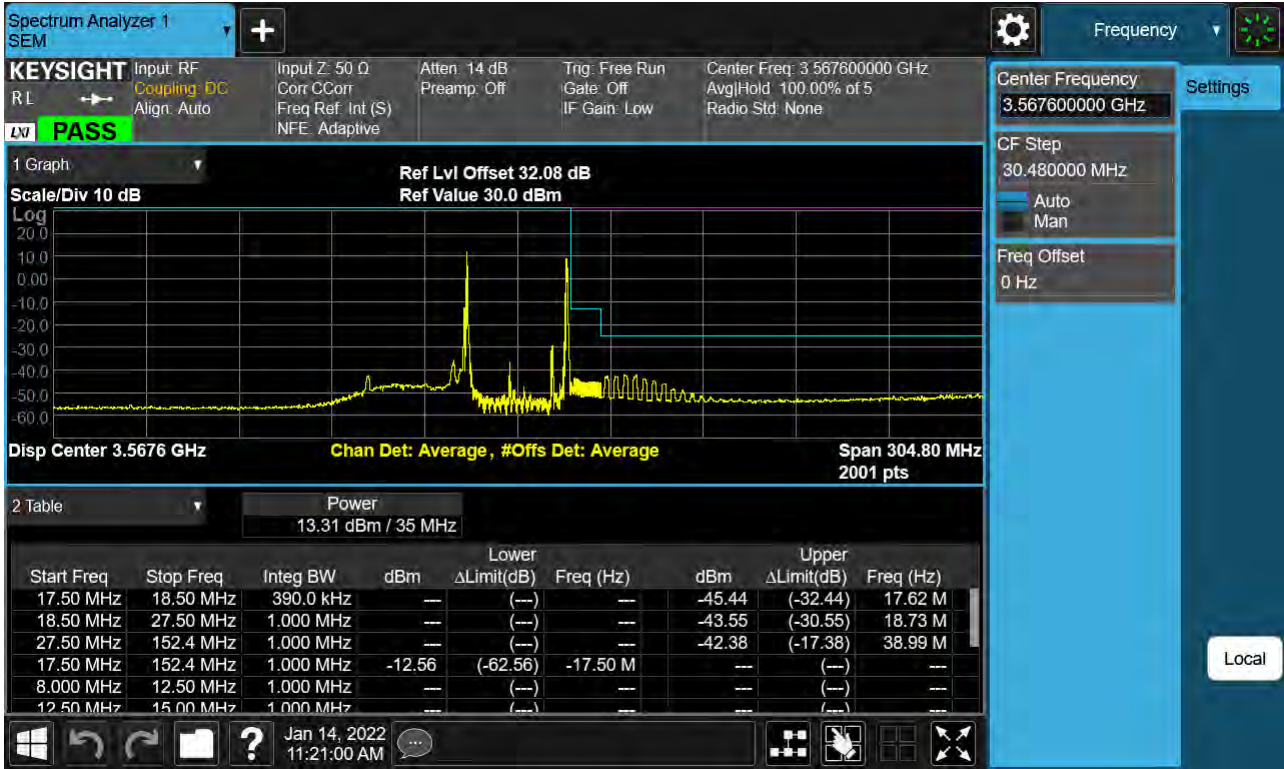

PCC 15 MHz Ch55318 RB1 Offset74, SCC 20 MHz Ch55489 RB1 Offset0-1

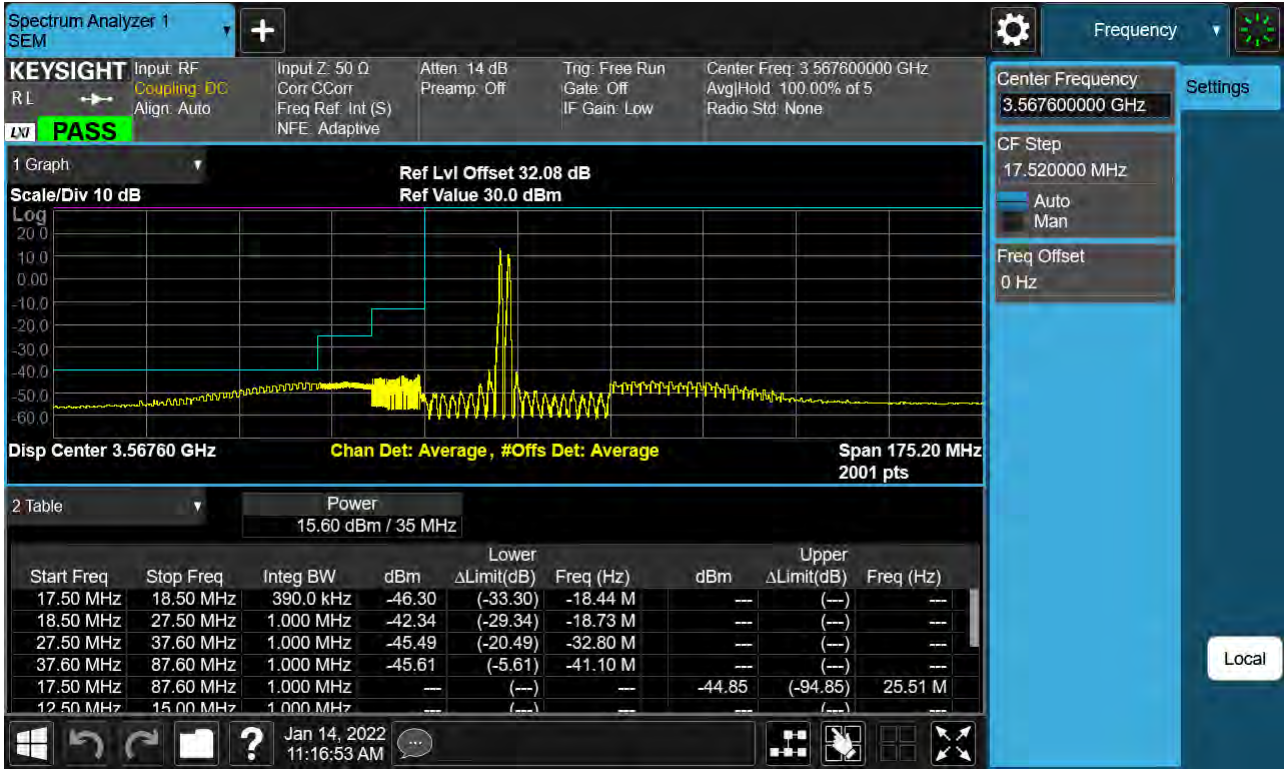


PCC 15 MHz Ch55318 RB1 Offset74, SCC 20 MHz Ch55489 RB1 Offset0-2

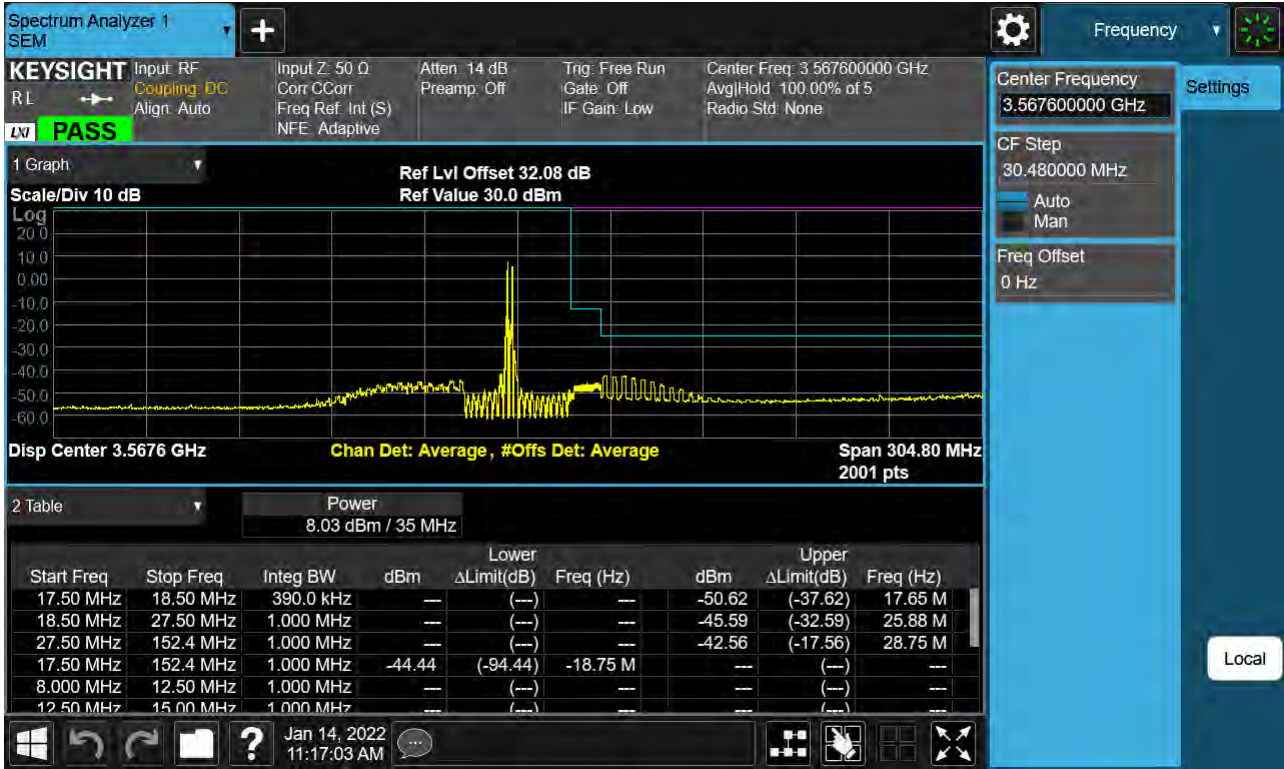

PCC 20 MHz Ch55340 RB100 Offset0, SCC 20 MHz Ch55538 RB100 Offset0-1




PCC 20 MHz Ch55340 RB100 Offset0, SCC 20 MHz Ch55538 RB100 Offset0-2

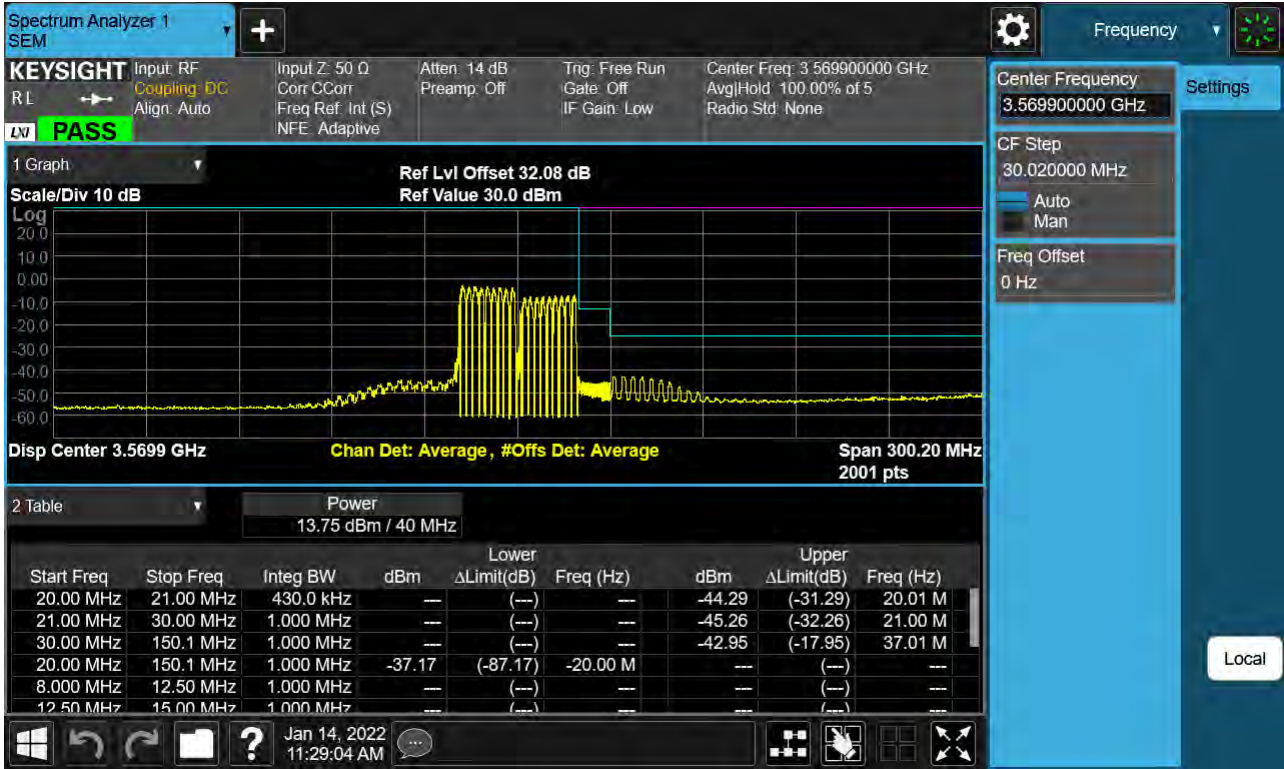


PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0




PCC 20 MHz Ch55965 RB1 Offset0, SCC 5 MHz Ch56082 RB1 Offset99

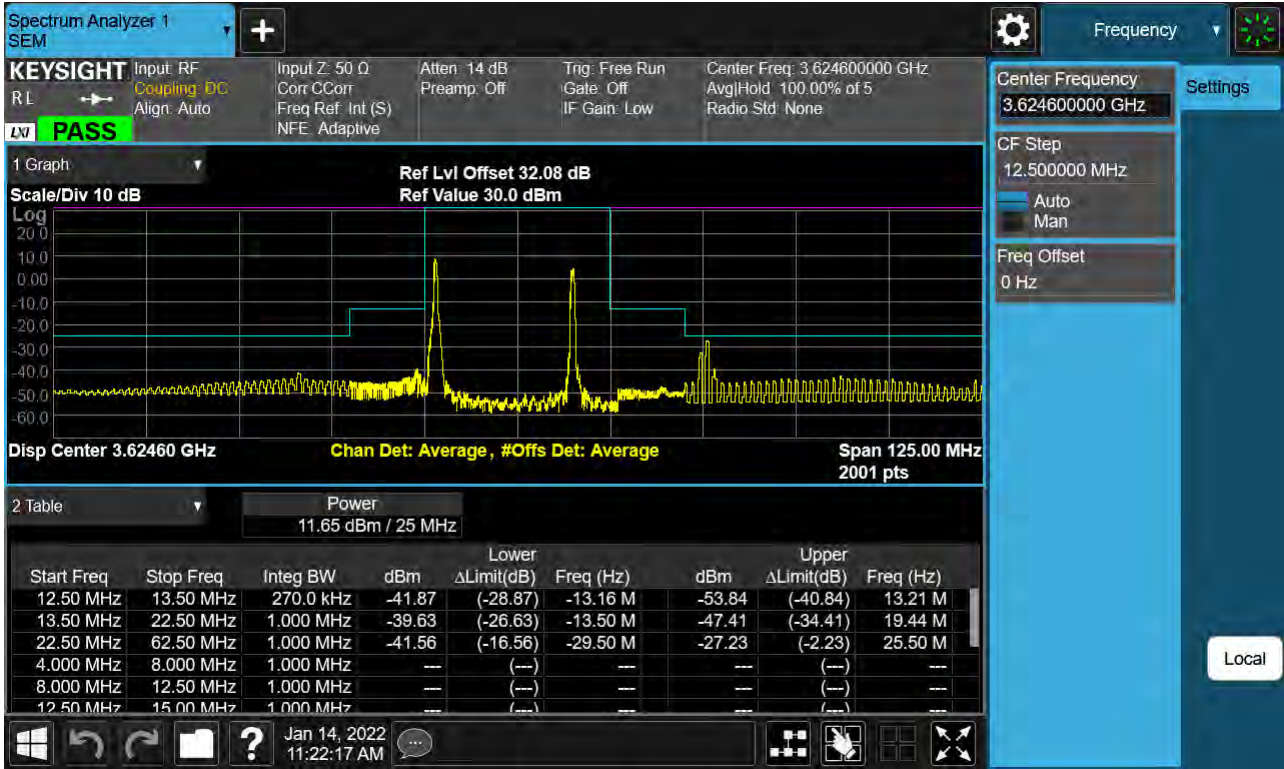


PCC 20 MHz Ch55965 RB1 Offset99, SCC 5 MHz Ch56082 RB1 Offset0

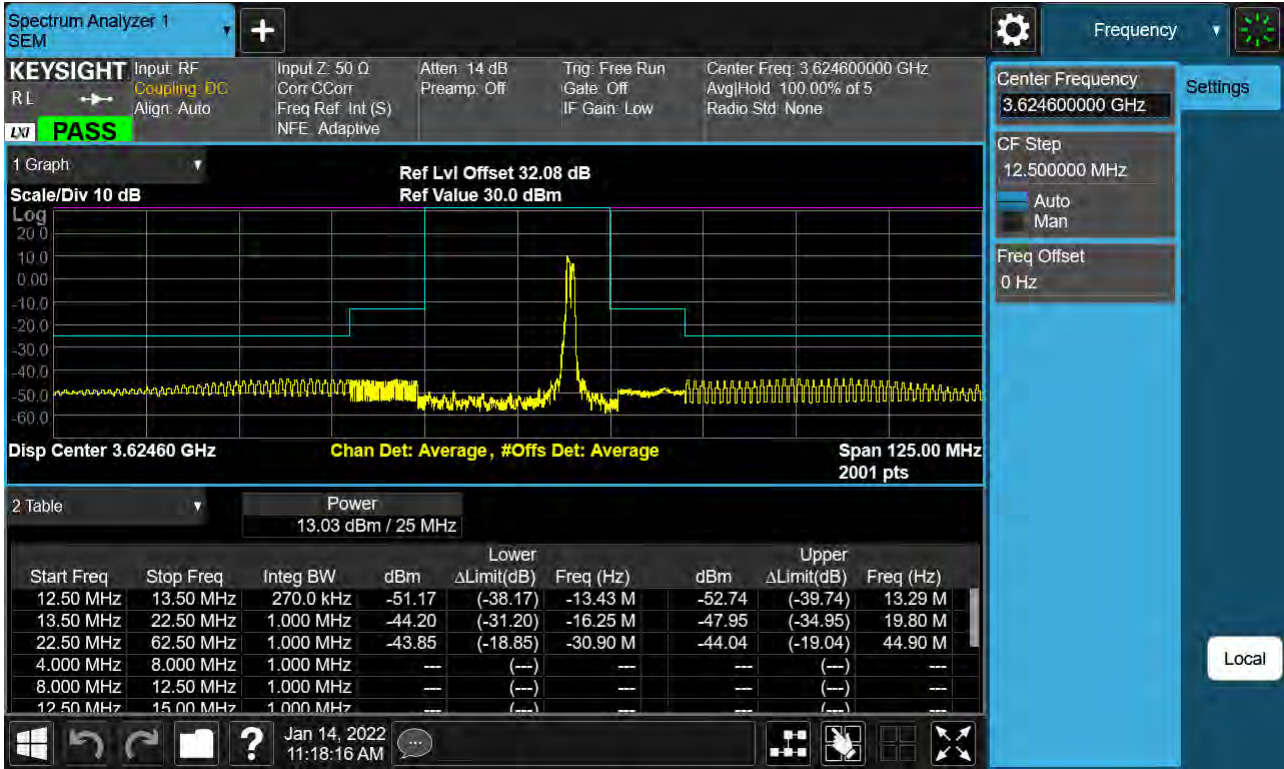


PCC 20 MHz Ch55965 RB100 Offset0, SCC 5 MHz Ch56082 RB25 Offset0

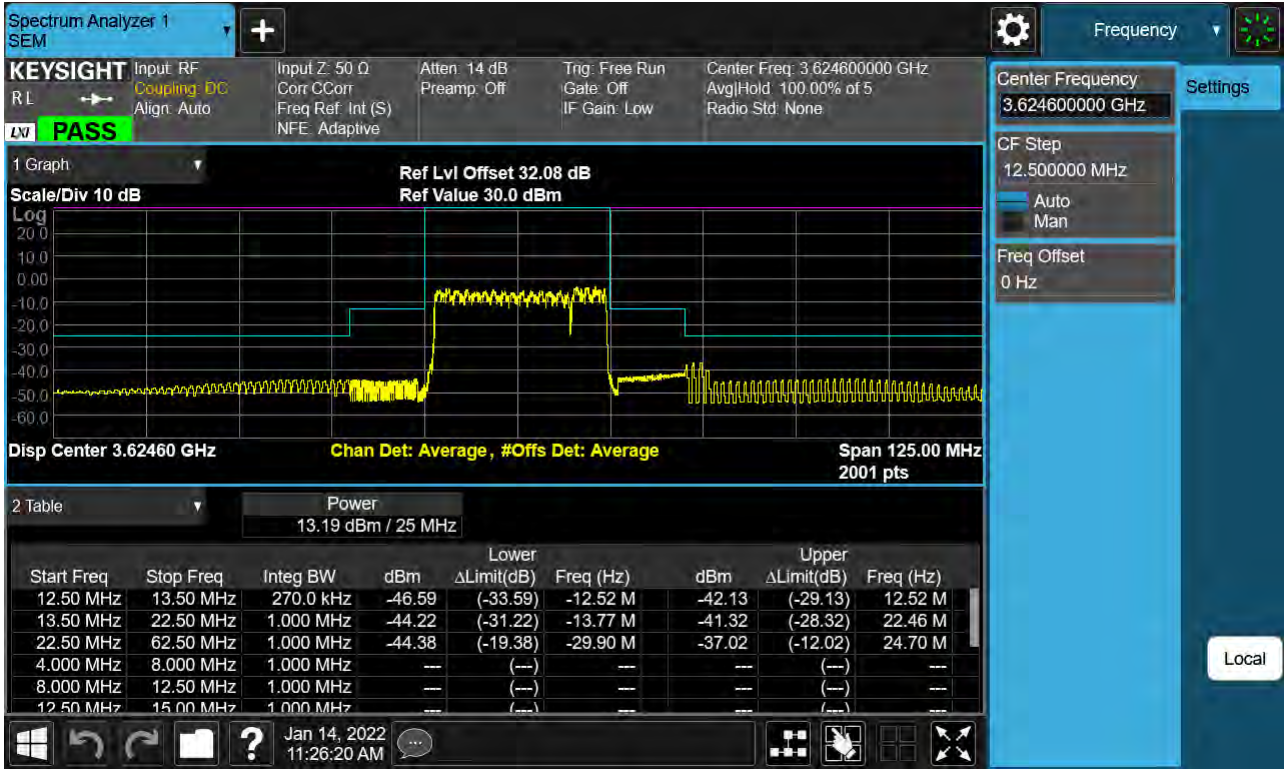


PCC 20 MHz Ch56442 RB100 Offset0, SCC 20 MHz Ch56640 RB100 Offset0-1

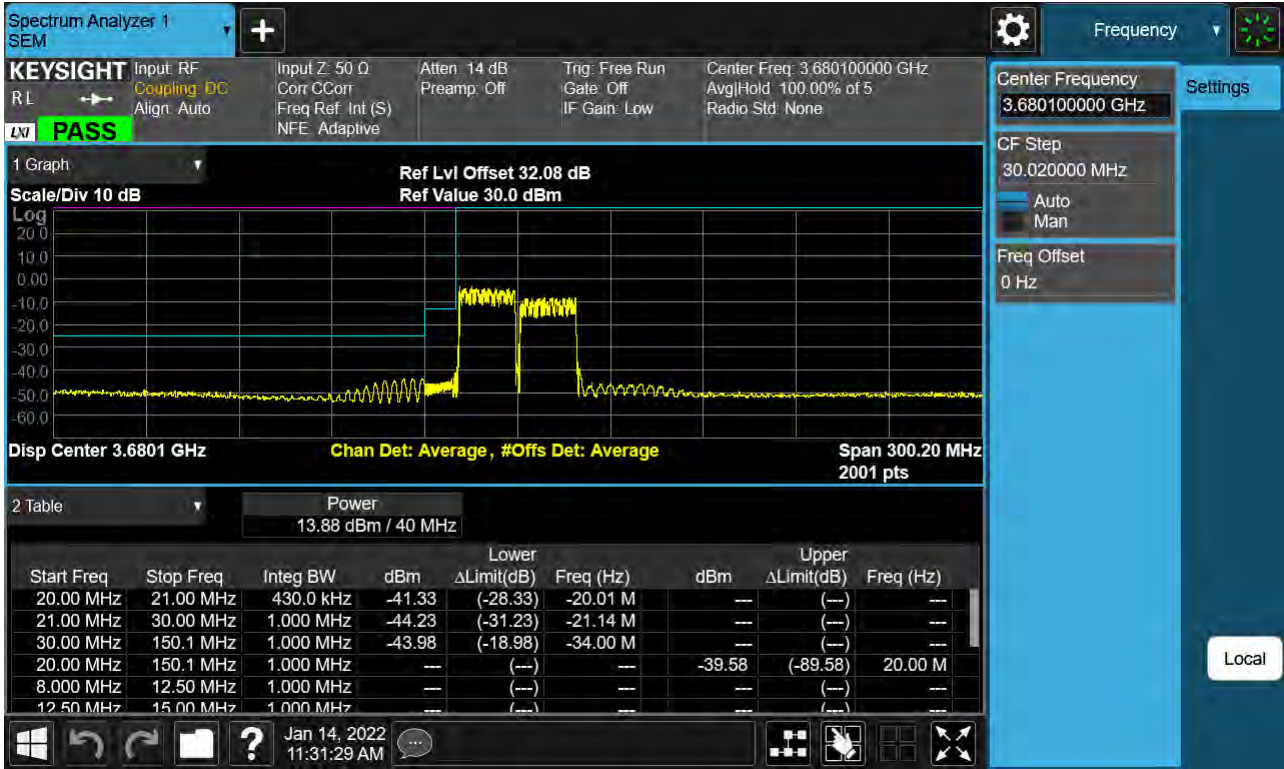


PCC 20 MHz Ch56442 RB100 Offset0, SCC 20 MHz Ch56640 RB100 Offset0-2

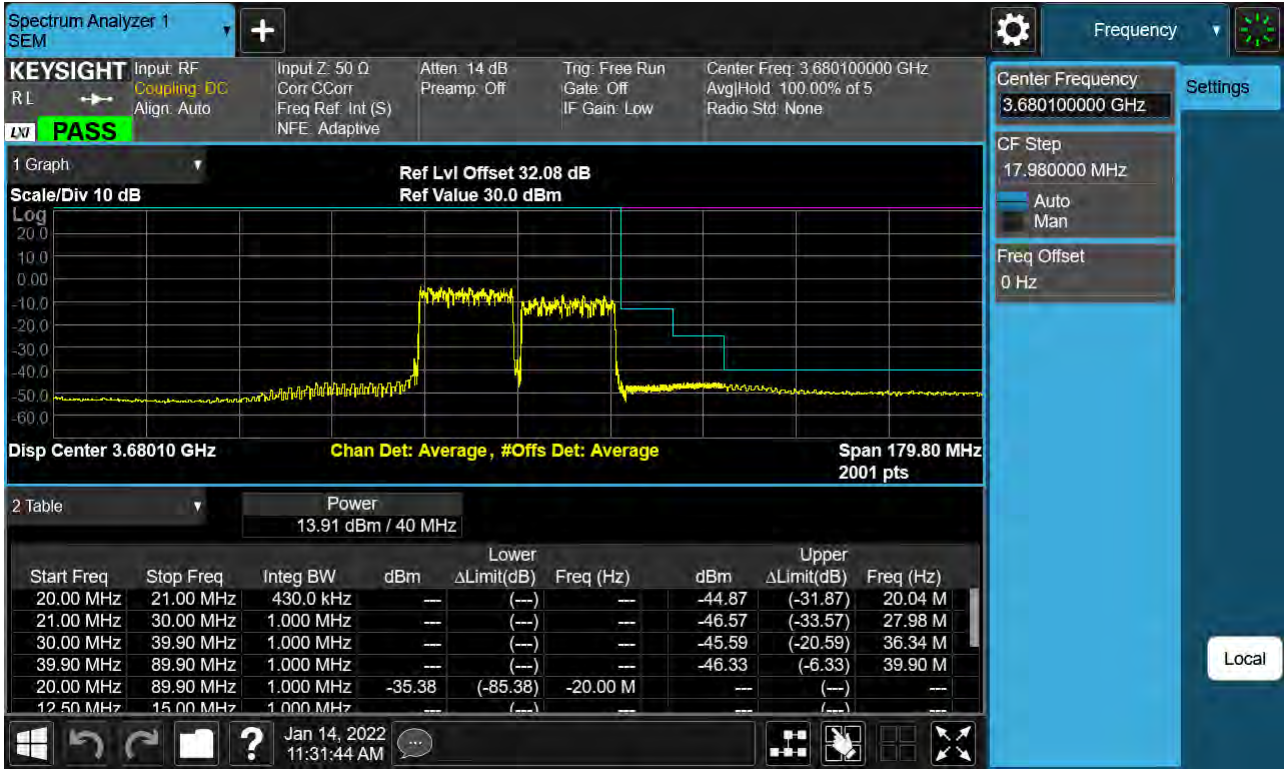


PCC 20 MHz Ch56541 RB1 Offset0, SCC 10 MHz Ch56685 RB1 Offset99-1

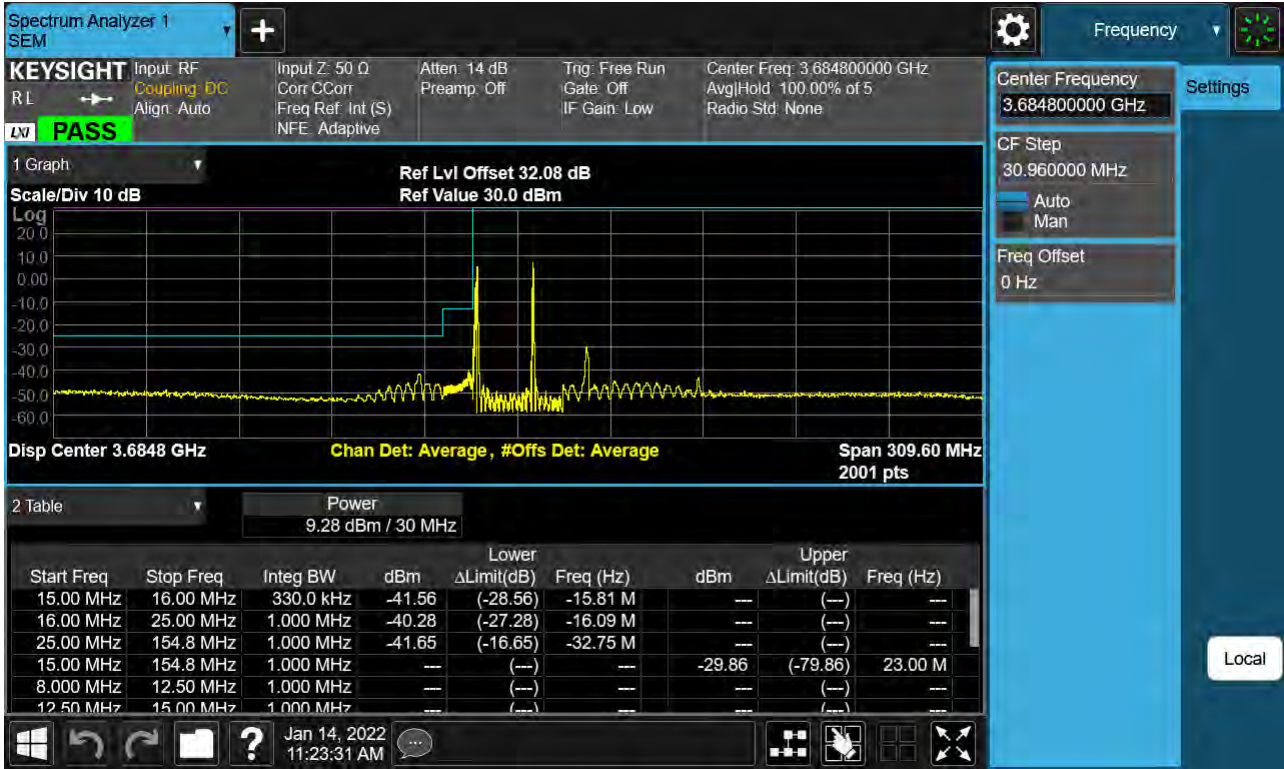


PCC 20 MHz Ch56541 RB1 Offset0, SCC 10 MHz Ch56685 RB1 Offset99-2

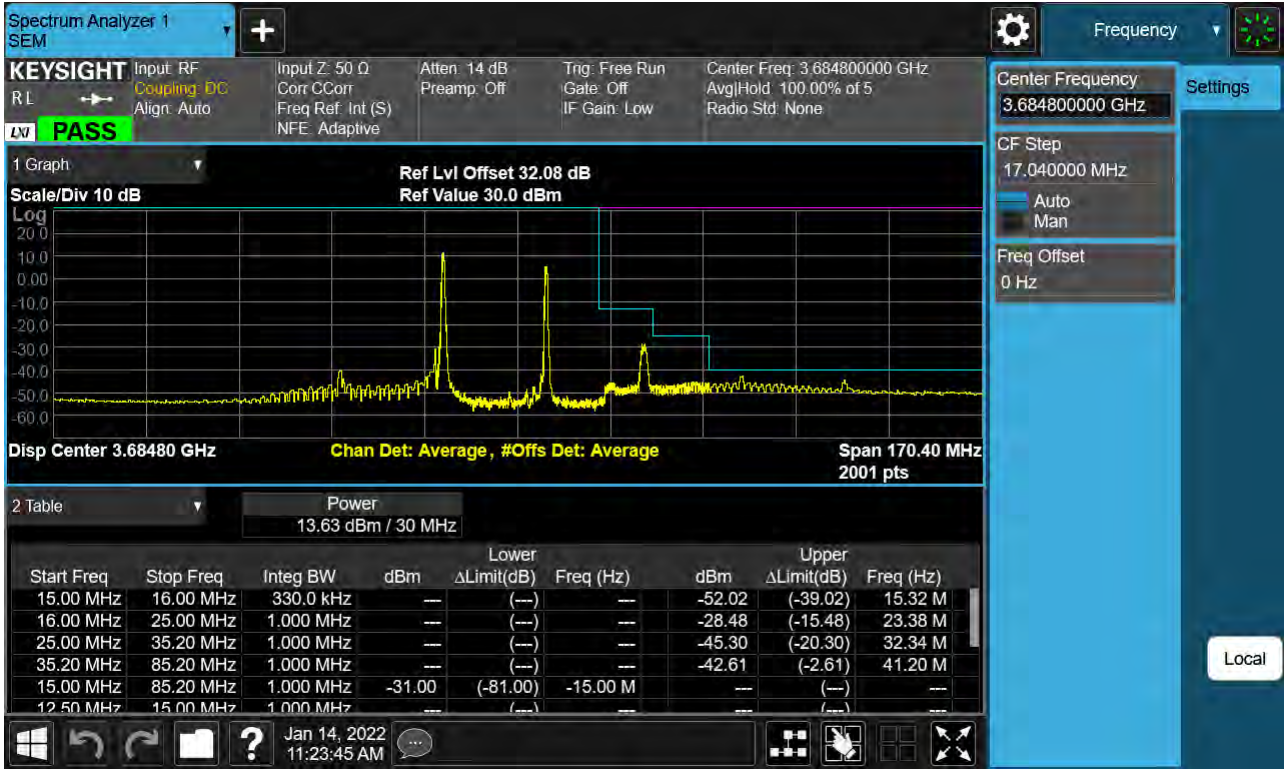

PCC 20 MHz Ch56541 RB1 Offset99, SCC 10 MHz Ch56685 RB1 Offset0-1

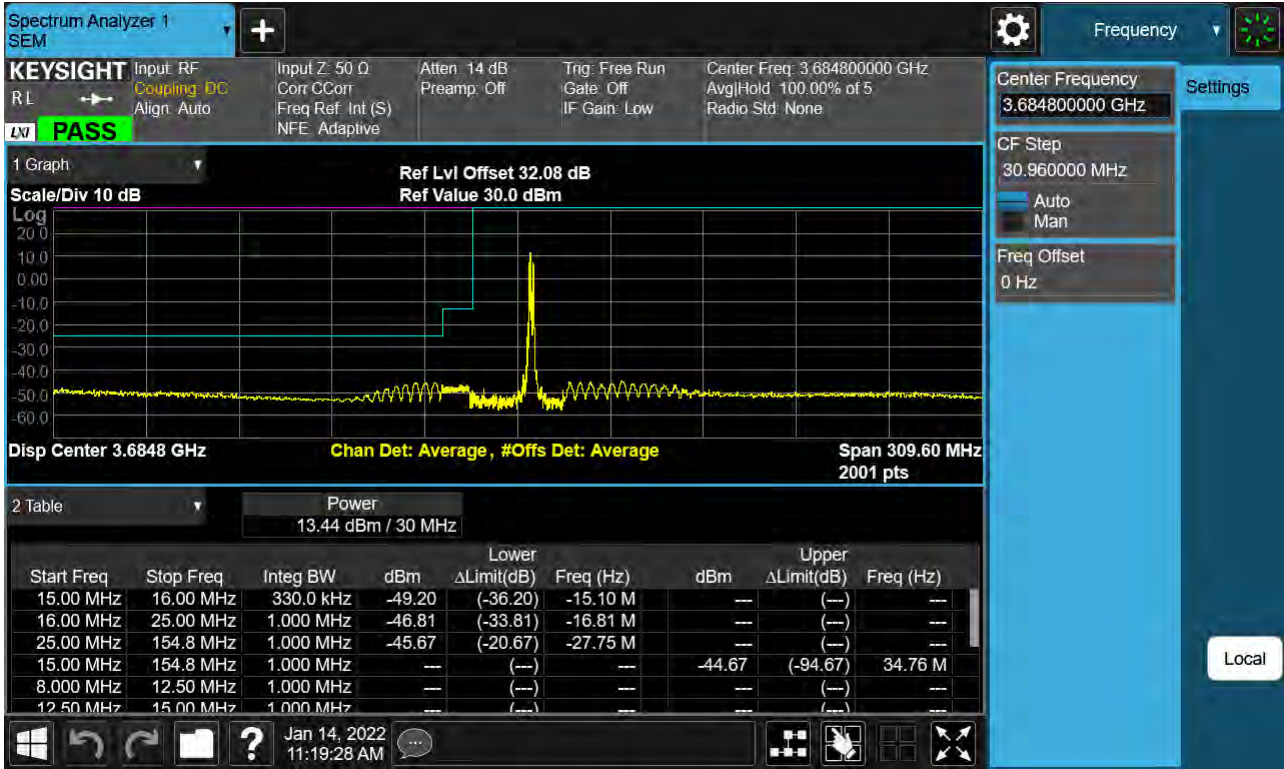

PCC 20 MHz Ch56541 RB1 Offset99, SCC 10 MHz Ch56685 RB1 Offset0-2

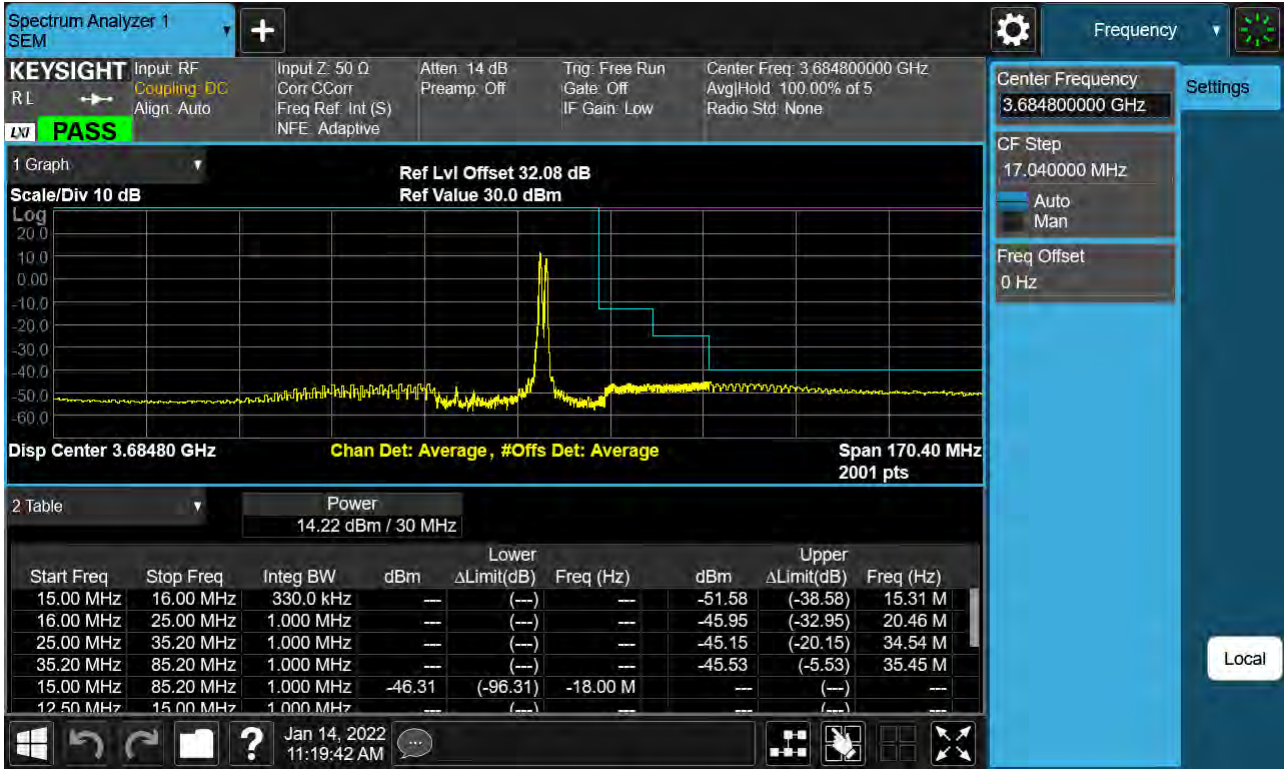

8.5 Frequency Stability / Variation Of Ambient Temperature

- ▣ PCC Channel: 55273
- ▣ PCC Frequency: 3553.3 MHz
- ▣ PCC BandWidth: 5 MHz
- ▣ SCC Channel: 55390
- ▣ SCC Frequency: 3565.0 MHz
- ▣ SCC BandWidth: 20 MHz
- ▣ Voltage : 4.200 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	4.200	+20(Ref)	0.033	-0.027	3553.30012	3564.99990
100 %		-30	0.036	-0.025	3553.30013	3564.99991
100 %		-20	0.032	0.025	3553.30012	3565.00009
100 %		-10	-0.034	0.031	3553.29988	3565.00011
100 %		0	0.036	0.036	3553.30013	3565.00013
100 %		10	0.030	0.026	3553.30011	3565.00009
100 %		30	0.028	0.035	3553.30010	3565.00012
100 %		40	-0.033	0.040	3553.29988	3565.00014
100 %		50	-0.039	0.031	3553.29986	3565.00011
Batt. Endpoint		3.400	20	0.037	-0.034	3553.30013

- ▣ PCC Channel: 55295
- ▣ PCC Frequency: 3555.5 MHz
- ▣ PCC BandWidth: 10 MHz
- ▣ SCC Channel: 55439
- ▣ SCC Frequency: 3569.9 MHz
- ▣ SCC BandWidth: 20 MHz
- ▣ Voltage : 4.200 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	4.200	+20(Ref)	0.042	0.043	3555.50015	3569.90015
100 %		-30	0.028	0.029	3555.50010	3569.90011
100 %		-20	0.039	0.042	3555.50014	3569.90015
100 %		-10	-0.042	-0.039	3555.49985	3569.89986
100 %		0	0.034	0.028	3555.50012	3569.90010
100 %		10	0.027	0.027	3555.50009	3569.90010
100 %		30	-0.041	0.029	3555.49985	3569.90010
100 %		40	0.040	0.024	3555.50014	3569.90009
100 %		50	0.041	-0.041	3555.50015	3569.89985
Batt. Endpoint	3.400	20	0.034	0.037	3555.50012	3569.90013

- PCC Channel: 55318
- PCC Frequency: 3557.8 MHz
- PCC BandWidth: 15 MHz
- SCC Channel: 55489
- SCC Frequency: 3574.9 MHz
- SCC BandWidth: 20 MHz
- Voltage : 4.200 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	4.200	+20(Ref)	0.027	0.039	3557.80010	3574.90014
100 %		-30	0.035	0.042	3557.80012	3574.90015
100 %		-20	0.039	-0.027	3557.80014	3574.89991
100 %		-10	-0.043	-0.027	3557.79985	3574.89990
100 %		0	0.038	-0.040	3557.80014	3574.89986
100 %		10	0.031	-0.032	3557.80011	3574.89988
100 %		30	0.038	0.032	3557.80013	3574.90012
100 %		40	0.026	0.035	3557.80009	3574.90012
100 %		50	-0.029	0.031	3557.79990	3574.90011
Batt. Endpoint	3.400	20	0.023	0.039	3557.80008	3574.90014

- PCC Channel: 55340
- PCC Frequency: 3560.0 MHz
- PCC BandWidth: 20 MHz
- SCC Channel: 55538
- SCC Frequency: 3579.8 MHz
- SCC BandWidth: 20 MHz
- Voltage : 4.200 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	4.200	+20(Ref)	-0.042	0.032	3559.99985	3579.80011
100 %		-30	-0.032	0.026	3559.99989	3579.80009
100 %		-20	0.030	0.025	3560.00011	3579.80009
100 %		-10	-0.039	0.028	3559.99986	3579.80010
100 %		0	0.041	-0.027	3560.00014	3579.79990
100 %		10	0.029	0.026	3560.00010	3579.80009
100 %		30	0.041	-0.035	3560.00015	3579.79987
100 %		40	0.037	-0.039	3560.00013	3579.79986
100 %		50	0.038	0.032	3560.00014	3579.80012
Batt. Endpoint		3.400	20	0.042	0.035	3560.00015

- PCC Channel: 56523
- PCC Frequency: 3678.3 MHz
- PCC BandWidth: 5 MHz
- SCC Channel: 56640
- SCC Frequency: 3690.0 MHz
- SCC BandWidth: 20 MHz
- Voltage : 4.200 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	4.200	+20(Ref)	-0.035	0.042	3678.29987	3690.00016
100 %		-30	0.032	0.031	3678.30012	3690.00011
100 %		-20	-0.026	0.029	3678.29990	3690.00011
100 %		-10	0.039	-0.038	3678.30014	3689.99986
100 %		0	0.042	-0.028	3678.30016	3689.99990
100 %		10	0.035	0.028	3678.30013	3690.00010
100 %		30	0.028	-0.032	3678.30010	3689.99988
100 %		40	0.036	-0.035	3678.30013	3689.99987
100 %		50	0.035	0.029	3678.30013	3690.00011
Batt. Endpoint		3.400	20	0.043	0.027	3678.30016

- PCC Channel: 56496
- PCC Frequency: 3675.6 MHz
- PCC BandWidth: 10 MHz
- SCC Channel: 56640
- SCC Frequency: 3690.0 MHz
- SCC BandWidth: 20 MHz
- Voltage : 4.200 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	4.200	+20(Ref)	0.043	0.025	3675.60016	3690.00009
100 %		-30	0.037	0.023	3675.60014	3690.00009
100 %		-20	0.030	-0.032	3675.60011	3689.99988
100 %		-10	0.037	0.039	3675.60014	3690.00015
100 %		0	0.024	-0.034	3675.60009	3689.99988
100 %		10	0.035	0.038	3675.60013	3690.00014
100 %		30	-0.033	0.038	3675.59988	3690.00014
100 %		40	0.041	0.040	3675.60015	3690.00015
100 %		50	-0.029	0.028	3675.59989	3690.00010
Batt. Endpoint		3.400	20	0.042	0.030	3675.60015

- PCC Channel: 56469
- PCC Frequency: 3672.9 MHz
- PCC BandWidth: 15 MHz
- SCC Channel: 56640
- SCC Frequency: 3690.0 MHz
- SCC BandWidth: 20 MHz
- Voltage : 4.200 VDC
- LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	4.200	+20(Ref)	0.029	-0.038	3672.90011	3689.99986
100 %		-30	-0.042	0.038	3672.89985	3690.00014
100 %		-20	-0.030	-0.028	3672.89989	3689.99990
100 %		-10	0.038	-0.024	3672.90014	3689.99991
100 %		0	0.033	0.027	3672.90012	3690.00010
100 %		10	0.028	-0.031	3672.90010	3689.99989
100 %		30	0.035	0.039	3672.90013	3690.00014
100 %		40	0.043	0.033	3672.90016	3690.00012
100 %		50	0.024	0.026	3672.90009	3690.00009
Batt. Endpoint	3.400	20	0.042	0.041	3672.90016	3690.00015

- ▣ PCC Channel: 56442
- ▣ PCC Frequency: 3670.2 MHz
- ▣ PCC BandWidth: 20 MHz
- ▣ SCC Channel: 56640
- ▣ SCC Frequency: 3690.0 MHz
- ▣ SCC BandWidth: 20 MHz
- ▣ Voltage : 4.200 MHz
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	4.200	+20(Ref)	0.042	-0.037	3670.20016	3689.99986
100 %		-30	0.023	0.028	3670.20009	3690.00010
100 %		-20	0.030	0.040	3670.20011	3690.00015
100 %		-10	0.035	0.043	3670.20013	3690.00016
100 %		0	0.041	-0.039	3670.20015	3689.99986
100 %		10	0.037	0.037	3670.20013	3690.00014
100 %		30	-0.029	0.036	3670.19990	3690.00013
100 %		40	-0.034	0.023	3670.19988	3690.00009
100 %		50	-0.028	0.031	3670.19990	3690.00011
Batt. Endpoint		3.400	20	-0.024	0.027	3670.19991

8.6 Radiated Spurious Emissions

- ▣ PCC Channel : 55340 (3560.0 MHz)
- ▣ PCC BW(MHz) : 20
- ▣ PCC RB/ RB Offset : 1/ 99
- ▣ SCC Channel : 55538 (3579.8 MHz)
- ▣ SCC BW(MHz) : 20
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: -40.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
7 139.80	-54.34	10.82	-57.06	4.34	H	-50.58
10 709.70	-56.29	11.28	-52.35	5.49	H	-46.56
14 279.60	-59.98	11.84	-48.47	6.42	V	-43.05

- ▣ PCC Channel : 55891 (3615.1 MHz)
- ▣ PCC BW(MHz) : 20
- ▣ PCC RB/ RB Offset : 1/ 99
- ▣ SCC Channel : 56089 (3634.9 MHz)
- ▣ SCC BW(MHz) : 20
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: -40.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
7 250.00	-54.95	10.90	-56.54	4.35	H	-49.99
10 875.00	-59.04	11.15	-53.76	5.61	V	-48.22
14 500.00	-60.09	11.40	-48.74	6.54	V	-43.88

- ▣ PCC Channel : 56590 (3685.0 MHz)
- ▣ PCC BW(MHz) : 20
- ▣ PCC RB/ RB Offset : 1/ 99
- ▣ SCC Channel : 56707 (3696.7 MHz)
- ▣ SCC BW(MHz) : 5
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: -40.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
7 381.70	-57.23	10.84	-57.60	4.40	V	-51.16
11 072.55	-54.88	11.04	-50.09	5.64	V	-44.69
14 763.40	-60.62	11.18	-49.45	6.58	V	-44.85

8.7 Occupied Bandwidth

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	55898	3615.8	QPSK	25/ 0	20	56015	3627.5	QPSK	100/ 0	22.859
10	55896	3615.6	QPSK	50/ 0	20	56040	3630.0	QPSK	100/ 0	27.656
15	55893	3615.3	QPSK	75/ 0	20	56064	3632.4	QPSK	100/ 0	32.602
20	55965	3622.5	QPSK	100/ 0	5	56082	3634.2	QPSK	25/ 0	22.912
20	55941	3620.1	QPSK	100/ 0	10	56085	3634.5	QPSK	50/ 0	27.665
20	55916	3617.6	QPSK	100 0	15	56087	3634.7	QPSK	75/ 0	32.691
20	55891	3615.1	QPSK	100/ 0	20	56089	3634.9	QPSK	75/ 0	37.700

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	55898	3615.8	16QAM	25/ 0	20	56015	3627.5	16QAM	100/ 0	22.887
10	55896	3615.6	16QAM	50/ 0	20	56040	3630.0	16QAM	100/ 0	27.691
15	55893	3615.3	16QAM	75/ 0	20	56064	3632.4	16QAM	100/ 0	32.468
20	55965	3622.5	16QAM	100/ 0	5	56082	3634.2	16QAM	25/ 0	22.996
20	55941	3620.1	16QAM	100/ 0	10	56085	3634.5	16QAM	50/ 0	27.571
20	55916	3617.6	16QAM	100 0	15	56087	3634.7	16QAM	75/ 0	32.708
20	55891	3615.1	16QAM	100/ 0	20	56089	3634.9	16QAM	75/ 0	37.397


PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	55898	3615.8	64QAM	25/ 0	20	56015	3627.5	64QAM	100/ 0	22.788
10	55896	3615.6	64QAM	50/ 0	20	56040	3630.0	64QAM	100/ 0	27.576
15	55893	3615.3	64QAM	75/ 0	20	56064	3632.4	64QAM	100/ 0	32.604
20	55965	3622.5	64QAM	100/ 0	5	56082	3634.2	64QAM	25/ 0	22.939
20	55941	3620.1	64QAM	100/ 0	10	56085	3634.5	64QAM	50/ 0	27.753
20	55916	3617.6	64QAM	100 0	15	56087	3634.7	64QAM	75/ 0	32.673
20	55891	3615.1	64QAM	100/ 0	20	56089	3634.9	64QAM	75/ 0	37.542

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	55898	3615.8	256QAM	25/ 0	20	56015	3627.5	256QAM	100/ 0	22.821
10	55896	3615.6	256QAM	50/ 0	20	56040	3630.0	256QAM	100/ 0	27.663
15	55893	3615.3	256QAM	75/ 0	20	56064	3632.4	256QAM	100/ 0	32.492
20	55965	3622.5	256QAM	100/ 0	5	56082	3634.2	256QAM	25/ 0	22.908
20	55941	3620.1	256QAM	100/ 0	10	56085	3634.5	256QAM	50/ 0	27.740
20	55916	3617.6	256QAM	100 0	15	56087	3634.7	256QAM	75/ 0	32.617
20	55891	3615.1	256QAM	100/ 0	20	56089	3634.9	256QAM	75/ 0	37.569


Note:

In order to simplify the report, attached plots were only Max.Bandwidth(20+20)


PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0_(QPSK)

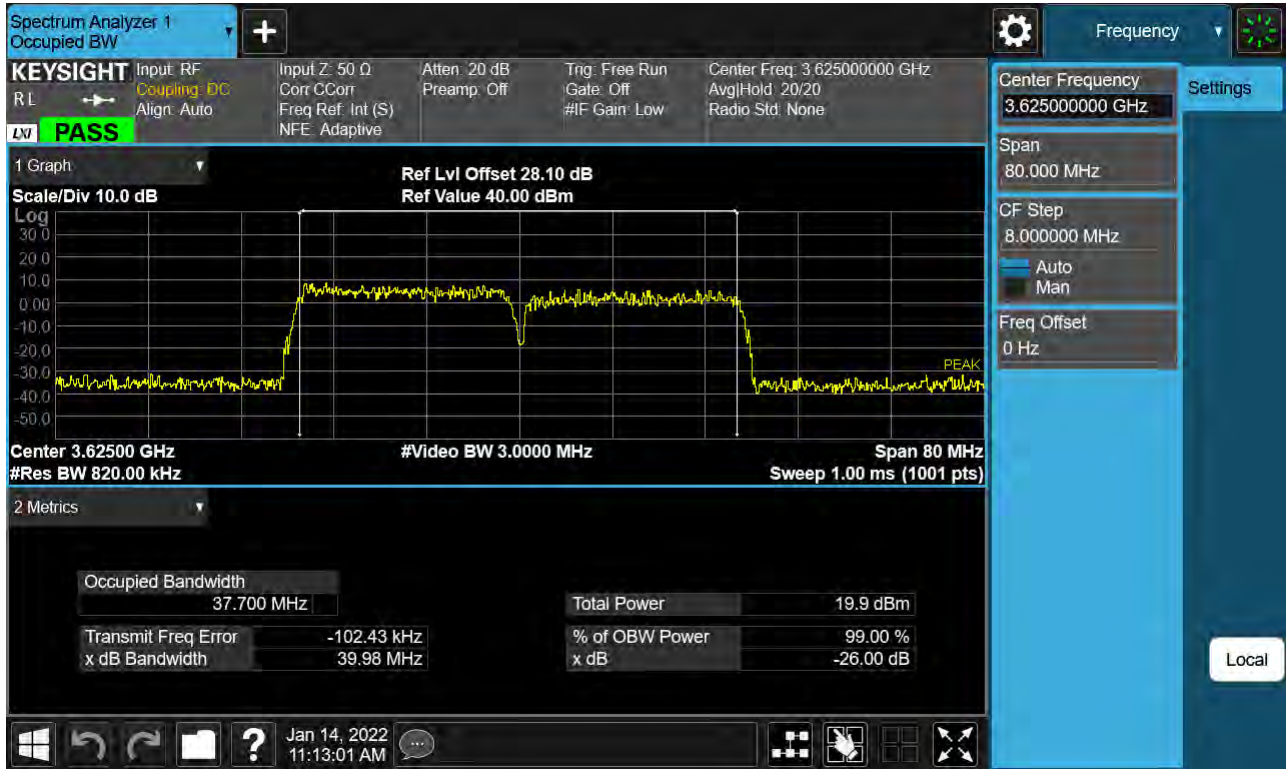


PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0_(16QAM)

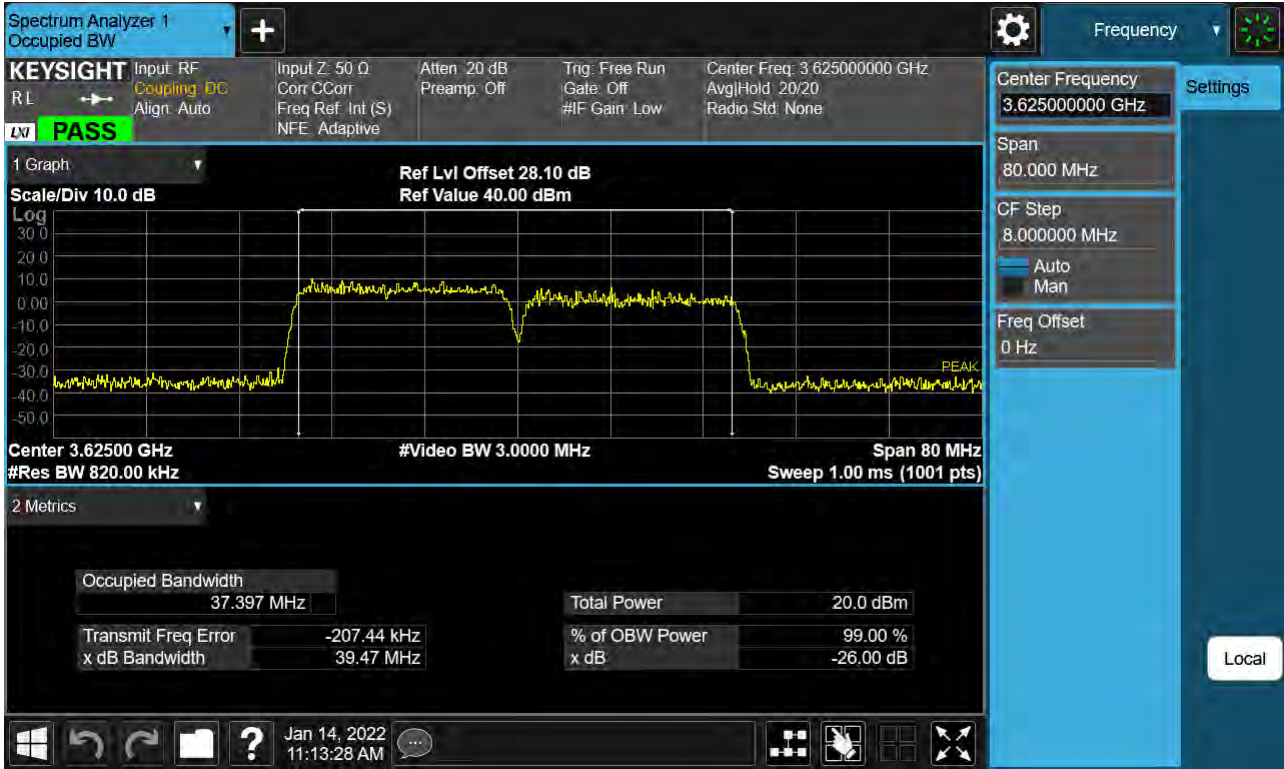

PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0_(64QAM)

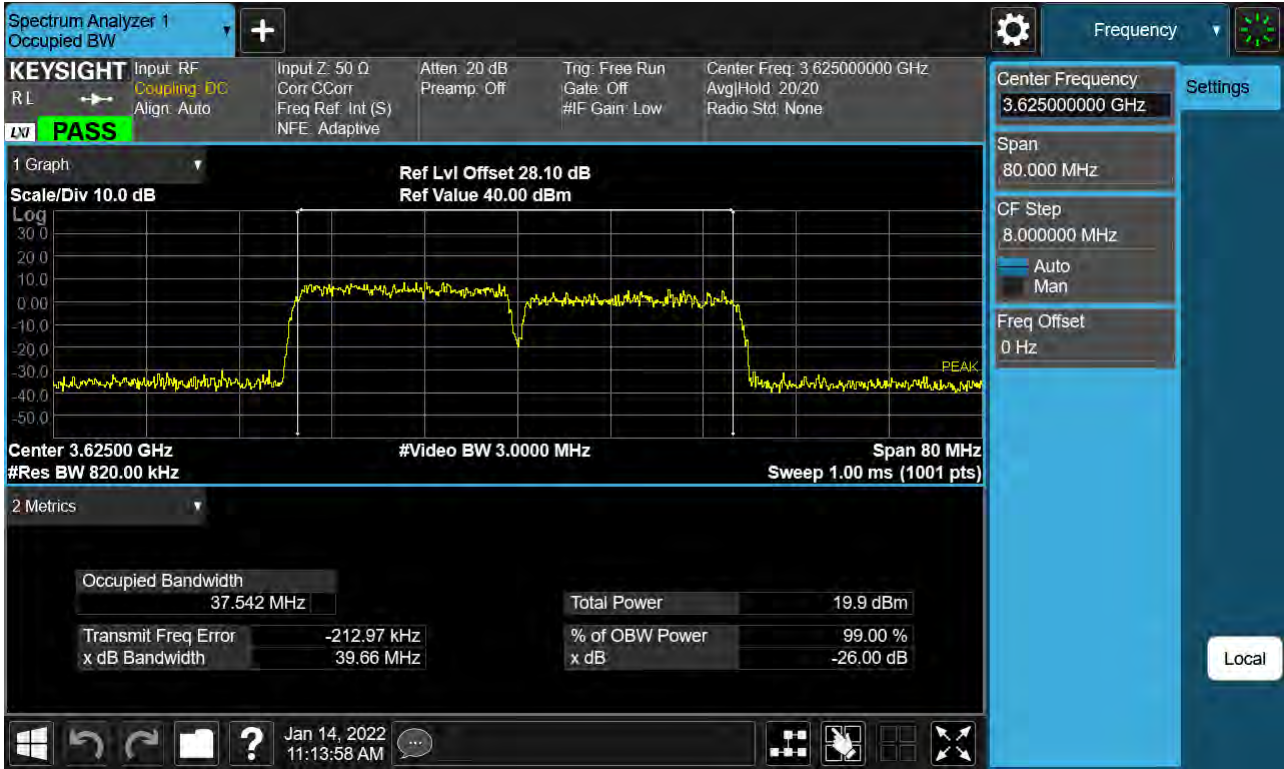

PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0_(256QAM)

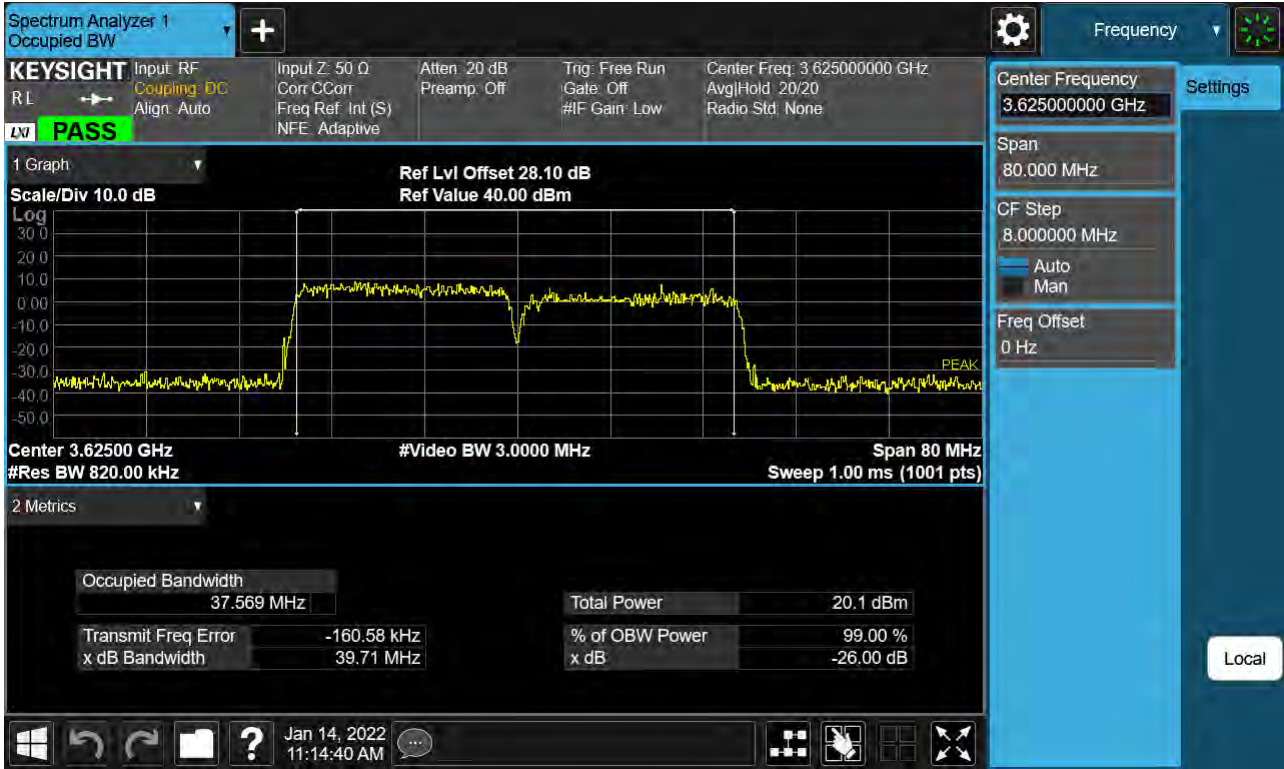

8.8 Peak- to- Average Ratio

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	55898	3615.8	QPSK	25/ 0	20	56015	3627.5	QPSK	100/ 0	6.40
10	55896	3615.6	QPSK	50/ 0	20	56040	3630.0	QPSK	100/ 0	6.45
15	55893	3615.3	QPSK	75/ 0	20	56064	3632.4	QPSK	100/ 0	6.43
20	55965	3622.5	QPSK	100/ 0	5	56082	3634.2	QPSK	25/ 0	6.48
20	55941	3620.1	QPSK	100/ 0	10	56085	3634.5	QPSK	50/ 0	6.49
20	55916	3617.6	QPSK	100 0	15	56087	3634.7	QPSK	75/ 0	6.50
20	55891	3615.1	QPSK	100/ 0	20	56089	3634.9	QPSK	75/ 0	7.11

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	55898	3615.8	16QAM	25/ 0	20	56015	3627.5	16QAM	100/ 0	7.02
10	55896	3615.6	16QAM	50/ 0	20	56040	3630.0	16QAM	100/ 0	6.98
15	55893	3615.3	16QAM	75/ 0	20	56064	3632.4	16QAM	100/ 0	6.91
20	55965	3622.5	16QAM	100/ 0	5	56082	3634.2	16QAM	25/ 0	7.00
20	55941	3620.1	16QAM	100/ 0	10	56085	3634.5	16QAM	50/ 0	7.01
20	55916	3617.6	16QAM	100 0	15	56087	3634.7	16QAM	75/ 0	6.98
20	55891	3615.1	16QAM	100/ 0	20	56089	3634.9	16QAM	75/ 0	7.07


PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	55898	3615.8	64QAM	25/ 0	20	56015	3627.5	64QAM	100/ 0	7.12
10	55896	3615.6	64QAM	50/ 0	20	56040	3630.0	64QAM	100/ 0	7.10
15	55893	3615.3	64QAM	75/ 0	20	56064	3632.4	64QAM	100/ 0	7.08
20	55965	3622.5	64QAM	100/ 0	5	56082	3634.2	64QAM	25/ 0	7.03
20	55941	3620.1	64QAM	100/ 0	10	56085	3634.5	64QAM	50/ 0	7.10
20	55916	3617.6	64QAM	100 0	15	56087	3634.7	64QAM	75/ 0	7.15
20	55891	3615.1	64QAM	100/ 0	20	56089	3634.9	64QAM	75/ 0	8.24

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	55898	3615.8	256QAM	25/ 0	20	56015	3627.5	256QAM	100/ 0	7.00
10	55896	3615.6	256QAM	50/ 0	20	56040	3630.0	256QAM	100/ 0	7.10
15	55893	3615.3	256QAM	75/ 0	20	56064	3632.4	256QAM	100/ 0	7.80
20	55965	3622.5	256QAM	100/ 0	5	56082	3634.2	256QAM	25/ 0	7.14
20	55941	3620.1	256QAM	100/ 0	10	56085	3634.5	256QAM	50/ 0	7.07
20	55916	3617.6	256QAM	100 0	15	56087	3634.7	256QAM	75/ 0	7.10
20	55891	3615.1	256QAM	100/ 0	20	56089	3634.9	256QAM	75/ 0	7.20


Note:

In order to simplify the report, attached plots were only Max.Bandwidth(20+20)


PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0_(QPSK)

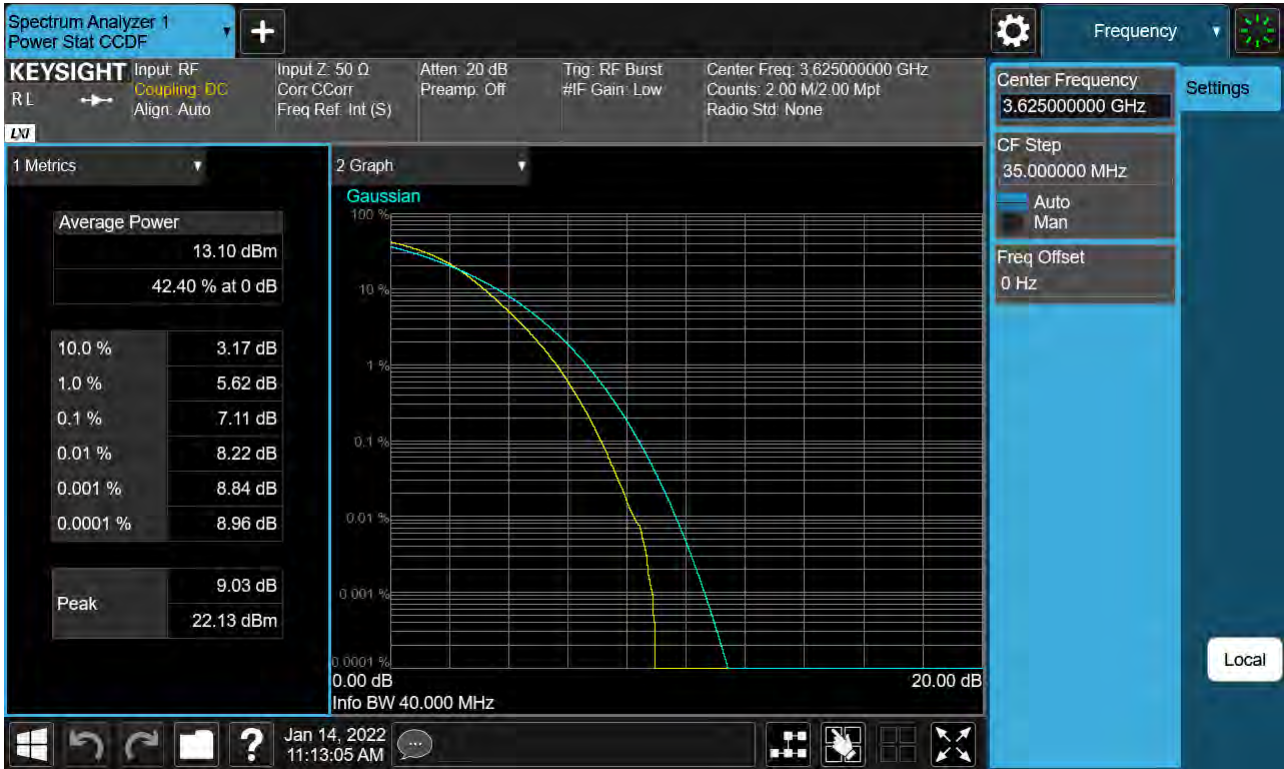

PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0_(16QAM)

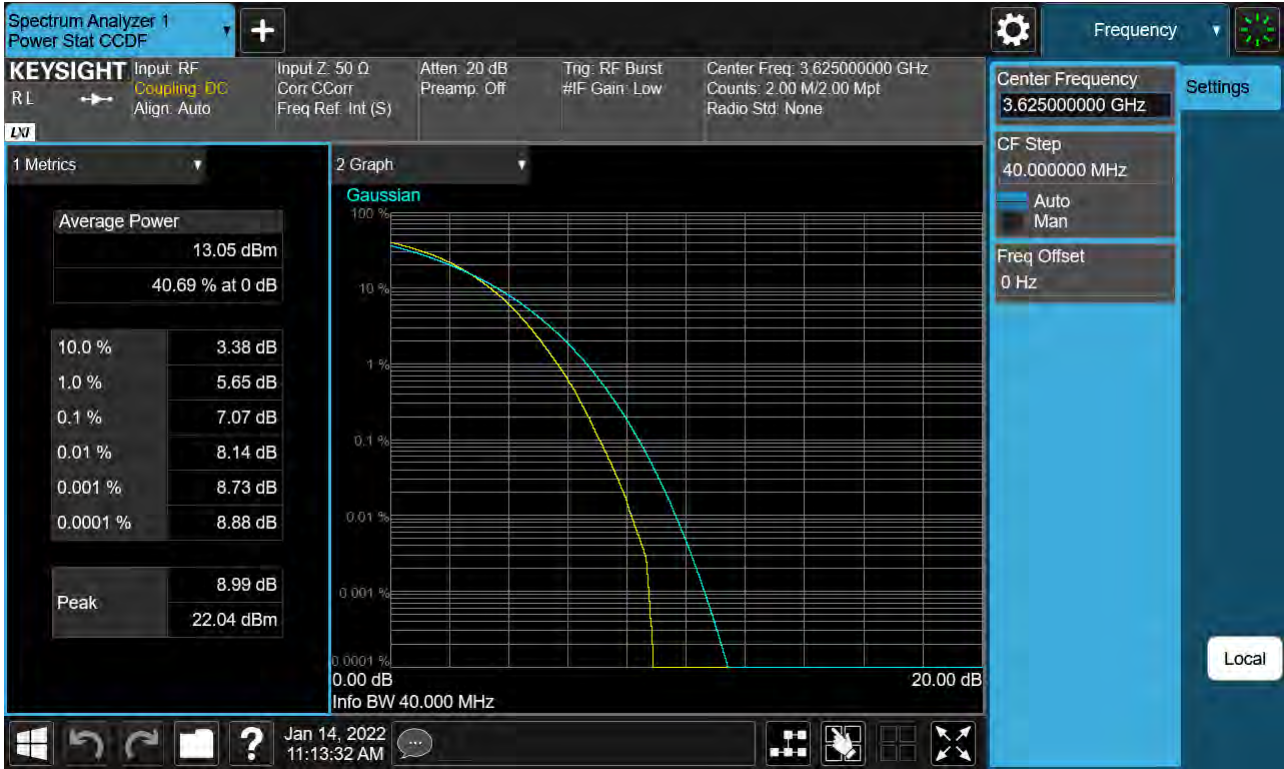

PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0_(64QAM)

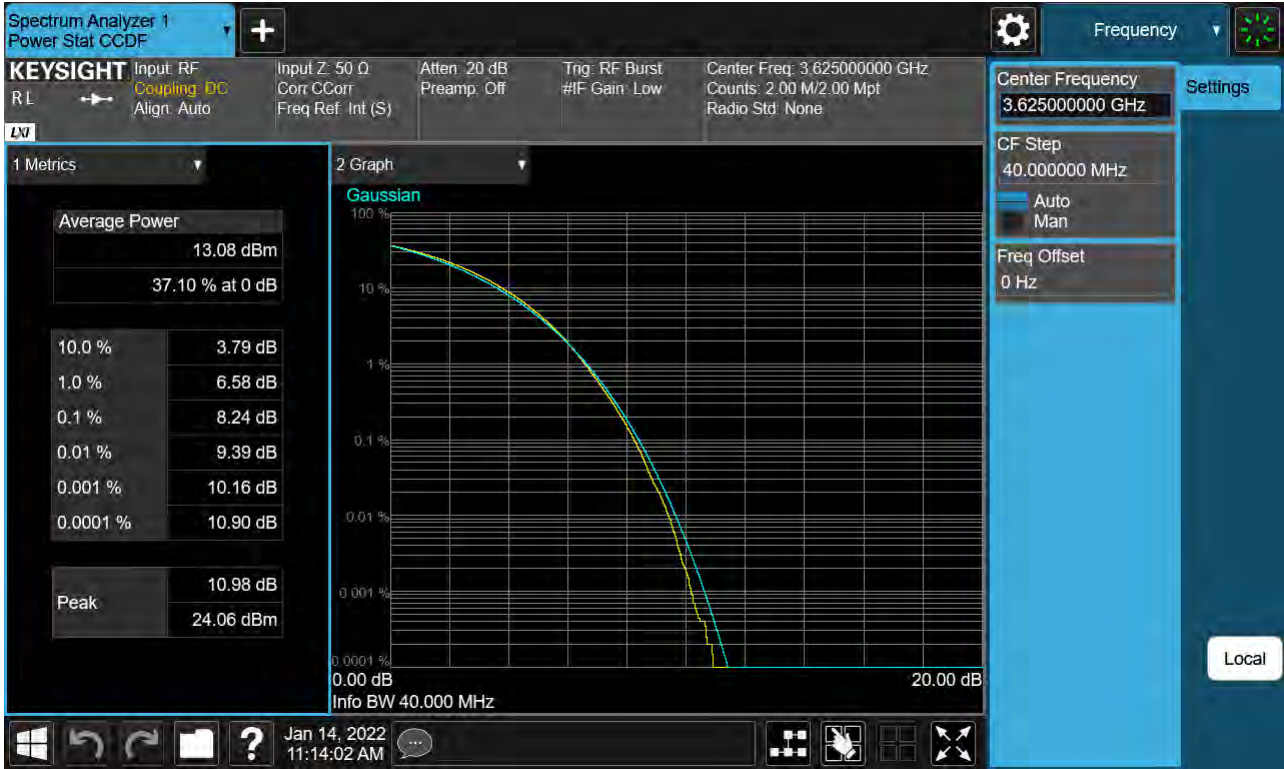

PCC 20 MHz Ch55891 RB100 Offset0, SCC 20 MHz Ch56089 RB100 Offset0_(256QAM)



9. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2201-FC063-P