

FCC NFC REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,
16677, Rep. of Korea

Date of Issue:
February 27, 2023

Test Site/Location:
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-
si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2302-FC026

FCC ID: A3LSMA546JPN

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SC-53D

Additional Model: SCG21

EUT Type: Mobile Phone

RF Output Field Strength: 13.75 dBμV/m @30 m

Frequency of Operation: 13.56 MHz

Modulation type: ASK

FCC Classification: Low Power Communication Device Transmitter (DXX)

FCC Rule Part(s): FCC Part 15.225 Subpart C

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2302-FC026

REVIEWED BY



Report prepared by : Jin Gwan Lee
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.
The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2302-FC026	February 27, 2023	- First Approval Report

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	6
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	7
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS.....	9
8. TEST SUMMARY	17
9. TEST RESULT	18
9.1. Operation within the band 13.110 MHz – 14.010 MHz.....	18
9.2. Radiated Emission 9kHz – 30 MHz	20
9.3. Radiated Emission 30 MHz – 1000 MHz	21
9.4. 20 dB Bandwidth	22
9.5. Frequency Stability	23
9.6. POWERLINE CONDUCTED EMISSIONS	27
10. LIST OF TEST EQUIPMENT	31
11. ANNEX A_ TEST SETUP PHOTO	33

1. EUT DESCRIPTION

Model	SC-53D
Additional Model	SCG21
EUT Type	Mobile Phone
Power Supply	DC 3.85 V
Frequency of Operation	13.56 MHz
Transmit Power	13.75 dBμV/m @30 m
Modulation Type	ASK
Date(s) of Tests	February 01, 2023 ~ February 27, 2023
Serial number	Radiated: R3CTC0EE5DJ

2. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013).

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

(1) The antennas of this E.U.T are permanently attached.

(2)The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Radiated Test

Limit (Operation within the band 13.110 MHz – 14.010 MHz)

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
13.553 – 13.567	15,848	30
13.410 $\leq f \leq$ 13.553 13.567 $\leq f \leq$ 13.710	334	30
13.110 $\leq f \leq$ 13.410 13.710 $\leq f \leq$ 14.010	106	30

Note:

1. 15,848 $\mu\text{V/m}$ = 84.0dB $\mu\text{V/m}$
2. 334 $\mu\text{V/m}$ = 50.47 dB $\mu\text{V/m}$
3. 106 $\mu\text{V/m}$ = 40.51dB $\mu\text{V/m}$

Limit(Radiated Spurious Emissions)


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	* 100	3
88-216	* 150	3
216-960	* 200	3
Above 960	500	3

※.


Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Test Configuration

Below 30 MHz

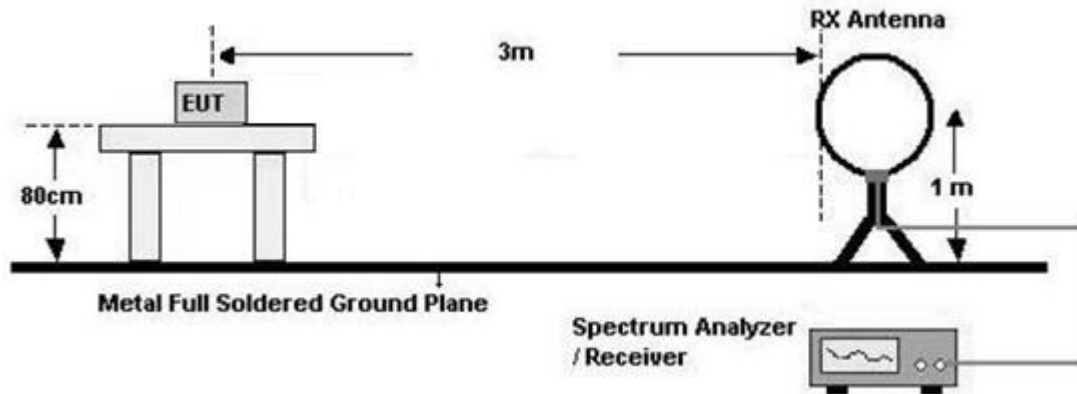

30 MHz - 1 GHz

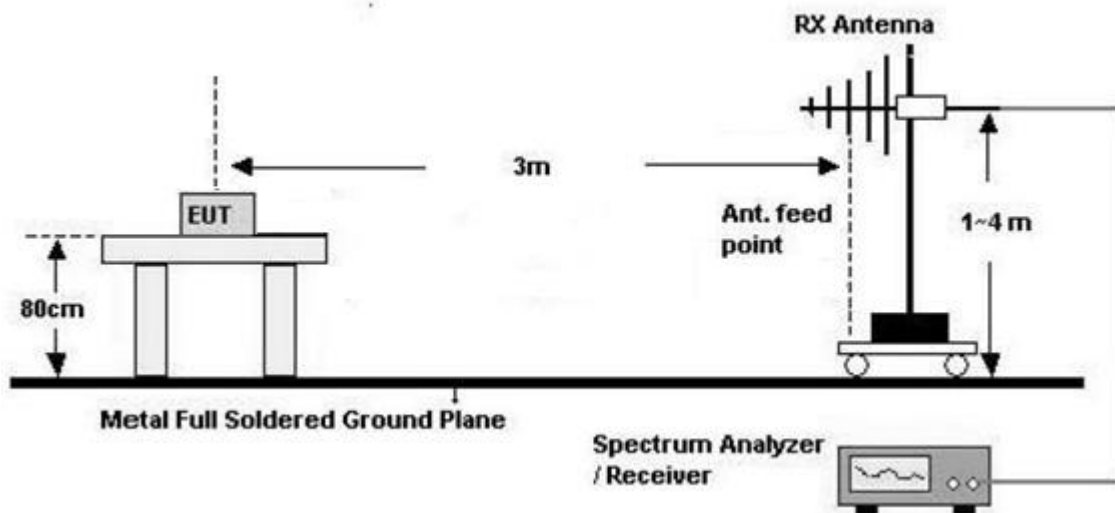

Test Procedure of in-band

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor = $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$
Measurement Distance : 3 m(Below30 MHz)
7. Spectrum Setting

1) Frequency Range = 9 kHz ~ 150 kHz

- Detector = Peak
- Trace = Maxhold
- RBW = 300 Hz
- VBW $\geq 3 \times$ RBW

2) Frequency Range = 150 kHz ~ 30 MHz

- Detector = Peak
- Trace = Maxhold
- RBW = 10 kHz
- VBW $\geq 3 \times$ RBW

8.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Test Procedure of Radiated spurious emissions(Below30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance : 3 m

8. Spectrum Setting

1) Frequency Range = 9 kHz ~ 150 kHz

- Detector = Peak
- Trace = Maxhold
- RBW = 300 Hz
- VBW $\geq 3 \times$ RBW

2) Frequency Range = 150 kHz ~ 30 MHz

- Detector = Peak
- Trace = Maxhold
- RBW = 10 kHz
- VBW $\geq 3 \times$ RBW

9.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.


OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Above30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - Frequency Range = 30 MHz ~ 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW $\geq 3 \times$ RBW
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

7.2. 20 dB Bandwidth

Test Configuration

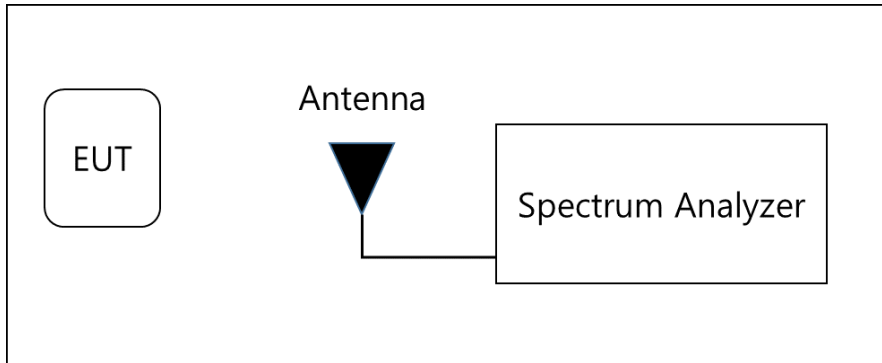

Test Procedure

The 20 dB bandwidth was measured by using a spectrum analyzer.

(Procedure 6.9.2 in ANSI 63.10-2013)

- 1) RBW = 1 %~5 % of the OBW
- 2) VBW = approximately three times RBW
- 3) Span = between two times and five times the OBW
- 4) Detector = Peak
- 5) Trace mode = Max hold
- 6) Allow the trace to stabilize

Note :


We tested Occupied Bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Frequency Stability

Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Test Configuration

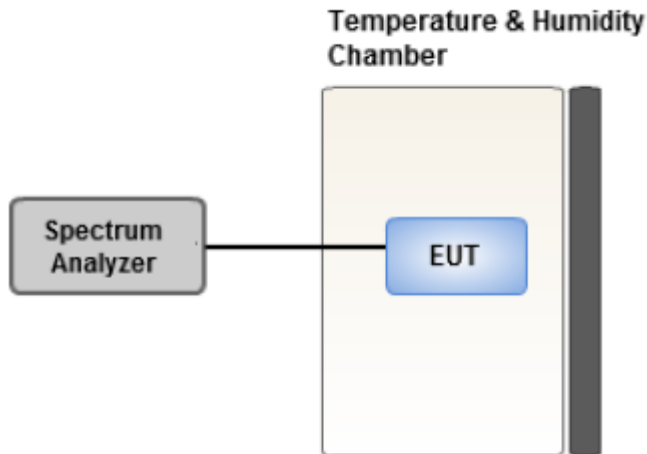

Test Procedure.

For battery operated equipment, the equipment tests shall be performed using a new battery.

- 1) Turn the EUT OFF and place it inside the environmental temperature chamber.
For devices that have oscillator heaters, energize only the heater circuit.
- 2) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- 3) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- 4) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Note:

- 1) Temperature:
The temperature is varied from -20°C to $+50^{\circ}\text{C}$ using an environmental chamber.
- 2) Primary Supply Voltage :
The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment.
For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

7.4. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

7.5. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + external accessories(Earphone, etc)
 - Worst case : Stand alone
2. EUT Axis : Y
3. All type and bitrate were investigated and the worst case results are reported.
 - Worst case : Type A, 106 kbps
4. All mode of without tag and with tag were investigated and the worst case configuration results are reported.
 - Worst case : Without Tag
5. All position of loop antenna were investigated and the worst case configuration results are reported.
 - Position : Horizontal, Vertical, Parallel to the ground plane
 - Worst case : Horizontal
6. SC-53D, SCG21 were tested and the worst case results are reported.
(Worst case : SC-53D)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Earphone + Travel Adapter, Stand alone + Travel Adapter
 - Worst case : Stand alone + Travel Adapter
2. All modes(For unterminated the Antenna, terminated the Antenna) of operation were investigated and the worst case configuration results are reported.
 - Worst case : Unterminated the Antenna
3. SC-53D, SCG21 were tested and the worst case results are reported.
(Worst case : SC-53D)

20 dB Bandwidth & Frequency Stability

1. All type and bitrate were investigated and the worst case results are reported.
 - Worst case : Type A, 106 kbps
2. SC-53D, SCG21 were tested and the worst case results are reported.
(Worst case : SC-53D)

8. TEST SUMMARY

Regulation	Requirement	Result
Part 15.225 (a)	Radiated Electric Field Emissions (13.553MHz to 13.567MHz)	Pass
Part 15.225 (b)	Radiated Electric Field Emissions ($13.410 \leq f \leq 13.553$, $13.567 \leq f \leq 13.710$)	Pass
Part 15.225 (c)	Radiated Electric Field Emissions ($13.110 \leq f \leq 13.410$, $13.710 \leq f \leq 14.010$)	Pass
Part 15.209	Radiated Electric Field Emissions (9kHz to 30MHz)	Pass
Part 15.209	Radiated Electric Field Emissions (30MHz to 1GHz)	Pass
Part 15.225 (e)	Frequency Stability	Pass
Part 15.207	AC power conducted emissions (150kHz to 30MHz)	Pass
Part 15.215 (c)	20 dB Bandwidth	Pass

9. TEST RESULT

9.1. Operation within the band 13.110 MHz – 14.010 MHz


Measured Frequency Range : 13.553 MHz-13.567 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @30 m	Limit (dBμV/m) @30 m	Margin (dB)
13.5610	33.16	20.59	-40.00	H	13.75	84.00	70.25
13.5609	33.14	20.59	-40.00	V	13.73	84.00	70.27

Measured Frequency Range : 13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @30 m	Limit (dBμV/m) @30 m	Margin (dB)
13.5530	26.57	20.59	-40.00	H	7.16	50.47	43.31
13.5671	28.26	20.59	-40.00	H	8.85	50.47	41.62

Measured Frequency Range : 13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @30 m	Limit (dBμV/m) @30 m	Margin (dB)
13.3488	18.97	20.59	-40.00	H	-0.44	40.51	40.95
13.7717	18.40	20.59	-40.00	H	-1.01	40.51	41.52


Test Plot

13.553 MHz ~ 13.567 MHz

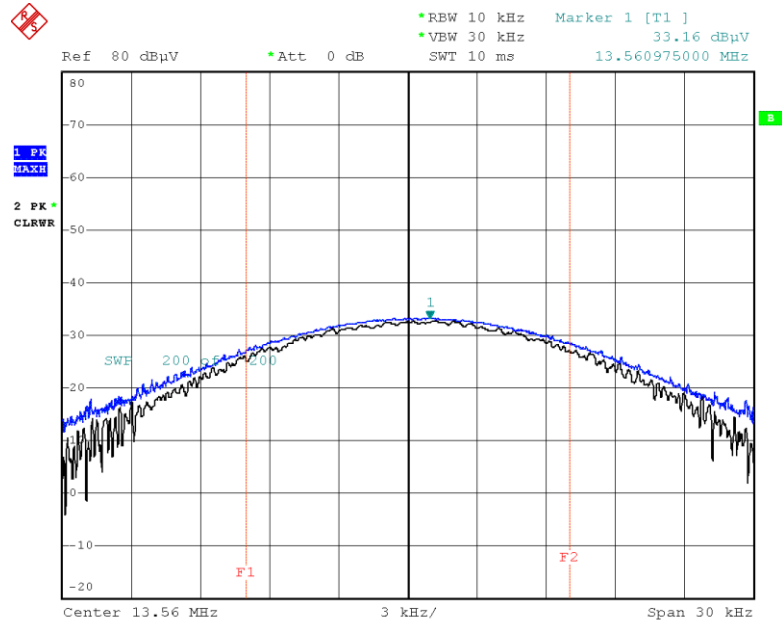

Date: 13.FEB.2023 10:10:34

Worst Case (13.110 MHz – 13.410 MHz)

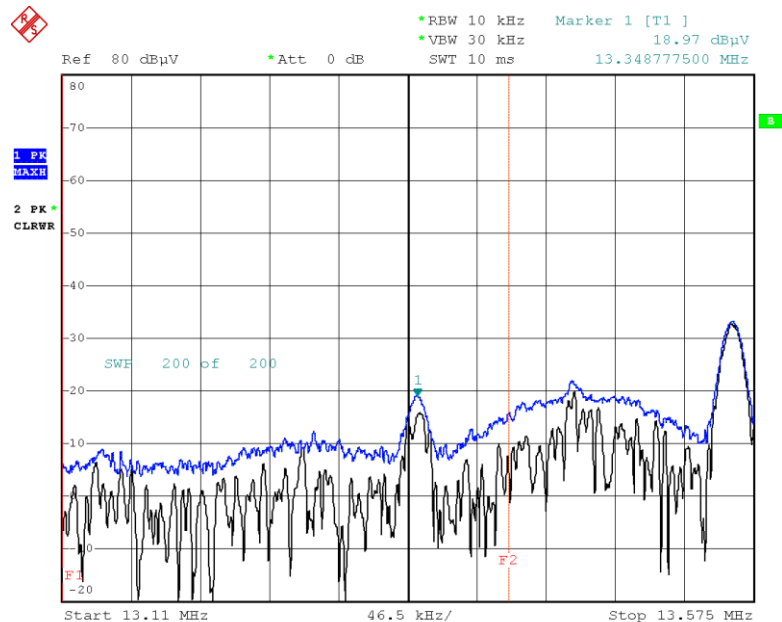

Date: 13.FEB.2023 10:14:00


Note:

Plot of worst case are only reported.

9.2. Radiated Emission 9kHz – 30 MHz

Measured Frequency Range : 9 kHz - 30 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dBμV/m) @30 m	Limit (dBμV/m) @30 m	Margin (dB)
9.6580	33.304	20.60	-40.00	H	13.90	29.54	15.64
19.1334	9.416	20.93	-40.00	H	-9.65	29.54	39.19
24.8600	8.846	20.74	-40.00	H	-10.42	29.54	39.96
28.4500	7.972	20.74	-40.00	V	-11.29	29.54	40.83

Test Plot

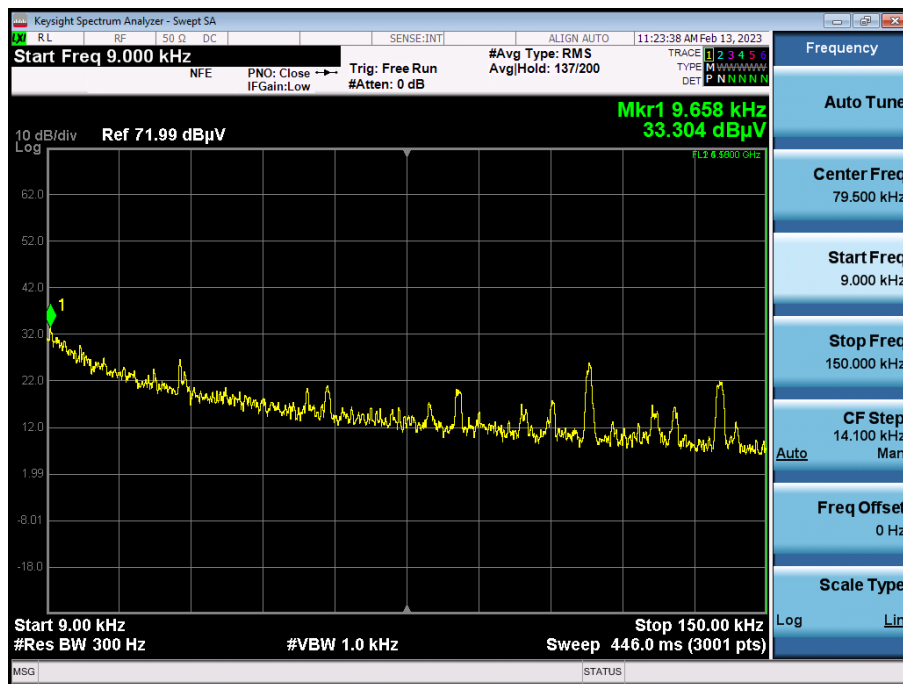

Note:

Plot of worst case was only reported


9.3. Radiated Emission 30 MHz – 1000 MHz

Measured Frequency Range : 30 MHz - 1000 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant. Factor (dB/m)	Cable Loss (dB)	Ant. Pol (H/V)	Total (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.5850	2.831	12.00	0.51	V	15.34	40.00	24.66
#38.051	2.037	13.10	0.75	H	15.89	40.00	24.11
72.7490	3.371	11.50	0.96	V	15.84	40.00	24.16
78.7830	7.487	8.50	1.04	V	17.03	40.00	22.97
#130.015	3.114	11.70	1.44	H	16.25	43.50	27.25
#168.218	2.245	13.30	1.53	V	17.07	43.50	26.43

Note:

1. # is the result for restricted band.

Test Plot

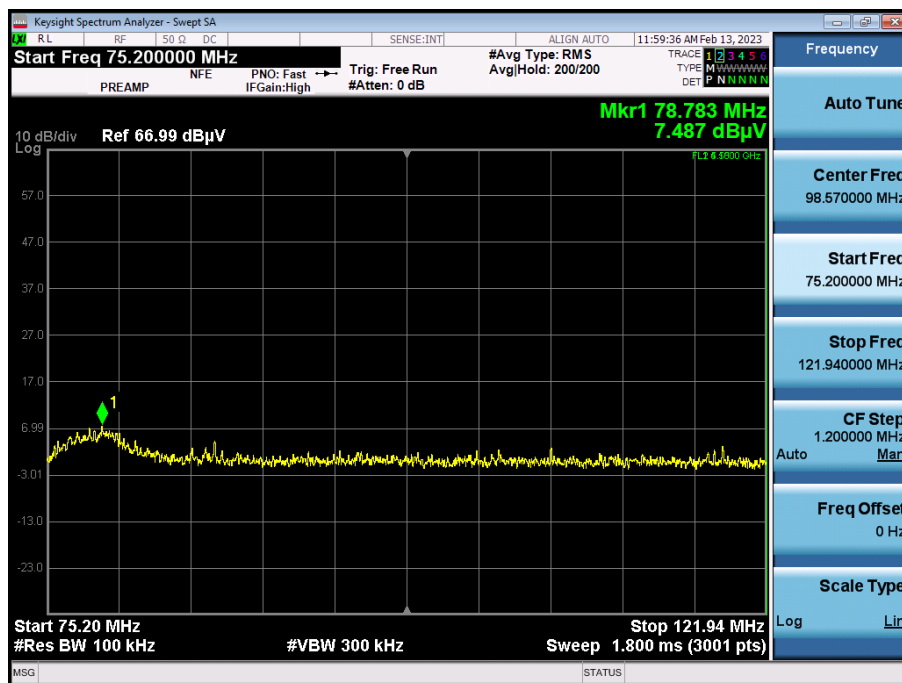

Note:

Plot of worst case was only reported

9.4. 20 dB Bandwidth



9.5. Frequency Stability

Startup

OPERATING FREQUENCY: 13.56 MHz

REFERENCE VOLTAGE: 3.85 VDC

DEVIATION LIMIT: $\pm 0.01 \% = \pm 1356 \text{ Hz}$

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560012	12	0.0000898
100%		-10	13.560019	19	0.0001415
100%		0	13.560034	34	0.0002482
100%		+10	13.560059	59	0.0004324
100%		+20(Ref.)	13.560043	43	0.0003136
100%		+30	13.560081	81	0.0005972
100%		+40	13.560086	86	0.0006347
100%		+50	13.560063	63	0.0004668
LOW	3.65	+20	13.560025	25	0.0001845
HIGH	4.4	+20	13.560071	71	0.0005202

2 minutes

PERATING FREQUENCY: 13.56 MHz

REFERENCE VOLTAGE: 3.85 VDC

DEVIATION LIMIT: $\pm 0.01 \% = \pm 1356 \text{ Hz}$

Voltage (%)	Power (VDC)	Temp. (℃)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560078	78	0.0005767
100%		-10	13.560079	79	0.0005844
100%		0	13.560052	52	0.0003803
100%		+10	13.560058	58	0.0004299
100%		+20(Ref.)	13.560006	6	0.0000454
100%		+30	13.560078	78	0.0005779
100%		+40	13.560043	43	0.0003150
100%		+50	13.560091	91	0.0006676
LOW	3.65	+20	13.560081	81	0.0005971
HIGH	4.4	+20	13.560064	64	0.0004723

5 minutes

PERATING FREQUENCY: 13.56 MHz

REFERENCE VOLTAGE: 3.85 VDC

DEVIATION LIMIT: $\pm 0.01 \% = \pm 1356 \text{ Hz}$

Voltage (%)	Power (VDC)	Temp. (℃)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560052	52	0.0003827
100%		-10	13.560046	46	0.0003401
100%		0	13.560004	4	0.0000301
100%		+10	13.560032	32	0.0002361
100%		+20(Ref.)	13.560047	47	0.0003497
100%		+30	13.560069	69	0.0005111
100%		+40	13.560087	87	0.0006448
100%		+50	13.560027	27	0.0002018
LOW	3.65	+20	13.560046	46	0.0003390
HIGH	4.4	+20	13.560044	44	0.0003229

10 minutes

PERATING FREQUENCY: 13.56 MHz

REFERENCE VOLTAGE: 3.85 VDC

DEVIATION LIMIT: $\pm 0.01 \% = \pm 1356 \text{ Hz}$

Voltage (%)	Power (VDC)	Temp. (℃)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560044	44	0.0003254
100%		-10	13.560003	3	0.0000235
100%		0	13.560097	97	0.0007183
100%		+10	13.560051	51	0.0003757
100%		+20(Ref.)	13.560049	49	0.0003629
100%		+30	13.560096	96	0.0007060
100%		+40	13.560080	80	0.0005923
100%		+50	13.560067	67	0.0004954
LOW	3.65	+20	13.560070	70	0.0005193
HIGH	4.4	+20	13.560067	67	0.0004934

9.6. POWERLINE CONDUCTED EMISSIONS

Conducted Emissions

Test

1 / 2

Test Report

Common Information

EUT :


SC-53D

Operating Conditions :

NFC Interm Mode

Comment :

Full Spectrum

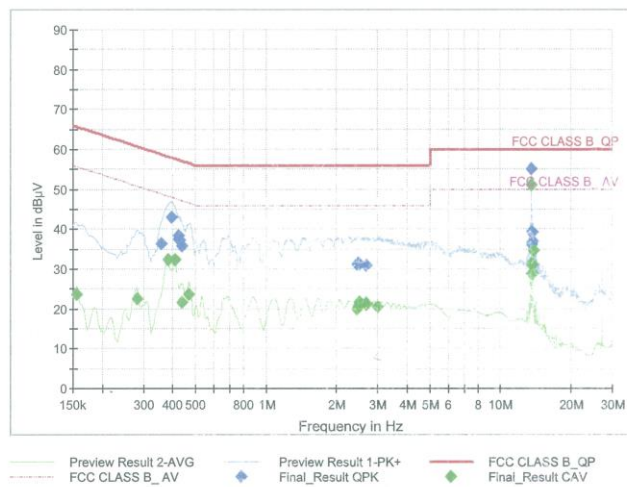

Final Result_QPK

Frequency (MHz)	QuasiPeak (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.3570	36.36	58.80	22.44	1000.0	9.000	L1	OFF	9.7
0.3953	43.12	57.95	14.83	1000.0	9.000	L1	OFF	9.7
0.4200	38.22	57.45	19.22	1000.0	9.000	L1	OFF	9.7
0.4245	37.57	57.36	19.78	1000.0	9.000	L1	OFF	9.7
0.4290	37.26	57.27	20.01	1000.0	9.000	L1	OFF	9.7
0.4358	35.74	57.14	21.41	1000.0	9.000	L1	OFF	9.7
2.4373	31.25	56.00	24.75	1000.0	9.000	L1	OFF	9.7
2.4440	31.26	56.00	24.74	1000.0	9.000	L1	OFF	9.7
2.4688	31.34	56.00	24.66	1000.0	9.000	L1	OFF	9.7
2.4845	31.10	56.00	24.90	1000.0	9.000	L1	OFF	9.7
2.4935	31.20	56.00	24.80	1000.0	9.000	L1	OFF	9.7
2.6600	30.79	56.00	25.21	1000.0	9.000	L1	OFF	9.8
13.4465	36.42	60.00	23.58	1000.0	9.000	L1	OFF	10.1
13.4555	39.22	60.00	20.78	1000.0	9.000	L1	OFF	10.1
13.4780	36.19	60.00	23.81	1000.0	9.000	L1	OFF	10.1
13.5613	55.02	60.00	4.98	1000.0	9.000	L1	OFF	10.1
13.6580	36.86	60.00	23.14	1000.0	9.000	L1	OFF	10.2
13.6670	39.36	60.00	20.64	1000.0	9.000	L1	OFF	10.2

2023-02-16

오후 8:10:23

Test

2 / 2

Final Result_CAV

Final Result_CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	23.54	55.75	32.21	1000.0	9.000	L1	OFF	9.7
0.2805	22.59	50.80	28.21	1000.0	9.000	L1	OFF	9.7
0.3795	32.24	48.29	16.05	1000.0	9.000	L1	OFF	9.7
0.4065	32.23	47.72	15.49	1000.0	9.000	L1	OFF	9.7
0.4358	21.58	47.14	25.56	1000.0	9.000	L1	OFF	9.7
0.4695	23.63	46.52	22.89	1000.0	9.000	L1	OFF	9.7
2.4530	20.02	46.00	25.98	1000.0	9.000	L1	OFF	9.7
2.4845	21.16	46.00	24.84	1000.0	9.000	L1	OFF	9.7
2.5003	21.54	46.00	24.46	1000.0	9.000	L1	OFF	9.8
2.6780	21.12	46.00	24.88	1000.0	9.000	L1	OFF	9.8
2.6848	21.39	46.00	24.61	1000.0	9.000	L1	OFF	9.8
2.9795	20.58	46.00	25.42	1000.0	9.000	L1	OFF	9.8
13.4555	31.19	50.00	18.81	1000.0	9.000	L1	OFF	10.1
13.4668	28.97	50.00	21.03	1000.0	9.000	L1	OFF	10.1
13.5613	51.08	50.00	-1.08	1000.0	9.000	L1	OFF	10.1
13.6535	28.96	50.00	21.04	1000.0	9.000	L1	OFF	10.2
13.6670	31.25	50.00	18.75	1000.0	9.000	L1	OFF	10.2
13.7728	34.49	50.00	15.51	1000.0	9.000	L1	OFF	10.2

2023-02-16

오후 8:10:23

Test

1 / 2

Test Report

Common Information

EUT :


SC-53D

Operating Conditions :

NFC Term Mode

Comment :

Full Spectrum

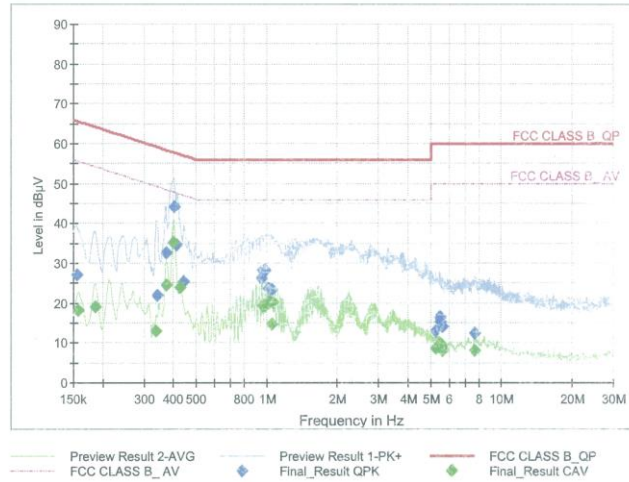

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	27.22	65.75	38.54	1000.0	9.000	N	OFF	9.6
0.3413	21.99	59.17	37.19	1000.0	9.000	L1	OFF	9.7
0.3728	32.59	58.44	25.85	1000.0	9.000	L1	OFF	9.7
0.4020	44.16	57.81	13.65	1000.0	9.000	L1	OFF	9.7
0.4133	34.62	57.58	22.96	1000.0	9.000	L1	OFF	9.7
0.4425	25.34	57.02	31.67	1000.0	9.000	L1	OFF	9.7
0.9478	26.13	56.00	29.87	1000.0	9.000	L1	OFF	9.7
0.9545	28.19	56.00	27.81	1000.0	9.000	L1	OFF	9.7
0.9770	28.28	56.00	27.72	1000.0	9.000	L1	OFF	9.7
0.9838	27.95	56.00	28.05	1000.0	9.000	L1	OFF	9.7
1.0175	23.68	56.00	32.32	1000.0	9.000	L1	OFF	9.7
1.0490	23.28	56.00	32.72	1000.0	9.000	L1	OFF	9.7
5.2498	13.02	60.00	46.98	1000.0	9.000	L1	OFF	9.8
5.4500	16.32	60.00	43.68	1000.0	9.000	L1	OFF	9.9
5.4793	16.40	60.00	43.60	1000.0	9.000	L1	OFF	9.9
5.5108	15.31	60.00	44.69	1000.0	9.000	L1	OFF	9.9
5.6008	14.01	60.00	45.99	1000.0	9.000	L1	OFF	9.9
7.6663	12.34	60.00	47.66	1000.0	9.000	L1	OFF	9.9

2023-02-16

오후 8:46:47

Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1568	18.05	55.63	37.58	1000.0	9.000	L1	OFF	9.7
0.1860	19.17	54.21	35.05	1000.0	9.000	L1	OFF	9.7
0.3390	12.90	49.23	36.33	1000.0	9.000	L1	OFF	9.7
0.3750	24.59	48.39	23.80	1000.0	9.000	L1	OFF	9.7
0.3998	35.24	47.86	12.62	1000.0	9.000	L1	OFF	9.7
0.4290	23.82	47.27	23.45	1000.0	9.000	L1	OFF	9.7
0.9545	19.38	46.00	26.62	1000.0	9.000	L1	OFF	9.7
0.9838	19.46	46.00	26.54	1000.0	9.000	L1	OFF	9.7
1.0108	19.82	46.00	26.18	1000.0	9.000	L1	OFF	9.7
1.0310	20.51	46.00	25.49	1000.0	9.000	L1	OFF	9.7
1.0468	14.81	46.00	31.19	1000.0	9.000	L1	OFF	9.7
1.0580	20.08	46.00	25.92	1000.0	9.000	L1	OFF	9.7
5.2340	8.61	50.00	41.39	1000.0	9.000	L1	OFF	9.8
5.4793	9.82	50.00	40.18	1000.0	9.000	L1	OFF	9.9
5.5085	9.17	50.00	40.83	1000.0	9.000	L1	OFF	9.9
5.6008	8.24	50.00	41.76	1000.0	9.000	L1	OFF	9.9
5.6300	8.12	50.00	41.88	1000.0	9.000	L1	OFF	9.9
7.6663	8.22	50.00	41.78	1000.0	9.000	L1	OFF	9.9

2023-02-16

오후 8:46:47

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/04/2023	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	09/06/2023	Annual
DC Power Supply	E3632A	Agilent	KR75305528	01/03/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	06/21/2023	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/18/2023	Biennial
Spectrum Analyzer	FSP(9 kHz ~ 30 GHz)	Rohde & Schwarz	836650/016	09/06/2023	Annual
Spectrum Analyzer	FSV40-N(9 kHz ~ 30 GHz)	Rohde & Schwarz	101068-SZ	09/07/2023	Annual
ATT(3 dB) + LNA2(6~18 GHz)	18B-03, CBL06185030	WEINSCHEL CERNEX	N/A	12/05/2023	Annual
ATT(10 dB) + LNA1(0.1~18 GHz)	56-10, CBLU1183540B-01	Api tech, CERNEX	N/A	12/05/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/11/2023	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2302-FC026-P