



CERTIFICATION TEST REPORT

Report Number. : 4791083081-E9V1

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SC-53E, SCG27

FCC ID : A3LSMA556JPN

EUT Description : GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,
and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:
2024-01-26

Prepared by:
UL KOREA LTD.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	2024-01-26	Initial issue	Dexter(Hyunsik) Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	6
4.2. <i>SAMPLE CALCULATION.....</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY</i>	6
4.4. <i>DECISION RULE</i>	6
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT.....</i>	7
5.2. <i>MAXIMUM E-FIELD STRENGTH.....</i>	7
5.3. <i>WORST-CASE CONFIGURATION AND MODE</i>	7
5.4. <i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	9
7. 20dB BANDWIDTH	10
8. RADIATED EMISSION TEST RESULTS.....	11
8.1. <i>LIMITS AND PROCEDURE</i>	11
8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)	13
8.1.2. SPURIOUS EMISSION 0.009 TO 30 MHz	14
8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz	15
8.1.4. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT without passive TAG mode]	16
8.1.5. SPURIOUS EMISSION 0.09 TO 30 MHz [EUT without passive TAG mode].....	17
8.1.6. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT without passive TAG mode] ...	18
9. AC MAINS LINE CONDUCTED EMISSIONS	19
10. FREQUENCY STABILITY	24

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, and NFC

MODEL NUMBER: SC-53E, SCG27

SERIAL NUMBER: R3CWC03BRHJ, R3CWC03BQTT (RADIATED);

DATE TESTED: 2023-12-20 ~ 2024-01-26

APPLICABLE STANDARDS		TEST RESULTS
STANDARD		
CFR 47 Part 15 Subpart C		Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL KOREA LTD. By:

Seokhwan Hong
Suwon Lab Engineer
UL KOREA LTD.

Tested By:

Dexter(Hyunsik) Yun
Suwon Lab Engineer
UL KOREA LTD.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. ANSI C63.10-2013.
4. KDB 414788 D01 Radiated Test Site v01r01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\begin{aligned} \text{Corrected Reading (dBuV)} &= \text{Meter Reading (dBuV)} + \text{External Cable (dB)} + \\ &\text{Cableloss (dB)} \\ 46.62 \text{ dBuV} + 9.8 \text{ dB} + 0.1 \text{ dB} &= 56.52 \text{ dBuV} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.80 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.69 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.92 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2021.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, and NFC. This test report addresses the DXX (NFC) operational mode.

Representative model	Difference	Derivative model
		SCG27
SC-53E	Hardware	Same as SC-53E
	Software	Different UI

The model SC-53E was used for final testing and is representative of the test results in this report.

5.2. MAXIMUM E-FIELD STRENGTH

The testing was performed at 3 meter. The transmitter maximum E-field at 30m distance is 16.08 dBuV/m which convert from 3 meter data.

5.3. WORST-CASE CONFIGURATION AND MODE

The NFC function was tested at its' fundamental and only operational frequency of 13.56 MHz.

Worst case of antenna axis:

NFC with tag mode	NFC without tag mode
Z	Z

The fundamental level of the EUT was investigated each type and bitrate.
All test was performed worst case condition.

- ISO/IEC 14443-A(Type A) and bit rate 106 kbps

Radiated(fundamental level and spurious emissions) tests were performed both without reading a passive tag condition[test mode] and with reading a passive tag condition.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37W61WENTASEA	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02117A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A

The EUT is a stand-alone device configured and tested in a worst-case setup.

Note: Worst case is using worst case orientation with AC charger attached to the EUT with NFC signal continuously transmitting.

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

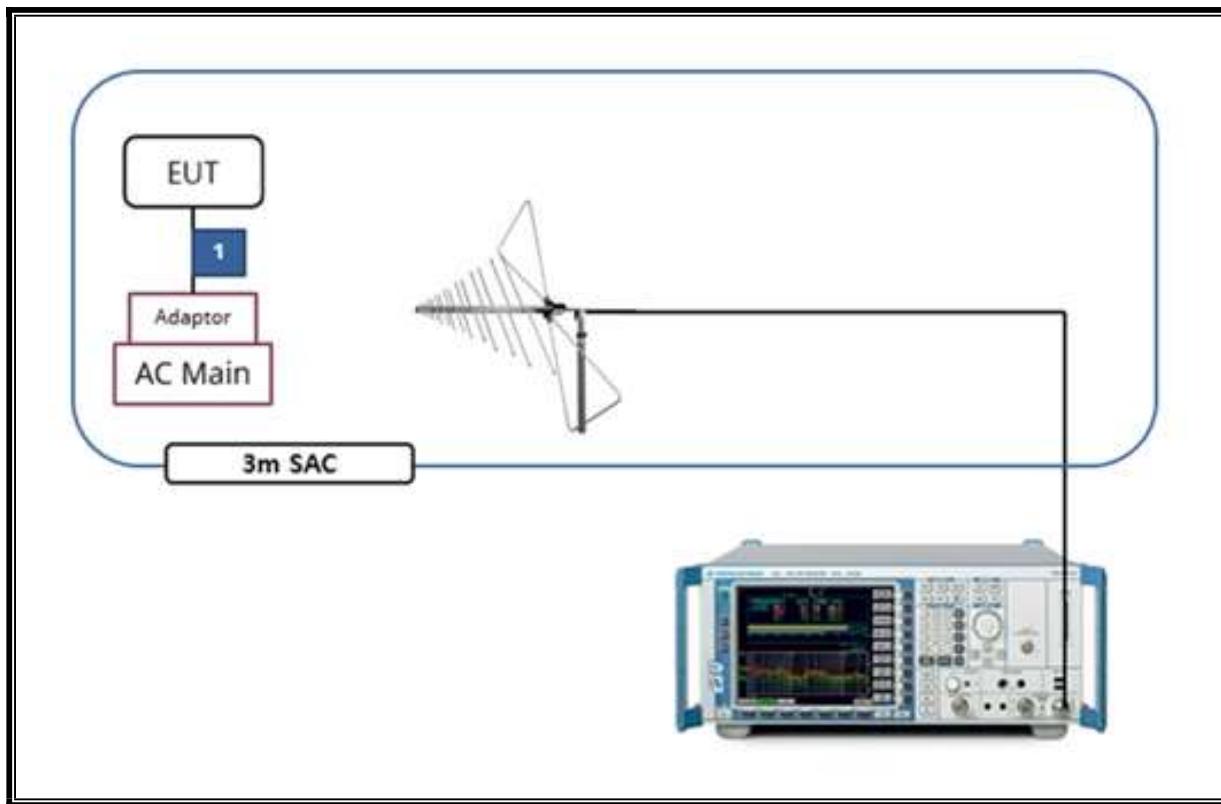

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2024-08-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2024-08-15
Preamplifier, 1000 MHz	Sonoma	310N	341282	2024-07-24
Preamplifier, 1000 MHz	Sonoma	310N	351741	2024-07-24
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	2024-07-23
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9030A	MY54170614	2024-07-24
EMI Test Receive, 3 GHz	R&S	ESR3	101832	2024-07-23
DC Power Supply	Agilent / HP	E3640A	MY54226395	2024-07-24
Temperature Chamber	ESPEC	SH-642	93001109	2024-07-24
LISN	R&S	ENV-216	101836	2024-07-23
LISN	R&S	ENV-216	101837	2024-07-23
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2025-09-06
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. 20dB BANDWIDTH

LIMITS

§15.215

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated

§15.225

Operation within the band 13.110 – 14.010MHz

TEST PROCEDURE

The spectrum analyzer connected receive antenna and the EUT placed on near the receive antenna. The RBW is set to 1-5% of emission BW. The VBW is set to 3 times the RBW. The sweep time is coupled.

RESULTS

Frequency [MHz]	20 dB Bandwidth [kHz]
13.56	435

20dB Bandwidth Plot



8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

§15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (μ V/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE


ANSI C63.10-2013

The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)

RESULTS

No non-compliance noted:

8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT with passive TAG mode]

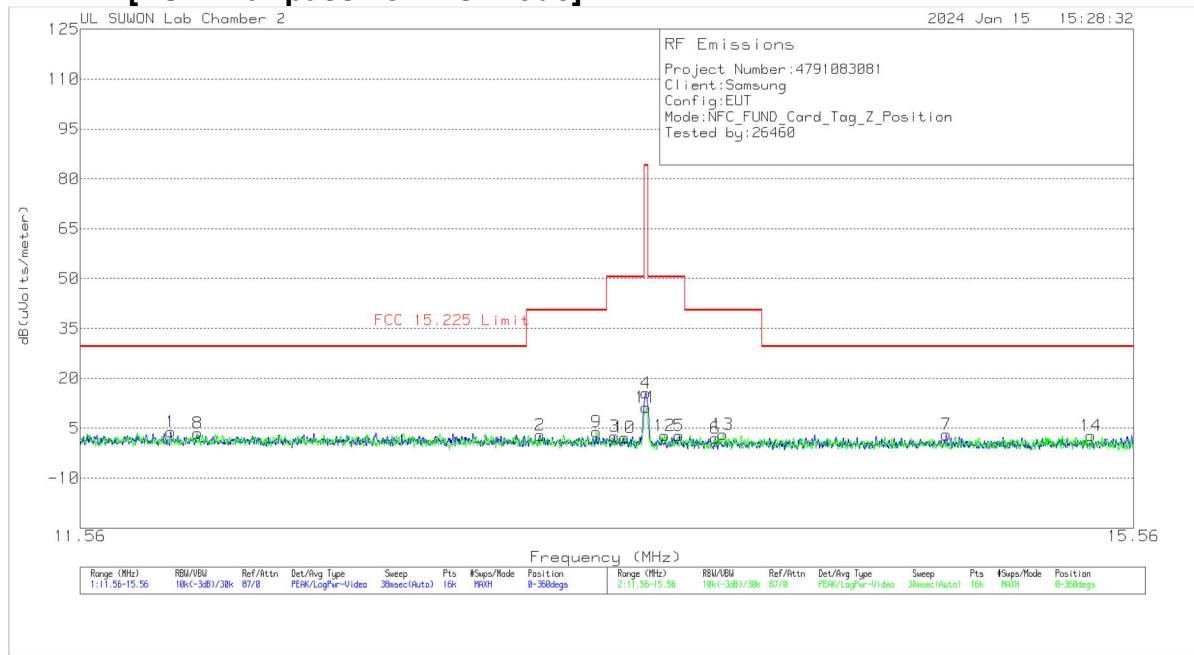

Trace Markers

Face on

Marker	Frequency (MHz)	Meter Reading (dBcV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m(dB)	Cable Loss (dB)	Corrected Reading (dBcV/m)	QP Limit (dBcV/m)	Margin (dB)	Azimuth (Degs)
1	11.859	23.26	Pk	20.2	-40	.5	3.96	29.54	-25.58	0-360
2	13.16088	22.29	Pk	20.1	-40	.5	2.89	40.51	-37.62	0-360
3	13.44038	22.03	Pk	20.1	-40	.5	2.63	50.5	-47.87	0-360
**4	13.55988	35.02	Pk	20.1	-40	.5	15.62	84	-68.38	0-360
5	13.6885	22.05	Pk	20.1	-40	.6	2.75	50.5	-47.75	0-360
6	13.82813	21.37	Pk	20.1	-40	.6	2.07	40.51	-38.44	0-360
7	14.76	22.38	Pk	20.1	-40	.6	3.08	29.54	-26.46	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dBcV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m(dB)	Cable Loss (dB)	Corrected Reading (dBcV/m)	QP Limit (dBcV/m)	Margin (dB)	Azimuth (Degs)
8	11.94963	22.88	Pk	20.2	-40	.5	3.58	29.54	-25.96	0-360
9	13.37238	23.34	Pk	20.1	-40	.5	3.94	40.51	-36.57	0-360
10	13.47813	21.7	Pk	20.1	-40	.5	2.3	50.5	-48.2	0-360
**11	13.56038	30.65	Pk	20.1	-40	.5	11.25	84	-72.75	0-360
12	13.63138	22.11	Pk	20.1	-40	.6	2.81	50.5	-47.69	0-360
13	13.85888	22.48	Pk	20.1	-40	.6	3.18	40.51	-37.33	0-360
14	15.37538	22.1	Pk	20.1	-40	.6	2.8	29.54	-26.74	0-360

Pk - Peak detector

**Fundamental


Note 1 : Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.2. SPURIOUS EMISSION 0.009 TO 30 MHz

[EUT with passive TAG mode]

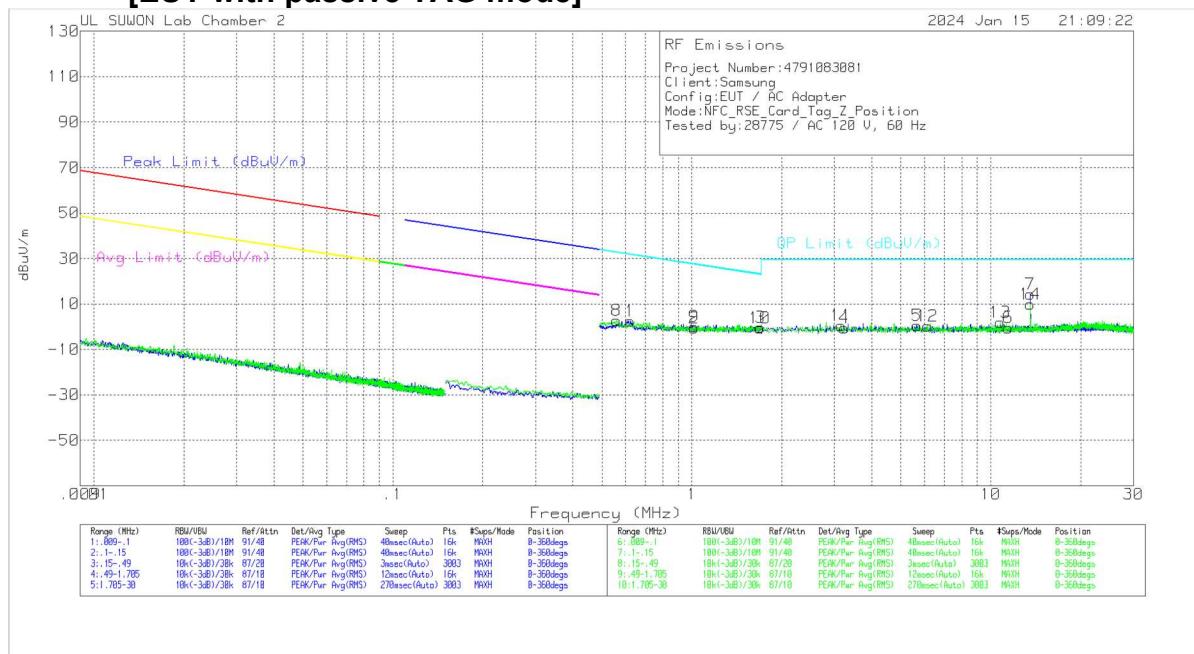

Trace Markers

Face on

Marker	Frequency (MHz)	Meter Reading (dB _{UV})	Det	Antenna Correction Factor(dB/m)	Loss(dB)	Dist Corr 30m(dB)	Corrected Reading (dB _{UV} /m)	QP Limit (dB _{UV} /m)	Margin (dB)	Azimuth (Degs)
1	.62304	22.26	Pk	20	.1	-40	2.36	31.72	-29.36	0-360
2	1.01847	19.25	Pk	20	.2	-40	-.55	27.46	-28.01	0-360
3	1.69403	19.53	Pk	20.1	.2	-40	-.17	23.06	-23.23	0-360
4	3.23185	18.94	Pk	20.2	.3	-40	-.56	29.5	-30.06	0-360
5	5.6635	19.94	Pk	20.2	.4	-40	.54	29.5	-28.96	0-360
6	11.42218	18.89	Pk	20.2	.5	-40	-.41	29.5	-29.91	0-360
**7	13.56165	33.82	Pk	20.1	.5	-40	14.42	29.5	-15.08	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dB _{UV})	Det	Antenna Correction Factor(dB/m)	Loss(dB)	Dist Corr 30m(dB)	Corrected Reading (dB _{UV} /m)	QP Limit (dB _{UV} /m)	Margin (dB)	Azimuth (Degs)
8	.56049	22.74	Pk	20	.1	-40	2.84	32.64	-29.8	0-360
9	1.01687	19.77	Pk	20	.2	-40	-.03	27.48	-27.51	0-360
10	1.69027	19.09	Pk	20.1	.2	-40	-.61	23.08	-23.69	0-360
11	3.15645	20.16	Pk	20.2	.3	-40	.66	29.5	-28.84	0-360
12	6.14418	19.66	Pk	20.2	.4	-40	.26	29.5	-29.24	0-360
13	10.73415	21.19	Pk	20.2	.5	-40	1.89	29.5	-27.61	0-360
**14	13.56165	29.43	Pk	20.1	.5	-40	10.03	29.5	-19.47	0-360

Pk - Peak detector

**Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal.

Please refer to section 8.1.1 about the fundamental level.


Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.


8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz

[EUT with passive TAG mode]

HORIZONTAL

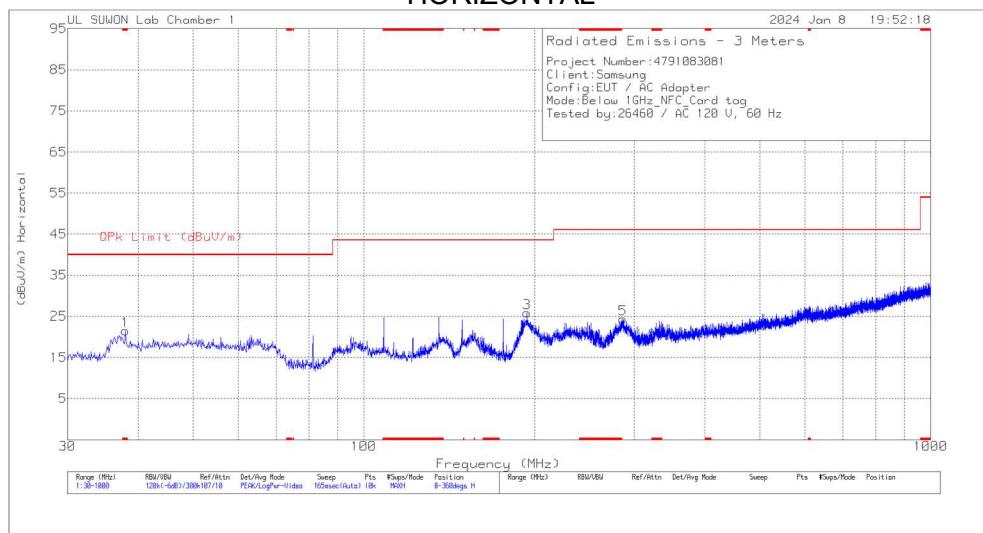

VERTICAL

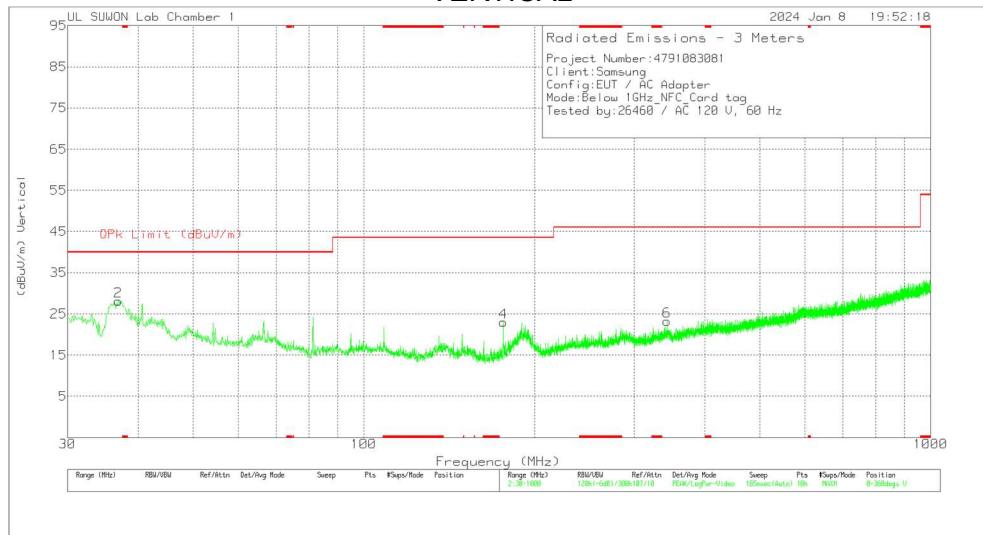


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Loss(dB)	Corrected Reading (dBuV/m)	QPK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 37.954	34.94	Pk	17.7	-31.1	21.54	40	-18.46	0-360	300	H
3	193.93	38.12	Pk	16.9	-29.2	25.82	43.52	-17.7	0-360	100	H
5	286.371	34.32	Pk	18.6	-28.6	24.32	46.02	-21.7	0-360	100	H
2	36.887	41.95	Pk	17.3	-31.1	28.15	40	-11.85	0-360	200	V
4	176.276	37.66	Pk	14.8	-29.5	22.96	43.52	-20.56	0-360	300	V
6	342.631	31.32	Pk	20.2	-28.3	23.22	46.02	-22.8	0-360	400	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

8.1.4. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT without passive TAG mode]

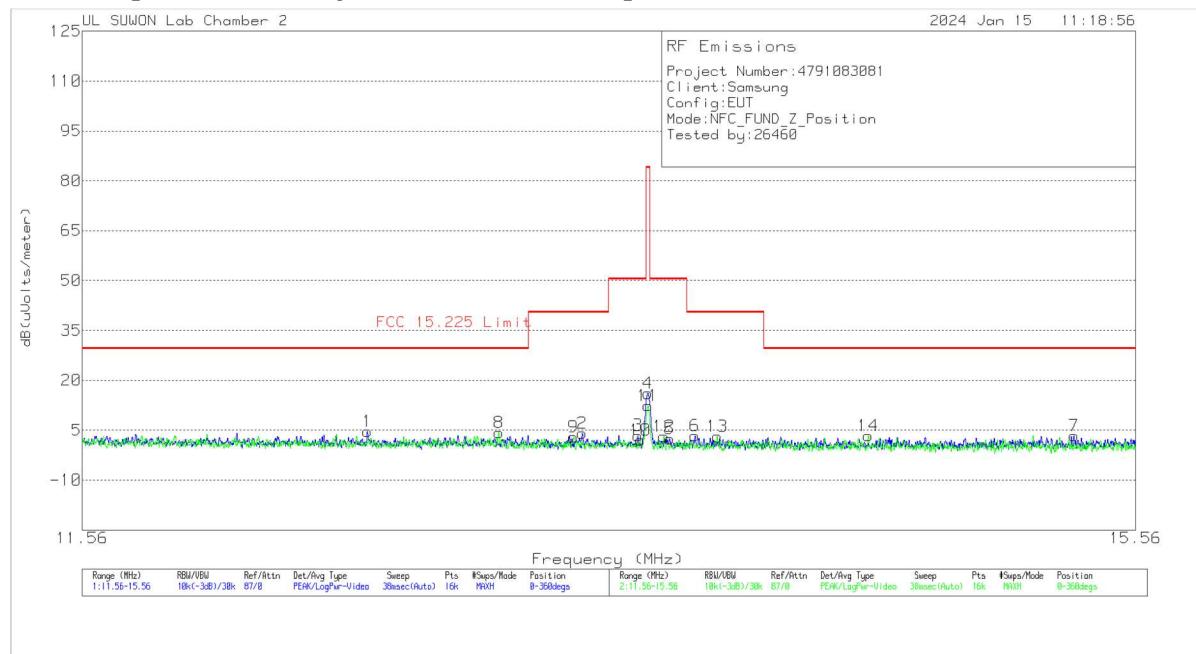

Trace Markers

Face on

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m(dB)	Cable Loss (dB)	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	12.52863	24.06	Pk	20.1	-40	.5	4.66	29.54	-24.88	0-360
2	13.31188	23.47	Pk	20.1	-40	.5	4.07	40.51	-36.44	0-360
3	13.52213	22.85	Pk	20.1	-40	.5	3.45	50.5	-47.05	0-360
**4	13.56038	35.48	Pk	20.1	-40	.5	16.08	84	-67.92	0-360
5	13.64338	21.71	Pk	20.1	-40	.6	2.41	50.5	-48.09	0-360
6	13.74163	22.69	Pk	20.1	-40	.6	3.39	40.51	-37.12	0-360
7	15.29238	22.64	Pk	20.1	-40	.6	3.34	29.54	-26.2	0-360

Face off

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor(dB/m)	Dist Corr 30m(dB)	Cable Loss (dB)	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	13.00163	23.77	Pk	20.1	-40	.5	4.37	29.54	-25.17	0-360
9	13.27888	22.32	Pk	20.1	-40	.5	2.92	40.51	-37.59	0-360
10	13.53063	21.52	Pk	20.1	-40	.5	2.12	50.5	-48.38	0-360
**11	13.56025	31.85	Pk	20.1	-40	.5	12.45	84	-71.55	0-360
12	13.6215	22.41	Pk	20.1	-40	.6	3.11	50.5	-47.39	0-360
13	13.82788	22.38	Pk	20.1	-40	.6	3.08	40.51	-37.43	0-360
14	14.43038	22.62	Pk	20.1	-40	.6	3.32	29.54	-26.22	0-360

Pk - Peak detector


**Fundamental

Note 1: Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open are test site.

Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.5. SPURIOUS EMISSION 0.09 TO 30 MHz [EUT without passive TAG mode]

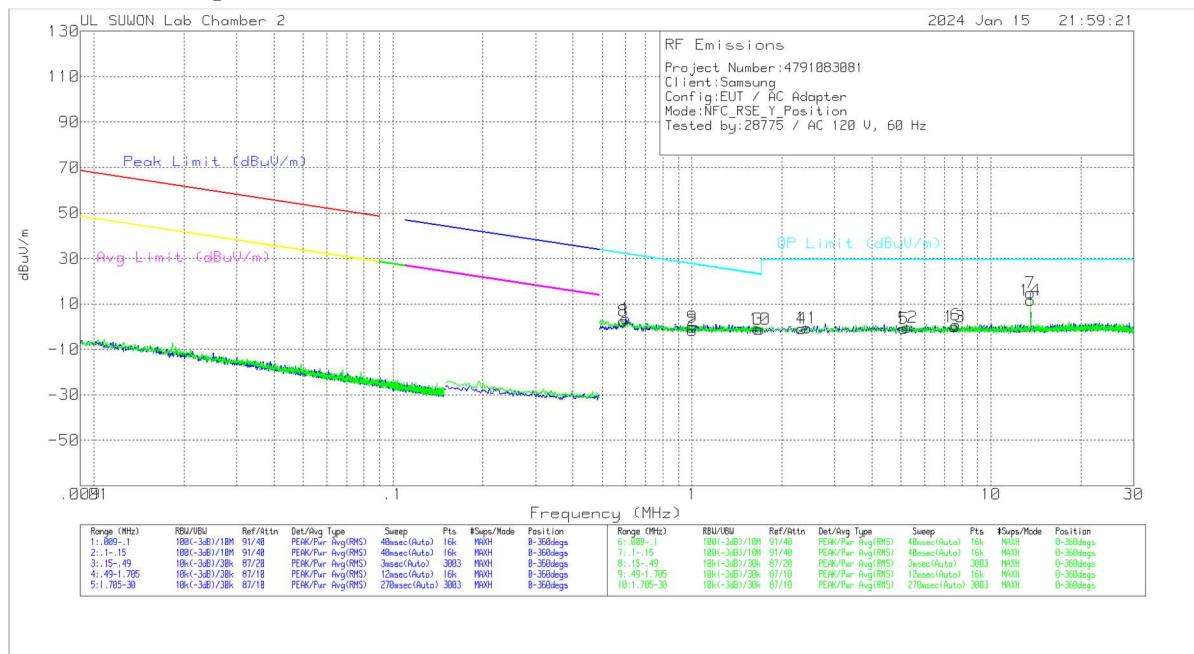

Trace Markers

Face on

Marker	Frequency (MHz)	Meter Reading (dB _{UV})	Det	Antenna Correction Factor(dB/m)	Loss(dB)	Dist Corr 30m(dB)	Corrected Reading (dB _{UV} /m)	QP Limit (dB _{UV} /m)	Margin (dB)	Azimuth (Degs)
1	.60085	23.53	Pk	20	.1	-40	3.63	32.03	-28.4	0-360
2	1.00414	18.18	Pk	20	.2	-40	-1.62	27.59	-29.21	0-360
3	1.66287	18.57	Pk	20.1	.2	-40	-1.13	23.22	-24.35	0-360
4	2.32705	18.99	Pk	20.1	.2	-40	-.71	29.5	-30.21	0-360
5	5.10743	18.68	Pk	20.2	.3	-40	-.82	29.5	-30.32	0-360
6	7.64275	20.19	Pk	20.2	.4	-40	.79	29.5	-28.71	0-360
**7	13.56165	34.24	Pk	20.1	.5	-40	14.84	29.5	-14.66	0-360

Facs off

Marker	Frequency (MHz)	Meter Reading (dB _{UV})	Det	Antenna Correction Factor(dB/m)	Loss(dB)	Dist Corr 30m(dB)	Corrected Reading (dB _{UV} /m)	QP Limit (dB _{UV} /m)	Margin (dB)	Azimuth (Degs)
8	.58907	22.39	Pk	20	.1	-40	2.49	32.21	-29.72	0-360
9	1.00505	19.55	Pk	20	.2	-40	-.25	27.58	-27.83	0-360
10	1.68407	18.48	Pk	20.1	.2	-40	-1.22	23.11	-24.33	0-360
11	2.4213	19.18	Pk	20.1	.2	-40	-.52	29.5	-30.02	0-360
12	5.2488	19.16	Pk	20.2	.4	-40	-.24	29.5	-29.74	0-360
13	7.55793	19.34	Pk	20.2	.4	-40	-.06	29.5	-29.56	0-360
**14	13.56165	30.92	Pk	20.1	.5	-40	11.52	29.5	-17.98	0-360

Pk - Peak detector

**Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal.


Please refer to section 8.1.4 about the fundamental level.

Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.


Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

8.1.6. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT without passive TAG mode]

HORIZONTAL

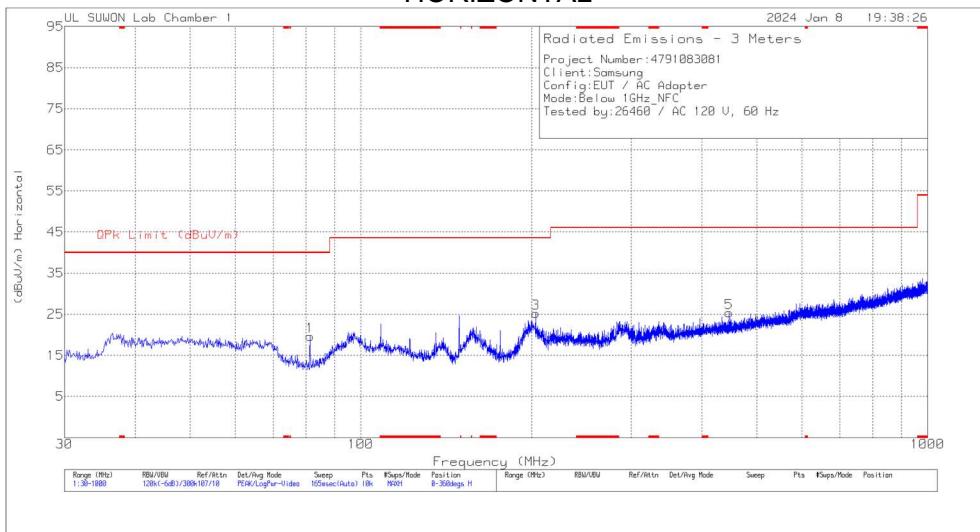

VERTICAL

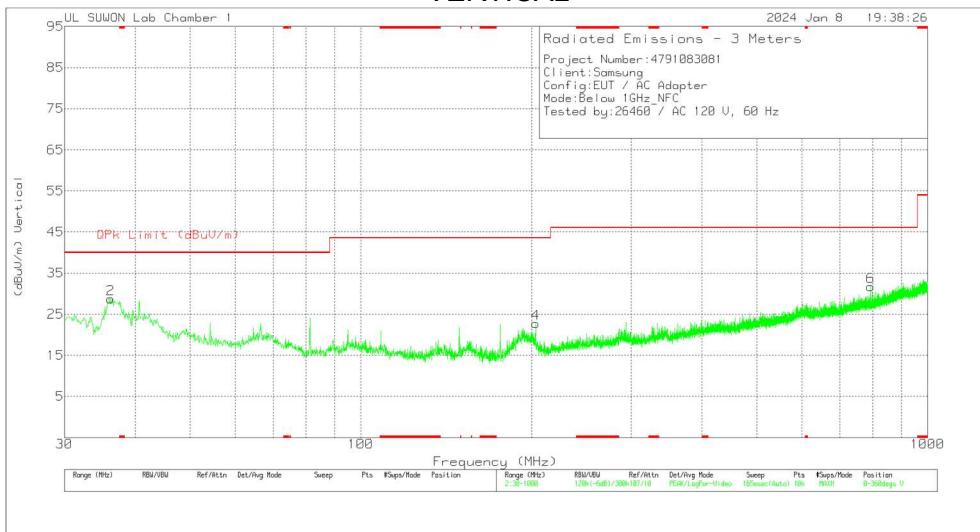

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBmV)	Det	Antenna Correction Factor(dB/m)	Loss(dB)	Corrected Reading (dBmV/m)	QPk Limit (dBmV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	81.313	37.18	Pk	13	-30.5	19.68	40	-20.32	0-360	300	H
3	203.339	38.16	Pk	16.3	-29.2	25.26	43.52	-18.26	0-360	100	H
5	446.421	31.77	Pk	21.4	-27.8	25.37	46.02	-20.65	0-360	300	H
2	36.208	42.88	Pk	17	-31.1	28.78	40	-11.22	0-360	200	V
4	203.339	35.67	Pk	16.3	-29.2	22.77	43.52	-20.75	0-360	300	V
6	792.711	32.24	Pk	25.8	-26.3	31.74	46.02	-14.28	0-360	300	V

Pk - Peak detector

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

WORST EMISSIONS(non-Terminated)

LINE 1 PLOT

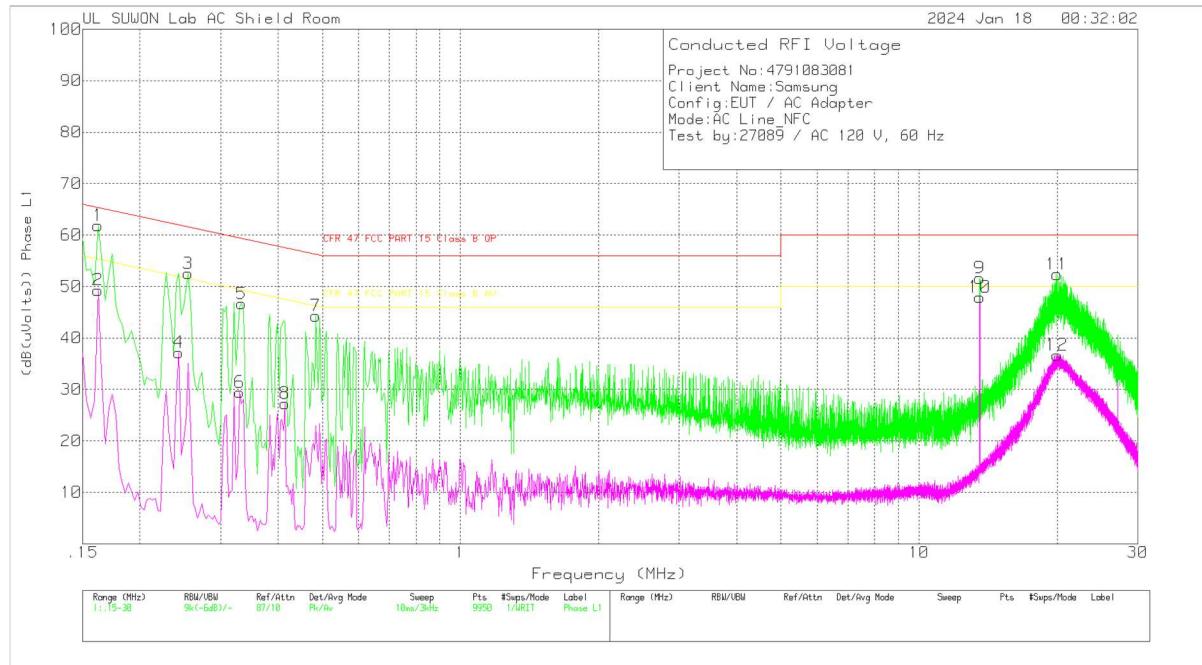

LINE 1 RESULTS

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU TO_With EX_L1[dB]	CABLELOSS [dB]	Corrected Reading (dB(uVolts))	47 CFR FCC PART 15 Class B QP (dB(uVolts))	Margin (dB)	47 CFR FCC PART 15 Class B AV (dB(uVolts))	Margin (dB)
1	.162	52.29	Pk	9.5	.1	61.89	65.36	-3.47	-	-
2	.162	39.7	Av	9.5	.1	49.3	-	-	55.36	-6.06
3	.255	42.82	Pk	9.5	.2	52.52	61.59	-9.07	-	-
4	.243	27.49	Av	9.5	.2	37.19	-	-	51.99	-14.8
5	.333	36.97	Pk	9.5	.2	46.67	59.38	-12.71	-	-
6	.33	19.75	Av	9.5	.2	29.45	-	-	49.45	-20
7	.483	34.61	Pk	9.5	.2	44.31	56.29	-11.98	-	-
8	.414	17.57	Av	9.5	.2	27.27	-	-	47.57	-20.3
9	13.557	41.64	Pk	9.6	.4	51.64	60	-8.36	-	-
10	13.56	37.95	Av	9.6	.4	47.95	-	-	50	-2.05
11	19.992	42.37	Pk	9.6	.4	52.37	60	-7.63	-	-
12	20.001	26.69	Av	9.6	.4	36.69	-	-	50	-13.31

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU TO_With EX_L1[dB]	CABLELOSS [dB]	Corrected Reading (dB(uVolts))	47 CFR FCC PART 15 Class B QP (dB(uVolts))	Margin (dB)	47 CFR FCC PART 15 Class B AV (dB(uVolts))	Margin (dB)
.16125	45.09	Qp	9.5	.1	54.69	65.4	-10.71	-	-
.25425	35.85	Qp	9.5	.2	45.55	61.62	-16.07	-	-
19.9922	32.49	Qp	9.6	.4	42.49	60	-17.51	-	-

Qp - Quasi-Peak detector

LINE 2 PLOT

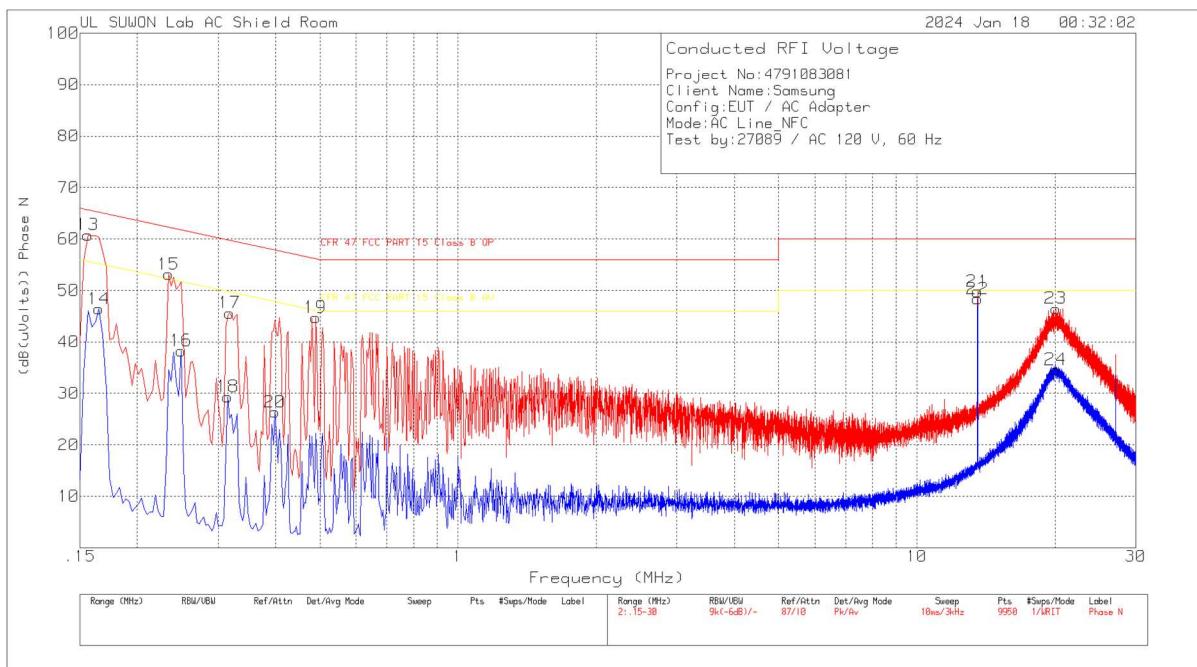

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU TO_With EX_L1[dB]	CABLELOSS [dB]	Corrected Reading (dB(uVolts))	47 CFR FCC PART 15 Class B QP (dB(uVolts))	Margin (dB)	47 CFR FCC PART 15 Class B AV (dB(uVolts))	Margin (dB)
13	.156	51.19	Pk	9.5	.1	60.79	65.67	-4.88	-	-
14	.165	36.83	Av	9.5	.1	46.43	-	-	55.21	-8.78
15	.234	43.44	Pk	9.5	.2	53.14	62.31	-9.17	-	-
16	.249	28.59	Av	9.5	.2	38.29	-	-	51.79	-13.5
17	.318	35.94	Pk	9.5	.2	45.64	59.76	-14.12	-	-
18	.315	19.66	Av	9.5	.2	29.36	-	-	49.84	-20.48
19	.489	35.03	Pk	9.5	.2	44.73	56.18	-11.45	-	-
20	.399	16.67	Av	9.5	.2	26.37	-	-	47.87	-21.5
21	13.56	39.82	Pk	9.6	.4	49.82	60	-10.18	-	-
22	13.56	38.36	Av	9.6	.4	48.36	-	-	50	-1.64
23	20.067	36.5	Pk	9.6	.4	46.5	60	-13.5	-	-
24	20.067	24.62	Av	9.6	.4	34.62	-	-	50	-15.38

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions


Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU TO_With EX_L1[dB]	CABLELOSS [dB]	Corrected Reading (dB(uVolts))	47 CFR FCC PART 15 Class B QP (dB(uVolts))	Margin (dB)	47 CFR FCC PART 15 Class B AV (dB(uVolts))	Margin (dB)
.15615	45.22	Qp	9.5	.1	54.82	65.67	-10.85	-	-
.16425	44.89	Qp	9.5	.1	54.49	65.25	-10.76	-	-
.23325	38.79	Qp	9.5	.2	48.49	62.33	-13.84	-	-

Qp - Quasi-Peak detector

WORST EMISSIONS(Terminated)

LINE 1 PLOT

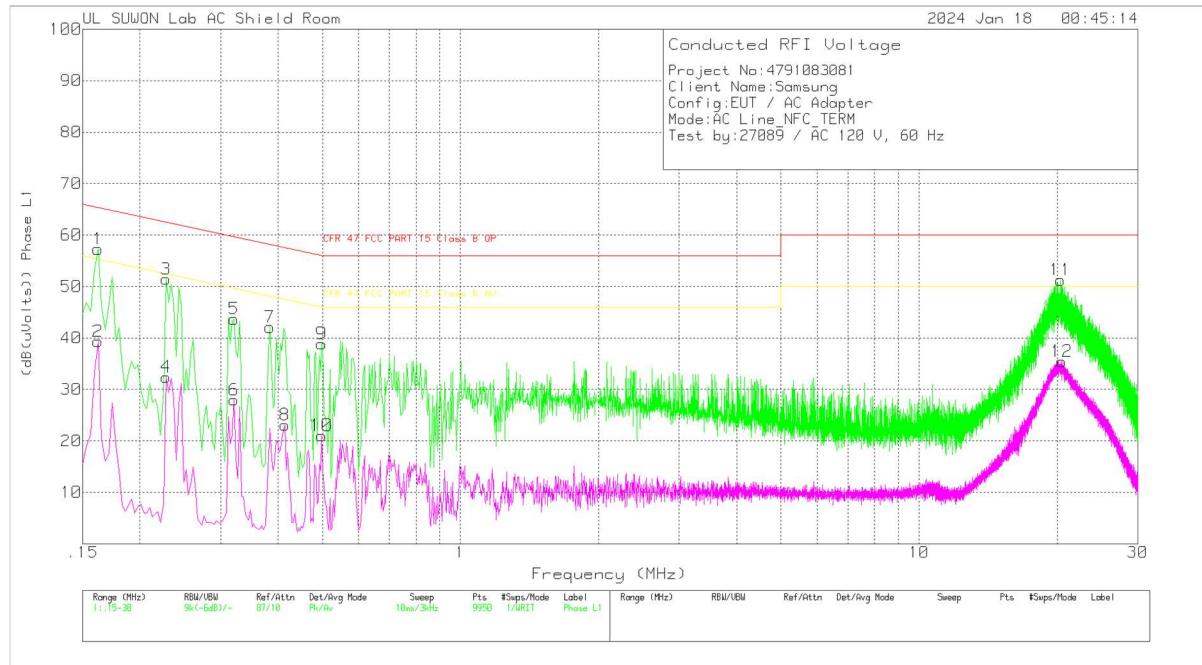

LINE 1 RESULTS

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU TO_With EX_L1[dB]	CABLELOSS [dB]	Corrected Reading (dB(uVolts))	47 CFR FCC PART 15 Class B QP (dB(uVolts))	Margin (dB)	47 CFR FCC PART 15 Class B AV (dB(uVolts))	Margin (dB)
1	.162	47.68	Pk	9.5	.1	57.28	65.36	-8.08	-	-
2	.162	29.74	Av	9.5	.1	39.34	-	-	55.36	-16.02
3	.228	41.74	Pk	9.5	.2	51.44	62.52	-11.08	-	-
4	.228	22.71	Av	9.5	.2	32.41	-	-	52.52	-20.11
5	.321	33.99	Pk	9.5	.2	43.69	59.68	-15.99	-	-
6	.321	18.27	Av	9.5	.2	27.97	-	-	49.68	-21.71
7	.384	32.41	Pk	9.5	.2	42.11	58.19	-16.08	-	-
8	.414	13.39	Av	9.5	.2	23.09	-	-	47.57	-24.48
9	.498	29.18	Pk	9.5	.2	38.88	56.03	-17.15	-	-
10	.498	11.35	Av	9.5	.2	21.05	-	-	46.03	-24.98
11	20.331	41.27	Pk	9.6	.4	51.27	60	-8.73	-	-
12	20.475	25.44	Av	9.6	.4	35.44	-	-	50	-14.56

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU TO_With EX_L1[dB]	CABLELOSS [dB]	Corrected Reading (dB(uVolts))	47 CFR FCC PART 15 Class B QP (dB(uVolts))	Margin (dB)	47 CFR FCC PART 15 Class B AV (dB(uVolts))	Margin (dB)
.16125	44.77	Qp	9.5	.1	54.37	65.4	-11.03	-	-
20.3303	32.52	Qp	9.6	.4	42.52	60	-17.48	-	-

Qp - Quasi-Peak detector

LINE 2 PLOT

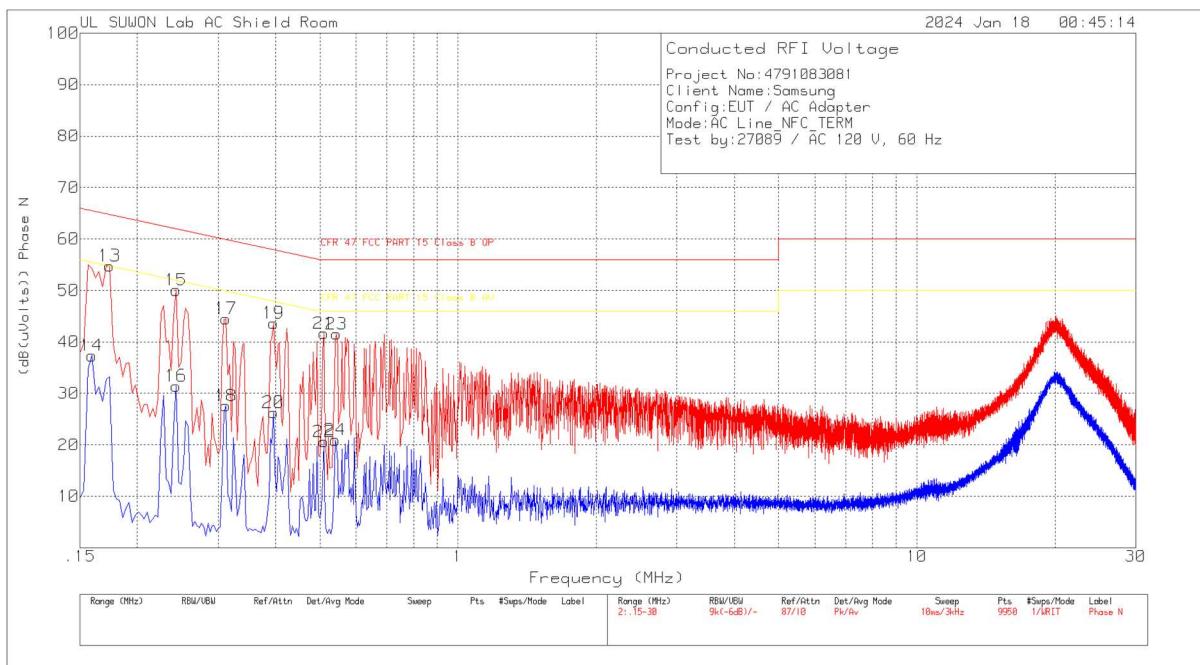

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU TO_With EX_L1[dB]	CABLELOSS [dB]	Corrected Reading (dB(uVolts))	47 CFR FCC PART 15 Class B QP (dB(uVolts))	Margin (dB)	47 CFR FCC PART 15 Class B AV (dB(uVolts))	Margin (dB)
13	.174	45.09	Pk	9.5	.2	54.79	64.77	-9.98	-	-
14	.159	27.74	Av	9.5	.1	37.34	-	-	55.52	-18.18
15	.243	40.37	Pk	9.5	.2	50.07	61.99	-11.92	-	-
16	.243	21.74	Av	9.5	.2	31.44	-	-	51.99	-20.55
17	.312	34.81	Pk	9.5	.2	44.51	59.92	-15.41	-	-
18	.312	17.89	Av	9.5	.2	27.59	-	-	49.92	-22.33
19	.396	33.95	Pk	9.5	.2	43.65	57.94	-14.29	-	-
20	.396	16.57	Av	9.5	.2	26.27	-	-	47.94	-21.67
21	.51	31.85	Pk	9.6	.2	41.65	56	-14.35	-	-
22	.51	10.82	Av	9.6	.2	20.62	-	-	46	-25.38
23	.543	31.72	Pk	9.6	.2	41.52	56	-14.48	-	-
24	.54	11.15	Av	9.6	.2	20.95	-	-	46	-25.05

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_AU TO_With EX_L1[dB]	CABLELOSS [dB]	Corrected Reading (dB(uVolts))	47 CFR FCC PART 15 Class B QP (dB(uVolts))	Margin (dB)	47 CFR FCC PART 15 Class B AV (dB(uVolts))	Margin (dB)
.17325	38.65	Qp	9.5	.2	48.35	64.8	-16.45	-	-

Qp - Quasi-Peak detector

10. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI C63.10 §6.8

RESULTS

Test Date	2024-1-11
Test Engineer	25546

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.88	50	13.559945202	-2.788	13.559942750	-2.969	13.559941822	-3.037	13.559942331	-3.000	100
3.88	40	13.559938870	-3.255	13.559938917	-3.251	13.559939861	-3.182	13.559940147	-3.161	100
3.88	30	13.559945087	-2.796	13.559947998	-2.582	13.559951120	-2.351	13.559952864	-2.223	100
3.88	20	13.559983006	0.000	13.559982264	-0.055	13.559981572	-0.106	13.559980510	-0.184	100
3.88	10	13.559981621	-0.102	13.559984660	0.122	13.559988885	0.434	13.559991010	0.590	100
3.88	0	13.559995078	0.890	13.559997334	1.057	13.559999154	1.191	13.560000502	1.290	100
3.88	-10	13.559996402	0.988	13.559994866	0.875	13.559994234	0.828	13.559993160	0.749	100
3.88	-20	13.559976447	-0.484	13.559965665	-1.279	13.559962338	-1.524	13.559961410	-1.593	100
3.88	-30	13.559925004	-4.277	13.559914906	-5.022	13.559906607	-5.634	13.559902015	-5.973	100

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: ± 100 ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.70	20	13.560029473	3.427	13.560027987	3.317	13.560025456	3.131	13.560024153	3.034	100
3.88	20	13.559983006	0.000	13.559982264	-0.055	13.559981572	-0.106	13.559980510	-0.184	100
4.45	20	13.560033835	3.748	13.560030575	3.508	13.560028657	3.367	13.560026734	3.225	100

No non-compliance noted.

END OF TEST REPORT