

# CERTIFICATION TEST REPORT

**Report Number.** : 4791083081-E7V2

**Applicant** : SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

**Model** : SC-53E, SCG27

**FCC ID** : A3LSMA556JPN

**EUT Description** : GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,  
and NFC

**Test Standard(s)** : FCC 47 CFR PART 15 SUBPART C

**Date Of Issue:**

2024-02-02

**Prepared by:**

UL KOREA LTD.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2024-01-26	Initial issue	Dexter(Hyunsik) Yun
V2	2024-02-02	Updated to address TCB's question	Dexter(Hyunsik) Yun

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b>	<b>5</b>
<b>2. TEST METHODOLOGY</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION</b>	<b>6</b>
<b>4. DECISION RULES AND MEASUREMENT UNCERTAINTY</b>	<b>7</b>
4.1. METROLOGICAL TRACEABILITY	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY	7
4.4. DECISION RULES	7
<b>5. EQUIPMENT UNDER TEST</b>	<b>8</b>
5.1. EUT DESCRIPTION	8
5.2. MAXIMUM OUTPUT POWER	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. WORST-CASE CONFIGURATION AND MODE	9
5.5. DESCRIPTION OF TEST SETUP	10
<b>6. TEST AND MEASUREMENT EQUIPMENT</b>	<b>12</b>
<b>7. TEST RESULTS SUMMARY</b>	<b>13</b>
<b>8. MEASUREMENT METHODS</b>	<b>14</b>
<b>9. ANTENNA PORT TEST RESULTS</b>	<b>15</b>
9.1. ON TIME AND DUTY CYCLE	15
9.2. 20 dB BANDWIDTH	16
9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	16
9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	16
9.3. HOPPING FREQUENCY SEPARATION	18
9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	19
9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	19
9.4. NUMBER OF HOPPING CHANNELS	20
9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	21
9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	22
9.5. AVERAGE TIME OF OCCUPANCY	23
9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION	24
9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION	26
9.6. OUTPUT POWER	28
9.6.1. BASIC DATA RATE GFSK MODULATION	28

---

9.6.2.	ENHANCED DATA RATE Pi/4-DPSK MODULATION .....	28
9.6.3.	ENHANCED DATA RATE 8PSK MODULATION .....	28
9.6.4.	OUTPUT POWER PLOTS .....	29
9.7.	<i>AVERAGE POWER</i> .....	31
9.7.1.	BASIC DATA RATE GFSK MODULATION .....	31
9.7.2.	ENHANCED DATA RATE PI/4-DQPSK MODULATION .....	31
9.7.3.	ENHANCED DATA RATE 8PSK MODULATION .....	31
9.8.	<i>CONDUCTED SPURIOUS EMISSIONS</i> .....	32
9.8.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION .....	33
9.8.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION .....	35
<b>10.</b>	<b>RADIATED TEST RESULTS</b> .....	<b>37</b>
10.1.	<i>TRANSMITTER ABOVE 1 GHz</i> .....	39
10.1.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION .....	39
10.1.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION .....	46
10.2.	<i>WORST CASE BELOW 1 GHz</i> .....	53
<b>11.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS</b> .....	<b>54</b>
11.1.	<i>AC Power Line</i> .....	55

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.

**EUT DESCRIPTION:** GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, and NFC

**MODEL:** SC-53E, SCG27

**SERIAL NUMBER:** 7ab3a2c4292c7ece, 7ab3a2c5c72c7ece (CONDUCTED);  
7ab3a2c4e12c7ece (RADIATED);

**DATE TESTED:** 2023-12-20 ~ 2024-01-26

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
47 CFR Part 15 Subpart C	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL KOREA LTD. By:



Seokhwan Hong  
Suwon Lab Engineer  
UL KOREA LTD.

Tested By:



Dexter(Hyunsik) Yun  
Suwon Lab Engineer  
UL KOREA LTD.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC 47 CFR Part 2.
2. FCC 47 CFR Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input checked="" type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

## 4. DECISION RULES AND MEASUREMENT UNCERTAINTY

### 4.1. METROLOGICAL TRACEABILITY

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

$$\begin{aligned} \text{AC Corrected Reading (dBuV)} &= \text{Measured Voltage (dBuV)} + \text{Extension Cord} \\ &\text{Loss (dB)} + \text{Cable Loss (dB)} \\ 44.72 \text{ dBuV} &= 34.72 \text{ dBuV} + 9.9 \text{ dB} + 0.1 \text{ dB} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.80 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.92 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.06 dB
Radiated Disturbance, 18 GHz to 40 GHz	6.02 dB

Uncertainty figures are valid to a confidence level of 95%.

### 4.4. DECISION RULES

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2021.

## 5. EQUIPMENT UNDER TEST

### 5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, and NFC. This test report addresses the DSS(Bluetooth) operational mode.

Representative model	Difference	Derivative model
		SCG27
SC-53E	Hardware	Same as SC-53E
	Software	Different UI

The model SC-53E was used for final testing and is representative of the test results in this report.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	Basic GFSK	Peak	14.92	31.04
		Average	14.73	29.70
	Enhanced Pi/4-DPSK	Peak	11.55	14.30
		Average	9.57	9.06
	Enhanced 8PSK	Peak	11.98	15.78
		Average	9.57	9.05



### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.  
Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes a internal antenna, with a maximum gain of: -6.01 dBi

“BT/WIFI #1\_2.4GHz, 5GHz (SUB4)” as indicated in antenna specification are written as ANT1 in this report.

### 5.4. WORST-CASE CONFIGURATION AND MODE

The fundamentals of the EUT were investigated in three orthogonal orientations X, Y and Z. It was determined that below table's orientation was the worst-case orientation.

ANT1
X

Radiated and power line conducted tests were performed with EUT connected to AC power adapter as the worst-case configuration. Radiated harmonics spurious 1~18 GHz Low/Mid/High channels, 18-26GHz were performed with the EUT set at the 1Tx mode. Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

For Radiated band-edge and spurious test, tests were performed on 1Tx mode.

All radiated and power line conducted tests were performed attached with travel adapter for the worst-case condition mode.

GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37W61WENTASEA	N/A
Data Cable	SAMSUNG	EP-DN980	GH39-02117A	N/A


### I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


### TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.  
Test software enable BT communications.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

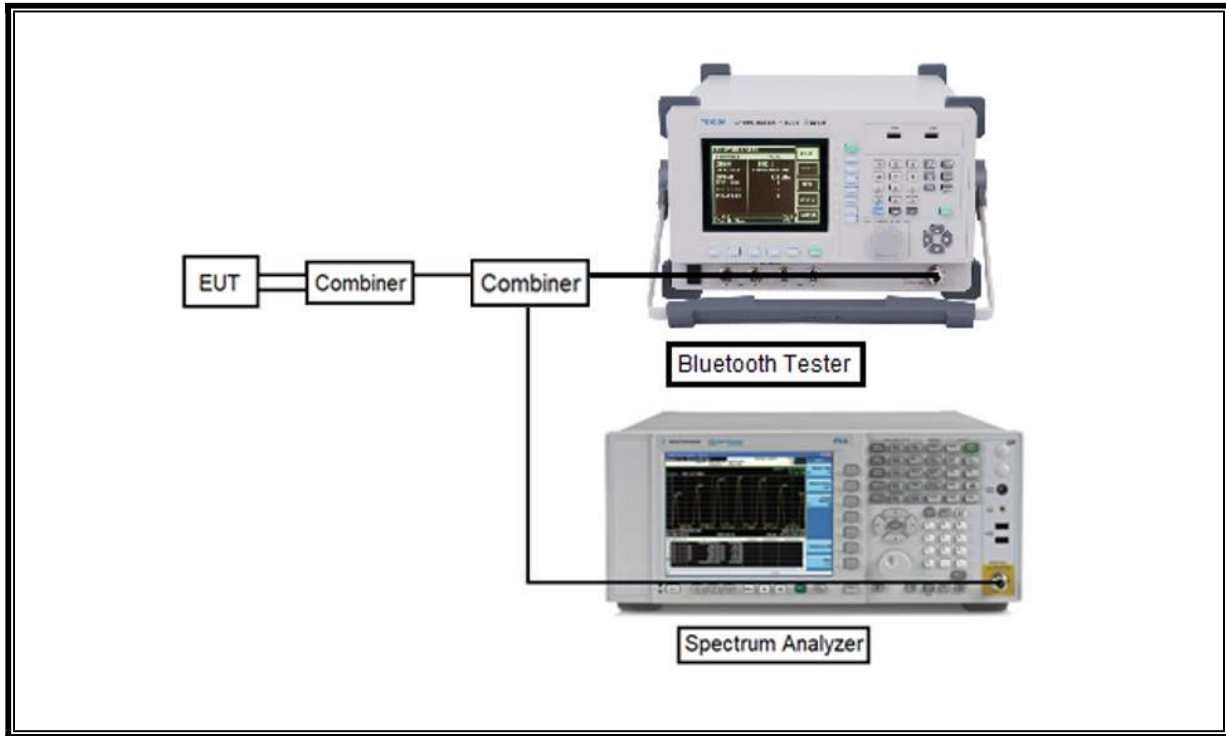

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

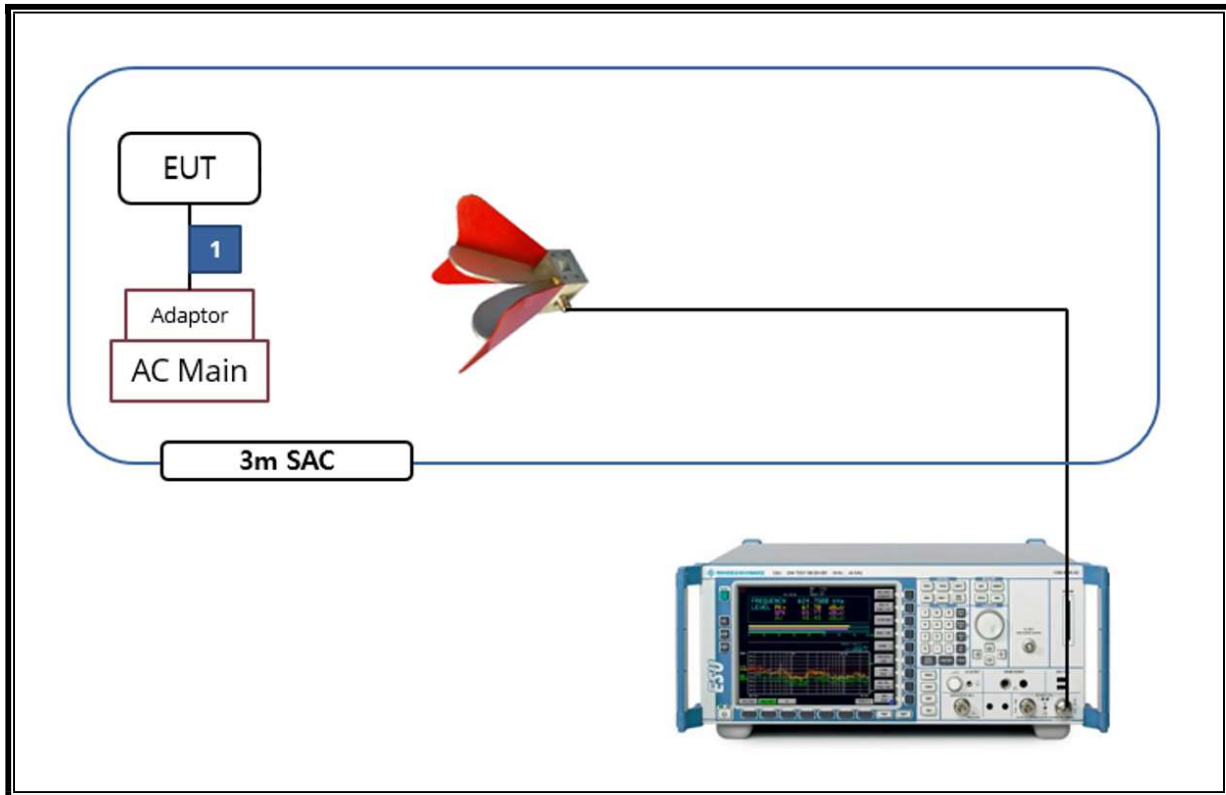

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2024-08-15
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	2025-09-06
Antenna, Horn, 18 GHz	ETS	3117	00168724	2024-08-04
Antenna, Horn, 18 GHz	ETS	3117	00168717	2024-08-21
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2024-08-02
Preamplifier	ETS	3115-PA	00167475	2024-07-25
Preamplifier	ETS	3116C-PA	00168841	2024-07-25
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	80108-0004	N/A
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	110367-0003	N/A
Preamplifier, 1000 MHz	Sonoma	310N	341282	2024-07-24
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2024-07-25
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2024-07-24
Spectrum Analyzer, 44 GHz	KEYSIGHT	N9040B	MY60080268	2025-01-03
Average Power Sensor	Agilent / HP	U2000	MY54270007	2024-07-23
Average Power Sensor	Agilent / HP	U2000	MY54260010	2024-07-24
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	2024-07-24
Power Splitter	MINI-CIRCUITS	WA1534	UL003	2025-01-03
Power Splitter	MINI-CIRCUITS	WA1534	UL004	2025-01-03
Attenuator	PASTERNAK	PE7087-10	A009	2024-07-24
Attenuator	PASTERNAK	PE7087-10	A001	2024-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2024-07-23
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2024-07-24
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	2024-07-23
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	2024-07-23
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	2024-07-23
LISN	R&S	ENV-216	101836	2024-07-23
Termination	WEINSCHTEL	M1406A	T09	2024-07-23
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

## 7. TEST RESULTS SUMMARY

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1051, 15.247(d)	Band Edge / Conducted Spurious Emission	-20 dBc	Conducted	Complies
15.247 (b)(1)	TX conducted output power	< 21 dBm		Complies
15.247 (a)(1)	Hopping frequency separation	> two-thirds of the 20 dB bandwidth		Complies
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		Complies
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 8 dBm		Complies
15.207(a)	AC Power Line conducted emissions	Section 11	Power Line conducted	Complies
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m(Av)	Radiated	Complies

## 8. MEASUREMENT METHODS

20dB BW : ANSI C63.10, Section 6.9.2

99% BW : ANSI C63.10, Section 6.9.3

HOPPING FREQUENCY SEPARATION : ANSI C63.10, Section 7.8.2

NUMBER OF HOPPING CHANNELS : ANSI C63.10, Section 7.8.3

AVERAGE TIME OF OCCUPANCY : ANSI C63.10, Section 7.8.4

OUTPUT POWER : ANSI C63.10, Section 7.8.5.

Out-of-band EMISSIONS (Conducted) : ANSI C63.10, Section 7.8.6, 7.8.8

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: ANSI C63.10, Section 6.

Out-of-band EMISSIONS IN RESTRICTED BANDS : ANSI C63.10, Section 6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

## 9. ANTENNA PORT TEST RESULTS

### 9.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only.

#### PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS

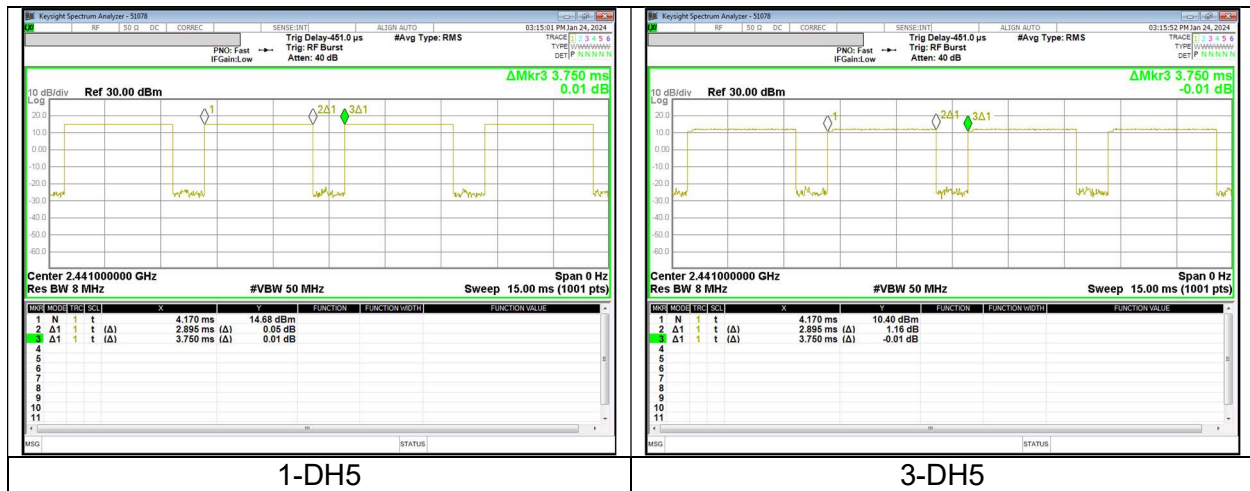

Mode	On time [msec]	Period [msec]	Duty Cycle [%]	1/T Minimum VBW [kHz]
<b>2 400 ~ 2 483.5 MHz Band</b>				
BDR	2.895	3.750	77.20	0.345
EDR	2.895	3.750	77.20	0.345

## 9.2. 20 dB BANDWIDTH

### LIMITS

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement. The sweep time is coupled.

### RESULTS


#### 9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	20 dB Bandwidth [kHz]
ANT1	0	2 402	938
	39	2 441	934
	78	2 480	1 005.0
<b>Worst</b>			<b>1 005.0</b>


#### 9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

Channel		Frequency [MHz]	20 dB Bandwidth [kHz]
ANT1	0	2 402	1 248.0
	39	2 441	1 256.0
	78	2 480	1 261.0
<b>Worst</b>			<b>1 261.0</b>




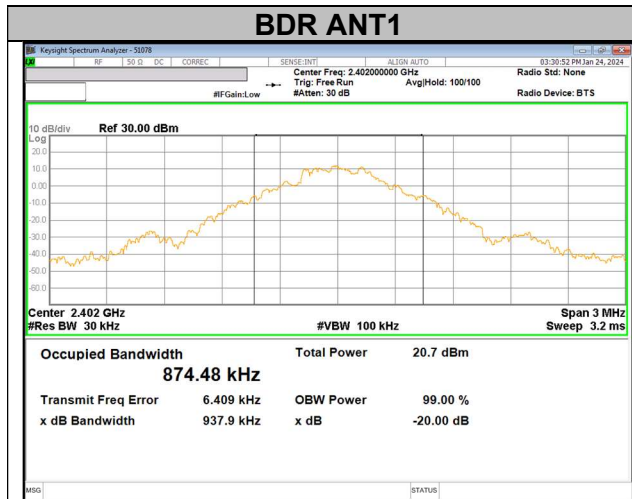


**20 dB bandwidth / 0 CHANNEL**

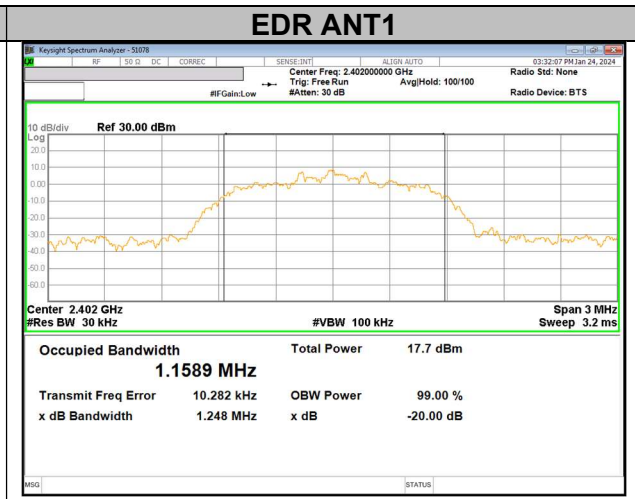


**20 dB bandwidth / 0 CHANNEL**

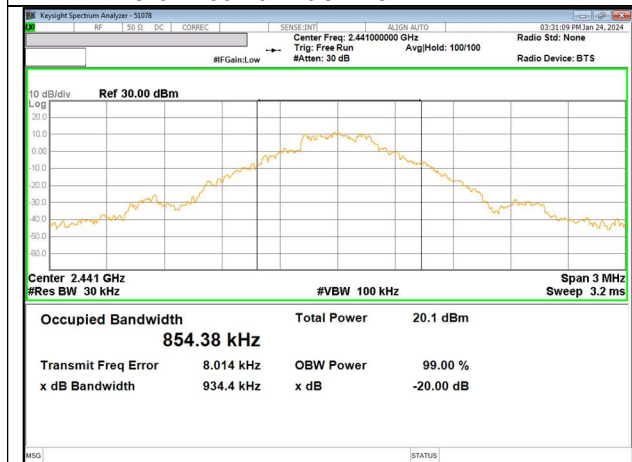


**20 dB bandwidth / 39 CHANNEL**

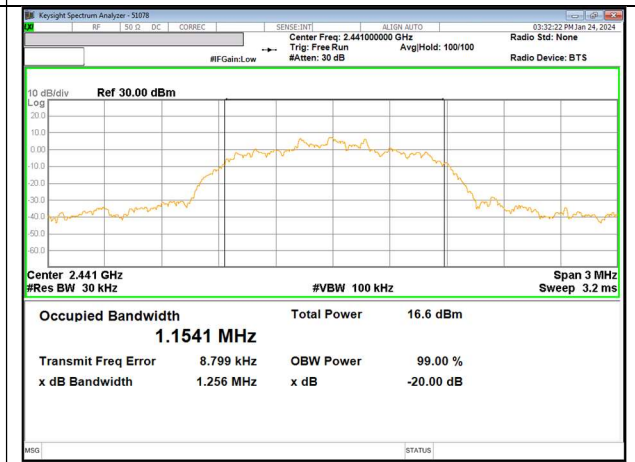

**20 dB bandwidth / 39 CHANNEL**

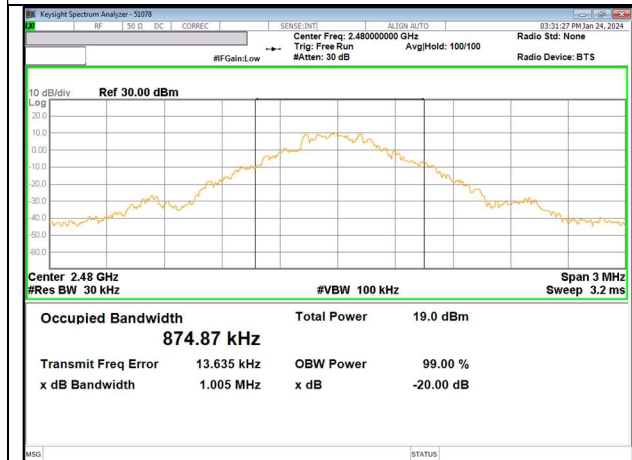

**20 dB bandwidth / 78 CHANNEL**

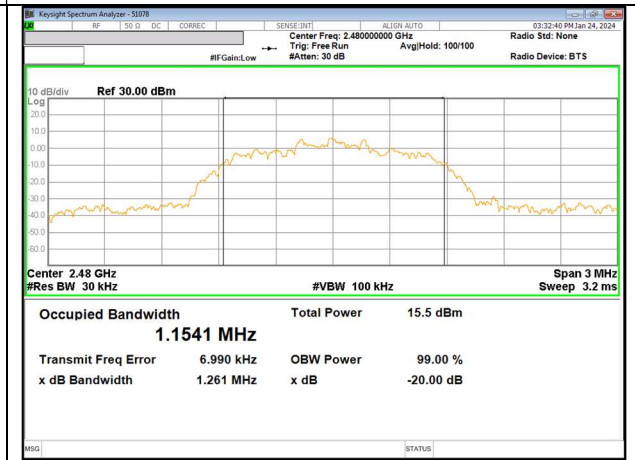

**20 dB bandwidth / 78 CHANNEL**

### **9.3. HOPPING FREQUENCY SEPARATION**

#### **LIMITS**

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. The VBW is set to  $VBW \geq RBW$ . The sweep time is coupled.

#### **RESULTS**

### 9.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

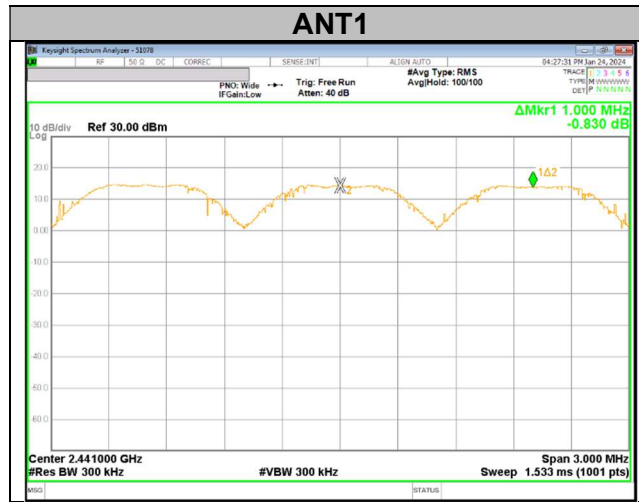

### 9.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

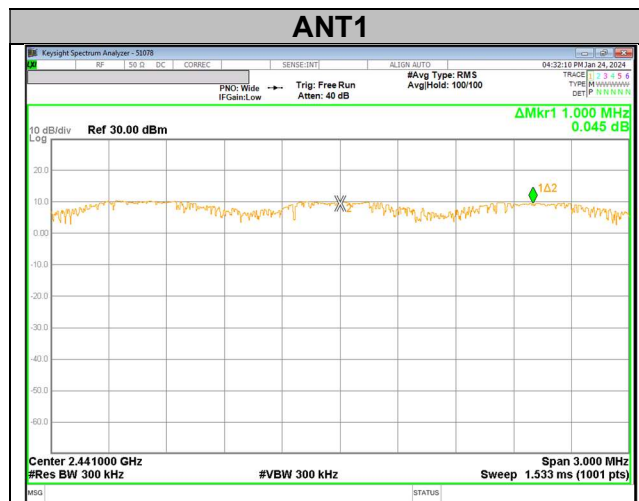

## **9.4. NUMBER OF HOPPING CHANNELS**

### **LIMITS**

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller. The analyzer is set to Max Hold.


### **RESULTS**

Normal Mode: 79 Channels Observed.

### 9.4.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

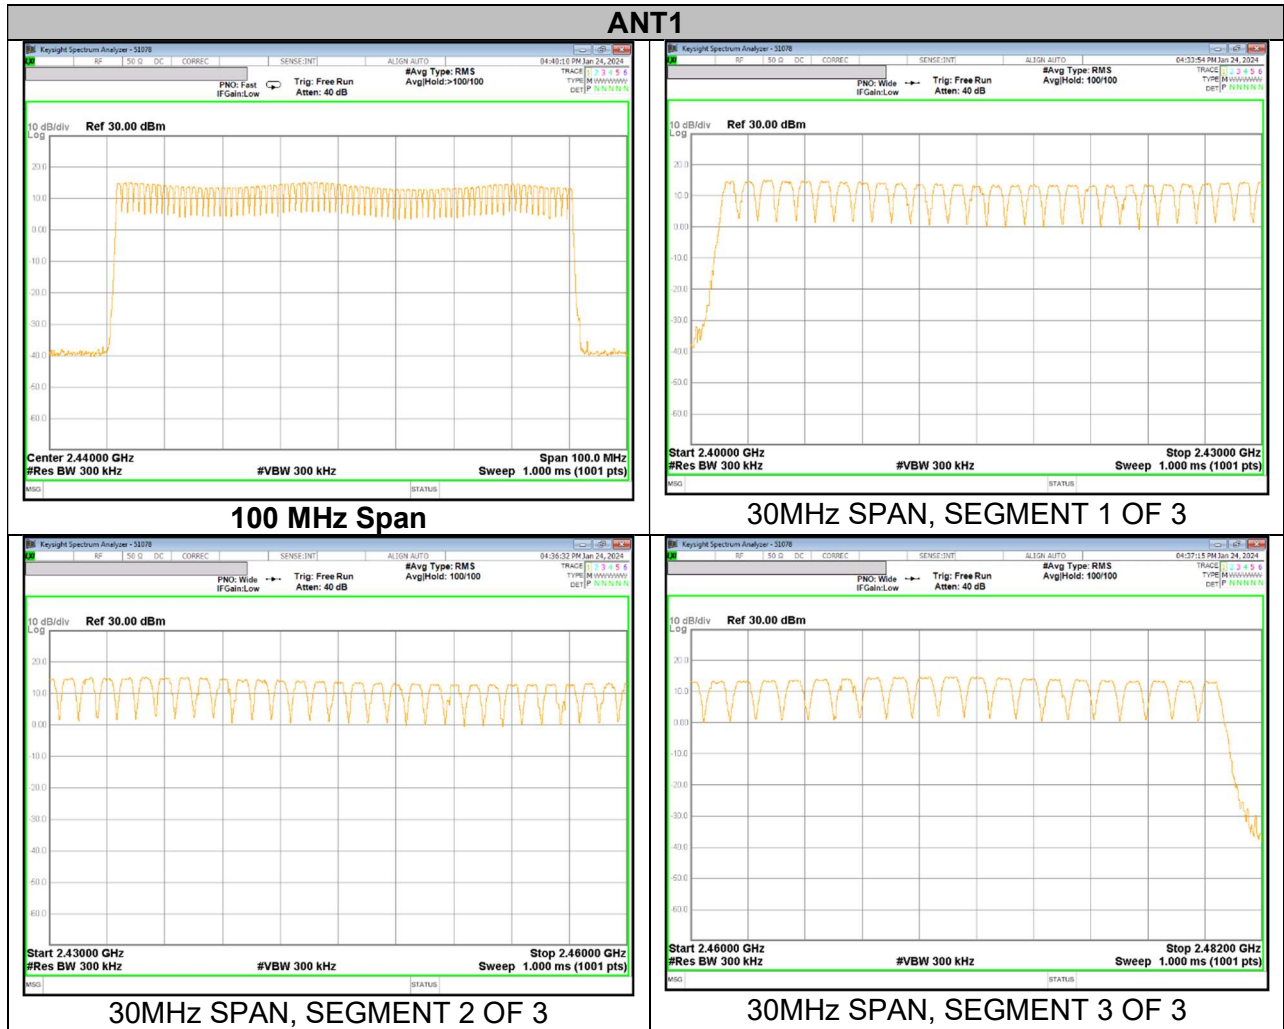

### 9.4.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

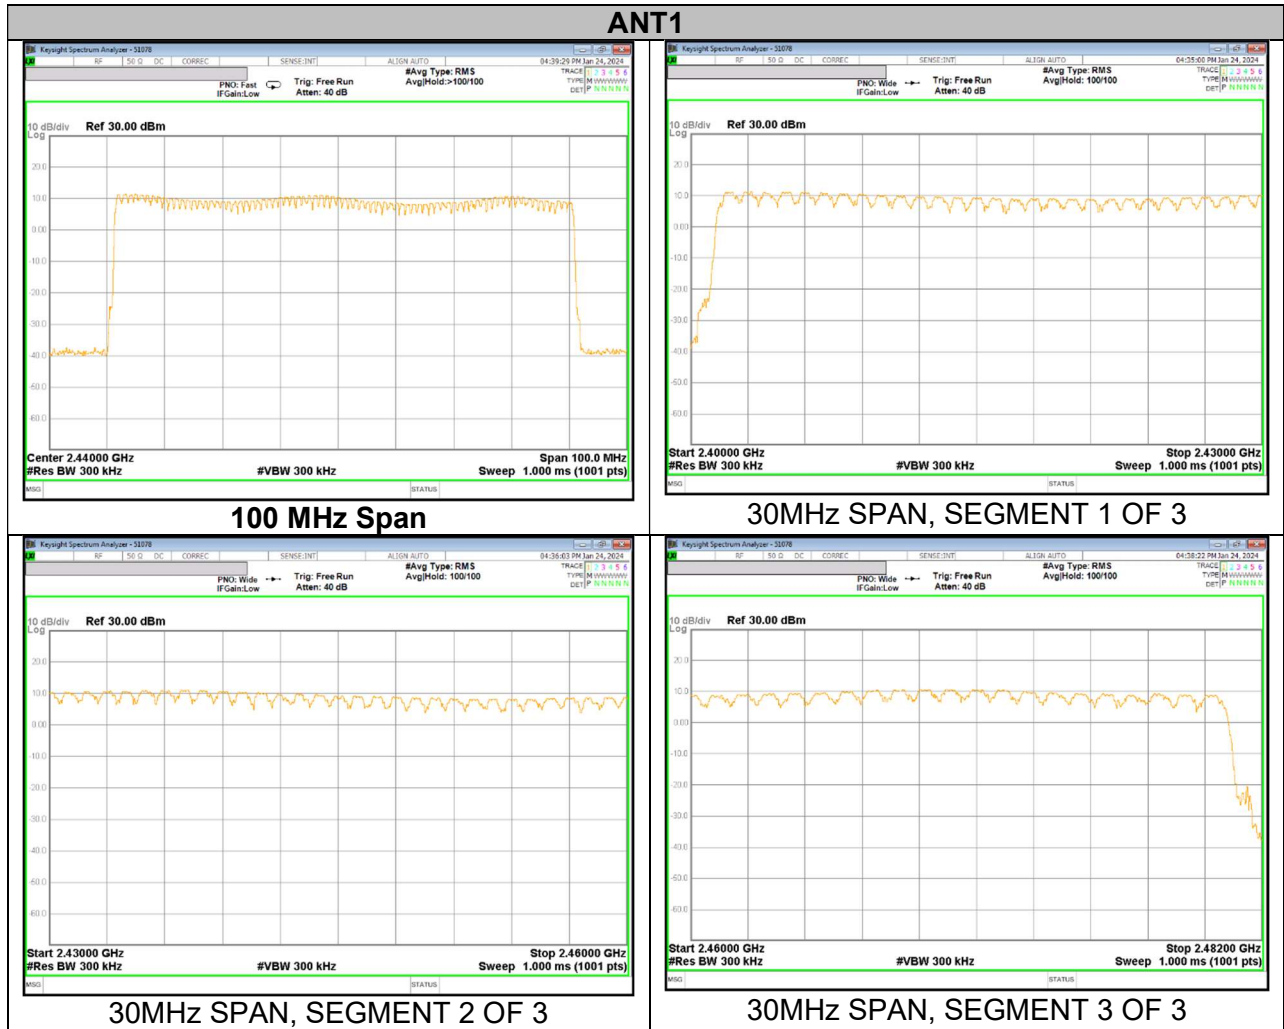

## 9.5. AVERAGE TIME OF OCCUPANCY

### LIMITS

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 3.16 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .


For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$ .

### RESULTS

### 9.5.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK Normal ANT1					
DH1	0.380	32	0.122	0.4	-0.278
DH3	1.637	17	0.278	0.4	-0.122
DH5	2.880	11	0.317	0.4	-0.083
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK AFH ANT1					
DH1	0.380	8	0.030	0.4	-0.370
DH3	1.635	4	0.065	0.4	-0.335
DH5	2.880	3	0.086	0.4	-0.314



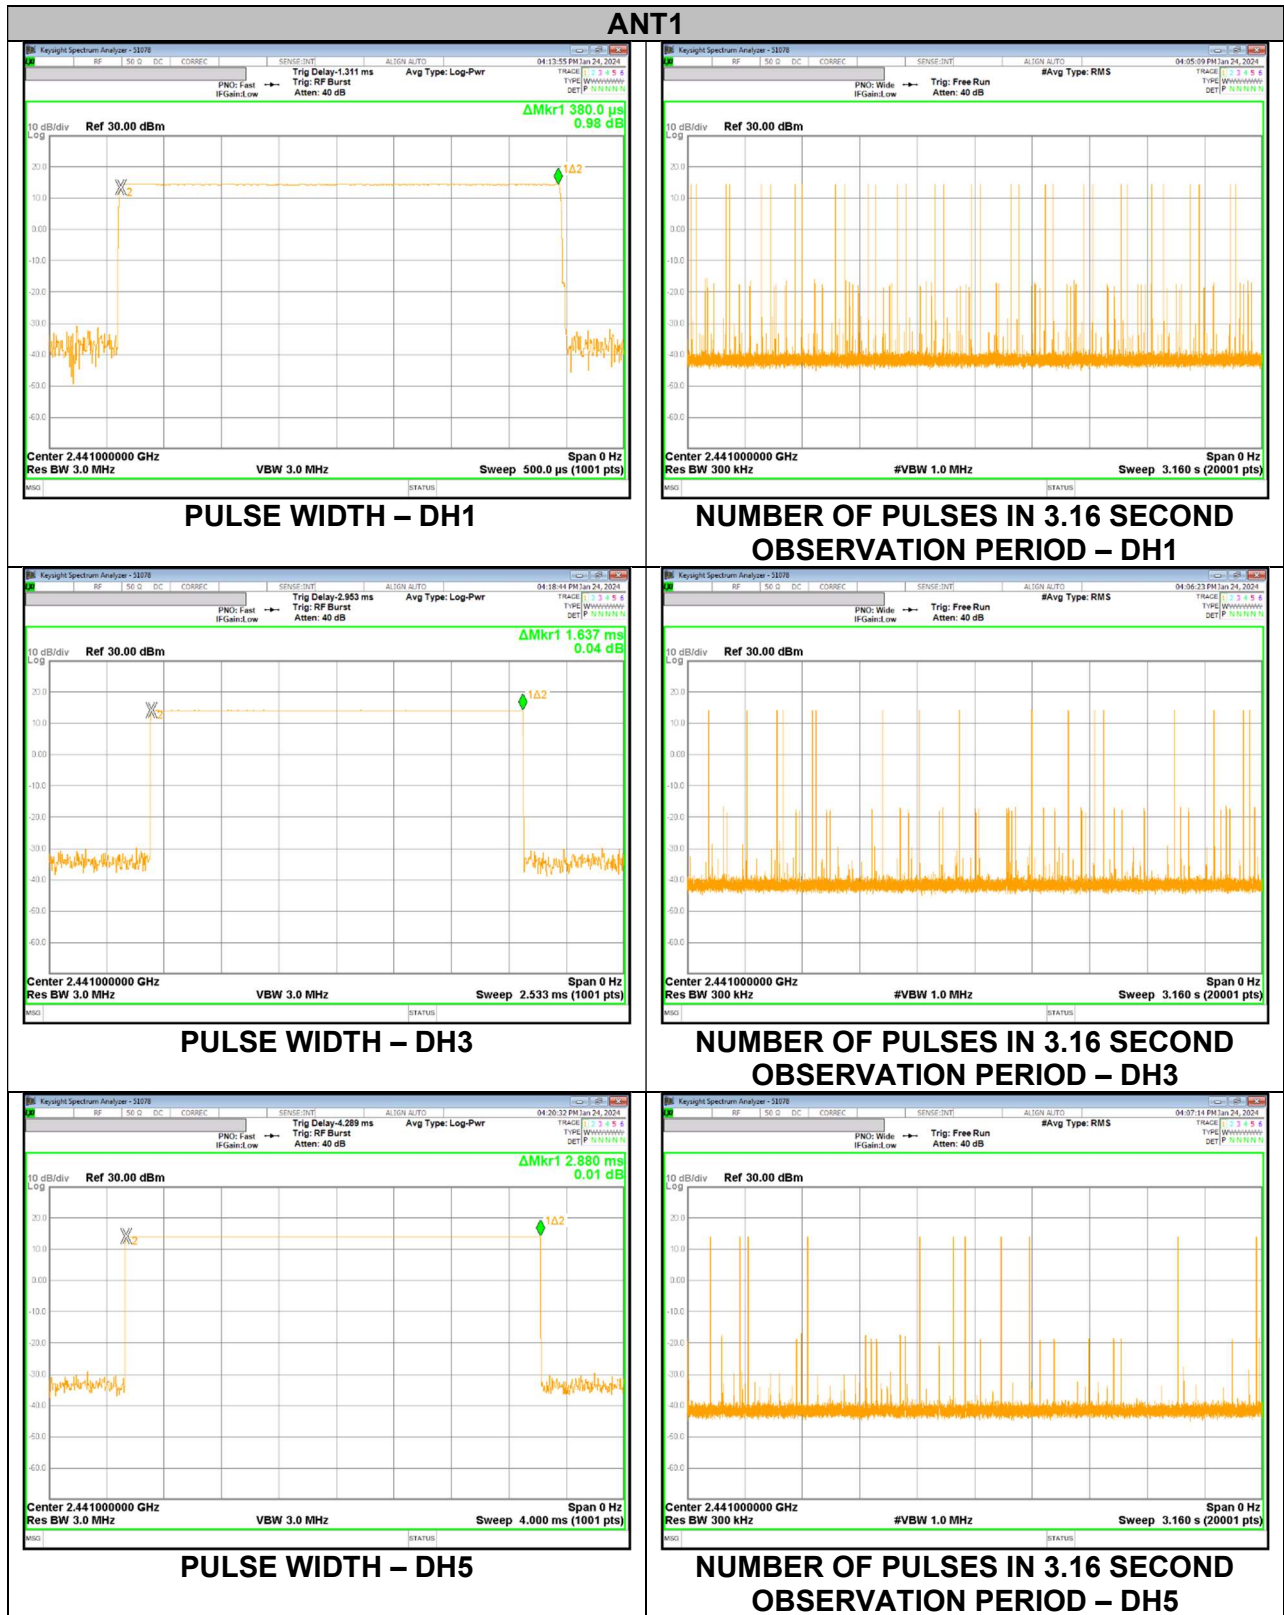

### 9.5.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK Normal ANT1					
DH1	0.392	32	0.125	0.4	-0.275
DH3	1.639	18	0.295	0.4	-0.105
DH5	2.880	11	0.317	0.4	-0.083
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
8PSK AFH ANT1					
DH1	0.392	8	0.031	0.4	-0.369
DH3	1.639	4	0.066	0.4	-0.334
DH5	2.880	3	0.086	0.4	-0.314



## 9.6. OUTPUT POWER

### LIMITS

§15.247 (b) (1)

The correlated maximum antenna gain + Beamforming gain is less than 6 dBi, therefore the limit is 21 dBm.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### RESULTS

#### 9.6.1. BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	14.92	21.00	-6.08
	39	2 441	14.39		-6.61
	78	2 480	13.23		-7.77
Worst			<b>14.92</b>		<b>-6.08</b>

#### 9.6.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION


Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	11.55	21.00	-9.45
	39	2 441	10.54		-10.46
	78	2 480	9.53		-11.47
Worst			<b>11.55</b>		<b>-9.45</b>


#### 9.6.3. ENHANCED DATA RATE 8PSK MODULATION

Antenna	Channel	Frequency [MHz]	Peak Output Power [dBm]	Limit [dBm]	Margin [dB]
ANT1	0	2 402	11.98	21.00	-9.02
	39	2 441	10.91		-10.09
	78	2 480	10.11		-10.89
Worst			<b>11.98</b>		<b>-9.02</b>

### 9.6.4. OUTPUT POWER PLOTS

#### PEAK OUTPUT POWER

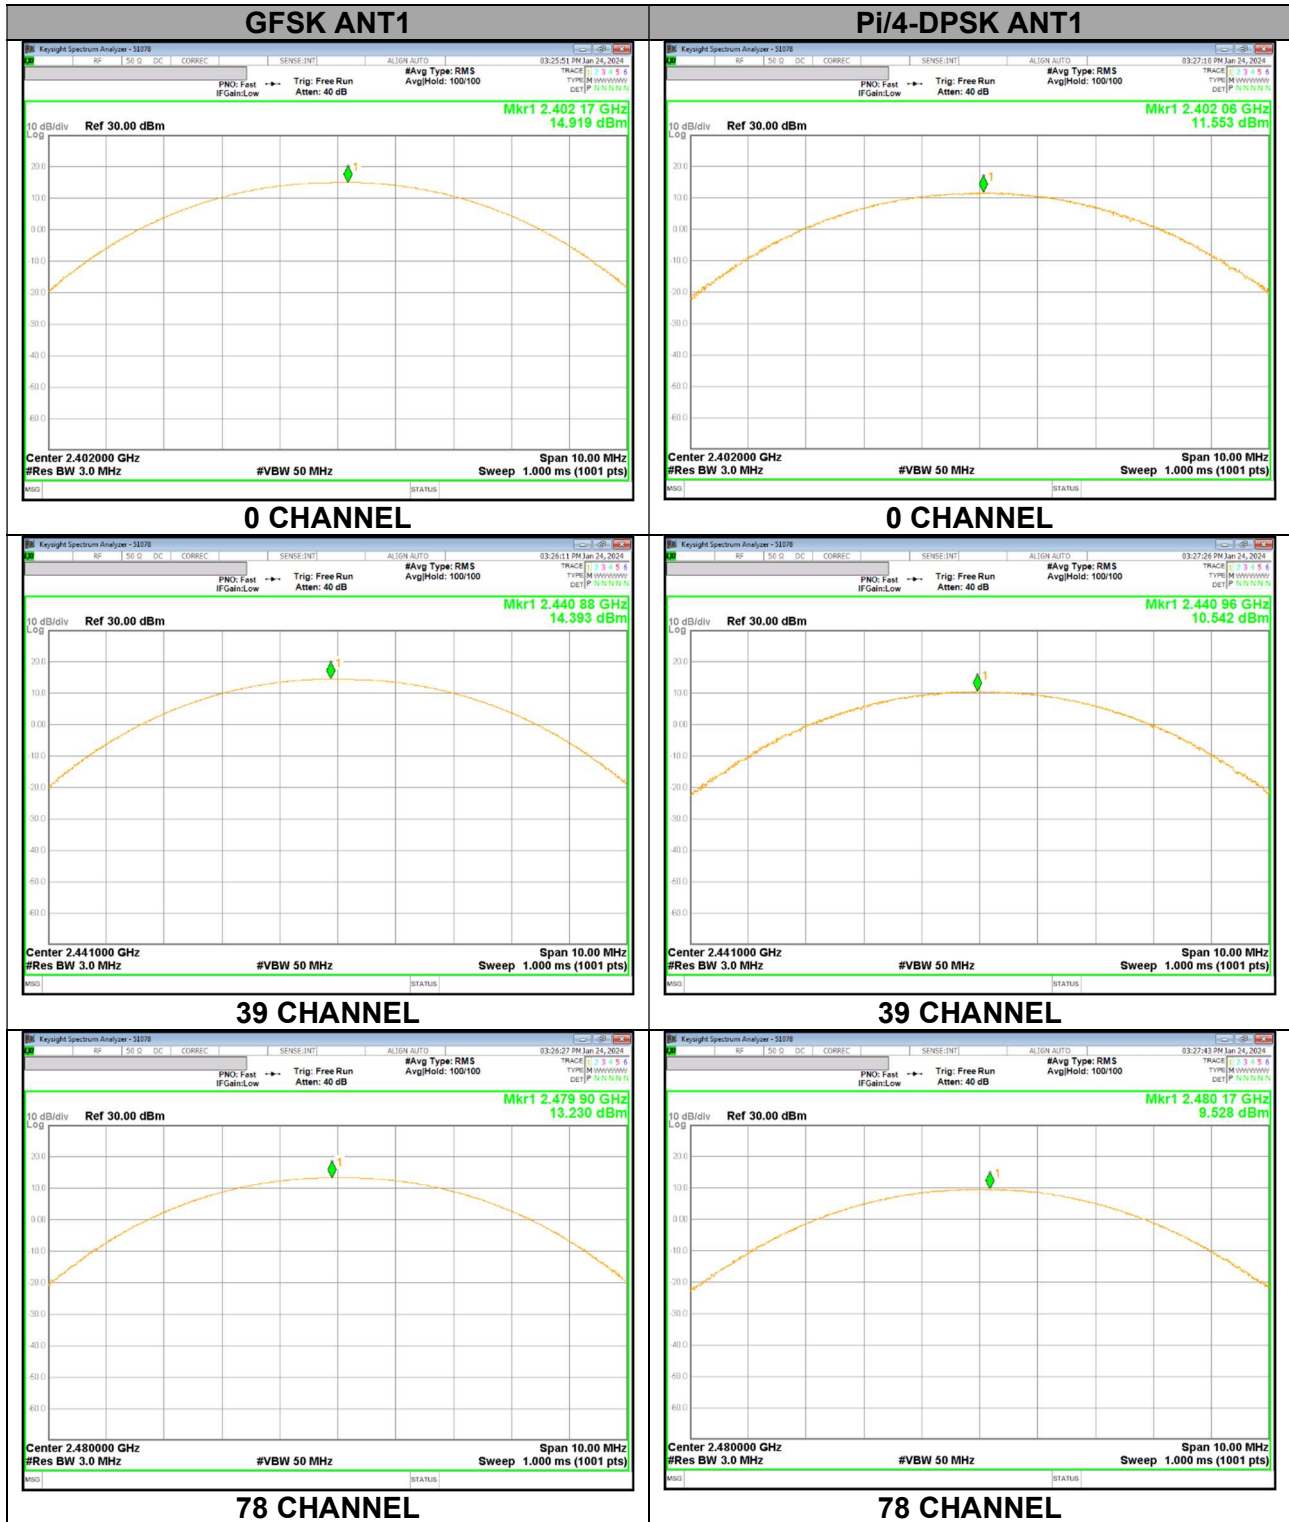

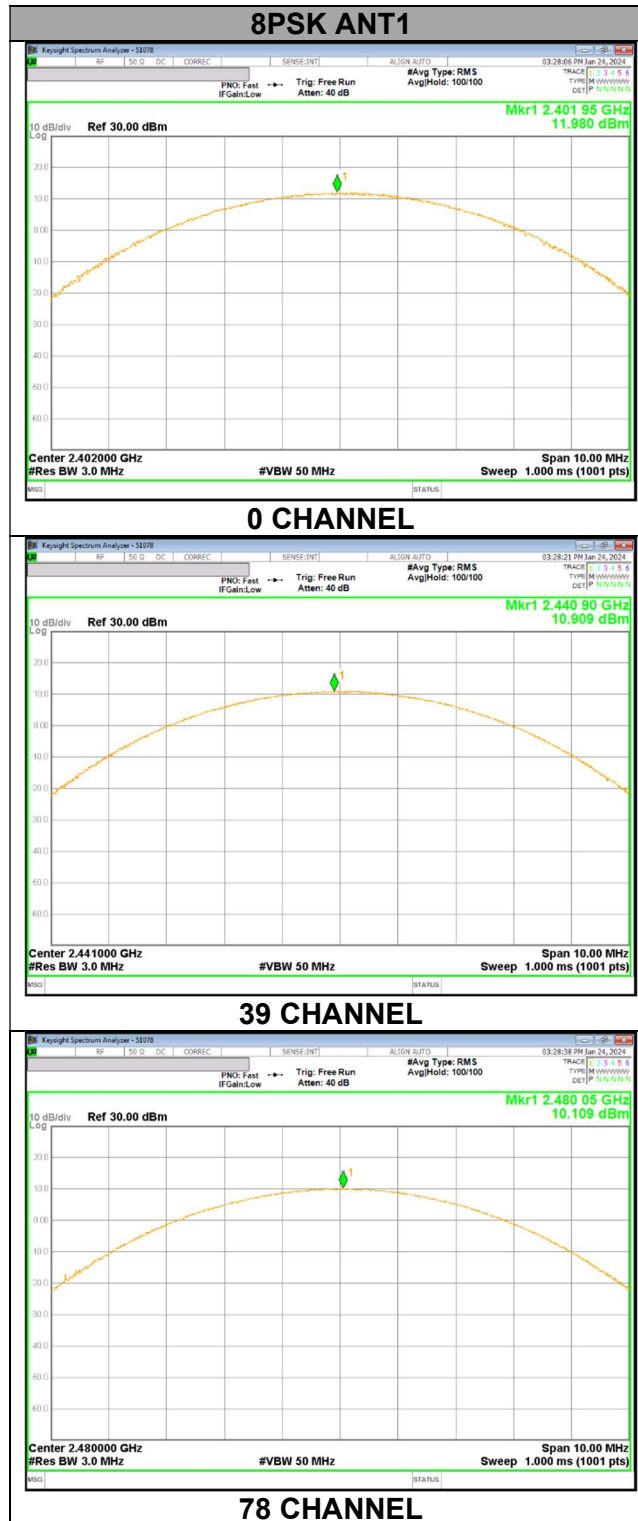

## 9.7. AVERAGE POWER

### LIMITS

None; for reporting purposes only

### TEST PROCEDURE

Measurements perform using a wideband gated RF power meter.  
 The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

### RESULTS

#### 9.7.1. BASIC DATA RATE GFSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	14.73	29.70
	39	2 441	14.16	26.07
	78	2 480	13.07	20.29

#### 9.7.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	9.57	9.06
	39	2 441	8.37	6.87
	78	2 480	7.29	5.35

#### 9.7.3. ENHANCED DATA RATE 8PSK MODULATION

Antenna	Channel	Frequency [MHz]	Average Output Power [dBm]	Average Output Power [mW]
ANT1	0	2 402	9.57	9.05
	39	2 441	8.38	6.88
	78	2 480	7.29	5.36

## 9.8. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.247 (d)

Limit = -20 dBc

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The band-edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

### RESULTS




### 9.8.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

#### SPURIOUS EMISSIONS, NON-HOPPING – ANT1

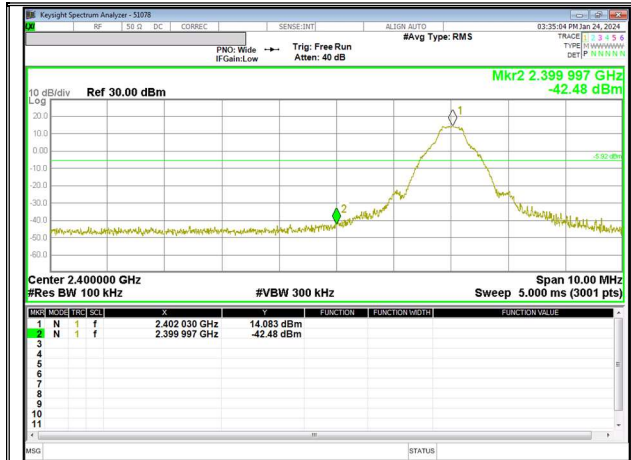


0 CHANNEL BANDEDGE

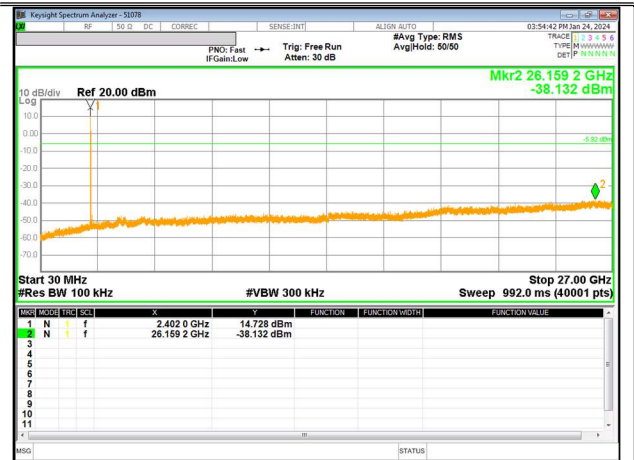


OUT-OF-BAND 0 CHANNEL




IN-BAND REFERENCE LEVEL

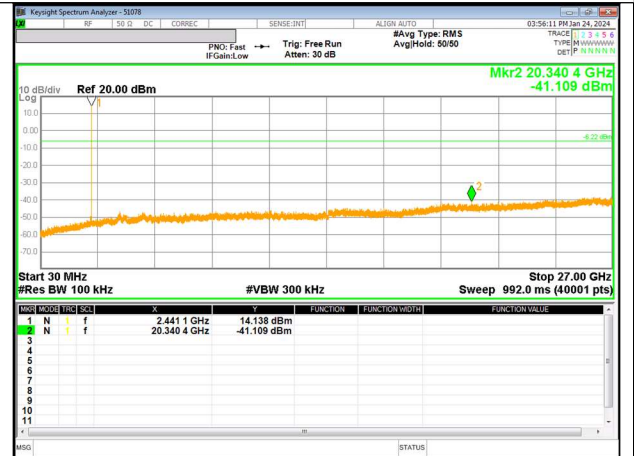

OUT-OF-BAND 39 CHANNEL


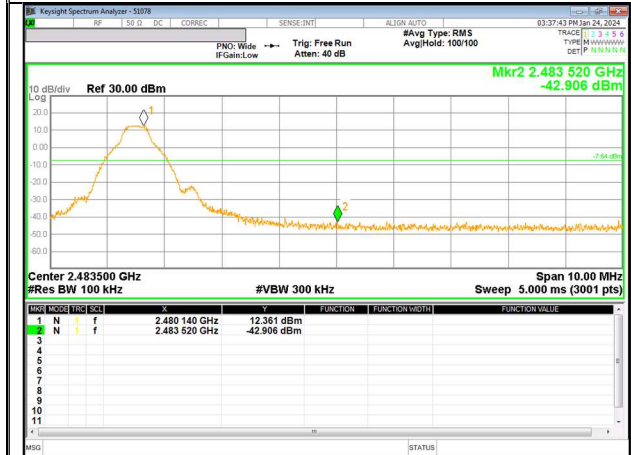


78 CHANNEL BANDEDGE

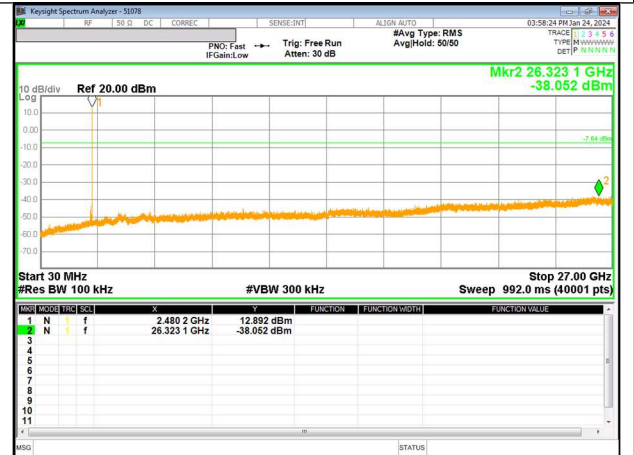

OUT-OF-BAND 78 CHANNEL

**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON – ANT1**

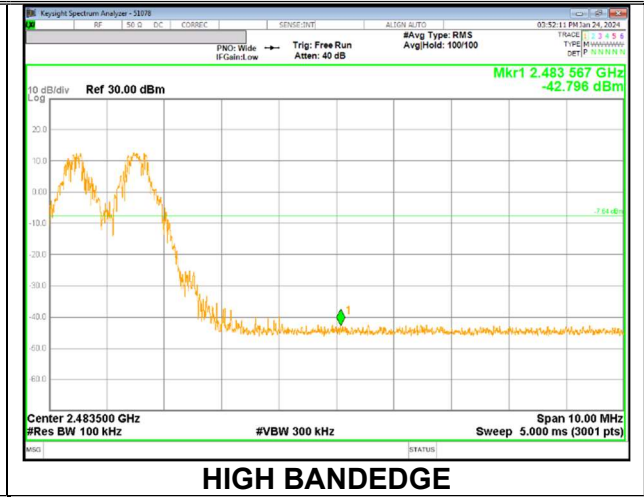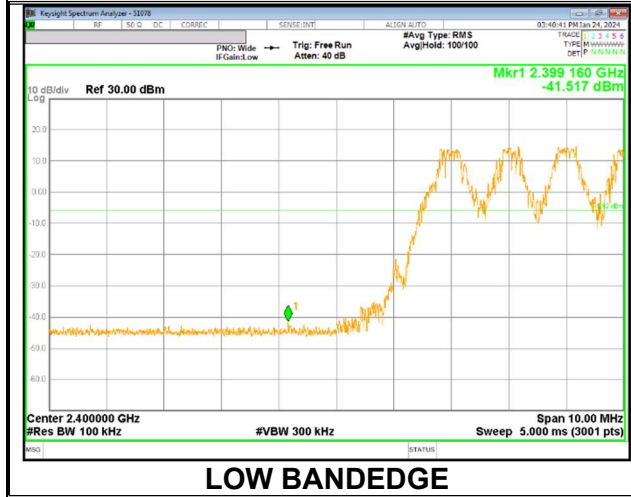


## 9.8.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION


### SPURIOUS EMISSIONS, NON-HOPPING – ANT1




0 CHANNEL BANDEDGE

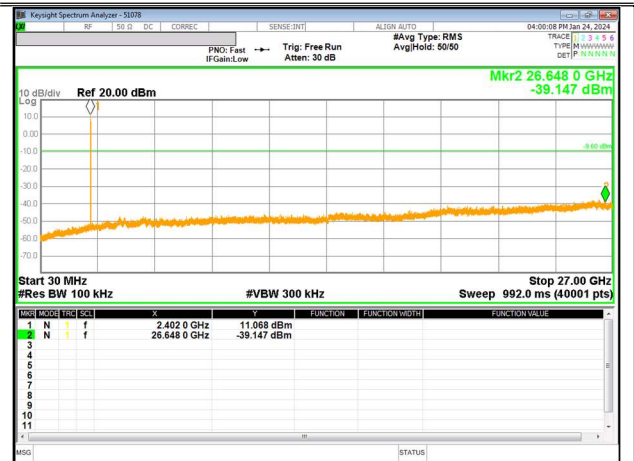


OUT-OF-BAND 0 CHANNEL

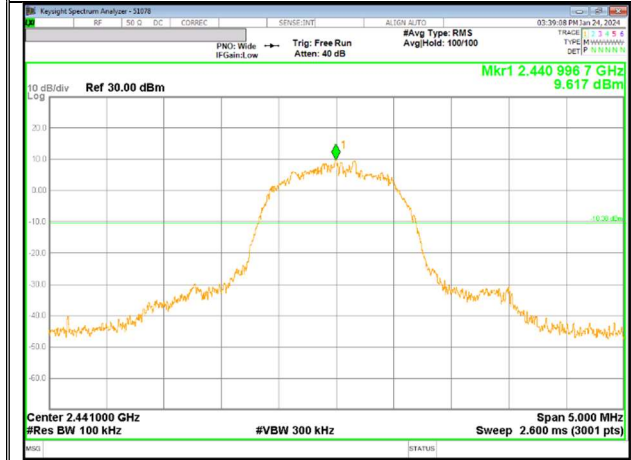


IN-BAND REFERENCE LEVEL

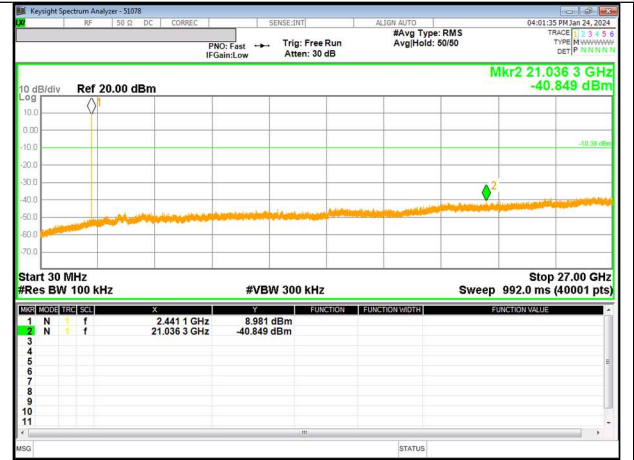

OUT-OF-BAND 39 CHANNEL

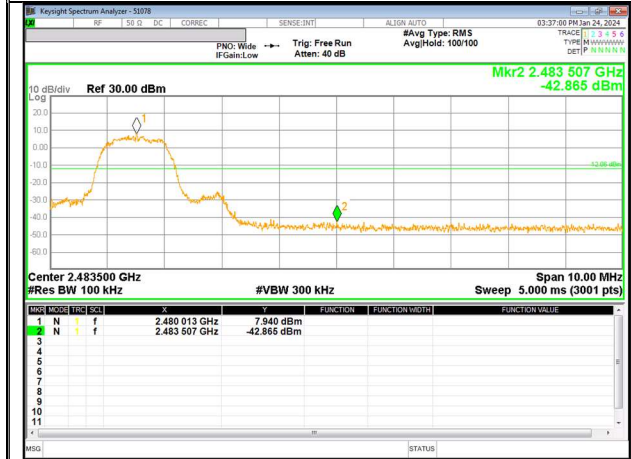

78 CHANNEL BANDEDGE

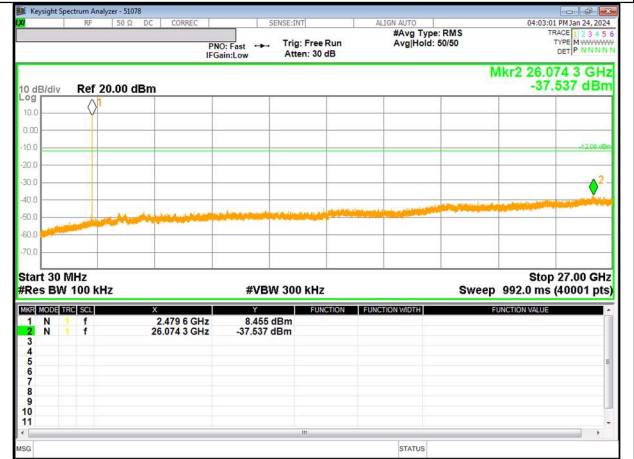

OUT-OF-BAND 78 CHANNEL

**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON – ANT1**



## 10. RADIATED TEST RESULTS

### LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a) : Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.17	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	167.72 ~ 173.2	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	240 ~ 285	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	322 ~ 335.4	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	399.90 ~ 410	3345.8 ~ 3358		
		608 ~ 614	3600 ~ 4400		
		960 ~ 1240			

▪ FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements. (Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.)

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.002895\text{s} = 345\text{Hz}.$$

The minimum VBW was 345Hz, but test receiver(ESU40) couldn't set value 345Hz. Due to this reason, testing VBW was set to 500Hz(Worst cases).

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.  
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).  
Per FCC part 15.31(o), test results were not reported.


Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.  
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

## 10.1. TRANSMITTER ABOVE 1 GHz

### 10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

#### ANT1 BANDEDGE (0 CHANNEL)

#### HORIZONTAL RESULT

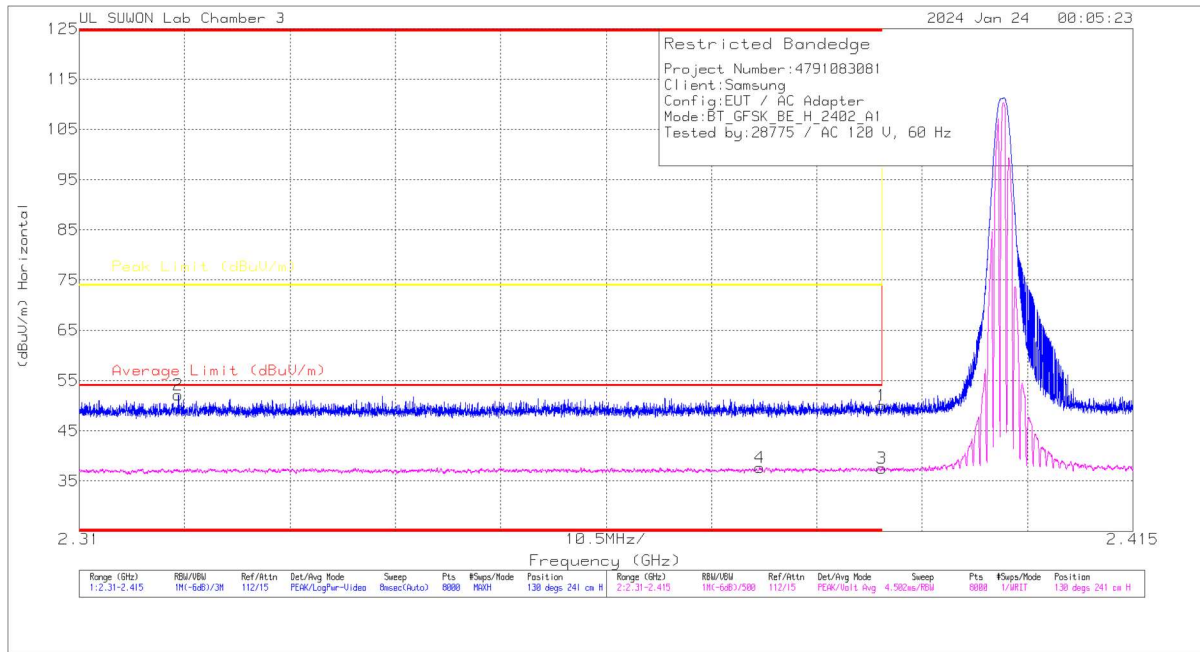

#### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor (dBm)	Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.65	Pk	32.1	-24.8	49.95	-	-	74	-24.05	130	241	H
2	* 2.31987	45.04	Pk	31.9	-24.8	52.14	-	-	74	-21.86	130	241	H
3	* 2.39	30.21	VA1T	32.1	-24.8	37.51	54	-16.49	-	-	130	241	H
4	* 2.3778	30.37	VA1T	32.1	-24.8	37.67	54	-16.33	-	-	130	241	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

### VERTICAL RESULT

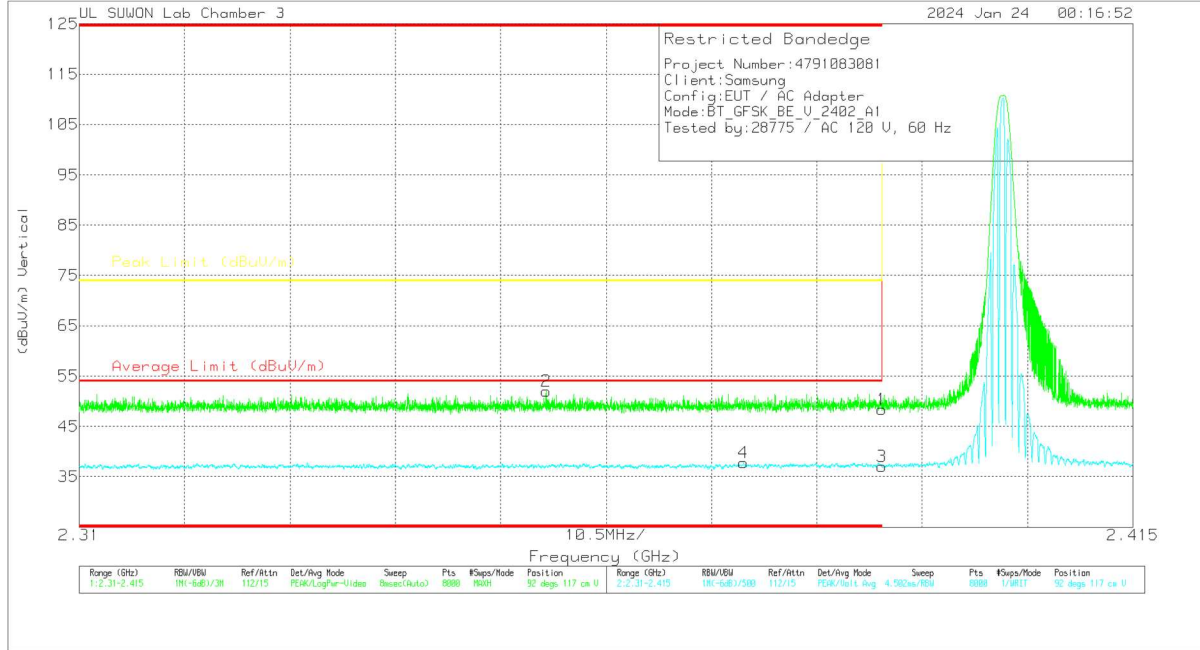

### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	Antenna Correction Factor (dBm)	Loss (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.14	Pk	32.1	-24.8	48.44	-	-	74	-25.56	92	117	V
2	* 2.35651	44.77	Pk	32	-24.8	51.97	-	-	74	-22.03	92	117	V
3	* 2.39	29.76	VA1T	32.1	-24.8	37.06	54	-16.94	-	-	92	117	V
4	* 2.3762	30.47	VA1T	32.1	-24.8	37.77	54	-16.23	-	-	92	117	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration