



FCC CFR47 PART 15 SUBPART C

Bluetooth

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC

MODEL NUMBER : SM-A600GN/DS, SM-A600GN

FCC ID: A3LSMA600GN

REPORT NUMBER: 4788371667-E3V2

ISSUE DATE: APR 07, 2018

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



ACCREDITED*

Testing
Laboratory

TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	03/30/18	Initial issue	Junwhan Lee
V2	04/07/18	Updated to address TCB's question	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
1.1. INTRODUCTION OF TEST DATA REUSE.....	6
1.2. DIFFERENCE.....	6
1.3. SPOT CHECK VERIFICATION DATA	6
1.4. REFERENCE DETAIL	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY.....	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT	10
5.1. MAXIMUM OUTPUT POWER.....	10
5.2. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.3. WORST-CASE CONFIGURATION AND MODE.....	10
5.4. DESCRIPTION OF TEST SETUP.....	11
6. MEASUREMENT METHODS	13
7. TEST AND MEASUREMENT EQUIPMENT	14
8. REFERENCE MEASUREMENT RESULTS.....	15
8.1. ON TIME AND DUTY CYCLE RESULTS.....	15
8.2. 20 dB AND 99% BANDWIDTH	16
8.2.1. BASIC DATA RATE GFSK MODULATION	16
8.2.2. ENHANCED DATA RATE Pi/4-DQPSK MODULATION.....	16
8.2.3. ENHANCED DATA RATE 8PSK MODULATION	16
8.2.4. 20 dB AND 99% BANDWIDTH PLOTS.....	17
9. SUMMARY TABLE	20
10. ANTENNA PORT TEST RESULTS	21
10.1. HOPPING FREQUENCY SEPARATION.....	21
10.2. NUMBER OF HOPPING CHANNELS	22
10.3. AVERAGE TIME OF OCCUPANCY	24
10.4. OUTPUT POWER.....	28

10.4.1.	BASIC DATA RATE GFSK MODULATION	28
10.4.2.	ENHANCED DATA RATE Pi/4-DPSK MODULATION.....	28
10.4.3.	ENHANCED DATA RATE 8PSK MODULATION.....	28
10.4.4.	OUTPUT POWER PLOTS	29
10.5.	AVERAGE POWER	32
10.5.1.	BASIC DATA RATE GFSK MODULATION	32
10.5.2.	DATA RATE PI/4-DQPSK MODULATION.....	32
10.5.3.	ENHANCED DATA RATE 8PSK MODULATION.....	32
10.6.	CONDUCTED SPURIOUS EMISSIONS	33
10.6.1.	BASIC DATA RATE GFSK MODULATION	34
11.	RADIATED TEST RESULTS	46
11.1.	LIMITS AND PROCEDURE.....	46
11.2.	TRANSMITTER ABOVE 1 GHz.....	48
11.2.1.	BASIC DATA RATE GFSK MODULATION	48
11.2.2.	ENHANCED DATA RATE 8PSK MODULATION.....	58
11.3.	WORST-CASE BELOW 1 GHz	68
12.	AC POWER LINE CONDUCTED EMISSIONS	70
13.	SETUP PHOTOS	75

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC
MODEL NUMBER: SM-A600GN/DS, SM-A600GN
SERIAL NUMBER: R38K108GVGN (RADIATED, Original);
R38K10BCS5W (CONDUCTED, Original);
R38K108NTAW, R38K108M8ZJ
(RADIATED, Spot check & Additional test);
DATE TESTED: FEB 22, 2018 - MAR 07, 2018 (Original)
MAR 28, 2018 - MAR 29, 2018 (Spot check & Additional test)

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

HoonPyo Lee
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMA600FN BT(FCC CFR 47 Part 15C).
 And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMA600GN shares the same enclosure and circuit board as FCC ID: A3LSMA600FN. The BT antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMA600FN remains representative of FCC ID: A3LSMA600GN. The test data of FCC ID: A3LSMA600FN being submitted for this application to cover BT features.

Due to difference of charger, radiated emission under 1GHz and AC line conducted test were performed newly.

1.3. SPOT CHECK VERIFICATION DATA

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-A600FN/DS Results	SM-A600GN/DS Results		
					FCC ID : A3LSMA600FN	FCC ID : A3LSMA600GN		
DSS BT (2.4GHz)	Band Edge	GFSK	2480 MHz	54 dBuV/m	40.02 dBuV/m	39.98 dBuV/m	-0.04 dB	
	RSE	GFSK	2441 MHz	74 dBuV/m	40.72 dBuV/m	40.17 dBuV/m	-0.55 dB	Noise Floor

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Type Grant/Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title / Section
DTS	A3LSMA600FN	Grant	4788371662-E1V2	Test	FCC Report DTS WLAN / All sections (Except section 11.3 and 12)
			4788371662-E2V2	Test	FCC Report BLE All sections (Except section 11.3 and 12)
DSS	A3LSMA600FN	Grant	4788371662-E3V2	Test	FCC Report BT / All sections (Except section 11.3 and 12)
NII	A3LSMA600FN	Grant	4788371662-E4V2	Test	FCC Report UNII WALN / All sections (Except section 12 and 13)
DXX	A3LSMA600FN	Grant	4788371662-E5V2	Test	FCC Report ANT+ / All sections (Except section 7.2.5 and 8)
			4788371662-E6V2	Test	FCC Report NFC / All sections (Except section 8.1.3 and 9)
PCE	A3LSMA600FN	Grant	4788371662-E7V3	Test	FCC Report WWAN / All sections (Except Conducted Output Power)

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. FCC DA 00-705 Filing and measurement guidelines for FHSS systems
4. ANSI C63.10-2013.
5. KDB 484596 D01 Referencing Test Data DR01-42712

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input type="checkbox"/>	Chamber 1
<input type="checkbox"/>	Chamber 2
<input checked="" type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC.
 This test report addresses the DSS (BT) operational mode.

5.1. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2402 - 2480	Basic GFSK	Average	7.906	6.174
		Peak	8.114	6.477
	Enhanced Pi/4-DPSK	Average	2.855	1.930
		Peak	5.353	3.430
	Enhanced 8PSK	Average	2.881	1.941
		Peak	5.631	3.657

5.2. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of -3.01 dBi.

5.3. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 9.5. All radiated and power line conducted tests were performed connected with earphone and charger for evaluation of worst case mode.

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA50JWS	DK6K104VS/A- E	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	EHS61ASFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A


TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
 Test software enable BT communications.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

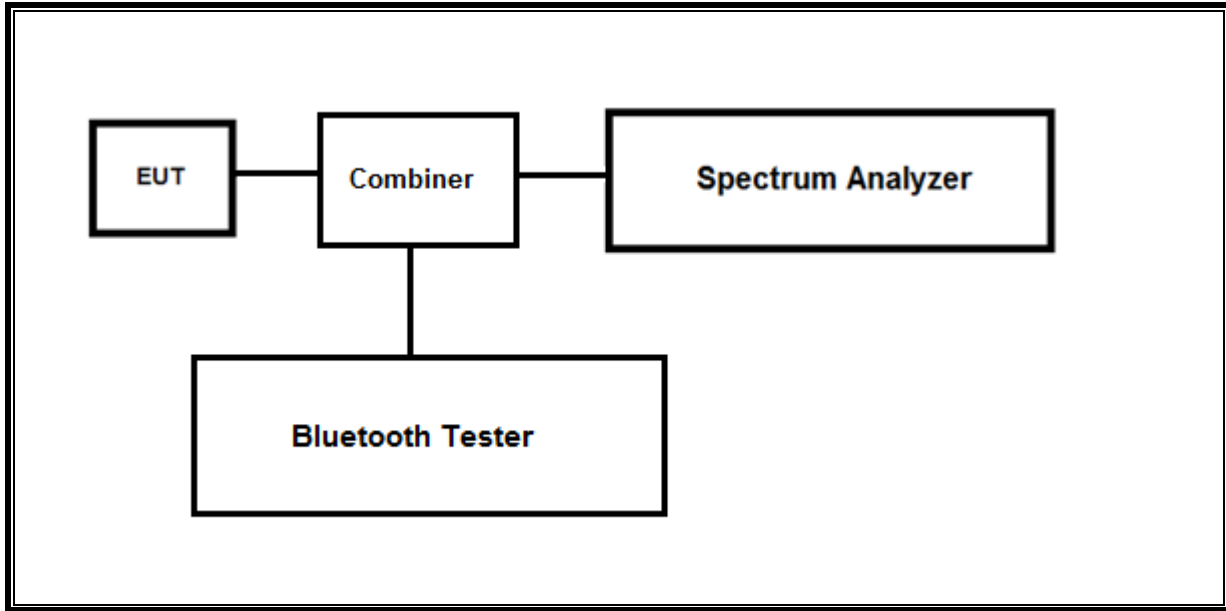

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

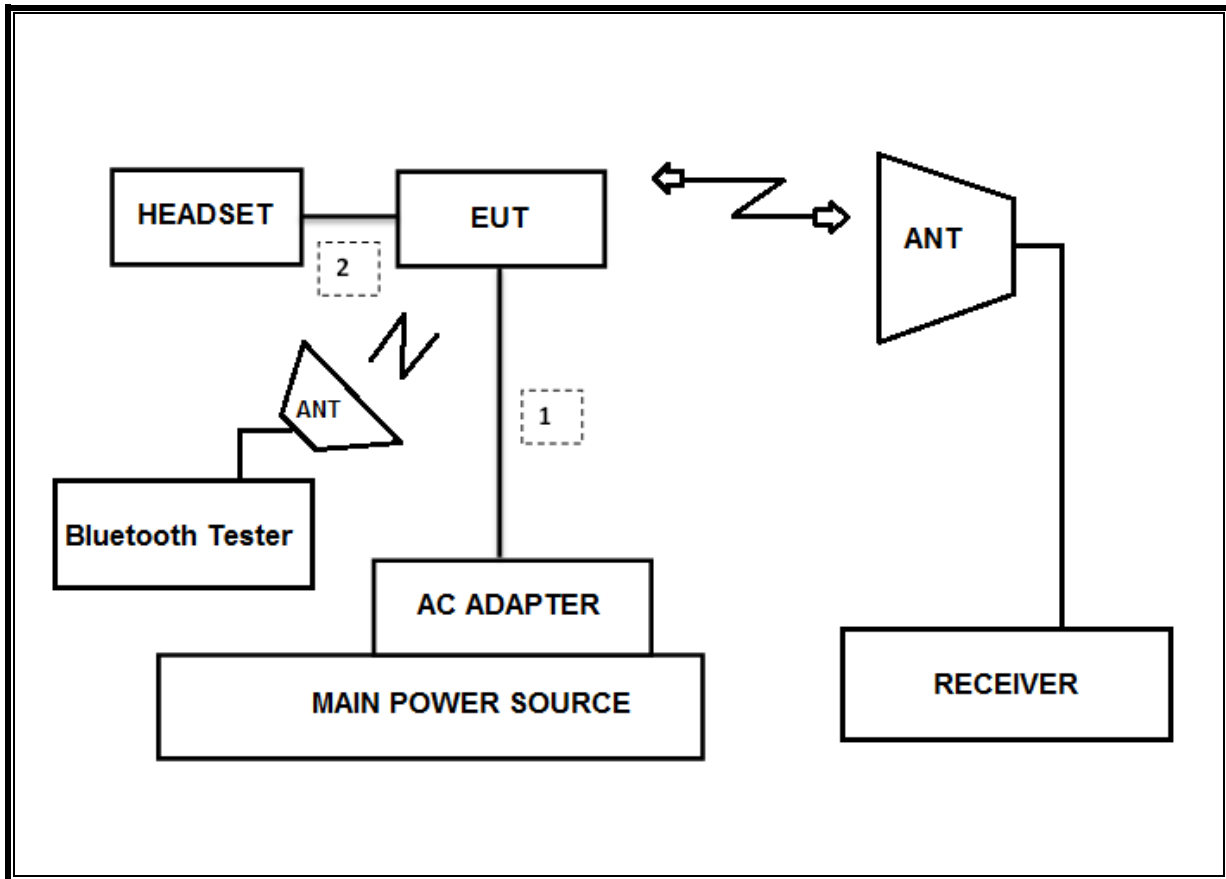

6. MEASUREMENT METHODS

20dB BW : ANSI C63.10, Section 6.9.2

99% BW : ANSI C63.10, Section 6.9.3

HOPPING FREQUENCY SEPARATION : ANSI C63.10, Section 7.8.2

NUMBER OF HOPPING CHANNELS : ANSI C63.10, Section 7.8.3

AVERAGE TIME OF OCCUPANCY : ANSI C63.10, Section 7.8.4

OUTPUT POWER : ANSI C63.10, Section 7.8.5.

Out-of-band EMISSIONS (Conducted) : ANSI C63.10, Section 7.8.6, 7.8.8

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: ANSI C63.10, Section 6.

Out-of-band EMISSIONS IN RESTRICTED BANDS : ANSI C63.10, Section 6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-31-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	09-14-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-31-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3115	00161451	03-10-19
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00168717	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00205959	11-29-18
Antenna, Horn, 40 GHz	ETS	3116C	00166155	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C	00168645	12-04-19
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	11-13-19
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-09-18
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-18
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-10-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-08-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-11-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-08-18
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-08-18
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-08-18
Combiner	WEINCHEL	1575	2152	08-08-18
Attenuator	PASTERNAK	PE7087-10	A001	08-08-18
Attenuator	PASTERNAK	PE7087-10	A008	08-08-18
Attenuator	PASTERNAK	PE7087-10	2	08-10-18
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-08-18
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-09-18
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-07-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-11-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-11-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-11-18
LISN	R&S	ENV-216	101837	08-09-18
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

8. REFERENCE MEASUREMENT RESULTS

8.1. ON TIME AND DUTY CYCLE RESULTS


LIMITS

None: for reporting purposes only.

Mode	Data Rate	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
2400MHz Bands							
BT	DH1	0.383	1.250	0.306	30.6%	5.14	2.613
	DH3	1.638	2.500	0.655	65.5%	1.84	0.611
	DH5	2.886	3.750	0.770	77.0%	1.14	0.347



[DH1]

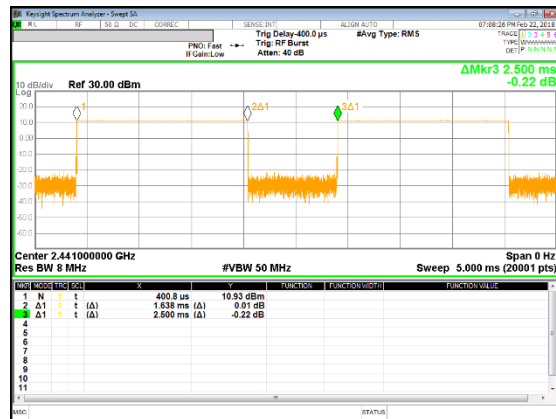

[DH3]



[DH5]

8.2. 20 dB AND 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

8.2.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [kHz]
Low	2402	1.052	928.560
Mid	2441	1.053	937.500
High	2480	1.053	938.200
Worst		1.053	938.200

8.2.2. ENHANCED DATA RATE Pi/4-DQPSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	1.359	1.196
Mid	2441	1.358	1.169
High	2480	1.359	1.197
Worst		1.359	1.197

8.2.3. ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	1.335	1.195
Mid	2441	1.322	1.168
High	2480	1.320	1.198
Worst		1.335	1.198

8.2.4. 20 dB AND 99% BANDWIDTH PLOTS


GFSK BANDWIDTH

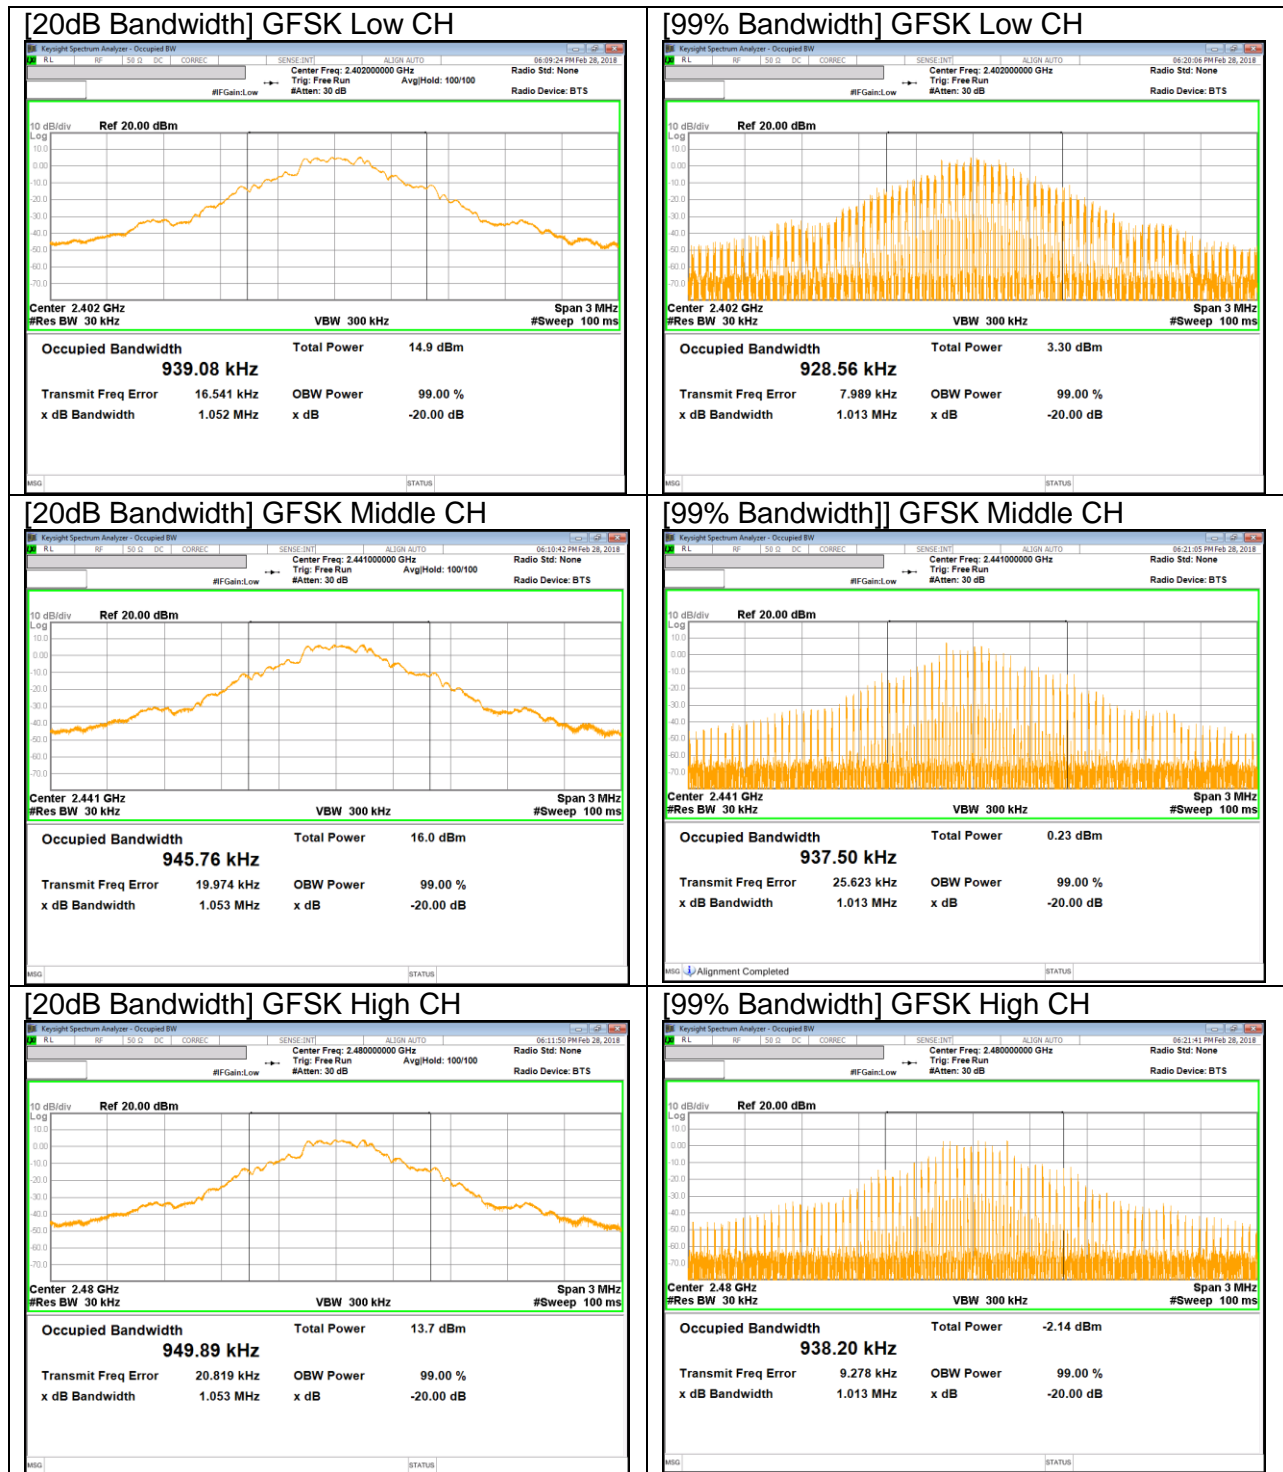

Pi/4-DQPSK BANDWIDTH

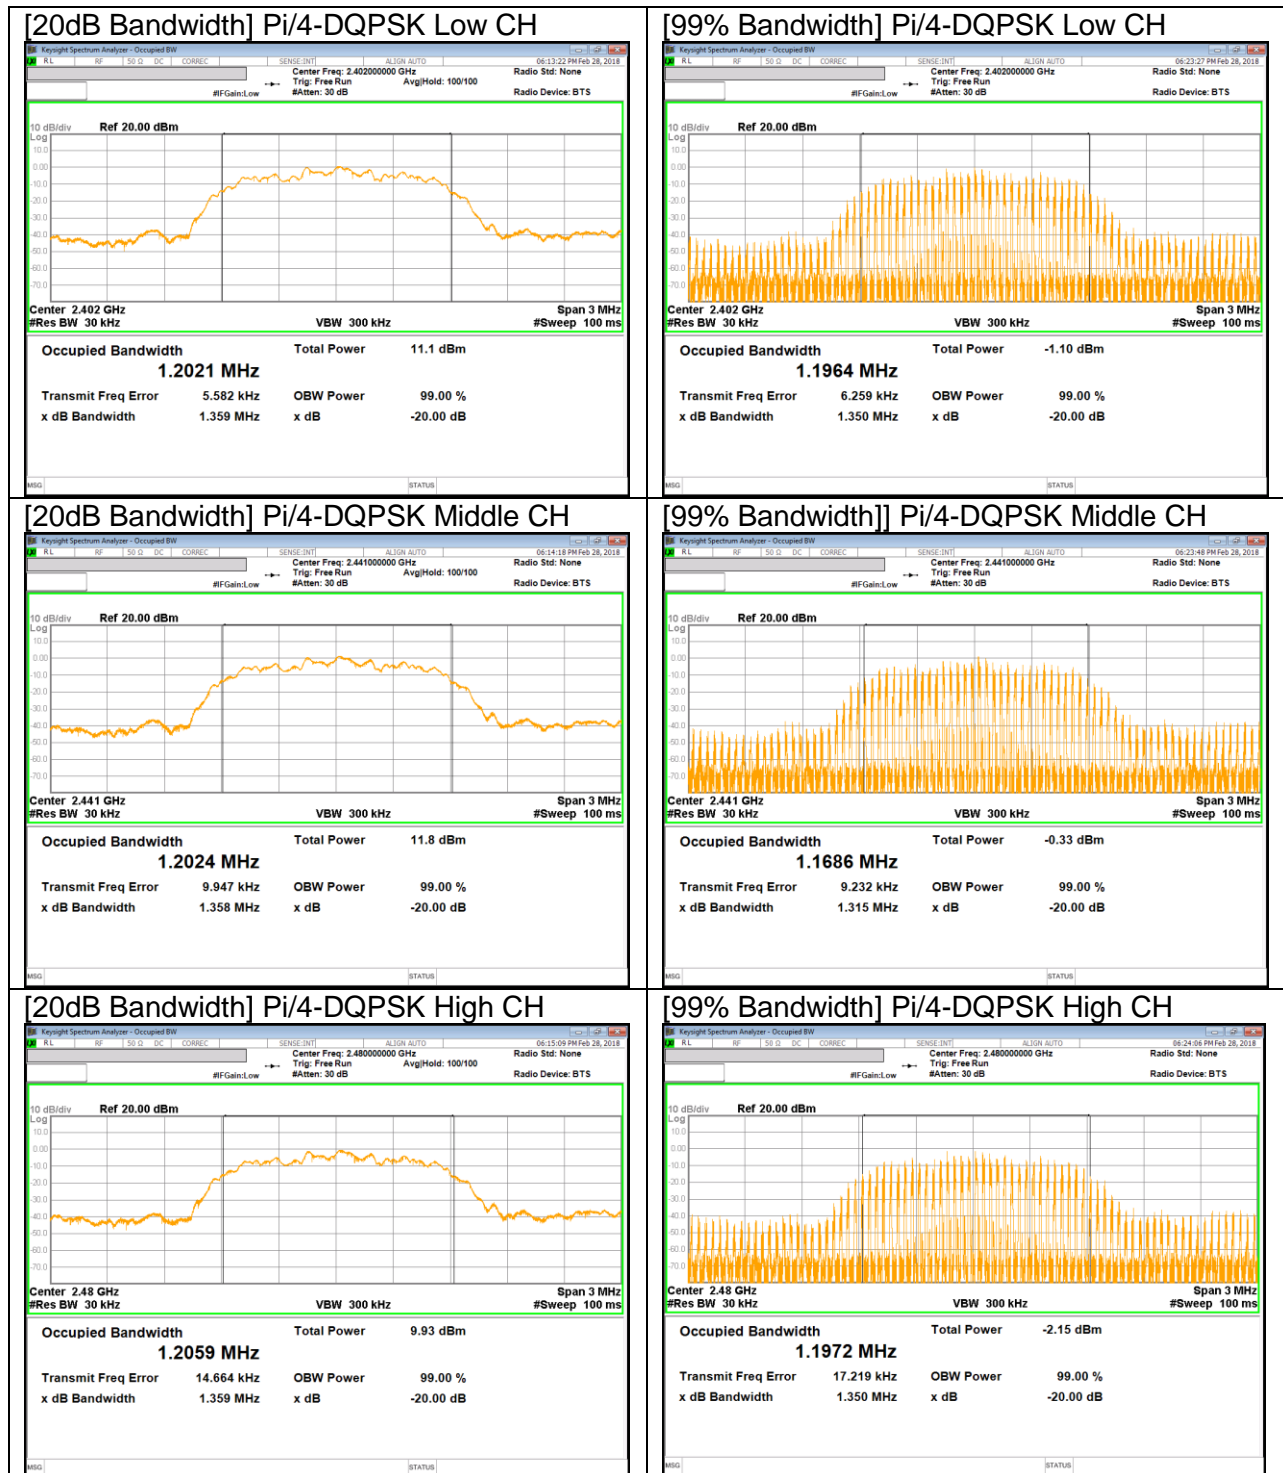

8PSK BANDWIDTH

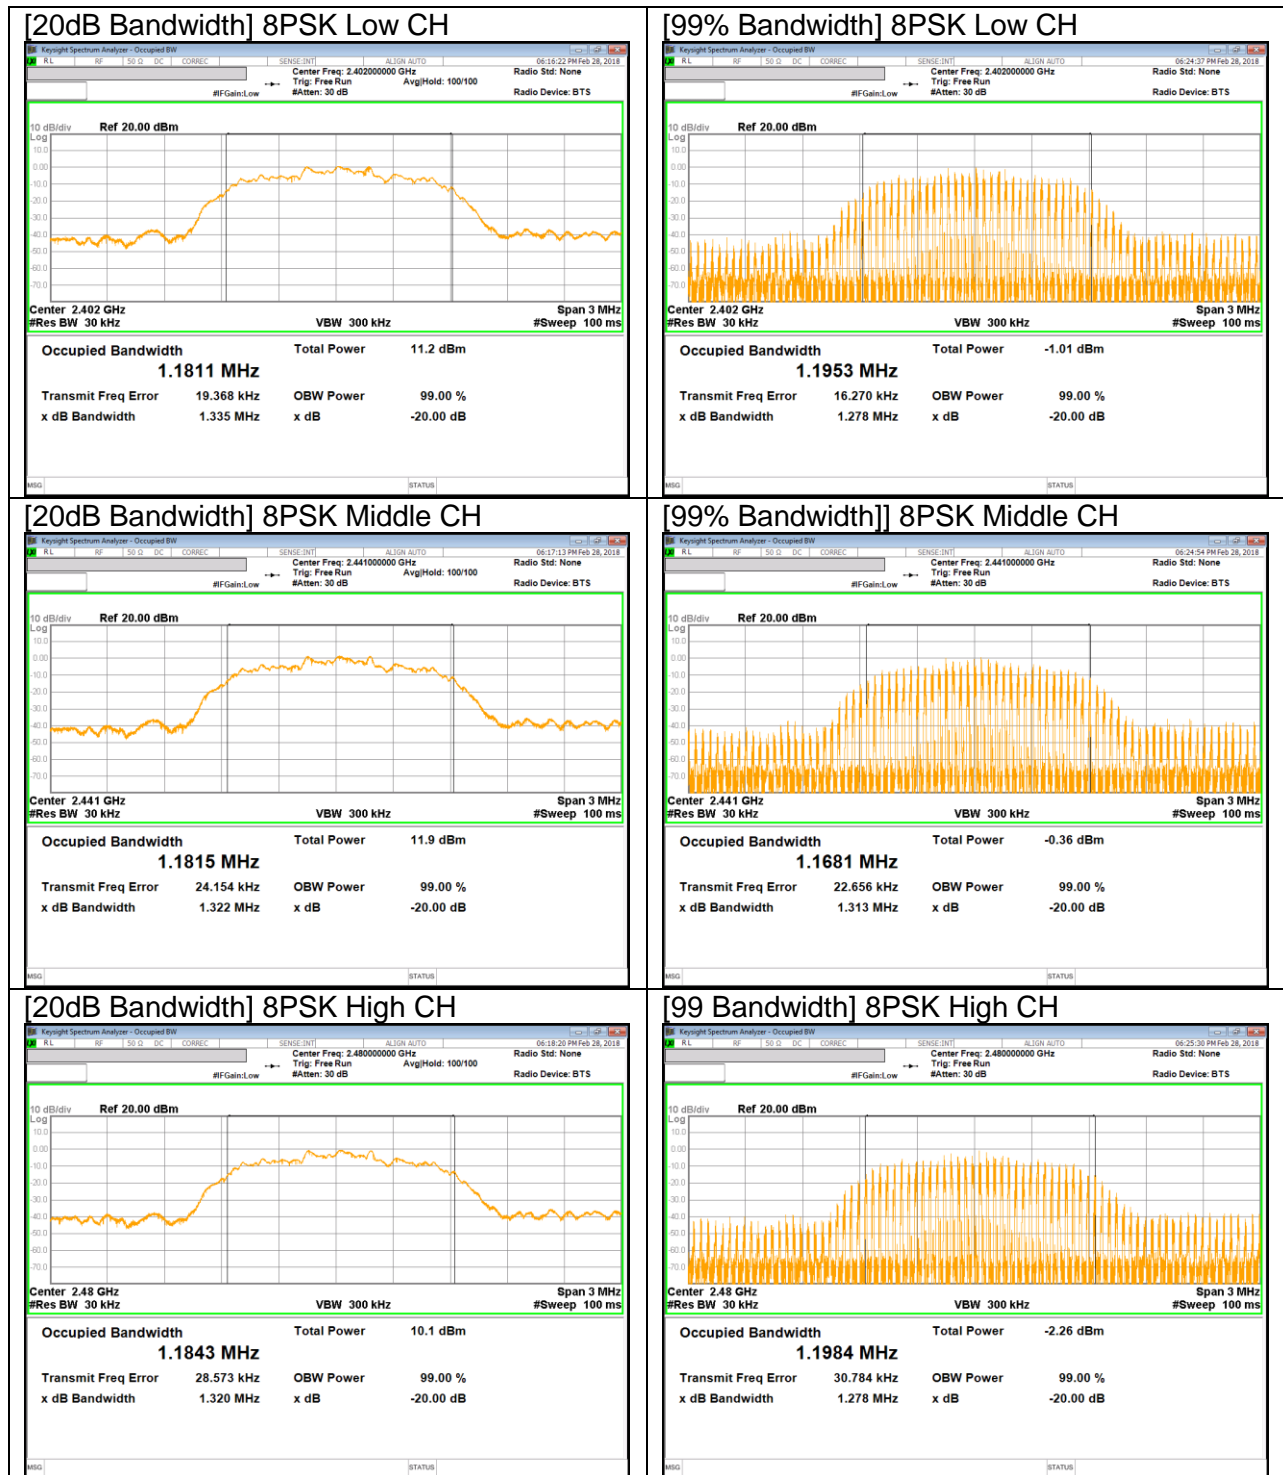

9. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass
15.247 (b)(1)	TX conducted output power	<30dBm		Pass
15.247 (a)(1)	Hopping frequency separation	> two-thirds of the 20 dB bandwidth		Pass
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		Pass
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 0.4sec		Pass
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass

10. ANTENNA PORT TEST RESULTS

10.1. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION PLOT

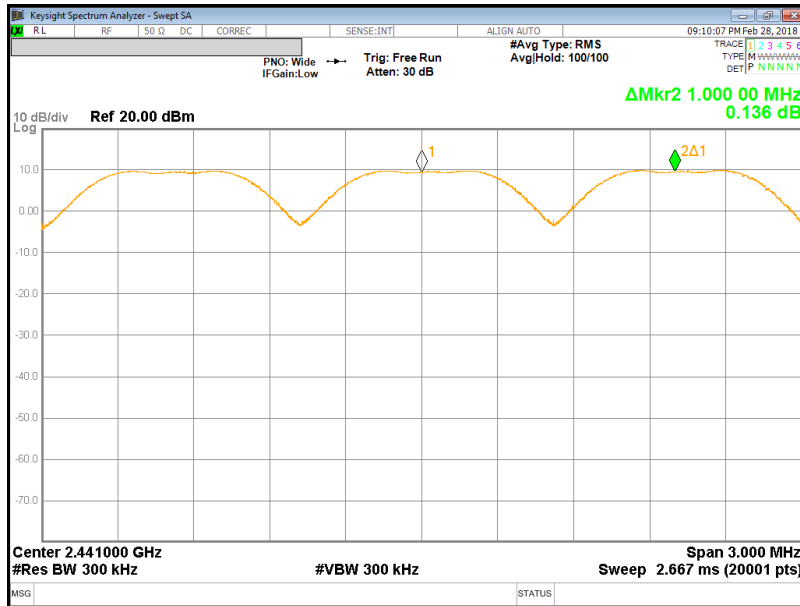

10.2. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS PLOTS

NUMBER OF HOPPING CHANNELS (100 MHz SPAN)

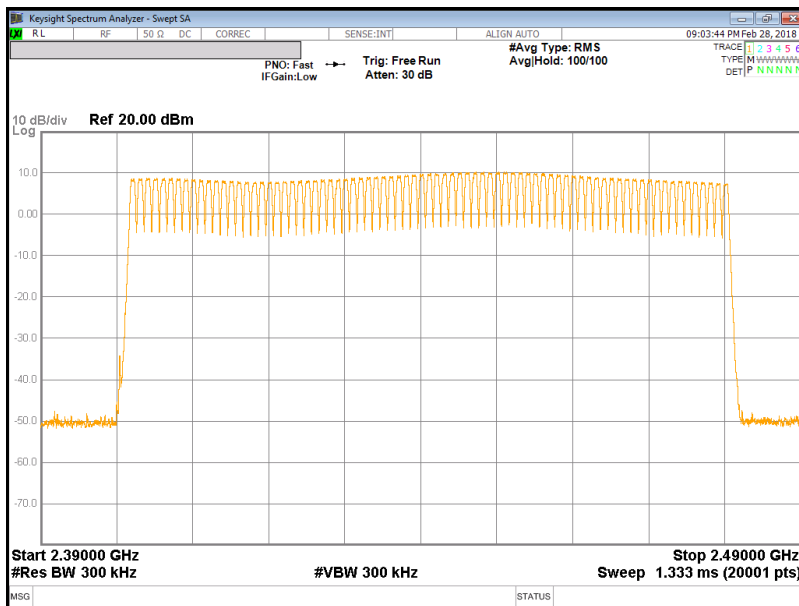

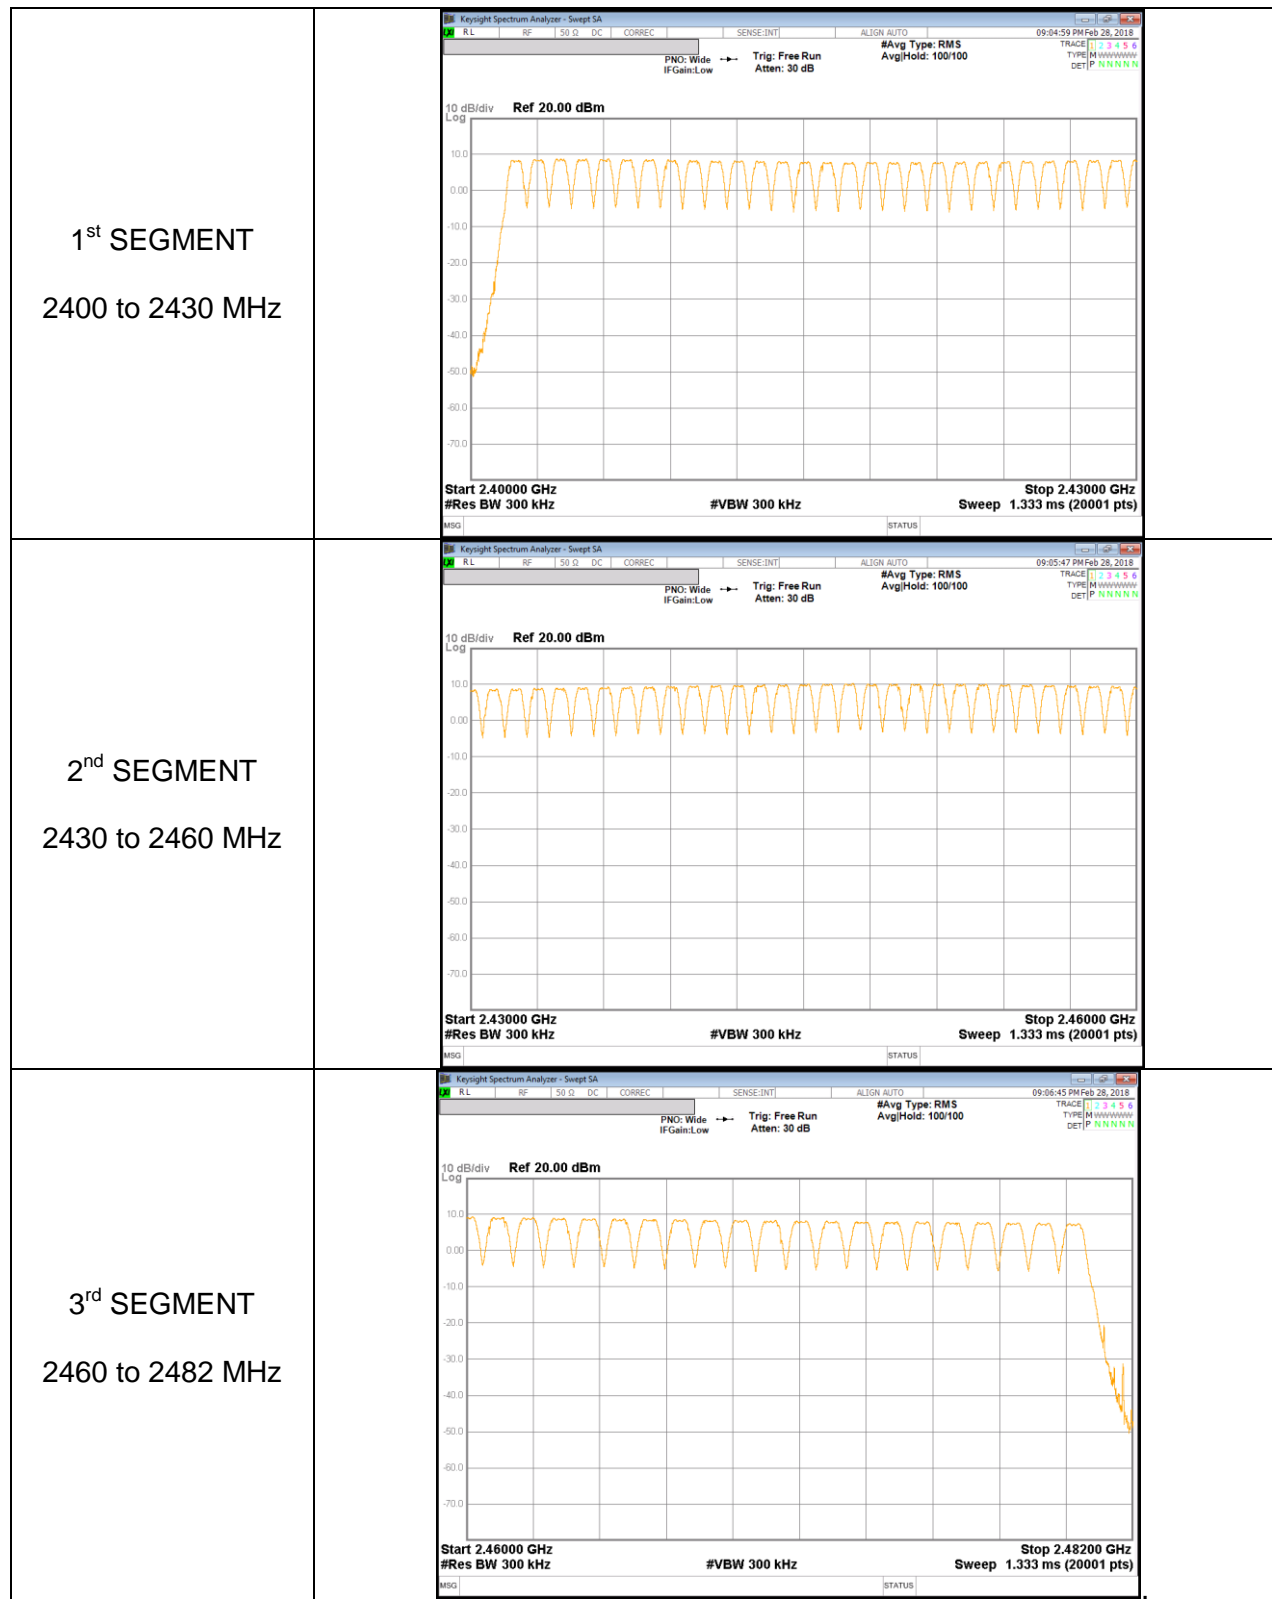

10.3. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.


RESULTS[GFSK]

	Width [msec]	Pulses in 3.16 seconds	of Occupancy [sec]	[sec]	[sec]
GFSK Normal					
DH1	0.383	32	0.122464	0.4	-0.2775
DH3	1.638	16	0.262080	0.4	-0.1379
DH5	2.886	12	0.346320	0.4	-0.0537
GFSK AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
DH1	0.383	8	0.030616	0.4	-0.3694
DH3	1.638	4	0.065520	0.4	-0.3345
DH5	2.886	3	0.086580	0.4	-0.3134


DH1

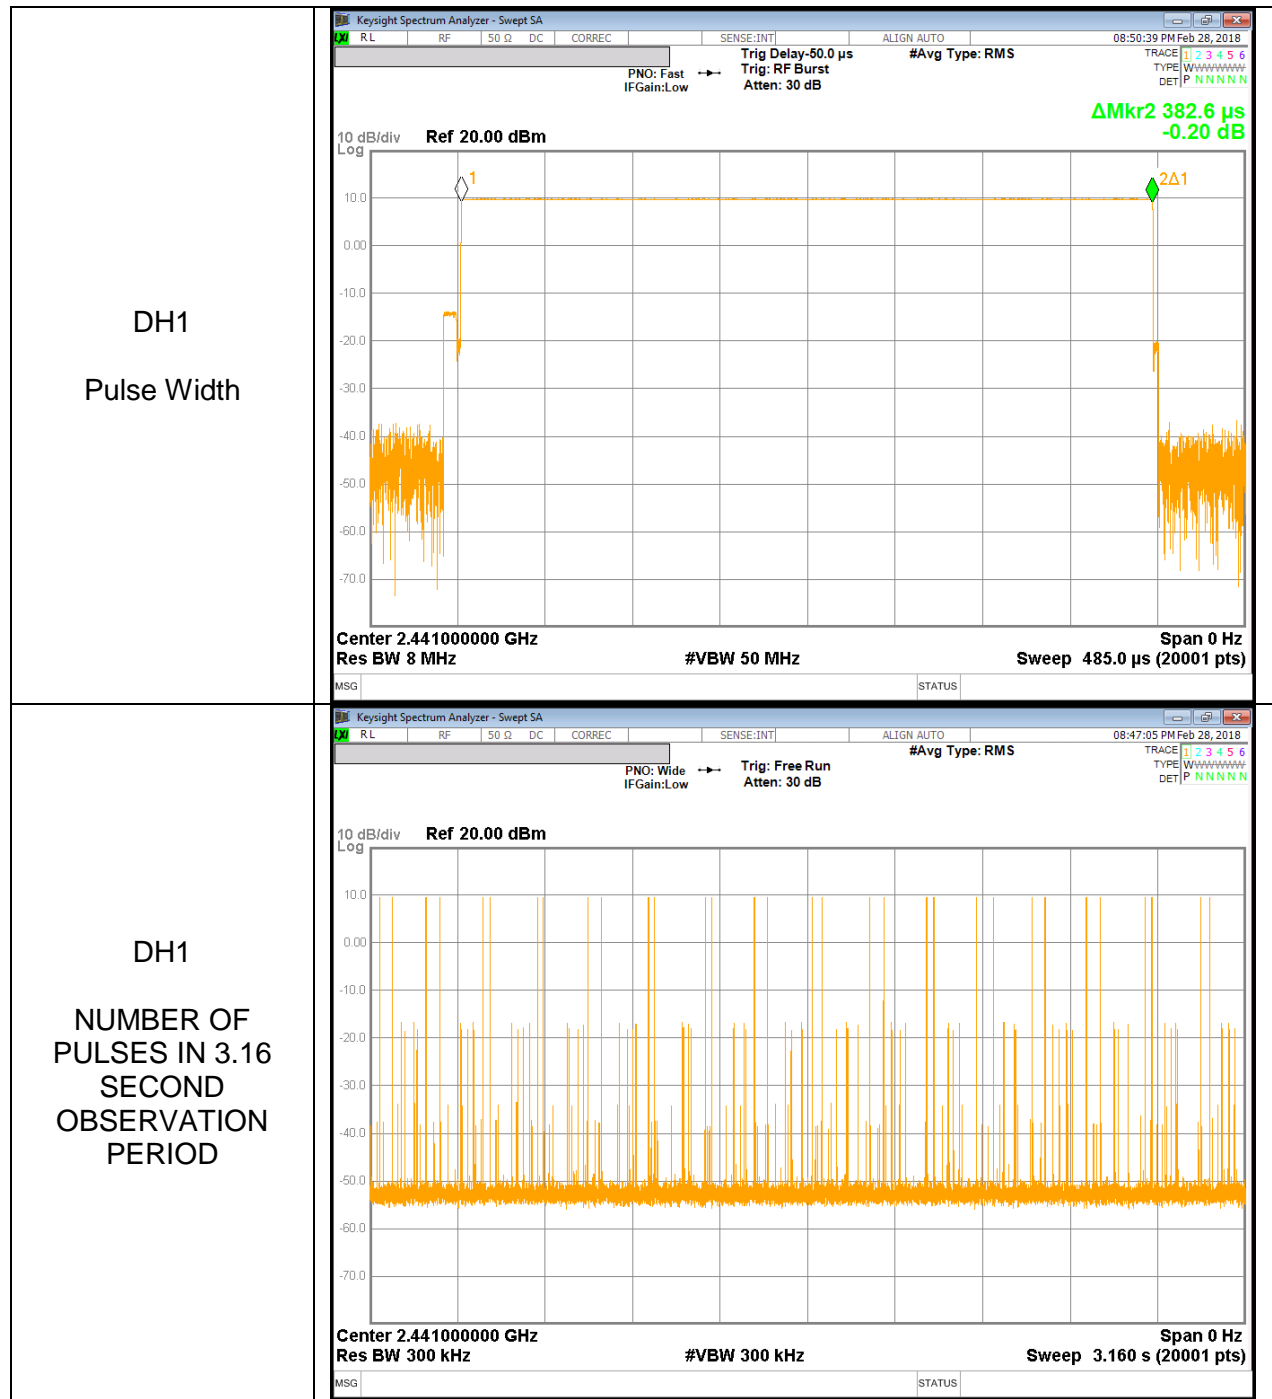

DH3

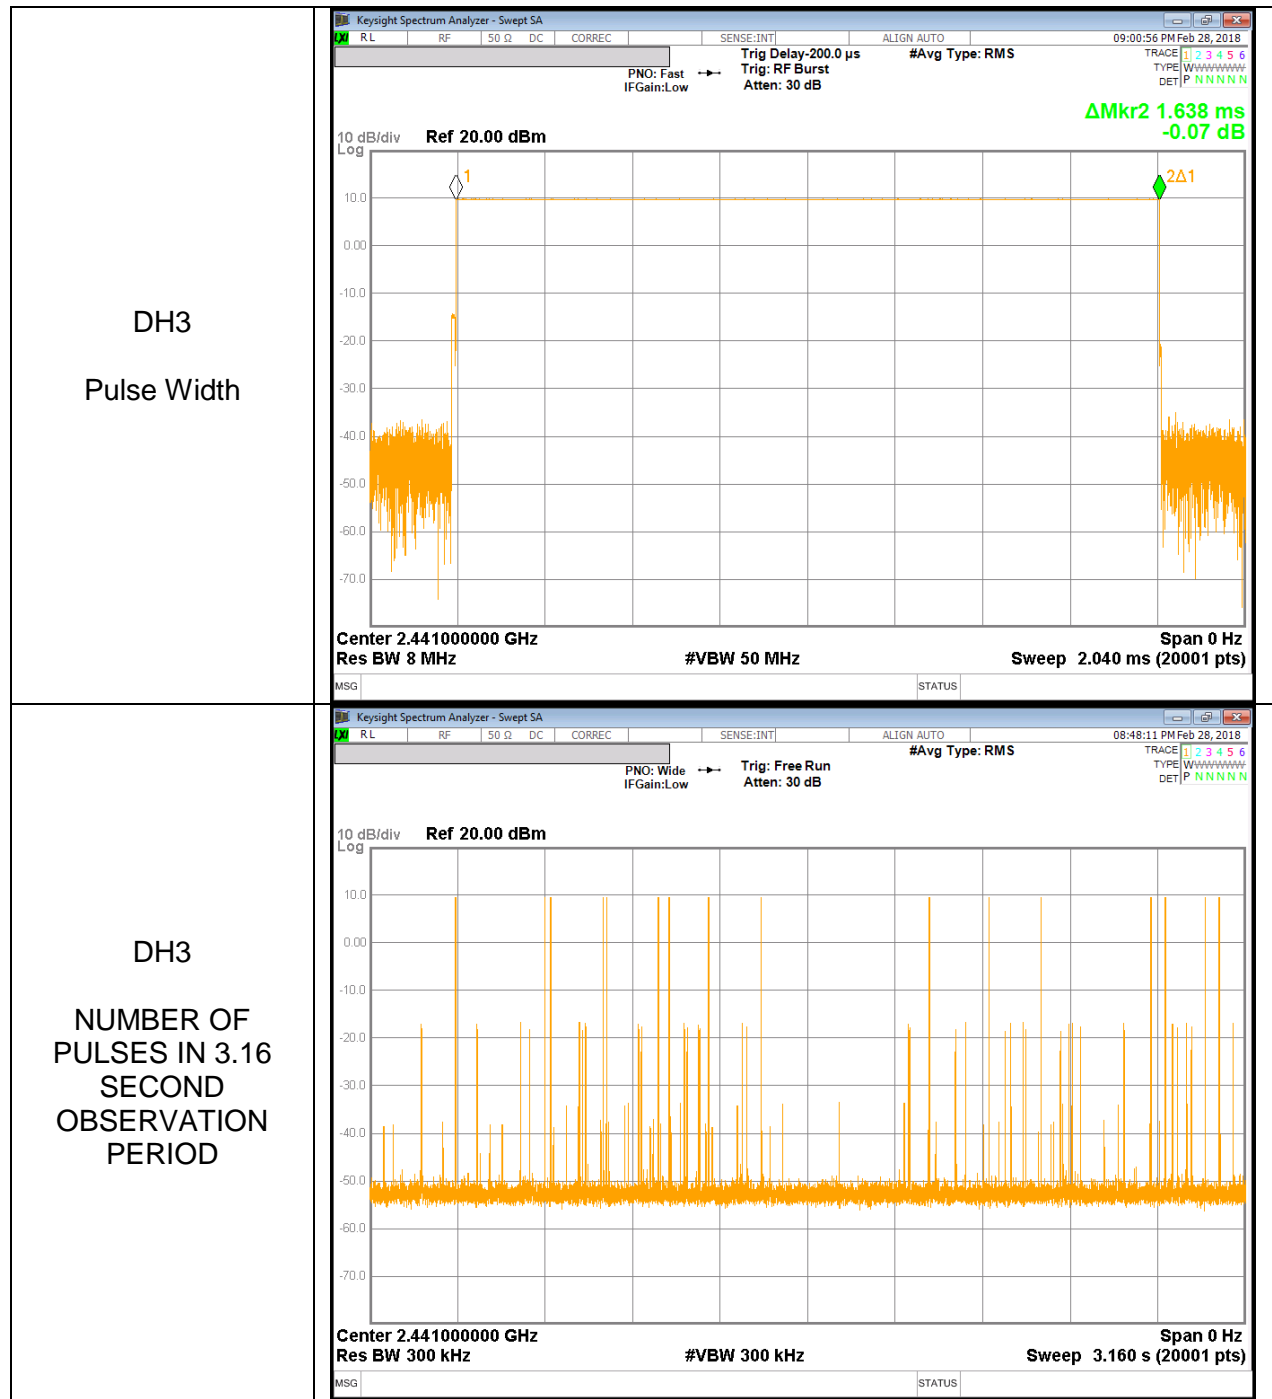

DH5

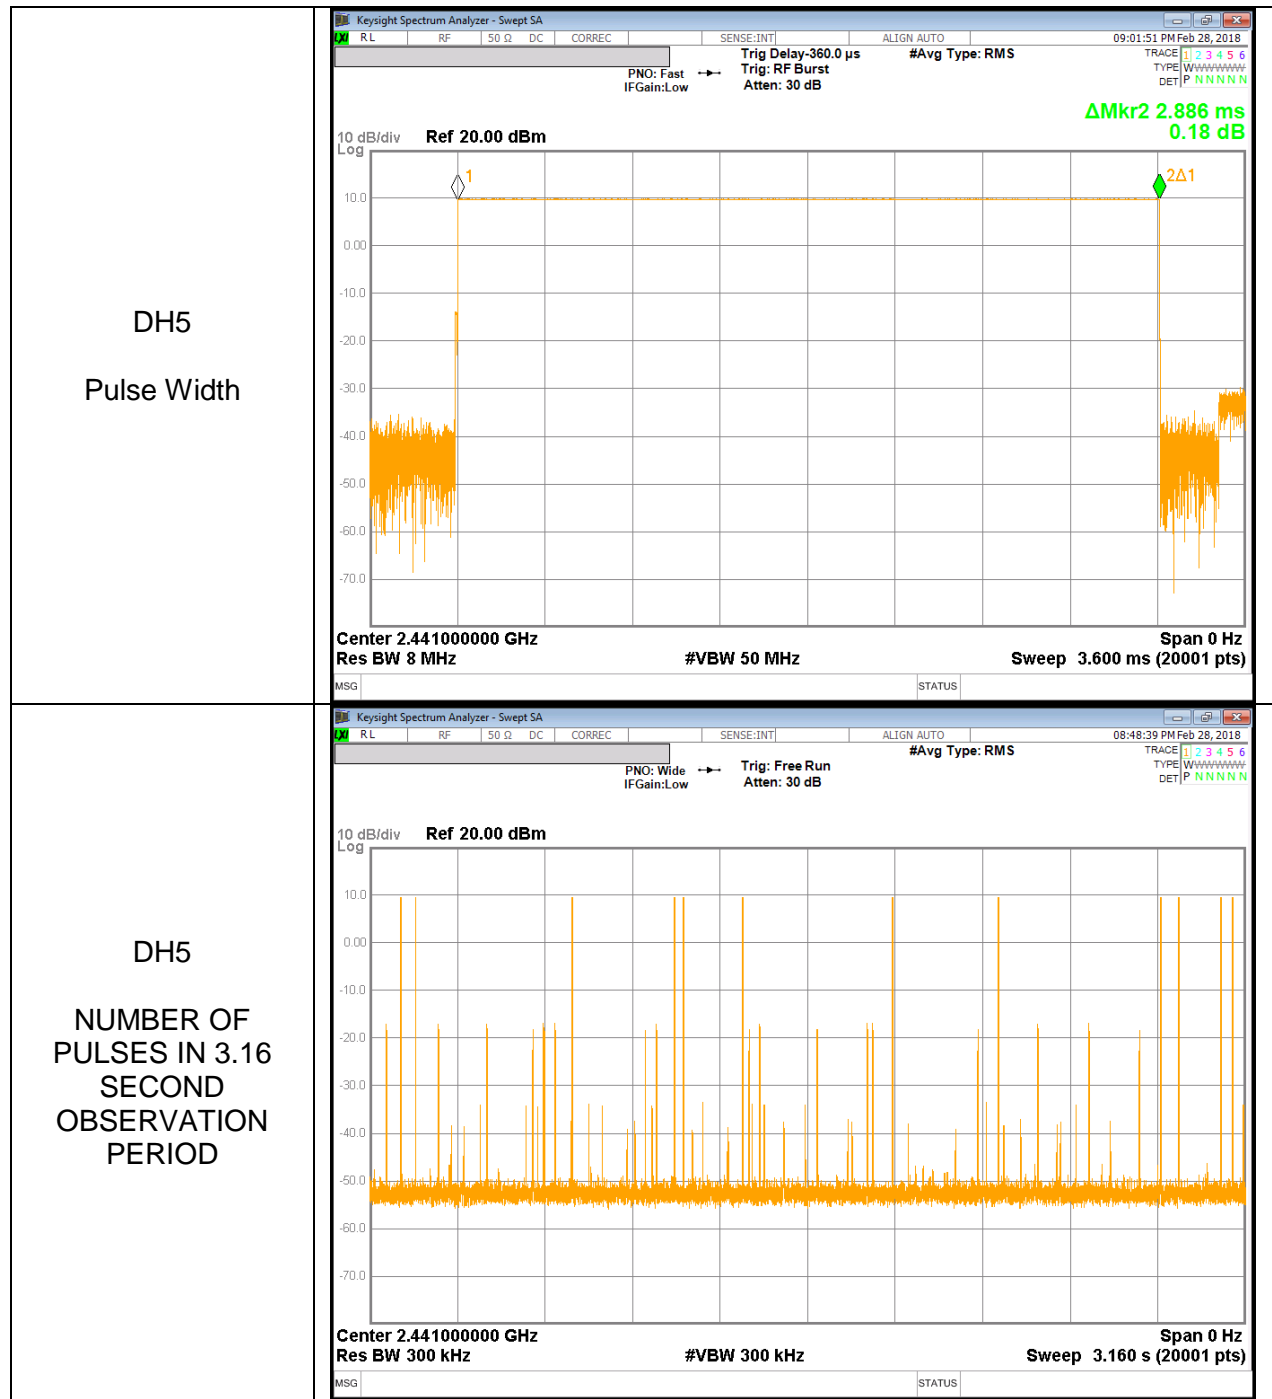

10.4. OUTPUT POWER

LIMIT

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

10.4.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	7.433	21	-13.567
Middle	2441	8.114	21	-12.886
High	2480	6.825	21	-14.175
Worst		8.114	21	-12.886

10.4.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION




Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	5.258	21	-15.742
Middle	2441	5.353	21	-15.647
High	2480	4.576	21	-16.424
Worst		5.353	21	-15.647

10.4.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	5.631	21	-15.369
Middle	2441	5.616	21	-15.384
High	2480	4.899	21	-16.101
Worst		5.631	21	-15.369

10.4.4. OUTPUT POWER PLOTS

GFSK OUTPUT POWER
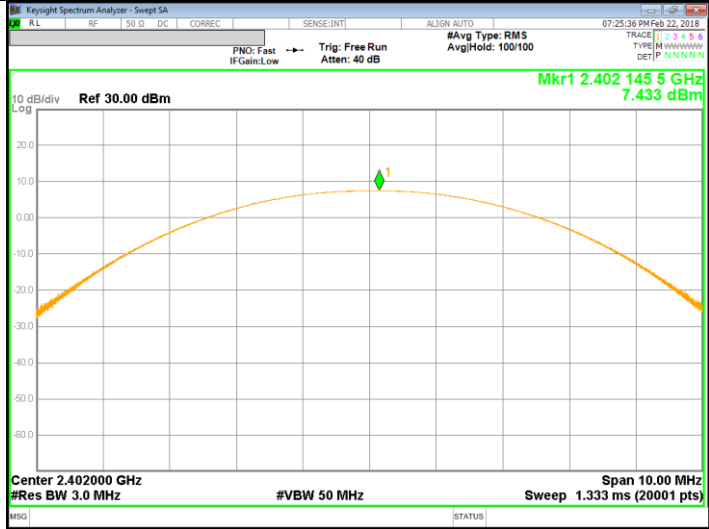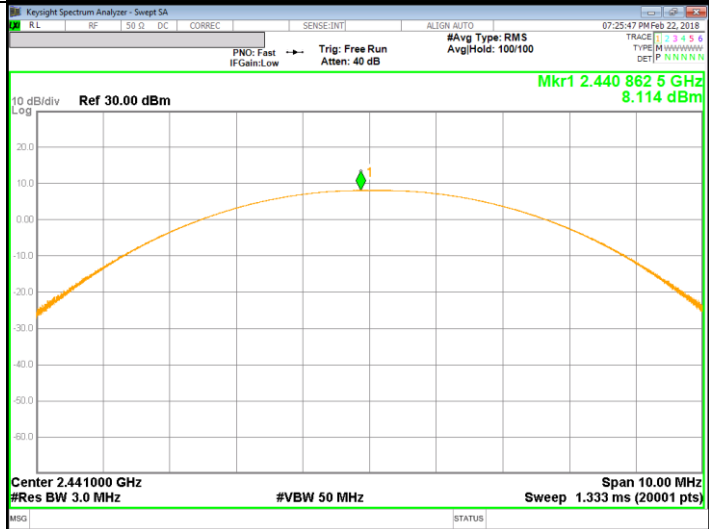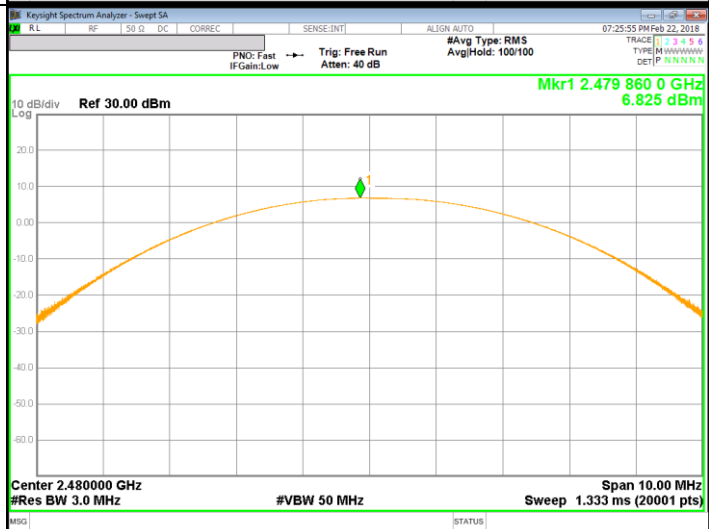
<p>GFSK Low CH</p>	 <p>Key parameters from the plot: Center: 2.402000 GHz #Res BW: 3.0 MHz #VBW: 50 MHz Sweep: 1.333 ms (20001 pts) Mkr1: 2.402 145 5 GHz 7.433 dBm</p>
<p>GFSK Middle CH</p>	 <p>Key parameters from the plot: Center: 2.441000 GHz #Res BW: 3.0 MHz #VBW: 50 MHz Sweep: 1.333 ms (20001 pts) Mkr1: 2.440 862 5 GHz 8.114 dBm</p>
<p>GFSK High CH</p>	 <p>Key parameters from the plot: Center: 2.480000 GHz #Res BW: 3.0 MHz #VBW: 50 MHz Sweep: 1.333 ms (20001 pts) Mkr1: 2.479 860 0 GHz 6.825 dBm</p>

Pi/4-DPSK OUTPUT POWER

<p>Pi/4-DPSK Low CH</p>	<p>KeySight Spectrum Analyzer - Swept SA Ref 30.00 dBm Mkr1 2.402 086 5 GHz 5.258 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>Pi/4-DPSK Middle CH</p>	<p>KeySight Spectrum Analyzer - Swept SA Ref 30.00 dBm Mkr1 2.441 115 0 GHz 5.353 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>Pi/4-DPSK High CH</p>	<p>KeySight Spectrum Analyzer - Swept SA Ref 30.00 dBm Mkr1 2.479 958 0 GHz 4.576 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>

8PSK OUTPUT POWER

<p>8PSK Low CH</p>	<p>Keyight Spectrum Analyzer - Swept SA 07:26:32 PM Feb 22, 2018 #Avg Type: RMS Avg/Hold: 100/100 Mkr1 2.402 013 0 GHz 5.631 dBm Ref 30.00 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>8PSK Middle CH</p>	<p>Keyight Spectrum Analyzer - Swept SA 07:26:39 PM Feb 22, 2018 #Avg Type: RMS Avg/Hold: 100/100 Mkr1 2.440 936 0 GHz 5.616 dBm Ref 30.00 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>8PSK High CH</p>	<p>Keyight Spectrum Analyzer - Swept SA 07:26:49 PM Feb 22, 2018 #Avg Type: RMS Avg/Hold: 100/100 Mkr1 2.480 021 0 GHz 4.899 dBm Ref 30.00 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>

10.5. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

10.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	7.240	5.30
Middle	2441	7.906	6.17
High	2480	6.613	4.58

10.5.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	2.855	1.93
Middle	2441	2.851	1.93
High	2480	2.321	1.71

10.5.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	2.881	1.94
Middle	2441	2.880	1.94
High	2480	2.337	1.71

10.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS


10.6.1. BASIC DATA RATE GFSK MODULATION

GFSK Mode


[GFSK] Low Channel BandEdge

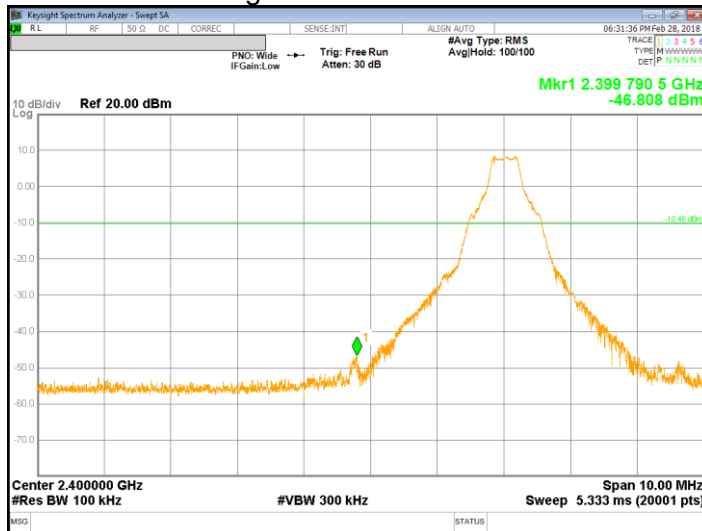


[GFSK] Low Channel Spurious

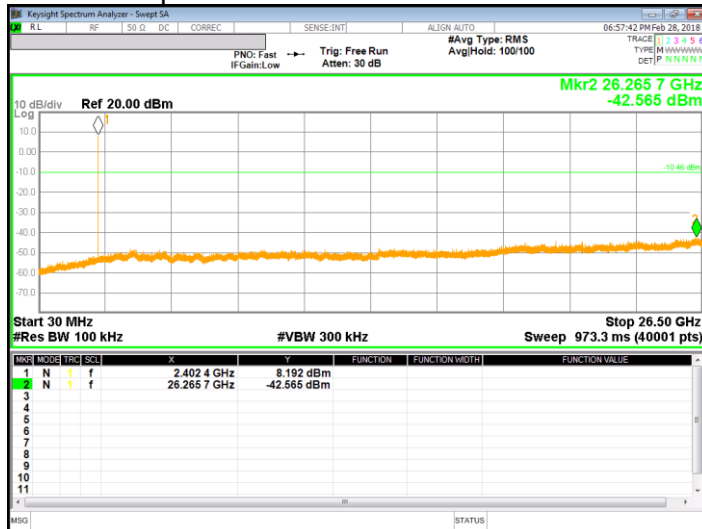


[GFSK] Mid Channel BandEdge

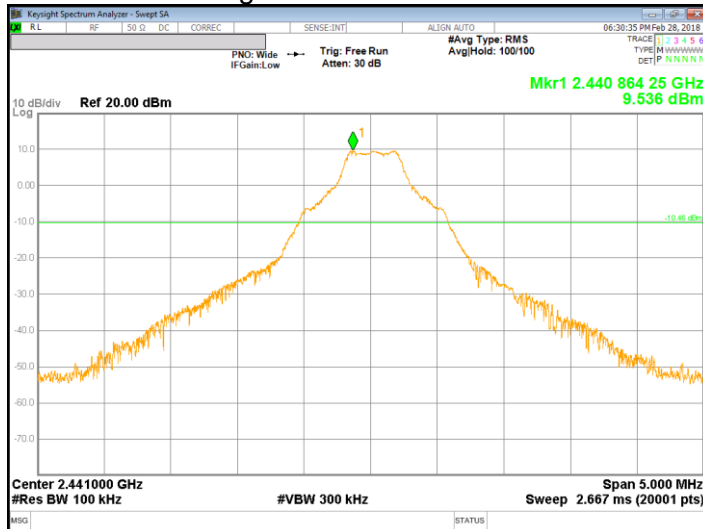


[GFSK] Mid Channel Spurious

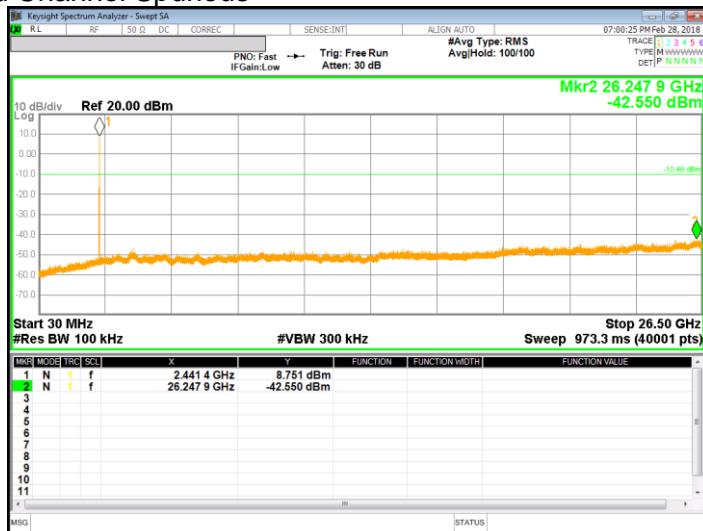

[GFSK] High Channel BandEdge

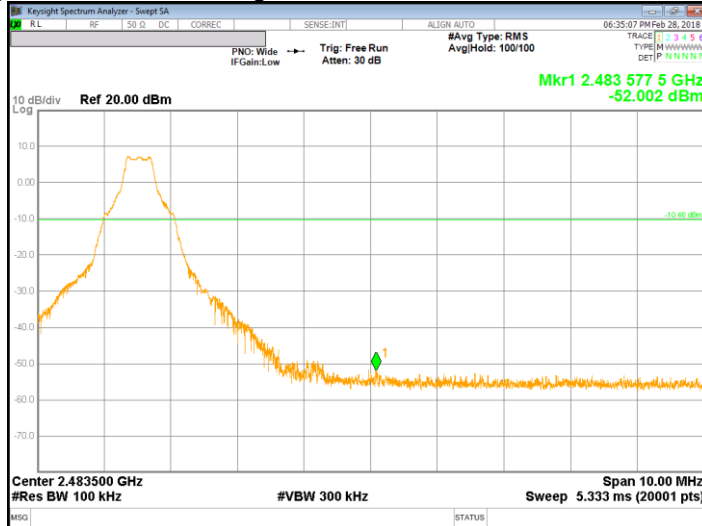


[GFSK] High Channel Spurious

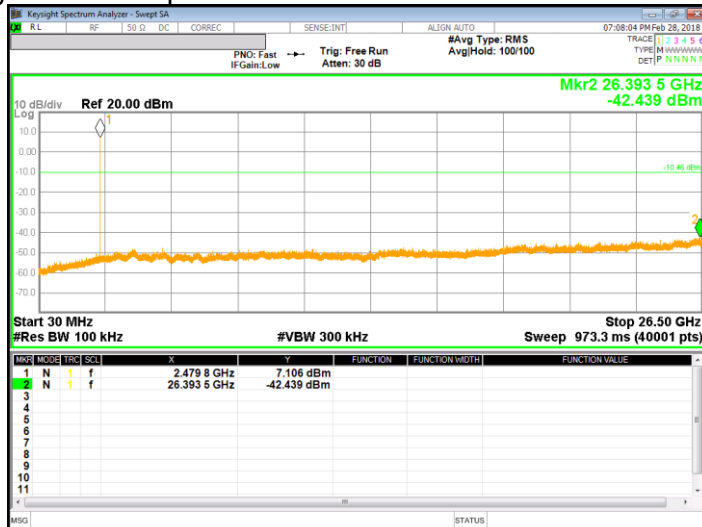


BandEdge Emission at GFSK Hopping Mode

[GFSK Hopping Mode] Low Channel BandEdge

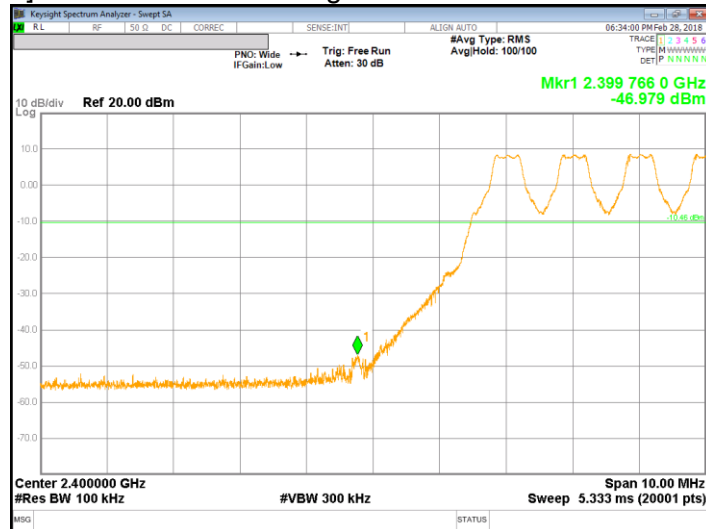

[GFSK Hopping Mode] High Channel BandEdge

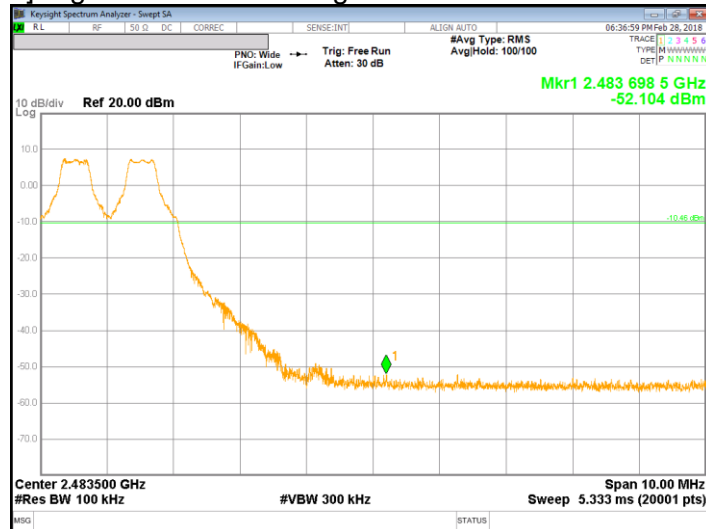


PI/4-DQPSK Mode

[PI/4-DQPSK] Low Channel BandEdge




[PI/4-DQPSK] Low Channel Spurious

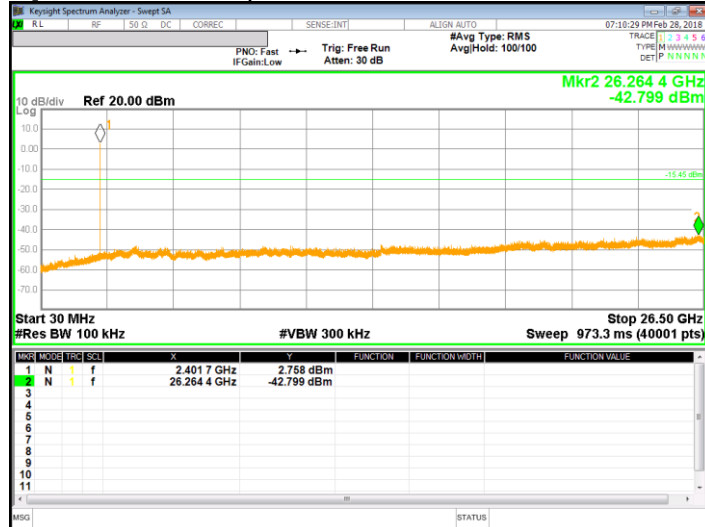


[PI/4-DQPSK] Mid Channel BandEdge




[PI/4-DQPSK] Mid Channel Spurious

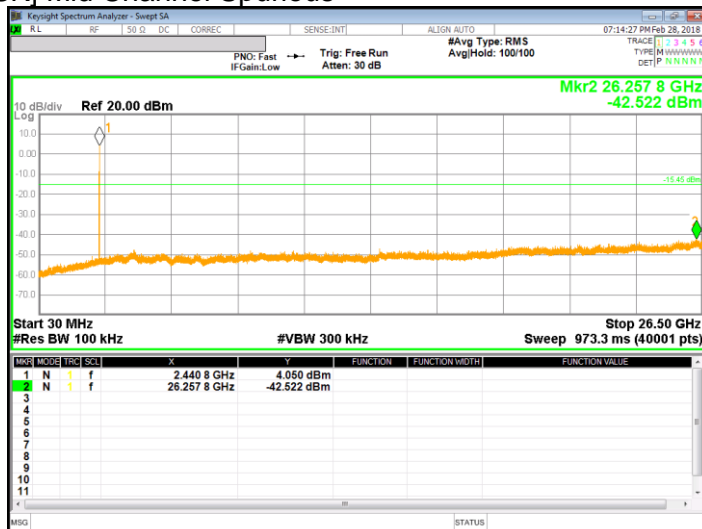

[PI/4-DQPSK] High Channel BandEdge

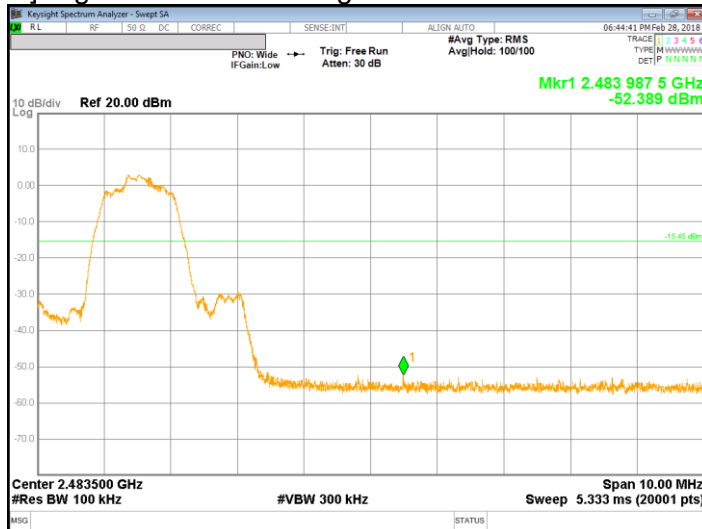


[PI/4-DQPSK] High Channel Spurious

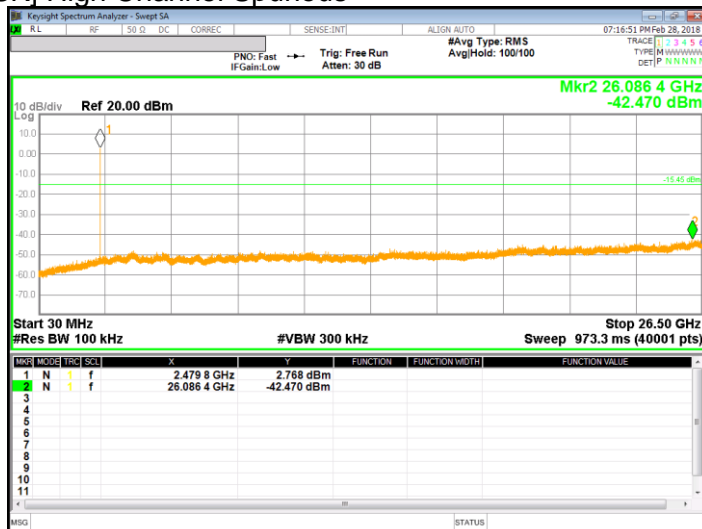

BandEdge Emission at PI/4-DQPSK Hopping Mode

[PI/4-DQPSK Hopping Mode] Low Channel BandEdge

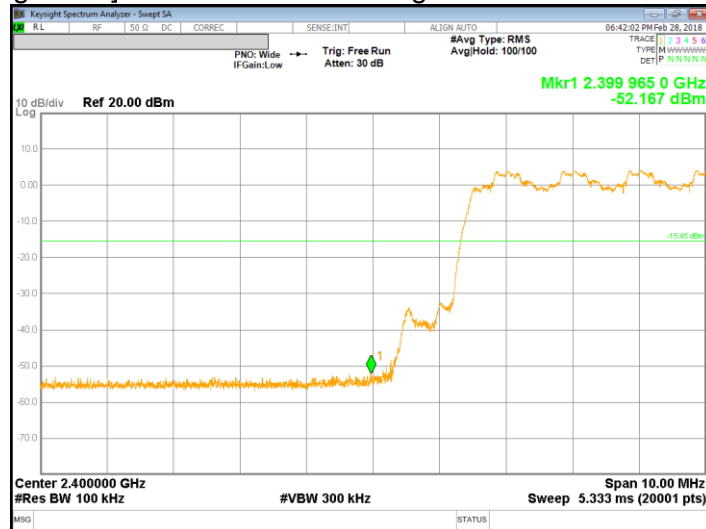


[PI/4-DQPSK Hopping Mode] High Channel BandEdge




8PSK Mode

[8PSK] Low Channel BandEdge

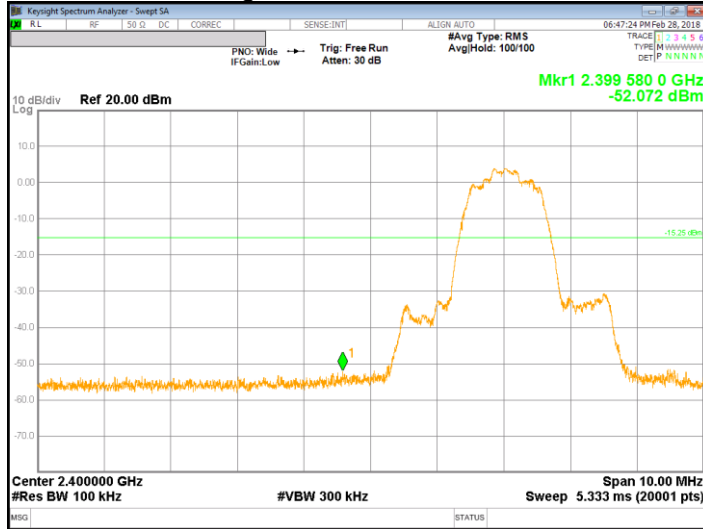


[8PSK] Low Channel Spurious

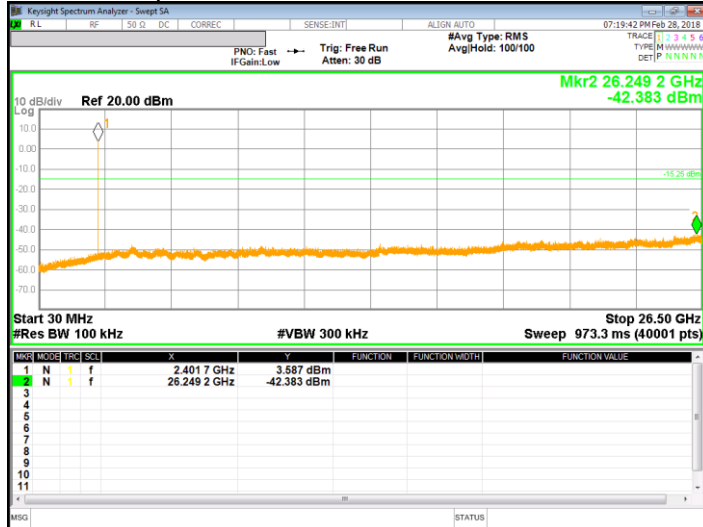


[8PSK] Mid Channel BandEdge




[8PSK] Mid Channel Spurious

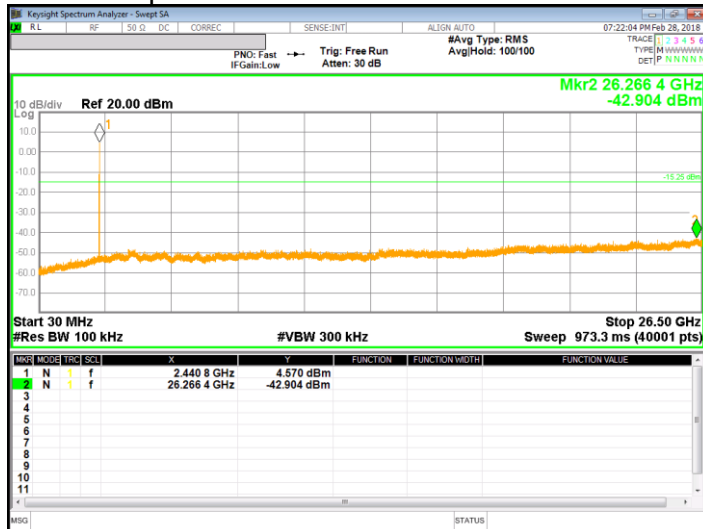

[8PSK] High Channel BandEdge

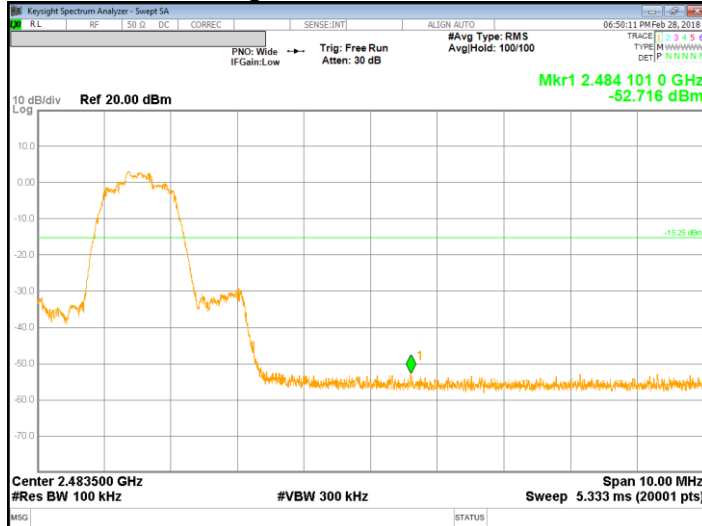


[8PSK] High Channel Spurious

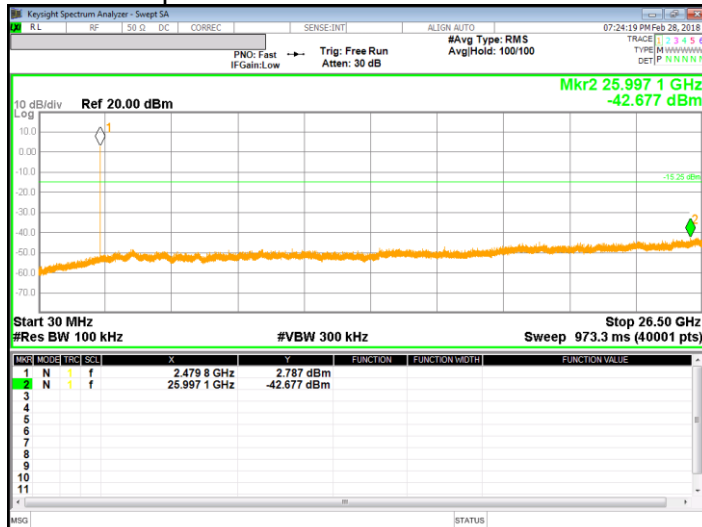

BandEdge Emission at 8PSK Hopping Mode

[8PSK Hopping Mode] Low Channel BandEdge

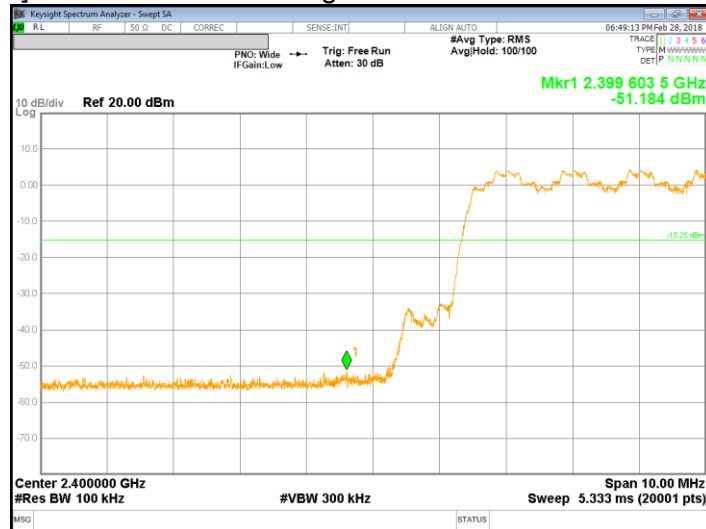

[8PSK Hopping Mode] High Channel BandEdge



11. RADIATED TEST RESULTS

11.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.(Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.)

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.0029\text{S} = 350\text{Hz}.$$

The minimum VBW was 350Hz, but test receiver(ESU40) couldn't set value 350Hz. Due to this reason, testing VBW was set to 500Hz(Worst cases).

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

11.2. TRANSMITTER ABOVE 1 GHz

11.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

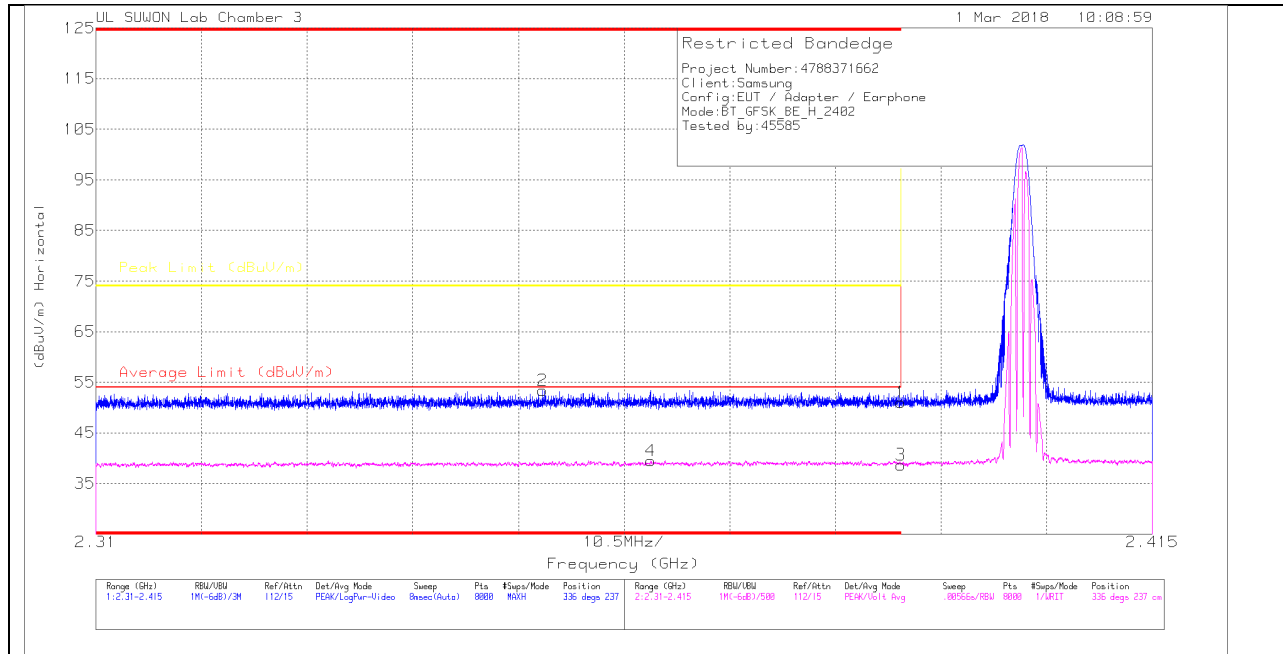

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.53	Pk	31.8	-23.3	51.03	-	-	74	-22.97	336	237	H
2	* 2.354	44.95	Pk	31.7	-23.2	53.45	-	-	74	-20.55	336	237	H
3	* 2.39	30.18	VA1T	31.8	-23.3	38.68	54	-15.32	-	-	336	237	H
4	* 2.365	31.04	VA1T	31.7	-23.2	39.54	54	-14.46	-	-	336	237	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $V_B=1/T_{on}$ where: T_{on} is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

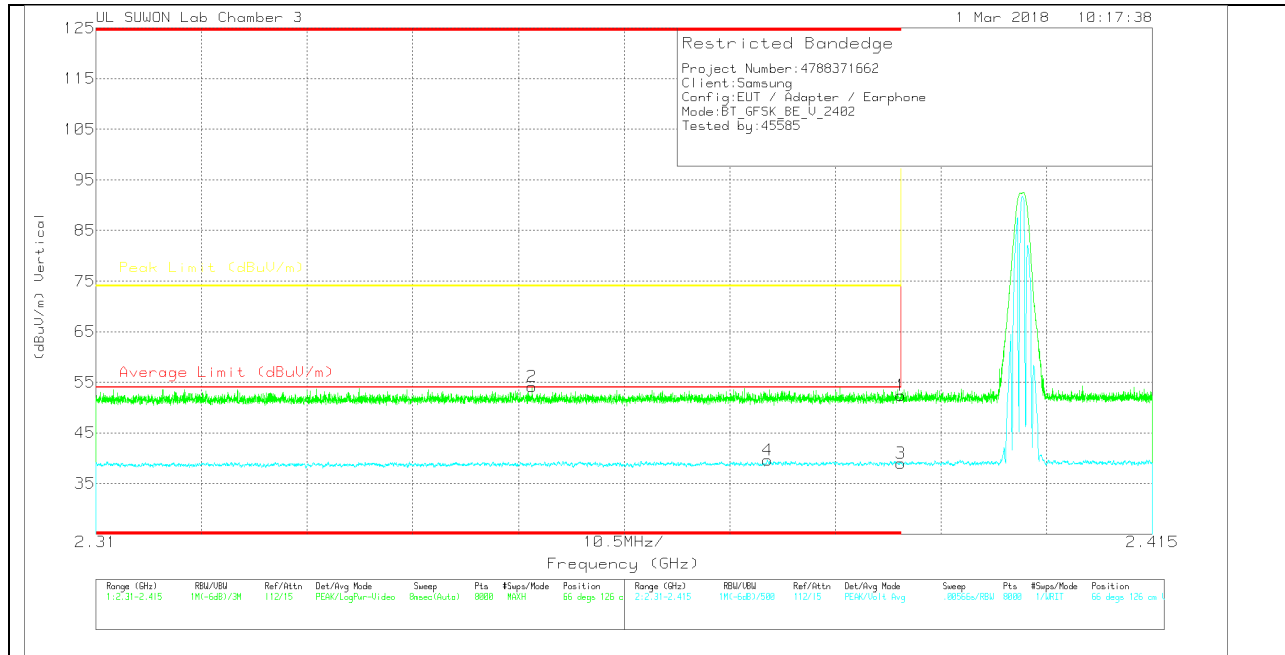

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.86	Pk	31.8	-23.3	52.36	-	-	74	-21.64	66	126	V
2	* 2.353	45.64	Pk	31.7	-23.2	54.14	-	-	74	-19.86	66	126	V
3	* 2.39	30.47	VA1T	31.8	-23.3	38.97	54	-15.03	-	-	66	126	V
4	* 2.377	30.96	VA1T	31.8	-23.2	39.56	54	-14.44	-	-	66	126	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $V_B=1/T_{on}$ where: T_{on} is transmit duration

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

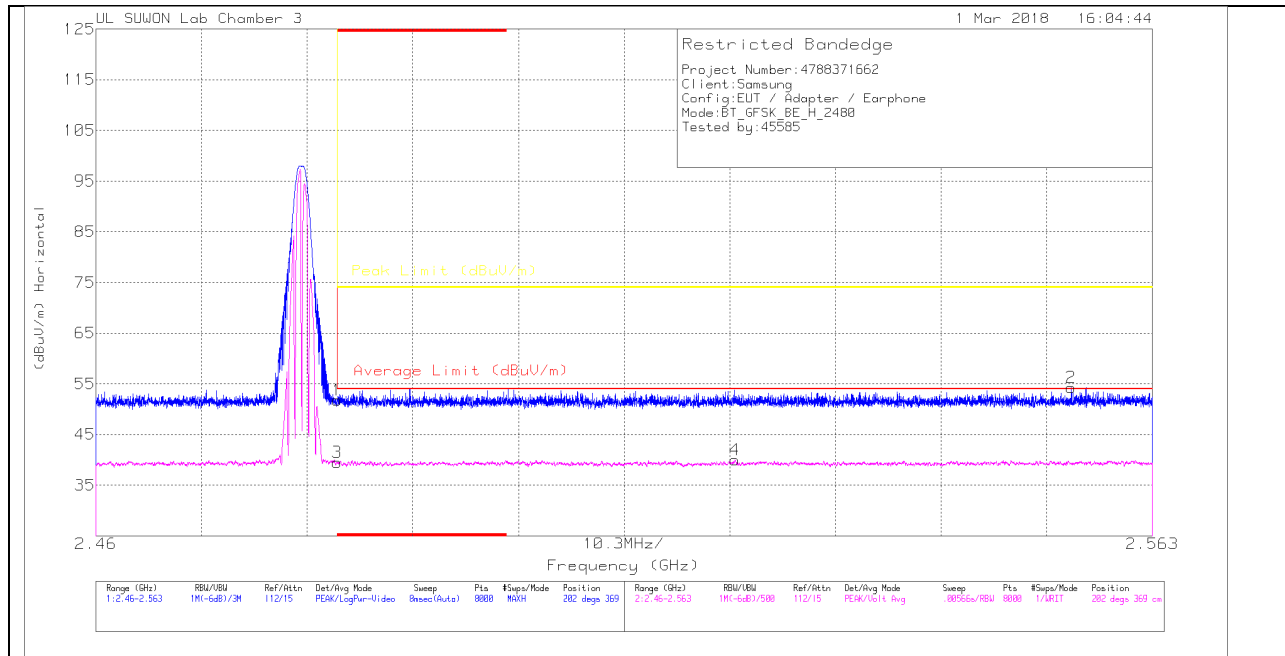

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.69	Pk		-23	51.79	-	-	74	-22.21	202	369	H
2	2.555	45.06	Pk		-22.9	54.26	-	-	74	-19.74	202	369	H
3	* 2.484	30.36	VA1T		-23	39.46	54	-14.54	-	-	202	369	H
4	2.522	30.82	VA1T		-22.9	40.02	54	-13.98	-	-	202	369	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $VB=1/Ton$ where: Ton is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

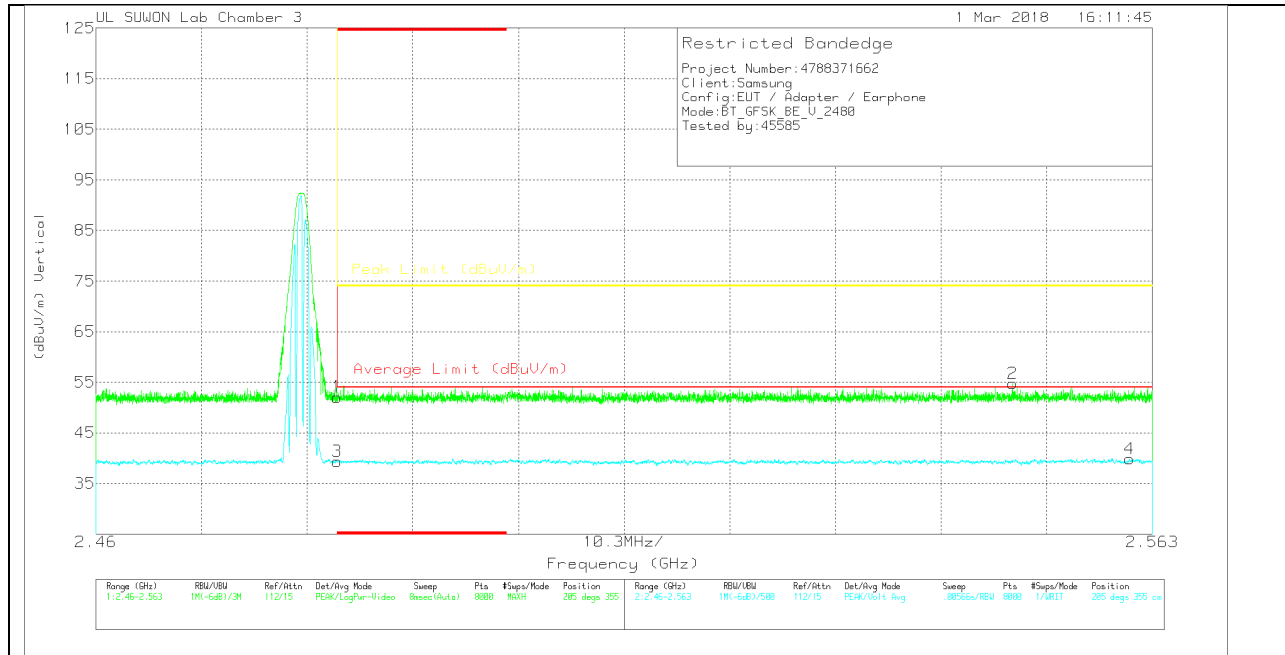

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.99	Pk	32.1	-23	52.09	-	-	74	-21.91	205	355	V
2	2.549	45.71	Pk	32.1	-23	54.81	-	-	74	-19.19	205	355	V
3	* 2.484	30.3	VA1T	32.1	-23	39.4	54	-14.6	-	-	205	355	V
4	2.561	30.7	VA1T	32.1	-22.9	39.9	54	-14.1	-	-	205	355	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

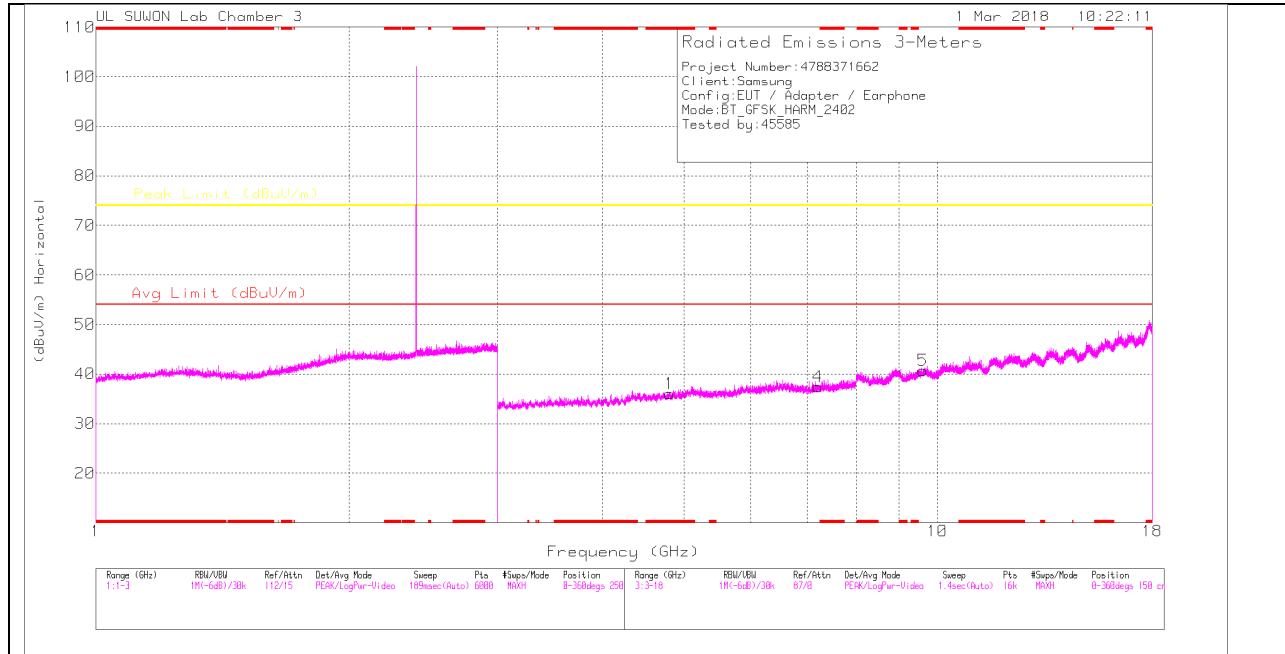

LOW CHANNEL VERTICAL

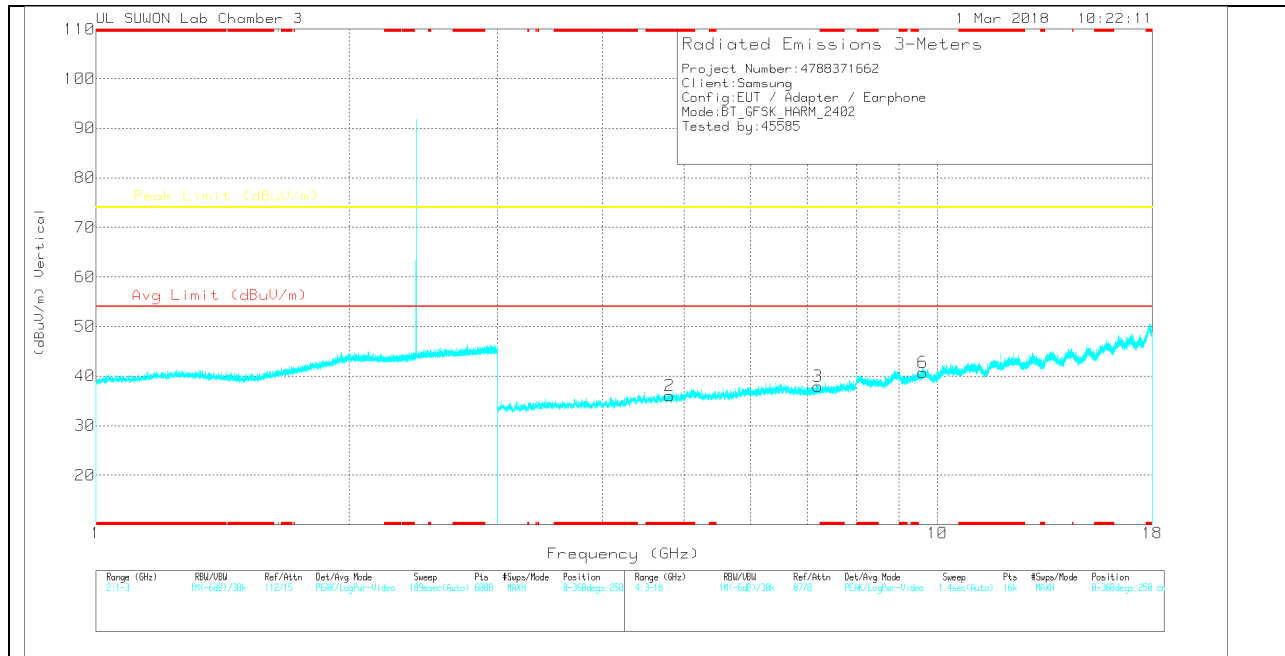

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.803	30.29	PK	33.9	-28.2	35.99	-	-	74	-38.01	0-360	250	H
4	7.204	25.78	PK	35.6	-23.9	37.48	-	-	74	-36.52	0-360	150	H
5	9.608	23.94	PK	36.7	-19.9	40.74	-	-	74	-33.26	0-360	150	H
2	* 4.803	30.32	PK	33.9	-28.2	36.02	-	-	74	-37.98	0-360	150	V
3	7.21	26.26	PK	35.6	-23.9	37.96	-	-	74	-36.04	0-360	150	V
6	9.609	23.95	PK	36.7	-19.9	40.75	-	-	74	-33.25	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

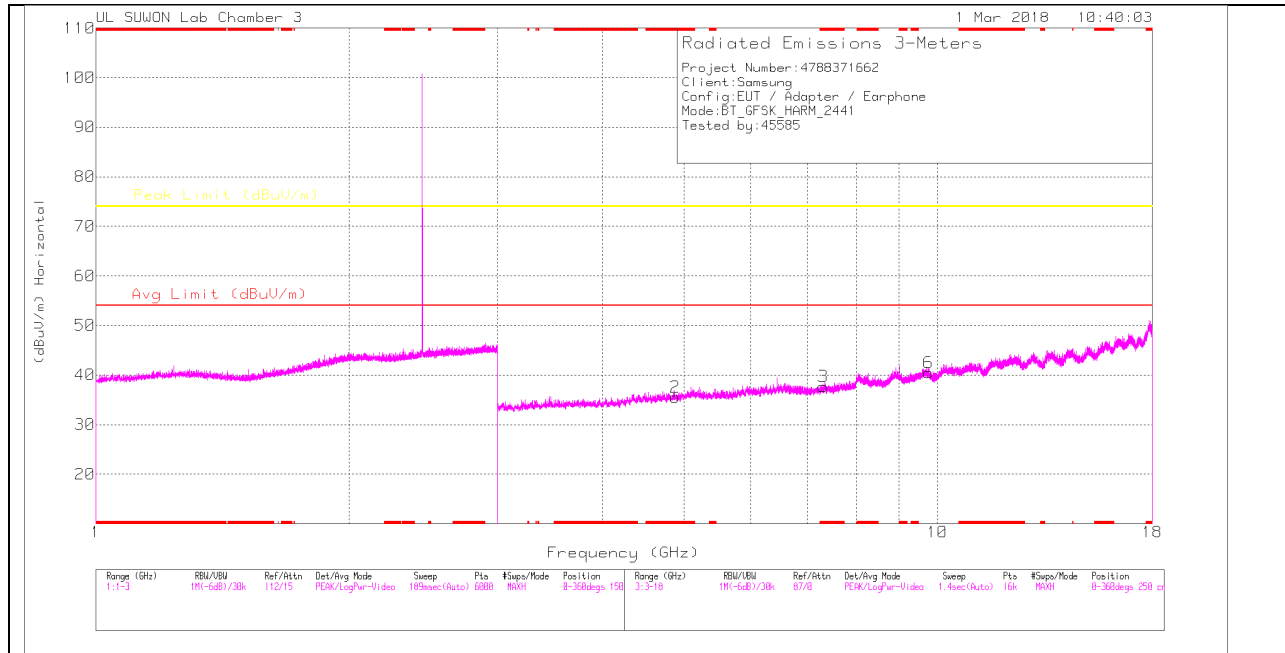

MID CHANNEL VERTICAL

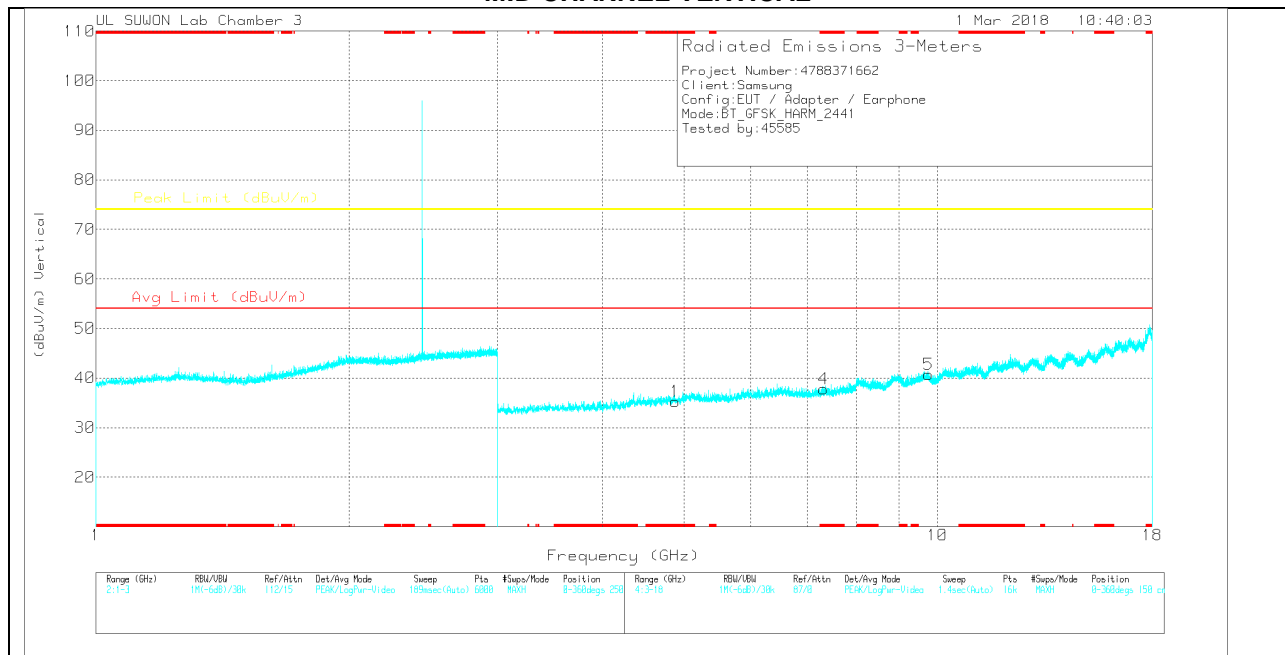

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.881	30.38	PK	34	-28.9	35.48	-	-	74	-38.52	0-360	150	H
3	* 7.316	25.54	PK	35.6	-23.5	37.64	-	-	74	-36.36	0-360	150	H
6	9.762	23.09	PK	36.9	-19.5	40.49	-	-	74	-33.51	0-360	250	H
1	* 4.882	30.17	PK	34	-28.9	35.27	-	-	74	-38.73	0-360	150	V
4	* 7.317	25.73	PK	35.6	-23.5	37.83	-	-	74	-36.17	0-360	250	V
5	9.763	23.32	PK	36.9	-19.5	40.72	-	-	74	-33.28	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

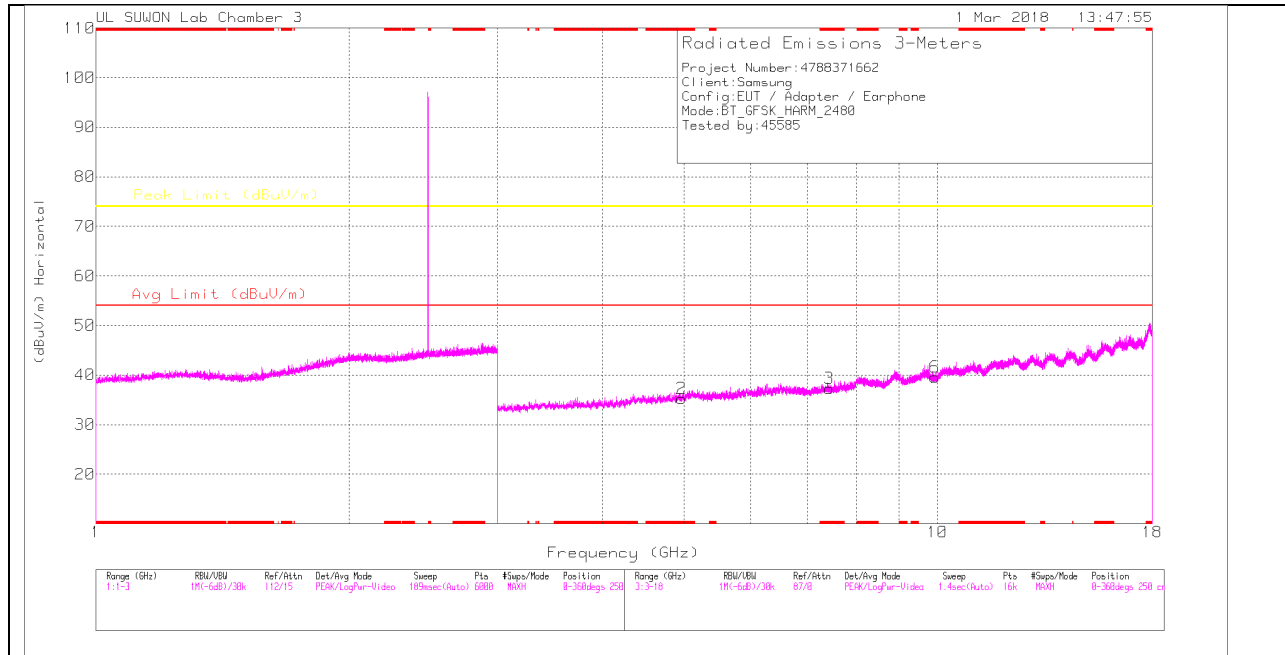

HIGH CHANNEL VERTICAL

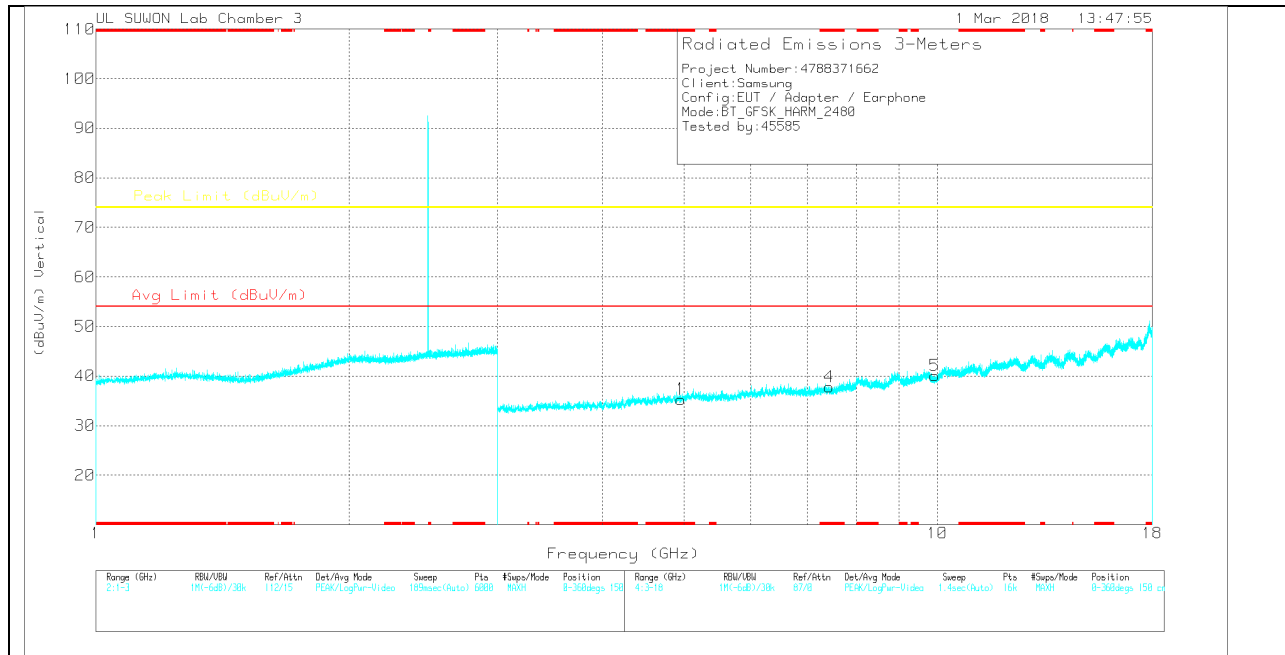

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.961	29.67	PK	34.1	-28.5	35.27	-	-	74	-38.73	0-360	250	H
3	* 7.44	24.88	PK	35.6	-23.2	37.28	-	-	74	-36.72	0-360	250	H
6	9.923	22.29	PK	37	-19.7	39.59	-	-	74	-34.41	0-360	150	H
1	* 4.959	29.73	PK	34.1	-28.5	35.33	-	-	74	-38.67	0-360	250	V
4	* 7.44	25.39	PK	35.6	-23.2	37.79	-	-	74	-36.21	0-360	250	V
5	9.92	22.83	PK	37	-19.7	40.13	-	-	74	-33.87	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

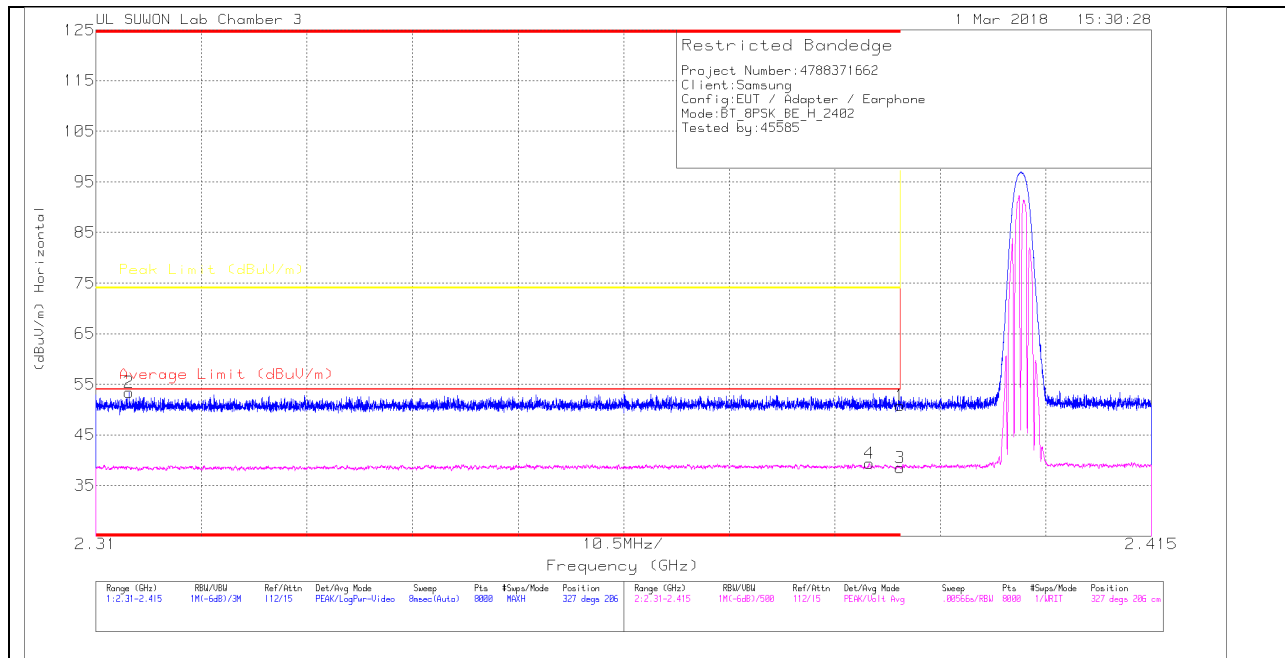

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.32	Pk	31.8	-23.3	50.82	-	-	74	-23.18	327	206	H
2	* 2.313	45.04	Pk	31.6	-23.2	53.44	-	-	74	-20.56	327	206	H
3	* 2.39	29.99	VA1T	31.8	-23.3	38.49	54	-15.51	-	-	327	206	H
4	* 2.387	30.82	VA1T	31.8	-23.3	39.32	54	-14.68	-	-	327	206	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $V_B=1/T_{on}$ where: T_{on} is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

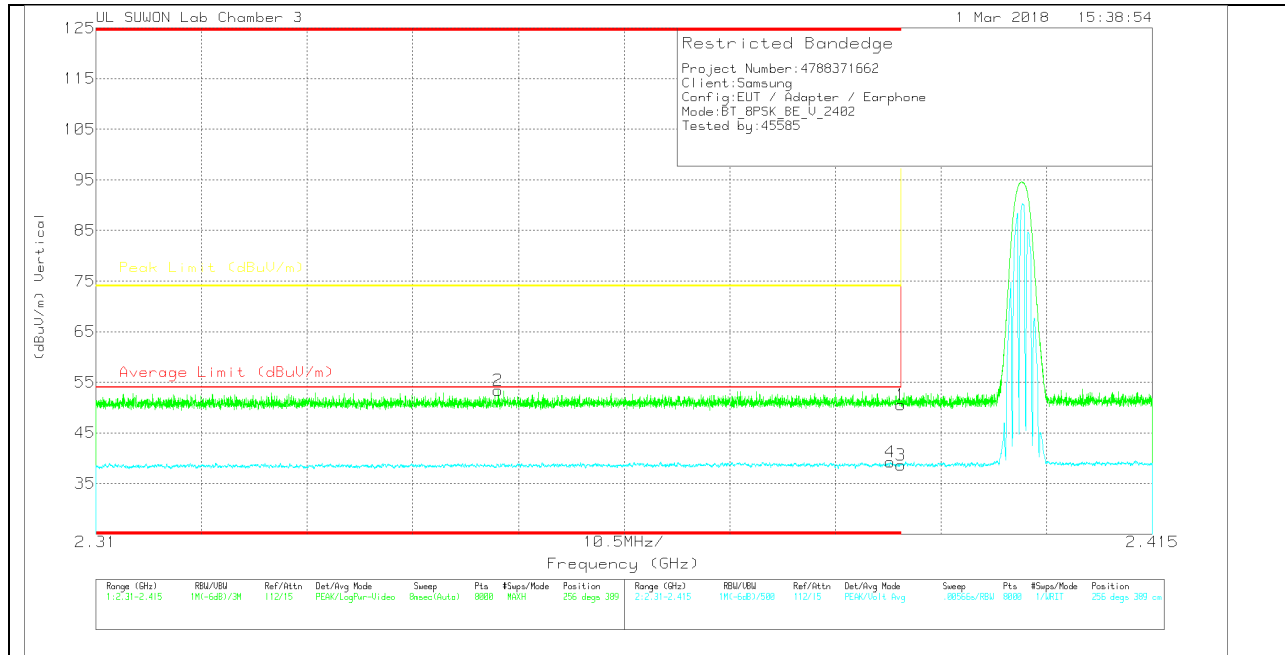

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.02	Pk	31.8	-23.3	50.52	-	-	74	-23.48	256	389	V
2	* 2.35	45.02	Pk	31.7	-23.3	53.42	-	-	74	-20.58	256	389	V
3	* 2.39	30.09	VA1T	31.8	-23.3	38.59	54	-15.41	-	-	256	389	V
4	* 2.389	30.71	VA1T	31.8	-23.3	39.21	54	-14.79	-	-	256	389	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $V_B=1/T_{on}$ where: T_{on} is transmit duration

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

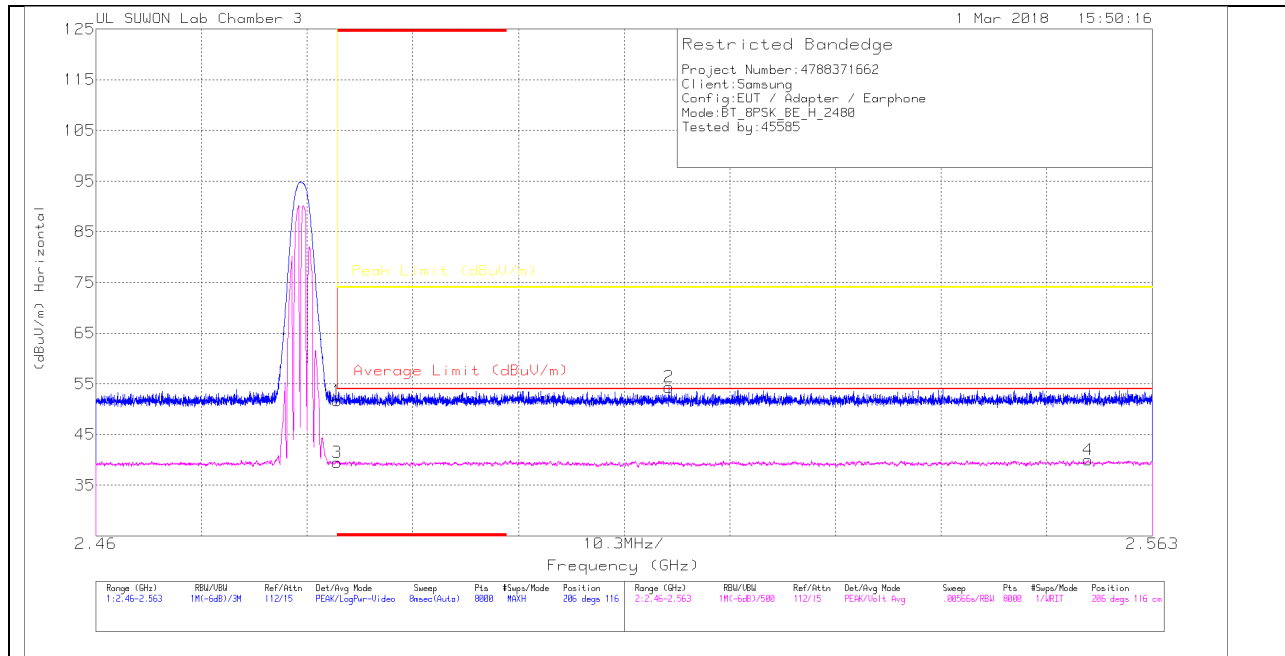

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.52	Pk		-23	51.62	-	-	74	-22.38	206	116	H
2	2.516	45.13	Pk		-22.9	54.33	-	-	74	-19.67	206	116	H
3	* 2.484	30.34	VA1T		-23	39.44	54	-14.56	-	-	206	116	H
4	2.557	30.76	VA1T		-22.9	39.96	54	-14.04	-	-	206	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $V_B=1/T_{on}$ where: T_{on} is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

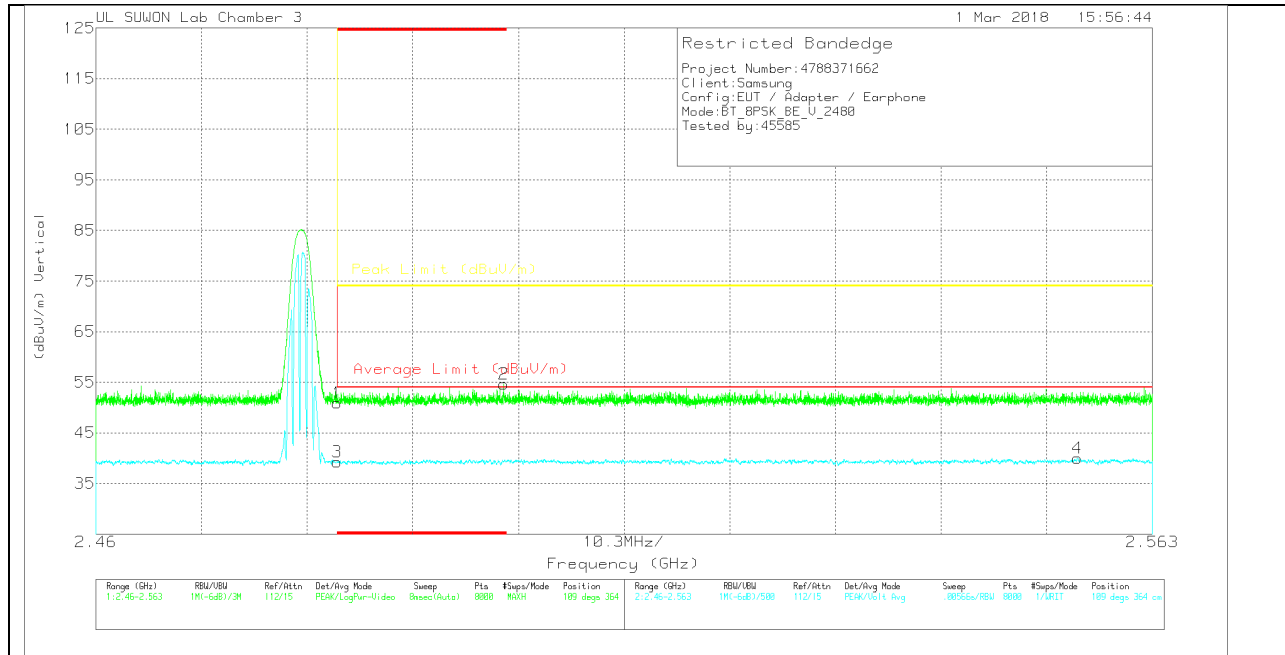

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(00205959)	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.76	Pk	32.1	-23	50.86	-	-	74	-23.14	109	364	V
2	* 2.5	45.57	Pk	32.1	-23	54.67	-	-	74	-19.33	109	364	V
3	* 2.484	30.1	VA1T	32.1	-23	39.2	54	-14.8	-	-	109	364	V
4	2.556	30.82	VA1T	32.1	-22.9	40.02	54	-13.98	-	-	109	364	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

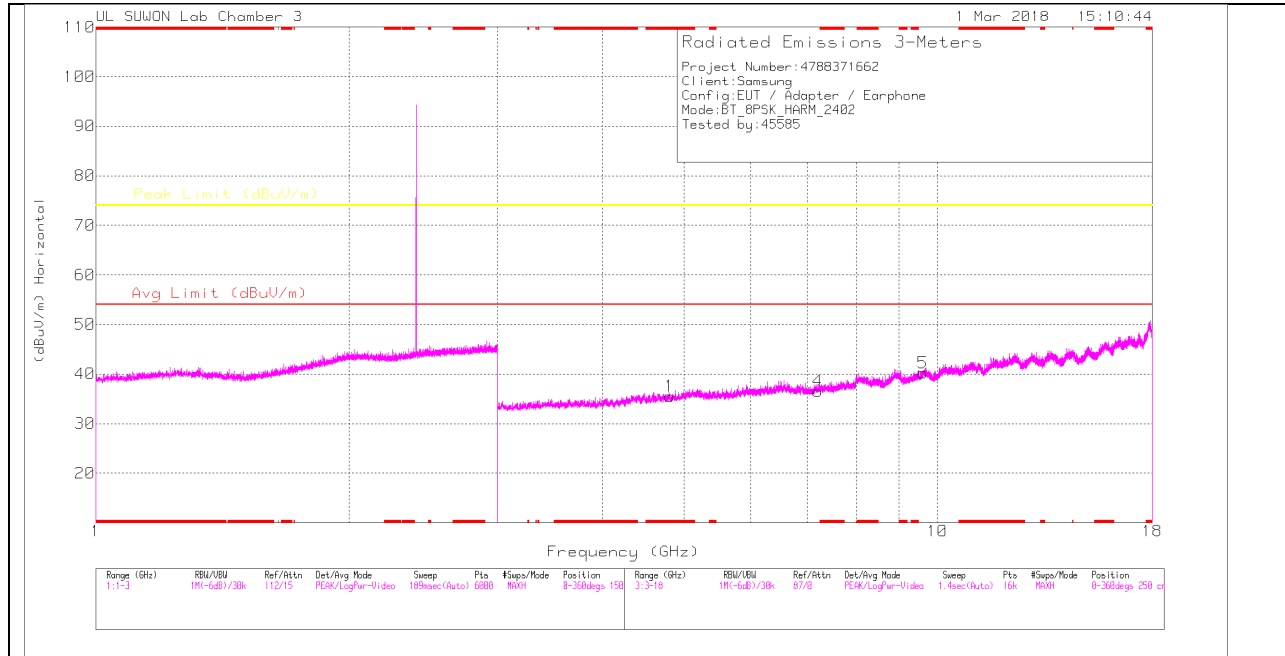

LOW CHANNEL VERTICAL

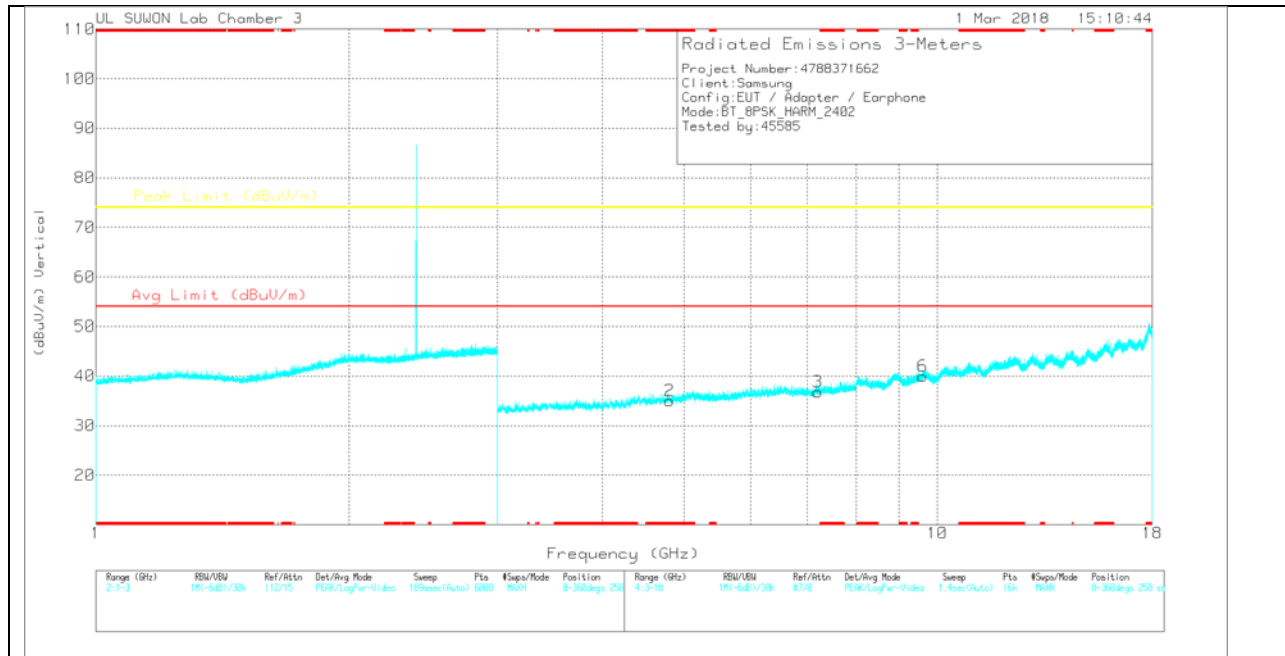

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.804	29.81	PK	33.9	-28.2	35.51	-	-	74	-38.49	0-360	150	H
4	7.206	24.86	PK	35.6	-23.9	36.56	-	-	74	-37.44	0-360	250	H
5	9.608	23.38	PK	36.7	-19.9	40.18	-	-	74	-33.82	0-360	150	H
2	* 4.804	29.37	PK	33.9	-28.2	35.07	-	-	74	-38.93	0-360	250	V
3	7.207	25.23	PK	35.6	-24	36.83	-	-	74	-37.17	0-360	150	V
6	9.609	23.18	PK	36.7	-19.9	39.98	-	-	74	-34.02	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

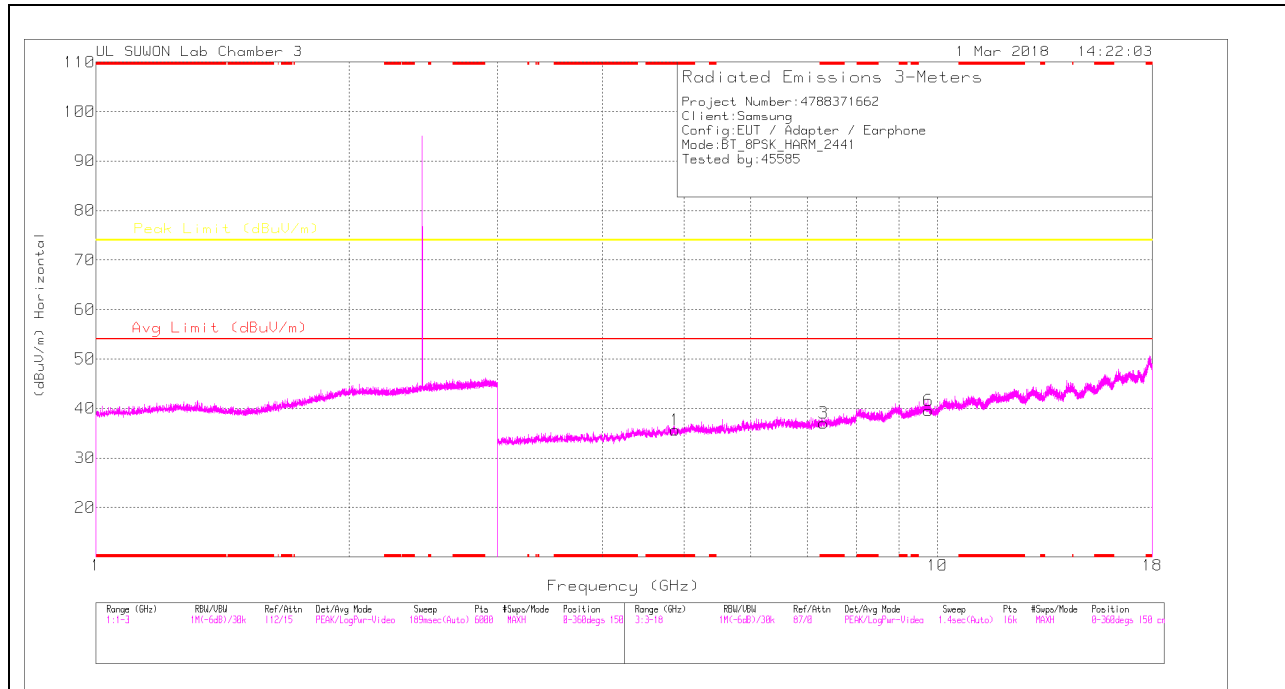

MID CHANNEL VERTICAL

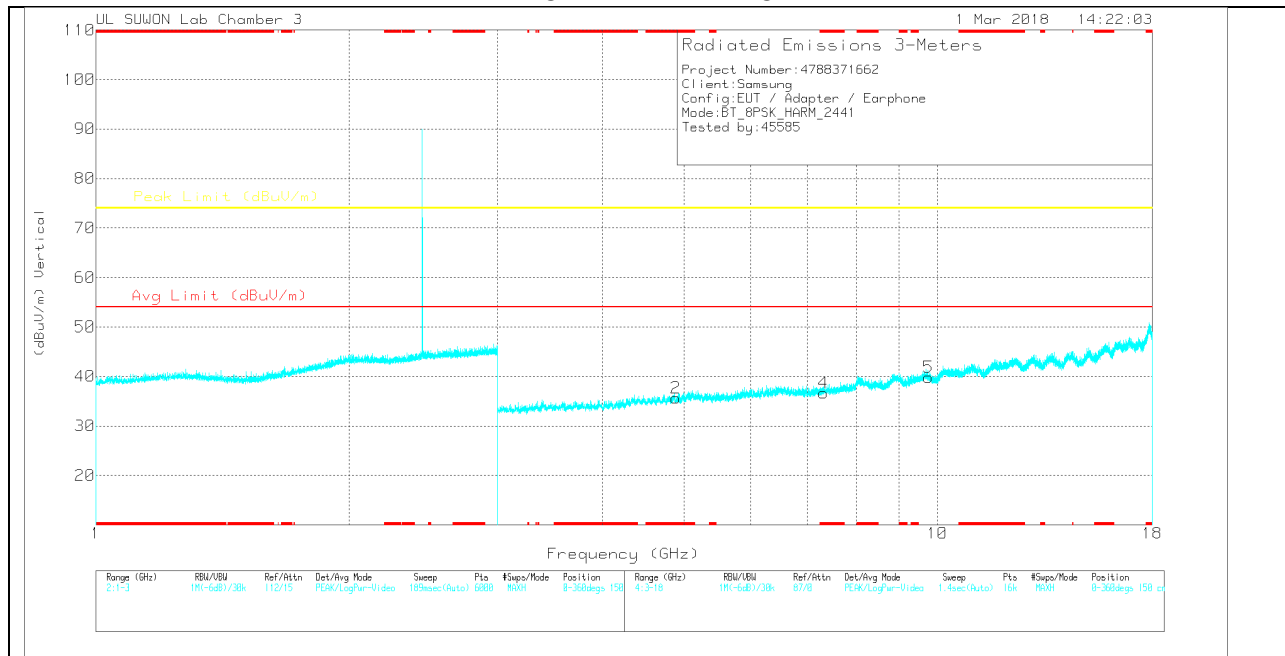

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.882	30.55	PK	34	-28.9	35.65	-	-	74	-38.35	0-360	150	H
3	* 7.324	24.83	PK	35.6	-23.4	37.03	-	-	74	-36.97	0-360	250	H
6	9.764	22.23	PK	36.9	-19.5	39.63	-	-	74	-34.37	0-360	150	H
2	* 4.884	30.5	PK	34	-28.9	35.6	-	-	74	-38.4	0-360	250	V
4	* 7.324	24.44	PK	35.6	-23.4	36.64	-	-	74	-37.36	0-360	150	V
5	9.764	22.47	PK	36.9	-19.5	39.87	-	-	74	-34.13	0-360	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

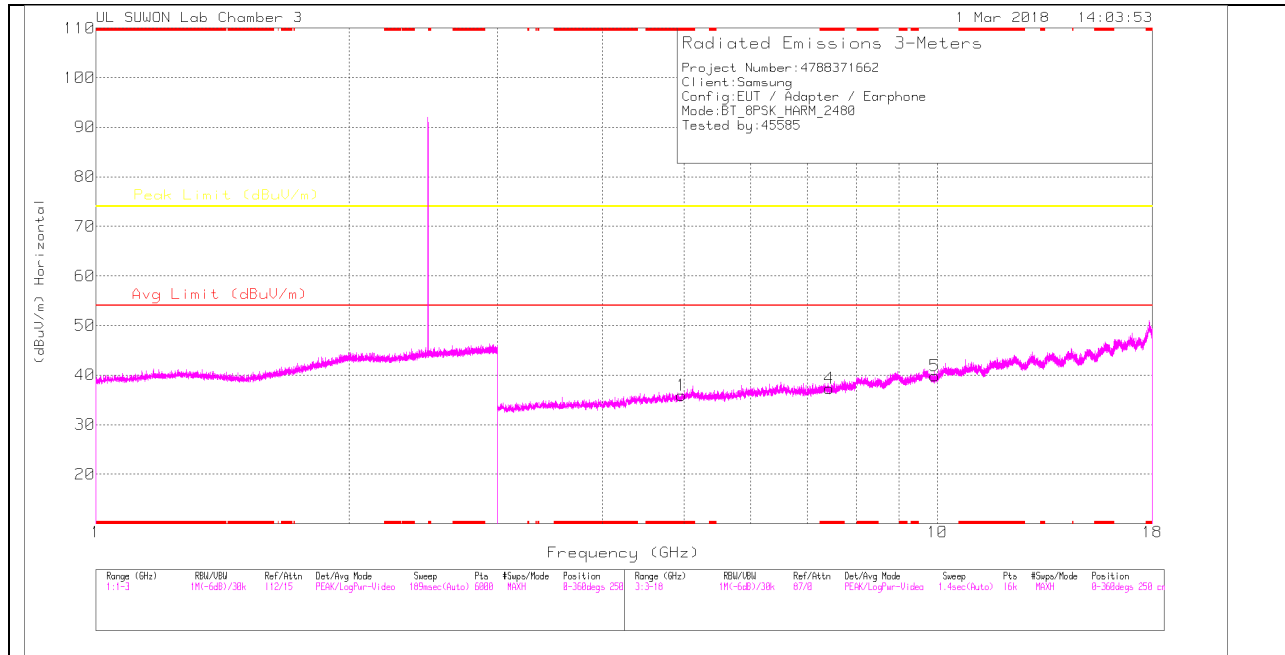

HIGH CHANNEL VERTICAL

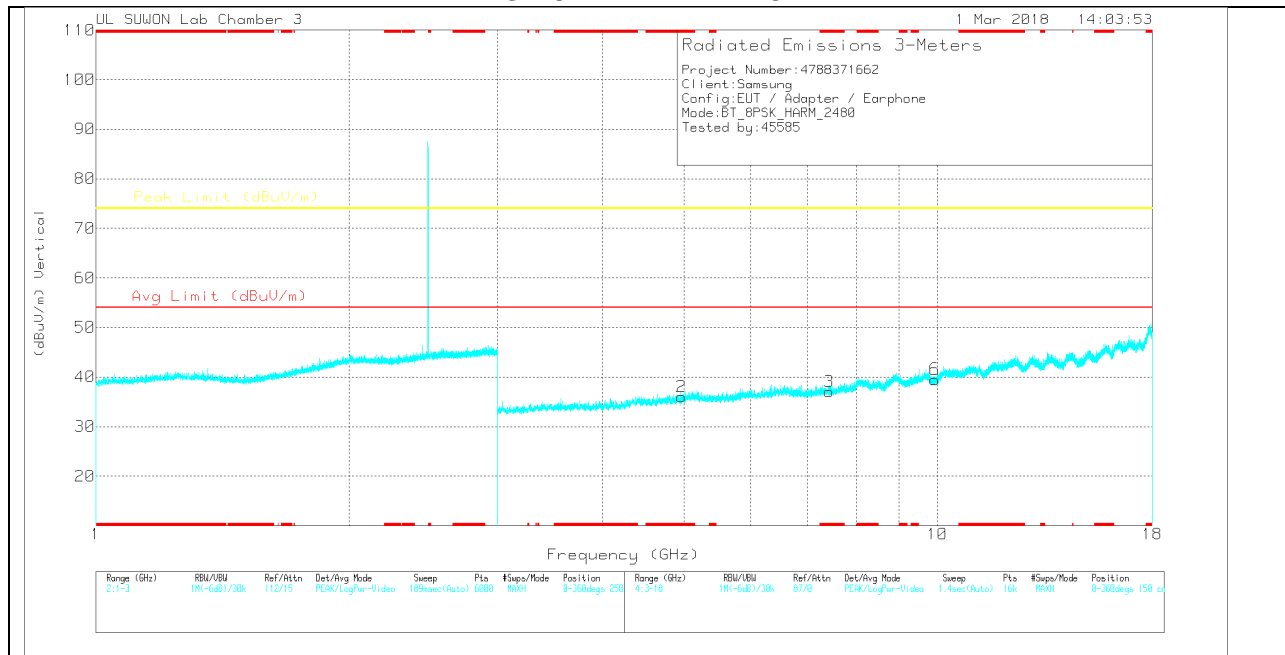

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117[00205959]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.961	30.26	PK	34.1	-28.5	35.86	-	-	74	-38.14	0-360	150	H
4	* 7.44	24.87	PK	35.6	-23.2	37.27	-	-	74	-36.73	0-360	250	H
5	9.923	22.5	PK	37	-19.7	39.8	-	-	74	-34.2	0-360	150	H
2	* 4.96	30.43	PK	34.1	-28.5	36.03	-	-	74	-37.97	0-360	150	V
3	* 7.44	24.59	PK	35.6	-23.2	36.99	-	-	74	-37.01	0-360	250	V
6	9.924	22.12	PK	37	-19.6	39.52	-	-	74	-34.48	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).


11.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

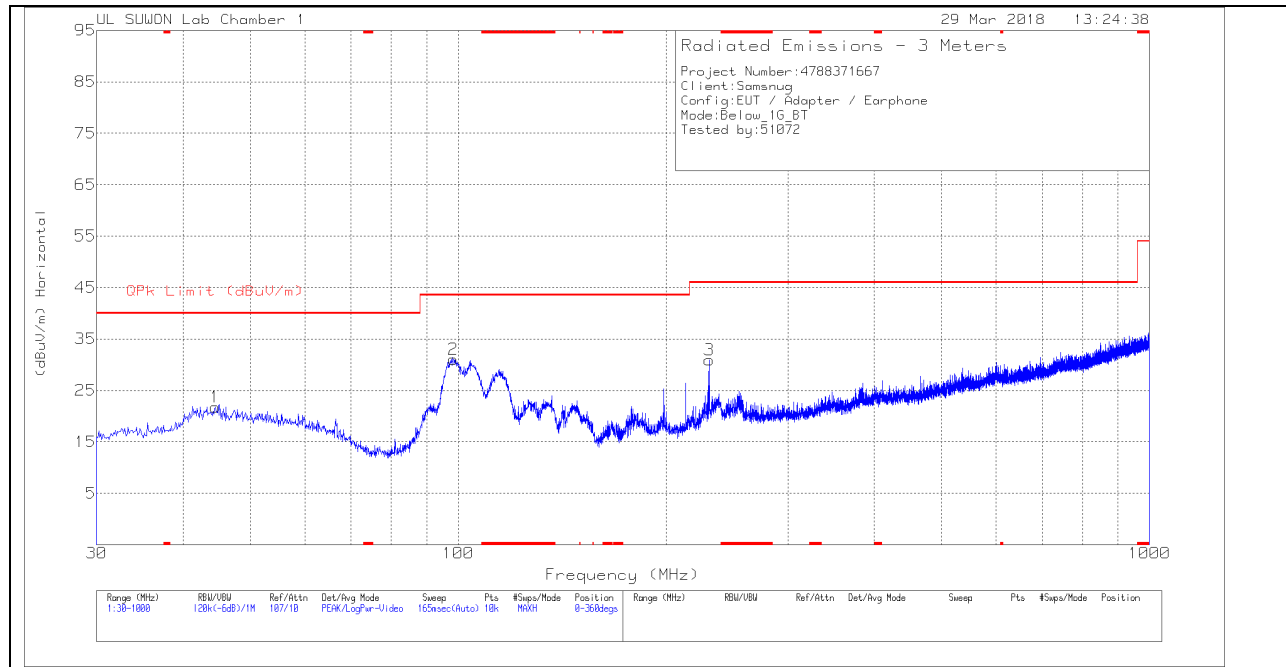

VERTICAL PLOT

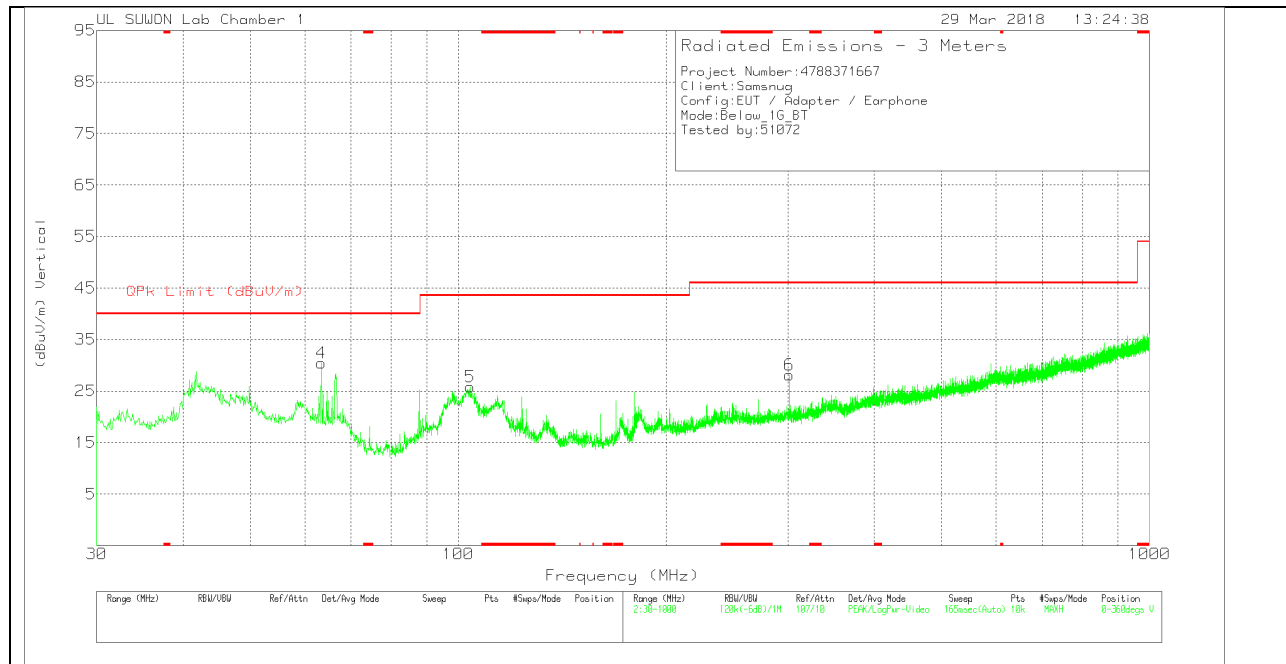

BELOW 1 GHz TABLE

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	750_20170831	30-1000MHz[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	44.55	31.67	Pk	19.6	-29.5	0	21.77	40	-18.23	0-360	400	H
2	98.288	42.36	Pk	17.2	-28.5	0	31.06	43.52	-12.46	0-360	300	H
3	230.79	40.74	Pk	17.7	-27.5	0	30.94	46.02	-15.08	0-360	100	H
4	63.368	42.11	Pk	17.4	-29.1	0	30.41	40	-9.59	0-360	100	V
5	104.011	36.57	Pk	17.6	-28.4	0	25.77	43.52	-17.75	0-360	100	V
6	301.212	35.71	Pk	19.3	-26.9	0	28.11	46.02	-17.91	0-360	100	V

Pk - Peak detector

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

WORST EMISSIONS

LINE 1 PLOT

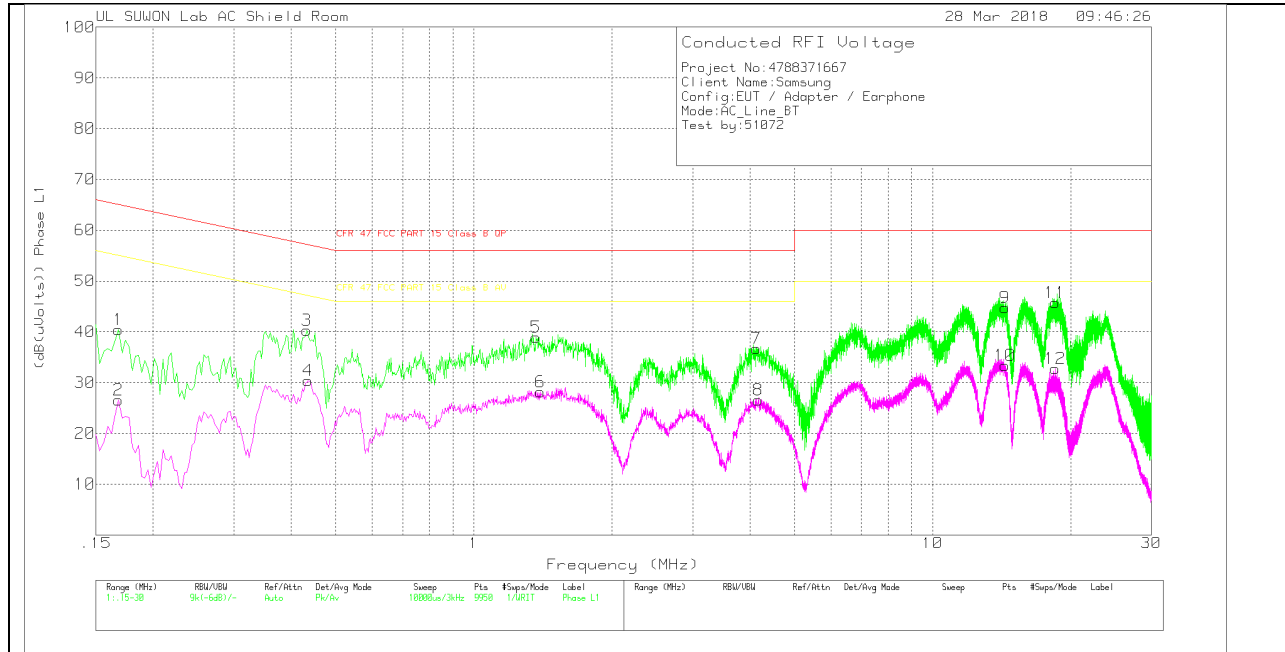

LINE 1 RESULTS

Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_L1_with extension	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.168	30.33	Pk	10	.1	40.43	65.06	-24.63	-	-
2	.168	16.49	Av	10	.1	26.59	-	-	55.06	-28.47
3	.432	30.4	Pk	9.7	.2	40.3	57.21	-16.91	-	-
4	.435	20.53	Av	9.7	.2	30.43	-	-	47.16	-16.73
5	1.368	28.71	Pk	9.9	.3	38.91	56	-17.09	-	-
6	1.395	17.97	Av	9.9	.3	28.17	-	-	46	-17.83
7	4.134	26.71	Pk	9.7	.3	36.71	56	-19.29	-	-
8	4.164	16.6	Av	9.7	.3	26.6	-	-	46	-19.4
9	14.388	34.58	Pk	9.8	.4	44.78	60	-15.22	-	-
10	14.382	23.14	Av	9.8	.4	33.34	-	-	50	-16.66
11	18.51	35.36	Pk	10	.4	45.76	60	-14.24	-	-
12	18.516	22.31	Av	10	.4	32.71	-	-	50	-17.29

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101837_L1_with extension	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.16875	26.89	Qp	10	.1	36.99	65.02	-28.03	-	-
.43275	26.5	Qp	9.7	.2	36.4	57.2	-20.8	-	-
.43515	26.51	Qp	9.7	.2	36.41	57.15	-20.74	-	-
1.36725	24.67	Qp	9.9	.3	34.87	56	-21.13	-	-
1.39575	24.38	Qp	9.9	.3	34.58	56	-21.42	-	-
4.13415	22.87	Qp	9.7	.3	32.87	56	-23.13	-	-
4.16415	22.82	Qp	9.7	.3	32.82	56	-23.18	-	-
14.3888	30.73	Qp	9.8	.4	40.93	60	-19.07	-	-
14.3822	30.84	Qp	9.8	.4	41.04	60	-18.96	-	-
18.5102	30.93	Qp	10	.4	41.33	60	-18.67	-	-
18.5168	31.06	Qp	10	.4	41.46	60	-18.54	-	-

Qp - Quasi-Peak detector

LINE 2 PLOT

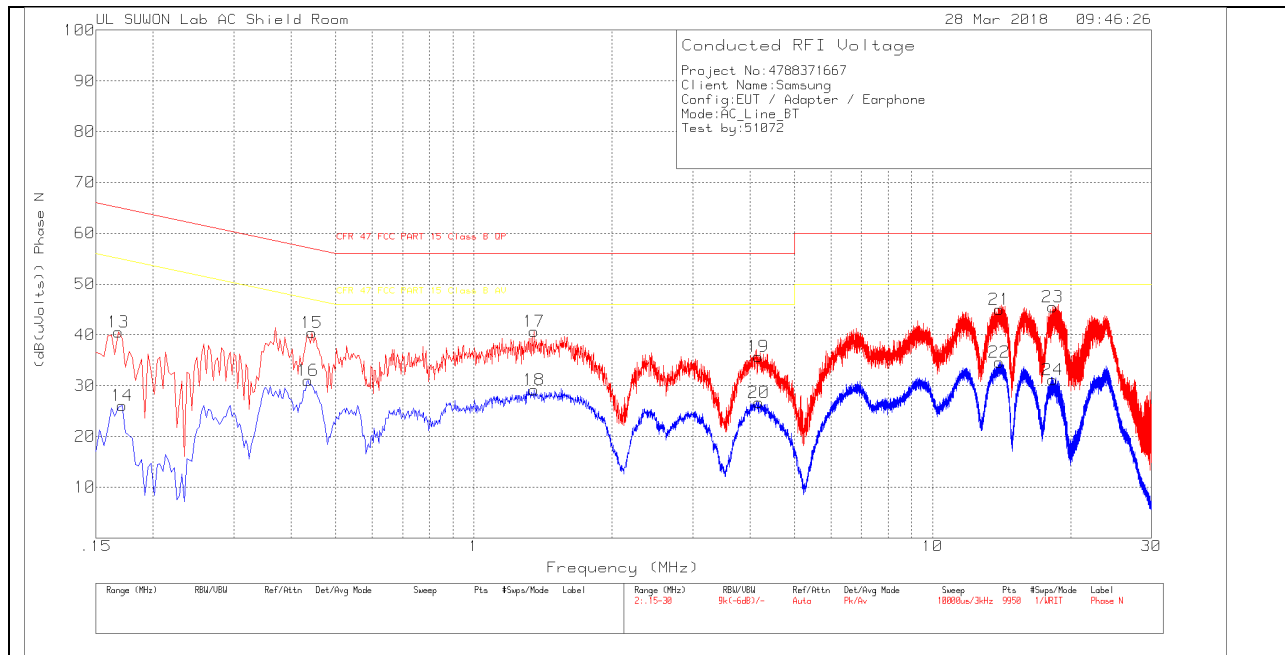

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_N_with extension	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.168	30.49	Pk	10	.1	40.59	65.06	-24.47	-	-
14	.171	15.88	Av	10	.2	26.08	-	-	54.91	-28.83
15	.444	30.4	Pk	9.8	.2	40.4	56.99	-16.59	-	-
16	.435	20.96	Av	9.8	.2	30.96	-	-	47.16	-16.2
17	1.353	30.51	Pk	9.9	.3	40.71	56	-15.29	-	-
18	1.353	18.98	Av	9.9	.3	29.18	-	-	46	-16.82
19	4.173	25.56	Pk	9.8	.3	35.66	56	-20.34	-	-
20	4.182	16.59	Av	9.8	.3	26.69	-	-	46	-19.31
21	13.989	34.78	Pk	9.8	.4	44.98	60	-15.02	-	-
22	13.983	24.46	Av	9.8	.4	34.66	-	-	50	-15.34
23	18.261	35.08	Pk	10	.4	45.48	60	-14.52	-	-
24	18.27	20.77	Av	10	.4	31.17	-	-	50	-18.83

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101837_N_with extension	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.16815	26.94	Qp	10	.1	37.04	65.05	-28.01	-	-
.17115	27.29	Qp	10	.2	37.49	64.9	-27.41	-	-
.44325	26.7	Qp	9.8	.2	36.7	57	-20.3	-	-
.43515	26.79	Qp	9.8	.2	36.79	57.15	-20.36	-	-
1.35315	25.2	Qp	9.9	.3	35.4	56	-20.6	-	-
4.17315	22.17	Qp	9.8	.3	32.27	56	-23.73	-	-
4.18125	21.98	Qp	9.8	.3	32.08	56	-23.92	-	-
13.9892	30.41	Qp	9.8	.4	40.61	60	-19.39	-	-
13.9832	30.41	Qp	9.8	.4	40.61	60	-19.39	-	-
18.2612	29.52	Qp	10	.4	39.92	60	-20.08	-	-
18.2702	29.51	Qp	10	.4	39.91	60	-20.09	-	-

Qp - Quasi-Peak detector