



**FCC 47 CFR § 2.1093  
IEEE Std 1528-2013**

**SAR EVALUATION REPORT**

**FOR**

**GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n, ANT+ and NFC**

**MODEL NUMBER: SM-A600GN/DS, SM-A600GN**

**FCC ID: A3LSMA600GN**

**REPORT NUMBER: 4788371667-S1V2**

**ISSUE DATE: 4/9/2018**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA**

*Prepared by*  
**UL Korea, Ltd.  
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea**

**Suwon Test Site: UL Korea, Ltd. Suwon Laboratory  
218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea  
TEL: (031) 337-9902  
FAX: (031) 213-5433**



**TL-637**

**Revision History**



Rev.	Date	Revisions	Revised By
V1	4/3/2018	Initial Issue	Sunghoon Kim
V2	4/9/2018	Added "notes" in Sec.1	Sunghoon Kim

## Table of Contents

<b>1.</b>	<b>Attestation of Test Results .....</b>	<b>5</b>
<b>2.</b>	<b>Test Specification, Methods and Procedures.....</b>	<b>6</b>
<b>3.</b>	<b>Facilities and Accreditation.....</b>	<b>6</b>
<b>4.</b>	<b>SAR Measurement System &amp; Test Equipment .....</b>	<b>7</b>
4.1.	SAR Measurement System.....	7
4.2.	SAR Scan Procedures.....	8
4.3.	Test Equipment.....	10
<b>5.</b>	<b>Measurement Uncertainty.....</b>	<b>10</b>
<b>6.</b>	<b>Device Under Test (DUT) Information .....</b>	<b>11</b>
6.1.	DUT Description .....	11
6.2.	Wireless Technologies.....	12
6.3.	Nominal and Maximum Output Power.....	13
6.4.	General LTE SAR Test and Reporting Considerations.....	15
6.5.	LTE (TDD) Considerations.....	17
6.6.	LTE Carrier Aggregation .....	18
6.7.	Power Reduction by Proximity Sensing .....	19
6.7.1.	Proximity Sensor Triggering Distance (KDB 616217 §6.2).....	19
6.7.2.	Proximity Sensor Coverage (KDB 616217 §6.3) .....	31
6.7.3.	Proximity Sensor Tilt Angle Assessment (KDB 616217 §6.4).....	31
6.7.4.	Resulting test positions for SAR measurements .....	32
<b>7.</b>	<b>RF Exposure Conditions (Test Configurations).....</b>	<b>32</b>
<b>8.</b>	<b>Dielectric Property Measurements &amp; System Check .....</b>	<b>33</b>
8.1.	Dielectric Property Measurements .....	33
8.2.	System Check.....	37
<b>9.</b>	<b>Conducted Output Power Measurements.....</b>	<b>41</b>
9.1.	GSM .....	41
9.2.	W-CDMA .....	43
9.3.	LTE.....	49
9.3.1.	LTE Rel. 10 Carrier Aggregation.....	71
9.4.	Wi-Fi 2.4 GHz (DTS Band).....	73
9.5.	Wi-Fi 5 GHz (U-NII Bands).....	74
9.6.	Bluetooth .....	74
<b>10.</b>	<b>Measured and Reported (Scaled) SAR Results.....</b>	<b>75</b>

10.1.	GSM 850.....	77
10.2.	GSM1900.....	77
10.3.	W-CDMA Band II.....	78
10.4.	W-CDMA Band IV.....	78
10.5.	W-CDMA Band V.....	79
10.6.	LTE Band 2 (20MHz Bandwidth).....	79
10.7.	LTE Band 4 (20MHz Bandwidth).....	79
10.8.	LTE Band 5 (10MHz Bandwidth).....	80
10.9.	LTE Band 12 (10MHz Bandwidth).....	80
10.10.	LTE Band 13 (10MHz Bandwidth).....	81
10.11.	LTE Band 17 (10MHz Bandwidth).....	81
10.12.	LTE Band 41 (20MHz Bandwidth).....	82
10.13.	LTE Band 66 (20MHz Bandwidth).....	83
10.14.	Wi-Fi (DTS Band).....	84
10.15.	Wi-Fi (UNII Bands).....	84
10.16.	Bluetooth.....	85
<b>11.</b>	<b>SAR Measurement Variability.....</b>	<b>86</b>
<b>12.</b>	<b>Simultaneous Transmission SAR Analysis.....</b>	<b>87</b>
12.1.	Sum of the SAR for WWAN & Wi-Fi & BT.....	88
<b>Appendixes</b>	<b>.....</b>	<b>89</b>
	4788371667-S1V2 FCC Report SAR_App A_Photos & Ant. Locations.....	89
	4788371667-S1V2 FCC Report SAR_App B_Highest SAR Test Plots.....	89
	4788371667-S1V2 FCC Report SAR_App C_System Check Plots.....	89
	4788371667-S1V2 FCC Report SAR_App D_SAR Tissue Ingredients.....	89
	4788371667-S1V2 FCC Report SAR_App E_Probe Cal. Certificates.....	89
	4788371667-S1V2 FCC Report SAR_App F_Dipole Cal. Certificates.....	89

# 1. Attestation of Test Results

Applicant Name		SAMSUNG ELECTRONICS CO.,LTD.			
FCC ID		A3LSMA600GN			
Model Number		SM-A600GN/DS and SM-A600GN			
Applicable Standards		FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
<b>SAR Limits (W/Kg)</b>					
Exposure Category		Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure		1.6			
<b>The Highest Reported SAR (W/kg)</b>					
<b>RF Exposure Conditions</b>		<b>Equipment Class</b>			
		<b>Licensed</b>	<b>DTS</b>	<b>UNII</b>	<b>DSS(BT)</b>
Head		0.30	0.98	0.58	N/A
Body-worn		0.85	0.15	< 0.1	
Hotspot		1.09	0.30	0.14	
Simultaneous TX	Head	1.28	1.28	0.88	
	Body-worn	1.00	1.00	0.93	
	Hotspot	1.40	1.40	1.24	
Date Tested		2/20/2018 to 3/30/2018			
Test Results		Pass			
<p><b>Notes:</b> SM-A600GN/DS and SM-A600GN are same hardware. Only SIM Tray is different. So SAR test is evaluated for All bands using SM-A600GN/DS.</p> <p>UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.</p>					
Approved & Released By:			Prepared By:		
					
Justin Park Lead Test Engineer UL Korea, Ltd. Suwon Laboratory			Sunghoon Kim Associate Test Engineer UL Korea, Ltd. Suwon Laboratory		

## 2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 648474 D04 Handset SAR v01r03
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D06 Hotspot Mode v02r01

In addition to the above, the following information was used:

- [TCB workshop](#) October, 2014; Page 36, RF Exposure Procedures Update (Overlapping LTE Bands)
- [TCB workshop](#) October, 2014; Page 37, RF Exposure Procedures Update (Other LTE Considerations)
- [TCB workshop](#) October, 2016; Page 7, RF Exposure Procedures (Bluetooth Duty Factor)

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 2 Room
SAR 3 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

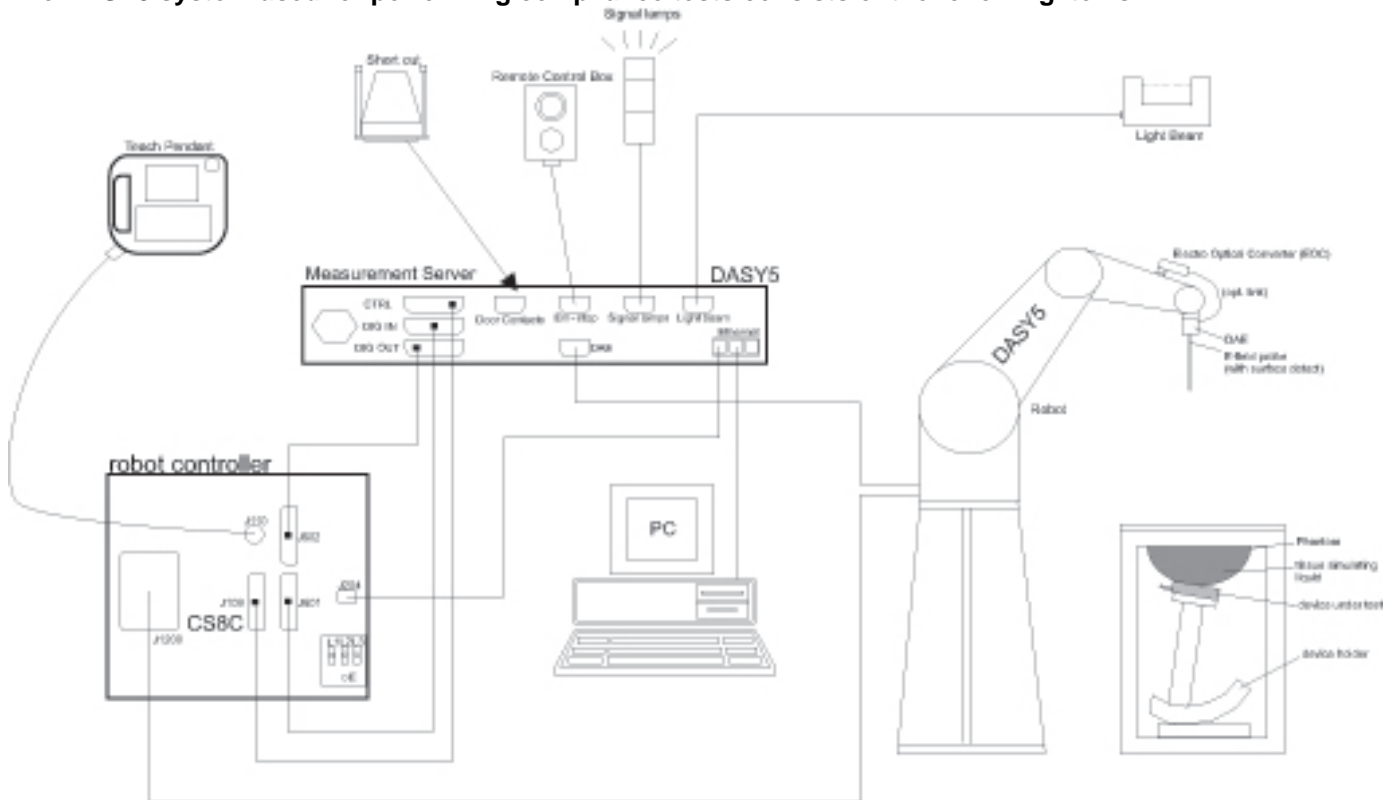

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	



**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		$\leq 3$ GHz	$> 3$ GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

**Step 5: Z-Scan (FCC only)**

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

### 4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

#### Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	8-8-2018
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	8-2-2018
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3424	8-11-2018
Thermometer	Lutron	MHB-382SD	AH.91478	8-10-2018

#### System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-7-2018
Power Sensor	Agilent	U2000A	MY54260010	8-8-2018
Power Sensor	Agilent	U2000A	MY54260007	8-8-2018
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	8-8-2018
Directional Coupler	Agilent	772D	MY52180193	8-7-2018
Directional Coupler	Agilent	778D	MY52180432	8-7-2018
Low Pass Filter	MICROLAB	LA-15N	03943	8-7-2018
Low Pass Filter	FILTRON	L14012FL	1410003S	8-7-2018
Low Pass Filter	MICROLAB	LA-60N	03942	8-7-2018
Attenuator	Agilent	8491B/003	MY39269292	8-7-2018
Attenuator	Agilent	8491B/010	MY39269315	8-7-2018
Attenuator	Agilent	8491B/020	MY39269298	8-7-2018
E-Field Probe (SAR1)	SPEAG	EX3DV4	7376	8-22-2018
E-Field Probe (SAR2)	SPEAG	EX3DV4	7330	1-22-2019
E-Field Probe (SAR3)	SPEAG	EX3DV4	7314	9-28-2018
Data Acquisition Electronics (SAR1)	SPEAG	DAE4	1468	8-22-2018
Data Acquisition Electronics (SAR2)	SPEAG	DAE4	1447	11-22-2018
Data Acquisition Electronics (SAR2)	SPEAG	DAE3	479	10-23-2018
Data Acquisition Electronics (SAR3)	SPEAG	DAE4	1494	7-20-2018
System Validation Dipole	SPEAG	D750V3	1014	7-19-2018
System Validation Dipole	SPEAG	D835V2	4d194	7-19-2018
System Validation Dipole	SPEAG	D1750V2	1125	2-16-2019
System Validation Dipole	SPEAG	D1900V2	5d190	9-20-2018
System Validation Dipole	SPEAG	D2450V2	939	9-19-2018
System Validation Dipole	SPEAG	D2600V2	1097	1-17-2019
System Validation Dipole	SPEAG	D5GHzV2	1209	2-15-2019
System Validation Dipole	SPEAG	D5GHzV2	1184	8-23-2018
Thermometer (SAR1)	Lutron	MHB-382SD	AH.91463	8-10-2018
Thermometer (SAR2)	Lutron	MHB-382SD	AH.50215	2-9-2019
Thermometer (SAR3)	Lutron	MHB-382SD	AH.50213	8-16-2018

#### Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150313	12-08-2018
Base Station Simulator	R & S	CMW500	150314	12-05-2018

### 5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

Device Dimension	Overall (Length x Width): 146.34 mm x 67.25 mm Overall Diagonal: 157.00 mm Display Diagonal: 142.00 mm																					
Back Cover	<input checked="" type="checkbox"/> The Back Cover is not removable.																					
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible																					
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 5.8 GHz)																					
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz_Ch.36 – Ch.48, Ch.149 – Ch.165)																					
Test Sample Information	<table border="1"> <thead> <tr> <th>No.</th> <th>S/N</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>R38K108M9AW</td> <td>Wi-Fi/BT conduction</td> </tr> <tr> <td>2</td> <td>R38K108M3ZN</td> <td>Main conduction</td> </tr> <tr> <td>3</td> <td>R38K108NTGJ</td> <td>SAR</td> </tr> <tr> <td>4</td> <td>R38K108NTEK</td> <td>SAR</td> </tr> <tr> <td>5</td> <td>R38K108NTAW</td> <td>SAR</td> </tr> <tr> <td>6</td> <td>R38K108M84V</td> <td>SAR</td> </tr> </tbody> </table>	No.	S/N	Notes	1	R38K108M9AW	Wi-Fi/BT conduction	2	R38K108M3ZN	Main conduction	3	R38K108NTGJ	SAR	4	R38K108NTEK	SAR	5	R38K108NTAW	SAR	6	R38K108M84V	SAR
No.	S/N	Notes																				
1	R38K108M9AW	Wi-Fi/BT conduction																				
2	R38K108M3ZN	Main conduction																				
3	R38K108NTGJ	SAR																				
4	R38K108NTEK	SAR																				
5	R38K108NTAW	SAR																				
6	R38K108M84V	SAR																				

## 6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GPRS Multi-Slot Class: <input type="checkbox"/> Class 8 - 1 Up, 4 Down <input type="checkbox"/> Class 10 - 2 Up, 4 Down <input type="checkbox"/> Class 12 - 4 Up, 4 Down <input checked="" type="checkbox"/> Class 33 - 4 Up, 5 Down	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
	Does this device support DTM (Dual Transfer Mode)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Release.5) HSUPA (Release.6) DC-HSDPA (Release 8) HSPA+ (DL only)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 12 FDD Band 13 FDD Band 17 TDD Band 41 FDD Band 66	QPSK 16QAM Rel. 10 Carrier Aggregation (1 Uplink and 2 Downlinks) (Carrier Aggregation is only supported for downlink and not for uplink.)		100%(FDD) 63.3%(TDD)
	Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		99.5% (802.11b) 96.8% (802.11g) 96.6% (802.11n HT20)
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40)		96.8% (802.11a) 96.6% (802.11n HT20) 93.4% (802.11n HT40)
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
	Does this device support Band gap channel? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Bluetooth	2.4 GHz	Version 4.2 LE		76.96% (DH5)

### Notes:

1. This device supports uplink-downlink configuration 0-6. The configuration with the highest duty cycle was used (Subframe Number 0 at 63.3%).
2. Duty cycle for Wi-Fi is referenced from the DTS and UNII report.

### 6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1. at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit.

RF Air interface	Mode	Time Slots	Max. RF Output Power (dBm)		Reduced. RF Output Power Hotspot back-off (dBm)		Reduced. RF Output Power Proximity sensor back-off (dBm)	
			Tune-up Limit	Frame Power	Tune-up Limit	Frame Power	Tune-up Limit	Frame Power
GSM850	Voice	1	34.0	25.0			34.0	25.0
	GPRS	1	34.0	25.0	31.5	22.5	31.5	22.5
	GPRS	2	33.0	27.0	30.5	24.5	30.5	24.5
	GPRS	3	31.5	27.2	29.0	24.7	29.0	24.7
	GPRS	4	30.0	27.0	27.5	24.5	27.5	24.5
	EGPRS	1	28.0	19.0	28.0	19.0	28.0	19.0
	EGPRS	2	25.5	19.5	25.5	19.5	25.5	19.5
	EGPRS	3	24.5	20.2	24.5	20.2	24.5	20.2
GSM1900	EGPRS	4	23.0	20.0	23.0	20.0	23.0	20.0
	Voice	1	30.5	21.5			30.5	21.5
	GPRS	1	30.5	21.5	29.0	20.0	29.0	20.0
	GPRS	2	27.5	21.5	26.0	20.0	26.0	20.0
	GPRS	3	26.5	22.2	25.0	20.7	25.0	20.7
	GPRS	4	25.5	22.5	24.0	21.0	24.0	21.0
	EGPRS	1	26.5	17.5	26.5	17.5	26.5	17.5
	EGPRS	2	24.5	18.5	24.0	18.0	24.0	18.0
GSM1900	EGPRS	3	23.0	18.7	23.0	18.7	23.0	18.7
	EGPRS	4	21.5	18.5	21.5	18.5	21.5	18.5

RF Air interface	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power Hotspot back-off (dBm)	Reduced. RF Output Power Proximity sensor back-off (dBm)
W-CDMA Band II	R99	23.0	21.0	21.0
	HSDPA	23.0	21.0	21.0
	HSUPA	23.0	21.0	21.0
	DC-HSDPA	23.0	21.0	21.0
W-CDMA Band IV	R99	23.0	20.5	20.5
	HSDPA	22.5	20.5	20.5
	HSUPA	23.0	20.5	20.5
	DC-HSDPA	22.5	20.5	20.5
W-CDMA Band V	R99	24.5		
	HSDPA	22.0		
	HSUPA	23.0		
	DC-HSDPA	22.0		

RF Air interface	Mode	Max. RF Output Power (dBm)	Reduced. RF Output Power Hotspot back-off (dBm)	Reduced. RF Output Power Proximity sensor back-off (dBm)
LTE Band 2	QPSK	24.0	21.0	21.0
LTE Band 4*	QPSK	24.0	22.0	22.0
LTE Band 5	QPSK	24.4		
LTE Band 12	QPSK	24.0		
LTE Band 13	QPSK	24.0		
LTE Band 17*	QPSK	24.0		
LTE Band 41	QPSK	24.5		
LTE Band 66	QPSK	24.0	22.0	22.0

**Notes:**

- The device utilizes power reduction under some portable hotspot conditions for SAR compliance. There is power reduction for GSM 850, GSM 1900, WCDMA Band II, WCDMA Band IV, LTE Band 2, LTE Band 4 and LTE Band 66. The reduced powers were confirmed via conducted power measurements the RF port. Detailed description of the hotspot power reduction mechanism is included in the operational description.
- The Proximity sensor is implemented for GSM 850, GSM 1900, WCDMA Band II, WCDMA Band IV, LTE Band 2, LTE Band 4 and LTE Band 66. But SAR tests for body exposure conditions were performed at full power at distances at 15mm and the head exposure conditions were tested at 0mm at full power the proximity sensor details are not required in the SAR test report. Both back-off feature is not operating at the same time
- LTE QPSK configuration has the highest maximum average output power per 3GPP standard.
- LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.
- LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

RF Air interface	Mode	Max. RF Output Power (dBm)	Reduced RF Output Power (dBm)	
WiFi 2.4 GHz (Ch. 1~Ch. 11)	802.11b	18.5		
	802.11g	16.5		
	802.11n HT20	15.5		
WiFi 2.4 GHz (Ch. 12 & Ch. 13)	802.11b	10.5		
	802.11g	10.5		
	802.11n HT20	10.5		
WiFi 5 GHz	802.11a	16.5		13.5
	802.11n HT20	16.5		13.5
	802.11n HT40	14.5		13.5
Bluetooth		9.0		
Bluetooth LE		5.5		

**Note(s):**

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.

### 6.4. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2	Frequency range: 1850 - 1910 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4	Frequency range: 1710 - 1755 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 12	Frequency range: 699 – 716 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 13	Frequency range: 777 - 787 MHz					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
Low				23205/ 779.5			
Mid			23230/ 782	23230/ 782			
High				23255/ 784.5			
Band 17	Frequency range: 704 - 716 MHz						
	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low			23780/ 709	23755/ 706.5			
Mid			23790/ 710	23790/ 710			
High			23800/ 711	23825/ 713.5			

**General LTE SAR Test and Reporting Considerations (Continued)**

Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 41	Frequency range: 2496 - 2690 MHz																																																																		
		Channel Bandwidth																																																																		
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																													
	Low	39750 / 2506.0																																																																		
	Low-Mid	40185 / 2549.5																																																																		
	Mid	40620 / 2593.0																																																																		
	Mid-High	41055 / 2636.5																																																																		
	High	41490 / 2680.0																																																																		
	Band 66	Frequency range: 1710 - 1780 MHz																																																																		
		Channel Bandwidth																																																																		
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																													
		Low	132072/ 1720	132047/ 1717.5	132022/ 1715	131997/ 1712.5	131987/ 1711.5	131979/ 1710.7																																																												
		Mid	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745																																																												
High		132572/ 1770	132597/ 1772.5	132622/ 1775	132647/ 1777.5	132657/ 1778.5	132665/ 1779.3																																																													
LTE transmitter and antenna implementation																																																																				
Refer to Appendix A.																																																																				
Maximum power reduction (MPR)																																																																				
<p align="center"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table> <p>MPR Built-in by design                      The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values.                      A-MPR (additional MPR) was disabled during SAR testing</p>							Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )							MPR (dB)																																																												
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																														
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																													
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																													
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																													
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																													
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																													
256 QAM	≥ 1						≤ 5																																																													
Power reduction																																																																				
Yes																																																																				
Spectrum plots for RB configurations																																																																				
A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																				

**Notes:**

- SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).



## 6.5. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

### Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Calculated Duty Cycle = Extended cyclic prefix in uplink  $\times (T_s) \times \#$  of S +  $\#$  of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle =  $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$  seconds

### Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle and Special Subframe 7

### 6.6. LTE Carrier Aggregation

Combination	CA configuration	BCS Configuration	Reverse Y/N	Bandwidth (MHz)										Max Aggregated BW (MHz)					
				Carrier 1					Carrier 2										
				20	15	10	5	3	1.4	20	15	10	5		3	1.4			
Intra-Band contiguous	2C	(0)	Yes				√				√							40	
				√	√	√				√	√	√	√						
	5B	(0)	Yes			√	√							√				20	
		(1)				√		√						√				8	
	41C	(0)	Yes			√						√						40	
		√		√	√				√	√	√								
		(1)				√	√				√	√	√	√					
		(2)				√					√	√	√	√					
	66C	(0)	Yes				√					√						40	
				√	√					√	√	√	√						
Intra-Band non-contiguous	2A-2A	(0)	Yes	√	√	√	√				√	√	√	√				40	
	4A-4A	(0)	Yes	√	√	√	√				√	√	√	√				40	
		(1)				√	√				√	√	√	√			20		
	5A-5A	(0)	Yes			√	√					√	√					20	
	41A-41A	(0)	Yes	√	√	√	√					√	√	√	√				40
		(1)		√	√	√	√					√	√	√	√			40	
66A-66A	(0)	Yes	√	√	√	√					√	√	√	√				40	
Inter-Band non-contiguous	2A-5A	(0)	Yes	√	√	√	√					√	√					30	
		(1)				√	√				√	√				20			
	2A-12A	(0)	Yes	√	√	√	√						√	√	√				30
		(1)		√	√	√	√					√	√	√			30		
		(2)				√	√					√	√				20		
	2A-13A	(0)	Yes	√	√	√	√						√	√					30
		(1)				√	√					√	√				20		
	2A-17A	(0)	Yes			√	√						√	√				20	
	4A-5A	(0)	Yes			√	√						√	√					20
		(1)		√	√	√	√					√	√	√				30	
	4A-12A	(0)	Yes			√	√		√	√			√	√					20
		(1)		√	√	√	√		√	√			√	√				30	
		(2)		√	√	√	√					√	√	√	√			30	
		(3)				√	√					√	√					20	
		(4)		√	√	√	√					√	√	√				30	
	4A-13A	(0)	Yes			√	√							√					30
		(1)				√	√					√						20	
	4A-17A	(0)	Yes			√	√						√	√				20	
5A-41A	(0)	No			√	√				√								30	
12A-66A	(0)	Yes			√	√						√	√	√	√	√		20	
	(1)				√	√				√	√	√	√	√	√	√		30	
	(2)				√	√		√			√	√	√	√	√	√		30	
	(3)				√	√					√	√	√	√				20	
	(4)				√	√					√	√	√	√				30	
(5)					√	√				√	√	√	√				20		

**Note(s):**  
For supported channels, please refer to §6.4


## 6.7. Power Reduction by Proximity Sensing

### 6.7.1. Proximity Sensor Triggering Distance (KDB 616217 §6.2)

Front, Rear and Edge 3 of the DUT was placed directly below the flat phantom. The DUT was moved toward the phantom in accordance with the steps outlined in KDB 616217 §6.2 to determine the trigger distance for enabling power reduction. The DUT was moved away from the phantom to determine the trigger distance for resuming full power.

The DUT featured a visual indicator on its display that showed the status of the proximity sensor (Triggered or not triggered). This was used to determine the status of the sensor during the proximity sensor assessment as monitoring the output power directly was not practical without affecting the measurement.

It was confirmed separately that the output power was altered according to the proximity sensor status indication. This was achieved by observing the proximity sensor status at the same time as monitoring the conducted power. Section 9 contains both the full and reduced conducted power measurements.

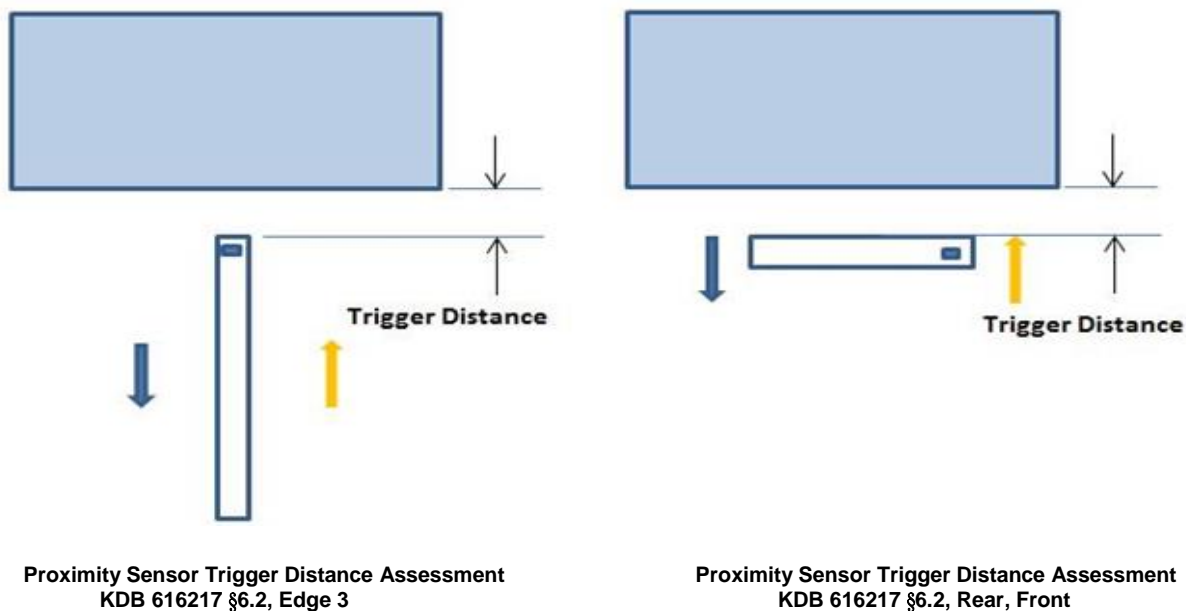

#### LEGEND

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point

### Summary of Trigger Distances


Tissue simulating liquid	Trigger distance - Front		Trigger distance - Rear		Trigger distance – Edge 3	
	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom
850 Body	8 mm	8 mm	16 mm	16 mm	12 mm	12 mm
1700 Body	8 mm	8 mm	16 mm	16 mm	12 mm	12 mm
1900 Body	8 mm	8 mm	16 mm	16 mm	12 mm	12 mm
2450 Head	70 mm	70 mm	N/A		N/A	
5G Head	70 mm	70 mm	N/A		N/A	

**Proximity Sensor Triggering Distance Measurement Results**

**GSM 850**


Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	4	5	6	7	8	9	10	11	12	13
GSM850 GPRS 1 Slot	31.2	31.0	31.1	31.0	31.0	33.5	33.5	33.5	33.6	33.5
GSM850 GPRS 2 Slots	30.0	30.2	30.2	30.1	30.2	32.6	32.5	32.6	32.5	32.6
GSM850 GPRS 3 Slots	28.5	28.6	28.5	28.5	28.5	31.2	31.1	31.2	31.1	31.2
GSM850 GPRS 4 Slots	27.0	27.1	27.1	27.0	27.0	29.5	29.5	29.5	29.6	29.6

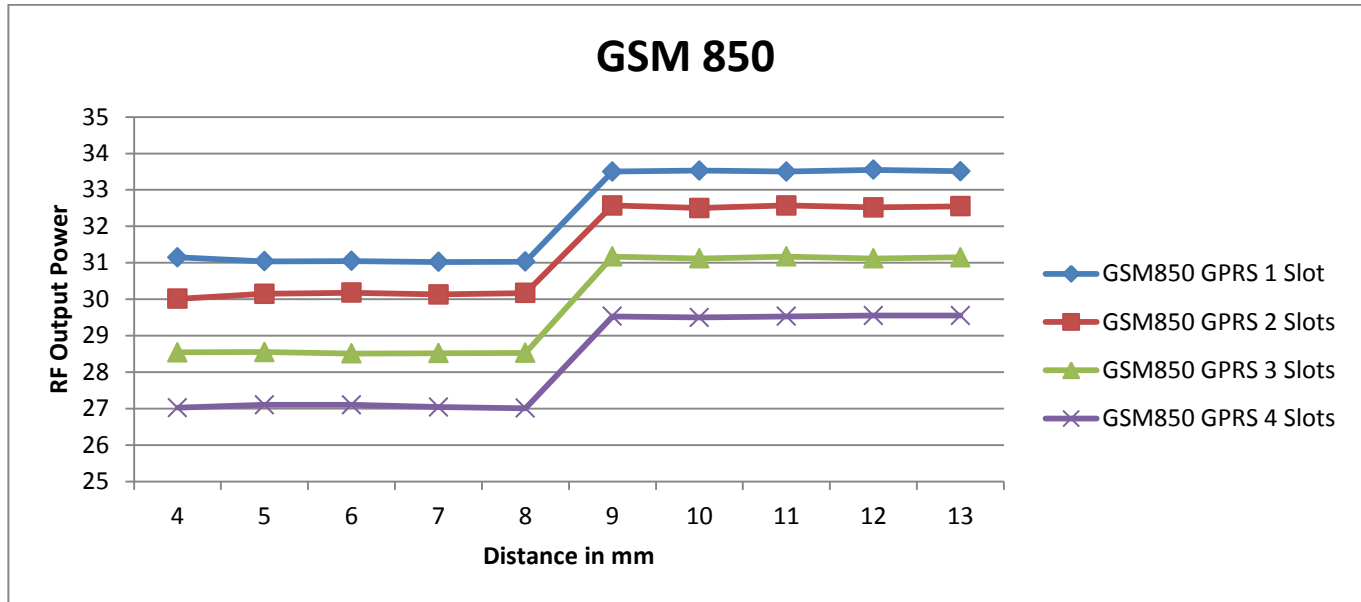


Rear, DUT Moving Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	12	13	14	15	16	17	18	19	20	21
GSM850 GPRS 1 Slot	31.2	31.0	31.1	31.0	31.0	33.5	33.5	33.5	33.6	33.5
GSM850 GPRS 2 Slots	30.0	30.2	30.2	30.1	30.2	32.6	32.5	32.6	32.5	32.6
GSM850 GPRS 3 Slots	28.5	28.6	28.5	28.5	28.5	31.2	31.1	31.2	31.1	31.2
GSM850 GPRS 4 Slots	27.0	27.1	27.1	27.0	27.0	29.5	29.5	29.5	29.6	29.6

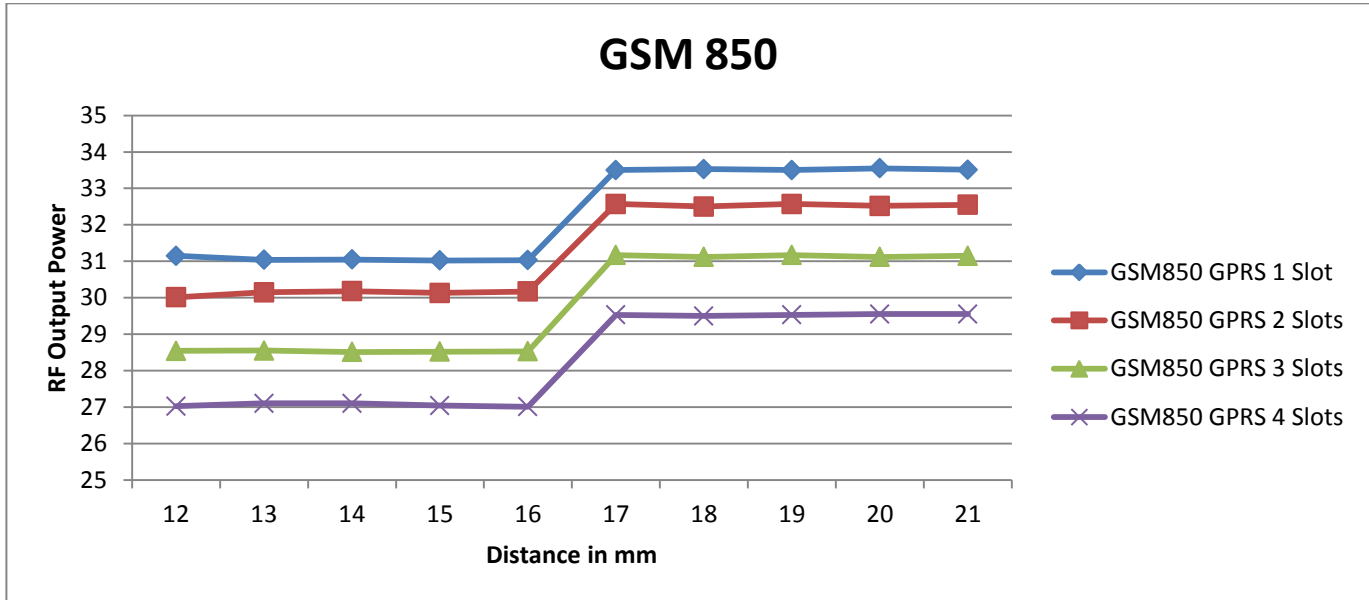

Edge 3, DUT Moving Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	8	9	10	11	12	13	14	15	16	17
GSM850 GPRS 1 Slot	31.2	31.0	31.1	31.0	31.0	33.5	33.5	33.5	33.6	33.5
GSM850 GPRS 2 Slots	30.0	30.2	30.2	30.1	30.2	32.6	32.5	32.6	32.5	32.6
GSM850 GPRS 3 Slots	28.5	28.6	28.5	28.5	28.5	31.2	31.1	31.2	31.1	31.2
GSM850 GPRS 4 Slots	27.0	27.1	27.1	27.0	27.0	29.5	29.5	29.5	29.6	29.6

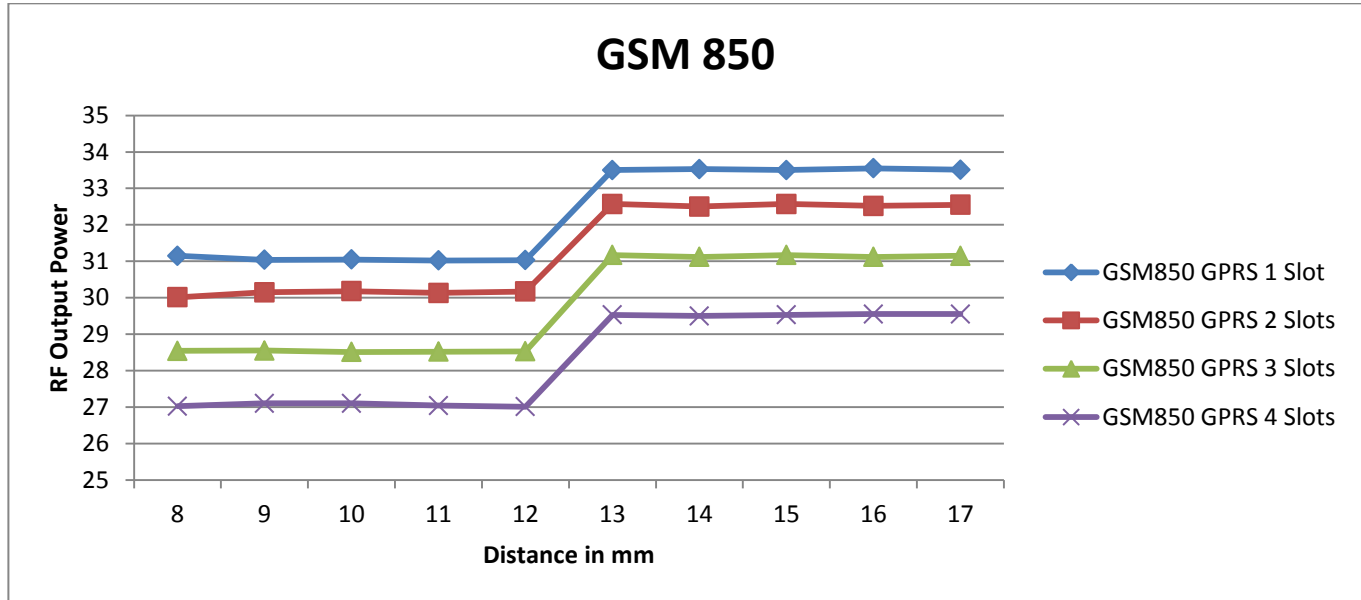

**GSM 1900**


Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	4	5	6	7	8	9	10	11	12	13
GSM1900 GPRS 1 Slot	28.6	28.5	28.5	28.6	28.6	30.0	30.1	30.0	30.1	30.0
GSM1900 GPRS 2 Slots	25.6	25.6	25.6	25.6	25.5	27.1	27.1	27.1	27.1	27.1
GSM1900 GPRS 3 Slots	24.5	24.6	24.5	24.5	24.5	26.1	26.1	26.1	26.1	26.0
GSM1900 GPRS 4 Slots	23.6	23.5	23.5	23.6	23.6	25.0	25.1	25.0	25.0	25.1

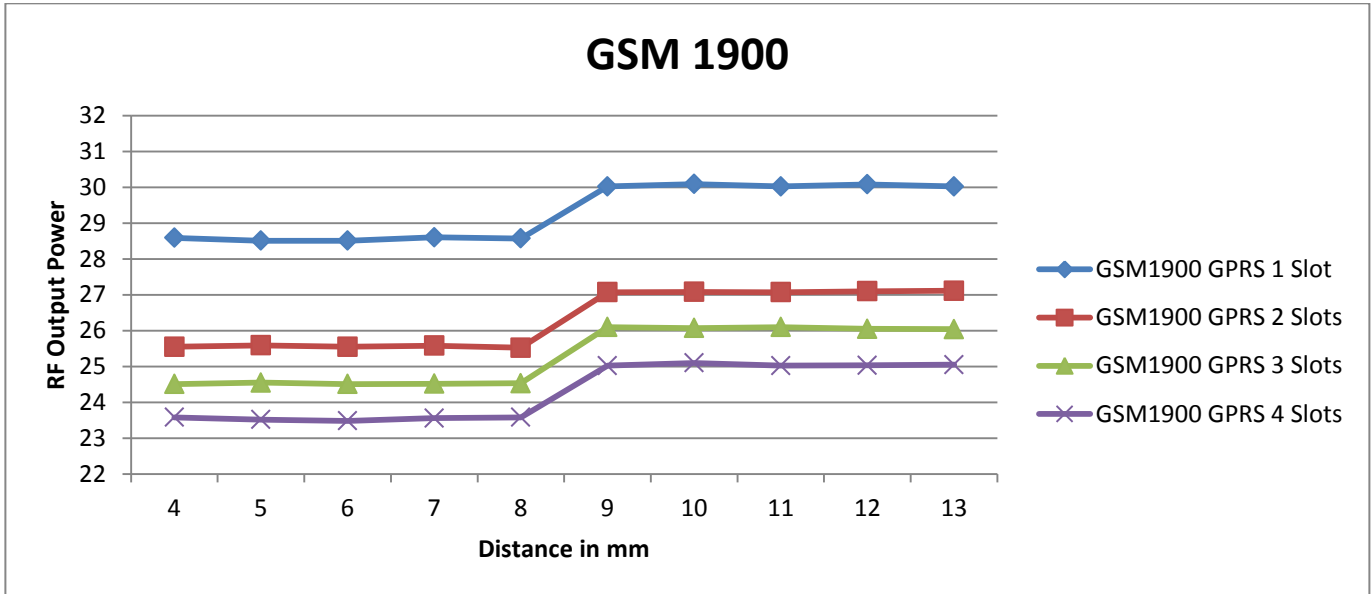

Rear, DUT Moving Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	12	13	14	15	16	17	18	19	20	21
GSM1900 GPRS 1 Slot	28.6	28.5	28.5	28.6	28.6	30.0	30.1	30.0	30.1	30.0
GSM1900 GPRS 2 Slots	25.6	25.6	25.6	25.6	25.5	27.1	27.1	27.1	27.1	27.1
GSM1900 GPRS 3 Slots	24.5	24.6	24.5	24.5	24.5	26.1	26.1	26.1	26.1	26.0
GSM1900 GPRS 4 Slots	23.6	23.5	23.5	23.6	23.6	25.0	25.1	25.0	25.0	25.1

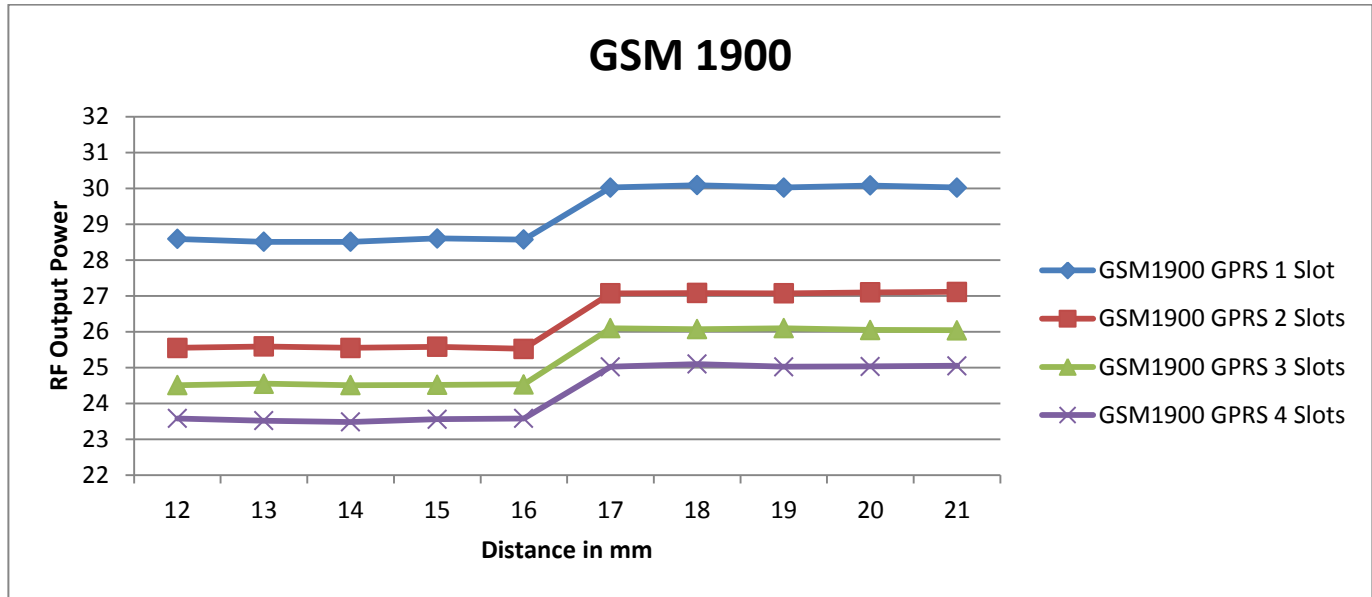



Edge 3, DUT Moving Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	8	9	10	11	12	13	14	15	16	17
GSM1900 GPRS 1 Slot	28.6	28.5	28.5	28.6	28.6	30.0	30.1	30.0	30.1	30.0
GSM1900 GPRS 2 Slots	25.6	25.6	25.6	25.6	25.5	27.1	27.1	27.1	27.1	27.1
GSM1900 GPRS 3 Slots	24.5	24.6	24.5	24.5	24.5	26.1	26.1	26.1	26.1	26.0
GSM1900 GPRS 4 Slots	23.6	23.5	23.5	23.6	23.6	25.0	25.1	25.0	25.0	25.1

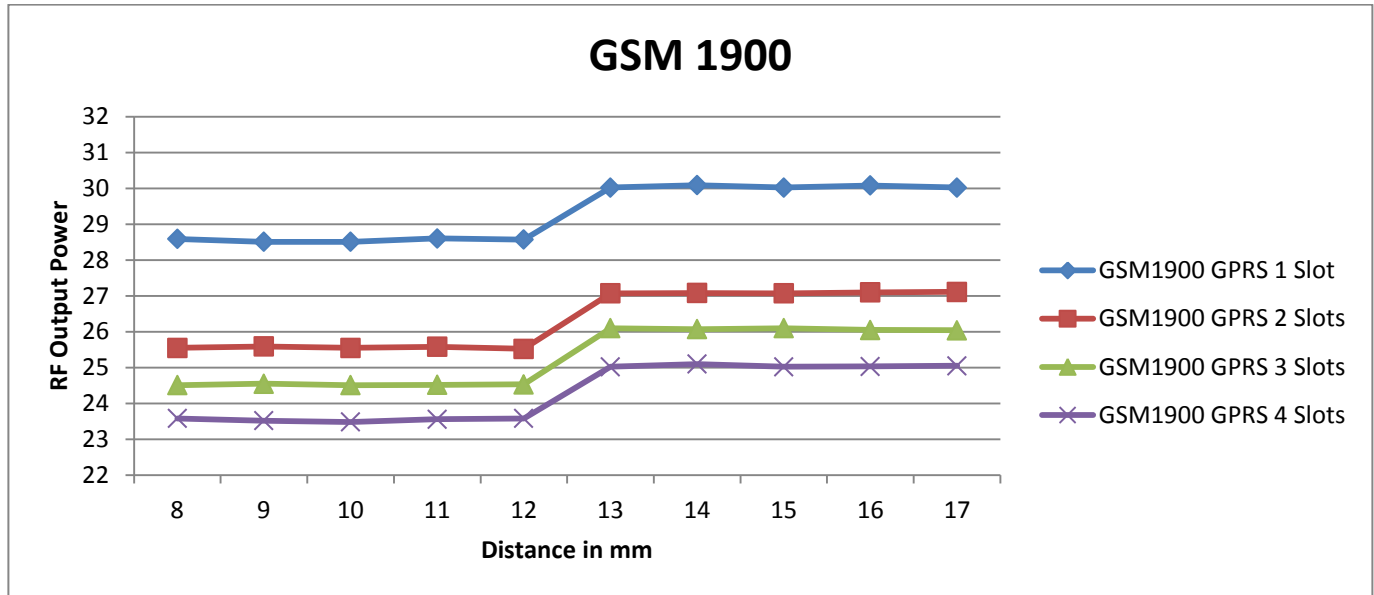

**WCDMA Band II, IV**


Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	4	5	6	7	8	9	10	11	12	13
WCDMA Band II	20.5	20.4	20.4	20.3	20.5	22.5	22.4	22.6	22.5	22.6
WCDMA Band IV	20.0	20.0	20.0	20.0	20.0	22.5	22.5	22.5	22.5	22.5

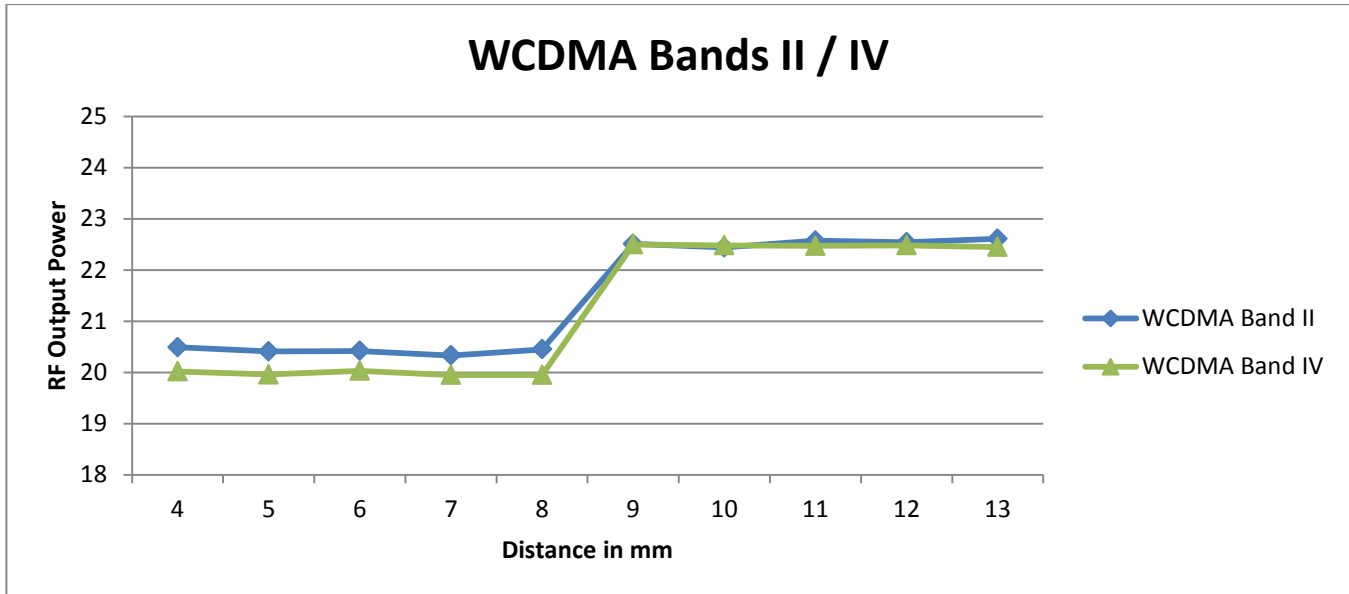


Rear, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	12	13	14	15	16	17	18	19	20	21
WCDMA Band II	20.5	20.4	20.4	20.3	20.5	22.5	22.4	22.6	22.5	22.6
WCDMA Band IV	20.0	20.0	20.0	20.0	20.0	22.5	22.5	22.5	22.5	22.6

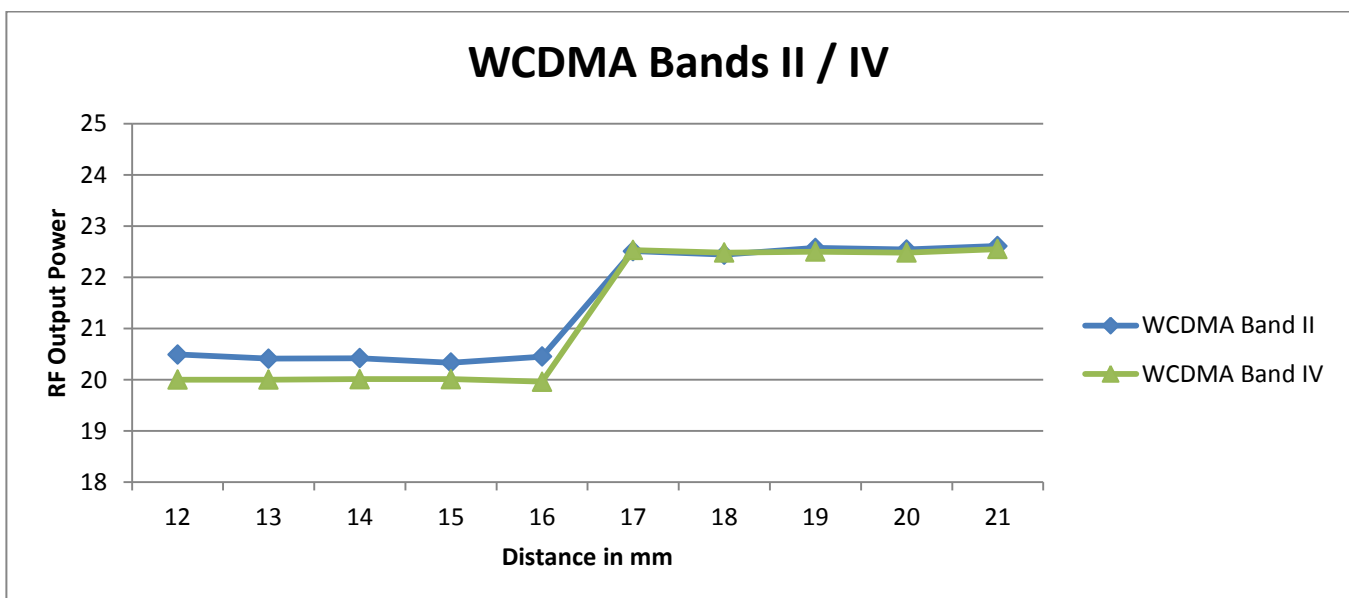

Edge 3, DUT Moving Toward (Trigger) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	8	9	10	11	12	13	14	15	16	17
WCDMA Band II	20.5	20.4	20.4	20.3	20.5	22.5	22.4	22.6	22.5	22.6
WCDMA Band IV	20.0	20.0	20.0	20.0	20.0	22.5	22.5	22.5	22.5	22.5

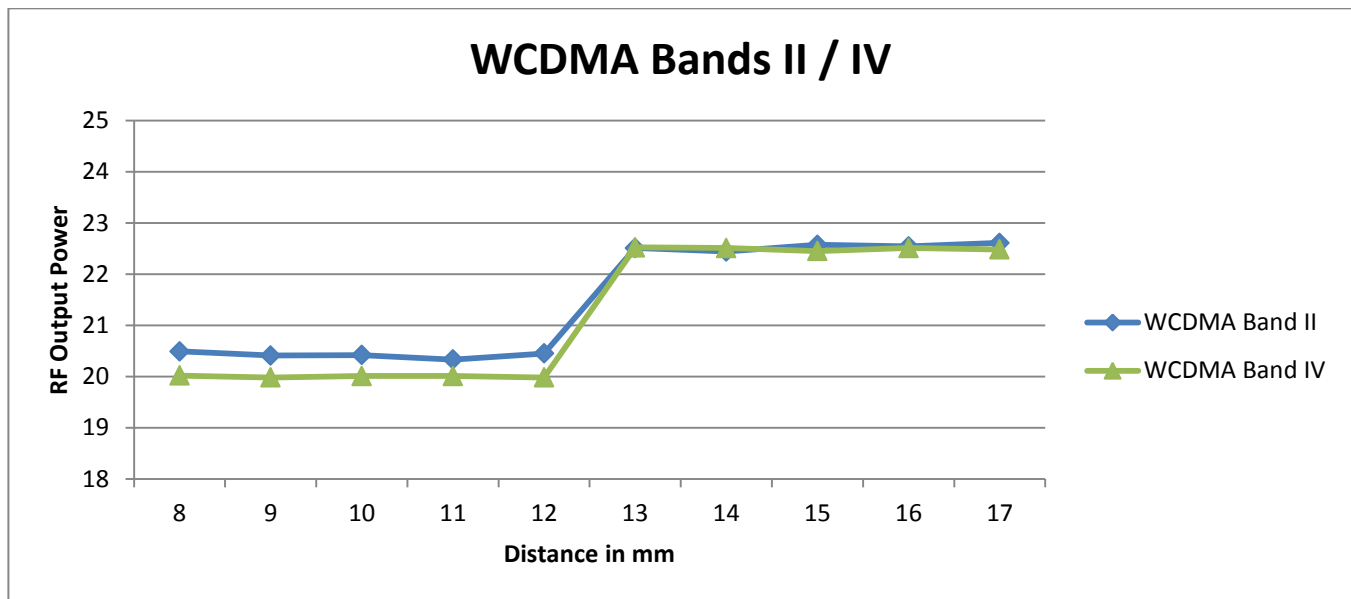

**LTE Band 2, 4, 66**


Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	4	5	6	7	8	9	10	11	12	13
LTE Band 2	20.45	20.54	20.54	20.51	20.51	23.45	23.51	23.50	23.52	23.45
LTE Band 4	21.46	21.47	21.49	21.49	21.55	23.53	23.49	23.47	23.51	23.49
LTE Band 66	21.49	21.53	21.49	21.47	21.54	23.52	23.54	23.48	23.49	23.54

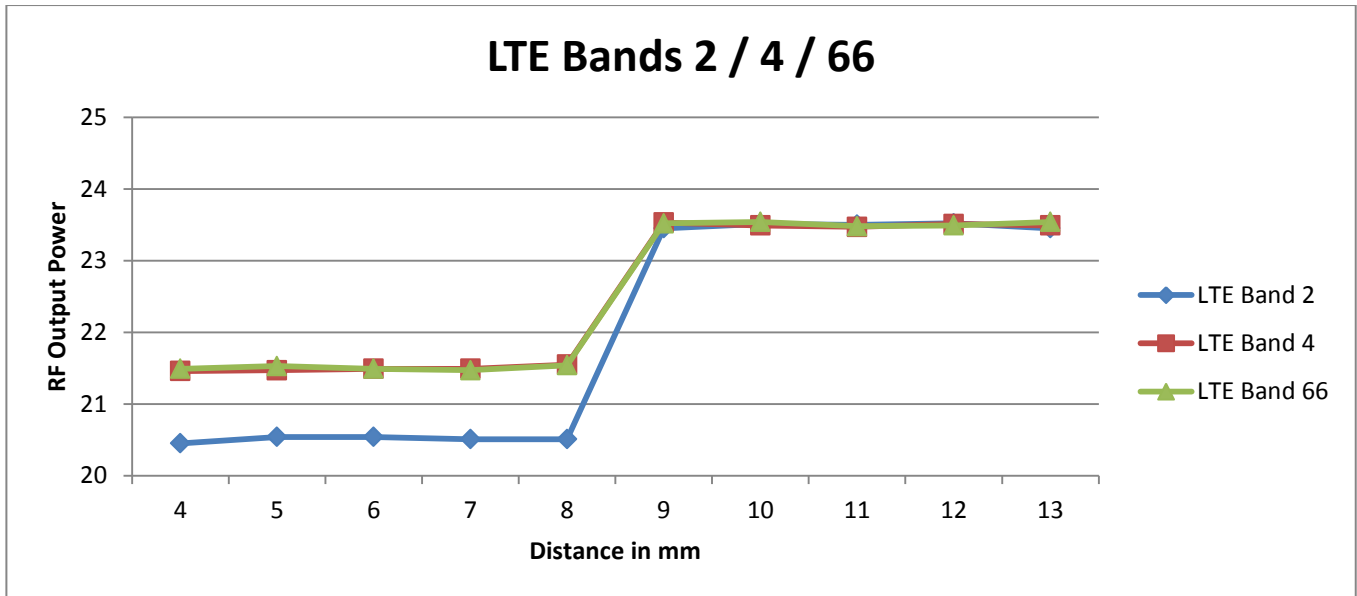


Rear, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance (mm)	12	13	14	15	16	17	18	19	20	21
LTE Band 2	20.58	20.51	20.54	20.41	20.46	23.45	23.51	23.46	23.54	23.45
LTE Band 4	21.49	21.48	21.48	21.47	21.54	23.47	23.50	23.47	23.52	23.51
LTE Band 66	21.46	21.47	21.49	21.53	21.52	23.50	23.48	23.54	23.48	23.47

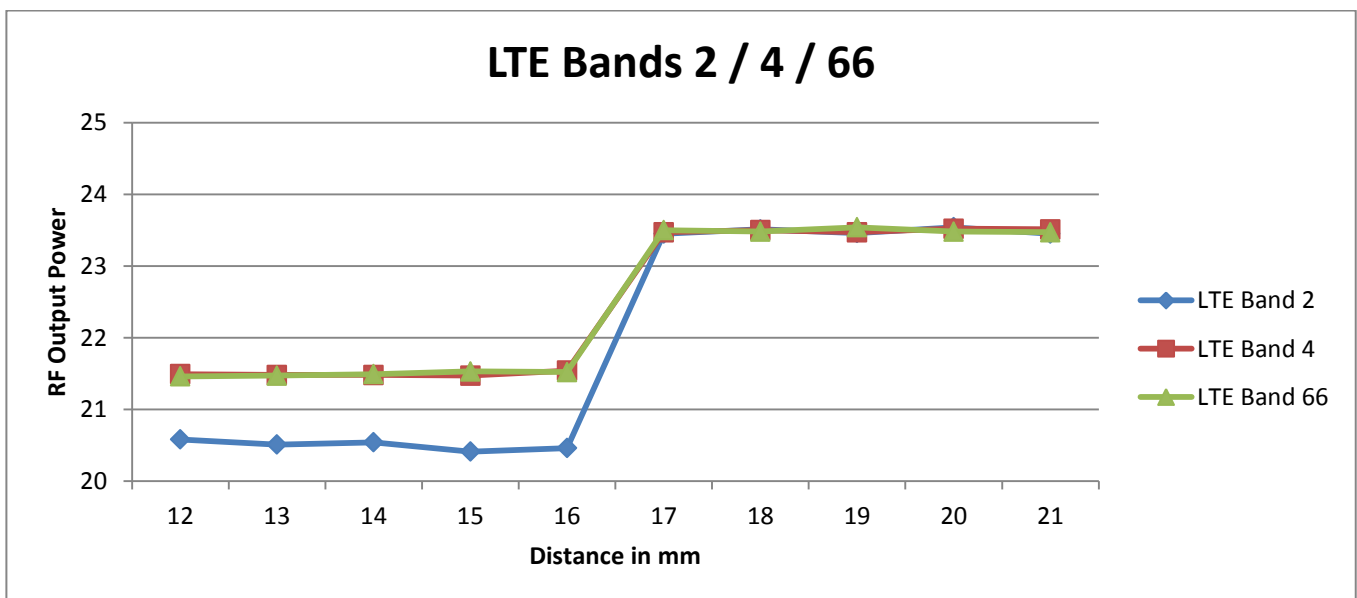

Edge 3, DUT Moving Toward (Trigger) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	8	9	10	11	12	13	14	15	16	17
LTE Band 2	20.42	20.52	20.54	20.40	20.44	23.48	23.45	23.51	23.53	23.54
LTE Band 4	21.48	21.51	21.45	21.49	21.54	23.48	23.54	23.48	23.49	23.51
LTE Band 66	21.48	21.48	21.45	21.50	21.54	23.47	23.49	23.49	23.45	23.53

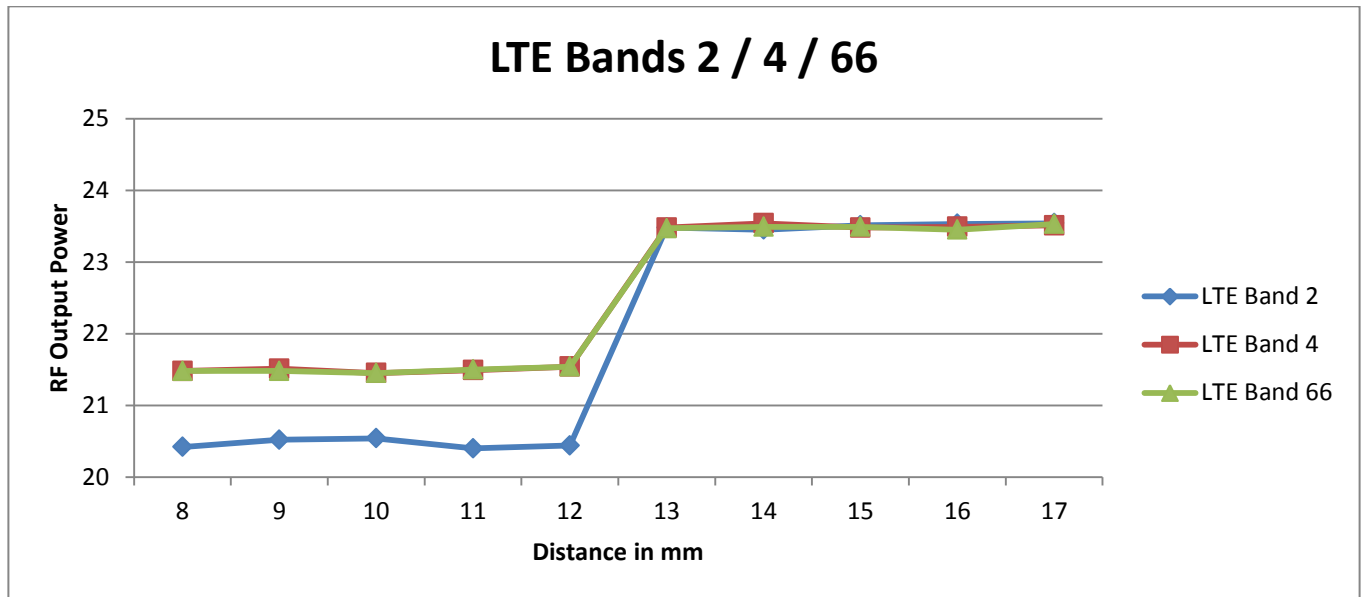

**WLAN**

Front, DUT Moving Toward (Trigger) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance	66	67	68	69	70	71	72	73	74	75
5 GHz 802.11a	13.1	13.1	13.1	13.1	13.0	16.1	16.1	16.1	16.2	16.1
5 GHz 802.11n HT20	13.1	13.1	13.1	13.1	13.0	16.1	16.1	16.0	16.2	16.1
5 GHz 802.11n HT40	13.1	13.1	13.1	13.1	13.1	14.2	14.2	14.1	14.1	14.2

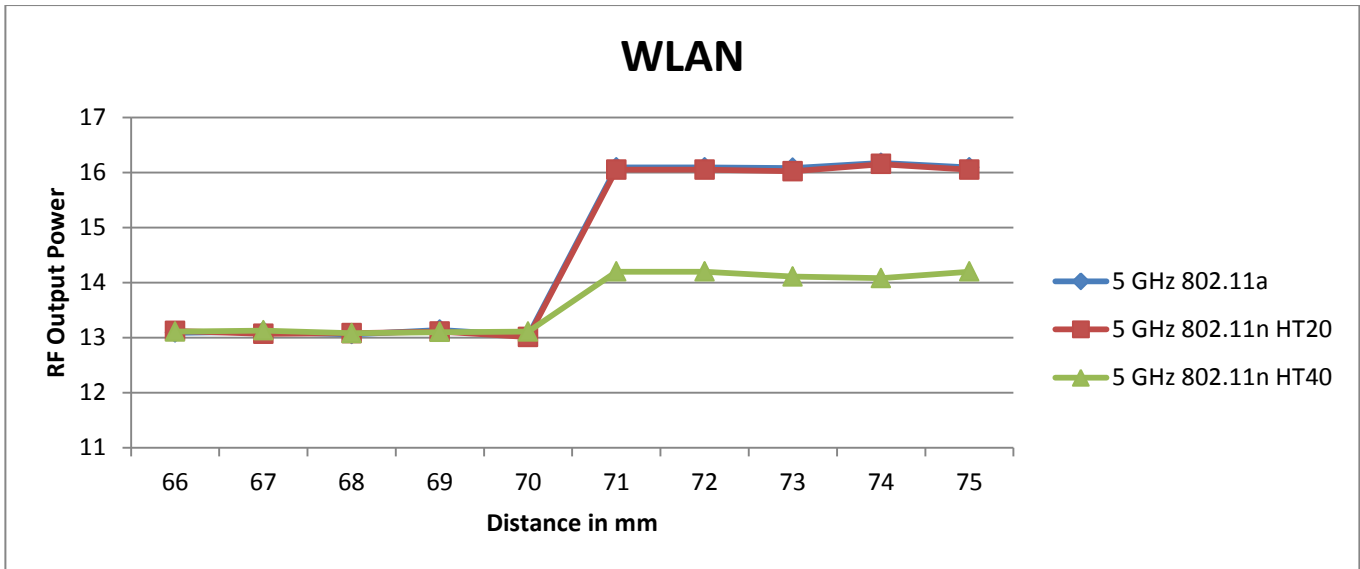


### 6.7.2. Proximity Sensor Coverage (KDB 616217 §6.3)

Except WLAN, As there is no spatial offset between the antenna and the proximity sensor element, proximity sensor coverage did not need to be assessed.

### 6.7.3. Proximity Sensor Tilt Angle Assessment (KDB 616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Edge 3 parallel to the base of the flat phantom for each band.

The EUT was rotated about Edge 3 for angles up to +/- 45°. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to +/- 45°.

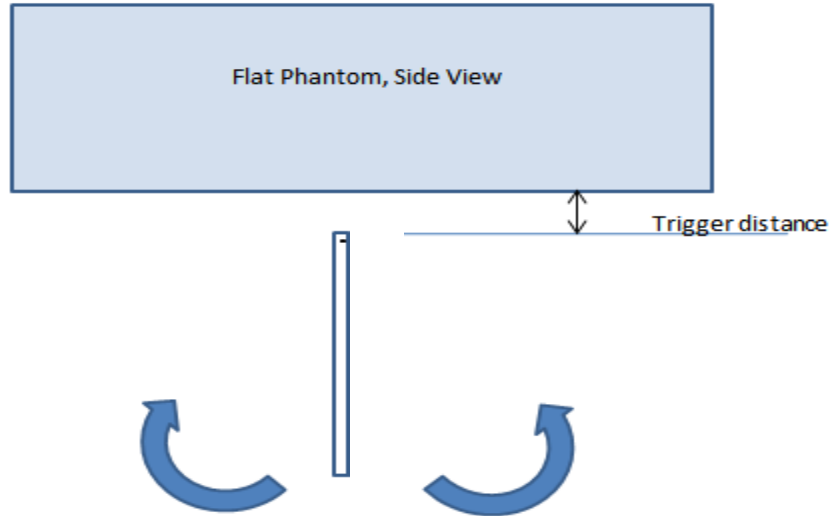

Proximity sensor tilt angle assessment (Edge 3) KDB 616217 §6.4

#### Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering (Edge 3)

Band (MHz)	Minimum trigger distance measured according to KDB 616217 §6.2	Minimum distance at which power reduction was maintained over +/-45°	Power reduction status											
			-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°	
850	12 mm	12 mm	On	On	On	On	On	On	On	On	On	On	On	On
1700	12 mm	12 mm	On	On	On	On	On	On	On	On	On	On	On	On
1900	12 mm	12 mm	On	On	On	On	On	On	On	On	On	On	On	On

### 6.7.4. Resulting test positions for SAR measurements

Wireless technologies	DUT Position	§6.2 Triggering Distance	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for SAR
WWAN	Front	8 mm	N/A	N/A	7 mm
	Rear	16 mm	N/A	N/A	15 mm
	Edge 3	12 mm	N/A	12 mm	11 mm
WLAN	Front	70 mm	N/A	70 mm	69 mm

**Notes:**

1. Worst case distance for SAR is not considered for body exposure condition. Because Power reduction is applied only voice or VoIP held to ear scenarios.
2. This proximity sensor is only operating in Head exposure condition. So tilt (15 degree) position of Head exposure was additional verified.

## 7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
WLAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	

**Notes:**

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot SAR.



## 8. Dielectric Property Measurements & System Check

### 8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

#### IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

**Dielectric Property Measurements Results:**

**SAR 1 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
2-21-2018	Body 2600	e'	52.9200	Relative Permittivity (ε <sub>r</sub> ):	52.92	52.51	0.78	5
		e"	14.8000	Conductivity (σ):	2.14	2.16	-0.98	5
	Body 2500	e'	53.2900	Relative Permittivity (ε <sub>r</sub> ):	53.29	52.64	1.24	5
		e"	14.5000	Conductivity (σ):	2.02	2.02	-0.23	5
	Body 2700	e'	52.6800	Relative Permittivity (ε <sub>r</sub> ):	52.68	52.38	0.56	5
		e"	14.9600	Conductivity (σ):	2.25	2.30	-2.41	5
2-24-2018	Head 2600	e'	39.0100	Relative Permittivity (ε <sub>r</sub> ):	39.01	39.01	0.00	5
		e"	13.1700	Conductivity (σ):	1.90	1.96	-2.97	5
	Head 2500	e'	39.3600	Relative Permittivity (ε <sub>r</sub> ):	39.36	39.14	0.57	5
		e"	12.7900	Conductivity (σ):	1.78	1.85	-4.11	5
	Head 2700	e'	38.5700	Relative Permittivity (ε <sub>r</sub> ):	38.57	38.88	-0.81	5
		e"	13.5200	Conductivity (σ):	2.03	2.07	-1.96	5
2-24-2018	Body 2600	e'	52.7800	Relative Permittivity (ε <sub>r</sub> ):	52.78	52.51	0.51	5
		e"	15.0400	Conductivity (σ):	2.17	2.16	0.62	5
	Body 2500	e'	53.0000	Relative Permittivity (ε <sub>r</sub> ):	53.00	52.64	0.69	5
		e"	14.8300	Conductivity (σ):	2.06	2.02	2.04	5
	Body 2700	e'	52.4900	Relative Permittivity (ε <sub>r</sub> ):	52.49	52.38	0.20	5
		e"	15.2600	Conductivity (σ):	2.29	2.30	-0.45	5
3-1-2018	Body 750	e'	57.3700	Relative Permittivity (ε <sub>r</sub> ):	57.37	55.55	3.28	5
		e"	23.2500	Conductivity (σ):	0.97	0.96	0.68	5
	Body 700	e'	57.8200	Relative Permittivity (ε <sub>r</sub> ):	57.82	55.74	3.73	5
		e"	23.7300	Conductivity (σ):	0.92	0.96	-3.71	5
	Body 790	e'	56.9800	Relative Permittivity (ε <sub>r</sub> ):	56.98	55.39	2.87	5
		e"	22.8900	Conductivity (σ):	1.01	0.97	4.07	5
3-6-2018	Body 1750	e'	54.3800	Relative Permittivity (ε <sub>r</sub> ):	54.38	53.44	1.76	5
		e"	14.7500	Conductivity (σ):	1.44	1.49	-3.42	5
	Body 1710	e'	54.4500	Relative Permittivity (ε <sub>r</sub> ):	54.45	53.54	1.69	5
		e"	14.7400	Conductivity (σ):	1.40	1.46	-4.11	5
	Body 1755	e'	54.3700	Relative Permittivity (ε <sub>r</sub> ):	54.37	53.43	1.76	5
		e"	14.7500	Conductivity (σ):	1.44	1.49	-3.35	5
3-9-2018	Body 1900	e'	53.7700	Relative Permittivity (ε <sub>r</sub> ):	53.77	53.30	0.88	5
		e"	14.9100	Conductivity (σ):	1.58	1.52	3.63	5
	Body 1850	e'	53.9100	Relative Permittivity (ε <sub>r</sub> ):	53.91	53.30	1.14	5
		e"	14.9100	Conductivity (σ):	1.53	1.52	0.90	5
	Body 1910	e'	53.7400	Relative Permittivity (ε <sub>r</sub> ):	53.74	53.30	0.83	5
		e"	14.9100	Conductivity (σ):	1.58	1.52	4.18	5
3-12-2018	Body 1900	e'	54.1500	Relative Permittivity (ε <sub>r</sub> ):	54.15	53.30	1.59	5
		e"	14.9600	Conductivity (σ):	1.58	1.52	3.98	5
	Body 1850	e'	54.3600	Relative Permittivity (ε <sub>r</sub> ):	54.36	53.30	1.99	5
		e"	14.8900	Conductivity (σ):	1.53	1.52	0.77	5
	Body 1910	e'	54.1200	Relative Permittivity (ε <sub>r</sub> ):	54.12	53.30	1.54	5
		e"	14.9800	Conductivity (σ):	1.59	1.52	4.66	5
3-12-2018	Head 2450	e'	37.8400	Relative Permittivity (ε <sub>r</sub> ):	37.84	39.20	-3.47	5
		e"	12.9900	Conductivity (σ):	1.77	1.80	-1.69	5
	Head 2410	e'	37.9900	Relative Permittivity (ε <sub>r</sub> ):	37.99	39.28	-3.28	5
		e"	12.8800	Conductivity (σ):	1.73	1.76	-1.96	5
	Head 2475	e'	37.7300	Relative Permittivity (ε <sub>r</sub> ):	37.73	39.17	-3.67	5
		e"	13.0800	Conductivity (σ):	1.80	1.83	-1.48	5
3-19-2018	Body 835	e'	54.1400	Relative Permittivity (ε <sub>r</sub> ):	54.14	55.20	-1.92	5
		e"	21.6300	Conductivity (σ):	1.00	0.97	3.53	5
	Body 820	e'	54.2800	Relative Permittivity (ε <sub>r</sub> ):	54.28	55.28	-1.80	5
		e"	21.6900	Conductivity (σ):	0.99	0.97	2.12	5
	Body 850	e'	53.9800	Relative Permittivity (ε <sub>r</sub> ):	53.98	55.16	-2.13	5
		e"	21.5900	Conductivity (σ):	1.02	0.99	3.37	5

**SAR 1 Room (Continued)**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)		
3-24-2018	Head 5180	e'	37.4100	Relative Permittivity (ε <sub>r</sub> ):	37.41	36.01	3.88	5	
		e"	15.6000	Conductivity (σ):	4.49	4.63	-2.97	5	
	Head 5300	e'	37.2300	Relative Permittivity (ε <sub>r</sub> ):	37.23	35.88	3.77	5	
		e"	15.6700	Conductivity (σ):	4.62	4.75	-2.85	5	
	Head 5600	e'	36.7700	Relative Permittivity (ε <sub>r</sub> ):	36.77	35.53	3.48	5	
		e"	15.8300	Conductivity (σ):	4.93	5.06	-2.59	5	
	Head 5800	e'	36.5000	Relative Permittivity (ε <sub>r</sub> ):	36.50	35.30	3.40	5	
		e"	15.9700	Conductivity (σ):	5.15	5.27	-2.27	5	
	Head 5825	e'	36.4500	Relative Permittivity (ε <sub>r</sub> ):	36.45	35.30	3.26	5	
		e"	15.9700	Conductivity (σ):	5.17	5.27	-1.85	5	
	3-25-2018	Body 1750	e'	53.5700	Relative Permittivity (ε <sub>r</sub> ):	53.57	53.44	0.24	5
			e"	14.7800	Conductivity (σ):	1.44	1.49	-3.23	5
Body 1710		e'	53.7100	Relative Permittivity (ε <sub>r</sub> ):	53.71	53.54	0.31	5	
		e"	14.8000	Conductivity (σ):	1.41	1.46	-3.72	5	
Body 1755		e'	53.5600	Relative Permittivity (ε <sub>r</sub> ):	53.56	53.43	0.25	5	
		e"	14.7800	Conductivity (σ):	1.44	1.49	-3.15	5	
3-30-2018	Body 1900	e'	53.6300	Relative Permittivity (ε <sub>r</sub> ):	53.63	53.30	0.62	5	
		e"	14.8000	Conductivity (σ):	1.56	1.52	2.87	5	
	Body 1850	e'	53.8100	Relative Permittivity (ε <sub>r</sub> ):	53.81	53.30	0.96	5	
		e"	14.7600	Conductivity (σ):	1.52	1.52	-0.11	5	
	Body 1910	e'	53.5900	Relative Permittivity (ε <sub>r</sub> ):	53.59	53.30	0.54	5	
		e"	14.8100	Conductivity (σ):	1.57	1.52	3.48	5	

**SAR 2 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
2-21-2018	Body 835	e'	54.0500	Relative Permittivity (ε <sub>r</sub> ):	54.05	55.20	-2.08	5
		e"	21.4600	Conductivity (σ):	1.00	0.97	2.72	5
	Body 820	e'	54.1900	Relative Permittivity (ε <sub>r</sub> ):	54.19	55.28	-1.97	5
		e"	21.5300	Conductivity (σ):	0.98	0.97	1.36	5
	Body 850	e'	53.9100	Relative Permittivity (ε <sub>r</sub> ):	53.91	55.16	-2.26	5
		e"	21.3800	Conductivity (σ):	1.01	0.99	2.36	5
2-24-2018	Head 835	e'	42.5500	Relative Permittivity (ε <sub>r</sub> ):	42.55	41.50	2.53	5
		e"	19.5600	Conductivity (σ):	0.91	0.90	0.90	5
	Head 820	e'	42.6900	Relative Permittivity (ε <sub>r</sub> ):	42.69	41.60	2.61	5
		e"	19.5200	Conductivity (σ):	0.89	0.90	-0.94	5
	Head 850	e'	42.3800	Relative Permittivity (ε <sub>r</sub> ):	42.38	41.50	2.12	5
		e"	19.5100	Conductivity (σ):	0.92	0.92	0.78	5
2-24-2018	Body 835	e'	52.9600	Relative Permittivity (ε <sub>r</sub> ):	52.96	55.20	-4.06	5
		e"	21.4600	Conductivity (σ):	1.00	0.97	2.72	5
	Body 820	e'	53.1000	Relative Permittivity (ε <sub>r</sub> ):	53.10	55.28	-3.94	5
		e"	21.5000	Conductivity (σ):	0.98	0.97	1.22	5
	Body 850	e'	52.8100	Relative Permittivity (ε <sub>r</sub> ):	52.81	55.16	-4.26	5
		e"	21.4100	Conductivity (σ):	1.01	0.99	2.51	5
3-20-2018	Head 835	e'	41.0100	Relative Permittivity (ε <sub>r</sub> ):	41.01	41.50	-1.18	5
		e"	19.4500	Conductivity (σ):	0.90	0.90	0.34	5
	Head 820	e'	41.1600	Relative Permittivity (ε <sub>r</sub> ):	41.16	41.60	-1.06	5
		e"	19.4900	Conductivity (σ):	0.89	0.90	-1.09	5
	Head 850	e'	40.8700	Relative Permittivity (ε <sub>r</sub> ):	40.87	41.50	-1.52	5
		e"	19.4300	Conductivity (σ):	0.92	0.92	0.36	5
3-20-2018	Body 835	e'	52.9600	Relative Permittivity (ε <sub>r</sub> ):	52.96	55.20	-4.06	5
		e"	21.4700	Conductivity (σ):	1.00	0.97	2.77	5
	Body 820	e'	53.1300	Relative Permittivity (ε <sub>r</sub> ):	53.13	55.28	-3.88	5
		e"	21.5200	Conductivity (σ):	0.98	0.97	1.31	5
	Body 850	e'	52.8100	Relative Permittivity (ε <sub>r</sub> ):	52.81	55.16	-4.26	5
		e"	21.4400	Conductivity (σ):	1.01	0.99	2.65	5

**SAR 3 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
2-24-2018	Head 1900	e'	39.7500	Relative Permittivity ( $\epsilon_r$ ):	39.75	40.00	-0.63	5
		e"	13.4500	Conductivity ( $\sigma$ ):	1.42	1.40	1.50	5
	Head 1850	e'	39.8700	Relative Permittivity ( $\epsilon_r$ ):	39.87	40.00	-0.33	5
		e"	13.4300	Conductivity ( $\sigma$ ):	1.38	1.40	-1.32	5
	Head 1910	e'	39.7200	Relative Permittivity ( $\epsilon_r$ ):	39.72	40.00	-0.70	5
		e"	13.4700	Conductivity ( $\sigma$ ):	1.43	1.40	2.18	5
3-1-2018	Head 750	e'	42.2300	Relative Permittivity ( $\epsilon_r$ ):	42.23	41.96	0.64	5
		e"	21.4300	Conductivity ( $\sigma$ ):	0.89	0.89	0.07	5
	Head 700	e'	42.9200	Relative Permittivity ( $\epsilon_r$ ):	42.92	42.22	1.66	5
		e"	21.7300	Conductivity ( $\sigma$ ):	0.85	0.89	-4.89	5
	Head 790	e'	41.6800	Relative Permittivity ( $\epsilon_r$ ):	41.68	41.76	-0.18	5
		e"	21.1700	Conductivity ( $\sigma$ ):	0.93	0.90	3.77	5
3-2-2018	Head 1750	e'	38.6400	Relative Permittivity ( $\epsilon_r$ ):	38.64	40.08	-3.60	5
		e"	13.9200	Conductivity ( $\sigma$ ):	1.35	1.37	-1.06	5
	Head 1710	e'	38.8200	Relative Permittivity ( $\epsilon_r$ ):	38.82	40.15	-3.30	5
		e"	13.8600	Conductivity ( $\sigma$ ):	1.32	1.35	-2.12	5
	Head 1755	e'	38.6200	Relative Permittivity ( $\epsilon_r$ ):	38.62	40.08	-3.64	5
		e"	13.9200	Conductivity ( $\sigma$ ):	1.36	1.37	-0.98	5
3-6-2018	Head 1900	e'	39.8200	Relative Permittivity ( $\epsilon_r$ ):	39.82	40.00	-0.45	5
		e"	13.7800	Conductivity ( $\sigma$ ):	1.46	1.40	3.99	5
	Head 1850	e'	40.0400	Relative Permittivity ( $\epsilon_r$ ):	40.04	40.00	0.10	5
		e"	13.7100	Conductivity ( $\sigma$ ):	1.41	1.40	0.73	5
	Head 1910	e'	39.7800	Relative Permittivity ( $\epsilon_r$ ):	39.78	40.00	-0.55	5
		e"	13.7900	Conductivity ( $\sigma$ ):	1.46	1.40	4.61	5
3-12-2018	Body 2450	e'	50.9700	Relative Permittivity ( $\epsilon_r$ ):	50.97	52.70	-3.28	5
		e"	14.7300	Conductivity ( $\sigma$ ):	2.01	1.95	2.90	5
	Body 2400	e'	51.0700	Relative Permittivity ( $\epsilon_r$ ):	51.07	52.77	-3.23	5
		e"	14.6100	Conductivity ( $\sigma$ ):	1.95	1.90	2.72	5
	Body 2480	e'	50.8800	Relative Permittivity ( $\epsilon_r$ ):	50.88	52.66	-3.38	5
		e"	14.8100	Conductivity ( $\sigma$ ):	2.04	1.99	2.51	5
3-27-2018	Body 5250	e'	49.0100	Relative Permittivity ( $\epsilon_r$ ):	49.01	48.95	0.12	5
		e"	18.5800	Conductivity ( $\sigma$ ):	5.42	5.35	1.32	5
	Body 5260	e'	48.9900	Relative Permittivity ( $\epsilon_r$ ):	48.99	48.94	0.11	5
		e"	18.5900	Conductivity ( $\sigma$ ):	5.44	5.36	1.35	5
	Body 5600	e'	48.4300	Relative Permittivity ( $\epsilon_r$ ):	48.43	48.48	-0.10	5
		e"	18.9200	Conductivity ( $\sigma$ ):	5.89	5.76	2.26	5
	Body 5750	e'	48.1900	Relative Permittivity ( $\epsilon_r$ ):	48.19	48.27	-0.18	5
		e"	19.0900	Conductivity ( $\sigma$ ):	6.10	5.94	2.82	5
	Body 5825	e'	48.0700	Relative Permittivity ( $\epsilon_r$ ):	48.07	48.20	-0.27	5
		e"	19.1700	Conductivity ( $\sigma$ ):	6.21	6.00	3.48	5

## 8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0  $\pm$ 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be  $\geq$  15.0 cm for SAR measurements  $\leq$  3 GHz and  $\geq$  10.0 cm for measurements  $>$  3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 2.5 mm.  
For 5 GHz band - Distance between probe sensors and phantom surface was set to 1.4 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

**Reference Target SAR Values**

The reference SAR values can be obtained from the calibration certificate of system validation dipoles.

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1014	7-19-2017	750	1g	8.28	8.66
				10g	5.38	5.68
D835V2	4d194	7-19-2017	835	1g	9.33	9.30
				10g	6.03	6.09
D1750V2	1125	2-16-2018	1750	1g	36.50	36.80
				10g	19.30	19.50
D1900V2	5d190	9-20-2017	1900	1g	38.30	40.00
				10g	20.10	21.10
D2450V2	939	9-19-2017	2450	1g	52.30	50.70
				10g	24.60	23.90
D2600V2	1097	1-17-2018	2600	1g	56.40	54.40
				10g	25.30	24.20
D5GHzV2	1184	8-23-2017	5300	1g	81.30	76.40
				10g	23.20	21.30
			5500	1g	80.60	77.10
				10g	22.90	21.30
			5600	1g	82.30	79.20
				10g	23.40	22.20
			5800	1g	78.10	76.40
				10g	22.20	21.20
D5GHzV2	1209	2-15-2018	5250	1g	80.80	75.70
				10g	23.10	21.00
			5600	1g	83.40	79.00
				10g	23.80	21.90
			5750	1g	80.70	75.60
				10g	22.90	20.80

**System Check Results**

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

**SAR 1 Room**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
2-21-2018	D2600V2	1097	Body	1g	5.23	52.30	54.40	-3.86	1, 2
				10g	2.30	23.00	24.20	-4.96	
2-24-2018	D2600V2	1097	Head	1g	5.63	56.30	56.40	-0.18	
				10g	2.45	24.50	25.30	-3.16	
2-24-2018	D2600V2	1097	Body	1g	5.31	53.10	54.40	-2.39	
				10g	2.35	23.50	24.20	-2.89	
3-1-2018	D750V3	1014	Body	1g	0.88	8.75	8.66	1.04	
				10g	0.59	5.85	5.68	2.99	
3-6-2018	D1750V2	1125	Body	1g	3.46	34.60	36.80	-5.98	3, 4
				10g	1.83	18.30	19.50	-6.15	
3-9-2018	D1900V2	5d190	Body	1g	4.03	40.30	40.00	0.75	
				10g	2.06	20.60	21.10	-2.37	
3-12-2018	D1900V2	5d190	Body	1g	4.05	40.50	40.00	1.25	
				10g	2.06	20.60	21.10	-2.37	
3-12-2018	D2450V2	939	Head	1g	5.37	53.70	52.30	2.68	
				10g	2.44	24.40	24.60	-0.81	
3-19-2019	D835V2	4d194	Body	1g	1.00	9.96	9.30	7.10	
				10g	0.66	6.55	6.09	7.55	
3-24-2018	D5GHzV2 (5300)	1184	Head	1g	7.95	79.50	81.30	-2.21	
				10g	2.25	22.50	23.20	-3.02	
3-24-2018	D5GHzV2 (5500)	1184	Head	1g	7.71	77.10	80.60	-4.34	
				10g	2.19	21.90	22.90	-4.37	
3-24-2018	D5GHzV2 (5600)	1184	Head	1g	8.33	83.30	82.30	1.22	
				10g	2.36	23.60	23.40	0.85	
3-24-2018	D5GHzV2 (5800)	1184	Head	1g	7.42	74.20	78.10	-4.99	5, 6
				10g	2.11	21.10	22.20	-4.95	
3-25-2018	D1750V2	1125	Body	1g	3.77	37.70	36.80	2.45	
				10g	1.99	19.90	19.50	2.05	
3-30-2018	D1900V2	5d190	Body	1g	4.02	40.20	40.00	0.50	
				10g	2.04	20.40	21.10	-3.32	

**SAR 2 Room**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
2-21-2018	D835V2	4d194	Body	1g	1.01	10.10	9.30	8.60	
				10g	0.66	6.61	6.09	8.54	
2-24-2018	D835V2	4d194	Head	1g	0.93	9.25	9.33	-0.86	
				10g	0.61	6.07	6.03	0.66	
2-24-2018	D835V2	4d194	Body	1g	1.01	10.10	9.30	8.60	7, 8
				10g	0.66	6.64	6.09	9.03	
3-20-2018	D835V2	4d194	Head	1g	1.00	10.00	9.33	7.18	
				10g	0.66	6.61	6.03	9.62	
3-20-2018	D835V2	4d194	Body	1g	0.99	9.91	9.30	6.56	
				10g	0.65	6.51	6.09	6.90	

**SAR 3 Room**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
2-24-2018	D1900V2	5d190	Head	1g	3.85	38.50	38.30	0.52	
				10g	1.98	19.80	20.10	-1.49	
3-1-2018	D750V3	1014	Head	1g	0.89	8.90	8.28	7.49	9, 10
				10g	0.58	5.78	5.38	7.43	
3-2-2018	D1750V2	1125	Head	1g	3.55	35.50	36.50	-2.74	
				10g	1.86	18.60	19.30	-3.63	
3-6-2018	D1900V2	5d190	Head	1g	4.09	40.90	38.30	6.79	11, 12
				10g	2.08	20.80	20.10	3.48	
3-12-2018	D2450V2	939	Body	1g	4.89	48.90	50.70	-3.55	13, 14
				10g	2.23	22.30	23.90	-6.69	
3-27-2018	D5GHzV2 (5250)	1209	Body	1g	7.25	72.50	75.70	-4.23	
				10g	2.05	20.50	21.00	-2.38	
3-27-2018	D5GHzV2 (5600)	1209	Body	1g	7.79	77.90	79.00	-1.39	
				10g	2.20	22.00	21.90	0.46	
3-27-2018	D5GHzV2 (5750)	1209	Body	1g	7.21	72.10	75.60	-4.63	15, 16
				10g	2.02	20.20	20.80	-2.88	



## 9. Conducted Output Power Measurements

### 9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

#### GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Full Power			Reduced Power Hotspot back-off			Reduced Power Proximity Sensor back-off		
					Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)
GSM (Voice)	CS1	1	128	824.4	33.0	24.0	25.0				33.0	23.9	25.0
			190	836.6	33.1	24.0					33.0	24.0	
			251	848.8	33.2	24.1					33.1	24.1	
GPRS (GMSK)	CS1	1	128	824.4	32.9	23.9	25.0	30.5	21.4	22.5	30.4	21.4	22.5
			190	836.6	33.2	24.1		30.6	21.6		30.6	21.5	
			251	848.8	33.2	24.2		30.7	21.7		30.7	21.6	
		2	128	824.4	32.2	26.2	27.0	29.5	23.5	24.5	29.5	23.4	24.5
			190	836.6	32.3	26.2		29.5	23.4		29.4	23.4	
			251	848.8	32.3	26.3		29.6	23.5		29.7	23.7	
		3	128	824.4	30.9	26.6	27.2	28.4	24.2	24.7	28.4	24.1	24.7
			190	836.6	30.9	26.6		28.4	24.2		28.4	24.1	
			251	848.8	31.0	26.7		28.5	24.3		28.5	24.2	
		4	128	824.4	29.6	26.6	27.0	27.0	24.0	24.5	27.0	24.0	24.5
			190	836.6	29.6	26.6		27.1	24.0		27.0	24.0	
			251	848.8	29.7	26.7		27.2	24.1		27.1	24.1	
EGPRS (8PSK)	MCS5	1	128	824.4	27.6	18.6	19.0	26.8	17.8	19.0	27.5	18.4	19.0
			190	836.6	26.7	17.7		26.8	17.7		26.7	17.7	
			251	848.8	26.8	17.8		26.9	17.8		26.8	17.8	
		2	128	824.4	25.5	19.5	19.5	24.9	18.8	19.5	24.8	18.8	19.5
			190	836.6	24.8	18.7		24.6	18.6		24.8	18.8	
			251	848.8	24.9	18.9		24.9	18.9		24.9	18.9	
		3	128	824.4	24.3	20.0	20.2	23.6	19.3	20.2	23.5	19.3	20.2
			190	836.6	23.5	19.3		23.6	19.3		23.5	19.3	
			251	848.8	23.6	19.4		23.7	19.4		23.6	19.4	
		4	128	824.4	22.3	19.3	20.0	22.2	19.2	20.0	22.1	19.1	20.0
			190	836.6	22.3	19.3		22.2	19.2		22.2	19.1	
			251	848.8	22.4	19.4		22.3	19.3		22.2	19.2	

#### Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 3 time slots for Max power and 3 time slots for reduced power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2W/kg.

**GSM1900 Measured Results**

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Full Power			Reduced Power Hotspot back-off			Reduced Power Proximity Sensor back-off		
					Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)	Burst Pwr (dBm)	Frame Pwr (dBm)	Max. Frame Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	29.9	20.9	21.5				30.0	20.9	21.5
			661	1880.0	30.2	21.1					30.2	21.2	
			810	1909.8	29.9	20.9					29.8	20.7	
GPRS (GMSK)	CS1	1	512	1850.2	30.1	21.0	21.5	28.2	19.2	20.0	28.2	19.2	20.0
			661	1880.0	30.2	21.1		28.6	19.6		28.4	19.4	
			810	1909.8	29.9	20.9		28.1	19.1		28.2	19.1	
		2	512	1850.2	27.0	20.9	21.5	25.1	19.1	20.0	25.2	19.2	20.0
			661	1880.0	27.3	21.2		25.6	19.5		25.6	19.6	
			810	1909.8	27.1	21.0		25.0	19.0		25.1	19.1	
		3	512	1850.2	26.3	22.1	22.2	24.3	20.0	20.7	24.3	20.1	20.7
			661	1880.0	26.5	22.2		24.7	20.4		24.7	20.5	
			810	1909.8	26.2	22.0		24.2	19.9		24.3	20.0	
		4	512	1850.2	25.5	22.5	22.5	23.4	20.4	21.0	23.5	20.5	21.0
			661	1880.0	25.5	22.5		23.7	20.7		23.8	20.8	
			810	1909.8	25.5	22.5		23.4	20.3		23.4	20.4	
EGPRS (8PSK)	MCS5	1	512	1850.2	26.1	17.0	17.5	25.9	16.8	17.5	25.9	16.9	17.5
			661	1880.0	26.2	17.1		26.2	17.2		26.2	17.2	
			810	1909.8	25.9	16.9		25.9	16.9		25.8	16.8	
		2	512	1850.2	23.8	17.8	18.5	23.8	17.8	18.0	23.8	17.8	18.0
			661	1880.0	24.1	18.1		23.9	17.8		23.9	17.9	
			810	1909.8	23.6	17.6		23.5	17.5		23.6	17.5	
		3	512	1850.2	22.7	18.5	18.7	22.7	18.5	18.7	22.4	18.2	18.7
			661	1880.0	22.8	18.5		22.8	18.5		22.8	18.5	
			810	1909.8	22.3	18.0		22.2	17.9		22.2	18.0	
		4	512	1850.2	21.1	18.1	18.5	21.1	18.1	18.5	21.1	18.1	18.5
			661	1880.0	21.4	18.4		21.3	18.3		21.1	18.1	
			810	1909.8	20.9	17.9		20.9	17.8		20.9	17.9	

**Notes:**

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GMSK (GPRS) mode with 4 time slots for Max power and 4 time slots for reduced power, based on the Tune-up Procedure. Refer to §6.3.
- SAR is not required for EGPRS (8PSK) mode because the maximum output power and tune-up limit is ≤ 1/4dB higher than GMSK GPRS or the adjusted SAR of the highest reported SAR of GMSK GPRS is ≤ 1.2W/kg.

## 9.2. W-CDMA

### Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

### HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Mode	Subtest	HSDPA	HSDPA	HSDPA	HSDPA
		1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	$\beta_c$	2/15	11/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	$\beta_c/\beta_d$	2/15	11/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	$D_{ACK}$	8			
	$D_{NAK}$	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
$A_{hs}=\beta_{hs}/\beta_c$	30/15				

**HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals**

The following 5 Sub-tests were completed according to Release 6 procedures in table C,11.1.3 of 3GPP TS 34.121-1 v13. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30/15	2/15	5/15
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	-
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
	$\beta_{ed}$	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
A <sub>hs</sub> = $\beta_{hs}/\beta_c$	30/15					
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelization Codes	2xSF2				SF4	

**DC-HSDPA Setup Procedures used to establish the test signals**

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**


Parameter	Unit	Value
<b>During Connection setup</b>		
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

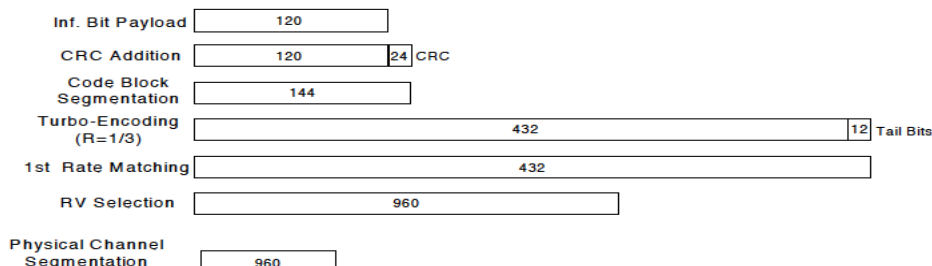

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 12			
	Power Control Algorithm	Algorithm2			
	$\beta_c$	2/15	11/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	$\beta_d$ (SF)	64			
	$\beta_c/\beta_d$	2/15	11/15	15/8	15/4
$\beta_{hs}$	4/15	24/15	30/15	30/15	
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
Ahs = $\beta_{hs}/\beta_c$	30/15				

**HSPA+**

HSPA+ mode is only support to Downlink.

**W-CDMA Band II Measured Results**

Band	Mode		UL Ch No.	Freq. (MHz)	Max. RF output power (dBm)		Reduced RF output power Hotspot back-off (dBm)		Reduced RF output power Proximity sensor back-off (dBm)	
					MPR (dB)	Meas. Avg Pwr	MPR (dB)	Meas. Avg Pwr	MPR (dB)	Meas. Avg Pwr
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	22.7	N/A	20.6	N/A	20.7
			9400	1880.0	N/A	22.6	N/A	20.6	N/A	20.6
			9538	1907.6	N/A	22.4	N/A	20.4	N/A	20.4
	HSDPA	Subtest 1	9262	1852.4	0	22.7	0	20.7	0	20.7
			9400	1880.0		22.6		20.6		20.6
			9538	1907.6		22.4		20.4		20.4
		Subtest 2	9262	1852.4	0	22.3	0	20.7	0	20.7
			9400	1880.0		22.2		20.6		20.6
			9538	1907.6		21.9		20.4		20.4
		Subtest 3	9262	1852.4	0.5	21.3	0	20.7	0	20.7
			9400	1880.0		21.1		20.6		20.6
			9538	1907.6		21.0		20.4		20.4
		Subtest 4	9262	1852.4	0.5	21.8	0	20.7	0	20.7
			9400	1880.0		21.7		20.6		20.6
			9538	1907.6		21.5		20.5		20.5
	HSUPA	Subtest 1	9262	1852.4	2	20.2	1	19.7	1	19.8
			9400	1880.0		20.0		19.7		19.6
			9538	1907.6		19.8		19.4		19.4
		Subtest 2	9262	1852.4	3	19.3	1	19.3	1	19.3
			9400	1880.0		19.2		19.2		19.2
			9538	1907.6		19.0		19.0		18.9
		Subtest 3	9262	1852.4	1	21.3	1	19.7	1	19.7
			9400	1880.0		21.2		19.7		19.7
			9538	1907.6		21.1		19.5		19.5
		Subtest 4	9262	1852.4	3	18.8	1	18.7	1	18.7
			9400	1880.0		18.7		18.6		18.7
			9538	1907.6		18.5		18.5		18.4
		Subtest 5	9262	1852.4	0	22.6	0	20.6	0	20.6
			9400	1880.0		22.6		20.6		20.7
			9538	1907.6		22.4		20.5		20.5
	DC-HSDPA	Subtest 1	9262	1852.4	0	22.4	0	20.5	0	20.5
			9400	1880.0		22.3		20.3		20.3
			9538	1907.6		22.0		20.0		20.0
		Subtest 2	9262	1852.4	0	22.2	0	20.6	0	20.9
			9400	1880.0		22.2		20.7		20.6
			9538	1907.6		21.9		20.3		20.4
		Subtest 3	9262	1852.4	0.5	20.9	0	20.6	0	20.6
			9400	1880.0		20.7		20.7		20.7
			9538	1907.6		20.5		20.4		20.4
		Subtest 4	9262	1852.4	0.5	21.9	0	20.8	0	20.9
			9400	1880.0		21.7		20.6		20.6
			9538	1907.6		21.5		20.4		20.4

**W-CDMA Band IV Measured Results**

Band	Mode		UL Ch No.	Freq. (MHz)	Max. RF output power (dBm)		Reduced RF output power Hotspot back-off (dBm)		Reduced RF output power Proximity sensor back-off (dBm)		
					MPR (dB)	Meas. Avg Pwr	MPR (dB)	Meas. Avg Pwr	MPR (dB)	Meas. Avg Pwr	
W-CDMA Band IV	Rel 99	RMC, 12.2 kbps	1312	1712.4	N/A	23.0	N/A	20.1	N/A	20.1	
			1413	1732.6	N/A	22.6	N/A	19.6	N/A	19.7	
			1513	1752.6	N/A	22.4	N/A	19.4	N/A	19.4	
	HSDPA	Subtest 1	1312	1712.4	0	22.0	0	20.1	0	20.0	
			1413	1732.6		21.6		19.6		19.6	
			1513	1752.6		21.4		19.4		19.4	
		Subtest 2	1312	1712.4	0	21.6	0	20.1	0	20.2	
			1413	1732.6		21.1		19.6		19.7	
			1513	1752.6		20.8		19.4		19.5	
		Subtest 3	1312	1712.4	0.5	21.6	0	20.1	0	20.0	
			1413	1732.6		21.1		19.6		19.7	
			1513	1752.6		20.9		19.4		19.5	
		Subtest 4	1312	1712.4	0.5	21.1	0	20.1	0	20.1	
			1413	1732.6		20.6		19.6		19.7	
			1513	1752.6		20.3		19.4		19.5	
		HSUPA	Subtest 1	1312	1712.4	2	20.4	1	19.1	1	19.2
				1413	1732.6		19.9		18.5		18.8
				1513	1752.6		19.7		18.3		18.5
	Subtest 2		1312	1712.4	3	18.9	1	18.8	1	19.2	
			1413	1732.6		18.3		18.3		18.7	
			1513	1752.6		18.1		18.0		18.5	
	Subtest 3		1312	1712.4	1	21.8	1	18.8	1	19.2	
			1413	1732.6		21.2		18.4		18.7	
			1513	1752.6		21.0		18.1		18.4	
	Subtest 4		1312	1712.4	2	20.5	1	19.1	1	19.2	
			1413	1732.6		20.0		18.7		18.7	
			1513	1752.6		19.8		18.4		18.5	
	Subtest 5		1312	1712.4	0	23.0	0	20.0	0	20.1	
			1413	1732.6		22.7		19.6		19.6	
			1513	1752.6		22.4		19.4		19.3	
	DC-HSDPA	Subtest 1	1312	1712.4	0	22.0	0	20.0	0	20.0	
			1413	1732.6		21.6		19.6		19.6	
			1513	1752.6		21.4		19.5		19.5	
		Subtest 2	1312	1712.4	0	21.6	0	20.1	0	20.0	
			1413	1732.6		21.1		19.6		19.6	
			1513	1752.6		20.9		19.5		19.5	
		Subtest 3	1312	1712.4	0.5	20.6	0	20.1	0	20.1	
			1413	1732.6		20.0		19.6		19.7	
			1513	1752.6		20.0		19.5		19.5	
		Subtest 4	1312	1712.4	0.5	21.1	0	20.2	0	20.1	
			1413	1732.6		20.6		19.7		19.7	
			1513	1752.6		20.4		19.5		19.5	

**W-CDMA Band V Measured Results**

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Meas. Avg Pwr (dBm)	
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	23.8	
			4183	836.6	N/A	23.5	
			4233	846.6	N/A	23.7	
	HSDPA	Subtest 1	4132	826.4	0	21.3	
			4183	836.6		21.0	
			4233	846.6		21.2	
		Subtest 2	4132	826.4	0	21.3	
			4183	836.6		21.1	
			4233	846.6		21.3	
		Subtest 3	4132	826.4	0.5	20.9	
			4183	836.6		20.6	
			4233	846.6		20.8	
		Subtest 4	4132	826.4	0.5	20.9	
			4183	836.6		20.6	
			4233	846.6		20.7	
		HSUPA	Subtest 1	4132	826.4	2	19.4
				4183	836.6		19.1
				4233	846.6		19.3
	Subtest 2		4132	826.4	4	17.7	
			4183	836.6		17.5	
			4233	846.6		17.7	
	Subtest 3		4132	826.4	1	20.9	
			4183	836.6		20.6	
			4233	846.6		20.8	
	Subtest 4		4132	826.4	4	17.7	
			4183	836.6		17.6	
			4233	846.6		17.7	
	Subtest 5		4132	826.4	0	22.9	
			4183	836.6		22.7	
			4233	846.6		22.8	
	DC-HSDPA	Subtest 1	4132	826.4	0	21.2	
			4183	836.6		21.2	
			4233	846.6		21.2	
		Subtest 2	4132	826.4	0	21.2	
			4183	836.6		21.3	
			4233	846.6		21.3	
		Subtest 3	4132	826.4	0.5	19.9	
			4183	836.6		19.9	
			4233	846.6		19.8	
		Subtest 4	4132	826.4	0.5	20.7	
			4183	836.6		20.7	
			4233	846.6		20.7	



### 9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3**

Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N <sub>RB</sub> )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
				10, 15, 20	≥ 50 (NOTE 1)
NS_05	6.6.3.3.1	1	15, 20	Table 6.2.4-18 (NOTE 2)	
			10, 15, 20	≥ 50	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	
6.6.3.3.2					
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
				6.6.3.3.13	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
				6.6.3.3.6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9	
				Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
				5	≥ 2
NS_18	6.6.3.3.11	28	10, 15, 20	≥ 1	≤ 4
				Table 6.2.4-14	
NS_19	6.2.2	44	10, 15, 20	Table 6.2.4-14	
				6.6.2.2.1	
NS_20	6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
				6.6.3.3.15	
NS_21	6.6.3.3.15	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
				6.2.2A, 6.6.3.3.24	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
				6.2.2A, 6.6.3.3.26	
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
				Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

### Max power Results

#### LTE Band 2 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	23.8	23.8	23.6
			1	49	0	23.8	23.8	23.5
			1	99	0	23.7	23.7	23.4
			50	0	2	21.7	21.8	21.5
			50	24	2	21.7	21.7	21.5
			50	50	2	21.7	21.7	21.4
			100	0	2	21.7	21.8	21.4
		16QAM	1	0	2	21.7	21.6	21.4
			1	49	2	21.7	21.6	21.3
			1	99	2	21.6	21.5	21.2
			50	0	3	20.8	20.8	20.5
			50	24	3	20.7	20.8	20.5
			50	50	3	20.7	20.7	20.4
			100	0	3	20.8	20.8	20.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	23.8	23.8	23.5
			1	37	0	23.8	23.8	23.4
			1	74	0	23.8	23.7	23.3
			36	0	2	21.7	21.8	21.4
			36	20	2	21.7	21.8	21.3
			36	39	2	21.7	21.7	21.3
			75	0	2	21.7	21.8	21.3
		16QAM	1	0	2	21.5	21.9	21.3
			1	37	2	21.5	21.8	21.3
			1	74	2	21.5	21.8	21.2
			36	0	3	20.7	20.7	20.4
			36	20	3	20.7	20.7	20.4
			36	39	3	20.6	20.7	20.4
			75	0	3	20.7	20.7	20.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	23.8	23.8	23.3
			1	25	0	23.8	23.8	23.3
			1	49	0	23.8	23.8	23.2
			25	0	2	21.7	21.7	21.3
			25	12	2	21.7	21.7	21.3
			25	25	2	21.7	21.7	21.3
			50	0	2	21.7	21.7	21.3
		16QAM	1	0	2	21.7	21.5	21.4
			1	25	2	21.7	21.5	21.3
			1	49	2	21.7	21.4	21.3
			25	0	3	20.7	20.7	20.4
			25	12	3	20.7	20.7	20.3
			25	25	3	20.7	20.7	20.3
			50	0	3	20.7	20.7	20.3

**LTE Band 2 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	23.6	23.6	23.2
			1	12	0	23.6	23.6	23.2
			1	24	0	23.6	23.6	23.2
			12	0	2	21.7	21.7	21.3
			12	7	2	21.7	21.7	21.2
			12	13	2	21.6	21.7	21.2
			25	0	2	21.7	21.7	21.2
		16QAM	1	0	2	21.6	21.5	21.3
			1	12	2	21.6	21.6	21.3
			1	24	2	21.6	21.5	21.2
			12	0	3	20.6	20.7	20.3
			12	7	3	20.6	20.7	20.3
			12	13	3	20.6	20.7	20.3
			25	0	3	20.8	20.7	20.3
LTE Band 2	3	QPSK	1	0	0	23.6	23.8	23.2
			1	8	0	23.7	23.8	23.2
			1	14	0	23.6	23.7	23.2
			8	0	2	21.6	21.7	21.2
			8	4	2	21.6	21.7	21.3
			8	7	2	21.6	21.7	21.2
			15	0	2	21.7	21.7	21.2
		16QAM	1	0	2	21.6	21.3	21.4
			1	8	2	21.3	21.5	21.1
			1	14	2	21.5	21.7	21.4
			8	0	3	20.7	20.7	20.3
			8	4	3	20.7	20.7	20.3
			8	7	3	20.7	20.7	20.3
			15	0	3	20.7	20.7	20.2
LTE Band 2	1.4	QPSK	1	0	0	23.7	23.8	23.1
			1	3	0	23.6	23.8	23.1
			1	5	0	23.6	23.8	23.1
			3	0	0	23.6	23.7	23.2
			3	1	0	23.6	23.7	23.2
			3	3	0	23.6	23.7	23.2
			6	0	2	21.7	21.7	21.2
		16QAM	1	0	2	21.3	21.5	21.1
			1	3	2	21.3	21.5	21.2
			1	5	2	21.4	21.6	21.1
			3	0	2	21.5	21.6	21.1
			3	1	2	21.5	21.6	21.1
			3	3	2	21.5	21.6	21.1
			6	0	3	20.6	20.6	20.2

**LTE Band 4 Measured Results**

SAR for LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

**LTE Band 5 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)						
					MPR	829 MHz	836.5 MHz	844 MHz			
LTE Band 5	10	QPSK	1	0	0		23.7				
			1	25	0		23.7				
			1	49	0		23.7				
			25	0	2		21.2				
			25	12	2		21.2				
			25	25	2		21.2				
		16QAM	1	0	2		21.2				
			1	25	2		21.1				
			1	49	2		21.1				
			25	0	3		19.9				
			25	12	3		19.9				
			25	25	3		19.9				
			50	0	3		19.9				
			50	0	3		19.9				
LTE Band 5	5	QPSK	1	0	0	23.8	23.6	23.8			
			1	12	0	23.7	23.6	23.8			
			1	24	0	23.7	23.6	23.8			
			12	0	2	21.4	21.2	21.3			
			12	7	2	21.3	21.2	21.3			
			12	13	2	21.3	21.2	21.3			
		16QAM	25	0	2	21.3	21.2	21.3			
			1	0	2	21.1	20.9	21.3			
			1	12	2	21.0	20.9	21.3			
			1	24	2	21.1	20.9	21.3			
			12	0	3	20.0	20.0	19.9			
			12	7	3	19.9	19.9	19.9			
			12	13	3	19.9	20.0	19.9			
			25	0	3	20.1	19.9	19.9			
			LTE Band 5	3	QPSK	1	0	0	24.0	23.9	24.0
						1	8	0	23.9	23.8	23.9
						1	14	0	23.9	23.8	24.0
						8	0	2	21.3	21.2	21.3
						8	4	2	21.3	21.2	21.4
						8	7	2	21.3	21.2	21.3
16QAM	15	0			2	21.3	21.2	21.4			
	1	0			2	21.9	21.5	21.3			
	1	8			2	21.4	21.5	21.8			
	1	14			2	21.8	21.6	21.7			
	8	0			3	19.9	19.8	20.0			
	8	4			3	19.9	19.8	20.0			
	8	7			3	19.9	19.8	20.0			
	15	0			3	20.0	19.8	20.0			

**LTE Band 5 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4 MHz	QPSK	1	0	0	23.8	23.7	23.9
			1	3	0	23.8	23.6	23.9
			1	5	0	23.8	23.6	23.9
			3	0	0	23.8	23.7	23.8
			3	1	0	23.9	23.7	23.9
			3	3	0	23.9	23.8	23.9
		6	0	2	21.3	21.2	21.3	
		16QAM	1	0	2	21.1	21.3	21.4
			1	3	2	21.0	21.2	21.4
			1	5	2	21.1	21.2	21.4
			3	0	2	21.4	21.4	21.5
			3	1	2	21.5	21.4	21.4
			3	3	2	21.5	21.3	21.5
			6	0	3	20.0	19.9	20.0

**Note(s):**

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

**LTE Band 12 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	704 MHz	707.5 MHz	711 MHz
LTE Band 12	10	QPSK	1	0	0		23.7	
			1	25	0		23.6	
			1	49	0		23.6	
			25	0	2		21.4	
			25	12	2		21.4	
			25	25	2		21.4	
		16QAM	50	0	2		21.4	
			1	0	2		21.5	
			1	25	2		21.4	
			1	49	2		21.4	
			25	0	3		20.5	
			25	12	3		20.5	
			25	25	3		20.4	
			50	0	3		20.4	
Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	701.5 MHz	707.5 MHz	713.5 MHz
LTE Band 12	5	QPSK	1	0	0	23.8	23.6	23.6
			1	12	0	23.7	23.6	23.6
			1	24	0	23.7	23.5	23.6
			12	0	2	21.6	21.4	21.4
			12	7	2	21.5	21.4	21.4
			12	13	2	21.6	21.4	21.4
		16QAM	25	0	2	21.5	21.4	21.4
			1	0	2	21.3	21.3	21.5
			1	12	2	21.2	21.2	21.4
			1	24	2	21.2	21.3	21.5
			12	0	3	20.5	20.5	20.3
			12	7	3	20.5	20.5	20.4
			12	13	3	20.5	20.5	20.3
			25	0	3	20.6	20.4	20.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	700.5 MHz	707.5 MHz	714.5 MHz
LTE Band 12	3	QPSK	1	0	0	23.8	23.9	23.6
			1	8	0	23.8	23.8	23.6
			1	14	0	23.9	23.9	23.7
			8	0	2	21.6	21.4	21.4
			8	4	2	21.6	21.4	21.4
			8	7	2	21.6	21.4	21.4
		16QAM	15	0	2	21.6	21.4	21.4
			1	0	2	21.8	22.0	21.8
			1	8	2	21.5	21.5	21.9
			1	14	2	21.5	21.5	21.9
			8	0	3	20.5	20.4	20.3
			8	4	3	20.5	20.4	20.3
			8	7	3	20.5	20.3	20.3
			15	0	3	20.5	20.3	20.3

**LTE Band 12 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	699.7 MHz	707.5 MHz	715.3 MHz
LTE Band 12	1.4 MHz	QPSK	1	0	0	23.7	23.6	23.5
			1	3	0	23.7	23.6	23.5
			1	5	0	23.7	23.6	23.6
			3	0	0	23.9	23.7	23.6
			3	1	0	23.9	23.7	23.7
			3	3	0	23.9	23.7	23.6
		6	0	2	21.5	21.4	21.4	
		16QAM	1	0	2	21.8	21.7	21.6
			1	3	2	21.9	21.7	21.4
			1	5	2	21.9	21.7	21.7
			3	0	2	21.7	21.4	21.4
			3	1	2	21.7	21.5	21.4
			3	3	2	21.7	21.5	21.4
			6	0	3	20.6	20.4	20.5

**Note(s):**

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices



**LTE Band 13 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)	
					MPR	782 MHz
LTE Band 13	10	QPSK	1	0	0	23.7
			1	25	0	23.6
			1	49	0	23.6
			25	0	2	21.7
			25	12	2	21.7
			25	25	2	21.6
			50	0	2	21.7
		16QAM	1	0	2	22.0
			1	25	2	21.9
			1	49	2	21.9
			25	0	3	20.5
			25	12	3	20.4
			25	25	3	20.4
			50	0	3	20.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)	
					MPR	782 MHz
LTE Band 13	5	QPSK	1	0	0	23.6
			1	12	0	23.6
			1	24	0	23.6
			12	0	2	21.7
			12	7	2	21.6
			12	13	2	21.6
			25	0	2	21.6
		16QAM	1	0	2	21.6
			1	12	2	21.6
			1	24	2	21.6
			12	0	3	20.4
			12	7	3	20.4
			12	13	3	20.4
			25	0	3	20.5

**Note(s):**

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

**LTE Band 17 Measured Results**

SAR for LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

**LTE Band 66 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	1720 MHz	1745 MHz	1770 MHz
LTE Band 66	20	QPSK	1	0	0	23.7	23.3	23.0
			1	49	0	23.6	23.3	23.0
			1	99	0	23.6	23.3	23.0
			50	0	2	21.8	21.4	21.1
			50	24	2	21.8	21.4	21.1
			50	50	2	21.8	21.4	21.1
			100	0	2	21.8	21.4	21.1
		16QAM	1	0	2	21.8	21.3	21.0
			1	49	2	21.8	21.3	21.1
			1	99	2	21.7	21.3	21.0
			50	0	3	20.9	20.5	20.1
			50	24	3	20.8	20.4	20.2
			50	50	3	20.7	20.4	20.1
			100	0	3	20.9	20.5	20.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	1717.5 MHz	1745 MHz	1772.5 MHz
LTE Band 66	15	QPSK	1	0	0	23.9	23.3	22.9
			1	37	0	23.8	23.2	22.9
			1	74	0	23.7	23.2	22.9
			36	0	2	21.9	21.4	21.0
			36	20	2	21.8	21.4	21.0
			36	39	2	21.8	21.4	21.0
			75	0	2	21.8	21.4	21.0
		16QAM	1	0	2	21.5	21.4	21.1
			1	37	2	21.5	21.4	21.1
			1	74	2	21.4	21.4	21.1
			36	0	3	20.9	20.4	20.1
			36	20	3	20.8	20.4	20.1
			36	39	3	20.8	20.4	20.0
			75	0	3	20.9	20.4	20.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	1715 MHz	1745 MHz	1775 MHz
LTE Band 66	10	QPSK	1	0	0	23.9	23.4	22.9
			1	25	0	23.8	23.3	22.9
			1	49	0	23.8	23.3	22.9
			25	0	2	21.9	21.4	21.0
			25	12	2	21.9	21.4	21.0
			25	25	2	21.8	21.4	21.0
			50	0	2	21.9	21.4	21.0
		16QAM	1	0	2	21.5	21.3	21.1
			1	25	2	21.5	21.3	21.0
			1	49	2	21.6	21.3	21.0
			25	0	3	20.9	20.5	20.1
			25	12	3	20.9	20.5	20.1
			25	25	3	20.9	20.5	20.1
			50	0	3	21.0	20.4	20.1

**LTE Band 66 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)			
					MPR	1712.5 MHz	1745 MHz	1777.5 MHz
LTE Band 66	5	QPSK	1	0	0	23.9	23.2	23.0
			1	12	0	23.8	23.2	23.0
			1	24	0	23.8	23.2	23.0
			12	0	2	21.9	21.4	21.0
			12	7	2	21.9	21.4	21.0
			12	13	2	21.9	21.4	21.0
			25	0	2	21.9	21.4	21.0
		16QAM	1	0	2	21.6	21.1	21.0
			1	12	2	21.6	21.1	21.0
			1	24	2	21.6	21.1	21.0
			12	0	3	20.8	20.4	21.0
			12	7	3	20.9	20.5	21.0
			12	13	3	20.9	20.4	21.0
			25	0	3	20.9	20.5	20.0
LTE Band 66	3	QPSK	1	0	0	23.9	23.4	22.9
			1	8	0	23.9	23.4	22.9
			1	14	0	23.9	23.4	22.9
			8	0	2	21.9	21.4	20.9
			8	4	2	21.9	21.3	20.9
			8	7	2	21.9	21.4	20.9
			15	0	2	21.9	21.4	20.9
		16QAM	1	0	2	22.0	21.5	21.3
			1	8	2	21.8	21.2	21.3
			1	14	2	21.8	21.4	21.1
			8	0	3	20.8	20.2	19.9
			8	4	3	20.8	20.3	20.0
			8	7	3	20.8	20.3	19.9
			15	0	3	20.9	20.3	19.9
LTE Band 66	1.4	QPSK	1	0	0	23.9	23.3	22.8
			1	3	0	23.9	23.3	22.8
			1	5	0	23.8	23.2	22.9
			3	0	0	23.8	23.4	22.9
			3	1	0	23.9	23.4	22.9
			3	3	0	23.9	23.4	22.9
			6	0	2	21.8	21.3	20.8
		16QAM	1	0	2	21.9	21.6	21.0
			1	3	2	22.0	21.6	20.9
			1	5	2	21.8	21.6	20.8
			3	0	2	21.8	21.4	20.9
			3	1	2	21.8	21.4	20.9
			3	3	2	21.8	21.4	20.9
			6	0	3	20.8	20.3	19.9

### Reduced power Results

#### LTE Band 2 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced Meas. Avg Pwr Hotspot back-off (dBm)			Reduced Meas. Avg Pwr Proximity sensor back-off (dBm)		
						1860 MHz	1880 MHz	1900 MHz	1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	20.4	20.5	20.4	20.3	20.3	20.3
			1	49	0	20.4	20.5	20.3	20.3	20.3	20.2
			1	99	0	20.4	20.5	20.2	20.3	20.3	20.1
			50	0	2	18.3	18.3	18.0	18.2	18.2	18.0
			50	24	2	18.2	18.3	18.0	18.2	18.2	17.9
			50	50	2	18.2	18.2	17.9	18.2	18.2	17.9
		16QAM	100	0	2	18.2	18.3	17.9	18.2	18.2	17.9
			1	0	2	18.3	18.4	18.1	18.2	18.5	18.1
			1	49	2	18.3	18.4	17.9	18.2	18.5	18.0
			1	99	2	18.3	18.3	17.9	18.1	18.5	17.9
			50	0	3	17.2	17.2	17.0	17.2	17.2	17.0
			50	24	3	17.2	17.2	16.9	17.2	17.2	16.9
			50	50	3	17.1	17.2	16.9	17.2	17.2	16.9
			100	0	3	17.2	17.2	16.9	17.2	17.2	16.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced Meas. Avg Pwr Hotspot back-off (dBm)			Reduced Meas. Avg Pwr Proximity sensor back-off (dBm)		
						1857.5 MHz	1880 MHz	1902.5 MHz	1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	20.5	20.4	20.2	20.5	20.4	20.1
			1	37	0	20.5	20.4	20.1	20.5	20.4	20.0
			1	74	0	20.5	20.4	20.0	20.4	20.3	19.9
			36	0	2	18.2	18.3	17.9	18.2	18.3	17.9
			36	20	2	18.2	18.3	17.9	18.2	18.3	17.9
			36	39	2	18.2	18.2	17.9	18.2	18.2	17.8
		16QAM	75	0	2	18.2	18.2	17.9	18.2	18.2	17.9
			1	0	2	18.1	18.5	17.9	18.1	18.4	17.9
			1	37	2	18.1	18.5	17.8	18.1	18.4	17.8
			1	74	2	18.1	18.5	17.7	18.0	18.4	17.7
			36	0	3	17.1	17.2	16.9	17.2	17.3	16.9
			36	20	3	17.1	17.2	16.9	17.1	17.3	16.9
			36	39	3	17.1	17.2	16.9	17.2	17.2	16.8
			75	0	3	17.1	17.2	16.8	17.2	17.3	16.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced Meas. Avg Pwr Hotspot back-off (dBm)			Reduced Meas. Avg Pwr Proximity sensor back-off (dBm)		
						1855 MHz	1880 MHz	1905 MHz	1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	20.5	20.6	20.1	20.4	20.5	20.1
			1	25	0	20.5	20.5	20.0	20.4	20.5	20.0
			1	49	0	20.5	20.5	20.0	20.4	20.5	20.0
			25	0	2	18.2	18.2	17.8	18.2	18.2	17.8
			25	12	2	18.2	18.2	17.8	18.2	18.2	17.8
			25	25	2	18.2	18.2	17.8	18.2	18.2	17.8
		16QAM	50	0	2	18.2	18.2	17.8	18.2	18.2	17.8
			1	0	2	18.1	18.3	17.9	18.2	18.3	17.9
			1	25	2	18.1	18.2	17.8	18.1	18.2	17.9
			1	49	2	18.1	18.2	17.8	18.2	18.2	17.8
			25	0	3	17.2	17.3	16.9	17.2	17.2	16.8
			25	12	3	17.2	17.2	16.8	17.2	17.2	16.8
			25	25	3	17.2	17.2	16.8	17.2	17.2	16.7
			50	0	3	17.2	17.2	16.8	17.2	17.2	16.8

**LTE Band 2 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced Meas. Avg Pwr Hotspot back-off (dBm)			Reduced Meas. Avg Pwr Proximity sensor back-off (dBm)		
						1852.5 MHz	1880 MHz	1907.5 MHz	1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	20.4	20.4	20.0	20.3	20.4	20.1
			1	12	0	20.3	20.4	19.9	20.3	20.3	20.0
			1	24	0	20.4	20.4	20.0	20.3	20.3	20.0
			12	0	2	18.2	18.2	17.8	18.2	18.2	17.8
			12	7	2	18.2	18.2	17.8	18.2	18.2	17.8
			12	13	2	18.2	18.2	17.8	18.2	18.2	17.8
			25	0	2	18.2	18.2	17.8	18.2	18.2	17.8
		16QAM	1	0	2	18.3	18.4	18.0	18.2	18.4	17.9
			1	12	2	18.3	18.3	18.0	18.1	18.4	17.9
			1	24	2	18.3	18.4	18.0	18.1	18.3	17.9
			12	0	3	17.2	17.2	16.7	17.1	17.2	16.9
			12	7	3	17.1	17.1	16.8	17.1	17.2	16.8
			12	13	3	17.1	17.1	16.8	17.1	17.3	16.8
			25	0	3	17.2	17.2	16.8	17.2	17.2	16.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced Meas. Avg Pwr Hotspot back-off (dBm)			Reduced Meas. Avg Pwr Proximity sensor back-off (dBm)		
						1851.5 MHz	1880 MHz	1908.5 MHz	1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	20.5	20.5	20.1	20.4	20.6	20.0
			1	8	0	20.5	20.5	20.0	20.3	20.5	19.9
			1	14	0	20.5	20.5	20.0	20.4	20.6	20.1
			8	0	2	18.2	18.2	17.8	18.2	18.2	17.8
			8	4	2	18.2	18.2	17.8	18.2	18.2	17.8
			8	7	2	18.2	18.2	17.8	18.2	18.2	17.8
			15	0	2	18.2	18.3	17.8	18.2	18.3	17.8
		16QAM	1	0	2	18.0	18.4	17.9	17.9	18.5	18.1
			1	8	2	18.0	18.4	17.8	18.1	18.4	18.2
			1	14	2	18.1	18.5	18.2	18.2	18.4	18.1
			8	0	3	17.1	17.1	16.7	17.1	17.2	16.7
			8	4	3	17.1	17.1	16.7	17.1	17.2	16.7
			8	7	3	17.1	17.1	16.7	17.1	17.2	16.7
			15	0	3	17.2	17.1	16.7	17.2	17.2	16.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced Meas. Avg Pwr Hotspot back-off (dBm)			Reduced Meas. Avg Pwr Proximity sensor back-off (dBm)		
						1850.7 MHz	1880 MHz	1909.3 MHz	1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	20.5	20.5	20.0	20.5	20.5	19.9
			1	3	0	20.5	20.5	20.0	20.5	20.5	20.0
			1	5	0	20.5	20.5	20.0	20.5	20.5	20.0
			3	0	0	20.4	20.5	20.0	20.4	20.5	20.0
			3	1	0	20.4	20.5	20.0	20.4	20.5	20.0
			3	3	0	20.4	20.5	20.0	20.4	20.5	20.0
			6	0	2	18.2	18.2	17.7	18.2	18.2	17.8
		16QAM	1	0	2	18.2	18.5	18.1	18.3	18.6	18.0
			1	3	2	18.3	18.7	18.0	18.3	18.5	17.9
			1	5	2	18.3	18.6	18.1	18.5	18.6	18.0
			3	0	2	18.3	18.4	17.8	18.3	18.4	17.8
			3	1	2	18.3	18.4	17.8	18.3	18.4	17.8
			3	3	2	18.3	18.4	17.8	18.3	18.5	17.7
			6	0	3	17.2	17.1	16.8	17.1	17.2	16.8

**LTE Band 4 Measured Results**

SAR for LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

**LTE Band 66 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced Meas. Avg Pwr Hotspot back-off (dBm)			Reduced Meas. Avg Pwr Proximity sensor back-off (dBm)		
						1720 MHz	1745 MHz	1770 MHz	1720 MHz	1745 MHz	1770 MHz
LTE Band 66	20	QPSK	1	0	0	21.5	21.0	20.7	21.4	21.0	20.7
			1	49	0	21.4	20.9	20.7	21.3	20.9	20.7
			1	99	0	21.4	20.9	20.7	21.2	20.9	20.7
			50	0	2	19.6	19.1	18.7	19.6	19.2	18.7
			50	24	2	19.5	19.1	18.7	19.6	19.1	18.7
			50	50	2	19.5	19.1	18.7	19.5	19.1	18.7
			100	0	2	19.5	19.1	18.7	19.6	19.2	18.8
		16QAM	1	0	2	19.7	19.1	18.8	19.5	19.3	18.7
			1	49	2	19.7	19.1	18.8	19.4	19.3	18.7
			1	99	2	19.5	19.0	18.8	19.3	19.3	18.6
			50	0	3	18.2	17.8	17.5	18.2	17.7	17.4
			50	24	3	18.2	17.8	17.5	18.2	17.7	17.4
			50	50	3	18.2	17.7	17.4	18.2	17.7	17.4
			100	0	3	18.3	17.8	17.5	18.2	17.8	17.4
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced Meas. Avg Pwr Hotspot back-off (dBm)			Reduced Meas. Avg Pwr Proximity sensor back-off (dBm)		
						1717.5 MHz	1745 MHz	1772.5 MHz	1717.5 MHz	1745 MHz	1772.5 MHz
LTE Band 66	15	QPSK	1	0	0	21.5	21.0	20.7	21.6	21.0	20.7
			1	37	0	21.4	20.9	20.7	21.5	21.0	20.7
			1	74	0	21.4	20.9	20.7	21.4	20.9	20.6
			36	0	2	19.5	19.1	18.6	19.6	19.1	18.7
			36	20	2	19.5	19.0	18.6	19.6	19.1	18.7
			36	39	2	19.5	19.0	18.6	19.6	19.1	18.7
			75	0	2	19.5	19.0	18.6	19.6	19.1	18.7
		16QAM	1	0	2	19.7	19.2	18.6	19.5	19.2	18.7
			1	37	2	19.7	19.1	18.5	19.5	19.1	18.6
			1	74	2	19.6	19.1	18.6	19.4	19.1	18.6
			36	0	3	18.3	17.8	17.4	18.2	17.8	17.3
			36	20	3	18.3	17.8	17.4	18.2	17.8	17.3
			36	39	3	18.3	17.8	17.4	18.1	17.8	17.3
			75	0	3	18.2	17.8	17.4	18.2	17.8	17.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced Meas. Avg Pwr Hotspot back-off (dBm)			Reduced Meas. Avg Pwr Proximity sensor back-off (dBm)		
						1715 MHz	1745 MHz	1775 MHz	1715 MHz	1745 MHz	1775 MHz
LTE Band 66	10	QPSK	1	0	0	21.7	21.1	20.7	21.8	21.1	20.7
			1	25	0	21.5	21.1	20.6	21.6	21.0	20.6
			1	49	0	21.5	21.1	20.7	21.6	21.0	20.7
			25	0	2	19.6	19.1	18.6	19.7	19.1	18.7
			25	12	2	19.5	19.0	18.6	19.6	19.1	18.7
			25	25	2	19.5	19.0	18.6	19.6	19.1	18.7
			50	0	2	19.5	19.0	18.6	19.6	19.2	18.7
		16QAM	1	0	2	19.7	18.9	18.4	19.5	18.9	18.8
			1	25	2	19.6	18.9	18.3	19.5	18.9	18.8
			1	49	2	19.6	18.8	18.4	19.5	18.9	18.8
			25	0	3	18.3	17.9	17.4	18.2	17.7	17.3
			25	12	3	18.3	17.8	17.4	18.2	17.7	17.3
			25	25	3	18.3	17.9	17.4	18.2	17.7	17.3
			50	0	3	18.3	17.8	17.4	18.2	17.8	17.3



**LTE Band 66 Measured Results (continued)**


Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Reduced Meas. Avg Pwr Hotspot back-off (dBm)			Reduced Meas. Avg Pwr Proximity sensor back-off (dBm)		
						1712.5 MHz	1745 MHz	1777.5 MHz	1712.5 MHz	1745 MHz	1777.5 MHz
LTE Band 66	5	QPSK	1	0	0	21.4	21.0	20.6	21.5	20.9	20.6
			1	12	0	21.4	21.0	20.6	21.5	20.9	20.6
			1	24	0	21.4	21.0	20.6	21.5	20.9	20.6
			12	0	2	19.5	19.0	18.6	19.7	19.1	18.6
			12	7	2	19.5	19.0	18.6	19.6	19.1	18.7
			12	13	2	19.5	19.0	18.5	19.6	19.1	18.7
			25	0	2	19.5	19.0	18.5	19.6	19.1	18.7
		16QAM	1	0	2	19.6	18.9	18.5	19.6	19.0	18.6
			1	12	2	19.6	18.9	18.5	19.5	19.0	18.6
			1	24	2	19.5	18.9	18.5	19.6	19.1	18.6
			12	0	3	18.4	17.8	17.3	18.2	17.7	17.3
			12	7	3	18.3	17.8	17.4	18.2	17.7	17.3
			12	13	3	18.3	17.8	17.4	18.2	17.7	17.3
			25	0	3	18.3	17.8	17.4	18.2	17.8	17.3
LTE Band 66	3	QPSK	1	0	0	21.6	21.3	20.8	21.6	21.1	20.6
			1	8	0	21.7	21.2	20.7	21.6	21.1	20.6
			1	14	0	21.6	21.2	20.7	21.6	21.1	20.6
			8	0	2	19.7	19.1	18.7	19.6	19.1	18.6
			8	4	2	19.7	19.1	18.7	19.6	19.1	18.6
			8	7	2	19.7	19.1	18.7	19.6	19.1	18.6
			15	0	2	19.7	19.1	18.7	19.6	19.1	18.7
		16QAM	1	0	2	19.6	19.0	19.0	19.6	18.9	19.3
			1	8	2	19.6	19.0	18.8	19.6	19.1	19.1
			1	14	2	19.5	19.0	19.0	19.6	19.3	19.2
			8	0	3	18.2	17.7	17.2	18.2	17.6	17.2
			8	4	3	18.2	17.7	17.2	18.2	17.7	17.2
			8	7	3	18.2	17.7	17.2	18.2	17.6	17.2
			15	0	3	18.2	17.7	17.2	18.3	17.7	17.3
LTE Band 66	1.4	QPSK	1	0	0	21.7	21.2	20.7	21.7	21.1	20.6
			1	3	0	21.7	21.1	20.6	21.6	21.1	20.4
			1	5	0	21.7	21.1	20.7	21.7	21.1	20.5
			3	0	0	21.6	21.1	20.6	21.6	21.0	20.5
			3	1	0	21.7	21.1	20.6	21.6	21.0	20.5
			3	3	0	21.7	21.1	20.6	21.6	21.0	20.5
			6	0	2	19.6	19.1	18.5	19.6	19.0	18.5
		16QAM	1	0	2	19.8	19.5	18.7	19.8	19.1	18.8
			1	3	2	19.8	19.4	18.7	19.7	19.1	18.8
			1	5	2	19.8	19.5	18.7	19.9	19.2	18.8
			3	0	2	19.6	19.2	18.5	19.6	19.2	18.6
			3	1	2	19.6	19.2	18.6	19.7	19.2	18.6
			3	3	2	19.5	19.2	18.6	19.7	19.2	18.6
			6	0	3	18.2	17.7	17.3	18.3	17.9	17.2

**LTE Band TDD Measured Results**


**Procedure used to establish SAR test signal for LTE TDD Band**

Set to CMW-500 with following parameters:

- Turn the LTE Signaling off using “ON | OFF” key
- Operating Band: Select Band 41 and TDD
- Go to “Config...”

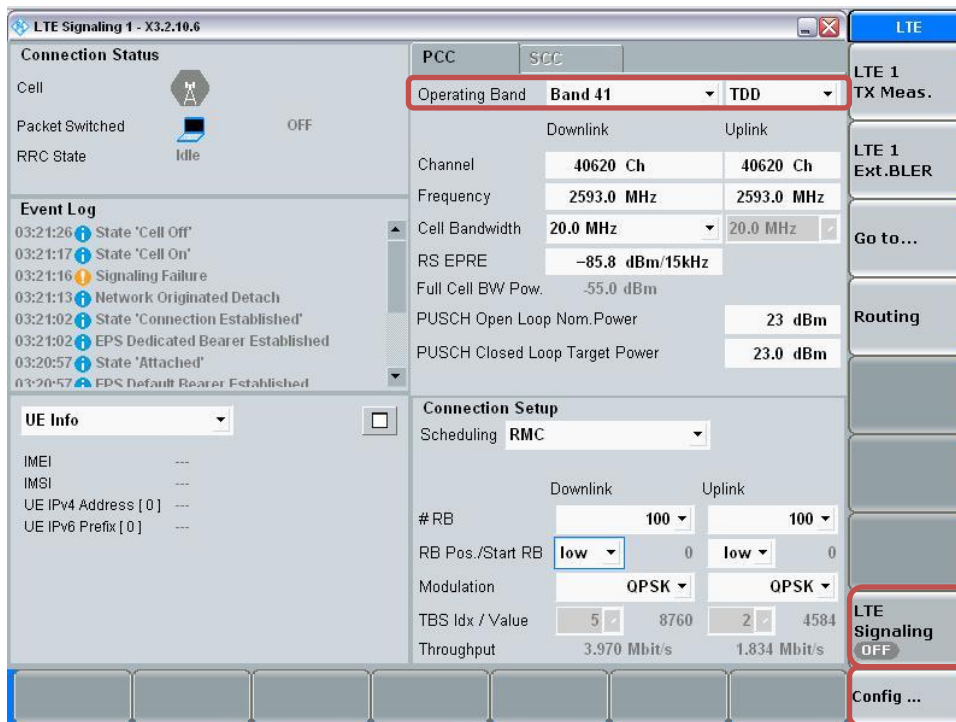


- Go to “Physical Cell Setup”
- Select “TDD” and Set “Uplink Downlink Configuration” to “0”
- Turn the cell on using “ON | OFF” key

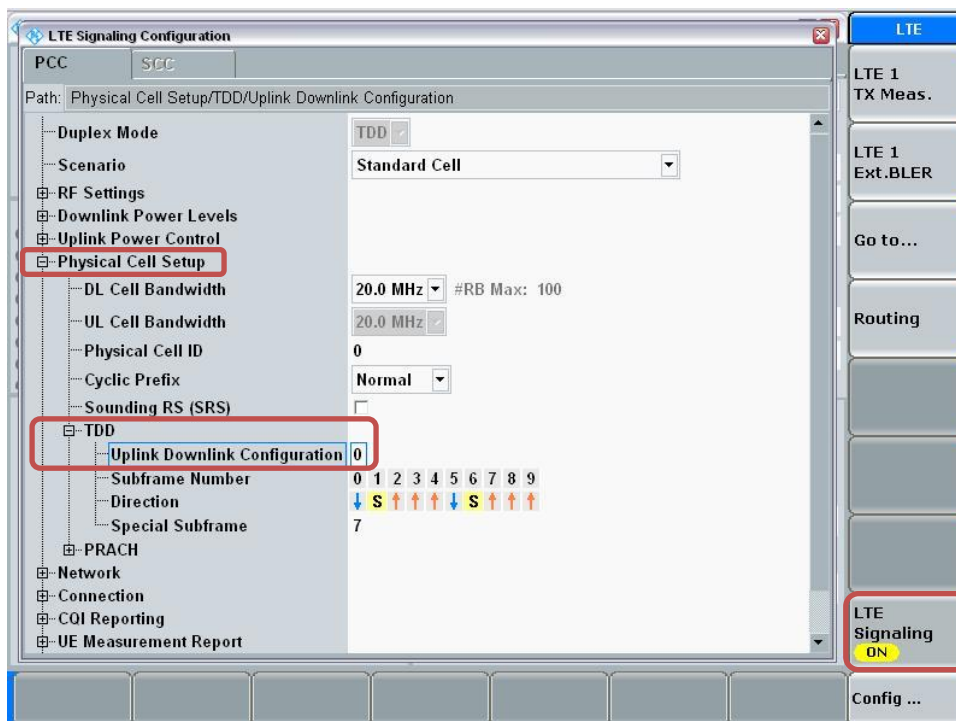


**Connect to EUT**

- Turn the cell on using “ON | OFF” key
- After EUT is Attached
- Select “Connect”

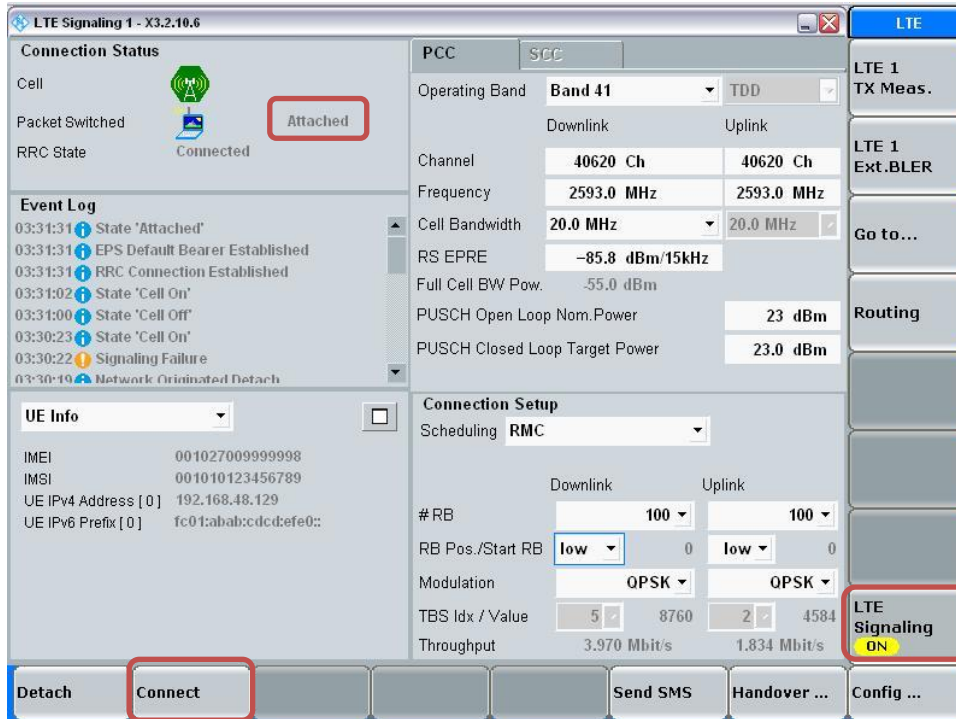


**Max Power Setting**

- Select “LTE 1 TX Meas.”
- Press “RESTART | STOP” Soft key

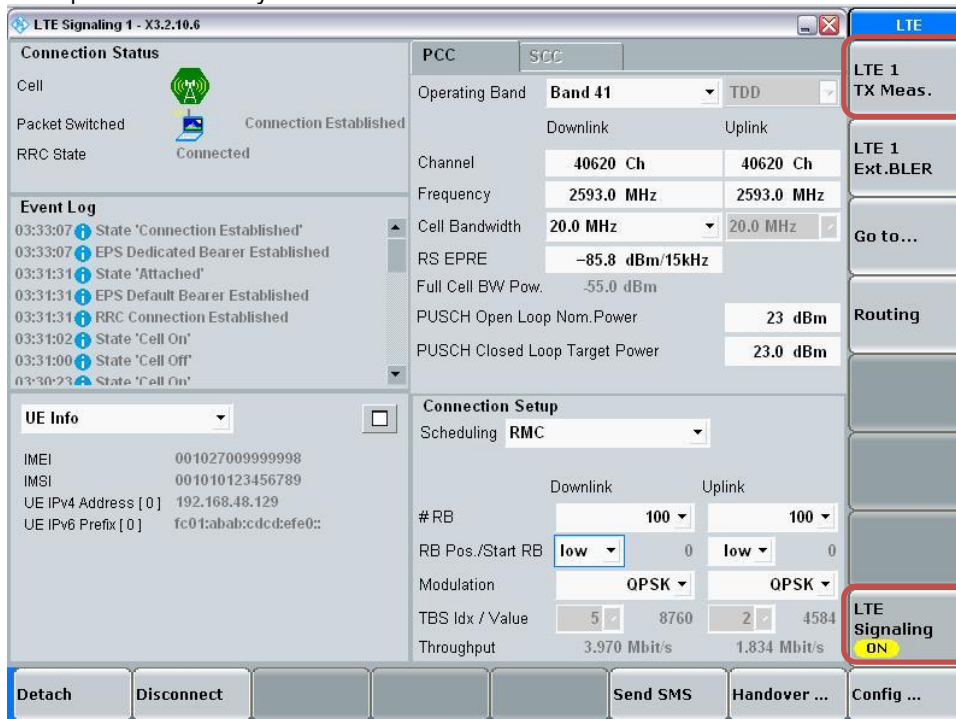


- Select “Signaling Parameter”
- Select “TX Power Control (TPC)” > Select “Active TPC Setup” to “Max Power” > Set “Closed Loop Target Power” to “23 dBm”

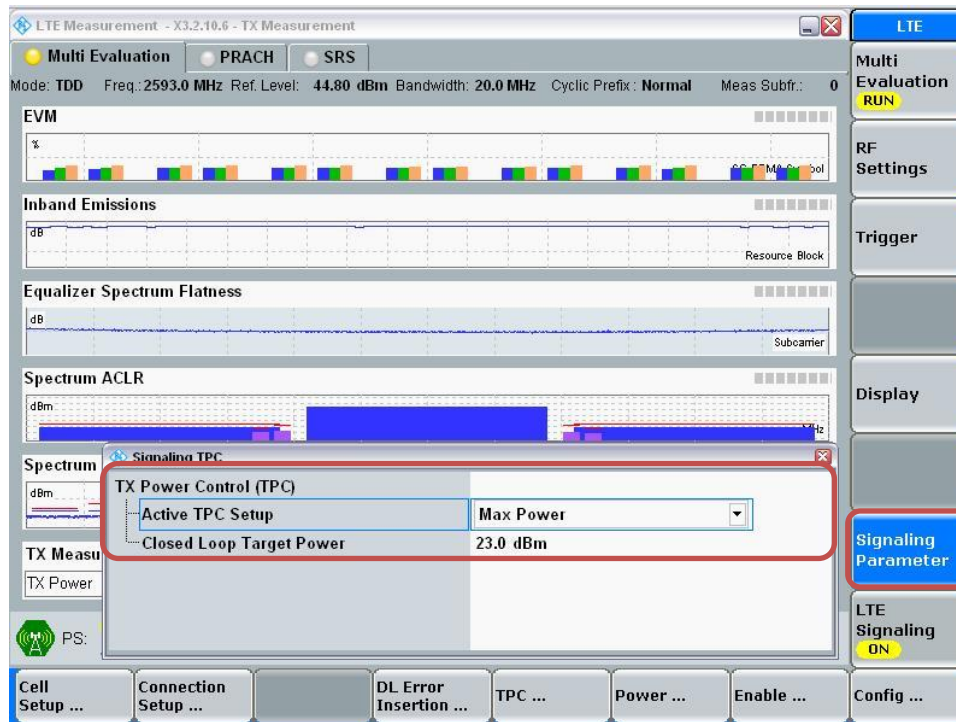

**View TX Power**

- Go to “Display”
- Select “Select View...”
- Select “Spectrum Emission Mask”

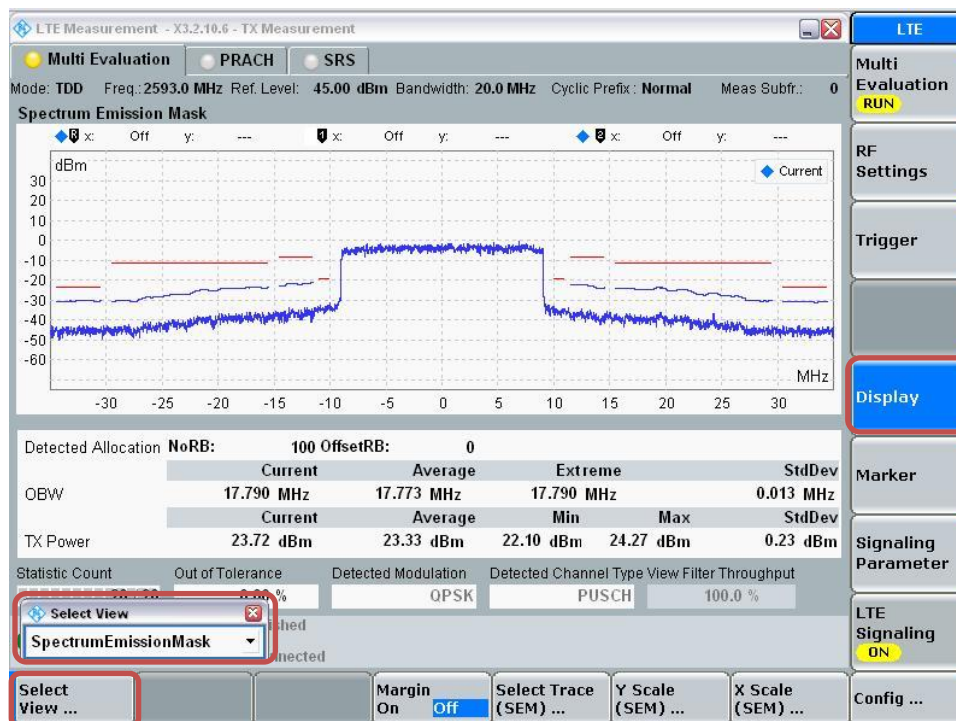

**LTE Band 41 Measured Results**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)					
					MPR	2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	20	QPSK	1	0	0	23.8	23.2	23.9	23.9	24.1
			1	49	0	23.9	23.4	23.9	23.9	24.2
			1	99	0	23.8	23.5	24.0	23.8	24.2
			50	0	2	21.8	21.3	21.9	21.9	22.1
			50	24	2	21.9	21.4	21.9	21.9	22.2
			50	50	2	21.9	21.4	21.9	21.9	22.1
		16QAM	1	0	2	21.6	21.4	21.5	21.6	22.1
			1	49	2	21.7	21.8	21.8	22.0	22.1
			1	99	2	22.0	21.4	22.1	21.7	22.4
			50	0	3	20.9	20.4	20.9	20.9	21.2
			50	24	3	20.9	20.5	21.0	20.9	21.2
			50	50	3	20.9	20.5	20.9	20.9	21.2
			100	0	3	20.9	20.5	21.0	20.9	21.2
			100	0	3	20.9	20.5	21.0	20.9	21.2
LTE Band 41	15	QPSK	1	0	0	23.8	23.3	23.9	23.9	24.1
			1	37	0	23.9	23.5	23.9	23.9	24.0
			1	74	0	23.8	23.4	23.9	23.9	24.1
			36	0	2	21.8	21.4	21.9	21.9	22.2
			36	20	2	21.8	21.4	21.9	21.9	22.2
			36	39	2	21.9	21.5	21.9	21.9	22.2
			75	0	2	21.8	21.4	21.9	21.9	22.2
		16QAM	1	0	2	21.8	21.2	21.5	22.0	22.1
			1	37	2	21.8	21.4	21.5	21.6	22.1
			1	74	2	21.5	21.4	21.6	21.8	22.3
			36	0	3	20.8	20.5	20.9	20.8	21.2
			36	20	3	20.8	20.5	21.0	20.8	21.2
			36	39	3	20.8	20.6	20.9	20.8	21.3
			75	0	3	20.9	20.5	20.9	20.8	21.2
LTE Band 41	10	QPSK	1	0	0	23.8	23.4	23.8	23.8	24.0
			1	25	0	23.9	23.4	23.8	23.8	24.1
			1	49	0	23.9	23.5	23.9	23.9	24.1
			25	0	2	21.8	21.4	21.9	21.9	22.1
			25	12	2	21.8	21.4	21.9	21.9	22.1
			25	25	2	21.8	21.4	21.9	21.9	22.1
			50	0	2	21.8	21.4	21.8	21.9	22.1
		16QAM	1	0	2	21.5	21.6	21.7	21.6	22.3
			1	25	2	21.5	21.6	21.7	21.6	22.3
			1	49	2	21.6	21.7	21.8	21.7	22.3
			25	0	3	20.8	20.4	20.9	20.8	21.1
			25	12	3	20.8	20.4	20.9	20.8	21.1
			25	25	3	20.9	20.4	20.9	20.8	21.1
			50	0	3	20.9	20.4	20.9	20.8	21.1

**LTE Band 41 Measured Results (continued)**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Max. Meas. Avg Pwr (dBm)					
					MPR	2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	5	QPSK	1	0	0	23.8	23.5	23.9	23.8	24.1
			1	12	0	23.8	23.5	24.0	23.8	24.1
			1	24	0	23.9	23.5	24.0	23.9	24.2
			12	0	2	21.8	21.4	21.9	21.9	22.2
			12	7	2	21.8	21.4	21.9	21.9	22.2
			12	13	2	21.8	21.4	21.9	21.9	22.2
			25	0	2	21.8	21.4	21.9	21.9	22.2
		16QAM	1	0	2	21.5	21.4	21.6	21.6	22.0
			1	12	2	21.5	21.4	21.6	21.6	22.0
			1	24	2	21.5	21.4	21.6	21.6	22.0
			12	0	3	20.8	20.4	20.9	20.7	21.1
			12	7	3	20.8	20.4	20.9	20.7	21.1
			12	13	3	20.8	20.4	20.9	20.8	21.1
			25	0	3	20.9	20.5	20.9	20.9	21.2



### 9.3.1. LTE Rel. 10 Carrier Aggregation

#### LTE Release 10 Carrier Aggregation

The following power measurements were performed with a single carrier uplink; CA for this particular project only supports one (1) uplink and two (2) downlinks.

#### 1) Max power results

Type	LTE CA combinations		PCC (UL)					SCC (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 10 Tx. Power [dBm]	Delta	
	PCC	+	SCC	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel				Freq. (MHz)
Intra Contiguous	2C		QPSK	10	18900	1880.0	1/0	15	1020	1972.0	23.82	23.82	0.00	
	5B (0), (1)		QPSK	5	20625	846.5	1/0	10	2553	884.3	23.84	23.81	-0.03	
	41C (0), (1), (2), (3)		QPSK	20	41490	2680.0	1/49	20	41292	2660.2	24.21	24.17	-0.04	
	66C		QPSK	10	132022	1715.0	1/0	15	66606	2127.0	23.90	23.89	-0.01	
Intra Non-Contiguous	2A	+	2A	QPSK	10	18900	1880.0	1/0	10	1150	1985.0	23.82	23.81	-0.01
	4A	+	4A (0), (1)	QPSK	10	20000	1715.0	1/0	10	2350	2150.0	23.85	23.87	0.02
	5A	+	5A	QPSK	5	20625	846.5	1/0	5	2425	871.5	23.84	23.88	0.04
	41A	+	41A (0), (1)	QPSK	20	41490	2680.0	1/49	41	40620	2593.0	24.21	24.23	0.02
	66A	+	66A	QPSK	10	132022	1715.0	1/0	10	67086	2175.0	23.90	23.81	-0.09
Inter Non-Contiguous	2A	+	5A (0), (1)	QPSK	10	18900	1880.0	1/0	10	2525	881.5	23.82	23.82	0.00
	2A	+	12A (0), (1), (2)	QPSK	10	18900	1880.0	1/0	10	5095	737.5	23.82	23.79	-0.03
	2A	+	13A (0), (1)	QPSK	10	18900	1880.0	1/0	10	5230	751.0	23.82	23.80	-0.02
	2A	+	17A	QPSK	10	18900	1880.0	1/0	10	5790	740.0	23.82	23.83	0.01
	4A	+	5A (0), (1)	QPSK	10	20000	1715.0	1/0	10	2525	881.5	23.85	23.92	0.07
	4A	+	12A (0), (1), (2), (3), (4), (5)	QPSK	10	20000	1715.0	1/0	10	5095	737.5	23.85	23.86	0.01
	4A	+	13A (0), (1)	QPSK	10	20000	1715.0	1/0	10	5230	751.0	23.85	23.88	0.03
	4A	+	17A	QPSK	10	20000	1715.0	1/0	10	5790	740.0	23.85	23.87	0.02
	5A	+	2A (0), (1)	QPSK	5	20625	846.5	1/0	20	900	1960.0	23.84	23.87	0.03
	5A	+	4A (0), (1)	QPSK	5	20625	846.5	1/0	20	2175	2132.5	23.84	23.91	0.07
	5A	+	41A	QPSK	5	20625	846.5	1/0	20	40620	2593.0	23.84	23.92	0.08
	12A	+	2A (0), (1), (2)	QPSK	3	23025	700.5	1/14	20	900	1960.0	23.89	24.01	0.12
	12A	+	4A (0), (1), (2), (3), (4), (5)	QPSK	3	23025	700.5	1/14	20	2175	2132.5	23.89	24.02	0.13
	12A	+	66A (0), (1), (2), (3), (4), (5)	QPSK	3	23025	700.5	1/14	20	66786	2145.0	23.89	24.04	0.15
	13A	+	2A (0), (1)	QPSK	10	23230	782.0	1/0	20	900	1960.0	23.65	23.64	-0.01
	13A	+	4A (0), (1)	QPSK	10	23230	782.0	1/0	20	2175	2132.5	23.65	23.69	0.04
	17A	+	2A	QPSK	10	23790	710.0	1/0	10	900	1960.0	23.61	23.62	0.01
	17A	+	4A	QPSK	10	23790	710.0	1/0	10	2175	2132.5	23.61	23.66	0.05
	66A	+	12A (0), (1), (2), (3), (4), (5)	QPSK	10	132022	1715.0	1/0	10	5095	737.5	23.90	23.88	-0.02

#### Note(s):

- Per KDB 941225 D05A LTE Rel. 10 KDB inquiry Sheet: SAR is excluded for Carrier Aggregation when measured power doesn't exceed LTE Release 8 by more than a 1/4 dBm.
- When the same frequency band is used for both contiguous and non-contiguous in DL CA Intra band, power was measured using the configuration with the largest aggregated bandwidth and maximum output power among the contiguous and non-contiguous in DL CA Intra band configurations.

**2) Reduction power results of Hotspot back-off**

Type	LTE CA combinations		PCC (UL)				SCC (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 10 Tx. Power [dBm]	Delta		
	PCC	+	SCC	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)				Channel	Freq. (MHz)
Intra Contiguous	2C		QPSK	10	18900	1880.0	1/0	15	1020	1972.0	20.55	20.58	0.03	
	66C		QPSK	10	132022	1715.0	1/0	15	66606	2127.0	21.74	21.76	0.02	
Intra Non-Contiguous	2A	+	2A	QPSK	10	18900	1880.0	1/0	10	1150	1985.0	20.55	20.53	-0.02
	4A	+	4A (0), (1)	QPSK	10	20000	1715.0	1/0	10	2350	2150.0	21.89	21.87	-0.02
	66A	+	66A	QPSK	10	132022	1715.0	1/0	10	67086	2175.0	21.74	21.70	-0.04
Inter Non-Contiguous	2A	+	5A (0), (1)	QPSK	10	18900	1880.0	1/0	10	2525	881.5	20.55	20.58	0.03
	2A	+	12A (0), (1), (2)	QPSK	10	18900	1880.0	1/0	10	5095	737.5	20.55	20.54	-0.01
	2A	+	13A (0), (1)	QPSK	10	18900	1880.0	1/0	10	5230	751.0	20.55	20.52	-0.03
	2A	+	17A	QPSK	10	18900	1880.0	1/0	10	5790	740.0	20.55	20.54	-0.01
	4A	+	5A (0), (1)	QPSK	10	20000	1715.0	1/0	10	2525	881.5	21.89	21.91	0.02
	4A	+	12A (0), (1), (2), (3), (4), (5)	QPSK	10	20000	1715.0	1/0	10	5095	737.5	21.89	21.93	0.04
	4A	+	13A (0), (1)	QPSK	10	20000	1715.0	1/0	10	5230	751.0	21.89	21.91	0.02
	4A	+	17A	QPSK	10	20000	1715.0	1/0	10	5790	740.0	21.89	21.92	0.03
	66A	+	12A (0), (1), (2), (3), (4), (5)	QPSK	10	132022	1715.0	1/0	10	5095	737.5	21.74	21.75	0.01

**3) Reduction power results of Proximity sensor back-off**

Type	LTE CA combinations		PCC (UL)				SCC (DL)			LTE Rel 8 Tx. Power [dBm]	LTE Rel 10 Tx. Power [dBm]	Delta		
	PCC	+	SCC	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)				Channel	Freq. (MHz)
Intra Contiguous	2C		QPSK	10	18900	1880.0	1/0	15	1020	1972.0	20.54	20.59	0.05	
	66C		QPSK	10	132022	1715.0	1/0	15	66606	2127.0	21.75	21.76	0.01	
Intra Non-Contiguous	2A	+	2A	QPSK	10	18900	1880.0	1/0	10	1150	1985.0	20.54	20.54	0.00
	4A	+	4A (0), (1)	QPSK	10	20000	1715.0	1/0	10	2350	2150.0	22.00	21.96	-0.04
	66A	+	66A	QPSK	10	132022	1715.0	1/0	10	67086	2175.0	21.75	21.69	-0.06
Inter Non-Contiguous	2A	+	5A (0), (1)	QPSK	10	18900	1880.0	1/0	10	2525	881.5	20.54	20.49	-0.05
	2A	+	12A (0), (1), (2)	QPSK	10	18900	1880.0	1/0	10	5095	737.5	20.54	20.50	-0.04
	2A	+	13A (0), (1)	QPSK	10	18900	1880.0	1/0	10	5230	751.0	20.54	20.52	-0.02
	2A	+	17A	QPSK	10	18900	1880.0	1/0	10	5790	740.0	20.54	20.51	-0.03
	4A	+	5A (0), (1)	QPSK	10	20000	1715.0	1/0	10	2525	881.5	22.00	21.98	-0.02
	4A	+	12A (0), (1), (2), (3), (4), (5)	QPSK	10	20000	1715.0	1/0	10	5095	737.5	22.00	22.02	0.02
	4A	+	13A (0), (1)	QPSK	10	20000	1715.0	1/0	10	5230	751.0	22.00	22.01	0.01
	4A	+	17A	QPSK	10	20000	1715.0	1/0	10	5790	740.0	22.00	21.98	-0.02
	66A	+	12A (0), (1), (2), (3), (4), (5)	QPSK	10	132022	1715.0	1/0	10	5095	737.5	21.75	21.73	-0.02

**Note(s):**

1. Per KDB 941225 D05A LTE Rel. 10 KDB inquiry Sheet: SAR is excluded for Carrier Aggregation when measured power doesn't exceed LTE Release 8 by more than a 1/4 dBm.
2. When the same frequency band is used for both contiguous and non-contiguous in DL CA Intra band, power was measured using the configuration with the largest aggregated bandwidth and maximum output power among the contiguous and non-contiguous in DL CA Intra band configurations.



## 9.4. Wi-Fi 2.4 GHz (DTS Band)

### Measured Results

Mode	Data Rate	Ch #	Freq. (MHz)	Meas. Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
802.11b	1 Mbps	1	2412	17.8	18.5	Yes
		6	2437	17.9		
		11	2462	18.1		
		12	2467	9.5	10.5	No
		13	2472	9.4		
802.11g	6 Mbps	1	2412	Not Require	16.5	No
		6	2437			
		11	2462			
		12	2467		10.5	
		13	2472			
802.11n (HT20)	6.5 Mbps	1	2412	Not Require	15.5	No
		6	2437			
		11	2462			
		12	2467		10.5	
		13	2472			

### Note(s):

- SAR is not required for 802.11g/n modes when the adjusted SAR for 802.11b is < 1.2 W/kg.
- For "Not required", SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.
- Additionally, SAR is not required for Channels 12 and 13 because the tune-up limit and the measured output power for these two channels are no greater than those for the default test channels. Refer to §6.3.

### 9.5. Wi-Fi 5 GHz (U-NII Bands)

#### Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduction Pwr		
					Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
5.3 (U-NII 2A)	802.11a	6 Mbps	52	5260	16.3	16.5	Yes	Not Required	13.5	No
			56	5280	16.1					
			60	5300	16.0					
			64	5320	16.0					
	802.11n (HT20)	6.5 Mbps	52	5260	15.8	16.5	No	Not Required	13.5	No
			56	5280	15.7					
			60	5300	15.6					
			64	5320	15.5					
	802.11n (HT40)	13.5 Mbps	54	5270	Not Required	14.5	No	12.9	13.5	Yes
			62	5310				12.6		
5.5 (U-NII 2C)	802.11a	6 Mbps	100	5500	16.4	16.5	Yes	Not Required	13.5	No
			120	5600	16.1					
			124	5620	16.1					
			144	5720	15.9					
	802.11n (HT20)	6.5 Mbps	100	5500	16.0	16.5	No	Not Required	13.5	No
			120	5600	15.6					
			124	5620	15.5					
			144	5720	15.7					
	802.11n (HT40)	13.5 Mbps	102	5510	Not Required	14.5	No	12.9	13.5	Yes
			118	5590				12.8		
126			5630	12.6						
142			5710	12.6						
5.8 (U-NII 3)	802.11a	6 Mbps	149	5745	16.1	16.5	Yes	Not Required	13.5	No
			157	5785	16.1					
			165	5825	16.0					
	802.11n (HT20)	6.5 Mbps	149	5745	15.8	16.5	No	Not Required	13.5	No
			157	5785	15.8					
			165	5825	15.8					
	802.11n (HT40)	13.5 Mbps	151	5755	Not Required	14.5	No	12.7	13.5	Yes
			159	5795				13.0		

#### Note(s):

- For “Not required”, SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
  - ≤ 1.2 W/kg, SAR is not required for UNII band I
  - > 1.2 W/kg, both bands should be tested independently for SAR.

### 9.6. Bluetooth

Maximum tune-up tolerance limit is 9.0 dBm. This power level qualifies for exclusion of SAR testing.

## 10. Measured and Reported (Scaled) SAR Results

### SAR Test Reduction criteria are as follows:

Reported SAR(W/kg) for WWAN= Measured SAR \*Tune-up Scaling Factor

Reported SAR(W/kg) for Wi-Fi and Bluetooth= Measured SAR \* Tune-up scaling factor \* Duty Cycle scaling factor

### KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg or  $2.0$  W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg or  $1.5$  W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg or  $1.0$  W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

### KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

### KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

### KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is  $> 0.8$  W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are  $> 0.8$  W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is  $< 1.45$  W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is  $< 1.45$  W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

**KDB 248227 D01 SAR meas for 802.11:**

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- $> 0.4$  W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions are tested.
  - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
  - When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required test channels are considered.
  - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is  $\leq 1.2$  W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is  $\leq 1.2$  W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

**10.1. GSM 850**

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head (VoIP)	GPRS 3 Slot	Off	0	Left Touch	190	836.6	31.5	30.9	0.172	0.199	1
				Left Tilt	190	836.6	31.5	30.9	0.125	0.144	
				Right Touch	190	836.6	31.5	30.9	0.260	0.300	
				Right Tilt	190	836.6	31.5	30.9	0.120	0.139	
Body-worn	GPRS 3 Slot	Off	15	Rear	128	824.2	31.5	30.9	0.728	0.845	2
					190	836.6	31.5	30.9	0.734	0.848	
					251	848.8	31.5	31.0	0.733	0.830	
				Front	190	836.6	31.5	30.9	0.430	0.497	
Hotspot	GPRS 3 Slot	On	10	Rear	190	836.6	29.0	28.4	0.663	0.755	3
				Front	190	836.6	29.0	28.4	0.346	0.394	
				Edge 2	190	836.6	29.0	28.4	0.244	0.278	
				Edge 3	190	836.6	29.0	28.4	0.236	0.269	
				Edge 4	190	836.6	29.0	28.4	0.040	0.045	

**10.2. GSM1900**

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head (VoIP)	GPRS 4 Slot	Off	0	Left Touch	661	1880.0	25.5	25.5	0.099	0.099	4
				Left Tilt	661	1880.0	25.5	25.5	0.030	0.030	
				Right Touch	661	1880.0	25.5	25.5	0.061	0.061	
				Right Tilt	661	1880.0	25.5	25.5	0.049	0.049	
Body-worn	GPRS 4 Slot	Off	15	Rear	661	1880.0	25.5	25.5	0.428	0.428	5
				Front	661	1880.0	25.5	25.5	0.209	0.209	
Hotspot	GPRS 4 Slot	On	10	Rear	661	1880.0	24.0	23.7	0.617	0.655	6
				Front	661	1880.0	24.0	23.7	0.286	0.304	
				Edge 2	661	1880.0	24.0	23.7	0.043	0.045	
				Edge 3	661	1880.0	24.0	23.7	0.614	0.652	
				Edge 4	661	1880.0	24.0	23.7	0.089	0.094	

### 10.3. W-CDMA Band II

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	Off	0	Left Touch	9400	1880.0	23.0	22.6	0.106	0.116	7
				Left Tilt	9400	1880.0	23.0	22.6	0.033	0.036	
				Right Touch	9400	1880.0	23.0	22.6	0.071	0.077	
				Righttt Tilt	9400	1880.0	23.0	22.6	0.056	0.061	
Bod-worn	Rel 99 RMC	Off	15	Rear	9400	1880.0	23.0	22.6	0.626	0.686	8
				Front	9400	1880.0	23.0	22.6	0.290	0.318	
Hotspot	Rel 99 RMC	On	10	Rear	9262	1852.4	21.0	20.6	0.892	0.969	
					9400	1880.0	21.0	20.6	0.862	0.950	
					9538	1907.6	21.0	20.4	0.817	0.940	
				Front	9400	1880.0	21.0	20.6	0.372	0.410	
					Edge 2	9400	1880.0	21.0	20.6	0.065	0.071
				Edge 3	9262	1852.4	21.0	20.6	0.939	1.020	9
					9400	1880.0	21.0	20.6	0.819	0.902	
					9538	1907.6	21.0	20.4	0.722	0.831	
Edge 4	9400	1880.0	21.0	20.6	0.119	0.131					

### 10.4. W-CDMA Band IV

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	Off	0	Left Touch	1312	1712.4	23.0	23.0	0.139	0.139	10
				Left Tilt	1312	1712.4	23.0	23.0	0.049	0.049	
				Right Touch	1312	1712.4	23.0	23.0	0.110	0.110	
				Righttt Tilt	1312	1712.4	23.0	23.0	0.055	0.055	
Body-worn	Rel 99 RMC	Off	15	Rear	1312	1712.4	23.0	23.0	0.670	0.670	11
				Front	1312	1712.4	23.0	23.0	0.340	0.340	
Hotspot	Rel 99 RMC	On	10	Rear	1312	1712.4	20.5	20.1	0.661	0.726	12
				Front	1312	1712.4	20.5	20.1	0.343	0.377	
				Edge 2	1312	1712.4	20.5	20.1	0.053	0.058	
				Edge 3	1312	1712.4	20.5	20.1	0.544	0.597	
				Edge 4	1312	1712.4	20.5	20.1	0.103	0.113	

### 10.5. W-CDMA Band V

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.		
							Tune-up limit	Meas.	Meas.	Scaled			
Head	Rel 99 RMC	N/A	0	Left Touch	4183	836.6	24.5	23.5	0.111	0.139	13		
				Left Tilt	4183	836.6	24.5	23.5	0.078	0.097			
				Right Touch	4183	836.6	24.5	23.5	0.168	0.210			
				Right Tilt	4183	836.6	24.5	23.5	0.078	0.097			
Body-worn	Rel 99 RMC		N/A	15	Rear	4183	836.6	24.5	23.5	0.414	0.518	14	
					Front	4183	836.6	24.5	23.5	0.240	0.300		
Hotspot	Rel 99 RMC			N/A	10	Rear	4132	826.4	24.5	23.8	0.916	1.081	15
							4183	836.6	24.5	23.5	0.756	0.945	
							4233	846.6	24.5	23.7	0.878	1.065	
						Front	4183	836.6	24.5	23.5	0.323	0.404	
						Edge 2	4183	836.6	24.5	23.5	0.278	0.348	
						Edge 3	4183	836.6	24.5	23.5	0.261	0.326	
Edge 4	4183	836.6			24.5	23.5	0.048	0.060					

### 10.6. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	Off	0	Left Touch	18900	1880.0	1	49	24.0	23.8	0.109	0.115	16
							50	0	22.0	21.8	0.068	0.071	
				Left Tilt	18900	1880.0	1	49	24.0	23.8	0.045	0.047	
							50	0	22.0	21.8	0.026	0.027	
				Right Touch	18900	1880.0	1	49	24.0	23.8	0.078	0.082	
							50	0	22.0	21.8	0.045	0.047	
Right Tilt	18900	1880.0	1	49	24.0	23.8	0.066	0.070					
Body-worn	QPSK	Off	15	Rear	18900	1880.0	1	49	24.0	23.8	0.601	0.631	17
							50	0	22.0	21.8	0.372	0.392	
				Front	18900	1880.0	1	49	24.0	23.8	0.294	0.309	
							50	0	22.0	21.8	0.186	0.196	
Hotspot	QPSK	On	10	Rear	18900	1880.0	1	49	21.0	20.4	0.859	0.991	18
							1	0	21.0	20.5	0.848	0.945	
							50	0	19.0	18.3	0.539	0.638	
				Front	18900	1880.0	1	49	21.0	20.3	0.800	0.951	
							1	0	21.0	20.5	0.391	0.436	
				Edge 2	18900	1880.0	1	0	21.0	20.5	0.056	0.062	
							50	0	19.0	18.3	0.254	0.300	
				Edge 3	18900	1880.0	1	49	21.0	20.4	0.715	0.825	
							1	0	21.0	20.5	0.724	0.807	
							50	0	19.0	18.3	0.459	0.543	
				Edge 4	18900	1880.0	1	49	21.0	20.3	0.706	0.839	
							1	0	21.0	20.5	0.115	0.128	
50	0	19.0	18.3	0.074	0.088								

### 10.7. LTE Band 4 (20MHz Bandwidth)

SAR for LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

### 10.8. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up limit	Meas.	Meas.	Scaled		
Head	QPSK	N/A	0	Left Touch	20525	836.5	1	0	24.4	23.7	0.111	0.130	19	
							25	0	22.4	21.2	0.055	0.072		
				Left Tilt	20525	836.5	1	0	24.4	23.7	0.073	0.085		
							25	0	22.4	21.2	0.038	0.050		
				Right Touch	20525	836.5	1	0	24.4	23.7	0.156	0.183		
							25	0	22.4	21.2	0.083	0.109		
Right Tilt	20525		836.5	1	0	24.4	23.7	0.075	0.088					
				25	0	22.4	21.2	0.040	0.053					
Body-worn	QPSK		N/A	15	Rear	20525	836.5	1	0	24.4	23.7	0.467	0.547	20
								25	0	22.4	21.2	0.258	0.337	
					Front	20525	836.5	1	0	24.4	23.7	0.277	0.325	
								25	0	22.4	21.2	0.145	0.189	
Hotspot	QPSK	N/A		10	Rear	20525	836.5	1	0	24.4	23.7	0.821	0.962	21
								25	0	22.4	21.2	0.459	0.600	
					Front	20525	836.5	1	0	24.4	23.7	0.355	0.416	
								25	0	22.4	21.2	0.195	0.255	
			Edge 2		20525	836.5	1	0	24.4	23.7	0.349	0.409		
							25	0	22.4	21.2	0.189	0.247		
			Edge 3		20525	836.5	1	0	24.4	23.7	0.249	0.292		
							25	0	22.4	21.2	0.139	0.182		
Edge 4	20525	836.5	1	0	24.4	23.7	0.072	0.084						
			25	0	22.4	21.2	0.036	0.047						

### 10.9. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up limit	Meas.	Meas.	Scaled		
Head	QPSK	N/A	0	Left Touch	23095	707.5	1	0	24.0	23.7	0.048	0.051	22	
							25	0	22.0	21.4	0.032	0.036		
				Left Tilt	23095	707.5	1	0	24.0	23.7	0.029	0.031		
							25	0	22.0	21.4	0.019	0.021		
				Right Touch	23095	707.5	1	0	24.0	23.7	0.055	0.059		
							25	0	22.0	21.4	0.036	0.041		
Right Tilt	23095		707.5	1	0	24.0	23.7	0.031	0.033					
				25	0	22.0	21.4	0.021	0.024					
Body-worn	QPSK		N/A	15	Rear	23095	707.5	1	0	24.0	23.7	0.135	0.145	23
								25	0	22.0	21.4	0.088	0.100	
					Front	23095	707.5	1	0	24.0	23.7	0.087	0.093	
								25	0	22.0	21.4	0.057	0.065	
Hotspot	QPSK	N/A		10	Rear	23095	707.5	1	0	24.0	23.7	0.193	0.207	24
								25	0	22.0	21.4	0.124	0.141	
					Front	23095	707.5	1	0	24.0	23.7	0.112	0.120	
								25	0	22.0	21.4	0.072	0.082	
			Edge 2		23095	707.5	1	0	24.0	23.7	0.071	0.076		
							25	0	22.0	21.4	0.047	0.053		
			Edge 3		23095	707.5	1	0	24.0	23.7	0.050	0.053		
							25	0	22.0	21.4	0.032	0.036		
Edge 4	23095	707.5	1	0	24.0	23.7	0.065	0.070						
			25	0	22.0	21.4	0.045	0.051						



### 10.10. LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.	
									Tune-up limit	Meas.	Meas.	Scaled		
Head	QPSK	N/A	0	Left Touch	23230	782.0	1	0	24.0	23.7	0.070	0.076		
							25	0	22.0	21.7	0.040	0.043		
				Left Tilt	23230	782.0	1	0	24.0	23.7	0.049	0.053		
							25	0	22.0	21.7	0.028	0.029		
				Right Touch	23230	782.0	1	0	24.0	23.7	0.078	0.084	25	
							25	0	22.0	21.7	0.045	0.048		
				Right Tilt	23230	782.0	1	0	24.0	23.7	0.044	0.047		
							25	0	22.0	21.7	0.025	0.026		
Body-worn	QPSK		N/A	15	Rear	23230	782.0	1	0	24.0	23.7	0.202	0.219	26
								25	0	22.0	21.7	0.122	0.130	
					Front	23230	782.0	1	0	24.0	23.7	0.149	0.161	
								25	0	22.0	21.7	0.089	0.096	
Hotspot	QPSK	N/A		10	Rear	23230	782.0	1	0	24.0	23.7	0.222	0.240	27
								25	0	22.0	21.7	0.133	0.142	
					Front	23230	782.0	1	0	24.0	23.7	0.147	0.159	
								25	0	22.0	21.7	0.089	0.095	
			Edge 2		23230	782.0	1	0	24.0	23.7	0.205	0.222		
							25	0	22.0	21.7	0.127	0.136		
			Edge 3		23230	782.0	1	0	24.0	23.7	0.063	0.068		
							25	0	22.0	21.7	0.037	0.040		
Edge 4	23230	782.0	1	0	24.0	23.7	0.136	0.147						
			25	0	22.0	21.7	0.082	0.088						

### 10.11. LTE Band 17 (10MHz Bandwidth)

SAR for LTE Band 17 (Frequency Range: 704-716 MHz) is covered by LTE Band 12 (Frequency Range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

**10.12. LTE Band 41 (20MHz Bandwidth)**

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.				
									Tune-up limit	Meas.	Meas.	Scaled					
Head	QPSK		0	Left Touch	41490	2680.0	1	49	24.5	24.2	0.039	0.042					
							50	24	22.5	22.2	0.024	0.026					
				Left Tilt	41490	2680.0	1	49	24.5	24.2	0.032	0.034					
							50	24	22.5	22.2	0.018	0.020					
				Right Touch	41490	2680.0	1	49	24.5	24.2	0.045	0.048	28				
							50	24	22.5	22.2	0.030	0.032					
				Right Tilt	41490	2680.0	1	49	24.5	24.2	0.038	0.040					
							50	24	22.5	22.2	0.023	0.025					
				Body-worn	QPSK		15	Rear	41490	2680.0	1	49	24.5	24.2	0.319	0.341	29
											50	24	22.5	22.2	0.198	0.215	
Front	41490	2680.0	1					49	24.5	24.2	0.224	0.239					
			50					24	22.5	22.2	0.139	0.151					
Hotspot	QPSK	N/A	10	Rear	41490	2680.0	39750	2506.0	1	49	24.5	23.9	0.462	0.531			
							40185	2549.5	1	49	24.5	23.4	0.437	0.559			
							40620	2593.0	1	49	24.5	23.9	0.559	0.636			
							41055	2636.5	1	49	24.5	23.9	0.606	0.698			
							1	49	24.5	24.2	0.635	0.679					
														50		24	22.5
							Front	41490	2680.0	1	49	24.5	24.2	0.447		0.478	
										50	24	22.5	22.2	0.276		0.299	
							Edge 2	41490	2680.0	1	49	24.5	24.2	0.100		0.106	
										50	24	22.5	22.2	0.064		0.069	
				Edge 3	41490	2680.0	39750	2506.0	1	49	24.5	23.9	0.652	0.750			
							40185	2549.5	1	49	24.5	23.4	0.708	0.906			
							40620	2593.0	1	49	24.5	23.9	0.800	0.910			
							41055	2636.5	1	49	24.5	23.9	0.844	0.972			
							1	49	24.5	24.2	0.842	0.900					
														50		24	22.5
				Edge 4	41490	2680.0	1	49	24.5	24.2	0.031	0.033					
							50	24	22.5	22.2	0.019	0.021					

**10.13. LTE Band 66 (20MHz Bandwidth)**

RF Exposure Conditions	Mode	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.		
									Tune-up limit	Meas.	Meas.	Scaled			
Head	QPSK	Off	0	Left Touch	132072	1720.0	1	0	24.0	23.7	0.097	0.103			
							50	0	22.0	21.8	0.057	0.059			
				Left Tilt	132072	1720.0	1	0	24.0	23.7	0.052	0.056			
							50	0	22.0	21.8	0.030	0.031			
				Right Touch	132072	1720.0	1	0	24.0	23.7	0.108	0.115	31		
							50	0	22.0	21.8	0.064	0.066			
Right Tilt	132072	1720.0	1	0	24.0	23.7	0.047	0.050							
			50	0	22.0	21.8	0.028	0.029							
Body-worn	QPSK	Off	15	Rear	132072	1720.0	1	0	24.0	23.7	0.471	0.501	32		
							50	0	22.0	21.8	0.312	0.323			
				Front	132072	1720.0	1	0	24.0	23.7	0.245	0.261			
							50	0	22.0	21.8	0.166	0.172			
Hotspot	QPSK	On	10	Rear	132072	1720.0	1	0	22.0	21.5	0.915	1.023			
							50	0	20.0	19.6	0.622	0.688			
							132322	1745.0	1	0	22.0	21.0		0.845	1.071
				Front	132072	1720.0	1	0	22.0	20.7	0.816	1.093	33		
							50	0	20.0	19.6	0.344	0.381			
							132572	1770.0	1	0	22.0	20.7		0.816	1.093
				Edge 2	132072	1720.0	1	0	22.0	21.5	0.549	0.614			
							50	0	20.0	19.6	0.344	0.381			
				Edge 3	132072	1720.0	1	0	22.0	21.5	0.079	0.088			
							50	0	20.0	19.6	0.048	0.054			
							132072	1720.0	1	0	22.0	21.5		0.803	0.897
				Edge 4	132072	1720.0	50	0	20.0	19.6	0.470	0.520			
							132322	1745.0	1	0	22.0	21.0		0.783	0.993
							132572	1770.0	1	0	22.0	20.7		0.746	0.999
Edge 4	132072	1720.0	1	0	22.0	21.5	0.149	0.167							
			50	0	20.0	19.6	0.093	0.103							

### 10.14. Wi-Fi (DTS Band)

Frequency Band	Mode	RF Exposure Conditions	PWR Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		Duty Cycle (%)	1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.		Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	Head	N/A	0	Left Touch	11	2462.0	0.948	18.5	18.1	99.5%	0.665	0.729	
					Left Tilt	6	2437.0	0.936	18.5	17.9	99.5%	0.717	0.825	
						11	2462.0	1.034	18.5	18.1	99.5%	0.764	0.838	
					Right Touch	11	2462.0	0.779	18.5	18.1	99.5%			
		Righttt Tilt		6	2437.0	1.102	18.5	17.9	99.5%	0.842	0.969			
				11	2462.0	1.108	18.5	18.1	99.5%	0.895	0.981	34		
		Body-worn		Rear	11	2462.0	0.164	18.5	18.1	99.5%	0.134	0.147	35	
				Front	11	2462.0	0.140	18.5	18.1	99.5%				
	Hotspot & Wi-Fi Direct		Rear	11	2462.0	0.315	18.5	18.1	99.5%					
			Front	11	2462.0	0.239	18.5	18.1	99.5%					
	Edge 1	11	2462.0	0.337	18.5	18.1	99.5%	0.277	0.304	36				
	Edge 4	11	2462.0	0.103	18.5	18.1	99.5%							

**Note(s):**

- When the 802.11b reported SAR of the highest measured maximum output power channel is  $\leq 0.8$  W/kg, no further SAR testing is required. If SAR is  $> 0.8$  W/kg and  $\leq 1.2$  W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is  $> 1.2$  W/kg, SAR is required for the third channel.
- SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

### 10.15. Wi-Fi (UNII Bands)

Frequency Band	Mode	RF Exposure Conditions	PWR back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		Duty Cycle	1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.		Meas.	Scaled	
5.3 GHz U-NII 2A	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	54	5270.0	0.219	13.5	12.9	93.4%			
					Left Tilt	54	5270.0	0.163	13.5	12.9	93.4%			
					Right Touch	54	5270.0	0.572	13.5	12.9	93.4%	0.202	0.248	37
					Right Tilt	54	5270.0	0.351	13.5	12.9	93.4%			
	802.11a 6 Mbps	Body-worn	Off	15	Rear	52	5260.0	0.025	16.5	16.3	96.8%			
					Front	52	5260.0	0.074	16.5	16.3	96.8%	0.034	0.037	38

Frequency Band	Mode	RF Exposure Conditions	PWR back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		Duty Cycle	1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.		Meas.	Scaled	
5.5 GHz U-NII 2C	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	102	5510.0	0.333	13.5	12.9	93.4%			
					Left Tilt	102	5510.0	0.317	13.5	12.9	93.4%			
					Right Touch	102	5510.0	1.115	13.5	12.9	93.4%	0.388	0.482	39
					Right Tilt	102	5510.0	0.832	13.5	12.9	93.4%	0.370	0.460	
	802.11a 6 Mbps	Body-worn	Off	15	Rear	100	5500.0	0.052	16.5	16.4	96.8%			
					Front	100	5500.0	0.150	16.5	16.4	96.8%	0.064	0.068	40

Frequency Band	Mode	RF Exposure Conditions	PWR back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		Duty Cycle	1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.		Meas.	Scaled	
5.8 GHz U-NII 3	802.11n HT 40 13.5 Mbps	Head	On	0	Left Touch	159	5795.0	0.411	13.5	13.0	93.4%			
					Left Tilt	159	5795.0	0.415	13.5	13.0	93.4%			
					Right Touch	159	5795.0	1.308	13.5	13.0	93.4%	0.475	0.575	
					Right Tilt	159	5795.0	0.938	13.5	13.0	93.4%	0.483	0.584	41
	802.11a 6 Mbps	Body-worn	Off	15	Rear	149	5745.0	0.060	16.5	16.1	96.8%			
					Front	149	5745.0	0.163	16.5	16.1	96.8%	0.072	0.081	42
		Hotspot	Off	10	Rear	149	5745.0	0.118	16.5	16.1	96.8%			
					Front	149	5745.0	0.291	16.5	16.1	96.8%	0.128	0.144	43
					Edge 1	149	5745.0	0.232	16.5	16.1	96.8%			
					Edge 4	149	5745.0	0.041	16.5	16.1	96.8%			

## 10.16. Bluetooth

### Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ , for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f_{(\text{GHz})}$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [f_{(\text{GHz})}/x] \text{ W/kg}$  for test separation distances  $\leq 50$  mm;  
where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is  $> 50$  mm.

RF Air interface	RF Exposure Conditions	Frequency (GHz)	Max. tune-up tolerance Power		Min. test separation distance (mm)	SAR test exclusion Result*	Estimated 1-g SAR (W/kg)
			(dBm)	(mW)			
Bluetooth	Head	2.480	9.0	8	5	2.5	0.336
	Body-worn	2.480	9.0	8	15	0.8	0.112
	Hotspot	2.480	9.0	8	10	1.3	0.168

#### Conclusion:

\*: The computed value is  $\leq 3$ ; therefore, this qualifies for Standalone SAR test exclusion.

## 11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $<0.8$  or  $2$  W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.8$  or  $2$  W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  or  $3.6$  W/kg ( $\sim 10\%$  from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is  $\geq 1.5$  or  $3.75$  W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

### Peak spatial-average (1g of tissue)

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 12	Hotspot	Rear	No	0.193	N/A	N/A
	LTE Band 13	Hotspot	Rear	No	0.222	N/A	N/A
835	GSM 850	Body	Rear	No	0.734	N/A	N/A
	WCDMA Band V	Hotspot	Rear	Yes	0.916	0.911	1.01
	LTE Band 5	Hotspot	Rear	No	0.821	N/A	N/A
1700	WCDMA Band IV	Body	Rear	No	0.670	N/A	N/A
	LTE Band 66	Hotspot	Rear	Yes	0.915	0.933	1.02
1900	GSM 1900	Hotspot	Rear	No	0.617	N/A	N/A
	WCDMA Band II	Hotspot	Edge 3	Yes	0.939	0.937	1.00
	LTE Band 2	Hotspot	Rear	No	0.859	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Head	Right Tilt	Yes	0.895	0.897	1.00
2600	LTE Band 41	Hotspot	Edge 3	Yes	0.844	0.841	1.00
5300	Wi-Fi 802.11a/n	Head	Right Touch	No	0.202	N/A	N/A
5500	Wi-Fi 802.11a/n	Head	Right Touch	No	0.388	N/A	N/A
5800	Wi-Fi 802.11a/n	Head	Right Tilt	No	0.483	N/A	N/A

### Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not  $> 1.20$ .

## 12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

**SAR<sub>1</sub>** is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

**SAR<sub>2</sub>** is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

**Ri** is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

### Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations	
Head	1	GSM(Voice/GPRS)	+ DTS
	2	GSM(Voice/GPRS)	+ BT
	3	GSM(Voice/GPRS)	+ U-NII
	4	W-CDMA	+ DTS
	5	W-CDMA	+ BT
	6	W-CDMA	+ U-NII
	7	LTE	+ DTS
	8	LTE	+ BT
	9	LTE	+ U-NII
Body-w orn	10	GSM(Voice/GPRS)	+ DTS
	11	GSM(Voice/GPRS)	+ BT
	12	GSM(Voice/GPRS)	+ U-NII
	13	W-CDMA	+ DTS
	14	W-CDMA	+ BT
	15	W-CDMA	+ U-NII
	16	LTE	+ DTS
	17	LTE	+ BT
	18	LTE	+ U-NII
Hotspot	19	GSM(GPRS)	+ DTS
	20	GSM(GPRS)	+ BT
	21	GSM(GPRS)	+ U-NII
	22	WCDMA	+ DTS
	23	WCDMA	+ BT
	24	WCDMA	+ U-NII
	25	LTE	+ DTS
	26	LTE	+ BT
	27	LTE	+ U-NII

Notes:

1. DTS supports Wi-Fi Direct, Hotspot and VoIP.
2. U-NII Wi-Fi Direct, Hotspot and VoIP.
3. GPRS, W-CDMA, LTE supports Hotspot and VoIP.
4. DTS and U-NII Radio cannot transmit simultaneously with Bluetooth Radio.
5. U-NII Radio cannot transmit simultaneously with DTS Radio.
6. BT tethering is consider about each RF exposure conditions

### 12.1. Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	All Position	0.300	0.981	0.584	0.336	1.281	No	0.884	No	0.636	No
Body-worn	All Position	0.848	0.147	0.081	0.112	0.995	No	0.929	No	0.960	No
Hotspot	All Position	1.093	0.304	0.144	0.168	1.397	No	1.237	No	1.261	No

**Conclusion:**

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.



## **Appendixes**

**Refer to separated files for the following appendixes.**

**4788371667-S1V2 FCC Report SAR\_App A\_Photos & Ant. Locations**

**4788371667-S1V2 FCC Report SAR\_App B\_Highest SAR Test Plots**

**4788371667-S1V2 FCC Report SAR\_App C\_System Check Plots**

**4788371667-S1V2 FCC Report SAR\_App D\_SAR Tissue Ingredients**

**4788371667-S1V2 FCC Report SAR\_App E\_Probe Cal. Certificates**

**4788371667-S1V2 FCC Report SAR\_App F\_Dipole Cal. Certificates**

**END OF REPORT**