

# FCC NFC REPORT

## Certification

**Applicant Name:**

SAMSUNG Electronics Co., Ltd.

**Date of Issue:**

March 13, 2019

**Location:**

HCT CO., LTD.,

**Address:**129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA**Report No.:** HCT-RF-1903-FC015**FCC ID:** A3LSMA6060**APPLICANT:** SAMSUNG Electronics Co., Ltd.**Model:** SM-A6060**EUT Type:** Mobile Phone**RF Output Field Strength:** 13.47 dBuV/m @30 m**Frequency of Operation:** 13.5595 MHz**Modulation type:** ASK**FCC Classification:** Low Power Communication Device – Transmitter**FCC Rule Part(s):** FCC Part 15.225 Subpart C

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

**Report prepared by : Jung Ki Lim**  
**Engineer of Telecommunication testing center**

**Approved by : Kwon Jeong**  
**Manager of Telecommunication testing center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1903-FC015	March 13, 2019	- First Approval Report

## **Table of Contents**

<b>1. EUT DESCRIPTION .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>EUT CONFIGURATION .....</b>	<b>5</b>
<b>EUT EXERCISE.....</b>	<b>5</b>
<b>GENERAL TEST PROCEDURES.....</b>	<b>5</b>
<b>DESCRIPTION OF TEST MODES.....</b>	<b>5</b>
<b>3. INSTRUMENT CALIBRATION .....</b>	<b>6</b>
<b>4. FACILITIES AND ACCREDITATIONS.....</b>	<b>6</b>
<b>FACILITIES .....</b>	<b>6</b>
<b>EQUIPMENT.....</b>	<b>6</b>
<b>5. ANTENNA REQUIREMENTS.....</b>	<b>6</b>
<b>6. MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
<b>7. DESCRIPTION OF TESTS .....</b>	<b>8</b>
<b>8. TEST SUMMARY .....</b>	<b>16</b>
<b>9. TEST RESULT .....</b>	<b>17</b>
<b>9.1. Operation within the band 13.110 MHz – 14.010 MHz.....</b>	<b>17</b>
<b>9.2. Radiated Emission 9 kHz – 30 MHz.....</b>	<b>19</b>
<b>9.3. Radiated Emission 30 MHz – 1000 MHz.....</b>	<b>20</b>
<b>9.4. 20 dB Bandwidth.....</b>	<b>21</b>
<b>9.5. Frequency Stability.....</b>	<b>22</b>
<b>9.6. POWERLINE CONDUCTE EMISSIONS.....</b>	<b>26</b>
<b>10. LIST OF TEST EQUIPMENT .....</b>	<b>34</b>
<b>11. ANNEX A_ TEST SETUP PHOTO.....</b>	<b>36</b>

## 1. EUT DESCRIPTION

Model	SM-A6060
EUT Type	Mobile Phone
Power Supply	DC 3.85 V
Battery Information	Model: EB-BA606ABU Type: Li-ion battery
Travel Adapter Information	Model : EP-TA200 Manufacture: DYREL
Frequency of Operation	13.5595 MHz
Transmit Power	13.47 dBuV/m @30 m
Modulation Type	ASK
Antenna Type	FPCB
Date(s) of Tests	January 31, 2019 ~ March 11, 2019

## 2. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

### GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013).

### DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

### 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.  
Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

### 4. FACILITIES AND ACCREDITATIONS

#### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

#### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

\* The antennas of this E.U.T are permanently attached.

\* The E.U.T Complies with the requirement of §15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

## 7. DESCRIPTION OF TESTS

### 7.1. Radiated Test

#### Limit (Operation within the band 13.110 MHz – 14.010 MHz)

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
13.553 – 13.567	15,848	30
13.410 ≤ f ≤ 13.553 13.567 ≤ f ≤ 13.710	334	30
13.110 ≤ f ≤ 13.410 13.710 ≤ f ≤ 14.010	106	30

Note:

1. 15,848 uV/m = 84.0 dBuV/m
2. 334 uV/m = 50.47 dBuV/m
3. 106 uV/m = 40.51 dBuV/m

#### Limit (Radiated Spurious Emissions)


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	**100	3
88-216	**150	3
216-960	**200	3
Above 960	500	3

\*\*:


Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

**Test Configuration**

Below 30 MHz

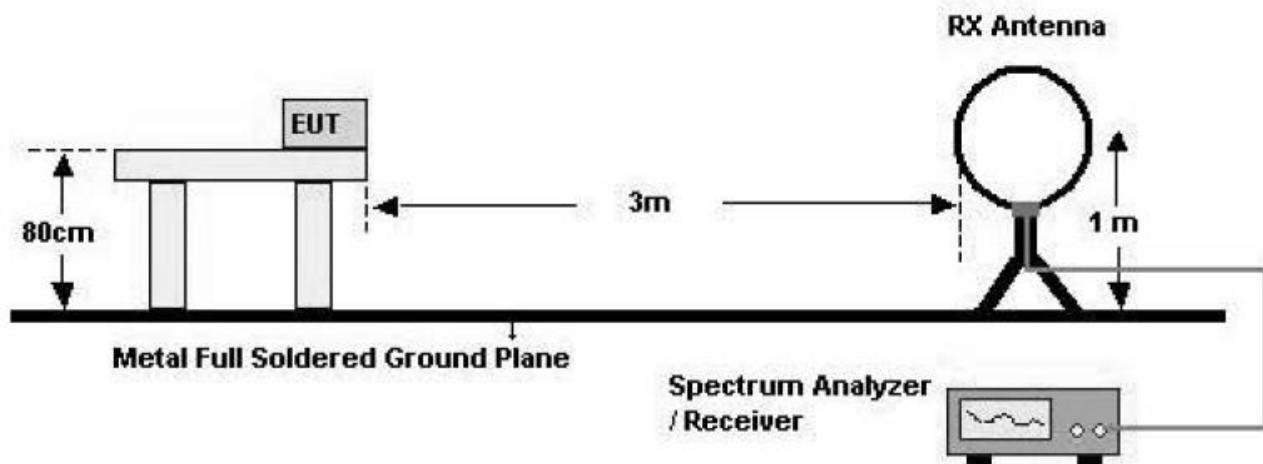

30 MHz - 1 GHz

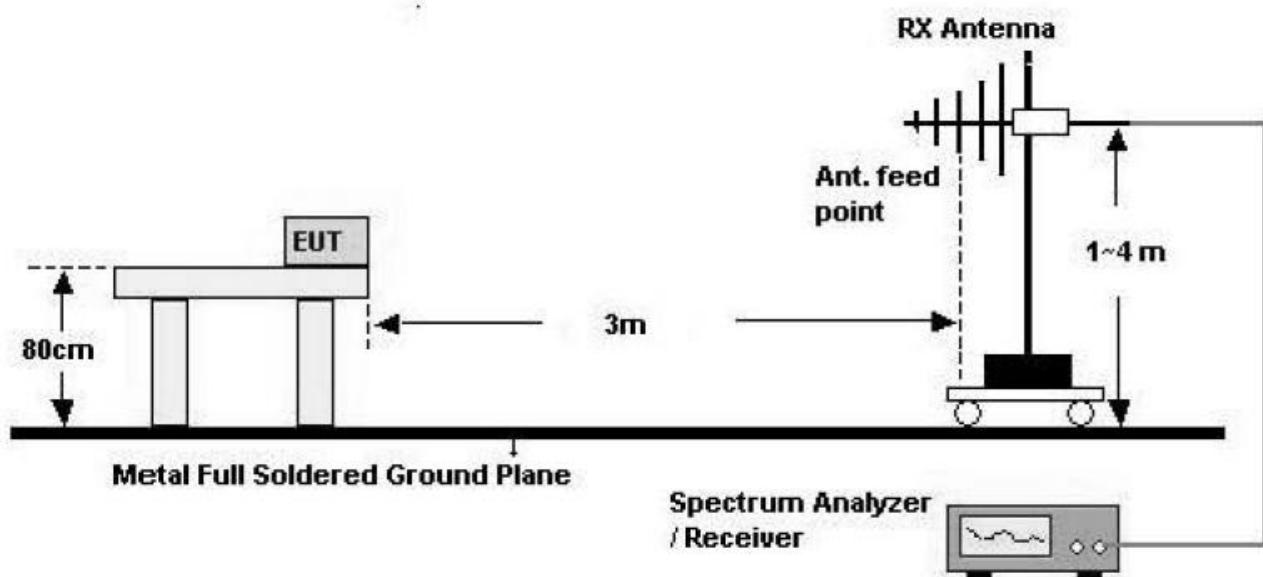

Above 1 GHz

**Test Procedure of inband**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor =  $40 \cdot \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$

Measurement Distance : 3 m (Below 30 MHz)

**7. Spectrum Setting**

- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW  $\geq 3 \cdot \text{RBW}$

8. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

9. The test results for below 30 MHz is correlated to an open site.

The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor( $0.009 \text{ MHz} - 0.490 \text{ MHz}$ ) =  $40 \cdot \log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor( $0.490 \text{ MHz} - 30 \text{ MHz}$ ) =  $40 \cdot \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$

Measurement Distance : 3 m

**8. Spectrum Setting**

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW  $\geq 3 \cdot \text{RBW}$

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. The test results for below 30 MHz is correlated to an open site.


The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

**Test Procedure of Radiated spurious emissions(Above 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
  - Frequency Range = 30 MHz ~ 1 GHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 100 kHz
  - VBW  $\geq$  3\*RBW
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

## 7.2. 20dB Bandwidth

### Test Configuration

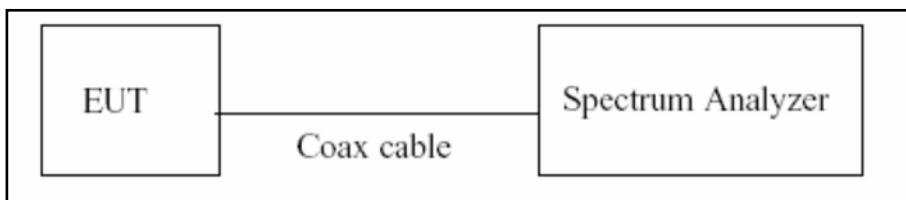

### Test Procedure

The 20 dB bandwidth was measured by using a spectrum analyzer.

- 1) RBW = Auto
- 2) VBW = Auto
- 3) Span = Adequately in the operating Tx.
- 4) Detector = Peak
- 5) Trace mode = Max hold
- 6) Allow the trace to stabilize

Note :


We tested Occupied Bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Frequency Stability

#### Limit

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency.

#### Test Configuration

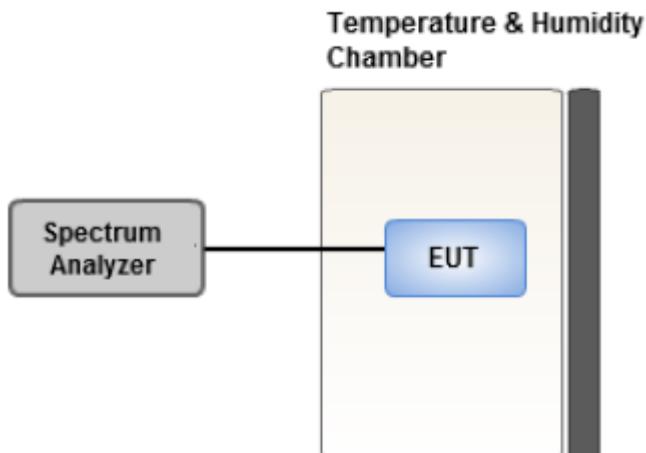

#### Test Procedure

For battery operated equipment, the equipment tests shall be performed using a new battery.

- 1) Turn the EUT OFF and place it inside the environmental temperature chamber.  
For devices that have oscillator heaters, energize only the heater circuit.
- 2) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- 3) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- 4) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency.

#### Note:

- 1) Temperature:  
The temperature is varied from  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  using an environmental chamber.
- 2) Primary Supply Voltage :  
The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment.  
For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

#### 7.4. AC Power line Conducted Emissions

##### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

##### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

##### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
  - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
  - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

##### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## 7.5. Worst case configuration and mode

### Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + external accessories(earphone, etc)
  - Worstcase : Stand alone
2. EUT Axis : Z
3. All type and bitrate were investigated and the worst case results are reported.  
(Worst case : Type A, 106 kbps)

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone+Earphone+Travel Adapter, Stand alone+Travel Adapter
  - Worstcase : Stand alone+Travel Adapter

### 20dB Bandwidth & Frequency Stability

1. All type and bitrate were investigated and the worst case results are reported.  
(Worst case : Type A, 106 kbps)

## 8. TEST SUMMARY

Regulation	Requirement	Result
Part 15.225 (a)	Radiated Electric Field Emissions (13.553MHz to 13.567MHz)	Pass
Part 15.225 (b)	Radiated Electric Field Emissions (13.410 ≤ f ≤ 13.553, 13.567 ≤ f ≤ 13.710)	Pass
Part 15.225 (c)	Radiated Electric Field Emissions (13.110 ≤ f ≤ 13.410, 13.710 ≤ f ≤ 14.010)	Pass
Part 15.209	Radiated Electric Field Emissions (9kHz to 30MHz)	Pass
Part 15.209	Radiated Electric Field Emissions (30MHz to 1GHz)	Pass
Part 15.225 (e)	Frequency Stability	Pass
Part 15.207	AC power conducted emissions (150kHz to 30MHz)	Pass
Part 15.215 (c)	20 dB Bandwidth	Pass

## 9. TEST RESULT


### 9.1. Operation within the band 13.110 MHz – 14.010 MHz

Measured Frequency Range :						
13.553 MHz-13.567 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor +Cable Loss (dB/m)	Distance Correction (dB)	Total (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.5595	33.42	20.05	-40	13.47	84	70.53
13.5598	28.88	20.05	-40	8.93	84	75.07

Measured Frequency Range :						
13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor +Cable Loss (dB/m)	Distance Correction (dB)	Total (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.4555	22.09	20.05	-40	2.14	50.47	48.33
13.6654	23.71	20.05	-40	3.76	50.47	46.71

Measured Frequency Range :						
13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz						
Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor +Cable Loss (dB/m)	Distance Correction (dB)	Total (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
13.3488	19.23	20.05	-40	-0.72	40.51	41.23
13.7718	19.04	20.05	-40	-0.91	40.51	41.42

**Test Plot**

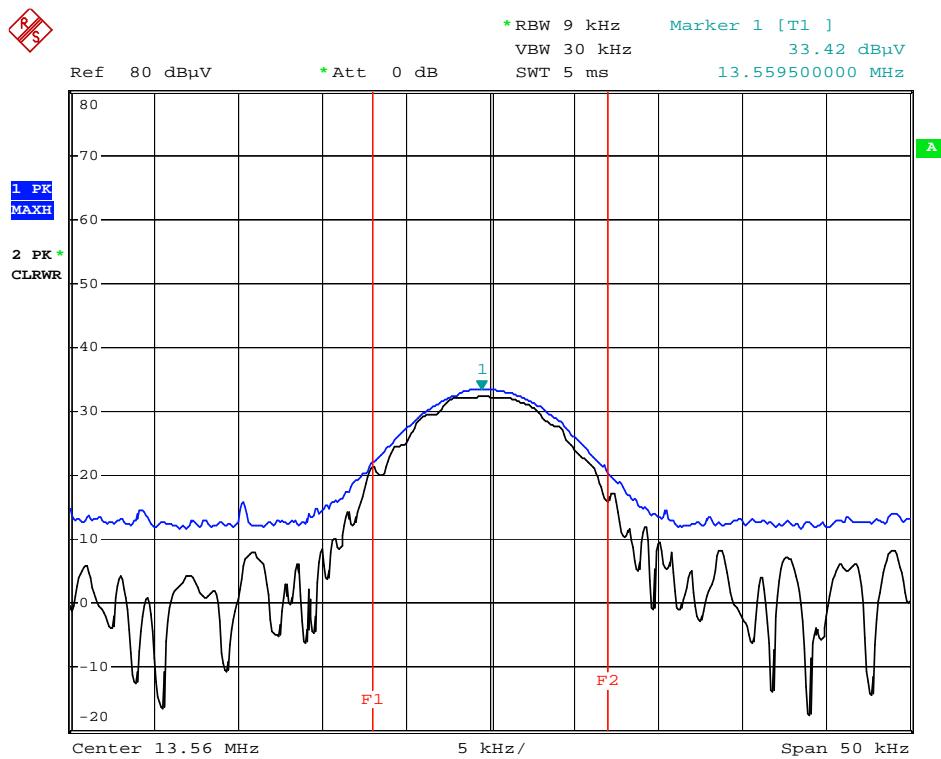

Date: 22.FEB.2019 14:03:42

**Note:**

Plot of worst case are only reported.

**9.2. Radiated Emission 9 kHz – 30 MHz**

Measured Frequency Range :

9 kHz - 30 MHz

Frequency (MHz)	Read Level (dBuV/m)@3m	Ant.Factor +Cable Loss (dB/m)	Distance Correction (dB)	Total (dBuV/m)@30m	Limit (dBuV/m)@30m	Margin (dB)
10.5162	12.02	20.05	-40	-7.93	29.54	37.47
14.0739	12.15	20.05	-40	-7.8	29.54	37.34
27.4735	10.61	20.17	-40	-9.22	29.54	38.76
27.1537	8.85	20.17	-40	-10.98	29.54	40.52


### 9.3. Radiated Emission 30 MHz – 1000 MHz

Measured Frequency Range :							
30 MHz - 1000 MHz							
Frequency (MHz)	Read Level (dB $\mu$ V/m) @3m	Ant.Factor (dB/m)	Cable Loss (dB)	Ant. Pol (H/V)	Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
*38.0415	13.16	18.5	0.49	H	32.15	40	7.85
51.548	11.69	18.2	0.56	H	30.45	40	9.55
99.856	12.67	15.5	0.78	V	28.95	40	11.05
*118.164	12.23	17.7	0.86	H	30.79	43.5	12.71
*131.604	12.21	18.35	0.91	H	31.47	43.5	12.03
158.516	12.27	18.8	0.98	V	32.05	43.5	11.45

**Note:**

1. '\*' is the result for restricted band.

**Test Plot**

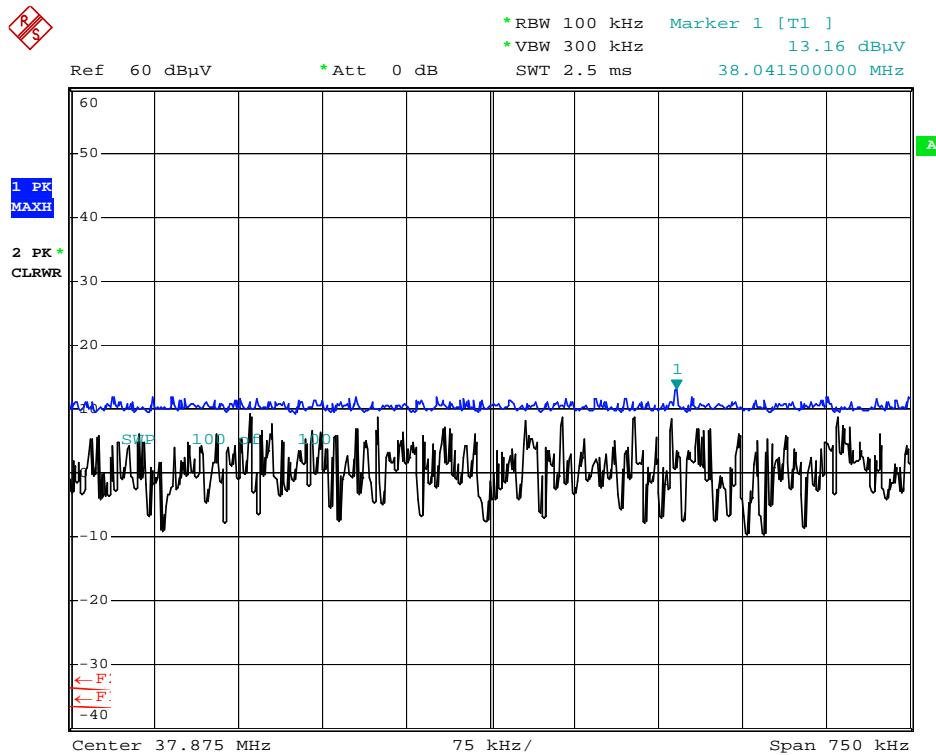

Date: 22.FEB.2019 14:49:58

**Note:**

Plot of worst case are only reported

#### 9.4. 20 dB Bandwidth



## 9.5. Frequency Stability

### Startup

OPERATING FREQUENCY: 13.56 MHz  
REFERENCE VOLTAGE: 3.85 VDC  
DEVIATION LIMIT: 0.01 % = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560095	95	0.0007006
100%		-10	13.560084	84	0.0006195
100%		0	13.560079	79	0.0005826
100%		+10	13.560073	73	0.0005383
100%		+20(Ref.)	13.560067	67	0.0004941
100%		+30	13.560061	61	0.0004499
100%		+40	13.560059	59	0.0004351
100%		+50	13.560048	48	0.0003540
High	4.4	+20	13.560058	58	0.0004277
End. Point	3.6	+20	13.560073	73	0.0005383

**2 minutes**OPERATING FREQUENCY: 13.56 MHzREFERENCE VOLTAGE: 3.85 VDCDEVIATION LIMIT: 0.01 % = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560092	92	0.0006785
100%		-10	13.560085	85	0.0006268
100%		0	13.560080	80	0.0005900
100%		+10	13.560075	75	0.0005531
100%		+20(Ref.)	13.560068	68	0.0005015
100%		+30	13.560066	66	0.0004867
100%		+40	13.560061	61	0.0004499
100%		+50	13.560055	55	0.0004056
High	4.4	+20	13.560059	59	0.0004351
End. Point	3.6	+20	13.560063	63	0.0004646

**5 minutes**

OPERATING FREQUENCY: 13.56 MHz  
REFERENCE VOLTAGE: 3.85 VDC  
DEVIATION LIMIT: 0.01 % = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560086	86	0.0006342
100%		-10	13.560073	73	0.0005383
100%		0	13.560070	70	0.0005162
100%		+10	13.560065	65	0.0004794
100%		+20(Ref.)	13.560051	51	0.0003761
100%		+30	13.560050	50	0.0003687
100%		+40	13.560045	45	0.0003319
100%		+50	13.560059	59	0.0004351
High	4.4	+20	13.560063	63	0.0004646
End. Point	3.6	+20	13.560060	60	0.0004425

**10 minutes**

OPERATING FREQUENCY: 13.56 MHz  
REFERENCE VOLTAGE: 3.85 VDC  
DEVIATION LIMIT: 0.01 % = 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.85	-20	13.560088	88	0.0006490
100%		-10	13.560080	80	0.0005900
100%		0	13.560078	78	0.0005752
100%		+10	13.560071	71	0.0005236
100%		+20(Ref.)	13.560066	66	0.0004867
100%		+30	13.560058	58	0.0004277
100%		+40	13.560051	51	0.0003761
100%		+50	13.560043	43	0.0003171
High	4.4	+20	13.560049	49	0.0003614
End. Point	3.6	+20	13.560053	53	0.0003909

## 9.6. POWERLINE CONDUCTE EMISSIONS

### Conducted Emissions (Line 1)

Test


1 / 2

## HCT TEST Report

### Common Information

EUT: SM-A6060  
Manufacturer: SAMSUNG  
Test Site: SHIELD ROOM  
Operating Conditions: NFC MODE\_TERMINATION

FCC CLASS B\_Exten Cable

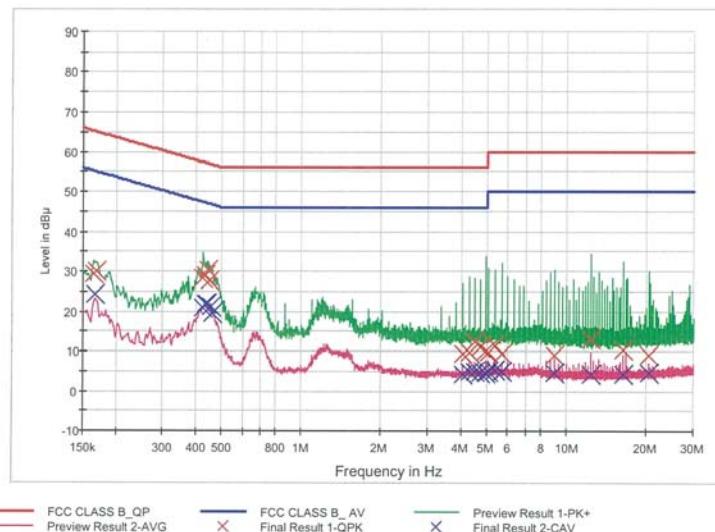

### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.164000	29.3	9.000	Off	L1	9.7	36.0	65.3
0.168000	30.1	9.000	Off	L1	9.7	34.9	65.1
0.426000	28.3	9.000	Off	L1	9.7	29.0	57.3
0.436000	28.9	9.000	Off	L1	9.7	28.2	57.1
0.444000	30.5	9.000	Off	L1	9.7	26.5	57.0
0.448000	27.7	9.000	Off	L1	9.7	29.3	56.9
4.062000	9.3	9.000	Off	L1	10.0	46.7	56.0
4.290000	9.8	9.000	Off	L1	10.0	46.2	56.0
4.520000	12.5	9.000	Off	L1	10.0	43.5	56.0
4.748000	10.9	9.000	Off	L1	10.0	45.1	56.0
4.976000	10.0	9.000	Off	L1	10.0	46.0	56.0
5.094000	9.6	9.000	Off	L1	10.0	50.4	60.0
5.396000	11.2	9.000	Off	L1	10.0	48.8	60.0
5.698000	9.5	9.000	Off	L1	10.1	50.5	60.0
9.022000	9.0	9.000	Off	L1	10.2	51.0	60.0
12.372000	13.0	9.000	Off	L1	10.3	47.0	60.0
16.328000	10.5	9.000	Off	L1	10.5	49.5	60.0
20.286000	9.0	9.000	Off	L1	10.6	51.0	60.0

2019-03-11

오전 10:13:39

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.166000	24.2	9.000	Off	L1	9.7	31.0	55.2
0.424000	21.0	9.000	Off	L1	9.7	26.4	47.4
0.436000	21.8	9.000	Off	L1	9.7	25.3	47.1
0.442000	22.0	9.000	Off	L1	9.7	25.0	47.0
0.454000	21.2	9.000	Off	L1	9.8	25.6	46.8
0.462000	19.6	9.000	Off	L1	9.8	27.0	46.7
4.062000	4.4	9.000	Off	L1	10.0	41.6	46.0
4.290000	5.0	9.000	Off	L1	10.0	41.0	46.0
4.520000	4.8	9.000	Off	L1	10.0	41.2	46.0
4.748000	4.6	9.000	Off	L1	10.0	41.4	46.0
4.976000	4.7	9.000	Off	L1	10.0	41.3	46.0
5.094000	4.8	9.000	Off	L1	10.0	45.2	50.0
5.396000	5.4	9.000	Off	L1	10.0	44.6	50.0
5.698000	5.0	9.000	Off	L1	10.1	45.0	50.0
9.022000	4.5	9.000	Off	L1	10.2	45.5	50.0
12.372000	4.2	9.000	Off	L1	10.3	45.8	50.0
16.328000	4.4	9.000	Off	L1	10.5	45.6	50.0
20.286000	4.5	9.000	Off	L1	10.6	45.5	50.0

2019-03-11

오전 10:13:39

**Conducted Emissions (Line 2)**


Test

1 / 2

**HCT TEST Report****Common Information**

EUT: SM-A6060  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: NFC MODE\_TERMINATION

FCC CLASS B\_Exten Cable

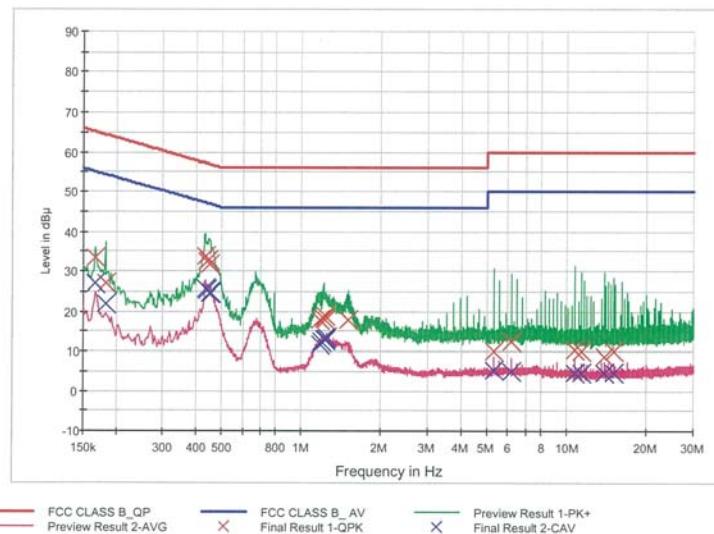**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.166000	33.2	9.000	Off	N	9.8	31.9	65.2
0.182000	27.0	9.000	Off	N	9.8	37.4	64.4
0.434000	33.6	9.000	Off	N	9.9	23.6	57.2
0.440000	32.4	9.000	Off	N	9.9	24.7	57.1
0.446000	32.7	9.000	Off	N	9.9	24.2	56.9
0.450000	31.7	9.000	Off	N	9.9	25.2	56.9
1.170000	17.8	9.000	Off	N	10.0	38.2	56.0
1.212000	18.1	9.000	Off	N	10.0	37.9	56.0
1.216000	18.2	9.000	Off	N	10.0	37.8	56.0
1.228000	18.7	9.000	Off	N	10.0	37.3	56.0
1.236000	17.8	9.000	Off	N	10.0	38.2	56.0
1.504000	17.7	9.000	Off	N	10.1	38.3	56.0
5.290000	9.9	9.000	Off	N	10.2	50.1	60.0
6.194000	12.3	9.000	Off	N	10.3	47.7	60.0
10.742000	10.4	9.000	Off	N	10.5	49.6	60.0
11.352000	10.1	9.000	Off	N	10.5	49.9	60.0
13.786000	8.8	9.000	Off	N	10.6	51.2	60.0
15.004000	10.0	9.000	Off	N	10.7	50.0	60.0

2019-03-11

오전 10:22:31

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.166000	26.8	9.000	Off	N	9.8	28.4	55.2
0.182000	21.9	9.000	Off	N	9.8	32.4	54.4
0.434000	25.7	9.000	Off	N	9.9	21.5	47.2
0.442000	25.2	9.000	Off	N	9.9	21.8	47.0
0.450000	24.5	9.000	Off	N	9.9	22.4	46.9
0.454000	24.6	9.000	Off	N	9.9	22.2	46.8
1.170000	11.7	9.000	Off	N	10.0	34.3	46.0
1.190000	12.3	9.000	Off	N	10.0	33.7	46.0
1.222000	13.0	9.000	Off	N	10.0	33.0	46.0
1.230000	12.8	9.000	Off	N	10.0	33.2	46.0
1.236000	13.0	9.000	Off	N	10.0	33.0	46.0
1.244000	13.3	9.000	Off	N	10.0	32.7	46.0
5.290000	5.3	9.000	Off	N	10.2	44.7	50.0
6.194000	5.0	9.000	Off	N	10.3	45.0	50.0
10.742000	4.4	9.000	Off	N	10.5	45.6	50.0
11.352000	4.5	9.000	Off	N	10.5	45.5	50.0
13.786000	4.5	9.000	Off	N	10.6	45.5	50.0
15.004000	4.5	9.000	Off	N	10.7	45.5	50.0

2019-03-11

오전 10:22:31

**Conducted Emissions (Line 3)**


Test

1 / 2

**HCT TEST Report****Common Information**

EUT: SM-A6060  
Manufacturer: SAMSUNG  
Test Site: SHIELD ROOM  
Operating Conditions: NFC MODE\_UNTERMINATION

FCC CLASS B\_Exten Cable

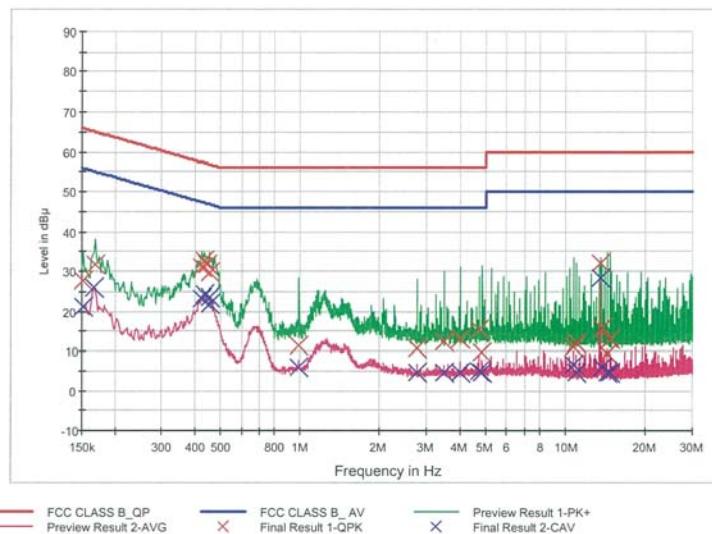**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	27.8	9.000	Off	L1	9.7	38.1	65.9
0.168000	31.7	9.000	Off	L1	9.7	33.4	65.1
0.426000	30.9	9.000	Off	L1	9.7	26.5	57.3
0.436000	32.8	9.000	Off	L1	9.7	24.4	57.1
0.446000	31.5	9.000	Off	L1	9.7	25.4	56.9
0.456000	29.6	9.000	Off	L1	9.8	27.2	56.8
0.990000	11.2	9.000	Off	L1	9.8	44.8	56.0
2.764000	10.8	9.000	Off	L1	9.9	45.2	56.0
3.500000	12.2	9.000	Off	L1	9.9	43.8	56.0
3.992000	13.1	9.000	Off	L1	10.0	42.9	56.0
4.728000	15.4	9.000	Off	L1	10.0	40.6	56.0
4.866000	9.5	9.000	Off	L1	10.0	46.5	56.0
10.684000	11.2	9.000	Off	L1	10.3	48.8	60.0
10.988000	12.0	9.000	Off	L1	10.3	48.0	60.0
13.560000	32.2	9.000	Off	L1	10.4	27.8	60.0
13.686000	15.7	9.000	Off	L1	10.4	44.4	60.0
14.334000	9.3	9.000	Off	L1	10.4	50.7	60.0
14.638000	13.1	9.000	Off	L1	10.4	46.9	60.0

2019-03-11

오전 10:02:55

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	21.2	9.000	Off	L1	9.7	34.7	55.9
0.166000	26.1	9.000	Off	L1	9.7	29.1	55.2
0.426000	23.1	9.000	Off	L1	9.7	24.2	47.3
0.436000	24.1	9.000	Off	L1	9.7	23.0	47.1
0.454000	23.5	9.000	Off	L1	9.8	23.3	46.8
0.458000	22.0	9.000	Off	L1	9.8	24.8	46.7
0.990000	5.9	9.000	Off	L1	9.8	40.1	46.0
2.764000	4.5	9.000	Off	L1	9.9	41.5	46.0
3.500000	4.6	9.000	Off	L1	9.9	41.4	46.0
3.992000	4.5	9.000	Off	L1	10.0	41.5	46.0
4.728000	4.8	9.000	Off	L1	10.0	41.2	46.0
4.866000	4.6	9.000	Off	L1	10.0	41.4	46.0
10.684000	6.5	9.000	Off	L1	10.3	43.5	50.0
10.988000	4.6	9.000	Off	L1	10.3	45.4	50.0
13.560000	28.3	9.000	Off	L1	10.4	21.7	50.0
13.686000	6.0	9.000	Off	L1	10.4	44.0	50.0
14.334000	4.4	9.000	Off	L1	10.4	45.6	50.0
14.638000	4.6	9.000	Off	L1	10.4	45.4	50.0

2019-03-11

오전 10:02:55

**Conducted Emissions (Line 4)**


Test

1 / 2

**HCT TEST Report****Common Information**

EUT: SM-A6060  
Manufacturer: SAMSUNG  
Test Site: SHIELD ROOM  
Operating Conditions: NFC MODE\_UNTERMINATION

FCC CLASS B\_Exten Cable

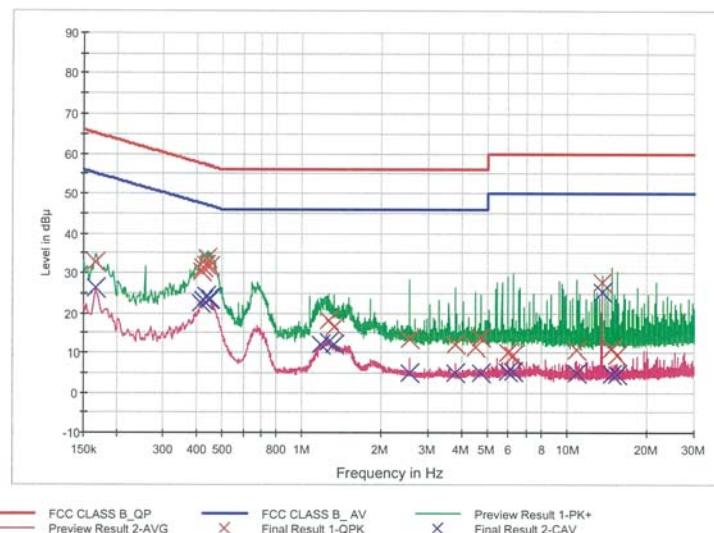**Final Result 1**

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.166000	32.6	9.000	Off	N	9.8	32.5	65.2
0.420000	30.2	9.000	Off	N	9.9	27.3	57.4
0.426000	31.4	9.000	Off	N	9.9	25.9	57.3
0.436000	32.1	9.000	Off	N	9.9	25.1	57.1
0.442000	33.9	9.000	Off	N	9.9	23.2	57.0
0.450000	31.8	9.000	Off	N	9.9	25.1	56.9
1.260000	18.2	9.000	Off	N	10.0	37.8	56.0
1.320000	16.6	9.000	Off	N	10.0	39.4	56.0
2.540000	13.3	9.000	Off	N	10.1	42.7	56.0
3.768000	12.2	9.000	Off	N	10.2	43.8	56.0
4.502000	11.2	9.000	Off	N	10.2	44.8	56.0
4.730000	13.6	9.000	Off	N	10.2	42.4	56.0
5.970000	9.9	9.000	Off	N	10.3	50.1	60.0
6.270000	9.4	9.000	Off	N	10.3	50.6	60.0
10.806000	10.8	9.000	Off	N	10.5	49.2	60.0
13.560000	27.6	9.000	Off	N	10.6	32.4	60.0
14.754000	11.1	9.000	Off	N	10.7	48.9	60.0
15.362000	9.2	9.000	Off	N	10.7	50.8	60.0

2019-03-11

오전 9:51:00

Test

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.166000	26.4	9.000	Off	N	9.8	28.8	55.2
0.414000	22.6	9.000	Off	N	9.9	25.0	47.6
0.424000	23.2	9.000	Off	N	9.9	24.1	47.4
0.436000	24.2	9.000	Off	N	9.9	22.9	47.1
0.446000	23.6	9.000	Off	N	9.9	23.3	46.9
0.450000	23.7	9.000	Off	N	9.9	23.2	46.9
1.172000	12.0	9.000	Off	N	10.0	34.0	46.0
1.260000	12.8	9.000	Off	N	10.0	33.2	46.0
1.320000	11.9	9.000	Off	N	10.0	34.1	46.0
2.540000	5.1	9.000	Off	N	10.1	40.9	46.0
3.768000	4.8	9.000	Off	N	10.2	41.2	46.0
4.730000	5.0	9.000	Off	N	10.2	41.0	46.0
5.970000	5.2	9.000	Off	N	10.3	44.8	50.0
6.270000	5.2	9.000	Off	N	10.3	44.8	50.0
10.806000	4.8	9.000	Off	N	10.5	45.2	50.0
13.560000	25.2	9.000	Off	N	10.6	24.8	50.0
14.754000	4.5	9.000	Off	N	10.7	45.5	50.0
15.362000	4.7	9.000	Off	N	10.7	45.3	50.0

2019-03-11

오전 9:51:00

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/27/2018	Annual	100033
ESPAC	SU-642 /Temperature Chamber	03/30/2018	Annual	0093008124
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY52090906
Agilent	N9030A / Signal Analyzer	01/10/2019	Annual	MY49431210
Rohde & Schwarz	OSP 120 / Power Measurement Set	07/26/2018	Annual	101231
Agilent	N1911A / Power Meter	04/16/2018	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/16/2018	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2018	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/07/2018	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/26/2018	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/10/2018	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	HFH2-Z2 / Loop Antenna	06/15/2017	Biennial	100341
Schwarzbeck	VULB 9168 / Hybrid Antenna	04/06/2017	Biennial	760
Schwarzbeck	VULB 9160 / TRILOG Antenna	08/09/2018	Biennial	9160-3368
Schwarzbeck	BBHA 9120D / Horn Antenna	05/02/2017	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/03/2018	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/28/2018	Annual	101068-SZ
Agilent	N9020A / Signal Analyzer	06/08/2018	Annual	MY51110085
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	06/07/2018	Annual	8
Wainwright Instruments	WHKX7.0/18G-8SS / High Pass Filter	05/09/2018	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/29/2018	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/07/2018	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	07/17/2018	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	07/10/2018	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/10/2018	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/29/2018	Annual	25956

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1903-FC009-P
2	HCT-RF-1903-FC010-P
3	HCT-RF-1903-FC011-P
4	HCT-RF-1903-FC012-P
5	HCT-RF-1903-FC013-P
6	HCT-RF-1903-FC014-P
7	HCT-RF-1903-FC015-P