



CERTIFICATION TEST REPORT

Report Number. : 12737383-E4V2

Applicant : Samsung Electronics Co., Ltd.
129 Samsung-Ro, Yeongtong-Gu,
Suwon-Si, Gyeonggi-Do, 16677, Korea

Model : SM-A7050

FCC ID : A3LSMA705F0

EUT Description : GSM/CDMA/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac,
ANT+ and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:
March 29, 2019

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538 U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	3/27/2019	Initial Issue	
V2	3/29/2019	Updated Section 3	Steven Tran

1. ATTESTATION OF TEST RESULTS	5
2. INTRODUCTION OF TEST DATA REUSE.....	6
2.1. INTRODUCTION	6
2.2. DIFFERENCES.....	6
2.3. SPOT CHECK VERIFICATION RESULTS SUMMARY.....	6
2.4. REFERENCE DETAIL	11
3. TEST METHODOLOGY	12
4. FACILITIES AND ACCREDITATION	12
5. CALIBRATION AND UNCERTAINTY	13
5.1. MEASURING INSTRUMENT CALIBRATION	13
5.2. SAMPLE CALCULATION	13
5.3. MEASUREMENT UNCERTAINTY	13
6. EQUIPMENT UNDER TEST	14
6.1. EUT DESCRIPTION	14
6.2. MAXIMUM OUTPUT POWER.....	14
6.3. DESCRIPTION OF AVAILABLE ANTENNAS	14
6.4. SOFTWARE AND FIRMWARE.....	14
6.5. WORST-CASE CONFIGURATION AND MODE	14
6.6. DESCRIPTION OF TEST SETUP.....	15
7. MEASUREMENT METHOD.....	18
8. TEST AND MEASUREMENT EQUIPMENT	19
9. ANTENNA PORT TEST RESULTS	20
9.1. ON TIME AND DUTY CYCLE.....	20
9.2. 6 dB BANDWIDTH.....	22
9.2.1. 802.11b MODE	23
9.2.2. 802.11g MODE	25
9.2.3. 802.11n HT20 MODE	27
9.3. OUTPUT POWER.....	29
9.3.1. 802.11b MODE	30
9.3.2. 802.11g MODE	31
9.3.3. 802.11n HT20 MODE	32
9.4. POWER SPECTRAL DENSITY	33
9.4.1. 802.11b MODE	34
9.4.2. 802.11g MODE	36
9.4.3. 802.11n HT20 MODE	38
9.5. CONDUCTED SPURIOUS EMISSIONS.....	40
9.5.1. 802.11b MODE	41

9.5.2.	802.11g MODE	43
9.5.3.	802.11n HT20 MODE	45
10.	RADIATED TEST RESULTS.....	47
10.1.	TRANSMITTER ABOVE 1 GHz.....	49
10.1.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND	49
10.1.2.	TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND	63
10.1.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND.....	79
10.2.	WORST CASE BELOW 30MHZ.....	95
10.3.	WORST CASE BELOW 1 GHZ (China Adapter)	96
10.4.	WORST CASE BELOW 1 GHZ (Hong Kong Adapter).....	98
10.5.	WORST CASE 18-26 GHZ.....	100
11.	AC POWER LINE CONDUCTED EMISSIONS	102
11.1.	AC Power Line Norm (China Adapter).....	103
11.2.	AC Power Line Norm (Hong Kong Adapter)	105
12.	SETUP PHOTOS.....	107
12.1.	SM-A705FN/DS (ORIGINAL)	107
12.2.	SM-A7050(Spot Check).....	111

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Samsung Electronics Co., Ltd.
129 Samsung-Ro, Yeongtong-Gu,
Suwon-Si, Gyeonggi-Do, 16677, Korea

EUT DESCRIPTION: GSM/CMA/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac,
ANT+ and
NFC

MODEL: SM-A7050

SERIAL NUMBER: Radiated (Original):R38M10NPF1Y, R38M10CSH8Z
Conducted (Original):R38M10CT1JE
Radiated (Spot Check):R38M207598Z, R38M207599M

DATE TESTED: FEBRUARY 18 to MARCH 26, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.

Approved & Released For
UL Verification Services Inc. By:



Dan Corona
Operations Leader
Consumer Technology Division
UL Verification Services Inc.

Reviewed By:



Steven Tran
Project Engineer
Consumer Technology Division
UL Verification Services Inc.

2. INTRODUCTION OF TEST DATA REUSE

2.1. INTRODUCTION

According to the manufacturer, FCC ID: A3LSMA705FN and FCC ID: A3LSMA7050 non-licensed radios are electrically identical. The FCC ID: A3LSMA705FN test data shall remain representative of FCC ID: A3LSMA7050.

The applicant takes full responsibility that the test data as referenced in this section represents compliance for this FCC ID.

2.2. DIFFERENCES

The FCC ID: A3LSMA705FN, shares the same enclosure and circuit board as FCC ID: A3LSMA7050. The DTS WLAN antennas and surrounding circuitry and layout are identical between two models.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMG705FN remains representative of FCC ID: A3LSMA7050. The test data of FCC ID: A3LSMG705FN being submitted for this application to cover DTS WLAN features.

2.3. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device A3LSMA7050 for radiated harmonic spurious and radiated band-edge. The data from the application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the summary below.


A3LSMA7050 SPOT CHECK RESULTS										
Technology	Mode	Test Item	Channel	Measured	Original model		Spot check model		Delta (dB)	
					SM-A705FN/DS		SM-A7050			
					A3LSMA705FN		A3LSMA7050			
				Frequency	Peak	Ave	Peak	Ave	Peak	Ave
DTS	11n HT20	RBE	11	2484MHz	65.58	51.86	54.69	42.15	-10.89	-9.71
	11b	RSE	11	4924MHz	45.98	41.69	43.46	35.79	-2.52	-5.9

Comparison of the models, upper deviation is within 3dB range and all tests are under FCC Technical Limits.

SPOT CHECK DATA

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

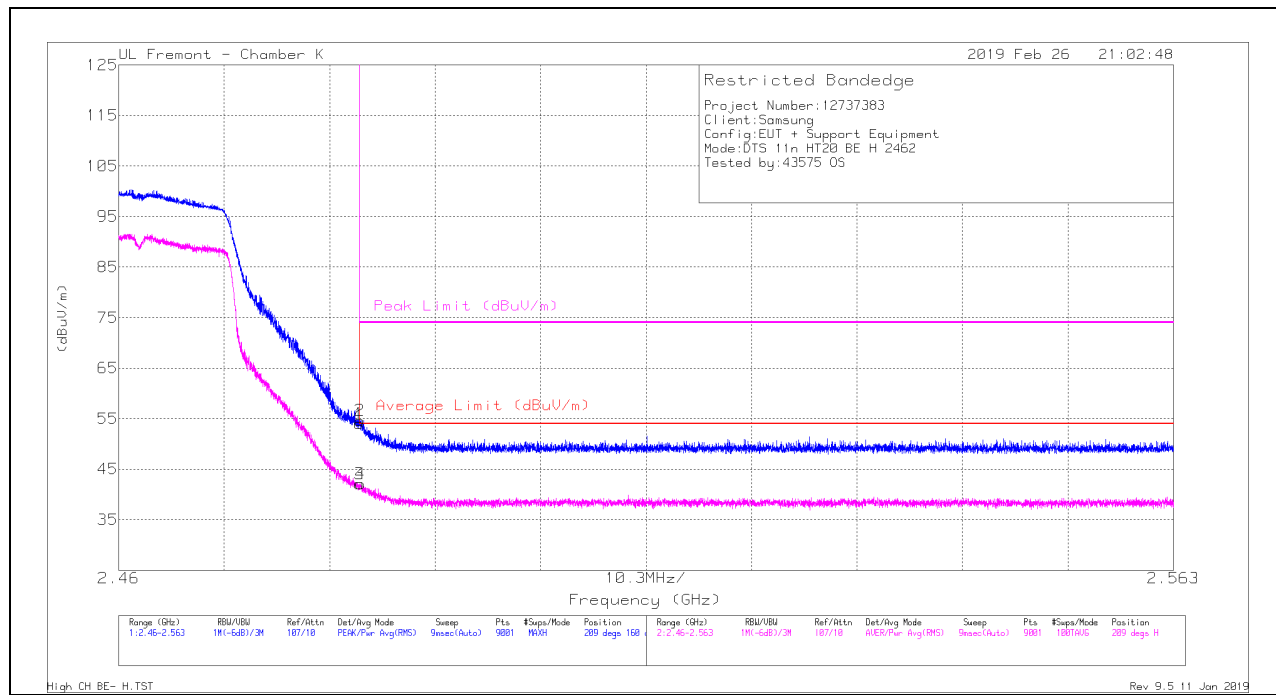

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/CbI/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.49	Pk	32.3	-24.8	0	53.99	-	-	74	-20.01	209	160	H
2	* 2.484	47.19	Pk	32.3	-24.8	0	54.69	-	-	74	-19.31	209	160	H
3	* 2.484	34.55	RMS	32.3	-24.8	.1	42.15	54	-11.85	-	-	209	160	H
4	* 2.484	34.53	RMS	32.3	-24.8	.1	42.13	54	-11.87	-	-	209	160	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

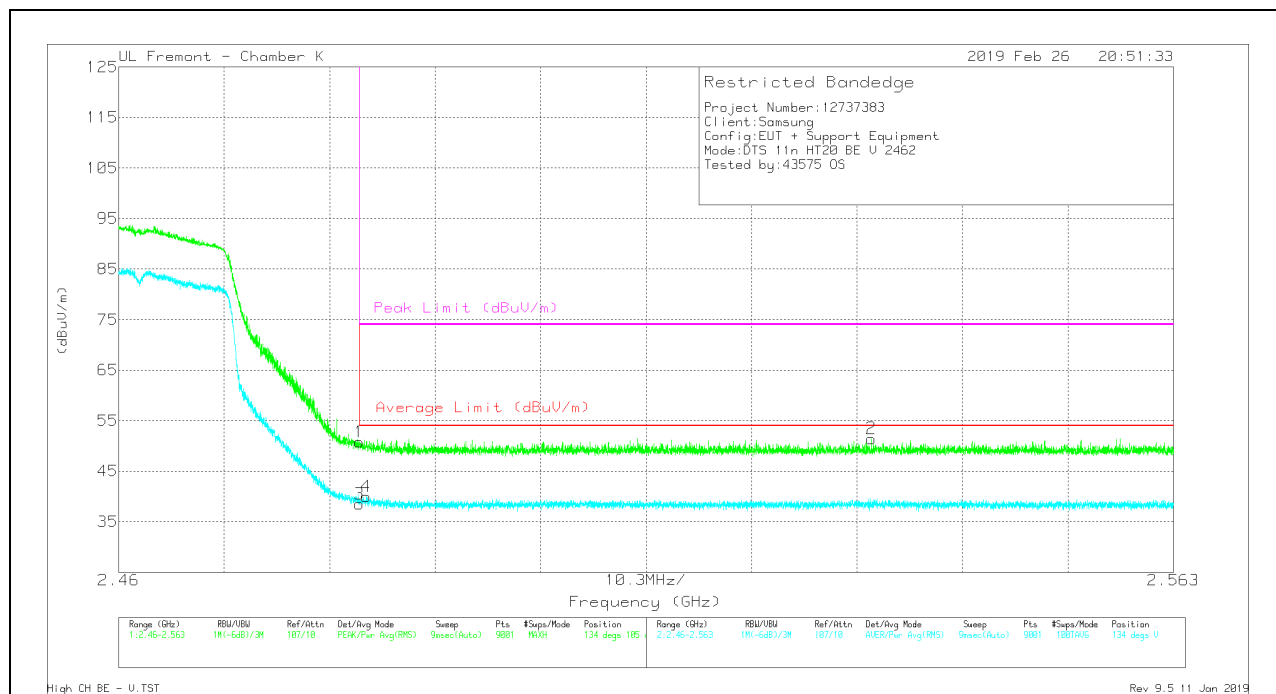

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.3	Pk	32.3	-24.8	0	50.8	-	-	74	-23.2	134	105	V
2	2.534	43.87	Pk	32.3	-24.7	0	51.47	-	-	74	-22.53	134	105	V
3	* 2.484	30.94	RMS	32.3	-24.8	.1	38.54	54	-15.46	-	-	134	105	V
4	* 2.484	32.37	RMS	32.3	-24.8	.1	39.97	54	-14.03	-	-	134	105	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

HIGH CHANNEL RESULTS

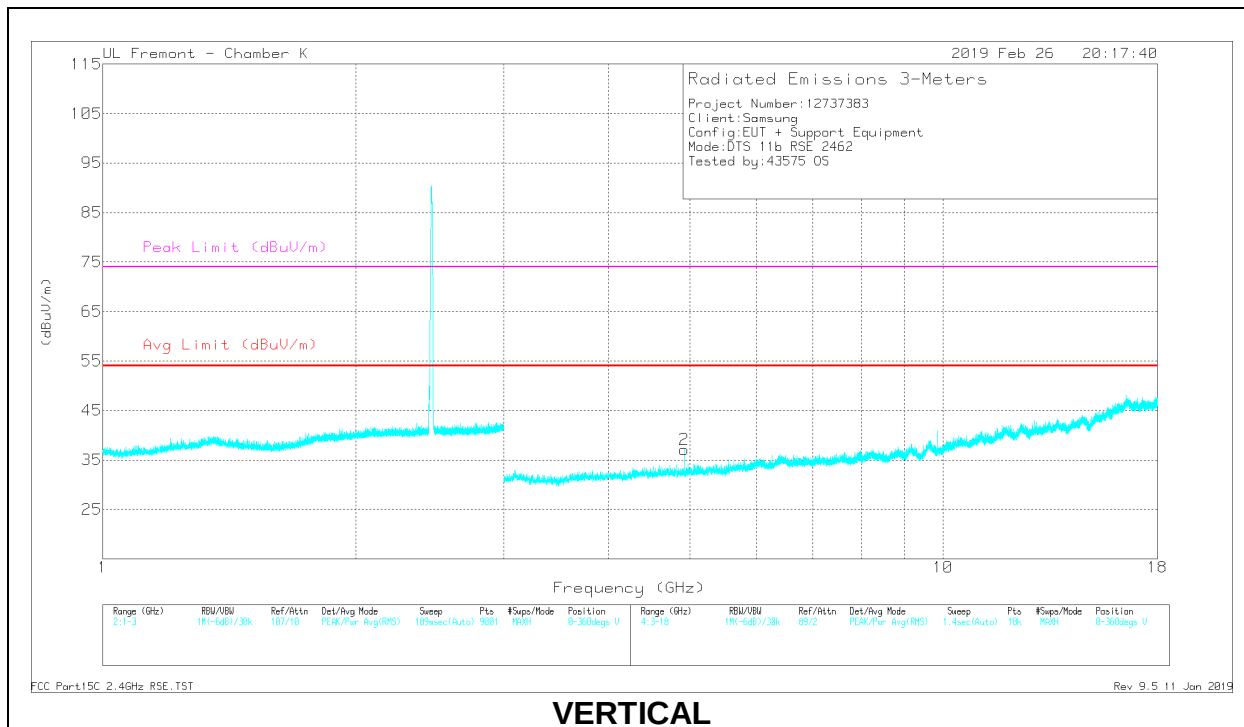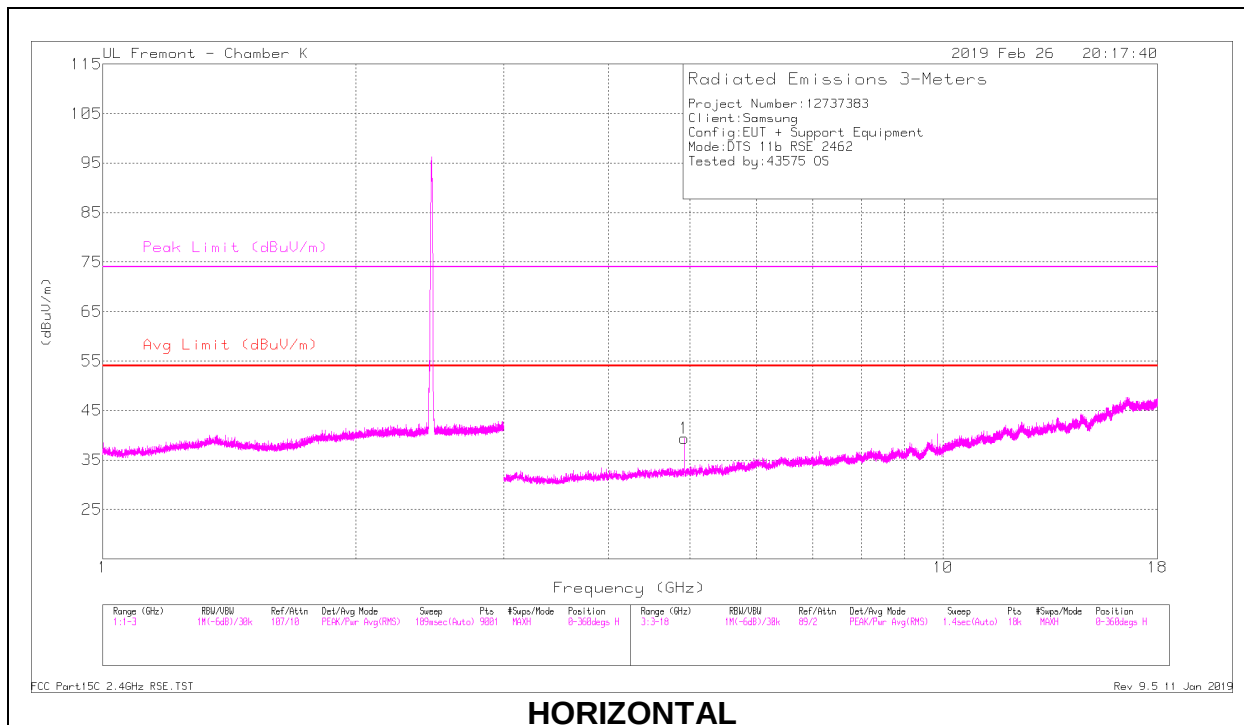

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.924	39.54	PK2	34.2	-30.6	0	43.14	-	-	74	-30.86	177	146	H
	* 4.924	34.01	MAv1	34.2	-30.6	.1	37.71	54	-16.29	-	-	177	146	H
2	* 4.924	39.86	PK2	34.2	-30.6	0	43.46	-	-	74	-30.54	296	108	V
	* 4.924	32.09	MAv1	34.2	-30.6	.1	35.79	54	-18.21	-	-	296	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

2.4. REFERENCE DETAIL

Reference application that contains the reused reference data

Equipment Class	Reference FCC ID	Type Grant/ Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title/Section
DTS	A3LSMA705FN	Grant	12726900-E4	Test	FCC Report DTS WLAN / All sections Except Worst Case Below 1GHz and AC Power Line Conducted Emissions

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r01, and KDB 484596 D01 Referencing Test Data v01.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd
☒ Chamber A (ISED:2324B-1)	☐ Chamber D (ISED:22541-1)	☒ Chamber I (ISED:2324A-5)
☐ Chamber B (ISED:2324B-2)	☐ Chamber E (ISED:22541-2)	☐ Chamber J (ISED:2324A-6)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)	☒ Chamber K (ISED:2324A-1)
	☐ Chamber G (ISED:22541-4)	☐ Chamber L (ISED:2324A-3)
	☐ Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. SAMPLE CALCULATION

RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) – Preamp Gain (dB)

36.5 dBuV + 18.7 dB/m + 0.6 dB – 26.9 dB = 28.9 dBuV/m

MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

Final Voltage (dBuV) = Measured Voltage (dBuV) + Cable Loss (dB) + Limiter Factor (dB) + LISN Insertion Loss.

36.5 dBuV + 0 dB + 10.1 dB + 0 dB = 46.6 dBuV

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	2.52 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	4.88 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.24 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.37 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.17 dB

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. EUT DESCRIPTION

The EUT is a GSM/CDMA/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, ANT+ and NFC. The model SM-A705FN/DS was used for final testing and is representative of the test results in this report.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b	18.83	76.38
2412 - 2472	802.11g	17.59	57.41
2412 - 2472	802.11n HT20	17.31	53.83

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -4.88 dBi.

6.4. SOFTWARE AND FIRMWARE

The test utility software used during testing was A705FN.001

6.5. WORST-CASE CONFIGURATION AND MODE

Radiated emissions below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Band edge and radiated emissions between 1GHz and 18GHz were performed with the EUT set to transmit at the highest power on low, middle and high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20mode: MCS0

6.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	EP-TA800 (China)	R37M2100011SE3	N/A
AC Adapter	Samsung	EP-TA800 (Hong Kong)	R37M3JA00F1DK3	N/A
Earphone	Samsung	N/A	N/A	N/A

I/O CABLES (CONDUCTED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Antenna	1	RF	Shielded	0.2	To spectrum Analyzer
2	USB	1	USB	Un-shielded	1	EUT to AC Mains


I/O CABLES (RADIATED AND CONDUCTED EMISSIONS)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	USB	1	USB	Shielded	1	N/A
2	earphone	1	3.5mm	Un-shielded	1	N/A

TEST SETUP

The EUT is a stand alone unit. Test software exercised the radio card.


CONDUCTED TEST SETUP DIAGRAM

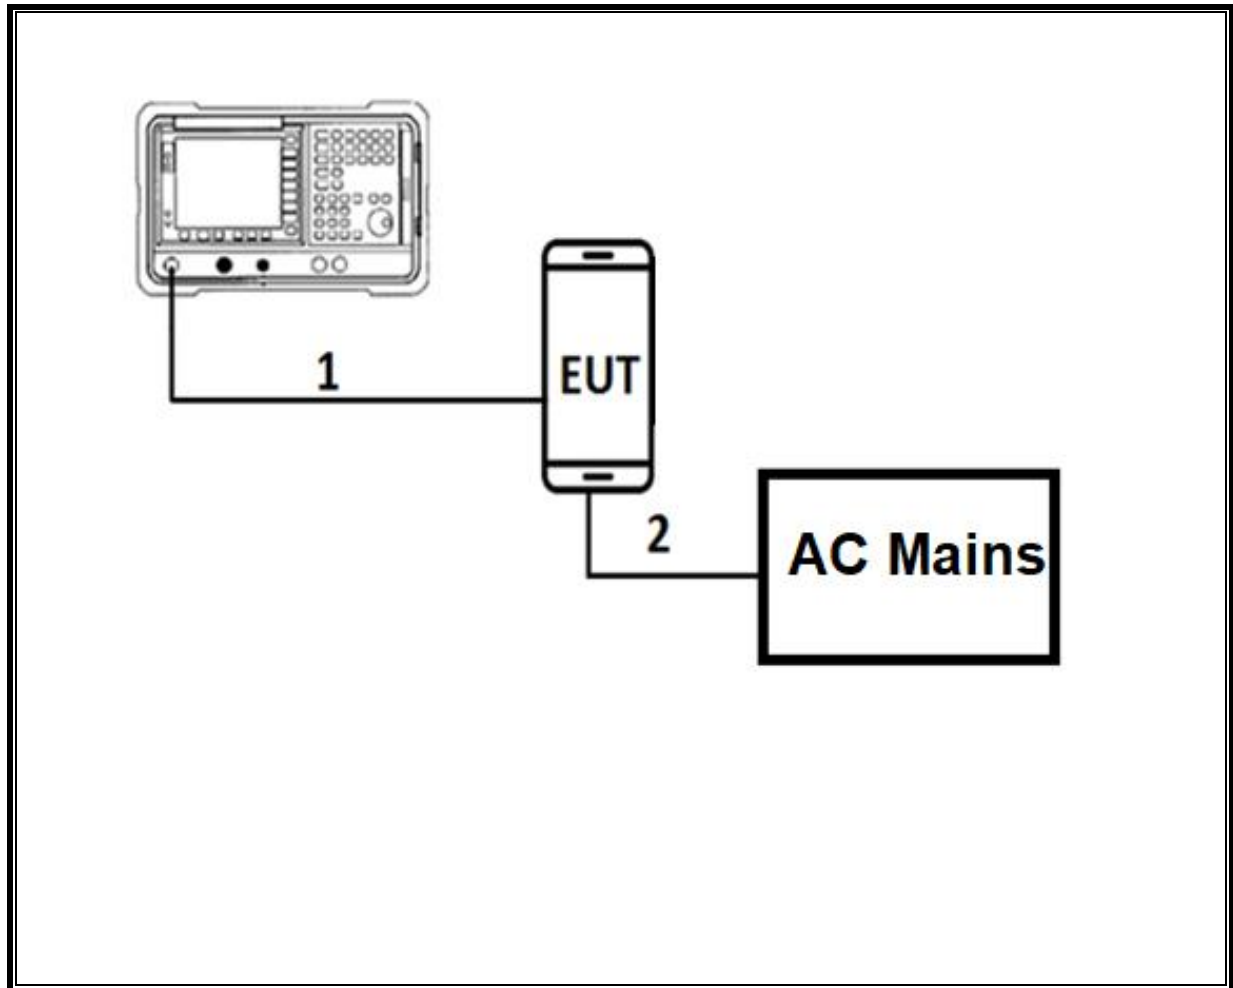

TEST SETUP

For conducted tests: the EUT was stand alone. The test software exercises the radio.

RADIATED AND AC LINE CONDUCTED EMISSIONS SETUP DIAGRAM

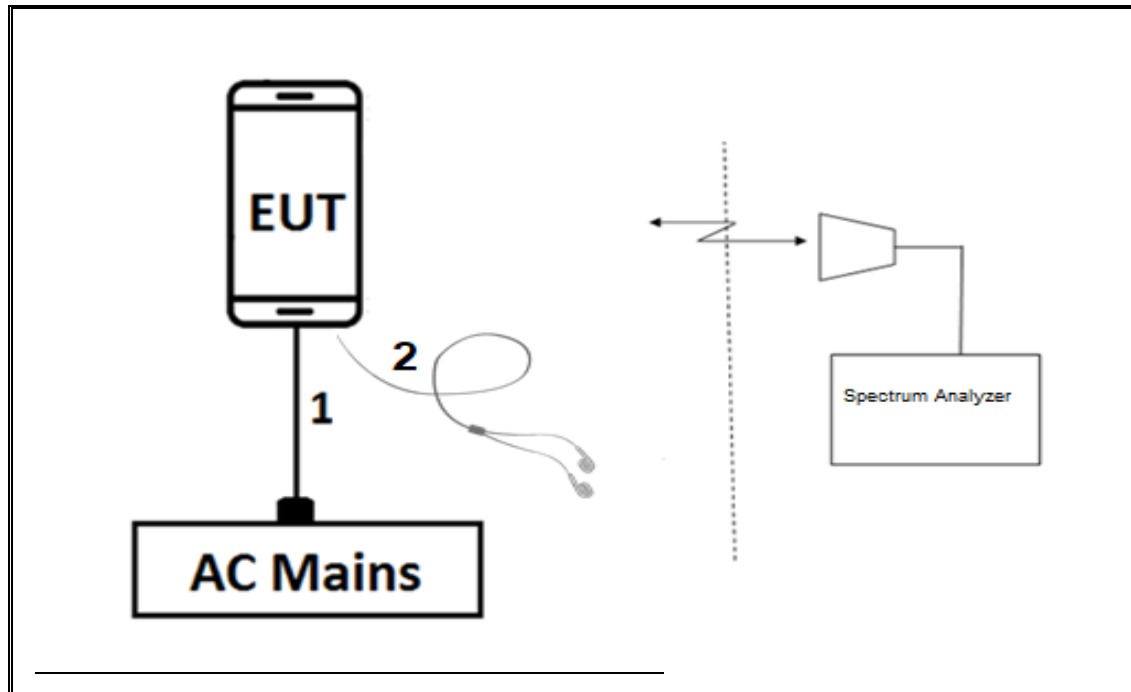

TEST SETUP

For radiated tests: EUT is stand alone. The test software exercises the radio.

7. MEASUREMENT METHOD

On Time and Duty Cycle: ANSI C63.10 Section 11.6

6 dB BW: ANSI C63.10 Section 11.8.1

Output Power: ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G (Measurement using a gated RF average-reading power meter)

PSD: ANSI C63.10 Section 11.10.2 Method PKPSD (peak PSD)

Band-edge: ANSI C63.10 Section 11.13.3.4 Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction factor

Radiated emissions non-restricted frequency bands: ANSI C63.10 Section 11.11

Radiated emissions restricted frequency bands: ANSI C63.10 Section 11.12.1

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2013 Section 6.4

Conducted emissions in restricted frequency bands: ANSI C63.10 Section 11.12.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Power Meter, P-series single channel	Agilent (Keysight) Technologies	N1911A	T1271	07/26/2019	07/26/2018
Power Sensor, P-series, 50MHz to 18GHz, Wideband	Agilent (Keysight) Technologies	N1921A	T1224	10/09/2019	10/09/2018
Antenna, Active Loop 9kHz-30MHz	ETS-Lindgren	6502	T757	09/25/2019	09/25/2018
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T344	04/30/2019	04/30/2018
Amplifier, 1 to18GHz, 35dB	AMOLICAL	AMP1G18-35	T1569	06/03/2019	06/03/2018
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T862	05/25/2019	05/25/2018
Amplifier, 1 to18GHz,	MITEQ	AFS42-00101800-25-S-42	PRE018078	08/01/2019	08/01/2018
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179367	04/25/2019	04/25/2018
EMI TEST RECEIVER	Rohde & Schwarz	ESW44	PRE0179375	05/08/2019	05/08/2018
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T908	01/23/2020	01/23/2019
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T341	09/26/2019	09/26/2018
Hybrid Antenna, 30MHz to 3GHz	SunAR rf motion	JB3	PRE0184052	10/24/2019	10/24/2018
Amplifier, 100kHz to 1GHz, 32 dB	Sonoma Instrument	310	PRE0186650	12/13/2019	12/23/2018
Hybrid Antenna, 30MHz to 3GHz	SunAR rf motion	JB3	PRE0184052	10/24/2019	10/24/2018
Antenna, Horn 18 to 26.5GHz	ARA	MWH-1826/B	T447	06/16/2019	06/16/2018
Pre-Amp, 1-26.5GHz	Agilent	8449B	T404	03/09/2019	03/09/2018
AC Line Conducted					
EMI Receiver	Rohde & Schwarz	ESR	T1436	02/14/2020	02/14/2019
LISN for Conducted Emissions CISPR-16	FCC INC.	FCC LISN 50/250	T1310	06/15/2019	06/15/2018
Test Software List					
Radiated Software	UL	UL EMC	Ver 9.5, June 22, 2018		
Antenna Port Software	UL	UL RF	Ver 9.3.2, Jan. 07, 2019		
AC Line Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015		

NOTES:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

9. ANTENNA PORT TEST RESULTS

9.1. ON TIME AND DUTY CYCLE

LIMITS

None; for reporting purposes only.


PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
2.4GHz Band						
802.11b 1TX	8.52	8.72	0.977	97.71%	0.10	0.117
802.11g 1TX	1.44	1.47	0.980	97.96%	0.09	0.694
802.11n HT20 1TX	1.35	1.38	0.978	97.83%	0.10	0.741

DUTY CYCLE PLOTS

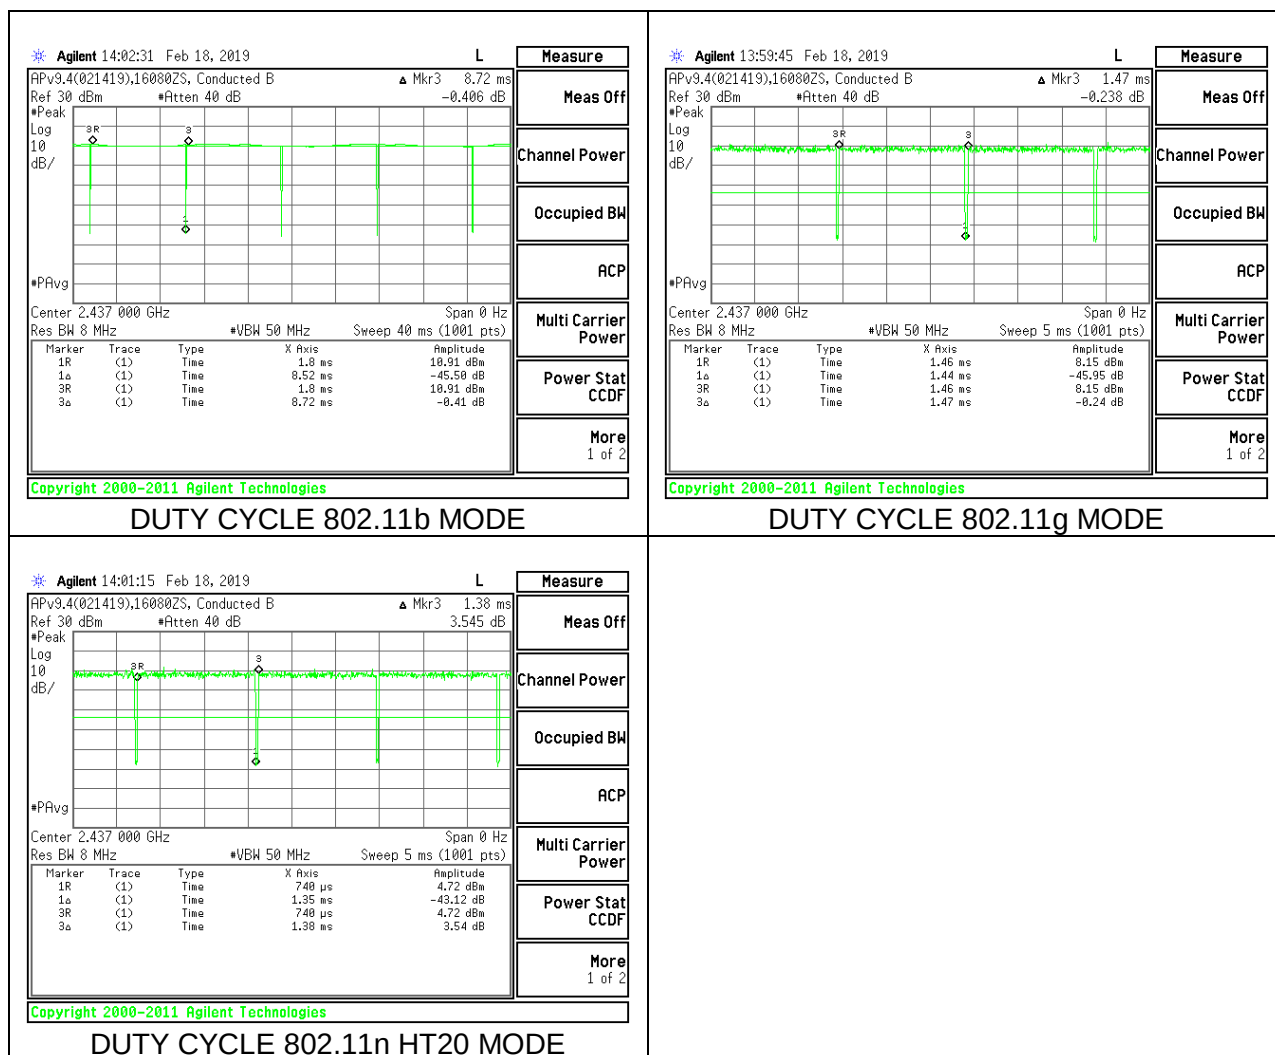

9.2. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)


The minimum 6 dB bandwidth shall be at least 500 kHz.

RESULTS

9.2.1. 802.11b MODE

1TX Antenna 1 MODE


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 1	2412	8.64	0.5
Mid 6	2437	8.68	0.5
High 11	2462	8.24	0.5
High 12	2467	8.64	0.5
High 13	2472	8.12	0.5

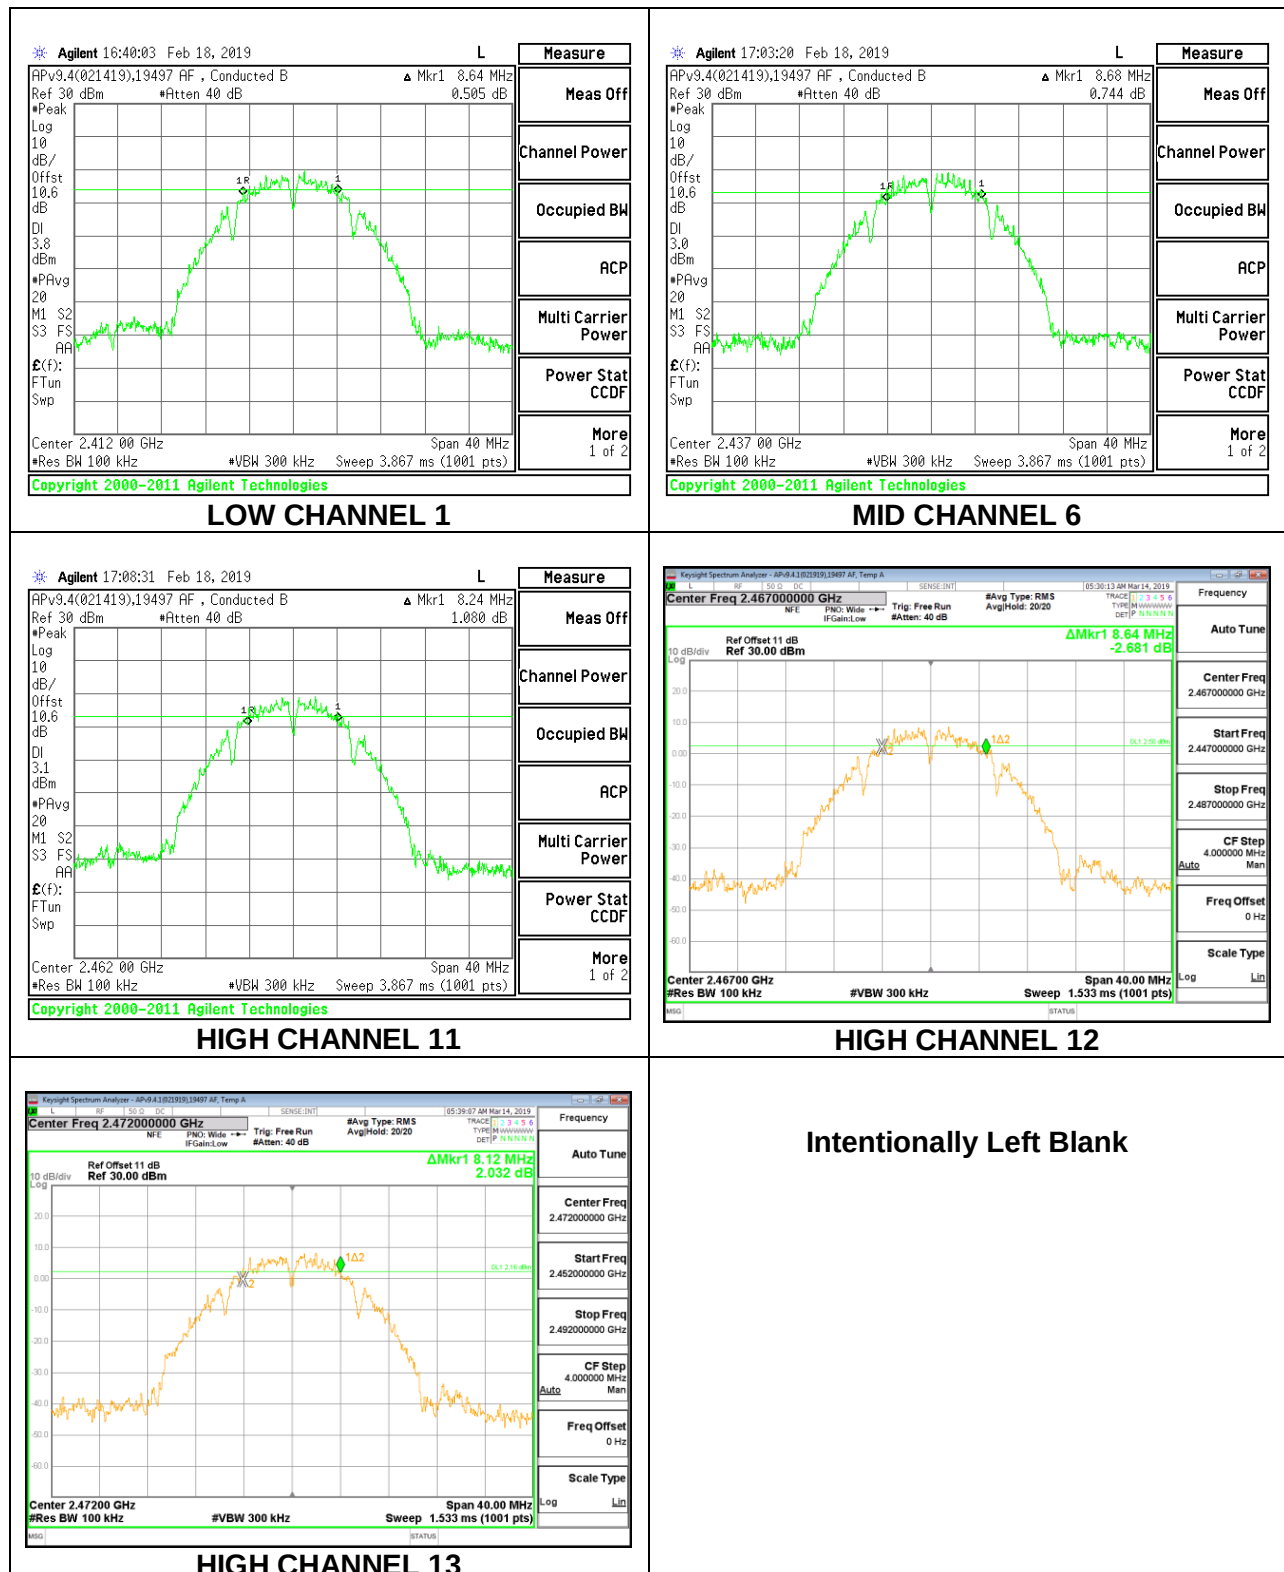

9.2.2. 802.11g MODE

1TX Antenna 1 MODE


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 1	2412	16.36	0.5
Low 2	2417	16.44	0.5
Mid 6	2437	16.48	0.5
High 11	2462	16.36	0.5
High 12	2467	16.48	0.5
High 13	2472	16.40	0.5

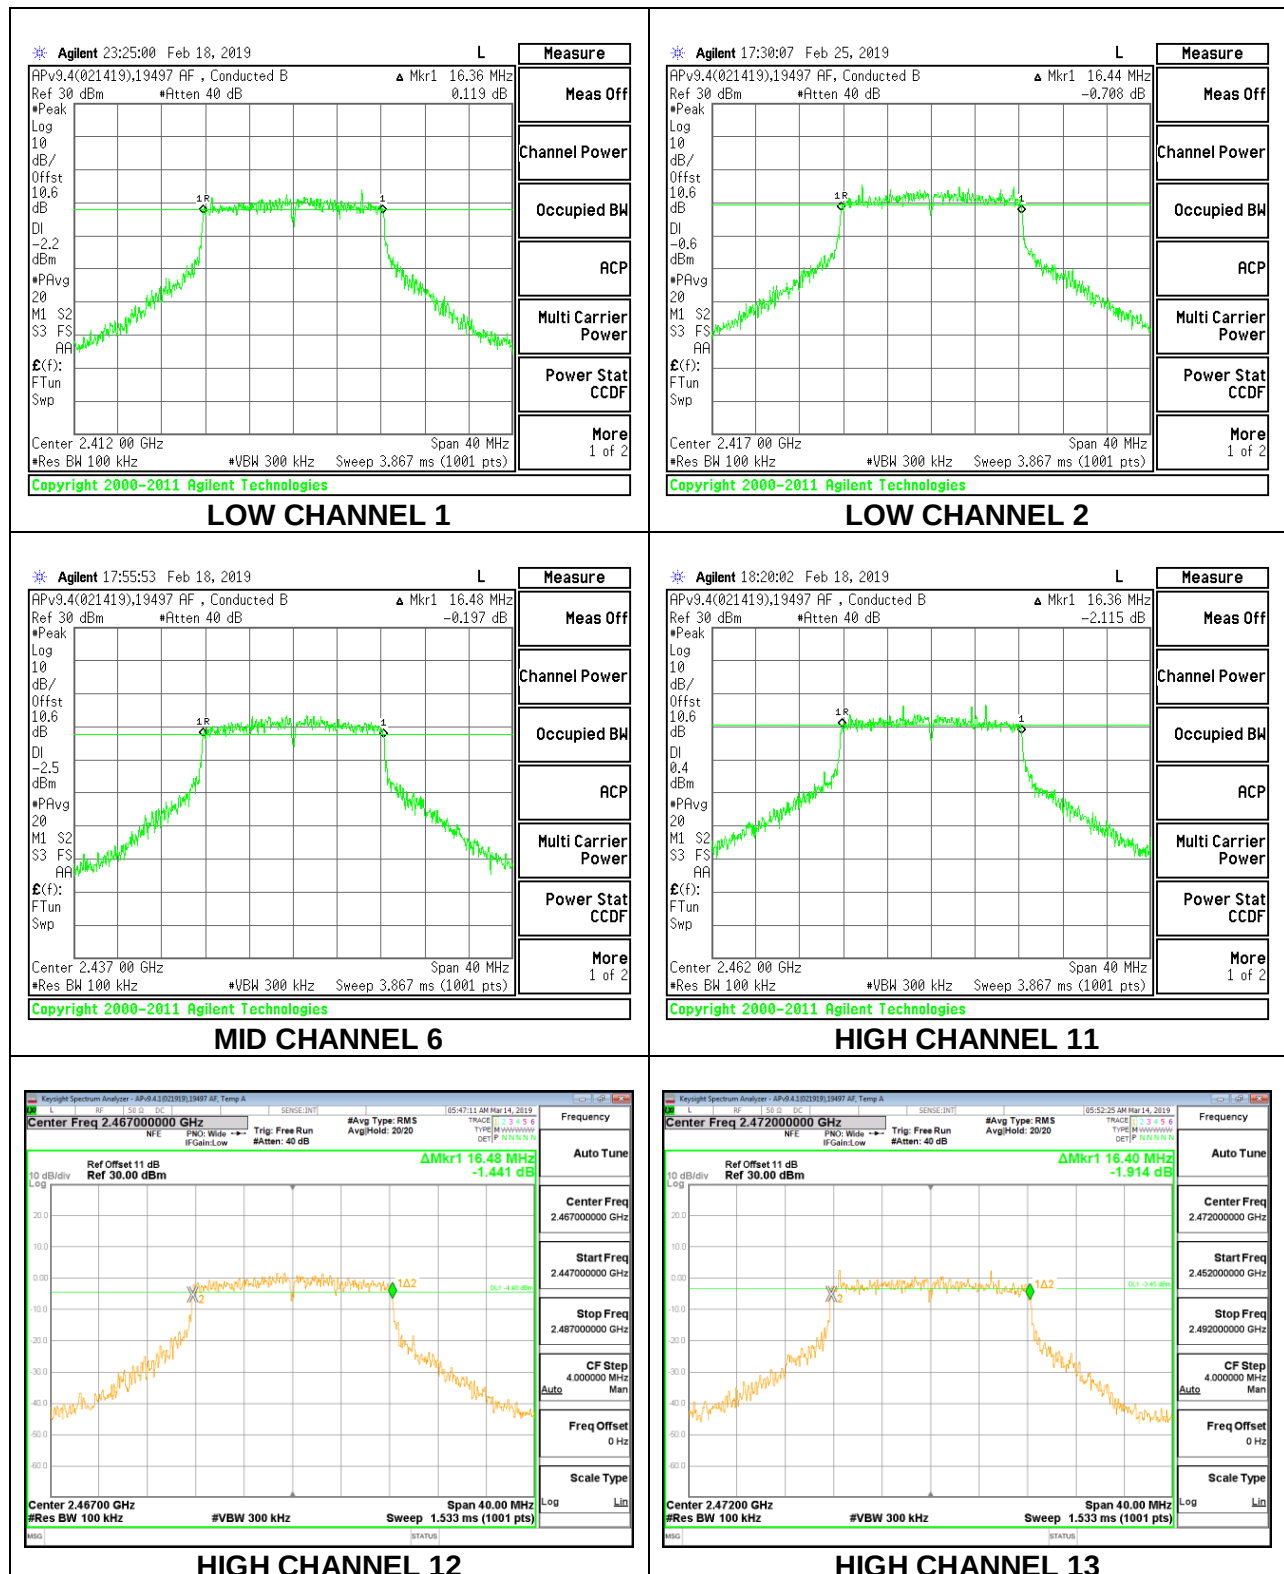

9.2.3. 802.11n HT20 MODE

1TX Antenna 1 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low 1	2412	17.64	0.5
Low 2	2417	17.64	0.5
Mid 6	2437	17.28	0.5
High 11	2462	17.64	0.5
High 12	2467	17.68	0.5
High 13	2472	17.64	0.5

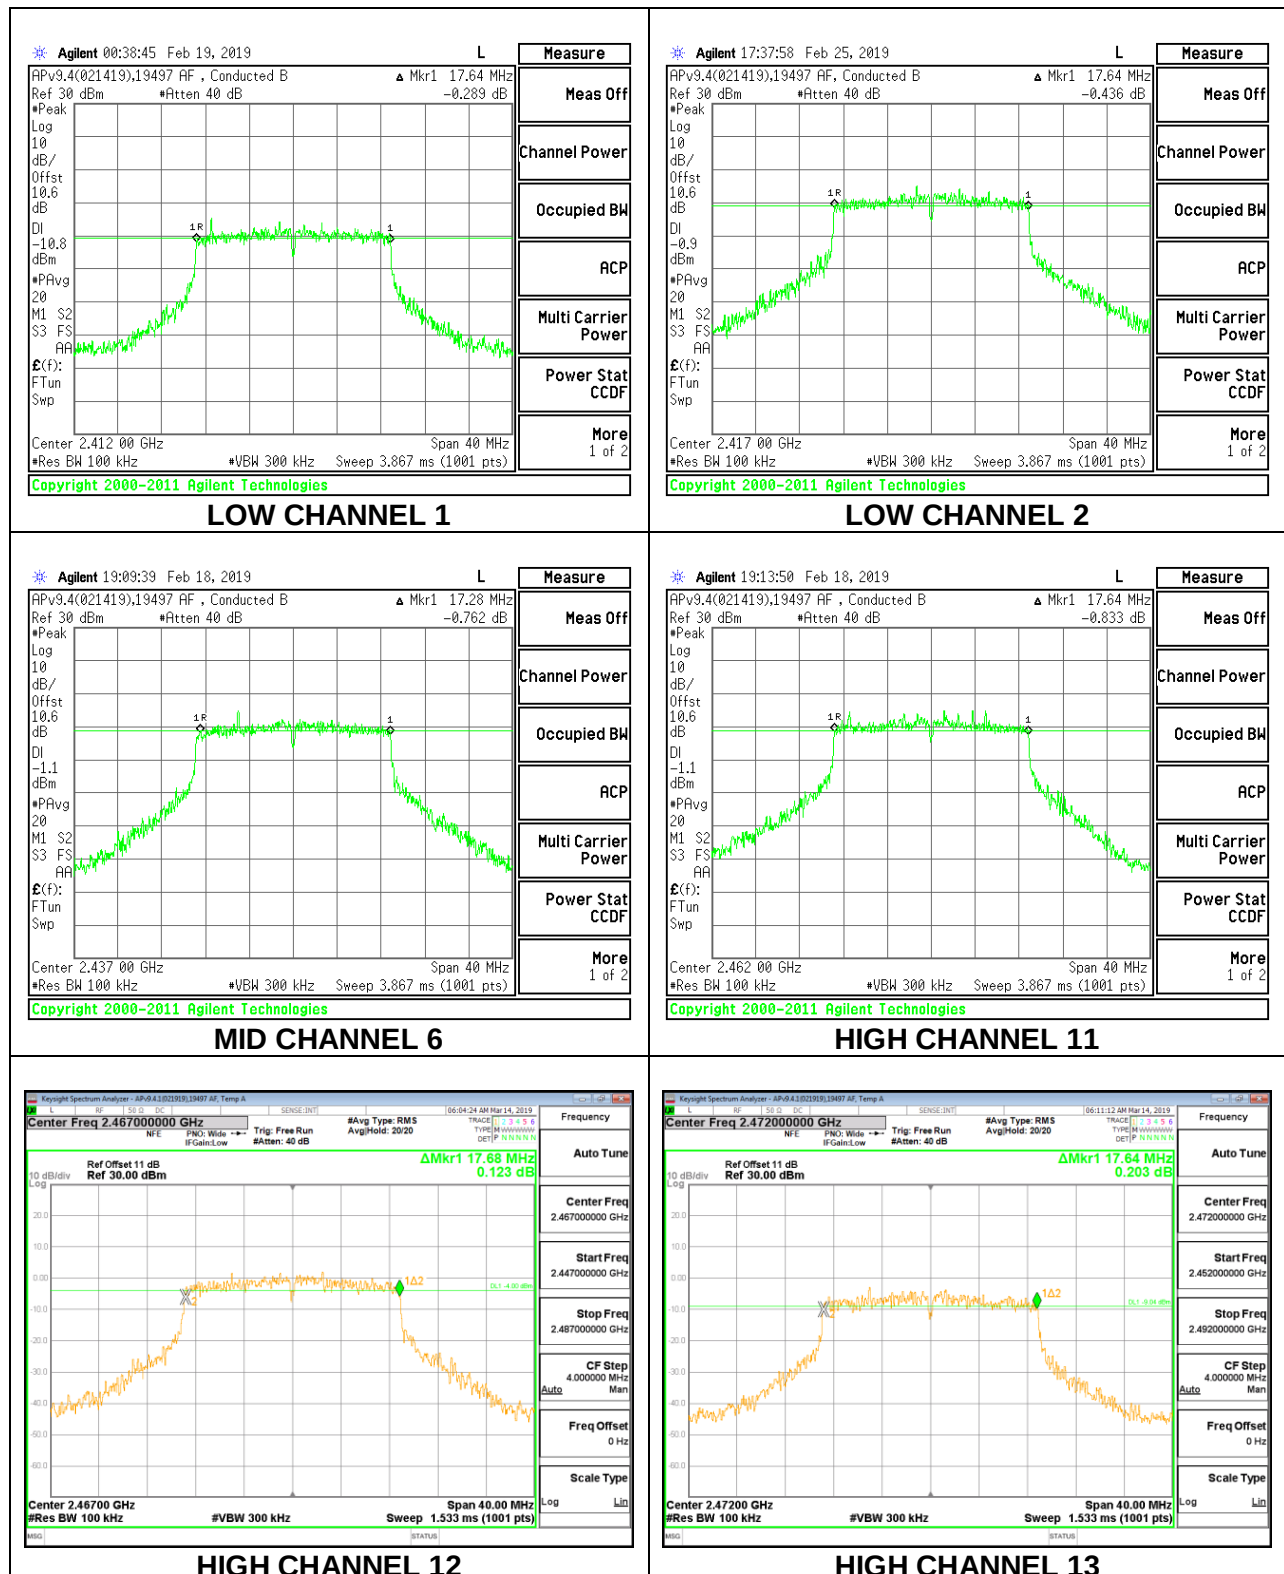

9.3. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a power meter. The cable assembly insertion loss was entered as an offset in the power meter to allow for a gated average reading of power.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

9.3.1. 802.11b MODE

1TX Antenna 1 MODE

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-4.88	30.00	30	36	30.00
Mid 6	2437	-4.88	30.00	30	36	30.00
High 11	2462	-4.88	30.00	30	36	30.00
High 12	2467	-4.88	30.00	30	36	30.00
High 13	2472	-4.88	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	18.45	18.45	30.00	-11.55
Mid 6	2437	18.16	18.16	30.00	-11.84
High 11	2462	18.48	18.48	30.00	-11.52
High 12	2467	18.83	18.83	30.00	-11.17
High 13	2472	18.50	18.50	30.00	-11.50

9.3.2. 802.11g MODE

1TX Antenna 1 MODE

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-4.88	30.00	30	36	30.00
Low 2	2417	-4.88	30.00	30	36	30.00
Mid 6	2437	-4.88	30.00	30	36	30.00
High 11	2462	-4.88	30.00	30	36	30.00
High 12	2467	-4.88	30.00	30	36	30.00
High 13	2472	-4.88	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	15.02	15.02	30.00	-14.98
Low 2	2417	17.12	17.12	30.00	-12.88
Mid 6	2437	17.18	17.18	30.00	-12.82
High 11	2462	17.38	17.38	30.00	-12.62
High 12	2467	17.59	17.59	30.00	-12.41
High 13	2472	3.77	3.77	30.00	-26.23

9.3.3. 802.11n HT20 MODE

1TX Antenna 1 MODE

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	ISED Power Limit (dBm)	ISED EIRP Limit (dBm)	Max Power (dBm)
Low 1	2412	-4.88	30.00	30	36	30.00
Low 2	2417	-4.88	30.00	30	36	30.00
Mid 6	2437	-4.88	30.00	30	36	30.00
High 11	2462	-4.88	30.00	30	36	30.00
High 12	2467	-4.88	30.00	30	36	30.00
High 13	2472	-4.88	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low 1	2412	15.28	15.28	30.00	-14.72
Low 2	2417	17.15	17.15	30.00	-12.85
Mid 6	2437	16.93	16.93	30.00	-13.07
High 11	2462	17.31	17.31	30.00	-12.69
High 12	2467	15.84	15.84	30.00	-14.16
High 13	2472	2.59	2.59	30.00	-27.41

9.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS


9.4.1. 802.11b MODE

1TX Antenna 1 MODE

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm/ 30kHz)	Total Corr'd PSD (dBm/ 30kHz)	Limit (dBm/ 30kHz)	Margin (dB)
Low 1	2412	-3.351	-3.25	8.0	-11.3
Mid 6	2437	-3.756	-3.66	8.0	-11.7
High 11	2462	-3.221	-3.12	8.0	-11.1
High 12	2467	-3.56	-3.46	8.0	-11.5
High 13	2472	-3.06	-2.96	8.0	-11.0

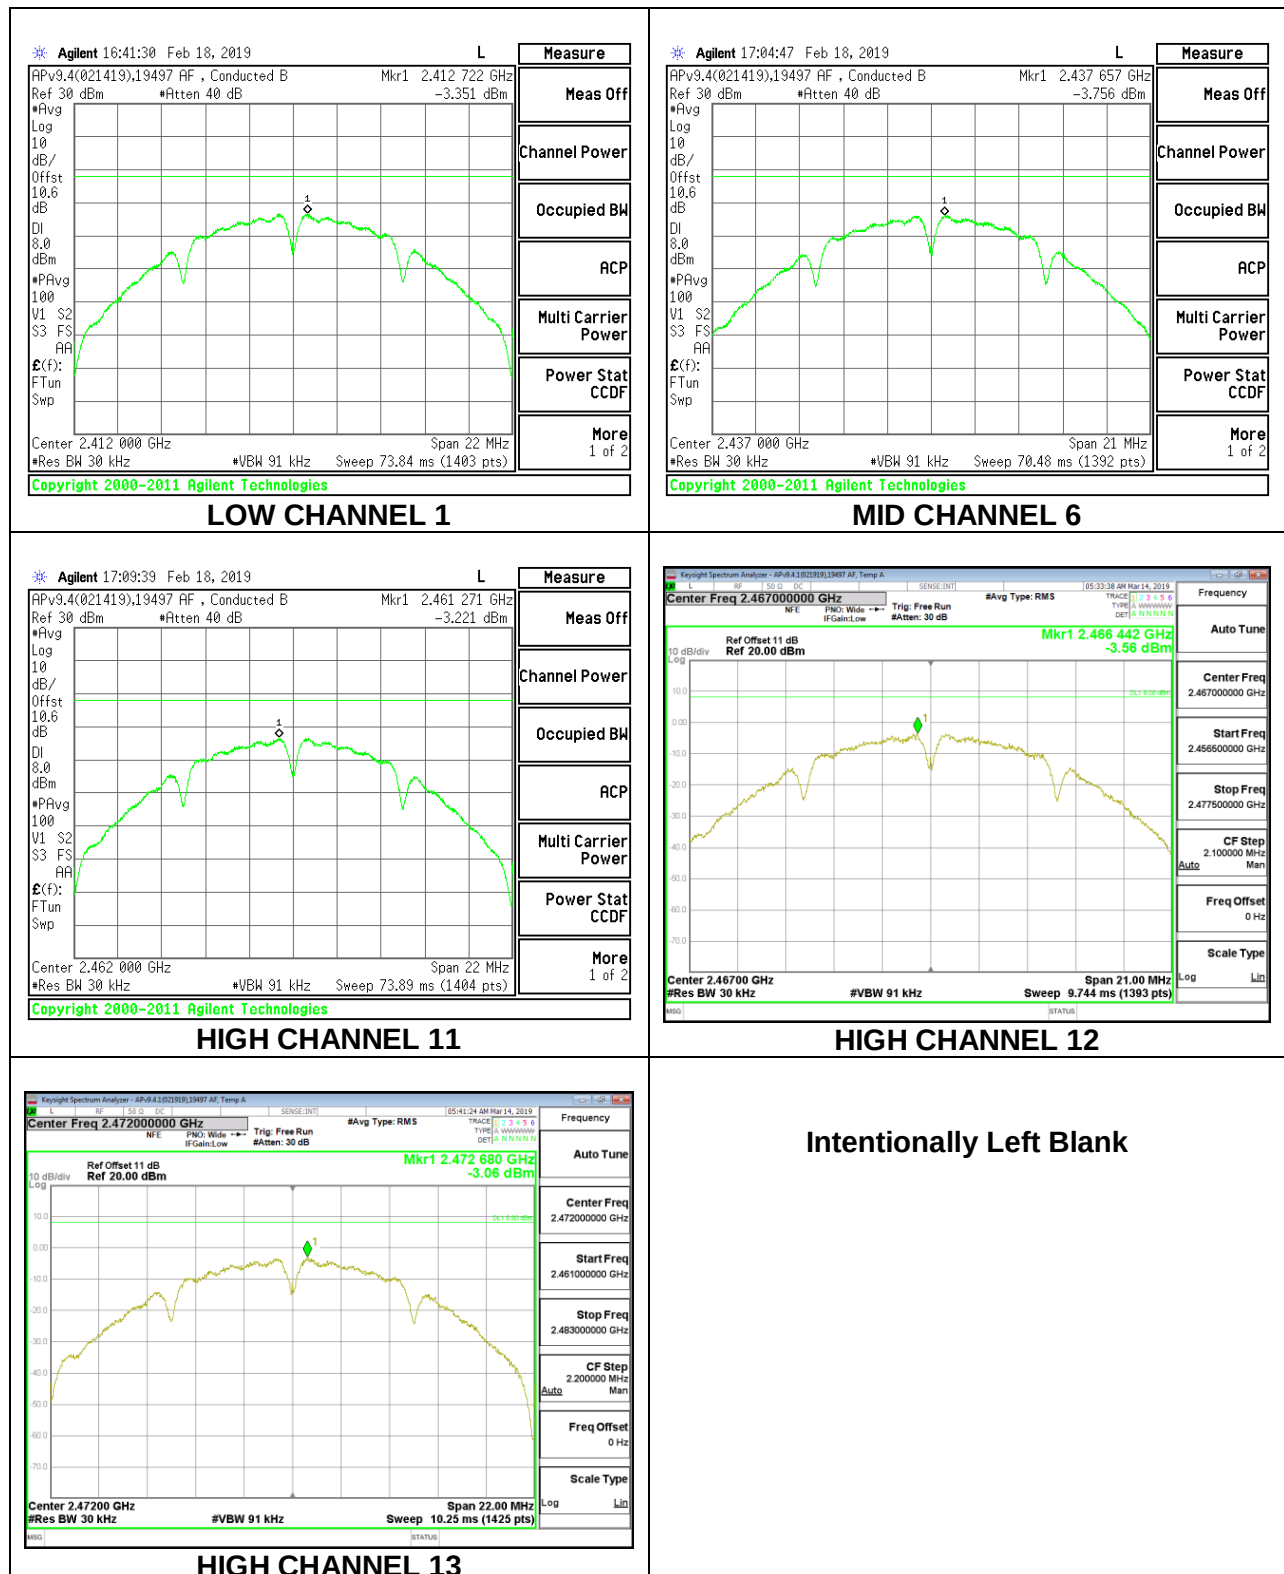


9.4.2. 802.11g MODE

1TX Antenna 1 MODE

Duty Cycle CF (dB)	0.09	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm/ 30kHz)	Total Corr'd PSD (dBm/ 30kHz)	Limit (dBm/ 30kHz)	Margin (dB)
Low 1	2412	-8.591	-8.50	8.0	-16.5
Low 2	2417	-6.698	-6.61	8.0	-14.6
Mid 6	2437	-7.331	-7.24	8.0	-15.2
High 11	2462	-6.620	-6.53	8.0	-14.5
High 12	2467	-6.55	-6.46	8.0	-14.5
High 13	2472	-20.50	-20.41	8.0	-28.4

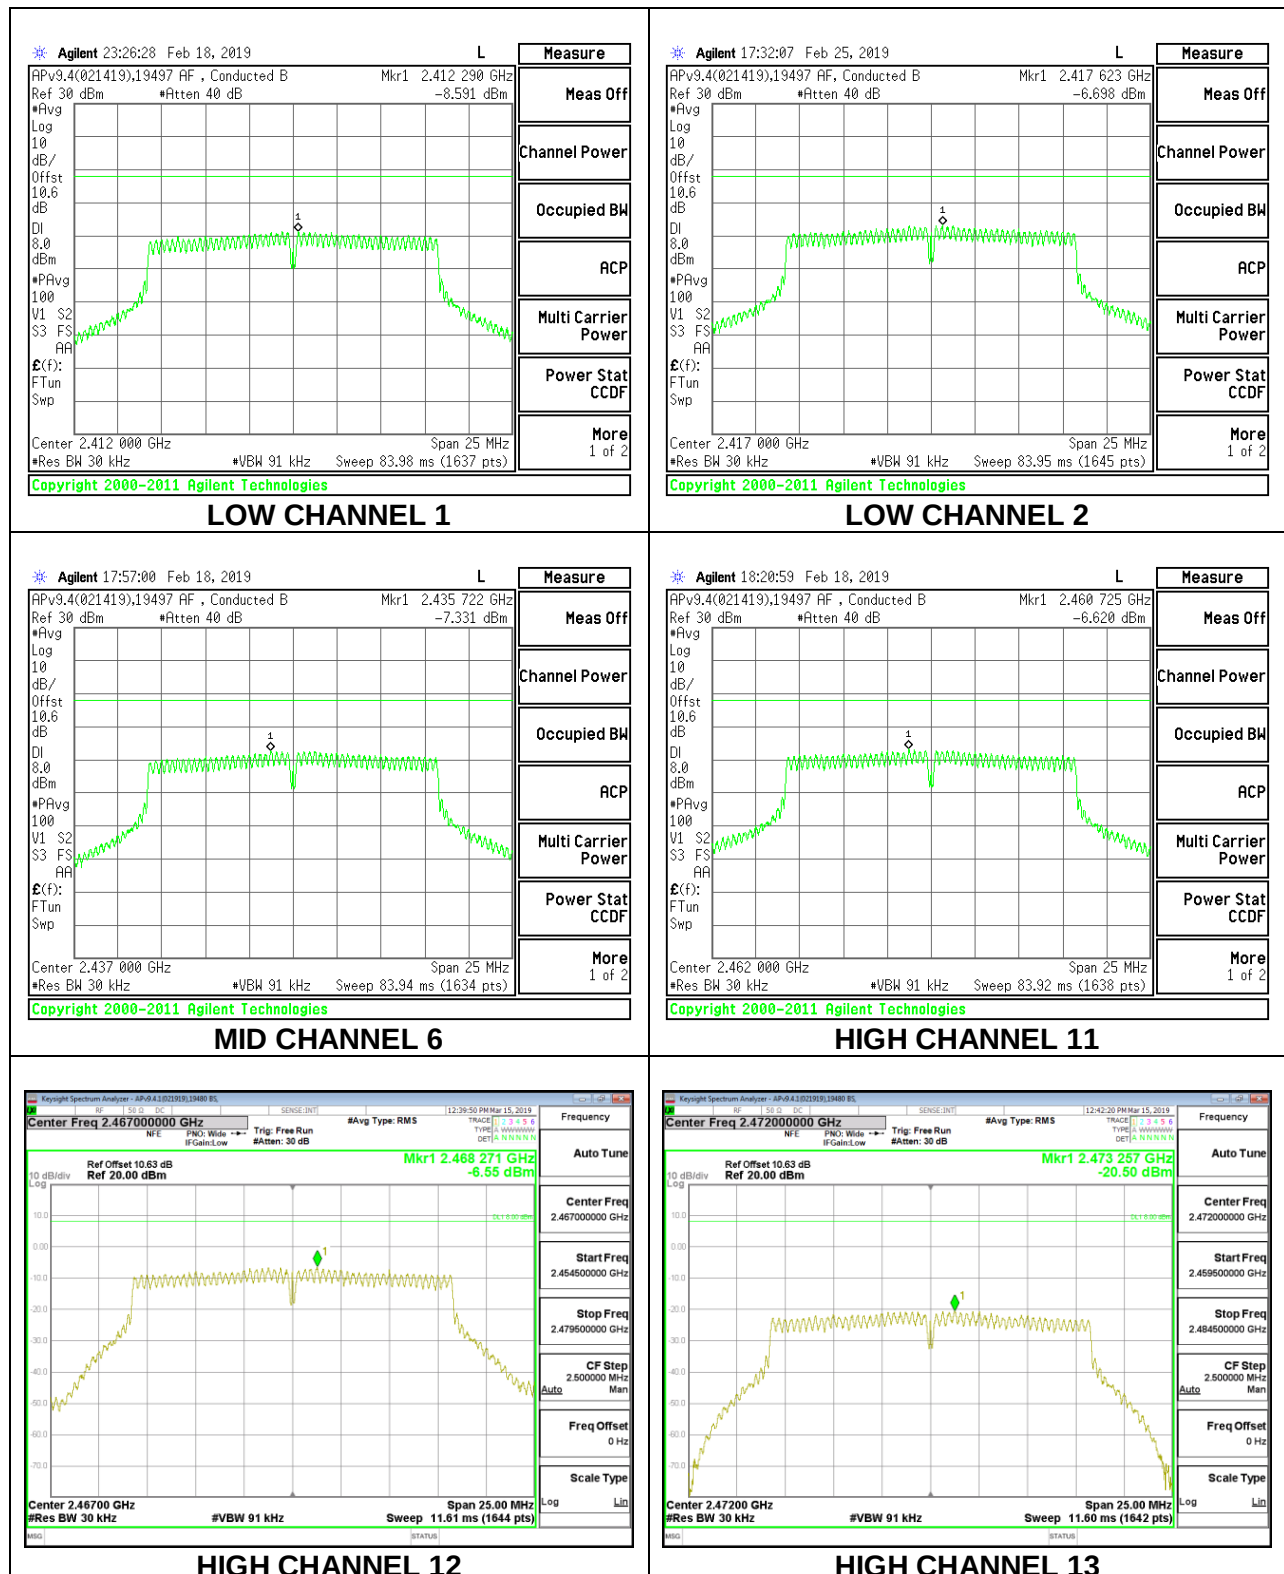


9.4.3. 802.11n HT20 MODE

1TX Antenna 1 MODE

Duty Cycle CF (dB)	0.10	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm/ 30kHz)	Total Corr'd PSD (dBm/ 30kHz)	Limit (dBm/ 30kHz)	Margin (dB)
Low 1	2412	-15.951	-15.85	8.0	-23.9
Low 2	2417	-6.896	-6.80	8.0	-14.8
Mid 6	2437	-8.004	-7.90	8.0	-15.9
High 11	2462	-7.353	-7.25	8.0	-15.3
High 12	2467	-8.25	-8.15	8.0	-16.2
High 13	2472	-21.43	-21.33	8.0	-29.3

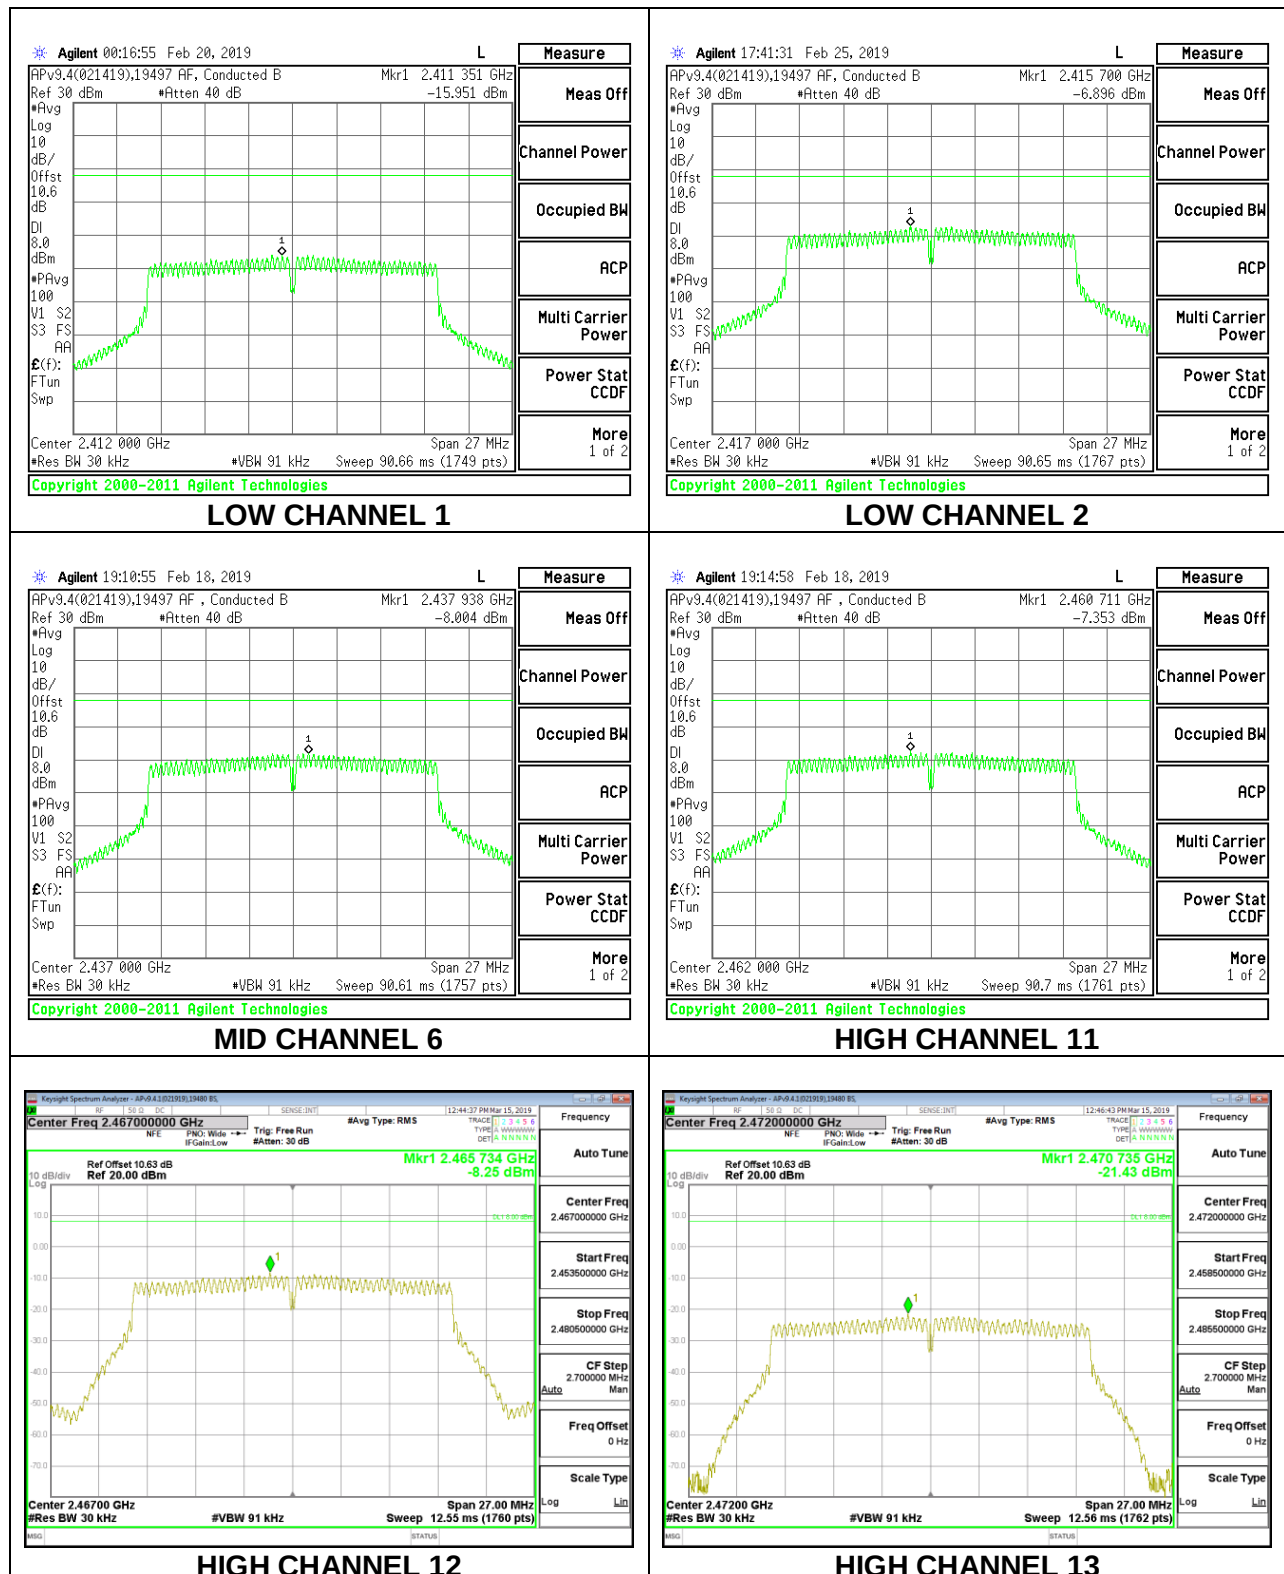

9.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS


FCC §15.247 (d)


Output power was measured based on the use of peak measurement, therefore the required attenuation is 30 dB.

RESULTS

9.5.1. 802.11b MODE


1TX Antenna 1 MODE

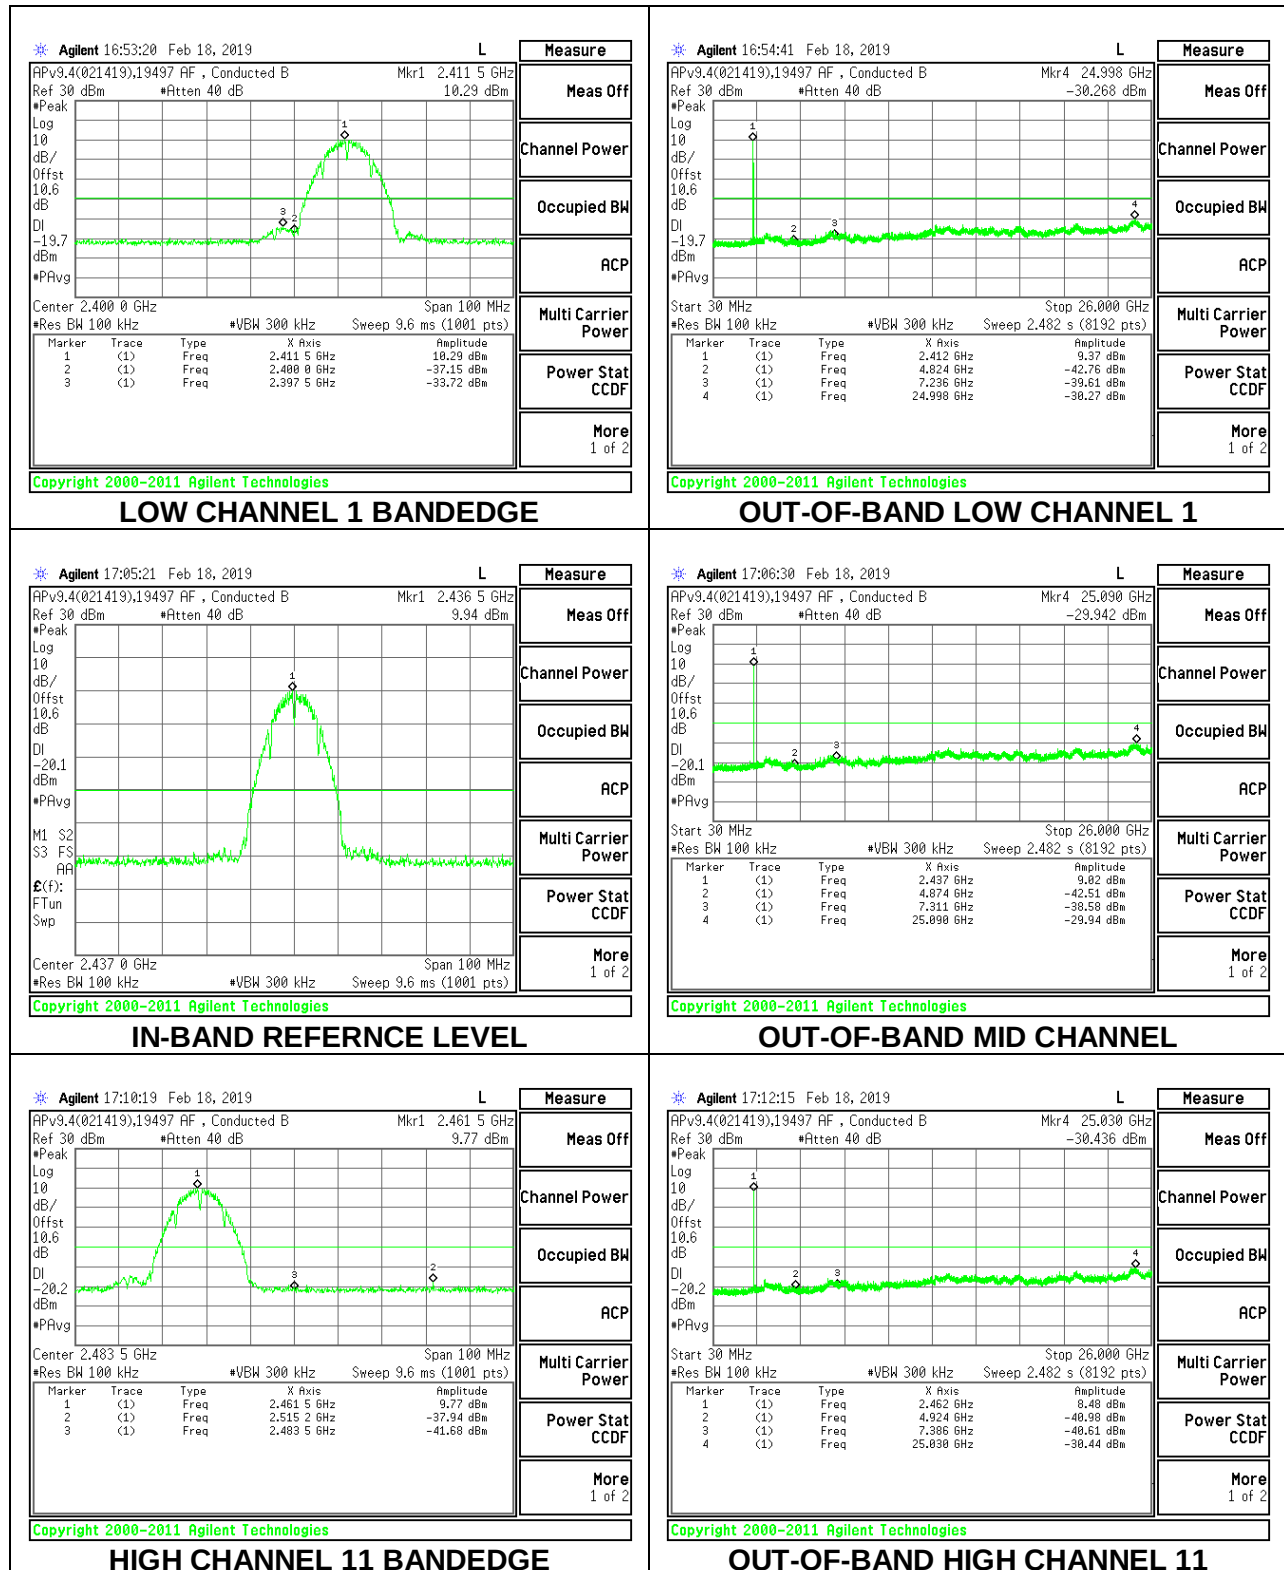


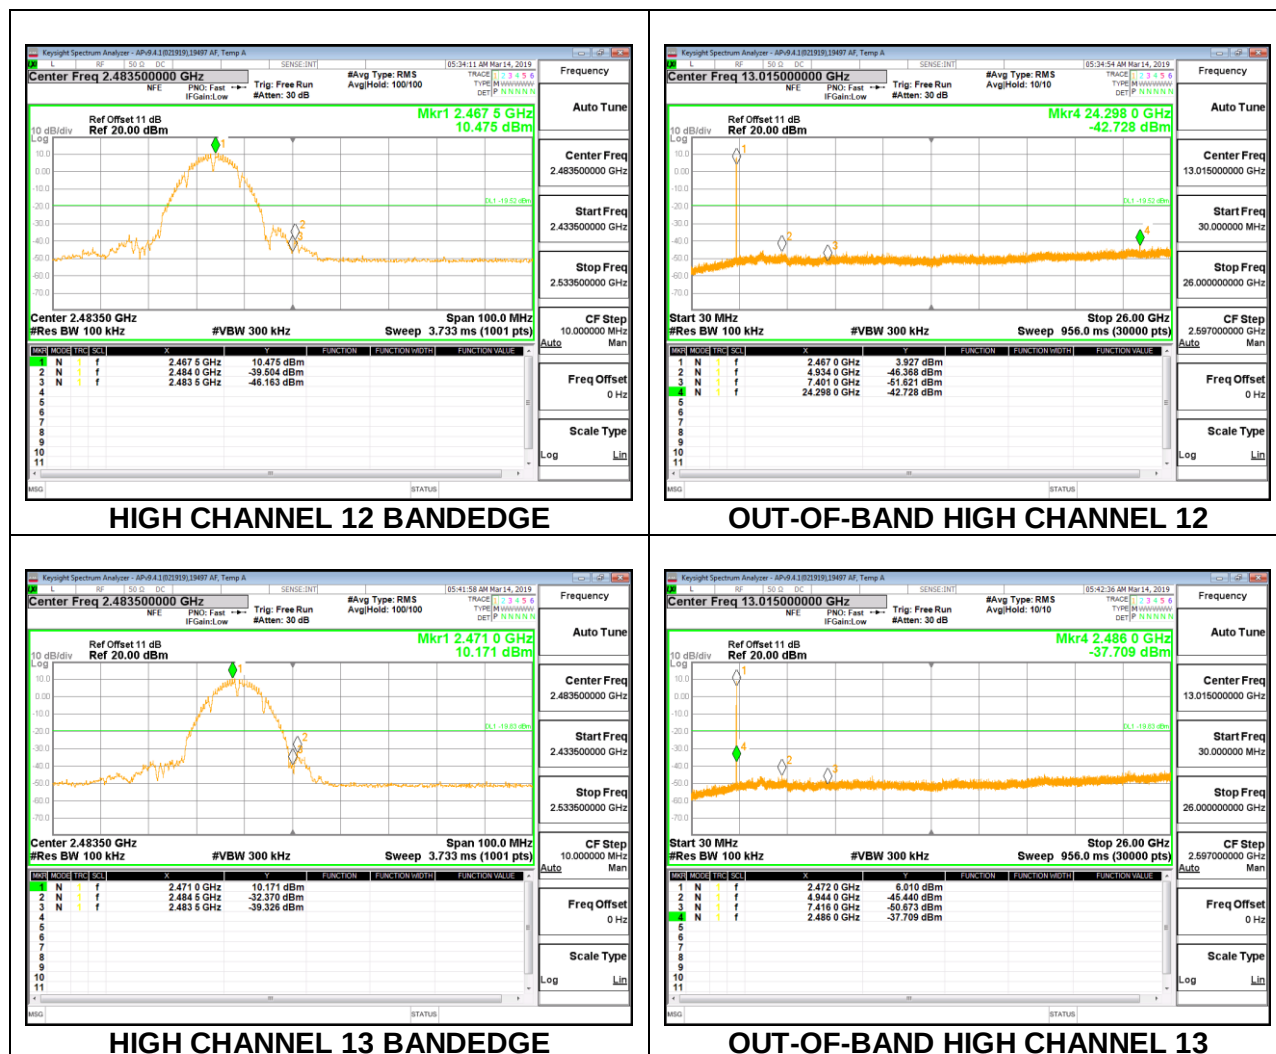


9.5.2. 802.11g MODE

1TX Antenna 1 MODE

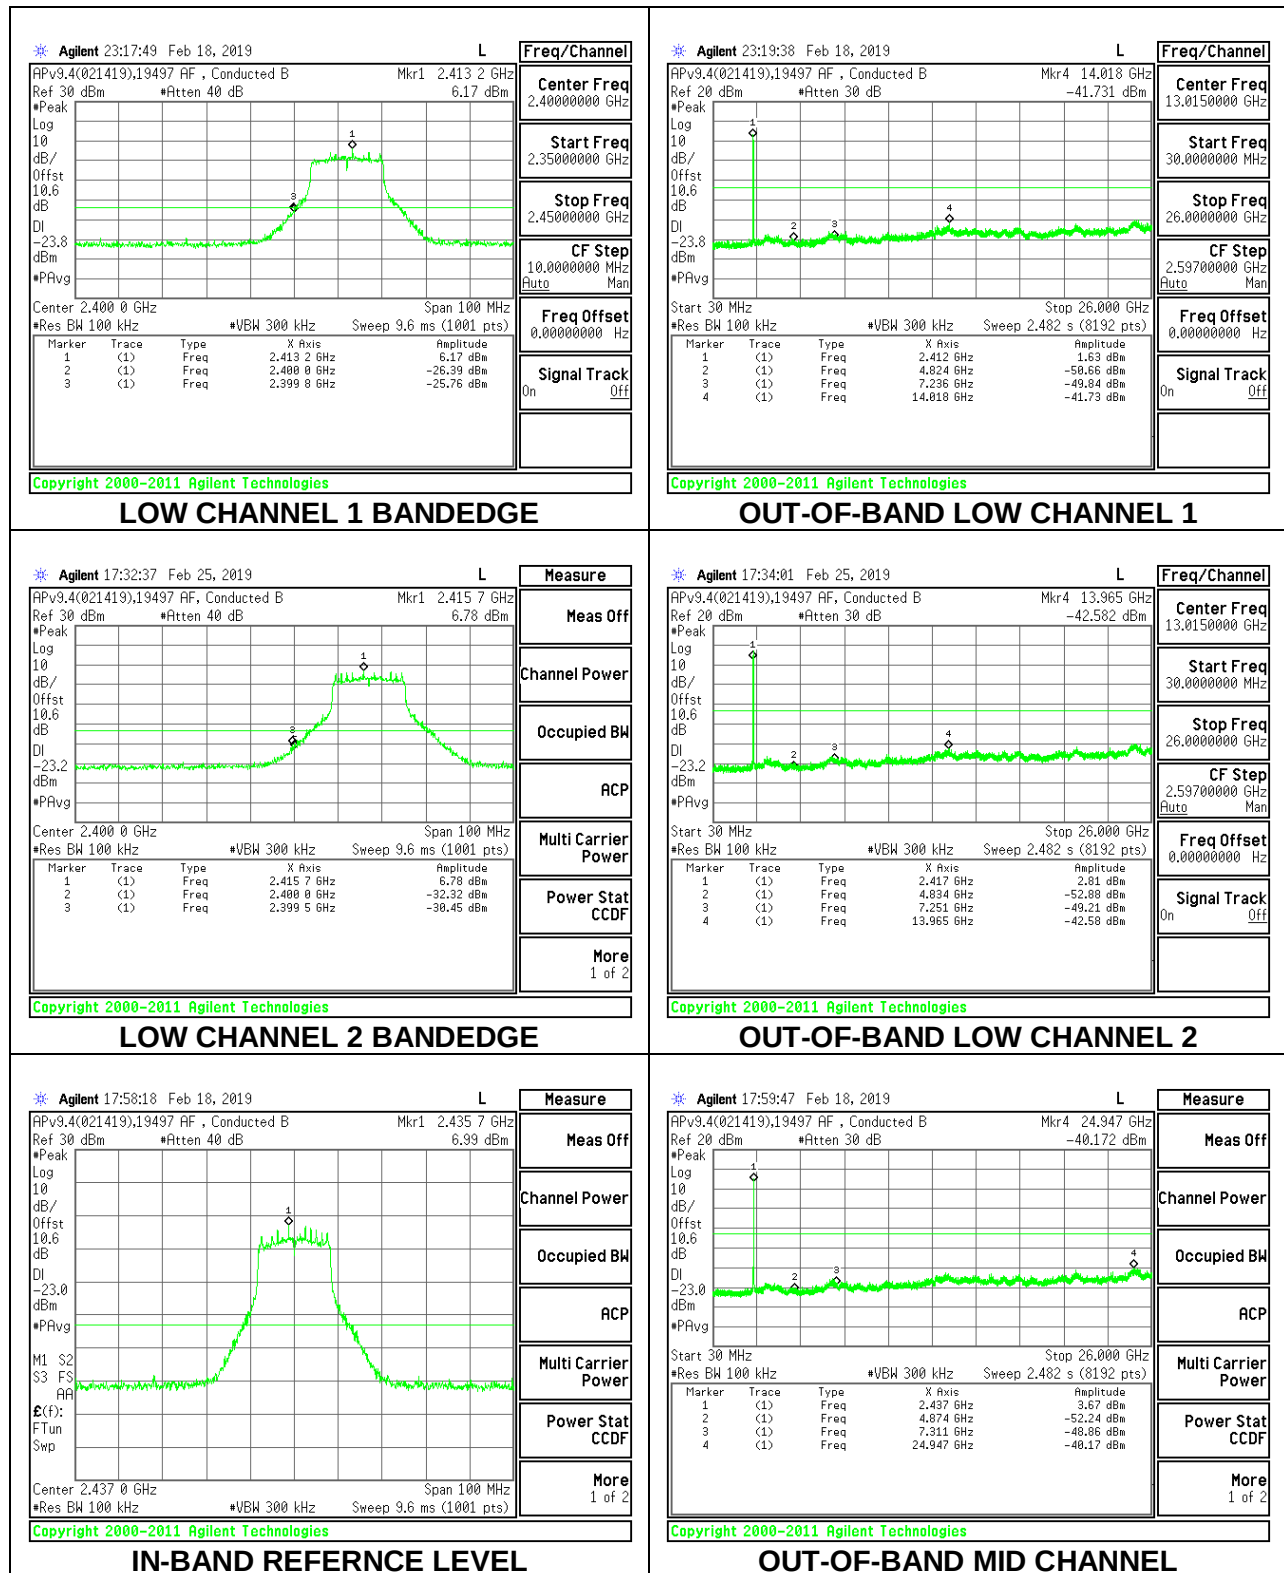


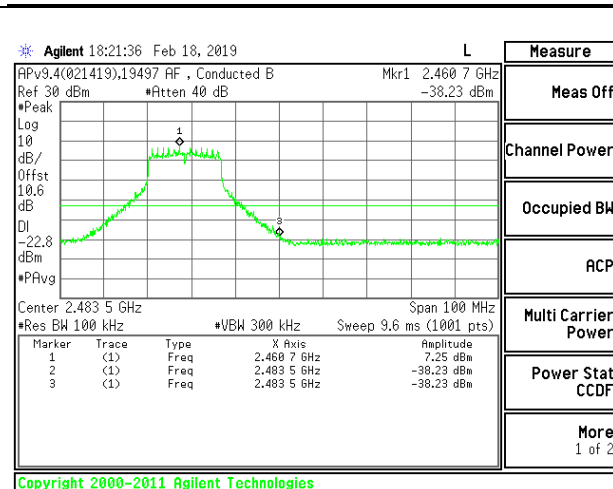


HIGH CHANNEL 11 BANDEDGE

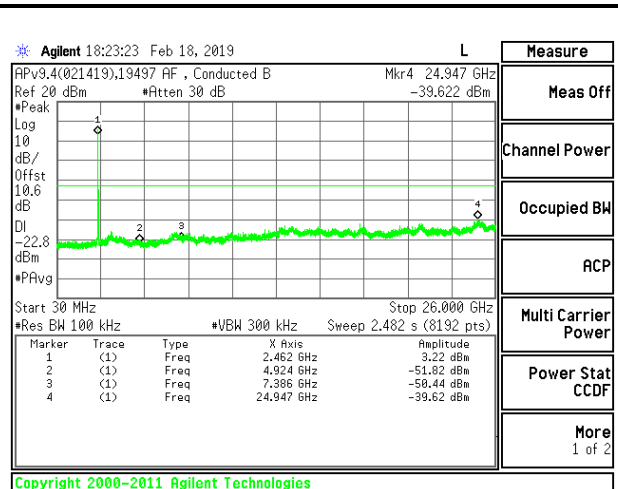


OUT-OF-BAND HIGH CHANNEL 11

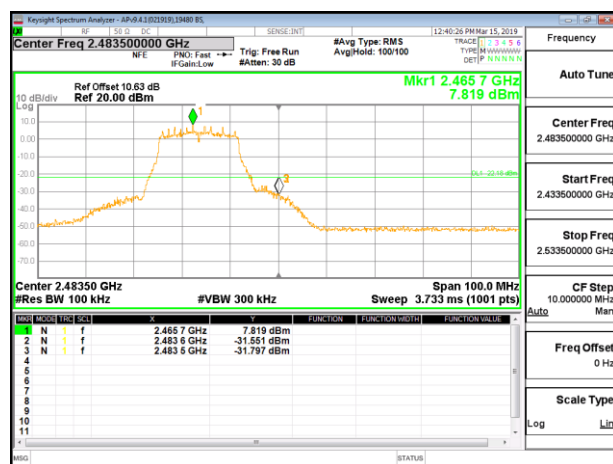


HIGH CHANNEL 12 BANDEDGE

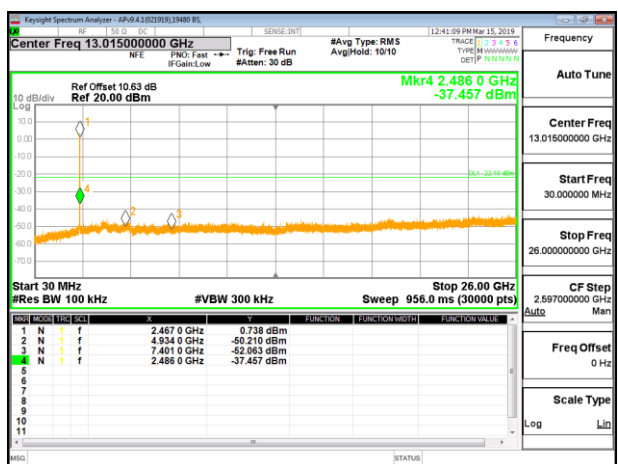

OUT-OF-BAND HIGH CHANNEL 12

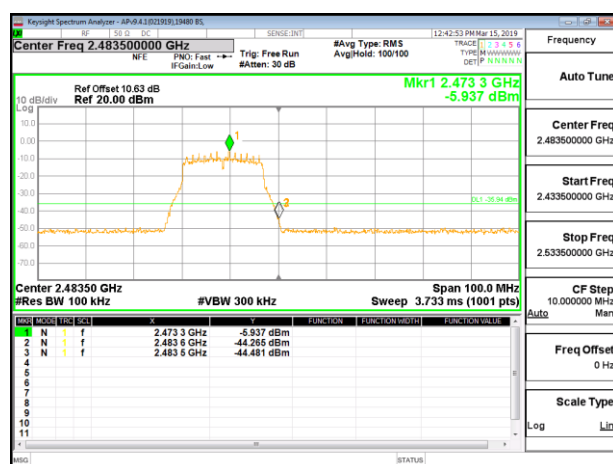


HIGH CHANNEL 13 BANDEDGE

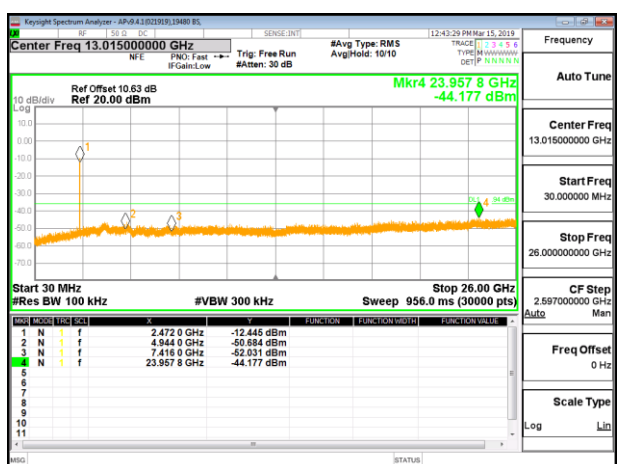


OUT-OF-BAND HIGH CHANNEL 13


9.5.3. 802.11n HT20 MODE

1TX Antenna 1 MODE

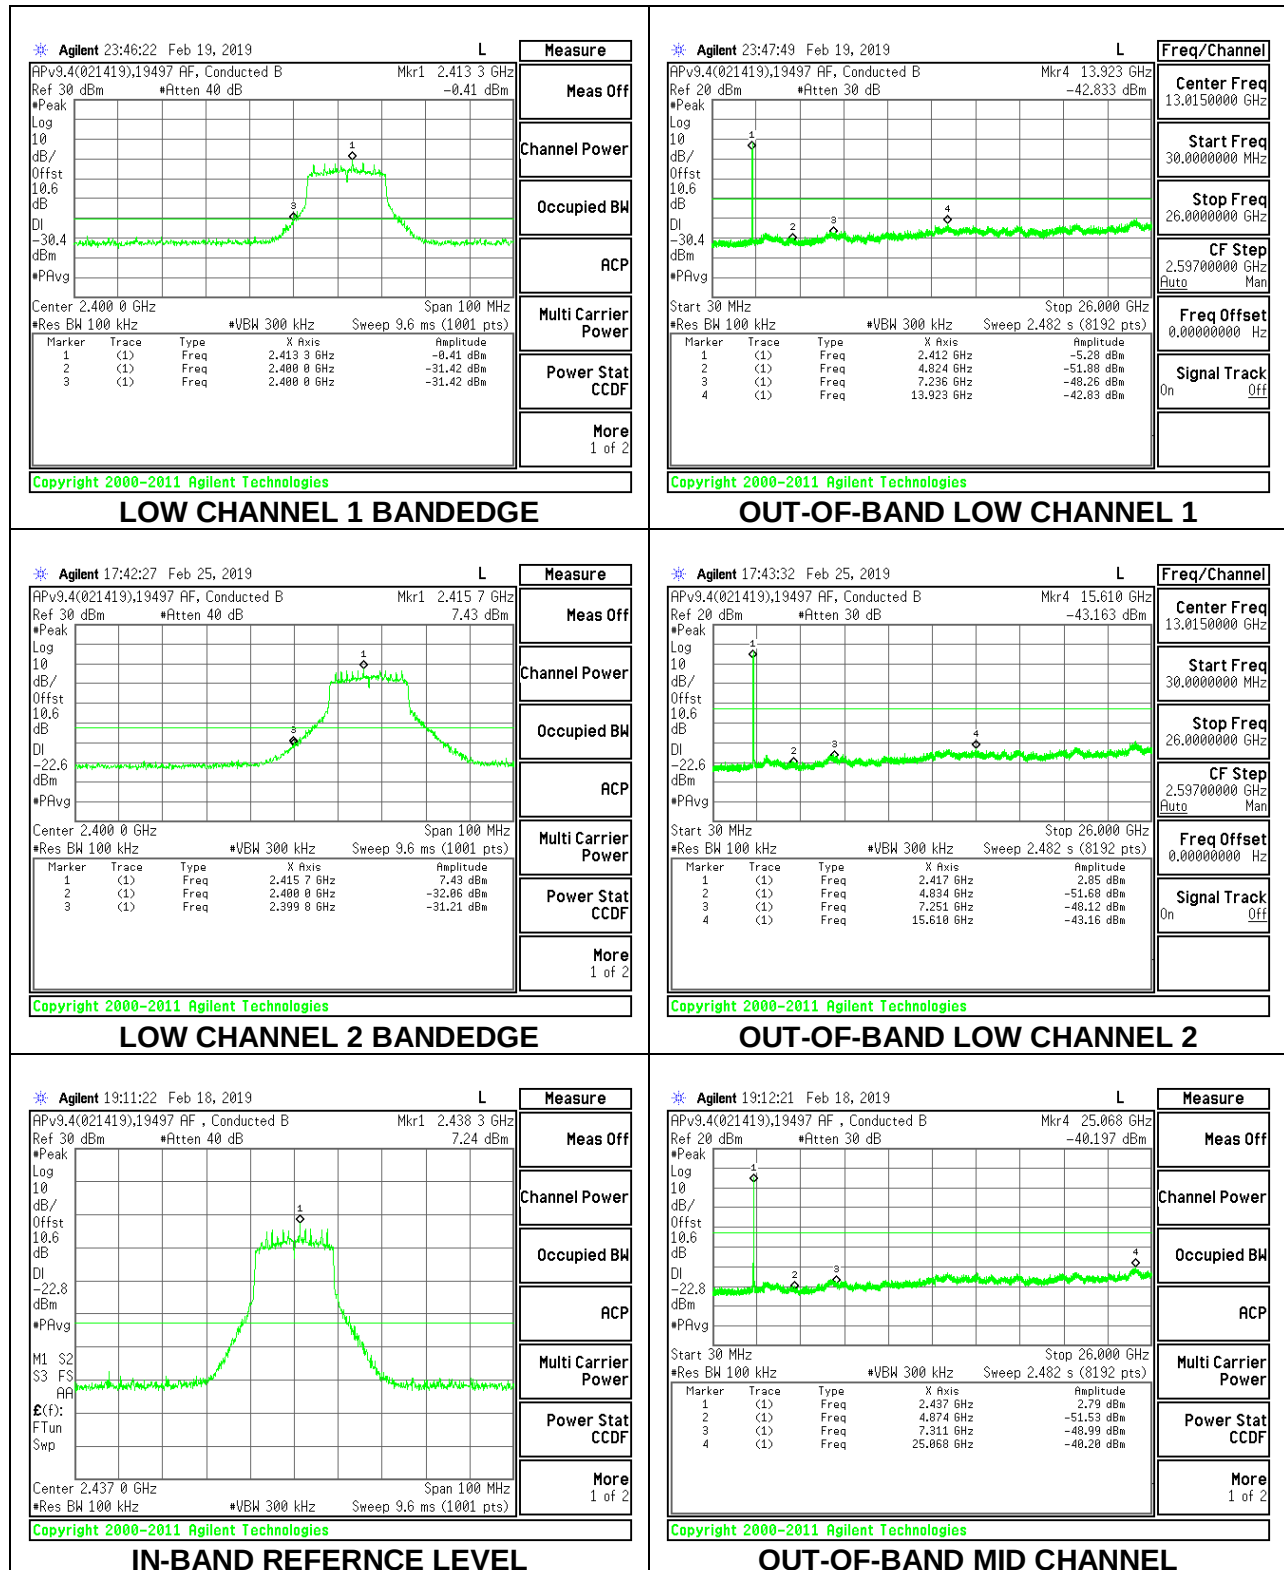


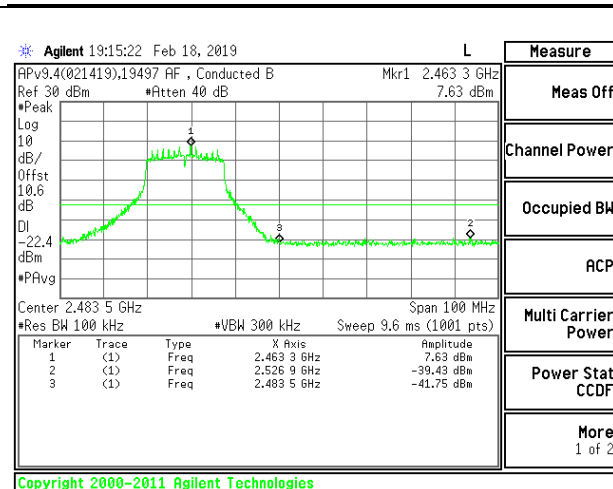


HIGH CHANNEL 11 BANDEDGE

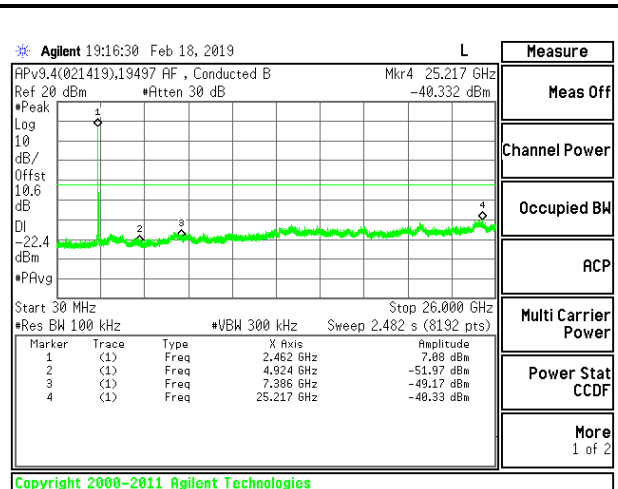


OUT-OF-BAND HIGH CHANNEL 11

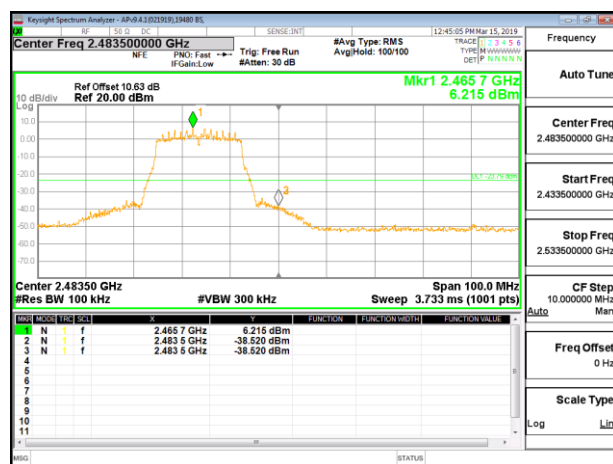


HIGH CHANNEL 12 BANDEDGE

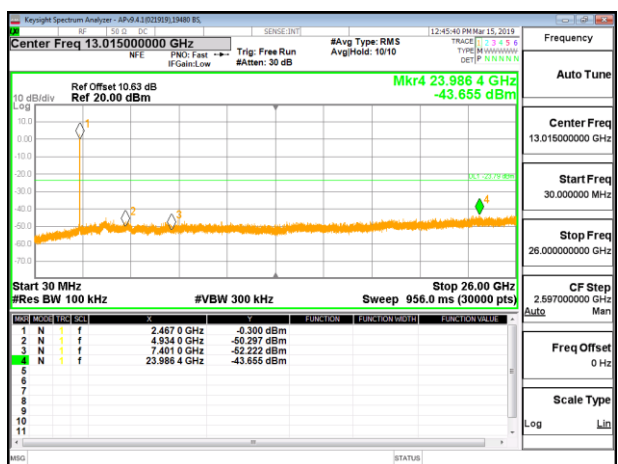

OUT-OF-BAND HIGH CHANNEL 12

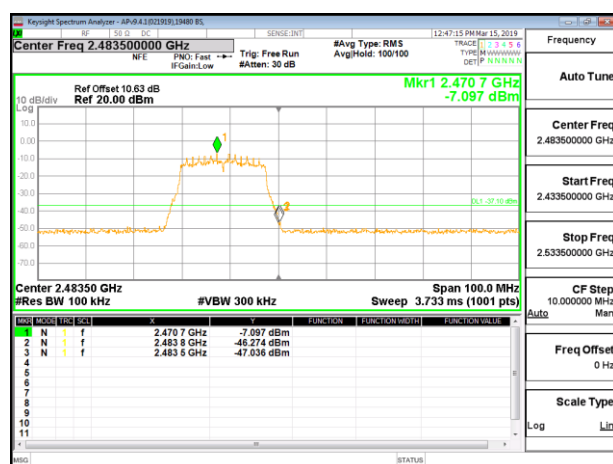

HIGH CHANNEL 13 BANDEDGE

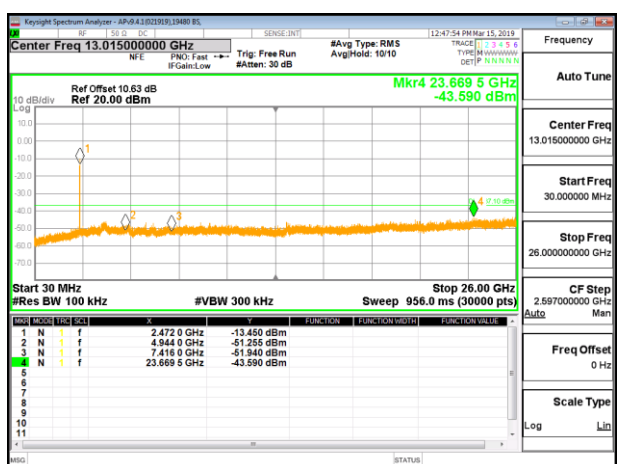

OUT-OF-BAND HIGH CHANNEL 13

10. RADIATED TEST RESULTS

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For pre-scans above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

For final measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and as applicable for average measurements.

The spectrum from 1 GHz to 18 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band. Below 1GHz and above 18GHz emissions, the channel with the highest output power was tested.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

2D antenna use - For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


10.1. TRANSMITTER ABOVE 1 GHz

10.1.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND

1TX Antenna 1 MODE

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

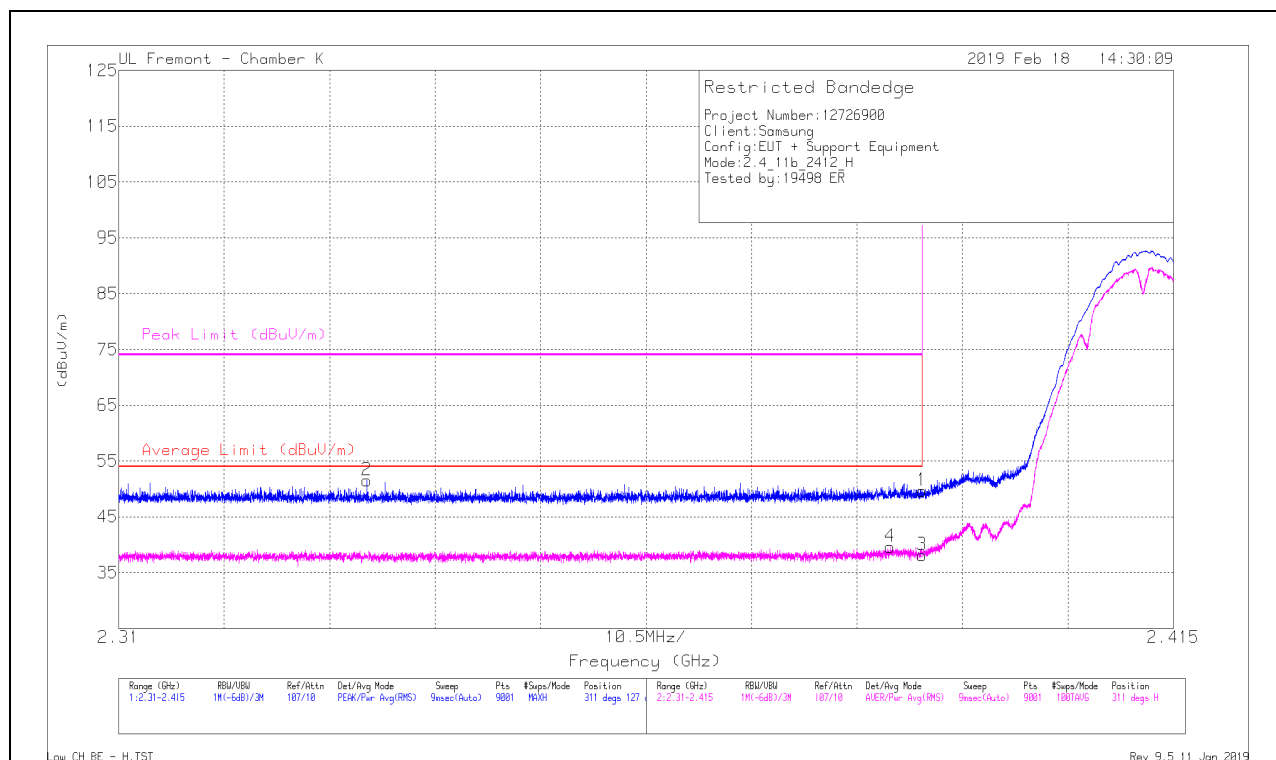

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.44	Pk	31.9	-24.7	0	49.64	-	-	74	-24.36	311	127	H
2	* 2.335	44.5	Pk	31.7	-24.7	0	51.5	-	-	74	-22.5	311	127	H
3	* 2.39	30.94	RMS	31.9	-24.7	-1	38.24	54	-15.76	-	-	311	127	H
4	* 2.387	32.27	RMS	31.9	-24.6	.1	39.67	54	-14.33	-	-	311	127	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

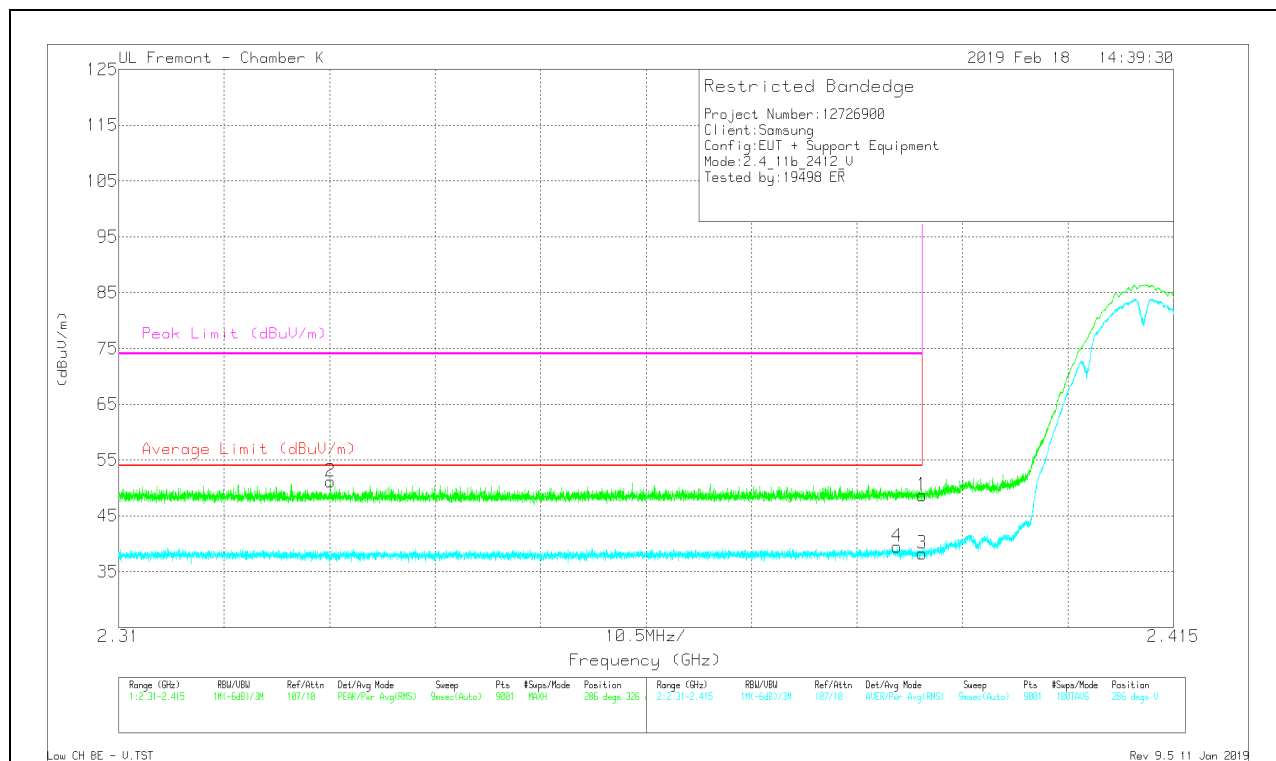

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.47	Pk	31.9	-24.7	0	48.67	-	-	74	-25.33	286	326	V
2	* 2.331	44.1	Pk	31.7	-24.6	0	51.2	-	-	74	-22.8	286	326	V
3	* 2.39	31	RMS	31.9	-24.7	.1	38.3	54	-15.7	-	-	286	326	V
4	* 2.388	32.07	RMS	31.9	-24.6	.1	39.47	54	-14.53	-	-	286	326	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

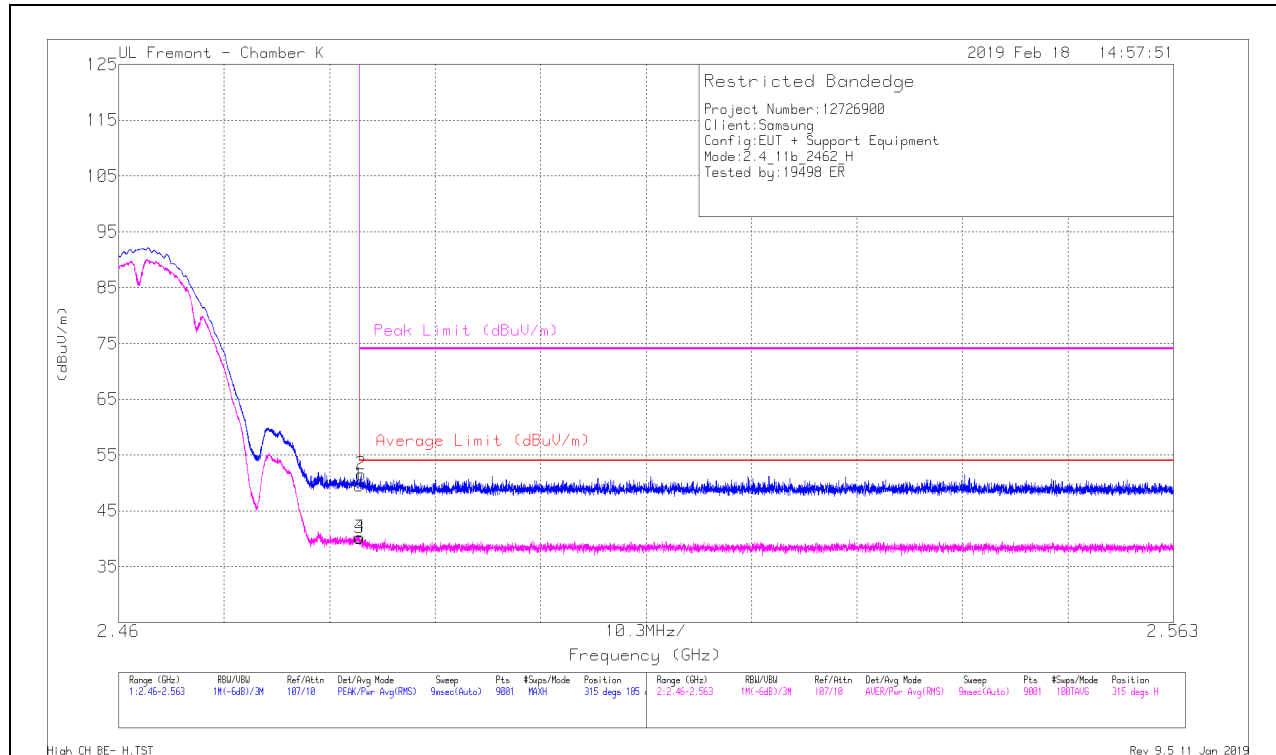

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Chl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.09	Pk	32.3	-24.8	0	49.59	-	-	74	-24.41	315	185	H
2	* 2.484	44.04	Pk	32.3	-24.8	0	51.54	-	-	74	-22.46	315	185	H
3	* 2.484	32.5	RMS	32.3	-24.8	.1	40.1	54	-13.9	-	-	315	185	H
4	* 2.484	32.68	RMS	32.3	-24.8	.1	40.28	54	-13.72	-	-	315	185	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

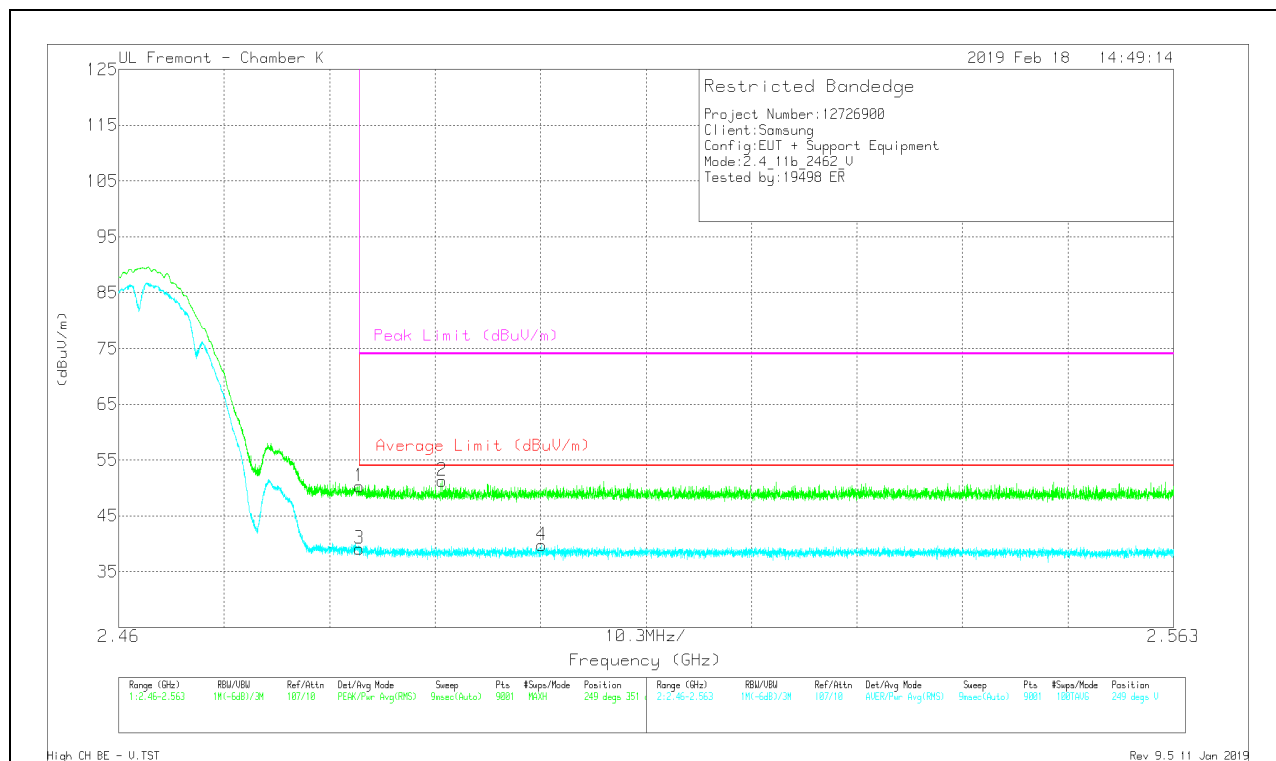

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.79	Pk	32.3	-24.8	0	50.29	-	-	74	-23.71	249	351	V
2	* 2.492	43.78	Pk	32.3	-24.8	0	51.28	-	-	74	-22.72	249	351	V
3	* 2.484	31.56	RMS	32.3	-24.8	.1	39.16	54	-14.84	-	-	249	351	V
4	2.501	32.03	RMS	32.3	-24.7	.1	39.73	54	-14.27	-	-	249	351	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

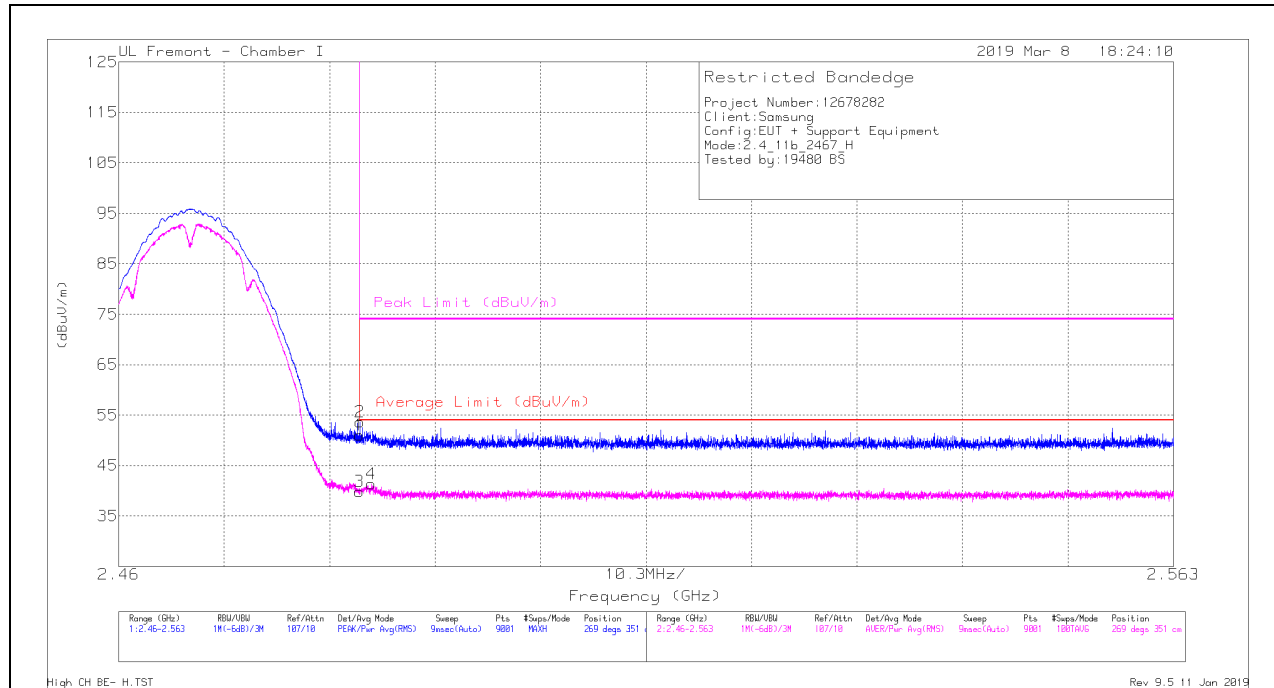

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CbI/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.28	Pk	32.4	-21.7	0	50.98	-	-	74	-23.02	269	351	H
2	* 2.484	42.91	Pk	32.4	-21.7	0	53.61	-	-	74	-20.39	269	351	H
3	* 2.484	29.1	RMS	32.4	-21.7	.1	39.9	54	-14.1	-	-	269	351	H
4	* 2.485	30.64	RMS	32.4	-21.8	.1	41.34	54	-12.66	-	-	269	351	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

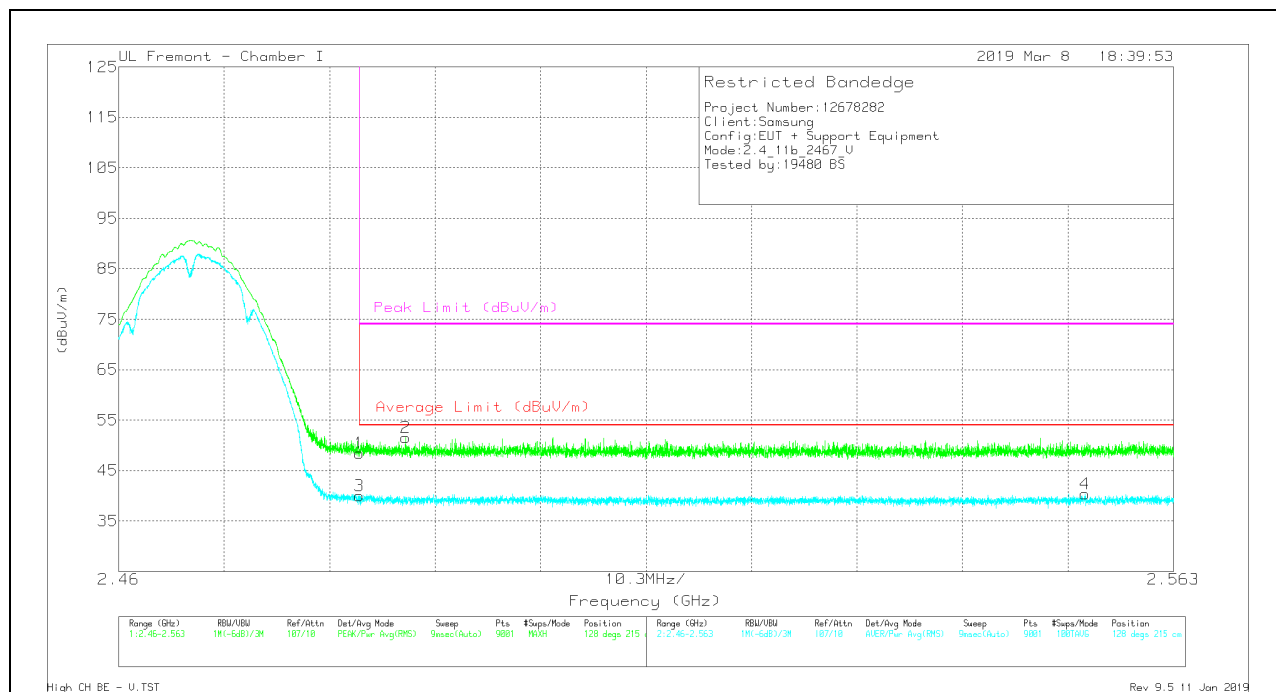

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	*2.484	37.69	PK	32.4	-21.7	0	48.39	-	-	74	-25.61	128	215	V
2	*2.488	40.88	PK	32.4	-21.7	0	51.58	-	-	74	-22.42	128	215	V
3	*2.484	29.2	RMS	32.4	-21.7	.1	40	54	-14	-	-	128	215	V
4	2.554	29.59	RMS	32.4	-21.7	.1	40.39	54	-13.61	-	-	128	215	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

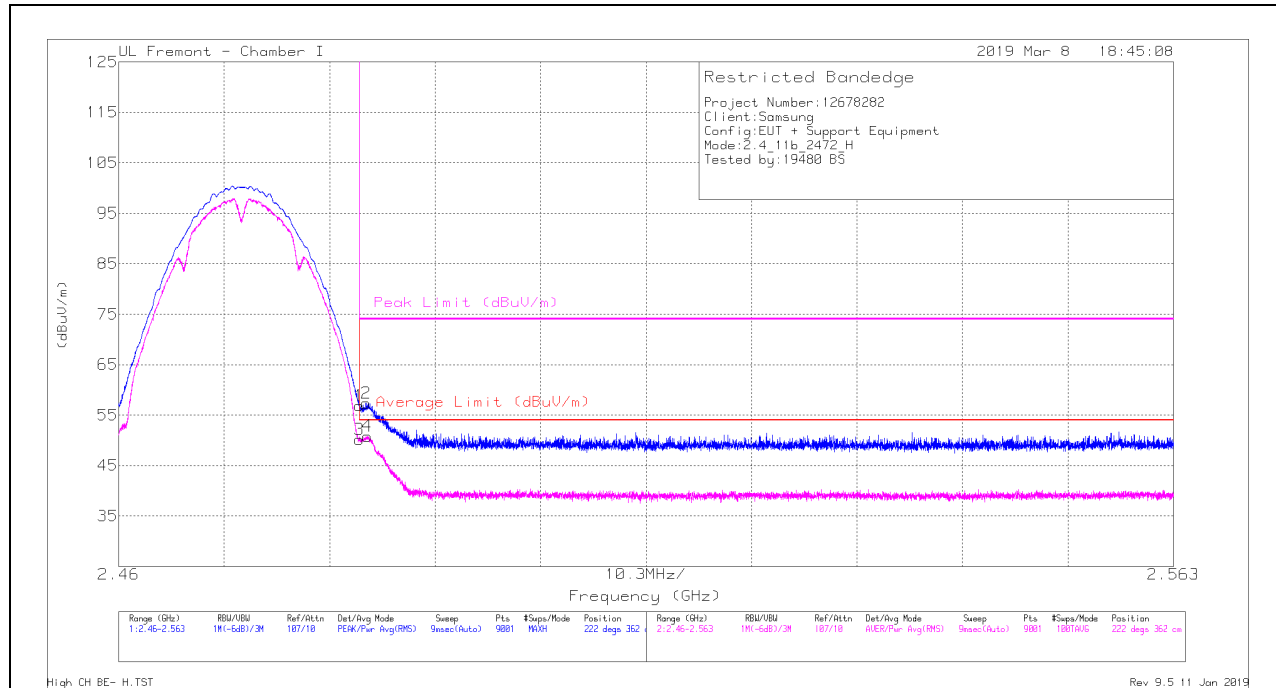

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	46.17	Pk	32.4	-21.7	0	56.87	-	-	74	-17.13	222	362	H
2	* 2.484	46.7	Pk	32.4	-21.7	0	57.4	-	-	74	-16.6	222	362	H
3	* 2.484	39.41	RMS	32.4	-21.7	.1	50.21	54	-3.79	-	-	222	362	H
4	* 2.484	40.05	RMS	32.4	-21.7	.1	50.85	54	-3.15	-	-	222	362	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

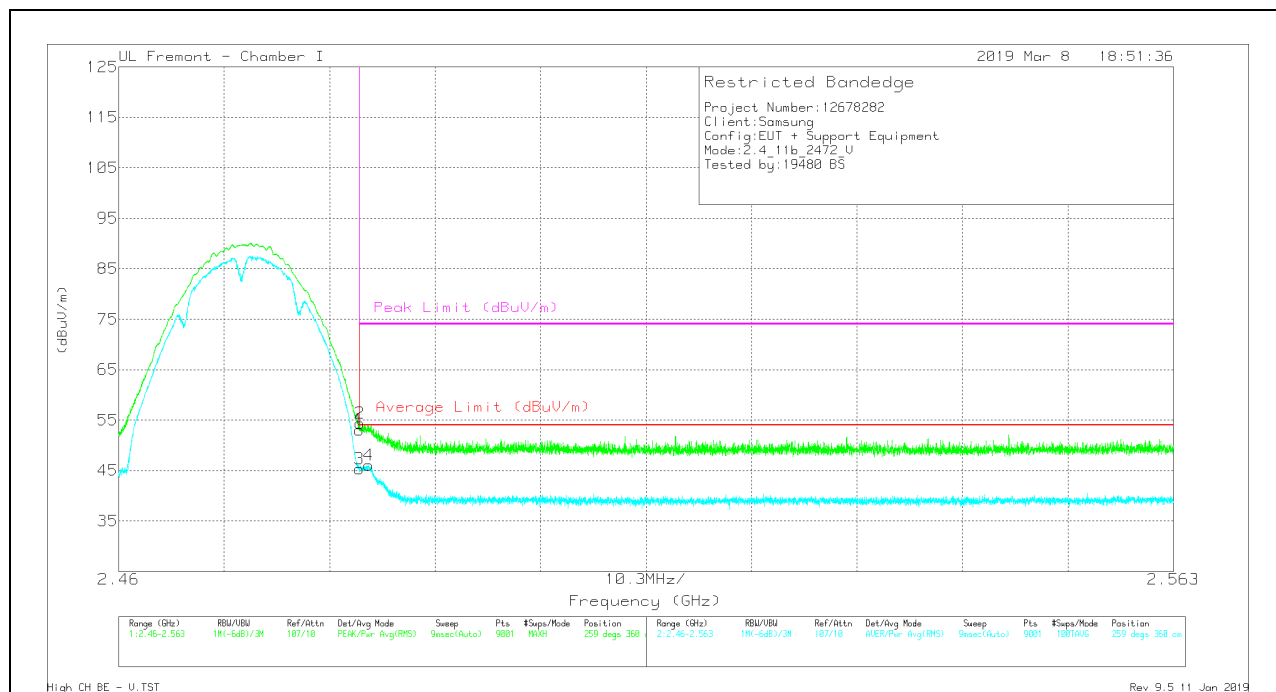

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.27	PK	32.4	-21.7	0	52.97	-	-	74	-21.03	259	360	V
2	* 2.484	43.64	PK	32.4	-21.7	0	54.34	-	-	74	-19.66	259	360	V
3	* 2.484	34.51	RMS	32.4	-21.7	.1	45.31	54	-8.69	-	-	259	360	V
4	* 2.484	35.29	RMS	32.4	-21.7	.1	46.09	54	-7.91	-	-	259	360	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

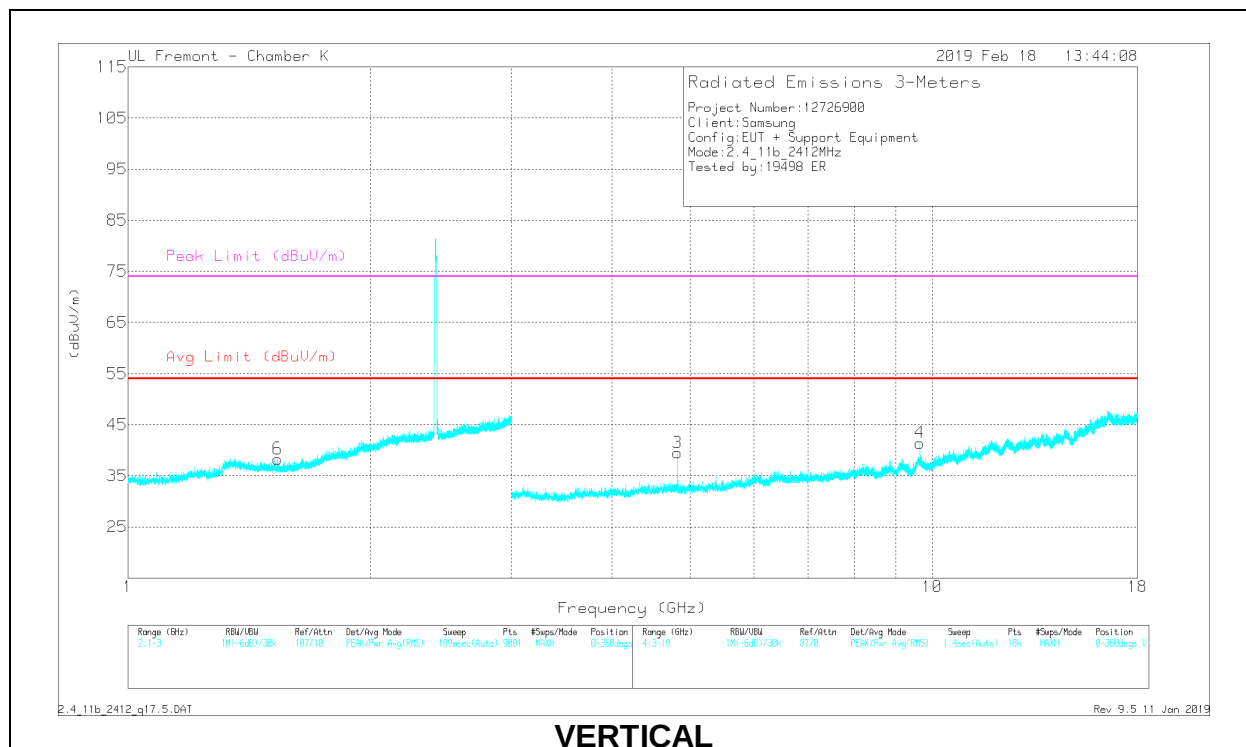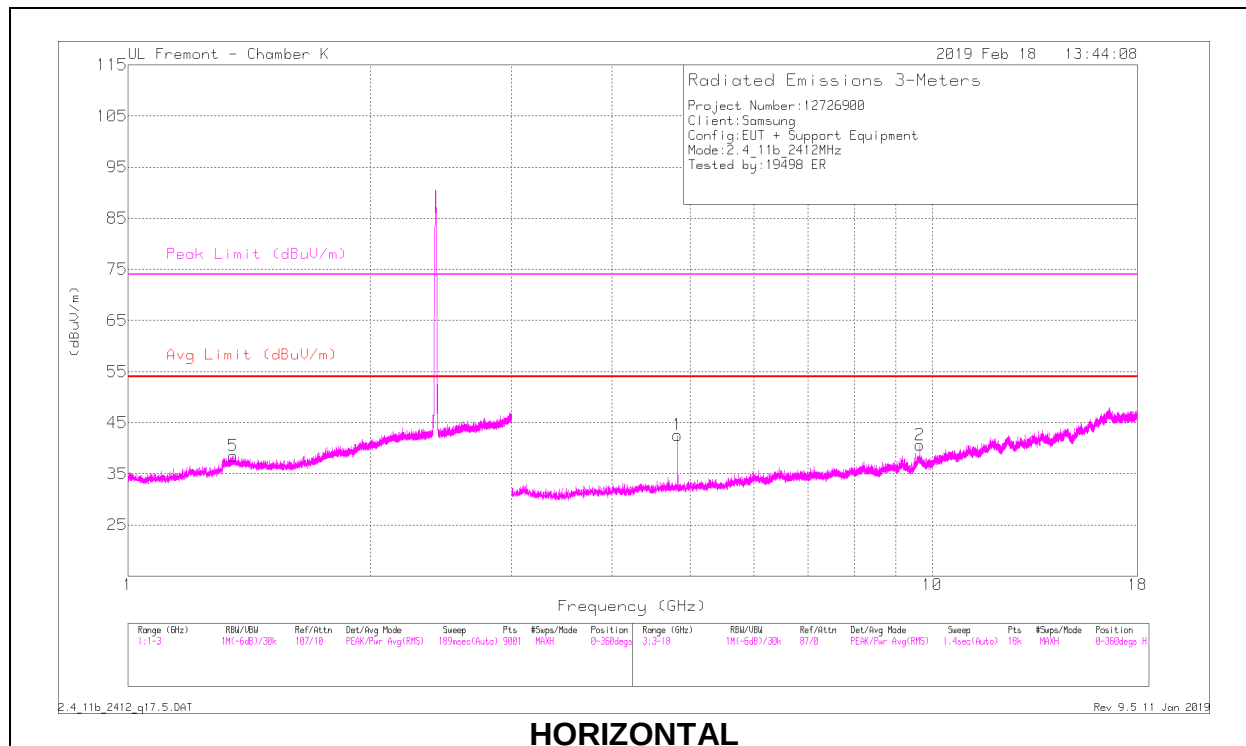

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI trl/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.35	31.47	Pk	29.4	-16.9	0	43.97	-	-	74	-30.03	99	126	H
* 1.35	12.44	Av	29.4	-16.9	.1	25.04	54	-28.96	-	-	99	126	H
* 1.537	32.23	PK2	28.1	-16.4	0	43.93	-	-	74	-30.07	130	174	V
* 1.536	22.66	MAv1	28.1	-16.4	.1	34.46	54	-19.54	-	-	130	174	V
* 4.824	41.48	Pk	34.1	-30.4	0	45.18	-	-	74	-28.82	149	113	H
* 4.824	36.85	Av	34.1	-30.4	.1	40.65	54	-13.35	-	-	149	113	H
9.648	34.3	PK	36.8	-23.4	0	47.7	-	-	-	-	89	106	H
* 4.824	40.14	Pk	34.1	-30.4	0	43.84	-	-	74	-30.16	286	102	V
* 4.824	35.26	Av	34.1	-30.4	.1	39.06	54	-14.94	-	-	286	102	V
9.648	34.21	Pk	36.8	-23.4	0	47.61	-	-	-	-	174	104	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



Pk - Peak detector

Av - Average detection

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

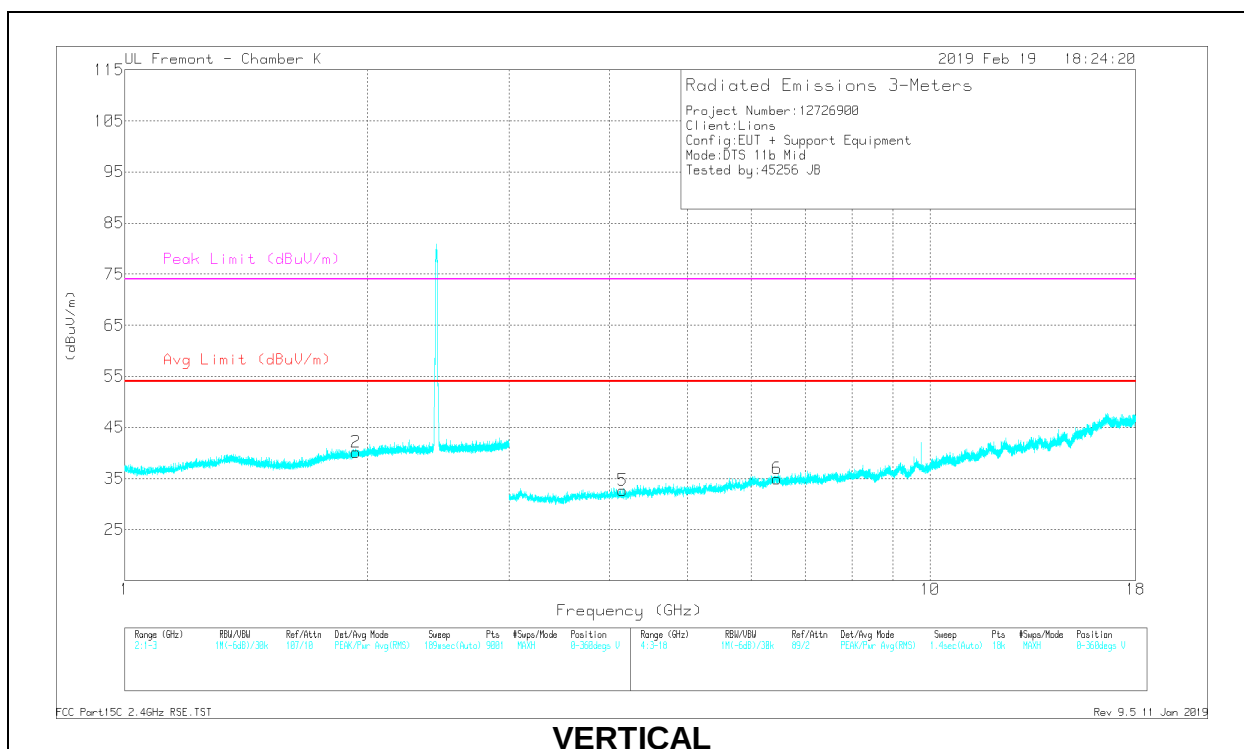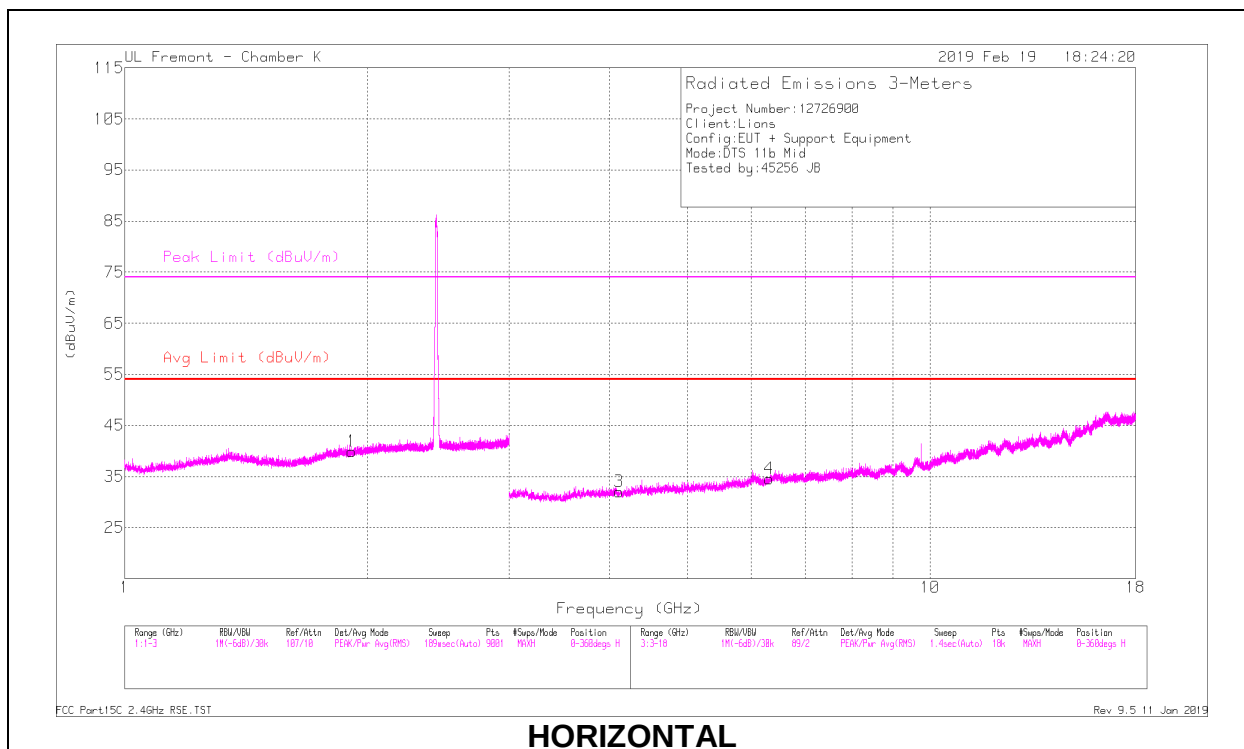

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI trl/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.111	36.54	PK2	33.5	-30.7	0	39.34	-	-	74	-34.66	115	158	H
* 4.113	26.55	MAv1	33.5	-30.7	.1	29.45	54	-24.55	-	-	115	158	H
* 4.152	37.9	PK2	33.4	-31	0	40.3	-	-	74	-33.7	72	285	V
* 4.152	27.13	MAv1	33.4	-31	.1	29.63	54	-24.37	-	-	72	285	V
1.914	33.69	Pk	30.5	-24.3	0	39.89	-	-	-	-	0-360	200	H
1.938	33.62	Pk	30.7	-24.2	0	40.12	-	-	-	-	0-360	100	V
6.316	26.87	Pk	35.4	-27.7	0	34.57	-	-	-	-	0-360	100	H
6.454	25.9	Pk	35.4	-26.4	0	34.9	-	-	-	-	0-360	200	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 11 RESULTS

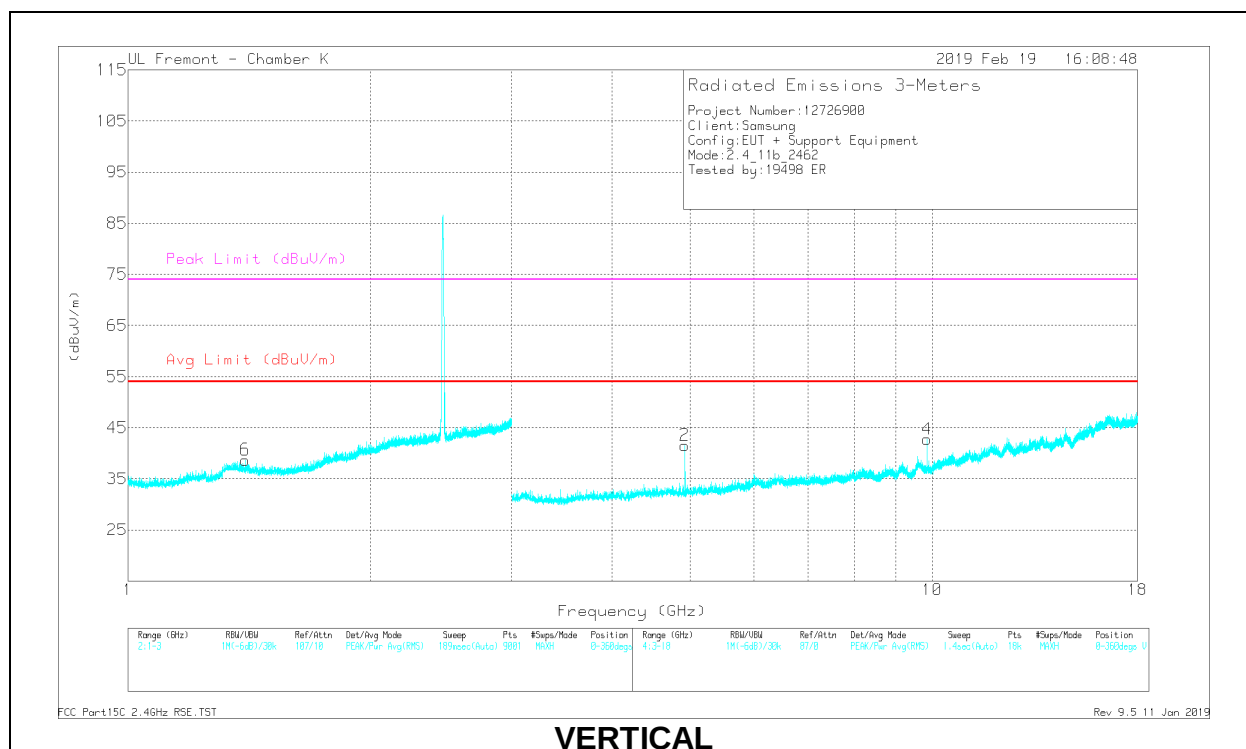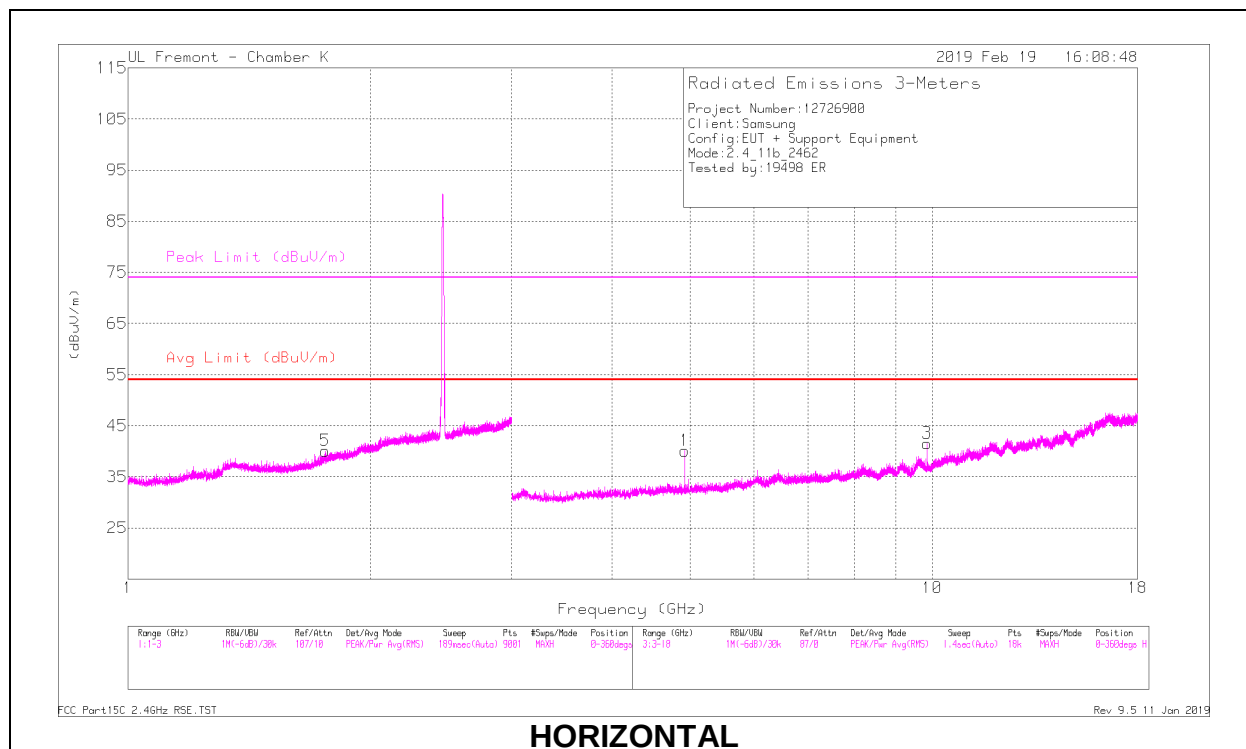

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.759	30.27	Pk	29.7	-15.7	0	44.27	-	-	-	-	249	223	H
* 1.398	31.75	Pk2	28.9	-16.9	0	43.75	-	-	74	-30.25	177	172	V
* 1.4	12.19	MAv1	28.9	-16.9	.1	24.29	54	-29.71	-	-	177	172	V
* 4.924	39.74	Pk2	34.2	-30.6	0	43.34	-	-	74	-30.66	259	114	H
* 4.924	35.17	MAv1	34.2	-30.6	.1	38.87	54	-15.13	-	-	259	114	H
9.848	33	Pk	36.9	-23.2	0	46.7	-	-	-	-	248	102	H
* 4.924	42.38	Pk2	34.2	-30.6	0	45.98	-	-	74	-28.02	8	106	V
* 4.924	37.99	MAv1	34.2	-30.6	.1	41.69	54	-12.31	-	-	8	106	V
9.848	33.93	Pk	36.9	-23.2	0	47.63	-	-	-	-	258	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

10.1.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND

1TX Antenna 1 MODE

BANDEDGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

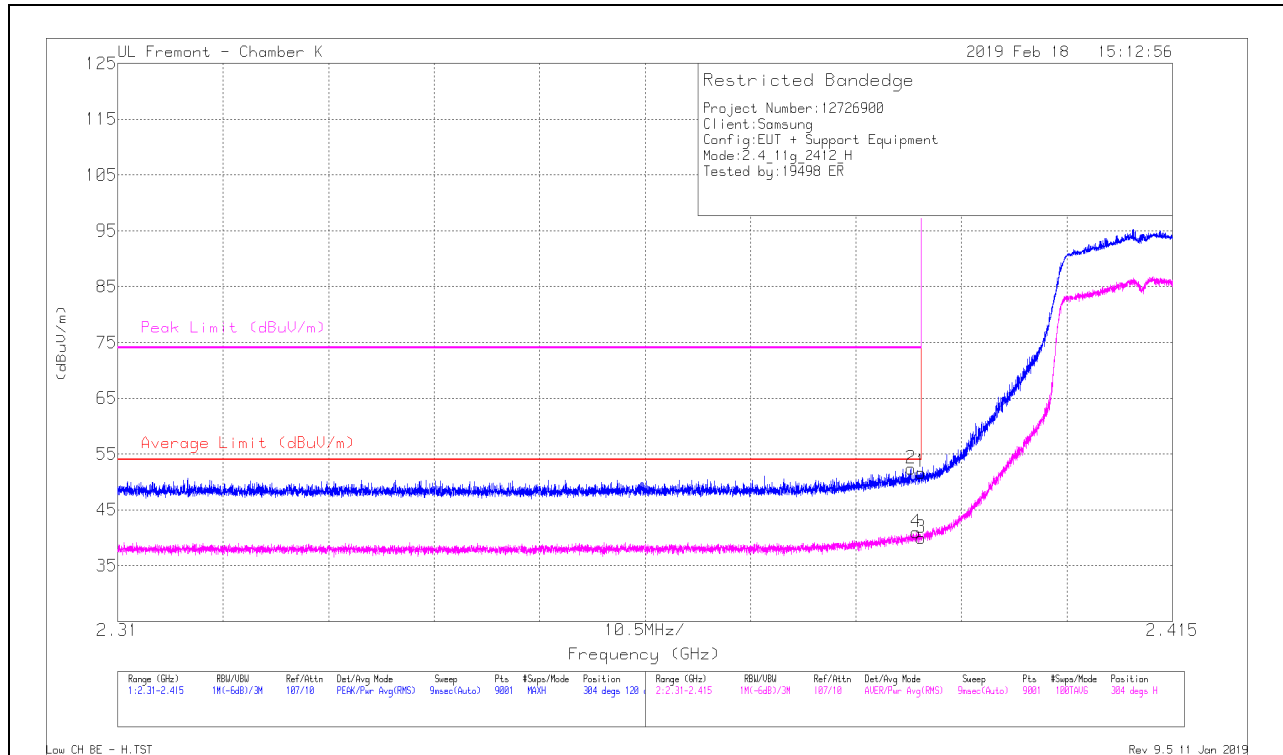


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Ampl/CBIF/TrPad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	44.52	Pk	31.9	-24.7	0	51.72	-	-	74	-22.28	304	120	H
2	* 2.399	45.16	Pk	31.9	-24.7	0	52.36	-	-	74	-21.64	304	120	H
3	* 2.39	32.69	RMS	31.9	-24.7	.09	39.98	54	-14.02	-	-	304	120	H
4	* 2.399	33.7	RMS	31.9	-24.7	.09	40.99	54	-13.01	-	-	304	120	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

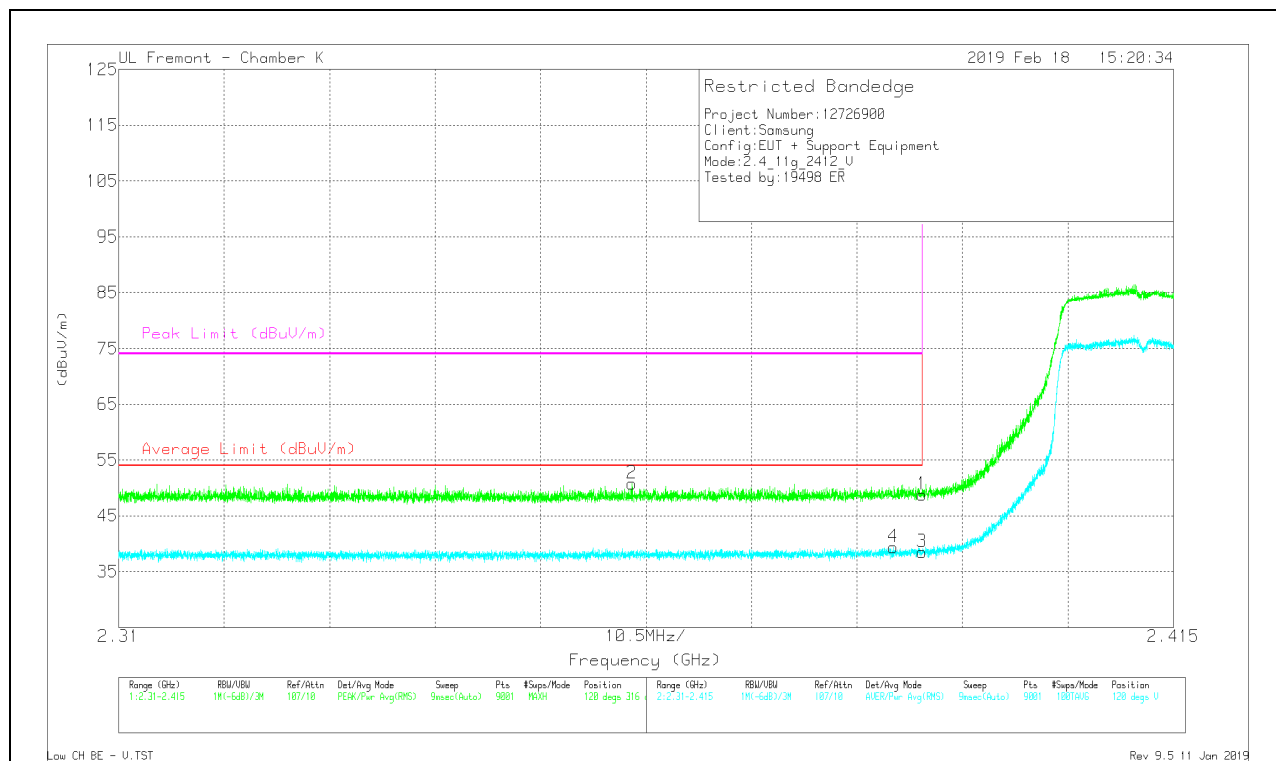

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.55	Pk	31.9	-24.7	0	48.75	-	-	74	-25.25	120	316	V
2	* 2.361	43.73	PK	31.7	-24.6	0	50.83	-	-	74	-23.17	120	316	V
3	* 2.39	31.2	RMS	31.9	-24.7	.09	38.49	54	-15.51	-	-	120	316	V
4	* 2.387	31.92	RMS	31.9	-24.6	.09	39.31	54	-14.69	-	-	120	316	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

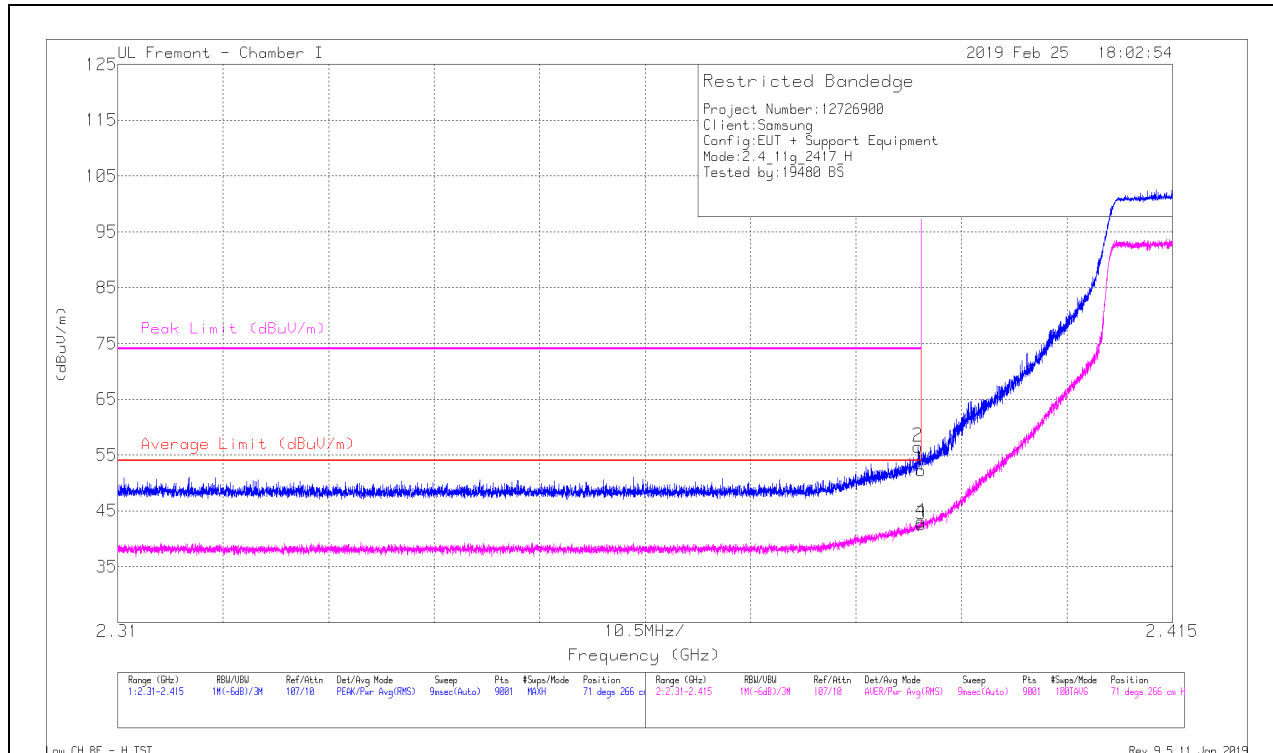


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.04	Pk	31.8	-21.6	0	52.24	-	-	74	-21.76	71	266	H
2	* 2.39	46.36	Pk	31.8	-21.6	0	56.56	-	-	74	-17.44	71	266	H
3	* 2.39	32.36	RMS	31.8	-21.6	.09	42.65	54	-11.35	-	-	71	266	H
4	* 2.39	32.78	RMS	31.8	-21.6	.09	43.07	54	-10.93	-	-	71	266	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

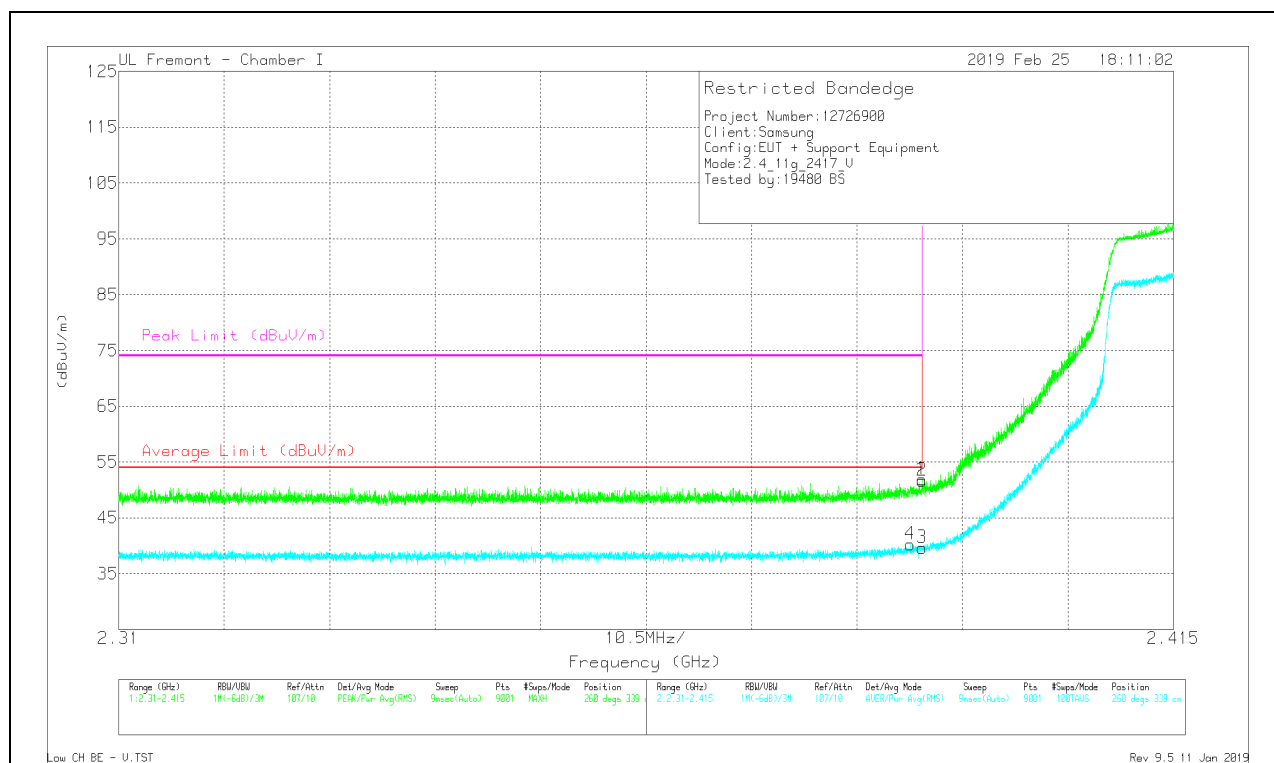

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CM/Ftr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.65	Pk	31.8	-21.6	0	51.85	-	-	74	-22.15	260	339	V
2	* 2.39	41.41	PK	31.8	-21.6	0	51.61	-	-	74	-22.39	260	339	V
3	* 2.39	29.31	RMS	31.8	-21.6	.09	39.6	54	-14.4	-	-	260	339	V
4	* 2.389	29.94	RMS	31.8	-21.6	.09	40.23	54	-13.77	-	-	260	339	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

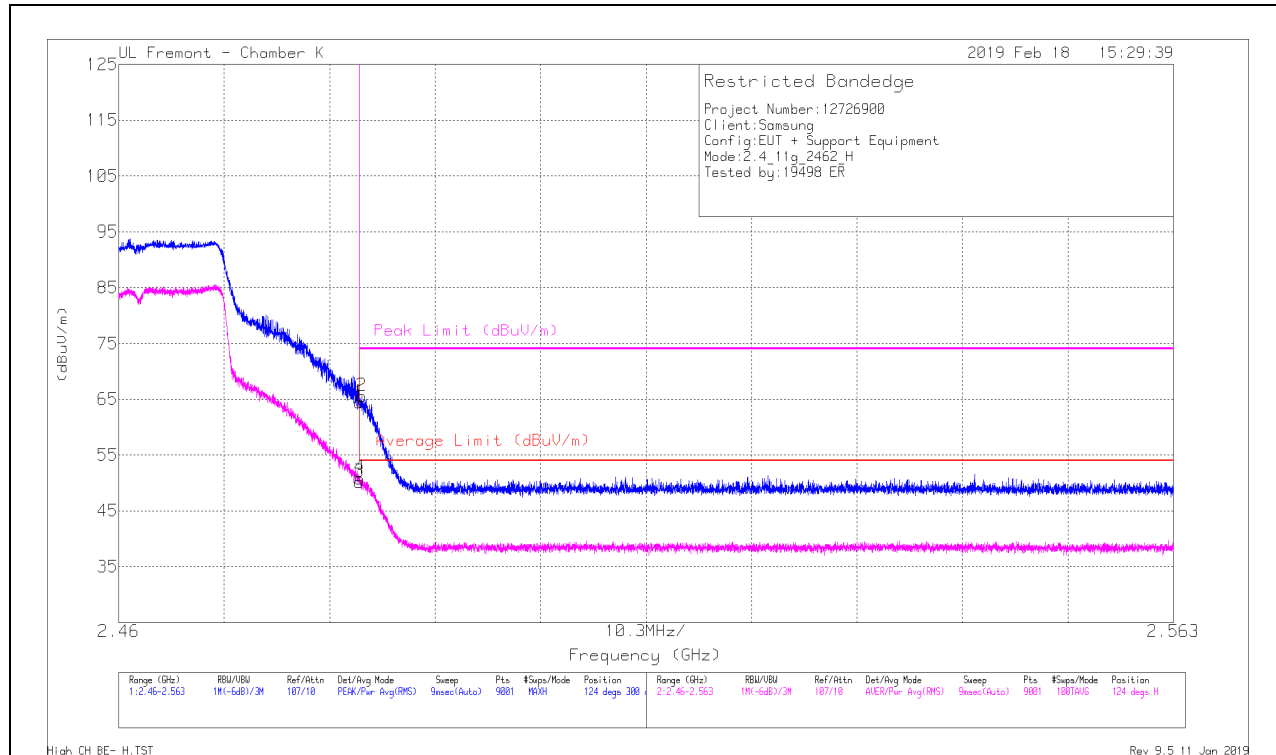


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	56.93	Pk	32.3	-24.8	0	64.43	-	-	74	-9.57	124	300	H
2	* 2.484	58.09	Pk	32.3	-24.8	0	65.59	-	-	74	-8.41	124	300	H
3	* 2.484	42.54	RMS	32.3	-24.8	.09	50.13	54	-3.87	-	-	124	300	H
4	* 2.484	43.26	RMS	32.3	-24.8	.09	50.85	54	-3.15	-	-	124	300	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

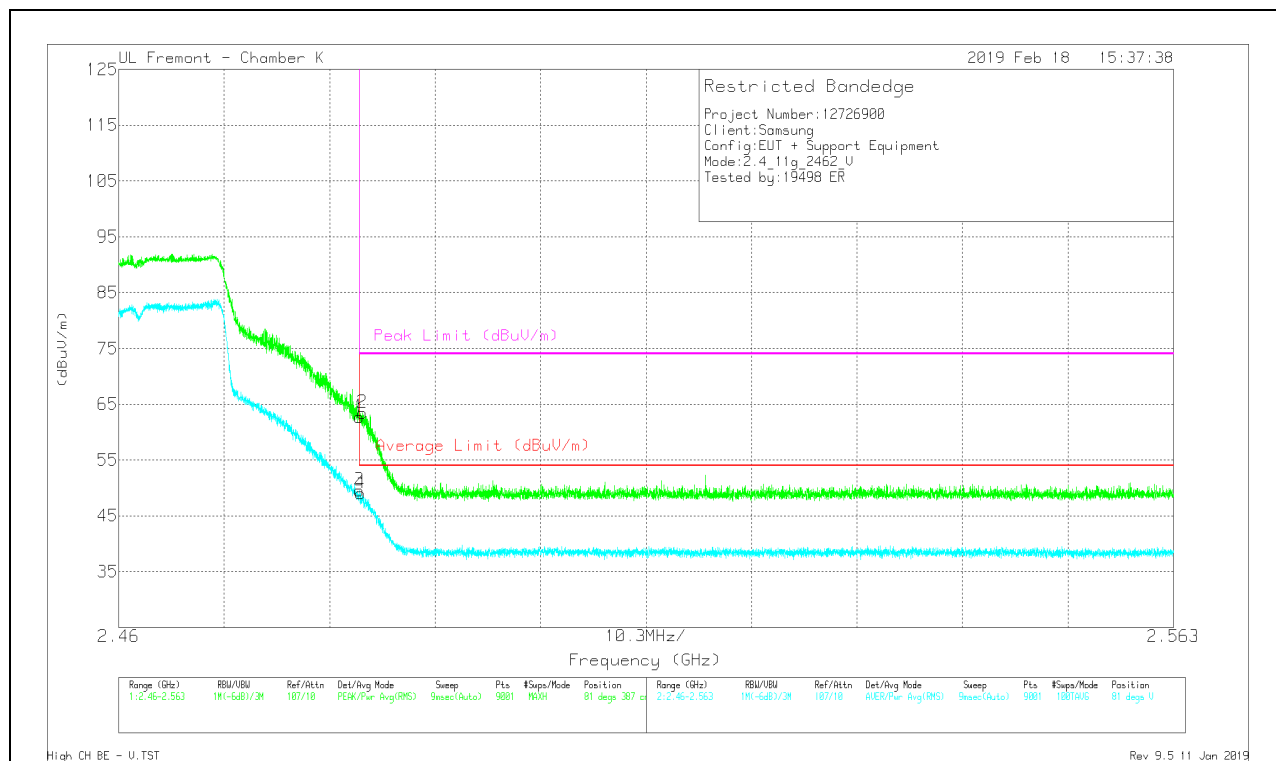

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.484	55.2	Pk	32.3	-24.8	0	62.7	-	-	74	-11.3	81	387	V
2	* 2.484	55.91	PK	32.3	-24.8	0	63.41	-	-	74	-10.59	81	387	V
3	* 2.484	41.95	RMS	32.3	-24.8	.09	49.54	54	-4.46	-	-	81	387	V
4	* 2.484	41.48	RMS	32.3	-24.8	.09	49.07	54	-4.93	-	-	81	387	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

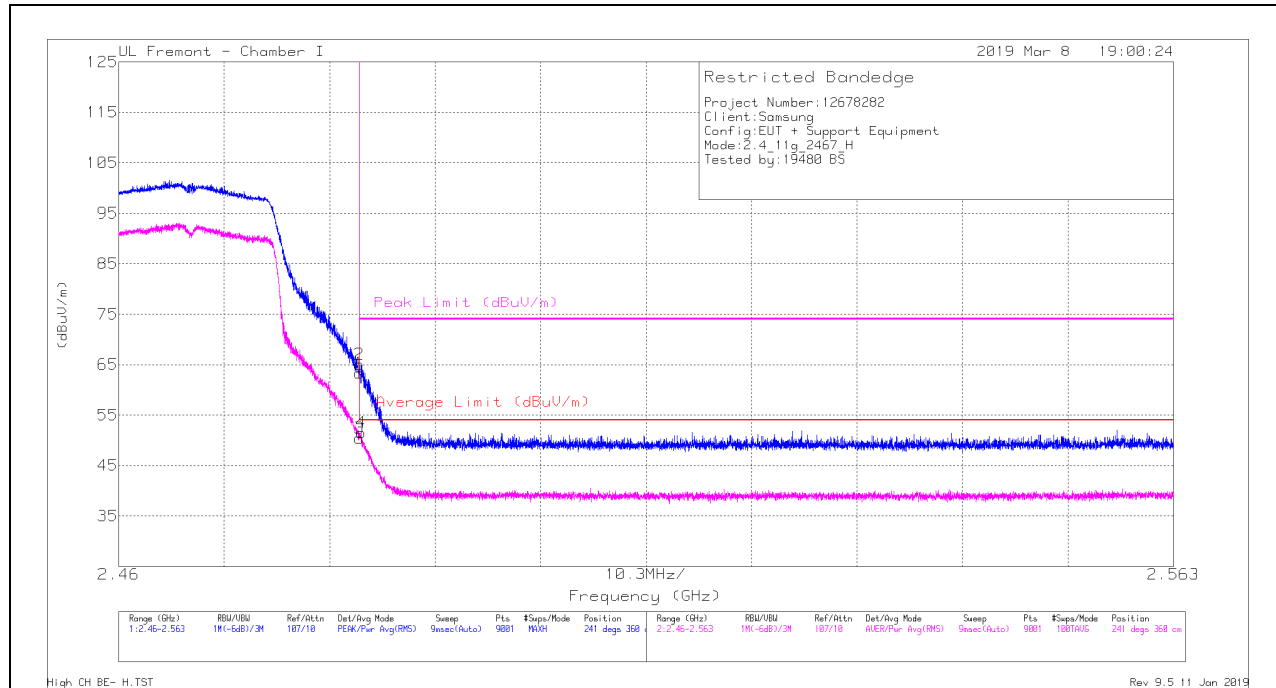

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	52.64	Pk	32.4	-21.7	0	63.34	-	-	74	-10.66	241	360	H
2	* 2.484	54.34	PK	32.4	-21.7	0	65.04	-	-	74	-8.96	241	360	H
3	* 2.484	39.64	RMS	32.4	-21.7	.09	50.43	54	-3.57	-	-	241	360	H
4	* 2.484	40.71	RMS	32.4	-21.7	.09	51.5	54	-2.5	-	-	241	360	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL RESULT

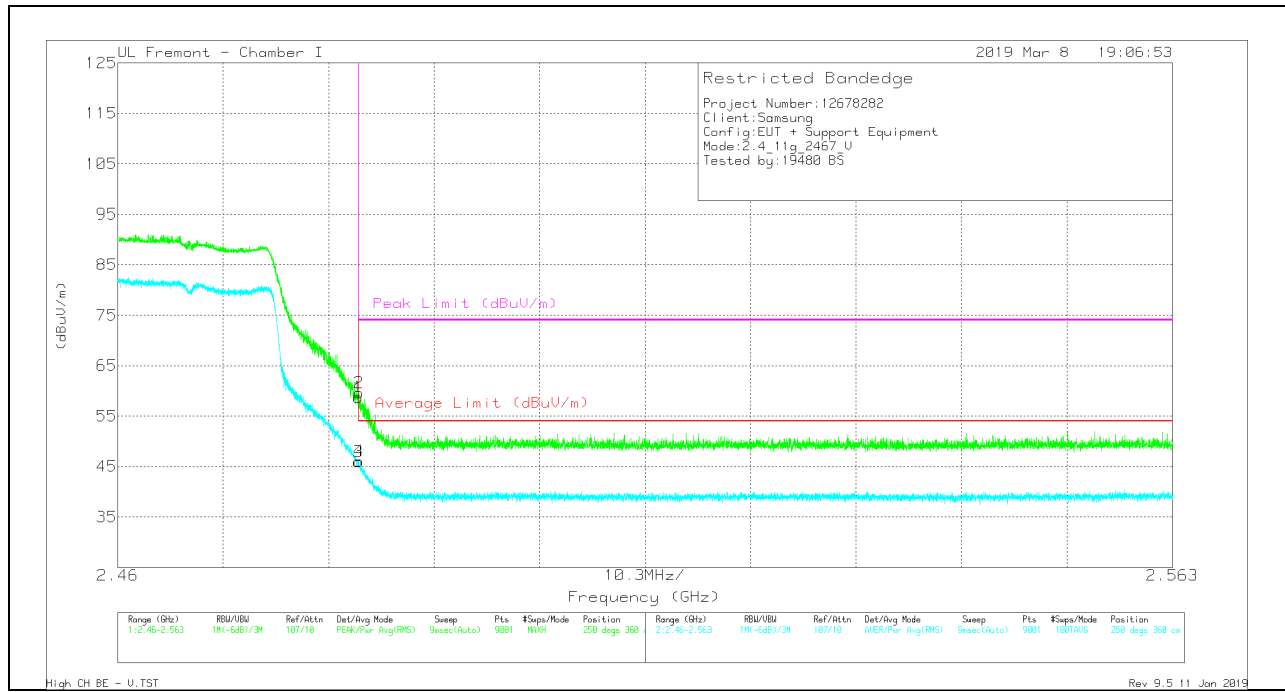

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	48.04	PK	32.4	-21.7	0	58.74	-	-	74	-15.26	250	360	V
2	* 2.484	48.96	PK	32.4	-21.7	0	59.66	-	-	74	-14.34	250	360	V
3	* 2.484	35.15	RMS	32.4	-21.7	.09	45.94	54	-8.06	-	-	250	360	V
4	* 2.484	35.24	RMS	32.4	-21.7	.09	46.03	54	-7.97	-	-	250	360	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

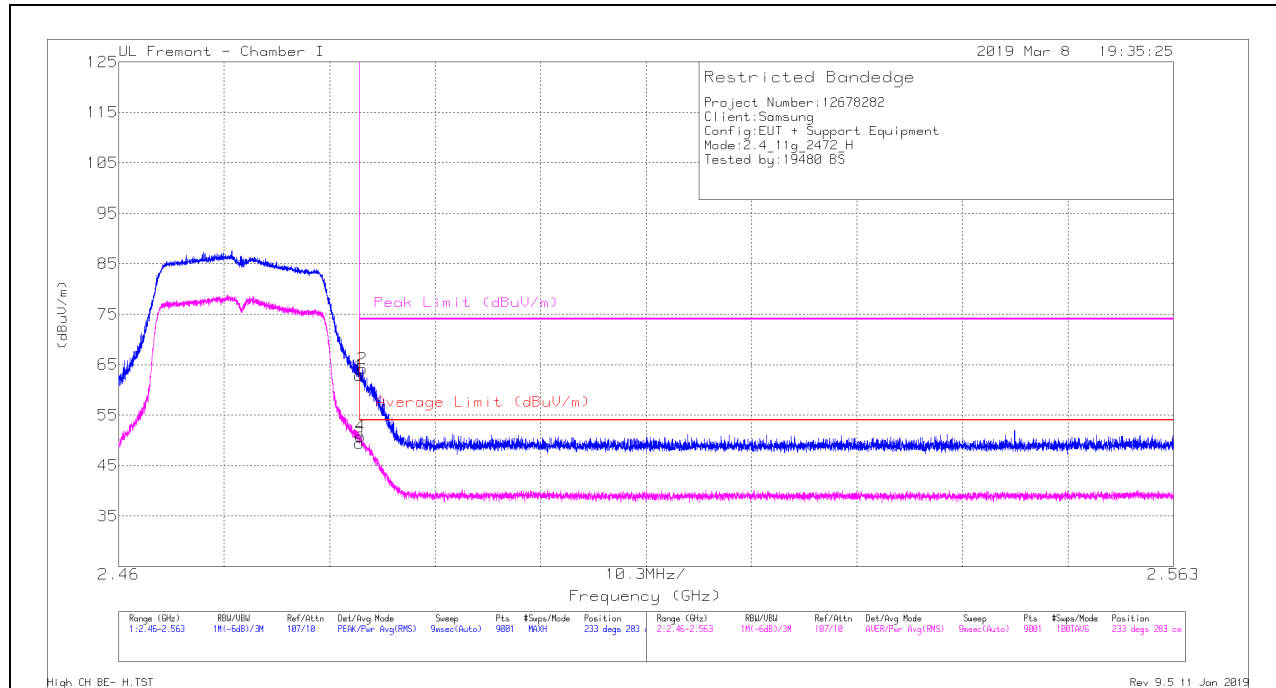

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	52.18	Pk	32.4	-21.7	0	62.88	-	-	74	-11.12	233	283	H
2	* 2.484	53.53	Pk	32.4	-21.7	0	64.23	-	-	74	-9.77	233	283	H
3	* 2.484	38.69	RMS	32.4	-21.7	.09	49.48	54	-4.52	-	-	233	283	H
4	* 2.484	40.05	RMS	32.4	-21.7	.09	50.84	54	-3.16	-	-	233	283	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

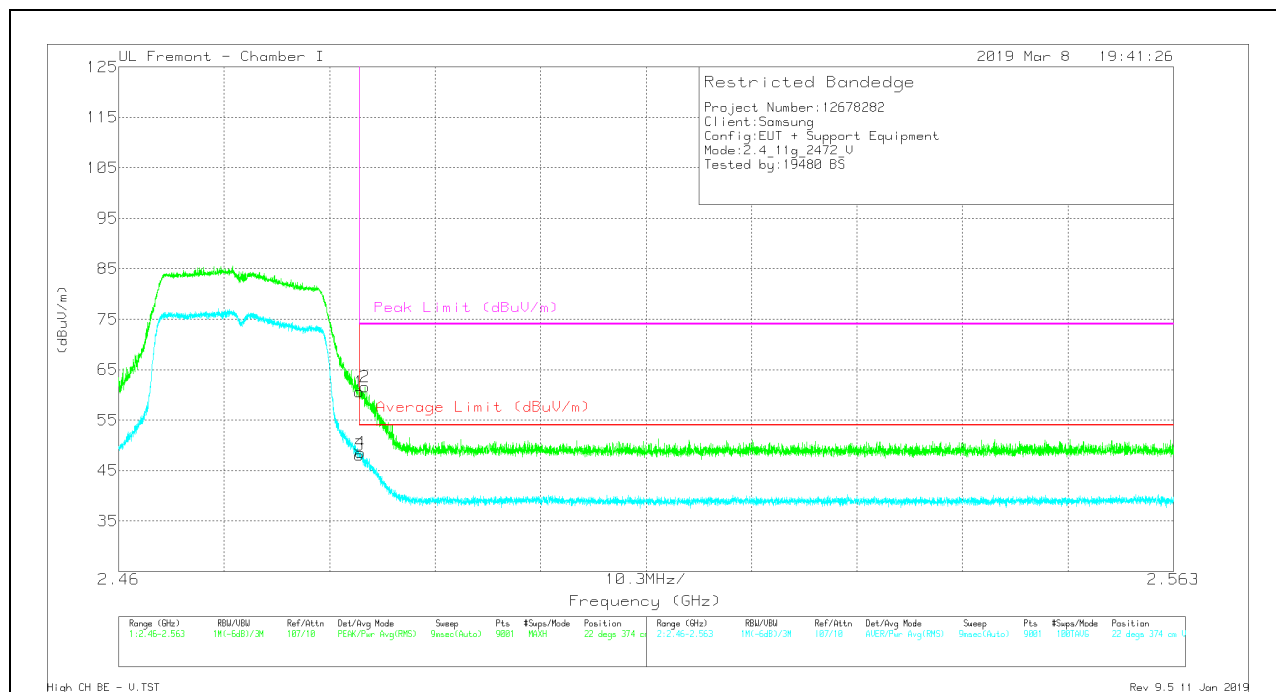

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.84	PK	32.4	-21.7	0	60.54	-	-	74	-13.46	22	374	V
2	* 2.484	50.86	PK	32.4	-21.7	0	61.56	-	-	74	-12.44	22	374	V
3	* 2.484	37.26	RMS	32.4	-21.7	.09	48.05	54	-5.95	-	-	22	374	V
4	* 2.484	37.75	RMS	32.4	-21.7	.09	48.54	54	-5.46	-	-	22	374	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

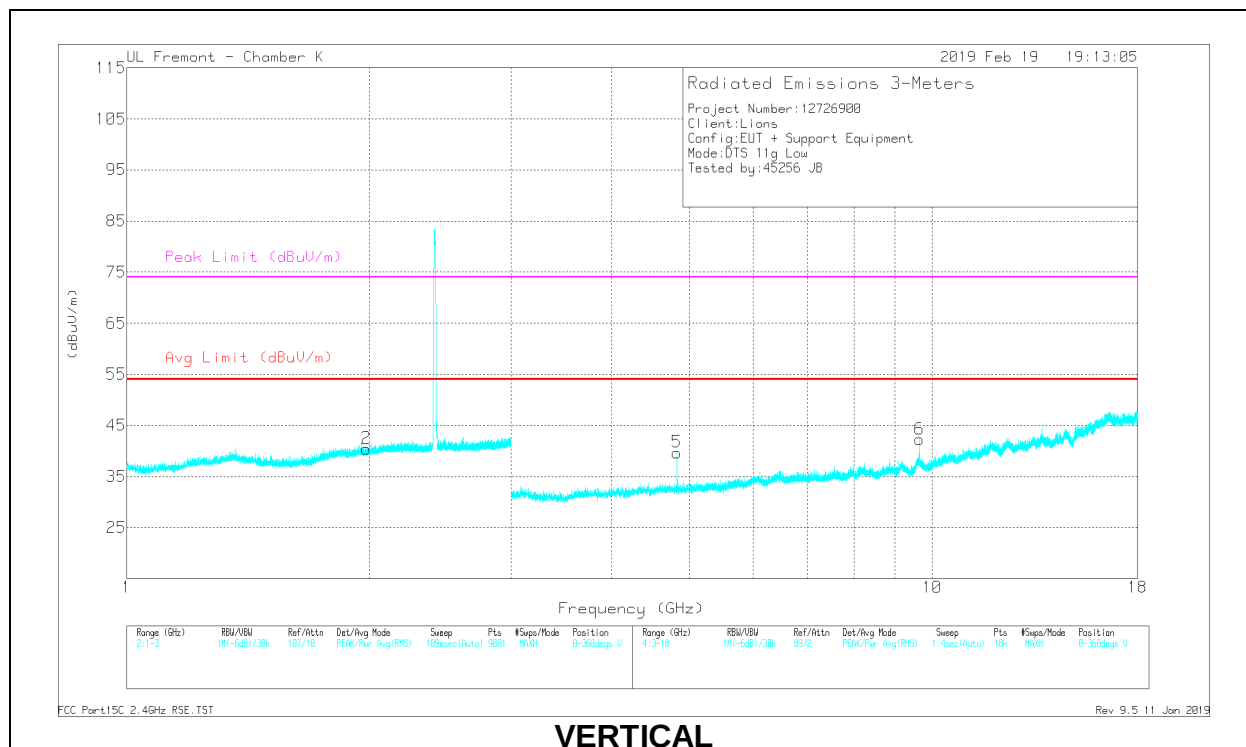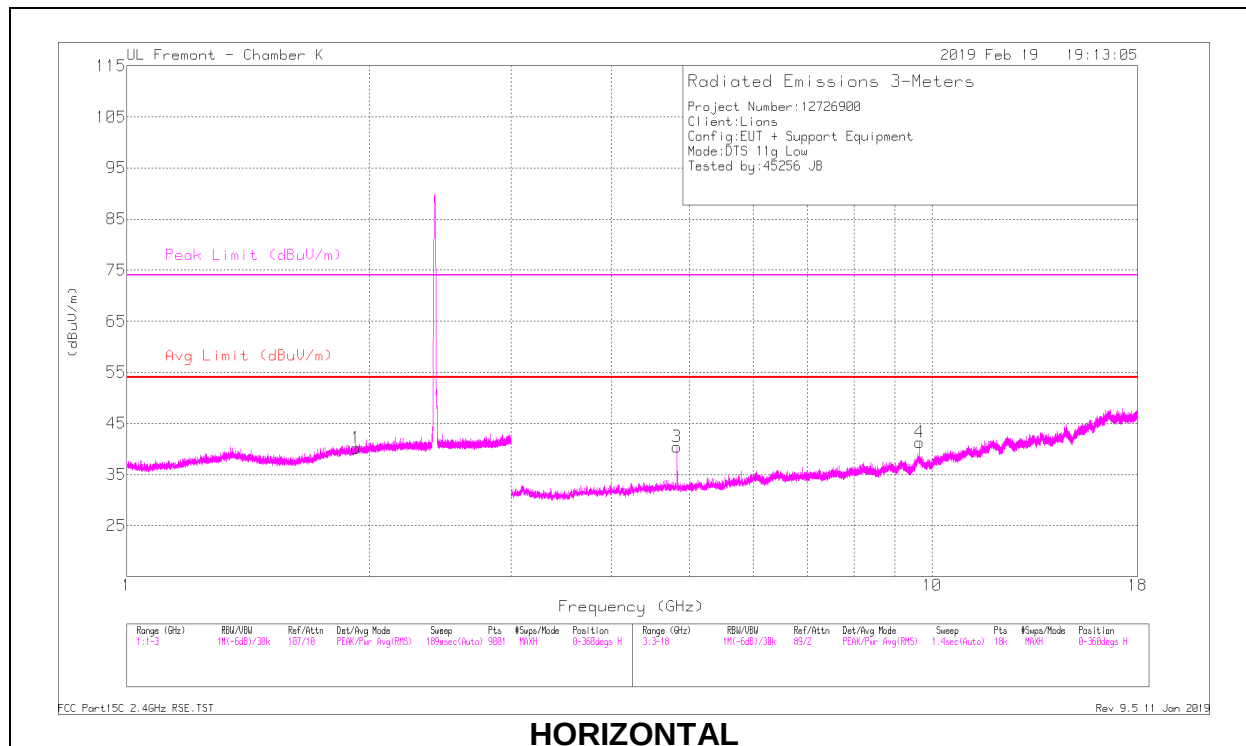

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI trl/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.824	40.98	PK2	34.1	-30.4	0	44.68	-	-	74	-29.32	168	122	H
* 4.824	30.96	MAv1	34.1	-30.4	.09	34.75	54	-19.25	-	-	168	122	H
* 4.824	39.33	PK2	34.1	-30.4	0	43.03	-	-	74	-30.97	288	100	V
* 4.824	29.98	MAv1	34.1	-30.4	.09	33.77	54	-20.23	-	-	288	100	V
1.927	33.78	Pk	30.6	-24.2	0	40.18	-	-	-	-	0-360	200	H
1.985	33.96	Pk	30.9	-24.4	0	40.46	-	-	-	-	0-360	200	V
9.648	27.83	Pk	36.8	-23.4	0	41.23	-	-	-	-	0-360	101	H
9.648	28.85	Pk	36.8	-23.4	0	42.25	-	-	-	-	0-360	100	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

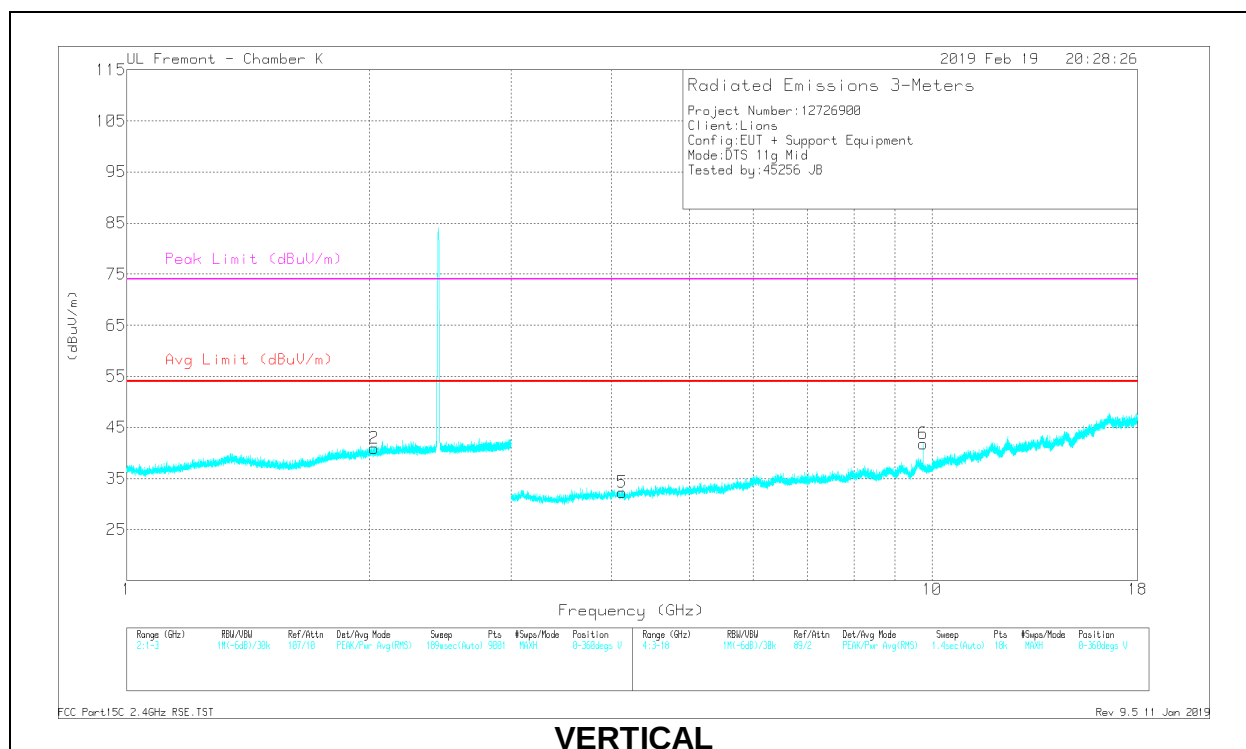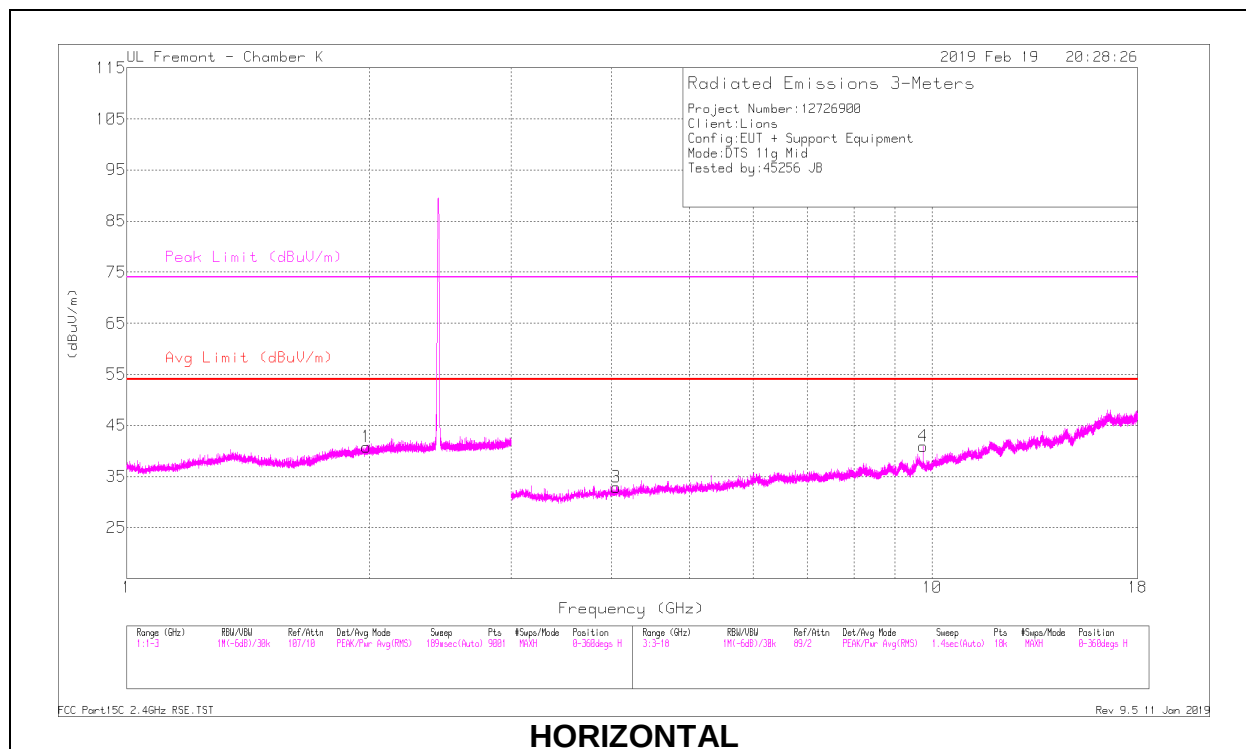

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI trl/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.054	36.63	PK2	33.4	-30.9	0	39.13	-	-	74	-34.87	245	310	H
* 4.056	27.62	MAv1	33.4	-30.9	.09	30.21	54	-23.79	-	-	245	310	H
* 4.125	36.62	PK2	33.5	-30.6	0	39.52	-	-	74	-34.48	209	289	V
* 4.125	27.31	MAv1	33.5	-30.6	.09	30.3	54	-23.7	-	-	209	289	V
1.983	34.28	Pk	30.9	-24.4	0	40.78	-	-	-	-	0-360	100	H
2.03	34.19	Pk	31.1	-24.4	0	40.89	-	-	-	-	0-360	101	V
9.748	27.63	Pk	36.9	-23.6	0	40.93	-	-	-	-	0-360	101	H
9.748	28.51	Pk	36.9	-23.6	0	41.81	-	-	-	-	0-360	101	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 11 RESULTS

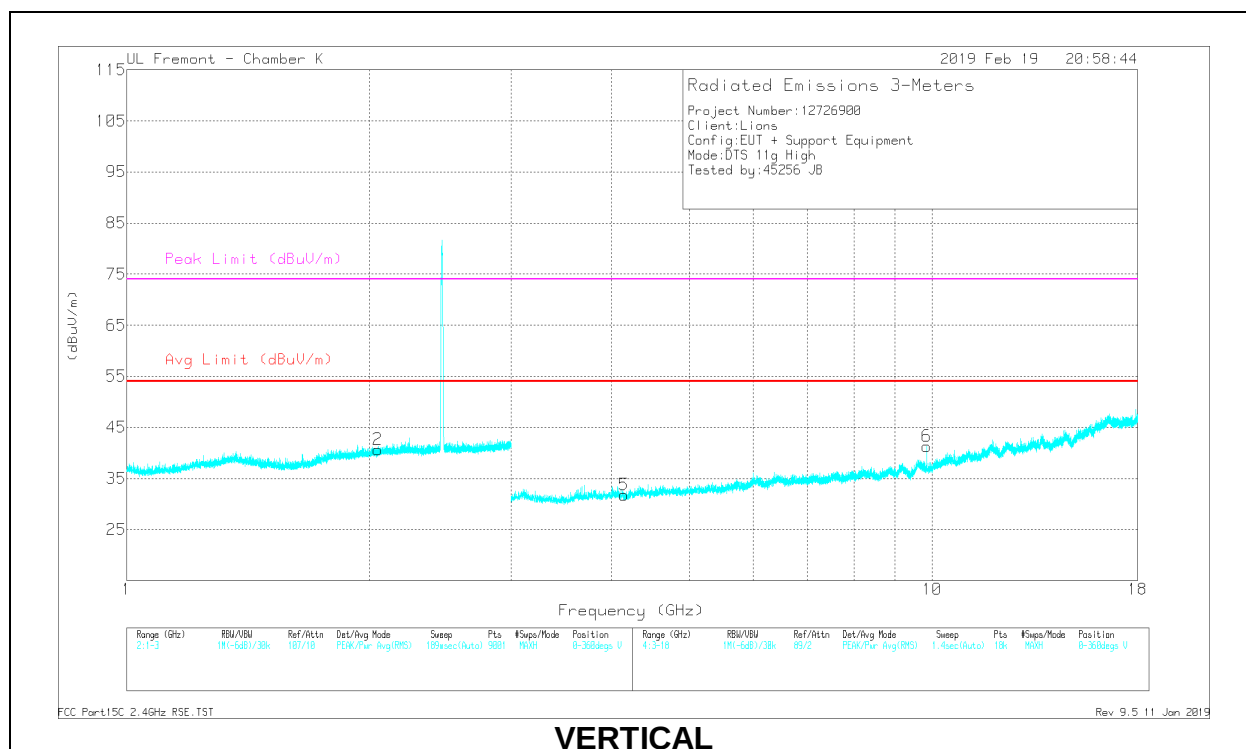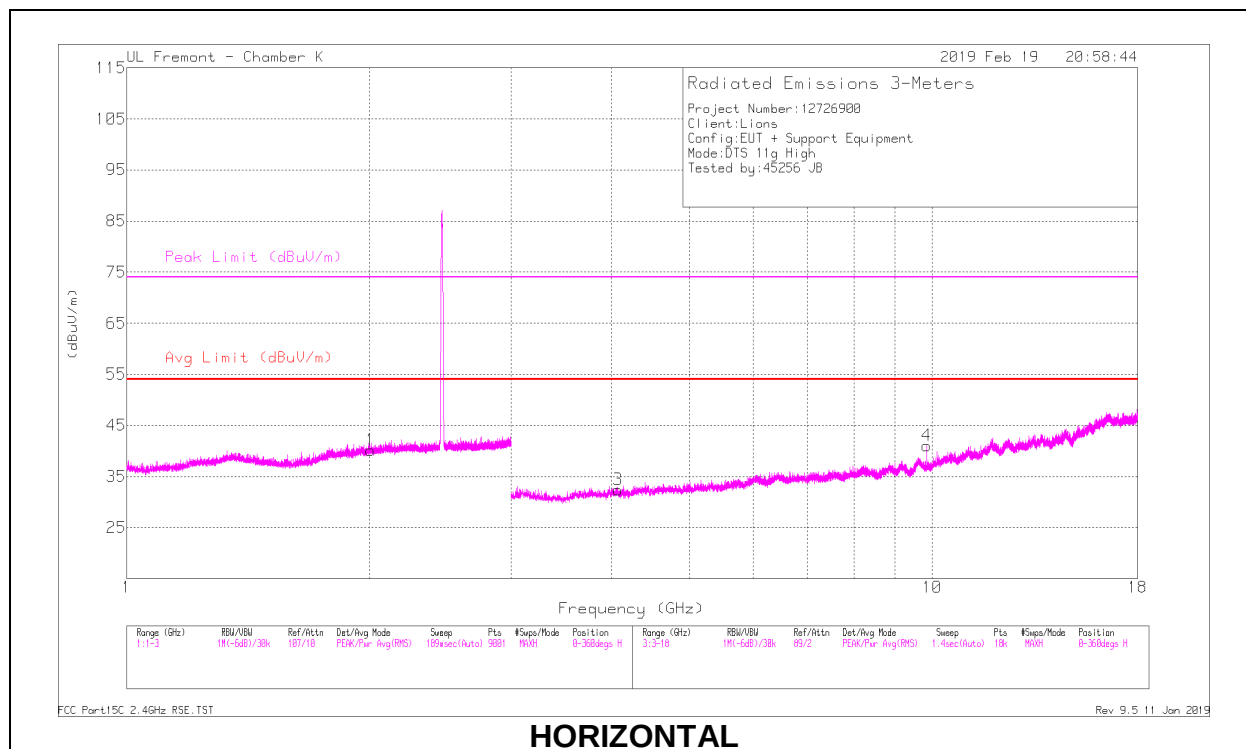

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI trl/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.073	37.65	PK2	33.5	-30.7	0	40.45	-	-	74	-33.55	105	385	H
* 4.074	26.82	MAv1	33.5	-30.7	.09	29.71	54	-24.29	-	-	105	385	H
* 4.144	36.73	PK2	33.4	-30.8	0	39.33	-	-	74	-34.67	146	388	V
* 4.145	27.14	MAv1	33.4	-30.8	.09	29.83	54	-24.17	-	-	146	388	V
2.009	33.32	Pk	31.1	-24.3	0	40.12	-	-	-	-	0-360	200	H
2.05	34	Pk	31.2	-24.6	0	40.6	-	-	-	-	0-360	101	V
9.848	27.31	Pk	36.9	-23.2	0	41.01	-	-	-	-	0-360	101	H
9.848	27.6	Pk	36.9	-23.2	0	41.3	-	-	-	-	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

10.1.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND

1TX Antenna 1 MODE

BANDEGE (LOW CHANNEL, CH 1)

HORIZONTAL RESULT

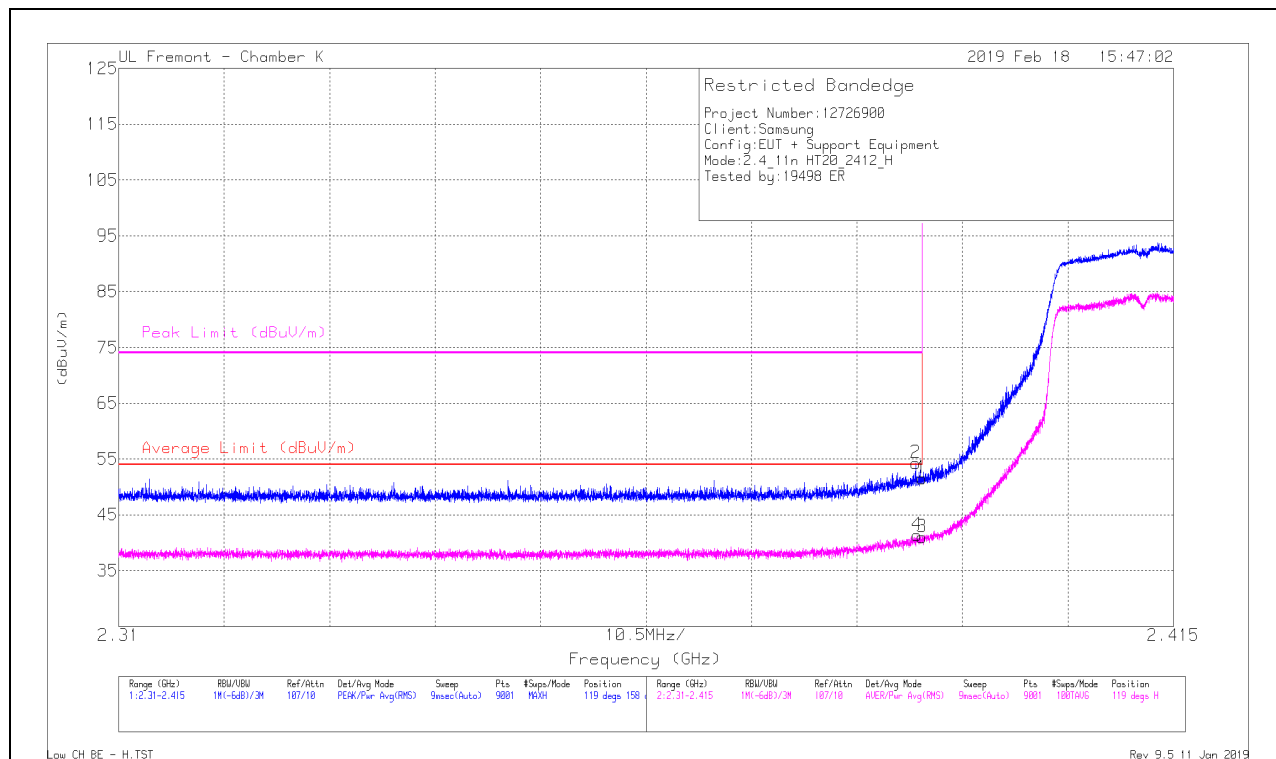


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Ampl/CdIF/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	44.33	Pk	31.9	-24.7	0	51.53	-	-	74	-22.47	119	158	H
2	* 2.389	47.08	Pk	31.9	-24.7	0	54.28	-	-	74	-19.72	119	158	H
3	* 2.39	33.65	RMS	31.9	-24.7	-1	40.95	54	-13.05	-	-	119	158	H
4	* 2.389	34.04	RMS	31.9	-24.7	-1	41.34	54	-12.66	-	-	119	158	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

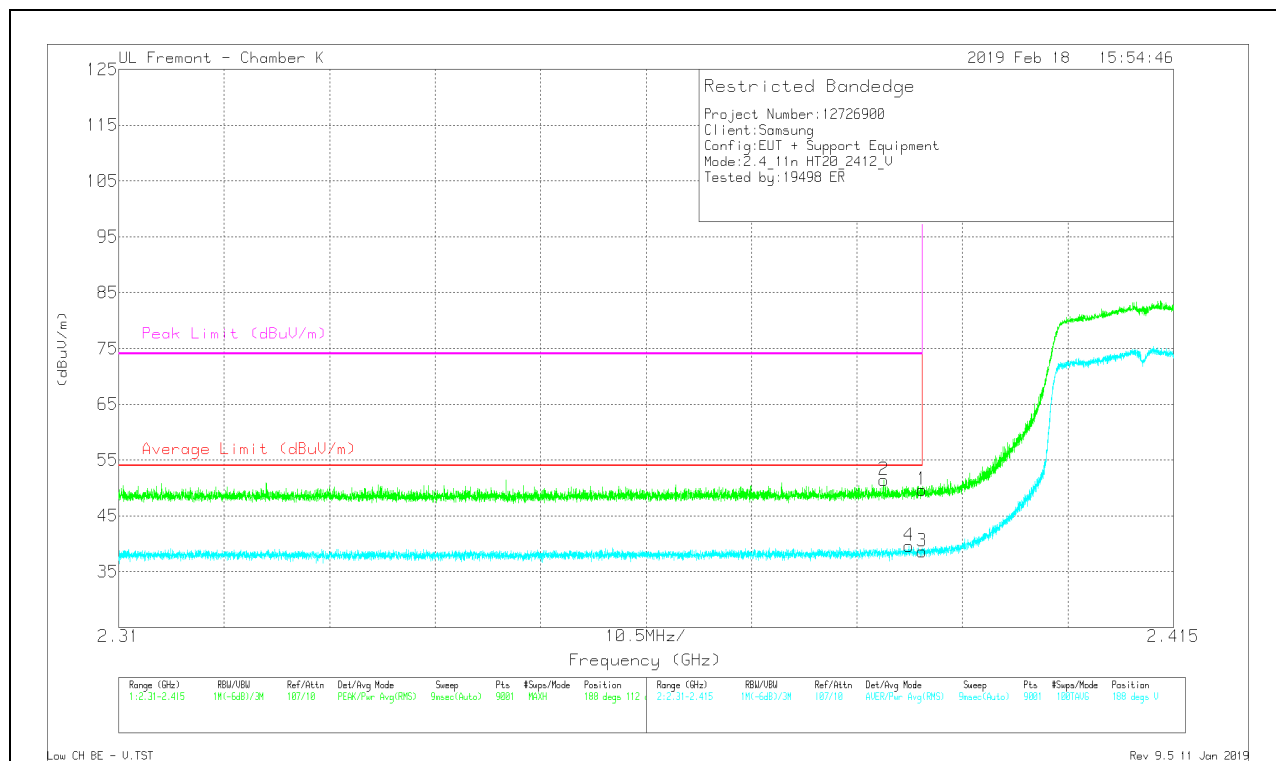

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 2.39	42.45	Pk	31.9	-24.7	0	49.65	-	-	74	-24.35	188	112	V
2	* 2.386	44.09	PK	31.9	-24.6	0	51.39	-	-	74	-22.61	188	112	V
3	* 2.39	31.36	RMS	31.9	-24.7	.1	38.66	54	-15.34	-	-	188	112	V
4	* 2.389	32.33	RMS	31.9	-24.7	.1	39.63	54	-14.37	-	-	188	112	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEGE (LOW CHANNEL, CH 2)

HORIZONTAL RESULT

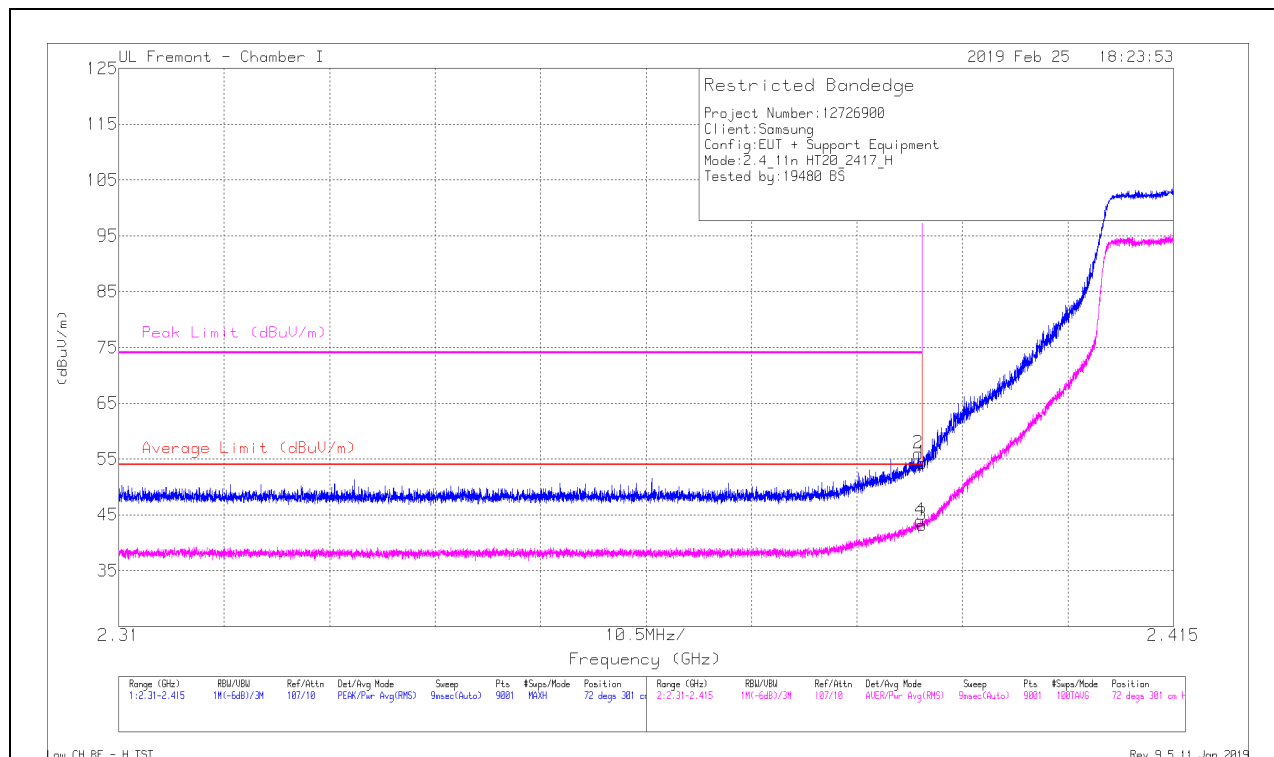


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	44.1	Pk	31.8	-21.6	0	54.3	-	-	74	-19.7	72	301	H
2	* 2.39	45.82	Pk	31.8	-21.6	0	56.02	-	-	74	-17.98	72	301	H
3	* 2.39	32.97	RMS	31.8	-21.6	.1	43.27	54	-10.73	-	-	72	301	H
4	* 2.39	33.68	RMS	31.8	-21.6	.1	43.98	54	-10.02	-	-	72	301	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

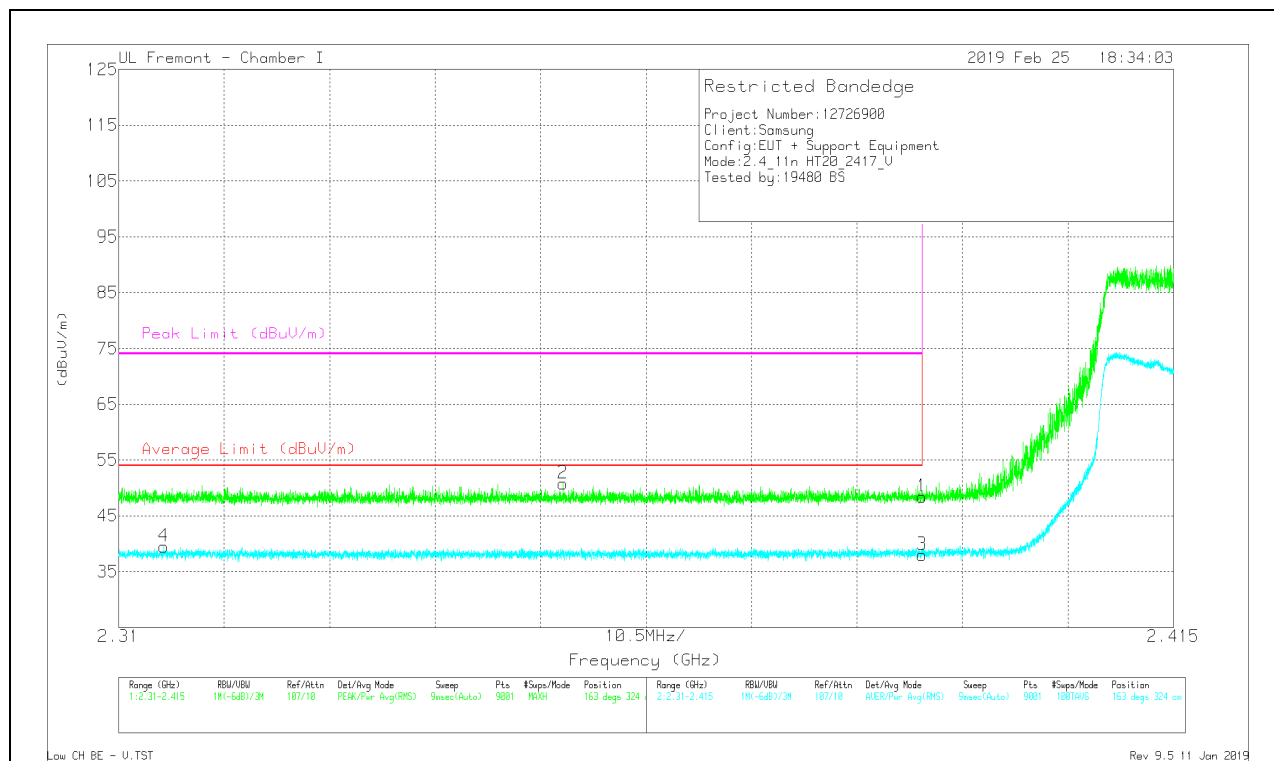

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/CM/Ftr/Pa d (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.27	Pk	31.8	-21.6	0	48.47	-	-	74	-25.53	163	324	V
2	* 2.354	40.7	PK	31.6	-21.5	0	50.8	-	-	74	-23.2	163	324	V
3	* 2.39	27.65	RMS	31.8	-21.6	.1	37.95	54	-16.05	-	-	163	324	V
4	* 2.314	29.3	RMS	31.6	-21.5	.1	39.5	54	-14.5	-	-	163	324	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 11)

HORIZONTAL RESULT

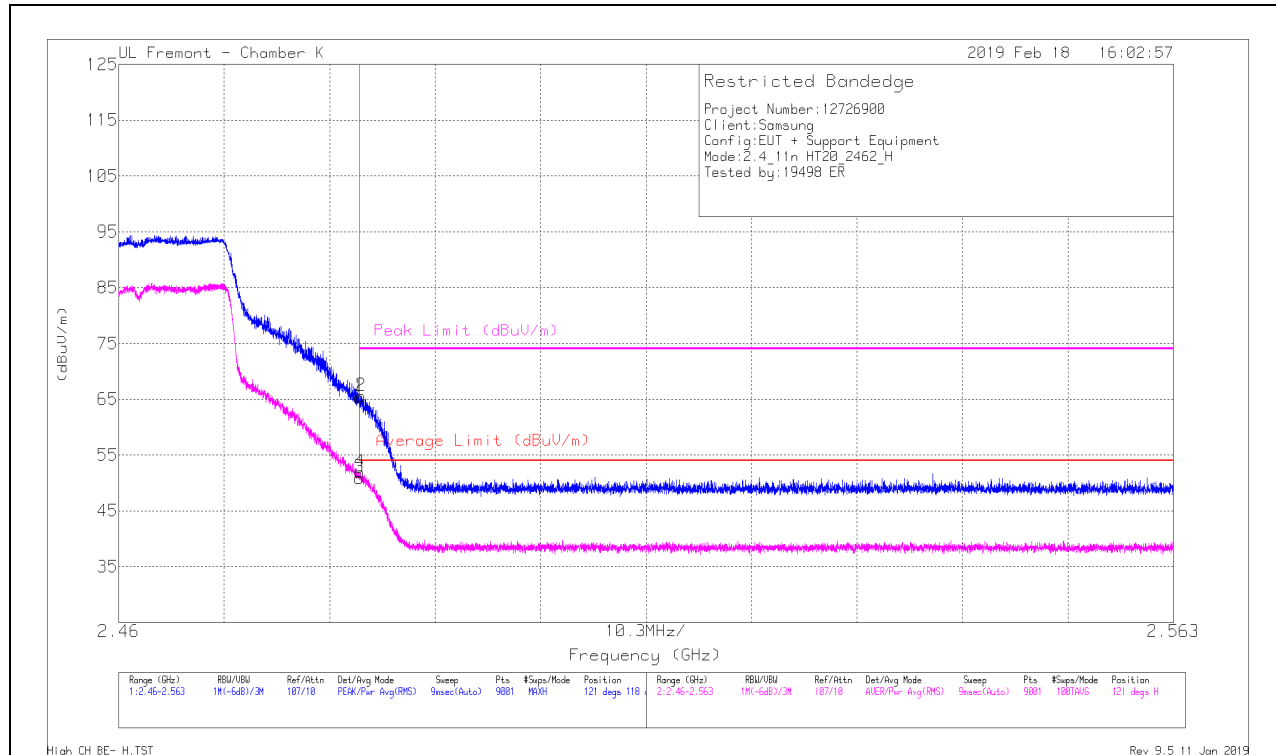


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T344 (dBm)	Amp/CbI/Fltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	57.8	Pk	32.3	-24.8	0	65.3	-	-	74	-8.7	121	118	H
2	* 2.484	58.08	Pk	32.3	-24.8	0	65.58	-	-	74	-8.42	121	118	H
3	* 2.484	43.29	RMS	32.3	-24.8	.1	50.89	54	-3.11	-	-	121	118	H
4	* 2.484	44.26	RMS	32.3	-24.8	.1	51.86	54	-2.14	-	-	121	118	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

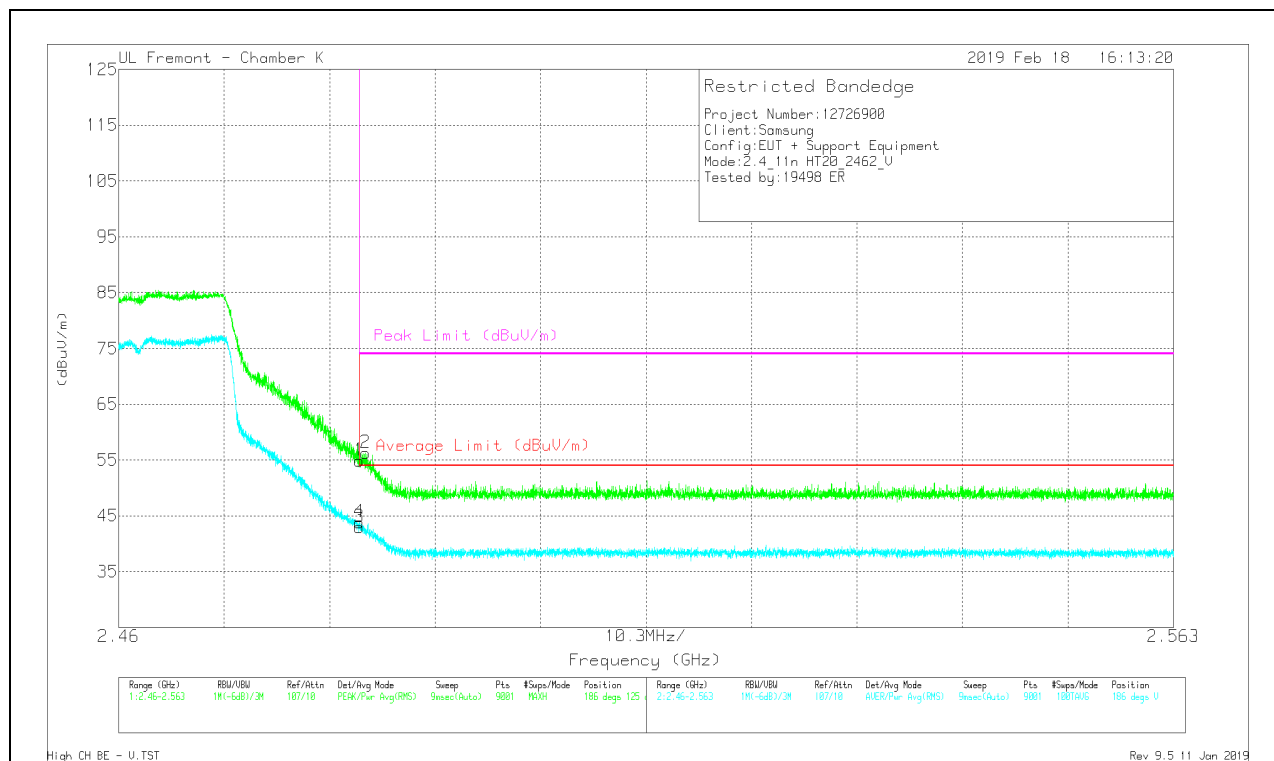

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dBm)	Amp/Cb/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.41	Pk	32.3	-24.8	0	54.91	-	-	74	-19.09	186	125	V
2	* 2.484	48.78	PK	32.3	-24.8	0	56.28	-	-	74	-17.72	186	125	V
3	* 2.484	35.4	RMS	32.3	-24.8	.1	43	54	-11	-	-	186	125	V
4	* 2.484	36.22	RMS	32.3	-24.8	.1	43.82	54	-10.18	-	-	186	125	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 12)

HORIZONTAL RESULT

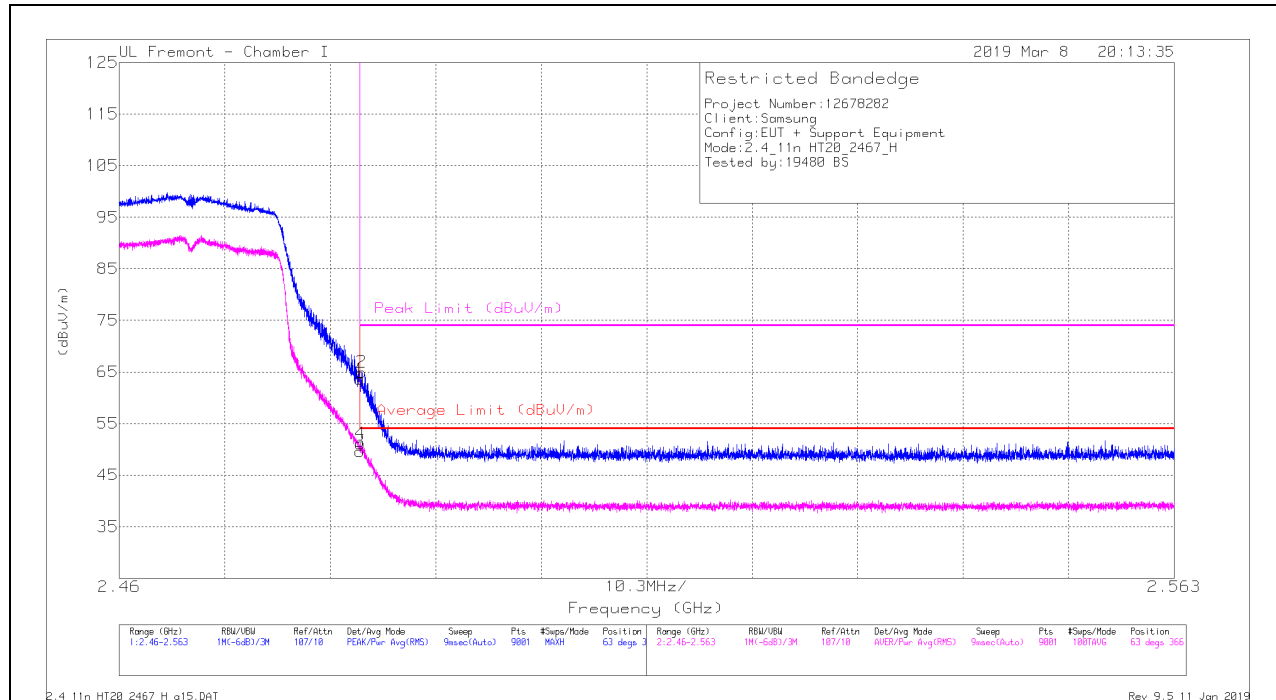

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	52.89	Pk	32.4	-21.7	0	63.59	-	-	74	-10.41	63	366	H
2	* 2.484	54.26	Pk	32.4	-21.7	0	64.96	-	-	74	-9.04	63	366	H
3	* 2.484	38.8	RMS	32.4	-21.7	.1	49.6	54	-4.4	-	-	63	366	H
4	* 2.484	40.33	RMS	32.4	-21.7	.1	51.13	54	-2.87	-	-	63	366	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

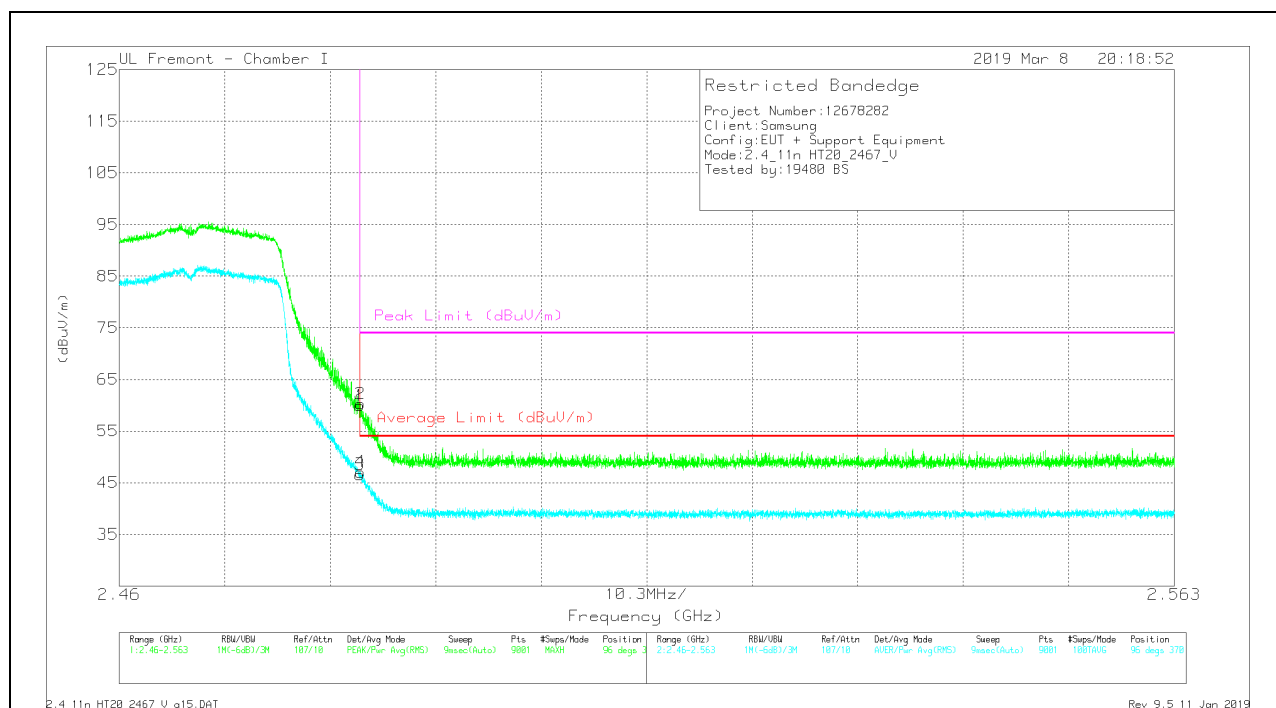

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.21	Pk	32.4	-21.7	0	59.91	-	-	74	-14.09	96	370	V
2	* 2.484	49.59	Pk	32.4	-21.7	0	60.29	-	-	74	-13.71	96	370	V
3	* 2.484	35.79	RMS	32.4	-21.7	.1	46.59	54	-7.41	-	-	96	370	V
4	* 2.484	36.28	RMS	32.4	-21.7	.1	47.08	54	-6.92	-	-	96	370	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL, CH 13)

HORIZONTAL RESULT

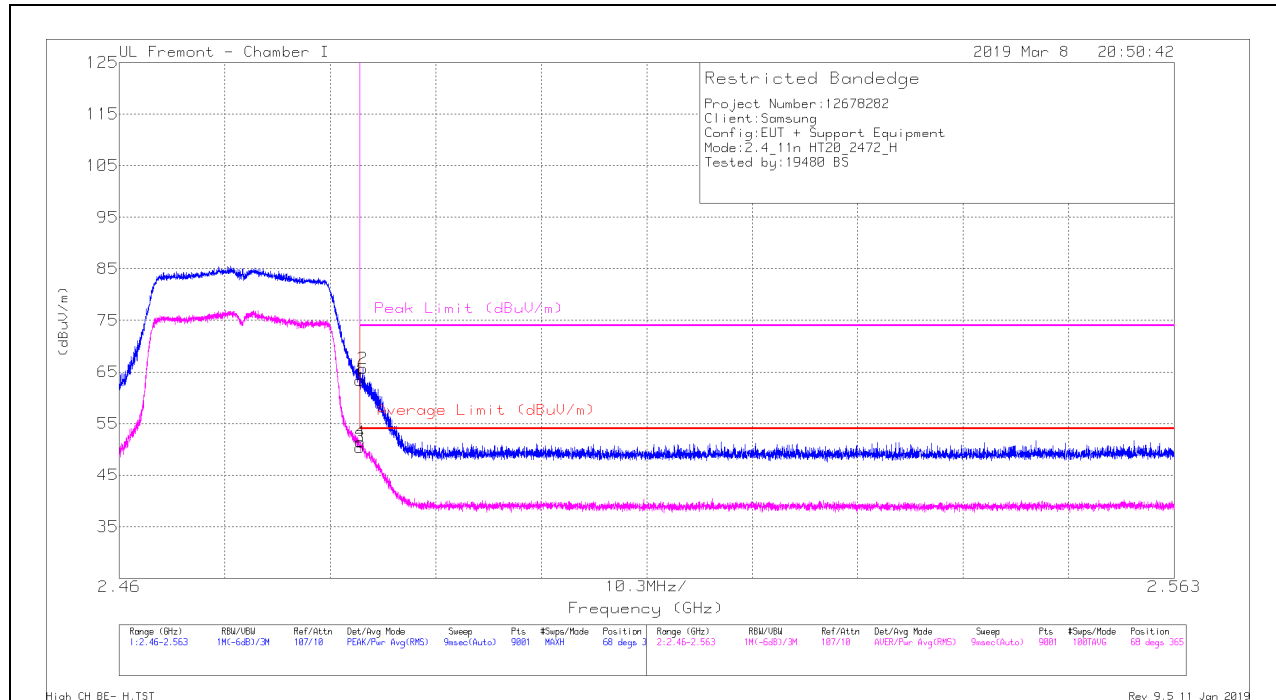

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/CbI/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	52.64	Pk	32.4	-21.7	0	63.34	-	-	74	-10.66	68	365	H
2	* 2.484	54.97	Pk	32.4	-21.7	0	65.67	-	-	74	-8.33	68	365	H
3	* 2.484	39.57	RMS	32.4	-21.7	.1	50.37	54	-3.63	-	-	68	365	H
4	* 2.484	40.59	RMS	32.4	-21.7	.1	51.39	54	-2.61	-	-	68	365	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

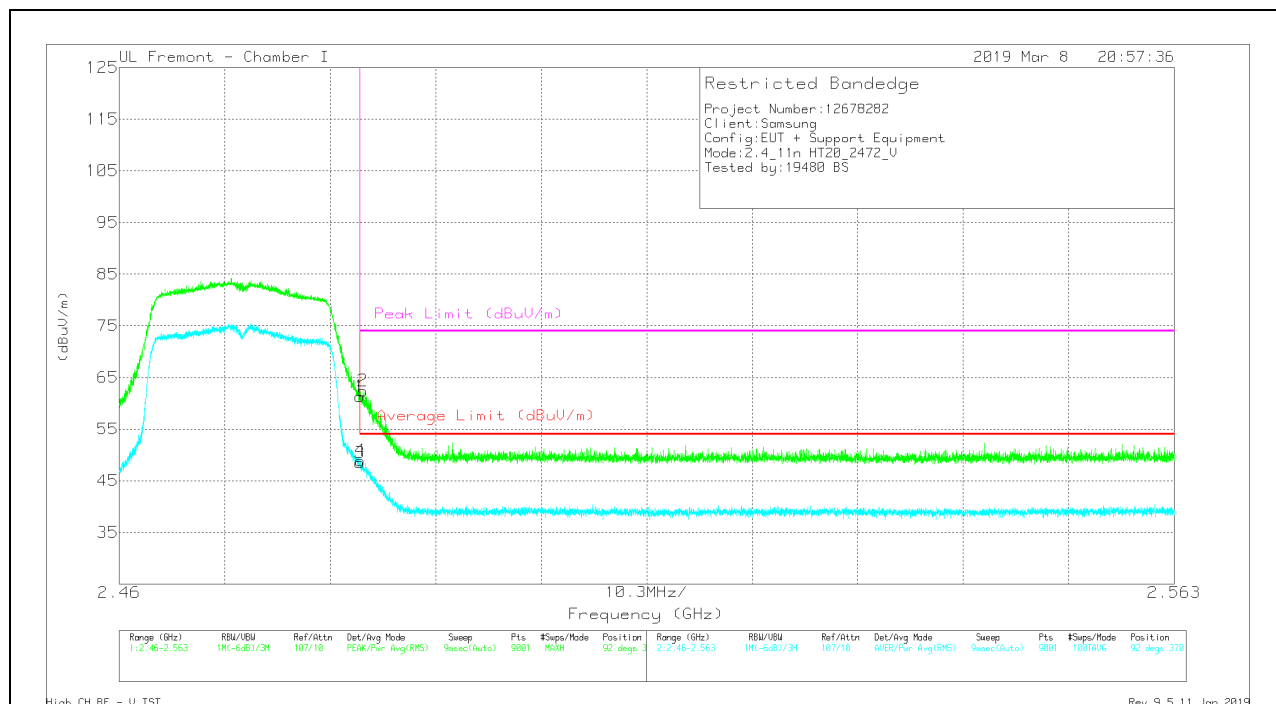

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/CbI/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.62	Pk	32.4	-21.7	0	61.32	-	-	74	-12.68	92	370	V
2	* 2.484	51.72	Pk	32.4	-21.7	0	62.42	-	-	74	-11.58	92	370	V
3	* 2.484	37.66	RMS	32.4	-21.7	.1	48.46	54	-5.54	-	-	92	370	V
4	* 2.484	38.1	RMS	32.4	-21.7	.1	48.9	54	-5.1	-	-	92	370	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL, CH 1 RESULTS

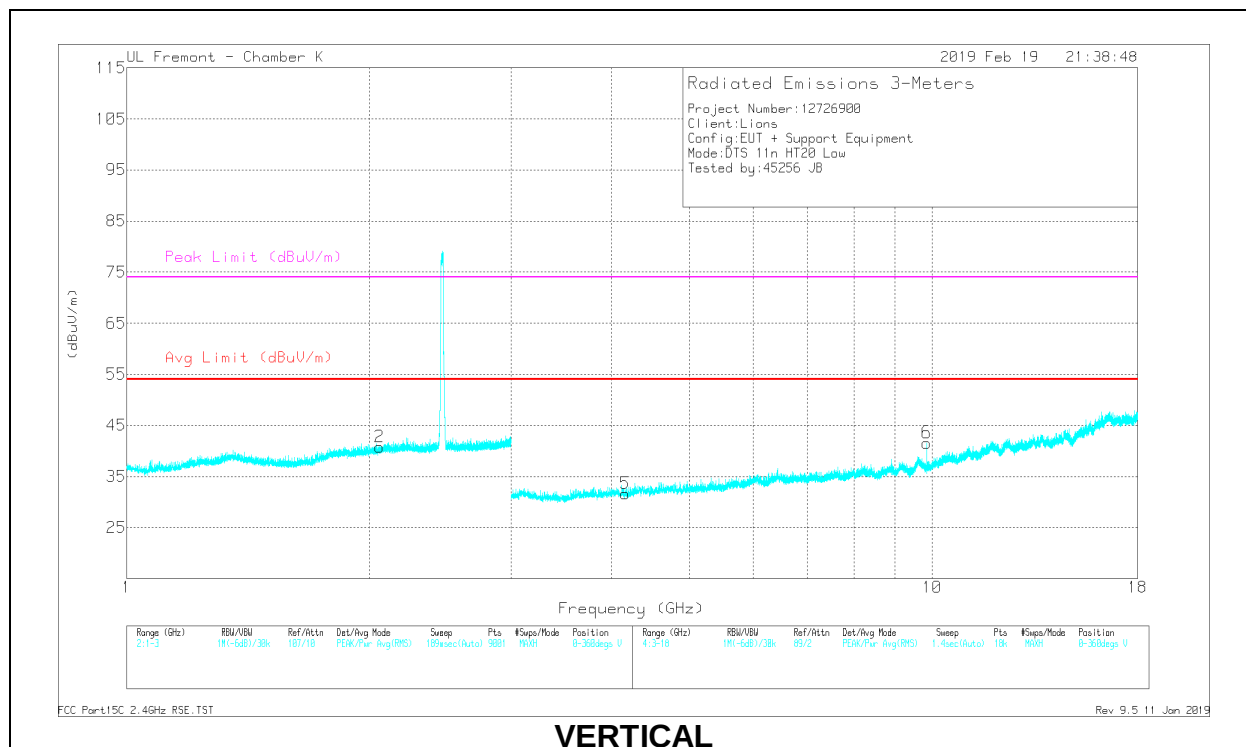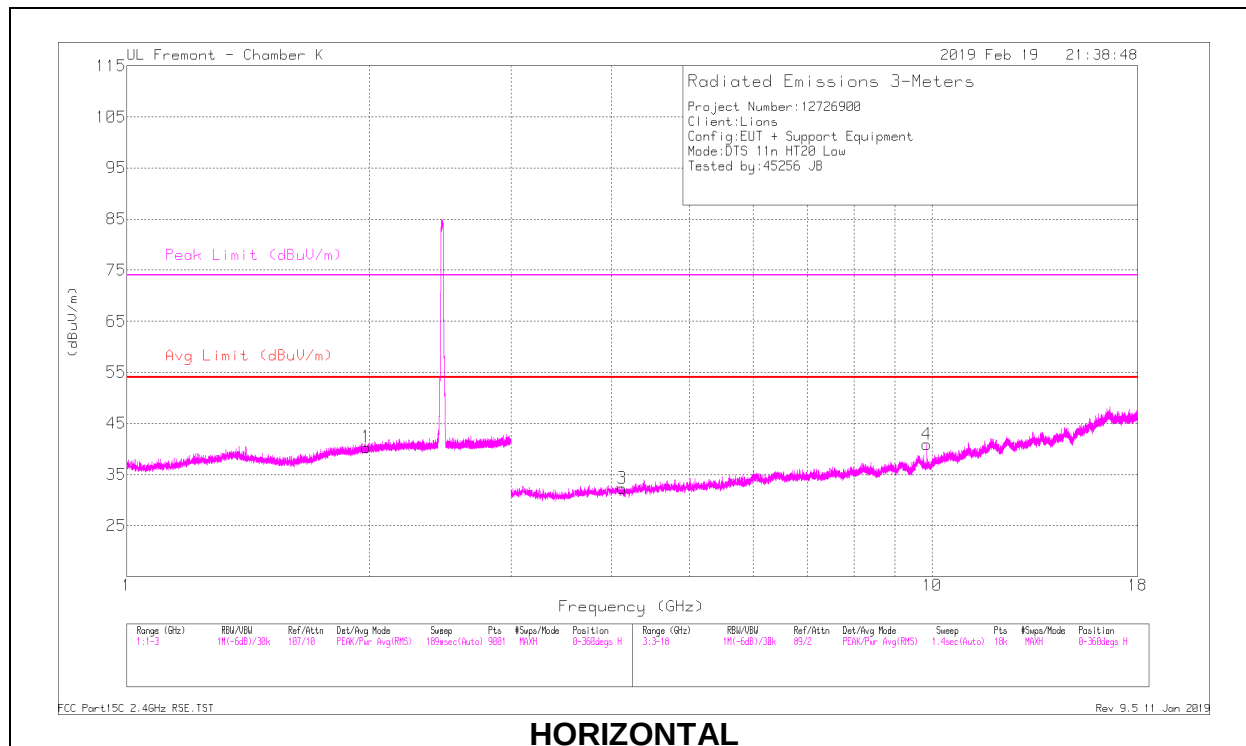

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI trl/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.123	36.99	PK2	33.5	-30.6	0	39.89	-	-	74	-34.11	304	206	H
* 4.121	27.23	MAv1	33.5	-30.6	.1	30.23	54	-23.77	-	-	304	206	H
* 4.158	36.68	PK2	33.4	-30.9	0	39.18	-	-	74	-34.82	161	223	V
* 4.156	26.94	MAv1	33.4	-30.9	.1	29.54	54	-24.46	-	-	161	223	V
1.985	33.83	Pk	30.9	-24.4	0	40.33	-	-	-	-	0-360	101	H
2.059	33.98	Pk	31.3	-24.5	0	40.78	-	-	-	-	0-360	100	V
9.848	27.26	Pk	36.9	-23.2	0	40.96	-	-	-	-	0-360	100	H
9.848	27.9	Pk	36.9	-23.2	0	41.6	-	-	-	-	0-360	100	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL, CH 6 RESULTS

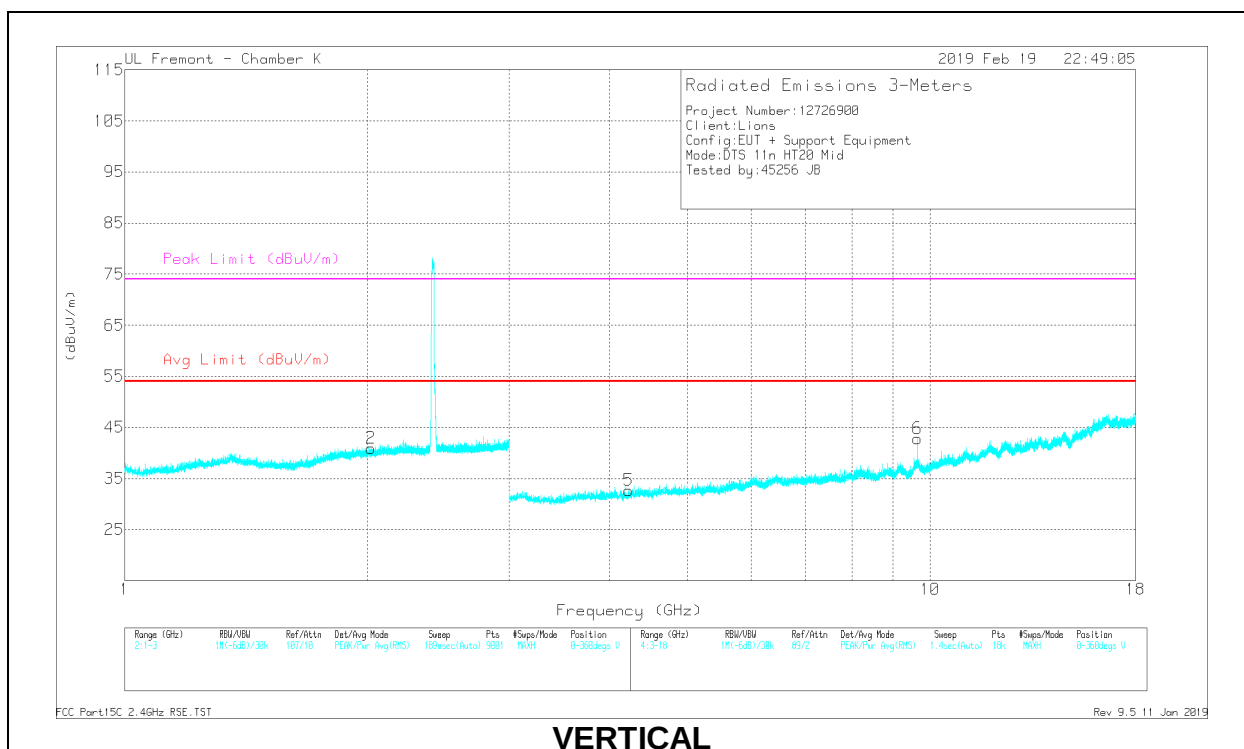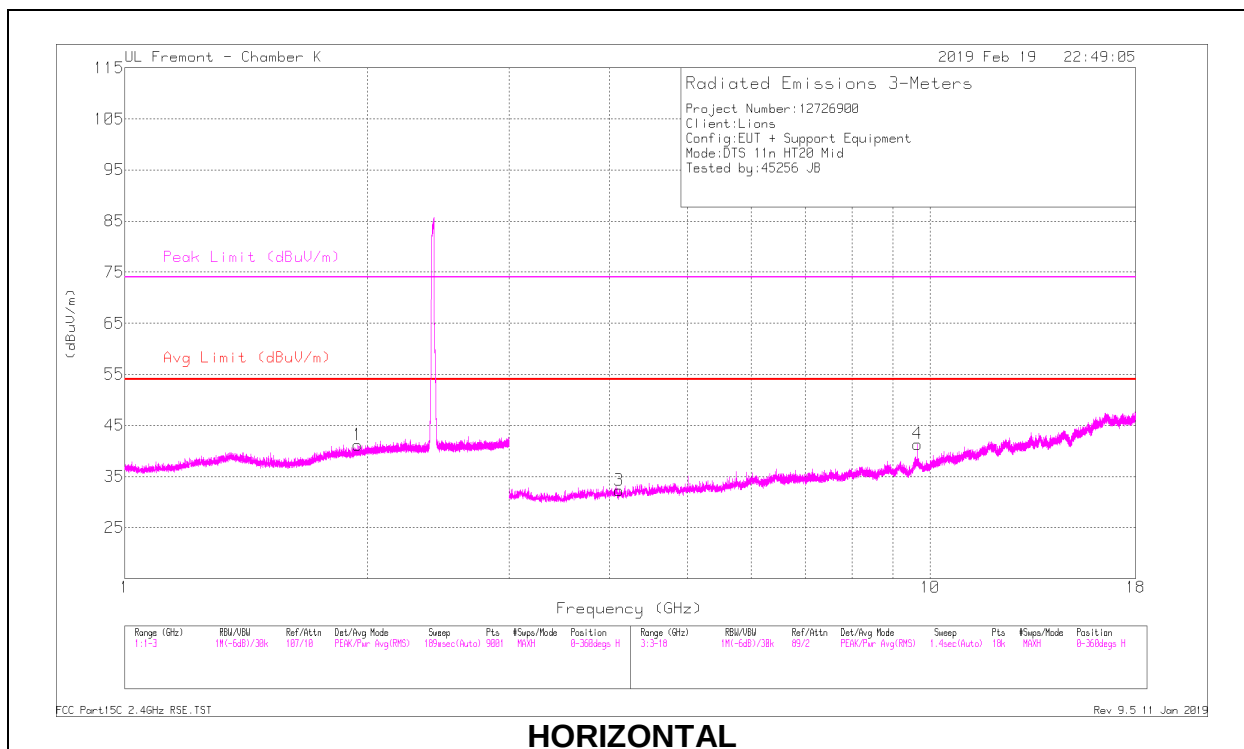

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI trl/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.112	36.81	PK2	33.5	-30.7	0	39.61	-	-	74	-34.39	265	316	H
* 4.114	26.94	MAv1	33.5	-30.6	.1	29.94	54	-24.06	-	-	265	316	H
* 4.225	37.61	PK2	33.4	-31.3	0	39.71	-	-	74	-34.29	63	349	V
* 4.224	28.15	MAv1	33.4	-31.3	.1	30.35	54	-23.65	-	-	63	349	V
1.947	34.59	Pk	30.8	-24.2	0	41.19	-	-	-	-	0-360	200	H
2.022	34.24	Pk	31.1	-24.4	0	40.94	-	-	-	-	0-360	100	V
9.648	27.95	Pk	36.8	-23.4	0	41.35	-	-	-	-	0-360	100	H
9.648	29.43	Pk	36.8	-23.4	0	42.83	-	-	-	-	0-360	100	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL, CH 11 RESULTS

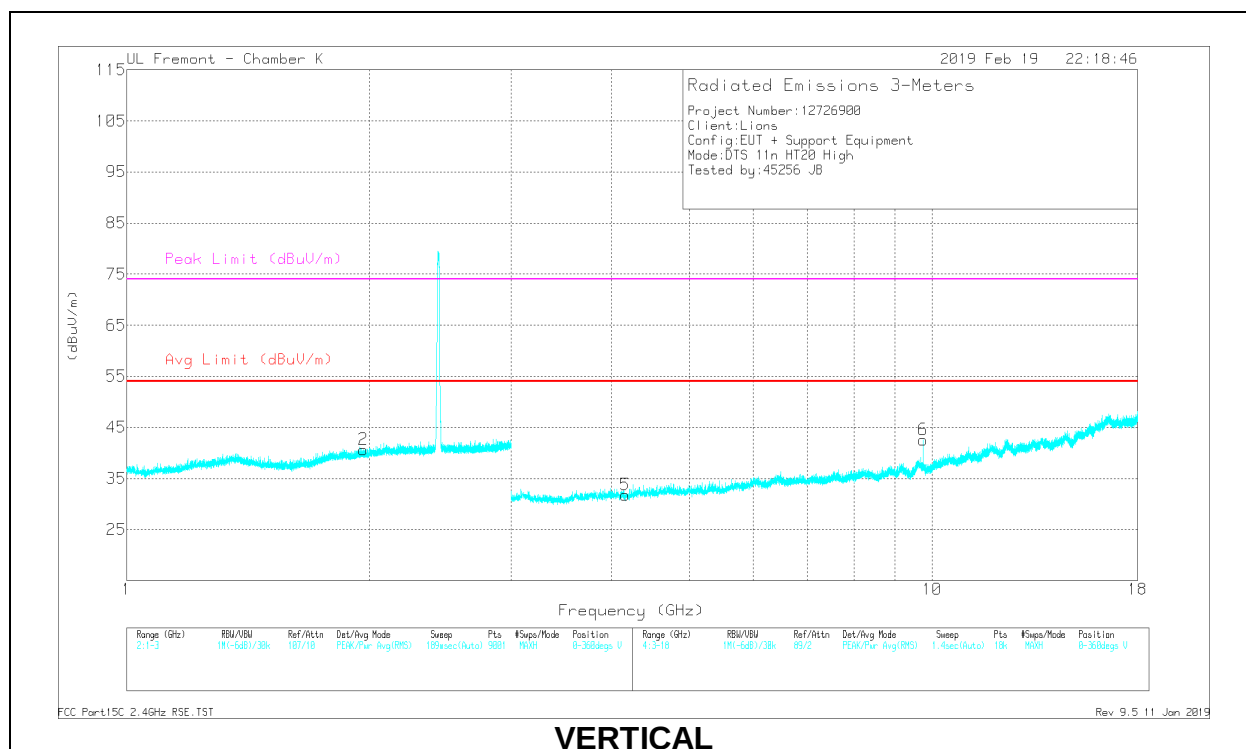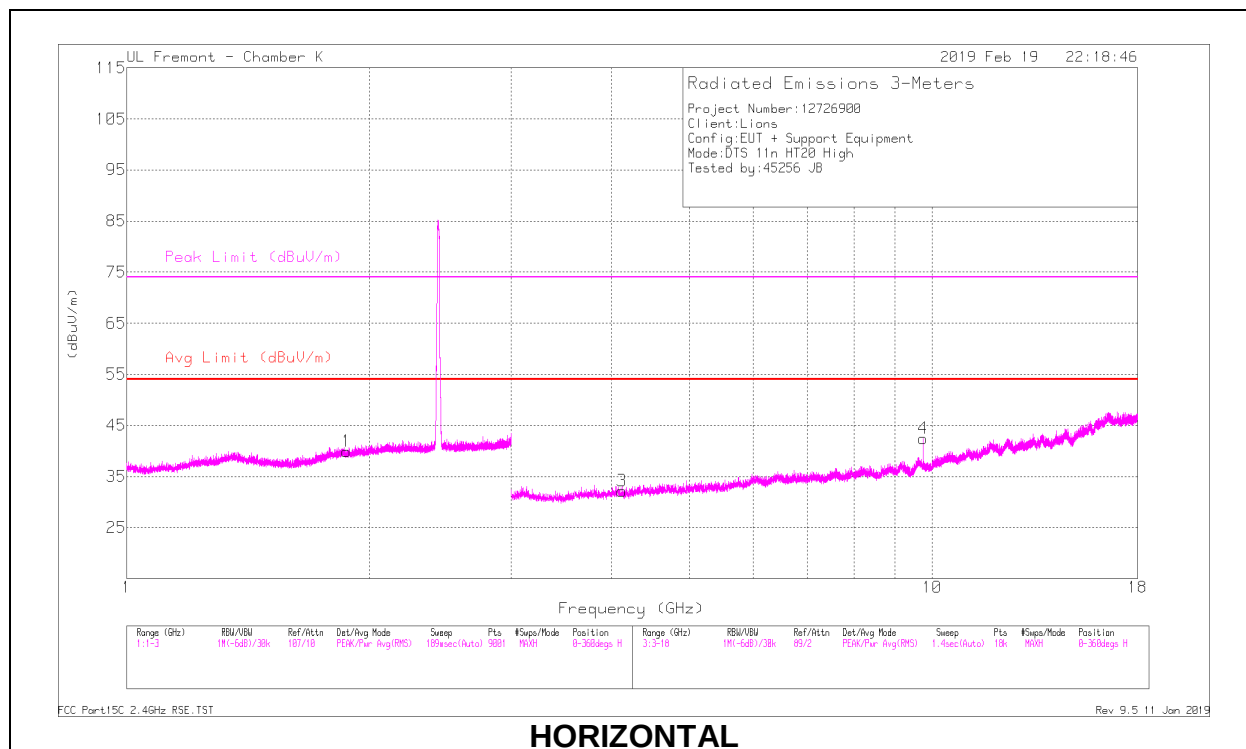

RADIATED EMISSIONS

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T344 (dB/m)	Amp/Cbl/FI trl/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.121	36.54	PK2	33.5	-30.6	0	39.44	-	-	74	-34.56	6	309	H
* 4.122	27.42	MAv1	33.5	-30.6	.1	30.42	54	-23.58	-	-	6	309	H
* 4.157	37.49	PK2	33.4	-30.9	0	39.99	-	-	74	-34.01	352	302	V
* 4.158	27.24	MAv1	33.4	-30.9	.1	29.84	54	-24.16	-	-	352	302	V
1.875	33.67	Pk	30.4	-24.2	0	39.87	-	-	-	-	0-360	101	H
1.966	34.2	Pk	30.9	-24.4	0	40.7	-	-	-	-	0-360	100	V
9.748	29.08	Pk	36.9	-23.6	0	42.38	-	-	-	-	0-360	100	H
9.748	29.31	Pk	36.9	-23.6	0	42.61	-	-	-	-	0-360	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

10.2. WORST CASE BELOW 30MHZ

SPURIOUS EMISSIONS BELOW 30 MHz (WORST-CASE CONFIGURATION)

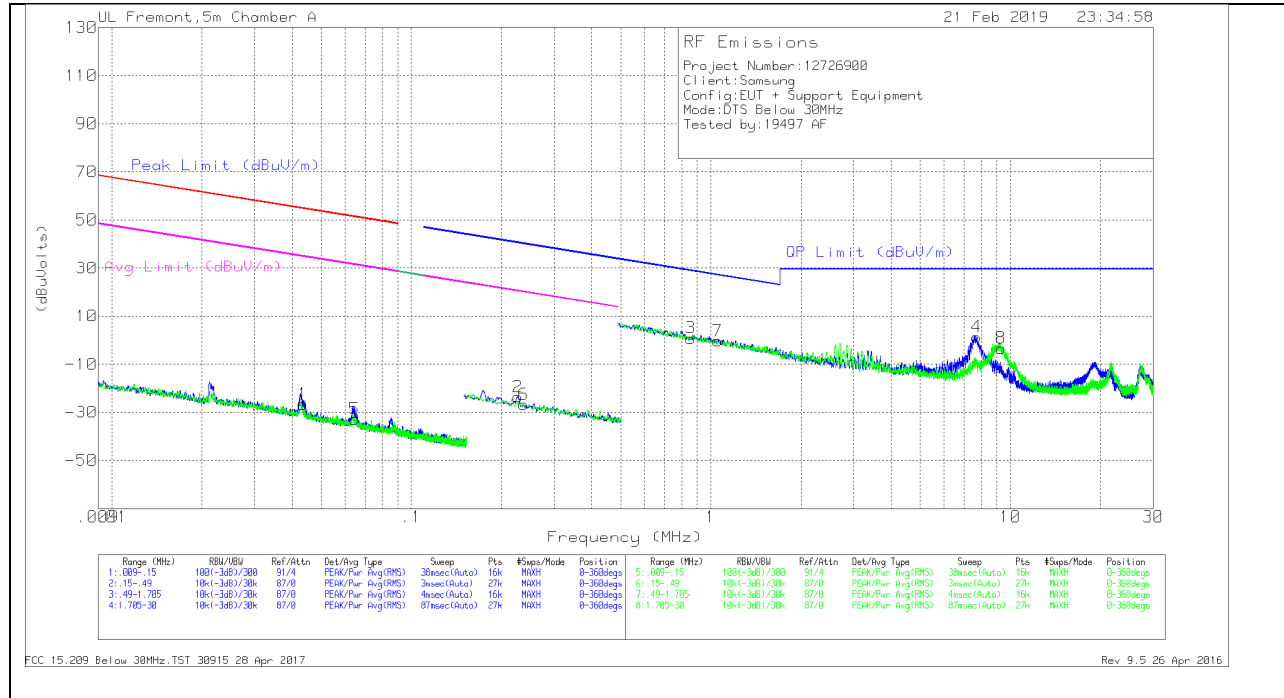

Below 30MHz Data



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dBm)	Cable s (dB)	Dist Corr 300m	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Avg Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.04354	40.17	Pk	13.3	0	-80	-26.53	54.81	-81.34	34.81	-61.34	-	-	-	-	0-360
5	.06465	34.81	Pk	12.4	0	-80	-32.79	51.37	-84.16	31.37	-64.16	-	-	-	-	0-360
2	.22691	45.28	Pk	11	.1	-80	-23.62	-	-	-	-	40.5	-64.12	20.5	-44.12	0-360
6	.23704	42.2	Pk	11	.1	-80	-26.7	-	-	-	-	40.12	-66.82	20.12	-46.82	0-360

Pk - Peak detector

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	Loop Antenna (dBm)	Cable s (dB)	Dist Corr 30m	Corrected Reading (dBuV/m)	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
3	.85666	29.69	Pk	11.1	.1	-40	.89	28.96	-28.07	0-360
7	1.05479	28.27	Pk	11.3	.1	-40	-.33	27.16	-27.49	0-360
4	7.72052	30.03	Pk	10.9	.4	-40	1.33	29.5	-28.17	0-360
8	9.31715	25.59	Pk	10.7	.4	-40	-3.31	29.5	-32.81	0-360

Pk - Peak detector

10.3. WORST CASE BELOW 1 GHZ (China Adapter)

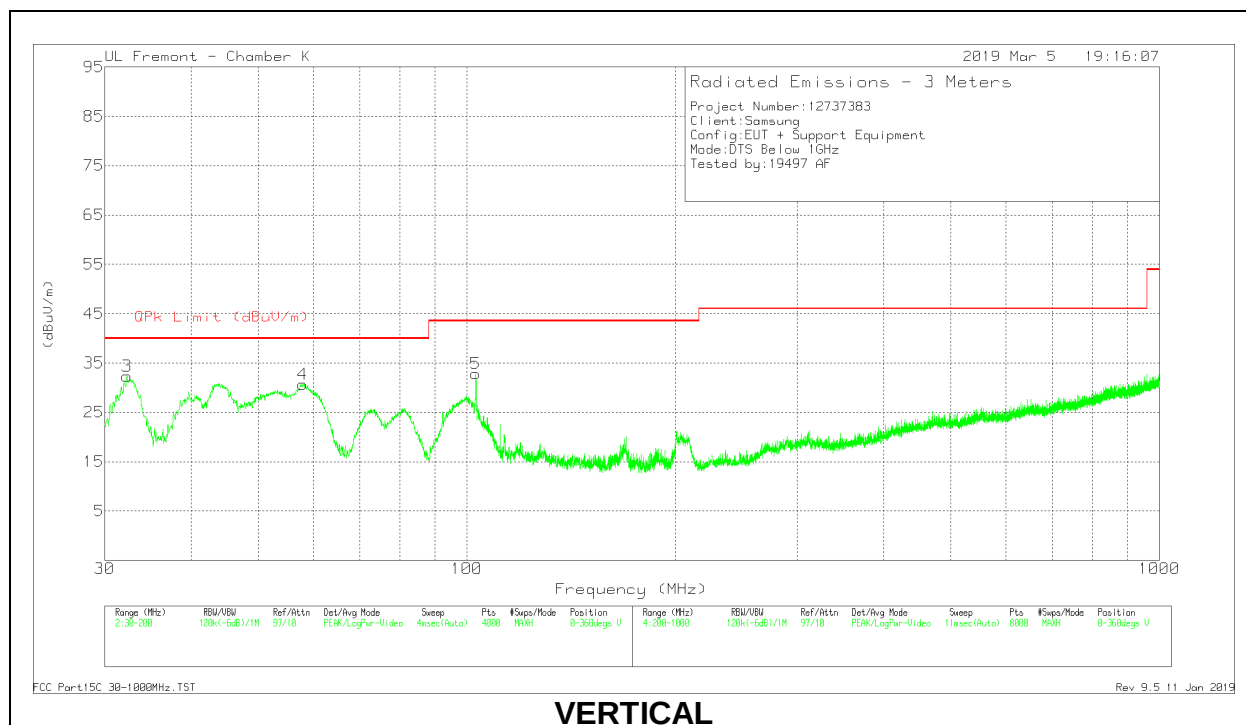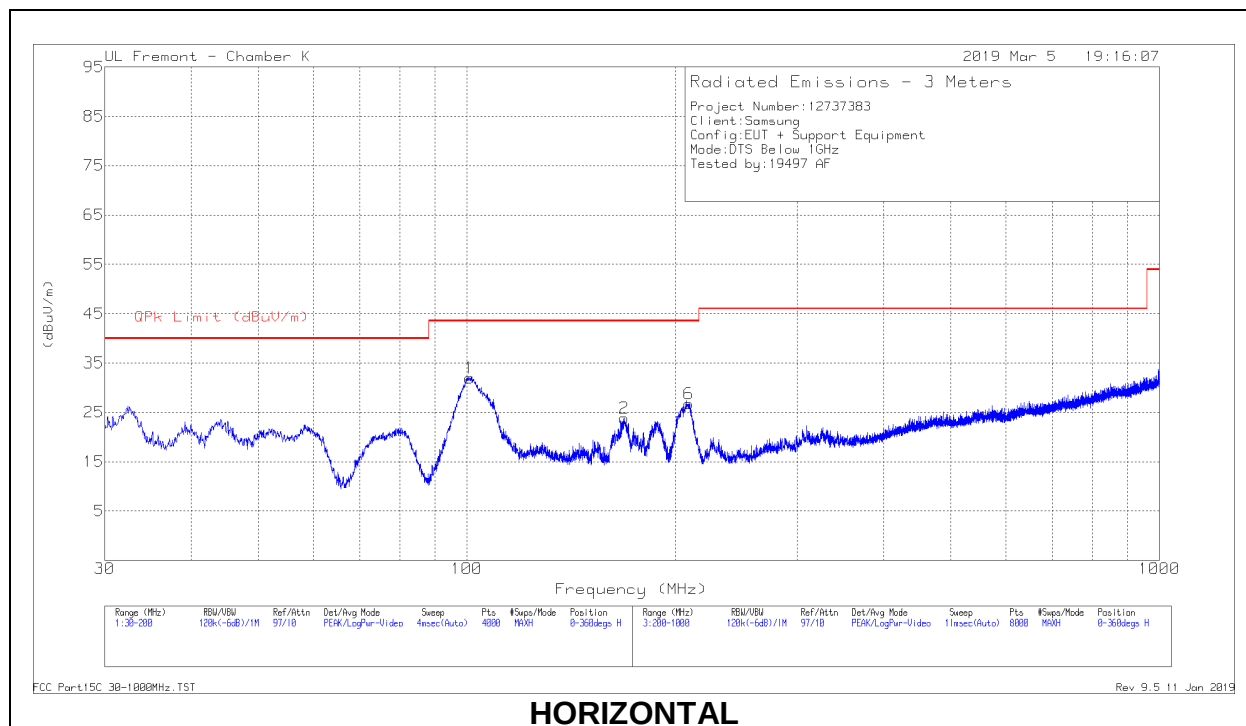

Below 1GHz DATA



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF PRE0184052 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	100.9083	46.47	Pk	16.4	-30.9	31.97	43.52	-11.55	0-360	299	H
2	* 168.8409	36.48	Pk	17.7	-30.4	23.78	43.52	-19.74	0-360	199	H
3	32.2956	38.68	Pk	25.2	-31.6	32.28	40	-7.72	0-360	100	V
	32.5272	36.33	Qp	25	-31.6	29.73	40	-10.27	122	101	V
4	57.9297	48.8	Pk	13.2	-31.3	30.7	40	-9.3	0-360	100	V
5	102.9914	46.71	Pk	17	-30.9	32.81	43.52	-10.71	0-360	100	V
6	209.1012	40.71	Pk	16.3	-30.3	26.71	43.52	-16.81	0-360	100	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector

10.4. WORST CASE BELOW 1 GHz (Hong Kong Adapter)

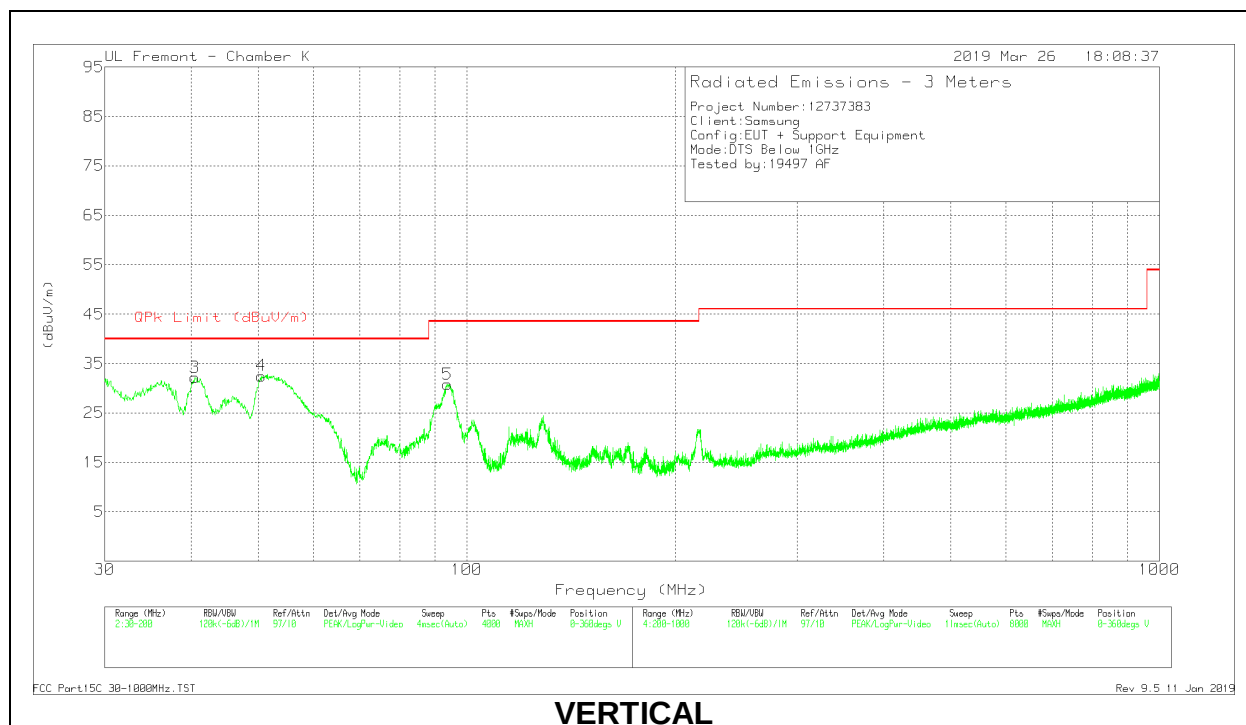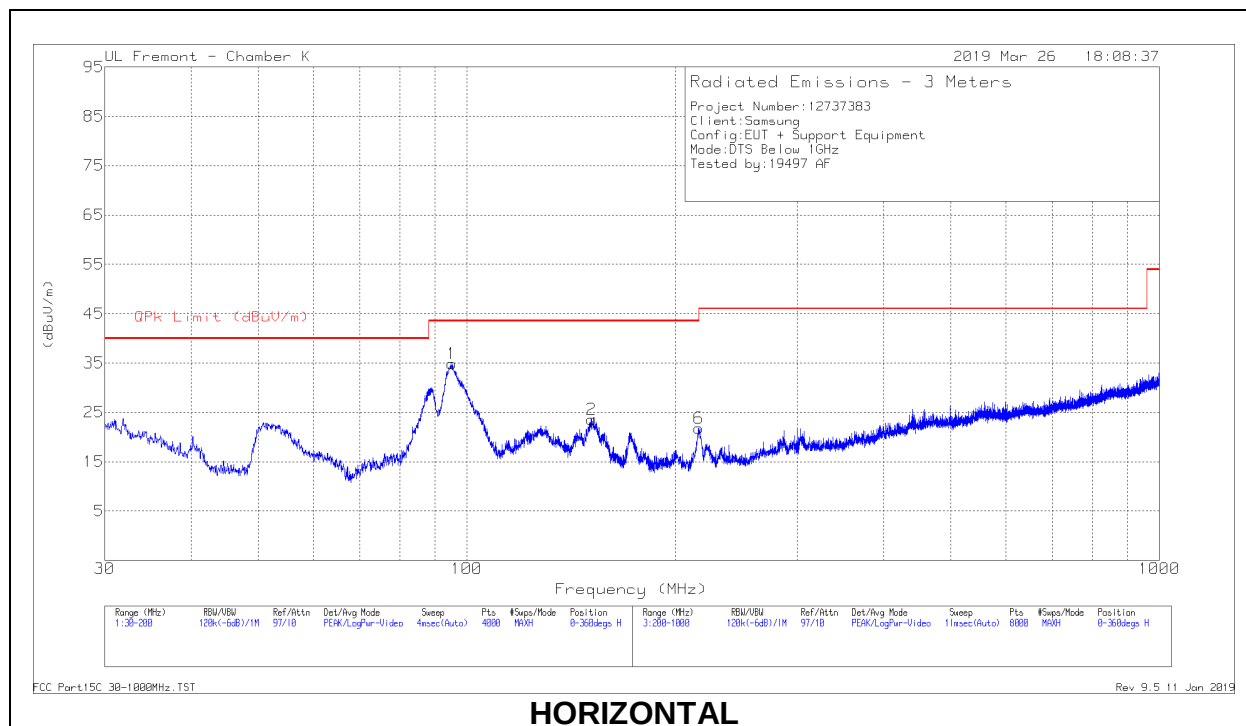

Below 1GHz DATA



Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF PRE0184052 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	95.1269	51.11	Pk	14.7	-31	34.81	43.52	-8.71	0-360	299	H
2	151.5389	35.62	Pk	18.4	-30.5	23.52	43.52	-20	0-360	199	H
3	40.5002	44.47	Pk	19.2	-31.5	32.17	40	-7.83	0-360	100	V
4	50.7577	48.2	Pk	13.5	-31.3	30.4	40	-9.6	206	102	V
	50.7577	48.26	Qp	13.5	-31.3	30.46	40	-9.54	206	102	V
5	93.7665	47.38	Pk	14.4	-31	30.78	43.52	-12.74	0-360	100	V
6	216.4021	35.54	Pk	16.5	-30.3	21.74	46.02	-24.28	0-360	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector

10.5. WORST CASE 18-26 GHZ

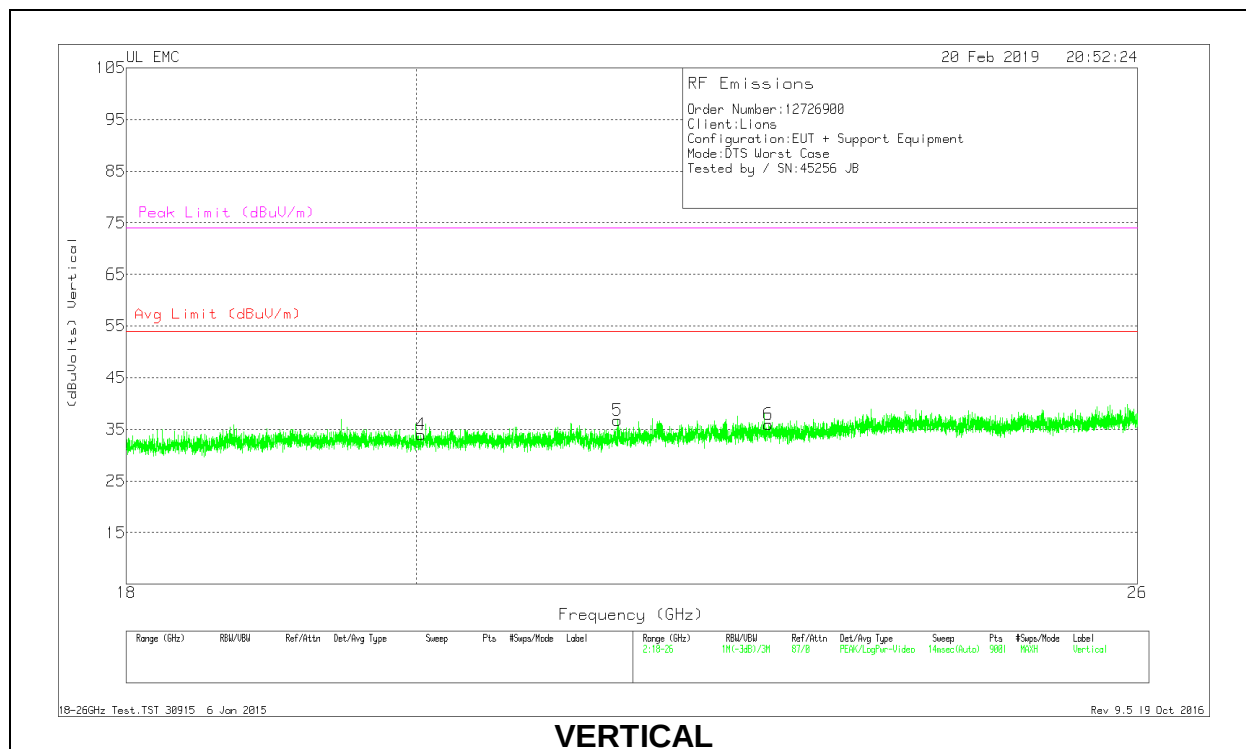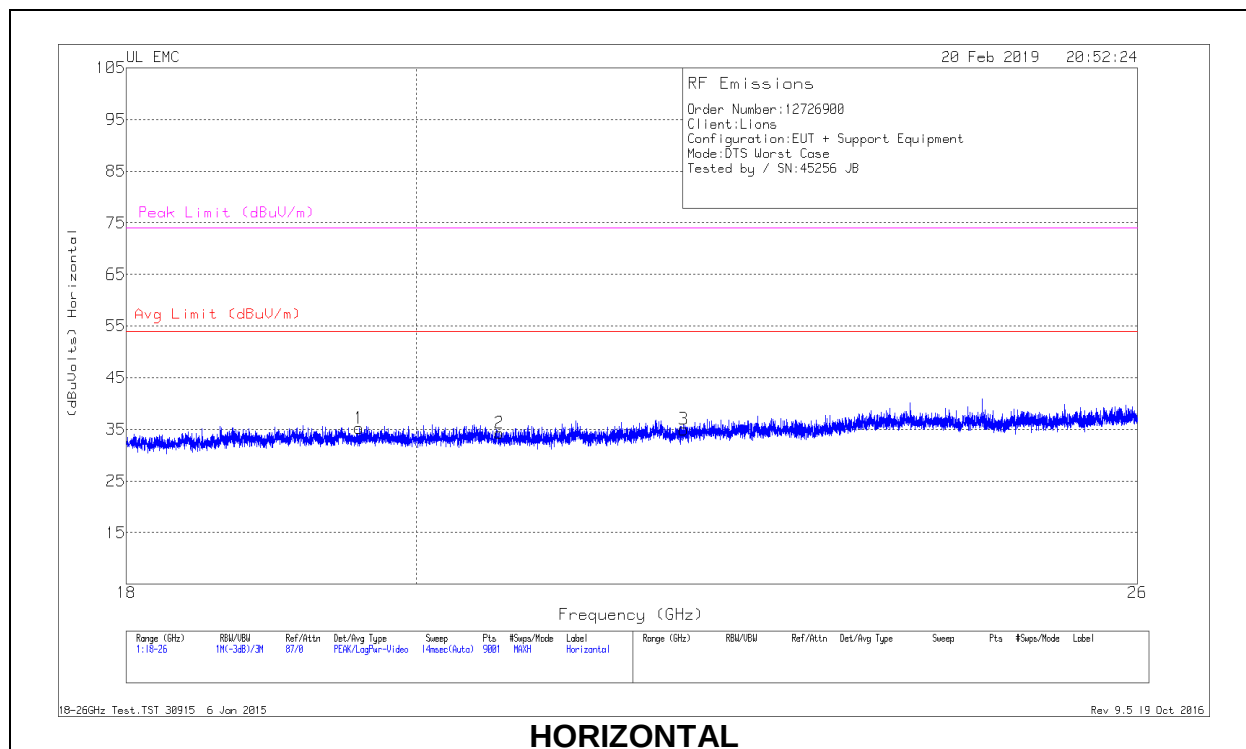

18 – 26GHz DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	T447 AF (dB/m)	Amp/Cbl (dB)	Dist Corr (dB)	Corrected Reading (dBuVolts)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
1	19.589	37.24	Pk	32.8	-25.3	-9.5	35.24	54	-18.76	74	-38.76
2	20.615	36.19	Pk	33	-25.4	-9.5	34.29	54	-19.71	74	-39.71
3	22.043	36.37	Pk	33.3	-25.2	-9.5	34.97	54	-19.03	74	-39.03
4	20.035	35.92	Pk	32.7	-25.2	-9.5	33.92	54	-20.08	74	-40.08
5	21.52	38.51	Pk	33.1	-25.4	-9.5	36.71	54	-17.29	74	-37.29
6	22.735	37.24	Pk	33.5	-25.3	-9.5	35.94	54	-18.06	74	-38.06

Pk - Peak detector

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBUV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

11.1. AC Power Line Norm (China Adapter)

LINE 1 RESULTS

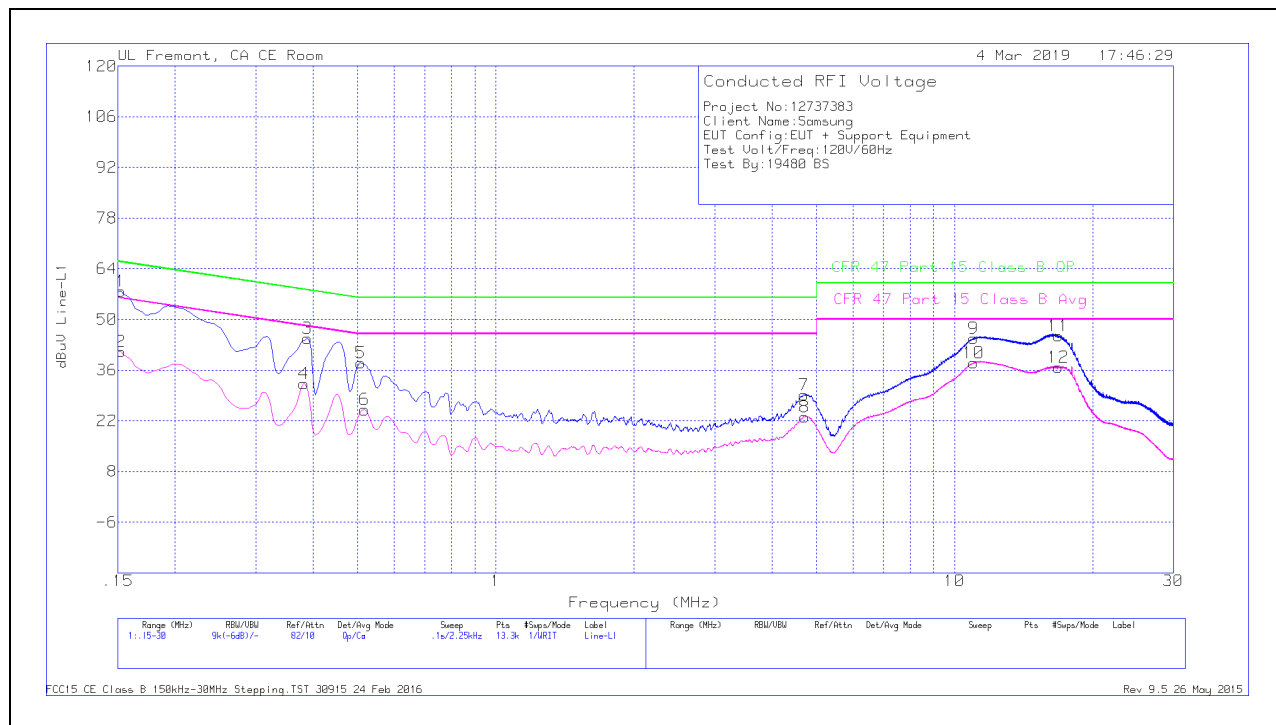

Trace Markers

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.15225	47.66	Qp	.1	0	10.1	57.86	65.88	-8.02	-	-
2	.15225	31.01	Ca	.1	0	10.1	41.21	-	-	55.88	-14.67
3	.3885	34.61	Qp	0	0	10.1	44.71	58.1	-13.39	-	-
4	.38175	22.17	Ca	0	0	10.1	32.27	-	-	48.24	-15.97
5	.50775	27.96	Qp	0	0	10.1	38.06	56	-17.94	-	-
6	.51675	14.96	Ca	0	0	10.1	25.06	-	-	46	-20.94
7	4.704	19.01	Qp	0	.1	10.1	29.21	56	-26.79	-	-
8	4.71075	12.93	Ca	0	.1	10.1	23.13	-	-	46	-22.87
9	10.9995	34.39	Qp	0	.2	10.2	44.79	60	-15.21	-	-
10	11.0085	27.56	Ca	.1	.2	10.2	38.06	-	-	50	-11.94
11	16.83375	34.76	Qp	.1	.3	10.3	45.46	60	-14.54	-	-
12	16.845	26.08	Ca	.1	.3	10.3	36.78	-	-	50	-13.22

Qp - Quasi-Peak detector

Ca - CISPR average detection