


LINE 2 RESULTS

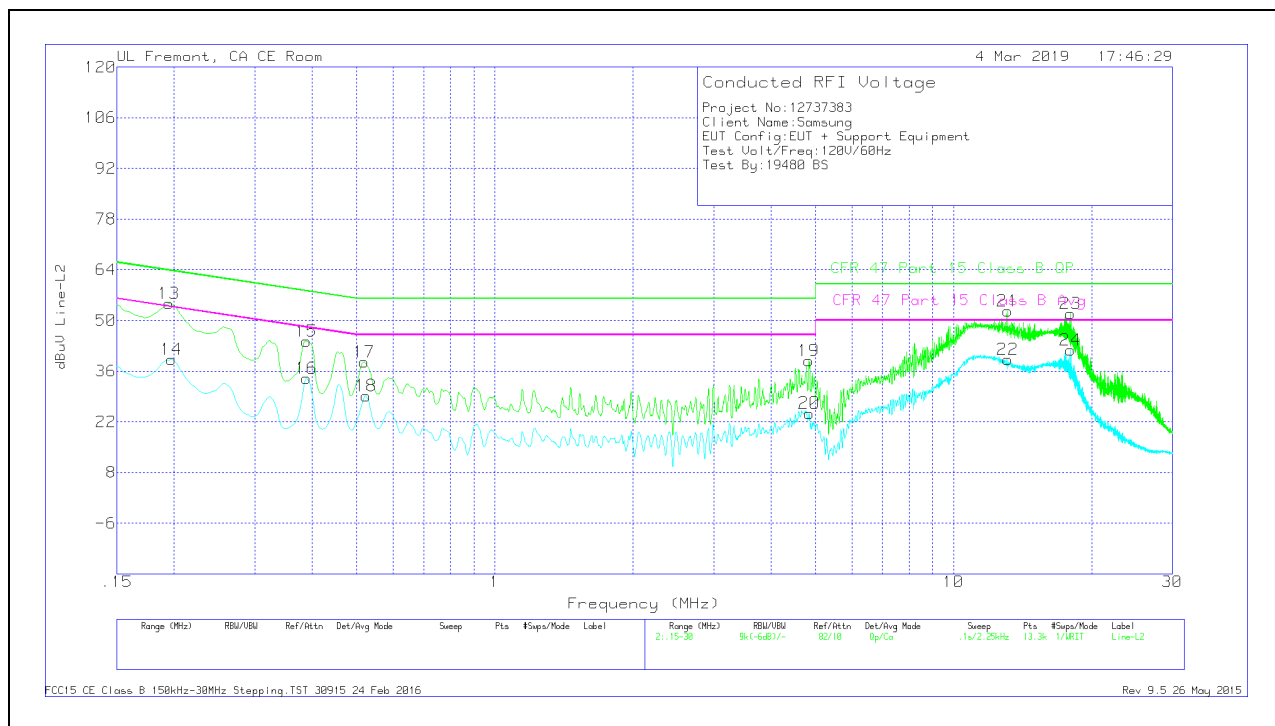

Trace Markers


Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.195	44.53	Qp	0	0	10.1	54.63	63.82	-9.19	-	-
14	.19725	29.06	Ca	0	0	10.1	39.16	-	-	53.73	-14.57
15	.3885	34.16	Qp	0	0	10.1	44.26	58.1	-13.84	-	-
16	.3885	23.84	Ca	0	0	10.1	33.94	-	-	48.1	-14.16
17	.519	28.49	Qp	0	0	10.1	38.59	56	-17.41	-	-
18	.5235	19.12	Ca	0	0	10.1	29.22	-	-	46	-16.78
19	4.84125	28.75	Qp	0	.1	10.1	38.95	56	-17.05	-	-
20	4.8435	14.16	Ca	0	.1	10.1	24.36	-	-	46	-21.64
21	13.13025	42.06	Qp	.1	.2	10.2	52.56	60	-7.44	-	-
22	13.128	28.67	Ca	.1	.2	10.2	39.17	-	-	50	-10.83
23	17.97225	41.2	Qp	.1	.3	10.3	51.9	60	-8.1	-	-
24	17.97225	31.06	Ca	.1	.3	10.3	41.76	-	-	50	-8.24

Qp - Quasi-Peak detector

Ca - CISPR average detection

11.2. AC Power Line Norm (Hong Kong Adapter)

LINE 1 RESULTS

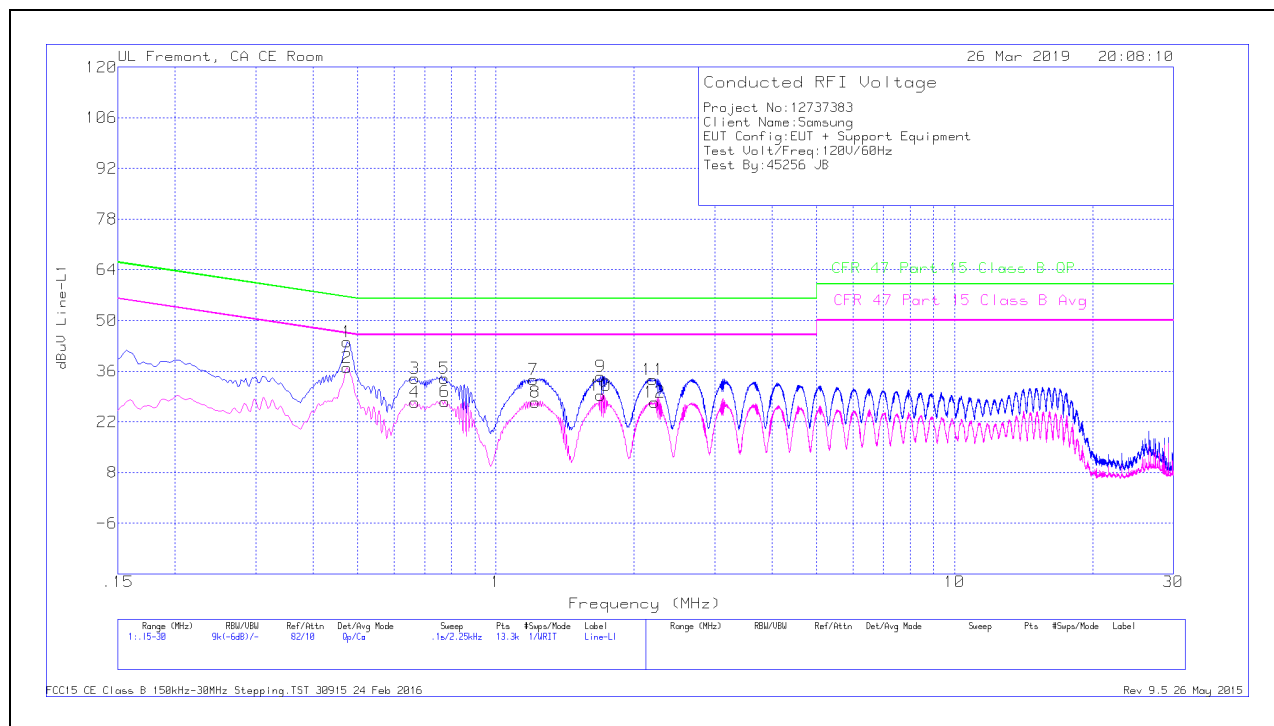


Trace Markers

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables C1&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.474	34.02	Qp	0	0	10.1	44.12	56.44	-12.32	-	-
2	.474	26.82	Ca	0	0	10.1	36.92	-	-	46.44	-9.52
3	.66525	23.89	Qp	0	0	10.1	33.99	56	-22.01	-	-
4	.66525	17.28	Ca	0	0	10.1	27.38	-	-	46	-18.62
5	.77325	23.96	Qp	0	0	10.1	34.06	56	-21.94	-	-
6	.7755	17.49	Ca	0	0	10.1	27.59	-	-	46	-18.41
7	1.20975	23.42	Qp	0	.1	10.1	33.62	56	-22.38	-	-
8	1.221	17.13	Ca	0	.1	10.1	27.33	-	-	46	-18.67
9	1.69125	24.33	Qp	0	.1	10.1	34.53	56	-21.47	-	-
10	1.6935	19.08	Ca	0	.1	10.1	29.28	-	-	46	-16.72
11	2.202	23.47	Qp	0	.1	10.1	33.67	56	-22.33	-	-
12	2.2225	17.15	Ca	0	.1	10.1	27.35	-	-	46	-18.65

Qp - Quasi-Peak detector

Ca - CISPR average detection

LINE 2 RESULTS

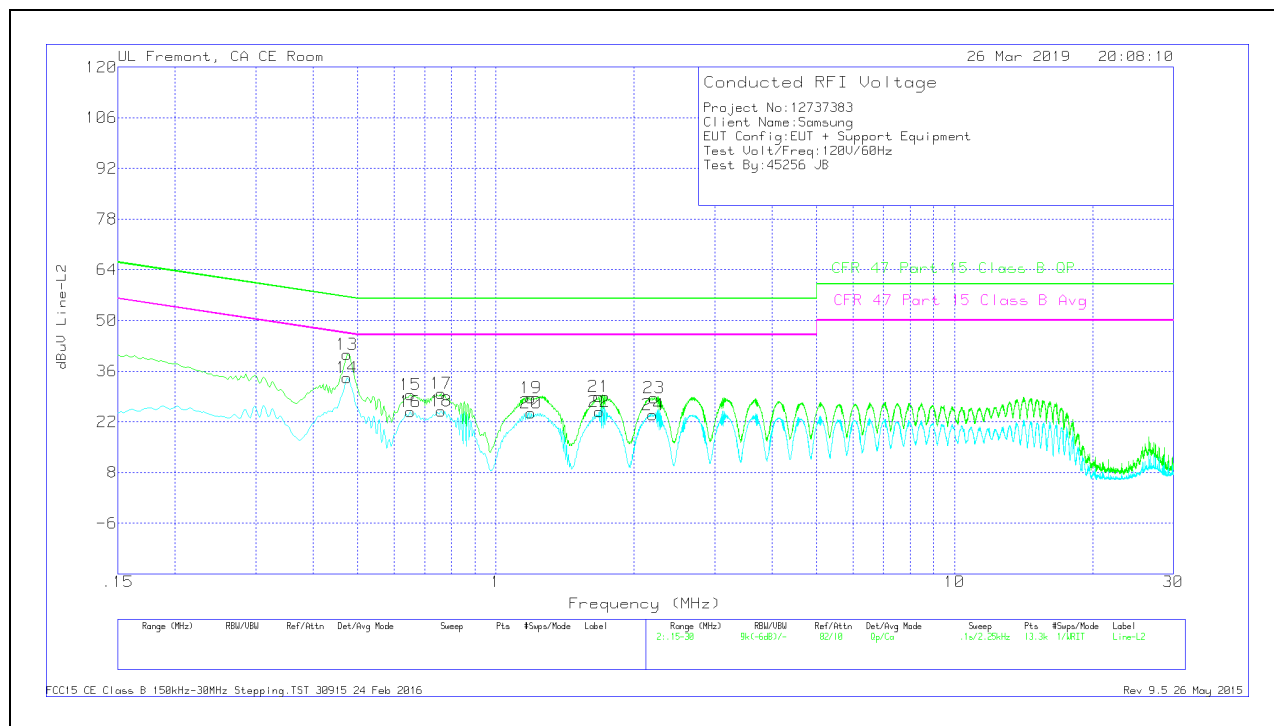

Trace Markers

Range 2: Line-L2 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables C2&C3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.474	30.47	Qp	0	0	10.1	40.57	56.44	-15.87	-	-
14	.474	24.02	Ca	0	0	10.1	34.12	-	-	46.44	-12.32
15	.65175	19.35	Qp	0	0	10.1	29.45	56	-26.55	-	-
16	.65175	14.62	Ca	0	0	10.1	24.72	-	-	46	-21.28
17	.75975	19.78	Qp	0	0	10.1	29.88	56	-26.12	-	-
18	.75975	14.94	Ca	0	0	10.1	25.04	-	-	46	-20.96
19	1.194	18.46	Qp	0	.1	10.1	28.66	56	-27.34	-	-
20	1.194	14.19	Ca	0	.1	10.1	24.39	-	-	46	-21.61
21	1.6755	18.69	Qp	0	.1	10.1	28.89	56	-27.11	-	-
22	1.68	14.61	Ca	0	.1	10.1	24.81	-	-	46	-21.19
23	2.2155	18.44	Qp	0	.1	10.1	28.64	56	-27.36	-	-
24	2.202	13.76	Ca	0	.1	10.1	23.96	-	-	46	-22.04

Qp - Quasi-Peak detector

Ca - CISPR average detection

12. SETUP PHOTOS

12.1. SM-A705FN/DS (ORIGINAL)

ANTENNA PORT AND AC LINE CONDUCTED SETUP



RF ANTENNA PORT CONDUCTED



**AC LINE CONDUCTED China Adapter
(FRONT)**



**AC LINE CONDUCTED China Adapter
(BACK)**




**AC LINE CONDUCTED HK Adapter
(FRONT)**




AC LINE CONDUCTED HK Adapter (BACK)


RADIATED RF MEASUREMENT SETUP

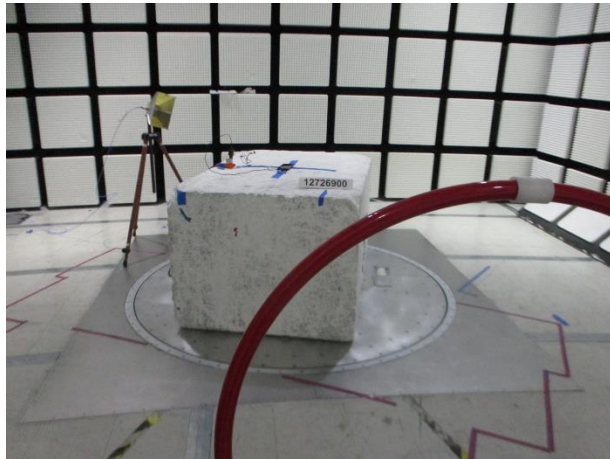


BELOW 30MHz (FRONT)

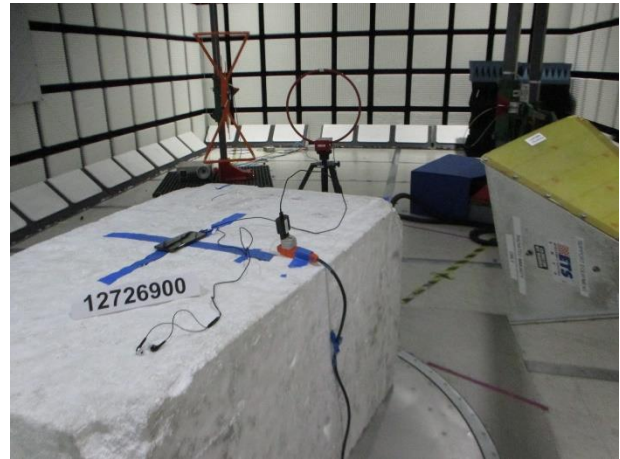


BELOW 30MHz (BACK)

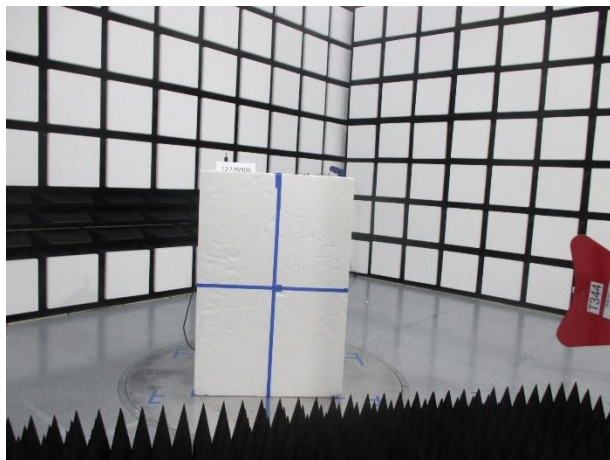


ABOVE 1GHz (FRONT)

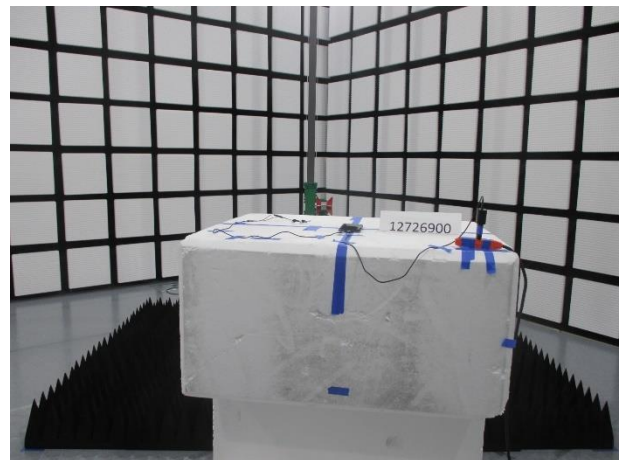

ABOVE 1GHz (BACK)

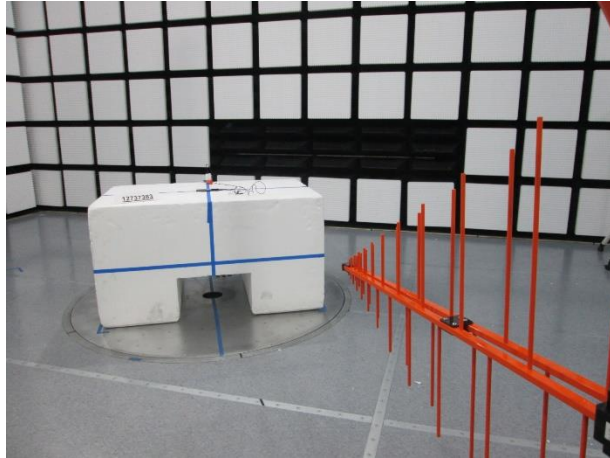

BELOW 1GHz China Adapter (FRONT)

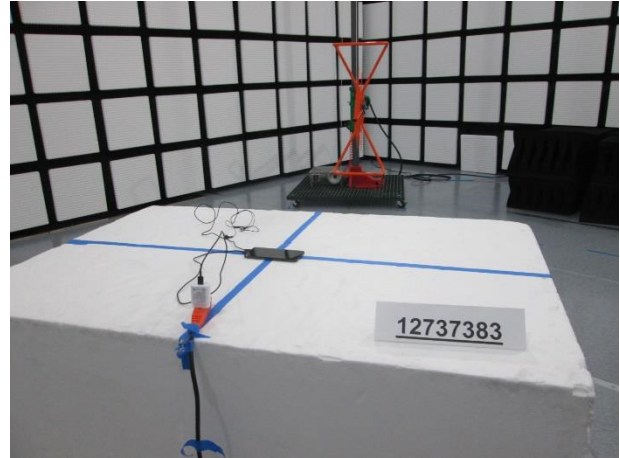

BELOW 1GHz China Adapter (BACK)




BELOW 1GHz HK Adapter (FRONT)



BELOW 1GHz HK Adapter (BACK)

ORIENTATIONS

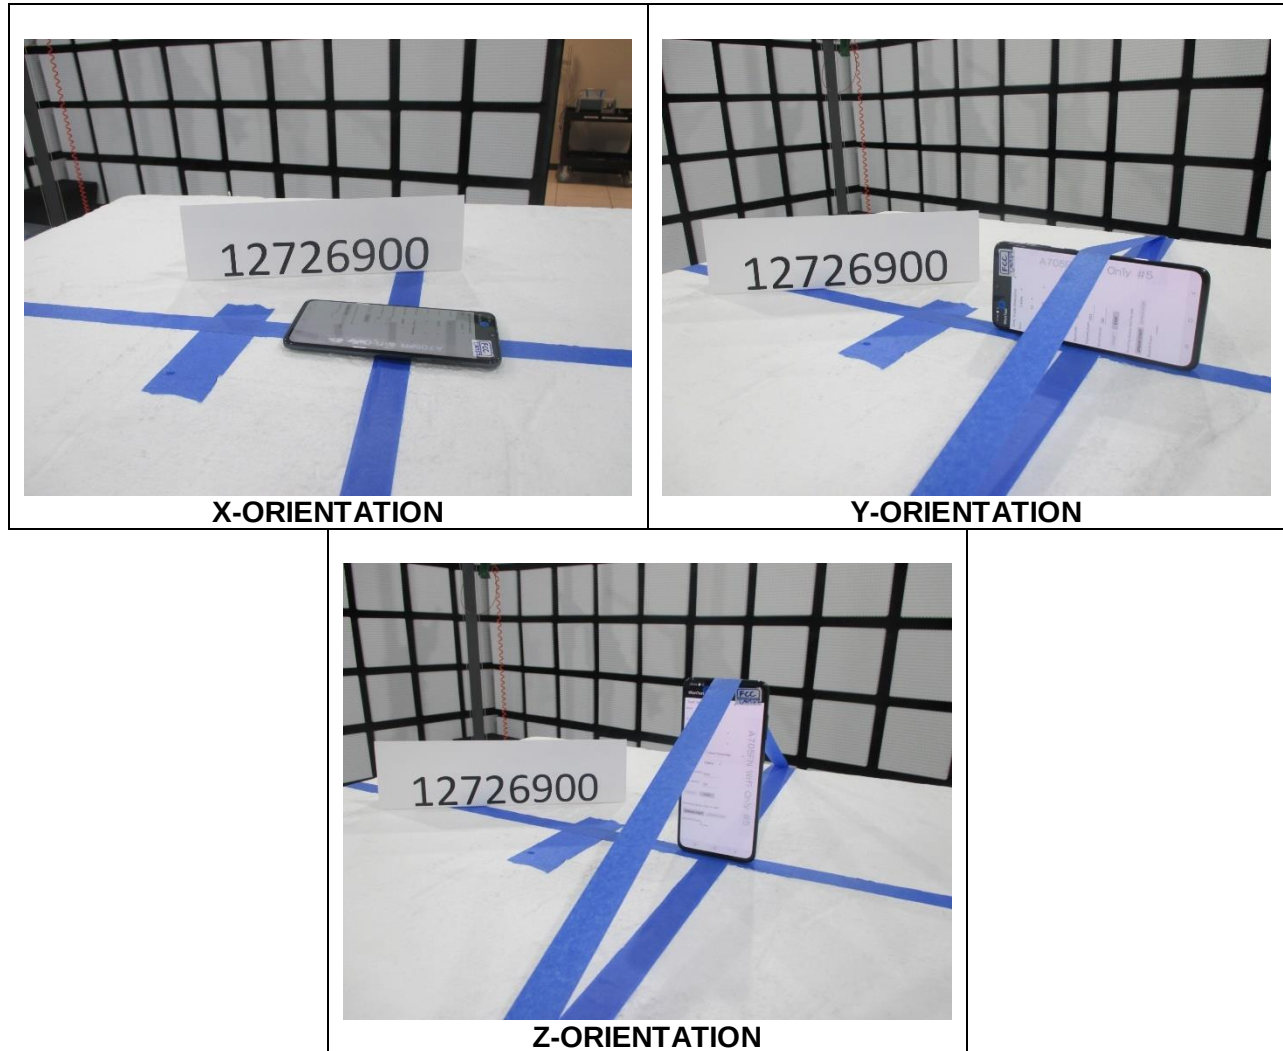


12.2. SM-A7050(Spot Check)

RADIATED RF MEASUREMENT SETUP



ABOVE 1GHz (FRONT)

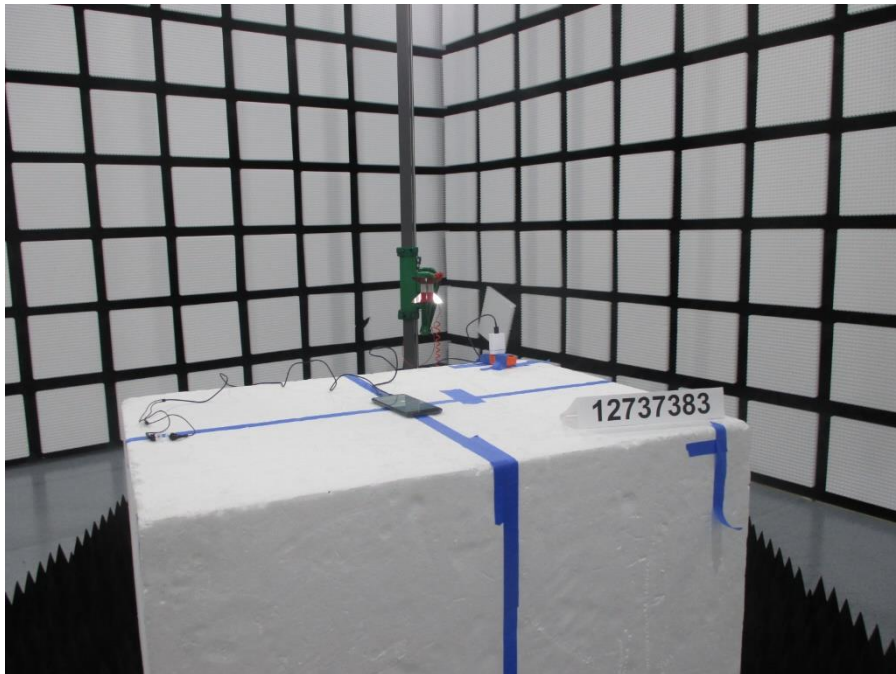

ABOVE 1GHz (BACK)

END OF REPORT