



TEL: (510) 319-4000



FORM NO: CCSUP4031B

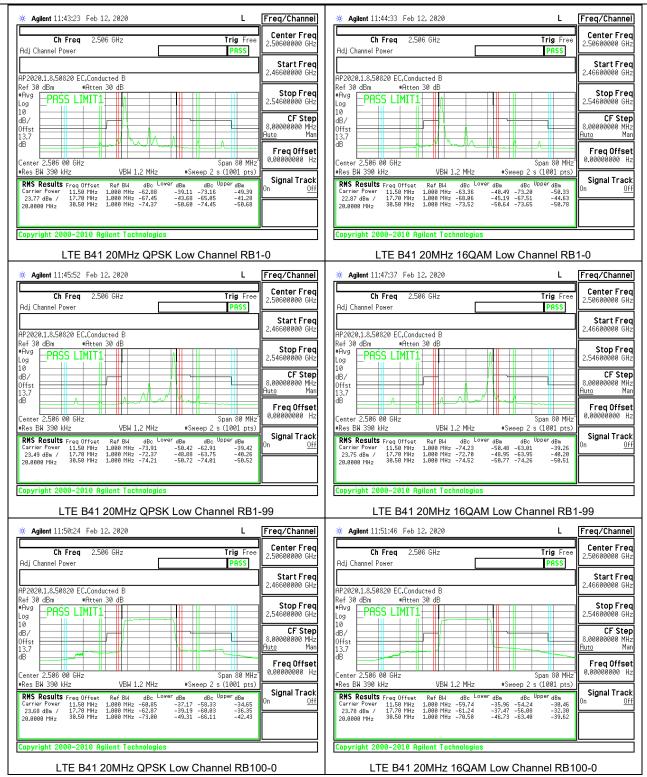

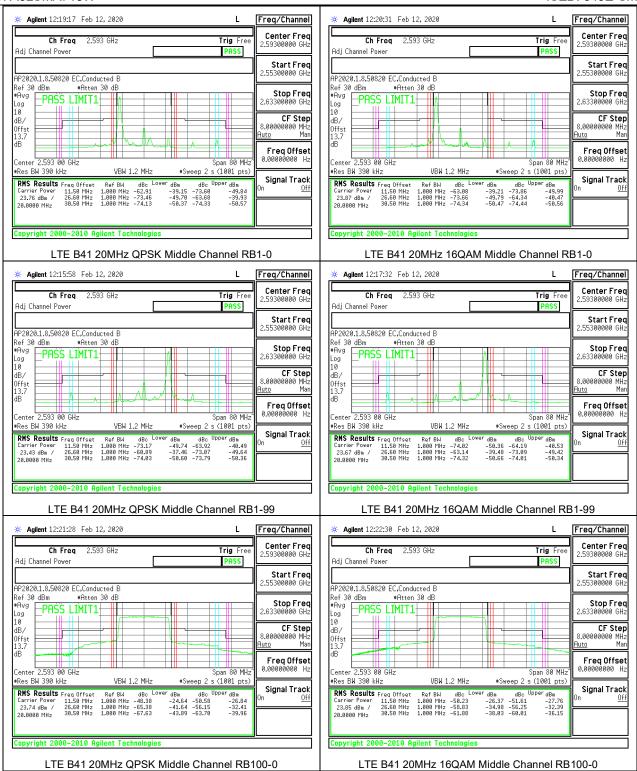

REPORT NO: 13211873-E1V2 DATE: March 02, 2020 FCC ID: A3LSMA715W ISED: 649E-SMA715W

8.2.12. LTE BAND 41 ADJACENT CHANNEL POWER (IC)

LIMITS


ISED: RSS199§4.5


Equipment shall comply with the following unwanted emission limits:


- a. for base station and fixed subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least 43 + 10 log₁₀ p
- b. for mobile subscriber equipment, the power of any unwanted emissions measured as above shall be attenuated (in dB) below the transmitter power, P (dBW), by at least:
 - i. $40 + 10 \log_{10} p$ from the channel edges to 5 MHz away
 - ii. $43 + 10 \log_{10} p$ between 5 MHz and X MHz from the channel edges, and
 - iii. 55 + 10 log₁₀ p at X MHz and beyond from the channel edges

In addition, the attenuation shall not be less than 43 + 10 log_{10} p on all frequencies between 2490.5 MHz and 2496 MHz, and 55 + 10 log_{10} p at or below 2490.5 MHz.


In (a) and (b), \mathbf{p} is the transmitter power measured in watts and \mathbf{X} is 6 MHz or the equipment occupied bandwidth, whichever is greater.

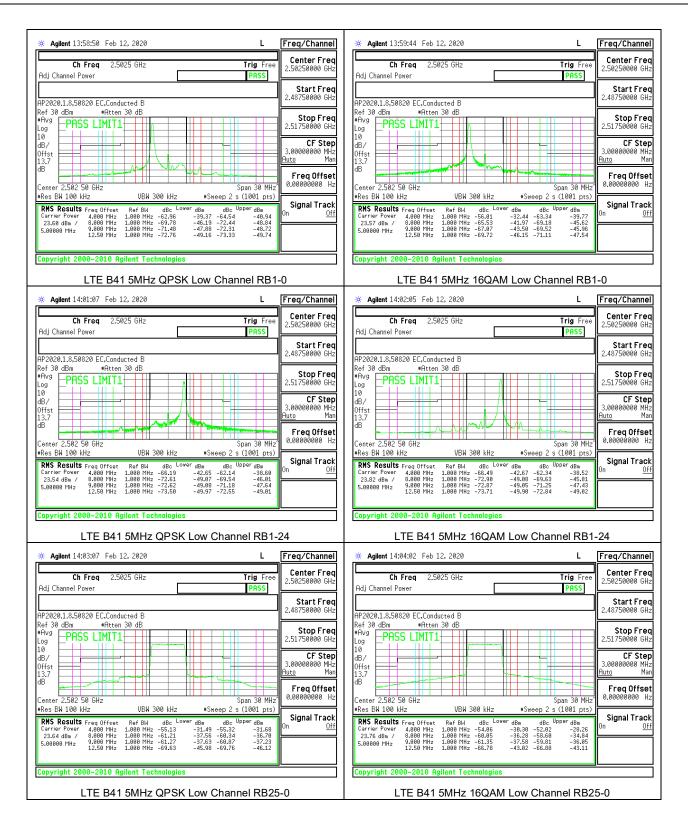


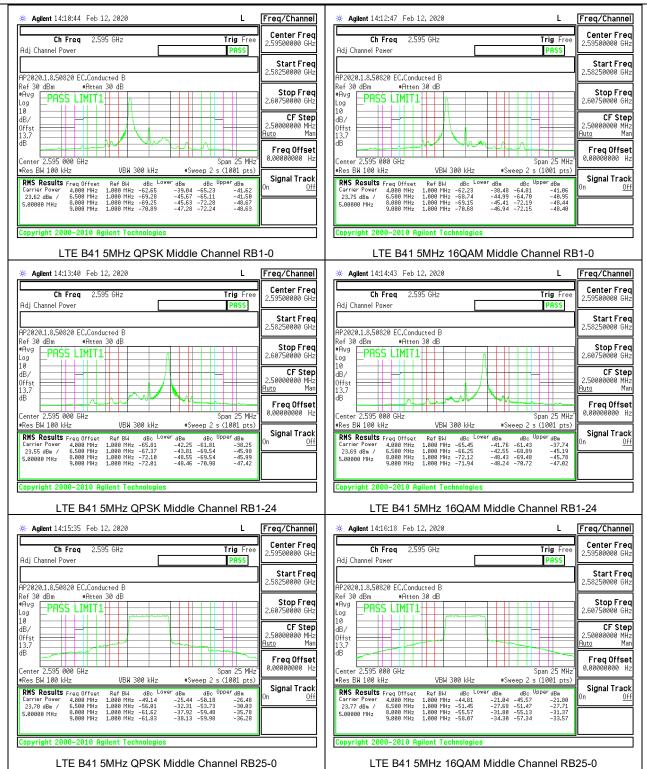


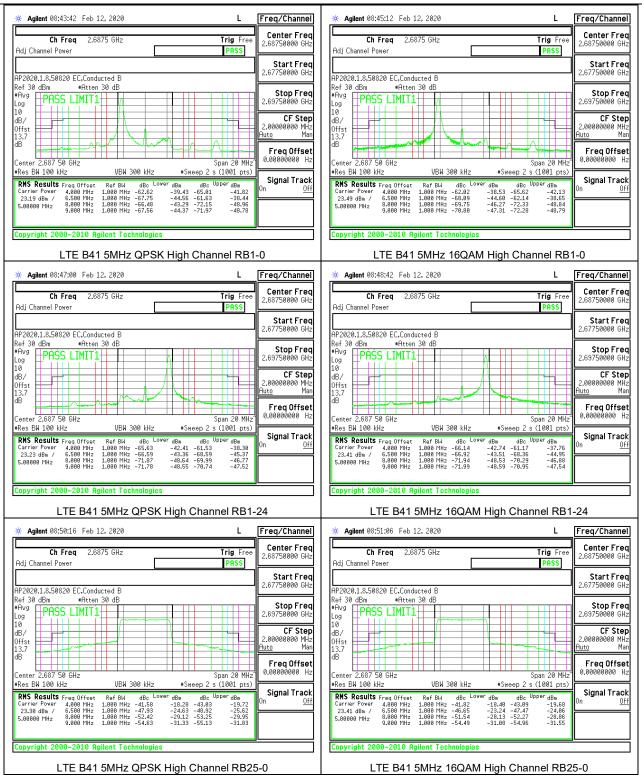



TEL: (510) 319-4000

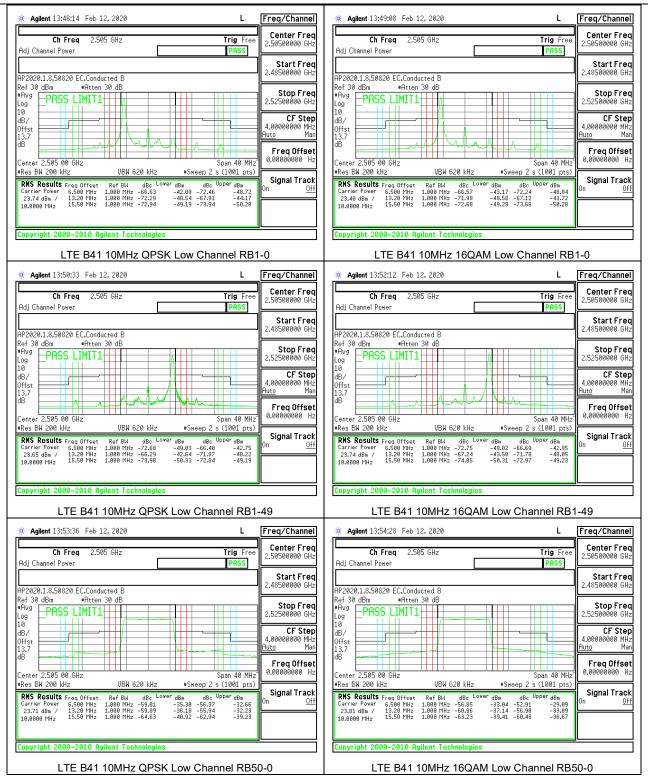


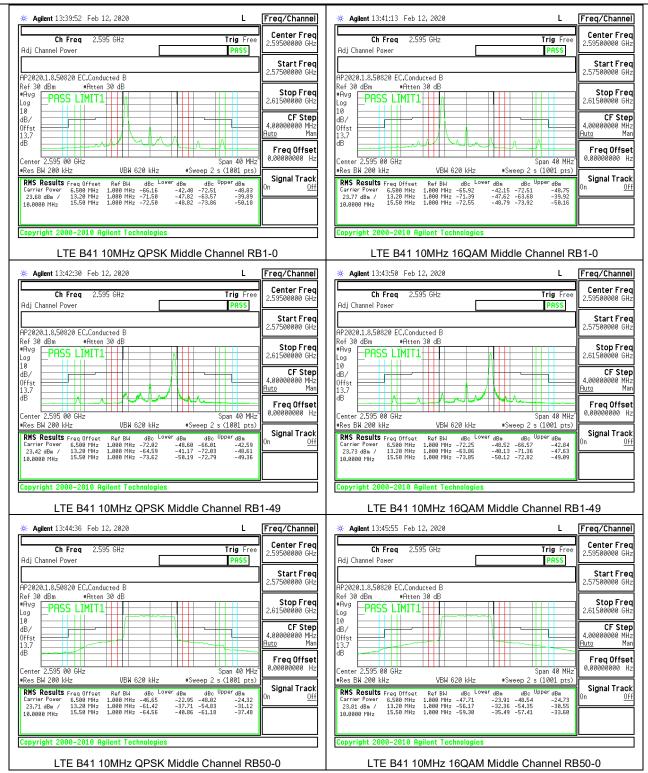

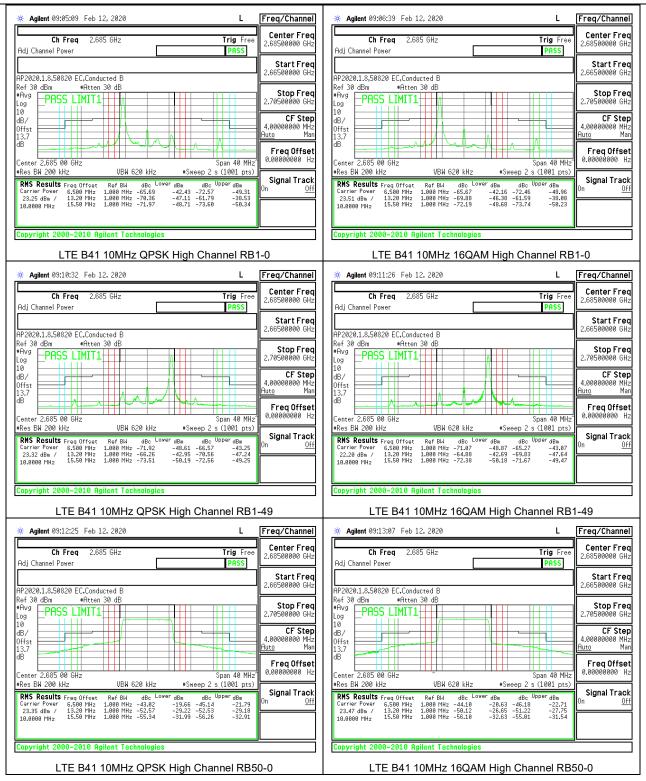


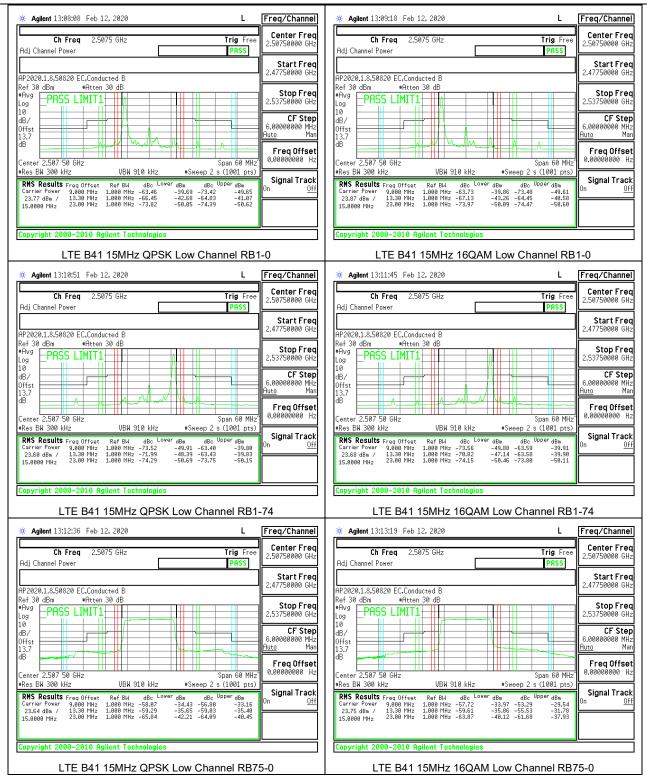

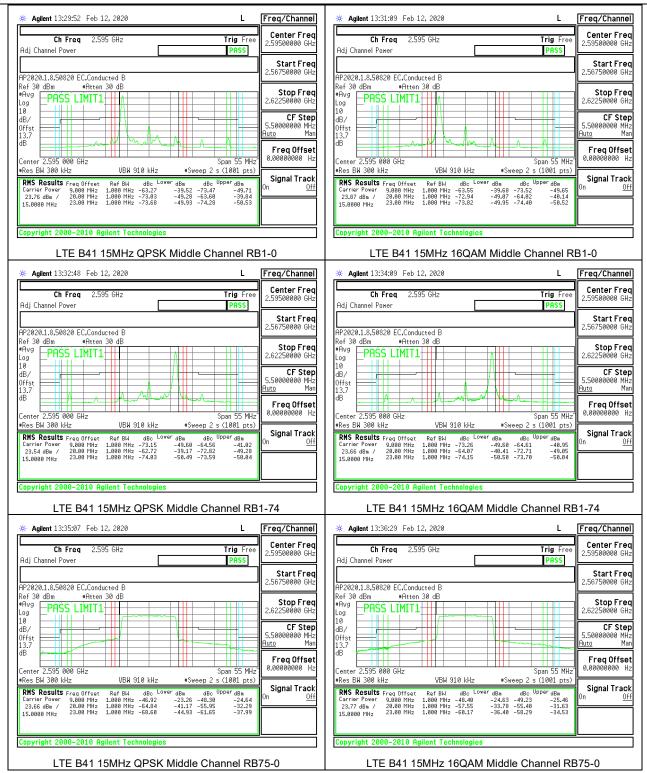


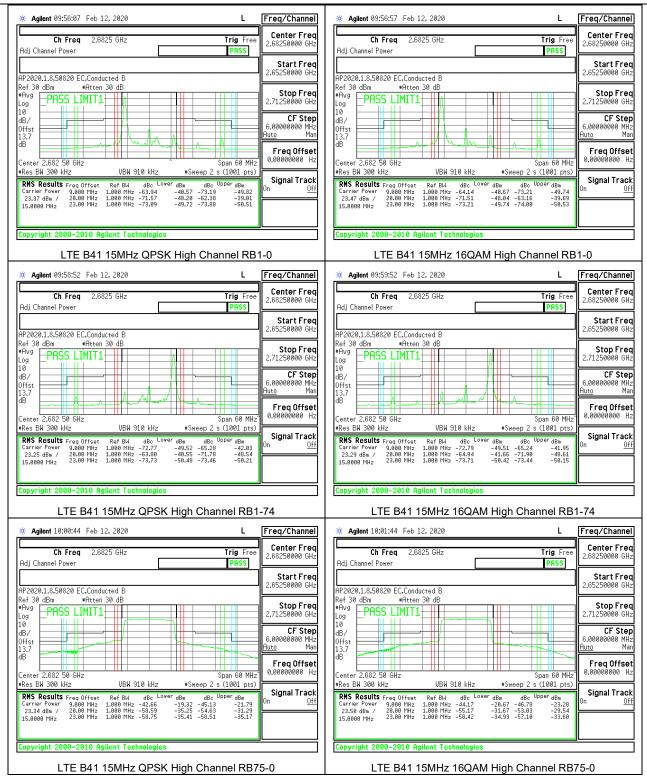



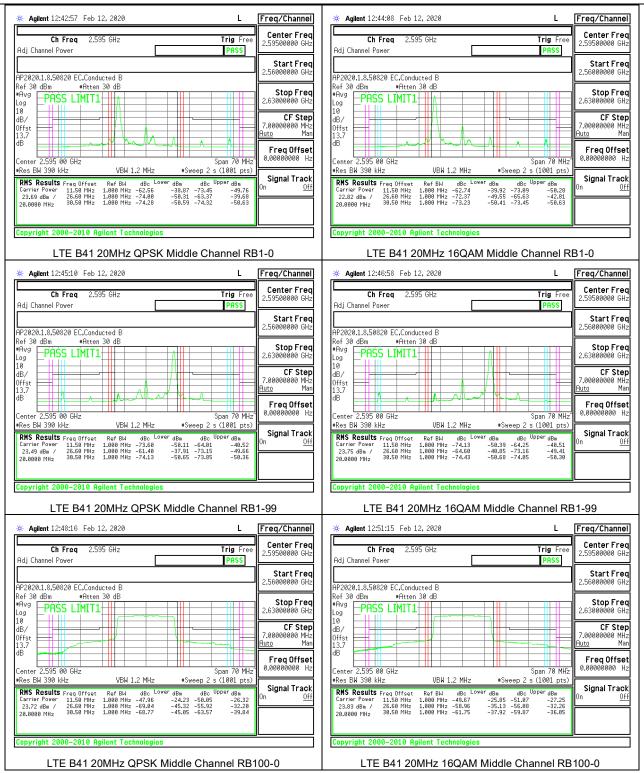

FORM NO: CCSUP4031B

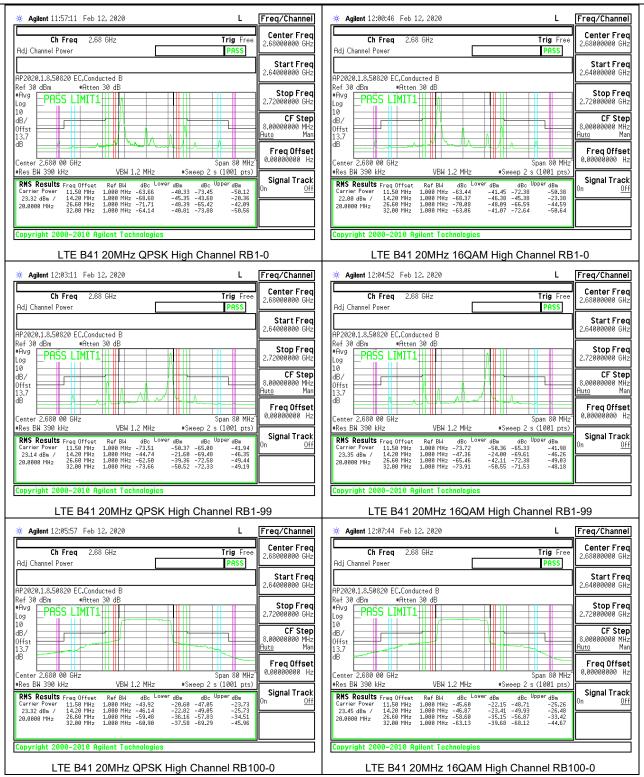

REPORT NO: 13211873-E1V2 DATE: March 02, 2020 FCC ID: A3LSMA715W ISED: 649E-SMA715W

8.2.13. LTE BAND 66 BANDEDGE


LIMITS


FCC: §27.53(h)


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.


ISED: RSS139§6.6


- (i) In the first 1.0 MHz bands immediately outside and adjacent to the equipment's smallest operating frequency block, Footnote2 which can contain the equipment's occupied bandwidth, the emission power per any 1% of the emission bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least43 + 10 log10 p (watts) dB.
- (ii) After the first 1.0 MHz outside the equipment's smallest operating frequency block, which can contain the equipment's occupied bandwidth, the emission power in any 1 MHz bandwidth shall be attenuated below the transmitter output power P (in dBW) by at least 43 + 10 log10 p (watts) dB.

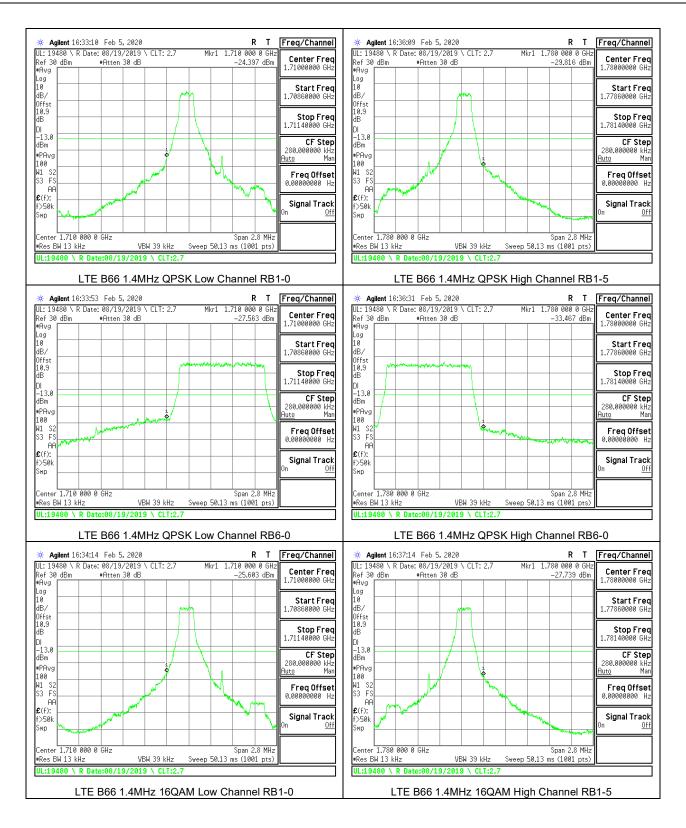


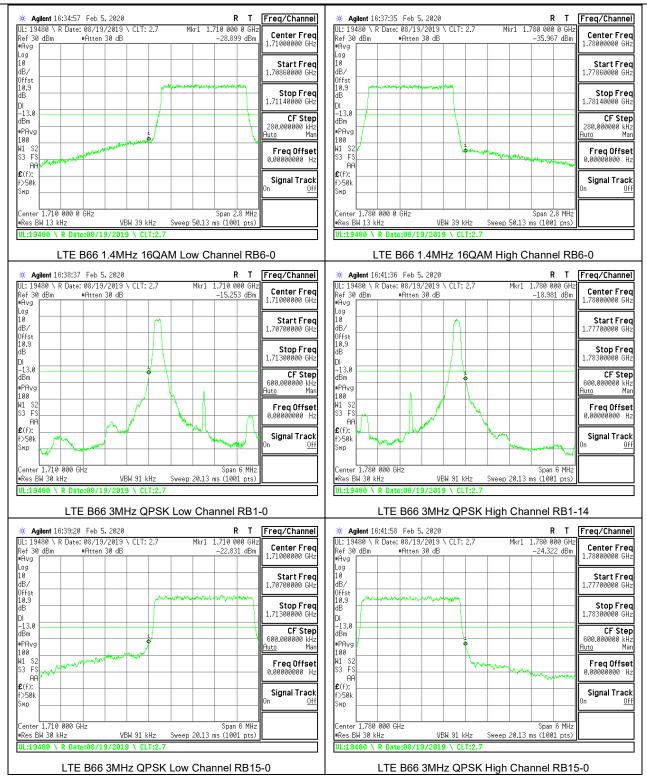


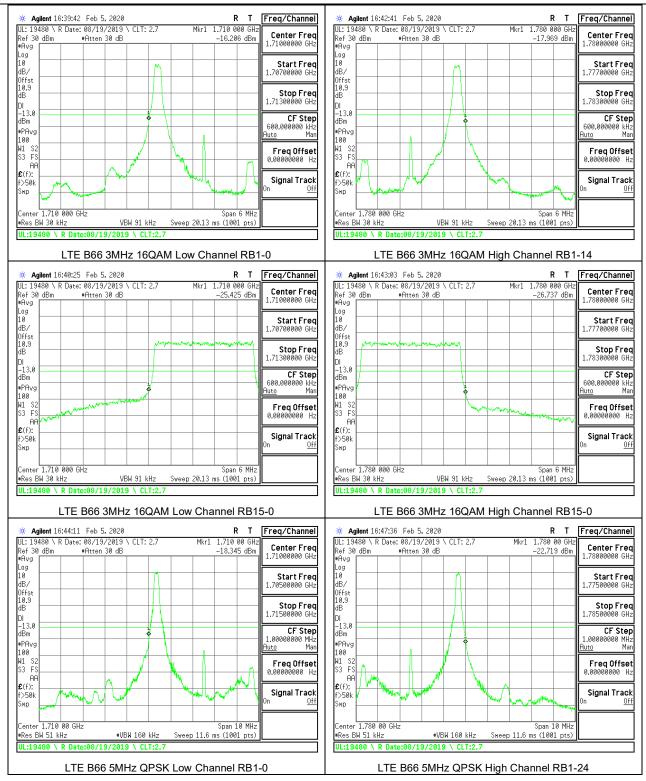


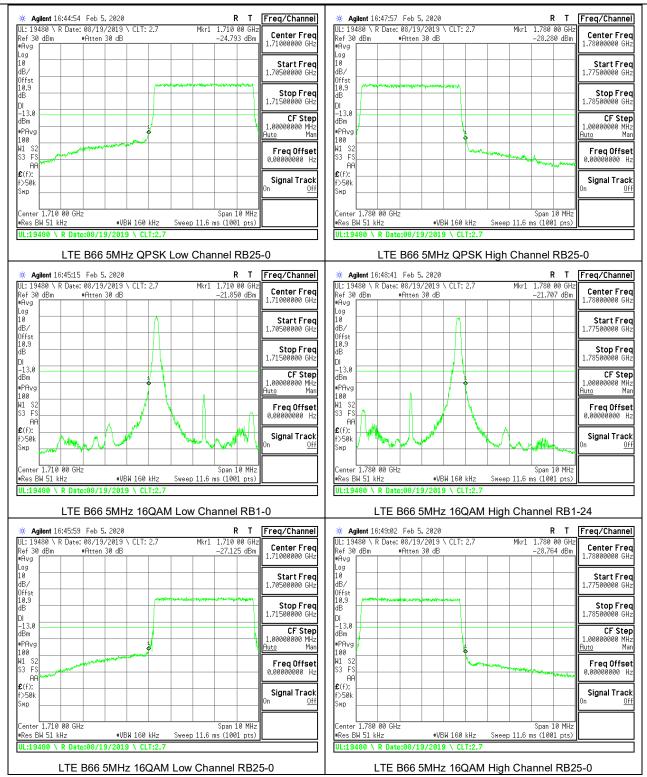

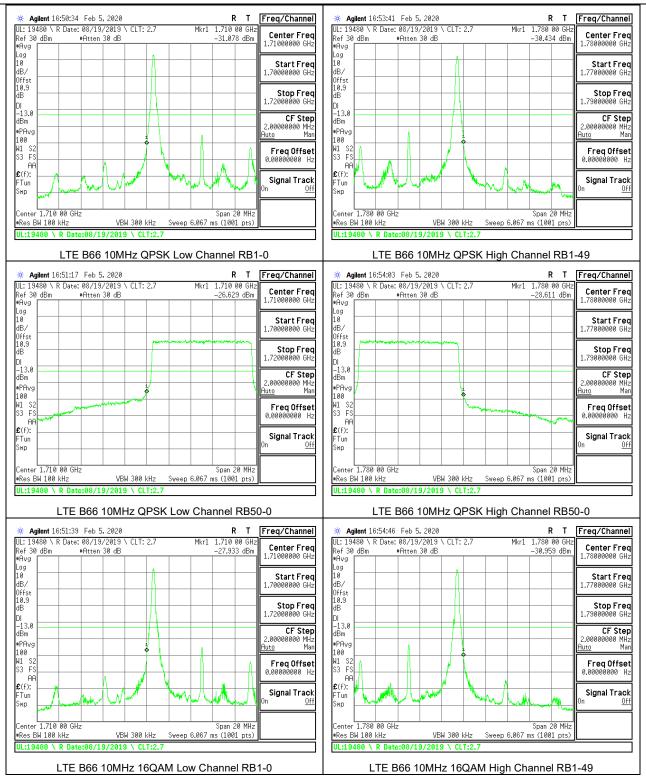

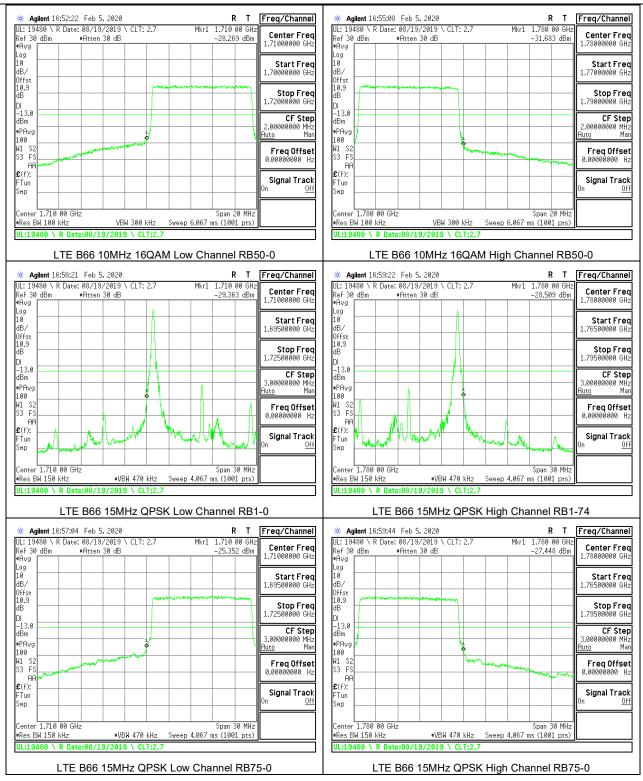

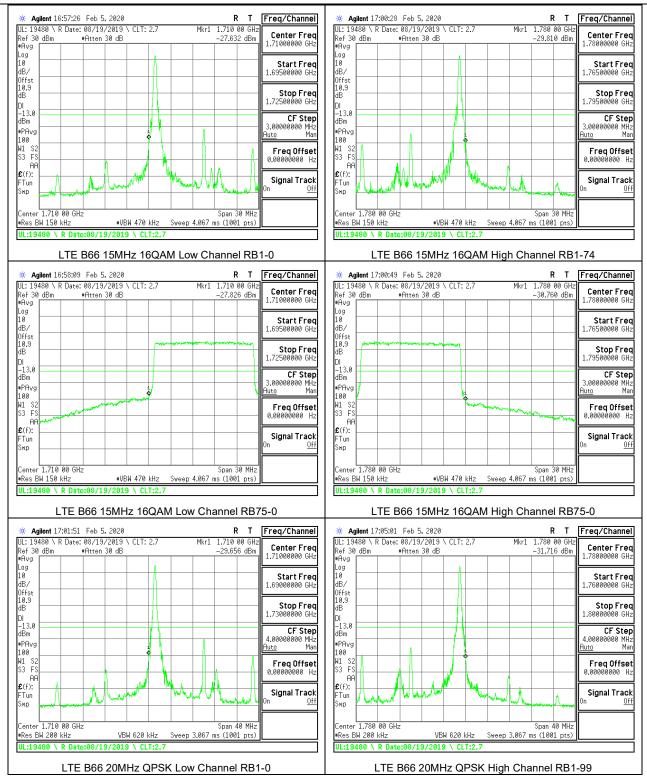

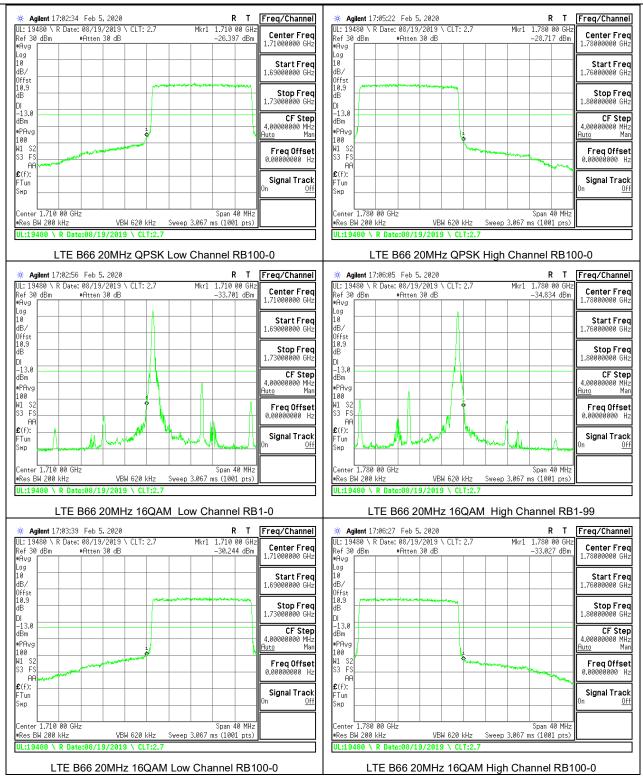

REPORT NO: 13211873-E1V2 DATE: March 02, 2020 FCC ID: A3LSMA715W ISED: 649E-SMA715W

8.2.14. LTE BAND 71 ADJACENT CHANNEL POWER

LIMITS

FCC: §27.53

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least 43 + 10 log (P) dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

ISED: RSS130§4.7

4.7.1 General unwanted emissions limits


The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least 43 + 10 log₁₀ p (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.


4.7.2 Additional unwanted emissions limits


In addition to the limit outlined in section 4.7.1 above, equipment operating in the frequency bands 746-756 MHz and 777-787 MHz shall also comply with the following restrictions:


- (a) the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least:
 - i. $76 + 10 \log_{10} p$ (watts), dB, for base and fixed equipment and
 - ii. 65 + 10 log₁₀ p (watts), dB, for mobile and portable equipment
- (b) the e.i.r.p. in the band 1559-1610 MHz shall not exceed −70 dBW/MHz for wideband signal and −80 dBW for discrete emission with bandwidth less than 700 Hz.


FORM NO: CCSUP4031B

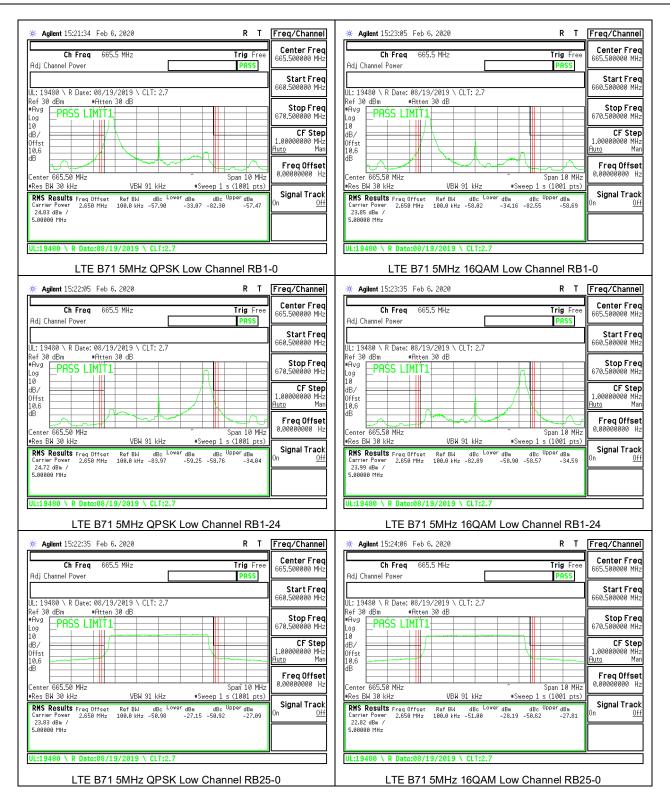


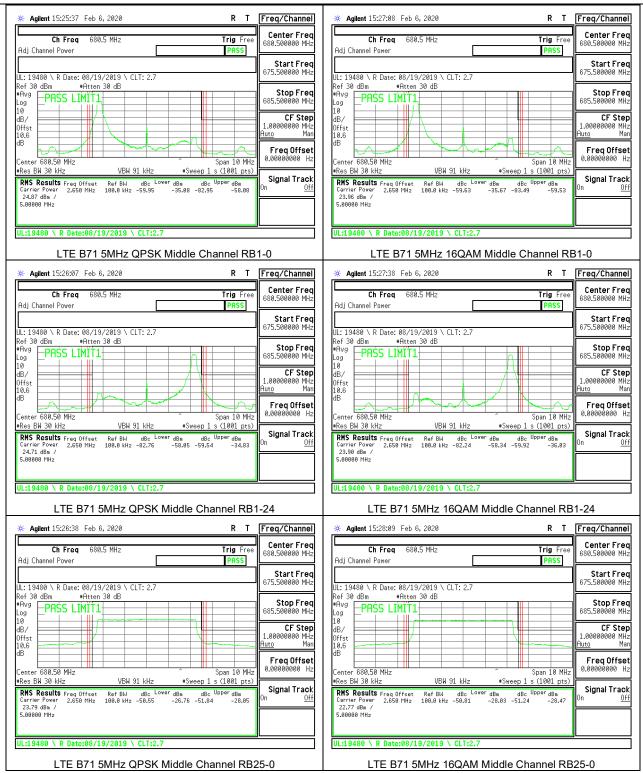


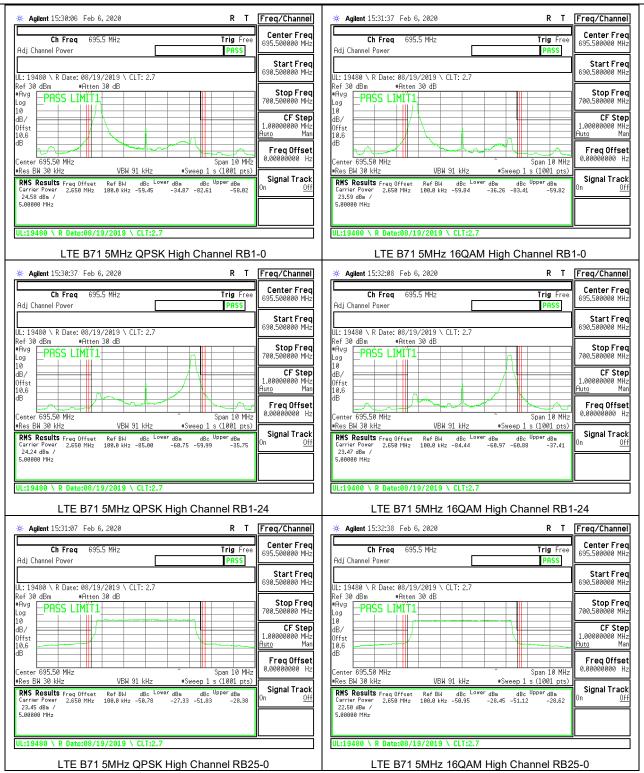


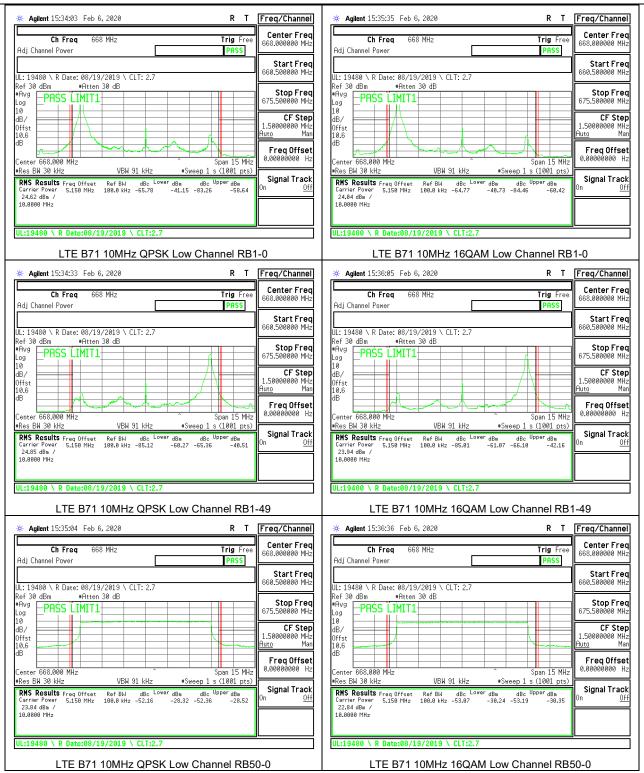


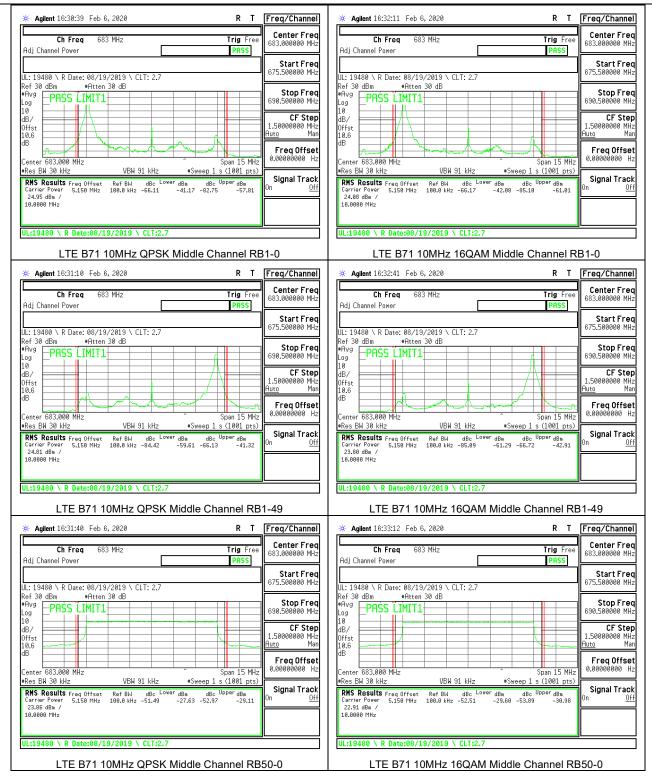

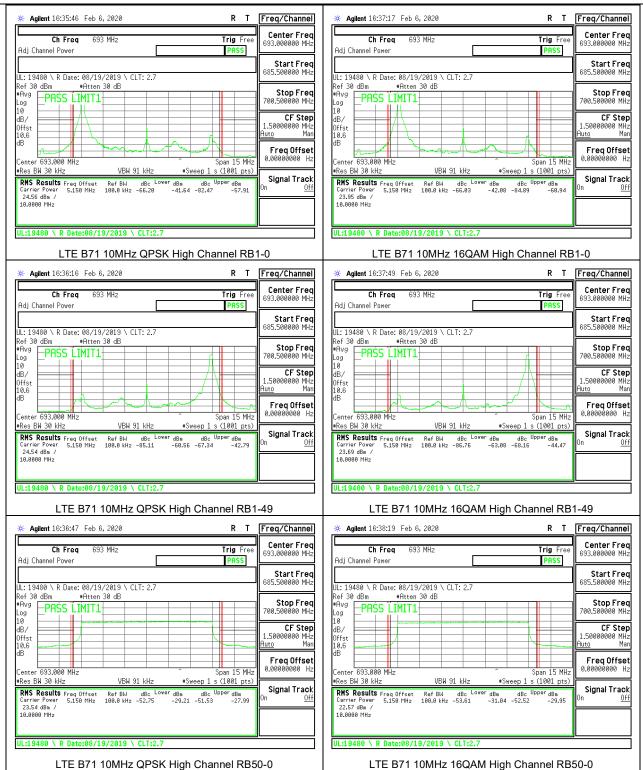


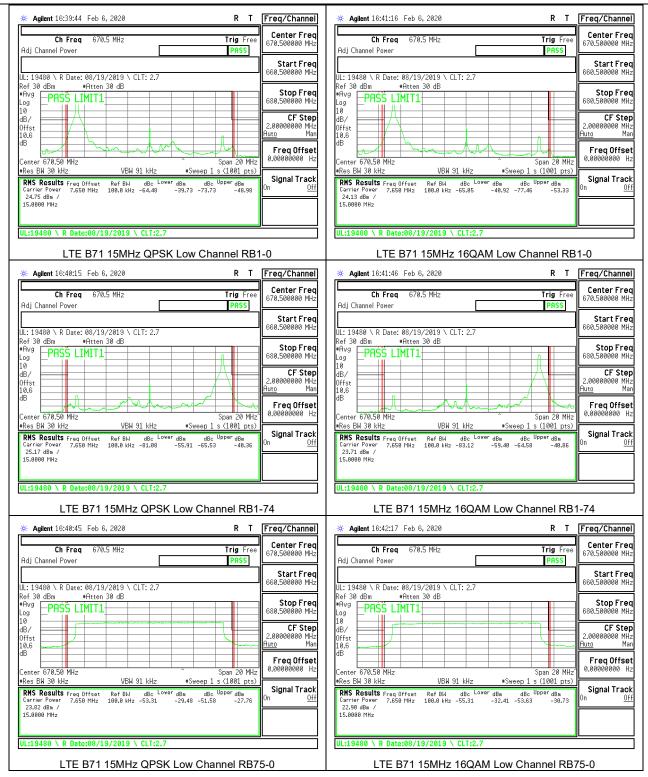

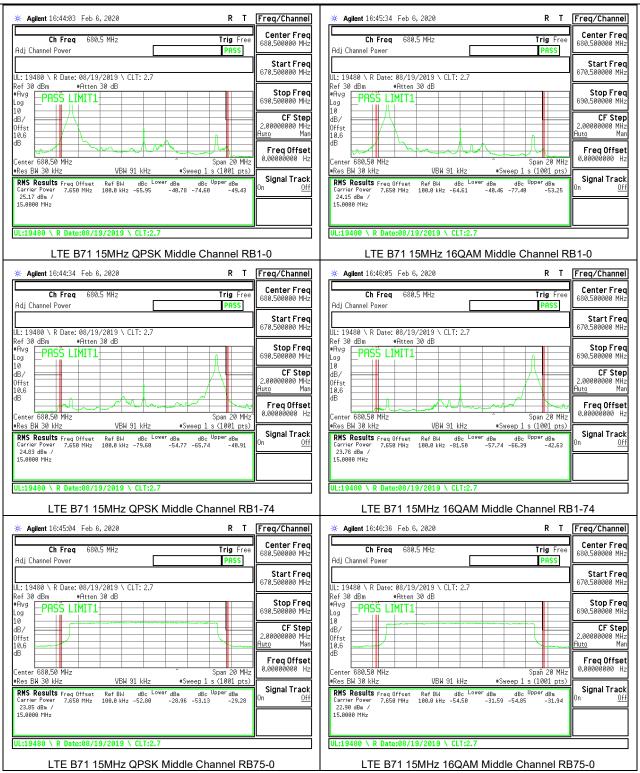

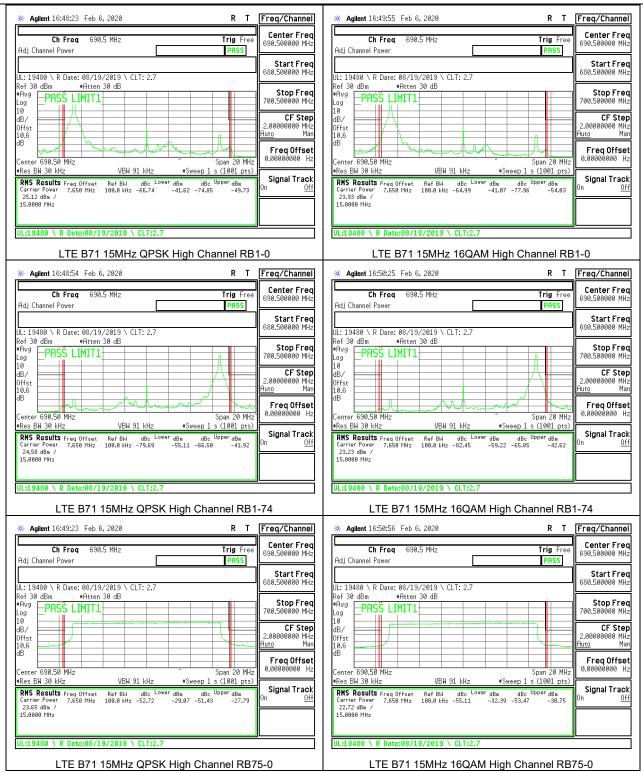



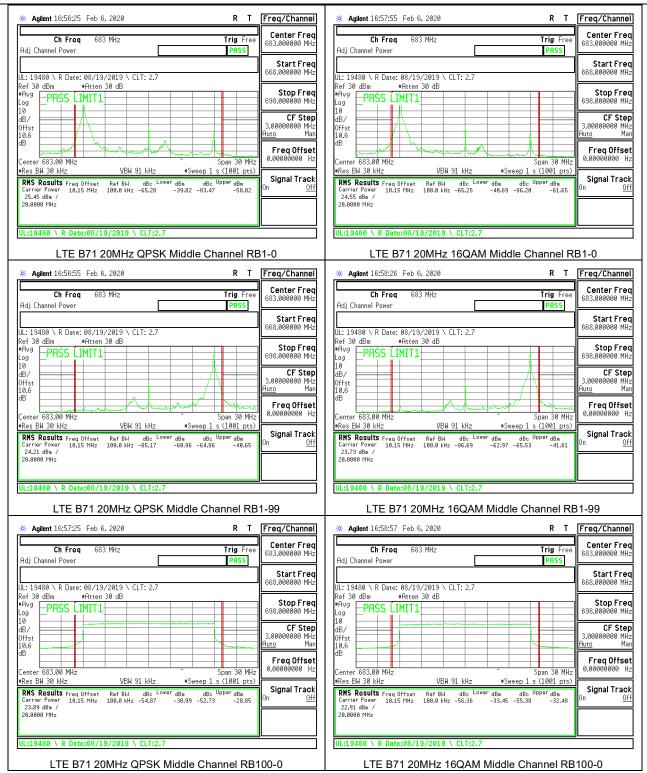



REPORT NO: 13211873-E1V2 DATE: March 02, 2020 FCC ID: A3LSMA715W ISED: 649E-SMA715W

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917, §24.238, and §27.53

ISED: RSS130§4.7, RSS132§5.5; RSS133§6.5, RSS139§6.6, RSS199§4.5.

LIMITS

FCC: §22.917, §24.238, §27.53 (g), (h)

The minimum permissible attenuation level of any spurious emissions is 43 + 10 log (P) dB where transmitting power (P) in Watts.

FCC: §27.53 (c), (f) (Band 13)

The minimum permissible attenuation level of any spurious emissions is 43 + 10 log (P) dB where transmitting power (P) in Watts. The band 1559-1610 MHz shall be limited to −70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and −80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

Note: Radiated data in section 9.1.6 confirms a compliance with narrowband limits for GPS1559-1610 MHz band.

FCC: §27.53 (m) (Band 7, 41)

The minimum permissible attenuation level of any spurious emissions is 55 + 10 log (P) dB where transmitting power (P) in Watts.

RSS130§4.7, RSS132§5.5, RSS133§6.5, RSS139§6.6

The minimum permissible attenuation level of any spurious emissions is 43 + 10 log (P) dB where transmitting power (P) in Watts.

RSS199§4.5

The minimum permissible attenuation level of any spurious emissions is 55 + 10 log (P) dB where transmitting power (P) in Watts.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line at -13 dBm, -25dBm and -40dBm according to the band Limit
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz. (NOTE: Worst case set RBW/VBW to 1MHz/3MHz)

RESULTS


Page 177 of 325


8.3.1. GSM 850

LIMITS

FCC: §22.917

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

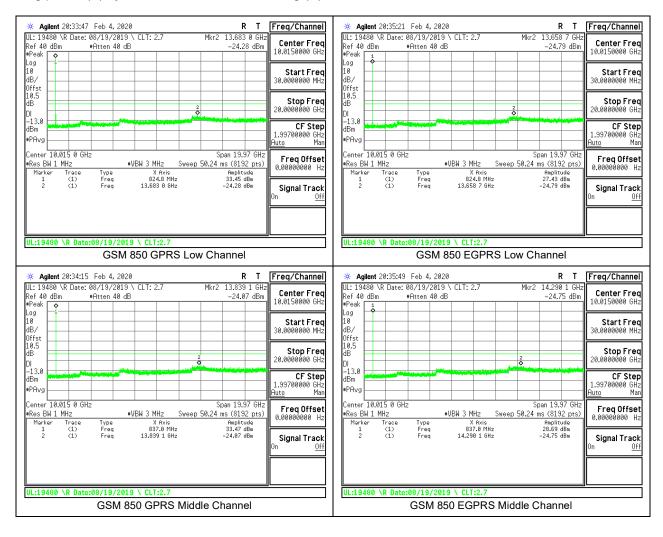

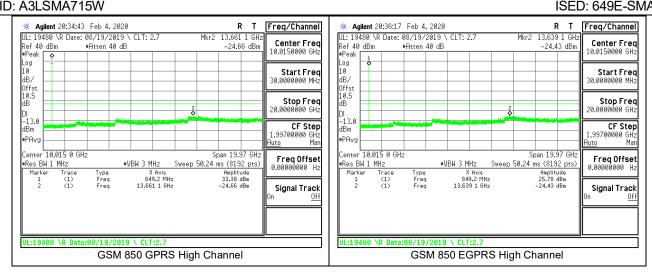


8.3.2. GSM 1900


LIMITS

FCC: §24.238

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

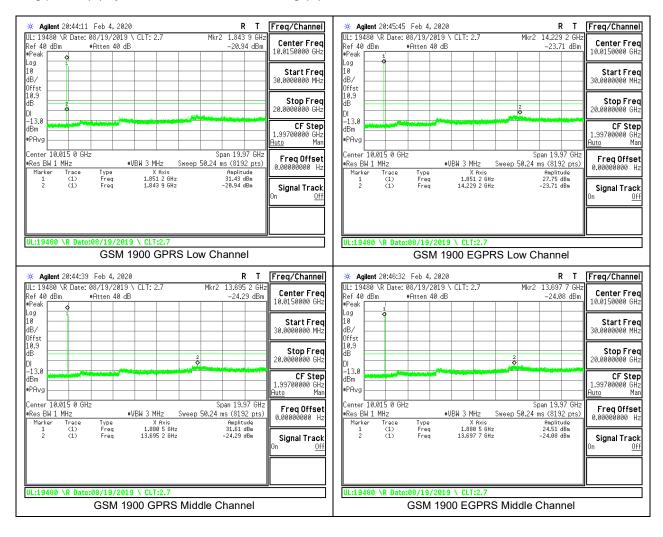

DATE: March 02, 2020

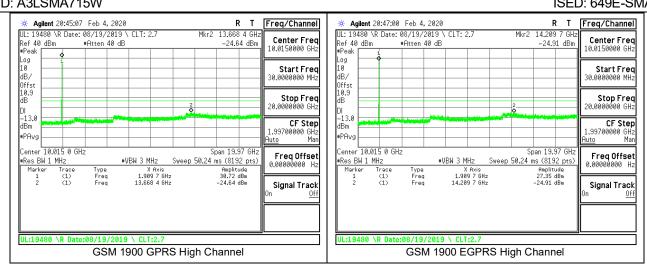

8.3.3. WCDMA BAND 5

LIMITS


FCC: §22.917

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.



FORM NO: CCSUP4031B

DATE: March 02, 2020

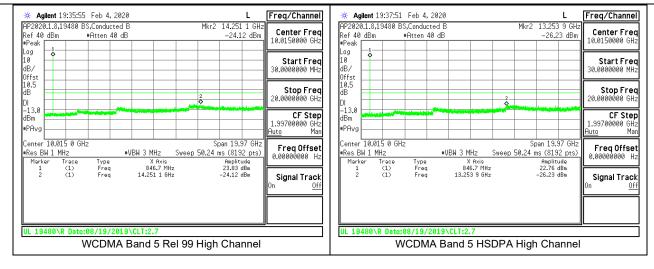


8.3.4. WCDMA BAND 2


LIMITS


FCC: §24.238

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.

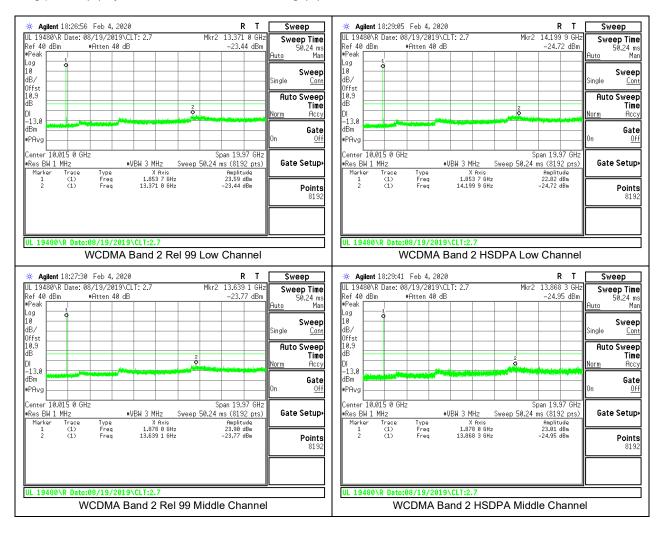

DATE: March 02, 2020





8.3.5. WCDMA BAND 4


LIMITS

FCC: §27.53(h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log (P) dB.



DATE: March 02, 2020

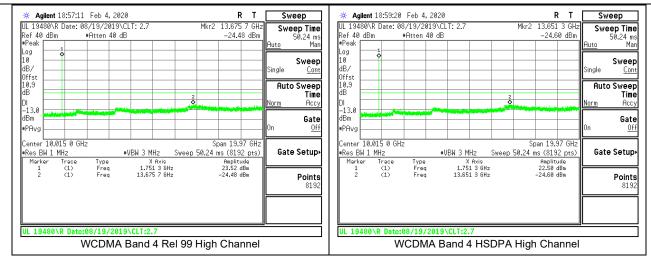

8.3.6. LTE BAND 2

LIMITS


FCC: §24.238

The minimum permissible attenuation level of any spurious emissions is 43 + 10 log (P) dB where transmitting power (P)


in Watts.


ISED: RSS133§6.5


The minimum permissible attenuation level of any spurious emissions is 43 + 10 log (P) dB where transmitting power (P)

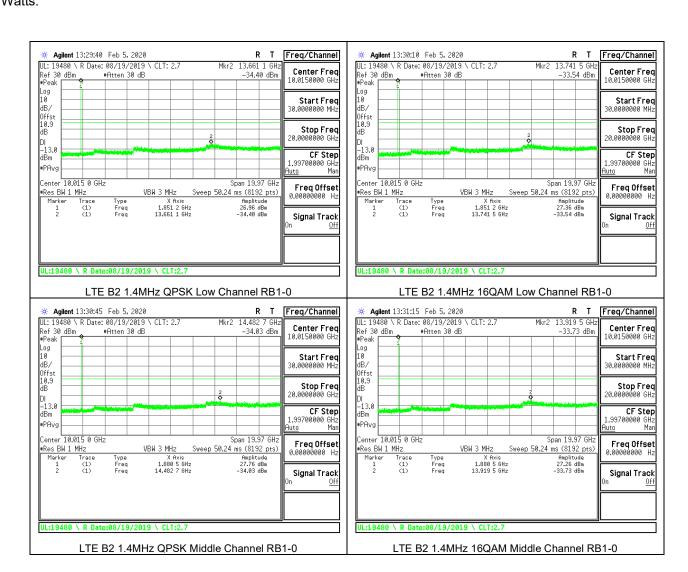



DATE: March 02, 2020

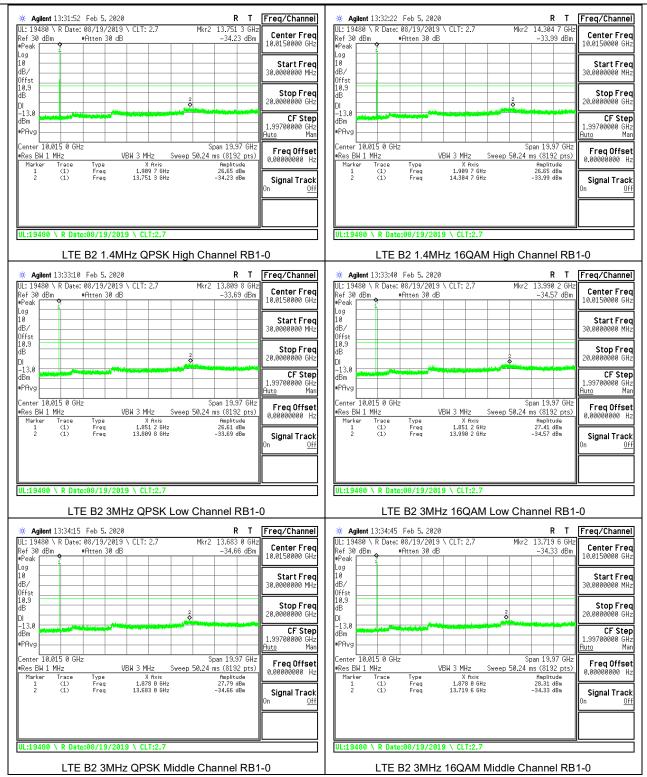


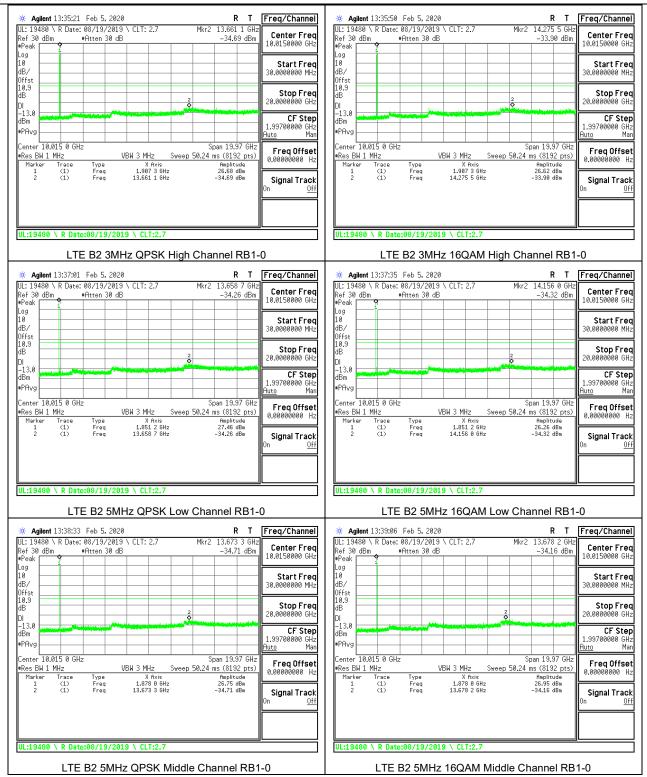

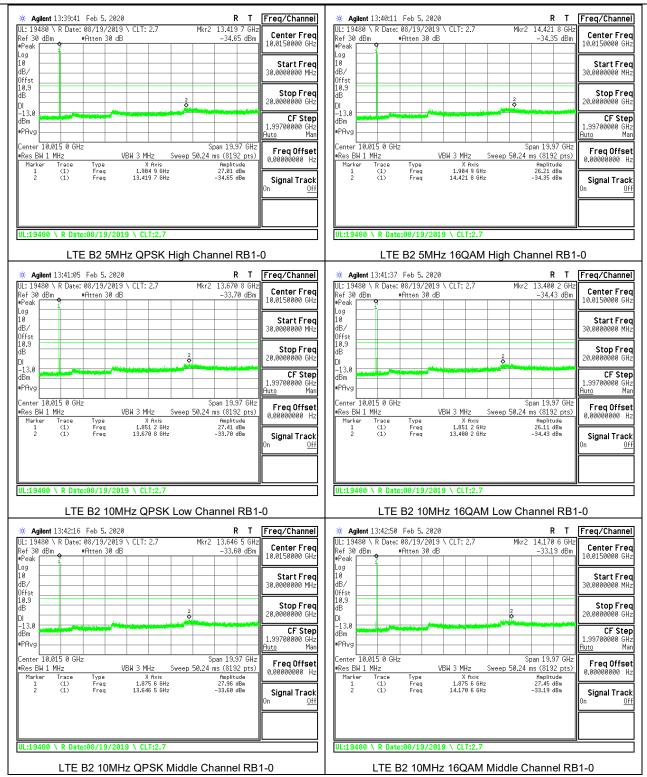

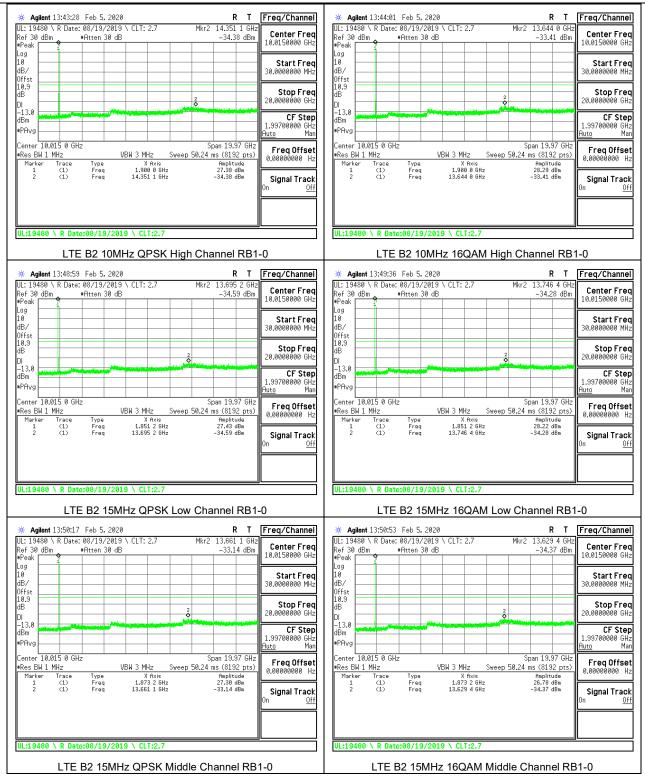

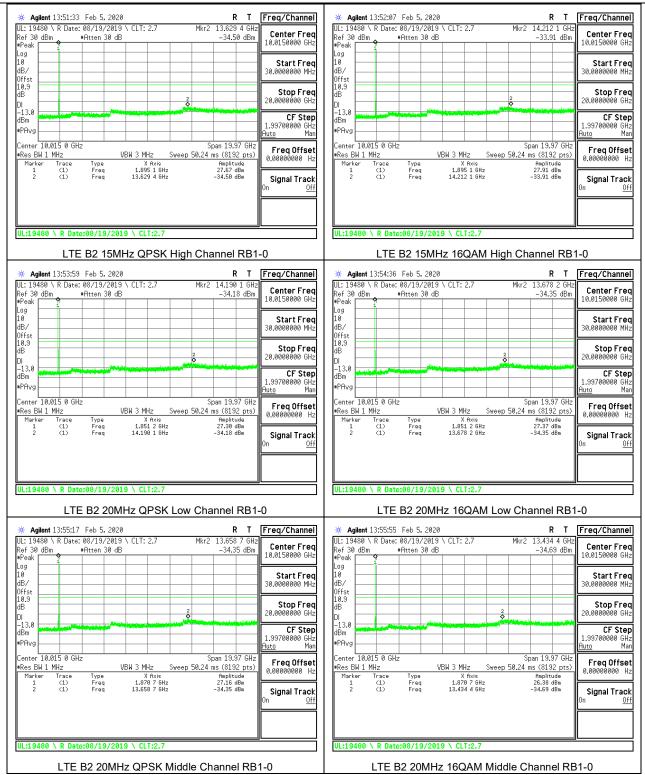

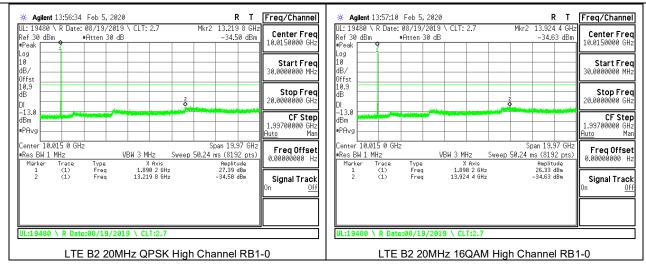

8.3.7. LTE BAND 5

LIMITS

FCC: §22.917

The minimum permissible attenuation level of any spurious emissions is 43 + 10 log (P) dB where transmitting power (P)


in Watts.


ISED: RSS132§5.5


The minimum permissible attenuation level of any spurious emissions is 43 + 10 log (P) dB where transmitting power (P) in Watte




DATE: March 02, 2020

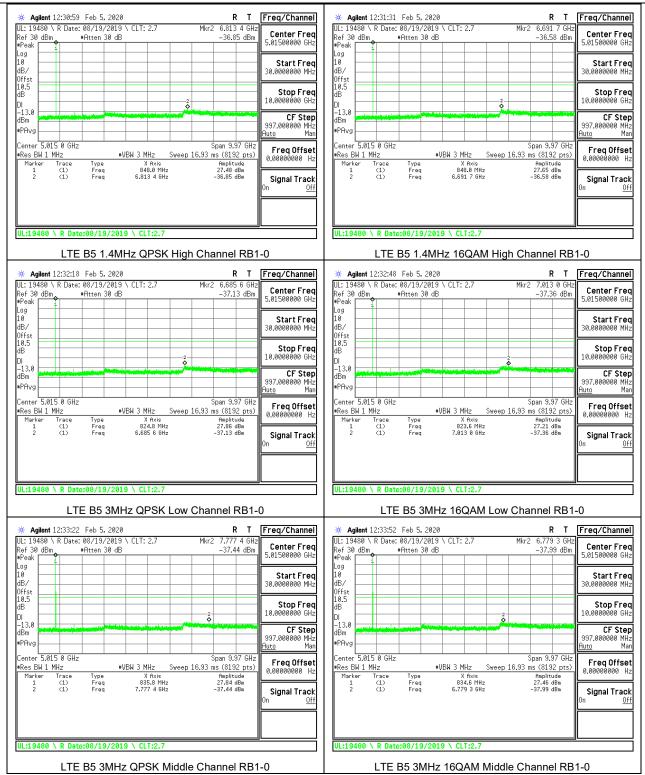

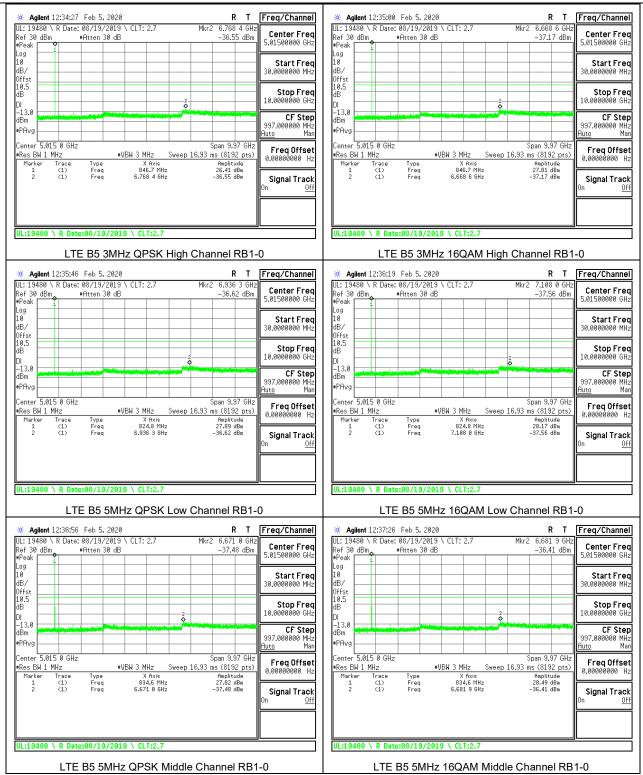

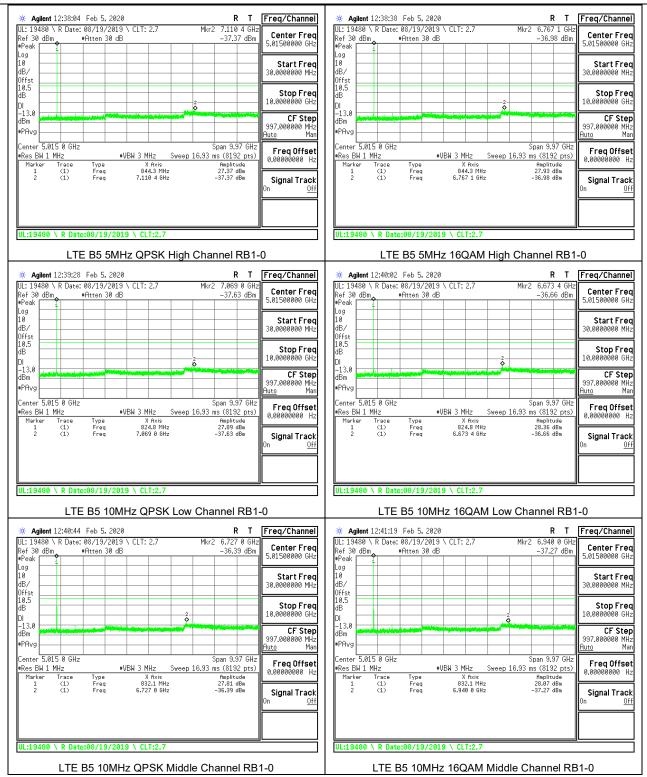

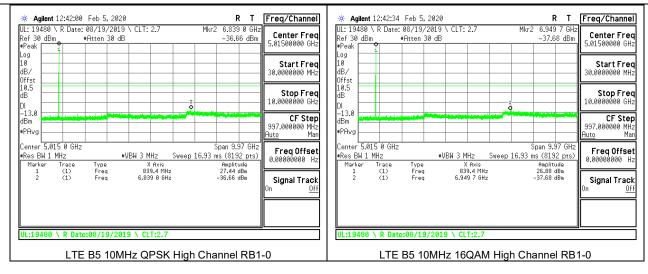

8.3.8. LTE BAND 7

LIMITS

FCC: §27.53 (m)


The minimum permissible attenuation level of any spurious emissions is 55 + 10 log (P) dB where transmitting power (P) in Watts.


RSS199§4.5


The minimum permissible attenuation level of any spurious emissions is 55 + 10 log (P) dB where transmitting power (P) in Watts.




DATE: March 02, 2020

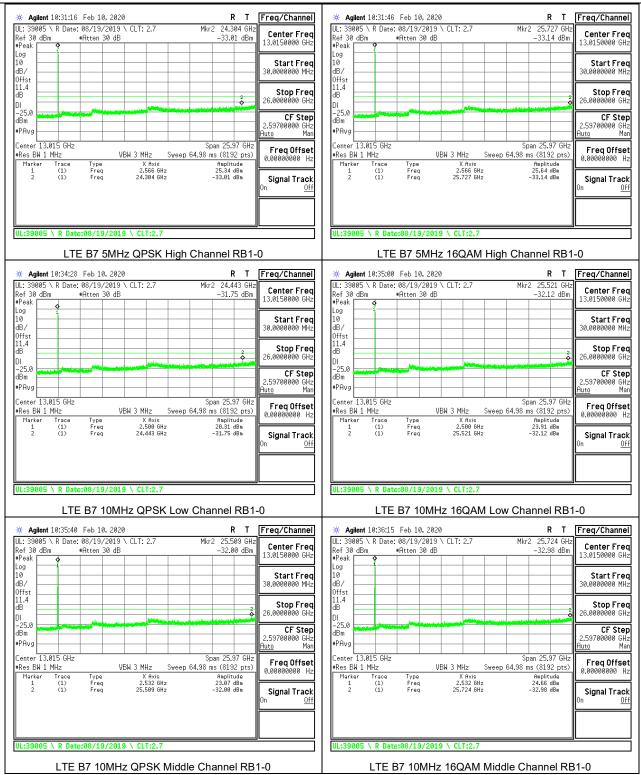

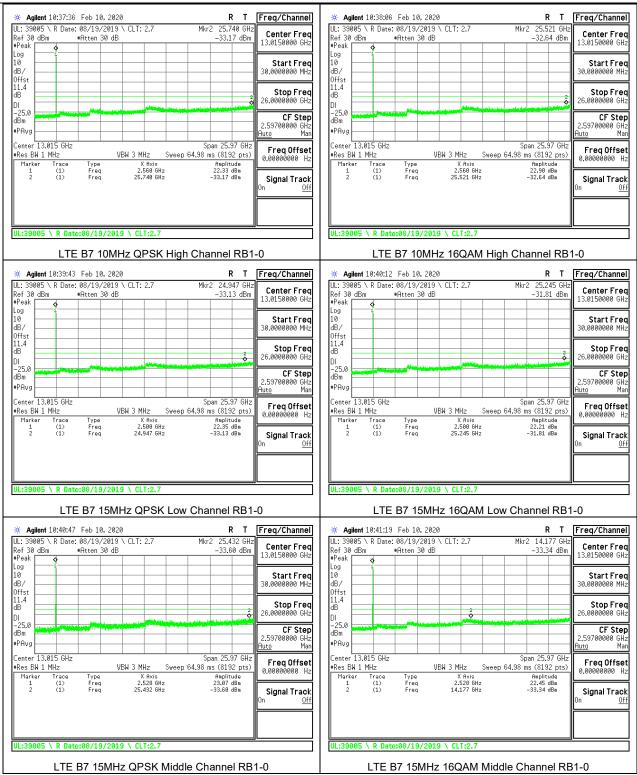

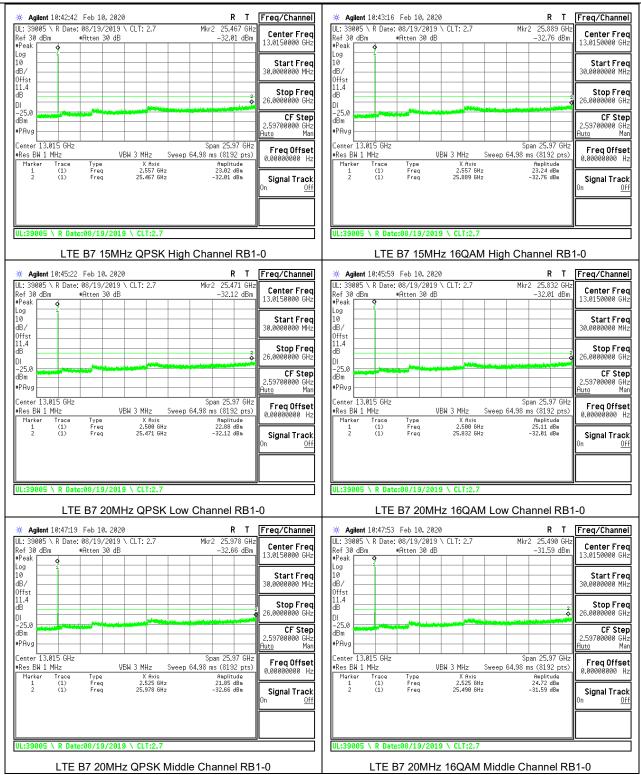

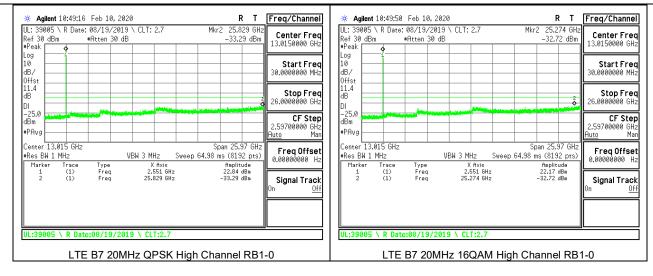

8.3.9. LTE BAND 12

LIMITS

FCC: §27.53 (g)

The minimum permissible attenuation level of any spurious emissions is 43 + 10 log (P) dB where transmitting power (P)


in Watts.


ISED: RSS130§4.7


The minimum permissible attenuation level of any spurious emissions is 43 + 10 log (P) dB where transmitting power (P) in Watts.




DATE: March 02, 2020 ISED: 649E-SMA715W

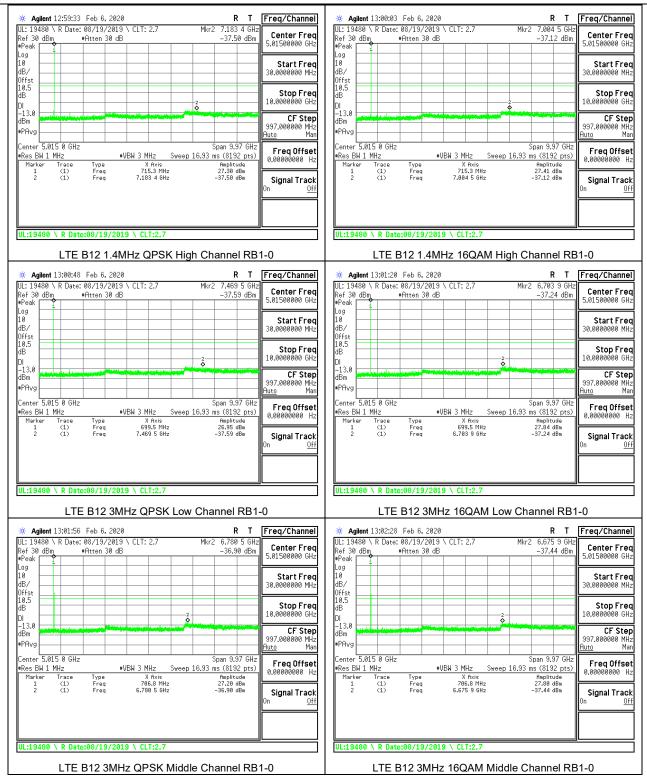

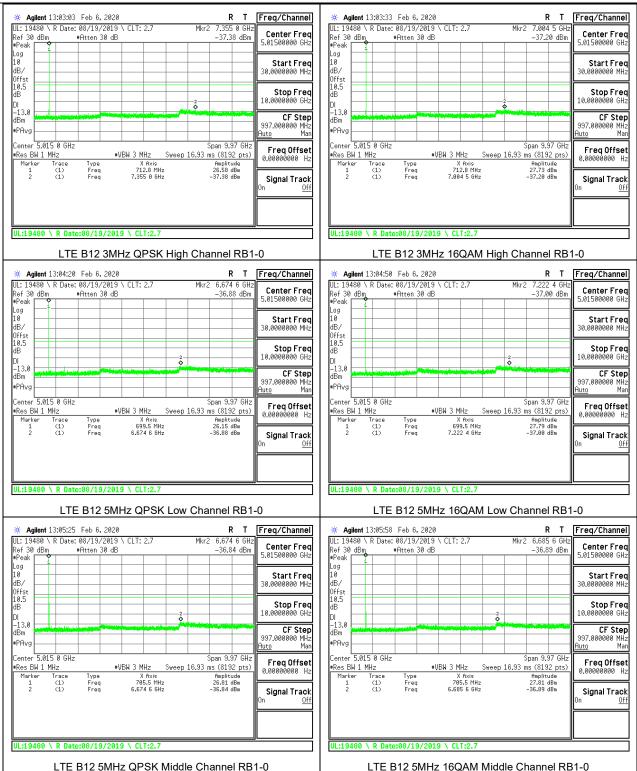

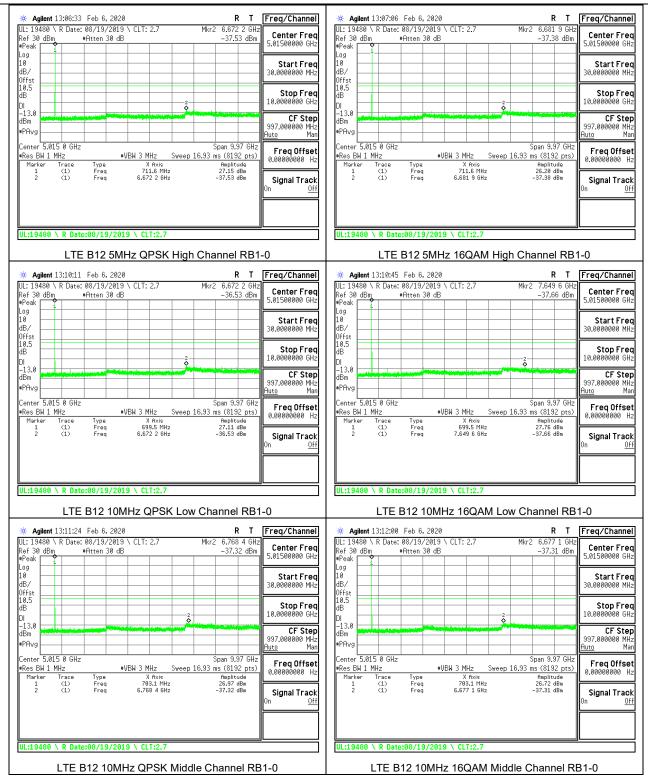

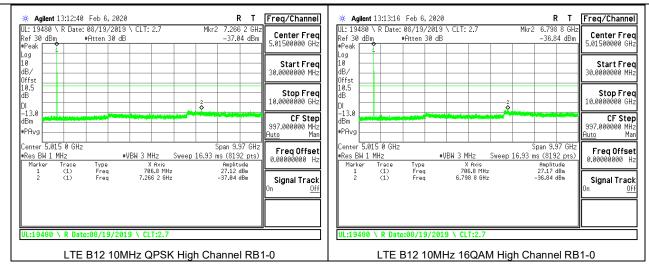

8.3.10. LTE BAND 13

LIMITS

FCC: §27.53 (c), (f)

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P) dB$ where transmitting power (P) in Watts. The band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

ISED: RSS130§4.7

The minimum permissible attenuation level of any spurious emissions is 43 + 10 log (P) dB where transmitting power (P) in Watts.

4.7.1 General unwanted emissions limits


The unwanted emissions in any 100 kHz bandwidth on any frequency outside the low frequency edge and the high frequency edge of each frequency block range(s), shall be attenuated below the transmitter power, P (dBW), by at least 43 + 10 log₁₀ p (watts), dB. However, in the 100 kHz band immediately outside of the equipment's frequency block range, a resolution bandwidth of 30 kHz may be employed.

4.7.2 Additional unwanted emissions limits


In addition to the limit outlined in section 4.7.1 above, equipment operating in the frequency bands 746-756 MHz and 777-787 MHz shall also comply with the following restrictions:

- (a) the power of any unwanted emissions in any 6.25 kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P (dBW), by at least:
 - i. $76 + 10 \log_{10} p$ (watts), dB, for base and fixed equipment and
 - ii. 65 + 10 log₁₀ p (watts), dB, for mobile and portable equipment
- (b) the e.i.r.p. in the band 1559-1610 MHz shall not exceed −70 dBW/MHz for wideband signal and −80 dBW for discrete emission with bandwidth less than 700 Hz.

Note: Radiated data in section 9.1.6 confirms a compliance for the emissions in GPS 1559-1610 MHz band were wideband emissions therefore the -40dBm/MHz limit was used.

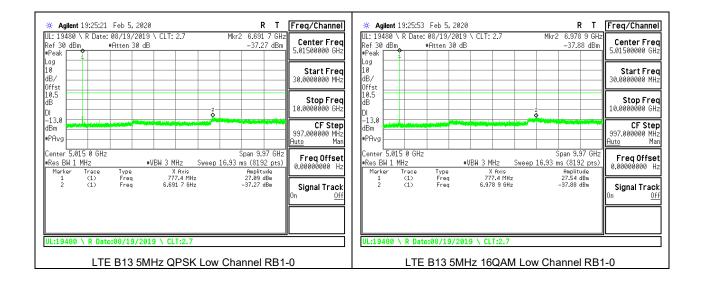

DATE: March 02, 2020

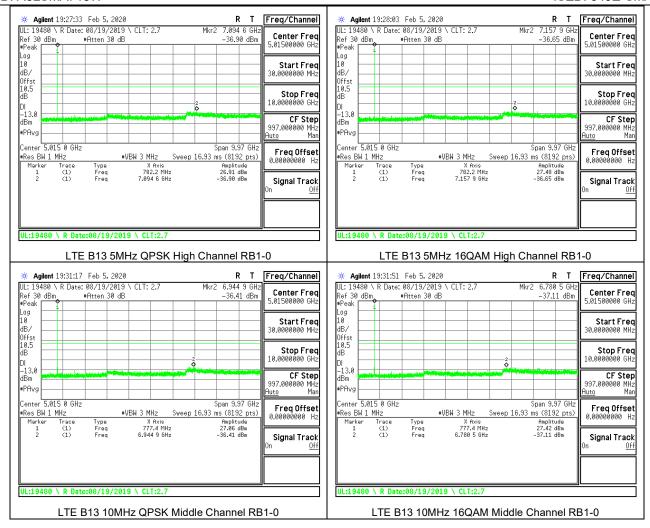


Note: Radiated data in section 9.2.10 confirms a compliance with narrowband limits for GPS1559-1610 MHz band.

8.3.11. LTE BAND 41 (FCC)

LIMITS


FCC: §27.53 (m)

The minimum permissible attenuation level of any spurious emissions is 55 + 10 log (P) dB where transmitting power (P) in Watts.

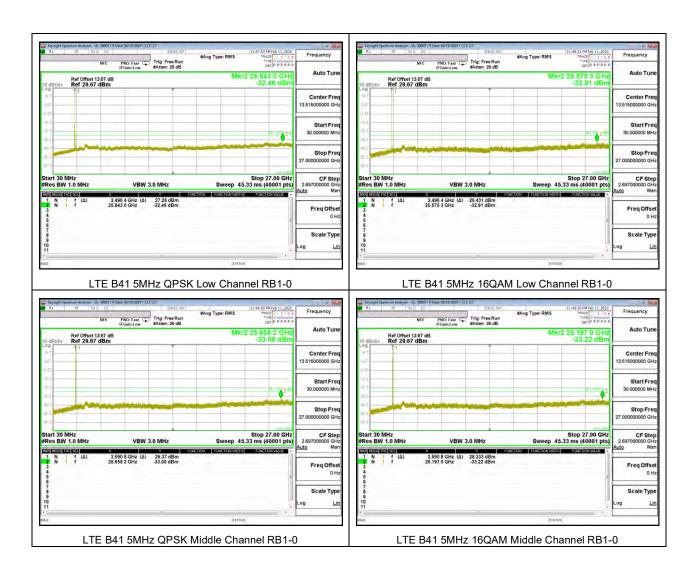



DATE: March 02, 2020



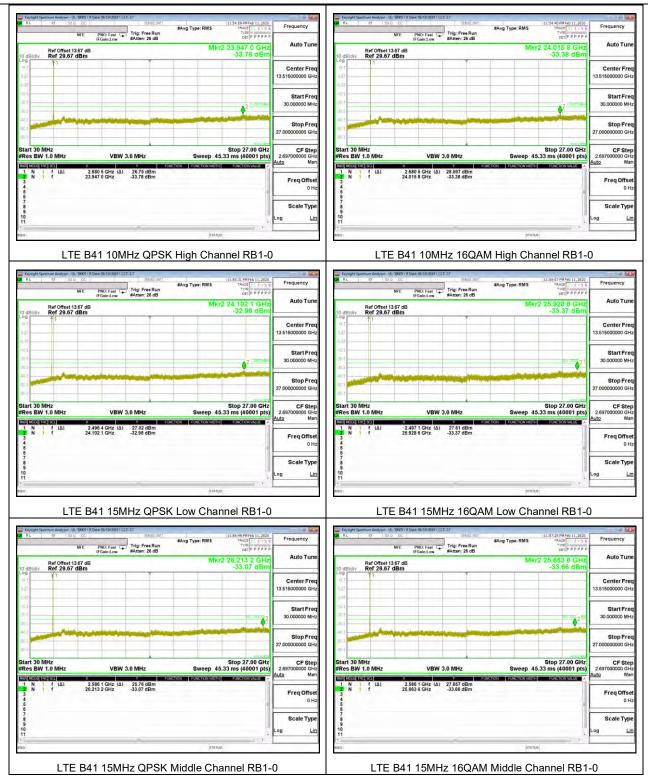

TEL: (510) 319-4000

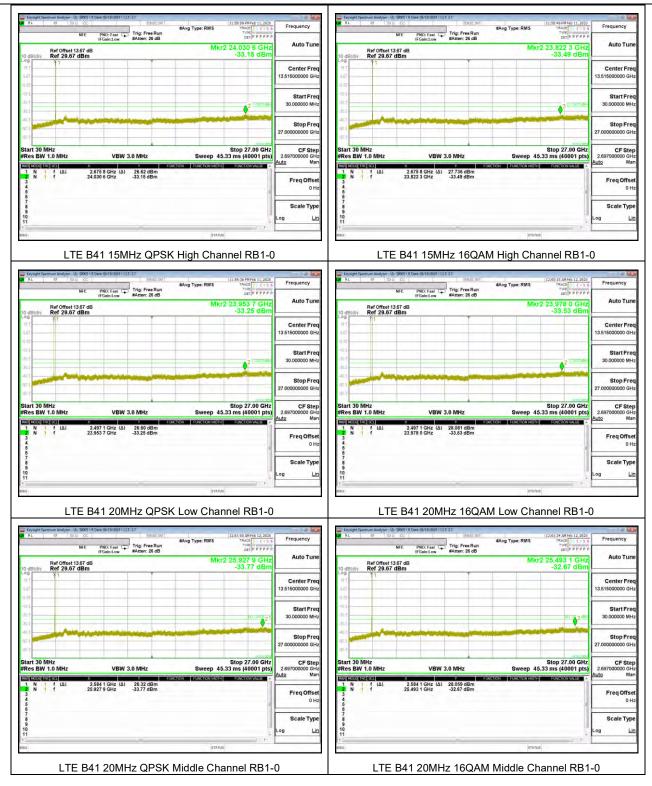

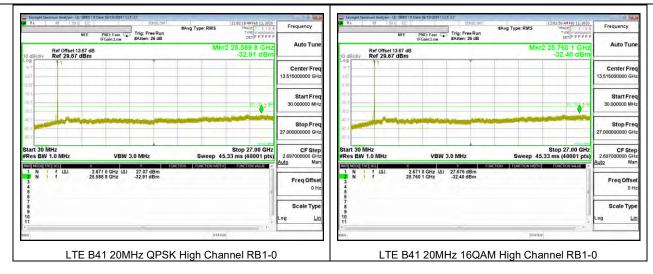


8.3.12. LTE BAND 41 (IC)

LIMITS

RSS199§4.5

The minimum permissible attenuation level of any spurious emissions is 55 + 10 log (P) dB where transmitting power (P) in Watts.

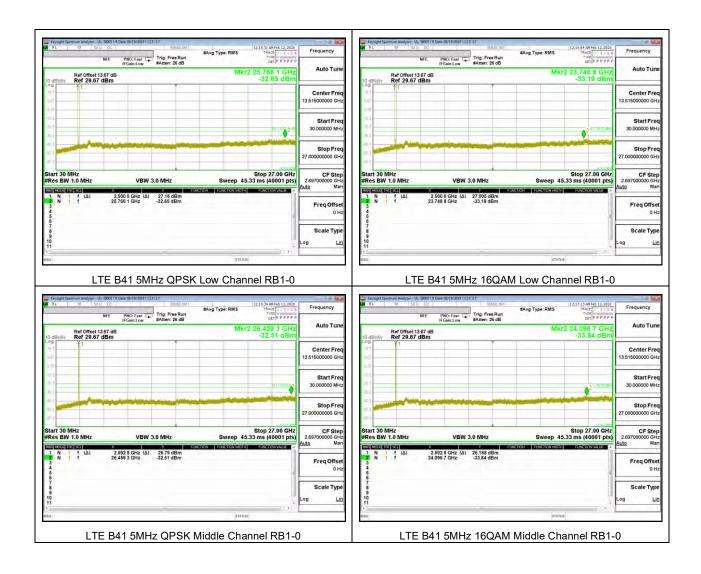

DATE: March 02, 2020