



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For
GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, ANT+ and NFC

**FCC ID: A3LSMA750GN
Model Name: SM-A750GN, SM-A750GN/DS**

**Report Number: 12440598-S1V3
Issue Date: 8/29/2018**

Prepared for
**Samsung Electronics Co., Ltd.
129 Samsung-Ro, Yeongtong-Gu,
Suwon-Si, Gyeonggi-Do, 16677, Korea**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
V1	8/23/2018	Initial Issue	--
V2	8/27/2018	Section 1: Updated table Section 6.2: Updated table. Updated W-CDMA Release information Section 10.17: Updated Table	Coltyce Sanders
V3	8/29/2018	Section 1: Updated Highest SAR Results Section 2: Added KDB and TCB Workshop Sections 4/6/7/8/9/10/11/12: Removed LTE band 26 and added LTE band 5 test data. Added Edge 4 Product Specific Appendices B/C/E/F: Updated to version 2	Coltyce Sanders

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation	6
4.	SAR Measurement System & Test Equipment	7
4.1.	SAR Measurement System.....	7
4.2.	SAR Scan Procedures.....	8
4.3.	Test Equipment.....	10
5.	Measurement Uncertainty.....	11
6.	Device Under Test (DUT) Information	12
6.1.	DUT Description	12
6.2.	Wireless Technologies.....	13
6.3.	General LTE SAR Test and Reporting Considerations.....	14
6.4.	LTE (TDD) Considerations.....	16
6.5.	LTE Carrier Aggregation	17
7.	RF Exposure Conditions (Test Configurations)	18
8.	Dielectric Property Measurements & System Check	20
8.1.	Dielectric Property Measurements	20
8.2.	System Check.....	23
9.	Conducted Output Power Measurements.....	25
9.1.	GSM	25
9.2.	W-CDMA	27
9.3.	LTE.....	33
9.4.	LTE Carrier Aggregation	44
9.5.	Wi-Fi 2.4GHz (DTS Band)	46
9.6.	Wi-Fi 5GHz (U-NII Bands).....	47
9.7.	Bluetooth	49
10.	Measured and Reported (Scaled) SAR Results.....	50
10.1.	GSM850.....	52
10.2.	GSM1900.....	52
10.3.	W-CDMA Band II.....	52
10.4.	W-CDMA Band IV	53
10.5.	W-CDMA Band V	53
10.6.	LTE Band 2 (20MHz Bandwidth)	54

10.7.	LTE Band 4 (20MHz Bandwidth)	54
10.8.	LTE Band 5 (10MHz Bandwidth)	55
10.9.	LTE Band 12 (10MHz Bandwidth)	55
10.10.	LTE Band 13 (10MHz Bandwidth)	56
10.11.	LTE Band 17 (10MHz Bandwidth)	56
10.12.	LTE Band 41 (20MHz Bandwidth)	56
10.13.	LTE Band 66 (20MHz Bandwidth)	57
10.14.	Wi-Fi (DTS Band)	58
10.15.	Wi-Fi (U-NII Band).....	59
10.16.	Bluetooth.....	60
10.17.	Standalone SAR Test Exclusion Considerations & Estimated SAR	61
11.	SAR Measurement Variability.....	62
12.	Simultaneous Transmission Conditions	63
12.1.	Simultaneous transmission SAR test exclusion considerations	63
12.1.1.	Sum of SAR	63
12.2.	Sum of the SAR for WWAN & Wi-Fi & BT.....	63
12.3.	Sum of the Product Specific 10g SAR for WWAN & Wi-Fi & BT	63
Appendixes		64
12440598-S1V1	Appendix A: SAR Setup Photos	64
12440598-S1V2	Appendix B: SAR System Check Plots.....	64
12440598-S1V2	Appendix C: Highest SAR Test Plots	64
12440598-S1V1	Appendix D: SAR Liquid Tissue Ingredients.....	64
12440598-S1V2	Appendix E: SAR Probe Calibration Certificates	64
12440598-S1V2	Appendix F: SAR Dipole Calibration Certificates	64

1. Attestation of Test Results

Applicant Name		Samsung Electronics Co., Ltd.			
FCC ID		A3LSMA750GN			
Model Name		SM-A750GN, SM-A750GN/DS			
Applicable Standards		FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category		SAR Limits (W/Kg)			
		Peak spatial-average (1g of tissue)		Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure		1.6		4	
RF Exposure Conditions		Equipment Class - Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
Head		0.133	0.287	0.409	<0.10
Body-worn		0.409	0.155	0.060	N/A
Hotspot/Wi-Fi Direct/BT Tethering		0.845	0.373	0.355	N/A
Product specific 10g SAR		2.288	1.133	0.561	N/A
Simultaneous TX	Head	0.471	0.420	0.471	0.233
	Body-worn	0.564	0.564	0.469	0.549
	Hotspot/ Wi-Fi Direct/ BT Tethering	1.218	1.218	1.200	1.055
	Product Specific 10g	3.153	3.153	2.743	2.456
Date Tested		8/7/2018 to 8/23/2018 and 8/28/2018 to 8/29/2018			
Test Results		Pass			
UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.					
Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.					
Approved & Released By:			Prepared By:		
					
Dave Weaver Operations Leader UL Verification Services Inc.			Coltyce Sanders Test Engineer UL Verification Services Inc.		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures:

- o 248227 D01 802.11 Wi-Fi SAR v02r02
- o 447498 D01 General RF Exposure Guidance v06
- o 447498 D03 Supplement C Cross-Reference v01
- o 648474 D04 Handset SAR v01r03
- o 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- o 865664 D02 RF Exposure Reporting v01r02
- o 941225 D01 3G SAR Procedures v03r01
- o 941225 D05 SAR for LTE Devices v02r05
- o 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- o 941225 D06 Hotspot Mode v02r01
- o 941225 D07 UMPC Mini Tablet v01r02

In addition to the above, the following information was used:

- o [TCB workshop](#) April 2015; Page 33, RF Exposure Procedures Update (Overlapping LTE Bands)
- o [TCB workshop](#) October 2014; Page 37, RF Exposure Procedures Update (Other LTE Considerations)
- o [TCB workshop](#) October 2015; Page 6, RF Exposure Procedures (KDB 941225 D05A)
- o [TCB workshop](#) April 2016; Page 13, RF Exposure Procedures (LTE Carrier Aggregation for DL)
- o [TCB workshop](#) April 2016; Page 22, RF Exposure Procedures (Phablet Procedures)
- o [TCB workshop](#) October 2016; Page 7, RF Exposure Procedures (Bluetooth Duty Factor)
- o [TCB workshop](#) October 2016; Page 18, RF Exposure Procedures (DUT Holder Perturbations)
- o [TCB workshop](#) May 2017; Page 9, Broadband Liquid Above 3 GHz
- o [TCB workshop](#) May 2017; Page 16, Bluetooth Tethering

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	SAR Lab 6
SAR Lab G	SAR Lab 7
SAR Lab H	SAR Lab 8

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

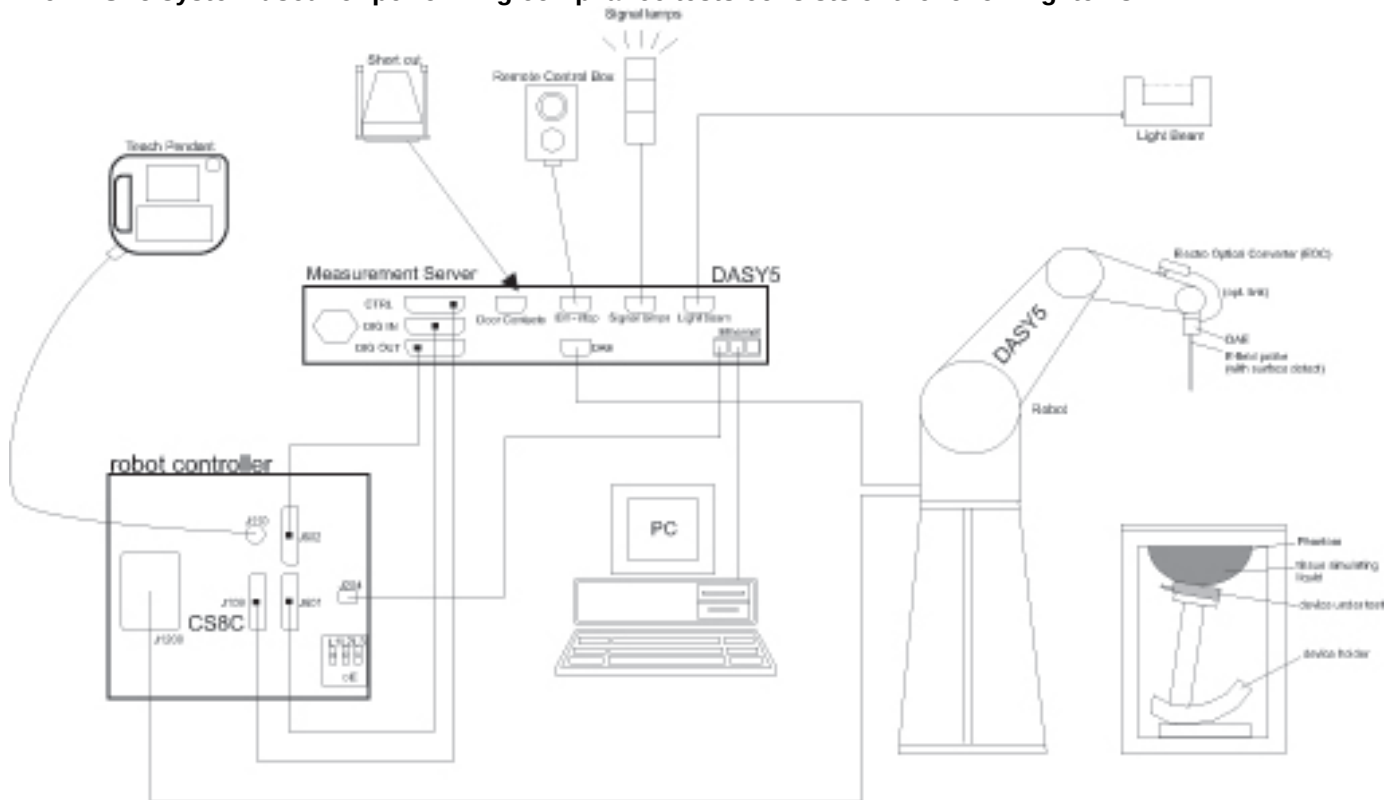

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Test Equipment used for Test Dates 8-7-2018 to 8-23-2018:

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Vector Network Analyzer	R&S	ZNLE6	101274-MN	7/16/2019
Dielectric Probe kit	SPEAG	DAK-3.5	1082	10/17/2018
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	10/17/2018
Thermometer	Fisher Scientific	Traceable	140562250	11/7/2018

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Signal Generator	Agilent	N5181A	MY50140610	6/7/2019
Power Meter	Keysight	N1912A	MY55196007	7/23/2019
Power Sensor	Agilent	N1921A	MY53020038	4/23/2019
Power Sensor	Agilent	N1921A	MY5226009	1/8/2019
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2149	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab 5)	SPEAG	EX3DV4	7498	5/4/2019
E-Field Probe (SAR Lab 6)	SPEAG	EX3DV4	3885	10/24/2018
Data Acquisition Electronics (SAR Lab 5)	SPEAG	DAE4	1546	5/3/2019
Data Acquisition Electronics (SAR Lab 6)	SPEAG	DAE4	1545	4/13/2019
System Validation Dipole	SPEAG	D750V3	1071	11/21/2018
System Validation Dipole	SPEAG	D835V2	4d142	10/12/2018
System Validation Dipole	SPEAG	D1750V2	1077	10/5/2018
System Validation Dipole	SPEAG	D1900V2	5d163	10/5/2018
System Validation Dipole	SPEAG	D2450V2	899	3/16/2019
System Validation Dipole	SPEAG	D2600V2	1036	3/16/2019
System Validation Dipole	SPEAG	D5GHzV2	1003	3/13/2019
Thermometer (SAR Lab 5/6)	Fisher Scientific	Traceable	181062300	2/26/2019

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Keysight	N1912A	MY55196015	3/1/2019
Power Sensor	Agilent	N1921A	MY53260010	10/17/2018
Base Station Simulator	R & S	R & S	137873-WG	6/1/2019
Base Station Simulator	R & S	R & S	137875-DZ	2/21/2019
PXA Spectrum Analyzer	Keysight	N9030A	MY53311010	2/3/2019

Test Equipment used for Test Dates 8-28-2018 to 8-29-2018:**Dielectric Property Measurements**

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Vector Network Analyzer	R&S	ZNLE6	101274-MN	7/16/2019
Dielectric Probe kit	SPEAG	DAK-3.5	1082	10/17/2018
Shorting Block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	10/17/2018
Thermometer	Fisher Scientific	Traceable	140562250	11/7/2018

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Signal Generator	Agilent	N5181A	MY50140610	6/7/2019
Power Meter	Keysight	N1912A	MY55196007	7/23/2019
Power Sensor	Agilent	N1921A	MY53020038	4/23/2019
Power Sensor	Agilent	N1921A	MY5226009	1/8/2019
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2149	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
E-Field Probe (SAR Lab 7)	SPEAG	EX3DV4	7500	5/4/2019
E-Field Probe (SAR Lab 8)	SPEAG	EX3DV4	7501	5/4/2019
Data Acquisition Electronics (SAR Lab 7)	SPEAG	DAE4	1547	5/3/2019
Data Acquisition Electronics (SAR Lab 8)	SPEAG	DAE4	1258	5/22/2019
System Validation Dipole	SPEAG	D835V2	4d117	5/16/2019
System Validation Dipole	SPEAG	D1750V2	1077	10/5/2018
System Validation Dipole	SPEAG	D1900V2	5d163	10/5/2018
Thermometer (SAR Lab 7/8)	Fisher Scientific	Traceable	181062300	2/26/2019

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	R & S	137873-WG	6/1/2019

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	This is a Phablet Device (display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm) Refer to Appendix A		
Back Cover	The Back Cover is not removable		
Battery Options	The rechargeable battery is not user accessible.		
Accessory	Headset		
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. ☒ Mobile Hotspot (Wi-Fi 2.4 GHz) ☒ Mobile Hotspot (Wi-Fi 5.8 GHz Channel 149 only)		
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other ☒ Wi-Fi Direct (Wi-Fi 2.4 GHz) ☒ Wi-Fi Direct (Wi-Fi 5.2 GHz) ☒ Wi-Fi Direct (Wi-Fi 5.8 GHz)		
Bluetooth Tethering	BT Tethering mode permits the device to share its cellular data connection with other devices. ☒ BT Tethering (Bluetooth 2.4 GHz)		
Test sample information	S/N	IMEI	Notes
	R38K70KBTSH	351580100020037 351581100020035	WWAN Conducted
	R38K70KBTTV	351580100020045 351581100020043	WWAN Conducted
	R38K70KQGDH	359979090076524 359980090076522	WLAN Conducted
	R38K70KQFPX	359979090076292 359980090076290	SAR Radiated
	R38K70KQFSB	359979090076326 359980090076324	SAR Radiated
	R38K70KQFGL	359979090076227 359980090076225	SAR Radiated
	R38K70KQGKL	359979090076581 359980090076589	SAR Radiated
Hardware Version	REV1.0		
Software Version	A750GN.001		

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating Mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EDGE (8PSK)	Multi-Slot Class: Class 33 - 4 Up, 5 Down	GPRS: 2 Slots: 25%
Does this device support DTM (Dual Transfer Mode)? ☐ Yes ☒ No				
W-CDMA (UMTS)	Band II Band IV Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 9) HSUPA (Rel. 9) HSPA+ (Rel. 9) ⁵ DC-HSDPA (Rel. 9)		100%
LTE	FDD Band 2 FDD Band 4 FDD Band 5 FDD Band 12 FDD Band 13 FDD Band 17 TDD Band 41 FDD Band 66	QPSK 16QAM Rel. 10 Carrier Aggregation (1 Uplink and 2 Downlinks) ⁴		100% (FDD) 63.3% (TDD) ³ Refer to §6.4
Does this device support SV-LTE (1xRTT-LTE)? ☐ Yes ☒ No				
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		802.11b ¹ : 99.65%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)		802.11a ¹ : 98.35% 802.11ac VHT80 ¹ : 92.74%
	Does this device support bands 5.60 ~ 5.65 GHz? ☒ Yes ☐ No			
	Does this device support Band gap channel(s)? ☒ Yes ☐ No			
Bluetooth	2.4 GHz	Version 5.0 LE		GFSK ² : 76.5%

Notes:

- Duty Cycles for Wi-Fi are referenced from the DTS report 12440598-E4 and U-NII report 12440598-E5.
- Duty Cycle for Bluetooth GFSK mode is referenced from the BT report 12440598-E2.
- This device supports uplink-downlink configuration 0-6. The configuration with the highest duty cycle was used (Subframe Number 0 at 63.3%).
- For supported Carrier Aggregation combinations, refer to §6.5.
- Uplink 16QAM is not supported for HSPA+. Only downlink is supported.

6.3. General LTE SAR Test and Reporting Considerations

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2 ³	Frequency range: 1850 - 1910 MHz (BW = 60 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	18700 /1860	18675/ 1857.5	18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High	19100/ 1900	19125/ 1902.5	19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4 ³	Frequency range: 1710 - 1755 MHz (BW = 45 MHz)					
		Channel Bandwidth					
		20 MHz ²	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low	20050/ 1720	20025/ 1717.5	20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High	20300/ 1745	20325/ 1747.5	20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Frequency range: 824 - 849 MHz (BW = 25 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ²	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 12	Frequency range: 699 – 716 MHz (BW = 17 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ²	5 MHz	3 MHz	1.4 MHz
	Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7
	Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5
	High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3
	Band 13	Frequency range: 777 - 787 MHz (BW = 10 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz ²	3 MHz	1.4 MHz
	Low				23205/ 779.5		
	Mid			23230/ 782	23230/ 782		
	High				23255/ 784.5		
	Band 17 ³	Frequency range: 704 - 716 MHz (BW = 12 MHz)					
		Channel Bandwidth					
		20 MHz	15 MHz	10 MHz ²	5 MHz ²	3 MHz	1.4 MHz
	Low			23780/ 709	23755/ 706.5		
	Mid			23790/ 710	23790/ 710		
	High			23800/ 711	23825/ 713.5		

General LTE SAR Test and Reporting Considerations (Continued)

Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 41 ¹	Frequency range: 2496 - 2690 MHz (BW = 194 MHz)																																																																			
		Channel Bandwidth																																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
	Low	39750 / 2506.0																																																																			
	Low-Mid	40185 / 2549.5																																																																			
	Mid	40620 / 2593.0																																																																			
	Mid-High	41055 / 2636.5																																																																			
	High	41490 / 2680.0																																																																			
	Band 66	Frequency range: 1710 - 1780 MHz (BW = 70 MHz)																																																																			
		Channel Bandwidth																																																																			
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																																														
	Low	132072/ 1720	132047/ 1717.5	132022/ 1715	131997/ 1712.5	131987/ 1711.5	131979/ 1710.7																																																														
	Mid	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745	132322/ 1745																																																														
	High	132572/ 1770	132597/ 1772.5	132622/ 1775	132647/ 1777.5	132657/ 1778.5	132665/ 1779.3																																																														
LTE transmitter and antenna implementation	Refer to Appendix A.																																																																				
Maximum power reduction (MPR)	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3 <table> <tr> <th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th><th rowspan="2">MPR (dB)</th></tr> <tr> <th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr> <tr> <td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr> <tr> <td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr> <tr> <td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr> <tr> <td>256 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 2</td></tr> <tr> <td>64 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 3</td></tr> <tr> <td>256 QAM</td><td colspan="6">≥ 1</td><td>≤ 5</td></tr> </table> MPR Built-in by design The manufacturer MPR values are always within the 3GPP maximum MPR allowance but may not follow the default MPR values. A-MPR (additional MPR) was disabled during SAR testing							Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	256 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																														
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																															
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																														
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																														
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																														
256 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																														
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																														
256 QAM	≥ 1						≤ 5																																																														
Power reduction	Yes Refer to Main Sensor triggering distance document																																																																				
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																				

Notes:

1. LTE band 41 test channels in accordance with October 2014 TCB workshop for all channels bandwidths. This band was tested using Uplink-Downlink Configuration 0 at 63.3% duty cycle and Special Subframe 7.
2. Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.
3. LTE QPSK configuration has the highest maximum average output power per 3GPP standard.
 - LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.
 - LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.
4. SAR Testing for LTE was performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

6.4. LTE (TDD) Considerations

According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

LTE TDD Bands support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$20480 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-
10	$13168 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-

Table 4.2-2: Uplink-downlink configurations & Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.3%
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.3%
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.3%
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.3%

Calculated Duty Cycle = Extended cyclic prefix in uplink * (T_s) * # of S + # of U / period

Note(s):

This device supports uplink-downlink configurations 0-6. The configuration with highest duty cycle was used for SAR Testing: configuration 0 at 63.3% duty cycle and Special Subframe 7.

6.5. LTE Carrier Aggregation

Combination	CA configuration	Bandwidth (MHz)											
		PCC						SCC1					
		20	15	10	5	3	1.4	20	15	10	5	3	1.4
Intra-Band contiguous	2C				√			√					
				√				√	√				
			√					√	√	√			
		√						√	√	√	√		
	41C				√			√					
				√				√	√				
			√					√	√	√			
		√						√	√	√	√		
Intra-Band non-contiguous	2A-2A	√	√	√	√			√	√	√	√		
	4A-4A	√	√	√	√			√	√	√	√		
	41A-41A	√	√	√	√			√	√	√	√		
Inter-Band non-contiguous	2A-12A	√	√	√	√					√	√	√	
	4A-17A			√	√					√	√		

Note(s):

For supported channels, please refer to §6.3.

7. RF Exposure Conditions (Test Configurations)

Refer to Appendix A for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN (Main Ant. 1)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	
	Product Specific 10g	0 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	< 25 mm	Yes	2
			Edge 4 (Left)	< 25 mm	Yes	2
	Product Specific 10g	10 mm	Rear	< 25 mm	Yes	3
		6 mm	Front	< 25 mm	Yes	3
		10 mm	Edge 3 (Bottom)	< 25 mm	Yes	3
		0 mm	Edge 4 (Left)	< 25 mm	Yes	3
WWAN (Main Ant. 2)	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
			Edge 3 (Bottom)	< 25 mm	Yes	
			Edge 4 (Left)	> 25 mm	No	1
	Product Specific 10g	0 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	2
			Edge 3 (Bottom)	< 25 mm	Yes	2
			Edge 4 (Left)	> 25 mm	No	1

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- For Phablet devices: when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.
- For Phablet devices when Power Reduction applies, Product Specific 10-g SAR is required with device transmitting at Max power and tested at Grip Sensor Trigger distance minus 1 mm. Refer to Main Sensor triggering distance document for required test distances.
- WWAN Main Ant. 2 supports LTE Band 41 only.
- Cellular Sub Antenna is Rx only.

RF Exposure Conditions (Test Configurations) (continued):

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WLAN & BT	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	
			Front	N/A	Yes	
	Hotspot / Wi-Fi Direct (2.4/5.2/5.8 GHz Bands)	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	
	Product Specific 10g (2.4 GHz)	0 mm	Rear	< 25 mm	Yes	3
			Front	< 25 mm	Yes	3
			Edge 1 (Top)	< 25 mm	Yes	3
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	3
	Product Specific 10g (5 GHz Bands)	0 mm	Rear	< 25 mm	Yes	2
			Front	< 25 mm	Yes	2
			Edge 1 (Top)	< 25 mm	Yes	2
			Edge 2 (Right)	> 25 mm	No	1
			Edge 3 (Bottom)	> 25 mm	No	1
			Edge 4 (Left)	< 25 mm	Yes	2

Notes:

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
2. For Phablet devices: when Hotspot Mode is not supported, Product Specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.
3. For Phablet devices: when hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within $\pm 5\%$ of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies $\leq 3\text{ GHz}$.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
5	8/7/2018	835	Head	835	40.00	41.50	-3.61	0.94	0.90	4.27
				805	40.15	41.68	-3.67	0.93	0.90	3.31
				905	39.99	41.50	-3.64	0.96	0.97	-1.22
5	8/7/2018	835	Body	835	53.03	55.20	-3.93	1.01	0.97	3.92
				805	53.20	55.33	-3.86	1.00	0.97	3.37
				905	53.01	55.00	-3.62	1.03	1.05	-2.14
5	8/8/2018	1750	Head	1750	39.62	40.08	-1.16	1.38	1.37	0.95
				1710	39.62	40.15	-1.31	1.36	1.35	0.64
				1780	39.60	40.04	-1.10	1.40	1.39	0.80
5	8/9/2018	1900	Head	1900	38.26	40.00	-4.35	1.46	1.40	4.14
				1850	38.30	40.00	-4.25	1.43	1.40	2.29
				1920	38.25	40.00	-4.38	1.47	1.40	5.00
5	8/13/2018	1750	Body	1750	51.03	53.44	-4.51	1.48	1.49	-0.28
				1710	51.05	53.54	-4.66	1.45	1.46	-0.65
				1755	51.01	53.43	-4.53	1.49	1.49	-0.22
5	8/13/2018	2450	Head	2450	39.08	39.20	-0.31	1.76	1.80	-2.28
				2400	39.16	39.30	-0.35	1.72	1.75	-1.75
				2480	39.10	39.16	-0.16	1.78	1.83	-2.92
5	8/13/2018	2450	Body	2450	50.77	52.70	-3.66	1.99	1.95	2.15
				2400	50.85	52.77	-3.64	1.95	1.90	2.58
				2480	50.78	52.66	-3.57	2.02	1.99	1.15
5	8/17/2018	1750	Body	1750	51.46	53.44	-3.71	1.49	1.49	0.12
				1710	51.50	53.54	-3.82	1.47	1.46	0.24
				1755	51.45	53.43	-3.70	1.49	1.49	0.12
5	8/21/2018	2450	Body	2450	51.11	52.70	-3.02	2.02	1.95	3.59
				2400	51.22	52.77	-2.94	1.98	1.90	4.16
				2480	51.06	52.66	-3.04	2.05	1.99	2.90
6	8/7/2018	750	Head	750	40.15	41.96	-4.32	0.93	0.89	3.60
				695	40.25	42.24	-4.72	0.91	0.89	1.99
				790	39.99	41.76	-4.23	0.93	0.90	4.31
6	8/7/2018	750	Body	750	53.28	55.55	-4.08	1.01	0.96	4.87
				695	53.39	55.76	-4.25	0.99	0.96	2.79
				790	53.18	55.39	-3.99	1.01	0.97	4.95
6	8/8/2018	2600	Head	2600	38.69	39.01	-0.82	1.89	1.96	-3.63
				2495	38.85	39.14	-0.75	1.82	1.85	-1.66
				2690	38.55	38.90	-0.89	1.96	2.06	-4.73
6	8/8/2018	2600	Body	2600	50.15	52.51	-4.50	2.13	2.16	-1.52
				2495	50.33	52.64	-4.39	2.05	2.01	1.63
				2690	49.95	52.40	-4.67	2.21	2.29	-3.51
6	8/13/2018	1900	Body	1900	51.49	53.30	-3.40	1.54	1.52	1.18
				1850	51.62	53.30	-3.15	1.51	1.52	-0.99
				1920	51.47	53.30	-3.43	1.56	1.52	2.30

Dielectric Property Measurements Results (continued):

SAR Lab	Date	Band (MHz)	Tissue Type	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta (%)	Measured	Target	Delta (%)
6	8/14/2018	5250	Head	5250	36.85	35.93	2.55	4.57	4.70	-2.83
				5150	37.03	36.05	2.73	4.45	4.60	-3.17
				5350	36.65	35.82	2.32	4.70	4.80	-2.15
6	8/14/2018	5600	Head	5600	36.28	35.53	2.10	4.97	5.06	-1.84
				5500	36.48	35.65	2.33	4.85	4.96	-2.26
				5725	36.03	35.39	1.80	5.13	5.19	-1.04
6	8/14/2018	5750	Head	5750	35.98	35.36	1.75	5.17	5.21	-0.88
				5700	36.10	35.42	1.92	5.10	5.16	-1.13
				5850	35.83	35.30	1.50	5.27	5.27	0.06
6	8/14/2018	5250	Body	5250	47.07	48.95	-3.84	5.30	5.35	-0.92
				5150	47.26	49.09	-3.72	5.18	5.24	-1.17
				5350	46.88	48.82	-3.97	5.47	5.47	-0.07
6	8/14/2018	5600	Body	5600	46.45	48.48	-4.18	5.79	5.76	0.45
				5500	46.66	48.61	-4.02	5.64	5.64	-0.17
				5725	46.20	48.31	-4.36	6.00	5.91	1.60
6	8/14/2018	5750	Body	5750	46.15	48.27	-4.40	6.03	5.94	1.62
				5700	46.28	48.34	-4.27	5.96	5.88	1.47
				5850	45.98	48.20	-4.61	6.17	6.00	2.78
6	8/17/2018	1900	Body	1900	51.81	53.30	-2.80	1.58	1.52	3.82
				1850	51.93	53.30	-2.57	1.54	1.52	1.58
				1920	51.79	53.30	-2.83	1.59	1.52	4.80
6	8/20/2018	2450	Body	2450	51.40	52.70	-2.47	2.00	1.95	2.36
				2400	51.46	52.77	-2.49	1.95	1.90	2.84
				2480	51.33	52.66	-2.53	2.03	1.99	1.70
7	8/27/2018	1750	Body	1750	51.96	53.44	-2.77	1.51	1.49	1.60
				1710	52.15	53.54	-2.60	1.48	1.46	1.54
				1755	51.95	53.43	-2.77	1.51	1.49	1.60
7	8/27/2018	1900	Body	1900	53.97	53.30	1.26	1.56	1.52	2.50
				1850	53.97	53.30	1.26	1.52	1.52	-0.13
				1920	53.97	53.30	1.26	1.57	1.52	3.55
8	8/27/2018	835	Head	835	41.44	41.50	-0.14	0.93	0.90	3.62
				750	41.58	41.96	-0.91	0.90	0.89	1.32
				905	41.28	41.50	-0.53	0.96	0.97	-1.12
8	8/27/2018	835	Body	835	55.32	55.20	0.22	0.98	0.97	0.85
				750	55.41	55.55	-0.25	0.95	0.96	-1.44
				905	55.22	55.00	0.40	1.01	1.05	-4.13

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 $\pm$ 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be $\geq$ 15.0 cm for SAR measurements $\leq$ 3 GHz and $\geq$ 10.0 cm for measurements $>$ 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within $\pm 10\%$ of the manufacturer calibrated dipole SAR target. Refer to Appendix B for the SAR System Check Plots.

SAR Lab	Date	Tissue Type	Dipole Type Serial #	Dipole Cal. Due Date	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta $\pm 10\%$	
5	8/7/2018	Head	D835V2 SN:4d142	10/12/2018	0.982	9.82	9.64	1.87	0.637	6.37	6.22	2.41	
5	8/7/2018	Body	D835V2 SN:4d142	10/12/2018	0.992	9.92	9.63	3.01	0.653	6.53	6.27	4.15	1,2
5	8/8/2018	Head	D1750V2 SN:1077	10/5/2018	3.720	37.20	36.26	2.59	1.970	19.70	19.34	1.86	
5	8/9/2018	Head	D1900V2 SN:5d163	10/5/2018	4.140	41.40	38.77	6.78	2.130	21.30	20.10	5.97	3,4
5	8/13/2018	Body	D1750V2 SN:1077	10/5/2018	3.650	36.50	37.34	-2.25	1.950	19.50	19.98	-2.40	
5	8/13/2018	Head	D2450V2 SN:899	3/16/2019	5.270	52.70	51.75	1.84	2.440	24.40	24.20	0.83	
5	8/13/2018	Body	D2450V2 SN:899	3/16/2019	5.240	52.40	50.55	3.66	2.430	24.30	23.20	4.74	5,6
5	8/17/2018	Body	D1750V2 SN:1077	10/5/2018	3.630	36.30	37.34	-2.79	1.930	19.30	19.98	-3.40	7,8
5	8/21/2018	Body	D2450V2 SN:899	3/16/2019	5.240	52.40	50.55	3.66	2.430	24.30	23.20	4.74	
6	8/7/2018	Head	D750V3 SN:1071	11/21/2018	0.866	8.66	8.59	0.81	0.563	5.63	5.73	-1.75	
6	8/7/2018	Body	D750V3 SN:1071	11/21/2018	0.903	9.03	8.52	5.99	0.596	5.96	5.69	4.75	9,10
6	8/8/2018	Head	D2600V2 SN:1036	3/16/2019	5.940	59.40	54.54	8.91	2.660	26.60	24.56	8.31	11,12
6	8/8/2018	Body	D2600V2 SN:1036	3/16/2019	5.460	54.60	56.13	-2.73	2.420	24.20	25.04	-3.35	
6	8/13/2018	Body	D1900V2 SN:5d163	10/5/2018	4.080	40.80	42.99	-5.09	2.120	21.20	21.97	-3.50	13,14
6	8/14/2018	Head	D5GHzV2 SN:1003 (5.25 GHz)	3/13/2019	8.620	86.20	80.60	6.95	2.490	24.90	23.20	7.33	
6	8/14/2018	Head	D5GHzV2 SN:1003 (5.60 GHz)	3/13/2019	9.110	91.10	84.50	7.81	2.620	26.20	24.00	9.17	
6	8/14/2018	Head	D5GHzV2 SN:1003 (5.75 GHz)	3/13/2019	7.940	79.40	78.40	1.28	2.290	22.90	22.20	3.15	15,16
6	8/14/2018	Body	D5GHzV2 SN:1003 (5.25 GHz)	3/13/2019	7.950	79.50	73.60	8.02	2.240	22.40	20.50	9.27	17,18
6	8/14/2018	Body	D5GHzV2 SN:1003 (5.60 GHz)	3/13/2019	8.410	84.10	77.70	8.24	2.350	23.50	21.70	8.29	19,20
6	8/14/2018	Body	D5GHzV2 SN:1003 (5.75 GHz)	3/13/2019	7.480	74.80	73.90	1.22	2.090	20.90	20.60	1.46	
6	8/17/2018	Body	D1900V2 SN:5d163	10/5/2018	4.180	41.80	42.99	-2.77	2.170	21.70	21.97	-1.23	
6	8/20/2018	Body	D2450V2 SN:899	3/16/2019	5.070	50.70	50.55	0.30	2.350	23.50	23.20	1.29	21,22
7	8/27/2018	Body	D1750V2 SN:1077	10/5/2018	3.960	39.60	37.34	6.05	2.100	21.00	19.98	5.11	23,24
7	8/27/2018	Body	D1900V2 SN:5d163	10/5/2018	4.310	43.10	42.99	0.26	2.230	22.30	21.97	1.50	25,26
8	8/27/2018	Body	D835V2 SN:4d117	5/16/2019	0.996	9.96	10.31	-3.39	0.655	6.55	6.84	-4.24	27,28
8	8/27/2018	Head	D835V2 SN:4d117	5/16/2019	1.020	10.20	9.87	3.34	0.664	6.64	6.40	3.75	

9. Conducted Output Power Measurements

9.1. GSM

Per KDB 941225 D01 3G SAR Procedures:

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When different maximum output power applies to GSM voice or GPRS/EDGE time slots, GSM voice and GPRS/EDGE time slots should be tested separately to determine compliance by summing the corresponding reported SAR.

The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance.

Per October 2013 TCB Workshop:

When the maximum frame-averaged powers levels are within 0.25 dB of each other, test the configuration with the most number of time slots.

GSM850 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	128	824.2	32.9	23.9	34.0	25.0
			190	836.6	33.0	24.0		
			251	848.8	33.0	24.0		
		2	128	824.2	30.2	24.2	32.0	26.0
			190	836.6	30.5	24.5		
			251	848.8	30.4	24.4		
		3	128	824.2	28.6	19.5	29.0	24.7
			190	836.6	28.8	19.8		
			251	848.8	28.7	19.6		
		4	128	824.2	27.2	21.1	28.0	25.0
			190	836.6	27.4	21.4		
			251	848.8	27.4	21.4		
EDGE (8PSK)	MCS5	1	128	824.2	26.6	17.5	27.0	18.0
			190	836.6	26.9	17.8		
			251	848.8	26.7	17.7		
		2	128	824.2	23.9	17.9	25.0	19.0
			190	836.6	24.2	18.2		
			251	848.8	24.2	18.2		
		3	128	824.2	22.5	13.4	24.0	19.7
			190	836.6	22.5	13.4		
			251	848.8	22.5	13.5		
		4	128	824.2	20.7	14.6	23.0	20.0
			190	836.6	20.7	14.7		
			251	848.8	20.7	14.7		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GPRS/EDGE (GMSK) mode with 2 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4$ dB higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is ≤ 1.2 W/kg.

GSM1900 Measured Results

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			
					Measured		Tune-up Limit	
					Burst Pwr	Frame Pwr	Burst Pwr	Frame Pwr
GPRS/EDGE (GMSK)	CS1	1	512	1850.2	29.4	20.3	31.0	22.0
			661	1880.0	29.7	20.7		
			810	1909.8	29.7	20.6		
		2	512	1850.2	26.8	20.8	28.5	22.5
			661	1880.0	27.2	21.1		
			810	1909.8	27.1	21.1		
		3	512	1850.2	25.7	16.7	26.5	22.2
			661	1880.0	26.2	17.2		
			810	1909.8	26.2	17.1		
		4	512	1850.2	24.6	18.6	25.0	22.0
			661	1880.0	25.0	18.9		
			810	1909.8	24.9	18.9		
EDGE (8PSK)	MCS5	1	512	1850.2	25.1	16.1	26.0	17.0
			661	1880.0	25.4	16.4		
			810	1909.8	25.4	16.3		
		2	512	1850.2	23.1	17.1	24.0	18.0
			661	1880.0	23.2	17.2		
			810	1909.8	23.3	17.3		
		3	512	1850.2	21.7	12.6	23.5	19.2
			661	1880.0	22.0	12.9		
			810	1909.8	21.8	12.8		
		4	512	1850.2	20.2	14.1	22.0	19.0
			661	1880.0	20.5	14.4		
			810	1909.8	20.3	14.2		

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- GPRS/EDGE (GMSK) mode with 2 time slots for Max power, based on the Tune-up Procedure.
- SAR is not required for EDGE (8PSK) mode because the maximum output power and tune-up limit is $\leq 1/4\text{dB}$ higher than GPRS/EDGE (GMSK) or the adjusted SAR of the highest reported SAR of GPRS/EDGE (GMSK) is $\leq 1.2\text{W/kg}$.

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 9 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Table C.10.2.4: β values for transmitter characteristics tests with HS-DPCCH

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 9 procedures in table C.11.1.3 of 3GPP TS 34.121-1

A summary of these settings are illustrated below:

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
HSDPA Specific Settings	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

DC-HSDPA Setup Procedures used to establish the test signals

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

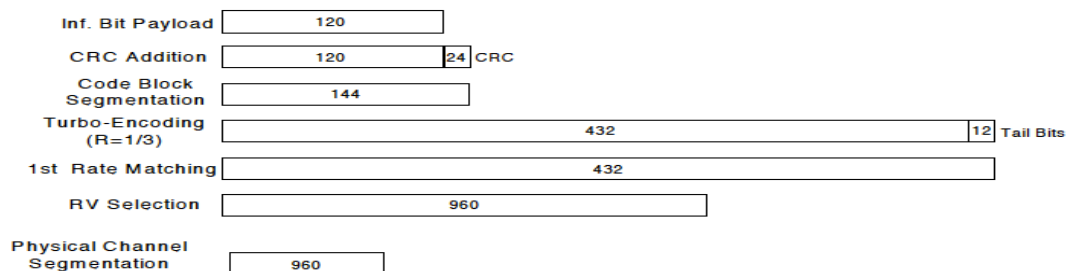**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 9 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	Ahs = β_{hs}/β_c	30/15			

HSPA+ Release 9

Since 16QAM is not used for uplink, RF conducted power measurements are not required for HSPA+.

W-CDMA Band II Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	23.1	N/A	24.5	20.0	N/A	22.5
		9400	1880.0	23.3			20.1		
		9538	1907.6	23.4			20.1		
HSDPA	Subtest 1	9262	1852.4	22.2	0	23.0	19.8	0	21.0
		9400	1880.0	22.3			20.1		
		9538	1907.6	22.4			20.1		
	Subtest 2	9262	1852.4	22.2	0	23.0	19.9	0	21.0
		9400	1880.0	22.3			20.1		
		9538	1907.6	22.4			20.2		
	Subtest 3	9262	1852.4	21.3	0.5	22.5	19.9	0.5	20.5
		9400	1880.0	21.5			20.2		
		9538	1907.6	21.6			20.2		
	Subtest 4	9262	1852.4	21.2	0.5	22.5	19.9	0.5	20.5
		9400	1880.0	21.3			20.1		
		9538	1907.6	21.4			20.2		
HSUPA	Subtest 1	9262	1852.4	21.1	0	23.0	18.7	0	21.0
		9400	1880.0	21.3			19.0		
		9538	1907.6	21.4			19.1		
	Subtest 2	9262	1852.4	19.2	2	21.0	19.0	2	19.0
		9400	1880.0	19.5			19.0		
		9538	1907.6	19.6			19.0		
	Subtest 3	9262	1852.4	20.3	1	22.0	18.7	1	20.0
		9400	1880.0	20.5			19.1		
		9538	1907.6	20.5			19.2		
	Subtest 4	9262	1852.4	19.2	2	21.0	18.8	2	19.0
		9400	1880.0	19.5			19.0		
		9538	1907.6	19.6			19.0		
	Subtest 5	9262	1852.4	22.1	0	23.0	19.8	0	21.0
		9400	1880.0	22.3			20.0		
		9538	1907.6	22.4			20.1		
DC-HSDPA	Subtest 1	9262	1852.4	22.2	0	23.0	20.0	0	21.0
		9400	1880.0	22.3			20.0		
		9538	1907.6	22.4			20.0		
	Subtest 2	9262	1852.4	22.2	0	23.0	20.0	0	21.0
		9400	1880.0	22.3			20.0		
		9538	1907.6	22.4			20.1		
	Subtest 3	9262	1852.4	21.3	0.5	22.5	20.0	0.5	20.5
		9400	1880.0	21.5			20.0		
		9538	1907.6	21.6			20.0		
	Subtest 4	9262	1852.4	21.2	0.5	22.5	20.0	0.5	20.5
		9400	1880.0	21.3			20.0		
		9538	1907.6	21.4			20.0		

Notes:

Refer to W-CDMA MPR Attestation Letter for HSUPA MPR Explanation.

W-CDMA Band IV Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit	Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	23.1	N/A	24.5	19.9	N/A	22.0
		1413	1732.6	23.1			19.9		
		1513	1752.6	23.0			19.8		
HSDPA	Subtest 1	1312	1712.4	22.5	0	23.0	19.9	0	20.5
		1413	1732.6	22.5			19.9		
		1513	1752.6	22.4			19.7		
	Subtest 2	1312	1712.4	21.6	0	23.0	19.8	0	20.5
		1413	1732.6	21.6			19.9		
		1513	1752.6	21.5			19.8		
	Subtest 3	1312	1712.4	20.6	0.5	22.5	19.9	0.5	20.0
		1413	1732.6	20.5			19.9		
		1513	1752.6	20.5			19.8		
	Subtest 4	1312	1712.4	20.6	0.5	22.5	19.9	0.5	20.0
		1413	1732.6	20.5			19.9		
		1513	1752.6	20.5			19.8		
HSUPA	Subtest 1	1312	1712.4	19.6	2	21.0	18.8	0	20.5
		1413	1732.6	19.7			18.8		
		1513	1752.6	19.6			18.7		
	Subtest 2	1312	1712.4	17.6	4	19.0	17.7	2	18.5
		1413	1732.6	17.7			17.8		
		1513	1752.6	17.5			17.7		
	Subtest 3	1312	1712.4	20.6	1	22.0	18.9	1	19.5
		1413	1732.6	20.6			18.9		
		1513	1752.6	20.5			18.8		
	Subtest 4	1312	1712.4	17.7	4	19.0	17.8	2	18.5
		1413	1732.6	17.7			17.9		
		1513	1752.6	17.6			17.7		
	Subtest 5	1312	1712.4	22.5	0	23.0	19.7	0	20.5
		1413	1732.6	22.6			19.8		
		1513	1752.6	22.4			19.7		
DC-HSDPA	Subtest 1	1312	1712.4	22.5	0	23.0	19.9	0	20.5
		1413	1732.6	22.5			20.0		
		1513	1752.6	22.4			19.8		
	Subtest 2	1312	1712.4	21.6	0	23.0	19.8	0	20.5
		1413	1732.6	21.6			20.0		
		1513	1752.6	21.5			19.8		
	Subtest 3	1312	1712.4	20.6	0.5	22.5	19.9	0.5	20.0
		1413	1732.6	20.5			20.0		
		1513	1752.6	20.5			19.8		
	Subtest 4	1312	1712.4	20.6	0.5	22.5	19.9	0.5	20.0
		1413	1732.6	20.5			19.9		
		1513	1752.6	20.5			19.8		

Notes:

Refer to W-CDMA MPR Attestation Letter for HSUPA MPR Explanation.

W-CDMA Band V Measured Results

Mode		UL Ch No.	Freq. (MHz)	Maximum Average Power (dBm)		
				Measured Pwr	MPR	Tune-up Limit
Release 99	Rel 99 (RMC, 12.2 kbps)	4132	826.4	24.0	N/A	25.0
		4183	836.6	24.2		
		4233	846.6	24.2		
HSDPA	Subtest 1	4132	826.4	22.9	0	23.5
		4183	836.6	23.1		
		4233	846.6	23.1		
	Subtest 2	4132	826.4	22.0	0	23.5
		4183	836.6	22.3		
		4233	846.6	22.3		
	Subtest 3	4132	826.4	20.9	0.5	23.0
		4183	836.6	21.2		
		4233	846.6	21.1		
	Subtest 4	4132	826.4	20.9	0.5	23.0
		4183	836.6	21.2		
		4233	846.6	21.1		
HSUPA	Subtest 1	4132	826.4	20.1	2	21.5
		4183	836.6	20.2		
		4233	846.6	20.2		
	Subtest 2	4132	826.4	18.1	4	19.5
		4183	836.6	18.1		
		4233	846.6	18.3		
	Subtest 3	4132	826.4	21.0	1	22.5
		4183	836.6	21.3		
		4233	846.6	21.2		
	Subtest 4	4132	826.4	18.1	4	19.5
		4183	836.6	18.2		
		4233	846.6	18.2		
	Subtest 5	4132	826.4	23.0	0	23.5
		4183	836.6	23.2		
		4233	846.6	23.2		
DC-HSDPA	Subtest 1	4132	826.4	22.9	0	23.5
		4183	836.6	23.1		
		4233	846.6	23.1		
	Subtest 2	4132	826.4	22.0	0	23.5
		4183	836.6	22.3		
		4233	846.6	22.3		
	Subtest 3	4132	826.4	20.9	0.5	23.0
		4183	836.6	21.2		
		4233	846.6	21.1		
	Subtest 4	4132	826.4	20.9	0.5	23.0
		4183	836.6	21.2		
		4233	846.6	21.1		

Notes:

Refer to W-CDMA MPR Attestation Letter for HSUPA MPR Explanation.

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256 QAM	≥ 1						≤ 5

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36, 66, 70	3	>5	≤ 1
			5	>6	≤ 1
			10	>8	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2, 6.6.3.3.19	41	5, 10, 15, 20	Table 6.2.4-4, Table 6.2.4-4a	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50 (NOTE 1)	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
		65 (NOTE 3)	10, 15, 20	≥ 50	≤ 1 (NOTE 1)
			15, 20	Table 6.2.4-18 (NOTE 2)	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	N/A
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1 6.6.3.3.13	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5, 10, 15	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2 6.6.2.2.1 6.6.3.3.14	23	5, 10, 15, 20	Table 6.2.4-15	
	6.6.2.2.1 6.6.3.3.15				
NS_21	6.6.2.2.1 6.6.3.3.15	30	5, 10	Table 6.2.4-16	
NS_22	6.6.3.3.16	42, 43	5, 10, 15, 20	Table 6.2.4-17	
NS_23	6.6.3.3.17	42, 43	5, 10, 15, 20	N/A	
NS_24	6.6.3.3.20	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-19	
NS_25	6.6.3.3.21	65 (NOTE 4)	5, 10, 15, 20	Table 6.2.4-20	
NS_26	6.6.3.3.22	68	10, 15	Table 6.2.4-21	
NS_27	6.6.2.2.5, 6.6.3.3.23	48	5, 10, 15, 20	Table 6.2.4-22	
NS_28	6.2.2A, 6.6.3.3.24	46 (NOTE 5)	20	Table 6.2.4-23	
NS_29	6.2.2A, 6.6.2.3.1a, 6.6.3.3.25	46 (NOTE 5)	20	Table 6.2.4-24	
NS_30	6.2.2A, 6.6.3.3.26	46 (NOTE 5)	20	Table 6.2.4-25	
NS_31	6.2.2A, 6.6.3.3.27	46 (NOTE 5)	20	Table 6.2.4-26	
NS_32	-	-	-	-	-

NOTE 1: Applicable when the lower edge of the assigned E-UTRA UL channel bandwidth frequency is larger than or equal to the upper edge of PHS band (1915.7 MHz) + 4 MHz + the channel BW assigned, where channel BW is as defined in subclause 5.6. A-MPR for

LTE Band 2 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				18700	18900	19100	MPR	Tune-up Limit	18700	18900	19100	MPR	Tune-up Limit
				1860 MHz	1880 MHz	1900 MHz			1860 MHz	1880 MHz	1900 MHz		
20 MHz	QPSK	1	0	22.9	23.0	22.9	0	24.5	21.2	21.3	21.4	0	22.5
		1	49	22.8	22.9	22.8	0	24.5	21.2	21.3	21.3	0	22.5
		1	99	22.8	22.9	22.8	0	24.5	21.1	21.2	21.2	0	22.5
		50	0	21.8	22.0	22.0	1	23.5	21.1	21.3	21.3	0	22.5
		50	24	21.8	22.0	22.0	1	23.5	21.1	21.3	21.2	0	22.5
		50	50	21.8	21.9	21.9	1	23.5	21.1	21.2	21.2	0	22.5
	16QAM	100	0	21.8	22.0	22.0	1	23.5	21.1	21.3	21.3	0	22.5
		1	0	21.6	21.8	22.0	1	23.5	21.1	21.2	21.3	0	22.5
		1	49	21.6	21.7	21.9	1	23.5	21.0	21.2	21.2	0	22.5
		1	99	21.6	21.6	21.9	1	23.5	20.9	21.1	21.2	0	22.5
		50	0	20.9	21.0	21.0	2	22.5	21.2	21.4	21.3	0	22.5
		50	24	20.9	21.0	21.0	2	22.5	21.1	21.3	21.2	0	22.5
		50	50	20.8	21.0	20.9	2	22.5	21.1	21.3	21.2	0	22.5
		100	0	20.8	21.0	21.0	2	22.5	21.1	21.3	21.3	0	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				18675	18900	19125	MPR	Tune-up Limit	18675	18900	19125	MPR	Tune-up Limit
				1857.5 MHz	1880 MHz	1902.5 MHz			1857.5 MHz	1880 MHz	1902.5 MHz		
15 MHz	QPSK	1	0	22.8	23.0	23.1	0	24.5	20.8	20.9	20.9	0	22.5
		1	37	22.8	23.0	22.9	0	24.5	20.7	20.8	20.8	0	22.5
		1	74	22.7	22.9	22.9	0	24.5	20.6	20.8	20.7	0	22.5
		36	0	21.9	22.0	22.1	1	23.5	20.7	20.8	20.8	0	22.5
		36	20	21.8	22.0	22.0	1	23.5	20.7	20.8	20.8	0	22.5
		36	39	21.8	22.0	22.0	1	23.5	20.6	20.8	20.8	0	22.5
	16QAM	75	0	21.8	22.0	22.0	1	23.5	20.7	20.8	20.8	0	22.5
		1	0	21.8	21.9	22.1	1	23.5	20.9	20.8	20.8	0	22.5
		1	37	21.7	21.9	22.1	1	23.5	20.8	20.7	20.7	0	22.5
		1	74	21.7	21.8	22.0	1	23.5	20.8	20.6	20.7	0	22.5
		36	0	20.9	21.1	21.0	2	22.5	20.7	20.9	20.8	0	22.5
		36	20	20.9	21.0	21.0	2	22.5	20.7	20.8	20.8	0	22.5
		36	39	20.9	21.0	21.0	2	22.5	20.7	20.8	20.8	0	22.5
		75	0	20.9	21.0	21.1	2	22.5	20.7	20.8	20.8	0	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				18650	18900	19150	MPR	Tune-up Limit	18650	18900	19150	MPR	Tune-up Limit
				1855 MHz	1880 MHz	1905 MHz			1855 MHz	1880 MHz	1905 MHz		
10 MHz	QPSK	1	0	22.7	23.0	23.0	0	24.5	21.1	21.4	21.4	0	22.5
		1	25	22.7	23.0	23.0	0	24.5	21.1	21.3	21.4	0	22.5
		1	49	22.7	23.0	22.9	0	24.5	21.0	21.3	21.3	0	22.5
		25	0	21.8	22.0	21.9	1	23.5	21.0	21.3	21.3	0	22.5
		25	12	21.7	22.0	21.9	1	23.5	21.0	21.3	21.2	0	22.5
		25	25	21.7	22.0	21.9	1	23.5	21.0	21.3	21.2	0	22.5
	16QAM	50	0	21.7	22.0	21.9	1	23.5	21.0	21.3	21.2	0	22.5
		1	0	21.8	22.0	21.6	1	23.5	21.2	21.2	21.2	0	22.5
		1	25	21.8	22.0	21.6	1	23.5	21.1	21.2	21.2	0	22.5
		1	49	21.8	22.0	21.6	1	23.5	21.1	21.1	21.2	0	22.5
		25	0	20.8	21.0	21.0	2	22.5	21.1	21.4	21.3	0	22.5
		25	12	20.8	21.0	20.9	2	22.5	21.1	21.4	21.3	0	22.5
		25	25	20.7	21.0	20.9	2	22.5	21.0	21.4	21.2	0	22.5
		50	0	20.7	21.1	21.0	2	22.5	21.0	21.3	21.2	0	22.5

LTE Band 2 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				18625	18900	19175	MPR	Tune-up Limit	18625	18900	19175	MPR	Tune-up Limit
				1852.5 MHz	1880 MHz	1907.5 MHz			1852.5 MHz	1880 MHz	1907.5 MHz		
5 MHz	QPSK	1	0	22.7	23.0	22.9	0	24.5	20.6	20.8	20.7	0	22.5
		1	12	22.7	23.0	22.9	0	24.5	20.6	20.8	20.7	0	22.5
		1	24	22.7	23.0	22.9	0	24.5	20.6	20.8	20.6	0	22.5
		12	0	21.8	22.0	22.0	1	23.5	20.6	20.8	20.7	0	22.5
		12	7	21.7	22.0	21.9	1	23.5	20.6	20.8	20.7	0	22.5
		12	13	21.7	22.0	21.9	1	23.5	20.6	20.8	20.7	0	22.5
		25	0	21.7	22.0	22.0	1	23.5	20.6	20.8	20.7	0	22.5
	16QAM	1	0	21.7	22.1	21.8	1	23.5	20.5	20.6	20.6	0	22.5
		1	12	21.7	22.0	21.8	1	23.5	20.6	20.6	20.6	0	22.5
		1	24	21.7	22.1	21.8	1	23.5	20.6	20.6	20.6	0	22.5
		12	0	20.8	21.0	21.0	2	22.5	20.7	20.9	20.8	0	22.5
		12	7	20.8	21.0	21.0	2	22.5	20.7	20.8	20.7	0	22.5
		12	13	20.8	21.0	21.0	2	22.5	20.6	20.8	20.7	0	22.5
		25	0	20.8	21.0	21.0	2	22.5	20.6	20.9	20.7	0	22.5
		25	0	20.8	21.0	21.0	2	22.5	20.6	20.9	20.7	0	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				18615	18900	19185	MPR	Tune-up Limit	18615	18900	19185	MPR	Tune-up Limit
				1851.5 MHz	1880 MHz	1908.5 MHz			1851.5 MHz	1880 MHz	1908.5 MHz		
3 MHz	QPSK	1	0	22.8	23.1	23.1	0	24.5	20.7	20.9	20.9	0	22.5
		1	8	22.8	23.0	23.1	0	24.5	20.7	20.9	20.8	0	22.5
		1	14	22.8	23.0	23.0	0	24.5	20.7	20.9	20.8	0	22.5
		8	0	21.8	22.0	22.0	1	23.5	20.6	20.8	20.8	0	22.5
		8	4	21.8	22.0	22.0	1	23.5	20.6	20.8	20.8	0	22.5
		8	7	21.8	22.0	22.0	1	23.5	20.6	20.8	20.8	0	22.5
		15	0	21.8	22.1	22.0	1	23.5	20.6	20.8	20.7	0	22.5
	16QAM	1	0	21.6	21.9	21.9	1	23.5	20.9	20.5	20.9	0	22.5
		1	8	21.6	21.9	21.9	1	23.5	20.6	20.6	20.6	0	22.5
		1	14	21.6	21.9	21.8	1	23.5	20.6	20.6	20.6	0	22.5
		8	0	20.8	21.0	21.0	2	22.5	20.6	20.9	20.8	0	22.5
		8	4	20.8	21.0	21.0	2	22.5	20.6	20.9	20.8	0	22.5
		8	7	20.8	21.0	21.0	2	22.5	20.6	20.8	20.8	0	22.5
		15	0	20.8	21.0	21.0	2	22.5	20.6	20.8	20.8	0	22.5
		15	0	20.8	21.0	21.0	2	22.5	20.6	20.8	20.8	0	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				18607	18900	19193	MPR	Tune-up Limit	18607	18900	19193	MPR	Tune-up Limit
				1850.7 MHz	1880 MHz	1909.3 MHz			1850.7 MHz	1880 MHz	1909.3 MHz		
1.4 MHz	QPSK	1	0	22.8	23.2	23.2	0	24.5	20.6	20.8	20.8	0	22.5
		1	3	22.8	23.1	23.1	0	24.5	20.6	20.8	20.8	0	22.5
		1	5	22.8	23.2	23.2	0	24.5	20.6	20.8	20.8	0	22.5
		3	0	22.8	23.1	23.1	0	24.5	20.6	20.8	20.7	0	22.5
		3	1	22.8	23.1	23.1	0	24.5	20.6	20.8	20.8	0	22.5
		3	3	22.9	23.1	23.1	0	24.5	20.6	20.8	20.7	0	22.5
		6	0	21.8	22.1	22.1	1	23.5	20.6	20.8	20.8	0	22.5
	16QAM	1	0	21.6	21.8	21.7	1	23.5	20.7	20.8	20.7	0	22.5
		1	3	21.7	21.7	21.7	1	23.5	20.6	20.6	20.7	0	22.5
		1	5	21.6	21.8	21.8	1	23.5	20.5	20.6	20.7	0	22.5
		3	0	21.8	22.0	22.1	1	23.5	20.6	20.8	20.8	0	22.5
		3	1	21.8	22.1	22.1	1	23.5	20.6	20.7	20.8	0	22.5
		3	3	21.8	22.0	22.1	1	23.5	20.6	20.8	20.8	0	22.5
		6	0	20.8	21.1	21.1	2	22.5	20.6	20.9	20.8	0	22.5
		6	0	20.8	21.1	21.1	2	22.5	20.6	20.9	20.8	0	22.5

LTE Band 4 Measured Results

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 5 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20450	20525	20600	MPR	Tune-up Limit
				829 MHz	836.5 MHz	844 MHz		
10 MHz	QPSK	1	0		23.1		0	25
		1	25		23.1		0	25
		1	49		23.1		0	25
		25	0		22.0		1	24
		25	12		22.0		1	24
		25	25		22.0		1	24
		50	0		22.1		1	24
	16QAM	1	0		22.0		1	24
		1	25		21.9		1	24
		1	49		22.0		1	24
		25	0		21.0		2	23
		25	12		21.0		2	23
		25	25		21.0		2	23
		50	0		21.0		2	23
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20425	20525	20625	MPR	Tune-up Limit
				826.5 MHz	836.5 MHz	846.5 MHz		
5 MHz	QPSK	1	0	23.0	23.1	23.1	0	25
		1	12	22.9	23.1	23.0	0	25
		1	24	23.0	23.1	23.0	0	25
		12	0	22.0	22.0	22.1	1	24
		12	7	21.9	22.0	22.1	1	24
		12	13	21.9	22.0	22.0	1	24
		25	0	21.9	22.1	22.1	1	24
	16QAM	1	0	21.8	21.9	21.9	1	24
		1	12	21.7	21.8	21.8	1	24
		1	24	21.7	21.9	21.8	1	24
		12	0	20.8	20.9	21.0	2	23
		12	7	20.8	20.9	20.9	2	23
		12	13	20.8	20.9	20.9	2	23
		25	0	20.8	20.9	20.9	2	23
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20415	20525	20635	MPR	Tune-up Limit
				825.5 MHz	836.5 MHz	847.5 MHz		
3 MHz	QPSK	1	0	23.0	23.2	23.3	0	25
		1	8	23.0	23.2	23.2	0	25
		1	14	23.0	23.2	23.2	0	25
		8	0	21.9	22.0	22.1	1	24
		8	4	21.9	22.0	22.1	1	24
		8	7	21.9	22.0	22.0	1	24
		15	0	22.0	22.1	22.1	1	24
	16QAM	1	0	21.9	22.1	22.0	1	24
		1	8	21.9	21.9	22.1	1	24
		1	14	22.0	22.0	22.0	1	24
		8	0	20.8	20.9	20.9	2	23
		8	4	20.8	20.9	20.9	2	23
		8	7	20.7	20.9	20.9	2	23
		15	0	20.8	20.9	20.9	2	23

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

LTE Band 5 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				20407	20525	20643	MPR	Tune-up Limit
				824.7 MHz	836.5 MHz	848.3 MHz		
1.4 MHz	QPSK	1	0	23.0	23.2	23.2	0	25
		1	3	23.1	23.2	23.2	0	25
		1	5	23.1	23.1	23.2	0	25
		3	0	23.0	23.1	23.2	0	25
		3	1	23.0	23.1	23.2	0	25
		3	3	23.0	23.1	23.1	0	25
		6	0	21.9	22.0	22.0	1	24
	16QAM	1	0	21.5	21.8	21.8	1	24
		1	3	21.5	21.8	21.8	1	24
		1	5	21.5	21.9	21.8	1	24
		3	0	22.0	22.1	22.1	1	24
		3	1	22.0	21.9	22.1	1	24
		3	3	22.0	22.0	22.1	1	24
		6	0	20.8	20.8	21.0	2	23

LTE Band 12 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23060	23095	23130	MPR	Tune-up Limit
				704 MHz	707.5 MHz	711 MHz		
10 MHz	QPSK	1	0		23.1		0	25
		1	25		23.0		0	25
		1	49		23.0		0	25
		25	0		22.1		1	24
		25	12		22.0		1	24
		25	25		22.0		1	24
		50	0		22.0		1	24
	16QAM	1	0		22.0		1	24
		1	25		21.9		1	24
		1	49		21.9		1	24
		25	0		21.0		2	23
		25	12		21.0		2	23
		25	25		20.9		2	23
		50	0		21.0		2	23
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23035	23095	23155	MPR	Tune-up Limit
				701.5 MHz	707.5 MHz	713.5 MHz		
5 MHz	QPSK	1	0	23.1	23.0	23.0	0	25
		1	12	23.0	23.0	22.9	0	25
		1	24	23.0	23.0	23.0	0	25
		12	0	22.1	22.0	22.0	1	24
		12	7	22.0	22.0	22.0	1	24
		12	13	22.0	22.0	22.1	1	24
		25	0	22.0	22.0	22.0	1	24
	16QAM	1	0	22.0	22.0	21.9	1	24
		1	12	21.8	21.9	21.9	1	24
		1	24	21.8	22.0	21.9	1	24
		12	0	20.9	20.9	20.9	2	23
		12	7	20.8	20.9	20.9	2	23
		12	13	20.8	20.9	20.9	2	23
		25	0	20.9	20.9	20.9	2	23
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23025	23095	23165	MPR	Tune-up Limit
				700.5 MHz	707.5 MHz	714.5 MHz		
3 MHz	QPSK	1	0	23.0	23.0	23.0	0	25
		1	8	22.9	23.0	23.0	0	25
		1	14	22.9	23.0	23.1	0	25
		8	0	22.0	22.0	22.0	1	24
		8	4	22.0	22.0	22.0	1	24
		8	7	22.0	22.0	22.0	1	24
		15	0	22.0	22.0	22.1	1	24
	16QAM	1	0	21.8	22.0	21.8	1	24
		1	8	21.9	22.0	21.8	1	24
		1	14	21.9	22.0	21.8	1	24
		8	0	20.8	20.9	20.9	2	23
		8	4	20.8	20.9	20.9	2	23
		8	7	20.8	21.0	20.9	2	23
		15	0	20.8	21.0	20.9	2	23

Note(s):

10 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices.

LTE Band 12 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
				23017	23095	23173	MPR	Tune-up Limit
				699.7 MHz	707.5 MHz	715.3 MHz		
1.4 MHz	QPSK	1	0	23.1	23.0	23.0	0	25
		1	3	23.1	23.0	22.9	0	25
		1	5	23.1	23.0	23.0	0	25
		3	0	23.1	23.0	23.0	0	25
		3	1	23.1	23.0	23.0	0	25
		3	3	23.1	23.0	23.0	0	25
	16QAM	6	0	22.0	22.0	22.0	1	24
		1	0	21.8	21.7	21.9	1	24
		1	3	21.7	21.6	21.9	1	24
		1	5	21.8	21.7	21.9	1	24
		3	0	22.0	22.0	22.0	1	24
		3	1	22.0	22.0	21.9	1	24
		3	3	22.0	21.9	21.9	1	24
		6	0	21.0	20.9	20.7	2	23

LTE Band 13 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
					23230		MPR	Tune-up Limit
					782 MHz			
10 MHz	QPSK	1	0		22.9		0	24.5
		1	25		22.8		0	24.5
		1	49		22.8		0	24.5
		25	0		21.8		1	23.5
		25	12		21.8		1	23.5
		25	25		21.8		1	23.5
		50	0		21.8		1	23.5
	16QAM	1	0		21.8		1	23.5
		1	25		21.7		1	23.5
		1	49		21.8		1	23.5
		25	0		20.8		2	22.5
		25	12		20.7		2	22.5
		25	25		20.7		2	22.5
		50	0		20.8		2	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)				
					23230		MPR	Tune-up Limit
					782 MHz			
5 MHz	QPSK	1	0		22.7		0	24.5
		1	12		22.7		0	24.5
		1	24		22.7		0	24.5
		12	0		21.8		1	23.5
		12	7		21.8		1	23.5
		12	13		21.8		1	23.5
		25	0		21.8		1	23.5
	16QAM	1	0		21.7		1	23.5
		1	12		21.7		1	23.5
		1	24		21.7		1	23.5
		12	0		20.7		2	22.5
		12	7		20.7		2	22.5
		12	13		20.7		2	22.5
		25	0		20.7		2	22.5

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

LTE Band 17 Measured Results

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 41 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
20 MHz	QPSK	1	0	22.6	22.8	23.1	23.6	23.7	0	24.5
		1	49	22.7	22.8	23.1	23.6	23.8	0	24.5
		1	99	22.7	22.8	23.1	23.6	23.8	0	24.5
		50	0	21.6	21.9	22.1	22.5	22.8	1	23.5
		50	24	21.6	21.9	22.2	22.5	22.8	1	23.5
		50	50	21.6	21.9	22.2	22.5	22.8	1	23.5
		100	0	21.6	21.9	22.2	22.5	22.8	1	23.5
	16QAM	1	0	21.3	21.7	21.7	22.6	22.6	1	23.5
		1	49	21.3	21.8	22.0	22.4	22.7	1	23.5
		1	99	21.5	21.6	21.7	22.4	22.7	1	23.5
		50	0	20.6	20.9	21.2	21.4	21.8	2	22.5
		50	24	20.6	20.9	21.2	21.5	21.8	2	22.5
		50	50	20.6	20.9	21.2	21.5	21.9	2	22.5
		100	0	20.6	20.9	21.2	21.5	21.8	2	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
15 MHz	QPSK	1	0	22.5	22.8	23.2	23.4	23.8	0	24.5
		1	37	22.5	22.8	23.2	23.4	23.8	0	24.5
		1	74	22.5	22.9	23.2	23.4	23.8	0	24.5
		36	0	21.6	21.9	22.2	22.5	22.8	1	23.5
		36	20	21.6	21.9	22.2	22.5	22.8	1	23.5
		36	39	21.7	21.9	22.2	22.5	22.8	1	23.5
		75	0	21.7	21.9	22.2	22.5	22.8	1	23.5
	16QAM	1	0	21.1	21.8	21.9	22.2	22.6	1	23.5
		1	37	21.2	22.1	21.9	22.2	22.7	1	23.5
		1	74	21.3	22.1	21.9	22.3	23.2	1	23.5
		36	0	20.7	20.9	21.3	21.5	21.8	2	22.5
		36	20	20.6	21.0	21.2	21.5	21.8	2	22.5
		36	39	20.7	21.0	21.2	21.5	21.9	2	22.5
		75	0	20.7	20.9	21.2	21.5	21.8	2	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
10 MHz	QPSK	1	0	22.5	22.8	23.2	23.4	23.7	0	24.5
		1	25	22.6	22.8	23.2	23.4	23.7	0	24.5
		1	49	22.6	22.8	23.2	23.4	23.8	0	24.5
		25	0	21.6	21.9	22.2	22.4	22.8	1	23.5
		25	12	21.6	21.9	22.2	22.4	22.8	1	23.5
		25	25	21.6	21.9	22.2	22.4	22.8	1	23.5
		50	0	21.6	21.9	22.2	22.4	22.8	1	23.5
	16QAM	1	0	21.3	21.8	21.7	22.3	22.8	1	23.5
		1	25	21.3	21.7	21.7	22.3	22.8	1	23.5
		1	49	21.3	21.7	21.7	22.3	22.8	1	23.5
		25	0	20.7	20.9	21.1	21.4	21.8	2	22.5
		25	12	20.7	20.9	21.2	21.5	21.8	2	22.5
		25	25	20.7	20.9	21.2	21.5	21.8	2	22.5
		50	0	20.7	20.9	21.2	21.5	21.8	2	22.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)						
				39750	40185	40620	41055	41490	MPR	Tune-up Limit
				2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz		
5 MHz	QPSK	1	0	22.6	22.9	23.1	23.5	23.8	0	24.5
		1	12	22.6	22.9	23.1	23.5	23.8	0	24.5
		1	24	22.6	22.9	23.2	23.5	23.8	0	24.5
		12	0	21.6	21.9	22.2	22.4	22.7	1	23.5
		12	7	21.6	21.9	22.2	22.4	22.7	1	23.5
		12	13	21.7	21.8	22.2	22.4	22.7	1	23.5
		25	0	21.6	21.8	22.2	22.5	22.7	1	23.5
	16QAM	1	0	21.4	21.6	21.7	22.3	22.6	1	23.5
		1	12	21.4	21.6	21.7	22.2	22.6	1	23.5
		1	24	21.4	21.6	21.7	22.3	22.6	1	23.5
		12	0	20.7	20.8	21.1	21.5	21.7	2	22.5
		12	7	20.7	20.8	21.1	21.5	21.7	2	22.5
		12	13	20.7	20.8	21.1	21.5	21.7	2	22.5
		25	0	20.7	20.9	21.2	21.5	21.8	2	22.5

LTE Band 66 Measured Results

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				132072	132322	132572	MPR	Tune-up Limit	132072	132322	132572	MPR	Tune-up Limit
				1720 MHz	1745 MHz	1770 MHz			1720 MHz	1745 MHz	1770 MHz		
20 MHz	QPSK	1	0	22.5	22.7	22.5	0	24.5	20.2	20.2	19.8	0	21.5
		1	49	22.5	22.6	22.4	0	24.5	20.2	20.1	19.8	0	21.5
		1	99	22.4	22.5	22.3	0	24.5	20.1	19.9	19.7	0	21.5
		50	0	21.6	21.7	21.5	1	23.5	20.1	20.1	19.9	0	21.5
		50	24	21.6	21.7	21.5	1	23.5	20.0	20.0	19.8	0	21.5
		50	50	21.5	21.6	21.4	1	23.5	19.9	20.0	19.8	0	21.5
	16QAM	100	0	21.6	21.7	21.5	1	23.5	20.0	20.0	19.8	0	21.5
		1	0	21.5	21.4	21.3	1	23.5	19.9	20.0	19.9	0	21.5
		1	49	21.4	21.3	21.2	1	23.5	19.8	19.9	19.8	0	21.5
		1	99	21.3	21.2	21.2	1	23.5	19.7	19.9	19.7	0	21.5
		50	0	20.6	20.7	20.5	2	22.5	20.1	20.1	19.9	0	21.5
		50	24	20.6	20.7	20.5	2	22.5	20.0	20.1	19.8	0	21.5
		50	50	20.6	20.6	20.4	2	22.5	20.0	20.0	19.8	0	21.5
		100	0	20.6	20.7	20.5	2	22.5	20.0	20.1	19.9	0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				132047	132322	132597	MPR	Tune-up Limit	132047	132322	132597	MPR	Tune-up Limit
				1717.5 MHz	1745 MHz	1772.5 MHz			1717.5 MHz	1745 MHz	1772.5 MHz		
15 MHz	QPSK	1	0	22.5	22.7	22.5	0	24.5	19.6	19.7	19.5	0	21.5
		1	37	22.5	22.6	22.4	0	24.5	19.5	19.7	19.5	0	21.5
		1	74	22.4	22.5	22.4	0	24.5	19.4	19.6	19.4	0	21.5
		36	0	21.6	21.7	21.6	1	23.5	19.5	19.6	19.4	0	21.5
		36	20	21.6	21.7	21.5	1	23.5	19.5	19.6	19.4	0	21.5
		36	39	21.5	21.6	21.5	1	23.5	19.4	19.5	19.4	0	21.5
		75	0	21.6	21.7	21.5	1	23.5	19.5	19.6	19.4	0	21.5
	16QAM	1	0	21.6	21.6	21.4	1	23.5	19.4	19.3	19.4	0	21.5
		1	37	21.5	21.5	21.3	1	23.5	19.4	19.2	19.4	0	21.5
		1	74	21.5	21.5	21.2	1	23.5	19.3	19.1	19.3	0	21.5
		36	0	20.6	20.7	20.6	2	22.5	19.5	19.6	19.4	0	21.5
		36	20	20.5	20.7	20.5	2	22.5	19.4	19.6	19.4	0	21.5
		36	39	20.5	20.7	20.5	2	22.5	19.4	19.5	19.4	0	21.5
		75	0	20.6	20.7	20.6	2	22.5	19.5	19.6	19.5	0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				132022	132322	132622	MPR	Tune-up Limit	132022	132322	132622	MPR	Tune-up Limit
				1715 MHz	1745 MHz	1775 MHz			1715 MHz	1745 MHz	1775 MHz		
10 MHz	QPSK	1	0	22.5	22.7	22.5	0	24.5	20.0	20.1	20.0	0	21.5
		1	25	22.5	22.6	22.4	0	24.5	20.0	20.1	20.0	0	21.5
		1	49	22.5	22.6	22.4	0	24.5	19.9	20.1	19.9	0	21.5
		25	0	21.6	21.7	21.5	1	23.5	20.0	20.1	19.9	0	21.5
		25	12	21.5	21.7	21.5	1	23.5	19.9	20.1	19.9	0	21.5
		25	25	21.5	21.6	21.5	1	23.5	19.9	20.0	19.8	0	21.5
		50	0	21.6	21.7	21.5	1	23.5	20.0	20.1	19.9	0	21.5
	16QAM	1	0	21.5	21.7	21.5	1	23.5	19.8	19.8	19.8	0	21.5
		1	25	21.4	21.6	21.5	1	23.5	19.8	19.8	19.9	0	21.5
		1	49	21.4	21.6	21.5	1	23.5	19.7	19.7	19.8	0	21.5
		25	0	20.5	20.7	20.5	2	22.5	20.0	20.1	19.9	0	21.5
		25	12	20.5	20.7	20.5	2	22.5	20.0	20.1	19.9	0	21.5
		25	25	20.5	20.7	20.5	2	22.5	20.0	20.1	19.8	0	21.5
		50	0	20.6	20.7	20.5	2	22.5	20.0	20.1	19.9	0	21.5

LTE Band 66 Measured Results (continued)

BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				131997	132322	132647	MPR	Tune-up Limit	131997	132322	132647	MPR	Tune-up Limit
				1712.5 MHz	1745 MHz	1777.5 MHz			1712.5 MHz	1745 MHz	1777.5 MHz		
5 MHz	QPSK	1	0	22.4	22.6	22.5	0	24.5	19.5	19.6	19.5	0	21.5
		1	12	22.3	22.5	22.4	0	24.5	19.5	19.6	19.5	0	21.5
		1	24	22.4	22.6	22.5	0	24.5	19.5	19.6	19.4	0	21.5
		12	0	21.5	21.7	21.5	1	23.5	19.4	19.6	19.4	0	21.5
		12	7	21.5	21.6	21.5	1	23.5	19.4	19.6	19.4	0	21.5
		12	13	21.5	21.6	21.5	1	23.5	19.4	19.6	19.4	0	21.5
		25	0	21.5	21.6	21.5	1	23.5	19.4	19.6	19.4	0	21.5
	16QAM	1	0	21.4	21.4	21.4	1	23.5	19.2	19.3	19.4	0	21.5
		1	12	21.3	21.4	21.4	1	23.5	19.2	19.3	19.4	0	21.5
		1	24	21.3	21.4	21.4	1	23.5	19.2	19.3	19.3	0	21.5
		12	0	20.6	20.6	20.6	2	22.5	19.5	19.7	19.5	0	21.5
		12	7	20.5	20.6	20.5	2	22.5	19.5	19.7	19.4	0	21.5
		12	13	20.5	20.6	20.5	2	22.5	19.5	19.6	19.4	0	21.5
		25	0	20.6	20.6	20.5	2	22.5	19.4	19.6	19.4	0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				131987	132322	132657	MPR	Tune-up Limit	131987	132322	132657	MPR	Tune-up Limit
				1711.5 MHz	1745 MHz	1778.5 MHz			1711.5 MHz	1745 MHz	1778.5 MHz		
3 MHz	QPSK	1	0	22.5	22.7	22.5	0	24.5	19.4	19.6	19.5	0	21.5
		1	8	22.5	22.6	22.5	0	24.5	19.4	19.5	19.5	0	21.5
		1	14	22.5	22.7	22.5	0	24.5	19.4	19.6	19.5	0	21.5
		8	0	21.5	21.6	21.5	1	23.5	19.4	19.6	19.5	0	21.5
		8	4	21.5	21.6	21.5	1	23.5	19.5	19.6	19.4	0	21.5
		8	7	21.5	21.6	21.5	1	23.5	19.4	19.6	19.4	0	21.5
		15	0	21.5	21.7	21.5	1	23.5	19.4	19.5	19.4	0	21.5
	16QAM	1	0	21.3	21.6	21.6	1	23.5	19.2	19.5	19.3	0	21.5
		1	8	21.3	21.6	21.5	1	23.5	19.4	19.4	19.3	0	21.5
		1	14	21.3	21.6	21.6	1	23.5	19.2	19.2	19.2	0	21.5
		8	0	20.5	20.7	20.5	2	22.5	19.5	19.6	19.5	0	21.5
		8	4	20.5	20.7	20.5	2	22.5	19.5	19.6	19.5	0	21.5
		8	7	20.5	20.7	20.5	2	22.5	19.5	19.6	19.5	0	21.5
		15	0	20.5	20.7	20.5	2	22.5	19.5	19.5	19.4	0	21.5
BW (MHz)	Mode	RB Allocation	RB offset	Maximum Average Power (dBm)					Reduced Average Power (dBm)				
				131979	132322	132665	MPR	Tune-up Limit	131979	132322	132665	MPR	Tune-up Limit
				1710.7 MHz	1745 MHz	1779.3 MHz			1710.7 MHz	1745 MHz	1779.3 MHz		
1.4 MHz	QPSK	1	0	22.6	22.7	22.6	0	24.5	19.4	19.5	19.4	0	21.5
		1	3	22.5	22.7	22.5	0	24.5	19.4	19.5	19.4	0	21.5
		1	5	22.5	22.7	22.6	0	24.5	19.4	19.6	19.4	0	21.5
		3	0	22.5	22.6	22.5	0	24.5	19.4	19.5	19.4	0	21.5
		3	1	22.5	22.6	22.5	0	24.5	19.4	19.5	19.4	0	21.5
		3	3	22.5	22.6	22.5	0	24.5	19.4	19.5	19.4	0	21.5
		6	0	21.5	21.7	21.5	1	23.5	19.5	19.6	19.4	0	21.5
	16QAM	1	0	21.3	21.5	21.3	1	23.5	19.5	19.4	19.3	0	21.5
		1	3	21.3	21.4	21.3	1	23.5	19.4	19.5	19.2	0	21.5
		1	5	21.4	21.5	21.3	1	23.5	19.3	19.4	19.2	0	21.5
		3	0	21.5	21.6	21.4	1	23.5	19.4	19.5	19.3	0	21.5
		3	1	21.5	21.6	21.4	1	23.5	19.4	19.5	19.3	0	21.5
		3	3	21.5	21.6	21.4	1	23.5	19.4	19.5	19.3	0	21.5
		6	0	20.5	20.7	20.5	2	22.5	19.6	19.6	19.3	0	21.5

9.4. LTE Carrier Aggregation

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

For inter-band carrier aggregation with uplink assigned to one E-UTRA band (Table 5.6A-1), the requirements in subclause 6.2.3 apply.

For inter-band carrier aggregation with one component carrier per operating band and the uplink active in two E-UTRA bands, the requirements in subclause 6.2.3 apply for each uplink component carrier.

For intra-band contiguous carrier aggregation the allowed Maximum Power Reduction (MPR) for the maximum output power applicable to the DUT in table below. In case the modulation format is different on different component carriers then the MPR is determined by the rules applied to higher order of those modulations.

Modulation	CA bandwidth Class B and C / Smallest Component Carrier Transmission Bandwidth Configuration				MPR (dB)
	25 RB	50 RB	75 RB	100 RB	
QPSK	> 8 and $\leq$ 25	> 12 and $\leq$ 50	> 16 and $\leq$ 75	> 18 and $\leq$ 100	$\leq$ 1
QPSK	> 25	> 50	> 75	> 100	$\leq$ 2
16 QAM	$\leq$ 8	$\leq$ 12	$\leq$ 16	$\leq$ 18	$\leq$ 1
16 QAM	> 8 and $\leq$ 25	> 12 and $\leq$ 50	> 16 and $\leq$ 75	> 18 and $\leq$ 100	$\leq$ 2
16 QAM	> 25	> 50	> 75	> 100	$\leq$ 3
64 QAM	$\leq$ 8 and allocation wholly contained within a single CC	$\leq$ 12 and allocation wholly contained within a single CC	$\leq$ 16 and allocation wholly contained within a single CC	$\leq$ 18 and allocation wholly contained within a single CC	$\leq$ 2
64 QAM	> 8 or allocation extends across two CC's	> 12 or allocation extends across two CC's	> 16 or allocation extends across two CC's	> 18 or allocation extends across two CC's	$\leq$ 3

For PUCCH and SRS transmissions, the allowed MPR is according to that specified for PUSCH WPDK modulation for the corresponding transmission bandwidth.

For intra-band contiguous carrier aggregation bandwidth class C with non-contiguous resource allocation, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2A-1 is specified as follows

$$\text{MPR} = \text{CEIL} \{ \min(M_A, M_{IM5}), 0.5 \}$$

Where M_A is defined as follows

$$M_A = \begin{array}{ll} 8.2 & ; 0 \leq A < 0.025 \\ 9.2 - 40A & ; 0.025 \leq A < 0.05 \\ 8 - 16A & ; 0.05 \leq A < 0.25 \\ 4.83 - 3.33A & ; 0.25 \leq A \leq 0.4 \\ 3.83 - 0.83A & ; 0.4 \leq A \leq 1 \end{array}$$

and M_{IM5} is defined as follows

$$M_{IM5} = \begin{array}{ll} 4.5 & ; \Delta_{IM5} < 1.5 * \text{BW}_{\text{Channel_CA}} \\ 6.0 & ; 1.5 * \text{BW}_{\text{Channel_CA}} \leq \Delta_{IM5} < \text{BW}_{\text{Channel_CA}}/2 + \Delta f_{\text{ooB}} \\ M_A & ; \Delta_{IM5} \geq \text{BW}_{\text{Channel_CA}}/2 + \Delta f_{\text{ooB}} \end{array}$$

Where

$$A = N_{RB_alloc} / N_{RB_agg}$$

$$\Delta_{IM5} = \max(|F_{C_agg} - (3 * F_{agg_alloc_low} - 2 * F_{agg_alloc_high})|, |F_{C_agg} - (3 * F_{agg_alloc_high} - 2 * F_{agg_alloc_low})|)$$

$\text{CEIL}\{M_A, 0.5\}$ means rounding upwards to closest 0.5dB, i.e. $\text{MPR} \in [3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 8.5]$

For intra-band carrier aggregation, the MPR is evaluated per slot and given by the maximum value taken over the transmission(s) on all component carriers within the slot; the maximum MPR over the two slots is then applied for the entire subframe.

For intra-band non-contiguous carrier aggregation with one uplink carrier on the PCC, the requirements in the subclause 6.2.3 apply. For intra-band non-contiguous aggregation with two uplink carriers the MPR is defined for those E-UTRA bands where maximum possible $W_{\text{GAP}} \leq 42.2$ MHz as follows

$$\text{MPR} = \text{CEIL}\{M_N, 0.5\}$$

Where M_N is defined as follows

$$M_N = \begin{array}{ll} -0.125N + 18.25 & ; 2 \leq N \leq 50 \\ -0.0333 N + 13.67 & ; 50 < N \leq 200 \end{array}$$

Where $N = N_{RB_alloc}$ is the number of allocated resource blocks.

For the UE maximum output power modified by MPR, the power limits specified in subclause 6.2.5A apply.

LTE Carrier Aggregation Measured Results

The following power measurements were performed with a single carrier uplink; CA for this particular project is only supported in the downlinks. The CA combinations supported by this device is one (1) Uplink and two (2) Downlinks.

Type	LTE CA combinations			PCC (UL)				SCC (DL)			LTE Rel 8 Tx. Power (dBm)	LTE Rel 10 Tx. Power (dBm)	Delta (dBm)	
	PCC	+	SCC	Mode	BW (MHz)	Channel	Freq. (MHz)	RB/Offset	BW (MHz)	Channel				Freq. (MHz)
Intra-Band Contiguous	2C			QPSK	20	18801	1870.1	1,0	20	999	1969.9	22.96	22.87	-0.09
	41C			QPSK	20	39750	2506.0	1,0	20	39948	2525.8	22.65	22.56	-0.09
Intra-Band Non-Contiguous	2A	+	2A	QPSK	20	18700	1860.0	1,0	20	1100	1980.0	22.81	22.75	-0.06
	4A	+	4A	QPSK	20	20050	1720.0	1,0	20	2300	2145.0	22.54	22.53	-0.01
	41A	+	41A	QPSK	20	39750	2506.0	1,0	20	41490	2680.0	22.65	22.54	-0.11
Inter-Band Non-Contiguous	2A	+	12A	QPSK	20	18700	1860.0	1,0	10	5095	737.5	22.81	22.77	-0.04
	4A	+	17A	QPSK	10	20000	1715.0	1,0	10	5790	740.0	22.61	22.57	-0.04

Note:

Per KDB 941225 D05A LTE Rel. 10 KDB Inquiry Sheet: SAR is excluded for Carrier Aggregation when measured power does not exceed LTE Release 8 by more than a $\frac{1}{4}$ dBm

9.5. Wi-Fi 2.4GHz (DTS Band)**Wi-Fi 2.4GHz Measured Results**

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
DSSS 2.4 GHz	802.11b	1 Mbps	1	2412	14.0	15.0	Yes	12.8	13.0	Yes
			2	2417	18.6	19.0		12.3	13.0	
			6	2437	18.6	19.0		12.3	13.0	
			10	2457	18.5	19.0		12.3	13.0	
			11	2462	16.0	16.0		12.5	13.0	
OFDM 2.4 GHz	802.11g	6 Mbps	1	2412	Not Required	17.0	No	Not Required	13.0	No
			6	2437		17.0			13.0	
			11	2462		17.0			13.0	
	802.11n (HT20)	6.5 Mbps	1	2412	Not Required	17.0	No	Not Required	13.0	No
			6	2437		17.0			13.0	
			11	2462		17.0			13.0	

Note(s):

- SAR testing is not required for OFDM modes when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- For "Not required", SAR Test reduction was applied in accordance with KDB 248227 §2.1, b), 1).
- Channels 2, 6 and 10 for Maximum average power, were chosen for SAR evaluation due to these channels having highest Tune-up power.

9.6. Wi-Fi 5GHz (U-NII Bands)

Wi-Fi 5 GHz Measured Results

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-1 5.2 GHz	802.11a	6 Mbps	36	5180	16.1	16.5	Yes	Not Required	11.0	No
			40	5200	16.0	16.5			11.0	
			44	5220	16.0	16.5			11.0	
			48	5240	16.2	16.5			11.0	
	802.11n (HT20)	6.5 Mbps	36	5180	Not Required	16.5	No	Not Required	11.0	No
			40	5200		16.5			11.0	
			44	5220		16.5			11.0	
			48	5240		16.5			11.0	
	802.11ac (VHT20)	6.5 Mbps	36	5180	Not Required	16.5	No	Not Required	11.0	No
			40	5200		16.5			11.0	
			44	5220		16.5			11.0	
			48	5240		16.5			11.0	
	802.11n (HT40)	13.5 Mbps	38	5190	Not Required	15.0	No	Not Required	11.0	No
			46	5230		15.0			11.0	
	802.11ac (VHT40)	13.5 Mbps	38	5190	Not Required	15.0	No	Not Required	11.0	No
			46	5230		15.0			11.0	
	802.11ac (VHT80)	29.3 Mbps	42	5210	Not Required	11.0	No	10.8	11.0	Yes
Band	Mode	Data Rate	Ch #	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-2A 5.3 GHz	802.11a	6 Mbps	52	5260	15.9	16.5	Yes	Not Required	11.0	No
			56	5280	16.2	16.5			11.0	
			60	5300	15.7	16.5			11.0	
			64	5320	16.4	16.5			11.0	
	802.11n (HT20)	6.5 Mbps	52	5260	Not Required	16.5	No	Not Required	11.0	No
			56	5280		16.5			11.0	
			60	5300		16.5			11.0	
			64	5320		16.5			11.0	
	802.11ac (VHT20)	6.5 Mbps	52	5260	Not Required	16.5	No	Not Required	11.0	No
			56	5280		16.5			11.0	
			60	5300		16.5			11.0	
			64	5320		16.5			11.0	
	802.11n (HT40)	13.5 Mbps	54	5270	Not Required	15.0	No	Not Required	11.0	No
			62	5310		15.0			11.0	
	802.11ac (VHT40)	13.5 Mbps	54	5270	Not Required	15.0	No	Not Required	11.0	No
			62	5310		15.0			11.0	
	802.11ac (VHT80)	29.3 Mbps	58	5290	Not Required	14.0	No	10.8	11.0	Yes

Note(s):

- For "Not required", SAR Test reduction was applied in accordance with KDB 248227 §2.1, b), 1). When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both U-NII band 1 and U-NII band 2A, begin SAR measurement in U-NII band 2A; and if the highest reported SAR for U-NII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for U-NII band 1
 - > 1.2 W/kg, both bands should be tested independently for SAR.
- Wi-Fi Direct is supported in U-NII Band 1. Therefore, Wi-Fi Direct was tested separately for SAR for U-NII Band 1.

Wi-Fi 5 GHz Measured Results (continued)

Band	Mode	Data Rate	Ch #	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-2C 5.5 GHz	802.11a	6 Mbps	100	5500	16.0	16.5	Yes	Not Required	11.0	No
			116	5580	15.6	16.5			11.0	
			124	5620	15.6	16.5			11.0	
			140	5700	15.6	16.5			11.0	
			144	5720	15.5	16.5			11.0	
	802.11n (HT20)	6.5 Mbps	100	5500	Not Required	16.5	No	Not Required	11.0	No
			116	5580		16.5			11.0	
			124	5620		16.5			11.0	
			140	5700		16.5			11.0	
			144	5720		16.5			11.0	
	802.11ac (VHT20)	6.5 Mbps	100	5500	Not Required	16.5	No	Not Required	11.0	No
			116	5580		16.5			11.0	
			124	5620		16.5			11.0	
			140	5700		16.5			11.0	
			144	5720		16.5			11.0	
	802.11n (HT40)	13.5 Mbps	102	5510	Not Required	15.0	No	Not Required	11.0	No
			118	5590		15.0			11.0	
			126	5630		15.0			11.0	
			134	5670		15.0			11.0	
			142	5710		15.0			11.0	
	802.11ac (VHT40)	13.5 Mbps	102	5510	Not Required	15.0	No	Not Required	11.0	No
			118	5590		15.0			11.0	
			126	5630		15.0			11.0	
			134	5670		15.0			11.0	
			142	5710		15.0			11.0	
	802.11ac (VHT80)	29.3 Mbps	106	5530	Not Required	14.0	No	10.4	11.0	Yes
			122	5610		14.0		10.5	11.0	
			138	5690		14.0		10.4	11.0	
Band	Mode	Data Rate	Ch #	Freq. (MHz)	Maximum Average Power (dBm)			Reduced Average Power (dBm)		
					Meas Pwr	Tune-up	SAR Test (Yes/No)	Meas Pwr	Tune-up	SAR Test (Yes/No)
UNII-3 5.8 GHz	802.11a	6 Mbps	149	5745	14.9	16.5	Yes	Not Required	11.0	No
			157	5785	15.0	16.5			11.0	
			165	5825	15.1	16.5			11.0	
	802.11n (HT20)	6.5 Mbps	149	5745	Not Required	16.5	No	Not Required	11.0	No
			157	5785		16.5			11.0	
			165	5825		16.5			11.0	
	802.11ac (VHT20)	6.5 Mbps	149	5745	Not Required	16.5	No	Not Required	11.0	No
			157	5785		16.5			11.0	
			165	5825		16.5			11.0	
	802.11n (HT40)	13.5 Mbps	151	5755	Not Required	15.0	No	Not Required	11.0	No
			159	5795		15.0			11.0	
	802.11ac (VHT40)	13.5 Mbps	151	5755	Not Required	15.0	No	Not Required	11.0	No
			159	5795		15.0			11.0	
	802.11ac (VHT80)	29.3 Mbps	155	5775	Not Required	14.0	No	10.5	11.0	Yes

Note(s):

- For "Not required", SAR Test reduction was applied in accordance with KDB 248227 §2.1, b), 1). When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band. Additional output power measurements were not deemed necessary.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.

9.7. Bluetooth

Bluetooth Measured Results

Band	Mode	Ch #	Freq. (MHz)	Maximum Average Power (dBm)		
				Meas Pwr	Tune-up	SAR Test (Yes/No)
2.4	GFSK	0	2402	8.1	10.00	Yes
		39	2441	8.3	10.00	
		78	2480	7.6	10.00	
	EDR, $\pi/4$ DQPSK	0	2402	7.4	10.00	No
		39	2441	7.8	10.00	
		78	2480	7.1	10.00	
	EDR, 8-DPSK	0	2402	6.7	10.00	No
		39	2441	7.2	10.00	
		78	2480	6.5	10.00	
	LE, GFSK	0	2402	4.2	5.00	No
		19	2440	4.9	5.00	
		39	2480	4.4	5.00	

Note(s):

Body-worn and BT Tethering Mode qualify for SAR Test Exclusion. Refer to §10.18.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

- Reported SAR(W/kg) for WWAN = Measured SAR * Tune-up Scaling Factor
- Reported SAR(W/kg) for Wi-Fi and Bluetooth = Measured SAR * Tune-up scaling factor * Duty Cycle scaling factor
- Duty Cycle scaling factor = 1 / Duty cycle (%)

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 648474 D04 Handset SAR (Phablet Only):

When hotspot mode does not apply, 10-g Extremity SAR is required for all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

Per TCB workshop April 2016; Page 22, RF Exposure Procedures (Phablet Procedures): phablet 10-g SAR should not be identified as hand or extremity SAR; this should be reported as product specific 10-g SAR in reports and grants.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

KDB 248227 D01 SAR meas for 802.11:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are

mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). Initial Test Position SAR Test Reduction Procedure is outlined in KDB 248227 D01 §5.1.1. To determine the initial test position, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the initial test position.

10.1. GSM850

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 2 Slots	OFF	0	Left Touch	190	836.6	32.0	30.5	0.007	0.010	1
				Left Tilt	190	836.6	32.0	30.5	0.005	0.007	
				Right Touch	190	836.6	32.0	30.5	0.017	0.024	
				Right Tilt	190	836.6	32.0	30.5	0.003	0.004	
Body-worn	GPRS 2 Slots	OFF	15	Rear	190	836.6	32.0	30.5	0.055	0.078	2
				Front	190	836.6	32.0	30.5	0.028	0.040	
Hotspot	GPRS 2 Slots	OFF	10	Rear	190	836.6	32.0	30.5	0.123	0.174	3
				Front	190	836.6	32.0	30.5	0.066	0.093	
				Edge 3	190	836.6	32.0	30.5	0.035	0.049	
				Edge 4	190	836.6	32.0	30.5	0.010	0.014	

10.2. GSM1900

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	GPRS 2 Slots	OFF	0	Left Touch	661	1880.0	28.5	27.2	0.015	0.020	4
				Left Tilt	661	1880.0	28.5	27.2	0.001	0.001	
				Right Touch	661	1880.0	28.5	27.2	0.011	0.015	
				Right Tilt	661	1880.0	28.5	27.2	<0.001	<0.001	
Body-worn	GPRS 2 Slots	OFF	15	Rear	661	1880.0	28.5	27.2	0.043	0.059	5
				Front	661	1880.0	28.5	27.2	0.069	0.094	
Hotspot	GPRS 2 Slots	OFF	10	Rear	661	1880.0	28.5	27.2	0.101	0.138	6
				Front	661	1880.0	28.5	27.2	0.152	0.207	
				Edge 3	661	1880.0	28.5	27.2	0.077	0.105	
				Edge 4	661	1880.0	28.5	27.2	0.125	0.171	

10.3. W-CDMA Band II

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel. 99 RMC 12.2 kbps	OFF	0	Left Touch	9400	1880.0	24.5	23.3	0.031	0.041	7
				Left Tilt	9400	1880.0	24.5	23.3	0.007	0.009	
				Right Touch	9400	1880.0	24.5	23.3	0.004	0.005	
				Right Tilt	9400	1880.0	24.5	23.3	0.004	0.005	
Body-worn	Rel. 99 RMC 12.2 kbps	OFF	15	Rear	9400	1880.0	24.5	23.3	0.107	0.140	8
				Front	9400	1880.0	24.5	23.3	0.110	0.144	
Hotspot	Rel. 99 RMC 12.2 kbps	OFF	10	Rear	9400	1880.0	24.5	23.3	0.250	0.328	9
				Front	9400	1880.0	24.5	23.3	0.249	0.327	
				Edge 3	9400	1880.0	24.5	23.3	0.112	0.147	
				Edge 4	9400	1880.0	24.5	23.3	0.224	0.294	

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Product Specific 10g	Rel. 99 RMC 12.2 kbps	OFF	10	Rear	9400	1880.0	24.5	23.3	0.133	0.175	10
			6	Front	9400	1880.0	24.5	23.3	0.285	0.374	
			10	Edge 3	9400	1880.0	24.5	23.3	0.065	0.085	
			0	Edge 4	9400	1880.0	24.5	23.3	0.740	0.971	

Notes:

Refer to Main Sensor Triggering document for required test distances.

10.4. W-CDMA Band IV

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel. 99 RMC 12.2 kbps	OFF	0	Left Touch	1413	1732.6	24.5	23.1	0.058	0.080	11
				Left Tilt	1413	1732.6	24.5	23.1	0.026	0.036	
				Right Touch	1413	1732.6	24.5	23.1	0.003	0.004	
				Right Tilt	1413	1732.6	24.5	23.1	0.003	0.004	
Body-worn	Rel. 99 RMC 12.2 kbps	OFF	15	Rear	1413	1732.6	24.5	23.1	0.250	0.344	12
				Front	1413	1732.6	24.5	23.1	0.247	0.340	
Hotspot	Rel. 99 RMC 12.2 kbps	OFF	10	Rear	1413	1732.6	24.5	23.1	0.487	0.671	13
				Front	1413	1732.6	24.5	23.1	0.408	0.562	
				Edge 3	1413	1732.6	24.5	23.1	0.313	0.431	
				Edge 4	1413	1732.6	24.5	23.1	0.428	0.589	

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		10-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Product Specific 10g	Rel. 99 RMC 12.2 Kbps	OFF	10	Rear	1413	1732.6	24.5	23.1	0.262	0.361	
			6	Front	1413	1732.6	24.5	23.1	0.574	0.791	
			10	Edge 3	1413	1732.6	24.5	23.1	0.163	0.224	
			0	Edge 4	1312	1712.4	24.5	23.1	1.390	1.936	
					1413	1732.6	24.5	23.1	1.470	2.024	14
					1513	1752.6	24.5	23.0	1.380	1.949	

Notes:

Refer to Main Sensor Triggering document for required test distances.

10.5. W-CDMA Band V

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel. 99 RMC 12.2 kbps	OFF	0	Left Touch	4183	836.6	25.0	24.2	0.019	0.023	
				Left Tilt	4183	836.6	25.0	24.2	0.010	0.012	
				Right Touch	4183	836.6	25.0	24.2	0.026	0.031	15
				Right Tilt	4183	836.6	25.0	24.2	0.003	0.004	
Body-worn	Rel. 99 RMC 12.2 kbps	OFF	15	Rear	4183	836.6	25.0	24.2	0.076	0.092	16
				Front	4183	836.6	25.0	24.2	0.040	0.048	
Hotspot	Rel. 99 RMC 12.2 kbps	OFF	10	Rear	4183	836.6	25.0	24.2	0.177	0.214	17
				Front	4183	836.6	25.0	24.2	0.078	0.094	
				Edge 3	4183	836.6	25.0	24.2	0.045	0.054	
				Edge 4	4183	836.6	25.0	24.2	0.016	0.019	

10.6. LTE Band 2 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	18900	1880.0	1	0	24.5	23.0	0.064	0.090	18
							50	0	23.5	22.0	0.046	0.065	
				Left Tilt	18900	1880.0	1	0	24.5	23.0	0.026	0.037	
							50	0	23.5	22.0	0.016	0.023	
				Right Touch	18900	1880.0	1	0	24.5	23.0	0.045	0.064	
							50	0	23.5	22.0	0.030	0.042	
				Right Tilt	18900	1880.0	1	0	24.5	23.0	0.013	0.018	
							50	0	23.5	22.0	0.008	0.011	
Body-worn	QPSK	OFF	15	Rear	18900	1880.0	1	0	24.5	23.0	0.110	0.155	
							50	0	23.5	22.0	0.083	0.117	
				Front	18900	1880.0	1	0	24.5	23.0	0.123	0.174	19
							50	0	23.5	22.0	0.092	0.130	
Hotspot	QPSK	OFF	10	Rear	18900	1880.0	1	0	24.5	23.0	0.245	0.346	20
							50	0	23.5	22.0	0.186	0.263	
				Front	18900	1880.0	1	0	24.5	23.0	0.233	0.329	
							50	0	23.5	22.0	0.183	0.259	
				Edge 3	18900	1880.0	1	0	24.5	23.0	0.126	0.178	
							50	0	23.5	22.0	0.092	0.130	
				Edge 4	18900	1880.0	1	0	24.5	23.0	0.208	0.294	
							50	0	23.5	22.0	0.157	0.222	

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		10-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Product Specific 10g	QPSK	OFF	10	Rear	18900	1880.0	1	0	24.5	23.0	0.132	0.186	
							50	0	23.5	22.0	0.100	0.141	
			6	Front	18900	1880.0	1	0	24.5	23.0	0.279	0.394	
							50	0	23.5	22.0	0.211	0.298	
			10	Edge 3	18900	1880.0	1	0	24.5	23.0	0.071	0.100	
							50	0	23.5	22.0	0.051	0.072	
			0	Edge 4	18900	1880.0	1	0	24.5	23.0	0.712	1.005	21
							50	0	23.5	22.0	0.498	0.704	

Notes:

Refer to Main Sensor Triggering document for required test distances.

10.7. LTE Band 4 (20MHz Bandwidth)

SAR for LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

10.8. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	20525	836.5	1	0	25.0	23.1	0.055	0.086	22
							25	0	24.0	22.0	0.042	0.066	
				Left Tilt	20525	836.5	1	0	25.0	23.1	0.036	0.056	
							25	0	24.0	22.0	0.027	0.042	
				Right Touch	20525	836.5	1	0	25.0	23.1	0.082	0.128	
							25	0	24.0	22.0	0.063	0.099	
Body-worn	QPSK	OFF	15	Rear	20525	836.5	1	0	25.0	23.1	0.177	0.275	23
							25	0	24.0	22.0	0.143	0.224	
				Front	20525	836.5	1	0	25.0	23.1	0.099	0.154	
							25	0	24.0	22.0	0.079	0.124	
Hotspot	QPSK	OFF	10	Rear	20525	836.5	1	0	25.0	23.1	0.393	0.611	24
							25	0	24.0	22.0	0.319	0.500	
				Front	20525	836.5	1	0	25.0	23.1	0.211	0.328	
							25	0	24.0	22.0	0.169	0.265	
				Edge 3	20525	836.5	1	0	25.0	23.1	0.134	0.208	
							25	0	24.0	22.0	0.105	0.165	
				Edge 4	20525	836.5	1	0	25.0	23.1	0.044	0.068	
							25	0	24.0	22.0	0.035	0.055	

10.9. LTE Band 12 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	23095	707.5	1	0	25.0	23.1	0.014	0.022	25
							25	0	24.0	22.1	0.011	0.017	
				Left Tilt	23095	707.5	1	0	25.0	23.1	0.009	0.013	
							25	0	24.0	22.1	0.008	0.012	
				Right Touch	23095	707.5	1	0	25.0	23.1	0.015	0.024	
							25	0	24.0	22.1	0.013	0.020	
Body-worn	QPSK	OFF	15	Rear	23095	707.5	1	0	25.0	23.1	0.053	0.083	26
							25	0	24.0	22.1	0.042	0.066	
				Front	23095	707.5	1	0	25.0	23.1	0.027	0.042	
							25	0	24.0	22.1	0.023	0.036	
Hotspot	QPSK	OFF	10	Rear	23095	707.5	1	0	25.0	23.1	0.067	0.105	27
							25	0	24.0	22.1	0.062	0.097	
				Front	23095	707.5	1	0	25.0	23.1	0.034	0.053	
							25	0	24.0	22.1	0.028	0.044	
				Edge 3	23095	707.5	1	0	25.0	23.1	0.013	0.020	
							25	0	24.0	22.1	0.010	0.016	
				Edge 4	23095	707.5	1	0	25.0	23.1	0.039	0.061	
							25	0	24.0	22.1	0.031	0.049	

10.10. LTE Band 13 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	23230	782.0	1	0	24.5	22.9	0.015	0.021	28
							25	0	23.5	21.8	0.009	0.013	
				Left Tilt	23230	782.0	1	0	24.5	22.9	0.007	0.011	
							25	0	23.5	21.8	0.003	0.005	
				Right Touch	23230	782.0	1	0	24.5	22.9	0.019	0.027	
							25	0	23.5	21.8	0.007	0.010	
				Right Tilt	23230	782.0	1	0	24.5	22.9	0.007	0.011	
							25	0	23.5	21.8	0.003	0.004	
Body-worn	QPSK	OFF	15	Rear	23230	782.0	1	0	24.5	22.9	0.053	0.076	29
							25	0	23.5	21.8	0.041	0.060	
				Front	23230	782.0	1	0	24.5	22.9	0.030	0.043	
							25	0	23.5	21.8	0.022	0.032	
Hotspot	QPSK	OFF	10	Rear	23230	782.0	1	0	24.5	22.9	0.091	0.130	30
							25	0	23.5	21.8	0.069	0.102	
				Front	23230	782.0	1	0	24.5	22.9	0.043	0.062	
							25	0	23.5	21.8	0.034	0.050	
				Edge 3	23230	782.0	1	0	24.5	22.9	0.022	0.031	
							25	0	23.5	21.8	0.008	0.011	
				Edge 4	23230	782.0	1	0	24.5	22.9	0.014	0.020	
							25	0	23.5	21.8	0.007	0.011	

10.11. LTE Band 17 (10MHz Bandwidth)

SAR for LTE Band 17 (Frequency Range: 704-716 MHz) is covered by LTE Band 12 (Frequency Range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

10.12. LTE Band 41 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	40620	2593.0	1	99	24.5	23.1	0.061	0.084	31
							50	24	23.5	22.2	0.044	0.060	
				Left Tilt	40620	2593.0	1	99	24.5	23.1	0.058	0.079	
							50	24	23.5	22.2	0.041	0.056	
				Right Touch	40620	2593.0	1	99	24.5	23.1	0.097	0.133	
							50	24	23.5	22.2	0.075	0.102	
				Right Tilt	40620	2593.0	1	99	24.5	23.1	0.045	0.062	
							50	24	23.5	22.2	0.035	0.047	
Body-worn	QPSK	OFF	15	Rear	40620	2593.0	1	99	24.5	23.1	0.129	0.176	32
							50	24	23.5	22.2	0.102	0.138	
				Front	40620	2593.0	1	99	24.5	23.1	0.074	0.101	
							50	24	23.5	22.2	0.061	0.083	
Hotspot	QPSK	OFF	10	Rear	40620	2593.0	1	99	24.5	23.1	0.239	0.327	33
							50	24	23.5	22.2	0.193	0.262	
				Front	40620	2593.0	1	99	24.5	23.1	0.128	0.175	
							50	24	23.5	22.2	0.110	0.149	
				Edge 2	40620	2593.0	1	99	24.5	23.1	0.152	0.208	
							50	24	23.5	22.2	0.125	0.169	
				Edge 3	40620	2593.0	1	99	24.5	23.1	0.076	0.104	
							50	24	23.5	22.2	0.061	0.083	

10.13. LTE Band 66 (20MHz Bandwidth)

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	OFF	0	Left Touch	132322	1745.0	1	0	24.5	22.7	0.080	0.121	34
							50	0	23.5	21.7	0.061	0.092	
				Left Tilt	132322	1745.0	1	0	24.5	22.7	0.037	0.056	
							50	0	23.5	21.7	0.027	0.041	
				Right Touch	132322	1745.0	1	0	24.5	22.7	0.045	0.068	
							50	0	23.5	21.7	0.034	0.052	
				Right Tilt	132322	1745.0	1	0	24.5	22.7	0.027	0.041	
							50	0	23.5	21.7	0.022	0.033	
Body-worn	QPSK	OFF	15	Rear	132322	1745.0	1	0	24.5	22.7	0.243	0.368	
							50	0	23.5	21.7	0.198	0.300	
				Front	132322	1745.0	1	0	24.5	22.7	0.270	0.409	35
							50	0	23.5	21.7	0.214	0.324	
Hotspot	QPSK	OFF	10	Rear	132072	1720.0	1	0	24.5	22.5	0.395	0.619	
					132322	1745.0	1	0	24.5	22.7	0.538	0.815	
							50	0	23.5	21.7	0.434	0.658	
					132572	1770.0	1	0	24.5	22.5	0.533	0.845	36
				Front	132322	1745.0	1	0	24.5	22.7	0.443	0.671	
							50	0	23.5	21.7	0.356	0.540	
				Edge 3	132322	1745.0	1	0	24.5	22.7	0.332	0.503	
							50	0	23.5	21.7	0.261	0.396	
				Edge 4	132322	1745.0	1	0	24.5	22.7	0.487	0.738	
							50	0	23.5	21.7	0.394	0.597	

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		10-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Product Specific 10g	QPSK	OFF	10	Rear	132322	1745.0	1	0	24.5	22.7	0.289	0.438	
							50	0	23.5	21.7	0.235	0.356	
			6	Front	132322	1745.0	1	0	24.5	22.7	0.632	0.958	
							50	0	23.5	21.7	0.512	0.776	
			10	Edge 3	132322	1745.0	1	0	24.5	22.7	0.172	0.261	
							50	0	23.5	21.7	0.135	0.205	
			0	Edge 4	132072	1720.0	1	0	24.5	22.5	1.440	2.256	
					132322	1745.0	1	0	24.5	22.7	1.510	2.288	37
							50	0	23.5	21.7	1.190	1.803	
					132572	1770.0	1	0	24.5	22.5	1.320	2.093	

Notes:

Refer to Main Sensor Triggering document for required test distances.

10.14. Wi-Fi (DTS Band)

When the 802.11b reported SAR of the highest measured maximum output power channel is ≤ 0.8 W/kg, no further SAR testing is required. If SAR is > 0.8 W/kg and ≤ 1.2 W/kg, SAR is required for the next highest measured output power channel. Finally, if SAR is > 1.2 W/kg, SAR is required for the third channel.

SAR testing is not required for OFDM mode(s) when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	802.11b 1 Mbps	ON	0	Left Touch	1	2412.0	99.65%	0.289	13.0	12.8			
				Left Tilt	1	2412.0	99.65%	0.245	13.0	12.8			
				Right Touch	1	2412.0	99.65%	0.467	13.0	12.8	0.273	0.287	38
				Right Tilt	1	2412.0	99.65%	0.381	13.0	12.8			
Body-worn	802.11b 1 Mbps	OFF	15	Rear	6	2437.0	99.65%	0.209	19.0	18.6	0.141	0.155	39
				Front	6	2437.0	99.65%	0.135	19.0	18.6			
Hotspot & Wi-Fi Direct	802.11b 1 Mbps	OFF	10	Rear	6	2437.0	99.65%	0.574	19.0	18.6	0.339	0.373	40
				Front	6	2437.0	99.65%	0.326	19.0	18.6			
				Edge 1	6	2437.0	99.65%	0.253	19.0	18.6			
				Edge 4	6	2437.0	99.65%	0.079	19.0	18.6			

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		10-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Product Specific 10g	802.11b 6 Mbps	OFF	0	Rear	6	2437.0	99.65%	5.361	19.0	18.6	1.030	1.133	41
				Front	6	2437.0	99.65%	3.250	19.0	18.6	0.786	0.865	
				Edge 1	6	2437.0	99.65%	1.580	19.0	18.6			
				Edge 4	6	2437.0	99.65%	0.267	19.0	18.6			

Adjusted SAR for OFDM Modes:

Power Back-off	802.11b Max. Power		802.11g Max. Power		802.11n HT20 Max. Power		Highest Reported SAR for 802.11b (W/kg)	Adjusted SAR for 802.11g (W/kg)	Adjusted SAR for 802.11n HT20 (W/kg)
	dBm	mW	dBm	mW	dBm	mW			
ON	13.0	20	13.0	20	13.0	20	0.287	0.287	0.287
OFF	19.0	79	17.0	50	17.0	50	0.373	0.235	0.235

Note(s):

Adjusted SAR for OFDM modes is < 1.2 W/kg, therefore SAR testing is not required for OFDM modes.

Product Specific 10g Adjusted SAR for OFDM Modes:

Power Back-off	802.11b Max. Power		802.11g Max. Power		802.11n HT20 Max. Power		Highest Reported SAR for 802.11b (W/kg)	Adjusted SAR for 802.11g (W/kg)	Adjusted SAR for 802.11n HT20 (W/kg)
	dBm	mW	dBm	mW	dBm	mW			
OFF	19.0	79	17.0	50	17.0	50	1.133	0.715	0.715

Note(s):

Product Specific 10g Adjusted SAR for OFDM modes is < 3.0 W/kg, therefore SAR testing is not required for OFDM modes.

10.15. Wi-Fi (U-NII Band)

UNII-1 & 2A

When the specified maximum output power is the same for both UNII band 1 and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is

- o ≤ 1.2 or 3 W/kg (1g and 10g respectively), SAR is not required for UNII band 1
- o > 1.2 or 3 W/kg (1g and 10g respectively), both bands should be tested independently for SAR.

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Wi-Fi Direct	802.11a 6 Mbps	OFF	10	Rear	48	5240.0	98.35%	0.327	16.5	16.2			
				Front	48	5240.0	98.35%	0.339	16.5	16.2			
				Edge 1	48	5240.0	98.35%	0.662	16.5	16.2	0.326	0.355	42
				Edge 4	48	5240.0	98.35%	0.024	16.5	16.2			

Note(s):

Wi-Fi Direct is supported in U-NII Band 1, therefore it was evaluated separately.

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	802.11ac VHT80	ON	0	Left Touch	58	5290.0	92.74%	0.454	11.0	10.8			
				Left Tilt	58	5290.0	92.74%	0.491	11.0	10.8			
				Right Touch	58	5290.0	92.74%	0.580	11.0	10.8	0.265	0.299	
				Right Tilt	58	5290.0	92.74%	0.825	11.0	10.8	0.308	0.348	43
Body-worn	802.11a 6 Mbps	OFF	15	Rear	64	5320.0	98.35%	0.078	16.5	16.4			
				Front	64	5320.0	98.35%	0.108	16.5	16.4	0.049	0.051	44

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		10-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Product Specific 10g	802.11a 6 Mbps	OFF	0	Rear	64	5320.0	98.35%	5.230	16.5	16.4	0.539	0.561	45
				Front	64	5320.0	98.35%	3.850	16.5	16.4			
				Edge 1	64	5320.0	98.35%	2.760	16.5	16.4			
				Edge 4	64	5320.0	98.35%	0.117	16.5	16.4			

Note(s):

- For Head and Body-worn RF Exposure Conditions, The Highest Reported 1-g SAR for U-NII 2A mode is < 1.2 W/kg, therefore SAR testing is not required for U-NII 1 mode.
- For Product Specific 10g RF Exposure Condition, The Highest Reported 10-g SAR for U-NII 2A mode is < 3.0 W/kg, therefore SAR testing is not required for U-NII 1 mode.

U-NII 2C

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	802.11ac VHT80	ON	0	Left Touch	122	5610.0	92.74%	0.206	11.0	10.5			
				Left Tilt	122	5610.0	92.74%	0.252	11.0	10.5			
				Right Touch	122	5610.0	92.74%	0.265	11.0	10.5			
				Right Tilt	122	5610.0	92.74%	0.430	11.0	10.5	0.115	0.139	46
Body-worn	802.11a 6 Mbps	OFF	15	Rear	100	5500.0	98.35%	0.047	16.5	16.0			
				Front	100	5500.0	98.35%	0.083	16.5	16.0	0.037	0.042	47

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		10-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Product Specific 10g	802.11a 6 Mbps	OFF	0	Rear	100	5500.0	98.35%	2.640	16.5	16.0			
				Front	100	5500.0	98.35%	2.310	16.5	16.0			
				Edge 1	100	5500.0	98.35%	3.100	16.5	16.0	0.399	0.455	48
				Edge 4	100	5500.0	98.35%	0.080	16.5	16.0			

U-NII 3

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
									Tune-up limit	Meas.	Meas.	Scaled	
Head	802.11ac VHT80	ON	0	Left Touch	155	5775	92.74%	0.301	11.0	10.5			
				Left Tilt	155	5775	92.74%	0.375	11.0	10.5			
				Right Touch	155	5775	92.74%	0.681	11.0	10.5	0.270	0.327	
				Right Tilt	155	5775	92.74%	0.897	11.0	10.5	0.338	0.409	49
Body-worn	802.11a 6 Mbps	OFF	15	Rear	165	5825	98.35%	0.051	16.5	15.1			
				Front	165	5825	98.35%	0.075	16.5	15.1	0.043	0.060	50
Hotspot & Wi-Fi Direct	802.11a 6 Mbps	OFF	10	Rear	165	5825	98.35%	0.141	16.5	15.1			
				Front	165	5825	98.35%	0.135	16.5	15.1			
				Edge 1	165	5825	98.35%	0.457	16.5	15.1	0.191	0.268	51
				Edge 4	165	5825	98.35%	0.013	16.5	15.1			

10.16. Bluetooth

RF Exposure Conditions	Mode	Power Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Duty Cycle	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	GFSK DH5	OFF	0	Left Touch	39	2441	76.50%	10.0	8.3	<0.10	<0.10	
				Left Tilt	39	2441	76.50%	10.0	8.3	<0.10	<0.10	
				Right Touch	39	2441	76.50%	10.0	8.3	<0.10	<0.10	
				Right Tilt	39	2441	76.50%	10.0	8.3	<0.10	<0.10	52

Note(s):

Body-worn, BT Tethering Mode and Product Specific 10g qualify for SAR Test Exclusion. Refer to §10.18.

10.17. Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{(\text{GHz})}/x}]$ W/kg for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Body-worn and BT Tethering:

RF Air interface	RF Exposure Conditions	Frequency (GHz)	Max. tune-up tolerance Power		Min. test separation distance (mm)	SAR test exclusion Result*	Estimated 1-g SAR (W/kg)
			(dBm)	(mW)			
Bluetooth	Body-worn	2.480	10.0	10	15	1.0	0.140
Bluetooth	Tethering	2.480	10.0	10	10	1.6	0.210

Conclusion:

*: The computed value is ≤ 3 ; therefore, this qualifies for Standalone SAR test exclusion.

Product Specific 10g:

RF Air interface	RF Exposure Conditions	Frequency (GHz)	Max. tune-up tolerance Power		Min. test separation distance (mm)	SAR test exclusion Result*	Estimated 10-g SAR (W/kg)
			(dBm)	(mW)			
Bluetooth	Product Specific 10g	2.480	10.0	10	0	3.1	0.168

Conclusion:

*: The computed value is ≤ 7.5 ; therefore, this qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg ($\sim 10\%$ from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)
700	LTE Band 12	Hotspot	Rear	No	0.067
	LTE Band 13	Hotspot	Rear	No	0.087
850	GSM 850	Hotspot	Rear	No	0.123
	WCDMA Band V	Hotspot	Rear	No	0.177
	LTE Band 5	Hotspot	Rear	No	0.393
1700	WCDMA Band IV	Hotspot	Rear	No	0.487
	LTE Band 66	Hotspot	Rear	No	0.538
1900	GSM 1900	Hotspot	Front	No	0.152
	WCDMA Band II	Hotspot	Rear	No	0.250
	LTE Band 2	Hotspot	Rear	No	0.245
2400	Wi-Fi 802.11b	Hotspot & Wi-Fi Direct	Rear	No	0.339
	BT	Head	Right Tilt	No	< 0.001
2600	LTE Band 41	Hotspot	Rear	No	0.239
5200	Wi-Fi 802.11a	Wi-Fi Direct	Edge 1	No	0.326
5300	Wi-Fi 802.11ac	Head	Right Tilt	No	0.308
5500	Wi-Fi 802.11ac	Head	Right Tilt	No	0.115
5800	Wi-Fi 802.11ac	Head	Right Tilt	No	0.338

Note(s):

Repeated Measurement is not required since measured SAR is $< 0.8 \text{ W/kg}$.

Product Specific 10g SAR:

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)
1700	WCDMA Band IV	Product Specific 10g	Edge 4	No	1.470
	LTE Band 66	Product Specific 10g	Edge 4	No	1.510
1900	WCDMA Band II	Product Specific 10g	Edge 4	No	0.740
	LTE Band 2	Product Specific 10g	Edge 4	No	0.712
2400	Wi-Fi 802.11b	Product Specific 10g	Rear	No	1.030
5300	Wi-Fi 802.11a	Product Specific 10g	Rear	No	0.539
5500	Wi-Fi 802.11a	Product Specific 10g	Edge 1	No	0.399

Note(s):

Repeated Measurement is not required since measured SAR is $< 2.0 \text{ W/kg}$.

12. Simultaneous Transmission Conditions

Simultaneous Transmission Scenarios

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Notes
1	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	
2	GSM voice + 5 GHz Wi-Fi	Yes	Yes	N/A	
3	GSM voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	^Bluetooth Tethering is considered
4	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	
5	UMTS + 5 GHz Wi-Fi	Yes	Yes	Yes	
6	UMTS + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	^Bluetooth Tethering is considered
7	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	
8	LTE + 5 GHz Wi-Fi	Yes	Yes	Yes	
9	LTE + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	^Bluetooth Tethering is considered
10	GPRS/EDGE + 2.4 GHz Wi-Fi	N/A	N/A	Yes	
11	GPRS/EDGE + 5 GHz Wi-Fi	N/A	N/A	Yes	
12	GPRS/EDGE + 2.4 GHz Bluetooth	N/A	N/A	Yes^	

12.1. Simultaneous transmission SAR test exclusion considerations

KDB 447498 D01 General RF Exposure Guidance provides two procedures for determining simultaneous transmission SAR test exclusion: Sum of SAR and SAR to Peak Location Ratio (SPLSR)

12.1.1. Sum of SAR

To qualify for simultaneous transmission SAR test exclusion based upon Sum of SAR the sum of the reported standalone SARs for all simultaneously transmitting antennas shall be below the applicable standalone SAR limit. If the sum of the SARs is above the applicable limit then simultaneous transmission SAR test exclusion may still apply if the requirements of the SAR to Peak Location Ratio (SPLSR) evaluation are met.

12.2. Sum of the SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)				Σ 1-g SAR (W/kg)		
		WWAN ①	DTS ②	U-NII ③	BT	WWAN + DTS +	WWAN + U-NII +	WWAN + BT +
Head	Left Touch	0.121	0.287	0.327	0.100	0.408	0.448	0.221
	Left Tilt	0.079	0.287	0.327	0.100	0.366	0.406	0.179
	Right Touch	0.133	0.287	0.327	0.100	0.420	0.460	0.233
	Right Tilt	0.062	0.287	0.409	0.100	0.349	0.471	0.162
Body-worn	Rear	0.368	0.155	0.060	0.140	0.523	0.428	0.508
	Front	0.409	0.155	0.060	0.140	0.564	0.469	0.549
Hotspot, Wi-Fi Direct & BT Tethering	Rear	0.845	0.373	0.355	0.210	1.218	1.200	1.055
	Front	0.671	0.373	0.355	0.210	1.044	1.026	0.881
	Edge 1		0.373	0.355	0.210			0.210
	Edge 2	0.208						
	Edge 3	0.503						
	Edge 4	0.738	0.373	0.355	0.210	1.111	1.093	0.948

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1-g SAR is < 1.6 W/kg.

12.3. Sum of the Product Specific 10g SAR for WWAN & Wi-Fi & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)				Σ 10-g SAR (W/kg)		
		WWAN ①	DTS ②	U-NII ③	BT	WWAN + DTS +	WWAN + U-NII +	WWAN + BT +
Product Specific 10g	Rear	0.438	1.133	0.561	0.168	1.571	0.999	0.606
	Front	0.958	0.865	0.455	0.168	1.823	1.413	1.126
	Edge 1		0.865	0.455	0.168			
	Edge 3	0.261						
	Edge 4	2.288	0.865	0.455	0.168	3.153	2.743	2.456

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 10-g SAR is < 4.0 W/kg.

Appendixes

Refer to separated files for the following appendixes.

12440598-S1V1 Appendix A: SAR Setup Photos

12440598-S1V2 Appendix B: SAR System Check Plots

12440598-S1V2 Appendix C: Highest SAR Test Plots

12440598-S1V1 Appendix D: SAR Liquid Tissue Ingredients

12440598-S1V2 Appendix E: SAR Probe Calibration Certificates

12440598-S1V2 Appendix F: SAR Dipole Calibration Certificates

END OF REPORT