


Band 41  
10MHz

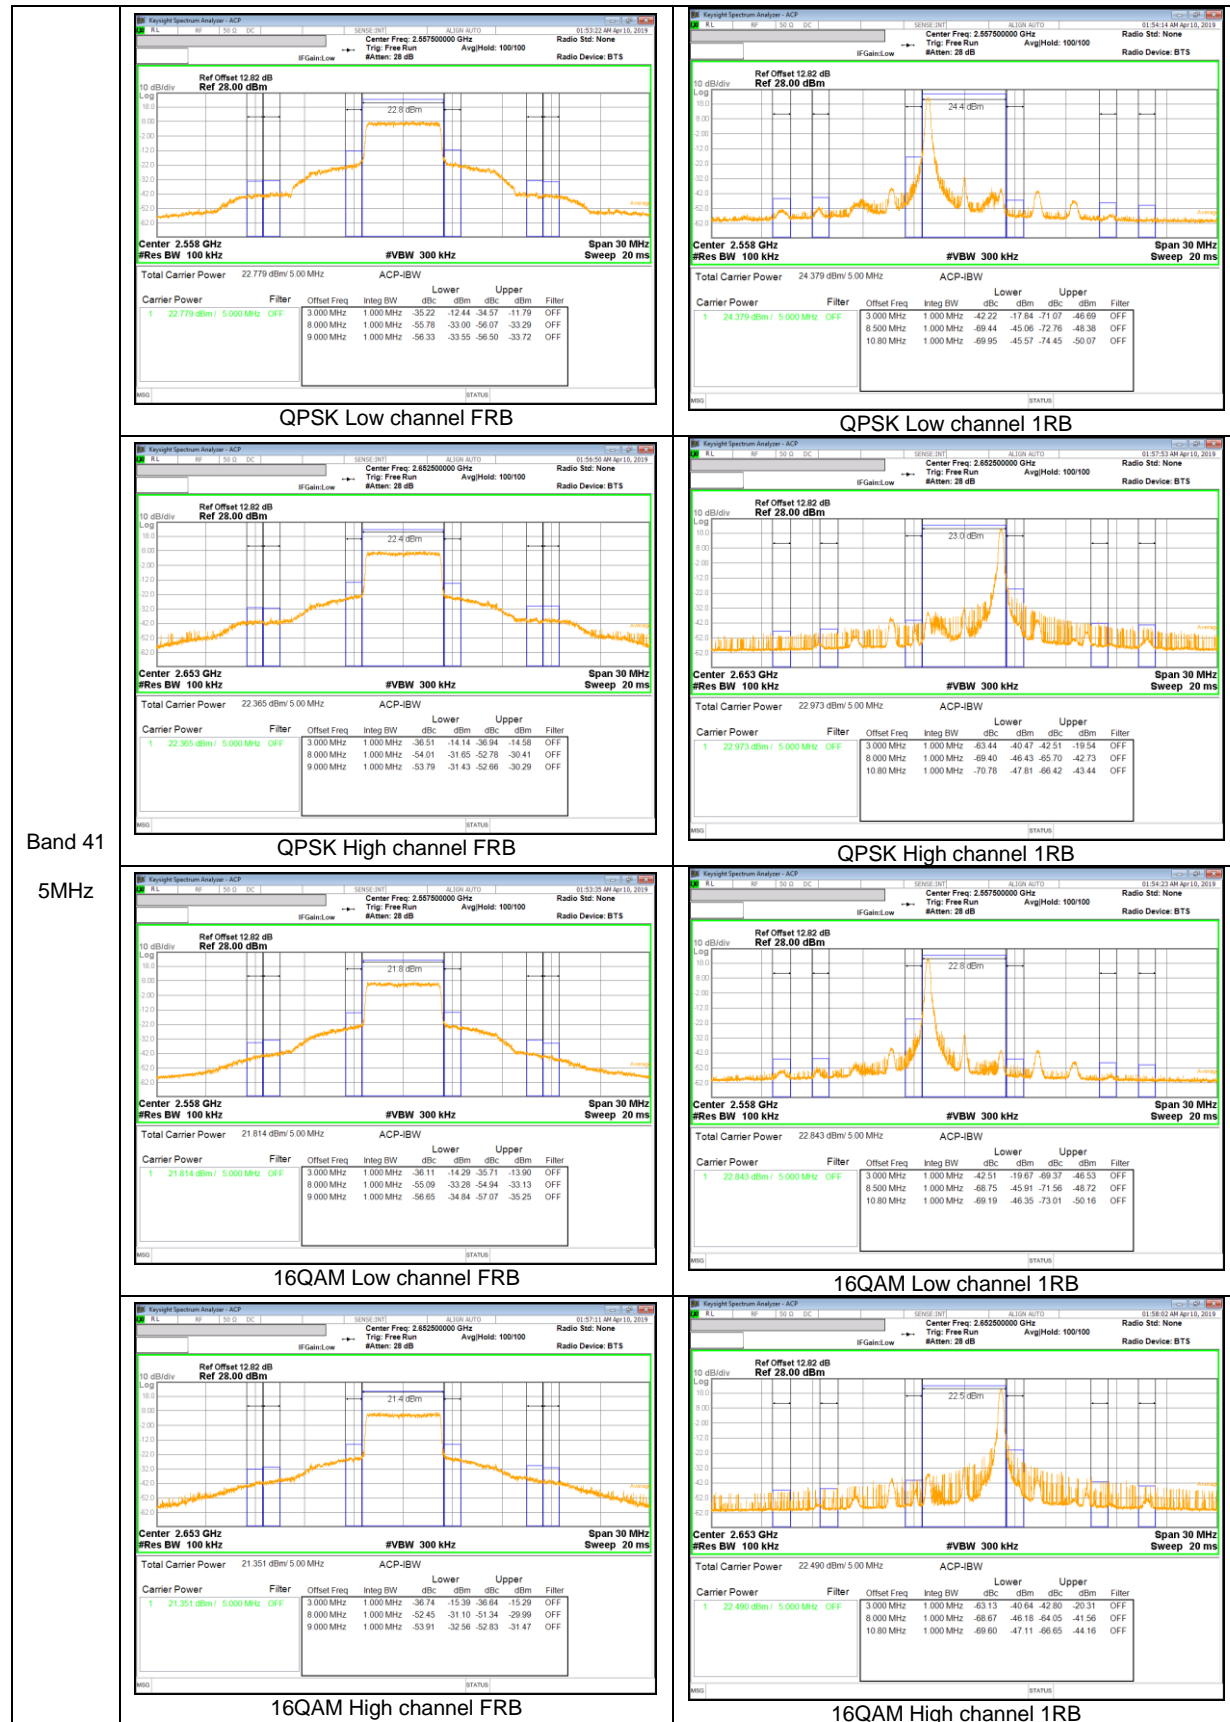

**LTE Band 17**

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

### 9.3. OUT OF BAND EMISSIONS

#### RULE PART(S)

FCC: §2.1051, §22.901, §22.917 and §27.53

#### LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

Part 27.53:

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB.

(h) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

(m) (4) For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

#### TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

- a) Set the RBW = 100KHz for emission below 1GHz and 1MHz for emissions above 1GHz (Tests were performed 1MHz [Worst case], to sweep 1 time for all frequency range)
- b) Set VBW  $\geq 3 \times$  RBW;
- c) Set span  $\geq 1.5$  times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points = Max (40001);
- g) Trace mode = average(WCDMA, LTE), Maxhold(GSM, LTE Band41);


#### RESULTS

See the following pages.

NOTE : Please refer to section 5.4 for bandwidth and RB setting about LTE bands.


### 9.3.1. OUT OF BAND EMISSIONS RESULT

#### GSM 850

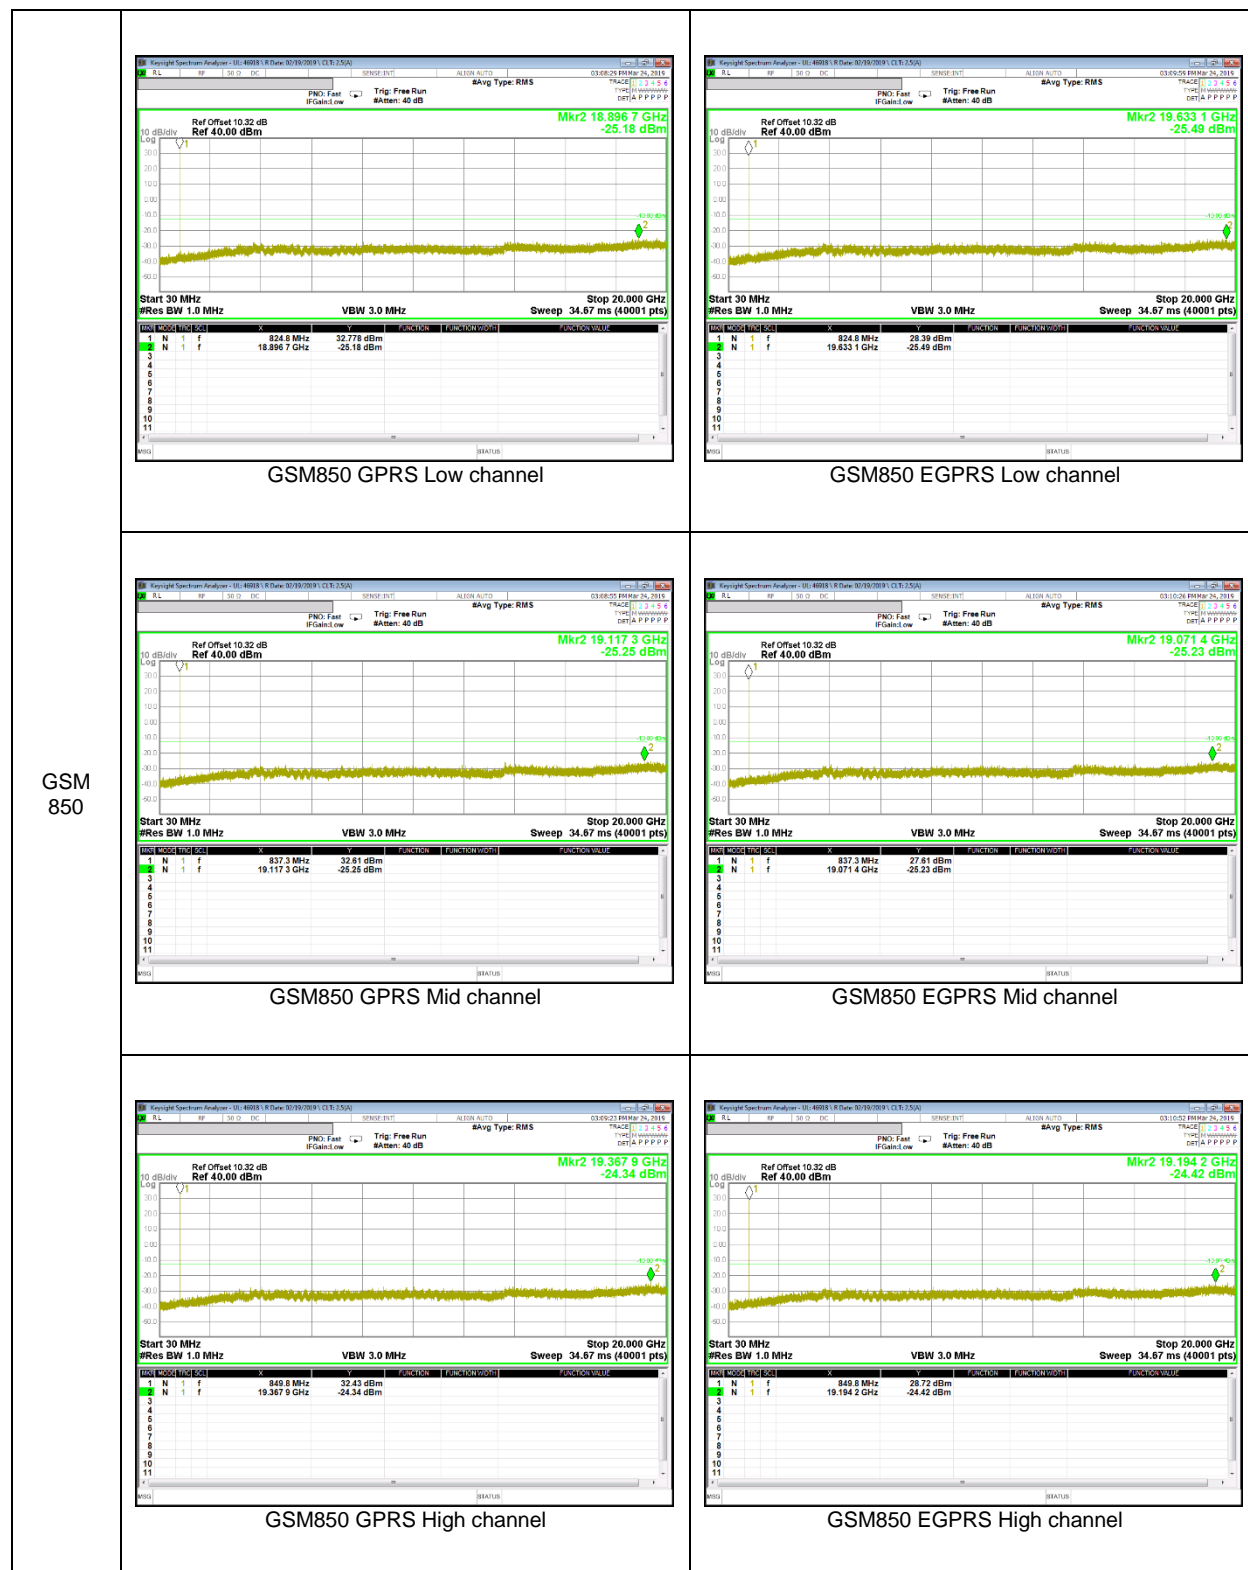

GSM  
850


**GSM 1900**

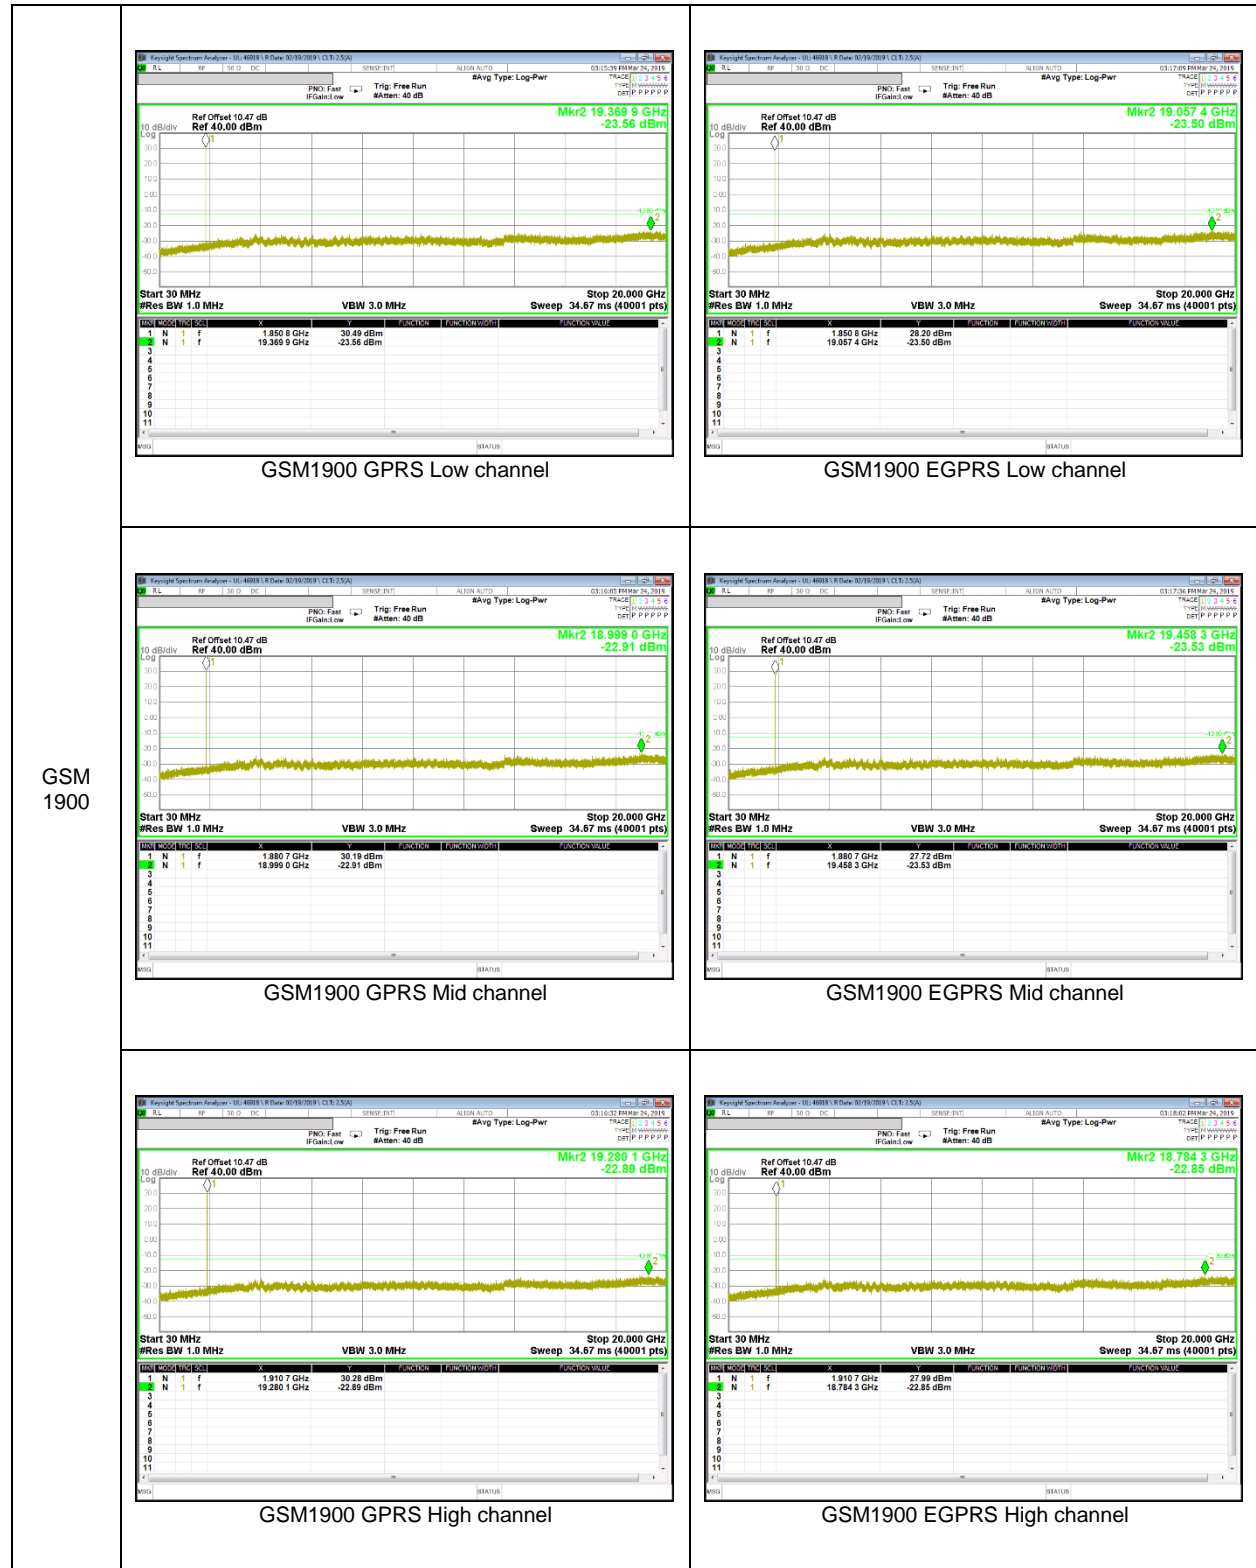

CDMA



WCDMA Band 5

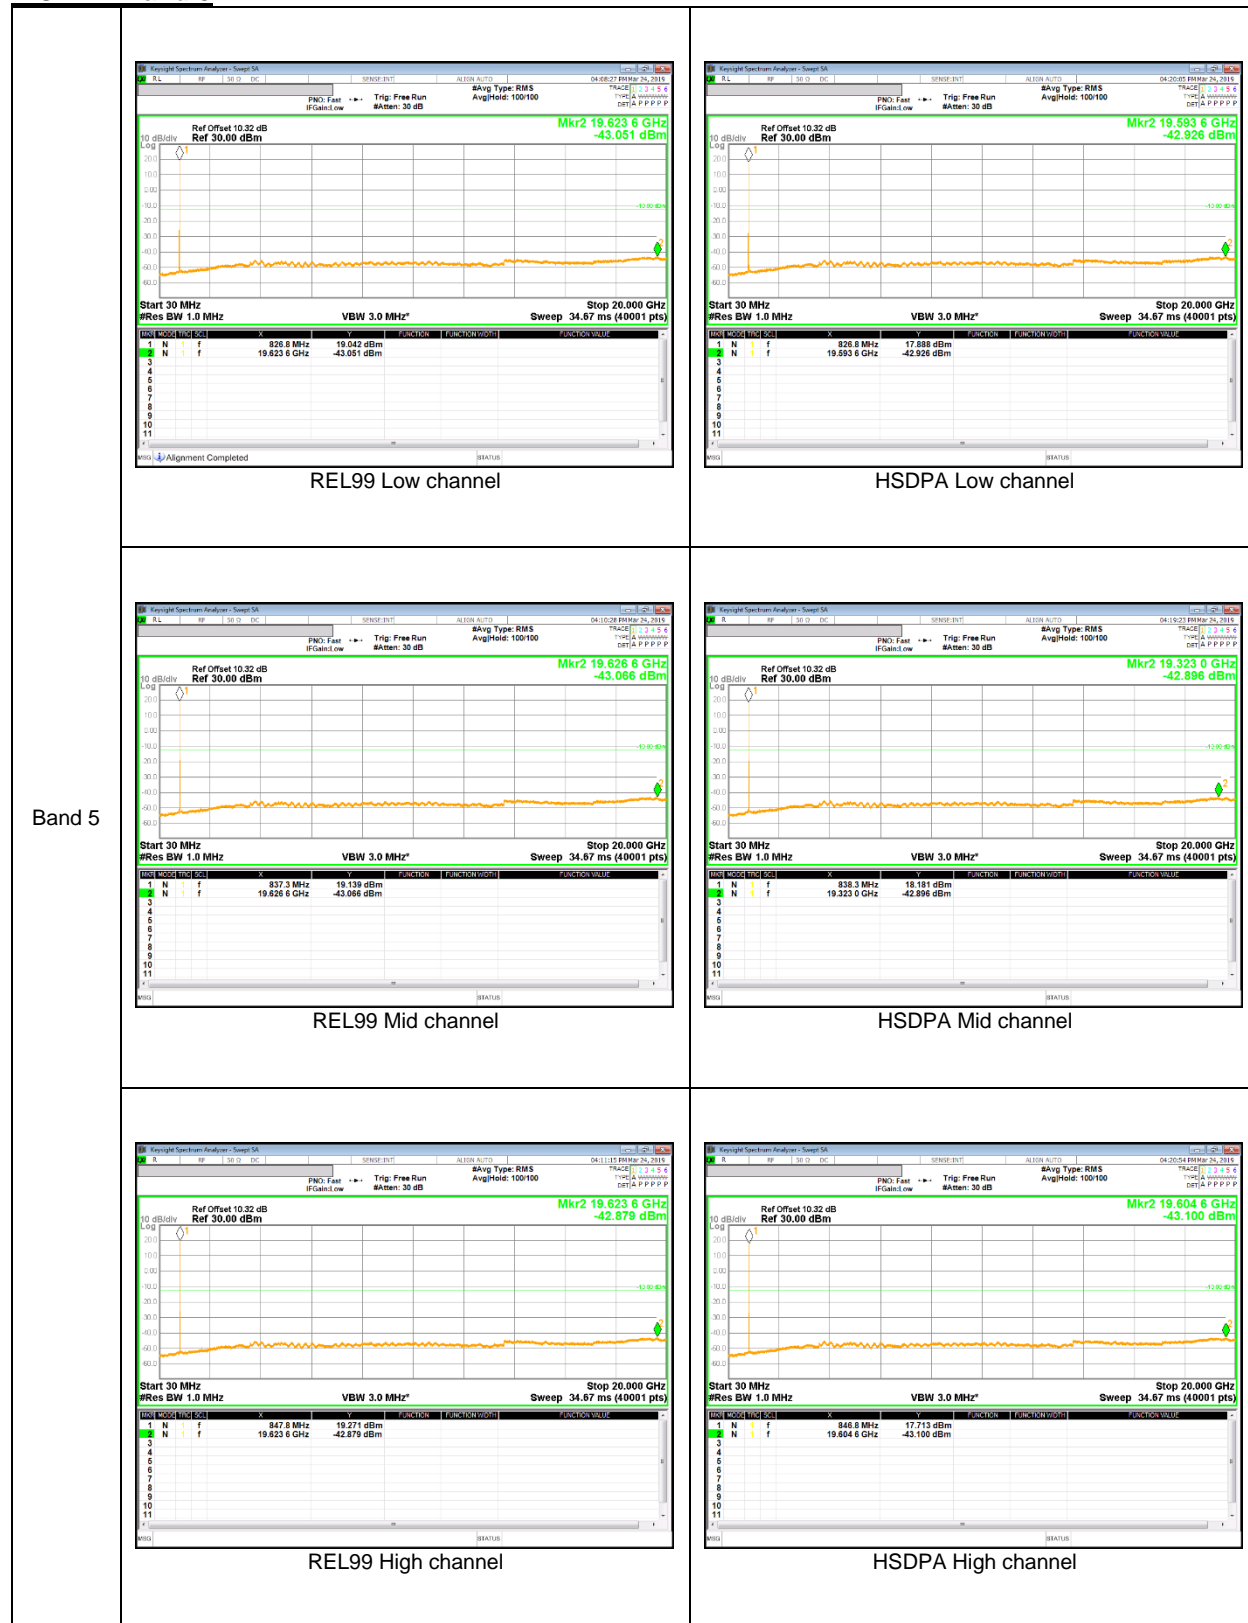

Band 5




**WCDMA Band 2**



**LTE Band 4**




**LTE Band 5**

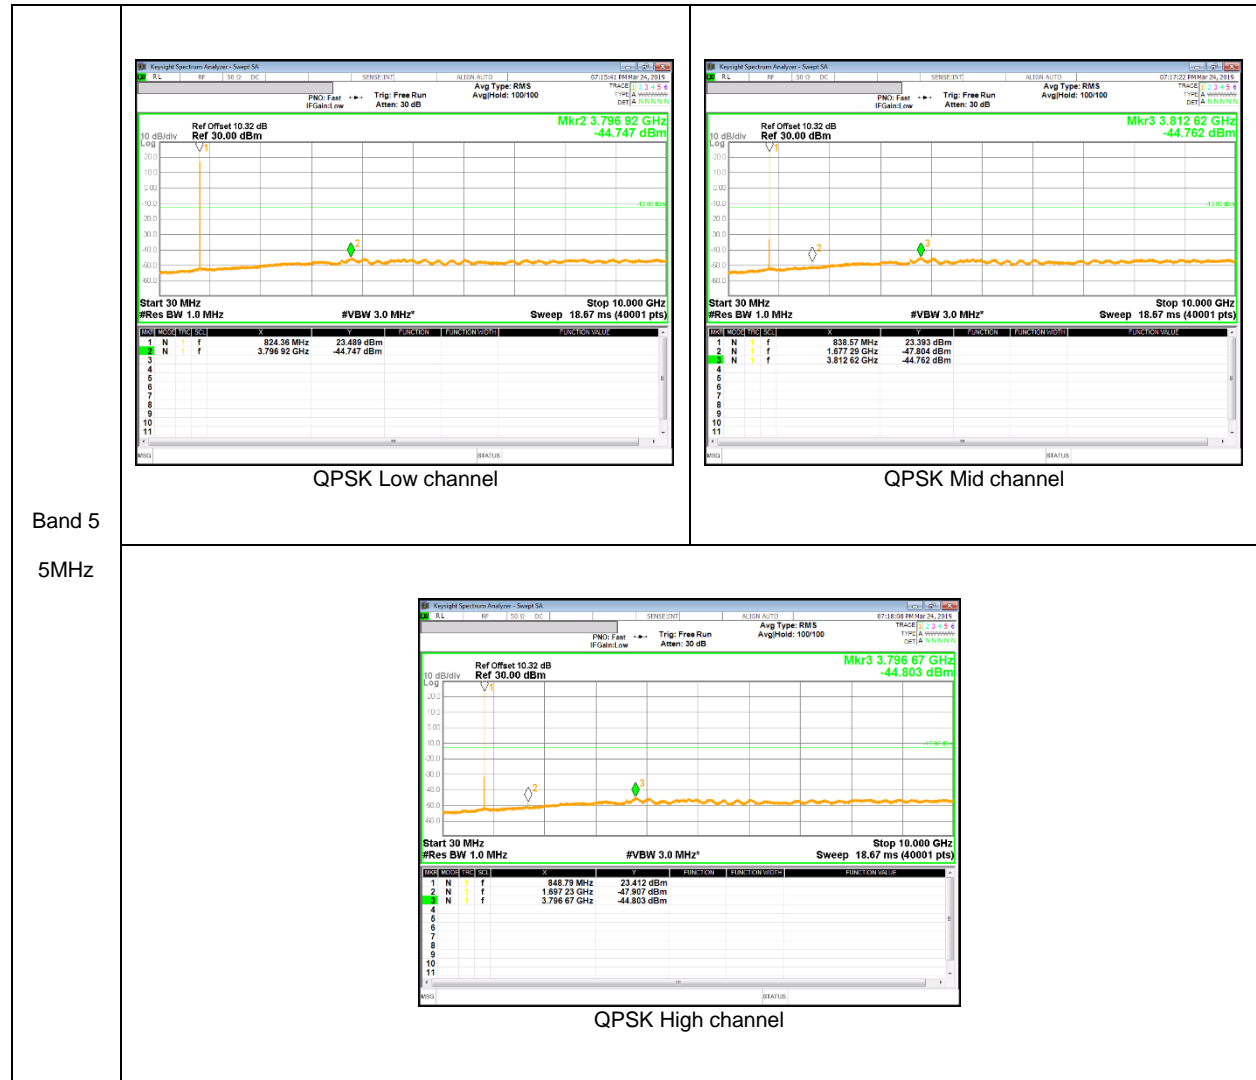

**LTE Band 12**



**LTE Band 41**

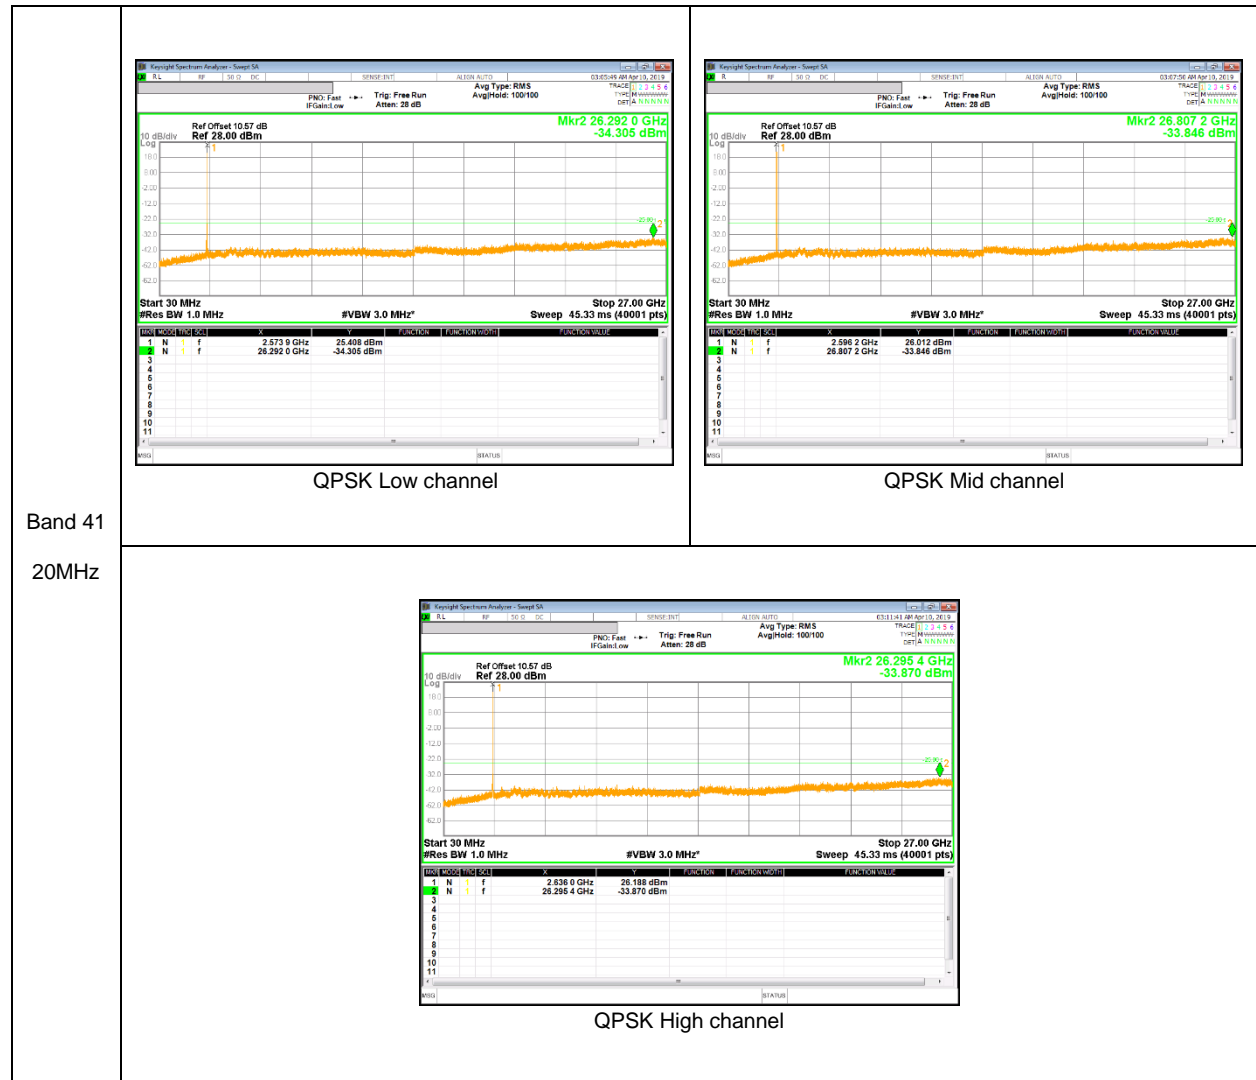

## 9.4. FREQUENCY STABILITY

### RULE PART(S)

FCC: §2.1055, §22.355, §24.235 and §27.54

### LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of  $\pm 2.5$  ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01

### RESULTS

See the following pages.

**NOTE** : Test were performed each lowest or highest frequency on the modulation condition of more wide bandwidth.(Please refer to section 9.1.1 OBW results)

### 9.4.1. FREQUENCY STABILITY RESULTS

#### GSM 850, Channel 128/251, Frequency 824.2/848.8 MHz

Reference Frequency : GSM850 Low Channel 824.2 MHz / High Channel 848.8 MHz @ 20°C							
Limit: +/- 2.5 ppm =		Low Channel	2060.500	Hz	High Channel	2122.000	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.80	50	824.19998558	-0.012	848.79998428	-0.009	2.5	
3.80	40	824.19997546	0.000	848.79997913	-0.003	2.5	
3.80	30	824.19998497	-0.011	848.79998433	-0.009	2.5	
<b>3.80</b>	<b>20</b>	<b>824.19997570</b>	<b>0.000</b>	<b>848.79997672</b>	<b>0.000</b>	<b>2.5</b>	
3.80	10	824.19998573	-0.012	848.79997590	0.001	2.5	
3.80	0	824.19998200	-0.008	848.79997879	-0.002	2.5	
3.80	-10	824.19998366	-0.010	848.79998277	-0.007	2.5	
3.80	-20	824.19998496	-0.011	848.79998102	-0.005	2.5	
3.80	-30	824.19997585	0.000	848.79998286	-0.007	2.5	

Reference Frequency : GSM850 Low Channel 824.2 MHz / High Channel 848.8 MHz @ 20°C							
Limit: +/- 2.5 ppm =		Low Channel	2060.500	Hz	High Channel	2122.000	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.80	20	824.19997570	0	848.79997672	0	2.5	
4.35	20	824.19997851	-0.003	848.79998436	-0.009	2.5	
3.40	20	824.19998480	-0.011	848.79998587	-0.011	2.5	

#### GSM 1900, Channel 512/810, Frequency 1850.0/1910.0 MHz

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1850.0756	1909.9244		
Extreme (50C)		1850.0755	1909.9244	-21.0	-0.011
Extreme (40C)		1850.0755	1909.9244	-29.3	-0.016
Extreme (30C)		1850.0755	1909.9244	-23.9	-0.013
Extreme (10C)		1850.0755	1909.9244	-22.0	-0.012
Extreme (0C)		1850.0755	1909.9244	-27.5	-0.015
Extreme (-10C)		1850.0755	1909.9244	-28.0	-0.015
Extreme (-20C)		1850.0755	1909.9244	-23.2	-0.012
Extreme (-30C)		1850.0755	1909.9244	-29.6	-0.016
20C		15%	1850.0755	1909.9244	-25.4
	-15%	1850.0755	1909.9244	-28.4	-0.015
	End Point	1850.0755	1909.9244	-29.3	-0.016

**CDMA BC0 1xRTT**

Reference Frequency : CDMA BC0 Low Channel 824.7 MHz / High Channel 848.31 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2061.750	Hz	High Channel	2120.775	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.80	50	824.69998169	0.000	848.30998534	-0.006	2.5	
3.80	40	824.69998200	0.000	848.30998272	-0.003	2.5	
3.80	30	824.69998355	-0.002	848.30998285	-0.003	2.5	
<b>3.80</b>	<b>20</b>	<b>824.69998195</b>	<b>0.000</b>	<b>848.30998057</b>	<b>0.000</b>	<b>2.5</b>	
3.80	10	824.69998243	-0.001	848.30998426	-0.004	2.5	
3.80	0	824.69999042	-0.010	848.30998056	0.000	2.5	
3.80	-10	824.69998677	-0.006	848.30999003	-0.011	2.5	
3.80	-20	824.69998175	0.000	848.30998315	-0.003	2.5	
3.80	-30	824.69998505	-0.004	848.30998044	0.000	2.5	

Reference Frequency : CDMA BC0 Low Channel 824.7 MHz / High Channel 848.31 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2061.750	Hz	High Channel	2120.775	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.80	20	824.69998195	0	848.30998057	0	2.5	
4.35	20	824.69998781	-0.007	848.30998983	-0.011	2.5	
3.40	20	824.69998019	0.002	848.30998686	-0.007	2.5	

**WCDMA Band 5 (Lowest Frequency: Rel. 99 / Highest Frequency: HSDPA)**

Reference Frequency : WCDMA Band 5 Low Channel 826.4 MHz / High Channel 846.6 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2066.000	Hz	High Channel	2116.500	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.80	50	826.39998158	-0.004	846.59997597	0.007	2.5	
3.80	40	826.39997846	0.000	846.59997515	0.008	2.5	
3.80	30	826.39998423	-0.007	846.59998568	-0.004	2.5	
<b>3.80</b>	<b>20</b>	<b>826.39997858</b>	<b>0.000</b>	<b>846.59998212</b>	<b>0.000</b>	<b>2.5</b>	
3.80	10	826.39997768	0.001	846.59998393	-0.002	2.5	
3.80	0	826.39997848	0.000	846.59998166	0.001	2.5	
3.80	-10	826.39998182	-0.004	846.59998188	0.000	2.5	
3.80	-20	826.39997589	0.003	846.59998303	-0.001	2.5	
3.80	-30	826.39997858	0.000	846.59997623	0.007	2.5	

Reference Frequency : WCDMA Band 5 Low Channel 826.4 MHz / High Channel 846.6 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2066.000	Hz	High Channel	2116.500	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.80	20	826.39997858	0	846.59998212	0	2.5	
4.35	20	826.39998217	-0.004	846.59998463	-0.003	2.5	
3.40	20	826.39998103	-0.003	846.59997653	0.007	2.5	



**WCDMA Band 2 (Lowest Frequency: HSDPA / Highest Frequency: Rel. 99)**

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1852.3979	1907.6021		
Extreme (50C)		1852.3979	1907.6020	-26.3	-0.014
Extreme (40C)		1852.3979	1907.6020	-21.4	-0.011
Extreme (30C)		1852.3979	1907.6020	-26.7	-0.014
Extreme (10C)		1852.3979	1907.6020	-26.6	-0.014
Extreme (0C)		1852.3979	1907.6020	-21.9	-0.012
Extreme (-10C)		1852.3979	1907.6020	-22.8	-0.012
Extreme (-20C)		1852.3979	1907.6020	-27.6	-0.015
Extreme (-30C)		1852.3979	1907.6020	-26.2	-0.014
20C	15%	1852.3979	1907.6020	-30.0	-0.016
	-15%	1852.3979	1907.6020	-23.5	-0.013
	End Point	1852.3979	1907.6020	-23.6	-0.013

**LTE Band 4 (QPSK)**

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1852.3995	1907.6005		
Extreme (50C)		1852.3994	1907.6005	-22.7	-0.013
Extreme (40C)		1852.3994	1907.6005	-23.1	-0.013
Extreme (30C)		1852.3994	1907.6005	-29.6	-0.017
Extreme (10C)		1852.3994	1907.6005	-22.8	-0.013
Extreme (0C)		1852.3994	1907.6005	-19.8	-0.011
Extreme (-10C)		1852.3994	1907.6005	-21.5	-0.012
Extreme (-20C)		1852.3994	1907.6005	-28.1	-0.016
Extreme (-30C)		1852.3994	1907.6005	-22.2	-0.013
20C	15%	1852.3994	1907.6005	-24.2	-0.014
	-15%	1852.3994	1907.6005	-24.0	-0.014
	End Point	1852.3994	1907.6005	-29.1	-0.017

**LTE Band 5 (QPSK)**

Reference Frequency : LTE Band 5 Low Channel 824.7 MHz / High Channel 848.3 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2061.750	Hz	High Channel	2120.750	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse					Limit [ppm]
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.80	50	824.69997619	0.010	848.29998417	-0.004	2.5	
3.80	40	824.69997824	0.008	848.29997835	0.003	2.5	
3.80	30	824.69997933	0.007	848.29998172	-0.001	2.5	
<b>3.80</b>	<b>20</b>	<b>824.69998483</b>	<b>0.000</b>	<b>848.29998070</b>	<b>0.000</b>	<b>2.5</b>	
3.80	10	824.69998029	0.006	848.29997540	0.006	2.5	
3.80	0	824.69998482	0.000	848.29998386	-0.004	2.5	
3.80	-10	824.69998162	0.004	848.29998592	-0.006	2.5	
3.80	-20	824.69998545	-0.001	848.29998301	-0.003	2.5	
3.80	-30	824.69998490	0.000	848.29997820	0.003	2.5	

Reference Frequency : LTE Band 5 Low Channel 824.7 MHz / High Channel 848.3 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2061.750	Hz	High Channel	2120.750	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse					Limit [ppm]
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.80	20	824.69998483	0	848.29998070	0	2.5	
4.35	20	824.69998369	0.001	848.29998479	-0.005	2.5	
3.40	20	824.69997626	0.010	848.29997603	0.006	2.5	

**LTE Band 12 (QPSK)**

Limit		699	716	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	699.6995	715.3005		
Extreme (50C)		699.6994	715.3005	-12.9	-0.018
Extreme (40C)		699.6994	715.3005	-16.4	-0.023
Extreme (30C)		699.6994	715.3005	-15.4	-0.022
Extreme (10C)		699.6994	715.3005	-9.1	-0.013
Extreme (0C)		699.6994	715.3005	-9.7	-0.014
Extreme (-10C)		699.6994	715.3005	-10.6	-0.015
Extreme (-20C)		699.6994	715.3005	-13.6	-0.019
Extreme (-30C)		699.6994	715.3005	-16.4	-0.023
20C		15%	699.6994	715.3005	-13.3
	-15%	699.6994	715.3005	-17.4	-0.025
	End Point	699.6994	715.3005	-10.4	-0.015

**LTE Band 41 (Lowest Frequency: QPSK / Highest Frequency: 16QAM)**

Limit		2555	2655	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	2498.4978	2687.5023		
Extreme (50C)		2498.4977	2687.5022	-28.9	-0.011
Extreme (40C)		2498.4977	2687.5022	-31.7	-0.012
Extreme (30C)		2498.4977	2687.5022	-33.4	-0.013
Extreme (10C)		2498.4977	2687.5022	-24.1	-0.009
Extreme (0C)		2498.4977	2687.5022	-25.4	-0.010
Extreme (-10C)		2498.4977	2687.5022	-34.2	-0.013
Extreme (-20C)		2498.4977	2687.5022	-26.4	-0.010
Extreme (-30C)		2498.4977	2687.5022	-24.2	-0.009
20C		15%	2498.4977	2687.5022	-24.3
	-15%	2498.4977	2687.5022	-32.5	-0.012
	End Point	2498.4977	2687.5022	-31.1	-0.012

**LTE Band 17**

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

## 10. RADIATED TEST RESULTS

### 10.1. RADIATED POWER (ERP & EIRP)

#### RULE PART(S)

FCC: §2.1046, §22.913, §24.232 and §27.50

#### LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50:

(c) (10) - Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d) (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

#### TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.17; ESU40 setting reference to 971168 D01 v03r01

For radiated output power measurement with a ESU40:

a) Set the RBW  $\geq$  OBW; b) Set VBW  $\geq$  3  $\times$  RBW; c) Set span  $\geq$  2  $\times$  RBW; d) Sweep time = auto couple; e) Detector = rms; f) Ensure that the number of measurement points  $\geq$  span/RBW; g) Trace mode = max hold(GSM, WCDMA), average(LTE);

#### TEST RESULTS

### 10.1.1. ERP/EIRP Results

#### GSM

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
GSM850	GPRS	512	824.2	25.03	318.42
		661	836.6	25.49	354.00
		810	848.8	24.65	291.74
	EGPRS	512	824.2	20.09	102.09
		661	836.6	19.34	85.90
		810	848.8	19.21	83.37
GSM1900	GPRS	512	1850.2	27.03	504.66
		661	1880	27.27	533.33
		810	1909.8	26.06	403.65
	EGPRS	512	1850.2	23.09	203.70
		661	1880	23.53	225.42
		810	1909.8	22.87	193.64

#### WCDMA

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
Band 5	REL99	4132	826.4	<b>15.39</b>	34.59
		4183	836.6	14.99	<b>31.55</b>
		4233	846.6	14.21	26.36
	HSDPA	4132	826.4	<b>14.17</b>	26.12
		4183	836.6	13.77	<b>23.82</b>
		4233	846.6	13.84	24.21
Band 2	REL99	9262	1852.4	18.98	79.07
		9400	1880.0	<b>20.03</b>	<b>100.69</b>
		9538	1907.6	18.73	74.64
	HSDPA	9262	1852.4	17.98	62.81
		9400	1880.0	<b>18.50</b>	<b>70.79</b>
		9538	1907.6	17.64	58.08

**CDMA**

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
BC0	1xRTT	1013	824.7	16.62	45.92
		384	836.52	17.41	55.08
		777	848.31	<b>17.89</b>	<b>61.52</b>
	EVDO Rel.0	1013	824.7	16.60	45.71
		384	836.52	16.78	47.64
		777	848.31	<b>17.00</b>	<b>50.12</b>

**LTE Band 5**

Band	BW	Mode	RB Size/	f [MHz]	ERP / EIRP	
	[MHz]		RB Offset		[dBm]	[mW]
Band 5	10	QPSK	1 / 0	829.0	<b>16.53</b>	<b>44.98</b>
			1 / 0	836.5	16.16	41.30
			1 / 49	844.0	16.30	42.66
		16QAM	1 / 49	829.0	14.93	31.12
			1 / 0	836.5	<b>15.83</b>	<b>38.28</b>
			1 / 0	844.0	14.55	28.51
	5	QPSK	1 / 0	826.5	<b>16.22</b>	<b>41.88</b>
			1 / 24	836.5	15.69	37.07
			1 / 24	846.5	16.12	40.93
		16QAM	1 / 0	826.5	<b>15.68</b>	<b>36.98</b>
			1 / 0	836.5	15.59	36.22
			1 / 12	846.5	15.02	31.77
	3	QPSK	1 / 8	825.5	<b>16.19</b>	<b>41.59</b>
			1 / 8	836.5	15.72	37.33
			1 / 14	847.5	15.97	39.54
		16QAM	1 / 8	825.5	<b>15.27</b>	<b>33.65</b>
			1 / 8	836.5	<b>15.27</b>	<b>33.65</b>
			1 / 8	847.5	14.83	30.41
	1.4	QPSK	1 / 3	824.7	<b>16.03</b>	<b>40.09</b>
			1 / 3	836.5	15.89	38.82
			1 / 3	848.3	15.80	38.02
		16QAM	1 / 3	824.7	<b>15.39</b>	<b>34.59</b>
			1 / 3	836.5	15.29	33.81
			1 / 3	848.3	15.10	32.36

**LTE Band 4**

Band	BW	Mode	RB Size/	f [MHz]	ERP / EIRP	
	[MHz]		RB Offset		[dBm]	[mW]
Band 4	20	QPSK	1/99	1720.0	23.30	213.80
			1/0	1732.5	23.07	202.77
			1/0	1745.0	<b>23.42</b>	<b>219.79</b>
		16QAM	1/99	1720.0	22.31	170.22
			1/0	1732.5	22.07	161.06
			1/0	1745.0	<b>22.68</b>	<b>185.35</b>
	15	QPSK	1/74	1717.5	23.22	209.89
			1/0	1732.5	23.60	229.09
			1/0	1747.5	<b>24.00</b>	<b>251.19</b>
		16QAM	1/0	1717.5	<b>22.88</b>	<b>194.09</b>
			1/74	1732.5	22.74	187.93
			1/0	1747.5	22.80	190.55
	10	QPSK	1/49	1715.0	<b>24.19</b>	<b>262.42</b>
			1/0	1732.5	23.93	247.17
			1/0	1750.0	24.07	255.27
		16QAM	1/0	1715.0	<b>23.25</b>	<b>211.35</b>
			1/0	1732.5	23.12	205.12
			1/0	1750.0	23.04	201.37
	5	QPSK	1/24	1712.5	<b>24.06</b>	<b>254.68</b>
			1/0	1732.5	23.53	225.42
			1/0	1752.5	23.81	240.44
		16QAM	1/24	1712.5	22.96	197.70
			1/0	1732.5	22.46	176.20
			1/0	1752.5	<b>23.08</b>	<b>203.24</b>
	3	QPSK	1/8	1711.5	23.63	230.67
			1/0	1732.5	<b>24.23</b>	<b>264.85</b>
			1/8	1753.5	23.77	238.23
		16QAM	1/0	1711.5	22.30	169.82
			1/8	1732.5	22.37	172.58
			1/8	1753.5	<b>22.71</b>	<b>186.64</b>
1.4	QPSK	1/3	1710.7	<b>23.77</b>	<b>238.23</b>	
		1/3	1732.5	23.64	231.21	
		1/3	1754.3	23.74	236.59	
	16QAM	1/3	1710.7	<b>22.67</b>	<b>184.93</b>	
		1/3	1732.5	22.59	181.55	
		1/3	1754.3	22.66	184.50	



**LTE Band 12**

Band	BW	Mode	RB Size/	f [MHz]	ERP / EIRP	
	[MHz]		RB Offset		[dBm]	[mW]
Band 12	10	QPSK	1 / 0	704.0	14.46	27.93
			1 / 0	707.5	<b>14.90</b>	30.90
			1 / 0	711.0	14.83	30.41
		16QAM	1 / 0	704.0	13.22	20.99
			1 / 0	707.5	<b>13.89</b>	24.49
			1 / 0	711.0	13.52	22.49
	5	QPSK	1 / 0	701.5	15.15	32.73
			1 / 0	707.5	15.32	34.04
			1 / 12	713.5	<b>15.72</b>	37.33
		16QAM	1 / 0	701.5	14.05	25.41
			1 / 0	707.5	13.93	24.72
			1 / 12	713.5	<b>14.94</b>	31.19
	3	QPSK	1 / 8	700.5	14.98	31.48
			1 / 8	707.5	15.56	35.97
			1 / 8	714.5	<b>15.84</b>	38.37
		16QAM	1 / 8	700.5	13.63	23.07
			1 / 8	707.5	14.39	27.48
			1 / 8	714.5	<b>14.54</b>	28.44
	1.4	QPSK	1 / 3	699.7	15.05	31.99
			1 / 3	707.5	15.30	33.88
			1 / 3	715.3	<b>15.93</b>	<b>39.17</b>
		16QAM	1 / 5	699.7	13.60	22.91
			1 / 3	707.5	14.35	27.23
			1 / 3	715.3	<b>14.59</b>	28.77

**LTE Band 41**

Band	BW	Mode	RB Size/	f [MHz]	ERP / EIRP	
	[MHz]		RB Offset		[dBm]	[mW]
Band 41	20	QPSK	1 / 99	2565.0	21.54	142.56
			1 / 0	2605.0	<b>21.67</b>	146.89
			1 / 0	2645.0	19.52	89.54
		16QAM	1 / 0	2565.0	<b>22.06</b>	160.69
			1 / 0	2605.0	21.20	131.83
			1 / 0	2645.0	20.79	119.95
	15	QPSK	1 / 0	2562.5	<b>21.92</b>	155.60
			1 / 0	2605.0	21.11	129.12
			1 / 0	2647.5	20.69	117.22
		16QAM	1 / 0	2562.5	<b>21.80</b>	151.36
			1 / 0	2605.0	21.13	129.72
			1 / 0	2647.5	21.09	128.53
	10	QPSK	1 / 0	2560.0	<b>21.58</b>	143.88
			1 / 0	2605.0	19.98	99.54
			1 / 0	2650.0	20.22	105.20
		16QAM	1 / 0	2560.0	<b>22.13</b>	<b>163.31</b>
			1 / 0	2605.0	20.27	106.41
			1 / 0	2650.0	20.53	112.98
	5	QPSK	1 / 0	2557.5	21.92	155.60
			1 / 0	2605.0	<b>22.11</b>	162.55
			1 / 0	2652.5	20.82	120.78
		16QAM	1 / 0	2557.5	21.50	141.25
			1 / 0	2605.0	<b>21.90</b>	154.88
			1 / 0	2652.5	20.51	112.46

**LTE Band 17**

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

**10.1.2. ERP/EIRP DATA**

**GSM850**

GSM850  GPRS	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886234 Date: 2019-03-25 Test Engineer: 47989 Configuration: EUT / Z-Position Location: Chamber 1 Mode: GPRS 850 MHz Fundamentals  <u>Test Equipment:</u> Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	<b>f</b>	<b>SG reading</b>	<b>Ant. Pol.</b>	<b>Cable Loss</b>	<b>Antenna Gain</b>	<b>ERP</b>	<b>Limit</b>	<b>Delta</b>	<b>Notes</b>
	<b>MHz</b>	<b>(dBm)</b>	<b>(H/V)</b>	<b>(dB)</b>	<b>(dBd)</b>	<b>(dBm)</b>	<b>(dBm)</b>	<b>(dB)</b>	
	Low Ch								
	824.20	29.52	V	3.0	-1.5	25.03	38.5	-13.5	
	824.20	21.82	H	3.0	-1.5	17.33	38.5	-21.2	
	Mid Ch								
	836.60	29.95	V	3.0	-1.4	25.49	38.5	-13.0	
	836.60	22.09	H	3.0	-1.4	17.62	38.5	-20.9	
	High Ch								
	848.80	29.09	V	3.1	-1.4	24.65	38.5	-13.9	
	848.80	21.21	H	3.1	-1.4	16.77	38.5	-21.7	
GSM850  EGPRS	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886234 Date: 2019-03-25 Test Engineer: 47989 Configuration: EUT / Z-Position Location: Chamber 1 Mode: EGPRS 850 MHz Fundamentals  <u>Test Equipment:</u> Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	<b>f</b>	<b>SG reading</b>	<b>Ant. Pol.</b>	<b>Cable Loss</b>	<b>Antenna Gain</b>	<b>ERP</b>	<b>Limit</b>	<b>Delta</b>	<b>Notes</b>
	<b>MHz</b>	<b>(dBm)</b>	<b>(H/V)</b>	<b>(dB)</b>	<b>(dBd)</b>	<b>(dBm)</b>	<b>(dBm)</b>	<b>(dB)</b>	
	Low Ch								
	824.20	24.58	V	3.0	-1.5	20.09	38.5	-18.4	
	824.20	15.88	H	3.0	-1.5	11.39	38.5	-27.1	
	Mid Ch								
	836.60	23.80	V	3.0	-1.4	19.34	38.5	-19.2	
	836.60	15.93	H	3.0	-1.4	11.46	38.5	-27.0	
	High Ch								
	848.80	23.65	V	3.1	-1.4	19.21	38.5	-19.3	
	848.80	14.96	H	3.1	-1.4	10.52	38.5	-28.0	

**GSM1900**

GSM1900 GPRS	<p style="text-align: center;"><b>UL Verification Services, Inc.</b>  <b>High Frequency Substitution Measurement</b></p> <p>Company: Samsung                  Project #: 4788886234                  Date: 2019-03-11                  Test Engineer: 45585                  Configuration: EUT / Z-Position                  Location: Chamber 2                  Mode: GPRS 1900 MHz Fundamentals</p> <p><u>Test Equipment:</u>                  Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables                  Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1850.20</td> <td>18.82</td> <td>V</td> <td>4.5</td> <td>9.4</td> <td>23.74</td> <td>33.0</td> <td>-9.3</td> <td></td> </tr> <tr> <td>1850.20</td> <td>22.11</td> <td>H</td> <td>4.5</td> <td>9.4</td> <td>27.03</td> <td>33.0</td> <td>-6.0</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>20.60</td> <td>V</td> <td>4.5</td> <td>9.2</td> <td>25.26</td> <td>33.0</td> <td>-7.7</td> <td></td> </tr> <tr> <td>1880.00</td> <td>22.56</td> <td>H</td> <td>4.5</td> <td>9.2</td> <td>27.23</td> <td>33.0</td> <td>-5.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1909.80</td> <td>19.96</td> <td>V</td> <td>4.6</td> <td>8.9</td> <td>24.32</td> <td>33.0</td> <td>-8.7</td> <td></td> </tr> <tr> <td>1909.80</td> <td>21.70</td> <td>H</td> <td>4.6</td> <td>8.9</td> <td>26.06</td> <td>33.0</td> <td>-6.9</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.20	18.82	V	4.5	9.4	23.74	33.0	-9.3		1850.20	22.11	H	4.5	9.4	27.03	33.0	-6.0		Mid Ch									1880.00	20.60	V	4.5	9.2	25.26	33.0	-7.7		1880.00	22.56	H	4.5	9.2	27.23	33.0	-5.8		High Ch									1909.80	19.96	V	4.6	8.9	24.32	33.0	-8.7		1909.80	21.70	H	4.6	8.9	26.06	33.0	-6.9	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																		
1850.20	18.82	V	4.5	9.4	23.74	33.0	-9.3																																																																																											
1850.20	22.11	H	4.5	9.4	27.03	33.0	-6.0																																																																																											
Mid Ch																																																																																																		
1880.00	20.60	V	4.5	9.2	25.26	33.0	-7.7																																																																																											
1880.00	22.56	H	4.5	9.2	27.23	33.0	-5.8																																																																																											
High Ch																																																																																																		
1909.80	19.96	V	4.6	8.9	24.32	33.0	-8.7																																																																																											
1909.80	21.70	H	4.6	8.9	26.06	33.0	-6.9																																																																																											
GSM1900 EGPRS	<p style="text-align: center;"><b>UL Verification Services, Inc.</b>  <b>High Frequency Substitution Measurement</b></p> <p>Company: Samsung                  Project #: 4788886234                  Date: 2019-03-11                  Test Engineer: 45585                  Configuration: EUT / Z-Position                  Location: Chamber 2                  Mode: EGPRS 1900 MHz Fundamentals</p> <p><u>Test Equipment:</u>                  Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables                  Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1850.20</td> <td>14.98</td> <td>V</td> <td>4.5</td> <td>9.4</td> <td>19.90</td> <td>33.0</td> <td>-13.1</td> <td></td> </tr> <tr> <td>1850.20</td> <td>18.17</td> <td>H</td> <td>4.5</td> <td>9.4</td> <td>23.09</td> <td>33.0</td> <td>-9.9</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1880.00</td> <td>16.66</td> <td>V</td> <td>4.5</td> <td>9.2</td> <td>21.32</td> <td>33.0</td> <td>-11.7</td> <td></td> </tr> <tr> <td>1880.00</td> <td>18.86</td> <td>H</td> <td>4.5</td> <td>9.2</td> <td>23.53</td> <td>33.0</td> <td>-9.5</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1909.80</td> <td>16.34</td> <td>V</td> <td>4.6</td> <td>8.9</td> <td>20.70</td> <td>33.0</td> <td>-12.3</td> <td></td> </tr> <tr> <td>1909.80</td> <td>18.51</td> <td>H</td> <td>4.6</td> <td>8.9</td> <td>22.87</td> <td>33.0</td> <td>-10.1</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.20	14.98	V	4.5	9.4	19.90	33.0	-13.1		1850.20	18.17	H	4.5	9.4	23.09	33.0	-9.9		Mid Ch									1880.00	16.66	V	4.5	9.2	21.32	33.0	-11.7		1880.00	18.86	H	4.5	9.2	23.53	33.0	-9.5		High Ch									1909.80	16.34	V	4.6	8.9	20.70	33.0	-12.3		1909.80	18.51	H	4.6	8.9	22.87	33.0	-10.1	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
1850.20	14.98	V	4.5	9.4	19.90	33.0	-13.1																																																																																											
1850.20	18.17	H	4.5	9.4	23.09	33.0	-9.9																																																																																											
Mid Ch																																																																																																		
1880.00	16.66	V	4.5	9.2	21.32	33.0	-11.7																																																																																											
1880.00	18.86	H	4.5	9.2	23.53	33.0	-9.5																																																																																											
High Ch																																																																																																		
1909.80	16.34	V	4.6	8.9	20.70	33.0	-12.3																																																																																											
1909.80	18.51	H	4.6	8.9	22.87	33.0	-10.1																																																																																											

**WCDMA Band 5**

WCDMA  Band 5 REL99	<p style="text-align: center;"><b>UL Verification Services, Inc.</b>  <b>High Frequency Substitution Measurement</b></p> <p>Company: Samsung                  Project #: 4788886234                  Date: 2019-03-07                  Test Engineer: 45585                  Configuration: EUT, Z-Position                  Location: Chamber 2                  Mode: Rel99 Band 5 Fundamentals</p> <p><u>Test Equipment:</u>                  Receiving: VULB9163-749, and Chamber 2 SMA Cables                  Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>826.40</td> <td>19.87</td> <td>V</td> <td>3.0</td> <td>-1.5</td> <td>15.39</td> <td>38.5</td> <td>-23.1</td> <td></td> </tr> <tr> <td>826.40</td> <td>11.54</td> <td>H</td> <td>3.0</td> <td>-1.5</td> <td>7.06</td> <td>38.5</td> <td>-31.4</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>19.45</td> <td>V</td> <td>3.0</td> <td>-1.4</td> <td>14.99</td> <td>38.5</td> <td>-23.5</td> <td></td> </tr> <tr> <td>836.60</td> <td>11.05</td> <td>H</td> <td>3.0</td> <td>-1.4</td> <td>6.59</td> <td>38.5</td> <td>-31.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>846.60</td> <td>18.65</td> <td>V</td> <td>3.1</td> <td>-1.4</td> <td>14.21</td> <td>38.5</td> <td>-24.3</td> <td></td> </tr> <tr> <td>846.60</td> <td>10.80</td> <td>H</td> <td>3.1</td> <td>-1.4</td> <td>6.36</td> <td>38.5</td> <td>-32.1</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									826.40	19.87	V	3.0	-1.5	15.39	38.5	-23.1		826.40	11.54	H	3.0	-1.5	7.06	38.5	-31.4		Mid Ch									836.60	19.45	V	3.0	-1.4	14.99	38.5	-23.5		836.60	11.05	H	3.0	-1.4	6.59	38.5	-31.9		High Ch									846.60	18.65	V	3.1	-1.4	14.21	38.5	-24.3		846.60	10.80	H	3.1	-1.4	6.36	38.5	-32.1	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																									
Low Ch																																																																																																		
826.40	19.87	V	3.0	-1.5	15.39	38.5	-23.1																																																																																											
826.40	11.54	H	3.0	-1.5	7.06	38.5	-31.4																																																																																											
Mid Ch																																																																																																		
836.60	19.45	V	3.0	-1.4	14.99	38.5	-23.5																																																																																											
836.60	11.05	H	3.0	-1.4	6.59	38.5	-31.9																																																																																											
High Ch																																																																																																		
846.60	18.65	V	3.1	-1.4	14.21	38.5	-24.3																																																																																											
846.60	10.80	H	3.1	-1.4	6.36	38.5	-32.1																																																																																											
WCDMA  Band 5 HSDPA	<p style="text-align: center;"><b>UL Verification Services, Inc.</b>  <b>High Frequency Substitution Measurement</b></p> <p>Company: Samsung                  Project #: 4788886234                  Date: 2019-03-07                  Test Engineer: 45585                  Configuration: EUT, Z-Position                  Location: Chamber 2                  Mode: HSDPA Band 5 Fundamentals</p> <p><u>Test Equipment:</u>                  Receiving: VULB9163-749, and Chamber 2 SMA Cables                  Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>826.40</td> <td>18.65</td> <td>V</td> <td>3.0</td> <td>-1.5</td> <td>14.17</td> <td>38.5</td> <td>-24.3</td> <td></td> </tr> <tr> <td>826.40</td> <td>10.67</td> <td>H</td> <td>3.0</td> <td>-1.5</td> <td>6.19</td> <td>38.5</td> <td>-32.3</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.60</td> <td>18.23</td> <td>V</td> <td>3.0</td> <td>-1.4</td> <td>13.77</td> <td>38.5</td> <td>-24.7</td> <td></td> </tr> <tr> <td>836.60</td> <td>10.09</td> <td>H</td> <td>3.0</td> <td>-1.4</td> <td>5.63</td> <td>38.5</td> <td>-32.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>846.60</td> <td>18.28</td> <td>V</td> <td>3.1</td> <td>-1.4</td> <td>13.84</td> <td>38.5</td> <td>-24.7</td> <td></td> </tr> <tr> <td>846.60</td> <td>10.00</td> <td>H</td> <td>3.1</td> <td>-1.4</td> <td>5.56</td> <td>38.5</td> <td>-32.9</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									826.40	18.65	V	3.0	-1.5	14.17	38.5	-24.3		826.40	10.67	H	3.0	-1.5	6.19	38.5	-32.3		Mid Ch									836.60	18.23	V	3.0	-1.4	13.77	38.5	-24.7		836.60	10.09	H	3.0	-1.4	5.63	38.5	-32.9		High Ch									846.60	18.28	V	3.1	-1.4	13.84	38.5	-24.7		846.60	10.00	H	3.1	-1.4	5.56	38.5	-32.9	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																										
Low Ch																																																																																																		
826.40	18.65	V	3.0	-1.5	14.17	38.5	-24.3																																																																																											
826.40	10.67	H	3.0	-1.5	6.19	38.5	-32.3																																																																																											
Mid Ch																																																																																																		
836.60	18.23	V	3.0	-1.4	13.77	38.5	-24.7																																																																																											
836.60	10.09	H	3.0	-1.4	5.63	38.5	-32.9																																																																																											
High Ch																																																																																																		
846.60	18.28	V	3.1	-1.4	13.84	38.5	-24.7																																																																																											
846.60	10.00	H	3.1	-1.4	5.56	38.5	-32.9																																																																																											

**WCDMA Band 2**

WCDMA Band 2 REL99	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886234 Date: 2019-02-28 Test Engineer: 47989 Configuration: EUT / Y-Position Location: Chamber 2 Mode: Rel99 Band 2 Fundamentals  <u>Test Equipment:</u> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable								
	<b>f</b>	<b>SG reading</b>	<b>Ant. Pol.</b>	<b>Cable Loss</b>	<b>Antenna Gain</b>	<b>EIRP</b>	<b>Limit</b>	<b>Delta</b>	<b>Notes</b>
	<b>MHz</b>	<b>(dBm)</b>	<b>(H/V)</b>	<b>(dB)</b>	<b>(dBi)</b>	<b>(dBm)</b>	<b>(dBm)</b>	<b>(dB)</b>	
	Low Ch								
	1852.40	14.08	V	4.5	9.4	18.98	33.0	-14.0	
	1852.40	5.63	H	4.5	9.4	10.53	33.0	-22.5	
	Mid Ch								
	1880.00	15.37	V	4.5	9.2	20.03	33.0	-13.0	
	1880.00	7.62	H	4.5	9.2	12.29	33.0	-20.7	
	High Ch								
	1907.60	14.34	V	4.6	9.0	18.73	33.0	-14.3	
	1907.60	7.20	H	4.6	9.0	11.59	33.0	-21.4	
WCDMA Band 2 HSDPA	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886234 Date: 2019-02-28 Test Engineer: 47989 Configuration: EUT / Y-Position Location: Chamber 2 Mode: HSDPA Band 2 Fundamentals  <u>Test Equipment:</u> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable								
	<b>f</b>	<b>SG reading</b>	<b>Ant. Pol.</b>	<b>Cable Loss</b>	<b>Antenna Gain</b>	<b>EIRP</b>	<b>Limit</b>	<b>Delta</b>	<b>Notes</b>
	<b>MHz</b>	<b>(dBm)</b>	<b>(H/V)</b>	<b>(dB)</b>	<b>(dBi)</b>	<b>(dBm)</b>	<b>(dBm)</b>	<b>(dB)</b>	
	Low Ch								
	1852.40	13.08	V	4.5	9.4	17.98	33.0	-15.0	
	1852.40	4.53	H	4.5	9.4	9.43	33.0	-23.6	
	Mid Ch								
	1880.00	13.84	V	4.5	9.2	18.50	33.0	-14.5	
	1880.00	5.62	H	4.5	9.2	10.29	33.0	-22.7	
	High Ch								
	1907.60	13.25	V	4.6	9.0	17.64	33.0	-15.4	
	1907.60	6.23	H	4.6	9.0	10.62	33.0	-22.4	

**CDMA BC0**

BC0 1xRTT	<p><b>UL Verification Services, Inc.</b>  <b>High Frequency Substitution Measurement</b></p> <p>Company: Samsung                  Project #: 4788886237                  Date: 2019-04-16                  Test Engineer: 45585                  Configuration: EUT / Z-Position                  Location: Chamber 1                  Mode: RTT BC0 Fundamentals</p> <p><u>Test Equipment:</u>                  Receiving: VULB9163-750, and Chamber 1 SMA Cables                  Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>824.70</td> <td>21.11</td> <td>V</td> <td>3.0</td> <td>-1.5</td> <td>16.62</td> <td>38.5</td> <td>-21.9</td> <td></td> </tr> <tr> <td>824.70</td> <td>14.26</td> <td>H</td> <td>3.0</td> <td>-1.5</td> <td>9.77</td> <td>38.5</td> <td>-28.7</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.52</td> <td>21.87</td> <td>V</td> <td>3.0</td> <td>-1.4</td> <td>17.41</td> <td>38.5</td> <td>-21.1</td> <td></td> </tr> <tr> <td>836.52</td> <td>14.02</td> <td>H</td> <td>3.0</td> <td>-1.4</td> <td>9.56</td> <td>38.5</td> <td>-28.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>848.31</td> <td>22.33</td> <td>V</td> <td>3.1</td> <td>-1.4</td> <td>17.89</td> <td>38.5</td> <td>-20.6</td> <td></td> </tr> <tr> <td>848.31</td> <td>14.34</td> <td>H</td> <td>3.1</td> <td>-1.4</td> <td>9.90</td> <td>38.5</td> <td>-28.6</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									824.70	21.11	V	3.0	-1.5	16.62	38.5	-21.9		824.70	14.26	H	3.0	-1.5	9.77	38.5	-28.7		Mid Ch									836.52	21.87	V	3.0	-1.4	17.41	38.5	-21.1		836.52	14.02	H	3.0	-1.4	9.56	38.5	-28.9		High Ch									848.31	22.33	V	3.1	-1.4	17.89	38.5	-20.6		848.31	14.34	H	3.1	-1.4	9.90	38.5	-28.6	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																		
Low Ch																																																																																											
824.70	21.11	V	3.0	-1.5	16.62	38.5	-21.9																																																																																				
824.70	14.26	H	3.0	-1.5	9.77	38.5	-28.7																																																																																				
Mid Ch																																																																																											
836.52	21.87	V	3.0	-1.4	17.41	38.5	-21.1																																																																																				
836.52	14.02	H	3.0	-1.4	9.56	38.5	-28.9																																																																																				
High Ch																																																																																											
848.31	22.33	V	3.1	-1.4	17.89	38.5	-20.6																																																																																				
848.31	14.34	H	3.1	-1.4	9.90	38.5	-28.6																																																																																				
BC0 EVDO Rel.0	<p><b>UL Verification Services, Inc.</b>  <b>High Frequency Substitution Measurement</b></p> <p>Company: Samsung                  Project #: 4788886237                  Date: 2019-04-16                  Test Engineer: 45585                  Configuration: EUT / Z-Position                  Location: Chamber 1                  Mode: EVDO BC0 Fundamentals</p> <p><u>Test Equipment:</u>                  Receiving: VULB9163-750, and Chamber 1 SMA Cables                  Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>824.70</td> <td>21.09</td> <td>V</td> <td>3.0</td> <td>-1.5</td> <td>16.60</td> <td>38.5</td> <td>-21.9</td> <td></td> </tr> <tr> <td>824.70</td> <td>12.39</td> <td>H</td> <td>3.0</td> <td>-1.5</td> <td>7.90</td> <td>38.5</td> <td>-30.6</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>836.52</td> <td>21.24</td> <td>V</td> <td>3.0</td> <td>-1.4</td> <td>16.78</td> <td>38.5</td> <td>-21.7</td> <td></td> </tr> <tr> <td>836.52</td> <td>13.55</td> <td>H</td> <td>3.0</td> <td>-1.4</td> <td>9.09</td> <td>38.5</td> <td>-29.4</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>848.31</td> <td>21.44</td> <td>V</td> <td>3.1</td> <td>-1.4</td> <td>17.00</td> <td>38.5</td> <td>-21.5</td> <td></td> </tr> <tr> <td>848.31</td> <td>13.72</td> <td>H</td> <td>3.1</td> <td>-1.4</td> <td>9.28</td> <td>38.5</td> <td>-29.2</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									824.70	21.09	V	3.0	-1.5	16.60	38.5	-21.9		824.70	12.39	H	3.0	-1.5	7.90	38.5	-30.6		Mid Ch									836.52	21.24	V	3.0	-1.4	16.78	38.5	-21.7		836.52	13.55	H	3.0	-1.4	9.09	38.5	-29.4		High Ch									848.31	21.44	V	3.1	-1.4	17.00	38.5	-21.5		848.31	13.72	H	3.1	-1.4	9.28	38.5	-29.2	
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																		
Low Ch																																																																																											
824.70	21.09	V	3.0	-1.5	16.60	38.5	-21.9																																																																																				
824.70	12.39	H	3.0	-1.5	7.90	38.5	-30.6																																																																																				
Mid Ch																																																																																											
836.52	21.24	V	3.0	-1.4	16.78	38.5	-21.7																																																																																				
836.52	13.55	H	3.0	-1.4	9.09	38.5	-29.4																																																																																				
High Ch																																																																																											
848.31	21.44	V	3.1	-1.4	17.00	38.5	-21.5																																																																																				
848.31	13.72	H	3.1	-1.4	9.28	38.5	-29.2																																																																																				

**LTE Band 4**

LTE Band 4 20MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-15 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_QPSK Band 4 Fundamentals, 20MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1720.00	11.89	V	4.3	9.4	16.99	30.0	-13.0	
	1720.00	18.19	H	4.3	9.4	23.30	30.0	-6.7	
	Mid Ch								
	1732.50	8.77	V	4.3	9.5	13.91	30.0	-16.1	
	1732.50	17.94	H	4.3	9.5	23.07	30.0	-6.9	
	High Ch								
	1745.00	13.74	V	4.4	9.5	18.90	30.0	-11.1	
1745.00	18.25	H	4.4	9.5	23.42	30.0	-6.6		
LTE Band 4 20MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-15 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_16QAM Band 4 Fundamentals, 20MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1720.00	10.05	V	4.3	9.4	15.15	30.0	-14.8	
	1720.00	17.20	H	4.3	9.4	22.31	30.0	-7.7	
	Mid Ch								
	1732.50	8.04	V	4.3	9.5	13.18	30.0	-16.8	
	1732.50	16.94	H	4.3	9.5	22.07	30.0	-7.9	
	High Ch								
	1745.00	12.62	V	4.4	9.5	17.78	30.0	-12.2	
1745.00	17.51	H	4.4	9.5	22.68	30.0	-7.3		



LTE Band 4 15MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-15 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_QPSK Band 4 Fundamentals, 15MHz Bandwidth								
	<b>Test Equipment</b> Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1717.50	15.61	V	4.3	9.4	20.71	30.0	-9.3	
	1717.50	18.12	H	4.3	9.4	23.22	30.0	-6.8	
	Mid Ch								
	1732.50	15.68	V	4.3	9.5	20.82	30.0	-9.2	
	1732.50	18.47	H	4.3	9.5	23.60	30.0	-6.4	
High Ch									
1747.50	14.31	V	4.4	9.5	19.48	30.0	-10.5		
1747.50	18.83	H	4.4	9.5	24.00	30.0	-6.0		
LTE Band 4 15MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-15 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_16QAM Band 4 Fundamentals, 15MHz Bandwidth								
	<b>Test Equipment</b> Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1717.50	13.59	V	4.3	9.4	18.69	30.0	-11.3	
	1717.50	17.78	H	4.3	9.4	22.88	30.0	-7.1	
	Mid Ch								
	1732.50	12.99	V	4.3	9.5	18.13	30.0	-11.9	
	1732.50	17.61	H	4.3	9.5	22.74	30.0	-7.3	
High Ch									
1747.50	13.47	V	4.4	9.5	18.64	30.0	-11.4		
1747.50	17.63	H	4.4	9.5	22.80	30.0	-7.2		

LTE Band 4 10MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>																																																																																										
	Company: Samsung Project #: 4788886237 Date: 2019-04-15 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_QPSK Band 4 Fundamentals, 10MHz Bandwidth																																																																																										
	<b>Test Equipment:</b> Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable																																																																																										
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1715.00</td> <td>12.91</td> <td>V</td> <td>4.3</td> <td>9.4</td> <td>18.00</td> <td>30.0</td> <td>-12.0</td> <td></td> </tr> <tr> <td>1715.00</td> <td>19.09</td> <td>H</td> <td>4.3</td> <td>9.4</td> <td>24.19</td> <td>30.0</td> <td>-5.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>14.20</td> <td>V</td> <td>4.3</td> <td>9.5</td> <td>19.34</td> <td>30.0</td> <td>-10.7</td> <td></td> </tr> <tr> <td>1732.50</td> <td>18.80</td> <td>H</td> <td>4.3</td> <td>9.5</td> <td>23.93</td> <td>30.0</td> <td>-6.1</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1750.00</td> <td>14.24</td> <td>V</td> <td>4.4</td> <td>9.5</td> <td>19.42</td> <td>30.0</td> <td>-10.6</td> <td></td> </tr> <tr> <td>1750.00</td> <td>18.89</td> <td>H</td> <td>4.4</td> <td>9.5</td> <td>24.07</td> <td>30.0</td> <td>-5.9</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1715.00	12.91	V	4.3	9.4	18.00	30.0	-12.0		1715.00	19.09	H	4.3	9.4	24.19	30.0	-5.8		Mid Ch									1732.50	14.20	V	4.3	9.5	19.34	30.0	-10.7		1732.50	18.80	H	4.3	9.5	23.93	30.0	-6.1		High Ch									1750.00	14.24	V	4.4	9.5	19.42	30.0	-10.6		1750.00	18.89	H	4.4	9.5	24.07	30.0	-5.9	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																			
Low Ch																																																																																											
1715.00	12.91	V	4.3	9.4	18.00	30.0	-12.0																																																																																				
1715.00	19.09	H	4.3	9.4	24.19	30.0	-5.8																																																																																				
Mid Ch																																																																																											
1732.50	14.20	V	4.3	9.5	19.34	30.0	-10.7																																																																																				
1732.50	18.80	H	4.3	9.5	23.93	30.0	-6.1																																																																																				
High Ch																																																																																											
1750.00	14.24	V	4.4	9.5	19.42	30.0	-10.6																																																																																				
1750.00	18.89	H	4.4	9.5	24.07	30.0	-5.9																																																																																				
LTE Band 4 10MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>																																																																																										
	Company: Samsung Project #: 4788886237 Date: 2019-04-15 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_16QAM Band 4 Fundamentals, 10MHz Bandwidth																																																																																										
	<b>Test Equipment:</b> Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable																																																																																										
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1715.00</td> <td>11.70</td> <td>V</td> <td>4.3</td> <td>9.4</td> <td>16.79</td> <td>30.0</td> <td>-13.2</td> <td></td> </tr> <tr> <td>1715.00</td> <td>18.15</td> <td>H</td> <td>4.3</td> <td>9.4</td> <td>23.25</td> <td>30.0</td> <td>-6.8</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>13.52</td> <td>V</td> <td>4.3</td> <td>9.5</td> <td>18.66</td> <td>30.0</td> <td>-11.3</td> <td></td> </tr> <tr> <td>1732.50</td> <td>17.99</td> <td>H</td> <td>4.3</td> <td>9.5</td> <td>23.12</td> <td>30.0</td> <td>-6.9</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1750.00</td> <td>12.86</td> <td>V</td> <td>4.4</td> <td>9.5</td> <td>18.04</td> <td>30.0</td> <td>-12.0</td> <td></td> </tr> <tr> <td>1750.00</td> <td>17.86</td> <td>H</td> <td>4.4</td> <td>9.5</td> <td>23.04</td> <td>30.0</td> <td>-7.0</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1715.00	11.70	V	4.3	9.4	16.79	30.0	-13.2		1715.00	18.15	H	4.3	9.4	23.25	30.0	-6.8		Mid Ch									1732.50	13.52	V	4.3	9.5	18.66	30.0	-11.3		1732.50	17.99	H	4.3	9.5	23.12	30.0	-6.9		High Ch									1750.00	12.86	V	4.4	9.5	18.04	30.0	-12.0		1750.00	17.86	H	4.4	9.5	23.04	30.0	-7.0	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																			
Low Ch																																																																																											
1715.00	11.70	V	4.3	9.4	16.79	30.0	-13.2																																																																																				
1715.00	18.15	H	4.3	9.4	23.25	30.0	-6.8																																																																																				
Mid Ch																																																																																											
1732.50	13.52	V	4.3	9.5	18.66	30.0	-11.3																																																																																				
1732.50	17.99	H	4.3	9.5	23.12	30.0	-6.9																																																																																				
High Ch																																																																																											
1750.00	12.86	V	4.4	9.5	18.04	30.0	-12.0																																																																																				
1750.00	17.86	H	4.4	9.5	23.04	30.0	-7.0																																																																																				

LTE Band 4 5MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>									
	Company: Samsung Project #: 4788886237 Date: 2019-04-15 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_QPSK Band 4 Fundamentals, 5MHz Bandwidth									
	<b>Test Equipment:</b> Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Ch									
	1712.50	14.73	V	4.3	9.4	19.82	30.0	-10.2		
	1712.50	18.97	H	4.3	9.4	24.06	30.0	-5.9		
	Mid Ch									
	1732.50	13.24	V	4.3	9.5	18.38	30.0	-11.6		
	1732.50	18.40	H	4.3	9.5	23.53	30.0	-6.5		
High Ch										
1752.50	15.50	V	4.4	9.5	20.67	30.0	-9.3			
1752.50	18.64	H	4.4	9.5	23.81	30.0	-6.2			
LTE Band 4 5MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>									
	Company: Samsung Project #: 4788886237 Date: 2019-04-15 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_16QAM Band 4 Fundamentals, 5MHz Bandwidth									
	<b>Test Equipment:</b> Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Ch									
	1712.50	13.97	V	4.3	9.4	19.06	30.0	-10.9		
	1712.50	17.87	H	4.3	9.4	22.96	30.0	-7.0		
	Mid Ch									
	1732.50	12.13	V	4.3	9.5	17.27	30.0	-12.7		
	1732.50	17.33	H	4.3	9.5	22.46	30.0	-7.5		
High Ch										
1752.50	14.86	V	4.4	9.5	20.03	30.0	-10.0			
1752.50	17.91	H	4.4	9.5	23.08	30.0	-6.9			

LTE Band 4 3MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>																																																																																										
	Company: Samsung Project #: 4788886237 Date: 2019-04-15 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_QPSK Band 4 Fundamentals, 3MHz Bandwidth																																																																																										
	<b>Test Equipment:</b> Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable																																																																																										
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1711.50</td> <td>14.60</td> <td>V</td> <td>4.3</td> <td>9.4</td> <td>19.69</td> <td>30.0</td> <td>-10.3</td> <td></td> </tr> <tr> <td>1711.50</td> <td>18.54</td> <td>H</td> <td>4.3</td> <td>9.4</td> <td>23.63</td> <td>30.0</td> <td>-6.4</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>13.21</td> <td>V</td> <td>4.3</td> <td>9.5</td> <td>18.35</td> <td>30.0</td> <td>-11.7</td> <td></td> </tr> <tr> <td>1732.50</td> <td>19.10</td> <td>H</td> <td>4.3</td> <td>9.5</td> <td>24.23</td> <td>30.0</td> <td>-5.8</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1753.50</td> <td>15.14</td> <td>V</td> <td>4.4</td> <td>9.5</td> <td>20.32</td> <td>30.0</td> <td>-9.7</td> <td></td> </tr> <tr> <td>1753.50</td> <td>18.59</td> <td>H</td> <td>4.4</td> <td>9.5</td> <td>23.77</td> <td>30.0</td> <td>-6.2</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1711.50	14.60	V	4.3	9.4	19.69	30.0	-10.3		1711.50	18.54	H	4.3	9.4	23.63	30.0	-6.4		Mid Ch									1732.50	13.21	V	4.3	9.5	18.35	30.0	-11.7		1732.50	19.10	H	4.3	9.5	24.23	30.0	-5.8		High Ch									1753.50	15.14	V	4.4	9.5	20.32	30.0	-9.7		1753.50	18.59	H	4.4	9.5	23.77	30.0	-6.2	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																			
Low Ch																																																																																											
1711.50	14.60	V	4.3	9.4	19.69	30.0	-10.3																																																																																				
1711.50	18.54	H	4.3	9.4	23.63	30.0	-6.4																																																																																				
Mid Ch																																																																																											
1732.50	13.21	V	4.3	9.5	18.35	30.0	-11.7																																																																																				
1732.50	19.10	H	4.3	9.5	24.23	30.0	-5.8																																																																																				
High Ch																																																																																											
1753.50	15.14	V	4.4	9.5	20.32	30.0	-9.7																																																																																				
1753.50	18.59	H	4.4	9.5	23.77	30.0	-6.2																																																																																				
LTE Band 4 3MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>																																																																																										
	Company: Samsung Project #: 4788886237 Date: 2019-04-15 Test Engineer: 45585 Configuration: EUT / X-Position Location: Chamber 1 Mode: LTE_16QAM Band 4 Fundamentals, 3MHz Bandwidth																																																																																										
	<b>Test Equipment:</b> Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable																																																																																										
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBi)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="9">Low Ch</td> </tr> <tr> <td>1711.50</td> <td>13.19</td> <td>V</td> <td>4.3</td> <td>9.4</td> <td>18.28</td> <td>30.0</td> <td>-11.7</td> <td></td> </tr> <tr> <td>1711.50</td> <td>17.21</td> <td>H</td> <td>4.3</td> <td>9.4</td> <td>22.30</td> <td>30.0</td> <td>-7.7</td> <td></td> </tr> <tr> <td colspan="9">Mid Ch</td> </tr> <tr> <td>1732.50</td> <td>11.64</td> <td>V</td> <td>4.3</td> <td>9.5</td> <td>16.78</td> <td>30.0</td> <td>-13.2</td> <td></td> </tr> <tr> <td>1732.50</td> <td>17.24</td> <td>H</td> <td>4.3</td> <td>9.5</td> <td>22.37</td> <td>30.0</td> <td>-7.6</td> <td></td> </tr> <tr> <td colspan="9">High Ch</td> </tr> <tr> <td>1753.50</td> <td>13.94</td> <td>V</td> <td>4.4</td> <td>9.5</td> <td>19.12</td> <td>30.0</td> <td>-10.9</td> <td></td> </tr> <tr> <td>1753.50</td> <td>17.53</td> <td>H</td> <td>4.4</td> <td>9.5</td> <td>22.71</td> <td>30.0</td> <td>-7.3</td> <td></td> </tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1711.50	13.19	V	4.3	9.4	18.28	30.0	-11.7		1711.50	17.21	H	4.3	9.4	22.30	30.0	-7.7		Mid Ch									1732.50	11.64	V	4.3	9.5	16.78	30.0	-13.2		1732.50	17.24	H	4.3	9.5	22.37	30.0	-7.6		High Ch									1753.50	13.94	V	4.4	9.5	19.12	30.0	-10.9		1753.50	17.53	H	4.4	9.5	22.71	30.0	-7.3	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																			
Low Ch																																																																																											
1711.50	13.19	V	4.3	9.4	18.28	30.0	-11.7																																																																																				
1711.50	17.21	H	4.3	9.4	22.30	30.0	-7.7																																																																																				
Mid Ch																																																																																											
1732.50	11.64	V	4.3	9.5	16.78	30.0	-13.2																																																																																				
1732.50	17.24	H	4.3	9.5	22.37	30.0	-7.6																																																																																				
High Ch																																																																																											
1753.50	13.94	V	4.4	9.5	19.12	30.0	-10.9																																																																																				
1753.50	17.53	H	4.4	9.5	22.71	30.0	-7.3																																																																																				

LTE Band 4 1.4MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	<b>Company:</b> Samsung <b>Project #:</b> 4788886237 <b>Date:</b> 2019-04-15 <b>Test Engineer:</b> 45585 <b>Configuration:</b> EUT / X-Position <b>Location:</b> Chamber 1 <b>Mode:</b> LTE_QPSK Band 4 Fundamentals, 1.4MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1710.70	14.39	V	4.3	9.4	19.47	30.0	-10.5	
	1710.70	18.69	H	4.3	9.4	23.77	30.0	-6.2	
	Mid Ch								
	1732.50	12.86	V	4.3	9.5	18.00	30.0	-12.0	
	1732.50	18.51	H	4.3	9.5	23.64	30.0	-6.4	
High Ch									
1754.30	15.08	V	4.4	9.5	20.26	30.0	-9.7		
1754.30	18.56	H	4.4	9.5	23.74	30.0	-6.3		
LTE Band 4 1.4MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	<b>Company:</b> Samsung <b>Project #:</b> 4788886237 <b>Date:</b> 2019-04-15 <b>Test Engineer:</b> 45585 <b>Configuration:</b> EUT / X-Position <b>Location:</b> Chamber 1 <b>Mode:</b> LTE_16QAM Band 4 Fundamentals, 1.4MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: Horn 3117[00168717], and Chamber 1 SMA Cables Substitution: Horn 3115[00167211], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	1710.70	13.13	V	4.3	9.4	18.21	30.0	-11.8	
	1710.70	17.59	H	4.3	9.4	22.67	30.0	-7.3	
	Mid Ch								
	1732.50	11.74	V	4.3	9.5	16.88	30.0	-13.1	
	1732.50	17.46	H	4.3	9.5	22.59	30.0	-7.4	
High Ch									
1754.30	13.96	V	4.4	9.5	19.14	30.0	-10.9		
1754.30	17.48	H	4.4	9.5	22.66	30.0	-7.3		

**LTE Band 5**

LTE Band 5 10MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886234 Date: 2019-03-06 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 5 Fundamentals, 10MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	829.00	21.01	V	3.0	-1.5	16.53	38.5	-22.0	
	829.00	12.89	H	3.0	-1.5	8.41	38.5	-30.1	
	Mid Ch								
	836.50	20.62	V	3.0	-1.4	16.16	38.5	-22.3	
	836.50	12.57	H	3.0	-1.4	8.10	38.5	-30.4	
High Ch									
844.00	20.75	V	3.1	-1.4	16.30	38.5	-22.2		
844.00	10.94	H	3.1	-1.4	6.49	38.5	-32.0		
LTE Band 5 10MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886234 Date: 2019-03-06 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 5 Fundamentals, 10MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	829.00	19.41	V	3.0	-1.5	14.93	38.5	-23.6	
	829.00	11.70	H	3.0	-1.5	7.22	38.5	-31.3	
	Mid Ch								
	836.50	20.29	V	3.0	-1.4	15.83	38.5	-22.7	
	836.50	11.93	H	3.0	-1.4	7.46	38.5	-31.0	
High Ch									
844.00	19.00	V	3.1	-1.4	14.55	38.5	-24.0		
844.00	11.87	H	3.1	-1.4	7.42	38.5	-31.1		

LTE Band 5 5MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886234 Date: 2019-03-06 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 5 Fundamentals, 5MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	826.50	20.71	V	3.0	-1.5	16.22	38.5	-22.3	
	826.50	12.63	H	3.0	-1.5	8.15	38.5	-30.4	
	Mid Ch								
	836.50	20.15	V	3.0	-1.4	15.69	38.5	-22.8	
	836.50	12.39	H	3.0	-1.4	7.92	38.5	-30.6	
High Ch									
846.50	20.57	V	3.1	-1.4	16.12	38.5	-22.4		
846.50	11.30	H	3.1	-1.4	6.85	38.5	-31.6		
LTE Band 5 5MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886234 Date: 2019-03-06 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 5 Fundamentals, 5MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	826.50	20.17	V	3.0	-1.5	15.68	38.5	-22.8	
	826.50	11.98	H	3.0	-1.5	7.50	38.5	-31.0	
	Mid Ch								
	836.50	20.05	V	3.0	-1.4	15.59	38.5	-22.9	
	836.50	12.03	H	3.0	-1.4	7.56	38.5	-30.9	
High Ch									
846.50	19.47	V	3.1	-1.4	15.02	38.5	-23.5		
846.50	10.89	H	3.1	-1.4	6.44	38.5	-32.1		

LTE Band 5 3MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886234 Date: 2019-03-06 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 5 Fundamentals, 3MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	825.50	20.67	V	3.0	-1.5	16.19	38.5	-22.3	
	825.50	12.71	H	3.0	-1.5	8.22	38.5	-30.3	
	Mid Ch								
	836.50	20.18	V	3.0	-1.4	15.72	38.5	-22.8	
	836.50	12.76	H	3.0	-1.4	8.29	38.5	-30.2	
High Ch									
847.50	20.41	V	3.1	-1.4	15.97	38.5	-22.5		
847.50	11.59	H	3.1	-1.4	7.15	38.5	-31.4		
LTE Band 5 3MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886234 Date: 2019-03-06 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 5 Fundamentals, 3MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	825.50	19.75	V	3.0	-1.5	15.27	38.5	-23.2	
	825.50	12.38	H	3.0	-1.5	7.89	38.5	-30.6	
	Mid Ch								
	836.50	19.73	V	3.0	-1.4	15.27	38.5	-23.2	
	836.50	12.15	H	3.0	-1.4	7.68	38.5	-30.8	
High Ch									
847.50	19.27	V	3.1	-1.4	14.83	38.5	-23.7		
847.50	11.15	H	3.1	-1.4	6.71	38.5	-31.8		



LTE Band 5 1.4MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886234 Date: 2019-03-06 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 5 Fundamentals, 1.4MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	824.70	20.51	V	3.0	-1.5	16.03	38.5	-22.5	
	824.70	13.10	H	3.0	-1.5	8.61	38.5	-29.9	
	Mid Ch								
	836.50	20.35	V	3.0	-1.4	15.89	38.5	-22.6	
	836.50	12.66	H	3.0	-1.4	8.19	38.5	-30.3	
High Ch									
848.30	20.24	V	3.1	-1.4	15.80	38.5	-22.7		
848.30	11.46	H	3.1	-1.4	7.02	38.5	-31.5		
LTE Band 5 1.4MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886234 Date: 2019-03-06 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 5 Fundamentals, 1.4MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	824.70	19.87	V	3.0	-1.5	15.39	38.5	-23.1	
	824.70	12.30	H	3.0	-1.5	7.81	38.5	-30.7	
	Mid Ch								
	836.50	19.75	V	3.0	-1.4	15.29	38.5	-23.2	
	836.50	12.09	H	3.0	-1.4	7.62	38.5	-30.9	
High Ch									
848.30	19.54	V	3.1	-1.4	15.10	38.5	-23.4		
848.30	10.55	H	3.1	-1.4	6.11	38.5	-32.4		

**LTE Band 12**

LTE Band 12 10MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-17 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 12 Fundamentals, 10MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	704.00	18.84	V	2.8	-1.6	14.46	34.8	-20.3	
	704.00	5.67	H	2.8	-1.6	1.28	34.8	-33.5	
	Mid Ch								
	707.50	19.28	V	2.8	-1.6	14.90	34.8	-19.9	
	707.50	5.19	H	2.8	-1.6	0.81	34.8	-34.0	
High Ch									
711.00	19.23	V	2.8	-1.6	14.83	34.8	-20.0		
711.00	5.65	H	2.8	-1.6	1.25	34.8	-33.5		
LTE Band 12 10MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-17 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 12 Fundamentals, 10MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	704.00	17.60	V	2.8	-1.6	13.22	34.8	-21.6	
	704.00	4.55	H	2.8	-1.6	0.16	34.8	-34.6	
	Mid Ch								
	707.50	18.27	V	2.8	-1.6	13.89	34.8	-20.9	
	707.50	4.02	H	2.8	-1.6	-0.36	34.8	-35.2	
High Ch									
711.00	17.92	V	2.8	-1.6	13.52	34.8	-21.3		
711.00	4.59	H	2.8	-1.6	0.19	34.8	-34.6		

LTE Band 12 5MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-17 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 12 Fundamentals, 5MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	701.50	19.53	V	2.8	-1.6	15.15	34.8	-19.6	
	701.50	5.73	H	2.8	-1.6	1.35	34.8	-33.5	
	Mid Ch								
	707.50	19.70	V	2.8	-1.6	15.32	34.8	-19.5	
	707.50	7.21	H	2.8	-1.6	2.83	34.8	-32.0	
High Ch									
713.50	20.12	V	2.8	-1.6	15.72	34.8	-19.1		
713.50	7.82	H	2.8	-1.6	3.43	34.8	-31.4		
LTE Band 12 5MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-17 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 12 Fundamentals, 5MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	701.50	18.43	V	2.8	-1.6	14.05	34.8	-20.7	
	701.50	4.42	H	2.8	-1.6	0.04	34.8	-34.8	
	Mid Ch								
	707.50	18.31	V	2.8	-1.6	13.93	34.8	-20.9	
	707.50	6.14	H	2.8	-1.6	1.76	34.8	-33.0	
High Ch									
713.50	19.34	V	2.8	-1.6	14.94	34.8	-19.9		
713.50	6.63	H	2.8	-1.6	2.24	34.8	-32.6		

LTE Band 12 3MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-17 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 12 Fundamentals, 3MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	700.50	19.36	V	2.8	-1.6	14.98	34.8	-19.8	
	700.50	5.91	H	2.8	-1.6	1.53	34.8	-33.3	
	Mid Ch								
	707.50	19.94	V	2.8	-1.6	15.56	34.8	-19.2	
	707.50	7.23	H	2.8	-1.6	2.85	34.8	-32.0	
High Ch									
714.50	20.24	V	2.8	-1.6	15.84	34.8	-19.0		
714.50	7.90	H	2.8	-1.6	3.50	34.8	-31.3		
LTE Band 12 3MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-17 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 12 Fundamentals, 3MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	700.50	18.01	V	2.8	-1.6	13.63	34.8	-21.2	
	700.50	4.55	H	2.8	-1.6	0.17	34.8	-34.6	
	Mid Ch								
	707.50	18.77	V	2.8	-1.6	14.39	34.8	-20.4	
	707.50	6.21	H	2.8	-1.6	1.83	34.8	-33.0	
High Ch									
714.50	18.94	V	2.8	-1.6	14.54	34.8	-20.3		
714.50	6.68	H	2.8	-1.6	2.28	34.8	-32.5		

LTE Band 12 1.4MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-17 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 12 Fundamentals, 1.4MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	699.70	19.43	V	2.8	-1.6	15.05	34.8	-19.8	
	699.70	5.43	H	2.8	-1.6	1.06	34.8	-33.7	
	Mid Ch								
	707.50	19.68	V	2.8	-1.6	15.30	34.8	-19.5	
	707.50	7.19	H	2.8	-1.6	2.81	34.8	-32.0	
High Ch									
715.30	20.33	V	2.8	-1.6	15.93	34.8	-18.9		
715.30	7.83	H	2.8	-1.6	3.43	34.8	-31.4		
LTE Band 12 1.4MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-17 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 12 Fundamentals, 1.4MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	699.70	17.98	V	2.8	-1.6	13.60	34.8	-21.2	
	699.70	4.77	H	2.8	-1.6	0.40	34.8	-34.4	
	Mid Ch								
	707.50	18.73	V	2.8	-1.6	14.35	34.8	-20.5	
	707.50	6.01	H	2.8	-1.6	1.63	34.8	-33.2	
High Ch									
715.30	18.99	V	2.8	-1.6	14.59	34.8	-20.2		
715.30	6.61	H	2.8	-1.6	2.21	34.8	-32.6		

**LTE Band 41**

LTE Band 41 20MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-09 Test Engineer: 45585 Configuration: EUT / X-Position_camera Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 20MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	2565.00	12.96	V	5.3	10.0	17.66	33.0	-15.3	
	2565.00	16.84	H	5.3	10.0	21.54	33.0	-11.5	
	Mid Ch								
	2593.00	5.03	V	5.3	10.0	9.67	33.0	-23.3	
	2593.00	17.03	H	5.3	10.0	21.67	33.0	-11.3	
	High Ch								
	2645.00	11.84	V	5.4	10.0	16.41	33.0	-16.6	
2645.00	14.95	H	5.4	10.0	19.52	33.0	-13.5		
LTE Band 41 20MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-09 Test Engineer: 45585 Configuration: EUT / X-Position_camera Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 20MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	2565.00	6.47	V	5.3	10.0	11.17	33.0	-21.8	
	2565.00	17.36	H	5.3	10.0	22.06	33.0	-10.9	
	Mid Ch								
	2593.00	5.53	V	5.3	10.0	10.17	33.0	-22.8	
	2593.00	16.56	H	5.3	10.0	21.20	33.0	-11.8	
	High Ch								
	2645.00	13.08	V	5.4	10.0	17.65	33.0	-15.3	
2645.00	16.22	H	5.4	10.0	20.79	33.0	-12.2		

LTE Band 41 15MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-09 Test Engineer: 45585 Configuration: EUT / X-Position_camera Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 15MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	2562.50	7.12	V	5.3	10.0	11.82	33.0	-21.2	
	2562.50	17.21	H	5.3	10.0	21.92	33.0	-11.1	
	Mid Ch								
	2605.00	5.83	V	5.4	10.0	10.46	33.0	-22.5	
	2605.00	16.48	H	5.4	10.0	21.11	33.0	-11.9	
High Ch									
2647.50	14.06	V	5.4	10.0	18.63	33.0	-14.4		
2647.50	16.12	H	5.4	10.0	20.69	33.0	-12.3		
LTE Band 41 15MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-09 Test Engineer: 45585 Configuration: EUT / X-Position_camera Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 15MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	2562.50	5.87	V	5.3	10.0	10.57	33.0	-22.4	
	2562.50	17.09	H	5.3	10.0	21.80	33.0	-11.2	
	Mid Ch								
	2605.00	6.48	V	5.4	10.0	11.11	33.0	-21.9	
	2605.00	16.50	H	5.4	10.0	21.13	33.0	-11.9	
High Ch									
2647.50	14.33	V	5.4	10.0	18.90	33.0	-14.1		
2647.50	16.52	H	5.4	10.0	21.09	33.0	-11.9		

LTE Band 41 10MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>									
	Company: Samsung Project #: 4788886237 Date: 2019-04-09 Test Engineer: 45585 Configuration: EUT / X-Position_camera Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 10MHz Bandwidth									
	<b>Test Equipment:</b> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Ch									
	2560.00	6.42	V	5.3	10.0	11.13	33.0	-21.9		
	2560.00	16.88	H	5.3	10.0	21.58	33.0	-11.4		
	Mid Ch									
	2605.00	4.70	V	5.4	10.0	9.33	33.0	-23.7		
	2605.00	15.35	H	5.4	10.0	19.98	33.0	-13.0		
High Ch										
2650.00	14.58	V	5.4	10.0	19.15	33.0	-13.8			
2650.00	15.65	H	5.4	10.0	20.22	33.0	-12.8			
LTE Band 41 10MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>									
	Company: Samsung Project #: 4788886237 Date: 2019-04-09 Test Engineer: 45585 Configuration: EUT / X-Position_camera Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 10MHz Bandwidth									
	<b>Test Equipment:</b> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
	Low Ch									
	2560.00	7.32	V	5.3	10.0	12.03	33.0	-21.0		
	2560.00	17.43	H	5.3	10.0	22.13	33.0	-10.9		
	Mid Ch									
	2605.00	6.17	V	5.4	10.0	10.80	33.0	-22.2		
	2605.00	15.64	H	5.4	10.0	20.27	33.0	-12.7		
High Ch										
2650.00	14.87	V	5.4	10.0	19.44	33.0	-13.6			
2650.00	15.96	H	5.4	10.0	20.53	33.0	-12.5			



LTE Band 41 5MHz QPSK	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-09 Test Engineer: 45585 Configuration: EUT / X-Position_camera Location: Chamber 2 Mode: LTE_QPSK Band 41 Fundamentals, 5MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	2557.50	6.76	V	5.3	10.0	11.47	33.0	-21.5	
	2557.50	17.21	H	5.3	10.0	21.92	33.0	-11.1	
	Mid Ch								
	2593.00	5.63	V	5.3	10.0	10.27	33.0	-22.7	
	2593.00	17.47	H	5.3	10.0	22.11	33.0	-10.9	
High Ch									
2652.50	5.99	V	5.4	10.0	10.56	33.0	-22.4		
2652.50	16.26	H	5.4	10.0	20.82	33.0	-12.2		
LTE Band 41 5MHz 16QAM	<b>UL Verification Services, Inc.</b> <b>High Frequency Substitution Measurement</b>								
	Company: Samsung Project #: 4788886237 Date: 2019-04-09 Test Engineer: 45585 Configuration: EUT / X-Position_camera Location: Chamber 2 Mode: LTE_16QAM Band 41 Fundamentals, 5MHz Bandwidth								
	<b>Test Equipment:</b> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch								
	2557.50	5.02	V	5.3	10.0	9.73	33.0	-23.3	
	2557.50	16.79	H	5.3	10.0	21.50	33.0	-11.5	
	Mid Ch								
	2593.00	6.78	V	5.3	10.0	11.42	33.0	-21.6	
	2593.00	17.26	H	5.3	10.0	21.90	33.0	-11.1	
High Ch									
2652.50	4.73	V	5.4	10.0	9.30	33.0	-23.7		
2652.50	15.95	H	5.4	10.0	20.51	33.0	-12.5		

## 10.2. FIELD STRENGTH OF SPURIOUS RADIATION

### RULE PART(S)

FCC: §2.1053, §22.917, §24.238 and §27. 53

### LIMIT

Part 22.917(a) & Part 24.238(a) & Part 27.53(h) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

Part 27.53:

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB.

(h) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

(m) (4) For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.12; ESU40 setting reference to 971168 D01 v03r01

For peak power measurement with a ESU40:

- a) Set the RBW = 100 KHz for emission below 1GHz and 1MHz for emissions above 1GHz
- b) Set VBW  $\geq 3 \times$  RBW;
- c) Set span  $\geq 1.5$  times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points  $\geq$  span/RBW;
- g) Trace mode = average(WCDMA, LTE), Maxhold(GSM, LTE Band41);;

### RESULTS

See the following pages.

NOTE : Please refer to section 5.4 for bandwidth and RB setting about LTE bands.