

LTE Band 17

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

9.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §27.53 and 90.691

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log_{10} (P)$ dB.

Part 27.53:

(c)(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log_{10} (P)$ dB.

(h) The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

(m) (4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log_{10} (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log_{10} (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log_{10} (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log_{10} (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log_{10} (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Part 90.691(a):

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz. (NOTE : Use 100kHz reference bandwidth)

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01
The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

- a) Set the RBW = 100KHz for emission below 1GHz and 1MHz for emissions above 1GHz
(Tests were performed 1MHz [Worst case], to sweep 1 time for all frequency range)
- b) Set VBW $\geq 3 \times$ RBW;
- c) Set span ≥ 1.5 times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points = Max (40001);
- g) Trace mode = average(WCDMA, LTE), Maxhold(GSM, LTE Band41);


RESULTS

See the following pages.


NOTE : Please refer to section 5.4 for bandwidth and RB setting about LTE bands.

9.3.1. OUT OF BAND EMISSIONS RESULT

GSM 850

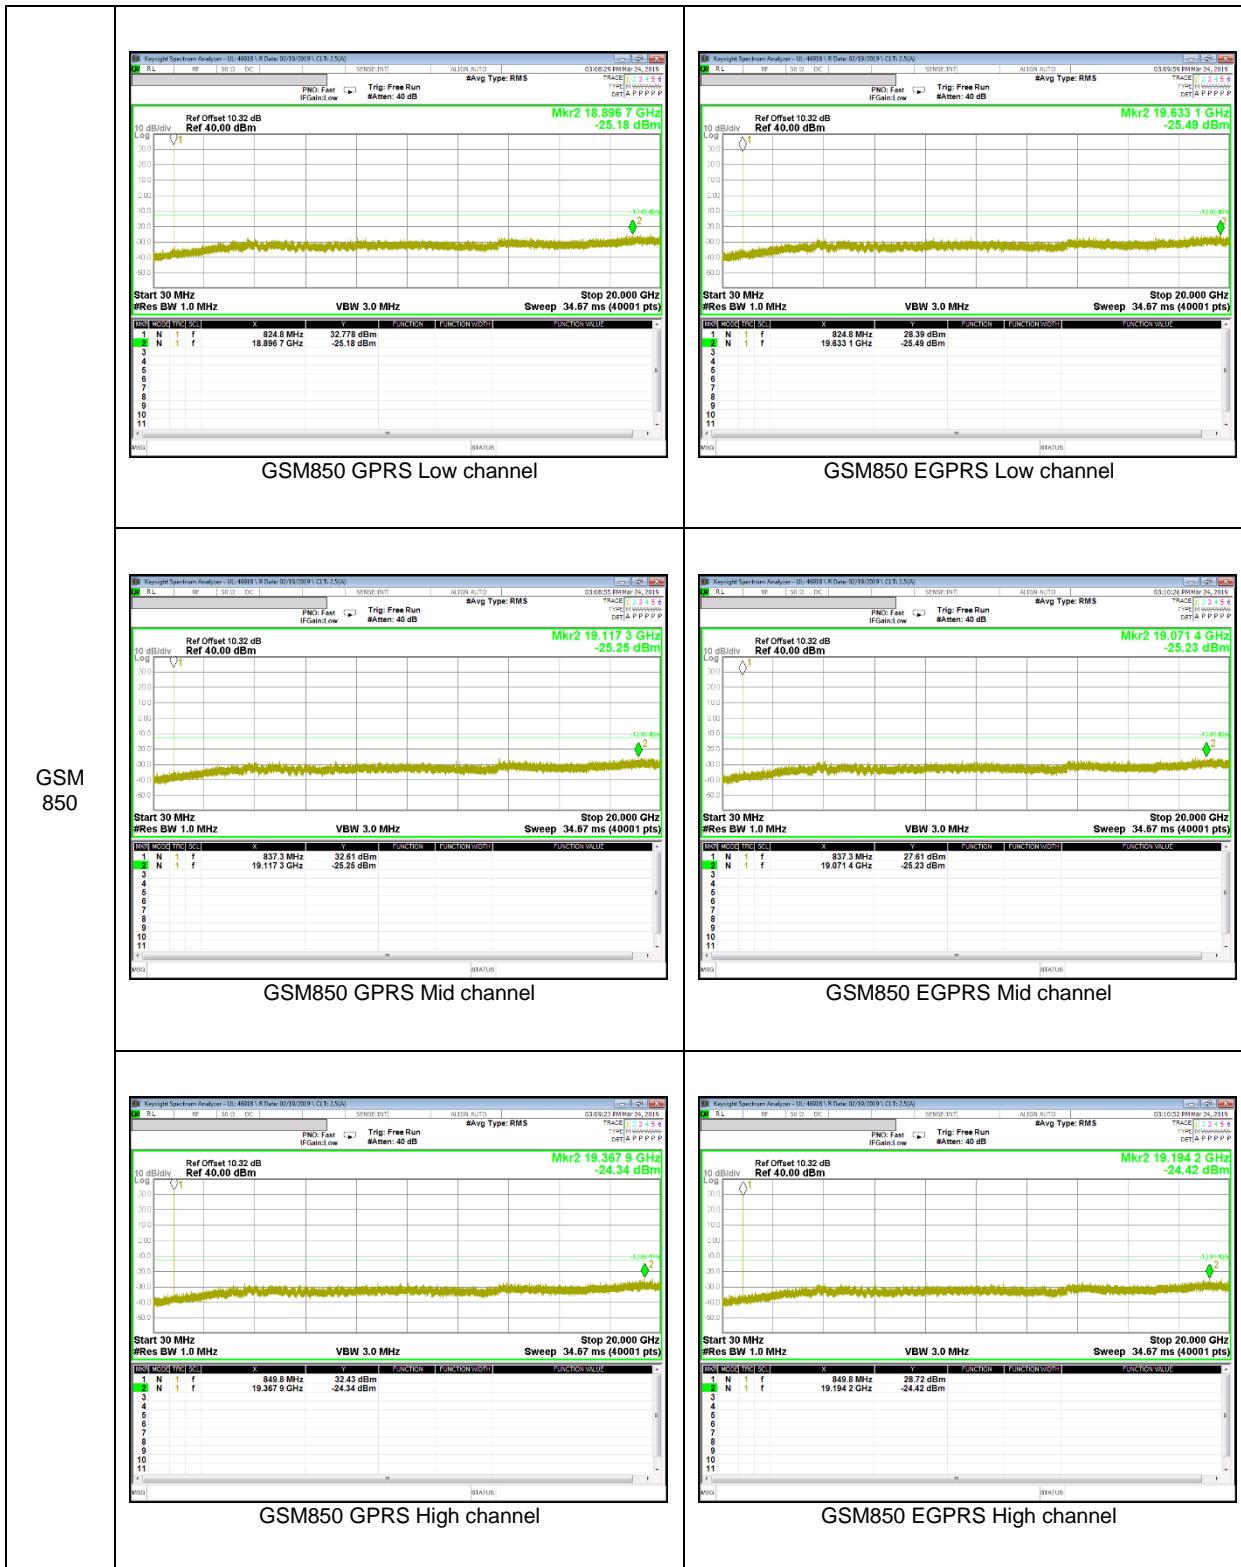

GSM 1900

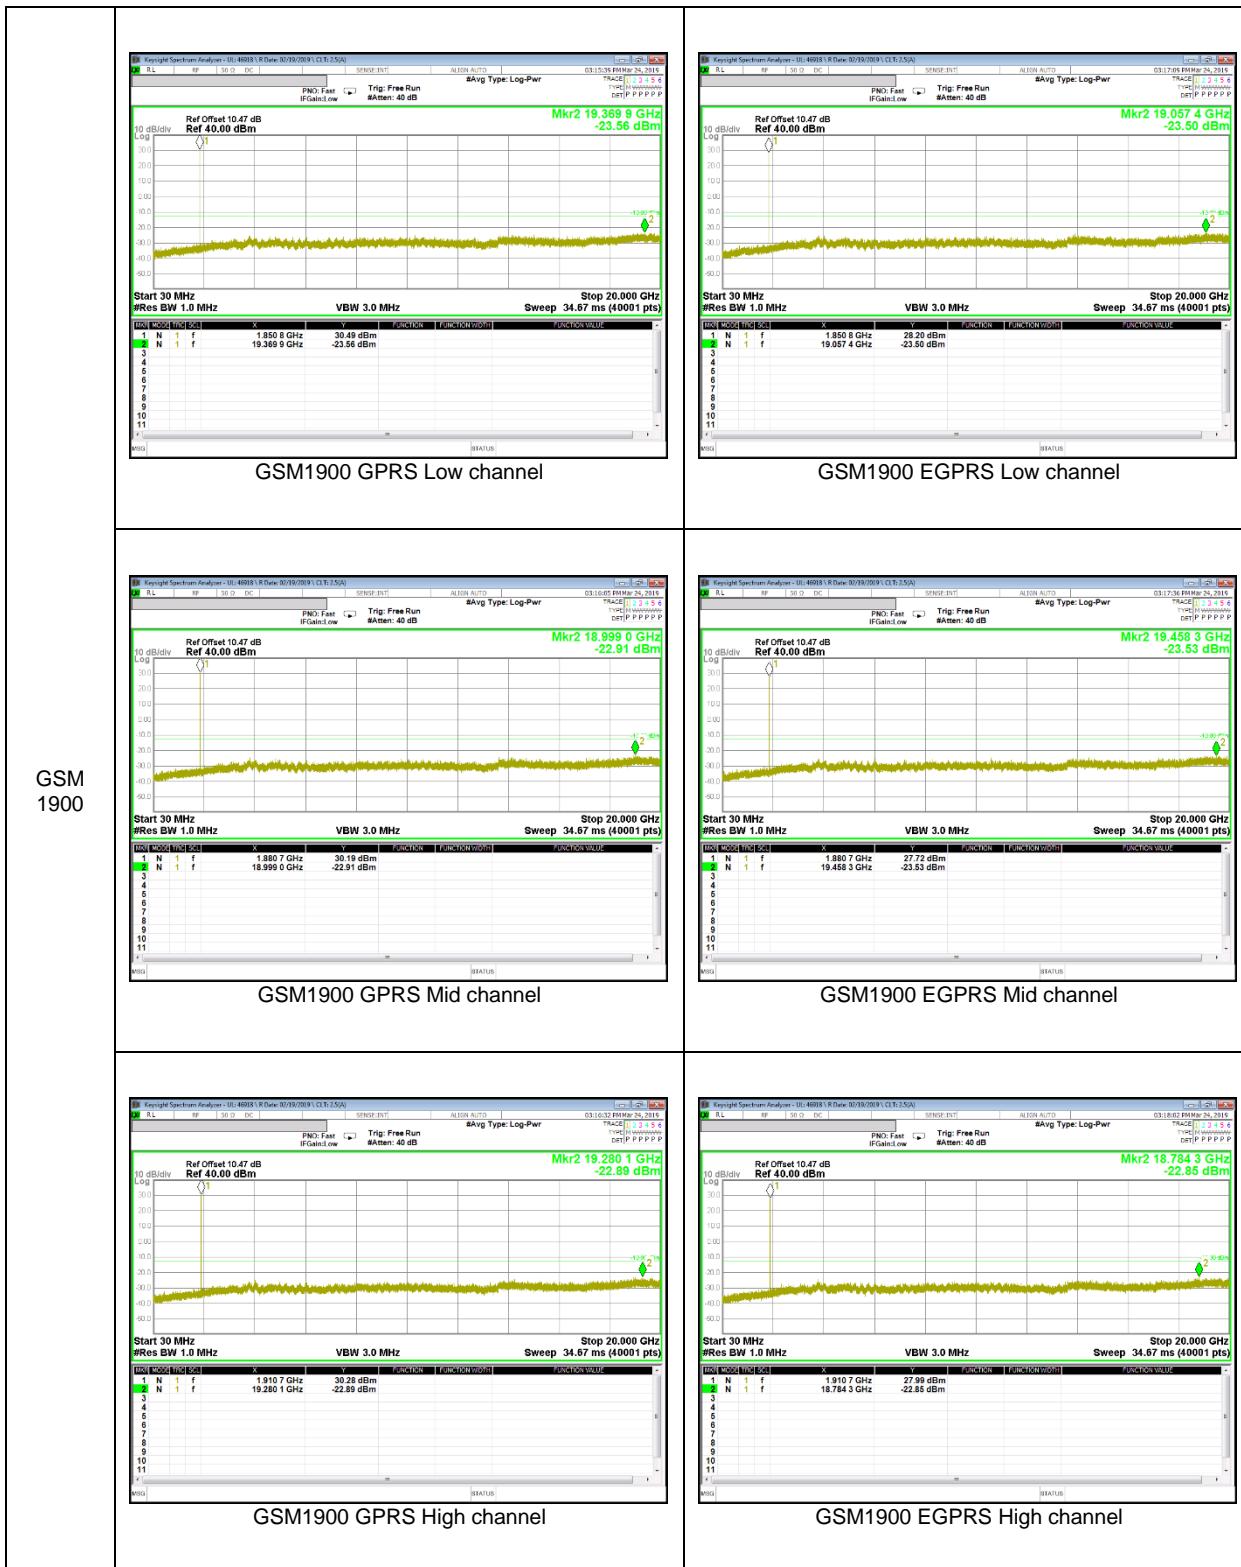

WCDMA Band 5




WCDMA Band 4




WCDMA Band 2




LTE Band 2

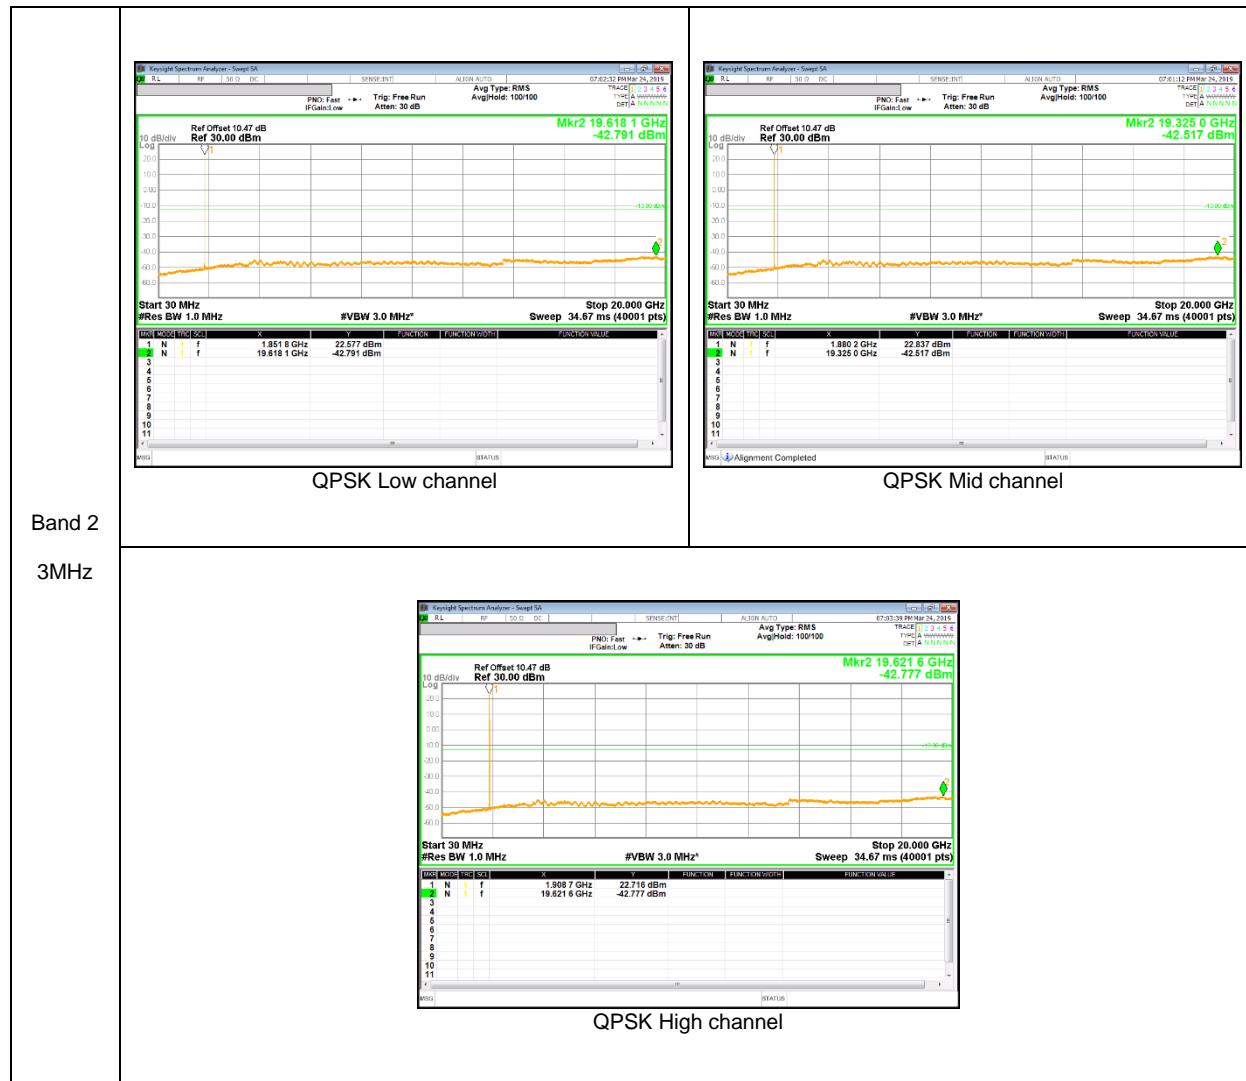


LTE Band 5

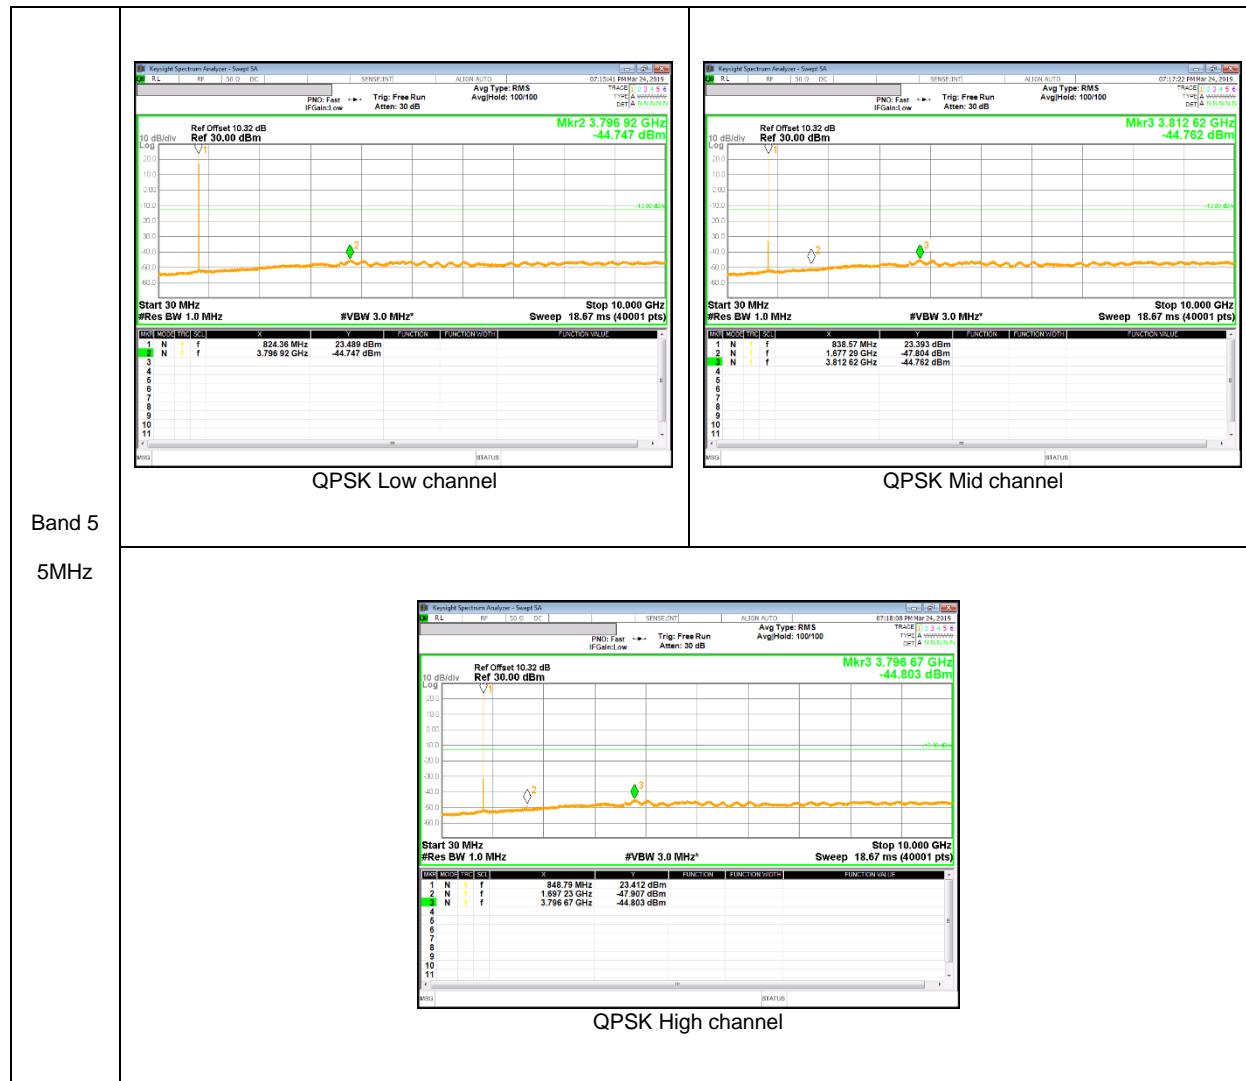

LTE Band 12

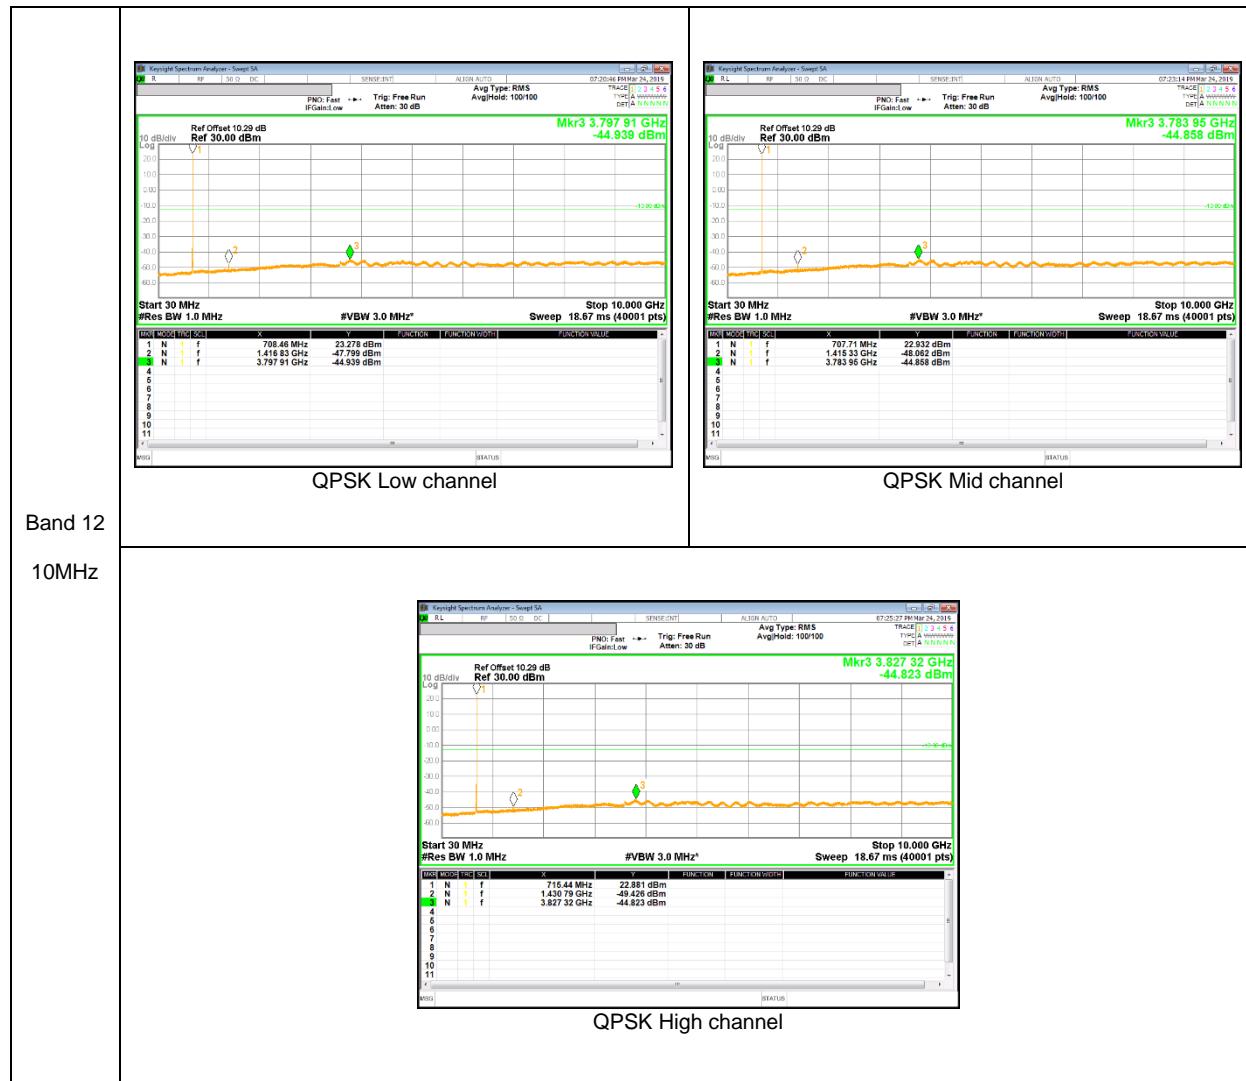


LTE Band 13

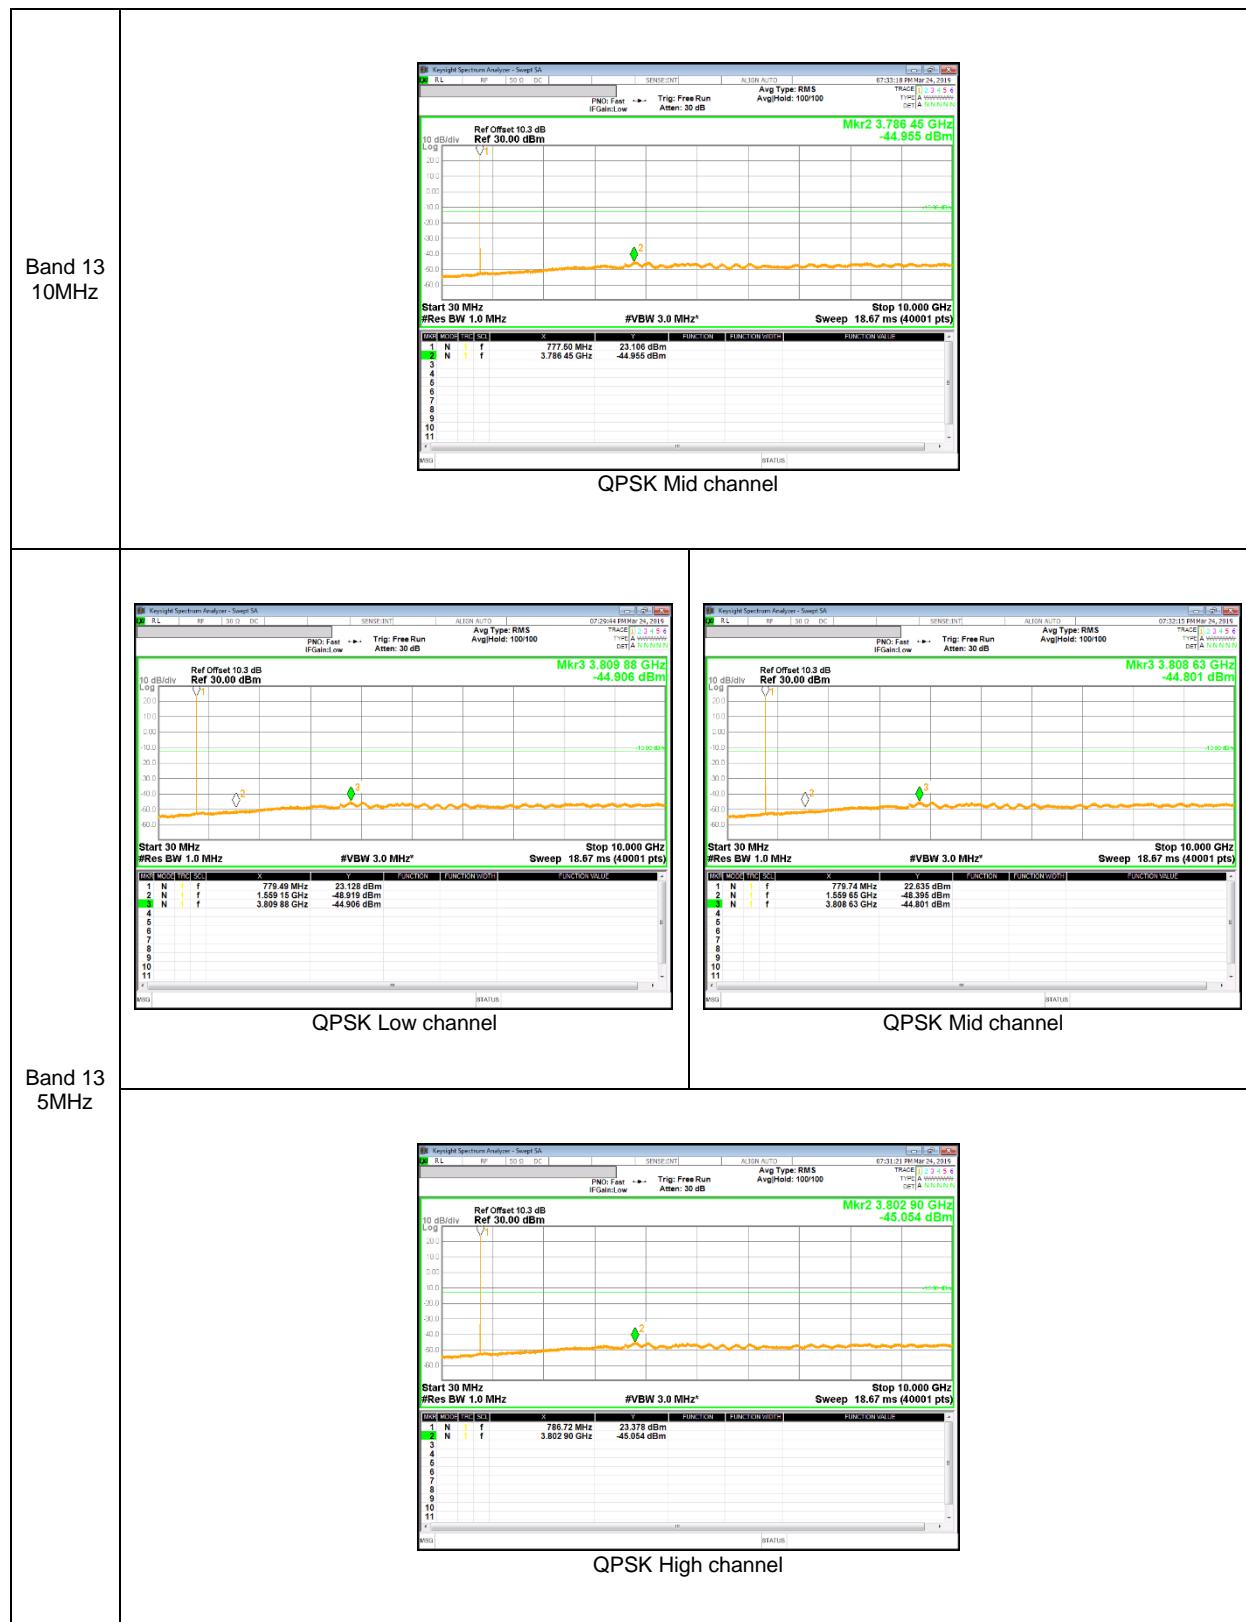


LTE Band 26



LTE Band 41

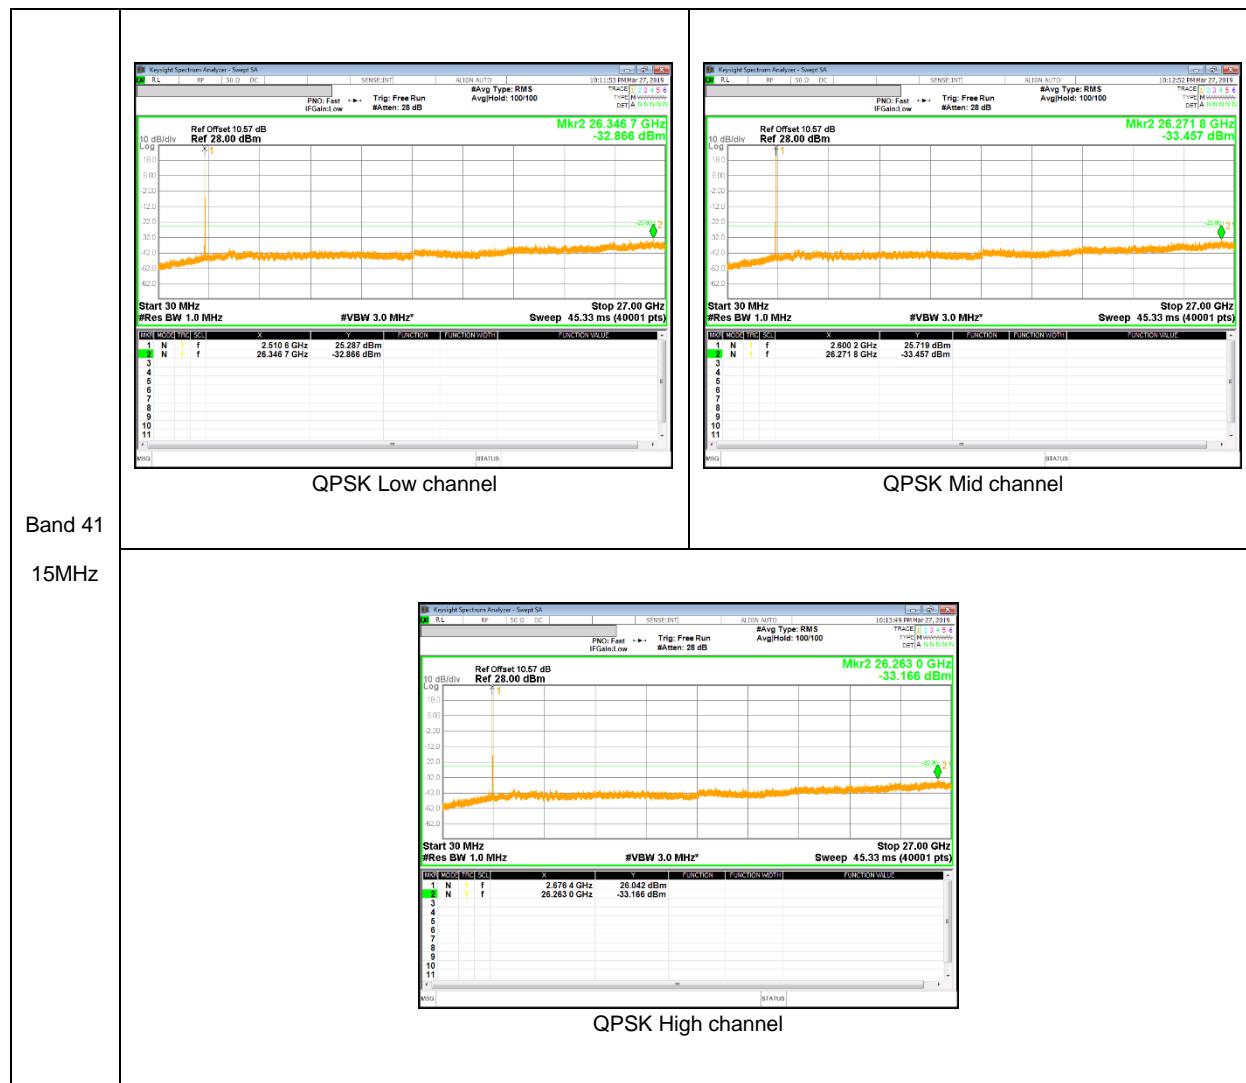

LTE Band 66

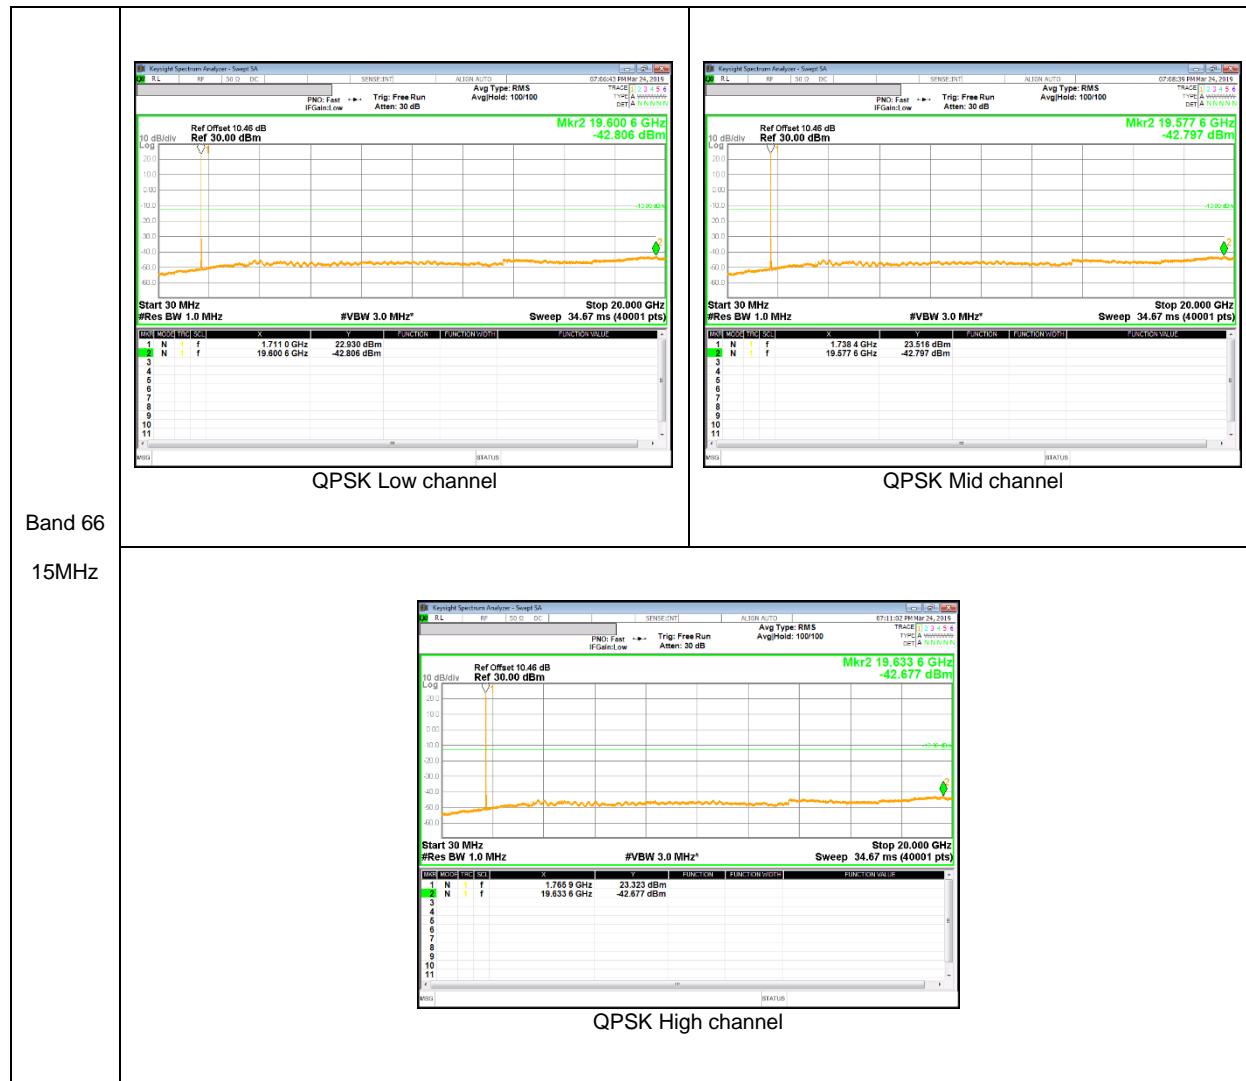

9.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54 and §90.213

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

§27.54 - The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

§90.213 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01

RESULTS

See the following pages.

NOTE : Test were performed each lowest or highest frequency on the modulation condition of more wide bandwidth.(Please refer to section 9.1.1 OBW results)

9.4.1. FREQUENCY STABILITY RESULTS

GSM 850, Channel 128/251, Frequency 824.2/848.8 MHz

Limit: +- 2.5 ppm =		Low Channel	2060.500 Hz	High Channel	2122.000 Hz	
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]
		Low Channel		High Channel		
[MHz]	Delta [ppm]	[MHz]	Delta [ppm]			
824.19998558	-0.012	848.79998428	-0.009			2.5
824.19997546	0.000	848.79997913	-0.003			2.5
824.19998497	-0.011	848.79998433	-0.009			2.5
824.19997570	0.000	848.79997672	0.000			2.5
824.19998573	-0.012	848.79997590	0.001			2.5
824.19998200	-0.008	848.79997879	-0.002			2.5
824.19998366	-0.010	848.79998277	-0.007			2.5
824.19998496	-0.011	848.79998102	-0.005			2.5
824.19997585	0.000	848.79998286	-0.007			2.5

Limit: +- 2.5 ppm =		Low Channel	2060.500 Hz	High Channel	2122.000 Hz	
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]
		Low Channel		High Channel		
[MHz]	Delta [ppm]	[MHz]	Delta [ppm]			
824.19997570	0	848.79997672	0			2.5
824.19997851	-0.003	848.79998436	-0.009			2.5
824.19998480	-0.011	848.79998587	-0.011			2.5

GSM 1900, Channel 512/810, Frequency 1850.0/1910.0 MHz

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1850.0756	1909.9244		
Extreme (50C)		1850.0755	1909.9244	-21.0	-0.011
Extreme (40C)		1850.0755	1909.9244	-29.3	-0.016
Extreme (30C)		1850.0755	1909.9244	-23.9	-0.013
Extreme (10C)		1850.0755	1909.9244	-22.0	-0.012
Extreme (0C)		1850.0755	1909.9244	-27.5	-0.015
Extreme (-10C)		1850.0755	1909.9244	-28.0	-0.015
Extreme (-20C)		1850.0755	1909.9244	-23.2	-0.012
Extreme (-30C)		1850.0755	1909.9244	-29.6	-0.016
20C	15%	1850.0755	1909.9244	-25.4	-0.013
	-15%	1850.0755	1909.9244	-28.4	-0.015
	End Point	1850.0755	1909.9244	-29.3	-0.016

WCDMA Band 5 (Lowest Frequency: Rel. 99 / Highest Frequency: HSDPA)

Limit: +- 2.5 ppm =		Low Channel	2066.000 Hz	High Channel	2116.500 Hz	
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				
		Low Channel		High Channel		Limit [ppm]
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.80	50	826.39998158	-0.004	846.59997597	0.007	2.5
3.80	40	826.39997846	0.000	846.59997515	0.008	2.5
3.80	30	826.39998423	-0.007	846.59998568	-0.004	2.5
3.80	20	826.39997858	0.000	846.59998212	0.000	2.5
3.80	10	826.39997768	0.001	846.59998393	-0.002	2.5
3.80	0	826.39997848	0.000	846.59998166	0.001	2.5
3.80	-10	826.39998182	-0.004	846.59998188	0.000	2.5
3.80	-20	826.39997589	0.003	846.59998303	-0.001	2.5
3.80	-30	826.39997858	0.000	846.59997623	0.007	2.5

Limit: +- 2.5 ppm =		Low Channel	2066.000 Hz	High Channel	2116.500 Hz	
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				
		Low Channel		High Channel		Limit [ppm]
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.80	20	826.39997858	0	846.59998212	0	2.5
4.35	20	826.39998217	-0.004	846.59998463	-0.003	2.5
3.40	20	826.39998103	-0.003	846.59997653	0.007	2.5

WCDMA Band 2 (Lowest Frequency: HSDPA / Highest Frequency: Rel. 99)

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1852.3979	1907.6021	-26.3	-0.014
Extreme (50C)		1852.3979	1907.6020		
Extreme (40C)		1852.3979	1907.6020		
Extreme (30C)		1852.3979	1907.6020		
Extreme (10C)		1852.3979	1907.6020		
Extreme (0C)		1852.3979	1907.6020		
Extreme (-10C)		1852.3979	1907.6020		
Extreme (-20C)		1852.3979	1907.6020		
Extreme (-30C)		1852.3979	1907.6020		
20C	15%	1852.3979	1907.6020	-30.0	-0.016
	-15%	1852.3979	1907.6020	-23.5	-0.013
	End Point	1852.3979	1907.6020	-23.6	-0.013

WCDMA Band 4 (HSDPA)

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1712.3979	1752.6021		
Extreme (50C)		1712.3979	1752.6020	-26.3	-0.015
Extreme (40C)		1712.3979	1752.6020	-20.0	-0.012
Extreme (30C)		1712.3979	1752.6020	-29.6	-0.017
Extreme (10C)		1712.3979	1752.6020	-19.2	-0.011
Extreme (0C)		1712.3979	1752.6020	-19.6	-0.011
Extreme (-10C)		1712.3979	1752.6020	-28.7	-0.017
Extreme (-20C)		1712.3979	1752.6020	-29.7	-0.017
Extreme (-30C)		1712.3979	1752.6020	-20.4	-0.012
20C	15%	1712.3979	1752.6020	-24.4	-0.014
	-15%	1712.3979	1752.6020	-25.9	-0.015
	End Point	1712.3979	1752.6020	-19.2	-0.011

LTE Band 2 (16QAM)

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1850.6995	1909.3005		
Extreme (50C)		1850.6994	1909.3005	-26.6	-0.014
Extreme (40C)		1850.6994	1909.3005	-20.8	-0.011
Extreme (30C)		1850.6994	1909.3005	-25.4	-0.013
Extreme (10C)		1850.6994	1909.3005	-21.7	-0.012
Extreme (0C)		1850.6994	1909.3005	-29.3	-0.016
Extreme (-10C)		1850.6994	1909.3005	-29.3	-0.016
Extreme (-20C)		1850.6994	1909.3005	-27.9	-0.015
Extreme (-30C)		1850.6994	1909.3005	-28.3	-0.015
20C	15%	1850.6994	1909.3005	-23.5	-0.012
	-15%	1850.6994	1909.3005	-27.8	-0.015
	End Point	1850.6994	1909.3005	-24.1	-0.013

LTE Band 5 (QPSK)

Reference Frequency : LTE Band 5 Low Channel 824.7 MHz / High Channel 848.3 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2061.750	Hz	High Channel	2120.750	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse					Limit [ppm]
		Low Channel		High Channel			
[MHz]		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.80	50	824.69997619	0.010	848.29998417	-0.004	2.5	
3.80	40	824.69997824	0.008	848.29997835	0.003	2.5	
3.80	30	824.69997933	0.007	848.29998172	-0.001	2.5	
3.80	20	824.69998483	0.000	848.29998070	0.000	2.5	
3.80	10	824.69998029	0.006	848.29997540	0.006	2.5	
3.80	0	824.69998482	0.000	848.29998386	-0.004	2.5	
3.80	-10	824.69998162	0.004	848.29998592	-0.006	2.5	
3.80	-20	824.69998545	-0.001	848.29998301	-0.003	2.5	
3.80	-30	824.69998490	0.000	848.29997820	0.003	2.5	

Reference Frequency : LTE Band 5 Low Channel 824.7 MHz / High Channel 848.3 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2061.750	Hz	High Channel	2120.750	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse					Limit [ppm]
		Low Channel		High Channel			
[MHz]		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.80	20	824.69998483	0	848.29998070	0	2.5	
4.35	20	824.69998369	0.001	848.29998479	-0.005	2.5	
3.40	20	824.69997626	0.010	848.29997603	0.006	2.5	

LTE Band 12 (16QAM)

Limit		699	716	Delta (Hz)	Frequency Stability (ppm)	
Condition		F low @ End of OBW	F high @ End of OBW			
Temperature	Voltage	(MHz)	(MHz)			
Normal (20C)	Normal	699.6995	715.3005			
Extreme (50C)		699.6994	715.3005	-14.6	-0.021	
Extreme (40C)		699.6994	715.3005	-10.3	-0.015	
Extreme (30C)		699.6994	715.3005	-12.1	-0.017	
Extreme (10C)		699.6994	715.3005	-17.4	-0.025	
Extreme (0C)		699.6994	715.3005	-13.2	-0.019	
Extreme (-10C)		699.6994	715.3005	-14.8	-0.021	
Extreme (-20C)		699.6994	715.3005	-16.7	-0.024	
Extreme (-30C)		699.6994	715.3005	-15.0	-0.021	
20C		15%	699.6994	715.3005	-10.9	-0.015
		-15%	699.6994	715.3005	-18.8	-0.027
		End Point	699.6994	715.3005	-10.4	-0.015

LTE Band 13 (QPSK)

Limit		777	787	Delta (Hz)	Frequency Stability (ppm)	
Condition		F low @ End of OBW	F high @ End of OBW			
Temperature	Voltage	(MHz)	(MHz)			
Normal (20C)	Normal	779.4978	784.5022			
Extreme (50C)		779.4977	784.5022	-11.3	-0.014	
Extreme (40C)		779.4977	784.5022	-16.8	-0.021	
Extreme (30C)		779.4977	784.5022	-11.2	-0.014	
Extreme (10C)		779.4977	784.5022	-9.8	-0.013	
Extreme (0C)		779.4977	784.5022	-10.2	-0.013	
Extreme (-10C)		779.4977	784.5022	-18.4	-0.023	
Extreme (-20C)		779.4977	784.5022	-19.7	-0.025	
Extreme (-30C)		779.4977	784.5022	-12.1	-0.016	
20C		15%	779.4977	784.5022	-15.7	-0.020
		-15%	779.4977	784.5022	-16.4	-0.021
		End Point	779.4977	784.5022	-17.4	-0.022

LTE Band 26 (QPSK)

Reference Frequency : LTE Band 26 Low Channel 814.7 MHz / High Channel 848.3 MHz @ 20°C						
Limit: +- 2.5 ppm =		Low Channel	2036.750 Hz	High Channel	2120.750 Hz	
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				
		Low Channel		High Channel		Limit [ppm]
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.80	50	814.69998506	-0.001	848.29997511	0.001	2.5
3.80	40	814.69997870	0.007	848.29998246	-0.008	2.5
3.80	30	814.69997726	0.009	848.29998580	-0.012	2.5
3.80	20	814.69998447	0.000	848.29997597	0.000	2.5
3.80	10	814.69998133	0.004	848.29998186	-0.007	2.5
3.80	0	814.69997898	0.007	848.29997851	-0.003	2.5
3.80	-10	814.69998349	0.001	848.29997836	-0.003	2.5
3.80	-20	814.69998024	0.005	848.29998154	-0.007	2.5
3.80	-30	814.69998133	0.004	848.29998539	-0.011	2.5

Reference Frequency : LTE Band 26 Low Channel 814.7 MHz / High Channel 848.3 MHz @ 20°C						
Limit: +- 2.5 ppm =		Low Channel	2036.750 Hz	High Channel	2120.750 Hz	
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				
		Low Channel		High Channel		Limit [ppm]
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.80	20	814.69998447	0	848.29997597	0	2.5
4.35	20	814.69998314	0.002	848.29998284	-0.008	2.5
3.40	20	814.69998408	0.000	848.29997571	0.000	2.5

LTE Band 41 (QPSK)

Limit		2496		2690	Delta (Hz)	Frequency Stability (ppm)	
Condition		F low @ End of OBW		F high @ End of OBW			
Temperature	Voltage	(MHz)	(MHz)				
Normal (20C)	Normal	2498.4977	2687.5022		-26.4	-0.010	
Extreme (50C)		2498.4977	2687.5022	-26.4			
Extreme (40C)		2498.4977	2687.5022	-23.2			
Extreme (30C)		2498.4977	2687.5022	-26.6			
Extreme (10C)		2498.4977	2687.5022	-31.4			
Extreme (0C)		2498.4977	2687.5022	-25.3			
Extreme (-10C)		2498.4977	2687.5022	-23.5			
Extreme (-20C)		2498.4977	2687.5022	-28.5			
Extreme (-30C)		2498.4977	2687.5022	-30.8			
20C		15%	2498.4977	2687.5022	-26.8	-0.010	
		-15%	2498.4977	2687.5022	-24.0	-0.009	
		End Point	2498.4977	2687.5022	-23.5	-0.009	

LTE Band 66 (16QAM)

Limit		1710	1780	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ End of OBW	F high @ End of OBW		
Temperature	Voltage	(MHz)	(MHz)		
Normal (20C)	Normal	1710.6995	1779.3005		
Extreme (50C)		1710.6994	1779.3005	-27.7	-0.016
Extreme (40C)		1710.6994	1779.3005	-29.7	-0.017
Extreme (30C)		1710.6994	1779.3005	-25.9	-0.015
Extreme (10C)		1710.6994	1779.3005	-19.0	-0.011
Extreme (0C)		1710.6994	1779.3005	-25.7	-0.015
Extreme (-10C)		1710.6994	1779.3005	-19.9	-0.011
Extreme (-20C)		1710.6994	1779.3005	-26.6	-0.015
Extreme (-30C)		1710.6994	1779.3005	-27.8	-0.016
20C	15%	1710.6994	1779.3005	-28.3	-0.016
	-15%	1710.6994	1779.3005	-21.5	-0.012
	End Point	1710.6994	1779.3005	-22.3	-0.013

LTE Band 17

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

10. RADIATED TEST RESULTS

10.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232, §27.50 and §27.53

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50:

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) (10) - Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d) (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Part 90.635(b) The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.17; ESU40 setting reference to 971168 D01 v03r01

For radiated output power measurement with a ESU40:

a) Set the RBW \geq OBW; b) Set VBW \geq $3 \times$ RBW; c) Set span \geq $2 \times$ RBW; d) Sweep time = auto couple; e) Detector = rms; f) Ensure that the number of measurement points \geq span/RBW; g) Trace mode = max hold(GSM, WCDMA), average(LTE);

TEST RESULTS

10.1.1. ERP/EIRP Results

GSM

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
GSM850	GPRS	512	824.2	25.03	318.42
		661	836.6	25.49	354.00
		810	848.8	24.65	291.74
	EGPRS	512	824.2	20.09	102.09
		661	836.6	19.34	85.90
		810	848.8	19.21	83.37
GSM1900	GPRS	512	1850.2	27.03	504.66
		661	1880	27.27	533.33
		810	1909.8	26.06	403.65
	EGPRS	512	1850.2	23.09	203.70
		661	1880	23.53	225.42
		810	1909.8	22.87	193.64

WCDMA

Band	Mode	Channel	f [MHz]	ERP / EIRP	
				[dBm]	[mW]
Band 5	REL99	4132	826.4	15.39	34.59
		4183	836.6	14.99	31.55
		4233	846.6	14.21	26.36
	HSDPA	4132	826.4	14.17	26.12
		4183	836.6	13.77	23.82
		4233	846.6	13.84	24.21
Band 4	REL99	1312	1712.4	21.59	144.21
		1413	1732.6	22.02	159.22
		1513	1752.6	21.42	138.68
	HSDPA	1312	1712.4	20.50	112.20
		1413	1732.6	21.18	131.22
		1513	1752.6	20.24	105.68
Band 2	REL99	9262	1852.4	18.98	79.07
		9400	1880.0	20.03	100.69
		9538	1907.6	18.73	74.64
	HSDPA	9262	1852.4	17.98	62.81
		9400	1880.0	18.50	70.79
		9538	1907.6	17.64	58.08

LTE Band 2

Band	BW [MHz]	Mode	RB Size/ RB Offset	f [MHz]	ERP / EIRP	
					[dBm]	[mW]
Band 2	20	QPSK	1 / 0	1860.0	20.24	105.68
			1 / 0	1880.0	20.30	107.15
			1 / 99	1900.0	20.17	103.99
		16QAM	1 / 99	1860.0	20.22	105.20
			1 / 0	1880.0	19.53	89.74
			1 / 49	1900.0	18.67	73.62
	15	QPSK	1 / 0	1857.5	19.92	98.17
			1 / 74	1880.0	19.97	99.31
			1 / 74	1902.5	20.13	103.04
		16QAM	1 / 37	1857.5	19.22	83.56
			1 / 74	1880.0	19.55	90.16
			1 / 0	1902.5	19.79	95.28
	10	QPSK	1 / 0	1855.0	19.60	91.20
			1 / 0	1880.0	20.96	124.74
			1 / 49	1905.0	20.03	100.69
		16QAM	1 / 0	1855.0	18.91	77.80
			1 / 0	1880.0	19.95	98.86
			1 / 0	1905.0	19.15	82.22
	5	QPSK	1 / 0	1852.5	19.98	99.54
			1 / 12	1880.0	21.39	137.72
			1 / 24	1907.5	19.77	94.84
		16QAM	1 / 12	1852.5	18.84	76.56
			1 / 0	1880.0	18.73	74.64
			1 / 12	1907.5	18.79	75.68
	3	QPSK	1 / 8	1851.5	19.13	81.85
			1 / 8	1880.0	21.23	132.74
			1 / 8	1908.5	19.77	94.84
		16QAM	1 / 8	1851.5	18.11	64.71
			1 / 8	1880.0	19.19	82.99
			1 / 8	1908.5	18.84	76.56
	1.4	QPSK	1 / 0	1850.7	20.39	109.40
			1 / 3	1880.0	21.05	127.35
			1 / 3	1909.3	19.60	91.20
		16QAM	1 / 3	1850.7	19.20	83.18
			1 / 3	1880.0	20.00	100.00
			1 / 3	1909.3	18.52	71.12

LTE Band 5

Band	BW [MHz]	Mode	RB Size/	f [MHz]	ERP / EIRP	
			RB Offset		[dBm]	[mW]
Band 5	10	QPSK	1 / 0	829.0	16.53	44.98
			1 / 0	836.5	16.16	41.30
			1 / 49	844.0	16.30	42.66
		16QAM	1 / 49	829.0	14.93	31.12
			1 / 0	836.5	15.83	38.28
			1 / 0	844.0	14.55	28.51
	5	QPSK	1 / 0	826.5	16.22	41.88
			1 / 24	836.5	15.69	37.07
			1 / 24	846.5	16.12	40.93
		16QAM	1 / 0	826.5	15.68	36.98
			1 / 0	836.5	15.59	36.22
			1 / 12	846.5	15.02	31.77
	3	QPSK	1 / 8	825.5	16.19	41.59
			1 / 8	836.5	15.72	37.33
			1 / 14	847.5	15.97	39.54
		16QAM	1 / 8	825.5	15.27	33.65
			1 / 8	836.5	15.27	33.65
			1 / 8	847.5	14.83	30.41
	1.4	QPSK	1 / 3	824.7	16.03	40.09
			1 / 3	836.5	15.89	38.82
			1 / 3	848.3	15.80	38.02
		16QAM	1 / 3	824.7	15.39	34.59
			1 / 3	836.5	15.29	33.81
			1 / 3	848.3	15.10	32.36

LTE Band 12

Band	BW [MHz]	Mode	RB Size/ RB Offset	f [MHz]	ERP / EIRP	
					[dBm]	[mW]
Band 12	10	QPSK	1 / 49	704.0	16.24	42.07
			1 / 25	707.5	16.53	44.98
			1 / 49	711.0	16.41	43.75
		16QAM	1 / 49	704.0	15.45	35.08
			1 / 25	707.5	15.44	34.99
			1 / 0	711.0	15.66	36.81
	5	QPSK	1 / 24	701.5	15.77	37.76
			1 / 24	707.5	17.68	58.61
			1 / 24	713.5	16.03	40.09
		16QAM	1 / 24	701.5	14.87	30.69
			1 / 24	707.5	16.85	48.42
			1 / 0	713.5	14.99	31.55
	3	QPSK	1 / 14	700.5	15.71	37.24
			1 / 8	707.5	15.24	33.42
			1 / 8	714.5	15.32	34.04
		16QAM	1 / 8	700.5	14.45	27.86
			1 / 8	707.5	13.93	24.72
			1 / 8	714.5	14.02	25.23
	1.4	QPSK	1 / 3	699.7	15.81	38.11
			1 / 3	707.5	15.32	34.04
			1 / 3	715.3	15.45	35.08
		16QAM	1 / 3	699.7	14.40	27.54
			1 / 3	707.5	14.22	26.42
			1 / 3	715.3	14.03	25.29

LTE Band 13

Band	BW [MHz]	Mode	RB size / RB Offset	f [MHz]	ERP / EIRP	
					[dBm]	[mW]
Band 13	10	QPSK	1 / 0	782.0	17.64	58.08
		16QAM	1 / 0	782.0	16.69	46.67
	5	QPSK	1 / 12	779.5	17.71	59.02
			1 / 0	782.0	17.50	56.23
			1 / 24	784.5	16.40	43.65
		16QAM	1 / 24	779.5	16.24	42.07
			1 / 0	782.0	16.34	43.05
			1 / 24	784.5	15.54	35.81

LTE Band 26

Band	BW [MHz]	Mode	RB Size/ RB Offset	f [MHz]	ERP/EIRP	
					[dBm]	[mW]
Band 26	15	QPSK	1 / 0	821.5	16.17	41.40
			1 / 0	831.5	20.23	105.44
			1 / 74	841.5	19.06	80.54
		16QAM	1 / 0	821.5	15.27	33.65
			1 / 0	831.5	18.04	63.68
	10	QPSK	1 / 37	841.5	19.96	99.08
			1 / 0	819.0	15.91	38.99
			1 / 0	829.0	17.25	53.09
			1 / 0	831.5	18.41	69.34
		16QAM	1 / 25	844.0	17.48	55.98
	5	QPSK	1 / 0	819.0	14.87	30.69
			1 / 0	829.0	16.81	47.97
			1 / 0	831.5	17.67	58.48
			1 / 25	844.0	17.42	55.21
		16QAM	1 / 0	816.5	15.61	36.39
			1 / 0	821.5	17.45	55.59
			1 / 0	826.5	16.36	43.25
			1 / 0	831.5	17.48	55.98
			1 / 0	846.5	17.70	58.88
	3	QPSK	1 / 0	816.5	14.72	29.65
			1 / 0	821.5	16.07	40.46
			1 / 12	826.5	15.67	36.90
			1 / 24	831.5	17.55	56.89
			1 / 0	846.5	17.11	51.40
		16QAM	1 / 8	815.5	15.83	38.28
			1 / 0	822.5	16.59	45.60
			1 / 0	825.5	16.20	41.69
			1 / 8	831.5	17.81	60.39
			1 / 14	847.5	17.02	50.35
	1.4	QPSK	1 / 8	815.5	14.77	29.99
			1 / 14	822.5	16.20	41.69
			1 / 8	825.5	15.05	31.99
			1 / 8	831.5	17.42	55.21
			1 / 8	847.5	16.22	41.88
		16QAM	1 / 3	814.7	15.78	37.84
			1 / 5	823.3	17.09	51.17
			1 / 3	824.7	16.41	43.75
			1 / 3	831.5	17.57	57.15
			1 / 3	848.3	17.31	53.83

LTE Band 41

Band	BW [MHz]	Mode	RB Size/ RB Offset	f [MHz]	ERP / EIRP	
					[dBm]	[mW]
Band 41	20	QPSK	1 / 0	2506.0	22.07	161.06
			1 / 99	2593.0	23.39	218.27
			1 / 0	2680.0	21.35	136.46
		16QAM	1 / 99	2506.0	21.94	156.31
			1 / 99	2593.0	22.71	186.64
			1 / 0	2680.0	22.05	160.32
	15	QPSK	1 / 74	2503.5	22.28	169.04
			1 / 74	2593.0	22.42	174.58
			1 / 0	2682.5	22.57	180.72
		16QAM	1 / 0	2503.5	21.59	144.21
			1 / 0	2593.0	21.86	153.46
			1 / 0	2682.5	22.33	171.00
	10	QPSK	1 / 49	2501.0	21.18	131.22
			1 / 25	2593.0	23.64	231.21
			1 / 0	2685.0	21.89	154.53
		16QAM	1 / 49	2501.0	20.78	119.67
			1 / 25	2593.0	22.51	178.24
			1 / 0	2685.0	22.19	165.58
	5	QPSK	1 / 24	2498.5	17.39	54.83
			1 / 24	2593.0	23.10	204.17
			1 / 24	2687.5	22.82	191.43
		16QAM	1 / 24	2498.5	19.02	79.80
			1 / 24	2593.0	24.20	263.03
			1 / 24	2687.5	22.00	158.49

LTE Band 17

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

LTE Band 66

Band	BW [MHz]	Mode	RB Size/ RB Offset	f [MHz]	ERP / EIRP	
					[dBm]	[mW]
Band 66	20	QPSK	1 / 0	1720.0	23.36	216.77
			1 / 0	1745.0	22.48	177.01
			1 / 0	1770.0	22.79	190.11
		16QAM	1 / 0	1720.0	22.20	165.96
			1 / 0	1745.0	21.52	141.91
			1 / 0	1770.0	21.83	152.41
	15	QPSK	1 / 0	1717.5	23.22	209.89
			1 / 0	1747.5	23.19	208.45
			1 / 0	1772.5	23.18	207.97
		16QAM	1 / 0	1717.5	21.95	156.68
			1 / 0	1747.5	22.20	165.96
			1 / 0	1772.5	22.37	172.58
	10	QPSK	1 / 0	1715.0	21.53	142.23
			1 / 0	1745.0	21.66	146.55
			1 / 0	1775.0	21.16	130.62
		16QAM	1 / 0	1715.0	20.52	112.72
			1 / 0	1745.0	20.58	114.29
			1 / 0	1775.0	19.99	99.77
	5	QPSK	1 / 0	1712.5	22.16	164.44
			1 / 0	1745.0	21.71	148.25
			1 / 0	1777.5	20.94	124.17
		16QAM	1 / 0	1712.5	21.21	132.13
			1 / 0	1745.0	20.99	125.60
			1 / 0	1777.5	20.07	101.62
	3	QPSK	1 / 8	1711.5	21.91	155.24
			1 / 8	1745.0	22.24	167.49
			1 / 8	1778.5	20.75	118.85
		16QAM	1 / 8	1711.5	20.71	117.76
			1 / 8	1745.0	21.63	145.55
			1 / 8	1778.5	19.72	93.76
	1.4	QPSK	1 / 3	1710.7	22.12	162.93
			1 / 3	1745.0	21.76	149.97
			1 / 3	1779.3	20.65	116.14
		16QAM	1 / 0	1710.7	20.99	125.60
			1 / 3	1745.0	20.71	117.76
			1 / 3	1779.3	19.66	92.47

10.1.2. ERP/EIRP DATA

GSM850

		UL Verification Services, Inc. High Frequency Substitution Measurement									
GSM850	GPRS	Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable									
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
		Low Ch									
		824.20	29.52	V	3.0	-1.5	25.03	38.5	-13.5		
		824.20	21.82	H	3.0	-1.5	17.33	38.5	-21.2		
		Mid Ch									
		836.60	29.95	V	3.0	-1.4	25.49	38.5	-13.0		
		836.60	22.09	H	3.0	-1.4	17.62	38.5	-20.9		
		High Ch									
		848.80	29.09	V	3.1	-1.4	24.65	38.5	-13.9		
		848.80	21.21	H	3.1	-1.4	16.77	38.5	-21.7		
		UL Verification Services, Inc. High Frequency Substitution Measurement									
GSM850	EGPRS	Company:	Samsung								
		Project #:	4788886234								
GSM850	EGPRS	Date:	2019-03-25								
		Test Engineer:	47989								
GSM850	EGPRS	Configuration:	EUT / Z-Position								
		Location:	Chamber 1								
GSM850	EGPRS	Mode:	EGPRS 850 MHz Fundamentals								
		Test Equipment: Receiving: VULB9163-750, and Chamber 1 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable									
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
		Low Ch									
		824.20	24.58	V	3.0	-1.5	20.09	38.5	-18.4		
		824.20	15.88	H	3.0	-1.5	11.39	38.5	-27.1		
		Mid Ch									
		836.60	23.80	V	3.0	-1.4	19.34	38.5	-19.2		
		836.60	15.93	H	3.0	-1.4	11.46	38.5	-27.0		
		High Ch									
		848.80	23.65	V	3.1	-1.4	19.21	38.5	-19.3		
		848.80	14.96	H	3.1	-1.4	10.52	38.5	-28.0		

GSM1900

	<p style="text-align: center;">UL Verification Services, Inc. High Frequency Substitution Measurement</p> <p>Company: Samsung Project #: 4788886234 Date: 2019-03-11 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: GPRS 1900 MHz Fundamentals</p> <p>Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr> </thead> <tbody> <tr> <td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1850.20</td><td>18.82</td><td>V</td><td>4.5</td><td>9.4</td><td>23.74</td><td>33.0</td><td>-9.3</td><td></td></tr> <tr> <td>1850.20</td><td>22.11</td><td>H</td><td>4.5</td><td>9.4</td><td>27.03</td><td>33.0</td><td>-6.0</td><td></td></tr> <tr> <td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1880.00</td><td>20.60</td><td>V</td><td>4.5</td><td>9.2</td><td>25.26</td><td>33.0</td><td>-7.7</td><td></td></tr> <tr> <td>1880.00</td><td>22.56</td><td>H</td><td>4.5</td><td>9.2</td><td>27.23</td><td>33.0</td><td>-5.8</td><td></td></tr> <tr> <td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1909.80</td><td>19.96</td><td>V</td><td>4.6</td><td>8.9</td><td>24.32</td><td>33.0</td><td>-8.7</td><td></td></tr> <tr> <td>1909.80</td><td>21.70</td><td>H</td><td>4.6</td><td>8.9</td><td>26.06</td><td>33.0</td><td>-6.9</td><td></td></tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.20	18.82	V	4.5	9.4	23.74	33.0	-9.3		1850.20	22.11	H	4.5	9.4	27.03	33.0	-6.0		Mid Ch									1880.00	20.60	V	4.5	9.2	25.26	33.0	-7.7		1880.00	22.56	H	4.5	9.2	27.23	33.0	-5.8		High Ch									1909.80	19.96	V	4.6	8.9	24.32	33.0	-8.7		1909.80	21.70	H	4.6	8.9	26.06	33.0	-6.9	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																			
Low Ch																																																																																											
1850.20	18.82	V	4.5	9.4	23.74	33.0	-9.3																																																																																				
1850.20	22.11	H	4.5	9.4	27.03	33.0	-6.0																																																																																				
Mid Ch																																																																																											
1880.00	20.60	V	4.5	9.2	25.26	33.0	-7.7																																																																																				
1880.00	22.56	H	4.5	9.2	27.23	33.0	-5.8																																																																																				
High Ch																																																																																											
1909.80	19.96	V	4.6	8.9	24.32	33.0	-8.7																																																																																				
1909.80	21.70	H	4.6	8.9	26.06	33.0	-6.9																																																																																				
GSM1900																																																																																											
GPRS																																																																																											
	<p style="text-align: center;">UL Verification Services, Inc. High Frequency Substitution Measurement</p> <p>Company: Samsung Project #: 4788886234 Date: 2019-03-11 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: EGPRS 1900 MHz Fundamentals</p> <p>Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr> </thead> <tbody> <tr> <td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1850.20</td><td>14.98</td><td>V</td><td>4.5</td><td>9.4</td><td>19.90</td><td>33.0</td><td>-13.1</td><td></td></tr> <tr> <td>1850.20</td><td>18.17</td><td>H</td><td>4.5</td><td>9.4</td><td>23.09</td><td>33.0</td><td>-9.9</td><td></td></tr> <tr> <td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1880.00</td><td>16.66</td><td>V</td><td>4.5</td><td>9.2</td><td>21.32</td><td>33.0</td><td>-11.7</td><td></td></tr> <tr> <td>1880.00</td><td>18.86</td><td>H</td><td>4.5</td><td>9.2</td><td>23.53</td><td>33.0</td><td>-9.5</td><td></td></tr> <tr> <td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1909.80</td><td>16.34</td><td>V</td><td>4.6</td><td>8.9</td><td>20.70</td><td>33.0</td><td>-12.3</td><td></td></tr> <tr> <td>1909.80</td><td>18.51</td><td>H</td><td>4.6</td><td>8.9</td><td>22.87</td><td>33.0</td><td>-10.1</td><td></td></tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.20	14.98	V	4.5	9.4	19.90	33.0	-13.1		1850.20	18.17	H	4.5	9.4	23.09	33.0	-9.9		Mid Ch									1880.00	16.66	V	4.5	9.2	21.32	33.0	-11.7		1880.00	18.86	H	4.5	9.2	23.53	33.0	-9.5		High Ch									1909.80	16.34	V	4.6	8.9	20.70	33.0	-12.3		1909.80	18.51	H	4.6	8.9	22.87	33.0	-10.1	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																			
Low Ch																																																																																											
1850.20	14.98	V	4.5	9.4	19.90	33.0	-13.1																																																																																				
1850.20	18.17	H	4.5	9.4	23.09	33.0	-9.9																																																																																				
Mid Ch																																																																																											
1880.00	16.66	V	4.5	9.2	21.32	33.0	-11.7																																																																																				
1880.00	18.86	H	4.5	9.2	23.53	33.0	-9.5																																																																																				
High Ch																																																																																											
1909.80	16.34	V	4.6	8.9	20.70	33.0	-12.3																																																																																				
1909.80	18.51	H	4.6	8.9	22.87	33.0	-10.1																																																																																				
GSM1900																																																																																											
EGPRS																																																																																											

WCDMA Band 5

UL Verification Services, Inc. High Frequency Substitution Measurement									
Company: Samsung Project #: 4788886234 Date: 2019-03-07 Test Engineer: 45585 Configuration: EUT, Z-Position Location: Chamber 2 Mode: Rel99 Band 5 Fundamentals									
<u>Test Equipment:</u> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch									
826.40	19.87	V	3.0	-1.5	15.39	38.5	-23.1		
826.40	11.54	H	3.0	-1.5	7.06	38.5	-31.4		
Mid Ch									
836.60	19.45	V	3.0	-1.4	14.99	38.5	-23.5		
836.60	11.05	H	3.0	-1.4	6.59	38.5	-31.9		
High Ch									
846.60	18.65	V	3.1	-1.4	14.21	38.5	-24.3		
846.60	10.80	H	3.1	-1.4	6.36	38.5	-32.1		

UL Verification Services, Inc. High Frequency Substitution Measurement									
Company: Samsung Project #: 4788886234 Date: 2019-03-07 Test Engineer: 45585 Configuration: EUT, Z-Position Location: Chamber 2 Mode: HSDPA Band 5 Fundamentals									
<u>Test Equipment:</u> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch									
826.40	18.65	V	3.0	-1.5	14.17	38.5	-24.3		
826.40	10.67	H	3.0	-1.5	6.19	38.5	-32.3		
Mid Ch									
836.60	18.23	V	3.0	-1.4	13.77	38.5	-24.7		
836.60	10.09	H	3.0	-1.4	5.63	38.5	-32.9		
High Ch									
846.60	18.28	V	3.1	-1.4	13.84	38.5	-24.7		
846.60	10.00	H	3.1	-1.4	5.56	38.5	-32.9		

WCDMA Band 4

		UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																									
WCDMA Band 4 REL99	<p>Company: Samsung Project #: 4788886234 Date: 2019-03-11 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: Rel99 Band 4 Fundamentals</p> <p>Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p> <table border="1"><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr></thead><tbody><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1712.40</td><td>12.90</td><td>V</td><td>4.3</td><td>9.3</td><td>17.92</td><td>30.0</td><td>-12.1</td><td></td></tr><tr><td>1712.40</td><td>16.57</td><td>H</td><td>4.3</td><td>9.3</td><td>21.59</td><td>30.0</td><td>-8.4</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1732.60</td><td>12.64</td><td>V</td><td>4.3</td><td>9.4</td><td>17.70</td><td>30.0</td><td>-12.3</td><td></td></tr><tr><td>1732.60</td><td>16.96</td><td>H</td><td>4.3</td><td>9.4</td><td>22.02</td><td>30.0</td><td>-8.0</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1752.60</td><td>12.26</td><td>V</td><td>4.4</td><td>9.5</td><td>17.37</td><td>30.0</td><td>-12.6</td><td></td></tr><tr><td>1752.60</td><td>16.31</td><td>H</td><td>4.4</td><td>9.5</td><td>21.42</td><td>30.0</td><td>-8.6</td><td></td></tr></tbody></table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1712.40	12.90	V	4.3	9.3	17.92	30.0	-12.1		1712.40	16.57	H	4.3	9.3	21.59	30.0	-8.4		Mid Ch									1732.60	12.64	V	4.3	9.4	17.70	30.0	-12.3		1732.60	16.96	H	4.3	9.4	22.02	30.0	-8.0		High Ch									1752.60	12.26	V	4.4	9.5	17.37	30.0	-12.6		1752.60	16.31	H	4.4	9.5	21.42	30.0	-8.6	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																			
Low Ch																																																																																											
1712.40	12.90	V	4.3	9.3	17.92	30.0	-12.1																																																																																				
1712.40	16.57	H	4.3	9.3	21.59	30.0	-8.4																																																																																				
Mid Ch																																																																																											
1732.60	12.64	V	4.3	9.4	17.70	30.0	-12.3																																																																																				
1732.60	16.96	H	4.3	9.4	22.02	30.0	-8.0																																																																																				
High Ch																																																																																											
1752.60	12.26	V	4.4	9.5	17.37	30.0	-12.6																																																																																				
1752.60	16.31	H	4.4	9.5	21.42	30.0	-8.6																																																																																				
WCDMA Band 4 HSDPA	<p>Company: Samsung Project #: 4788886234 Date: 2019-03-11 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: HSDPA Band 4 Fundamentals</p> <p>Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p> <table border="1"><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr></thead><tbody><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1712.40</td><td>11.98</td><td>V</td><td>4.3</td><td>9.3</td><td>17.00</td><td>30.0</td><td>-13.0</td><td></td></tr><tr><td>1712.40</td><td>15.48</td><td>H</td><td>4.3</td><td>9.3</td><td>20.50</td><td>30.0</td><td>-9.5</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1732.60</td><td>11.47</td><td>V</td><td>4.3</td><td>9.4</td><td>16.53</td><td>30.0</td><td>-13.5</td><td></td></tr><tr><td>1732.60</td><td>16.12</td><td>H</td><td>4.3</td><td>9.4</td><td>21.18</td><td>30.0</td><td>-8.8</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1752.60</td><td>11.29</td><td>V</td><td>4.4</td><td>9.5</td><td>16.40</td><td>30.0</td><td>-13.6</td><td></td></tr><tr><td>1752.60</td><td>15.13</td><td>H</td><td>4.4</td><td>9.5</td><td>20.24</td><td>30.0</td><td>-9.8</td><td></td></tr></tbody></table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1712.40	11.98	V	4.3	9.3	17.00	30.0	-13.0		1712.40	15.48	H	4.3	9.3	20.50	30.0	-9.5		Mid Ch									1732.60	11.47	V	4.3	9.4	16.53	30.0	-13.5		1732.60	16.12	H	4.3	9.4	21.18	30.0	-8.8		High Ch									1752.60	11.29	V	4.4	9.5	16.40	30.0	-13.6		1752.60	15.13	H	4.4	9.5	20.24	30.0	-9.8	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																			
Low Ch																																																																																											
1712.40	11.98	V	4.3	9.3	17.00	30.0	-13.0																																																																																				
1712.40	15.48	H	4.3	9.3	20.50	30.0	-9.5																																																																																				
Mid Ch																																																																																											
1732.60	11.47	V	4.3	9.4	16.53	30.0	-13.5																																																																																				
1732.60	16.12	H	4.3	9.4	21.18	30.0	-8.8																																																																																				
High Ch																																																																																											
1752.60	11.29	V	4.4	9.5	16.40	30.0	-13.6																																																																																				
1752.60	15.13	H	4.4	9.5	20.24	30.0	-9.8																																																																																				

WCDMA Band 2

		UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																	
WCDMA		<p>Company: Samsung Project #: 4788886234 Date: 2019-02-28 Test Engineer: 47989 Configuration: EUT / Y-Position Location: Chamber 2 Mode: Rel99 Band 2 Fundamentals</p>																																																																																																	
Band 2 REL99		<p>Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p>																																																																																																	
		<table border="1"><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr></thead><tbody><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1852.40</td><td>14.08</td><td>V</td><td>4.5</td><td>9.4</td><td>18.98</td><td>33.0</td><td>-14.0</td><td></td></tr><tr><td>1852.40</td><td>5.63</td><td>H</td><td>4.5</td><td>9.4</td><td>10.53</td><td>33.0</td><td>-22.5</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1880.00</td><td>15.37</td><td>V</td><td>4.5</td><td>9.2</td><td>20.03</td><td>33.0</td><td>-13.0</td><td></td></tr><tr><td>1880.00</td><td>7.62</td><td>H</td><td>4.5</td><td>9.2</td><td>12.29</td><td>33.0</td><td>-20.7</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1907.60</td><td>14.34</td><td>V</td><td>4.6</td><td>9.0</td><td>18.73</td><td>33.0</td><td>-14.3</td><td></td></tr><tr><td>1907.60</td><td>7.20</td><td>H</td><td>4.6</td><td>9.0</td><td>11.59</td><td>33.0</td><td>-21.4</td><td></td></tr></tbody></table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1852.40	14.08	V	4.5	9.4	18.98	33.0	-14.0		1852.40	5.63	H	4.5	9.4	10.53	33.0	-22.5		Mid Ch									1880.00	15.37	V	4.5	9.2	20.03	33.0	-13.0		1880.00	7.62	H	4.5	9.2	12.29	33.0	-20.7		High Ch									1907.60	14.34	V	4.6	9.0	18.73	33.0	-14.3		1907.60	7.20	H	4.6	9.0	11.59	33.0	-21.4	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																											
Low Ch																																																																																																			
1852.40	14.08	V	4.5	9.4	18.98	33.0	-14.0																																																																																												
1852.40	5.63	H	4.5	9.4	10.53	33.0	-22.5																																																																																												
Mid Ch																																																																																																			
1880.00	15.37	V	4.5	9.2	20.03	33.0	-13.0																																																																																												
1880.00	7.62	H	4.5	9.2	12.29	33.0	-20.7																																																																																												
High Ch																																																																																																			
1907.60	14.34	V	4.6	9.0	18.73	33.0	-14.3																																																																																												
1907.60	7.20	H	4.6	9.0	11.59	33.0	-21.4																																																																																												
WCDMA		<p>UL Verification Services, Inc. High Frequency Substitution Measurement</p>																																																																																																	
Band 2 HSDPA		<p>Company: Samsung Project #: 4788886234 Date: 2019-02-28 Test Engineer: 47989 Configuration: EUT / Y-Position Location: Chamber 2 Mode: HSDPA Band 2 Fundamentals</p>																																																																																																	
		<p>Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p>																																																																																																	
		<table border="1"><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr></thead><tbody><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1852.40</td><td>13.08</td><td>V</td><td>4.5</td><td>9.4</td><td>17.98</td><td>33.0</td><td>-15.0</td><td></td></tr><tr><td>1852.40</td><td>4.53</td><td>H</td><td>4.5</td><td>9.4</td><td>9.43</td><td>33.0</td><td>-23.6</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1880.00</td><td>13.84</td><td>V</td><td>4.5</td><td>9.2</td><td>18.50</td><td>33.0</td><td>-14.5</td><td></td></tr><tr><td>1880.00</td><td>5.62</td><td>H</td><td>4.5</td><td>9.2</td><td>10.29</td><td>33.0</td><td>-22.7</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1907.60</td><td>13.25</td><td>V</td><td>4.6</td><td>9.0</td><td>17.64</td><td>33.0</td><td>-15.4</td><td></td></tr><tr><td>1907.60</td><td>6.23</td><td>H</td><td>4.6</td><td>9.0</td><td>10.62</td><td>33.0</td><td>-22.4</td><td></td></tr></tbody></table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1852.40	13.08	V	4.5	9.4	17.98	33.0	-15.0		1852.40	4.53	H	4.5	9.4	9.43	33.0	-23.6		Mid Ch									1880.00	13.84	V	4.5	9.2	18.50	33.0	-14.5		1880.00	5.62	H	4.5	9.2	10.29	33.0	-22.7		High Ch									1907.60	13.25	V	4.6	9.0	17.64	33.0	-15.4		1907.60	6.23	H	4.6	9.0	10.62	33.0	-22.4	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																											
Low Ch																																																																																																			
1852.40	13.08	V	4.5	9.4	17.98	33.0	-15.0																																																																																												
1852.40	4.53	H	4.5	9.4	9.43	33.0	-23.6																																																																																												
Mid Ch																																																																																																			
1880.00	13.84	V	4.5	9.2	18.50	33.0	-14.5																																																																																												
1880.00	5.62	H	4.5	9.2	10.29	33.0	-22.7																																																																																												
High Ch																																																																																																			
1907.60	13.25	V	4.6	9.0	17.64	33.0	-15.4																																																																																												
1907.60	6.23	H	4.6	9.0	10.62	33.0	-22.4																																																																																												

LTE Band 2

		UL Verification Services, Inc. High Frequency Substitution Measurement <p>Company: Samsung Project #: 4788886234 Date: 2019-02-28 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_QPSK Band 2 Fundamentals, 20MHz Bandwidth</p> <p>Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr> </thead> <tbody> <tr> <td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1860.00</td><td>11.99</td><td>V</td><td>4.5</td><td>9.3</td><td>16.83</td><td>33.0</td><td>-16.2</td><td></td></tr> <tr> <td>1860.00</td><td>15.40</td><td>H</td><td>4.5</td><td>9.3</td><td>20.24</td><td>33.0</td><td>-12.8</td><td></td></tr> <tr> <td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1880.00</td><td>11.78</td><td>V</td><td>4.5</td><td>9.2</td><td>16.44</td><td>33.0</td><td>-16.6</td><td></td></tr> <tr> <td>1880.00</td><td>15.63</td><td>H</td><td>4.5</td><td>9.2</td><td>20.30</td><td>33.0</td><td>-12.7</td><td></td></tr> <tr> <td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1900.00</td><td>11.00</td><td>V</td><td>4.6</td><td>9.0</td><td>15.50</td><td>33.0</td><td>-17.5</td><td></td></tr> <tr> <td>1900.00</td><td>15.67</td><td>H</td><td>4.6</td><td>9.0</td><td>20.17</td><td>33.0</td><td>-12.8</td><td></td></tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1860.00	11.99	V	4.5	9.3	16.83	33.0	-16.2		1860.00	15.40	H	4.5	9.3	20.24	33.0	-12.8		Mid Ch									1880.00	11.78	V	4.5	9.2	16.44	33.0	-16.6		1880.00	15.63	H	4.5	9.2	20.30	33.0	-12.7		High Ch									1900.00	11.00	V	4.6	9.0	15.50	33.0	-17.5		1900.00	15.67	H	4.6	9.0	20.17	33.0	-12.8									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																												
Low Ch																																																																																																				
1860.00	11.99	V	4.5	9.3	16.83	33.0	-16.2																																																																																													
1860.00	15.40	H	4.5	9.3	20.24	33.0	-12.8																																																																																													
Mid Ch																																																																																																				
1880.00	11.78	V	4.5	9.2	16.44	33.0	-16.6																																																																																													
1880.00	15.63	H	4.5	9.2	20.30	33.0	-12.7																																																																																													
High Ch																																																																																																				
1900.00	11.00	V	4.6	9.0	15.50	33.0	-17.5																																																																																													
1900.00	15.67	H	4.6	9.0	20.17	33.0	-12.8																																																																																													
		UL Verification Services, Inc. High Frequency Substitution Measurement <p>Company: Samsung Project #: 4788886234 Date: 2019-02-28 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_16QAM Band 2 Fundamentals, 20MHz Bandwidth</p> <p>Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr> </thead> <tbody> <tr> <td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1860.00</td><td>10.90</td><td>V</td><td>4.5</td><td>9.3</td><td>15.74</td><td>33.0</td><td>-17.3</td><td></td></tr> <tr> <td>1860.00</td><td>15.38</td><td>H</td><td>4.5</td><td>9.3</td><td>20.22</td><td>33.0</td><td>-12.8</td><td></td></tr> <tr> <td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1880.00</td><td>10.89</td><td>V</td><td>4.5</td><td>9.2</td><td>15.55</td><td>33.0</td><td>-17.5</td><td></td></tr> <tr> <td>1880.00</td><td>14.86</td><td>H</td><td>4.5</td><td>9.2</td><td>19.53</td><td>33.0</td><td>-13.5</td><td></td></tr> <tr> <td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1900.00</td><td>12.15</td><td>V</td><td>4.6</td><td>9.0</td><td>16.65</td><td>33.0</td><td>-16.4</td><td></td></tr> <tr> <td>1900.00</td><td>14.17</td><td>H</td><td>4.6</td><td>9.0</td><td>18.67</td><td>33.0</td><td>-14.3</td><td></td></tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1860.00	10.90	V	4.5	9.3	15.74	33.0	-17.3		1860.00	15.38	H	4.5	9.3	20.22	33.0	-12.8		Mid Ch									1880.00	10.89	V	4.5	9.2	15.55	33.0	-17.5		1880.00	14.86	H	4.5	9.2	19.53	33.0	-13.5		High Ch									1900.00	12.15	V	4.6	9.0	16.65	33.0	-16.4		1900.00	14.17	H	4.6	9.0	18.67	33.0	-14.3									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																												
Low Ch																																																																																																				
1860.00	10.90	V	4.5	9.3	15.74	33.0	-17.3																																																																																													
1860.00	15.38	H	4.5	9.3	20.22	33.0	-12.8																																																																																													
Mid Ch																																																																																																				
1880.00	10.89	V	4.5	9.2	15.55	33.0	-17.5																																																																																													
1880.00	14.86	H	4.5	9.2	19.53	33.0	-13.5																																																																																													
High Ch																																																																																																				
1900.00	12.15	V	4.6	9.0	16.65	33.0	-16.4																																																																																													
1900.00	14.17	H	4.6	9.0	18.67	33.0	-14.3																																																																																													

		UL Verification Services, Inc. High Frequency Substitution Measurement									
LTE		Company:	Samsung								
Band 2		Project #:	4788886234								
15MHz		Date:	2019-02-28								
QPSK		Test Engineer:	47989								
		Configuration:	EUT / X-Position								
		Location:	Chamber 2								
		Mode:	LTE_QPSK Band 2 Fundamentals, 15MHz Bandwidth								
Test Equipment:											
Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables											
Substitution: Horn 3115[00167451], 8.5m SMA-type Cable											
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
		Low Ch									
		1857.50	10.96	V	4.5	9.4	15.82	33.0	-17.2		
		1857.50	15.06	H	4.5	9.4	19.92	33.0	-13.1		
		Mid Ch									
		1880.00	12.11	V	4.5	9.2	16.77	33.0	-16.2		
		1880.00	15.30	H	4.5	9.2	19.97	33.0	-13.0		
		High Ch									
		1902.50	10.78	V	4.6	9.0	15.24	33.0	-17.8		
		1902.50	15.68	H	4.6	9.0	20.13	33.0	-12.9		
		UL Verification Services, Inc. High Frequency Substitution Measurement									
LTE		Company:	Samsung								
Band 2		Project #:	4788886234								
15MHz		Date:	2019-02-28								
16QAM		Test Engineer:	47989								
		Configuration:	EUT / X-Position								
		Location:	Chamber 2								
		Mode:	LTE_16QAM Band 2 Fundamentals, 15MHz Bandwidth								
		Test Equipment:									
Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables											
Substitution: Horn 3115[00167451], 8.5m SMA-type Cable											
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
		Low Ch									
		1857.50	10.52	V	4.5	9.4	15.38	33.0	-17.6		
		1857.50	14.36	H	4.5	9.4	19.22	33.0	-13.8		
		Mid Ch									
		1880.00	11.26	V	4.5	9.2	15.92	33.0	-17.1		
		1880.00	14.88	H	4.5	9.2	19.55	33.0	-13.5		
		High Ch									
		1902.50	11.92	V	4.6	9.0	16.38	33.0	-16.6		
		1902.50	15.34	H	4.6	9.0	19.79	33.0	-13.2		

		UL Verification Services, Inc. High Frequency Substitution Measurement								
		Company: Samsung Project #: 4788886234 Date: 2019-02-28 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_QPSK Band 2 Fundamentals, 10MHz Bandwidth								
		<u>Test Equipment:</u> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable								
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
		Low Ch								
		1855.00	11.24	V	4.5	9.4	16.12	33.0	-16.9	
		1855.00	14.72	H	4.5	9.4	19.60	33.0	-13.4	
		Mid Ch								
		1880.00	12.34	V	4.5	9.2	17.00	33.0	-16.0	
		1880.00	16.29	H	4.5	9.2	20.96	33.0	-12.0	
		High Ch								
		1905.00	11.05	V	4.6	9.0	15.47	33.0	-17.5	
		1905.00	15.60	H	4.6	9.0	20.03	33.0	-13.0	
		UL Verification Services, Inc. High Frequency Substitution Measurement								
		Company: Samsung Project #: 4788886234 Date: 2019-02-28 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_16QAM Band 2 Fundamentals, 10MHz Bandwidth								
		<u>Test Equipment:</u> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable								
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
		Low Ch								
		1855.00	10.37	V	4.5	9.4	15.25	33.0	-17.8	
		1855.00	14.03	H	4.5	9.4	18.91	33.0	-14.1	
		Mid Ch								
		1880.00	11.49	V	4.5	9.2	16.15	33.0	-16.9	
		1880.00	15.28	H	4.5	9.2	19.95	33.0	-13.1	
		High Ch								
		1905.00	10.17	V	4.6	9.0	14.59	33.0	-18.4	
		1905.00	14.72	H	4.6	9.0	19.15	33.0	-13.9	

		UL Verification Services, Inc. High Frequency Substitution Measurement										
LTE	Band 2	5MHz	QPSK	Company:	Samsung							
				Project #:	4788886234							
				Date:	2019-02-28							
				Test Engineer:	47989							
				Configuration:	EUT / X-Position							
				Location:	Chamber 2							
				Mode:	LTE_QPSK Band 2 Fundamentals, 5MHz Bandwidth							
				Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable								
				f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
				Low Ch								
				1852.50	11.33	V	4.5	9.4	16.23	33.0	-16.8	
				1852.50	15.08	H	4.5	9.4	19.98	33.0	-13.0	
				Mid Ch								
				1880.00	11.84	V	4.5	9.2	16.50	33.0	-16.5	
				1880.00	16.72	H	4.5	9.2	21.39	33.0	-11.6	
				High Ch								
				1907.50	11.47	V	4.6	9.0	15.86	33.0	-17.1	
				1907.50	15.38	H	4.6	9.0	19.77	33.0	-13.2	
LTE	Band 2	5MHz	16QAM	Company:	Samsung							
				Project #:	4788886234							
				Date:	2019-02-28							
				Test Engineer:	47989							
				Configuration:	EUT / X-Position							
				Location:	Chamber 2							
				Mode:	LTE_16QAM Band 2 Fundamentals, 5MHz Bandwidth							
				Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable								
				f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
				Low Ch								
				1852.50	9.50	V	4.5	9.4	14.40	33.0	-18.6	
				1852.50	13.94	H	4.5	9.4	18.84	33.0	-14.2	
				Mid Ch								
				1880.00	10.84	V	4.5	9.2	15.50	33.0	-17.5	
				1880.00	14.06	H	4.5	9.2	18.73	33.0	-14.3	
				High Ch								
				1907.50	10.93	V	4.6	9.0	15.32	33.0	-17.7	
				1907.50	14.40	H	4.6	9.0	18.79	33.0	-14.2	

		<p style="text-align: center;">UL Verification Services, Inc. High Frequency Substitution Measurement</p> <p>Company: Samsung Project #: 4788886234 Date: 2019-02-28 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_QPSK Band 2 Fundamentals, 3MHz Bandwidth</p> <p><u>Test Equipment:</u> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p> <table border="1"><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr></thead><tbody><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1851.50</td><td>10.45</td><td>V</td><td>4.5</td><td>9.4</td><td>15.36</td><td>33.0</td><td>-17.6</td><td></td></tr><tr><td>1851.50</td><td>14.22</td><td>H</td><td>4.5</td><td>9.4</td><td>19.13</td><td>33.0</td><td>-13.9</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1880.00</td><td>12.25</td><td>V</td><td>4.5</td><td>9.2</td><td>16.91</td><td>33.0</td><td>-16.1</td><td></td></tr><tr><td>1880.00</td><td>16.56</td><td>H</td><td>4.5</td><td>9.2</td><td>21.23</td><td>33.0</td><td>-11.8</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1908.50</td><td>11.54</td><td>V</td><td>4.6</td><td>8.9</td><td>15.91</td><td>33.0</td><td>-17.1</td><td></td></tr><tr><td>1908.50</td><td>15.39</td><td>H</td><td>4.6</td><td>8.9</td><td>19.77</td><td>33.0</td><td>-13.2</td><td></td></tr></tbody></table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1851.50	10.45	V	4.5	9.4	15.36	33.0	-17.6		1851.50	14.22	H	4.5	9.4	19.13	33.0	-13.9		Mid Ch									1880.00	12.25	V	4.5	9.2	16.91	33.0	-16.1		1880.00	16.56	H	4.5	9.2	21.23	33.0	-11.8		High Ch									1908.50	11.54	V	4.6	8.9	15.91	33.0	-17.1		1908.50	15.39	H	4.6	8.9	19.77	33.0	-13.2	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																				
Low Ch																																																																																												
1851.50	10.45	V	4.5	9.4	15.36	33.0	-17.6																																																																																					
1851.50	14.22	H	4.5	9.4	19.13	33.0	-13.9																																																																																					
Mid Ch																																																																																												
1880.00	12.25	V	4.5	9.2	16.91	33.0	-16.1																																																																																					
1880.00	16.56	H	4.5	9.2	21.23	33.0	-11.8																																																																																					
High Ch																																																																																												
1908.50	11.54	V	4.6	8.9	15.91	33.0	-17.1																																																																																					
1908.50	15.39	H	4.6	8.9	19.77	33.0	-13.2																																																																																					
LTE	Band 2																																																																																											
3MHz	QPSK																																																																																											
LTE	Band 2	<p style="text-align: center;">UL Verification Services, Inc. High Frequency Substitution Measurement</p> <p>Company: Samsung Project #: 4788886234 Date: 2019-02-28 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_16QAM Band 2 Fundamentals, 3MHz Bandwidth</p> <p><u>Test Equipment:</u> Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p> <table border="1"><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr></thead><tbody><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1851.50</td><td>9.37</td><td>V</td><td>4.5</td><td>9.4</td><td>14.28</td><td>33.0</td><td>-18.7</td><td></td></tr><tr><td>1851.50</td><td>13.20</td><td>H</td><td>4.5</td><td>9.4</td><td>18.11</td><td>33.0</td><td>-14.9</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1880.00</td><td>11.47</td><td>V</td><td>4.5</td><td>9.2</td><td>16.13</td><td>33.0</td><td>-16.9</td><td></td></tr><tr><td>1880.00</td><td>14.52</td><td>H</td><td>4.5</td><td>9.2</td><td>19.19</td><td>33.0</td><td>-13.8</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1908.50</td><td>10.21</td><td>V</td><td>4.6</td><td>8.9</td><td>14.58</td><td>33.0</td><td>-18.4</td><td></td></tr><tr><td>1908.50</td><td>14.46</td><td>H</td><td>4.6</td><td>8.9</td><td>18.84</td><td>33.0</td><td>-14.2</td><td></td></tr></tbody></table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1851.50	9.37	V	4.5	9.4	14.28	33.0	-18.7		1851.50	13.20	H	4.5	9.4	18.11	33.0	-14.9		Mid Ch									1880.00	11.47	V	4.5	9.2	16.13	33.0	-16.9		1880.00	14.52	H	4.5	9.2	19.19	33.0	-13.8		High Ch									1908.50	10.21	V	4.6	8.9	14.58	33.0	-18.4		1908.50	14.46	H	4.6	8.9	18.84	33.0	-14.2	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																				
Low Ch																																																																																												
1851.50	9.37	V	4.5	9.4	14.28	33.0	-18.7																																																																																					
1851.50	13.20	H	4.5	9.4	18.11	33.0	-14.9																																																																																					
Mid Ch																																																																																												
1880.00	11.47	V	4.5	9.2	16.13	33.0	-16.9																																																																																					
1880.00	14.52	H	4.5	9.2	19.19	33.0	-13.8																																																																																					
High Ch																																																																																												
1908.50	10.21	V	4.6	8.9	14.58	33.0	-18.4																																																																																					
1908.50	14.46	H	4.6	8.9	18.84	33.0	-14.2																																																																																					
3MHz	16QAM																																																																																											

		<p style="text-align: center;">UL Verification Services, Inc. High Frequency Substitution Measurement</p> <p>Company: Samsung Project #: 4788886234 Date: 2019-02-28 Test Engineer: 47989 Configuration: EUT / X-Position Location: Chamber 2 Mode: LTE_QPSK Band 2 Fundamentals, 1.4MHz Bandwidth</p> <p>Test Equipment: Receiving: Horn 3117[00168724], and Chamber 2 SMA Cables Substitution: Horn 3115[00167451], 8.5m SMA-type Cable</p> <table border="1"> <thead> <tr> <th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>EIRP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr> </thead> <tbody> <tr> <td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1850.70</td><td>11.28</td><td>V</td><td>4.5</td><td>9.4</td><td>16.20</td><td>33.0</td><td>-16.8</td><td></td></tr> <tr> <td>1850.70</td><td>15.47</td><td>H</td><td>4.5</td><td>9.4</td><td>20.39</td><td>33.0</td><td>-12.6</td><td></td></tr> <tr> <td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1880.00</td><td>12.05</td><td>V</td><td>4.5</td><td>9.2</td><td>16.71</td><td>33.0</td><td>-16.3</td><td></td></tr> <tr> <td>1880.00</td><td>16.38</td><td>H</td><td>4.5</td><td>9.2</td><td>21.05</td><td>33.0</td><td>-12.0</td><td></td></tr> <tr> <td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>1909.30</td><td>12.06</td><td>V</td><td>4.6</td><td>8.9</td><td>16.43</td><td>33.0</td><td>-16.6</td><td></td></tr> <tr> <td>1909.30</td><td>15.23</td><td>H</td><td>4.6</td><td>8.9</td><td>19.60</td><td>33.0</td><td>-13.4</td><td></td></tr> </tbody> </table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									1850.70	11.28	V	4.5	9.4	16.20	33.0	-16.8		1850.70	15.47	H	4.5	9.4	20.39	33.0	-12.6		Mid Ch									1880.00	12.05	V	4.5	9.2	16.71	33.0	-16.3		1880.00	16.38	H	4.5	9.2	21.05	33.0	-12.0		High Ch									1909.30	12.06	V	4.6	8.9	16.43	33.0	-16.6		1909.30	15.23	H	4.6	8.9	19.60	33.0	-13.4		
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																					
Low Ch																																																																																													
1850.70	11.28	V	4.5	9.4	16.20	33.0	-16.8																																																																																						
1850.70	15.47	H	4.5	9.4	20.39	33.0	-12.6																																																																																						
Mid Ch																																																																																													
1880.00	12.05	V	4.5	9.2	16.71	33.0	-16.3																																																																																						
1880.00	16.38	H	4.5	9.2	21.05	33.0	-12.0																																																																																						
High Ch																																																																																													
1909.30	12.06	V	4.6	8.9	16.43	33.0	-16.6																																																																																						
1909.30	15.23	H	4.6	8.9	19.60	33.0	-13.4																																																																																						
LTE																																																																																													
Band 2																																																																																													
1.4MHz																																																																																													
QPSK																																																																																													
LTE																																																																																													
Band 2																																																																																													
1.4MHz																																																																																													
16QAM																																																																																													

LTE Band 5

		<p style="text-align: center;">UL Verification Services, Inc. High Frequency Substitution Measurement</p> <p>Company: Samsung Project #: 4788886234 Date: 2019-03-06 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_QPSK Band 5 Fundamentals, 10MHz Bandwidth</p> <p>Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable</p> <table border="1"><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr></thead><tbody><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>829.00</td><td>21.01</td><td>V</td><td>3.0</td><td>-1.5</td><td>16.53</td><td>38.5</td><td>-22.0</td><td></td></tr><tr><td>829.00</td><td>12.89</td><td>H</td><td>3.0</td><td>-1.5</td><td>8.41</td><td>38.5</td><td>-30.1</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>836.50</td><td>20.62</td><td>V</td><td>3.0</td><td>-1.4</td><td>16.16</td><td>38.5</td><td>-22.3</td><td></td></tr><tr><td>836.50</td><td>12.57</td><td>H</td><td>3.0</td><td>-1.4</td><td>8.10</td><td>38.5</td><td>-30.4</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>844.00</td><td>20.75</td><td>V</td><td>3.1</td><td>-1.4</td><td>16.30</td><td>38.5</td><td>-22.2</td><td></td></tr><tr><td>844.00</td><td>10.94</td><td>H</td><td>3.1</td><td>-1.4</td><td>6.49</td><td>38.5</td><td>-32.0</td><td></td></tr></tbody></table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									829.00	21.01	V	3.0	-1.5	16.53	38.5	-22.0		829.00	12.89	H	3.0	-1.5	8.41	38.5	-30.1		Mid Ch									836.50	20.62	V	3.0	-1.4	16.16	38.5	-22.3		836.50	12.57	H	3.0	-1.4	8.10	38.5	-30.4		High Ch									844.00	20.75	V	3.1	-1.4	16.30	38.5	-22.2		844.00	10.94	H	3.1	-1.4	6.49	38.5	-32.0	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																				
Low Ch																																																																																												
829.00	21.01	V	3.0	-1.5	16.53	38.5	-22.0																																																																																					
829.00	12.89	H	3.0	-1.5	8.41	38.5	-30.1																																																																																					
Mid Ch																																																																																												
836.50	20.62	V	3.0	-1.4	16.16	38.5	-22.3																																																																																					
836.50	12.57	H	3.0	-1.4	8.10	38.5	-30.4																																																																																					
High Ch																																																																																												
844.00	20.75	V	3.1	-1.4	16.30	38.5	-22.2																																																																																					
844.00	10.94	H	3.1	-1.4	6.49	38.5	-32.0																																																																																					
		<p style="text-align: center;">UL Verification Services, Inc. High Frequency Substitution Measurement</p> <p>Company: Samsung Project #: 4788886234 Date: 2019-03-06 Test Engineer: 45585 Configuration: EUT / Z-Position Location: Chamber 2 Mode: LTE_16QAM Band 5 Fundamentals, 10MHz Bandwidth</p> <p>Test Equipment: Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable</p> <table border="1"><thead><tr><th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr></thead><tbody><tr><td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>829.00</td><td>19.41</td><td>V</td><td>3.0</td><td>-1.5</td><td>14.93</td><td>38.5</td><td>-23.6</td><td></td></tr><tr><td>829.00</td><td>11.70</td><td>H</td><td>3.0</td><td>-1.5</td><td>7.22</td><td>38.5</td><td>-31.3</td><td></td></tr><tr><td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>836.50</td><td>20.29</td><td>V</td><td>3.0</td><td>-1.4</td><td>15.83</td><td>38.5</td><td>-22.7</td><td></td></tr><tr><td>836.50</td><td>11.93</td><td>H</td><td>3.0</td><td>-1.4</td><td>7.46</td><td>38.5</td><td>-31.0</td><td></td></tr><tr><td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>844.00</td><td>19.00</td><td>V</td><td>3.1</td><td>-1.4</td><td>14.55</td><td>38.5</td><td>-24.0</td><td></td></tr><tr><td>844.00</td><td>11.87</td><td>H</td><td>3.1</td><td>-1.4</td><td>7.42</td><td>38.5</td><td>-31.1</td><td></td></tr></tbody></table>	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									829.00	19.41	V	3.0	-1.5	14.93	38.5	-23.6		829.00	11.70	H	3.0	-1.5	7.22	38.5	-31.3		Mid Ch									836.50	20.29	V	3.0	-1.4	15.83	38.5	-22.7		836.50	11.93	H	3.0	-1.4	7.46	38.5	-31.0		High Ch									844.00	19.00	V	3.1	-1.4	14.55	38.5	-24.0		844.00	11.87	H	3.1	-1.4	7.42	38.5	-31.1	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																				
Low Ch																																																																																												
829.00	19.41	V	3.0	-1.5	14.93	38.5	-23.6																																																																																					
829.00	11.70	H	3.0	-1.5	7.22	38.5	-31.3																																																																																					
Mid Ch																																																																																												
836.50	20.29	V	3.0	-1.4	15.83	38.5	-22.7																																																																																					
836.50	11.93	H	3.0	-1.4	7.46	38.5	-31.0																																																																																					
High Ch																																																																																												
844.00	19.00	V	3.1	-1.4	14.55	38.5	-24.0																																																																																					
844.00	11.87	H	3.1	-1.4	7.42	38.5	-31.1																																																																																					

		UL Verification Services, Inc. High Frequency Substitution Measurement																																																																																																		
		Company:	Samsung																																																																																																	
		Project #:	4788886234																																																																																																	
		Date:	2019-03-06																																																																																																	
		Test Engineer:	45585																																																																																																	
		Configuration:	EUT / Z-Position																																																																																																	
		Location:	Chamber 2																																																																																																	
		Mode:	LTE_QPSK Band 5 Fundamentals, 5MHz Bandwidth																																																																																																	
LTE		<u>Test Equipment:</u> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																		
Band 5																																																																																																				
5MHz																																																																																																				
QPSK		<table border="1"> <thead> <tr> <th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr> </thead> <tbody> <tr> <td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>826.50</td><td>20.71</td><td>V</td><td>3.0</td><td>-1.5</td><td>16.22</td><td>38.5</td><td>-22.3</td><td></td></tr> <tr> <td>826.50</td><td>12.63</td><td>H</td><td>3.0</td><td>-1.5</td><td>8.15</td><td>38.5</td><td>-30.4</td><td></td></tr> <tr> <td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>836.50</td><td>20.15</td><td>V</td><td>3.0</td><td>-1.4</td><td>15.69</td><td>38.5</td><td>-22.8</td><td></td></tr> <tr> <td>836.50</td><td>12.39</td><td>H</td><td>3.0</td><td>-1.4</td><td>7.92</td><td>38.5</td><td>-30.6</td><td></td></tr> <tr> <td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>846.50</td><td>20.57</td><td>V</td><td>3.1</td><td>-1.4</td><td>16.12</td><td>38.5</td><td>-22.4</td><td></td></tr> <tr> <td>846.50</td><td>11.30</td><td>H</td><td>3.1</td><td>-1.4</td><td>6.85</td><td>38.5</td><td>-31.6</td><td></td></tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									826.50	20.71	V	3.0	-1.5	16.22	38.5	-22.3		826.50	12.63	H	3.0	-1.5	8.15	38.5	-30.4		Mid Ch									836.50	20.15	V	3.0	-1.4	15.69	38.5	-22.8		836.50	12.39	H	3.0	-1.4	7.92	38.5	-30.6		High Ch									846.50	20.57	V	3.1	-1.4	16.12	38.5	-22.4		846.50	11.30	H	3.1	-1.4	6.85	38.5	-31.6		
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																												
Low Ch																																																																																																				
826.50	20.71	V	3.0	-1.5	16.22	38.5	-22.3																																																																																													
826.50	12.63	H	3.0	-1.5	8.15	38.5	-30.4																																																																																													
Mid Ch																																																																																																				
836.50	20.15	V	3.0	-1.4	15.69	38.5	-22.8																																																																																													
836.50	12.39	H	3.0	-1.4	7.92	38.5	-30.6																																																																																													
High Ch																																																																																																				
846.50	20.57	V	3.1	-1.4	16.12	38.5	-22.4																																																																																													
846.50	11.30	H	3.1	-1.4	6.85	38.5	-31.6																																																																																													
LTE		<u>Test Equipment:</u> Receiving: VULB9163-749, and Chamber 2 SMA Cables Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable																																																																																																		
Band 5																																																																																																				
5MHz																																																																																																				
16QAM		<table border="1"> <thead> <tr> <th>f MHz</th><th>SG reading (dBm)</th><th>Ant. Pol. (H/V)</th><th>Cable Loss (dB)</th><th>Antenna Gain (dBi)</th><th>ERP (dBm)</th><th>Limit (dBm)</th><th>Delta (dB)</th><th>Notes</th></tr> </thead> <tbody> <tr> <td>Low Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>826.50</td><td>20.17</td><td>V</td><td>3.0</td><td>-1.5</td><td>15.68</td><td>38.5</td><td>-22.8</td><td></td></tr> <tr> <td>826.50</td><td>11.98</td><td>H</td><td>3.0</td><td>-1.5</td><td>7.50</td><td>38.5</td><td>-31.0</td><td></td></tr> <tr> <td>Mid Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>836.50</td><td>20.05</td><td>V</td><td>3.0</td><td>-1.4</td><td>15.59</td><td>38.5</td><td>-22.9</td><td></td></tr> <tr> <td>836.50</td><td>12.03</td><td>H</td><td>3.0</td><td>-1.4</td><td>7.56</td><td>38.5</td><td>-30.9</td><td></td></tr> <tr> <td>High Ch</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> <tr> <td>846.50</td><td>19.47</td><td>V</td><td>3.1</td><td>-1.4</td><td>15.02</td><td>38.5</td><td>-23.5</td><td></td></tr> <tr> <td>846.50</td><td>10.89</td><td>H</td><td>3.1</td><td>-1.4</td><td>6.44</td><td>38.5</td><td>-32.1</td><td></td></tr> </tbody> </table>									f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch									826.50	20.17	V	3.0	-1.5	15.68	38.5	-22.8		826.50	11.98	H	3.0	-1.5	7.50	38.5	-31.0		Mid Ch									836.50	20.05	V	3.0	-1.4	15.59	38.5	-22.9		836.50	12.03	H	3.0	-1.4	7.56	38.5	-30.9		High Ch									846.50	19.47	V	3.1	-1.4	15.02	38.5	-23.5		846.50	10.89	H	3.1	-1.4	6.44	38.5	-32.1	
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																												
Low Ch																																																																																																				
826.50	20.17	V	3.0	-1.5	15.68	38.5	-22.8																																																																																													
826.50	11.98	H	3.0	-1.5	7.50	38.5	-31.0																																																																																													
Mid Ch																																																																																																				
836.50	20.05	V	3.0	-1.4	15.59	38.5	-22.9																																																																																													
836.50	12.03	H	3.0	-1.4	7.56	38.5	-30.9																																																																																													
High Ch																																																																																																				
846.50	19.47	V	3.1	-1.4	15.02	38.5	-23.5																																																																																													
846.50	10.89	H	3.1	-1.4	6.44	38.5	-32.1																																																																																													

		UL Verification Services, Inc. High Frequency Substitution Measurement								
LTE	Band 5	Company:	Samsung							
		Project #:	4788886234							
		Date:	2019-03-06							
		Test Engineer:	45585							
		Configuration:	EUT / Z-Position							
		Location:	Chamber 2							
		Mode:	LTE_QPSK Band 5 Fundamentals, 3MHz Bandwidth							
		<u>Test Equipment:</u>								
		Receiving: VULB9163-749, and Chamber 2 SMA Cables								
		Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
3MHz	QPSK	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
		Low Ch								
LTE	Band 5	825.50	20.67	V	3.0	-1.5	16.19	38.5	-22.3	
		825.50	12.71	H	3.0	-1.5	8.22	38.5	-30.3	
3MHz	QPSK	Mid Ch								
		836.50	20.18	V	3.0	-1.4	15.72	38.5	-22.8	
LTE	Band 5	836.50	12.76	H	3.0	-1.4	8.29	38.5	-30.2	
		High Ch								
3MHz	QPSK	847.50	20.41	V	3.1	-1.4	15.97	38.5	-22.5	
		847.50	11.59	H	3.1	-1.4	7.15	38.5	-31.4	
		<u>Test Equipment:</u>								
		Receiving: VULB9163-749, and Chamber 2 SMA Cables								
		Substitution: Dipole 3121_DB4, 8.5m SMA-type Cable								
16QAM	3MHz	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
		Low Ch								
LTE	Band 5	825.50	19.75	V	3.0	-1.5	15.27	38.5	-23.2	
		825.50	12.38	H	3.0	-1.5	7.89	38.5	-30.6	
3MHz	16QAM	Mid Ch								
		836.50	19.73	V	3.0	-1.4	15.27	38.5	-23.2	
LTE	Band 5	836.50	12.15	H	3.0	-1.4	7.68	38.5	-30.8	
		High Ch								
3MHz	16QAM	847.50	19.27	V	3.1	-1.4	14.83	38.5	-23.7	
		847.50	11.15	H	3.1	-1.4	6.71	38.5	-31.8	