

# TEST REPORT

FCC BT LE Test for SM-A908B  
Certification

**APPLICANT**  
SAMSUNG Electronics Co., Ltd.

**REPORT NO.**  
HCT-RF-1908-FC039-R3

**DATE OF ISSUE**  
10 September 2019

**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 634 6300 Fax. +82 31 645 6401



REPORT NO.  
HCT-RF-1908-FC039-R3

DATE OF ISSUE  
10 September 2019

FCC ID  
A3LSMA908B

Applicant **SAMSUNG Electronics Co., Ltd.**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Eut Type Model Name	Mobile Phone SM-A908B
Average Output Power	7.72 dBm (5.919 mW)
Modulation type	GFSK
FCC Classification	Digital Transmission System(DTS)
FCC Rule Part(s)	Part 15.247

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.  
This test results were applied only to the test methods required by the standard.

Tested by  
Jeong Ho Kim

(signature)

Technical Manager  
Jong Seok Lee

(signature)

HCT CO., LTD.  
*Soo Chon Lee*  
SooChun Lee / CEO

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	27 August 2019	Initial Release
1	5 September 2019	Added the ISO 17025 KOLAS logo.
2	7 September 2019	-Add the HCT Accreditation No. for ISO 17025 KOLAS -Changed the * mark except for page 3
3	10 September 2019	-* identification mark do not use for different identification mark

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

### Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

## CONTENTS

1. EUT DESCRIPTION .....	5
2. TEST METHODOLOGY .....	6
EUT CONFIGURATION .....	6
EUT EXERCISE .....	6
GENERAL TEST PROCEDURES .....	6
DESCRIPTION OF TEST MODES .....	7
3. INSTRUMENT CALIBRATION .....	7
4. FACILITIES AND ACCREDITATIONS .....	7
FACILITIES .....	7
EQUIPMENT .....	7
5. ANTENNA REQUIREMENTS .....	8
6. MEASUREMENT UNCERTAINTY .....	8
7. DESCRIPTION OF TESTS .....	9
8. SUMMARY TEST OF RESULTS .....	24
9. TEST RESULT .....	25
9.1 DUTY CYCLE .....	25
9.2 6dB BANDWIDTH .....	30
9.3 OUTPUT POWER .....	39
9.4 POWER SPECTRAL DENSITY .....	41
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS .....	47
9.6 RADIATED SPURIOUS EMISSIONS .....	64
9.7 RADIATED RESTRICTED BAND EDGES .....	71
9.8 POWERLINE CONDUCTED EMISSIONS .....	80
10. LIST OF TEST EQUIPMENT .....	84
11. ANNEX A_ TEST SETUP PHOTO .....	86

## 1. EUT DESCRIPTION

Model	SM-A908B	
Additional Model	-	
EUT Type	Mobile Phone	
Power Supply	DC 3.85 V	
Battery Information	Model: EB-BA908ABY Type: Li-ion Battery	
Travel Adapter Information	Model : EP-TA800 Manufacture: SOLUM	
Data Cable Information	Model : EP-DA905BBE Manufacture: Luxshare	
Ear-jack Information	Model : GHSS028-K4 Manufacture: BUJEON Electronics	
Frequency Range	2402 MHz - 2480 MHz	
Max. RF Output Power	Peak (For information only)	125k Bit/s : 7.770 dBm (5.984 mW) 500k Bit/s : 7.887 dBm (6.148 mW) 1M Bit/s : 7.849 dBm (6.094 mW) 2M Bit/s : 7.889 dBm (6.150 mW)
	Average	125k Bit/s : 7.72 dBm (5.919 mW) 500k Bit/s : 7.68 dBm (5.857 mW) 1M Bit/s : 7.69 dBm (5.882 mW) 2M Bit/s : 7.66 dBm (5.837 mW)
Modulation Type	GFSK	
Bluetooth Version	5.0	
Number of Channels	40 Channels	
Antenna Specification	Antenna type: LDS Peak Gain : -5.52 dBi	
Date(s) of Tests	July 17, 2019 ~ August 23, 2019	

## 2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

## GENERAL TEST PROCEDURES

### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

## DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

## 3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 4. FACILITIES AND ACCREDITATIONS

### FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

### EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

## 6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

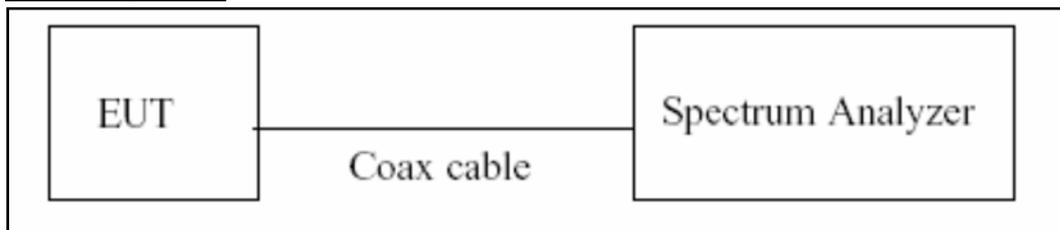

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v05r02.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured T data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on}/T_{total}$  and Duty Cycle Factor =  $10\log(1/Duty\ Cycle)$

## 7.2. 6dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration

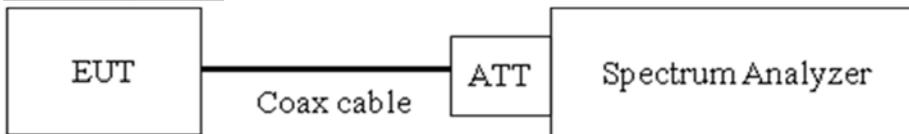

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.2 in KDB 558074 v05r02, Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration

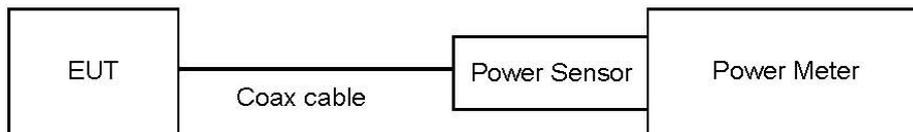

#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
  
- Average Power (Procedure 8.3.2.3 in KDB 558074 v05r02, Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

### Test Configuration

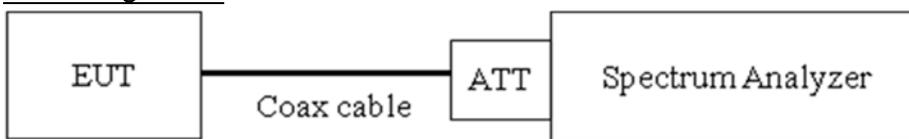

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / RBW]$ .
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.  
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98%

### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss

## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions


### Limit

The maximum conducted (average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least

30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 30 dBc ]

### Test Configuration

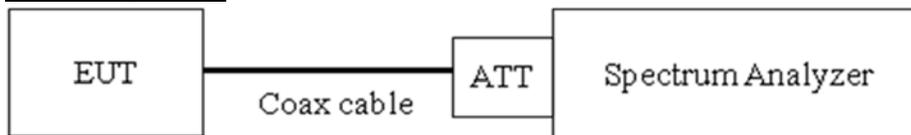

### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 8.5 in KDB 558074 v05r02, Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq$  3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq$  2 x Span/VBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	20.30
100	20.28
200	20.24
300	20.14
400	20.14
500	20.14
600	20.17
700	20.22
800	20.29
900	20.36
1000	20.41
2000	20.41
2400	20.38
2500	20.39
3000	20.48
4000	20.53
5000	20.63
6000	20.70
7000	20.77
8000	20.79
9000	20.81
10000	20.82
11000	20.81
12000	20.91
13000	20.94
14000	21.07
15000	21.16
16000	21.25
17000	21.27
18000	21.32
19000	21.39
20000	21.45
21000	21.56
22000	21.65
23000	21.53
24000	21.63
25000	21.64
26000	21.69

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20 dB) + Cable loss


## 7.6. Radiated Test

### Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

### Test Configuration


Below 30 MHz

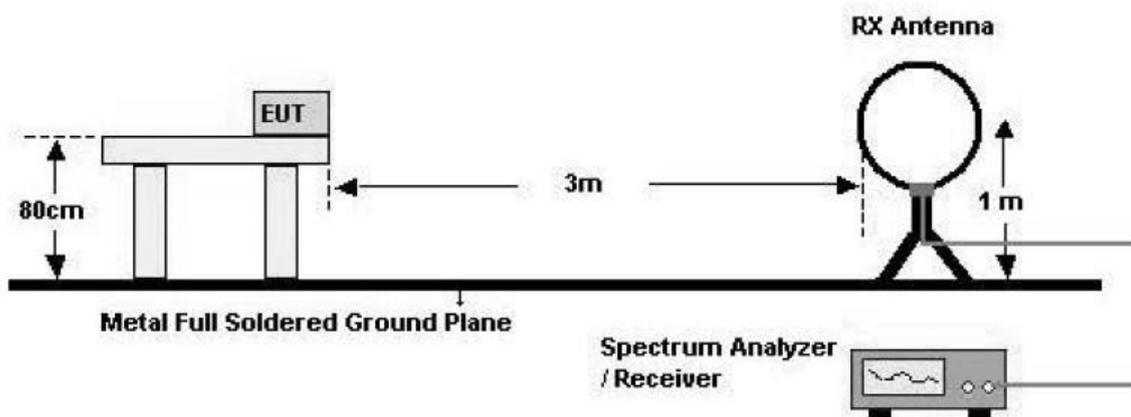

30 MHz - 1 GHz

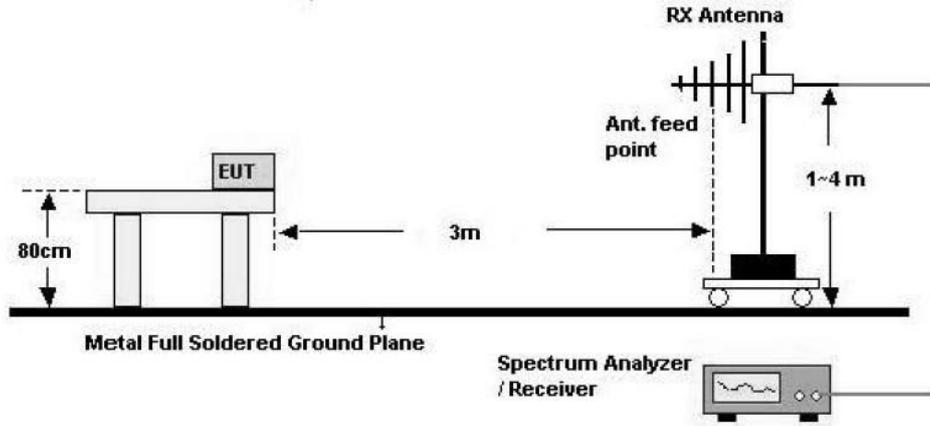

Above 1 GHz

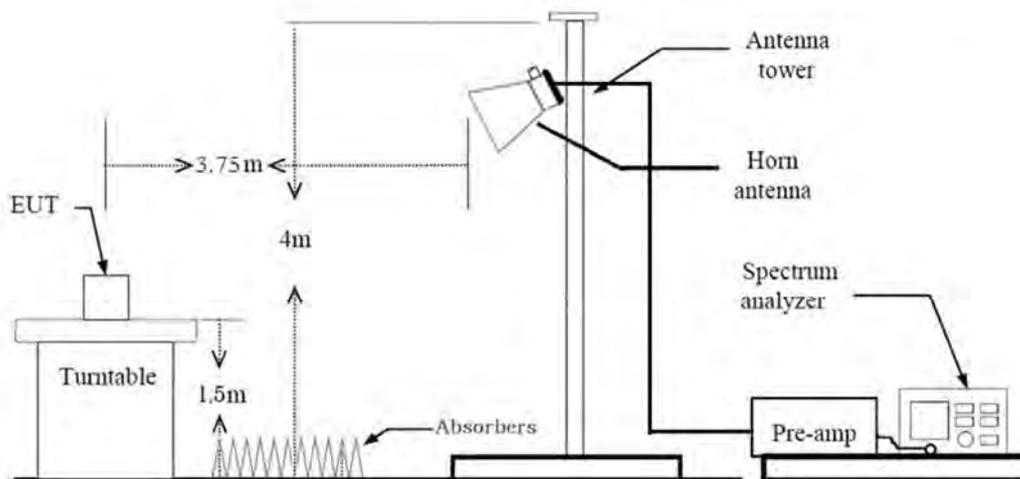

### **Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

### **KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

**5. Spectrum Setting****(1) Measurement Type(Peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

**(2) Measurement Type(Quasi-peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
7. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

### Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - ◆ Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$
    - Measured Frequency Range : 1 GHz – 25 GHz
    - Detector = RMS
    - Averaging type = power (*i.e.*, RMS)
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
    - Sweep time = auto.
    - Trace mode = average (at least 100 traces).
    - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
    - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)  
+ Duty Cycle Factor

#### **Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor( reference distance : 3 m).
  - ◆ Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
  - (1) Measurement Type(Peak):
    - Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
    - Detector = Peak
    - Trace = Maxhold
    - RBW = 1 MHz
    - VBW  $\geq$  3 x RBW
  - (2) Measurement Type(Average):
    - Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) + Duty Cycle Factor

### 7.7. AC Power line Conducted Emissions

#### Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

#### Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

#### Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

#### Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

## 7.8. Worst case configuration and mode

### Radiated Test

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
  - Worstcase : Stand alone
2. EUT Axis:
  - Radiated Spurious Emissions : Y
  - Radiated Restricted Band Edge : X
3. All packet length of operation were investigated and the test results are worst case in lowest packet length.  
(Worst case : 37 Byte)
4. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane

### AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter,  
Stand alone + Travel Adapter
  - Worstcase : Stand alone + Travel Adapter

### Conducted test

1. The EUT was configured with packet length of highest power.  
(Worst case : 37 Byte)

## 8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS


## 9. TEST RESULT

### 9.1 DUTY CYCLE

Data rate (Bit/s)	Packet length (Byte)	T <sub>on</sub> (ms)	T <sub>total</sub> (ms)	Duty Cycle	Duty Cycle Factor (dB)
125k	37	3.1000	3.7500	0.8267	0.83
	255	17.0700	17.4900	0.9760	0.11
500k	37	1.0700	1.8750	0.5707	2.44
	255	4.5600	5.0000	0.9120	0.40
1M	37	0.3914	0.6257	0.6255	2.04
	255	2.1350	2.5000	0.8540	0.69
2M	37	0.2065	0.6257	0.3300	4.82
	255	1.0800	1.8750	0.5760	2.40

## 125k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)

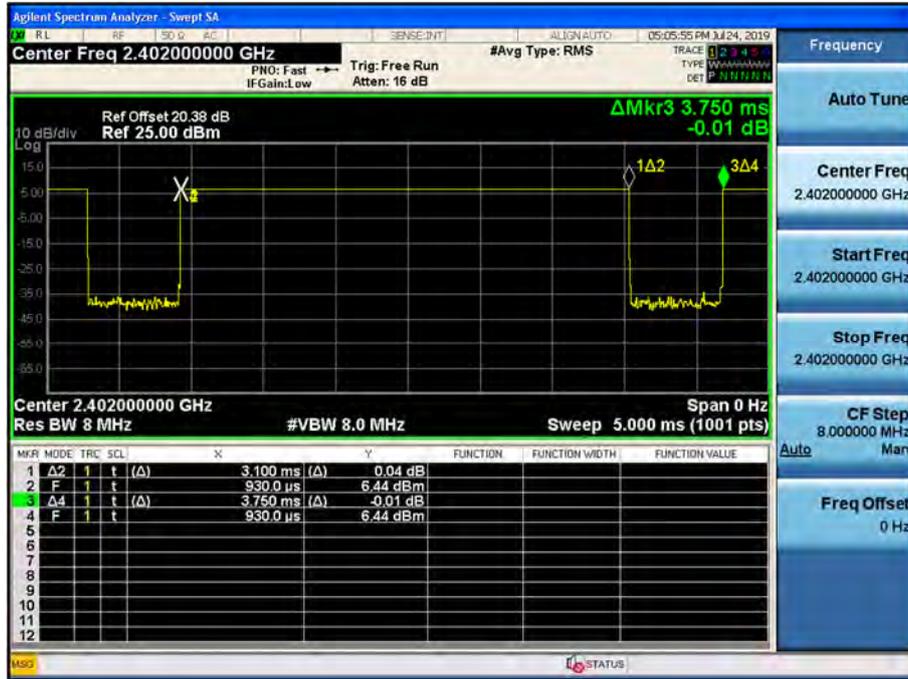

## 125k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)




## 500k Bit/s(37 Byte) Test Plots

Duty Cycle (Low-CH 0)



## 500k Bit/s(255 Byte) Test Plots

Duty Cycle (Low-CH 0)

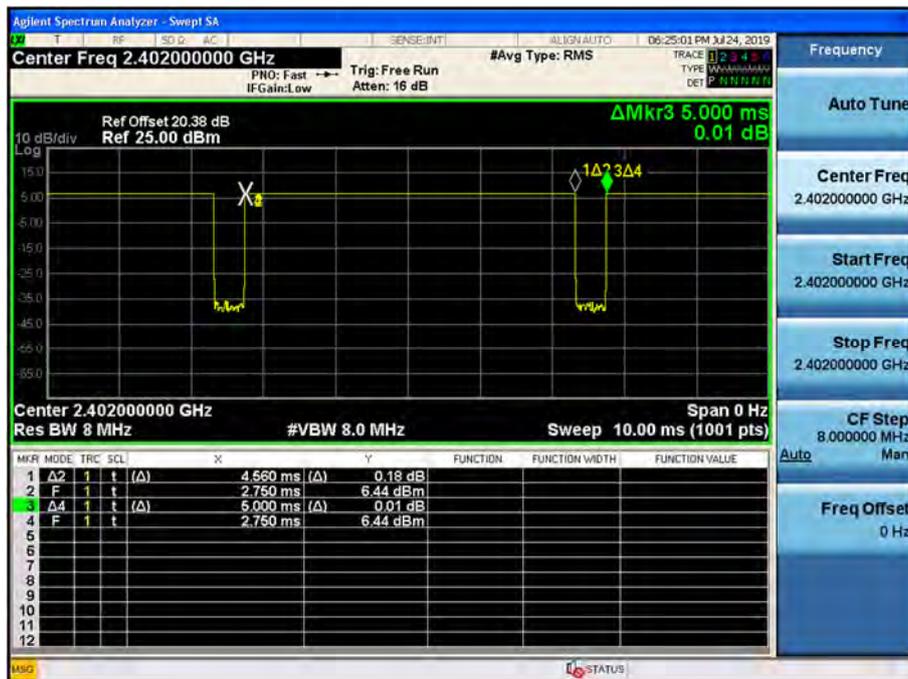

## 1M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)




## 1M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)



## 2M Bit/s (37 Byte) Test Plots

Duty Cycle (Low-CH 0)

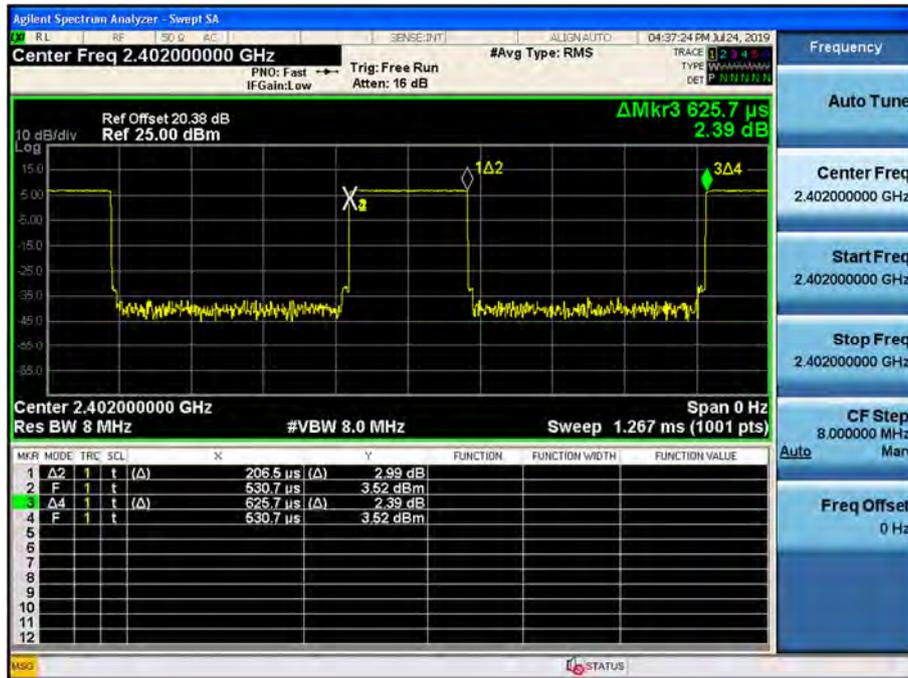

## 2M Bit/s (255 Byte) Test Plots

Duty Cycle (Low-CH 0)




## 9.2 6dB BANDWIDTH

Mode (Bit/s)	Channel	6 dB Bandwidth (kHz)	Limit (kHz)
125k	0	617.6	> 500
	19	615.4	
	39	615.4	
500k	0	678.1	> 500
	19	672.2	
	39	674.7	
1M	0	673.3	> 500
	19	683.2	
	39	683.1	
2M	0	1149.0	> 500
	19	1175.0	
	39	1154.0	

125k Bit/s(37 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)

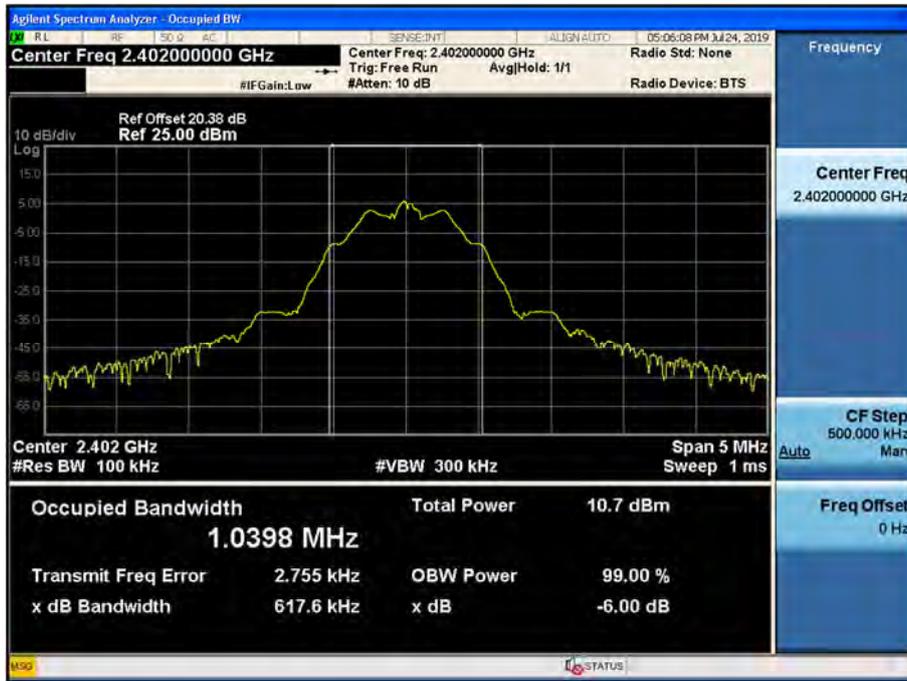

6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



500k Bit/s(37 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)




6 dB Bandwidth plot (High-CH 39)

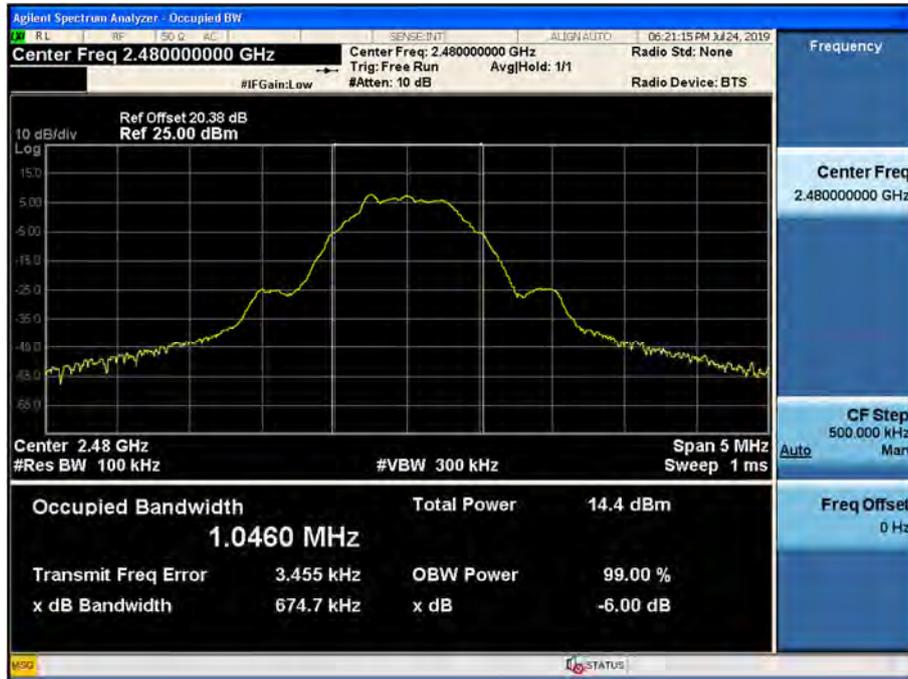

1M Bit/s (37 Byte) Test Plots


6 dB Bandwidth plot (Low-CH 0)

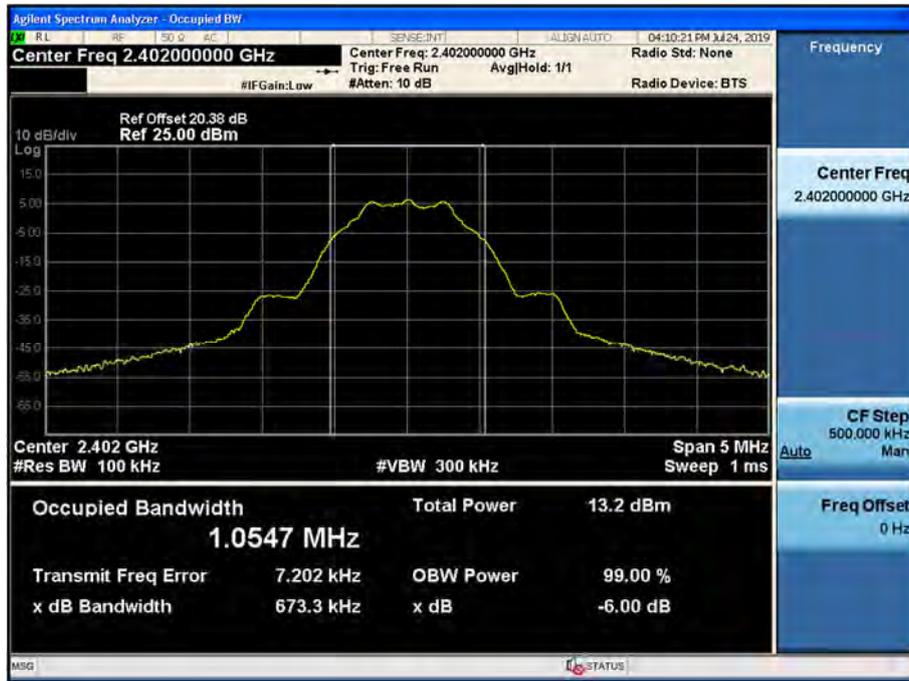

6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)

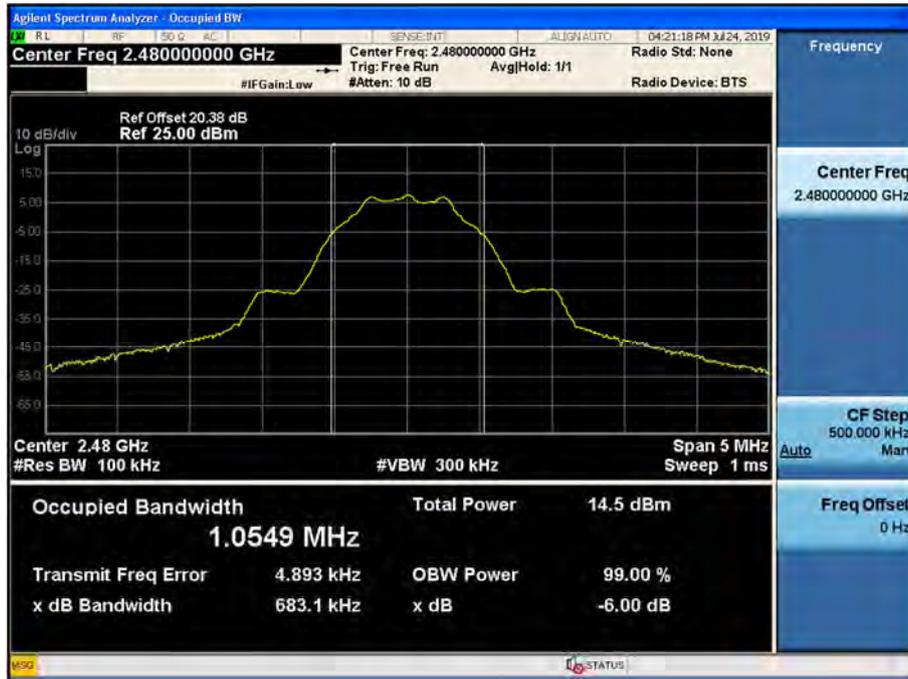

2M Bit/s (255 Byte) Test Plots

6 dB Bandwidth plot (Low-CH 0)



6 dB Bandwidth plot (Mid-CH 19)



6 dB Bandwidth plot (High-CH 39)



### 9.3 OUTPUT POWER

#### Peak Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power(dBm)	Limit (dBm)
		Frequency [MHz]	Channel		
125k	37	2402	0	6.565	30
		2440	19	6.415	
		2480	39	7.770	
	255	2402	0	6.533	
		2440	19	6.387	
		2480	39	7.746	
500k	37	2402	0	6.708	
		2440	19	6.483	
		2480	39	7.887	
	255	2402	0	6.624	
		2440	19	6.415	
		2480	39	7.788	
1M	37	2402	0	6.632	
		2440	19	6.472	
		2480	39	7.849	
	255	2402	0	6.585	
		2440	19	6.407	
		2480	39	7.808	
2M	37	2402	0	6.947	
		2440	19	6.537	
		2480	39	7.889	
	255	2402	0	6.903	
		2440	19	6.489	
		2480	39	7.827	

### Average Power

Data rate (Bit/s)	Packet length (Byte)	LE Mode		Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)
		Frequency [MHz]	Channel				
125k	37	2402	0	5.69	0.83	6.52	30
		2440	19	5.52	0.83	6.35	
		2480	39	6.90	0.83	7.72	
	255	2402	0	6.23	0.11	6.34	
		2440	19	6.05	0.11	6.16	
		2480	39	7.42	0.11	7.52	
500k	37	2402	0	4.05	2.44	6.49	
		2440	19	3.66	2.44	6.10	
		2480	39	5.24	2.44	7.68	
	255	2402	0	6.00	0.40	6.40	
		2440	19	5.81	0.40	6.21	
		2480	39	7.18	0.40	7.58	
1M	37	2402	0	4.44	2.04	6.48	
		2440	19	4.24	2.04	6.28	
		2480	39	5.66	2.04	7.70	
	255	2402	0	5.60	0.69	6.29	
		2440	19	5.45	0.69	6.14	
		2480	39	6.94	0.69	7.63	
2M	37	2402	0	1.51	4.82	6.33	
		2440	19	1.50	4.82	6.32	
		2480	39	2.83	4.82	7.65	
	255	2402	0	4.20	2.40	6.60	
		2440	19	3.87	2.40	6.27	
		2480	39	5.27	2.40	7.67	

#### Note :

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss

3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 20.38 dB is offset for 2.4 GHz Band.

#### 9.4 POWER SPECTRAL DENSITY

Frequency (MHz)	Channel No.	Mode	Test Result			
			Measured Power(dBm)	Duty Cycle Factor(dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
2402	0	125k 37 Byte	-0.414	0.83	0.416	8.000
2440	19		-0.500	0.83	0.330	
2480	39		0.819	0.83	1.649	
2402	0	125k 255 Byte	0.434	0.11	0.544	
2440	19		0.195	0.11	0.305	
2480	39		1.734	0.11	1.844	
2402	0	500k 37 Byte	-3.355	2.44	-0.915	
2440	19		-2.931	2.44	-0.491	
2480	39		-1.925	2.44	0.515	
2402	0	500k 255 Byte	-0.840	0.40	-0.440	
2440	19		-1.121	0.40	-0.721	
2480	39		0.360	0.40	0.760	
2402	0	1M 37 Byte	-1.936	2.04	0.104	
2440	19		-1.940	2.04	0.100	
2480	39		-0.667	2.04	1.373	
2402	0	1M 255 Byte	-1.261	0.69	-0.571	
2440	19		-0.981	0.69	-0.291	
2480	39		0.535	0.69	1.225	
2402	0	2M 37 Byte	-6.834	4.82	-2.014	
2440	19		-6.475	4.82	-1.665	
2480	39		-4.706	4.82	0.114	
2402	0	2M 255 Byte	-5.475	2.40	-3.075	
2440	19		-4.831	2.40	-2.431	
2480	39		-4.043	2.40	-1.643	

**Note :**

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss

3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 20.38 dB is offset for 2.4 GHz Band.

4. Worst case test Plot Only : 125k (37&255 byte)

125k Bit/s (37 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)



Power Spectral Density (High-CH 39)



▣ 125k Bit/s (255 Byte) Test Plots

Power Spectral Density (Low-CH 0)



Power Spectral Density (Mid-CH 19)



### Power Spectral Density (High-CH 39)



## 9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

125k Bit/s (37 Byte) Test Plots -BandEdge

Low-CH 0




High-CH 39



125k Bit/s (37 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (High-CH 39)

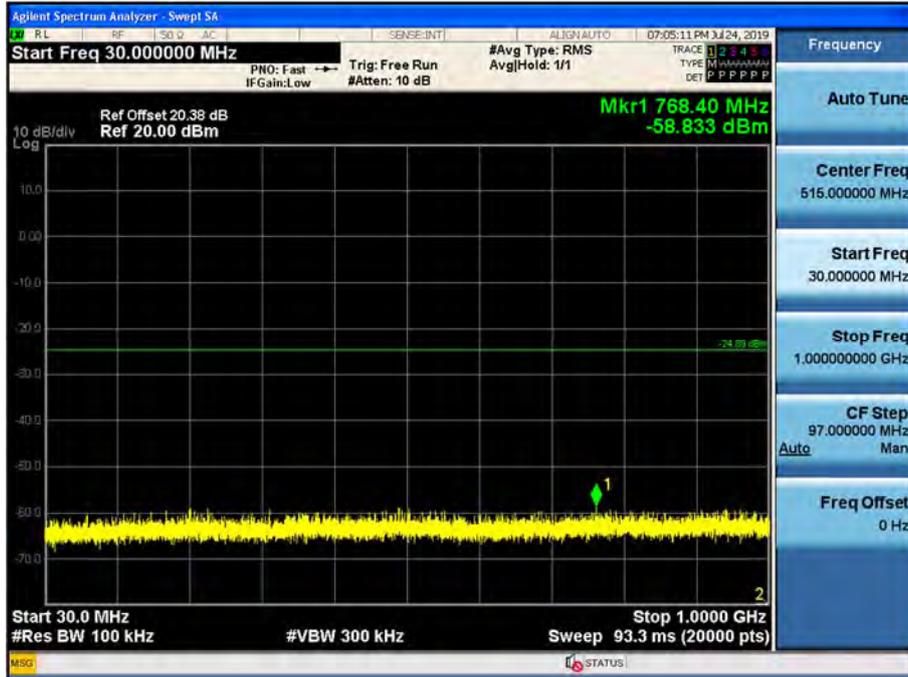


1 GHz ~ 3 GHz

Conducted Spurious Emission (High-CH 39)

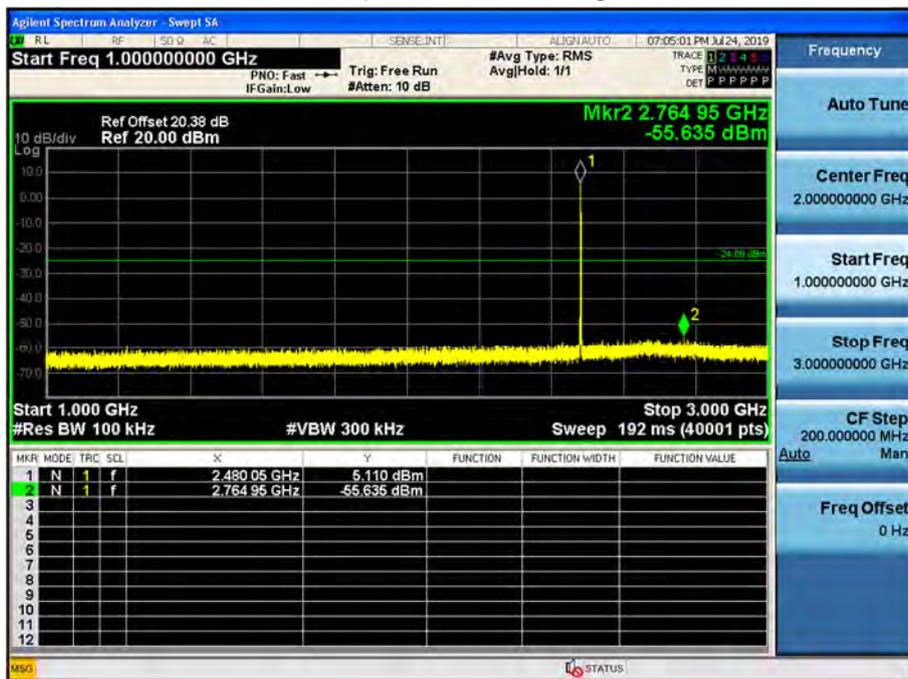


3 GHz ~ 5 GHz

Conducted Spurious Emission (High-CH 39)

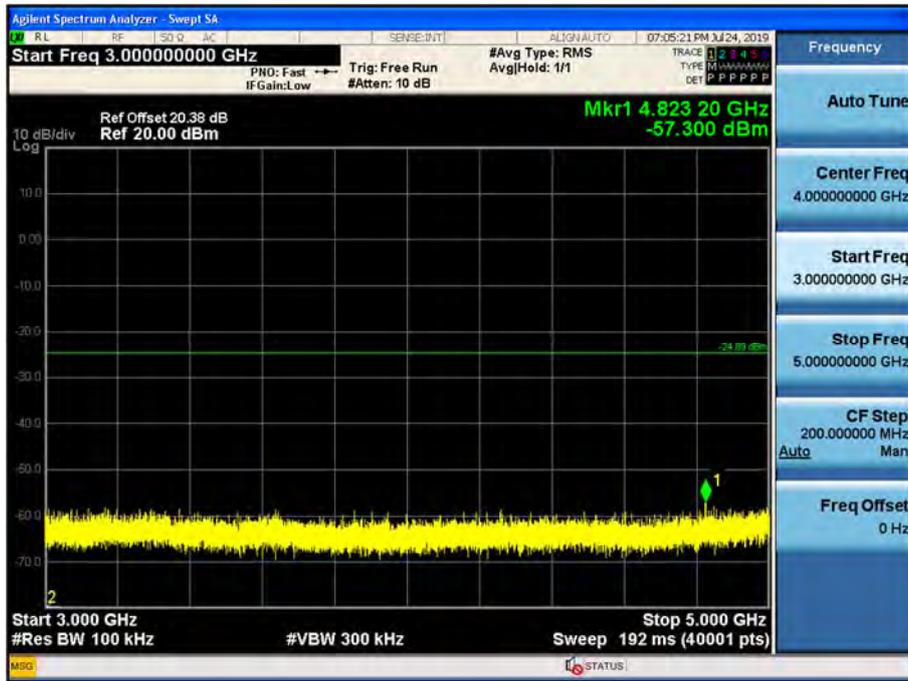


5 GHz ~ 7 GHz

Conducted Spurious Emission (High-CH 39)

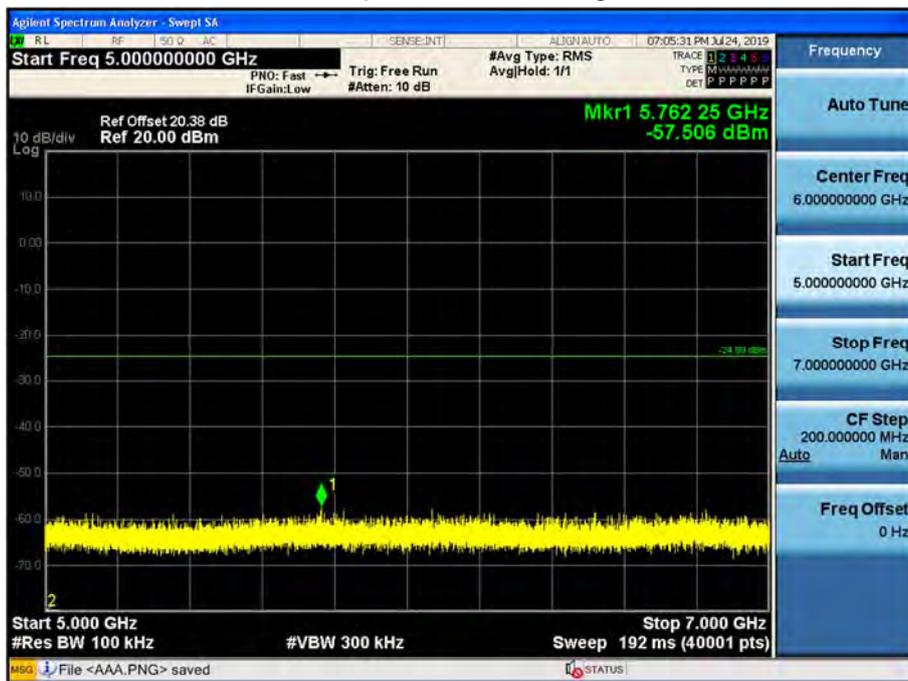


7 GHz ~ 9 GHz

Conducted Spurious Emission (High-CH 39)

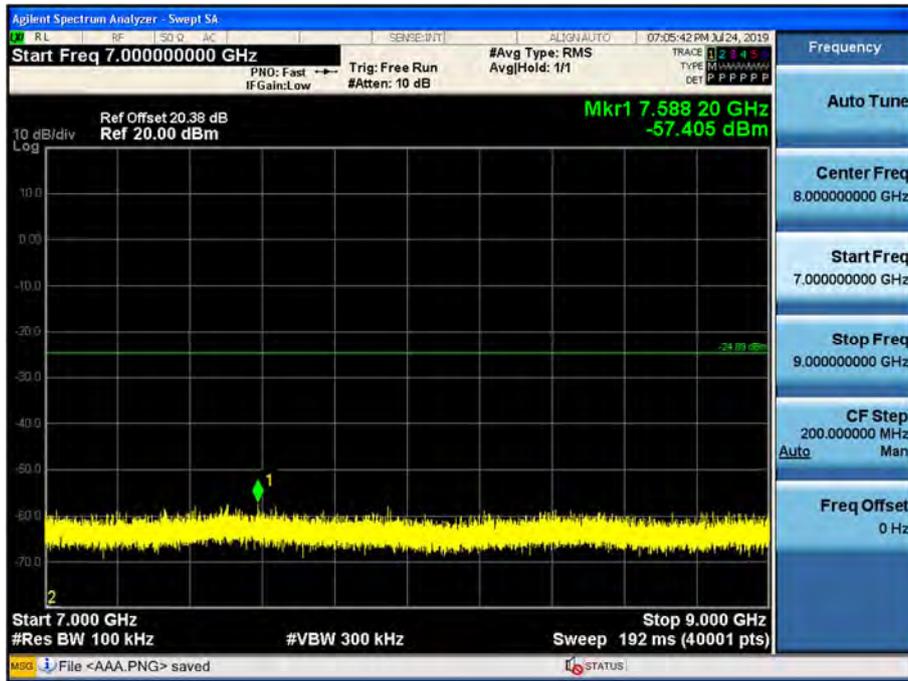


9 GHz ~ 11 GHz

Conducted Spurious Emission (High-CH 39)

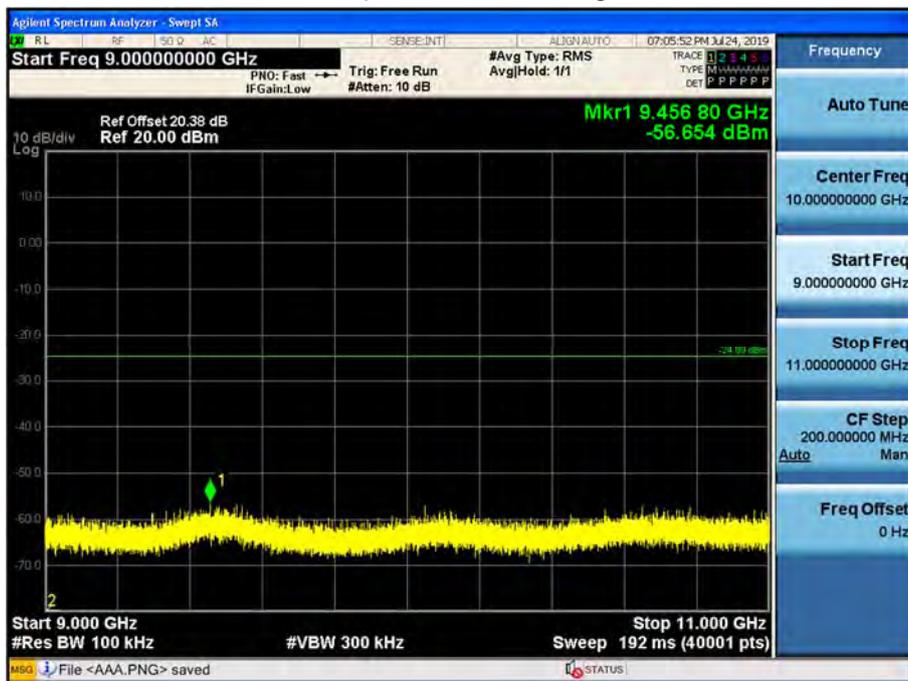


11 GHz ~ 13 GHz

Conducted Spurious Emission (High-CH 39)

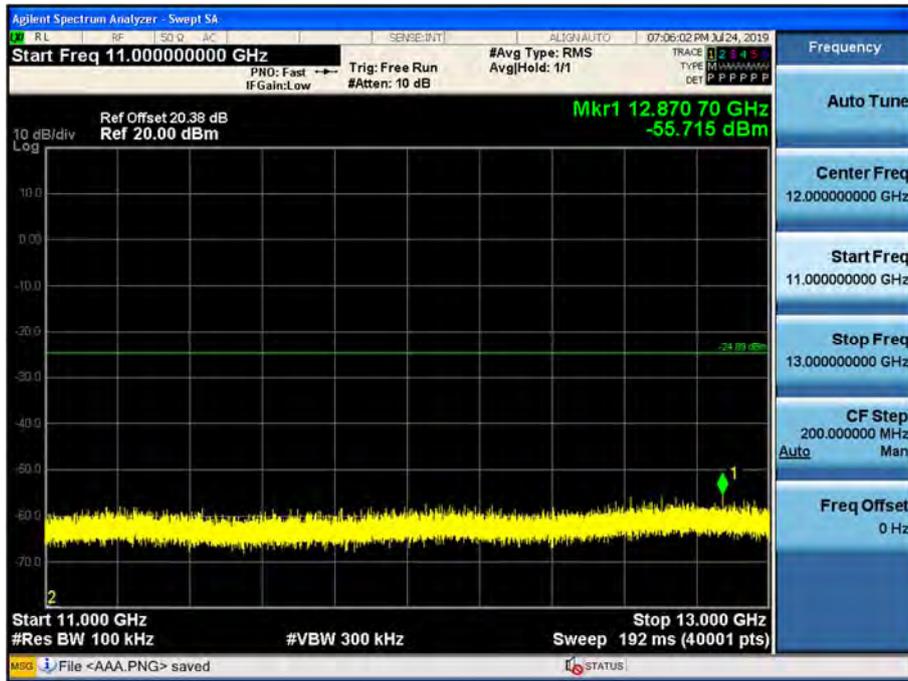


13 GHz ~ 15 GHz

Conducted Spurious Emission (High-CH 39)

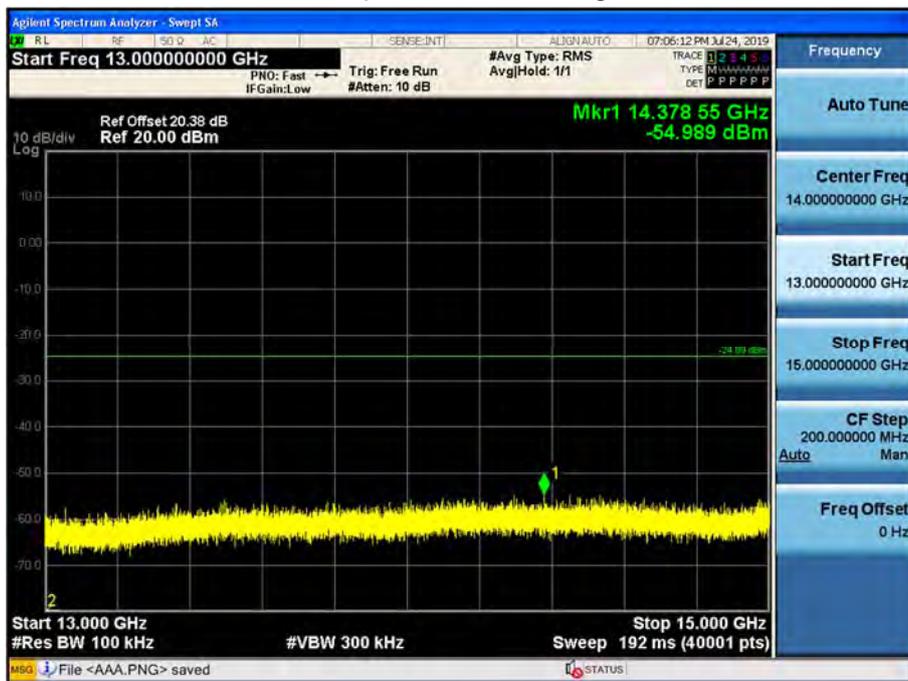


15 GHz ~ 17 GHz

Conducted Spurious Emission (High-CH 39)

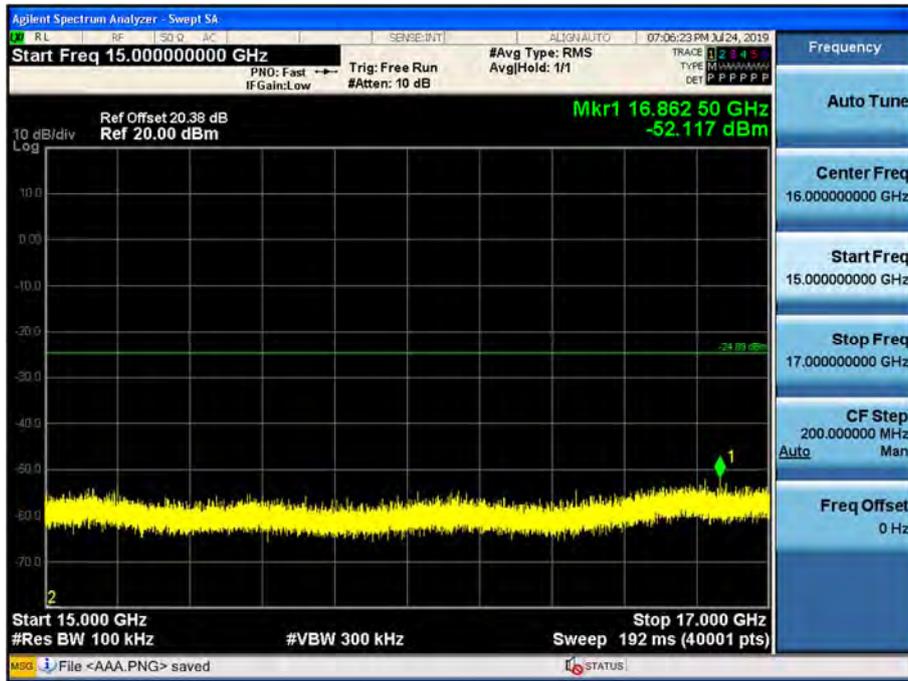


17 GHz ~ 19 GHz

Conducted Spurious Emission (High-CH 39)

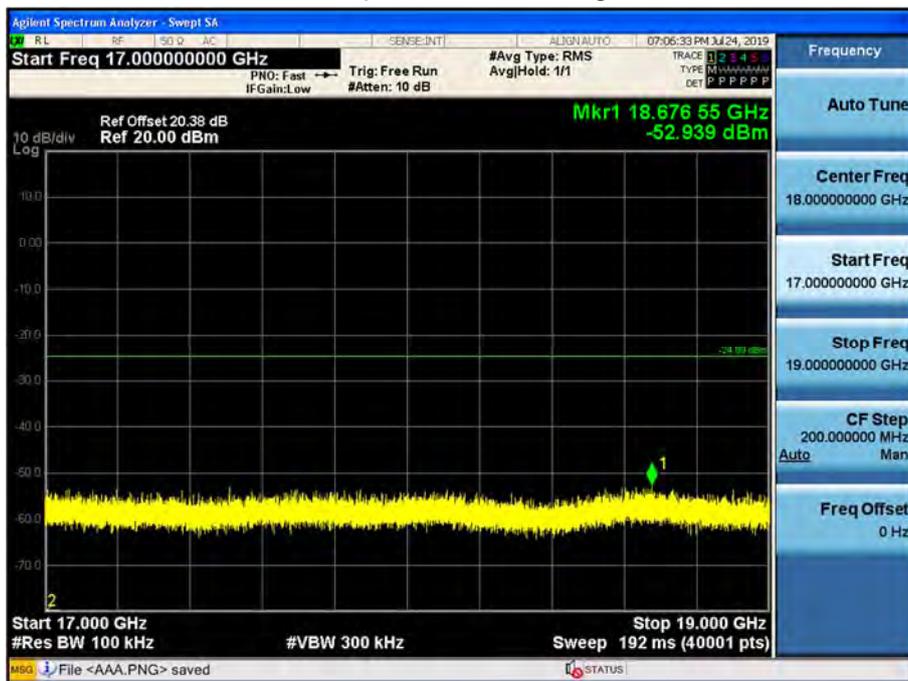


19 GHz ~ 21 GHz

Conducted Spurious Emission (High-CH 39)

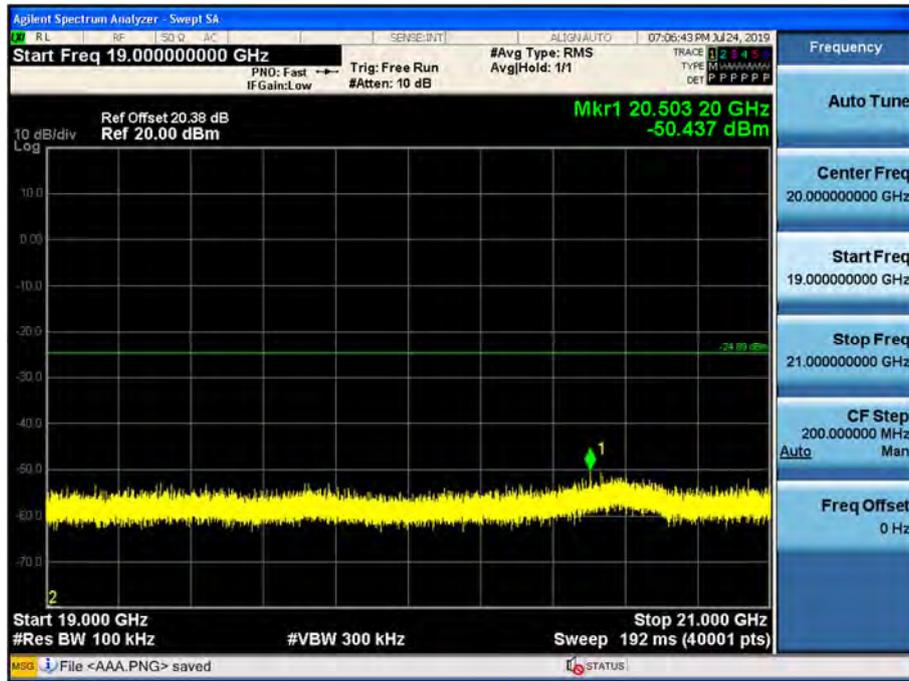


21 GHz ~ 23 GHz

Conducted Spurious Emission (High-CH 39)

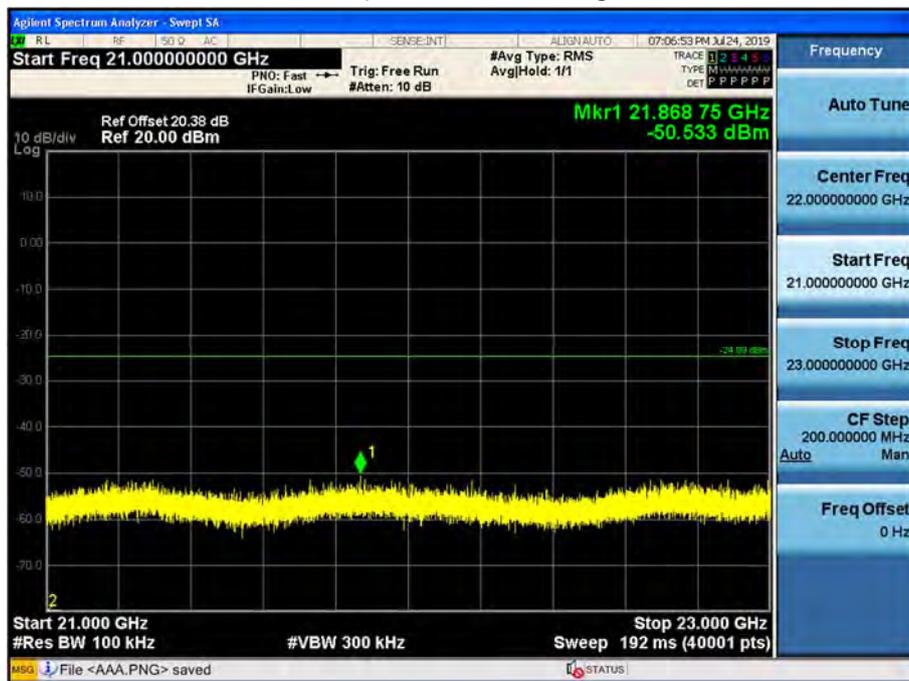


23 GHz ~ 25 GHz

Conducted Spurious Emission (High-CH 39)

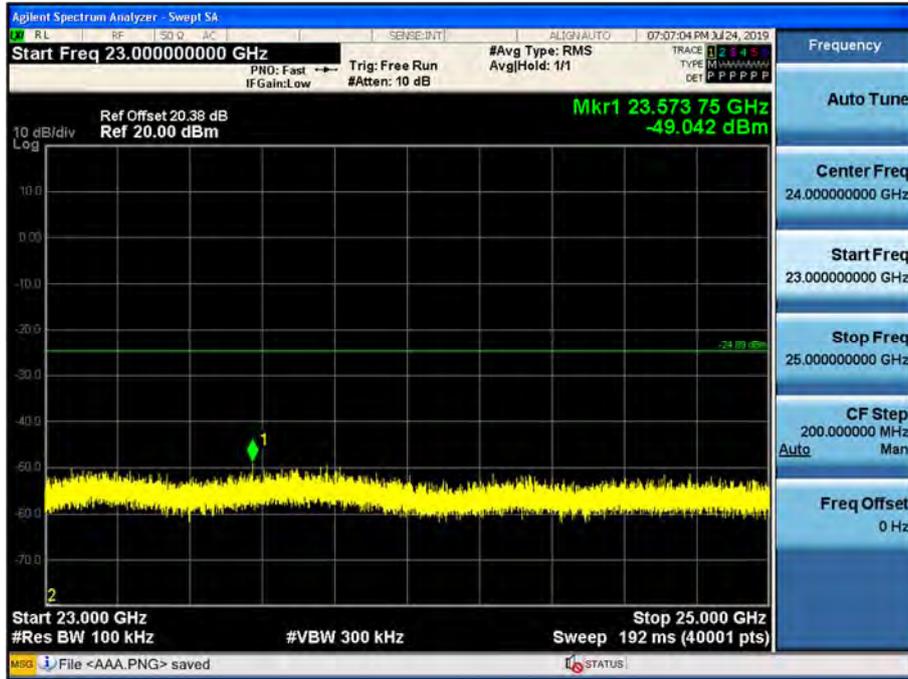

▣ 2M Bit/s (255 Byte) Test Plots -BandEdge

Low-CH 0

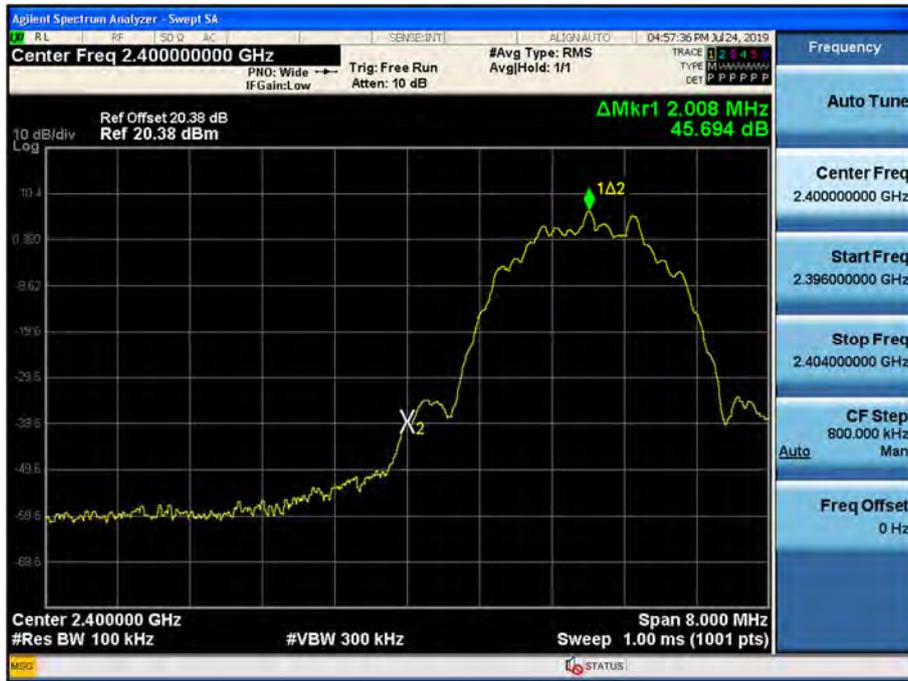


High-CH 39



2M Bit/s (255 Byte) Test Plots -Conducted Spurious Emission


30 MHz ~ 1 GHz

Conducted Spurious Emission (High-CH 39)

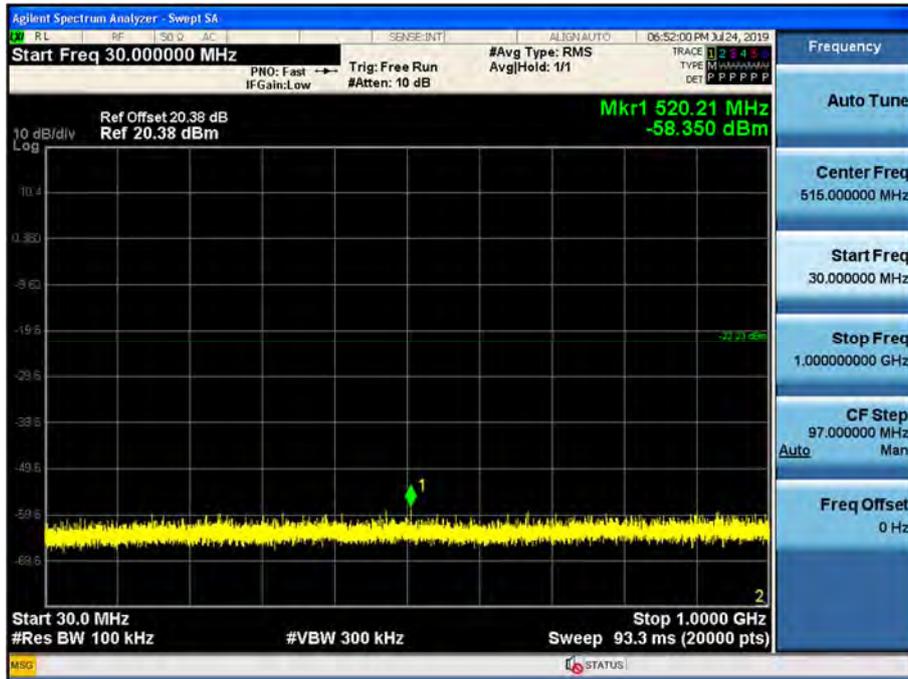


1 GHz ~ 3 GHz

Conducted Spurious Emission (High-CH 39)

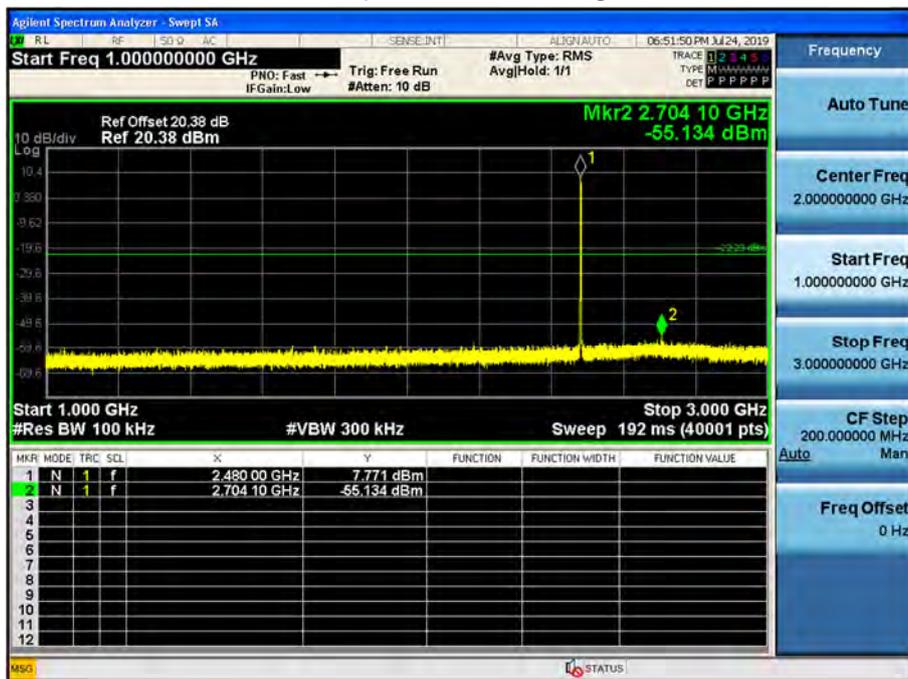


3 GHz ~ 5 GHz

Conducted Spurious Emission (High-CH 39)

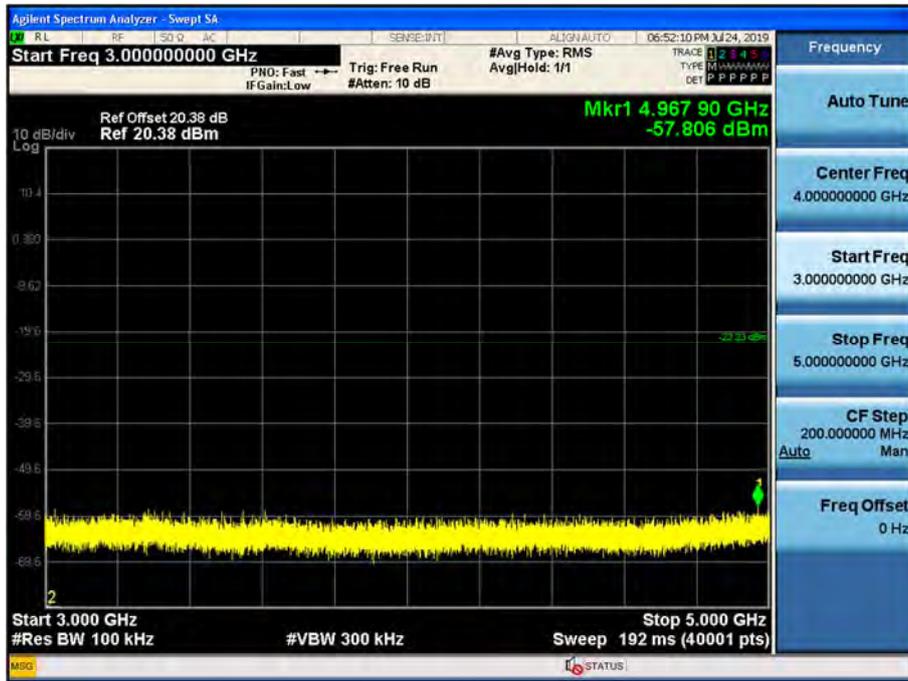


5 GHz ~ 7 GHz

Conducted Spurious Emission (High-CH 39)

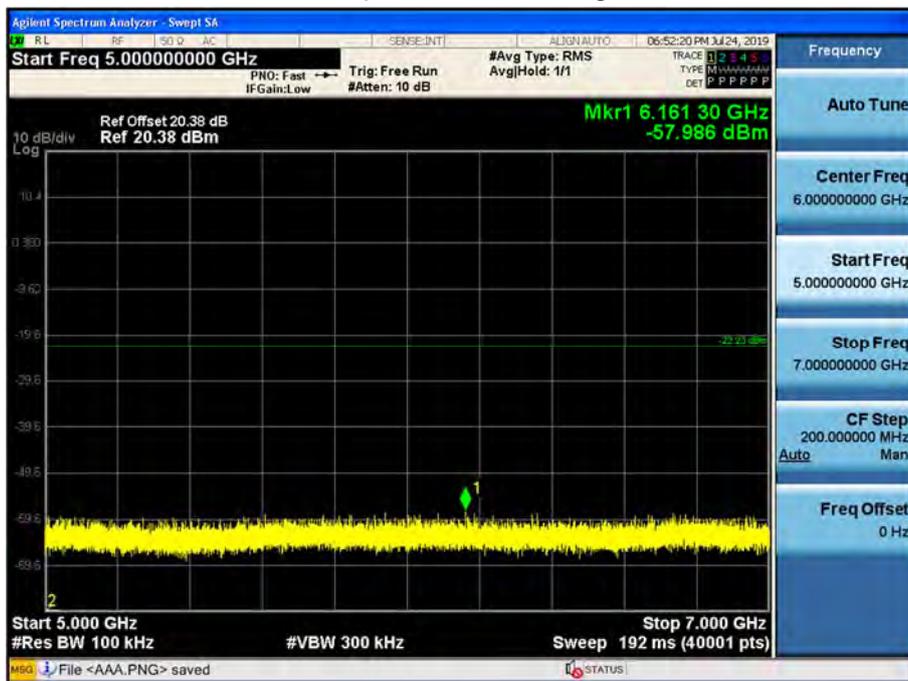

7 GHz ~ 9 GHz

Conducted Spurious Emission (High-CH 39)

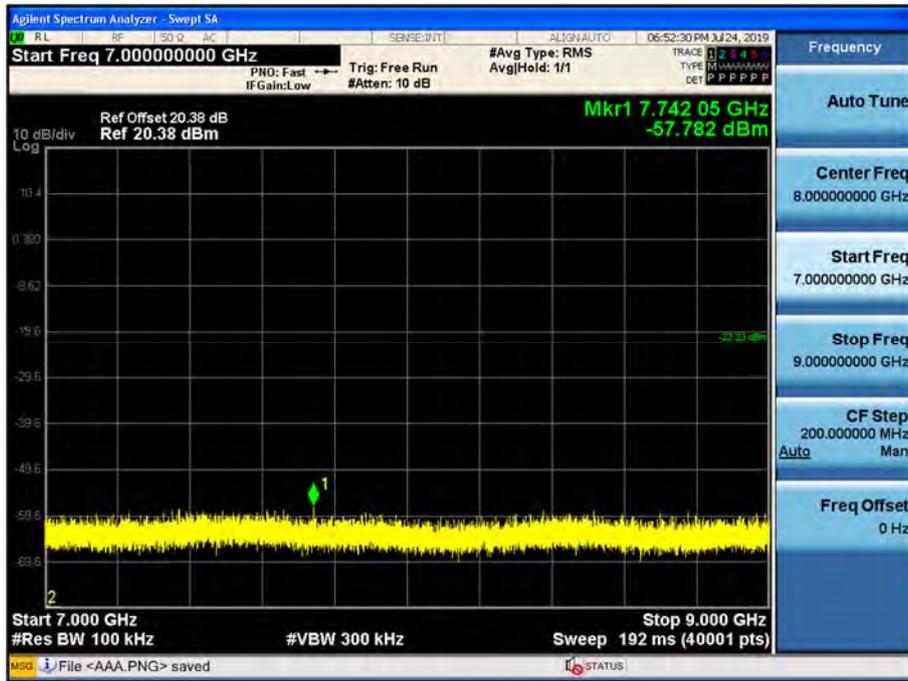


9 GHz ~ 11 GHz

Conducted Spurious Emission (High-CH 39)




11 GHz ~ 13 GHz

Conducted Spurious Emission (High-CH 39)

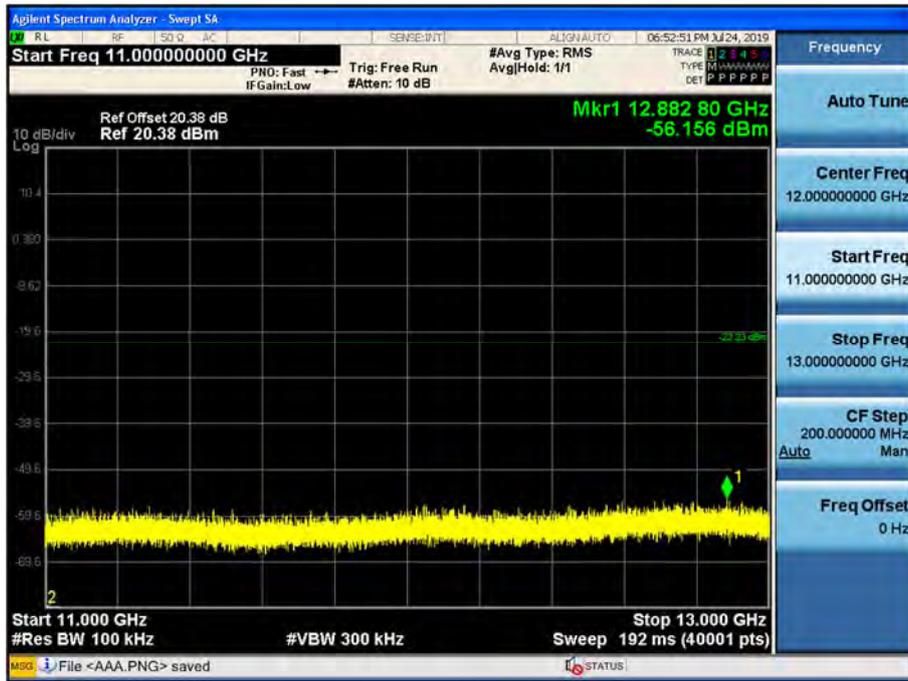


13 GHz ~ 15 GHz

Conducted Spurious Emission (High-CH 39)

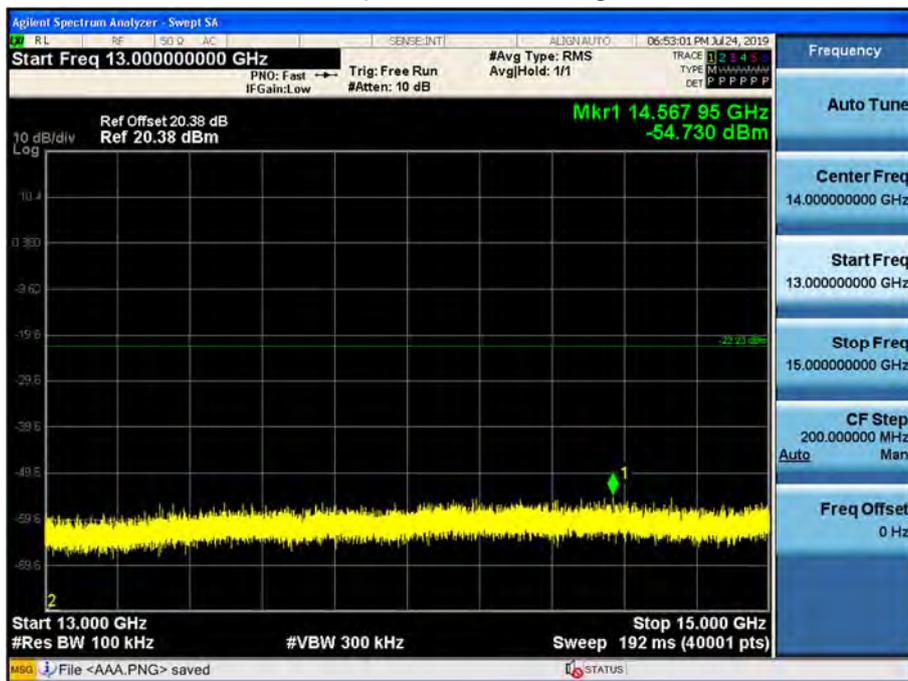


15 GHz ~ 17 GHz

Conducted Spurious Emission (High-CH 39)

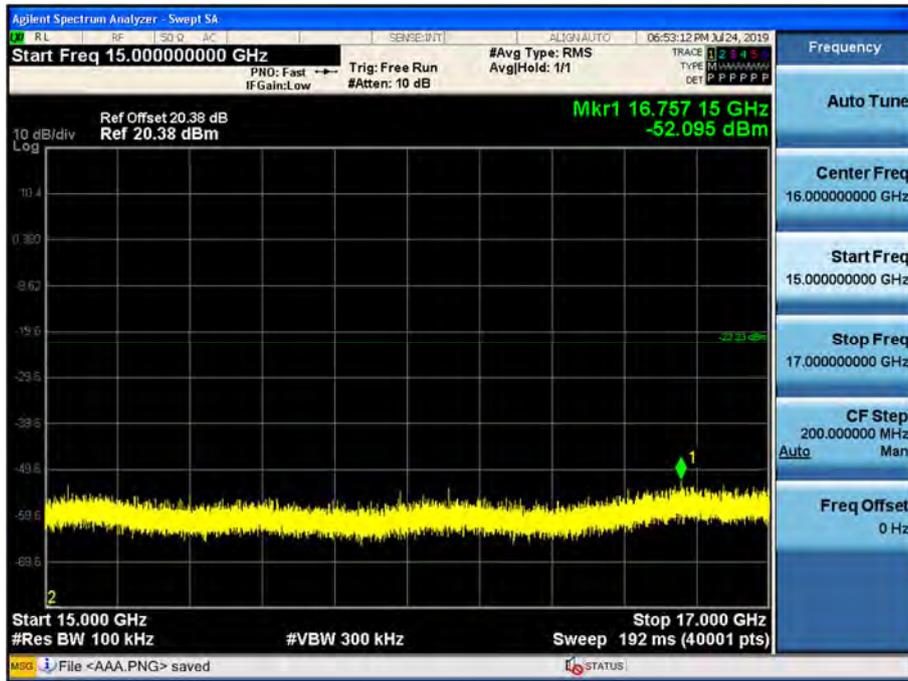


17 GHz ~ 19 GHz

Conducted Spurious Emission (High-CH 39)

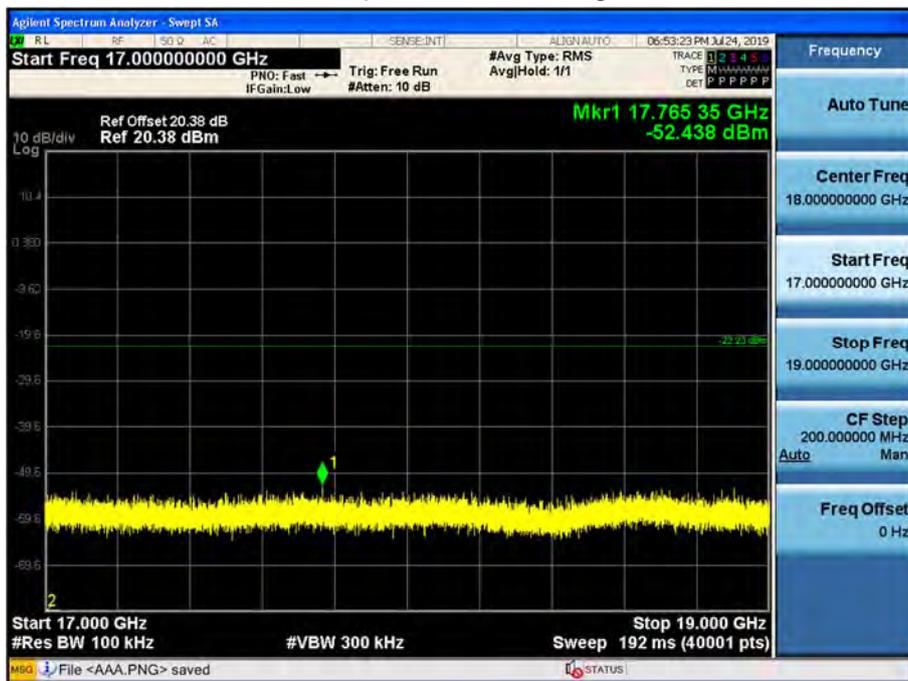


19 GHz ~ 21 GHz

Conducted Spurious Emission (High-CH 39)

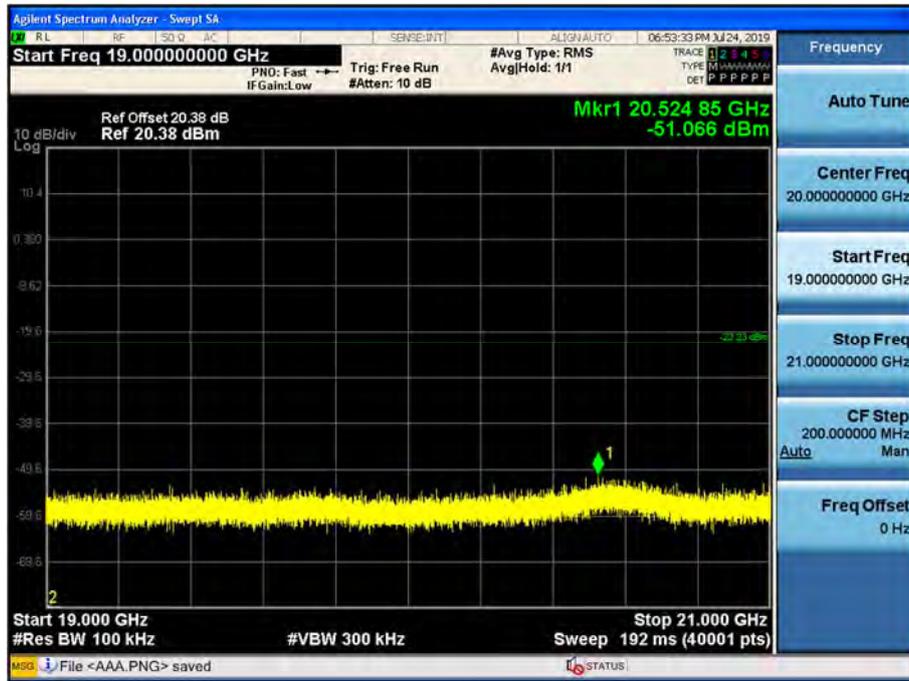


21 GHz ~ 23 GHz

Conducted Spurious Emission (High-CH 39)

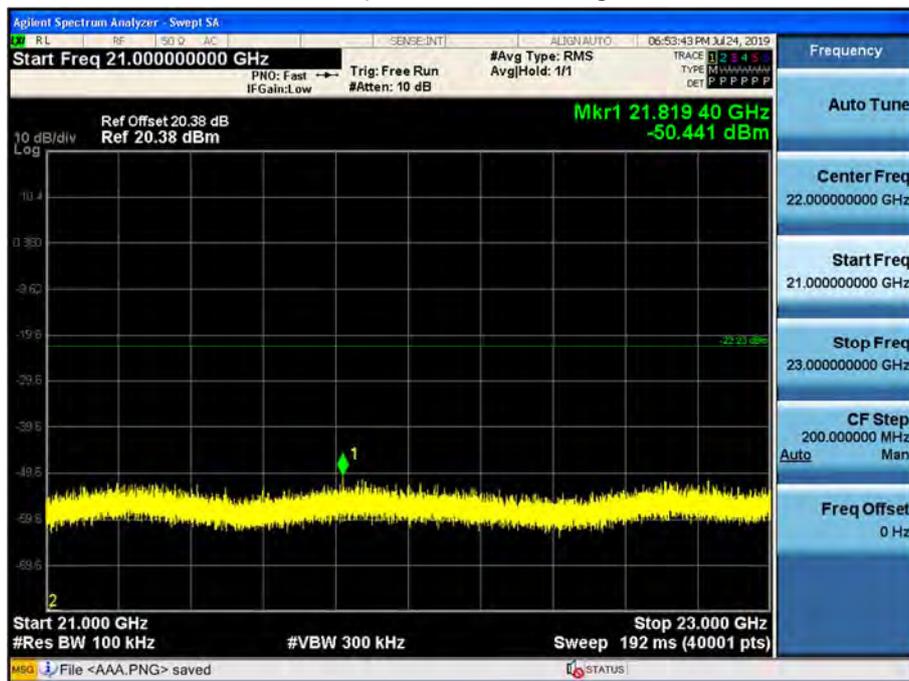

23 GHz ~ 25 GHz

Conducted Spurious Emission (High-CH 39)

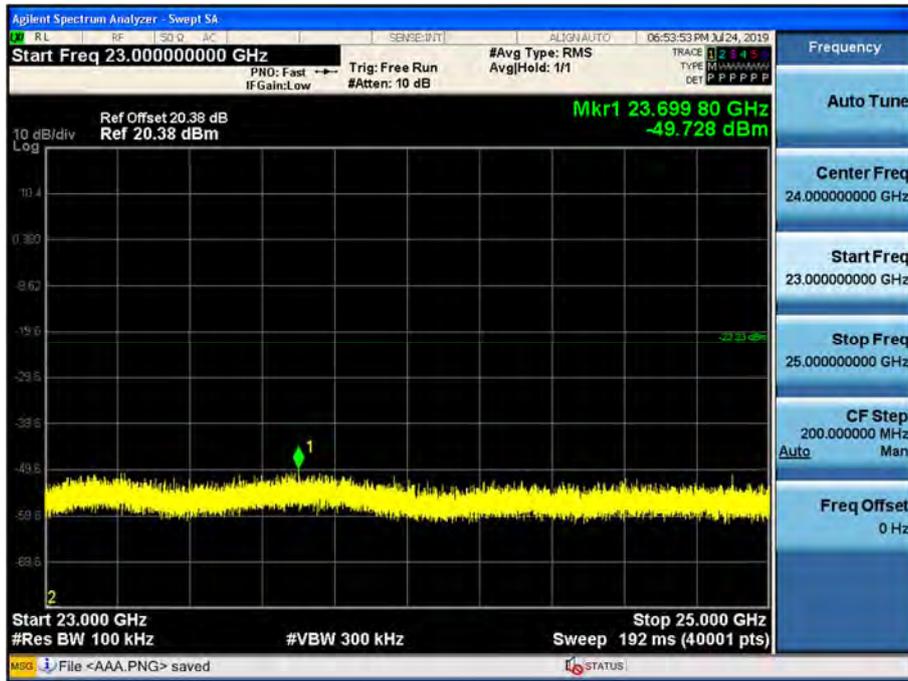

### 9.6 RADIATED SPURIOUS EMISSIONS

#### Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.
5. The test results for below 30 MHz is correlated to an open site.  
The result on OFS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

#### Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Mode : 1M Bit/s (37 Byte)

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	48.14	0	0.64	V	48.78	73.98	25.20	PK
4804	36.01	2.04	0.64	V	38.69	53.98	15.29	AV
7206	47.01	0	9.55	V	56.56	73.98	17.42	PK
7206	34.92	2.04	9.55	V	46.51	53.98	7.47	AV
4804	49.48	0	0.64	H	50.12	73.98	23.86	PK
4804	36.09	2.04	0.64	H	38.77	53.98	15.21	AV
7206	47.46	0	9.55	H	57.01	73.98	16.97	PK
7206	35.61	2.04	9.55	H	47.2	53.98	6.78	AV

Operation Mode: CH Mid

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	47.20	0	1.06	V	48.26	73.98	25.72	PK
4880	35.81	2.04	1.06	V	38.91	53.98	15.07	AV
7320	46.92	0	9.24	V	56.16	73.98	17.82	PK
7320	35.88	2.04	9.24	V	47.16	53.98	6.82	AV
4880	48.61	0	1.06	H	49.67	73.98	24.31	PK
4880	36.72	2.04	1.06	H	39.82	53.98	14.16	AV
7320	48.82	0	9.24	H	58.06	73.98	15.92	PK
7320	36.07	2.04	9.24	H	47.35	53.98	6.63	AV

Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	48.62	0	0.66	V	49.28	73.98	24.70	PK
4960	36.02	2.04	0.66	V	38.72	53.98	15.26	AV
7440	46.10	0	10.16	V	56.26	73.98	17.72	PK
7440	34.05	2.04	10.16	V	46.25	53.98	7.73	AV
4960	49.37	0	0.66	H	50.03	73.98	23.95	PK
4960	36.49	2.04	0.66	H	39.19	53.98	14.79	AV
7440	46.32	0	10.16	H	56.48	73.98	17.50	PK
7440	34.55	2.04	10.16	H	46.75	53.98	7.23	AV

**Mode : 2M Bit/s (37 Byte)**

Operation Mode: CH Low

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	47.34	0	0.64	V	47.98	73.98	26.00	PK
4804	35.82	4.83	0.64	V	41.29	53.98	12.69	AV
7206	46.29	0	9.55	V	55.84	73.98	18.14	PK
7206	35.20	4.83	9.55	V	49.58	53.98	4.40	AV
4804	48.27	0	0.64	H	48.91	73.98	25.07	PK
4804	36.10	4.83	0.64	H	41.57	53.98	12.41	AV
7206	47.45	0	9.55	H	57	73.98	16.98	PK
7206	35.56	4.83	9.55	H	49.94	53.98	4.04	AV

Operation Mode: CH Mid


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4880	47.51	0	1.06	V	48.57	73.98	25.41	PK
4880	35.21	4.83	1.06	V	41.1	53.98	12.88	AV
7320	47.59	0	9.24	V	56.83	73.98	17.15	PK
7320	35.80	4.83	9.24	V	49.87	53.98	4.11	AV
4880	48.83	0	1.06	H	49.89	73.98	24.09	PK
4880	36.66	4.83	1.06	H	42.55	53.98	11.43	AV
7320	48.13	0	9.24	H	57.37	73.98	16.61	PK
7320	36.03	4.83	9.24	H	50.1	53.98	3.88	AV

Operation Mode: CH High

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F + C.L - A.G + D.F [dB]	Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	48.71	0	0.66	V	49.37	73.98	24.61	PK
4960	35.86	4.83	0.66	V	41.35	53.98	12.63	AV
7440	45.59	0	10.16	V	55.75	73.98	18.23	PK
7440	33.92	4.83	10.16	V	48.91	53.98	5.07	AV
4960	49.59	0	0.66	H	50.25	73.98	23.73	PK
4960	36.52	4.83	0.66	H	42.01	53.98	11.97	AV
7440	46.26	0	10.16	H	56.42	73.98	17.56	PK
7440	34.55	4.83	10.16	H	49.54	53.98	4.44	AV


1M Bit 37 Byte Test Plots (Worst case : Y-H)

Radiated Spurious Emissions plot – Average Reading (Ch.19 3rd Harmonic)

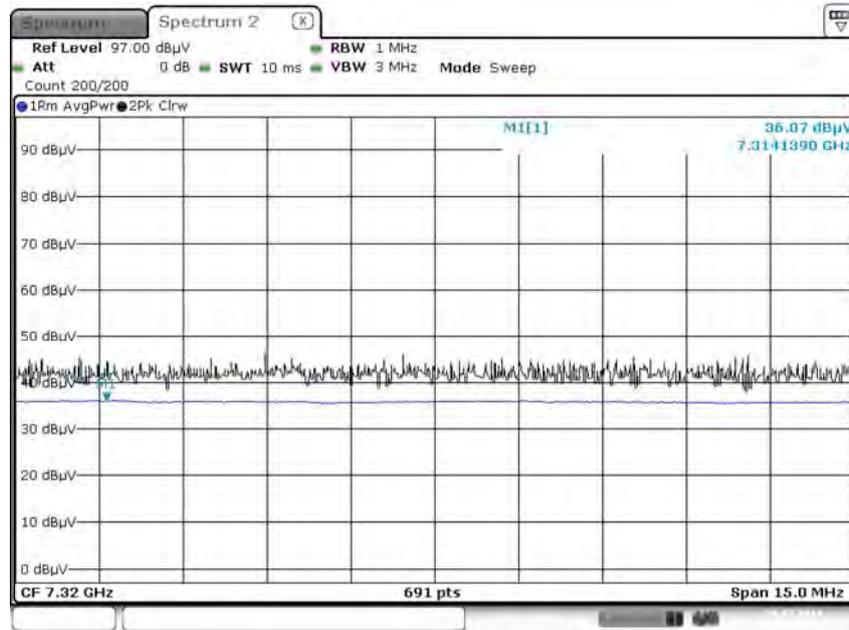

Date: 30.JUL.2019 03:40:35


Radiated Spurious Emissions plot – Peak Reading (Ch.19 3rd Harmonic)

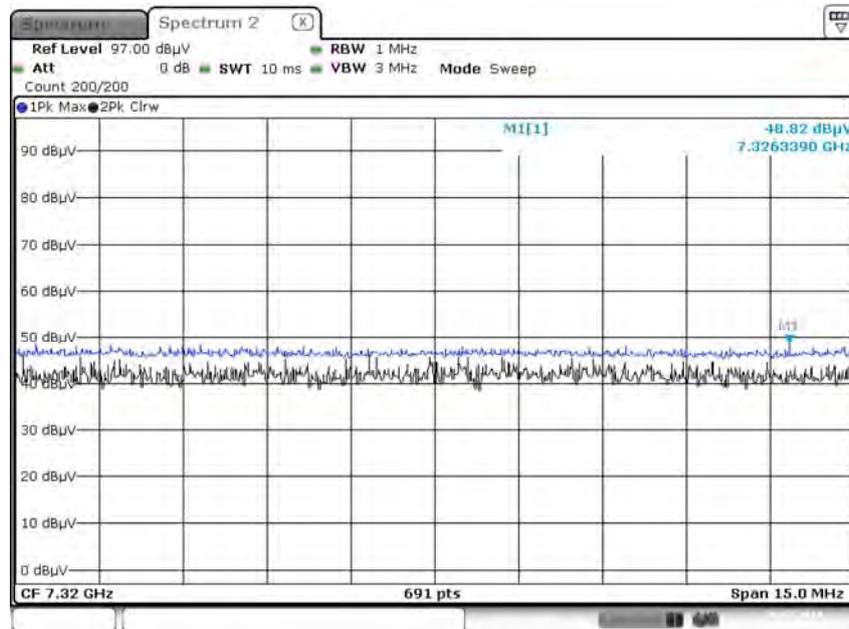

Date: 30.JUL.2019 03:39:02


2M Bit 37 Byte Test Plots (Worst case : Y-H)

Radiated Spurious Emissions plot – Average Reading (Ch.19 3rd Harmonic)

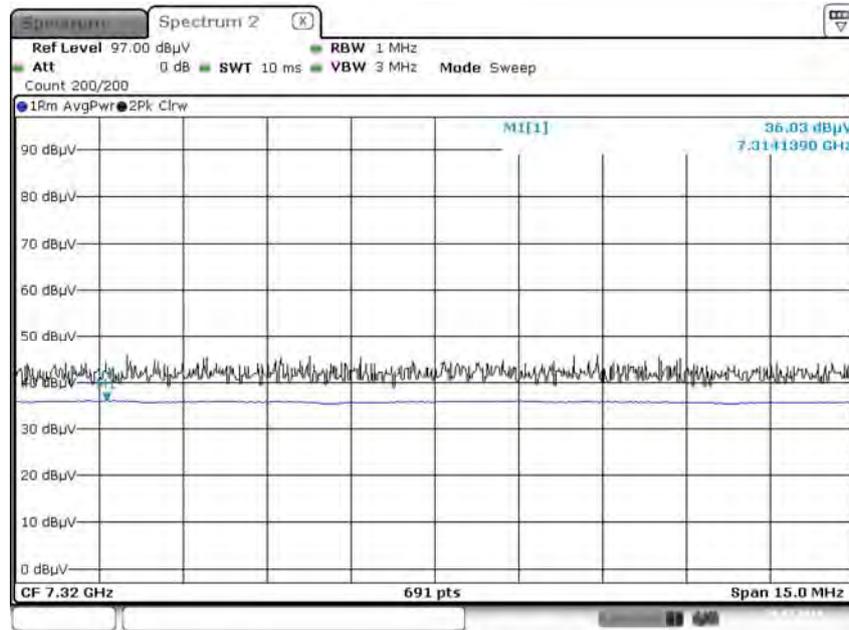

Date: 30.JUL.2019 03:47:36

Radiated Spurious Emissions plot – Peak Reading (Ch.19 3rd Harmonic)

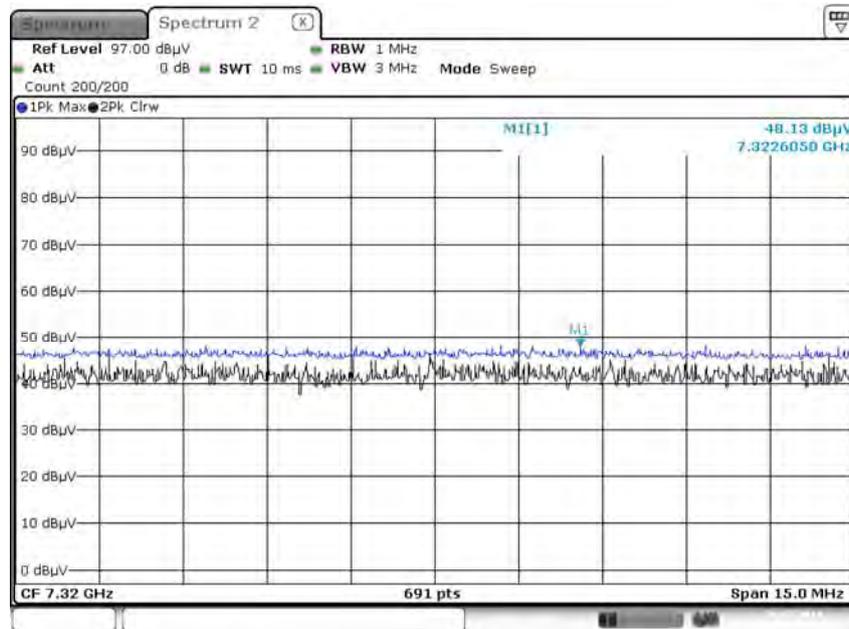

Date: 30.JUL.2019 03:48:22

**Note:**

Plot of worst case are only reported.

**9.7 RADIATED RESTRICTED BAND EDGES**

**Mode : 125k Bit/s 37 byte**

Operating Frequency 2402 MHz  
 Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	19.76	0.00	33.69	H	53.45	73.98	20.53	PK
2390.0	8.73	0.83	33.69	H	43.25	53.98	10.73	AV
2390.0	18.51	0.00	33.69	V	52.20	73.98	21.78	PK
2390.0	7.86	0.83	33.69	V	42.38	53.98	11.60	AV

Operating Frequency 2480 MHz  
 Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	19.66	0.00	33.19	H	52.85	73.98	21.13	PK
2483.5	8.45	0.83	33.19	H	42.47	53.98	11.51	AV
2483.5	18.25	0.00	33.19	V	51.44	73.98	22.54	PK
2483.5	8.35	0.83	33.19	V	42.37	53.98	11.61	AV

**Mode : 125k Bit/s 255 byte**

Operating Frequency 2402 MHz  
 Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	20.45	0.00	33.69	H	54.14	73.98	19.84	PK
2390.0	8.24	0.11	33.69	H	42.04	53.98	11.94	AV
2390.0	19.63	0.00	33.69	V	53.32	73.98	20.66	PK
2390.0	8.00	0.11	33.69	V	41.80	53.98	12.18	AV

Operating Frequency 2480 MHz  
 Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	19.70	0.00	33.19	H	52.89	73.98	21.09	PK
2483.5	8.46	0.11	33.19	H	41.76	53.98	12.22	AV
2483.5	19.06	0.00	33.19	V	52.25	73.98	21.73	PK
2483.5	8.05	0.11	33.19	V	41.35	53.98	12.63	AV

**Mode : 500k Bit/s 37 byte**

Operating Frequency 2402 MHz  
 Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	18.27	0.00	33.69	H	51.96	73.98	22.02	PK
2390.0	8.46	2.45	33.69	H	44.60	53.98	9.38	AV
2390.0	18.16	0.00	33.69	V	51.85	73.98	22.13	PK
2390.0	8.15	2.45	33.69	V	44.29	53.98	9.69	AV

Operating Frequency 2480 MHz  
 Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	21.20	0.00	33.19	H	54.39	73.98	19.59	PK
2483.5	8.23	2.45	33.19	H	43.87	53.98	10.11	AV
2483.5	19.96	0.00	33.19	V	53.15	73.98	20.83	PK
2483.5	8.06	2.45	33.19	V	43.70	53.98	10.28	AV

**Mode : 500k Bit/s 255 byte**

Operating Frequency 2402 MHz  
 Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	19.90	0.00	33.69	H	53.59	73.98	20.39	PK
2390.0	8.21	0.42	33.69	H	42.32	53.98	11.66	AV
2390.0	18.26	0.00	33.69	V	51.95	73.98	22.03	PK
2390.0	8.05	0.42	33.69	V	42.16	53.98	11.82	AV

Operating Frequency 2480 MHz  
 Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	19.33	0.00	33.19	H	52.52	73.98	21.46	PK
2483.5	8.45	0.42	33.19	H	42.06	53.98	11.92	AV
2483.5	18.97	0.00	33.19	V	52.16	73.98	21.82	PK
2483.5	8.21	0.42	33.19	V	41.82	53.98	12.16	AV

**Mode : 1M Bit/s 37 byte**

Operating Frequency 2402 MHz  
 Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	19.24	0.00	33.69	H	52.93	73.98	21.05	PK
2390.0	8.35	2.04	33.69	H	44.08	53.98	9.90	AV
2390.0	19.13	0.00	33.69	V	52.82	73.98	21.16	PK
2390.0	8.02	2.04	33.69	V	43.75	53.98	10.23	AV

Operating Frequency 2480 MHz  
 Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	21.23	0.00	33.19	H	54.42	73.98	19.56	PK
2483.5	8.62	2.04	33.19	H	43.85	53.98	10.13	AV
2483.5	20.99	0.00	33.19	V	54.18	73.98	19.80	PK
2483.5	8.32	2.04	33.19	V	43.55	53.98	10.43	AV

**Mode : 1M Bit/s 255 byte**

Operating Frequency 2402 MHz  
 Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	18.35	0.00	33.69	H	52.04	73.98	21.94	PK
2390.0	8.22	0.69	33.69	H	42.60	53.98	11.38	AV
2390.0	17.99	0.00	33.69	V	51.68	73.98	22.30	PK
2390.0	7.99	0.69	33.69	V	42.37	53.98	11.61	AV

Operating Frequency 2480 MHz  
 Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	21.10	0.00	33.19	H	54.29	73.98	19.69	PK
2483.5	8.58	0.69	33.19	H	42.46	53.98	11.52	AV
2483.5	19.68	0.00	33.19	V	52.87	73.98	21.11	PK
2483.5	8.27	0.69	33.19	V	42.15	53.98	11.83	AV

**Mode : 2M Bit/s 37 byte**

Operating Frequency 2402 MHz  
 Channel No. 0

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	18.98	0.00	33.69	H	52.67	73.98	21.31	PK
2390.0	7.96	4.83	33.69	H	46.48	53.98	7.50	AV
2390.0	18.41	0.00	33.69	V	52.10	73.98	21.88	PK
2390.0	7.91	4.83	33.69	V	46.43	53.98	7.55	AV

Operating Frequency 2480 MHz  
 Channel No. 39

Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	23.90	0.00	33.19	H	57.09	73.98	16.89	PK
2483.5	8.55	4.83	33.19	H	46.57	53.98	7.41	AV
2483.5	21.79	0.00	33.19	V	54.98	73.98	19.00	PK
2483.5	8.14	4.83	33.19	V	46.16	53.98	7.82	AV

**Mode : 2M Bit/s 255 byte**

Operating Frequency 2402 MHz  
 Channel No. 0


Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	19.20	0.00	33.69	H	52.89	73.98	21.09	PK
2390.0	8.24	2.40	33.69	H	44.33	53.98	9.65	AV
2390.0	18.15	0.00	33.69	V	51.84	73.98	22.14	PK
2390.0	8.03	2.40	33.69	V	44.12	53.98	9.86	AV

Operating Frequency 2480 MHz  
 Channel No. 39


Frequency [MHz]	Reading [dBuV/m]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	Ant. Pol. [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	22.21	0.00	33.19	H	55.40	73.98	18.58	PK
2483.5	8.66	2.40	33.19	H	44.25	53.98	9.73	AV
2483.5	21.97	0.00	33.19	V	55.16	73.98	18.82	PK
2483.5	8.25	2.40	33.19	V	43.84	53.98	10.14	AV

Mode : 2M Bit/s (37 Byte) Test Plots (Worst case : X-H)

Radiated Restricted Band Edges plot – Average Reading (Ch.39)

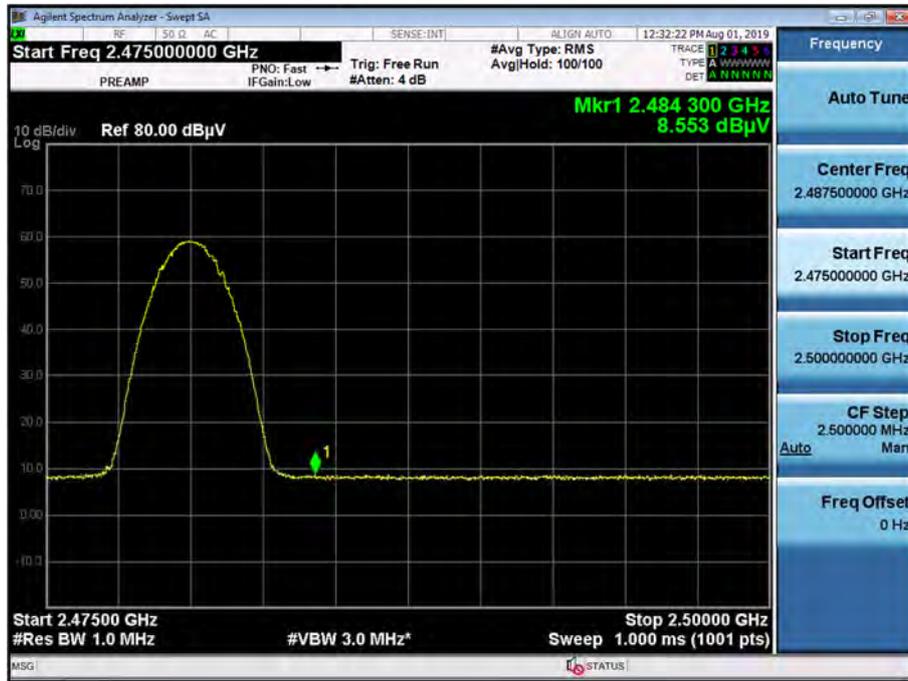

Radiated Restricted Band Edges plot – Peak Reading (Ch.39)

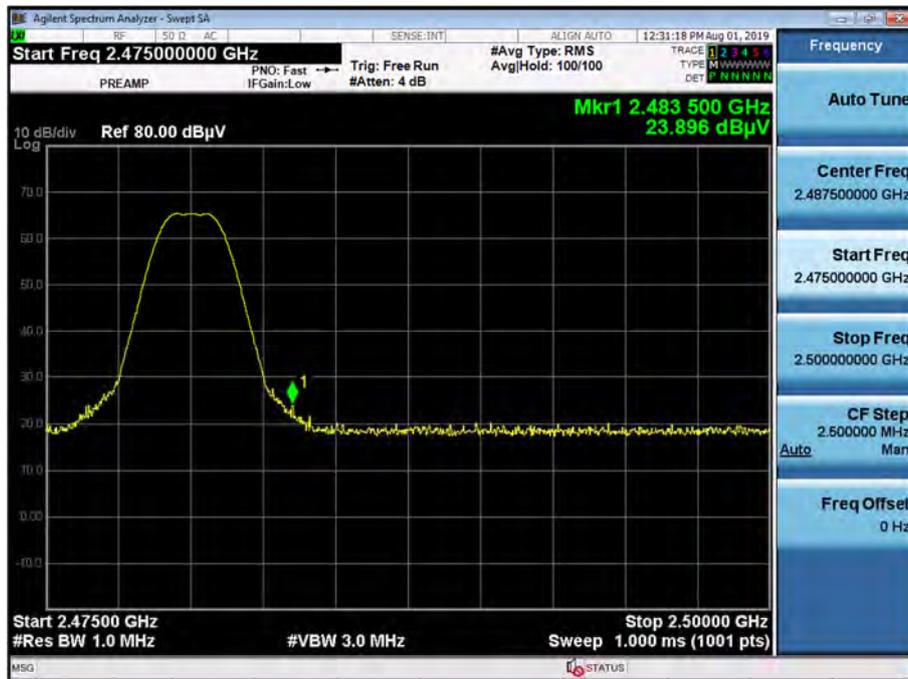

Note:

Plot of worst case are only reported.

## 9.8 POWERLINE CONDUCTED EMISSIONS

### Conducted Emissions (Line 1)

BTLE\_L1


1 / 2

## HCT TEST Report

### Common Information

EUT: SM-A908B  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: BTLE Mode\_L1

FCC CLASS B\_Exten Cable

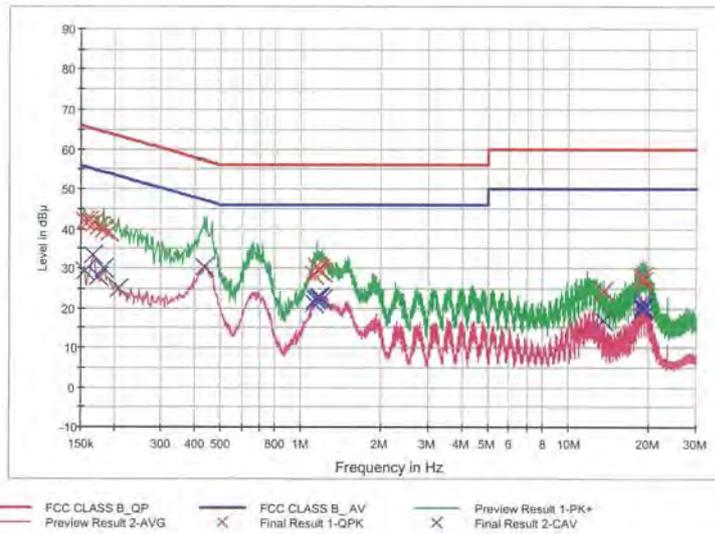

### Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.156000	41.8	9.000	Off	L1	9.7	23.9	65.7
0.160000	41.9	9.000	Off	L1	9.7	23.6	65.5
0.168000	41.6	9.000	Off	L1	9.7	23.4	65.1
0.174000	40.6	9.000	Off	L1	9.7	24.2	64.8
0.182000	39.8	9.000	Off	L1	9.7	24.6	64.4
0.192000	39.2	9.000	Off	L1	9.7	24.8	63.9
1.126000	28.5	9.000	Off	L1	9.8	27.5	56.0
1.144000	30.5	9.000	Off	L1	9.8	25.5	56.0
1.156000	29.6	9.000	Off	L1	9.8	26.4	56.0
1.168000	29.8	9.000	Off	L1	9.8	26.2	56.0
1.182000	29.5	9.000	Off	L1	9.8	26.5	56.0
1.196000	28.8	9.000	Off	L1	9.8	27.2	56.0
13.560000	24.4	9.000	Off	L1	10.4	32.6	60.0
18.832000	27.5	9.000	Off	L1	10.6	32.5	60.0
18.906000	26.7	9.000	Off	L1	10.6	33.3	60.0
18.922000	27.8	9.000	Off	L1	10.6	32.2	60.0
18.962000	27.9	9.000	Off	L1	10.6	32.1	60.0
19.032000	26.7	9.000	Off	L1	10.6	33.3	60.0

2019-07-18

오전 10:27:25

BTLE\_L1

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.156000	29.3	9.000	Off	L1	9.7	26.3	55.7
0.166000	33.3	9.000	Off	L1	9.7	21.9	55.2
0.174000	28.0	9.000	Off	L1	9.7	26.8	54.8
0.182000	29.9	9.000	Off	L1	9.7	24.5	54.4
0.208000	25.0	9.000	Off	L1	9.7	28.2	53.3
0.436000	30.4	9.000	Off	L1	9.7	16.8	47.1
1.126000	21.3	9.000	Off	L1	9.8	24.7	46.0
1.136000	22.1	9.000	Off	L1	9.8	23.9	46.0
1.144000	22.5	9.000	Off	L1	9.8	23.5	46.0
1.170000	22.8	9.000	Off	L1	9.8	23.2	46.0
1.182000	22.5	9.000	Off	L1	9.8	23.5	46.0
1.196000	22.3	9.000	Off	L1	9.8	23.7	46.0
13.560000	16.9	9.000	Off	L1	10.4	33.1	50.0
18.904000	19.6	9.000	Off	L1	10.6	30.4	50.0
18.922000	19.8	9.000	Off	L1	10.6	30.2	50.0
18.962000	20.2	9.000	Off	L1	10.6	29.8	50.0
19.000000	20.5	9.000	Off	L1	10.6	29.5	50.0
19.006000	21.4	9.000	Off	L1	10.6	28.6	50.0

2019-07-18

모전 10:27:25

**Conducted Emissions (Line 2)**

BTLE\_N


1 / 2

**HCT TEST Report**

**Common Information**

EUT: SM-A908B  
 Manufacturer: SAMSUNG  
 Test Site: SHIELD ROOM  
 Operating Conditions: BTLE Mode\_N

FCC CLASS B\_Exten Cable

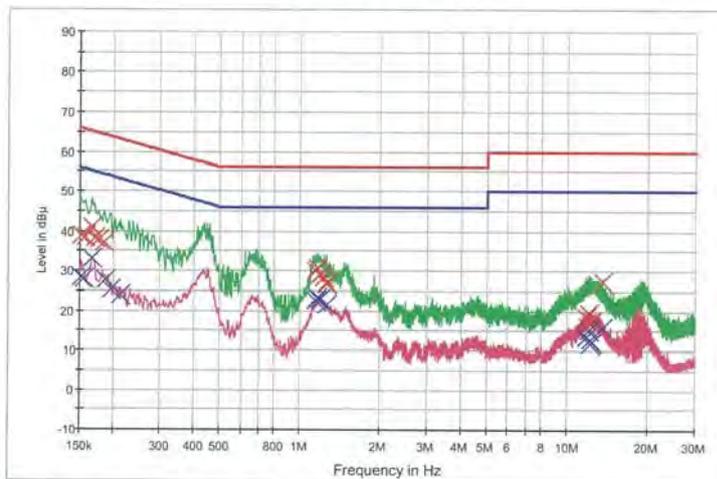

— FCC CLASS B\_QP      — FCC CLASS B\_AV      — Preview Result 1-PK+  
 — Preview Result 2-AVG      x Final Result 1-QPK      x Final Result 2-CAV

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.152000	38.7	9.000	Off	N	9.8	27.1	65.9
0.158000	38.6	9.000	Off	N	9.8	27.0	65.6
0.166000	40.7	9.000	Off	N	9.8	24.5	65.2
0.170000	38.1	9.000	Off	N	9.8	26.9	65.0
0.176000	37.7	9.000	Off	N	9.8	27.0	64.7
0.186000	37.0	9.000	Off	N	9.8	27.2	64.2
1.152000	30.1	9.000	Off	N	10.0	25.9	56.0
1.160000	30.6	9.000	Off	N	10.0	25.4	56.0
1.188000	29.0	9.000	Off	N	10.0	27.0	56.0
1.228000	28.2	9.000	Off	N	10.0	27.8	56.0
1.254000	27.1	9.000	Off	N	10.0	28.9	56.0
1.262000	26.7	9.000	Off	N	10.0	29.3	56.0
11.748000	18.4	9.000	Off	N	10.5	41.6	60.0
11.864000	16.0	9.000	Off	N	10.5	44.0	60.0
12.024000	19.5	9.000	Off	N	10.5	40.5	60.0
12.234000	16.9	9.000	Off	N	10.5	43.1	60.0
12.346000	17.5	9.000	Off	N	10.6	42.5	60.0
13.558000	27.3	9.000	Off	N	10.6	32.7	60.0

2019-07-18

오전 10:12:24

BTLE\_N

2 / 2

**Final Result 2**

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	28.3	9.000	Off	N	9.8	27.6	55.9
0.156000	28.1	9.000	Off	N	9.8	27.6	55.7
0.166000	33.1	9.000	Off	N	9.8	22.1	55.2
0.186000	27.5	9.000	Off	N	9.8	26.6	54.1
0.196000	25.2	9.000	Off	N	9.8	28.6	53.8
0.214000	23.9	9.000	Off	N	9.9	29.1	53.0
1.146000	22.5	9.000	Off	N	10.0	23.5	46.0
1.152000	22.5	9.000	Off	N	10.0	23.5	46.0
1.160000	23.2	9.000	Off	N	10.0	22.8	46.0
1.188000	23.0	9.000	Off	N	10.0	23.0	46.0
1.194000	22.8	9.000	Off	N	10.0	23.2	46.0
1.260000	21.5	9.000	Off	N	10.0	24.5	46.0
11.748000	13.4	9.000	Off	N	10.5	36.6	50.0
12.024000	15.2	9.000	Off	N	10.5	34.8	50.0
12.186000	12.8	9.000	Off	N	10.5	37.2	50.0
12.234000	11.7	9.000	Off	N	10.5	38.3	50.0
12.298000	12.0	9.000	Off	N	10.6	38.0	50.0
13.558000	15.8	9.000	Off	N	10.6	34.2	50.0

2019-07-18

모전 10:12:24

## 10. LIST OF TEST EQUIPMENT

### Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/18/2019	Annual	100584
ESPAC	SU-642 /Temperature Chamber	03/12/2019	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/20/2018	Annual	MY49431210
Agilent	N1911A / Power Meter	04/10/2019	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/10/2019	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2018	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/24/2019	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/18/2019	Annual	KR75303960
WEINSCHTEL	2-20 / Attenuator(20 dB)	10/26/2018	Annual	BR0592
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/16/2019	Annual	100422

### Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	03/22/2019	Biennial	760
Schwarzbeck	VULB 9160 / TRILOG Antenna	08/09/2018	Biennial	9160-3368
Schwarzbeck	BBHA 9120D / Horn Antenna	08/01/2019	Biennial	1151
Schwarzbeck	BBHA 9120D / Horn Antenna	04/29/2019	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/03/2018	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/28/2018	Annual	101068-SZ
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	05/23/2019	Annual	8
Wainwright Instruments	WHKX7.0/18G-8SS / High Pass Filter	05/03/2019	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/19/2019	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/04/2019	Annual	1
H+S	5910-N-50-010 / Attenuator(10 dB)	11/08/2018	Annual	NONE
CERNEX	CBLU1183540 / Power Amplifier	07/01/2019	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/01/2019	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/18/2019	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/26/2019	Annual	3000C000276

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## 11. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1908-FC039-P