

TEST REPORT

FCC DTS Test for SM-A908B

Certification

APPLICANT

SAMSUNG Electronics Co., Ltd.

REPORT NO.

HCT-RF-1908-FC041-R3

DATE OF ISSUE

10 September 2019

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401



REPORT NO.
HCT-RF-1908-FC041-R3

DATE OF ISSUE
10 September 2019

FCC ID
A3LSMA908B

Applicant **SAMSUNG Electronics Co., Ltd.**
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Eut Type Model Name
Mobile Phone SM-A908B

Average Output Power
Ant.1: 802.11b: 18.48 dBm / 802.11g: 15.77 dBm / 802.11n(HT20): 14.67 dBm
Ant.2: 802.11b: 17.91 dBm / 802.11g: 15.00 dBm / 802.11n(HT20): 13.83 dBm
Ant.1&2: 802.11g: 18.38 dBm / 802.11n(HT20): 17.18 dBm

Modulation type
CCK/DSSS/OFDM

FCC Classification
Digital Transmission System(DTS)

FCC Rule Part(s)
Part 15.247

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

Tested by
Jeong Ho Kim

Technical Manager
Jong Seok Lee

HCT CO., LTD.

Soo Chan Lee
SooChan Lee / CEO

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	27 August 2019	Initial Release
1	5 September 2019	Added the ISO 17025 KOLAS logo.
2	7 September 2019	-Add the HCT Accreditation No. for ISO 17025 KOLAS -Changed the * mark except for page 3
3	10 September 2019	-* identification mark do not use for different identification mark

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

CONTENTS

1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	8
3. INSTRUMENT CALIBRATION	8
4. FACILITIES AND ACCREDITATIONS	8
FACILITIES	8
EQUIPMENT	8
5. ANTENNA REQUIREMENTS	9
6. MEASUREMENT UNCERTAINTY	9
7. DESCRIPTION OF TESTS	10
8. SUMMARY TEST OF RESULTS	27
9. TEST RESULT	28
9.1 DUTY CYCLE	28
9.2 6dB BANDWIDTH	31
9.3 OUTPUT POWER	37
9.4 POWER SPECTRAL DENSITY	53
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	60
9.6 RADIATED SPURIOUS EMISSIONS	81
9.7 RADIATED RESTRICTED BAND EDGES	95
9.8 POWERLINE CONDUCTED EMISSIONS	100
10. LIST OF TEST EQUIPMENT	104
11. ANNEX A_ TEST SETUP PHOTO	106

1. EUT DESCRIPTION

Model	SM-A908B		
Additional Model	-		
EUT Type	Mobile Phone		
Power Supply	DC 3.85 V		
Battery Information	Model: EB-BA908ABY Type: Li-ion Battery		
Travel Adapter Information	Model : EP-TA800 Manufacture: SOLUM		
Data Cable Information	Model : EP-DA905BBE Manufacture: Luxshare		
Ear-jack Information	Model : GHSS028-K4 Manufacture: BUJEON Electronics		
Frequency Range	2412 MHz - 2462 MHz		
Max. RF Output Power	Peak Power (For information only)	Ant. 1 (SISO)	802.11b : 21.11 dBm 802.11g : 25.57 dBm 802.11n(HT20) : 25.25 dBm
		Ant.2 (SISO)	802.11b : 20.14 dBm 802.11g : 24.83 dBm 802.11n(HT20) : 24.55 dBm
		Ant.1&2 (MIMO)	802.11g : 28.20 dBm 802.11n(HT20) : 27.92 dBm
	Average Power	Ant. 1 (SISO)	802.11b: 18.48 dBm 802.11g: 15.77 dBm 802.11n(HT20): 14.67 dBm
		Ant.2 (SISO)	802.11b: 17.91 dBm 802.11g: 15.00 dBm 802.11n(HT20): 13.83 dBm
		Ant.1&2 (MIMO)	802.11g: 18.38 dBm 802.11n(HT20): 17.18 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n		
Number of Channels	11 Channels		
Antenna Specification	Antenna type: LDS Peak Gain Ant.1: -5.52 dBi / Ant.2: -6.50 dBi		
Date(s) of Tests	July 17, 2019 ~ August 27, 2019		

ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO		SDM	CDD
	Ant1	Ant2	Ant1 + Ant2	Ant1 + Ant2
802.11b	O	O	X	X
802.11g	O	O	X	O
802.11n(HT20)	O	O	O	O

Note:

1. O = Support, X = Not Support
2. SISO = Single Input Single Output
3. SDM = Spatial Diversity Multiplexing
4. CDD = Cyclic Delay Diversity

2. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna.

Frequency	Supported
2.4 GHz Ant 1 + 5 GHz Ant 2	O
2.4 GHz Ant 2 + 5 GHz Ant 1	X
2.4 GHz Ant 1 + 5 GHz Ant 1	X
2.4 GHz Ant 2 + 5 GHz Ant 2	X

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii)

Directional gain = $G_{ANT\ MAX} + 10 \log(N_{ANT}/N_{SS})$ dBi

($N_{ANT} = 2$, $N_{SS} = 2$, $G_{ANT\ MAX}$ is the gain of the antenna having the highest gain)

Band	Ant Gain (dBi)		N_{ANT}/N_{SS}	Directional Gain (= $G_{ANT\ MAX} + 10 \log(N_{ANT}/N_{SS})$) (dBi)
DTS	ANT1	-5.52	2 / 2	-2.99
	ANT2	-6.50		

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

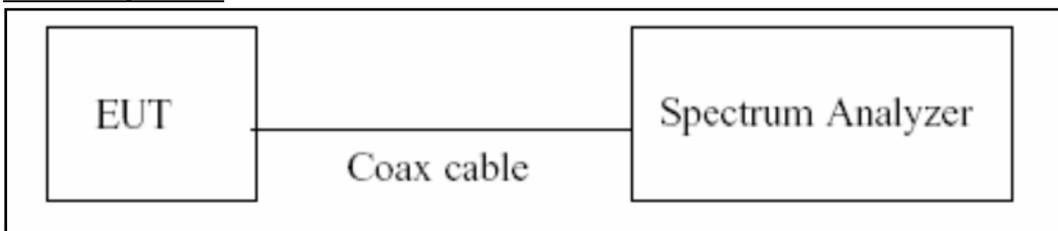

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/Duty\ Cycle)$

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

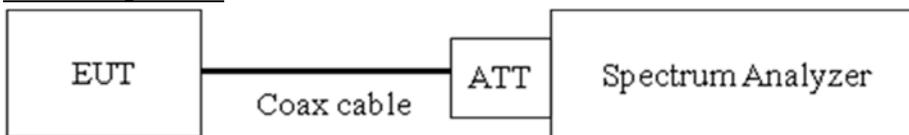

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration

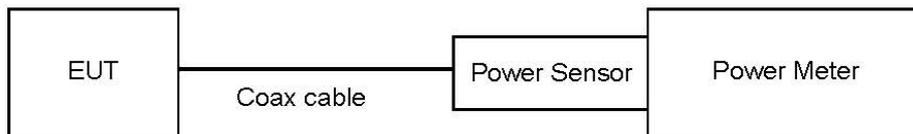

Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration

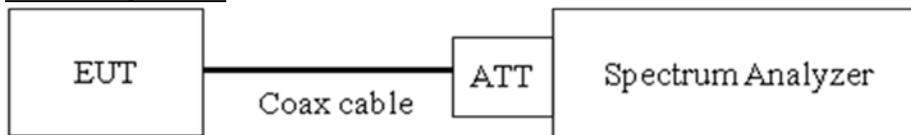

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
- 4) $VBW \geq 3 \times RBW$.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / RBW]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss

7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions


Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least

30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration

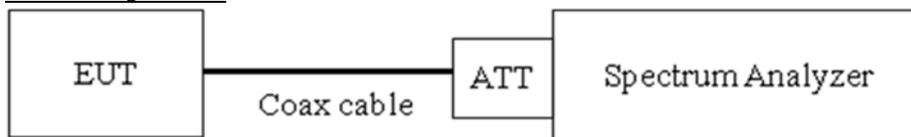

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.30
100	20.28
200	20.24
300	20.14
400	20.14
500	20.14
600	20.17
700	20.22
800	20.29
900	20.36
1000	20.41
2000	20.41
2400	20.38
2500	20.39
3000	20.48
4000	20.53
5000	20.63
6000	20.70
7000	20.77
8000	20.79
9000	20.81
10000	20.82
11000	20.81
12000	20.91
13000	20.94
14000	21.07
15000	21.16
16000	21.25
17000	21.27
18000	21.32
19000	21.39
20000	21.45
21000	21.56
22000	21.65
23000	21.53
24000	21.63
25000	21.64
26000	21.69

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20 dB) + Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

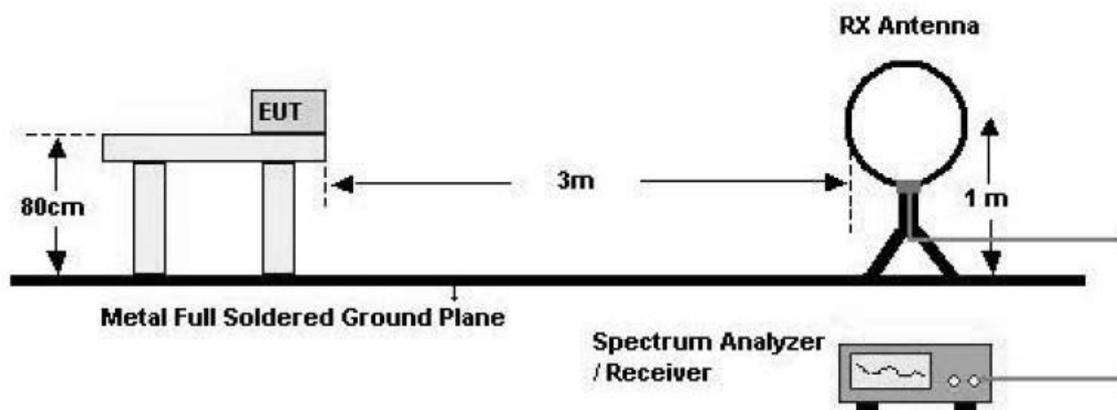

30 MHz - 1 GHz

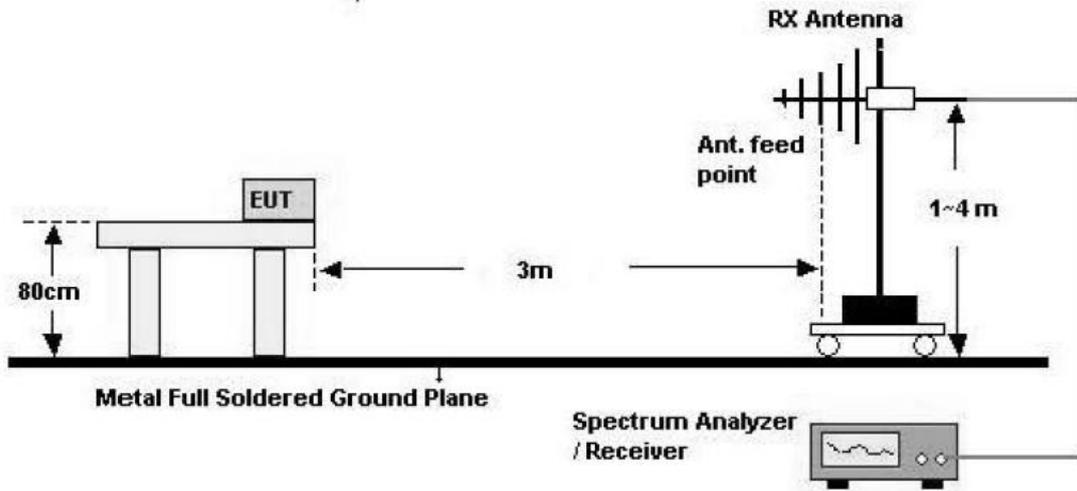

Above 1 GHz

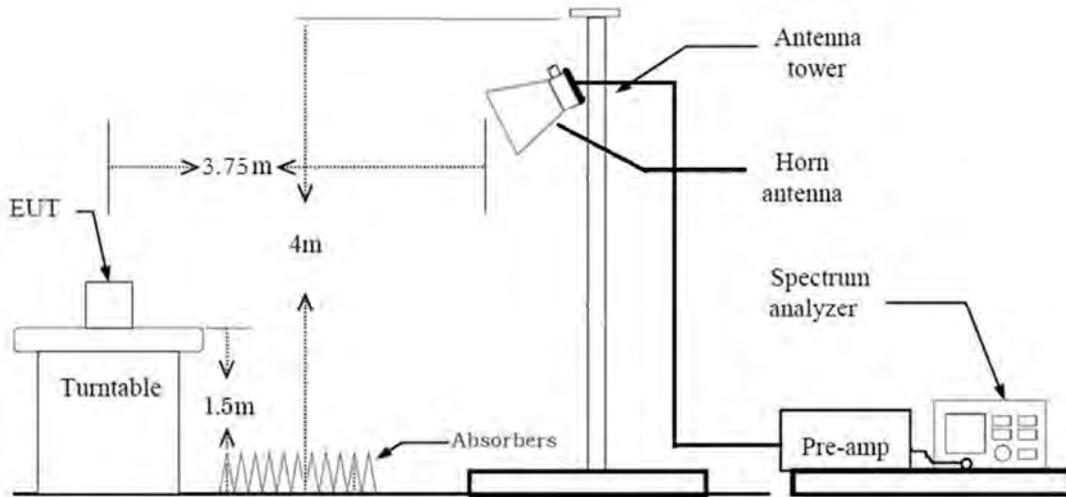

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

5. Spectrum Setting**(1) Measurement Type(Peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
 - ◆ Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average): Duty cycle \geq 98%
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - (3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)

- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle < 98%)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)} \\ + \text{Duty Cycle Factor}$$

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
 - ◆ Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.

7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

8. The unit was tested with its standard battery.

9. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98%,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – AMP Gain (A.G)
+Attenuator(ATT)

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – AMP Gain (A.G)
+Attenuator(ATT)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – AMP Gain (A.G)
+Attenuator(ATT) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : Z
3. Duty cycle factor applies only 802.11g/n(Duty cycle < 98%).
4. All data rate of operation were investigated and the test results are worst case in lowest datarate of each mode.
 - 802.11b : 1Mbps
 - 802.11g : 6Mbps
 - 802.11n_HT20 : MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

Radiated test(DBS)

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Y
3. The following tables show the worst case configurations determined during testing.

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	6	120
Data Rate	1 Mbps	6 Mbps
Mode	802.11b	802.11a

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter, Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter

Conducted test

1. The EUT was configured with data rate of highest power.

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

9. TEST RESULT

9.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.633	8.693	0.993	0.030
	2	4.309	4.343	0.992	0.034
	5.5	1.629	1.659	0.982	0.081
	11	0.863	0.893	0.967	0.146
802.11g	6	1.432	1.469	0.975	0.110
	9	0.960	0.997	0.963	0.163
	12	0.728	0.765	0.952	0.214
	18	0.492	0.529	0.929	0.318
	24	0.376	0.413	0.911	0.404
	36	0.256	0.292	0.877	0.571
	48	0.200	0.236	0.846	0.728
	54	0.180	0.216	0.833	0.792
802.11n (HT20)	6.5 (MCS0)	1.339	1.376	0.973	0.119
	13 (MCS1)	0.688	0.726	0.947	0.234
	19.5 (MCS2)	0.472	0.509	0.927	0.328
	26 (MCS3)	0.364	0.401	0.908	0.419
	39 (MCS4)	0.256	0.292	0.876	0.575
	52 (MCS5)	0.200	0.236	0.847	0.719
	58.5 (MCS6)	0.184	0.220	0.836	0.777
	65 (MCS7)	0.168	0.204	0.824	0.843

▣ Test Plots


Duty cycle plot (802.11b(1Mbps))



Duty cycle plot (802.11g(6Mbps))

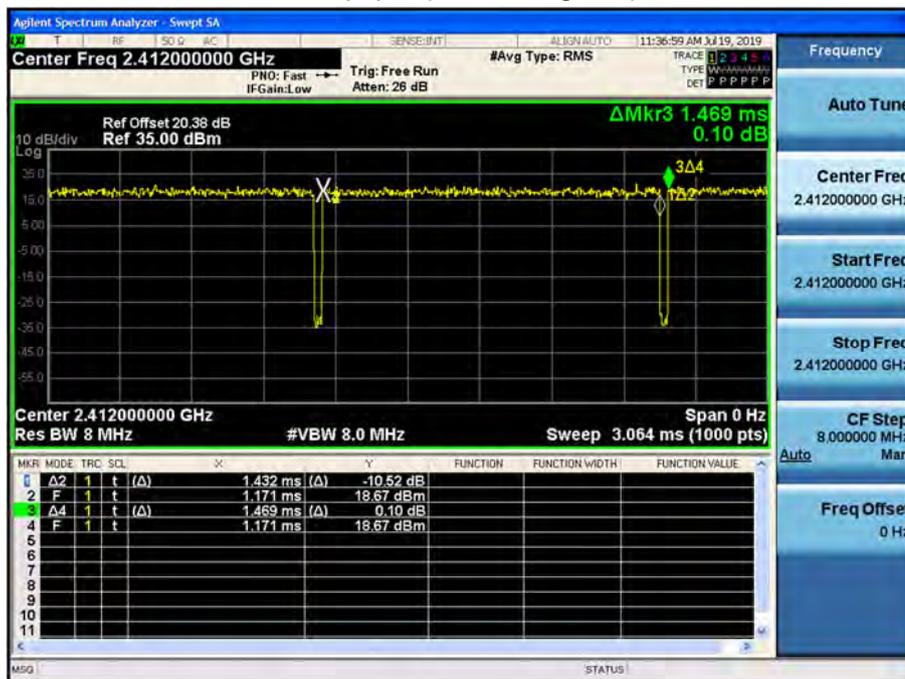

Duty cycle plot (802.11n(MCS0))

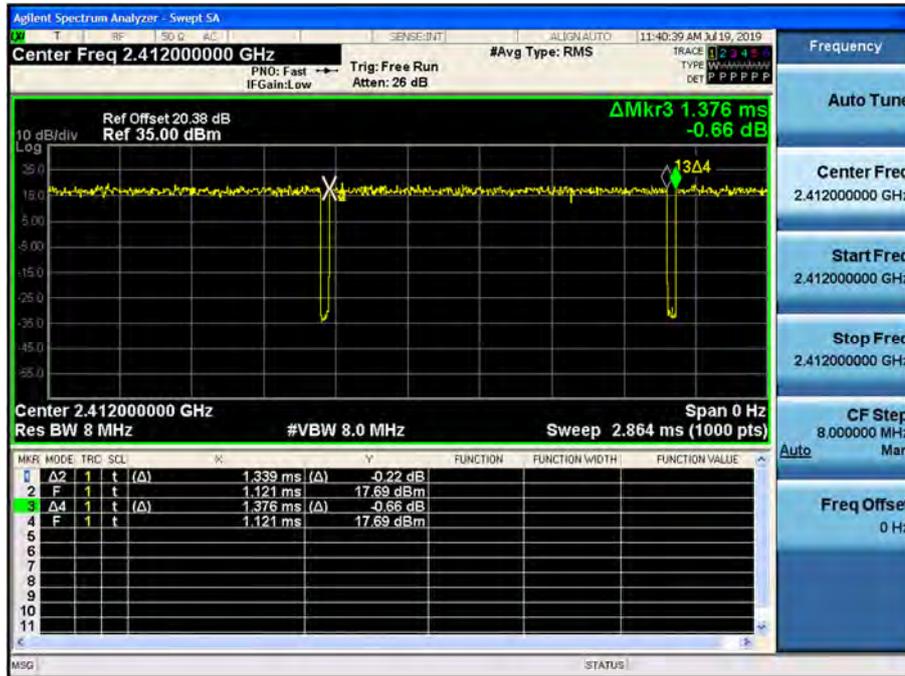

Note:

In order to simplify the report, attached plots were only the most lowest datarate.

9.2 6dB BANDWIDTH

[ANT1]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	8.119	0.5
2437	6	8.589	0.5
2462	11	8.592	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	12.630	0.5
2437	6	15.033	0.5
2462	11	13.818	0.5

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.790	0.5
2437	6	15.101	0.5
2462	11	15.073	0.5

[ANT2]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	8.568	0.5
2437	6	9.057	0.5
2462	11	8.579	0.5


802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.860	0.5
2437	6	15.073	0.5
2462	11	15.060	0.5

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.099	0.5
2437	6	15.060	0.5
2462	11	15.073	0.5


[ANT1]

▣ Test Plots


6dB Bandwidth plot (802.11b-CH 1)

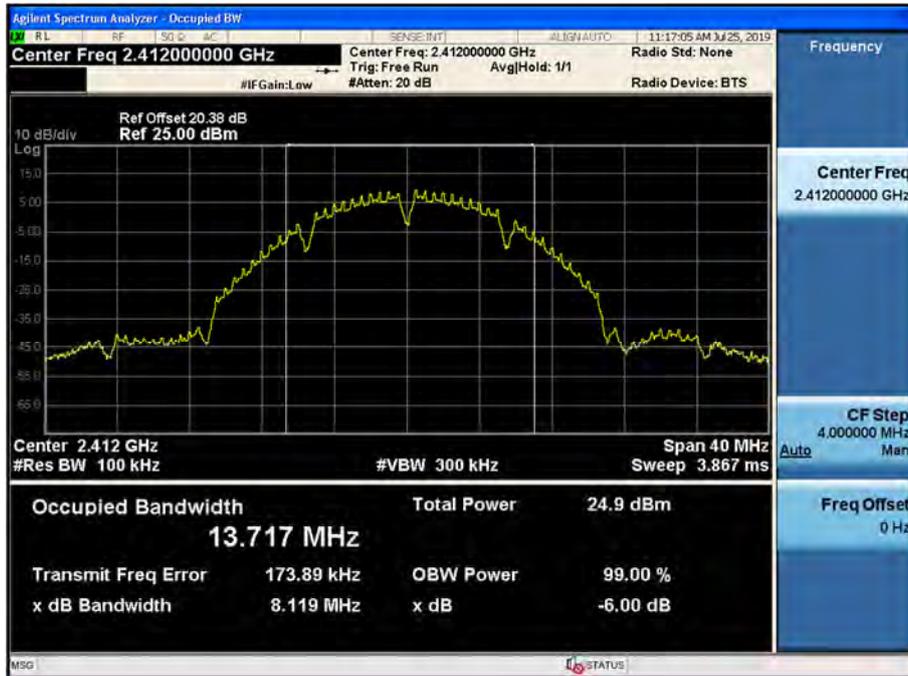

6dB Bandwidth plot (802.11g-CH 1)

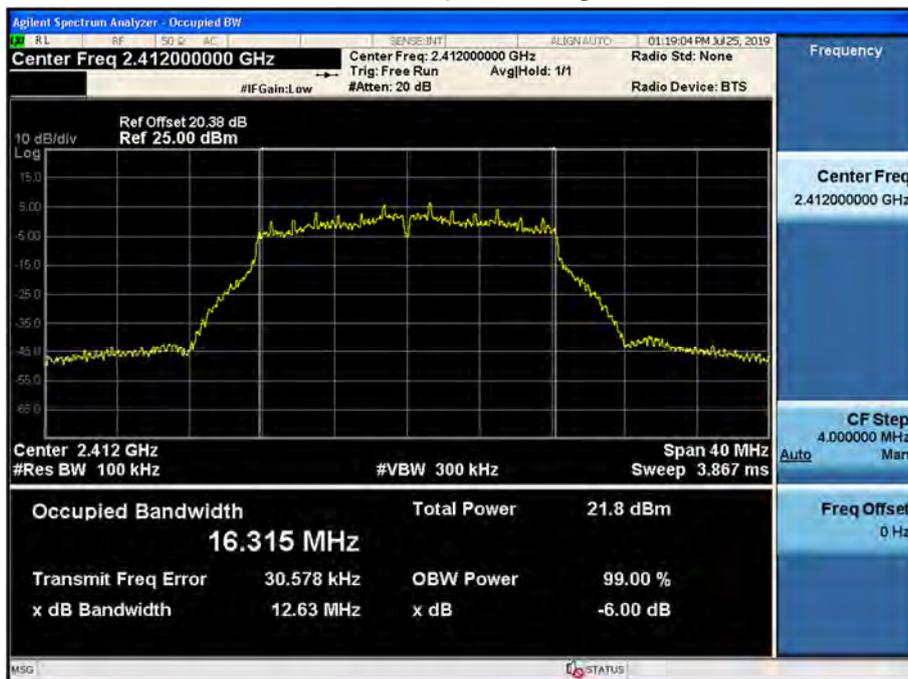

6dB Bandwidth plot (802.11n_HT20-CH 1)

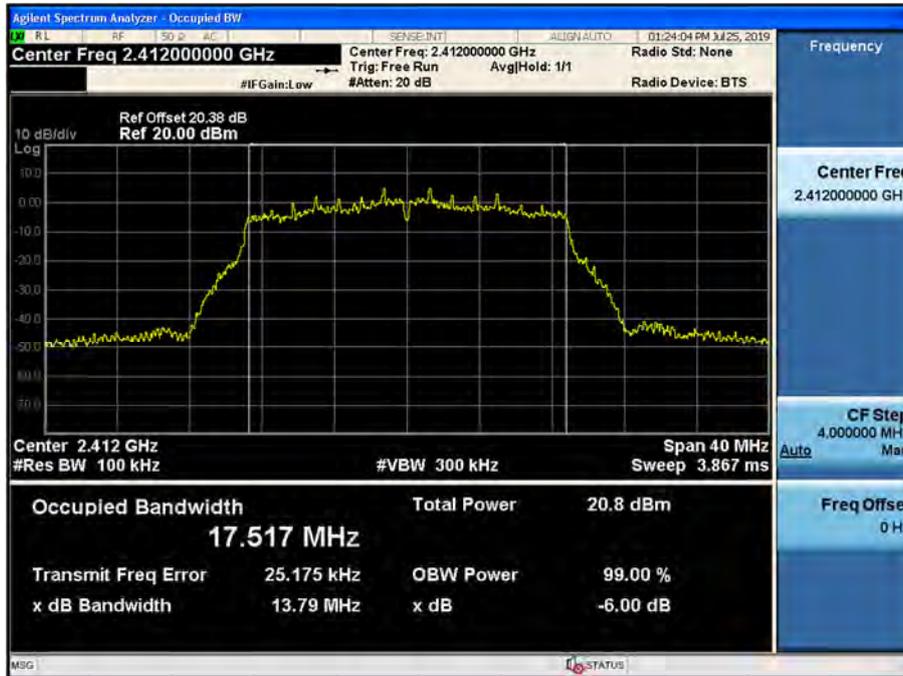


[ANT2]

▣ Test Plots


6dB Bandwidth plot (802.11b-CH 1)



6dB Bandwidth plot (802.11g-CH 1)

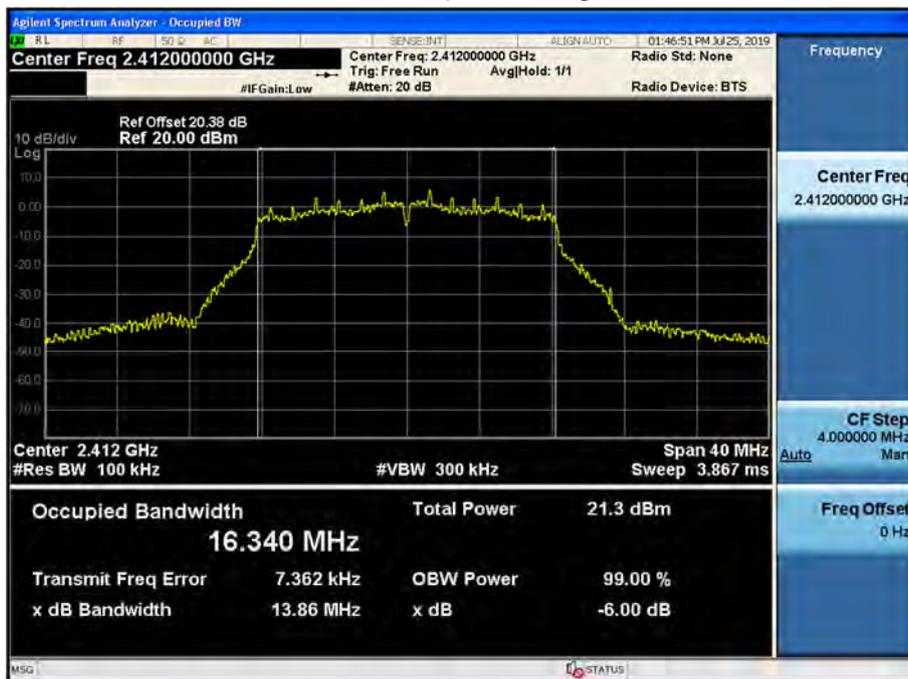

6dB Bandwidth plot (802.11n_HT20-CH 6)

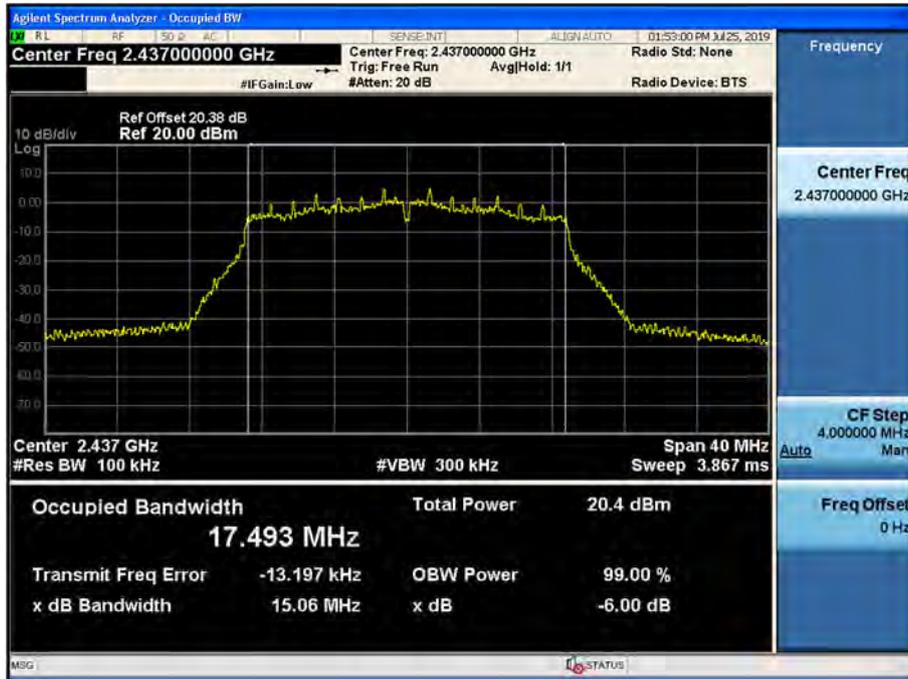

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss(20 dB) + Cable loss

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 20.38 dB is offset for 2.4 GHz Band

[ANT1]

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	1	19.98	30	17
		2	20.23	30	
		5.5	20.15	30	
		11	20.14	30	
2437	6	1	20.70	30	
		2	20.87	30	
		5.5	20.78	30	
		11	20.81	30	
2462	11	1	20.91	30	
		2	21.11	30	
		5.5	21.02	30	
		11	21.06	30	

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	6	20.50	30	14
		9	20.33	30	
		12	20.25	30	
		18	22.33	30	
		24	21.89	30	
		36	25.22	30	
		48	25.45	30	
		54	25.18	30	
2437	6	6	20.06	30	
		9	20.16	30	
		12	20.11	30	
		18	22.20	30	
		24	21.81	30	
		36	25.21	30	
		48	25.53	30	
		54	25.24	30	
2462	11	6	20.93	30	
		9	20.93	30	
		12	20.95	30	
		18	22.95	30	
		24	22.42	30	
		36	25.52	30	
		48	25.57	30	
		54	25.52	30	

802.11n Mode		MCS Index	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	0	19.47	30	13
		1	19.43	30	
		2	21.62	30	
		3	20.81	30	
		4	24.77	30	
		5	24.11	30	
		6	24.44	30	
		7	24.34	30	
2437	6	0	19.42	30	
		1	19.20	30	
		2	21.36	30	
		3	20.78	30	
		4	25.09	30	
		5	24.00	30	
		6	24.18	30	
		7	24.42	30	
2462	11	0	19.91	30	
		1	19.99	30	
		2	21.90	30	
		3	21.47	30	
		4	25.25	30	
		5	24.77	30	
		6	24.93	30	
		7	24.73	30	

[ANT2]

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	1	19.95	30	17
		2	20.09	30	
		5.5	20.12	30	
		11	20.14	30	
2437	6	1	19.85	30	
		2	19.99	30	
		5.5	19.97	30	
		11	20.02	30	
2462	11	1	20.01	30	
		2	20.11	30	
		5.5	20.13	30	
		11	20.13	30	

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	6	20.38	30	14
		9	20.24	30	
		12	20.22	30	
		18	22.66	30	
		24	22.17	30	
		36	24.76	30	
		48	24.83	30	
		54	24.73	30	
2437	6	6	20.28	30	
		9	20.26	30	
		12	20.23	30	
		18	22.38	30	
		24	21.78	30	
		36	23.95	30	
		48	23.98	30	
		54	23.93	30	
2462	11	6	20.48	30	
		9	20.58	30	
		12	20.57	30	
		18	22.71	30	
		24	22.19	30	
		36	24.69	30	
		48	24.78	30	
		54	24.65	30	

802.11n Mode		MCS Index	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	0	19.47	30	13
		1	19.31	30	
		2	21.68	30	
		3	20.88	30	
		4	24.36	30	
		5	23.94	30	
		6	23.96	30	
		7	24.09	30	
2437	6	0	19.43	30	
		1	19.34	30	
		2	21.45	30	
		3	20.89	30	
		4	23.90	30	
		5	23.63	30	
		6	23.68	30	
		7	23.60	30	
2462	11	0	19.40	30	
		1	19.02	30	
		2	21.71	30	
		3	21.02	30	
		4	24.55	30	
		5	24.05	30	
		6	24.27	30	
		7	24.13	30	

[MIMO]

802.11g Mode		Rate (Mbps)	ANT1 Measured Power(dBm)	ANT2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.						
2412	1	6	20.50	20.38	23.45	30	14
		9	20.33	20.24	23.29	30	
		12	20.25	20.22	23.25	30	
		18	22.33	22.66	25.51	30	
		24	21.89	22.17	25.04	30	
		36	25.22	24.76	28.01	30	
		48	25.45	24.83	28.16	30	
		54	25.18	24.73	27.97	30	
2437	6	6	20.06	20.28	23.18	30	
		9	20.16	20.26	23.22	30	
		12	20.11	20.23	23.18	30	
		18	22.20	22.38	25.30	30	
		24	21.81	21.78	24.80	30	
		36	25.21	23.95	27.64	30	
		48	25.53	23.98	27.83	30	
		54	25.24	23.93	27.64	30	
2462	11	6	20.93	20.48	23.72	30	
		9	20.93	20.58	23.77	30	
		12	20.95	20.57	23.77	30	
		18	22.95	22.71	25.84	30	
		24	22.42	22.19	25.32	30	
		36	25.52	24.69	28.13	30	
		48	25.57	24.78	28.20	30	
		54	25.52	24.65	28.12	30	

802.11n Mode		MCS Index	ANT1 Measured Power(dBm)	ANT2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.						
2412	1	0	19.47	19.47	22.48	30	13
		1	19.43	19.31	22.38	30	
		2	21.62	21.68	24.66	30	
		3	20.81	20.88	23.85	30	
		4	24.77	24.36	27.58	30	
		5	24.11	23.94	27.04	30	
		6	24.44	23.96	27.21	30	
		7	24.34	24.09	27.23	30	
2437	6	0	19.42	19.43	22.44	30	
		1	19.20	19.34	22.28	30	
		2	21.36	21.45	24.41	30	
		3	20.78	20.89	23.85	30	
		4	25.09	23.90	27.55	30	
		5	24.00	23.63	26.83	30	
		6	24.18	23.68	26.95	30	
		7	24.42	23.60	27.04	30	
2462	11	0	19.91	19.40	22.67	30	
		1	19.99	19.02	22.54	30	
		2	21.90	21.71	24.82	30	
		3	21.47	21.02	24.26	30	
		4	25.25	24.55	27.92	30	
		5	24.77	24.05	27.43	30	
		6	24.93	24.27	27.62	30	
		7	24.73	24.13	27.45	30	

Average Power

1. Power Meter offset = Attenuator loss(20 dB) + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.38 dB is offset for 2.4 GHz Band.

[ANT1]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	1	17.47	0.030	17.50	30	17
		2	17.65	0.034	17.68	30	
		5.5	17.62	0.081	17.70	30	
		11	17.57	0.146	17.71	30	
2437	6	1	17.95	0.030	17.98	30	
		2	18.18	0.034	18.21	30	
		5.5	18.10	0.081	18.18	30	
		11	18.01	0.146	18.16	30	
2462	11	1	18.22	0.030	18.25	30	
		2	18.44	0.034	18.48	30	
		5.5	18.39	0.081	18.47	30	
		11	18.31	0.146	18.46	30	

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	14.34	0.110	14.45	30	14
		9	14.28	0.163	14.45	30	
		12	14.25	0.214	14.46	30	
		18	14.78	0.318	15.10	30	
		24	14.74	0.404	15.14	30	
		36	13.97	0.571	14.54	30	
		48	13.80	0.728	14.53	30	
		54	13.72	0.792	14.51	30	
2437	6	6	14.25	0.110	14.36	30	
		9	14.21	0.163	14.38	30	
		12	14.16	0.214	14.38	30	
		18	14.67	0.318	14.99	30	
		24	14.59	0.404	15.00	30	
		36	13.88	0.571	14.45	30	
		48	13.74	0.728	14.46	30	
		54	13.71	0.792	14.51	30	
2462	11	6	15.05	0.110	15.16	30	
		9	15.00	0.163	15.16	30	
		12	14.98	0.214	15.19	30	
		18	15.43	0.318	15.75	30	
		24	15.37	0.404	15.77	30	
		36	14.66	0.571	15.23	30	
		48	14.54	0.728	15.27	30	
		54	14.47	0.792	15.26	30	

802.11n Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	0	13.28	0.119	13.40	30	13
		1	13.16	0.234	13.40	30	
		2	13.60	0.328	13.93	30	
		3	13.56	0.419	13.97	30	
		4	13.06	0.575	13.63	30	
		5	12.96	0.719	13.68	30	
		6	12.89	0.777	13.66	30	
		7	12.84	0.843	13.69	30	
2437	6	0	13.17	0.119	13.29	30	
		1	13.10	0.234	13.33	30	
		2	13.56	0.328	13.89	30	
		3	13.54	0.419	13.96	30	
		4	12.96	0.575	13.53	30	
		5	12.81	0.719	13.53	30	
		6	12.77	0.777	13.54	30	
		7	12.69	0.843	13.54	30	
2462	11	0	13.87	0.119	13.99	30	
		1	13.81	0.234	14.04	30	
		2	14.27	0.328	14.60	30	
		3	14.25	0.419	14.67	30	
		4	13.62	0.575	14.19	30	
		5	13.47	0.719	14.19	30	
		6	13.44	0.777	14.22	30	
		7	13.36	0.843	14.20	30	

[ANT2]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	1	17.33	0.030	17.36	30	17
		2	17.48	0.034	17.52	30	
		5.5	17.39	0.081	17.47	30	
		11	17.36	0.146	17.50	30	
2437	6	1	17.60	0.030	17.63	30	
		2	17.69	0.034	17.72	30	
		5.5	17.83	0.081	17.91	30	
		11	17.70	0.146	17.84	30	
2462	11	1	17.41	0.030	17.44	30	
		2	17.53	0.034	17.56	30	
		5.5	17.45	0.081	17.53	30	
		11	17.41	0.146	17.55	30	

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	14.12	0.110	14.23	30	14
		9	14.09	0.163	14.25	30	
		12	14.04	0.214	14.25	30	
		18	14.64	0.318	14.96	30	
		24	14.58	0.404	14.99	30	
		36	13.91	0.571	14.48	30	
		48	13.76	0.728	14.49	30	
		54	13.67	0.792	14.47	30	
2437	6	6	14.15	0.110	14.26	30	
		9	14.11	0.163	14.27	30	
		12	14.06	0.214	14.27	30	
		18	14.62	0.318	14.93	30	
		24	14.60	0.404	15.00	30	
		36	13.72	0.571	14.29	30	
		48	13.58	0.728	14.31	30	
		54	13.51	0.792	14.30	30	
2462	11	6	14.07	0.110	14.18	30	
		9	14.01	0.163	14.18	30	
		12	13.96	0.214	14.18	30	
		18	14.58	0.318	14.90	30	
		24	14.51	0.404	14.92	30	
		36	13.85	0.571	14.42	30	
		48	13.68	0.728	14.41	30	
		54	13.61	0.792	14.40	30	

802.11n Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	0	13.01	0.119	13.13	30	13
		1	12.92	0.234	13.16	30	
		2	13.42	0.328	13.75	30	
		3	13.39	0.419	13.81	30	
		4	12.81	0.575	13.38	30	
		5	12.66	0.719	13.38	30	
		6	12.63	0.777	13.40	30	
		7	12.55	0.843	13.39	30	
2437	6	0	13.00	0.119	13.12	30	
		1	12.90	0.234	13.13	30	
		2	13.45	0.328	13.78	30	
		3	13.41	0.419	13.83	30	
		4	12.71	0.575	13.29	30	
		5	12.55	0.719	13.27	30	
		6	12.50	0.777	13.28	30	
		7	12.41	0.843	13.26	30	
2462	11	0	12.73	0.119	12.85	30	
		1	12.71	0.234	12.95	30	
		2	13.20	0.328	13.53	30	
		3	13.18	0.419	13.60	30	
		4	12.66	0.575	13.23	30	
		5	12.51	0.719	13.22	30	
		6	12.47	0.777	13.24	30	
		7	12.36	0.843	13.20	30	

[MIMO]

802.11g Mode		Rate (Mbps)	ANT1 Measured Power(dBm)	ANT2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	14.45	14.23	17.35	30	14
		9	14.45	14.25	17.36	30	
		12	14.46	14.25	17.37	30	
		18	15.10	14.96	18.04	30	
		24	15.14	14.99	18.08	30	
		36	14.54	14.48	17.52	30	
		48	14.53	14.49	17.52	30	
		54	14.51	14.47	17.50	30	
2437	6	6	14.36	14.26	17.32	30	
		9	14.38	14.27	17.34	30	
		12	14.38	14.27	17.34	30	
		18	14.99	14.93	17.97	30	
		24	15.00	15.00	18.01	30	
		36	14.45	14.29	17.38	30	
		48	14.46	14.31	17.40	30	
		54	14.51	14.30	17.41	30	
2462	11	6	15.16	14.18	17.71	30	
		9	15.16	14.18	17.71	30	
		12	15.19	14.18	17.73	30	
		18	15.75	14.90	18.36	30	
		24	15.77	14.92	18.38	30	
		36	15.23	14.42	17.86	30	
		48	15.27	14.41	17.87	30	
		54	15.26	14.40	17.86	30	

802.11n Mode		MCS Index	ANT1	ANT2	MIMO	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.		Measured Power(dBm)	Measured Power(dBm)	Measured Power(dBm)		
2412	1	0	13.40	13.13	16.27	30	13
		1	13.40	13.16	16.29	30	
		2	13.93	13.75	16.85	30	
		3	13.97	13.81	16.90	30	
		4	13.63	13.38	16.52	30	
		5	13.68	13.38	16.54	30	
		6	13.66	13.40	16.54	30	
		7	13.69	13.39	16.55	30	
2437	6	0	13.29	13.12	16.22	30	
		1	13.33	13.13	16.24	30	
		2	13.89	13.78	16.85	30	
		3	13.96	13.83	16.90	30	
		4	13.53	13.29	16.42	30	
		5	13.53	13.27	16.41	30	
		6	13.54	13.28	16.42	30	
		7	13.54	13.26	16.41	30	
2462	11	0	13.99	12.85	16.47	30	
		1	14.04	12.95	16.54	30	
		2	14.60	13.53	17.11	30	
		3	14.67	13.60	17.18	30	
		4	14.19	13.23	16.75	30	
		5	14.19	13.22	16.75	30	
		6	14.22	13.24	16.77	30	
		7	14.20	13.20	16.74	30	

9.4 POWER SPECTRAL DENSITY

[ANT1]

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	0.360	0.081	0.441	8
	2437	6	1.634	0.081	1.715	
	2462	11	1.904	0.081	1.985	
802.11g	2412	1	-2.783	0.728	-2.055	
	2437	6	-2.985	0.728	-2.257	
	2462	11	-2.049	0.728	-1.321	
802.11n	2412	1	-3.655	0.777	-2.878	
	2437	6	-3.806	0.777	-3.029	
	2462	11	-3.162	0.777	-2.385	

[ANT2]

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	0.387	0.081	0.468	8
	2437	6	0.010	0.081	0.091	
	2462	11	0.870	0.081	0.951	
802.11g	2412	1	-3.102	0.728	-2.374	
	2437	6	-3.028	0.728	-2.300	
	2462	11	-2.706	0.728	-1.978	
802.11n	2412	1	-4.119	0.777	-3.342	
	2437	6	-4.403	0.777	-3.626	
	2462	11	-4.649	0.777	-3.872	

[MIMO]

Mode	Frequency (MHz)	Channel No.	Test Result			
			ANT 1 Measured PSD(dBm) + Duty Cycle Factor	ANT 2 Measured PSD(dBm) + Duty Cycle Factor	MIMO Result (dBm)	Limit (dBm)
802.11g	2412	1	-2.055	-2.374	0.799	8
	2437	6	-2.257	-2.300	0.732	
	2462	11	-1.321	-1.978	1.374	
802.11n	2412	1	-2.878	-3.342	-0.094	
	2437	6	-3.029	-3.626	-0.307	
	2462	11	-2.385	-3.872	-0.055	

Note :

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(20 dB) + Cable loss

3. 20.38 dB is offset for 2.4 GHz Band.

▣ Test Plots [ANT1]


Power Spectral Density (802.11b-CH 11)



Power Spectral Density (802.11g-CH 11)



Power Spectral Density (802.11n_HT20 -CH 11)

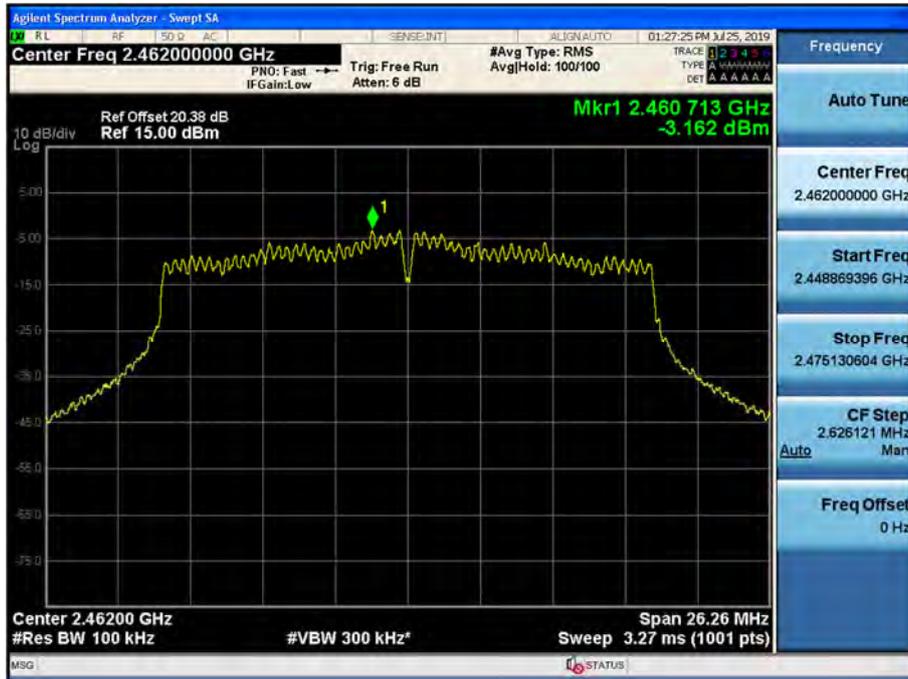


▣ Test Plots [ANT2]


Power Spectral Density (802.11b-CH 11)



Power Spectral Density (802.11g-CH 11)

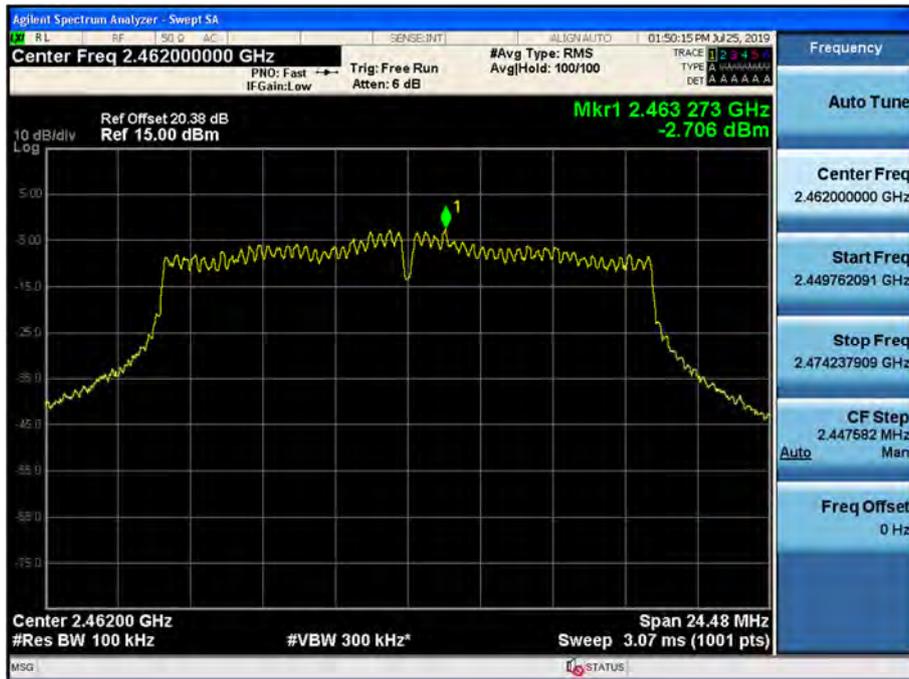

Power Spectral Density (802.11n_HT20 -CH 1)

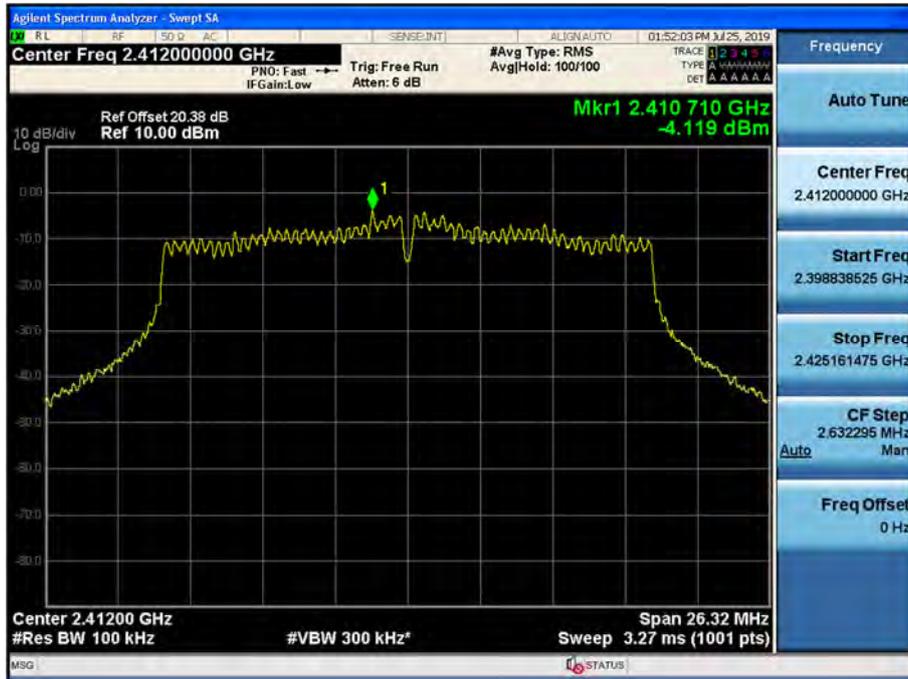

Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.


[ANT1]

☐ Test Plots(BandEdge)

Band Edge (802.11b-CH1)

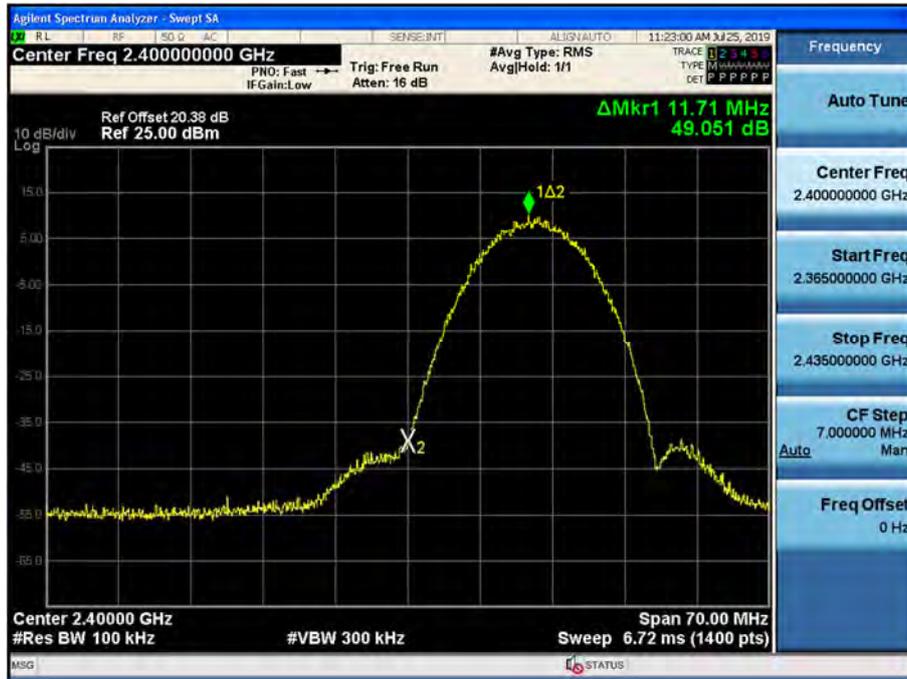

Band Edge (802.11b-CH11)

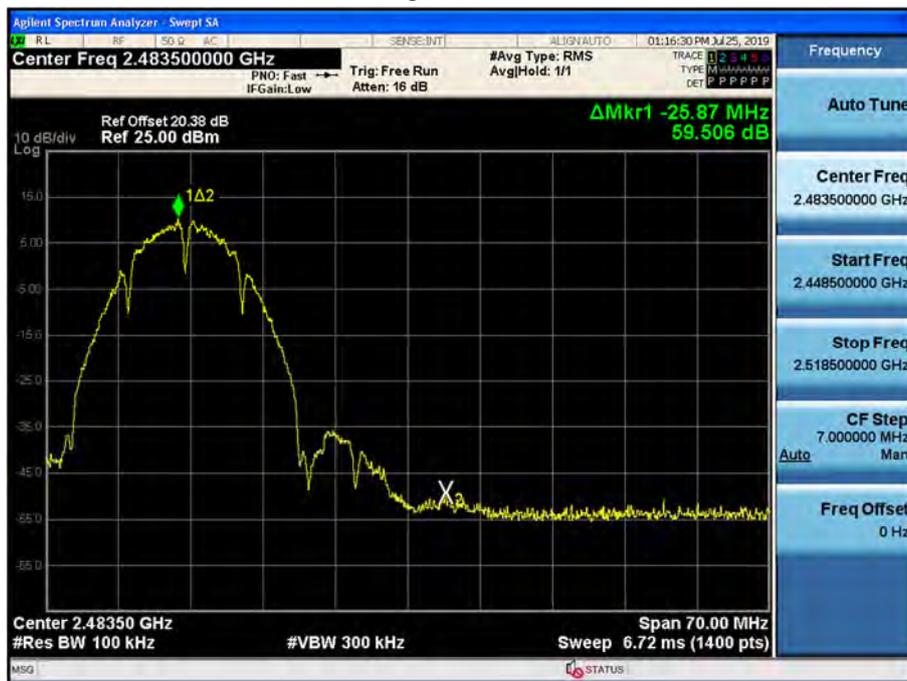

Band Edge (802.11g-CH1)



Band Edge (802.11g-CH11)



Band Edge (802.11n_HT20 -CH1)




Band Edge (802.11n_HT20 -CH11)



▣ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

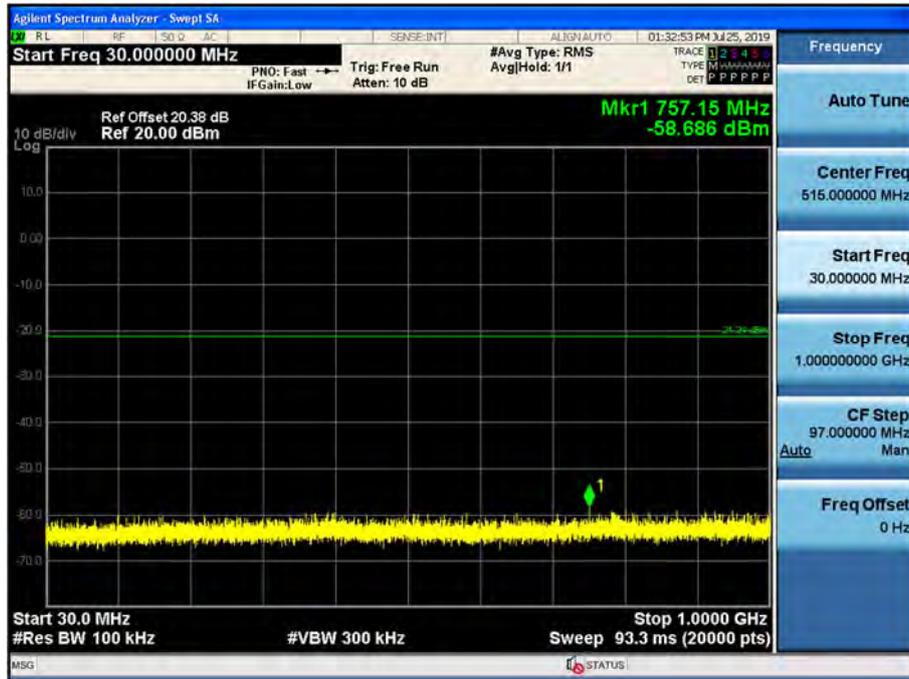


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

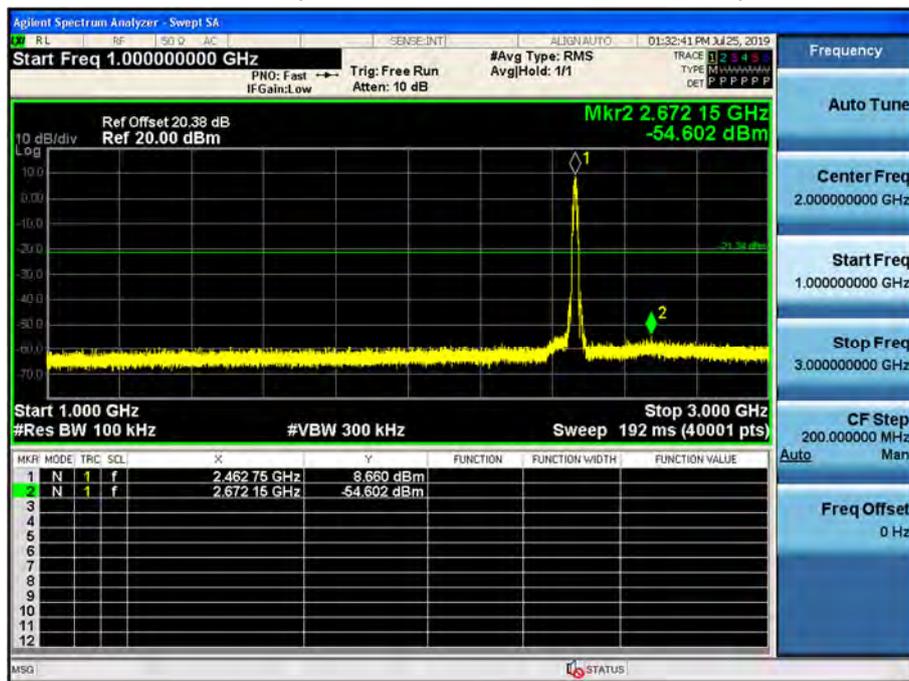


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

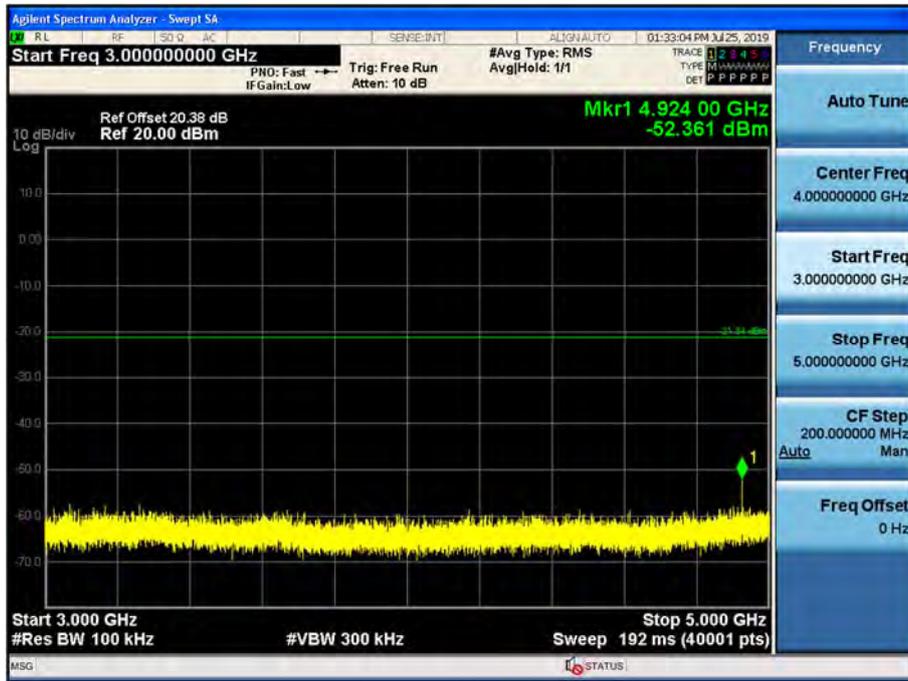


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

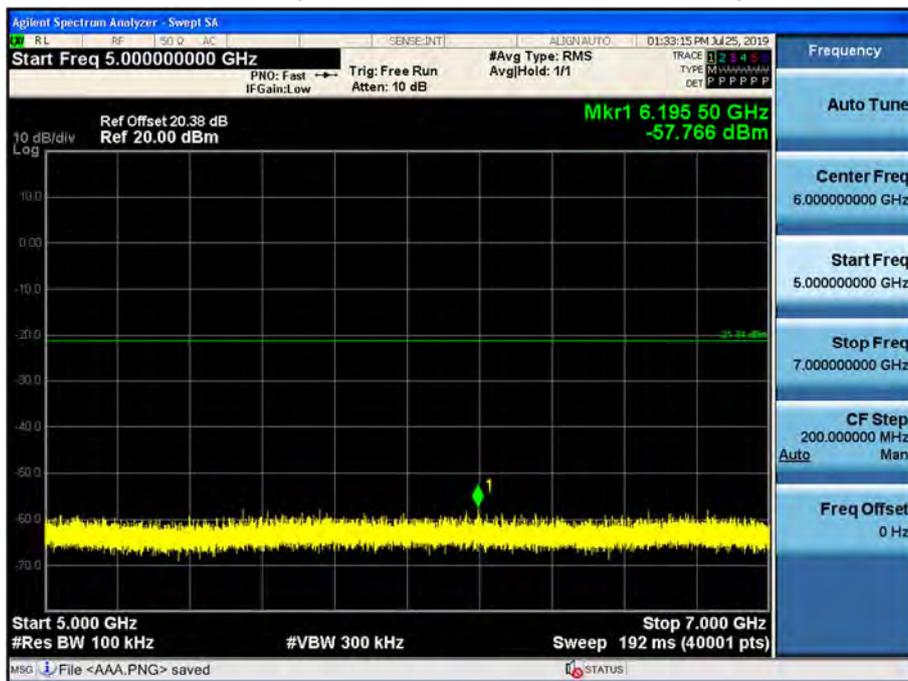


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

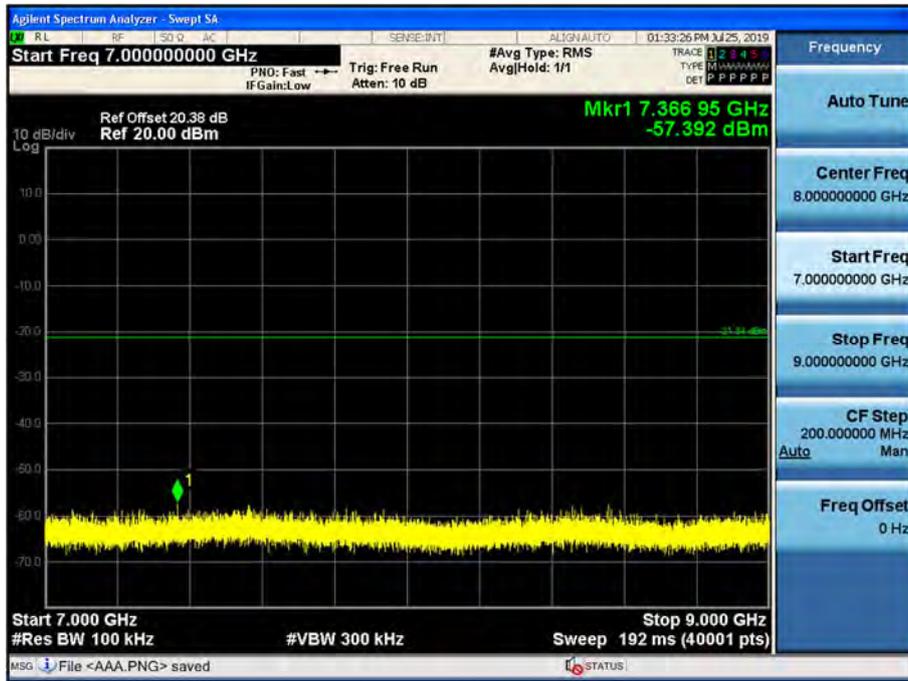


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

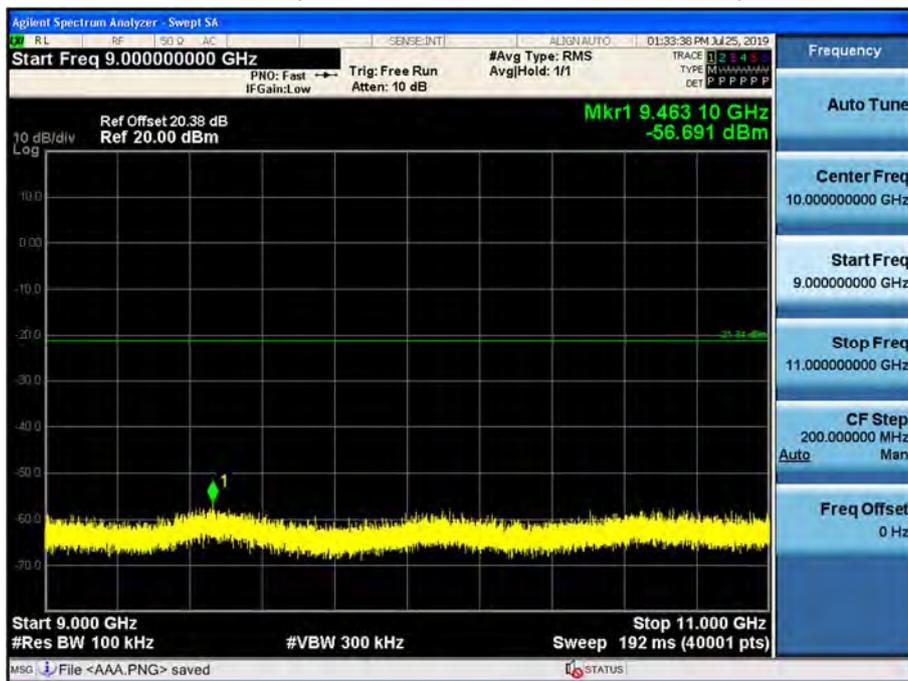


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

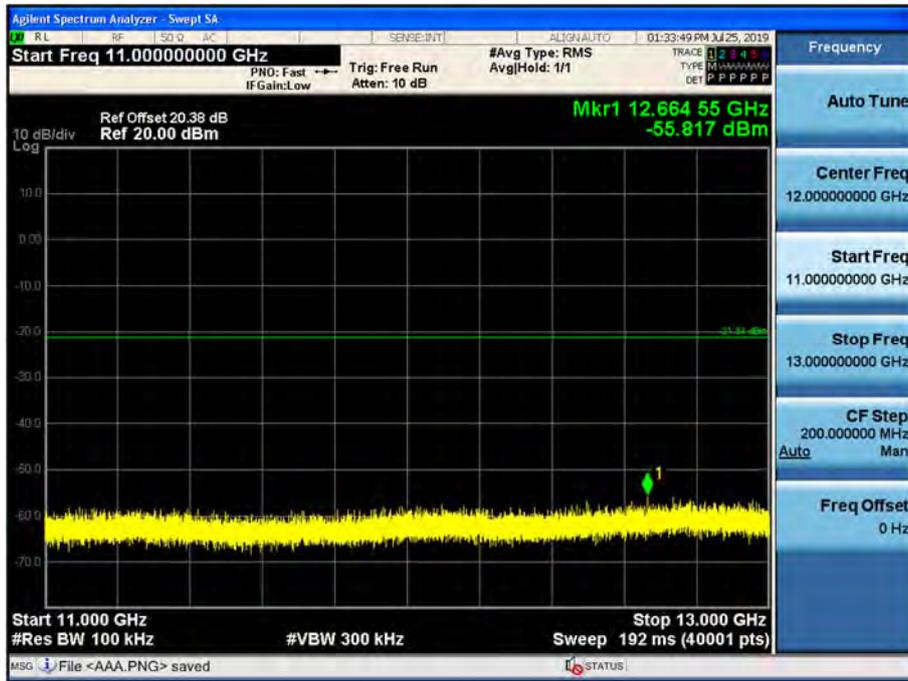


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

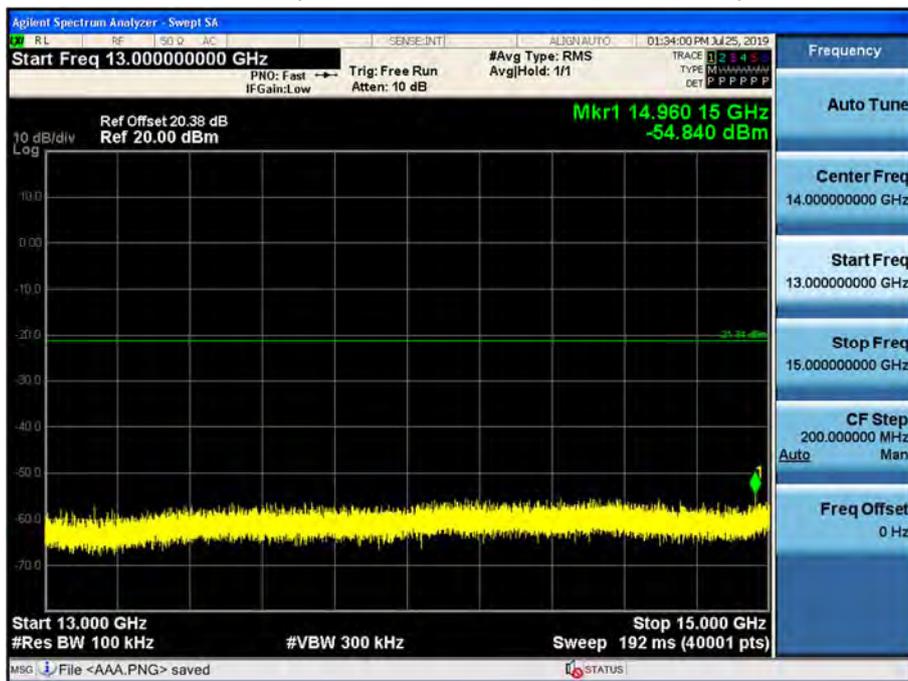


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

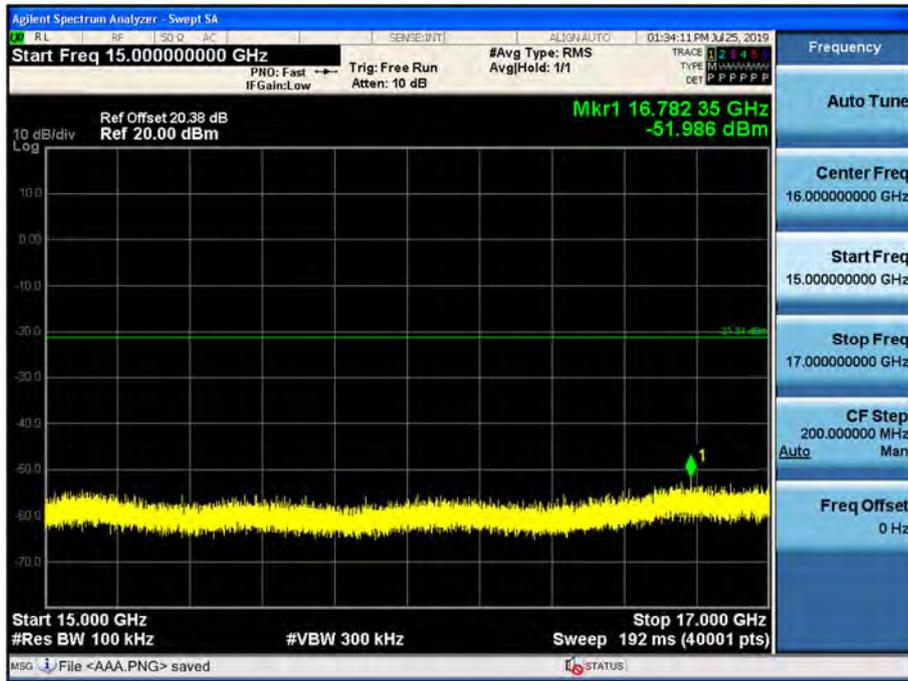


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

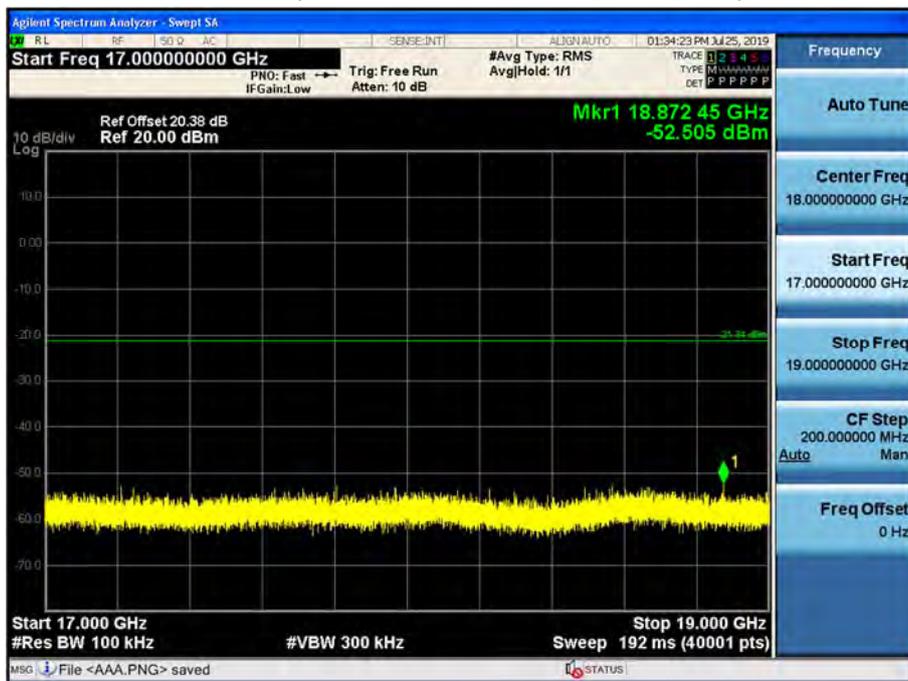


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

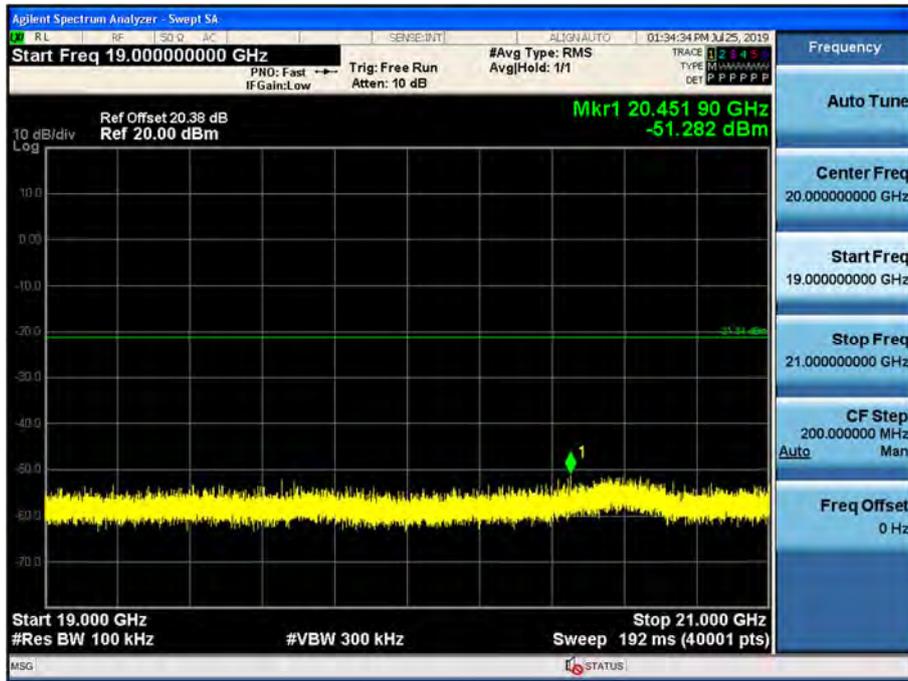


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

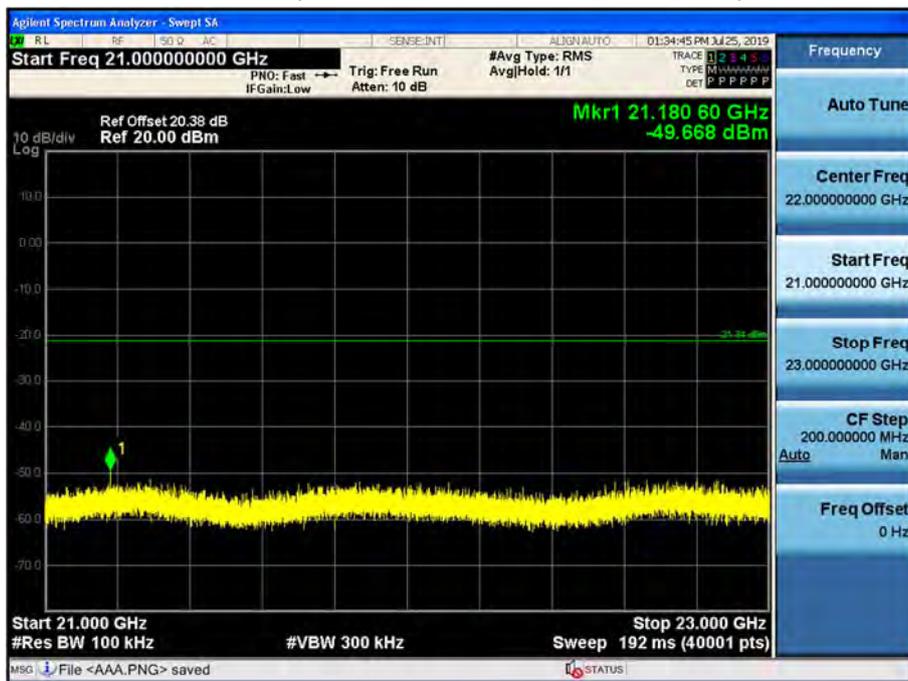

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.11_2 Mbps)

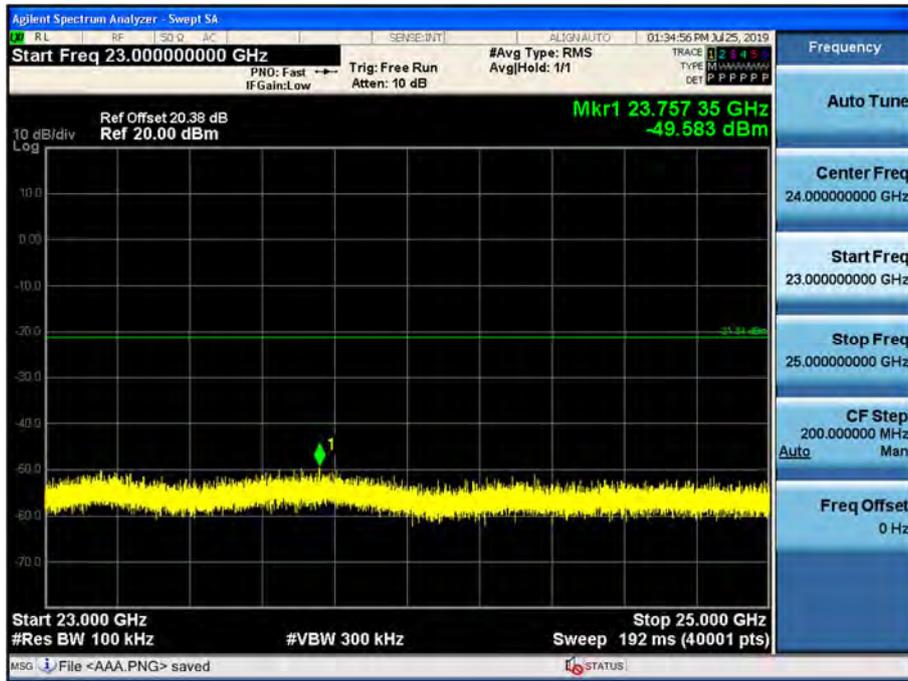

[ANT2]

☐ Test Plots(BandEdge)

Band Edge (802.11b-CH1)



Band Edge (802.11b-CH11)



Band Edge (802.11g-CH1)




Band Edge (802.11g-CH11)



Band Edge (802.11n_HT20 -CH1)




Band Edge (802.11n_HT20 -CH11)

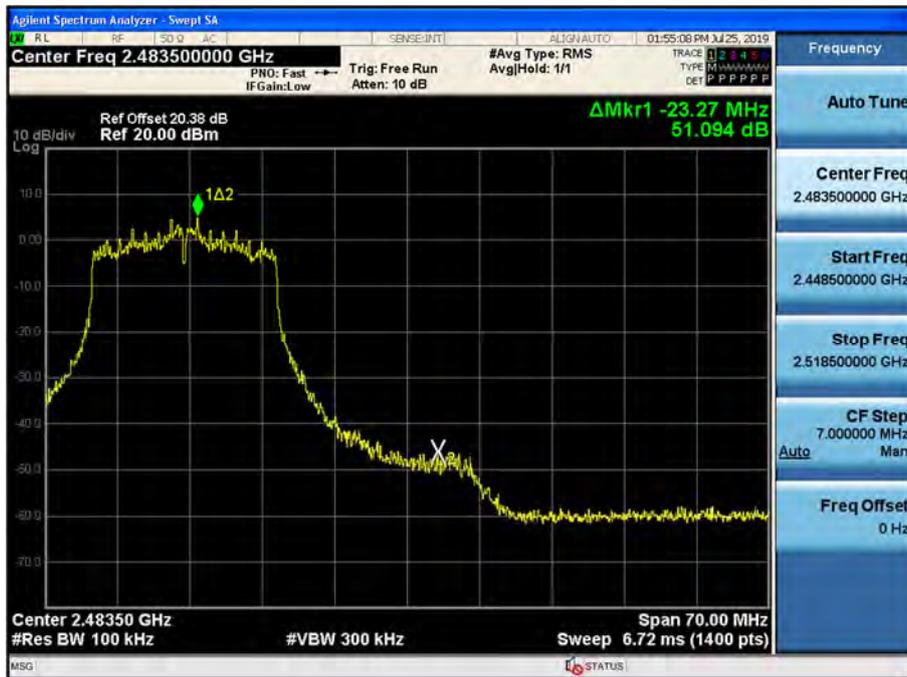

▣ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

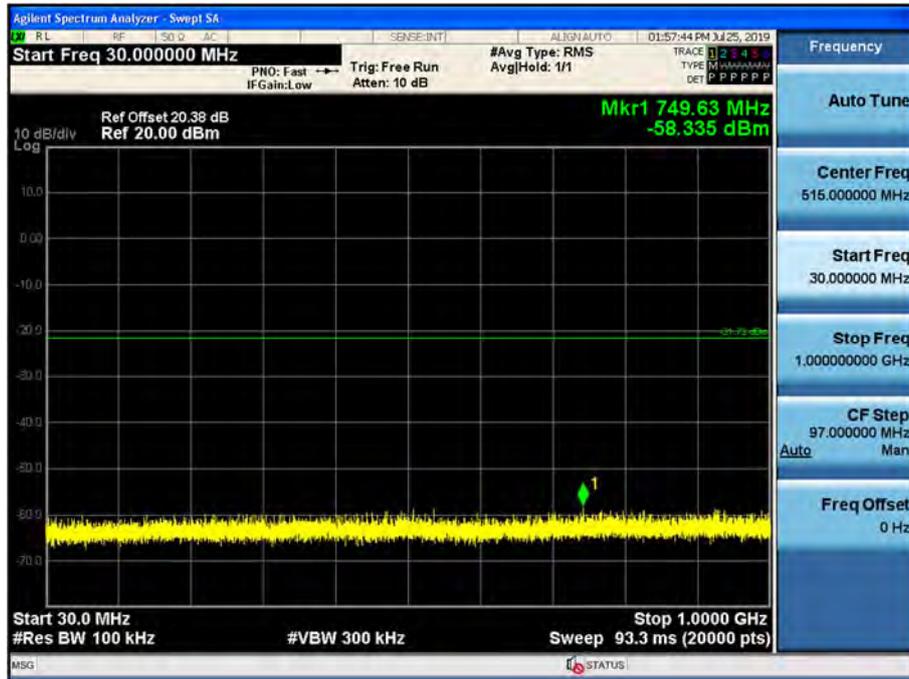


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

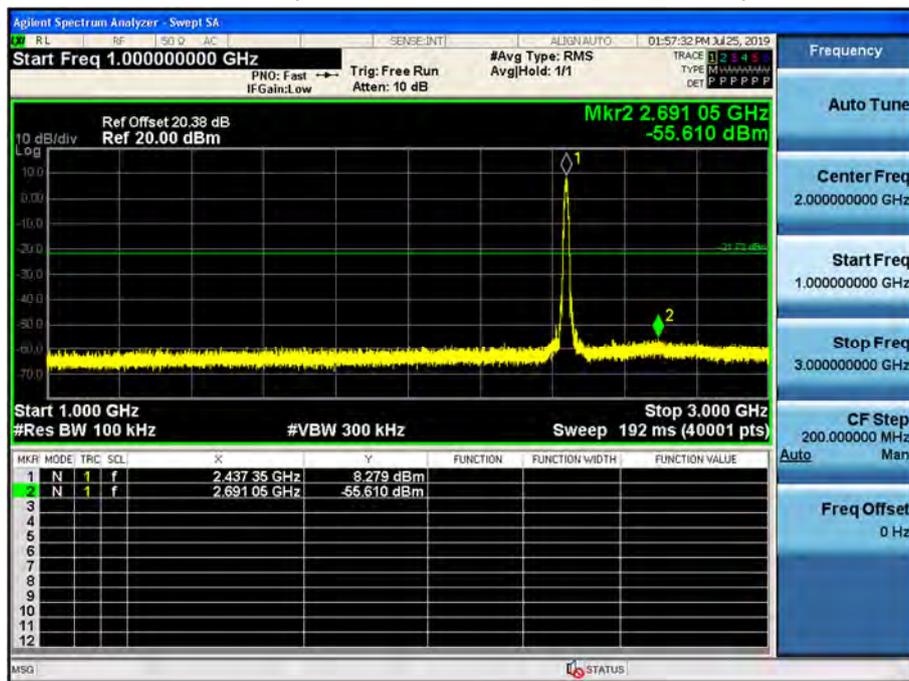


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

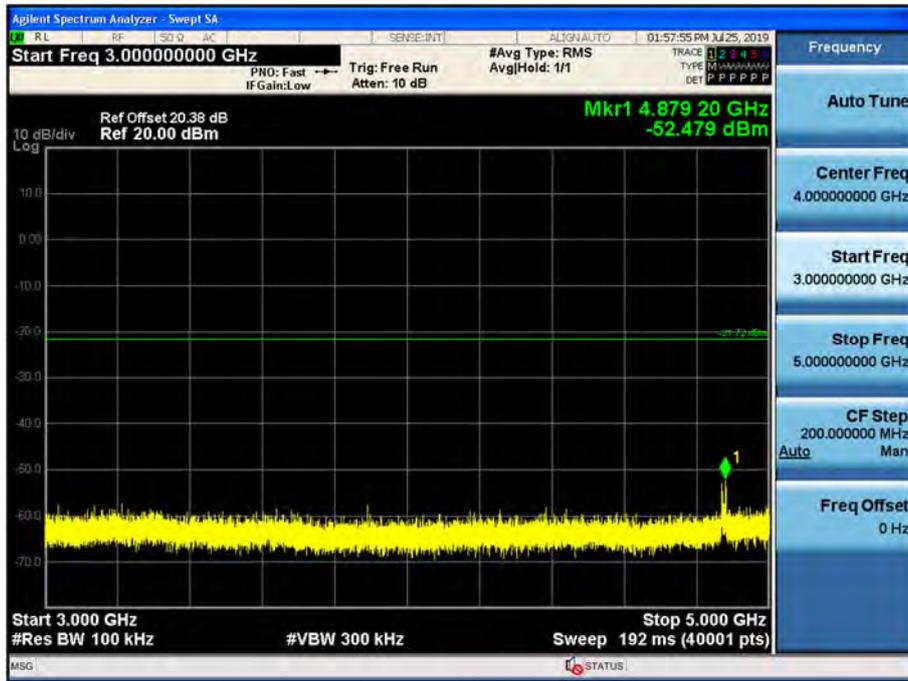


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

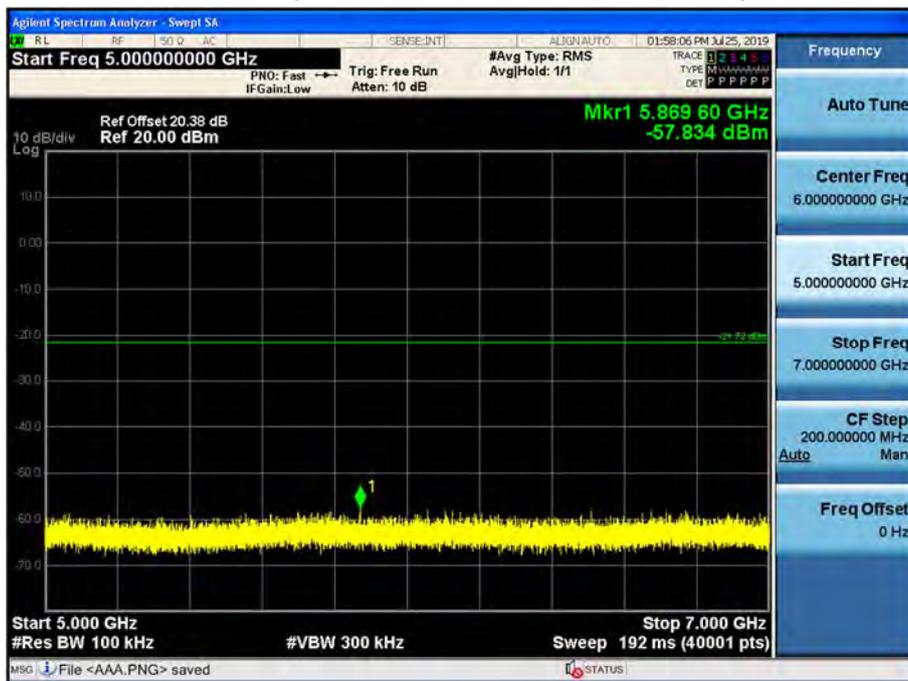


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

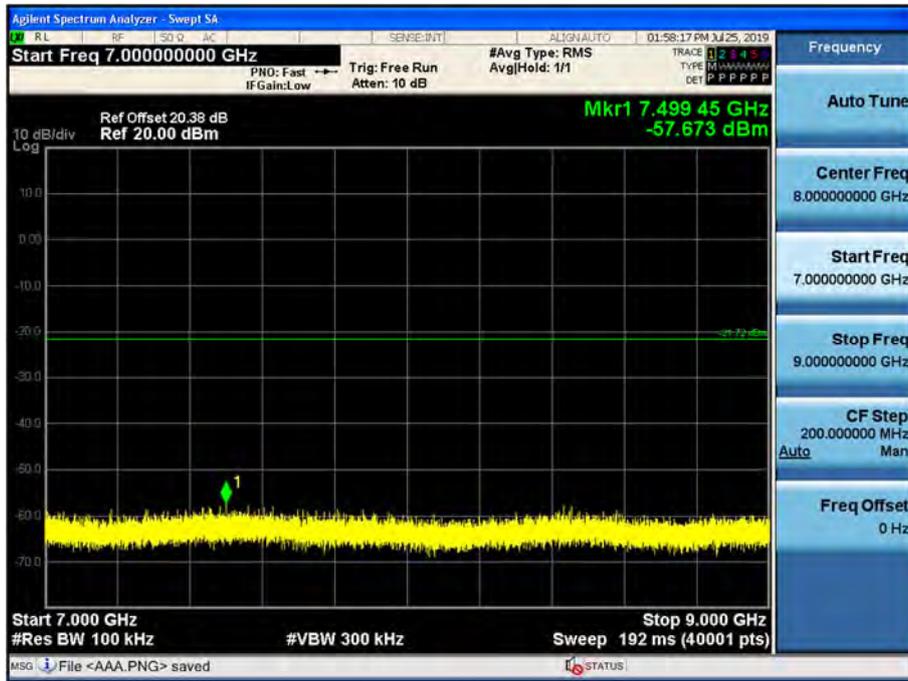


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

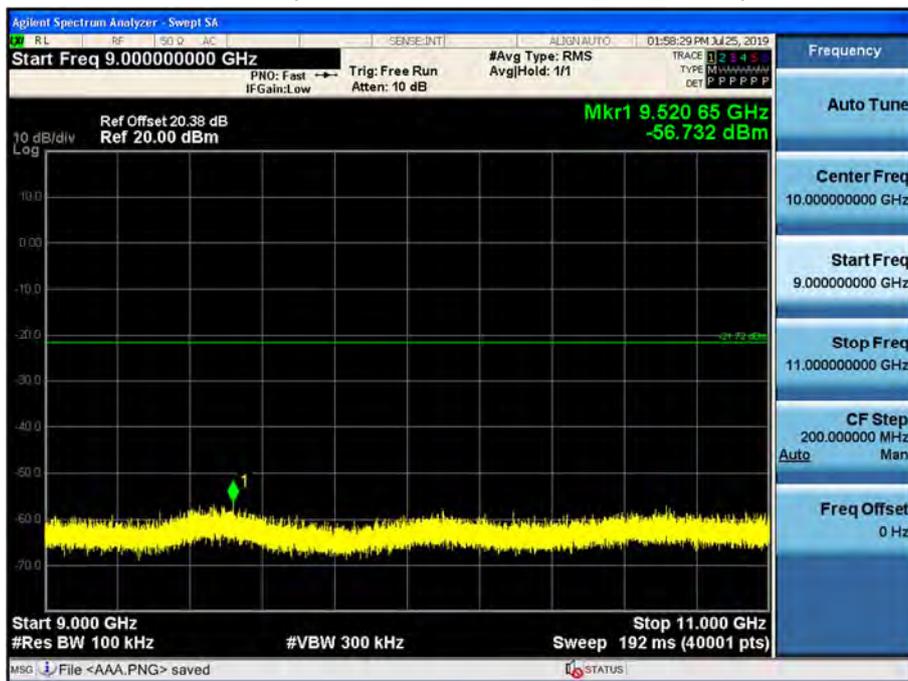


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

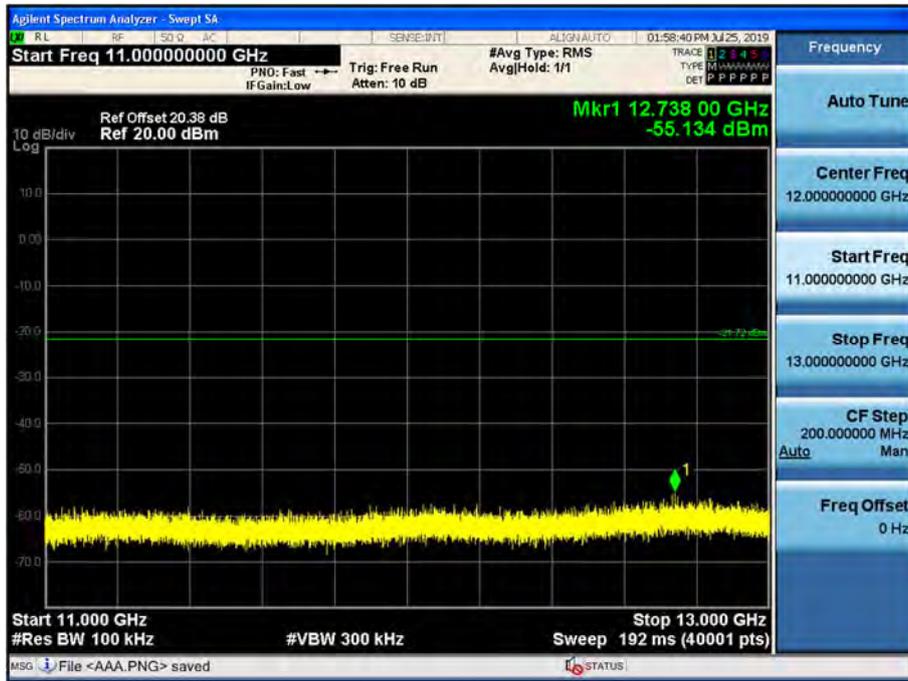


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

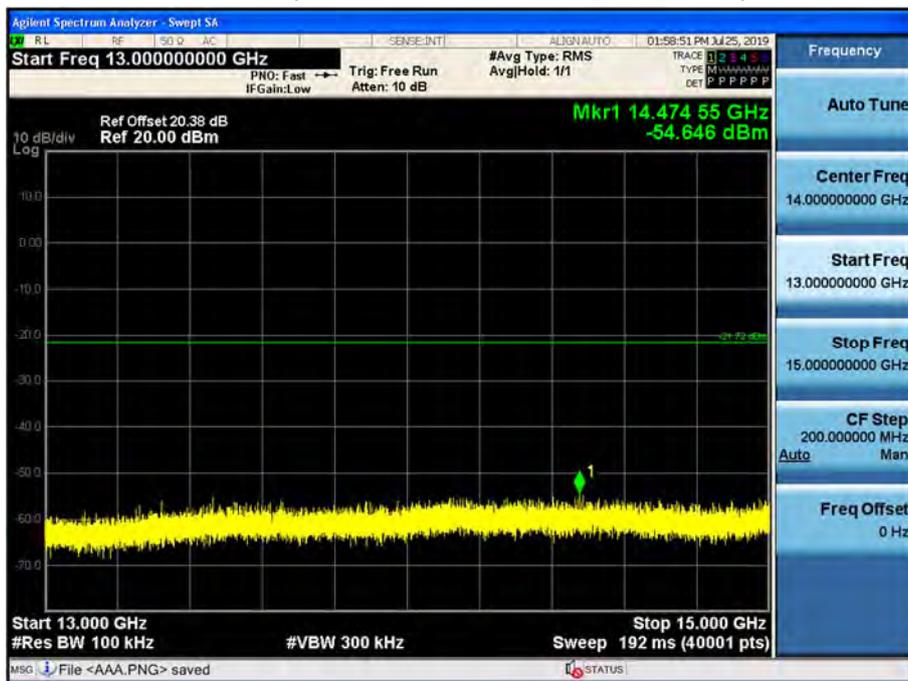


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

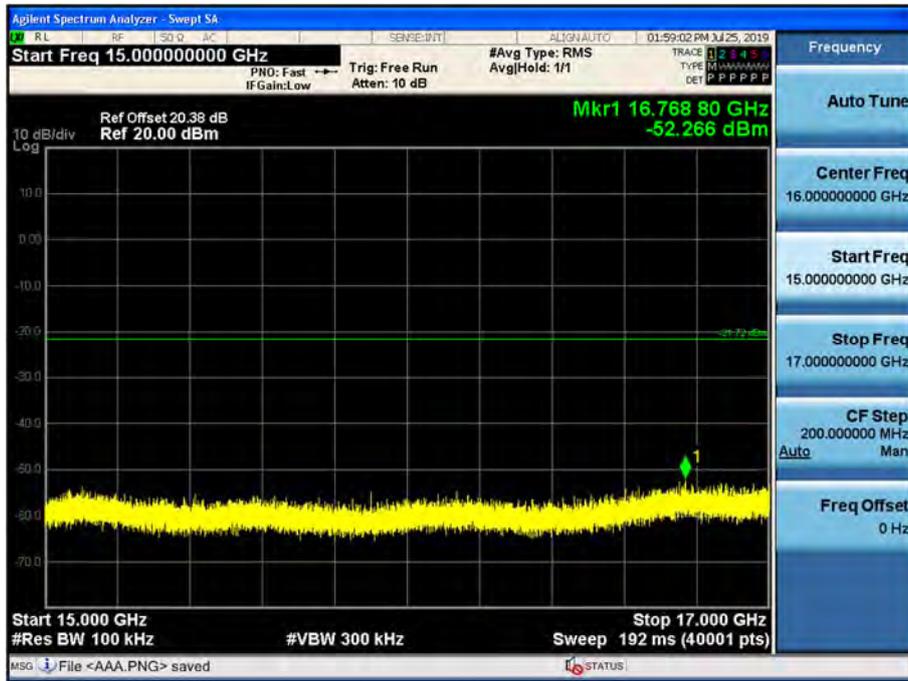


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

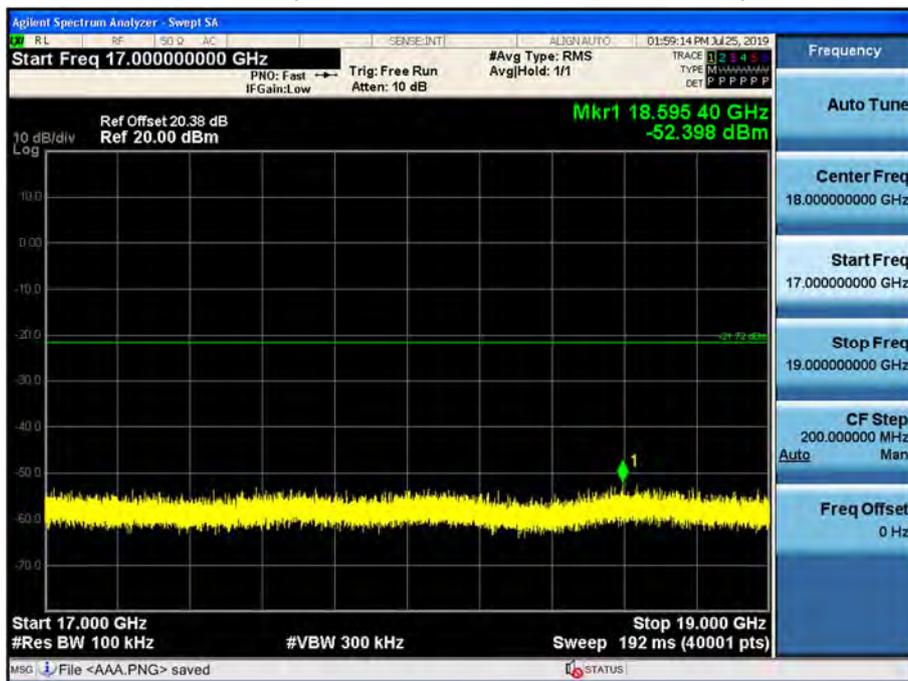


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

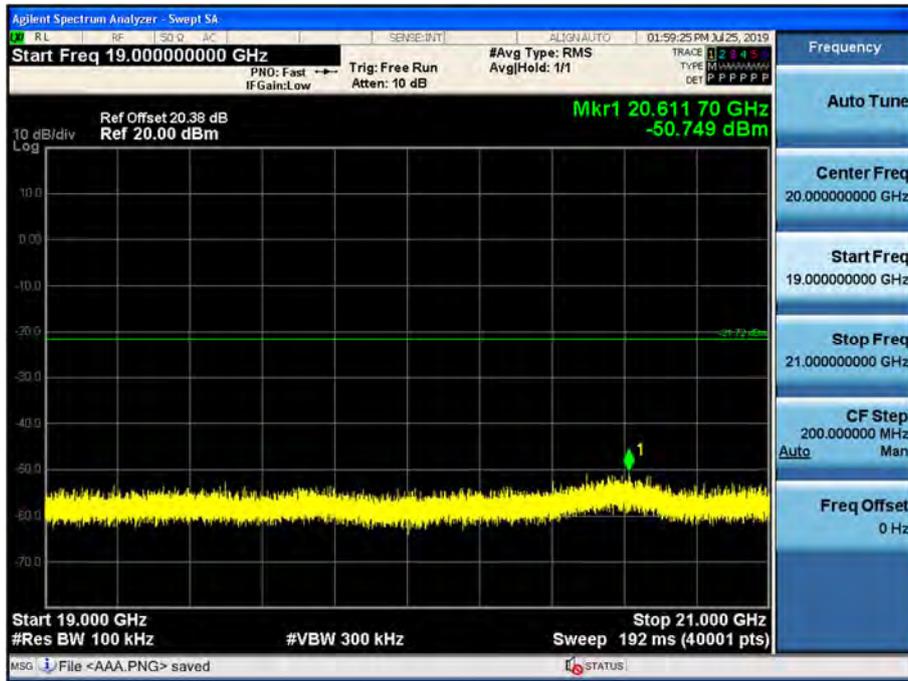


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

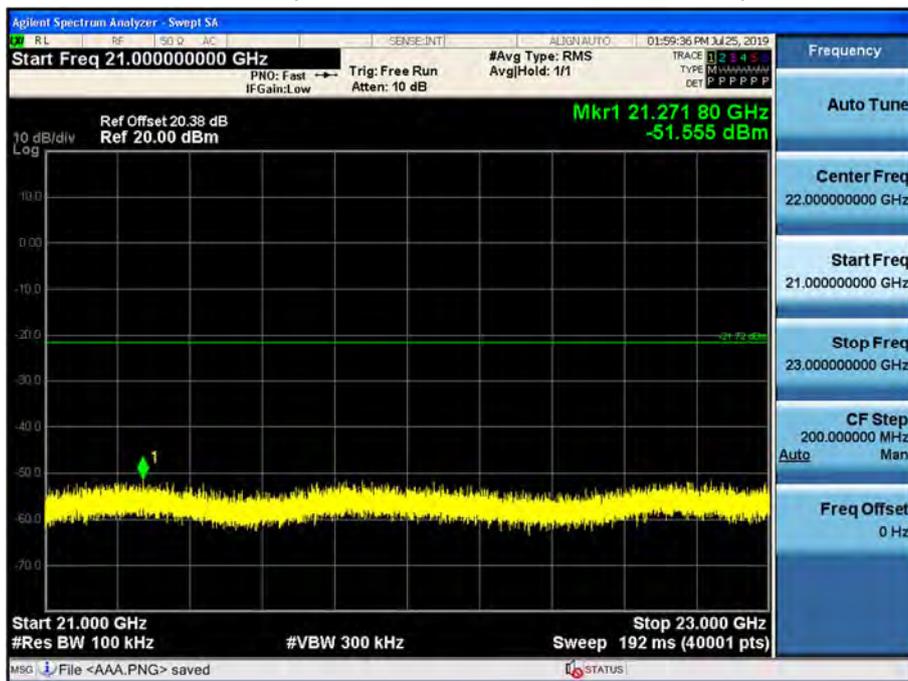

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.6_5.5 Mbps)

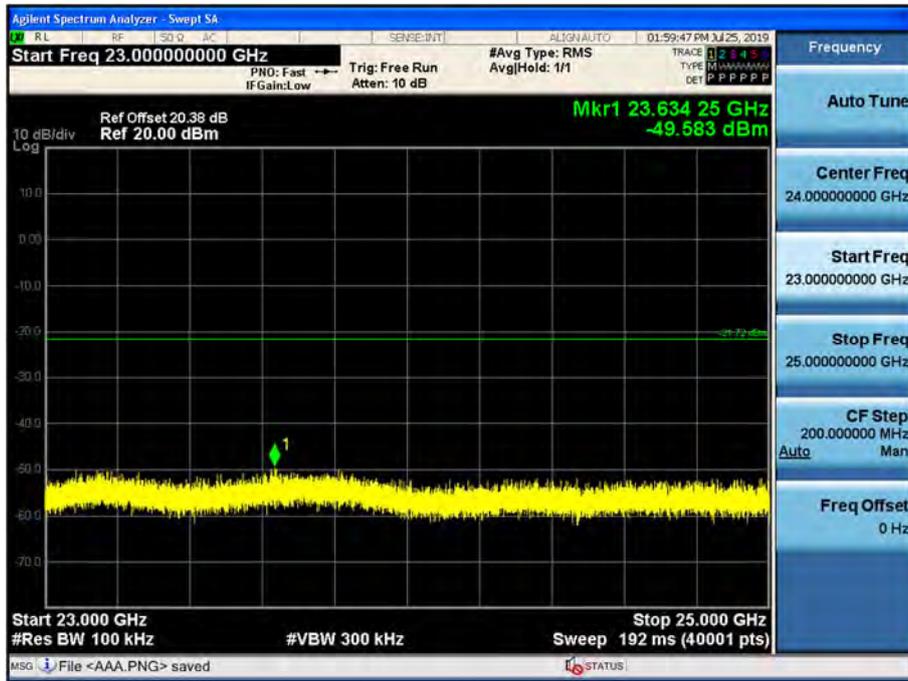

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

[ANT1_SISO]
Frequency Range : Above 1 GHz

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	53.30	0.76	V	54.06	73.98	19.93	PK
4824	47.40	0.76	V	48.16	53.98	5.83	AV
7236	47.56	9.77	V	57.33	73.98	16.65	PK
7236	35.84	9.77	V	45.61	53.98	8.37	AV
4824	53.63	0.76	H	54.39	73.98	19.60	PK
4824	47.57	0.76	H	48.33	53.98	5.65	AV
7236	48.11	9.77	H	57.88	73.98	16.10	PK
7236	35.89	9.77	H	45.66	53.98	8.32	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	52.42	0.97	V	53.39	73.98	20.60	PK
4874	45.70	0.97	V	46.67	53.98	7.31	AV
7311	48.45	9.26	V	57.71	73.98	16.27	PK
7311	36.32	9.26	V	45.58	53.98	8.40	AV
4874	52.35	0.97	H	53.32	73.98	20.67	PK
4874	45.50	0.97	H	46.47	53.98	7.51	AV
7311	48.57	9.26	H	57.83	73.98	16.15	PK
7311	36.32	9.26	H	45.58	53.98	8.40	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	50.98	0.86	V	51.84	73.98	22.15	PK
4924	44.00	0.86	V	44.86	53.98	9.13	AV
7386	47.11	9.38	V	56.49	73.98	17.49	PK
7386	35.01	9.38	V	44.39	53.98	9.59	AV
4924	50.49	0.86	H	51.35	73.98	22.64	PK
4924	43.75	0.86	H	44.61	53.98	9.38	AV
7386	47.25	9.38	H	56.63	73.98	17.35	PK
7386	35.05	9.38	H	44.43	53.98	9.55	AV

[ANT2_SISO]
Frequency Range : Above 1 GHz

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	52.89	0.76	V	53.65	73.98	20.34	PK
4824	47.01	0.76	V	47.77	53.98	6.22	AV
7236	47.54	9.77	V	57.31	73.98	16.67	PK
7236	35.78	9.77	V	45.55	53.98	8.43	AV
4824	53.60	0.76	H	54.36	73.98	19.63	PK
4824	47.78	0.76	H	48.54	53.98	5.44	AV
7236	47.98	9.77	H	57.75	73.98	16.23	PK
7236	35.95	9.77	H	45.72	53.98	8.26	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	51.75	0.97	V	52.72	73.98	21.27	PK
4874	45.21	0.97	V	46.18	53.98	7.80	AV
7311	49.12	9.26	V	58.38	73.98	15.60	PK
7311	36.09	9.26	V	45.35	53.98	8.63	AV
4874	52.03	0.97	H	53.00	73.98	20.99	PK
4874	45.63	0.97	H	46.60	53.98	7.38	AV
7311	49.73	9.26	H	58.99	73.98	14.99	PK
7311	36.29	9.26	H	45.55	53.98	8.43	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	51.76	0.86	V	52.62	73.98	21.37	PK
4924	44.89	0.86	V	45.75	53.98	8.24	AV
7386	46.89	9.38	V	56.27	73.98	17.71	PK
7386	35.08	9.38	V	44.46	53.98	9.52	AV
4924	52.09	0.86	H	52.95	73.98	21.04	PK
4924	45.44	0.86	H	46.30	53.98	7.69	AV
7386	47.40	9.38	H	56.78	73.98	17.20	PK
7386	35.16	9.38	H	44.54	53.98	9.44	AV

[ANT1&ANT2_MIMO(CDD)]

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	49.87	0.00	0.76	V	50.63	73.98	23.36	PK
4824	38.14	0.11	0.76	V	39.01	53.98	14.98	AV
7236	47.86	0.00	9.77	V	57.63	73.98	16.35	PK
7236	35.91	0.11	9.77	V	45.79	53.98	8.19	AV
4824	49.53	0.00	0.76	H	50.29	73.98	23.70	PK
4824	37.42	0.11	0.76	H	38.29	53.98	15.70	AV
7236	47.80	0.00	9.77	H	57.57	73.98	16.41	PK
7236	35.88	0.11	9.77	H	45.76	53.98	8.22	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	49.81	0.00	0.97	V	50.78	73.98	23.21	PK
4874	37.10	0.11	0.97	V	38.18	53.98	15.81	AV
7311	48.33	0.00	9.26	V	57.59	73.98	16.39	PK
7311	36.30	0.11	9.26	V	45.67	53.98	8.31	AV
4874	48.90	0.00	0.97	H	49.87	73.98	24.12	PK
4874	37.01	0.11	0.97	H	38.09	53.98	15.90	AV
7311	48.04	0.00	9.26	H	57.30	73.98	16.68	PK
7311	36.25	0.11	9.26	H	45.62	53.98	8.36	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2462
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	48.17	0.00	0.86	V	49.03	73.98	24.96	PK
4924	36.50	0.11	0.86	V	37.47	53.98	16.52	AV
7386	47.27	0.00	9.38	V	56.65	73.98	17.33	PK
7386	35.13	0.11	9.38	V	44.62	53.98	9.36	AV
4924	48.10	0.00	0.86	H	48.96	73.98	25.03	PK
4924	36.43	0.11	0.86	H	37.40	53.98	16.59	AV
7386	47.99	0.00	9.38	H	57.37	73.98	16.61	PK
7386	35.09	0.11	9.38	H	44.58	53.98	9.40	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	49.80	0.00	0.76	V	50.56	73.98	23.43	PK
4824	37.50	0.12	0.76	V	38.38	53.98	15.61	AV
7236	48.22	0.00	9.77	V	57.99	73.98	15.99	PK
7236	35.90	0.12	9.77	V	45.79	53.98	8.19	AV
4824	49.24	0.00	0.76	H	50.00	73.98	23.99	PK
4824	37.44	0.12	0.76	H	38.32	53.98	15.67	AV
7236	47.94	0.00	9.77	H	57.71	73.98	16.27	PK
7236	35.85	0.12	9.77	H	45.74	53.98	8.24	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	49.55	0.00	0.97	V	50.52	73.98	23.47	PK
4874	37.14	0.12	0.97	V	38.23	53.98	15.76	AV
7311	48.21	0.00	9.26	V	57.47	73.98	16.51	PK
7311	36.28	0.12	9.26	V	45.66	53.98	8.32	AV
4874	49.12	0.00	0.97	H	50.09	73.98	23.90	PK
4874	37.03	0.12	0.97	H	38.12	53.98	15.87	AV
7311	47.85	0.00	9.26	H	57.11	73.98	16.87	PK
7311	36.24	0.12	9.26	H	45.62	53.98	8.36	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	48.31	0.00	0.86	V	49.17	73.98	24.82	PK
4924	36.65	0.12	0.86	V	37.63	53.98	16.36	AV
7386	48.44	0.00	9.38	V	57.82	73.98	16.16	PK
7386	35.01	0.12	9.38	V	44.51	53.98	9.47	AV
4924	48.25	0.00	0.86	H	49.11	73.98	24.88	PK
4924	36.51	0.12	0.86	H	37.49	53.98	16.50	AV
7386	48.12	0.00	9.38	H	57.50	73.98	16.48	PK
7386	35.08	0.12	9.38	H	44.58	53.98	9.40	AV

[DBS Mode 2.4 GHz & 5GHz]

Operation Mode:	802.11b & 802.11a
Transfer Rate:	1 Mbps & 6 Mbps
Operating Frequency	2412 & 5180
Channel No.	01 Ch & 36 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	52.21	0.56	V	52.77	73.98	21.22	PK
4824	46.10	0.56	V	46.66	53.98	7.33	AV
7236	45.96	9.47	V	55.43	73.98	18.55	PK
7236	35.62	9.47	V	45.09	53.98	8.89	AV
4824	52.80	0.56	H	53.36	73.98	20.63	PK
4824	46.17	0.56	H	46.73	53.98	7.26	AV
7236	46.45	9.47	H	55.92	73.98	18.06	PK
7236	35.96	9.47	H	45.43	53.98	8.55	AV

Operation Mode:	802.11b & 802.11a
Transfer Rate:	1 Mbps & 6 Mbps
Operating Frequency	2437 & 5600
Channel No.	06 Ch & 120 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	51.80	0.87	V	52.67	73.98	21.32	PK
4874	46.26	0.87	V	47.13	53.98	6.86	AV
7311	47.59	9.16	V	56.75	73.98	17.23	PK
7311	35.92	9.16	V	45.08	53.98	8.90	AV
4874	52.60	0.87	H	53.47	73.98	20.52	PK
4874	46.80	0.87	H	47.67	53.98	6.32	AV
7311	47.83	9.16	H	56.99	73.98	16.99	PK
7311	36.15	9.16	H	45.31	53.98	8.67	AV


Operation Mode: 802.11b & 802.11a
 Transfer Rate: 1 Mbps & 6 Mbps
 Operating Frequency: 2462 & 5825
 Channel No.: 11 Ch & 165 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	49.59	0.81	V	50.40	73.98	23.59	PK
4924	41.95	0.81	V	42.76	53.98	11.23	AV
7386	45.32	9.38	V	54.70	73.98	19.28	PK
7386	34.92	9.38	V	44.30	53.98	9.68	AV
4924	50.48	0.81	H	51.29	73.98	22.70	PK
4924	42.23	0.81	H	43.04	53.98	10.95	AV
7386	46.90	9.38	H	56.28	73.98	17.70	PK
7386	35.05	9.38	H	44.43	53.98	9.55	AV

[ANT1_SISO]


▣ Test Plots (Worst case : Z-H)

Radiated Spurious Emissions plot – Average Reading (802.11b_1Mbps, Ch.1 2nd Harmonic)

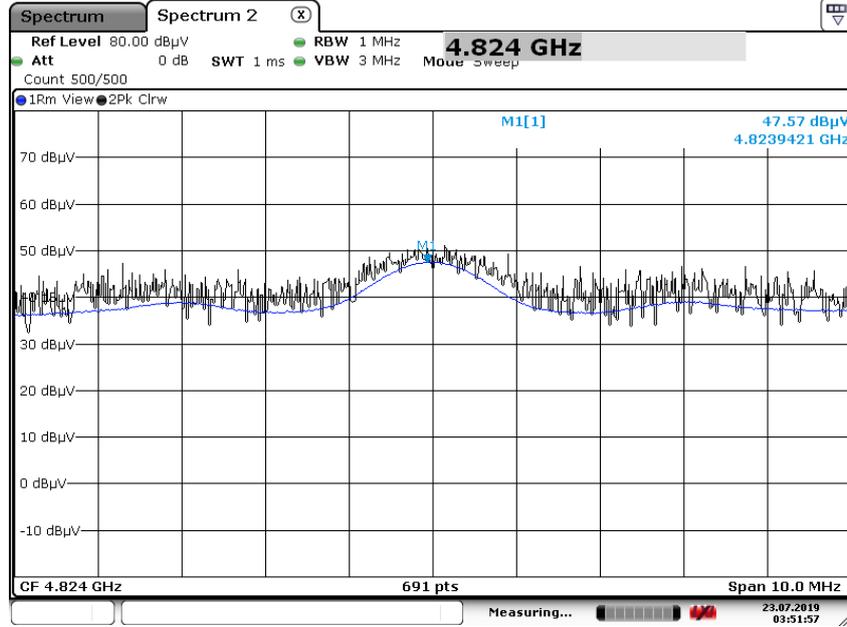

Date: 23.JUL.2019 03:51:57

Radiated Spurious Emissions plot – Peak Reading (802.11b_1Mbps, Ch.1 2nd Harmonic)

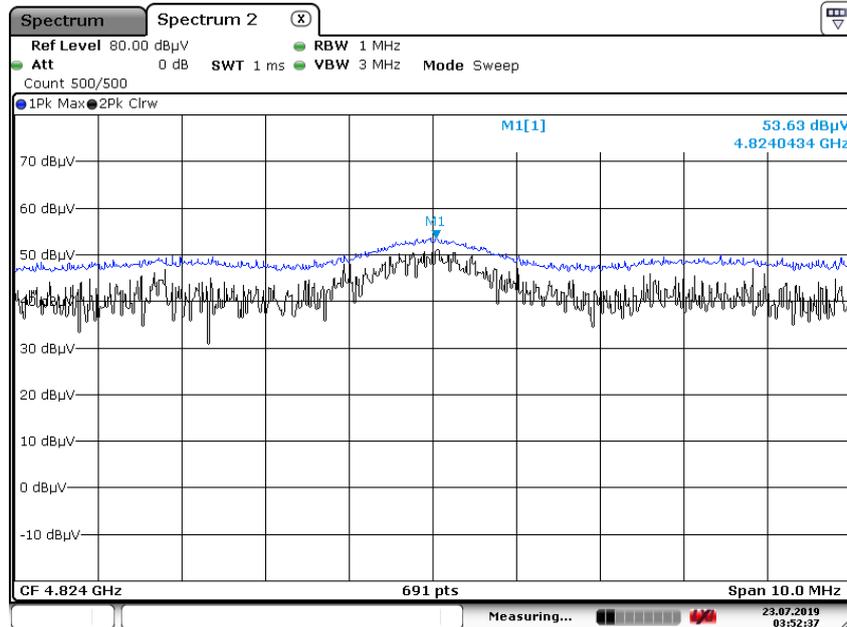


Date: 23.JUL.2019 03:52:36

[ANT2_SISO]


▣ Test Plots (Worst case : Z-H)

Radiated Spurious Emissions plot – Average Reading (802.11b_1Mbps, Ch.1 2nd Harmonic)

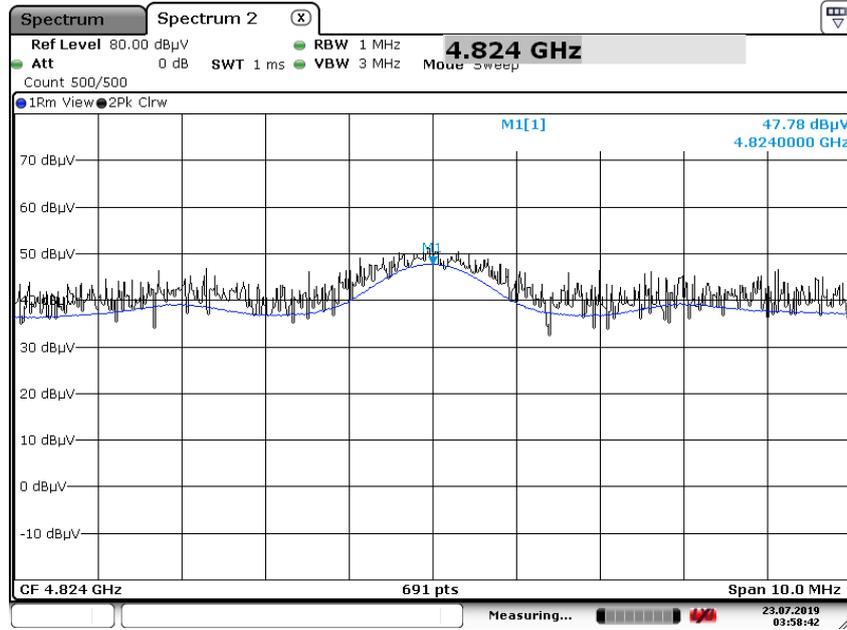

Date: 23.JUL.2019 03:58:42


Radiated Spurious Emissions plot – Peak Reading (802.11b_1Mbps, Ch.1 2nd Harmonic)

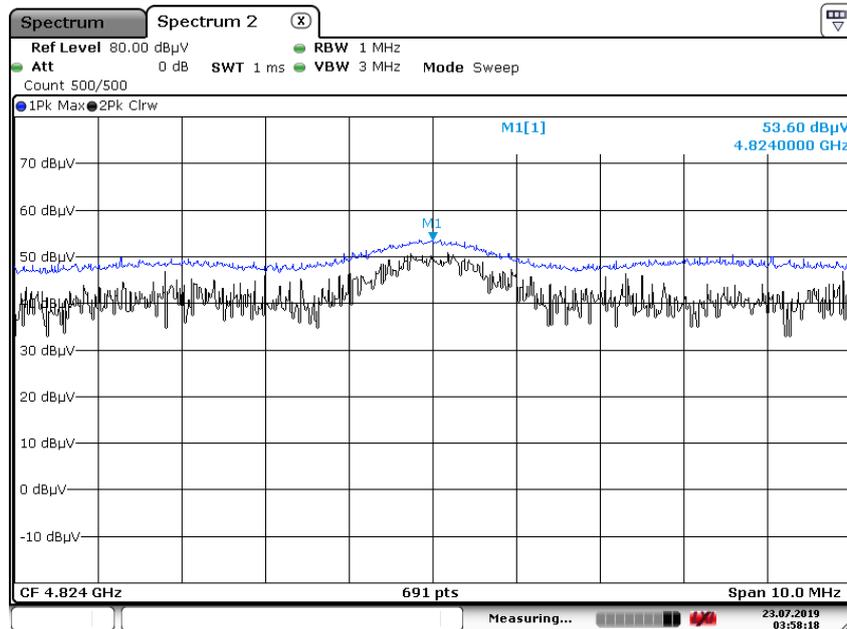


Date: 23.JUL.2019 03:58:18

[ANT1&ANT2_MIMO(CDD)]_(Worst case : Y-V)

Radiated Spurious Emissions plot – Average Reading (802.11g_6 Mbps, 01 Ch 3rd Harmonic)

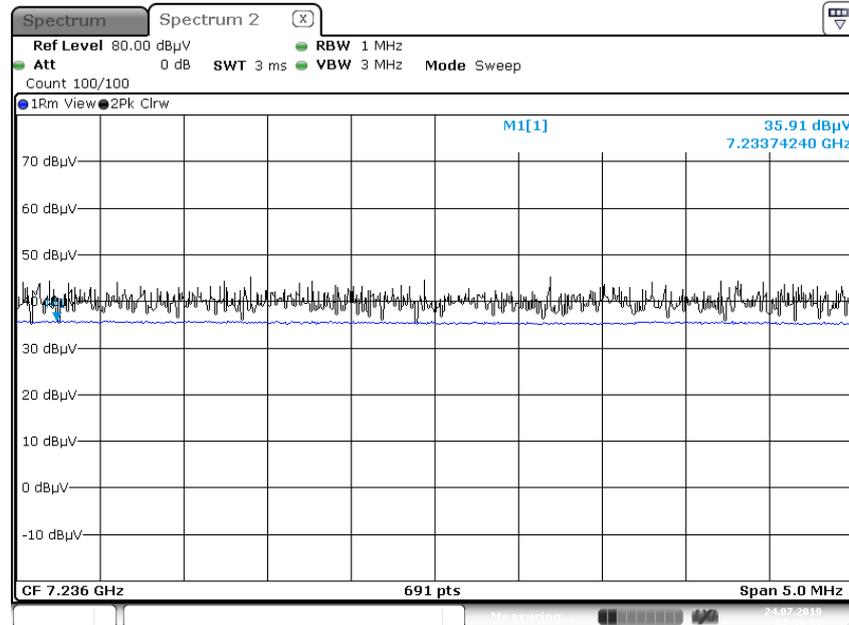


Radiated Spurious Emissions plot – Peak Reading (802.11g_6 Mbps, 01 Ch 3rd Harmonic)

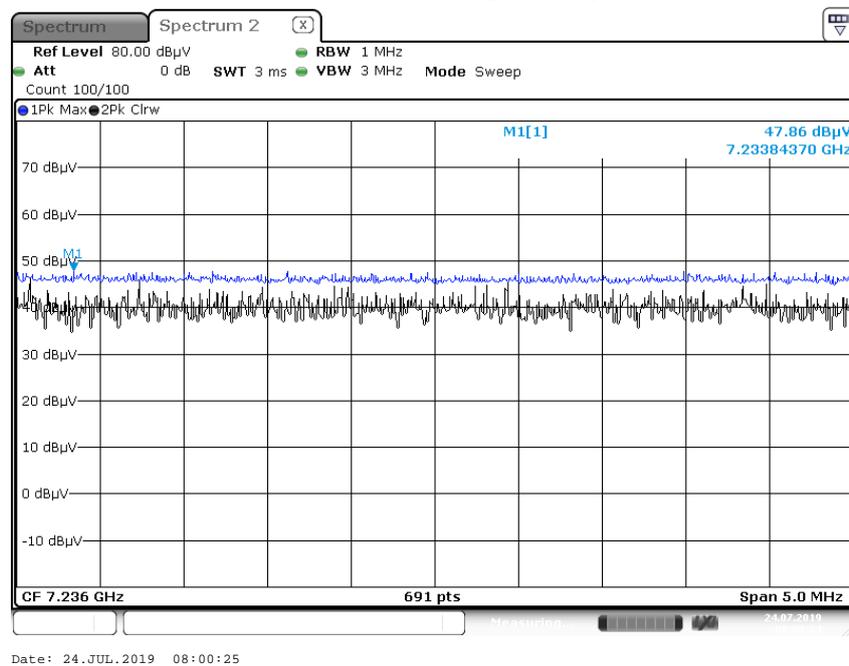**Note:**


Plot of worst case are only reported.

[DBS Mode 2.4 GHz & 5GHz_Z-H]

Radiated Spurious Emissions plot – Average Reading (802.11b & 802.11a, 06 Ch & 120 Ch 2nd Harmonic)

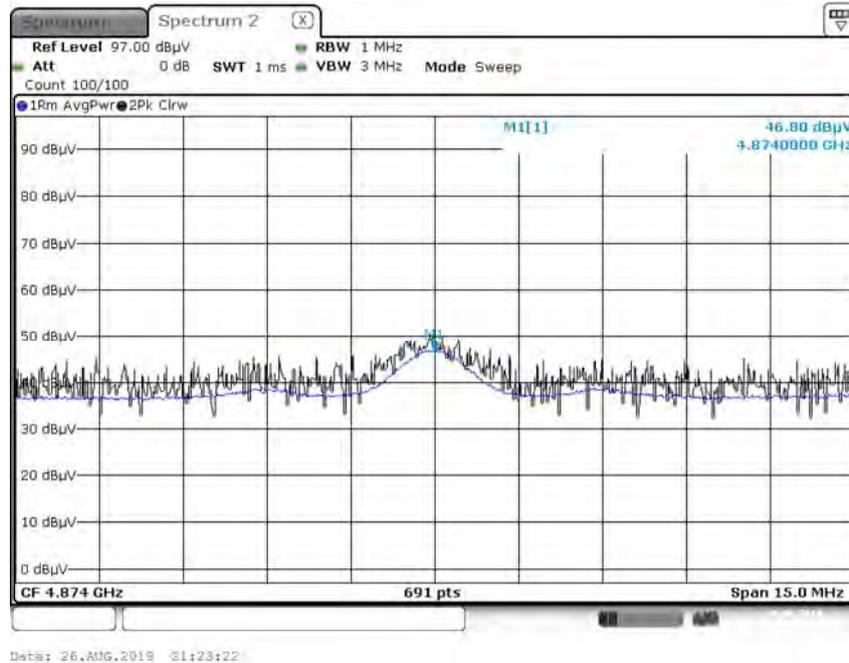

Radiated Spurious Emissions plot – Peak Reading (802.11b & 802.11a, 06 Ch & 120 Ch 2nd Harmonic)

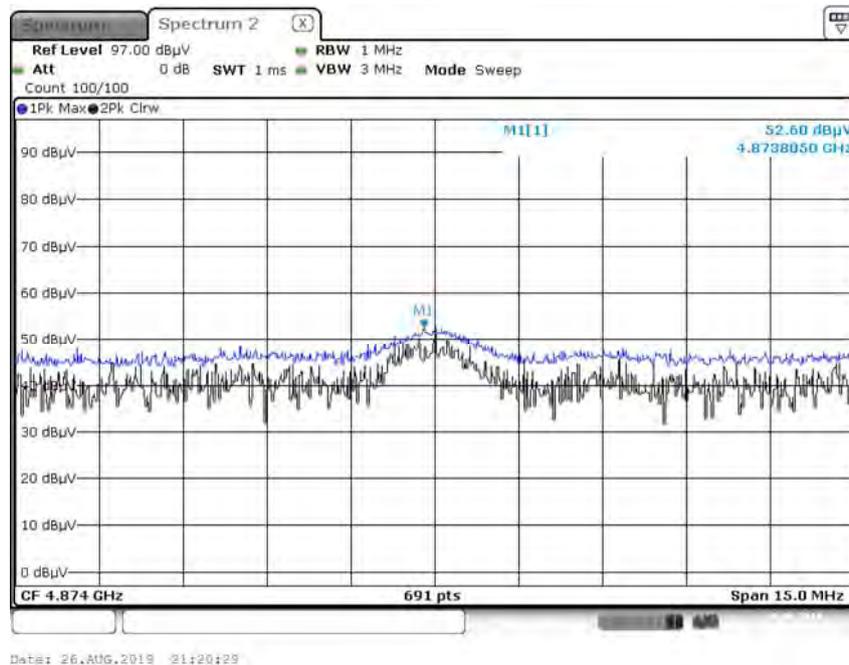**Note:**

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES
[ANT1_SISO]

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. -A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	51.21	1.46	H	52.67	73.98	21.31	PK
2390.0	39.66	1.46	H	41.12	53.98	12.86	AV
2390.0	50.89	1.46	V	52.35	73.98	21.63	PK
2390.0	39.55	1.46	V	41.01	53.98	12.97	AV
2483.5	52.52	0.92	H	53.44	73.98	20.55	PK
2483.5	40.22	0.92	H	41.14	53.98	12.85	AV
2483.5	51.88	0.92	V	52.80	73.98	21.19	PK
2483.5	40.18	0.92	V	41.10	53.98	12.89	AV

[ANT2_SISO]

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F. -A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	51.58	1.46	H	53.04	73.98	20.94	PK
2390.0	39.40	1.46	H	40.86	53.98	13.12	AV
2390.0	51.49	1.46	V	52.95	73.98	21.03	PK
2390.0	39.38	1.46	V	40.84	53.98	13.14	AV
2483.5	57.57	0.92	H	58.49	73.98	15.50	PK
2483.5	40.91	0.92	H	41.83	53.98	12.16	AV
2483.5	55.04	0.92	V	55.96	73.98	18.03	PK
2483.5	39.30	0.92	V	40.22	53.98	13.77	AV

[ANT1&ANT2_MIMO(CDD)]

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	54.55	0.00	1.46	H	56.01	73.98	17.97	PK
2390.0	42.17	0.11	1.46	H	43.74	53.98	10.24	AV
2390.0	53.66	0.00	1.46	V	55.12	73.98	18.86	PK
2390.0	41.38	0.11	1.46	V	42.95	53.98	11.03	AV
2483.5	60.26	0.00	0.92	H	61.18	73.98	12.81	PK
2483.5	42.10	0.11	0.92	H	43.13	53.98	10.86	AV
2483.5	59.34	0.00	0.92	V	60.26	73.98	13.73	PK
2483.5	40.55	0.11	0.92	V	41.58	53.98	12.41	AV


Operation Mode: 802.11n (HT20)
 Transfer Rate: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	54.66	0.00	1.46	H	56.12	73.98	17.86	PK
2390.0	40.98	0.12	1.46	H	42.56	53.98	11.42	AV
2390.0	53.41	0.00	1.46	V	54.87	73.98	19.11	PK
2390.0	40.84	0.12	1.46	V	42.42	53.98	11.56	AV
2483.5	57.47	0.00	0.92	H	58.39	73.98	15.60	PK
2483.5	41.98	0.12	0.92	H	43.02	53.98	10.97	AV
2483.5	56.99	0.00	0.92	V	57.91	73.98	16.08	PK
2483.5	41.61	0.12	0.92	V	42.65	53.98	11.34	AV

[ANT1_SISO]


▣ Test Plots (Worst case : X-H)

Radiated Restricted Band Edges plot – Average Reading (802.11b Ch.11)

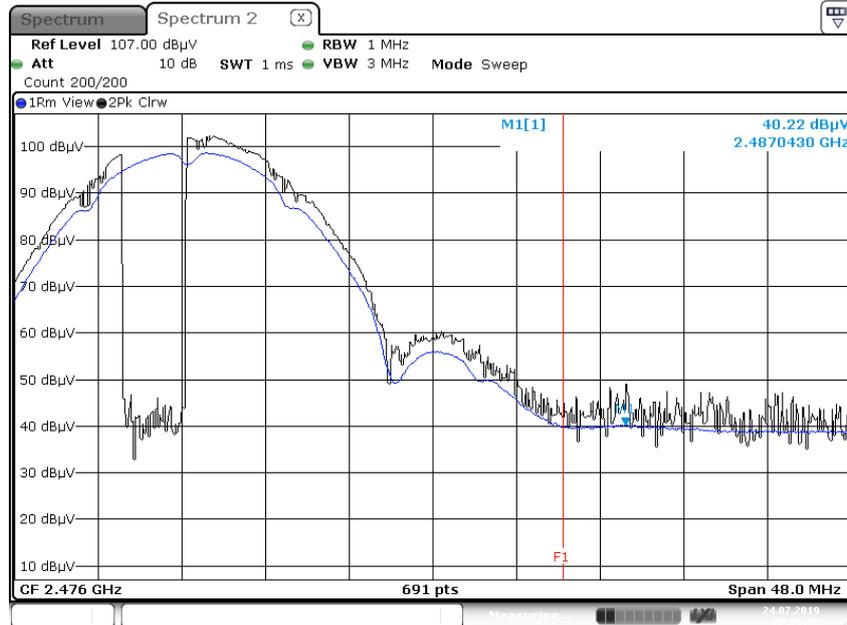

Date: 24.JUL.2019 02:51:30

Radiated Restricted Band Edges plot – Peak Reading (802.11b Ch.11)

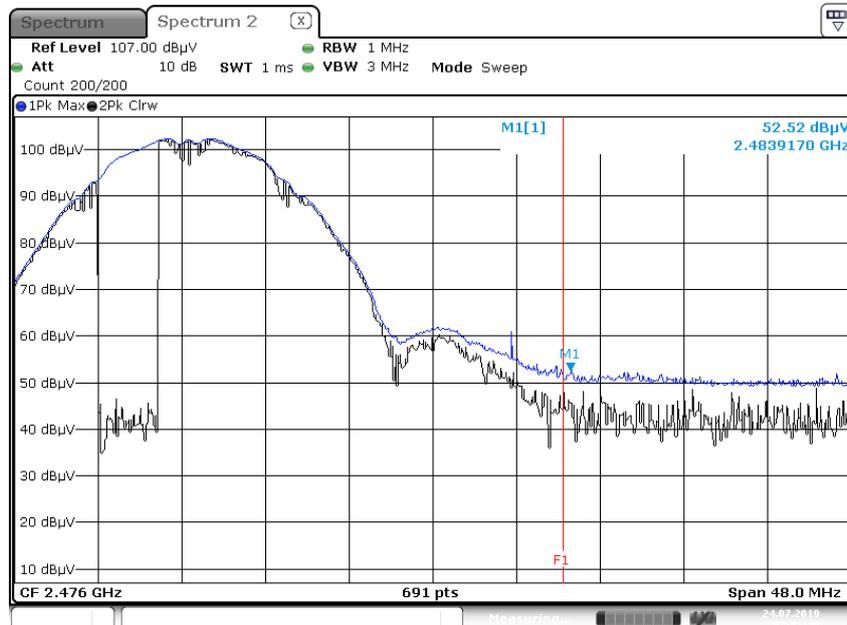


Date: 24.JUL.2019 02:53:50


[ANT2_SISO]

☐ Test Plots (Worst case : X-H)

Radiated Restricted Band Edges plot – Average Reading (802.11b Ch.11)

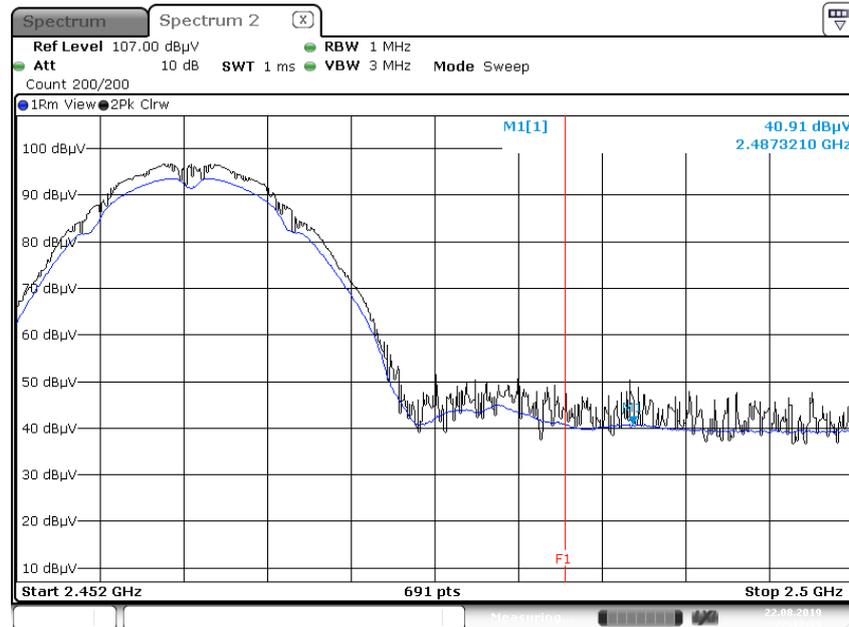


Radiated Restricted Band Edges plot – Peak Reading (802.11b Ch.11)

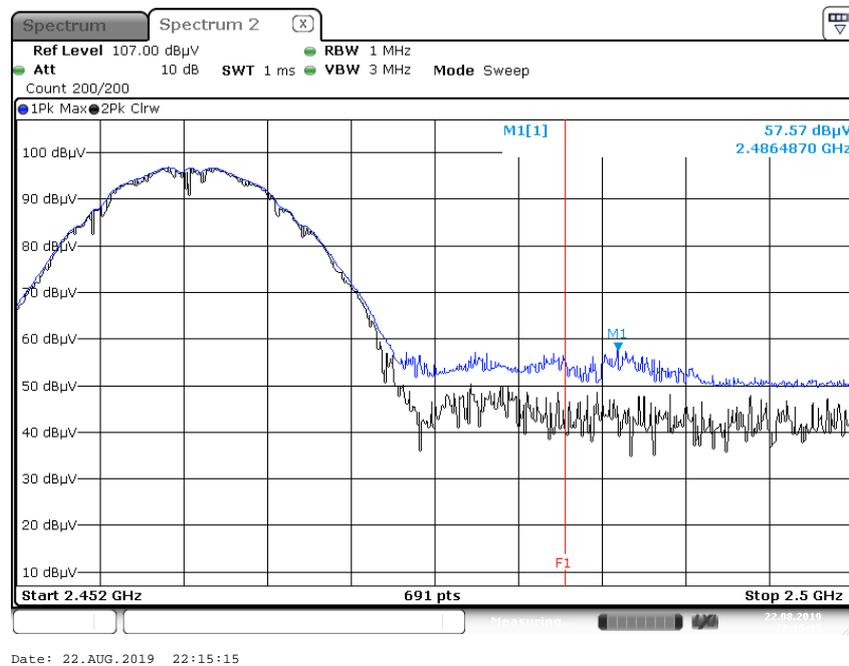


[ANT1&ANT2_MIMO(CDD)]

▣ Test Plots (Worst case : X-H)

Radiated Restricted Band Edges plot – Average Reading (802.11g Ch.1)

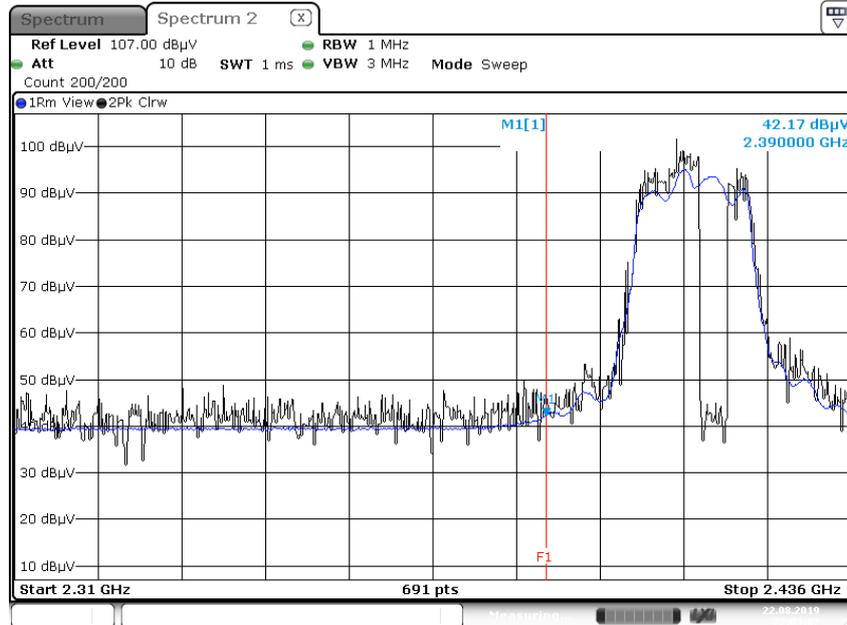

Radiated Restricted Band Edges plot – Peak Reading (802.11g Ch.1)

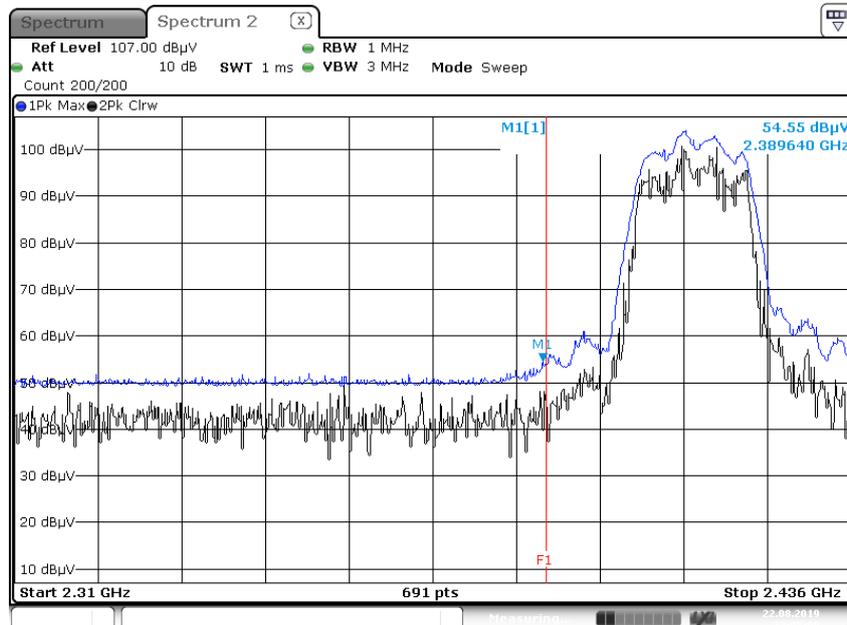

Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

2.4G_L1


1 / 2

HCT TEST Report

Common Information

EUT: SM-A908B
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: 2.4G Mode_L1

FCC CLASS B_Exten Cable

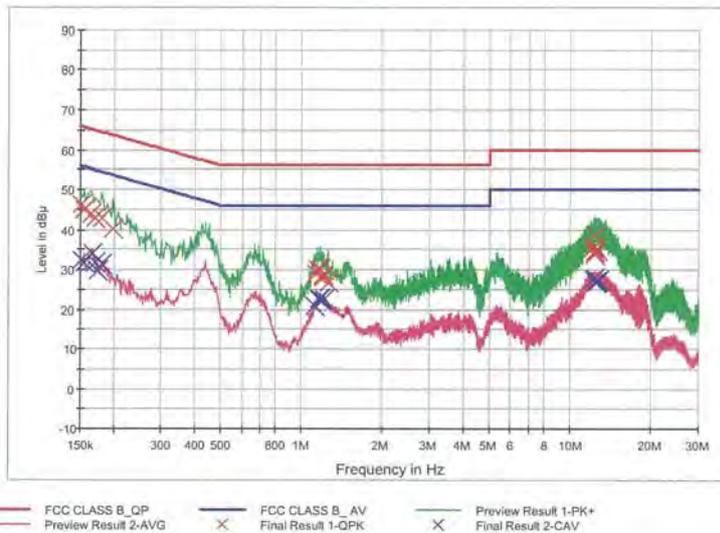

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	46.2	9.000	Off	L1	9.7	19.7	65.9
0.156000	44.8	9.000	Off	L1	9.7	20.9	65.7
0.164000	44.0	9.000	Off	L1	9.7	21.2	65.3
0.170000	42.8	9.000	Off	L1	9.7	22.2	65.0
0.180000	42.9	9.000	Off	L1	9.7	21.6	64.5
0.198000	40.1	9.000	Off	L1	9.7	23.6	63.7
1.134000	29.0	9.000	Off	L1	9.8	27.0	56.0
1.144000	30.0	9.000	Off	L1	9.8	26.0	56.0
1.172000	29.9	9.000	Off	L1	9.8	26.1	56.0
1.196000	28.5	9.000	Off	L1	9.8	27.5	56.0
1.202000	28.1	9.000	Off	L1	9.8	27.9	56.0
1.254000	26.7	9.000	Off	L1	9.9	29.3	56.0
12.194000	35.5	9.000	Off	L1	10.3	24.5	60.0
12.288000	35.7	9.000	Off	L1	10.3	24.3	60.0
12.330000	38.4	9.000	Off	L1	10.3	21.6	60.0
12.342000	33.8	9.000	Off	L1	10.3	26.2	60.0
12.386000	34.6	9.000	Off	L1	10.3	25.4	60.0
12.688000	34.6	9.000	Off	L1	10.3	25.4	60.0

2019-07-18

오전 9:37:56

2.4G_L1

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	32.5	9.000	Off	L1	9.7	23.4	55.9
0.156000	31.8	9.000	Off	L1	9.7	23.9	55.7
0.166000	34.1	9.000	Off	L1	9.7	21.1	55.2
0.170000	31.8	9.000	Off	L1	9.7	23.2	55.0
0.174000	29.7	9.000	Off	L1	9.7	25.0	54.8
0.180000	31.4	9.000	Off	L1	9.7	23.1	54.5
1.122000	20.9	9.000	Off	L1	9.8	25.1	46.0
1.158000	22.4	9.000	Off	L1	9.8	23.6	46.0
1.172000	22.4	9.000	Off	L1	9.8	23.6	46.0
1.198000	22.3	9.000	Off	L1	9.8	23.7	46.0
1.202000	22.1	9.000	Off	L1	9.8	23.9	46.0
1.212000	22.5	9.000	Off	L1	9.8	23.5	46.0
12.194000	27.8	9.000	Off	L1	10.3	22.2	50.0
12.330000	28.1	9.000	Off	L1	10.3	21.9	50.0
12.414000	27.0	9.000	Off	L1	10.3	23.0	50.0
12.488000	26.8	9.000	Off	L1	10.3	23.2	50.0
12.688000	26.8	9.000	Off	L1	10.3	23.2	50.0
12.730000	27.4	9.000	Off	L1	10.3	22.6	50.0

2019-07-18

오전 9:37:56

Conducted Emissions (Line 2)

2.4G_N


1 / 2

HCT TEST Report

Common Information

EUT: SM-A908B
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: 2.4G Mode_N

FCC CLASS B_ Exten Cable

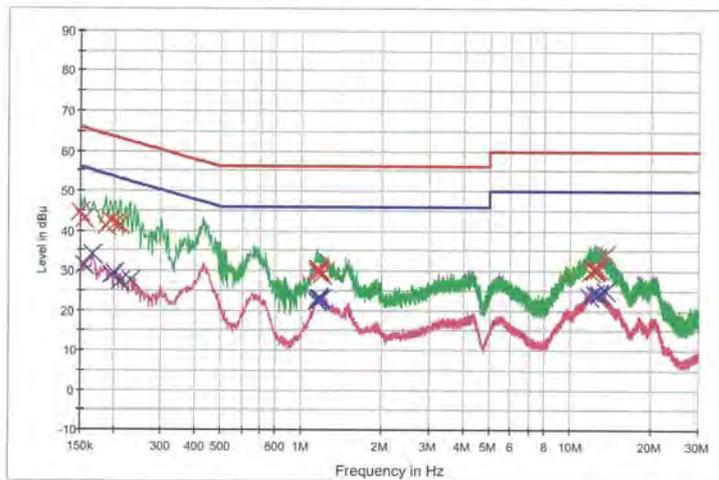

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
— Preview Result 2-AVG X Final Result 1-QPK X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	44.7	9.000	Off	N	9.8	21.3	66.0
0.156000	43.0	9.000	Off	N	9.8	22.7	65.7
0.188000	41.2	9.000	Off	N	9.8	22.9	64.1
0.194000	42.4	9.000	Off	N	9.8	21.5	63.9
0.204000	42.0	9.000	Off	N	9.9	21.5	63.4
0.210000	41.5	9.000	Off	N	9.9	21.7	63.2
1.142000	30.4	9.000	Off	N	10.0	25.6	56.0
1.152000	29.6	9.000	Off	N	10.0	26.4	56.0
1.164000	30.4	9.000	Off	N	10.0	25.6	56.0
1.170000	29.6	9.000	Off	N	10.0	26.4	56.0
1.184000	29.0	9.000	Off	N	10.0	27.0	56.0
1.188000	29.1	9.000	Off	N	10.0	26.9	56.0
11.920000	29.6	9.000	Off	N	10.5	30.4	60.0
12.348000	30.1	9.000	Off	N	10.6	29.9	60.0
12.392000	30.3	9.000	Off	N	10.6	29.7	60.0
12.542000	30.3	9.000	Off	N	10.6	29.7	60.0
12.708000	30.3	9.000	Off	N	10.6	29.7	60.0
13.560000	34.0	9.000	Off	N	10.6	26.0	60.0

2019-07-18

오전 9:24:14

2.4G_N

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.156000	31.2	9.000	Off	N	9.8	24.5	55.7
0.166000	33.9	9.000	Off	N	9.8	21.2	55.2
0.196000	29.1	9.000	Off	N	9.8	24.6	53.8
0.202000	29.3	9.000	Off	N	9.9	24.2	53.5
0.210000	27.2	9.000	Off	N	9.9	26.0	53.2
0.230000	27.7	9.000	Off	N	9.9	24.8	52.4
1.142000	22.5	9.000	Off	N	10.0	23.6	46.0
1.148000	22.3	9.000	Off	N	10.0	23.7	46.0
1.158000	22.8	9.000	Off	N	10.0	23.2	46.0
1.164000	23.2	9.000	Off	N	10.0	22.8	46.0
1.176000	22.7	9.000	Off	N	10.0	23.3	46.0
1.184000	22.8	9.000	Off	N	10.0	23.2	46.0
11.756000	23.4	9.000	Off	N	10.5	26.6	50.0
12.348000	24.3	9.000	Off	N	10.6	25.7	50.0
12.392000	24.3	9.000	Off	N	10.6	25.8	50.0
12.708000	24.2	9.000	Off	N	10.6	25.8	50.0
12.828000	24.0	9.000	Off	N	10.6	26.0	50.0
13.562000	25.0	9.000	Off	N	10.6	25.0	50.0

2019-07-18

오전 9:24:14

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/18/2019	Annual	100584
ESPAC	SU-642 /Temperature Chamber	03/12/2019	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	11/20/2018	Annual	MY49431210
Agilent	N1911A / Power Meter	04/10/2019	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/10/2019	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2018	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/24/2019	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/18/2019	Annual	KR75303960
WEINSCHTEL	2-20 / Attenuator(20 dB)	10/26/2018	Annual	BR0592
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/16/2019	Annual	100422

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	03/22/2019	Biennial	760
Schwarzbeck	VULB 9160 / TRILOG Antenna	08/09/2018	Biennial	9160-3368
Schwarzbeck	BBHA 9120D / Horn Antenna	08/01/2019	Biennial	1151
Schwarzbeck	BBHA 9120D / Horn Antenna	04/29/2019	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/03/2018	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/28/2018	Annual	101068-SZ
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	05/23/2019	Annual	8
Wainwright Instruments	WHKX7.0/18G-8SS / High Pass Filter	05/03/2019	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/19/2019	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/04/2019	Annual	1
H+S	5910-N-50-010 / Attenuator(10 dB)	11/08/2018	Annual	NONE
CERNE X	CBLU1183540 / Power Amplifier	07/01/2019	Annual	22964
CERNE X	CBL06185030 / Power Amplifier	07/01/2019	Annual	22965
CERNE X	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNE X	CBL26405040 / Power Amplifier	06/18/2019	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/26/2019	Annual	3000C000276

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1908-FC041-P