

Technical Description

1. Use 'AI/PDF' provided by 'SAMSUNG' for letter and contents
2. Background color is 'WHITE', letter color is 'BLACK'  
(reverse for SAMSUNG LOGO)
3. Back side should be attached to release paper once adhesive is applied.
4. No letter should be blur/smeared
5. The production must be proceed after the approval of R&D Group
6. The product must be within approved sample's specification tolerance.
7. The product must be finished in a ROLL
8. Release paper must be unified for material and color(blue)

MAT.	HS-800W	 MZ1081 40μ White PET 50μ Adhesive 20μ (0.115T±0.01)	FIN.	Semi transparency OPP Laminating + UVP Coating		
TITLE	<b>SM-B780A</b>		<b>LABEL-MAIN</b>			
UNIT	mm	DESIGNED	CHECKED	APPROVED	PROJECTION	
TOLERANCE	+0.0 -0.1	Yun Jun Sang		Kim June Sop		
SCALE	N/S					
Vendor	HANSUNG P&I	140409		140409	SHEET NO	1 / 1
		Doc. CODE	<b>GH68-00000A</b>			


FCC ID: A3LSMB780A  
MODEL: SM-B780A

Location:

Top →

Back plate of device →

Bottom →

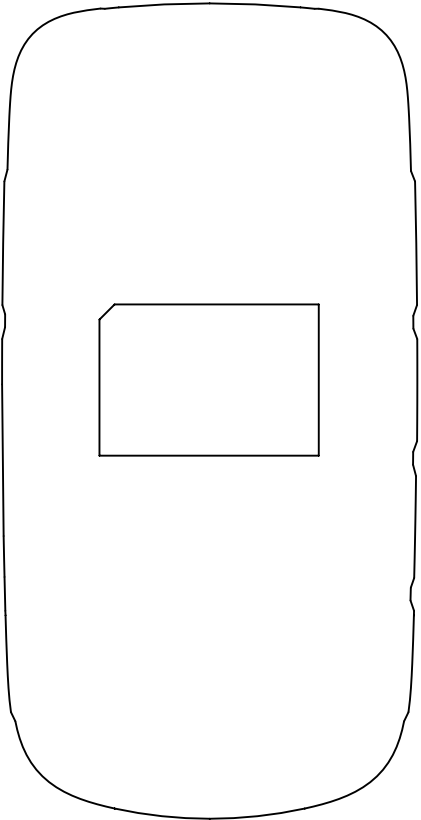

Label is placed inside of the battery compartment.