



FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA Phone + Bluetooth, DTS/UNII a/b/g/n & NFC

MODEL NUMBER: SM-C1158

FCC ID: A3LSMC1158

REPORT NUMBER: 14U17498-2 Revision A

ISSUE DATE: April 29, 2014

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	4/21/14	Initial Issue	P. Kim
A	4/29/14	Updated statement	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION.....	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT.....	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. WORST-CASE CONFIGURATION AND MODE.....	8
5.5. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. SUMMARY TABLE	12
8. ANTENNA PORT TEST RESULTS	13
8.1. 20 dB AND 99% BANDWIDTH.....	13
8.1.1. BASIC DATA RATE GFSK MODULATION.....	13
8.1.1. ENHANCED DATA RATE 8PSK MODULATION	13
8.2. HOPPING FREQUENCY SEPARATION	22
8.3. NUMBER OF HOPPING CHANNELS.....	24
8.4. AVERAGE TIME OF OCCUPANCY.....	27
8.5. OUTPUT POWER	31
8.5.1. BASIC DATA RATE GFSK MODULATION.....	31
8.5.2. ENHANCED DATA RATE 8PSK MODULATION	31
8.6. AVERAGE POWER.....	36
8.6.1. BASIC DATA RATE GFSK MODULATION.....	36
8.6.2. ENHANCED DATA RATE 8PSK MODULATION	36
8.7. CONDUCTED SPURIOUS EMISSIONS.....	37
8.7.1. BASIC DATA RATE GFSK MODULATION.....	38
8.7.1. ENHANCED DATA RATE 8PSK MODULATION	42
9. RADIATED TEST RESULTS	46
9.1. LIMITS AND PROCEDURE	46
9.2. TRANSMITTER ABOVE 1 GHz	47
9.2.1. BASIC DATA RATE GFSK MODULATION.....	47

9.2.2.	ENHANCED DATA RATE 8PSK MODULATION	60
9.3.	WORST-CASE BELOW 1 GHz	73
10.	AC POWER LINE CONDUCTED EMISSIONS	76
11.	SETUP PHOTOS	80

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA Phone + Bluetooth & DTS/UNII a/b/g/n + NFC
MODEL: SM-C1158
SERIAL NUMBER: FL-032-V (Conducted), FL-032-S (Radiated)
DATE TESTED: FEBRUARY 25 – MARCH 18, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PHILIP KIM
CONSUMER TECHNOLOGY DIVISION
PROGRAM MANAGER
UL Verification Services Inc.

CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB TECHNICIAN
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Phone + Bluetooth & DTS/UNII a/b/g/n + NFC

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	10.92	12.36
2402 - 2480	Enhanced 8PSK	10.64	11.59

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -1.4 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SAMSUNG	EP-TA10EWE	N/A	N/A
Earphone	SAMSUNG	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

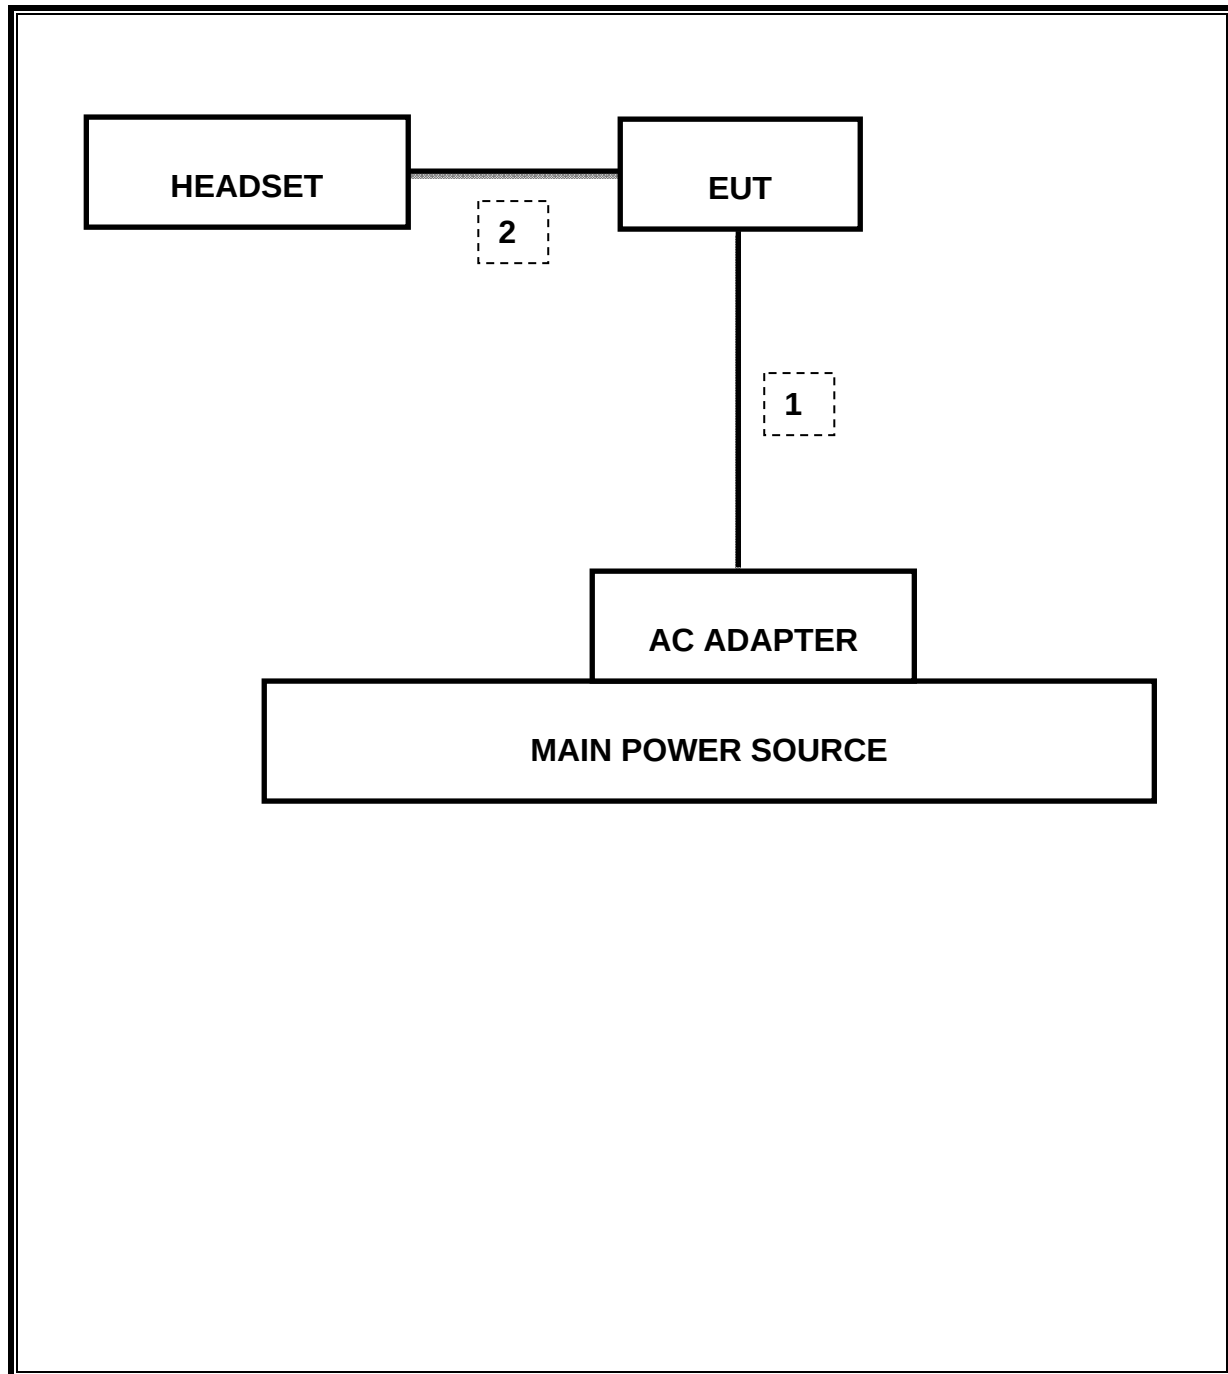

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	07/12/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14

7. SUMMARY TABLE

The model FCC ID: A3LSMC1158 shares the same enclosure and circuit board as mode FCC ID: A3LSMC115. The WLAN/Bluetooth/NFC circuitry and layout, including antenna, are almost identical between the two units. The WLAN/Bluetooth antenna and surrounding circuitry is the same between these two units.

After confirming through preliminary radiated emissions that the performance of the A3LSMC1158 BT remains representative of this model (FCC ID A3LSM C115) test data for FCC ID: A3LSM C115 is being submitted for this application.

Radiated emissions were fully re-evaluated against 15B requirements for digital devices and results indicated no significant differences between the two versions. Other differences between the two FCC IDs are in the WWAN RF Transceiver, connectivity part, components and placement. WWAN SAR and EMC has been fully retested for FCC ID: A3LSMC1158.

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.234MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-49.28dBm
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	10.92dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.317
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	44.67dBuV
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	48.05dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.

RESULTS



8.1.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	989.1	898.5
Middle	2441	997.2	872.3
High	2480	996.6	889.3
Worst		997.2	898.5

8.1.1. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.337	1.234
Middle	2441	1.341	1.218
High	2480	1.34	1.215
Worst		1.341	1.234


GFSK 20 dB BANDWIDTH

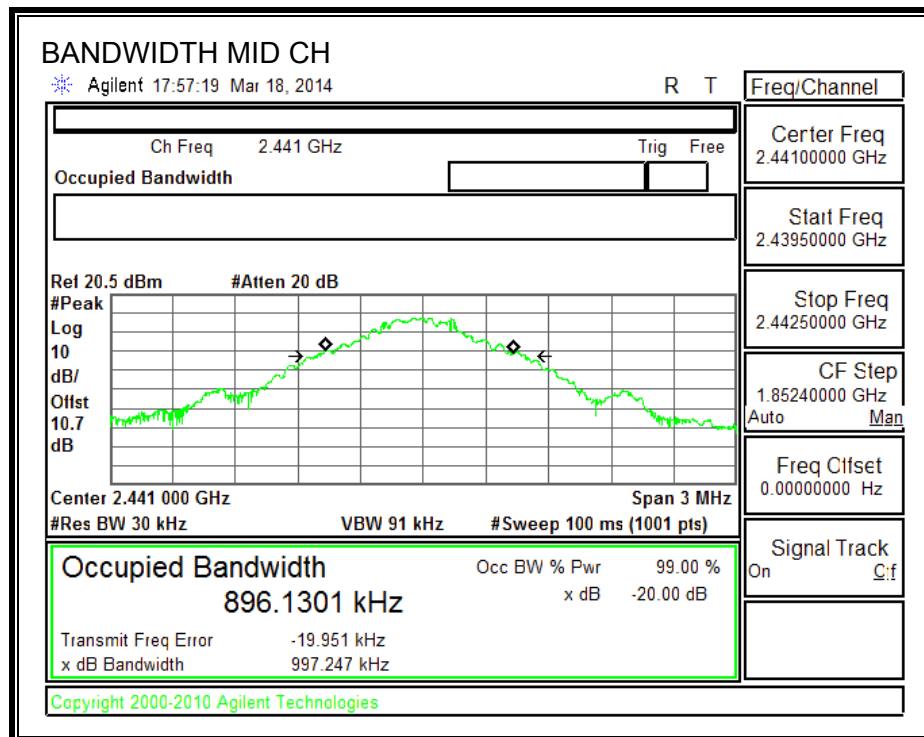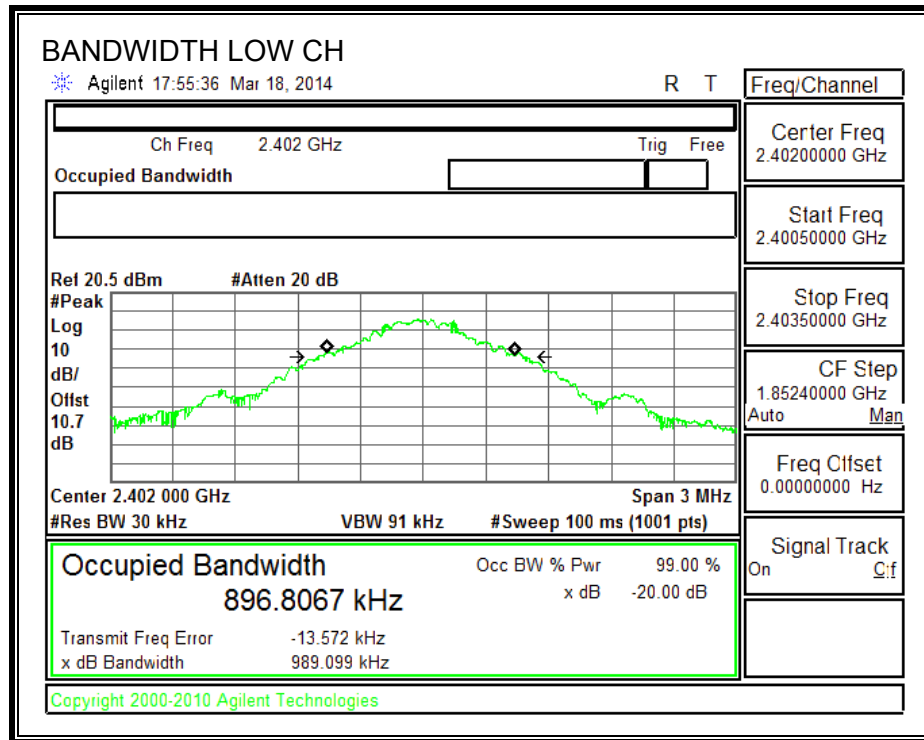


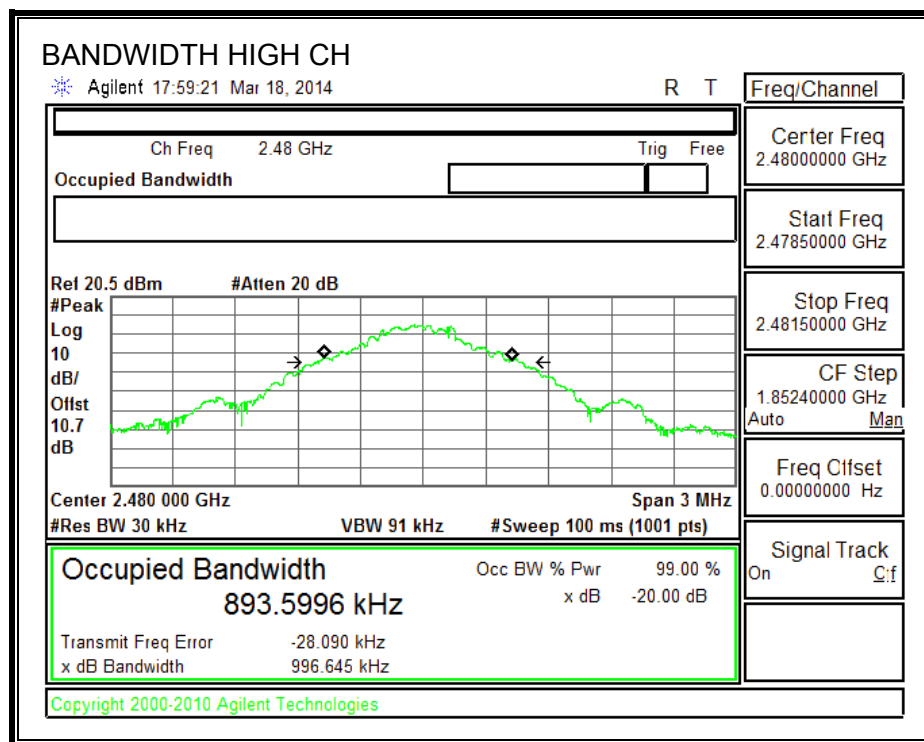



GFSK 99% BANDWIDTH

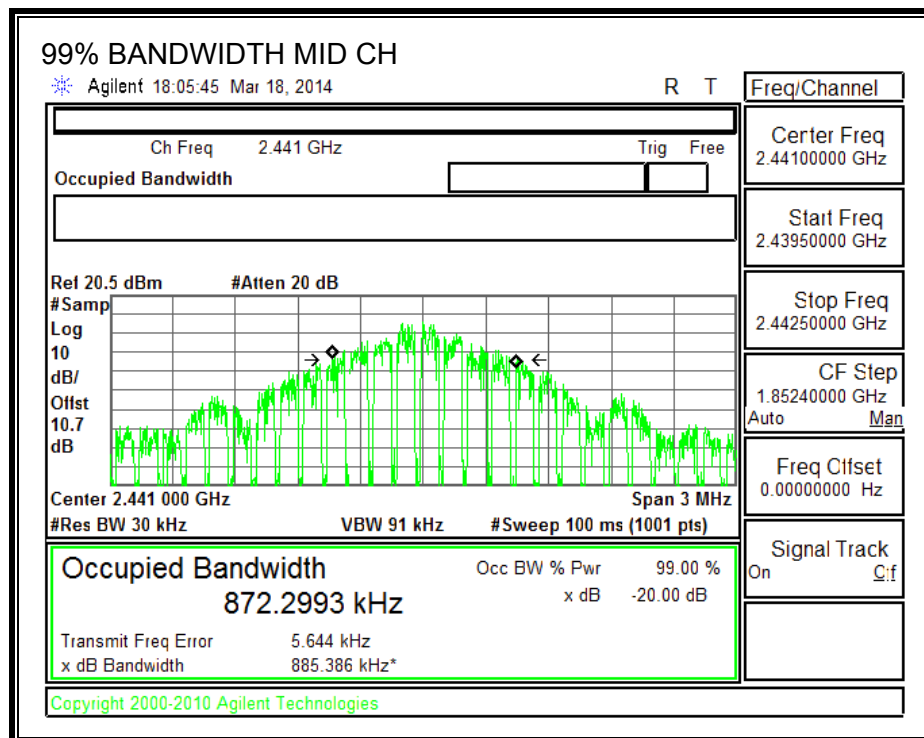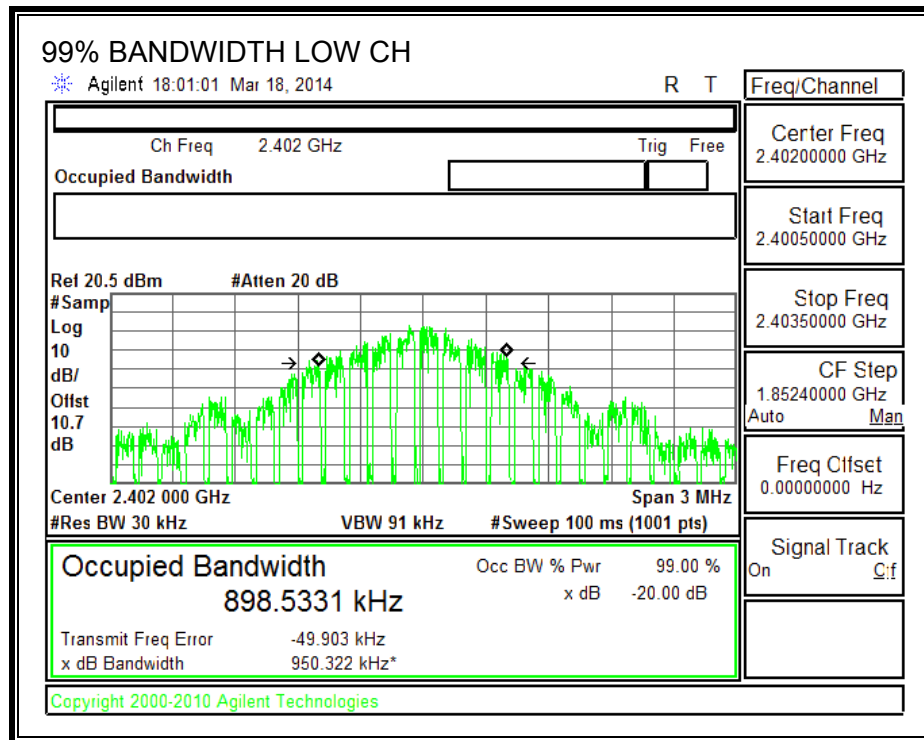


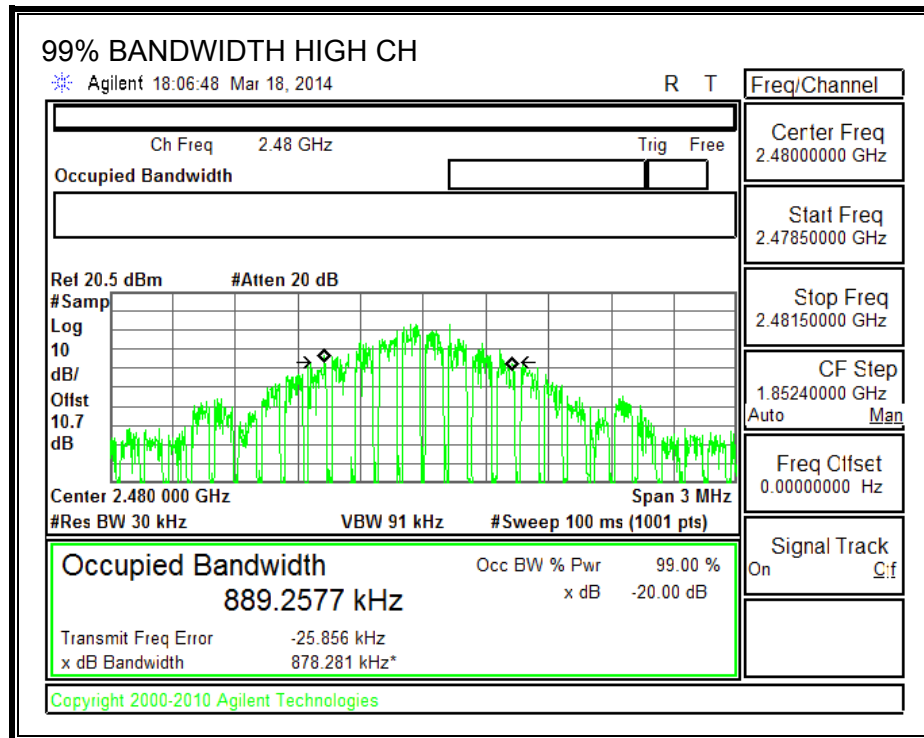



8PSK 20 dB BANDWIDTH

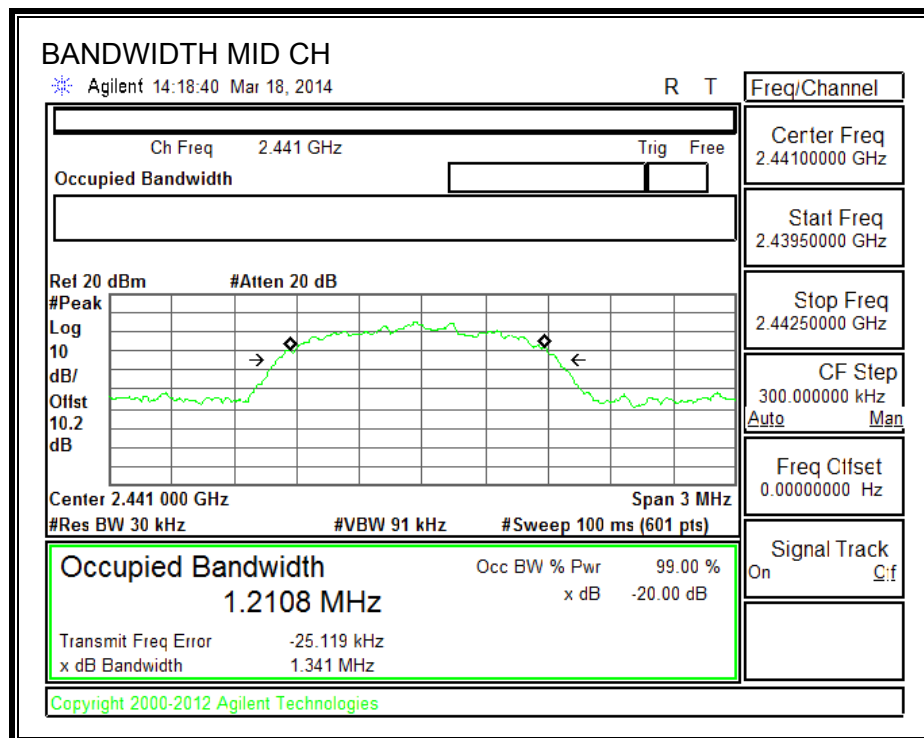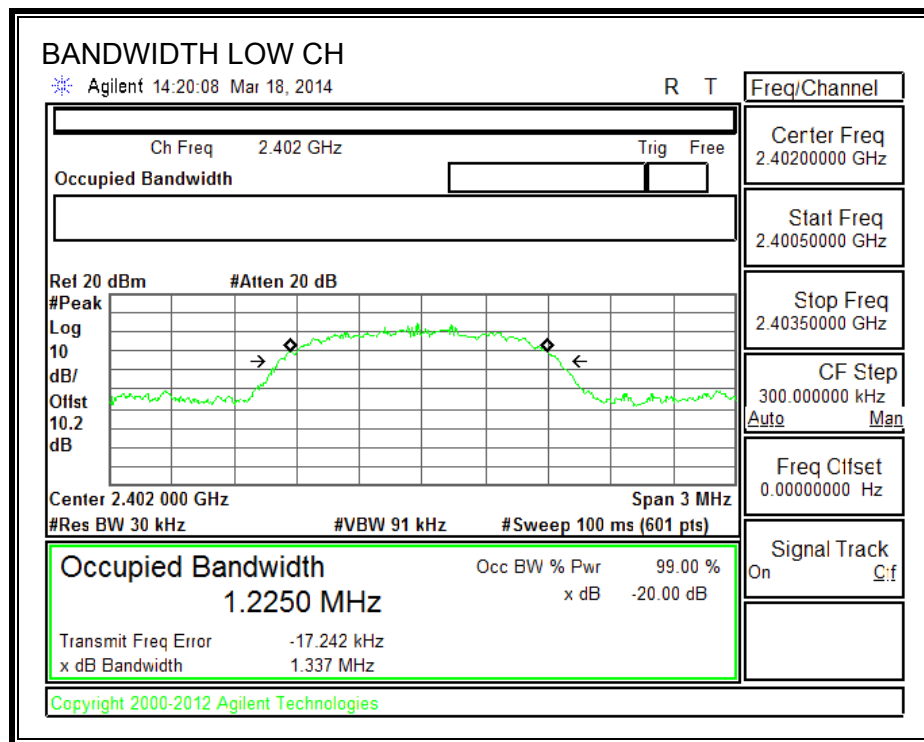

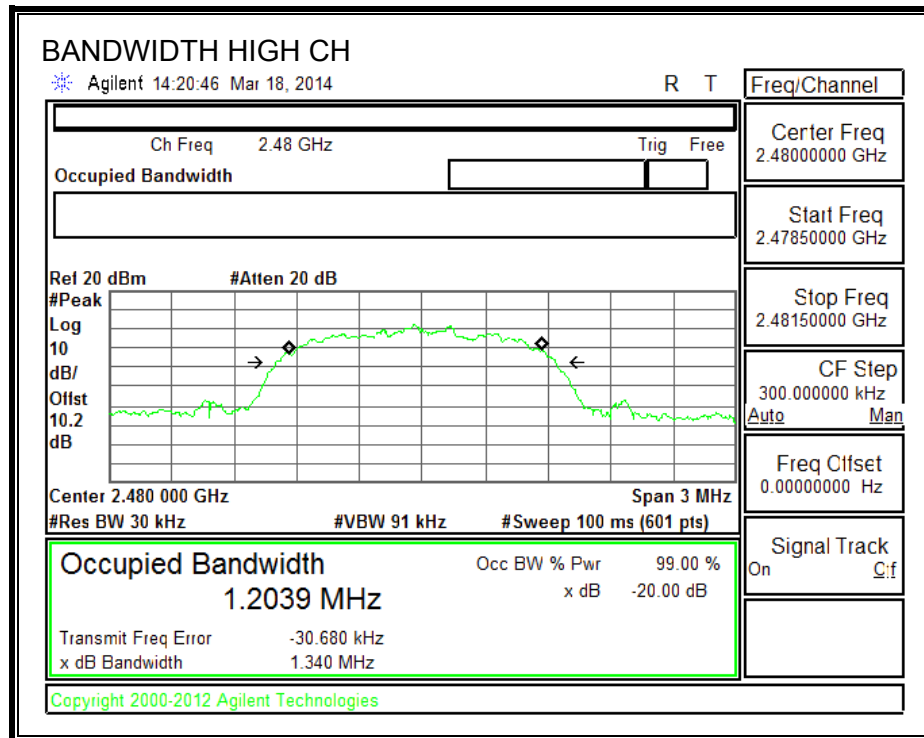

8PSK 99% BANDWIDTH

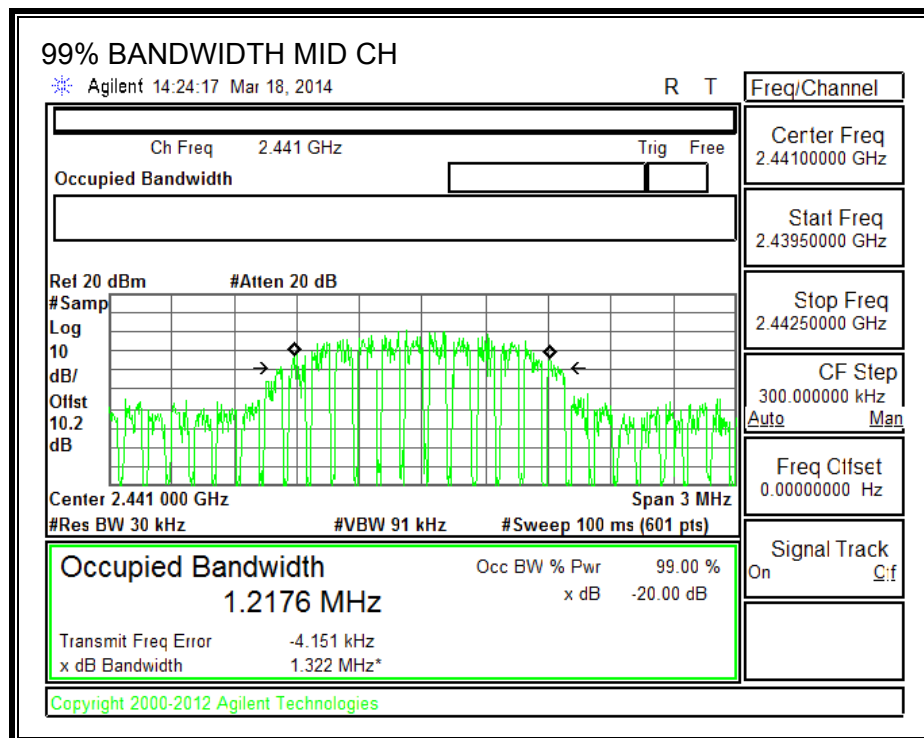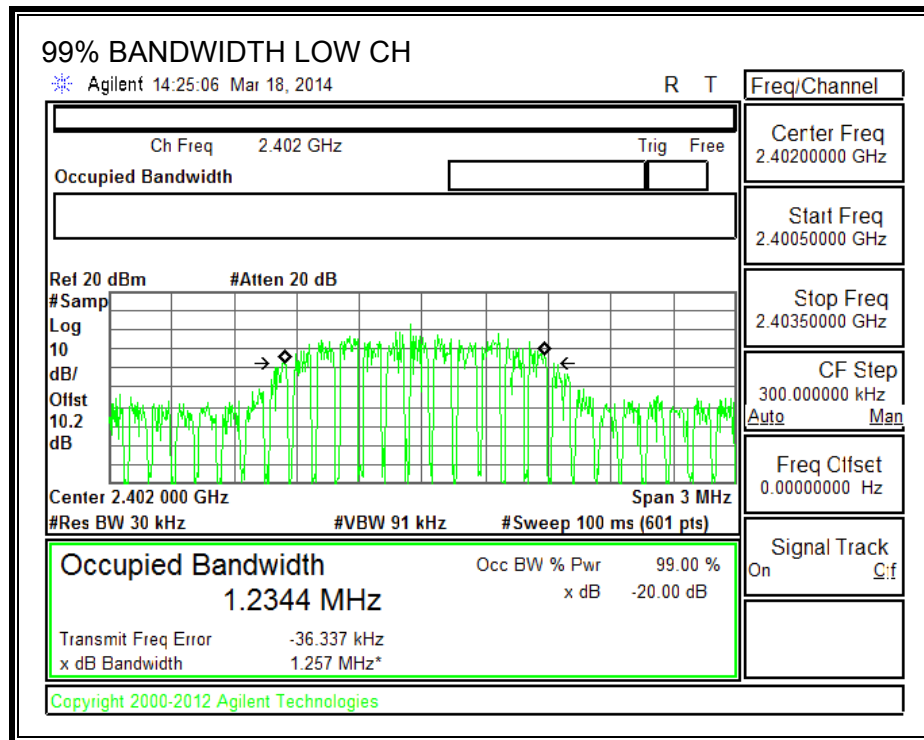

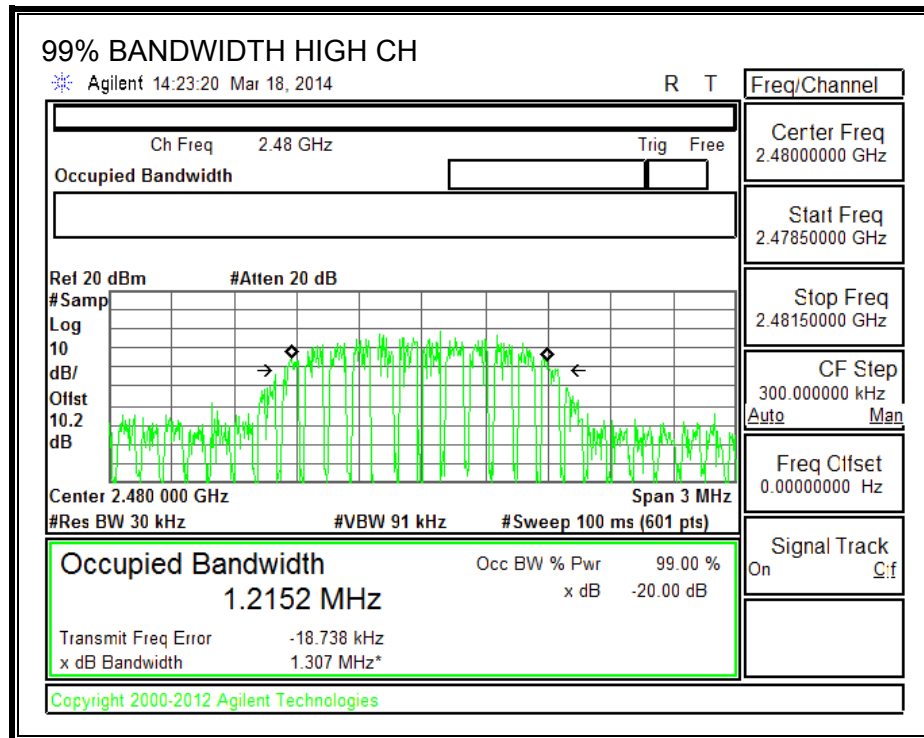

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

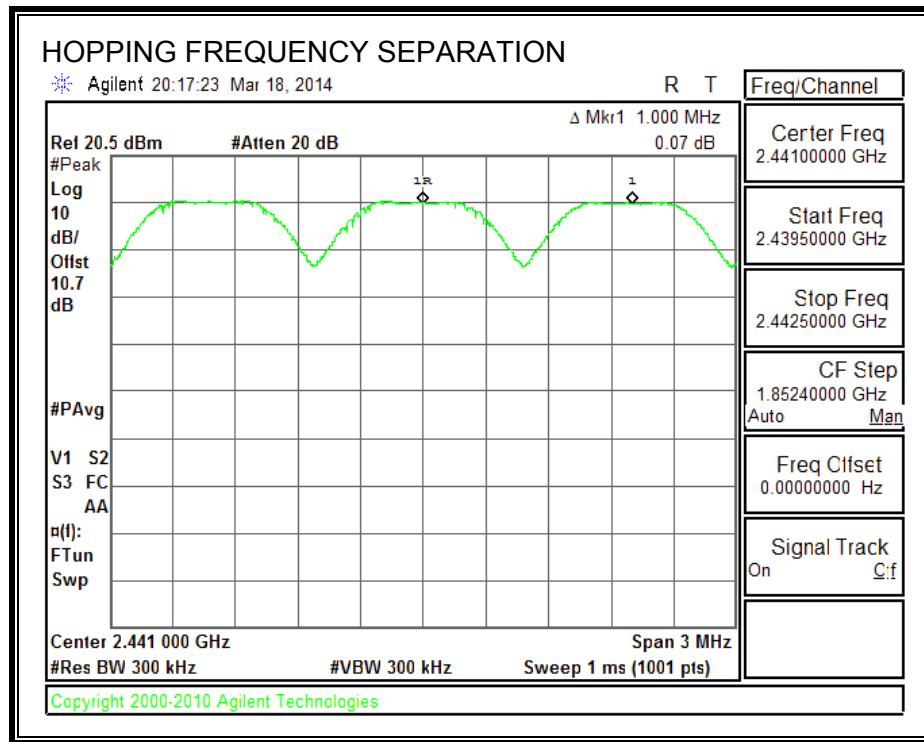

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



TEST PROCEDURE



DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS

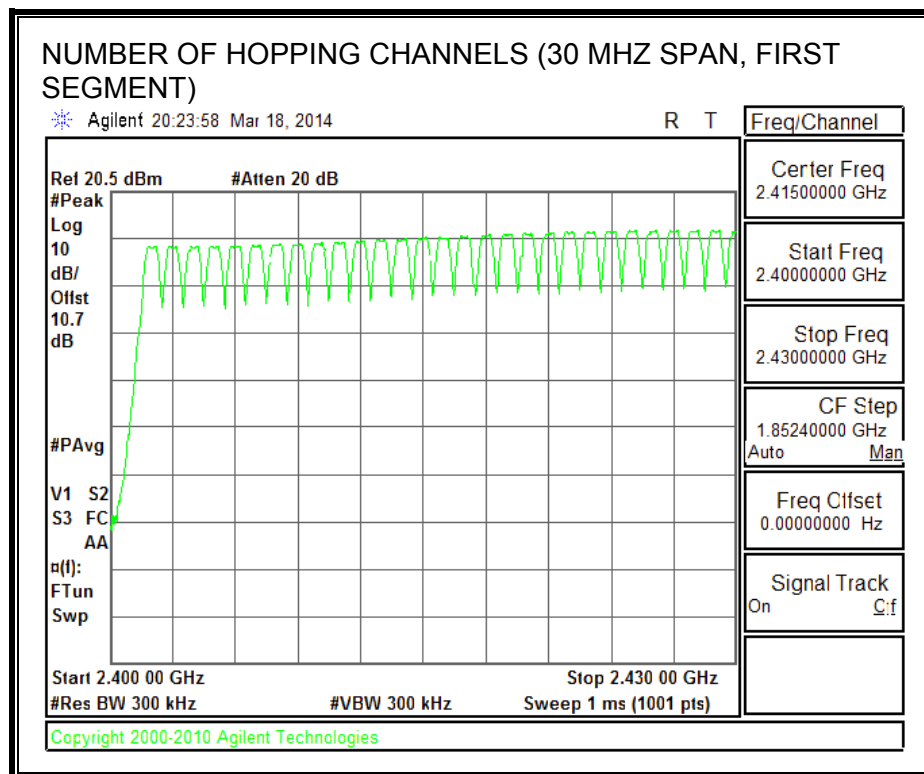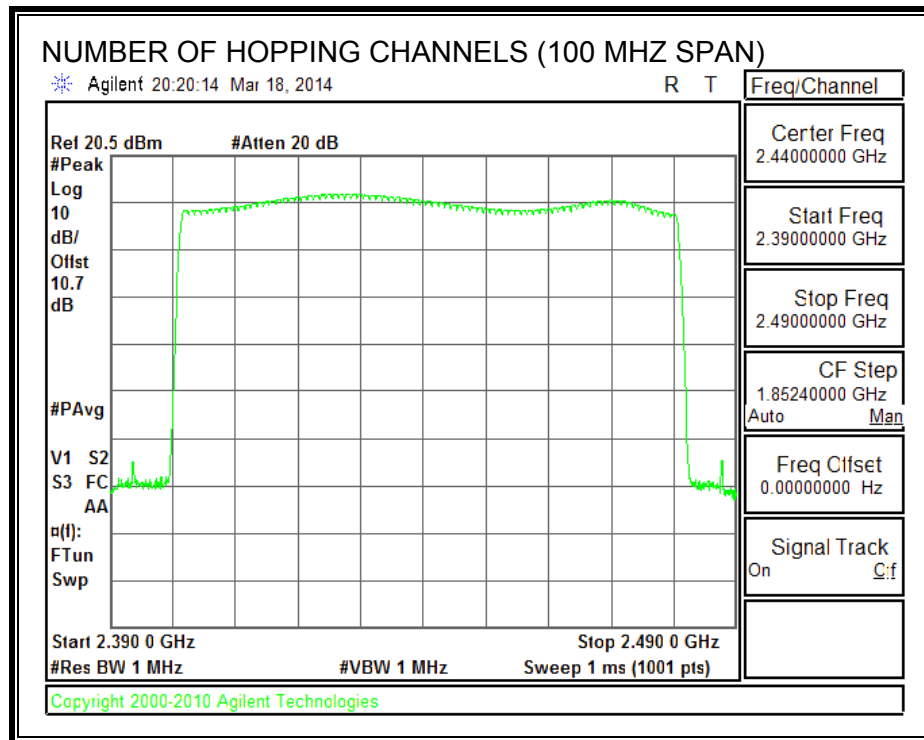

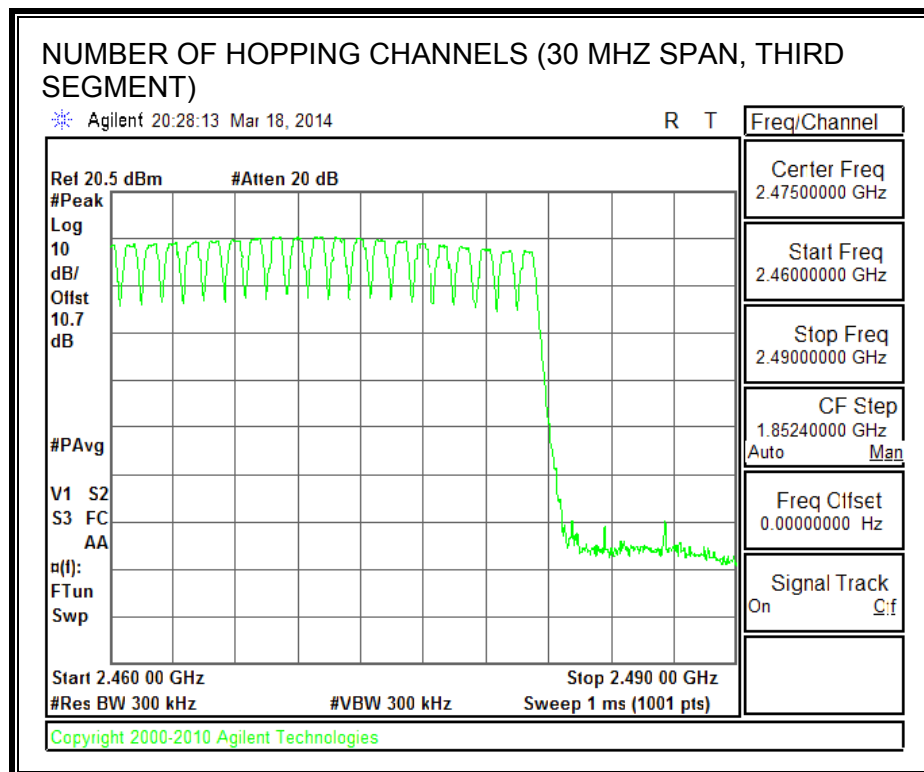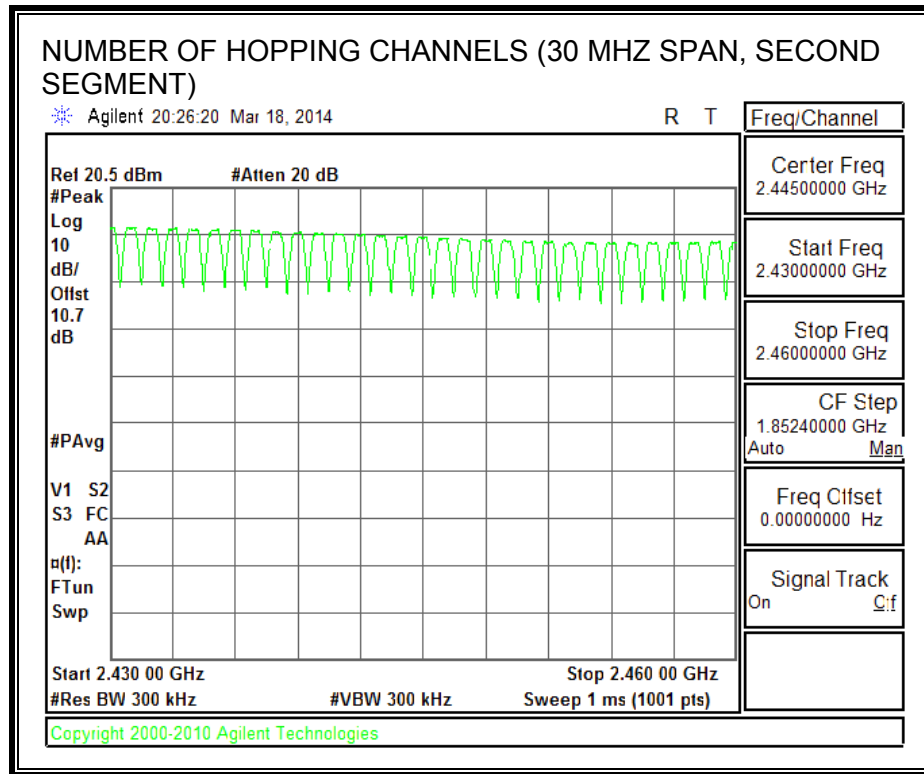

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$.


RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.382	31	0.118	0.4	-0.282
DH3	1.638	16	0.262	0.4	-0.138
DH5	2.885	11	0.317	0.4	-0.083
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.382	8	0.031	0.4	-0.369
DH3	1.638	4	0.066	0.4	-0.334
DH5	2.885	3	0.087	0.4	-0.313


PULSE WIDTH - DH1

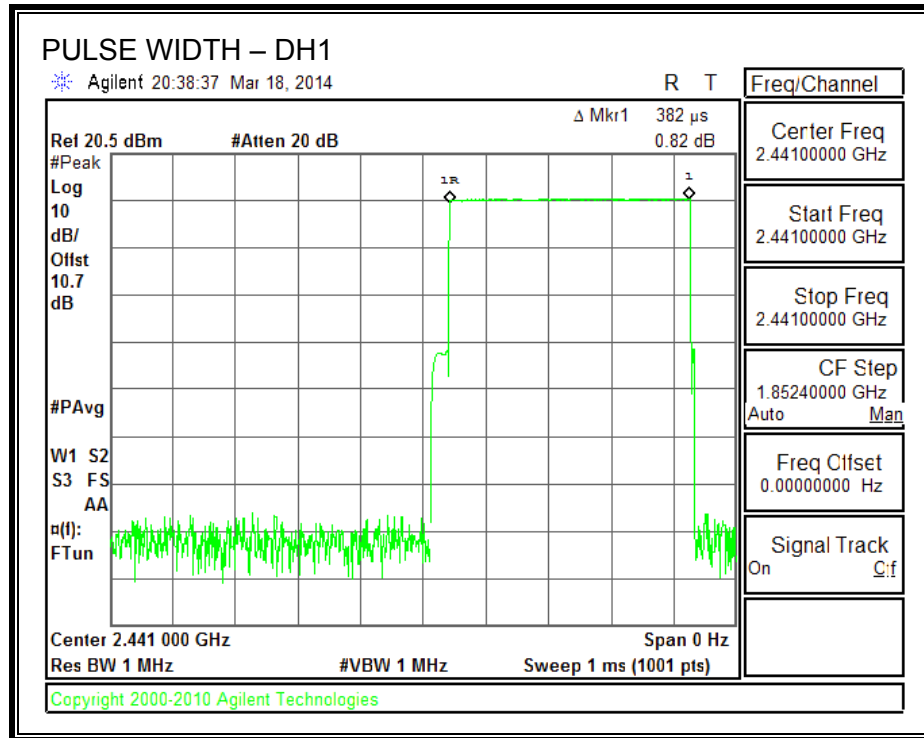


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

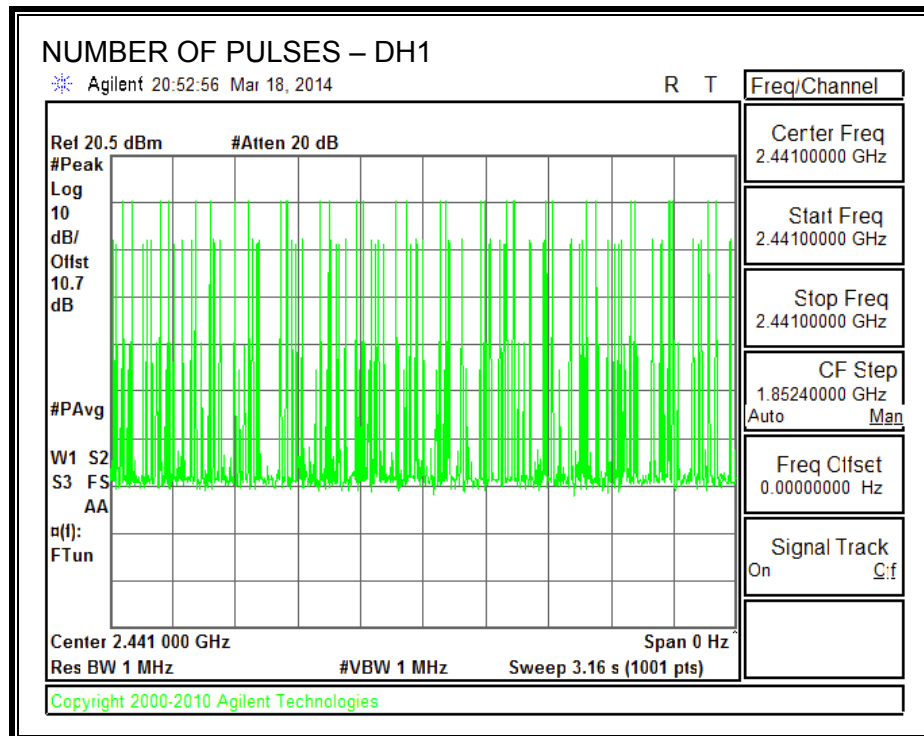


PULSE WIDTH – DH3

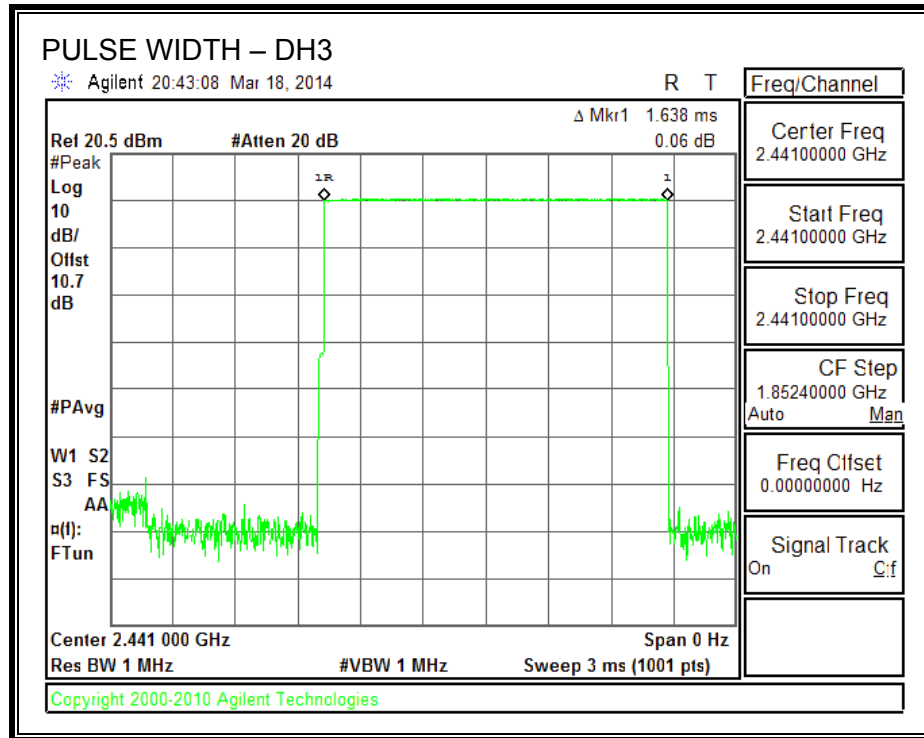


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

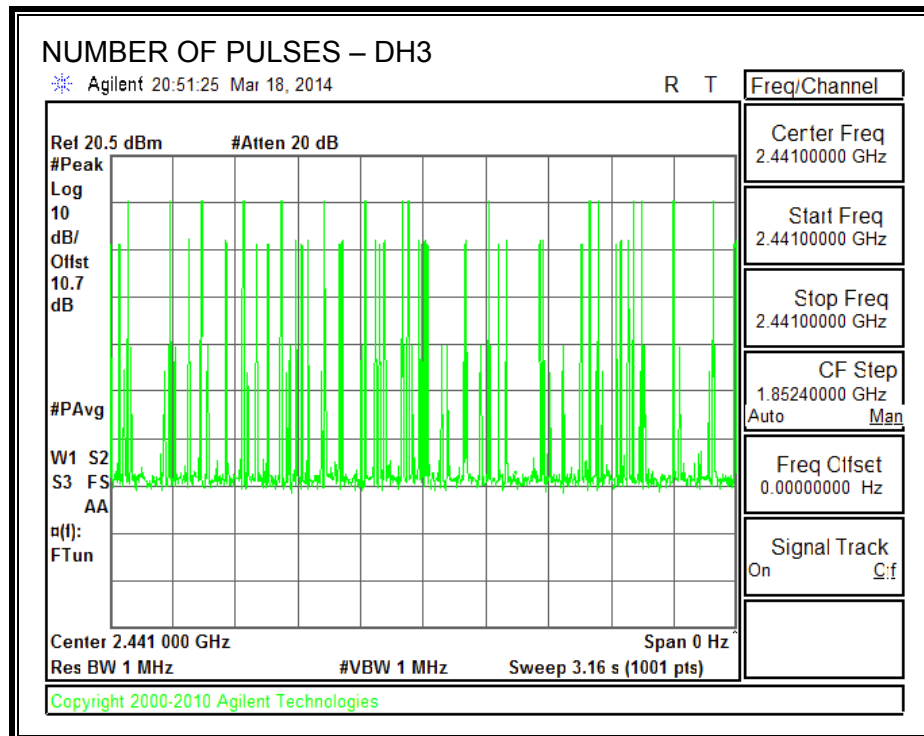

PULSE WIDTH – DH5

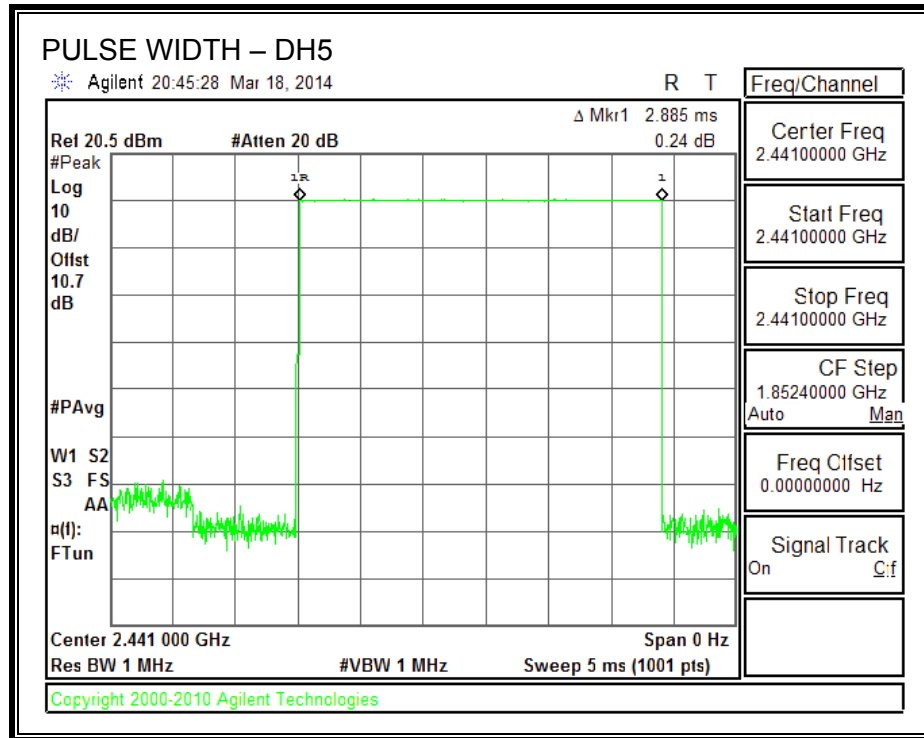

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

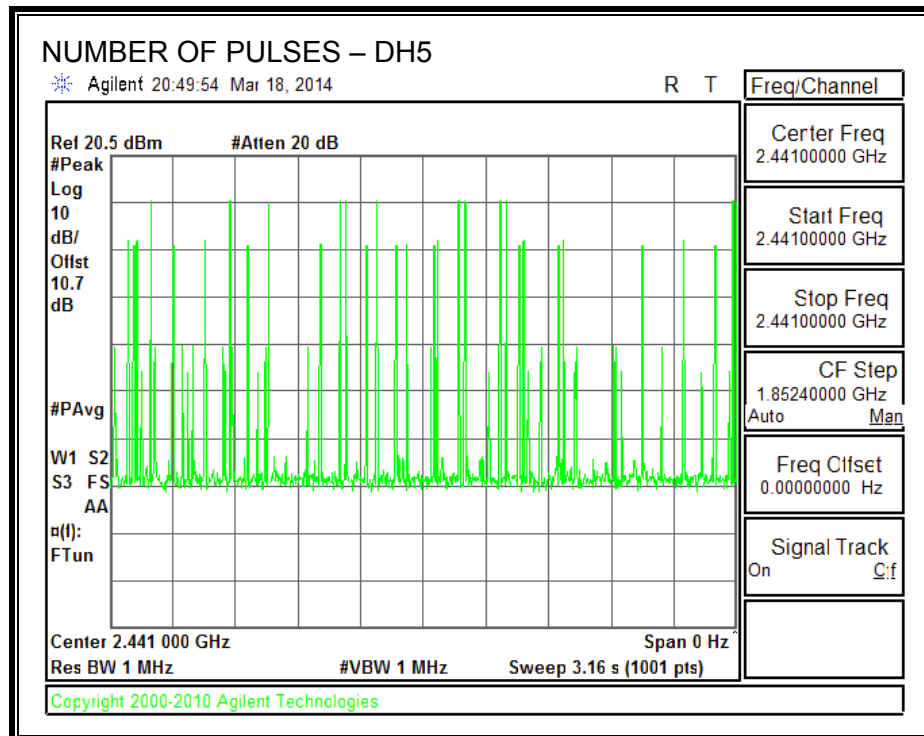

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS



8.5.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	8.93	21	-12.07
Middle	2441	10.92	21	-10.08
High	2480	8.19	21	-12.81
Worst		10.92		-10.08

8.5.2. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	9.82	21	-11.18
Middle	2441	10.64	21	-10.36
High	2480	8.12	21	-12.88
Worst		10.64		-10.36


GFSK OUTPUT POWER

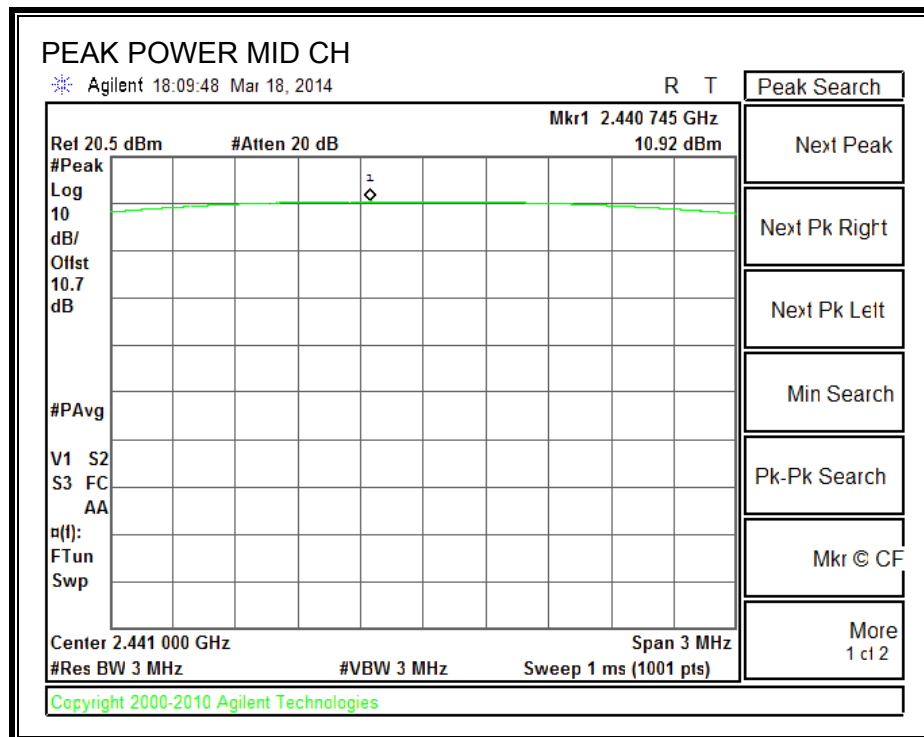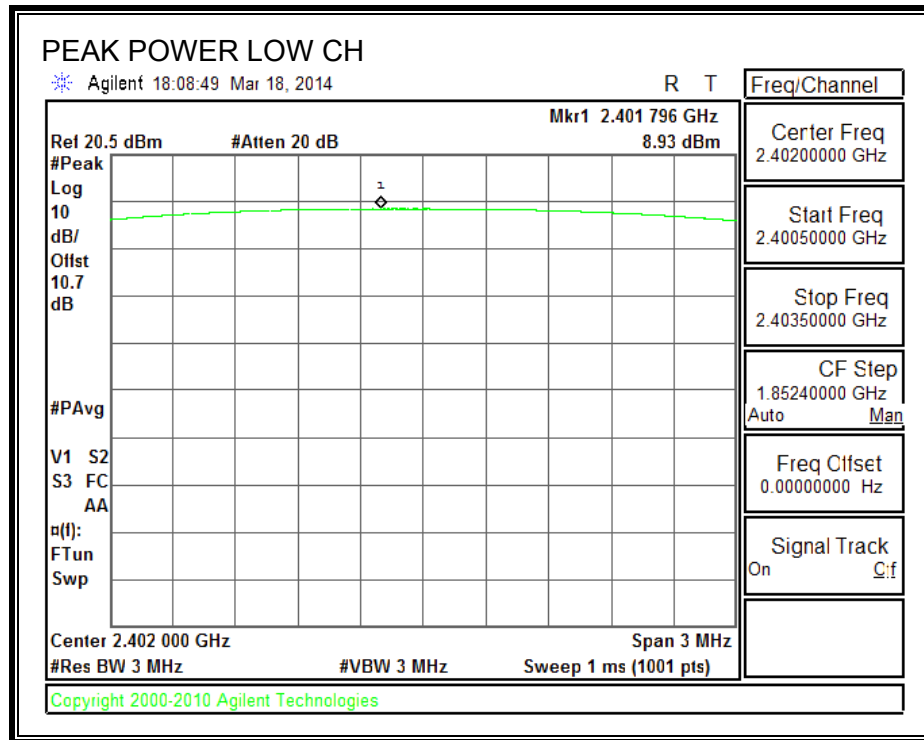

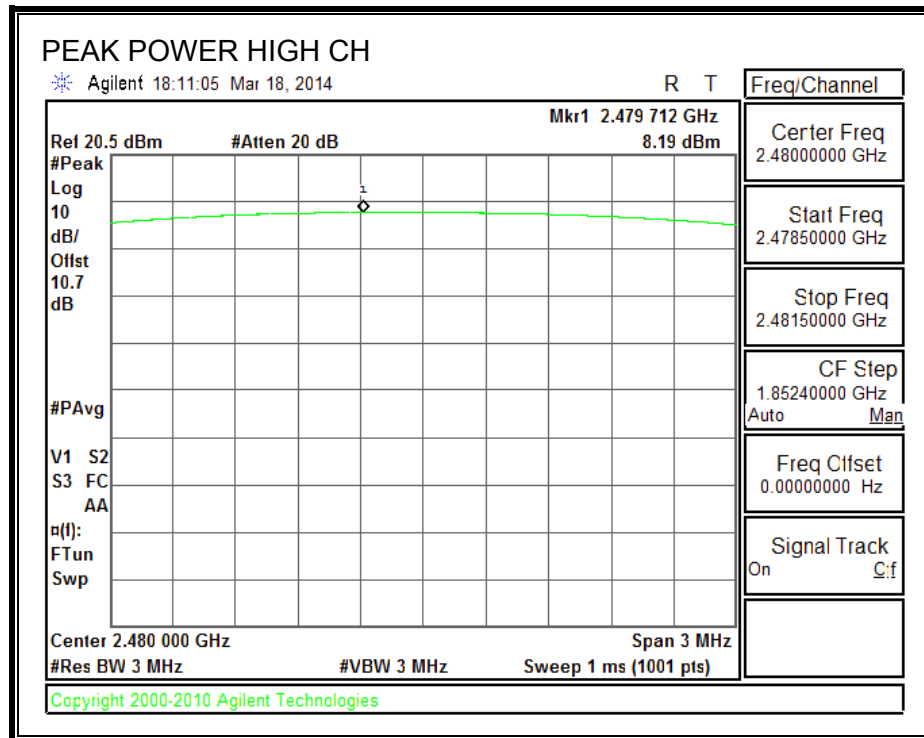

8PSK OUTPUT POWER

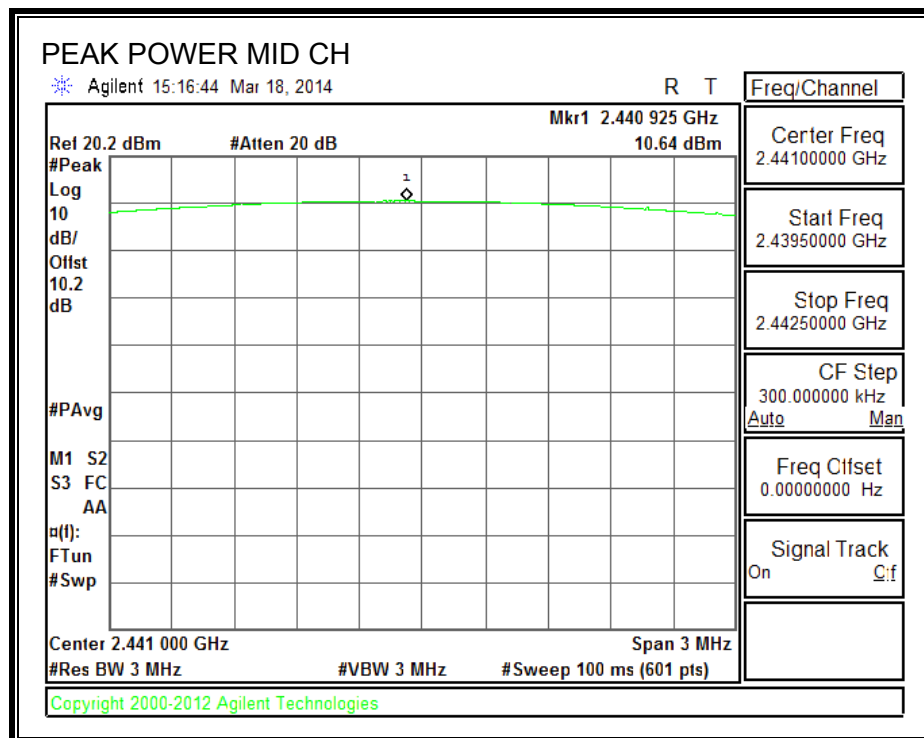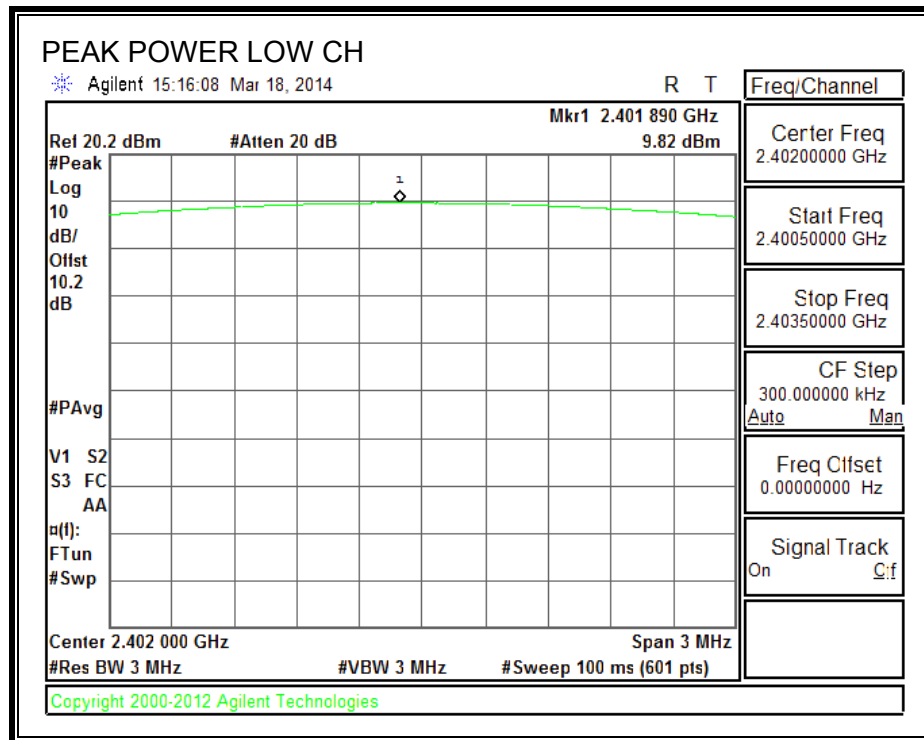

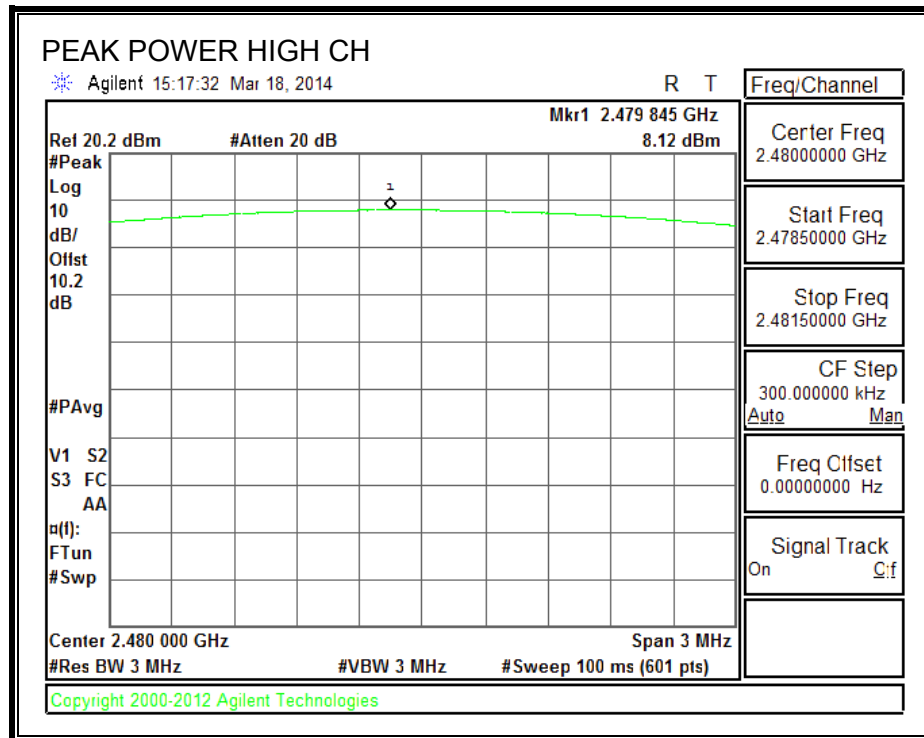

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.90
Middle	2441	10.50
High	2480	8.00
Worst		10.50

8.6.2. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.00
Middle	2441	8.20
High	2480	5.00
Worst		8.20

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

8.7.1. BASIC DATA RATE GFSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

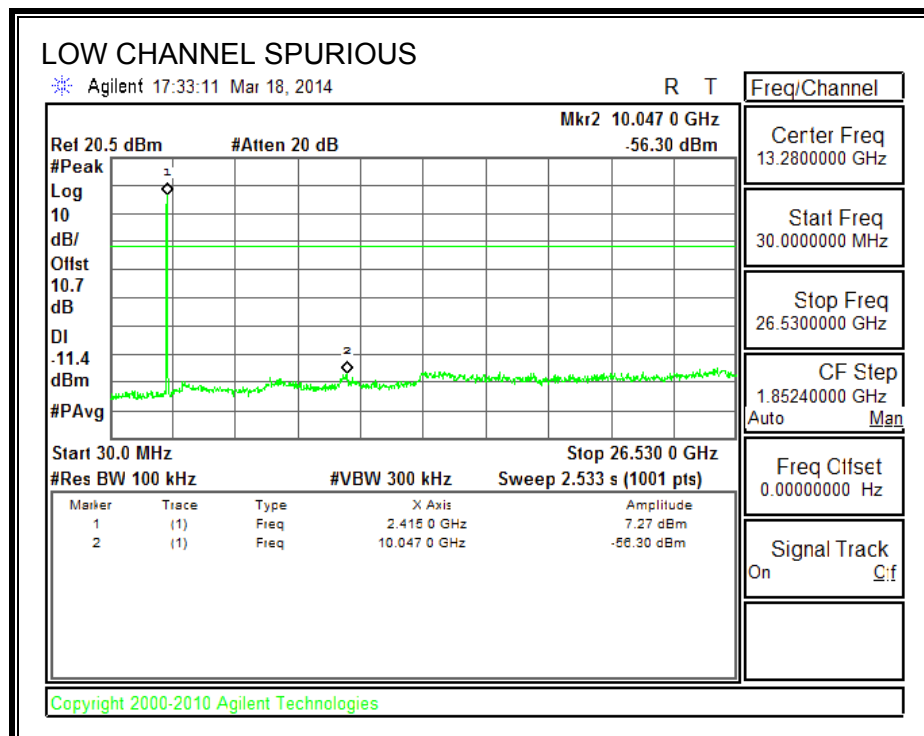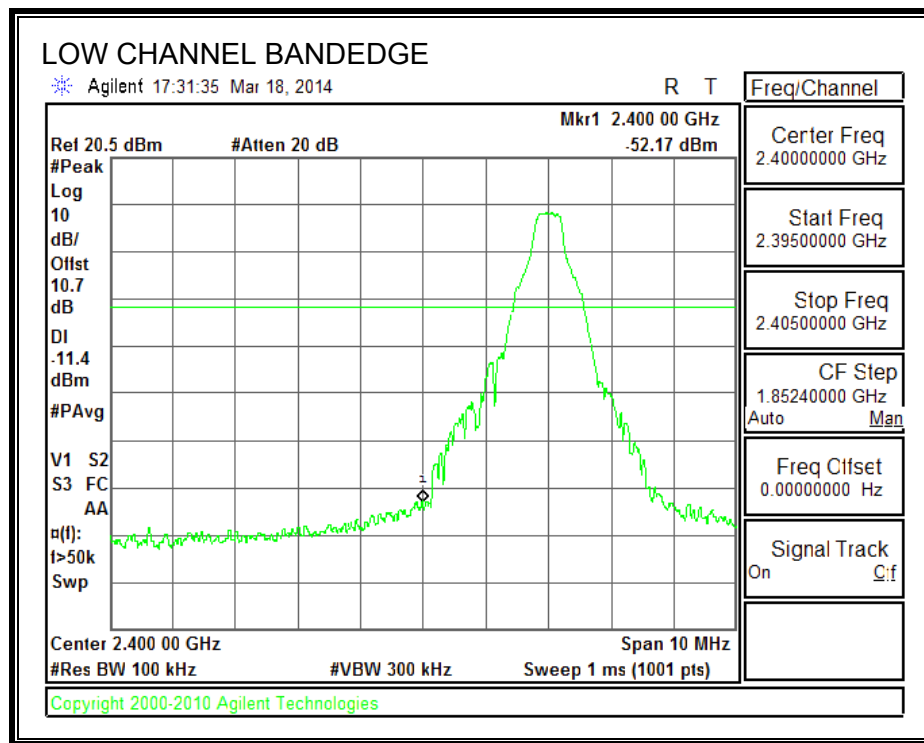



SPURIOUS EMISSIONS, MID CHANNEL

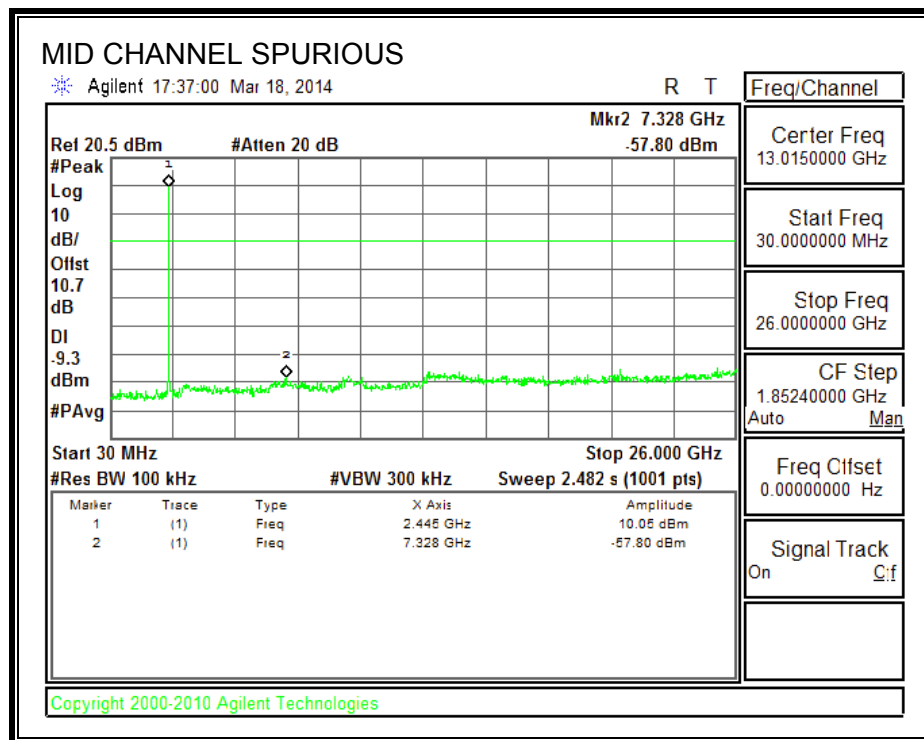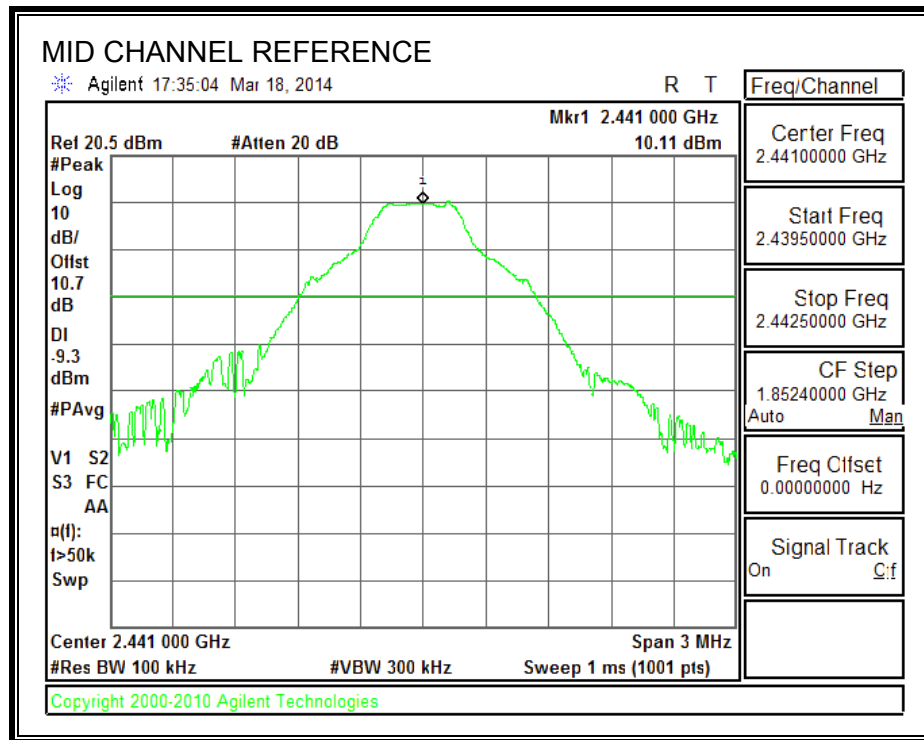

SPURIOUS EMISSIONS, HIGH CHANNEL

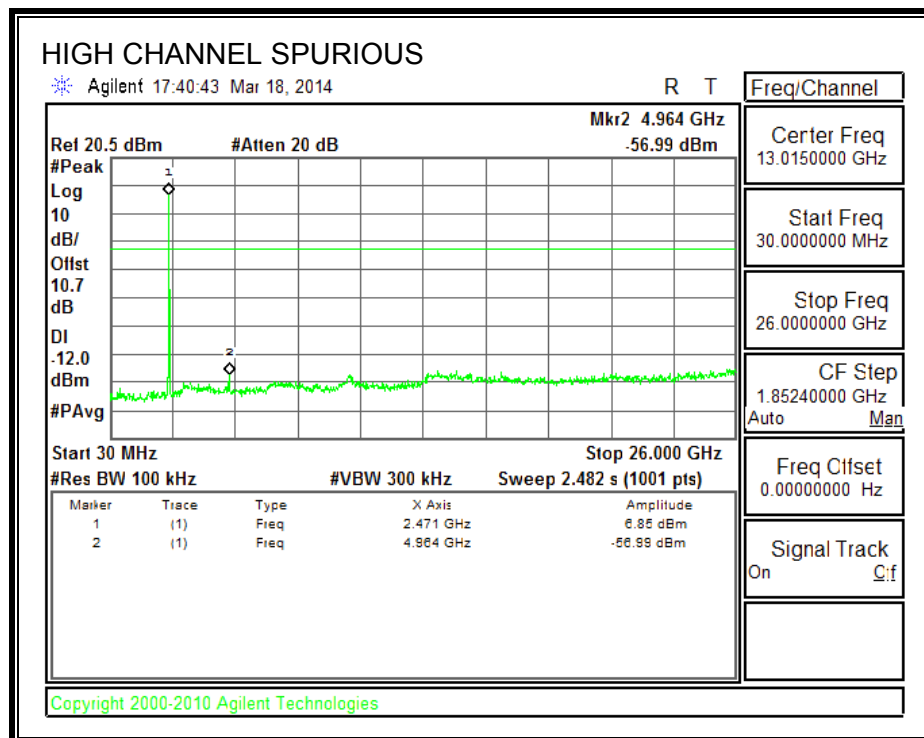
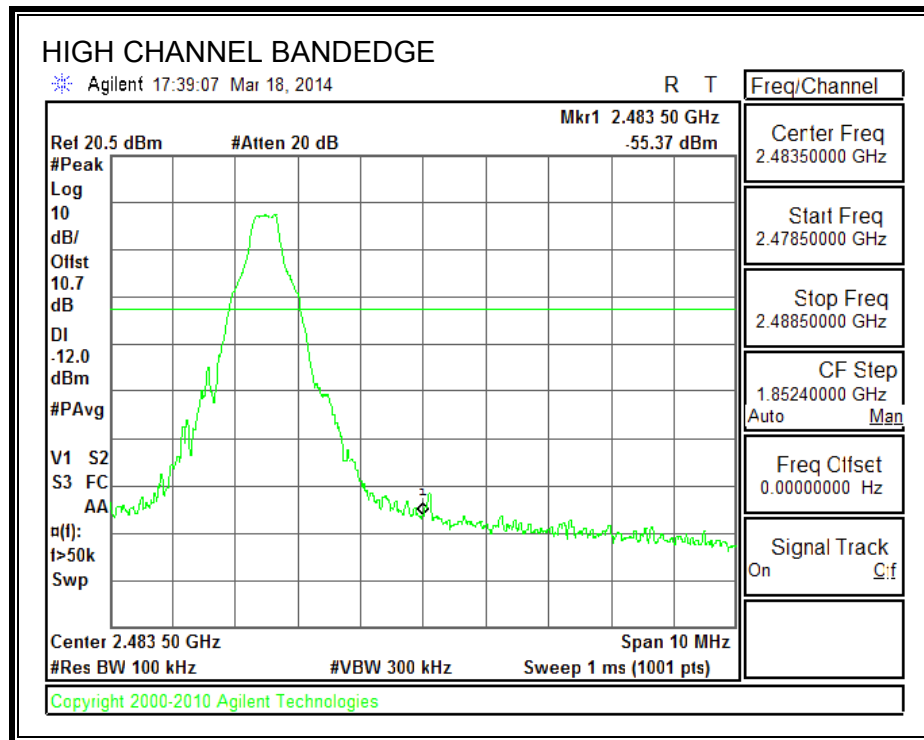


SPURIOUS BANDEDGE EMISSIONS WITH GFSK HOPPING ON

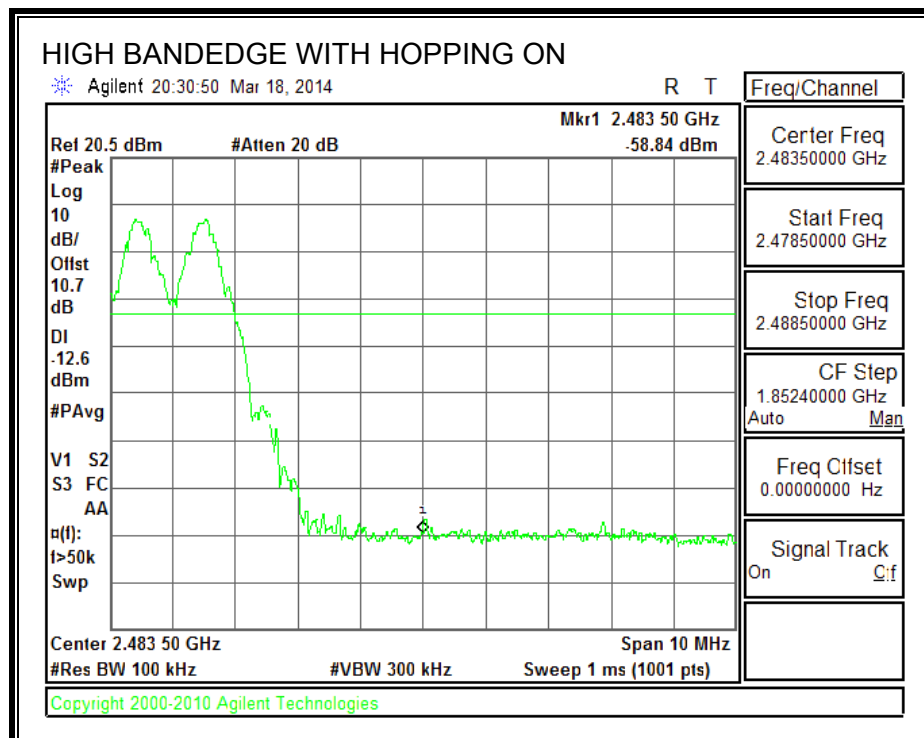
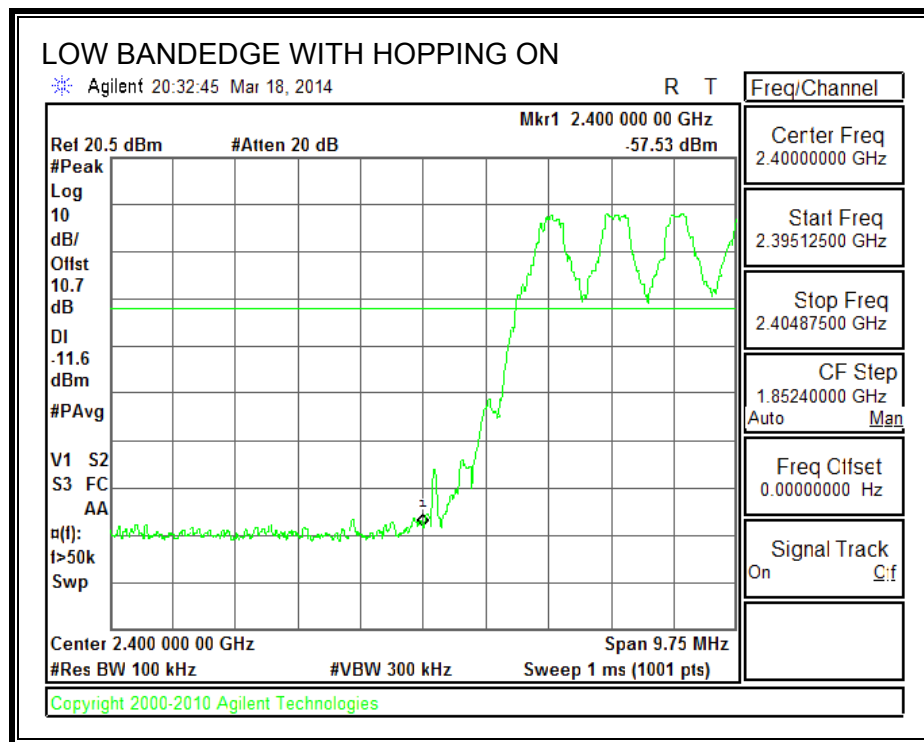


8.7.1. ENHANCED DATA RATE 8PSK MODULATION



SPURIOUS EMISSIONS, LOW CHANNEL

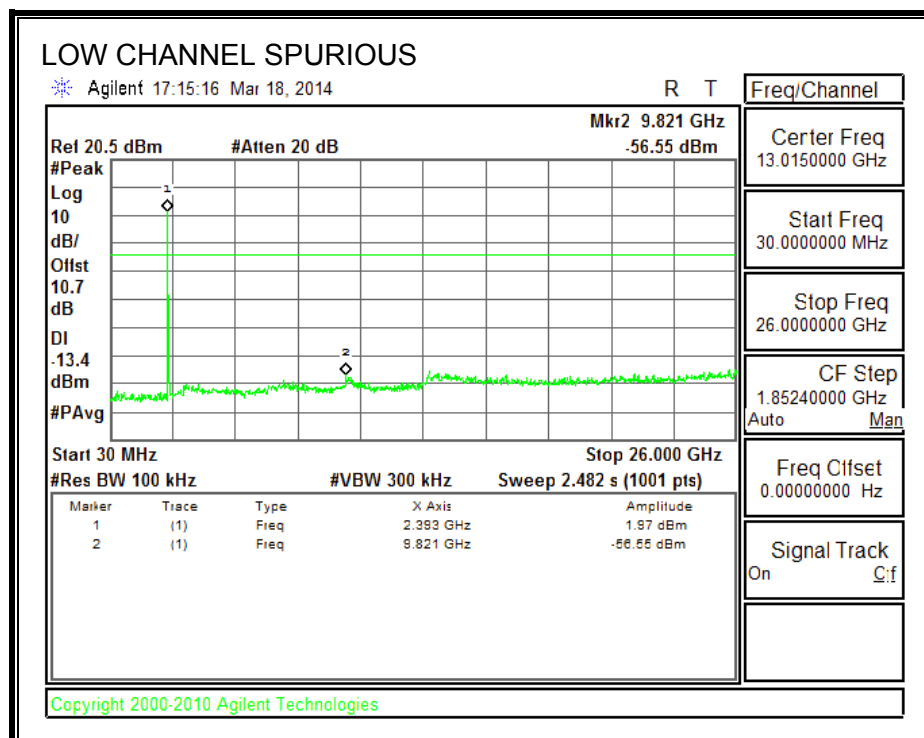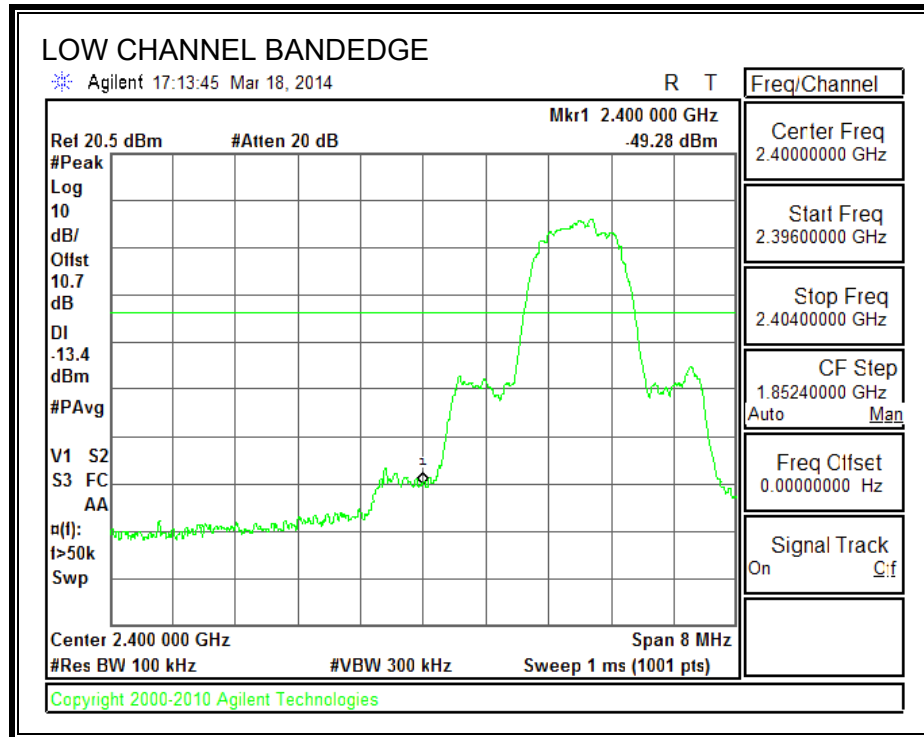



SPURIOUS EMISSIONS, MID CHANNEL

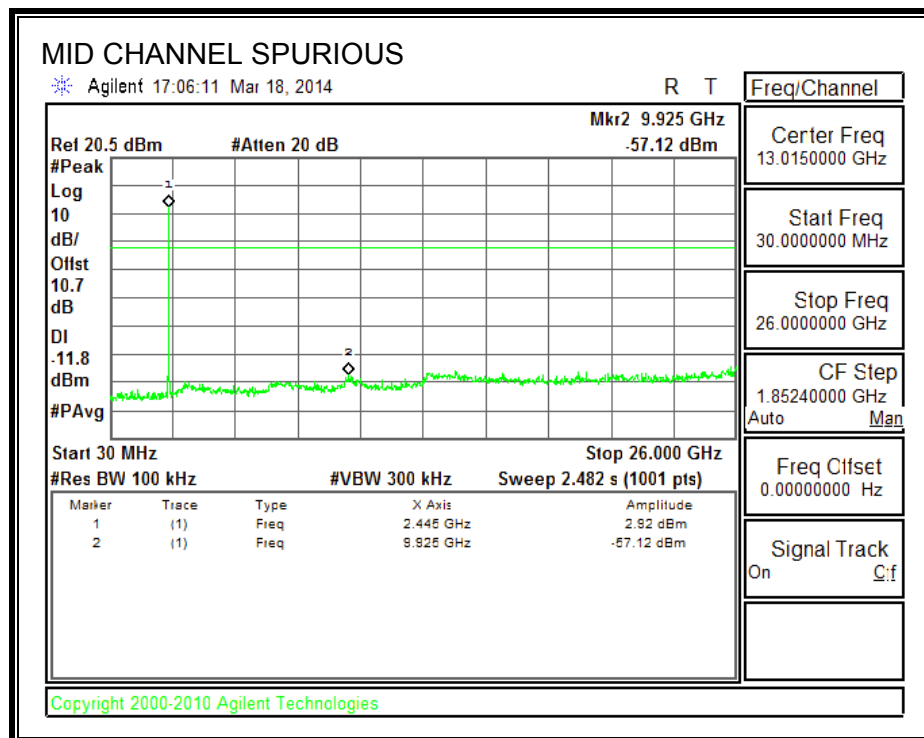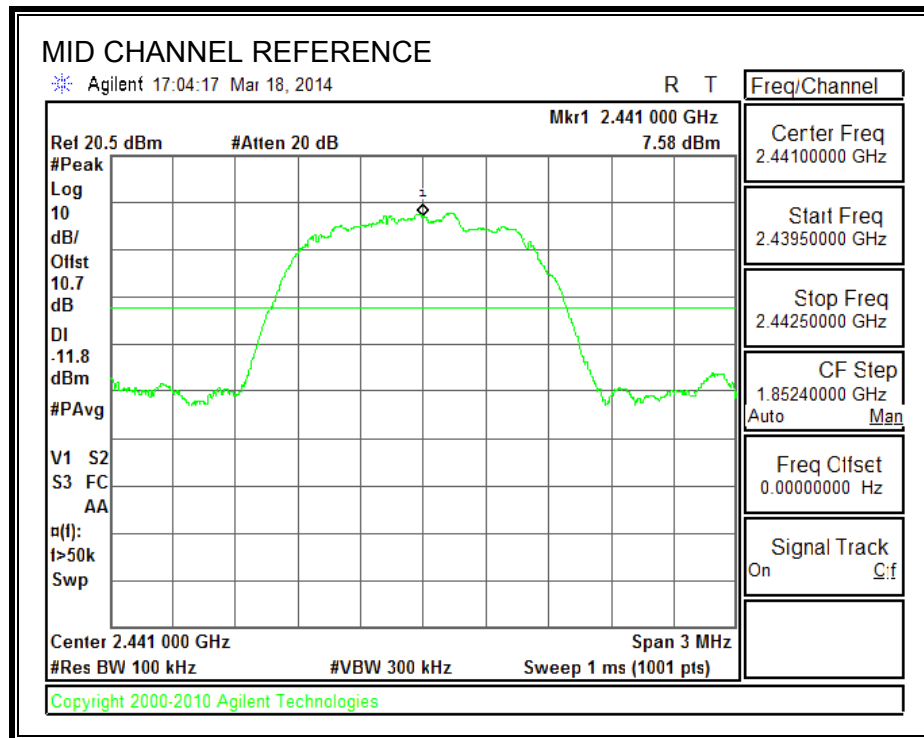

SPURIOUS EMISSIONS, HIGH CHANNEL

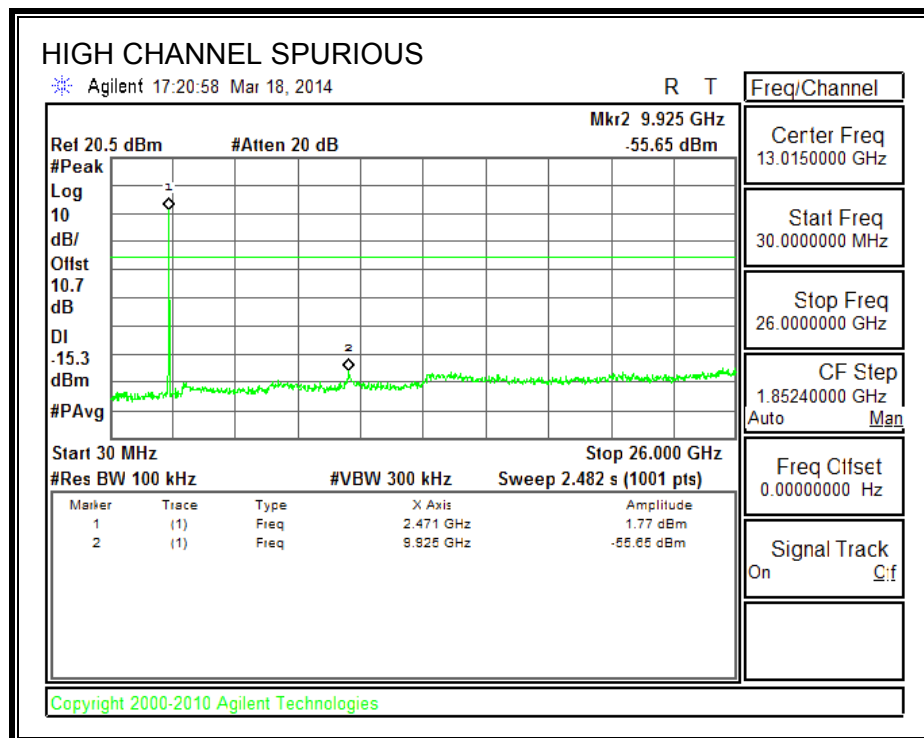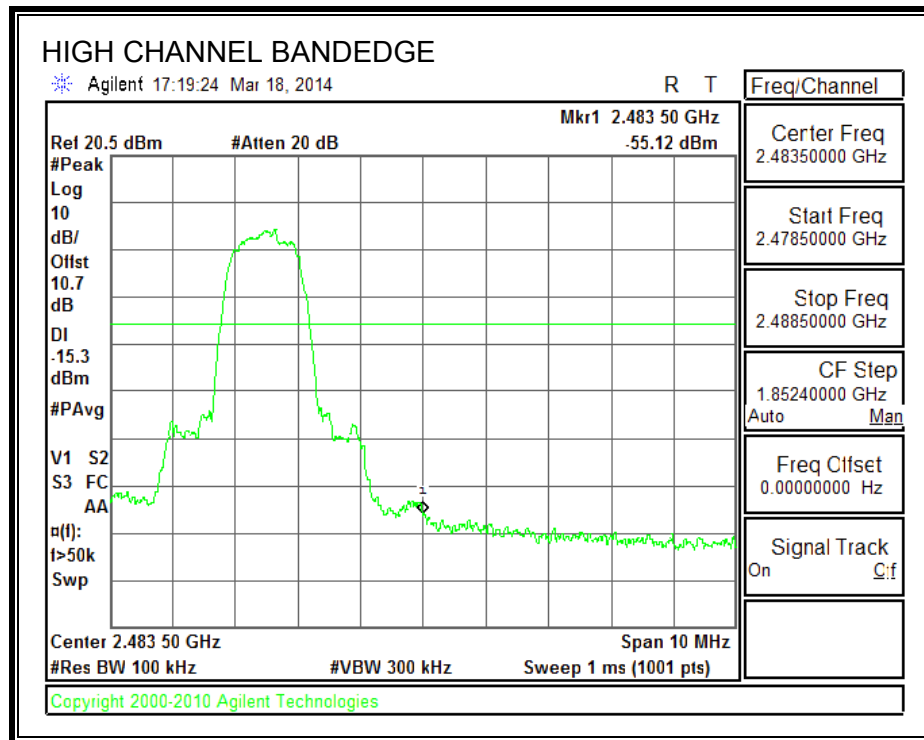

SPURIOUS BANDEDGE EMISSIONS WITH 8PSK HOPPING ON

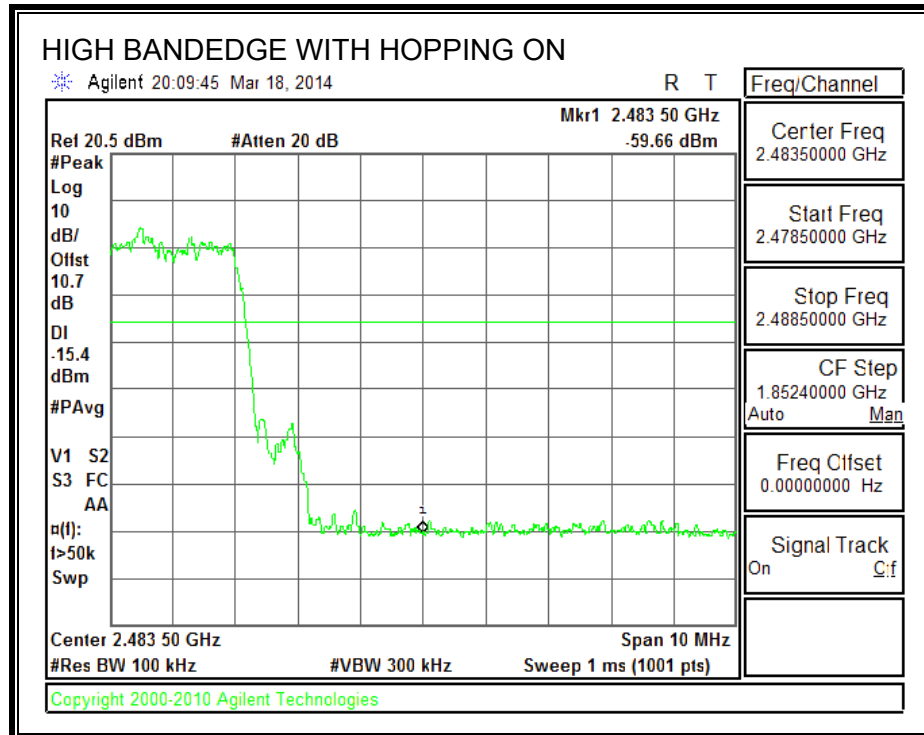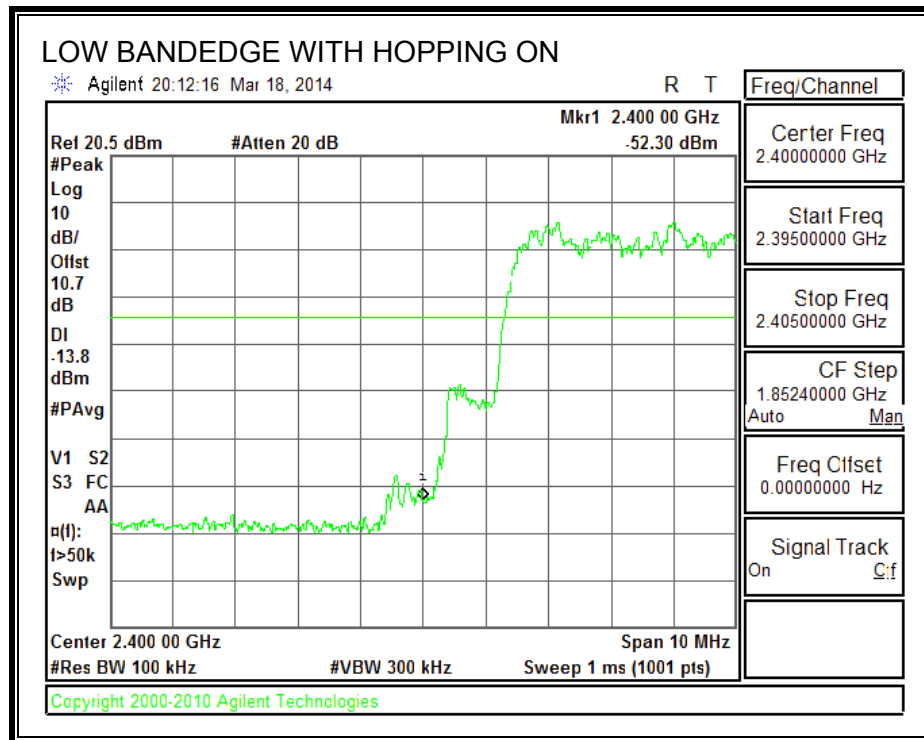

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement.


The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

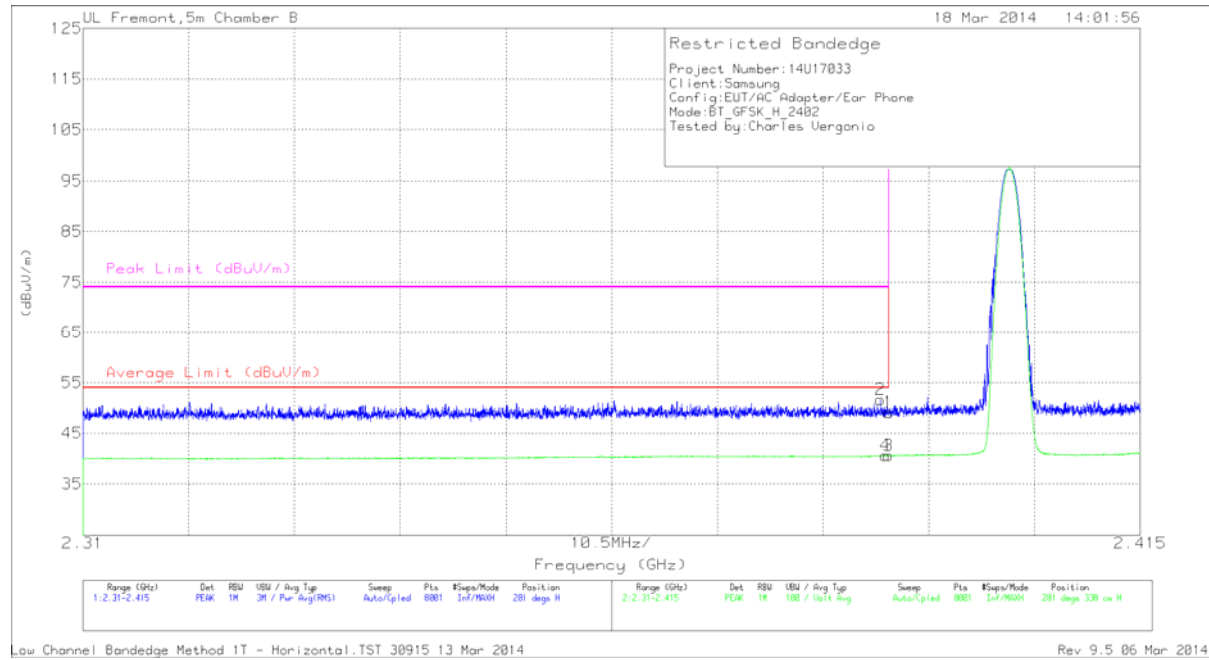


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.91	PK	32.1	-22.9	0	49.11	-	-	74	-24.89	281	338	H
2	* 2.389	42.45	PK	32.1	-22.9	0	51.65	-	-	74	-22.35	281	338	H
3	* 2.39	30.27	VB1T	32.1	-22.9	0	40.57	54	-13.43	-	-	281	338	H
4	* 2.39	30.33	VB1T	32.1	-22.9	0	40.63	54	-13.37	-	-	281	338	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

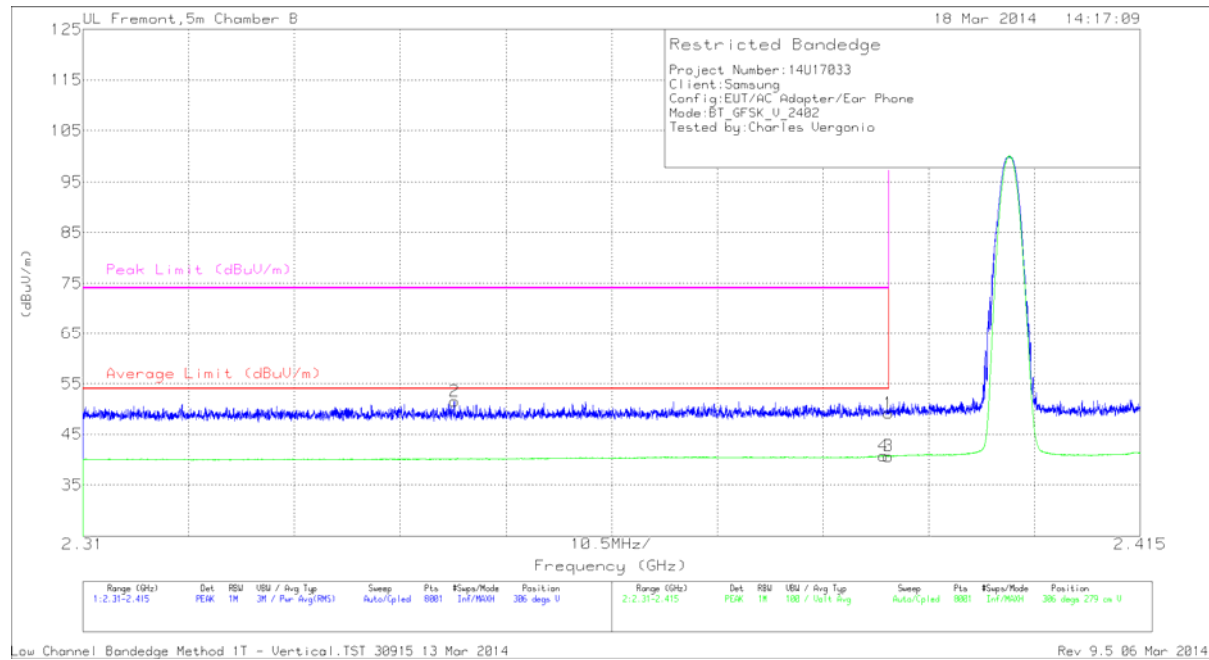


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/CbI/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.97	PK	32.1	-22.9	0	49.17	-	-	74	-24.83	306	279	V
2	* 2.347	42.61	PK	31.9	-23	0	51.51	-	-	74	-22.49	306	279	V
3	* 2.39	30.37	VB1T	32.1	-22.9	0	40.67	54	-13.33	-	-	306	279	V
4	* 2.39	30.48	VB1T	32.1	-22.9	0	40.78	54	-13.22	-	-	306	279	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

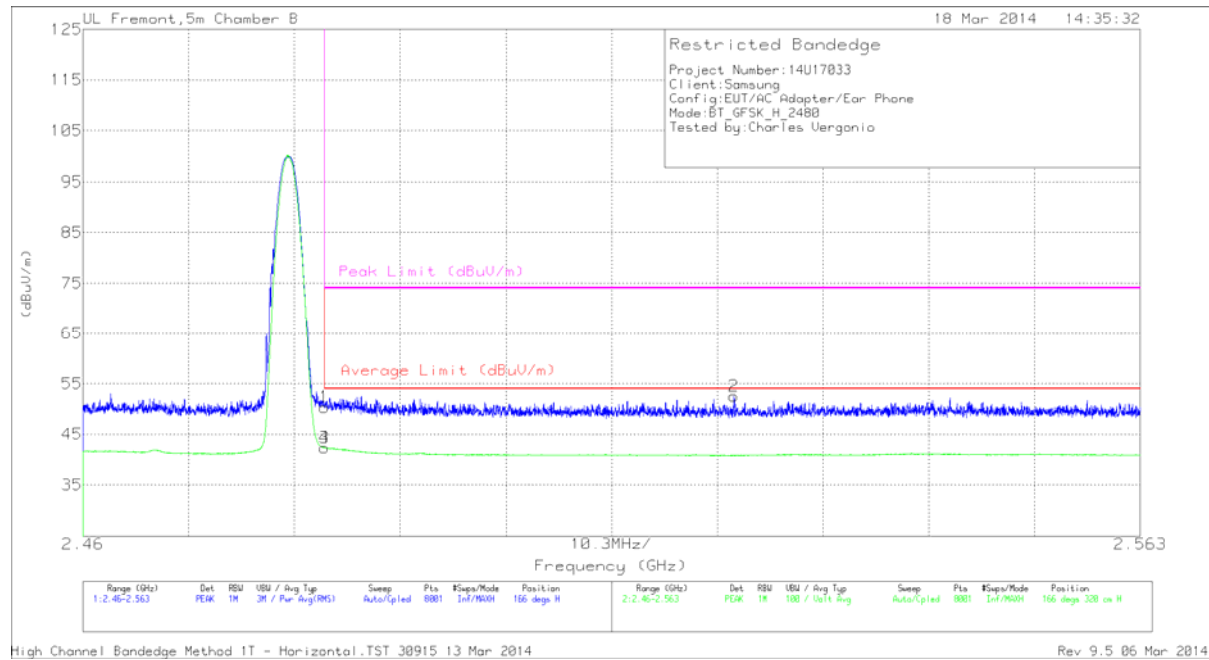


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.55	PK	32.4	-22.6	0	50.35	-	-	74	-23.65	166	320	H
3	* 2.484	31.46	VB1T	32.4	-22.6	0	42.36	54	-11.64	-	-	166	320	H
4	* 2.484	31.49	VB1T	32.4	-22.6	0	42.39	54	-11.61	-	-	166	320	H
2	2.523	42.8	PK	32.5	-22.8	0	52.5	-	-	74	-21.5	166	320	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

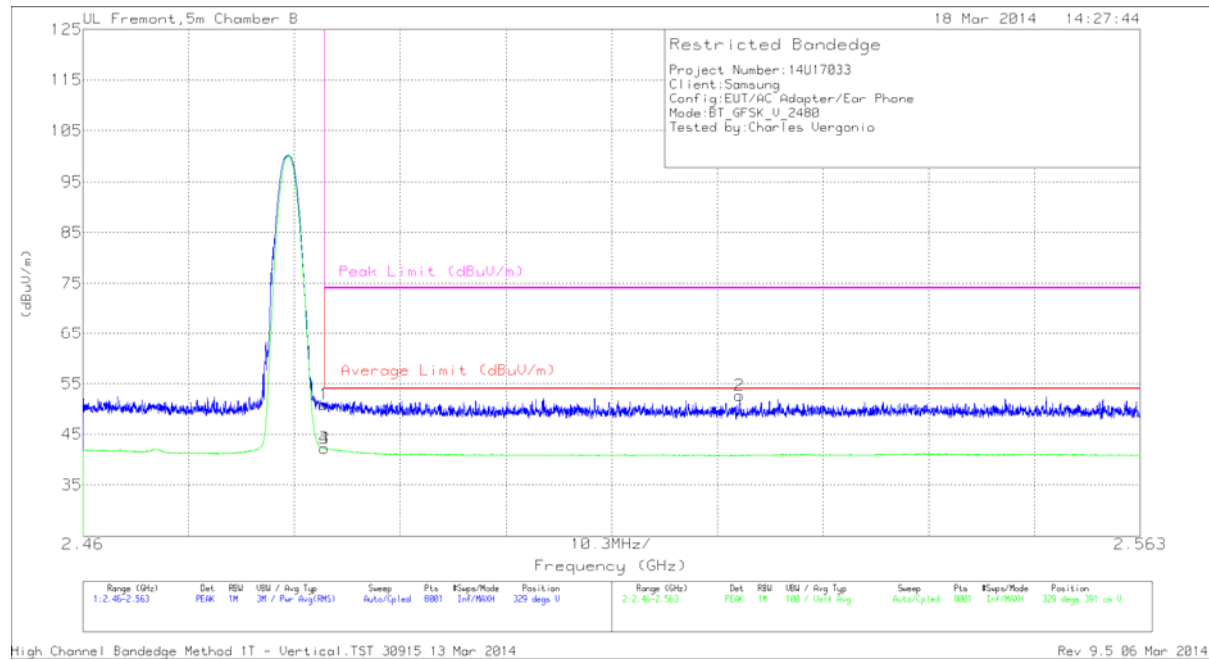


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	41.07	PK	32.4	-22.6	0	50.87	-	-	74	-23.13	329	391	V
3	2.484	31.32	VB1T	32.4	-22.6	0	42.22	54	-11.78	-	-	329	391	V
4	2.484	31.32	VB1T	32.4	-22.6	0	42.22	54	-11.78	-	-	329	391	V
2	2.524	42.9	PK	32.5	-22.8	0	52.6	-	-	74	-21.4	329	391	V

PK - Peak detector


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

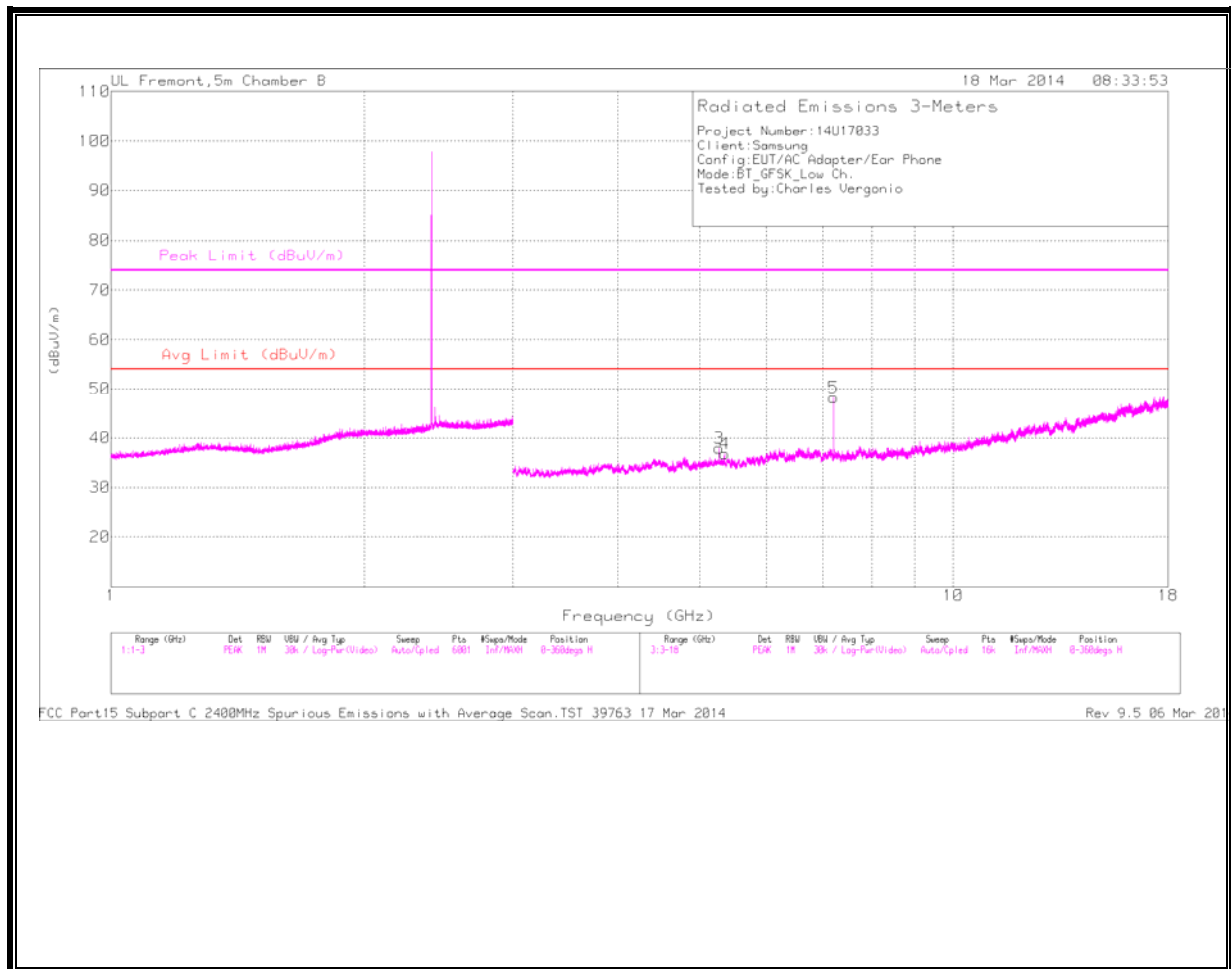

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

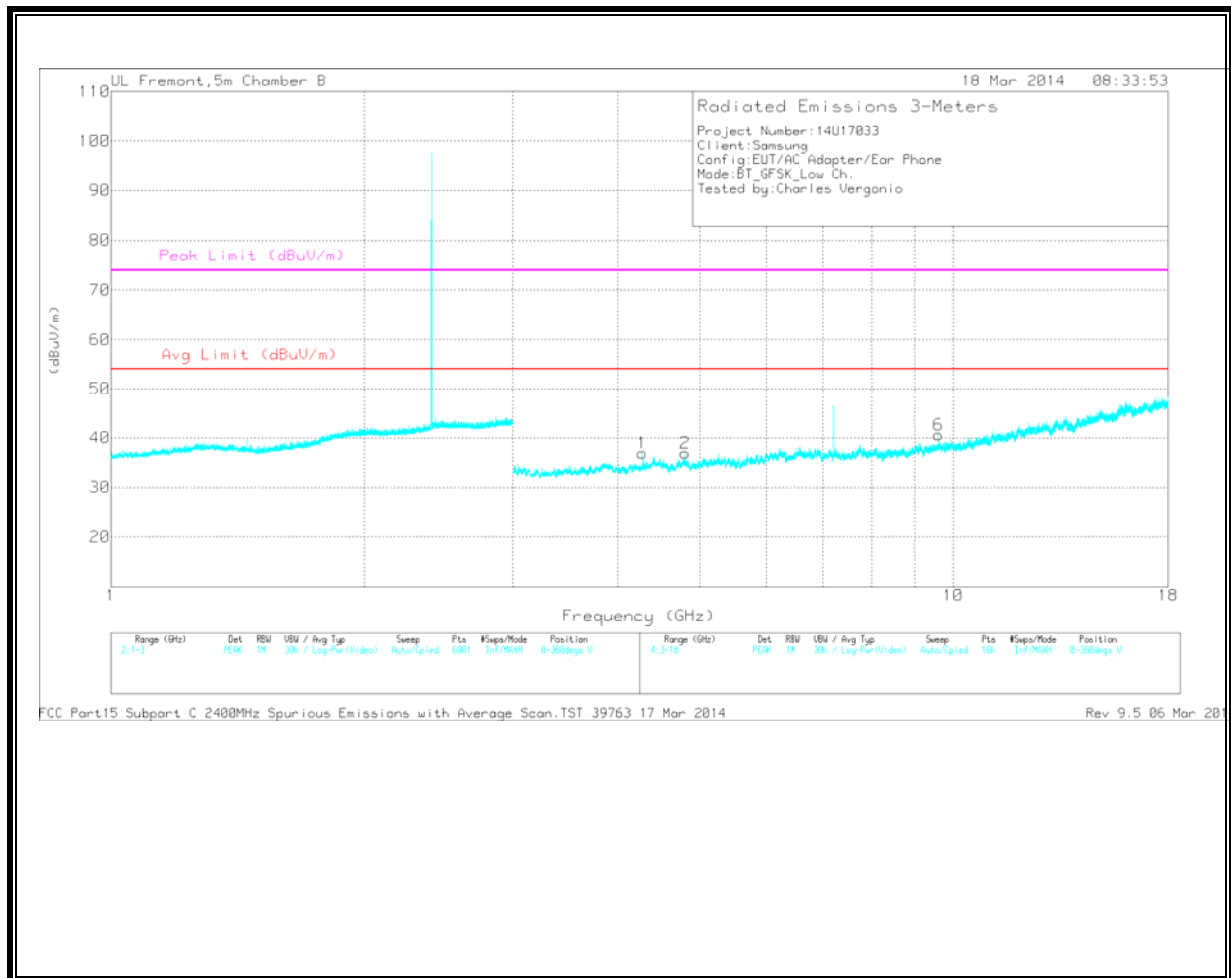

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 5.353	31.11	PK	34.5	-28.8	0	36.81	54	-17.19	74	-37.19	0-360	99	H
1	* 4.276	34.21	PK	33.7	-31	0	36.91	54	-17.09	74	-37.09	0-360	99	V
2	* 4.804	31.5	PK	34.2	-28.8	0	36.9	54	-17.1	74	-37.1	0-360	99	V
3	5.275	33.28	PK	34.4	-29.7	0	37.98	54	-16.02	74	-36.02	0-360	99	H
5	7.206	39.67	PK	35.5	-26.9	0	48.27	54	-5.73	74	-25.73	0-360	202	H
6	9.608	27.95	PK	36.8	-24.1	0	40.65	54	-13.35	74	-33.35	0-360	202	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 5.355	38.56	PK2	34.5	-28.8	0	44.26	54	-9.74	74	-29.74	1	100	H
* 4.276	40.3	PK2	33.7	-31	0	43	54	-11	74	-31	1	100	V
* 4.274	30.85	MAv1	33.7	-31	0	34.65	54	-19.35	74	-39.35	1	100	V
* 4.802	38.65	PK2	34.2	-28.8	0	44.05	54	-9.95	74	-29.95	1	100	V
5.276	39.52	PK2	34.4	-29.7	0	44.22	54	-9.78	74	-29.78	1	100	H
7.205	44.16	PK2	35.5	-27	0	52.66			74	-21.34	165	157	H
7.206	38.35	MAv1	35.5	-26.9	0	48.05	54	-5.95	74	-25.95	165	157	H
9.609	34.89	PK2	36.8	-24.1	0	47.59	54	-6.41	74	-26.41	165	157	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

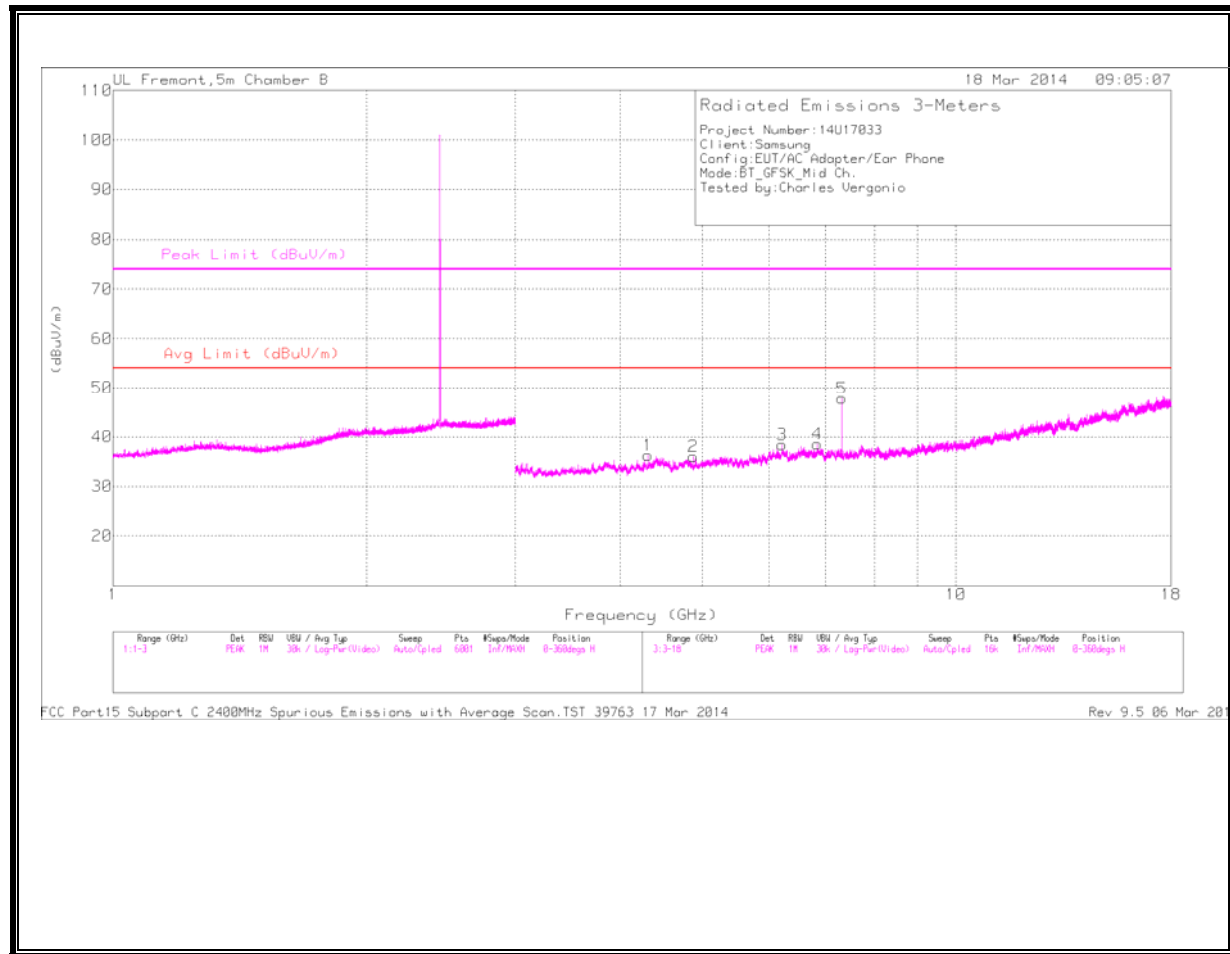

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

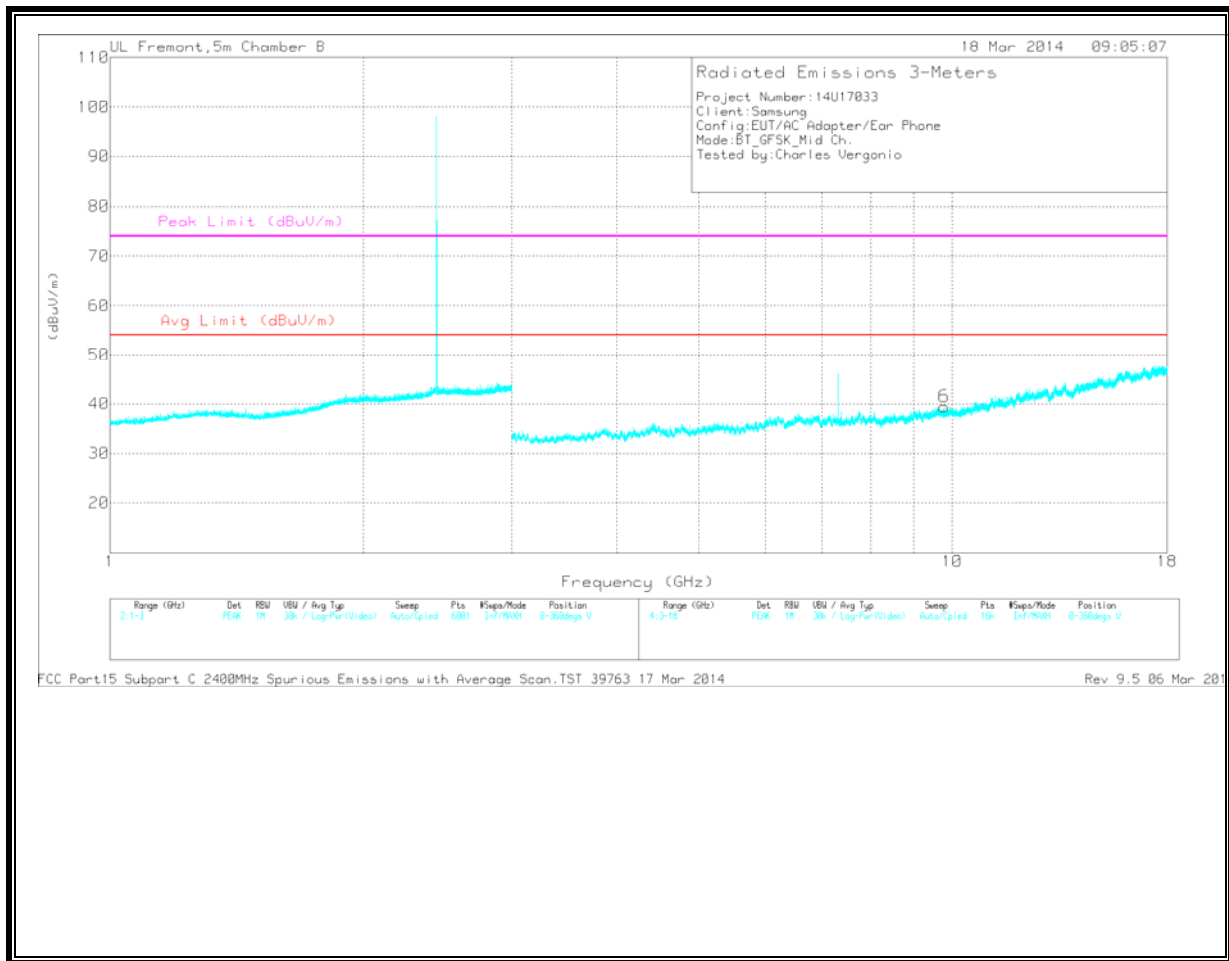

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.312	33.71	PK	33.7	-31.1	0	36.31	54	-17.69	74	-37.69	0-360	202	H
2	* 4.881	32.45	PK	34.2	-30.6	0	36.05	54	-17.95	74	-37.95	0-360	202	H
5	* 7.323	40	PK	35.6	-27.8	0	47.8	54	-6.2	74	-26.2	0-360	202	H
3	6.219	30.83	PK	35.4	-27.8	0	38.43	54	-15.57	74	-35.57	0-360	99	H
4	6.85	30.52	PK	35.6	-27.6	0	38.52	54	-15.48	74	-35.48	0-360	202	H
6	9.782	26.22	PK	36.9	-23.6	0	39.52	54	-14.48	74	-34.48	0-360	202	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.313	40.68	PK2	33.7	-31.1	0	43.28	54	-10.72	74	-30.72	1	100	H
* 4.882	40.52	PK2	34.2	-30.6	0	44.12	54	-9.88	74	-29.88	1	100	H
* 7.323	44.25	PK2	35.6	-27.8	0	52.05	54	-1.95	74	-21.95	204	230	H
* 7.323	37.46	MAv1	35.6	-27.8	0	46.36	54	-7.64	74	-27.64	204	230	H
6.217	38.62	PK2	35.4	-27.7	0	46.32	54	-7.68	74	-27.68	1	100	H
6.852	37.63	PK2	35.6	-27.6	0	45.63	54	-8.37	74	-28.37	1	100	H
9.783	34.93	PK2	36.9	-23.6	0	48.23	54	-5.77	74	-25.77	204	230	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

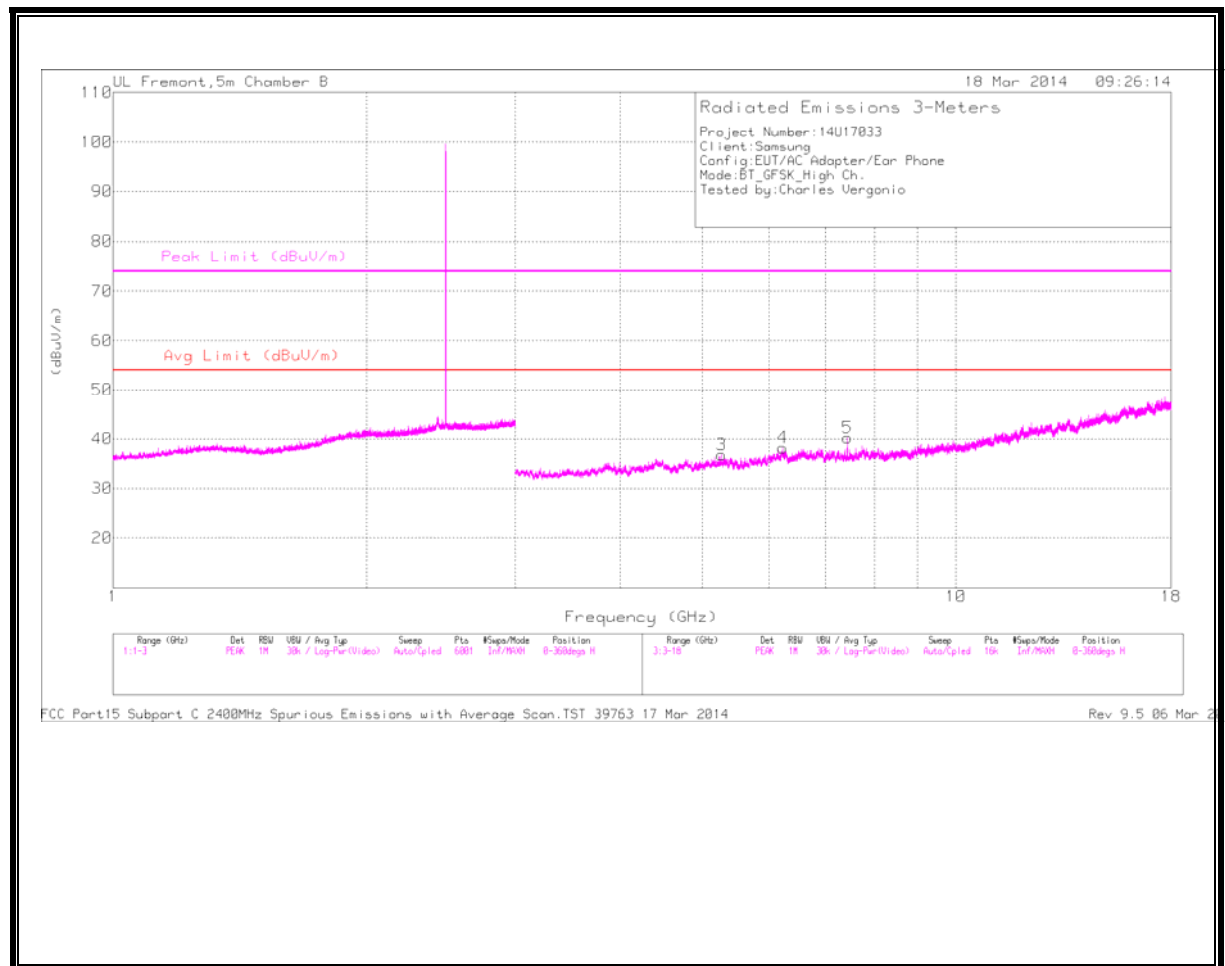

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

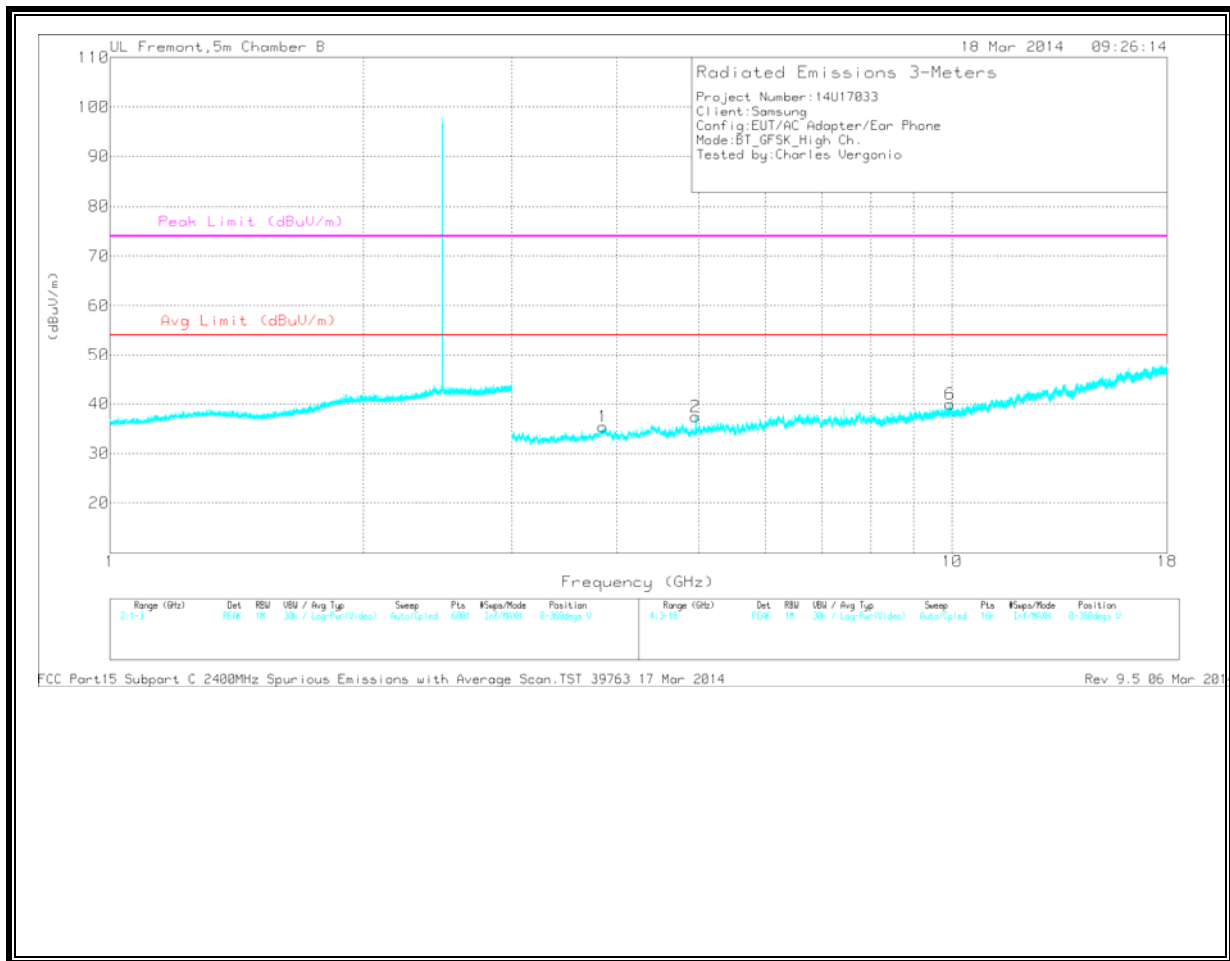

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 7.44	31.46	PK	35.6	-26.8	0	40.26	54	-13.74	74	-33.74	0-360	99	H
1	* 3.85	31.95	PK	33.7	-30.2	0	35.45	54	-18.55	74	-38.55	0-360	99	V
2	* 4.96	33.42	PK	34.2	-30.2	0	37.42	54	-16.58	74	-36.58	0-360	202	V
3	5.274	32.14	PK	34.4	-29.7	0	36.84	54	-17.16	74	-37.16	0-360	202	H
4	6.226	30.75	PK	35.4	-27.9	0	38.25	54	-15.75	74	-35.75	0-360	202	H
6	9.95	26.87	PK	37	-23.9	0	39.97	54	-14.03	74	-34.03	0-360	99	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.44	39.1	PK2	35.6	-26.8	0	47.9	54	-6.1	74	-26.1	131	188	H
* 7.44	31.21	MAv1	35.6	-26.8	0	41.11	54	-12.89	74	-32.89	131	188	H
* 3.851	40.35	PK2	33.7	-30.2	0	43.85	54	-10.15	74	-30.15	360	100	V
* 4.959	40.26	PK2	34.2	-30.2	0	44.26	54	-9.74	74	-29.74	360	100	V
* 4.96	29.93	MAv1	34.2	-30.2	0	35.03	54	-18.97	74	-38.97	360	100	V
5.274	40.43	PK2	34.4	-29.7	0	45.13	54	-8.87	74	-28.87	360	100	H
6.225	38.5	PK2	35.4	-27.9	0	46	54	-8	74	-28	360	100	H
9.952	35.14	PK2	37	-23.9	0	48.24	54	-5.76	74	-25.76	360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

9.2.2. ENHANCED DATA RATE 8PSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

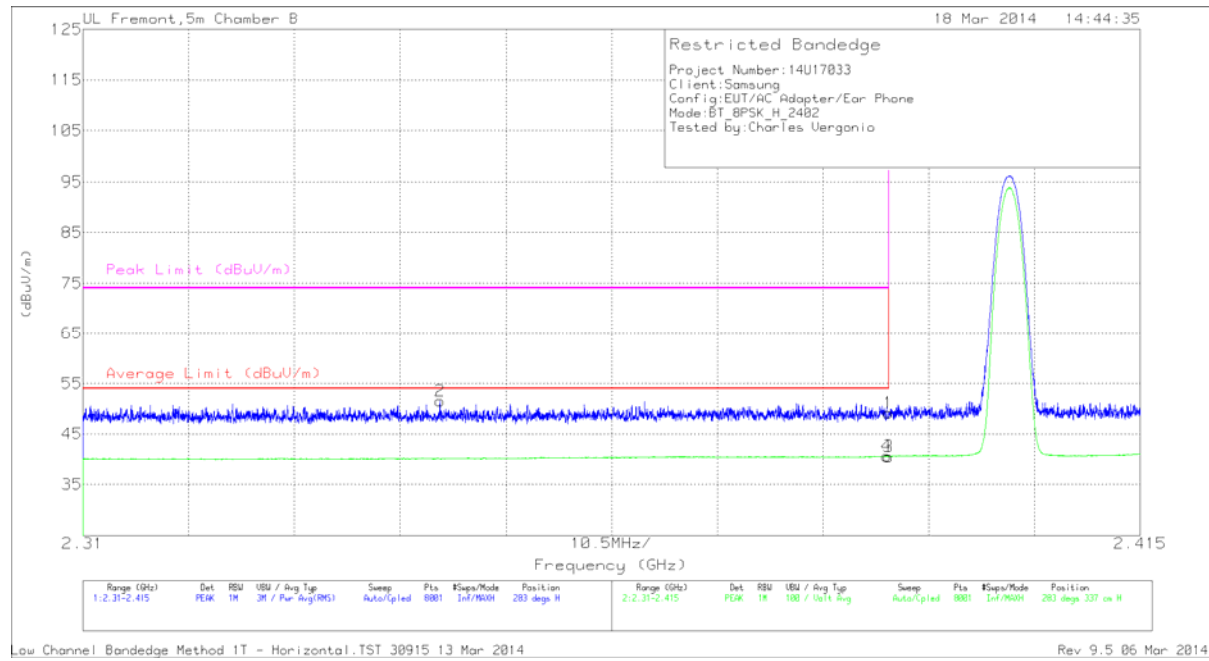


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T345 (dB/m)	Amp/Cb/IF tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.01	PK	32.1	-22.9	0	49.21	-	-	74	-24.79	283	337	H
2	* 2.345	42.58	PK	31.9	-23	0	51.48	-	-	74	-22.52	283	337	H
3	* 2.39	30.24	VB1T	32.1	-22.9	0	40.54	54	-13.46	-	-	283	337	H
4	* 2.39	30.33	VB1T	32.1	-22.9	0	40.63	54	-13.37	-	-	283	337	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

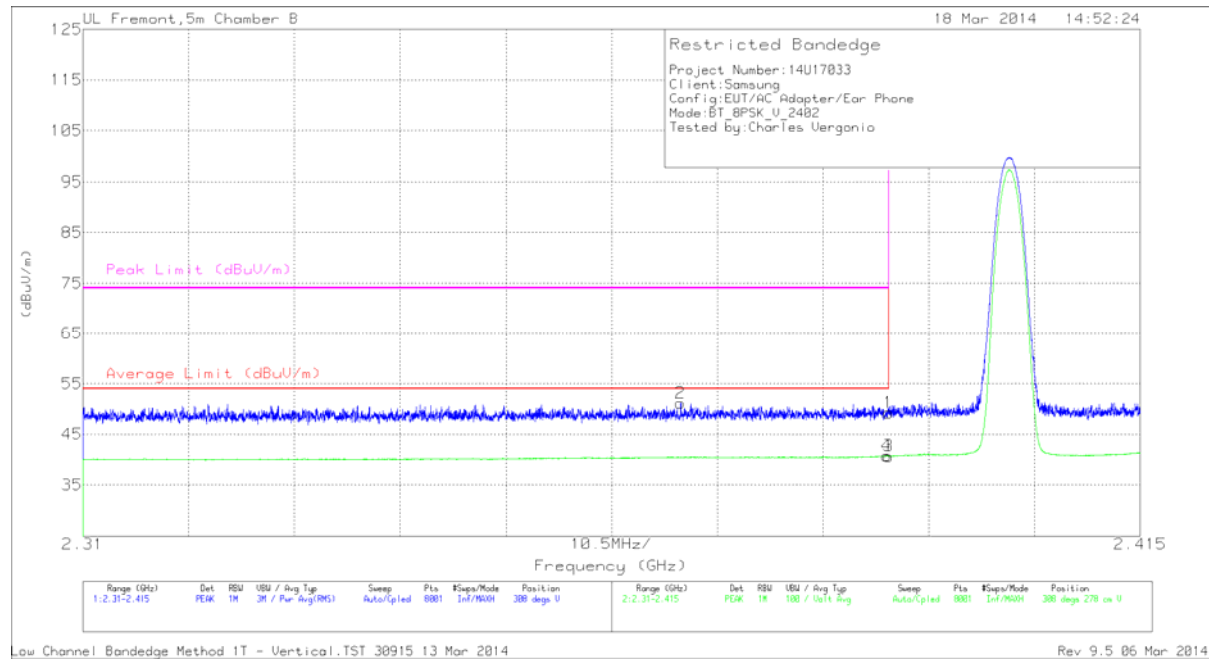


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.04	PK	32.1	-22.9	0	49.24	-	-	74	-24.76	308	278	V
2	* 2.369	41.98	PK	32	-22.8	0	51.18	-	-	74	-22.82	308	278	V
3	* 2.39	30.37	VB1T	32.1	-22.9	0	40.67	54	-13.33	-	-	308	278	V
4	* 2.39	30.48	VB1T	32.1	-22.9	0	40.78	54	-13.22	-	-	308	278	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

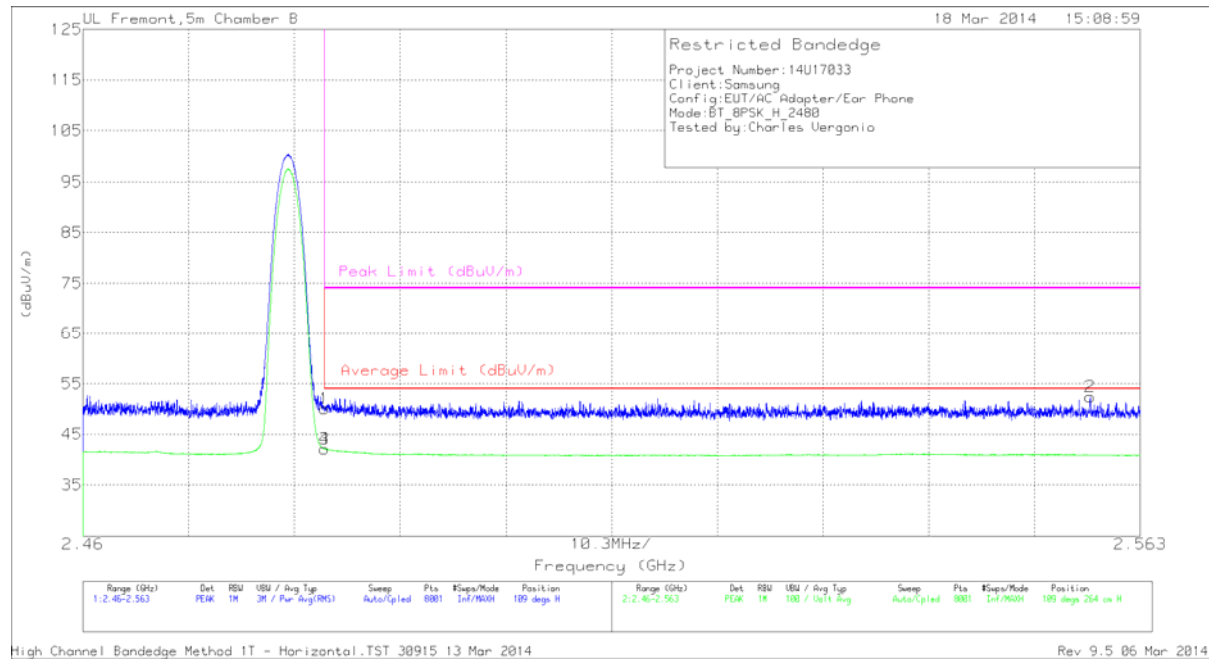


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.21	PK	32.4	-22.6	0	50.01	-	-	74	-23.99	109	264	H
3	* 2.484	31.22	VB1T	32.4	-22.6	0	42.12	54	-11.88	-	-	109	264	H
4	* 2.484	31.22	VB1T	32.4	-22.6	0	42.12	54	-11.88	-	-	109	264	H
2	2.558	42.7	PK	32.5	-22.8	0	52.4	-	-	74	-21.6	109	264	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

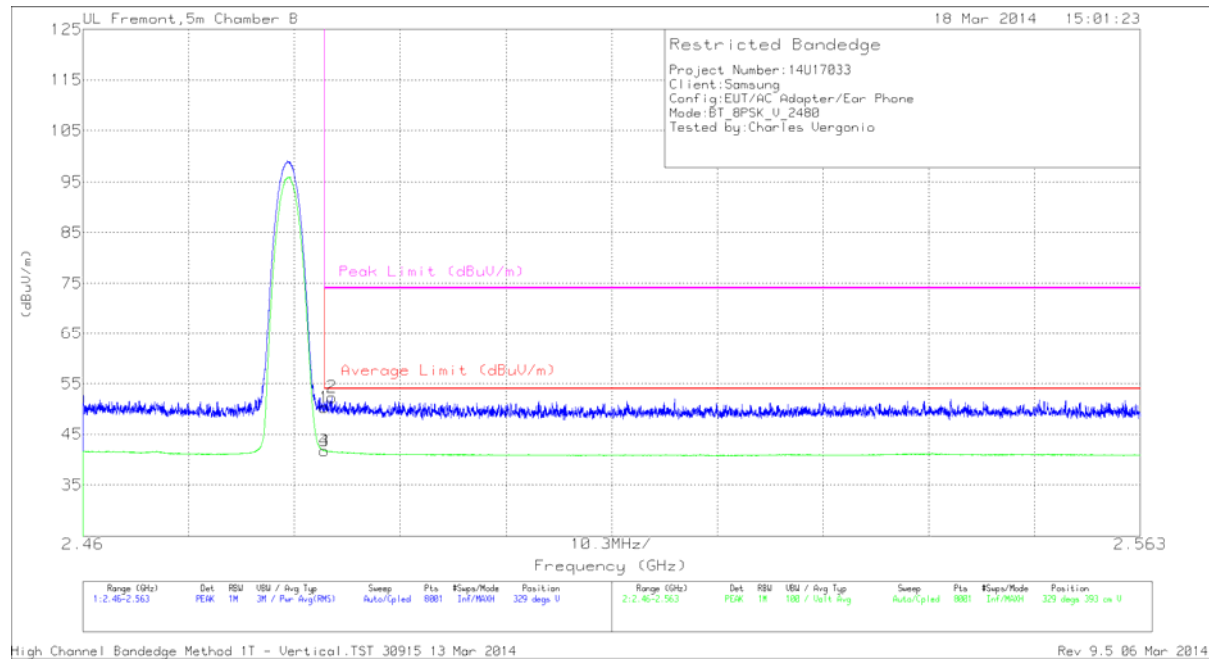


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	40.46	PK	32.4	-22.6	0	50.26	-	-	74	-23.74	329	393	V
2	2.484	42.54	PK	32.4	-22.6	0	52.34	-	-	74	-21.66	329	393	V
3	2.484	30.84	VB1T	32.4	-22.6	0	41.74	54	-12.26	-	-	329	393	V
4	2.484	30.84	VB1T	32.4	-22.6	0	41.74	54	-12.26	-	-	329	393	V

PK - Peak detector


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

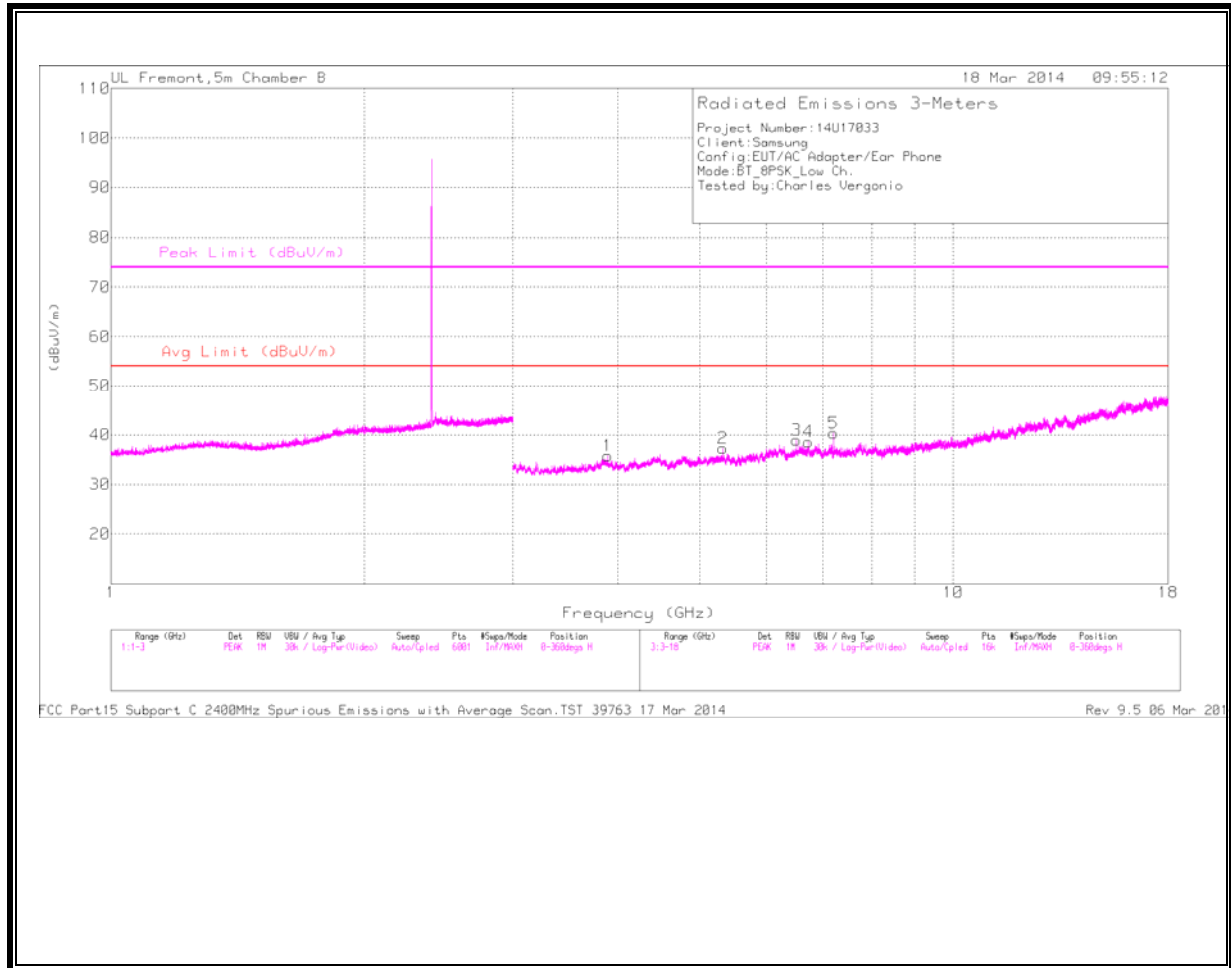

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

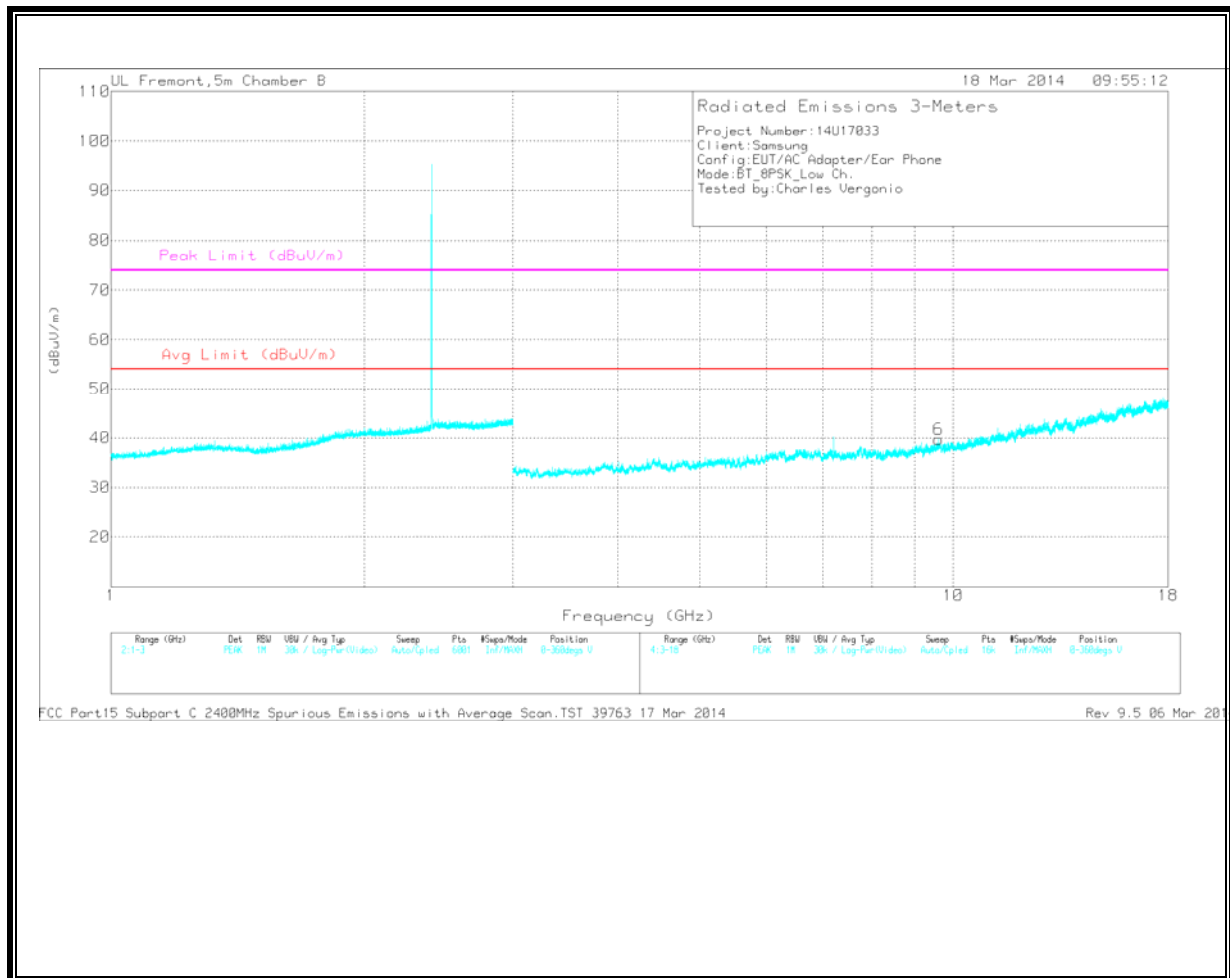

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Avg Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.891	32.32	PK	33.8	-30.4	0	35.72	54	-18.28	74	-38.28	0-360	99	H
2	5.33	31.58	PK	34.5	-28.8	0	37.28	54	-16.72	74	-36.72	0-360	202	H
3	6.514	30.74	PK	35.7	-27.5	0	38.94	54	-15.06	74	-35.06	0-360	99	H
4	6.734	31.43	PK	35.7	-28.5	0	38.63	54	-15.37	74	-35.37	0-360	99	H
5	7.205	31.9	PK	35.5	-27	0	40.4	54	-13.6	74	-33.6	0-360	202	H
6	9.607	26.96	PK	36.8	-24.1	0	39.66	54	-14.34	74	-34.34	0-360	202	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Avg Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.893	40.2	PK2	33.8	-30.5	0	43.5	54	-10.5	74	-30.5	1	100	H
5.328	39.14	PK2	34.5	-28.8	0	44.84	54	-9.16	74	-29.16	1	100	H
6.515	37.65	PK2	35.7	-27.5	0	45.85	54	-8.15	74	-28.15	1	100	H
6.733	38.57	PK2	35.7	-28.5	0	45.77	54	-8.23	74	-28.23	1	100	H
7.206	41.36	PK2	35.5	-26.9	0	49.96	54	-4.04	74	-24.04	176	201	H
7.206	32.67	MAv1	35.5	-26.9	0	42.37	54	-11.63	74	-31.63	176	201	H
9.605	34.71	PK2	36.8	-24.1	0	47.41	54	-6.59	74	-26.59	176	201	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

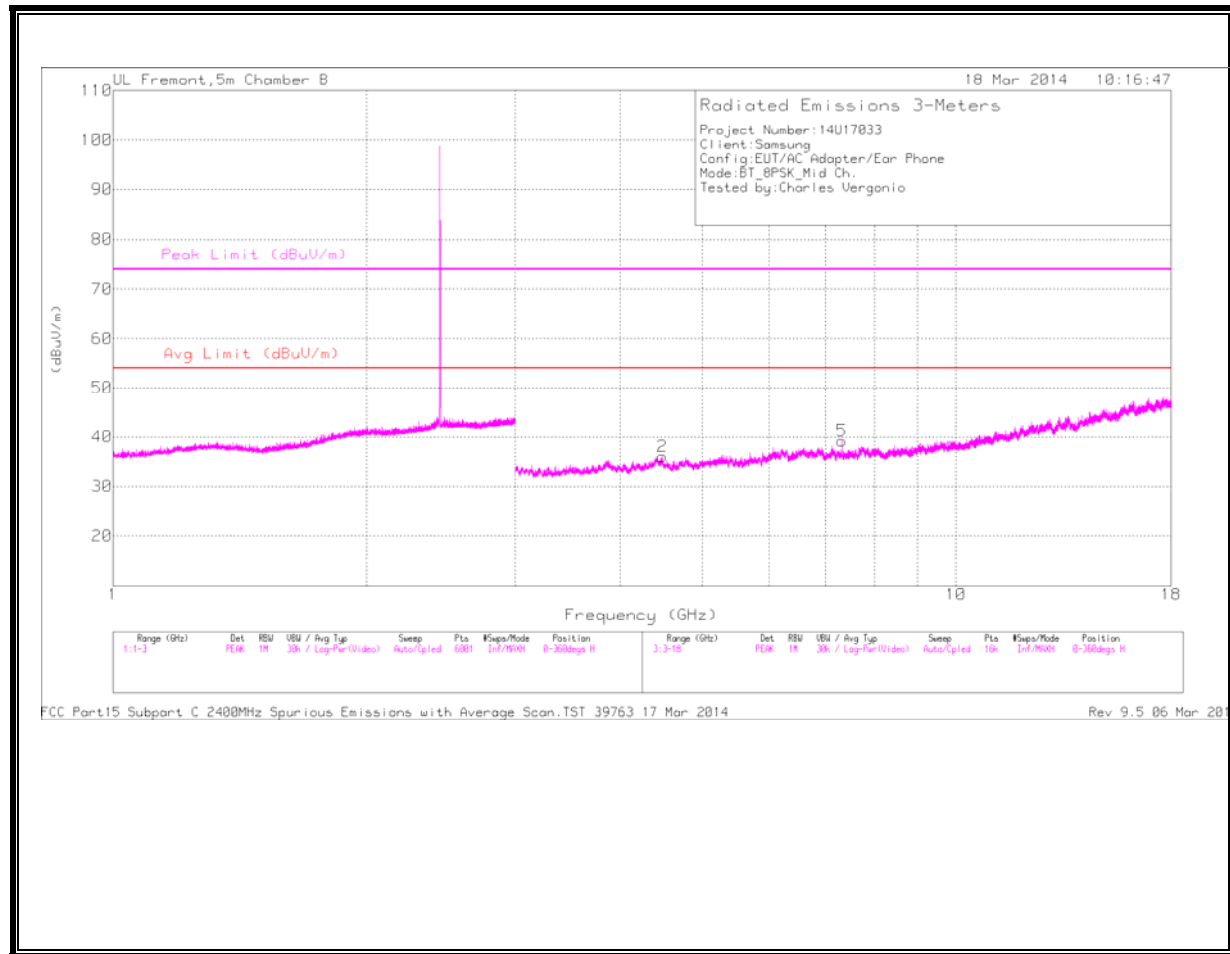MID CHANNEL
HORIZONTAL

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

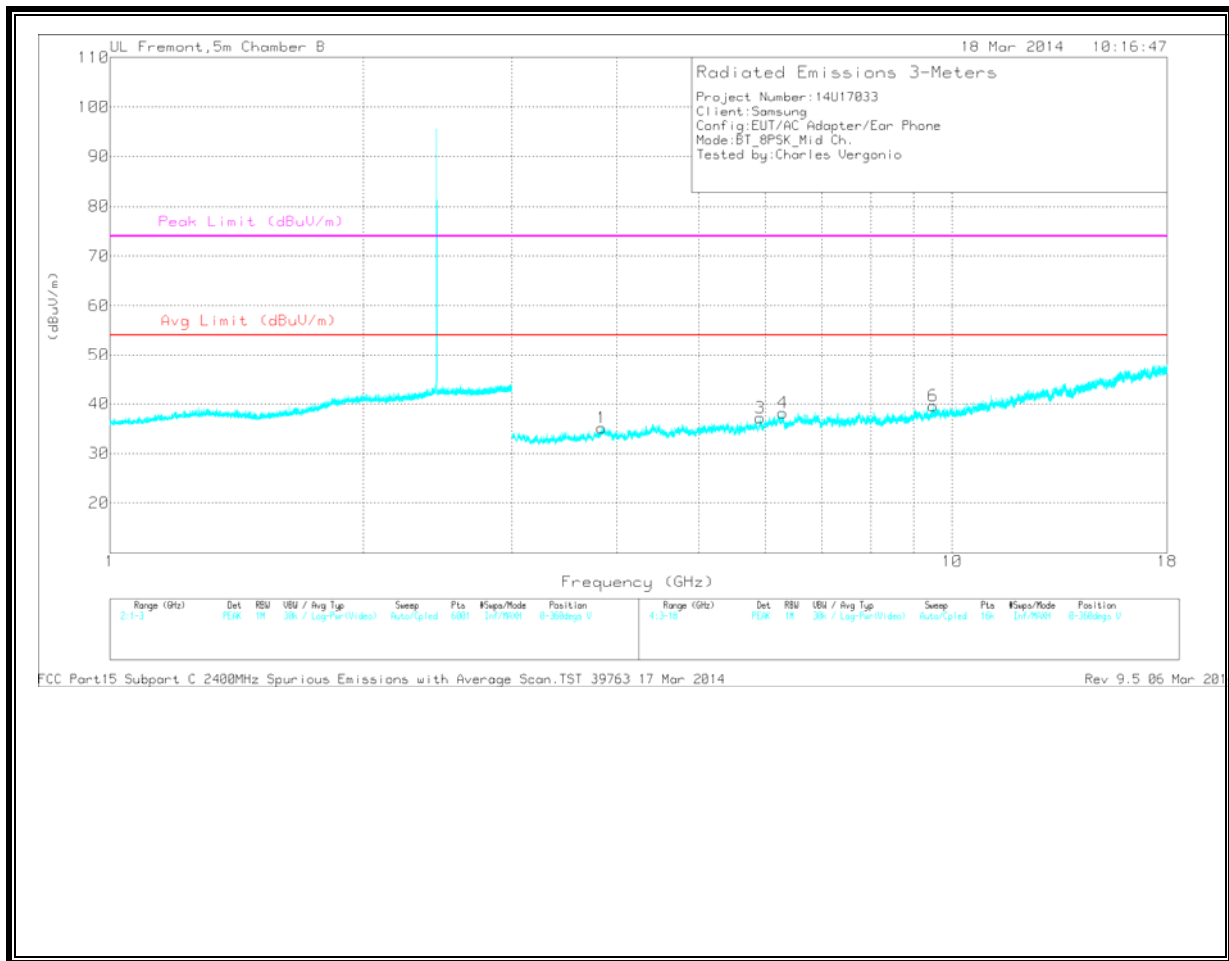

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Avg Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 7.323	31.36	PK	35.6	-27.8	0	39.16	54	-14.84	74	-34.84	0-360	202	H
1	* 3.838	31.7	PK	33.7	-30.2	0	35.2	54	-18.8	74	-38.8	0-360	99	V
6	* 9.496	27.77	PK	36.6	-24.8	0	39.57	54	-14.43	74	-34.43	0-360	99	V
2	4.484	31.24	PK	34	-29.2	0	36.04	54	-17.96	74	-37.96	0-360	202	H
3	5.915	30.53	PK	35	-28.4	0	37.13	54	-16.87	74	-36.87	0-360	202	V
4	6.296	30.8	PK	35.5	-28.1	0	38.2	54	-15.8	74	-35.8	0-360	202	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Avg Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.322	38.85	PK2	35.6	-27.8	0	46.65	54	-7.35	74	-27.35	1	100	H
* 3.838	40.47	PK2	33.7	-30.2	0	43.97	54	-10.03	74	-30.03	1	100	V
* 9.497	34.61	PK2	36.6	-24.8	0	46.41	54	-7.59	74	-27.59	1	100	V
4.482	38.81	PK2	34	-29.2	0	43.61	54	-10.39	74	-30.39	1	100	H
5.914	38.55	PK2	35	-28.4	0	45.15	54	-8.85	74	-28.85	1	100	V
6.296	38.53	PK2	35.5	-28.1	0	45.93	54	-8.07	74	-28.07	1	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

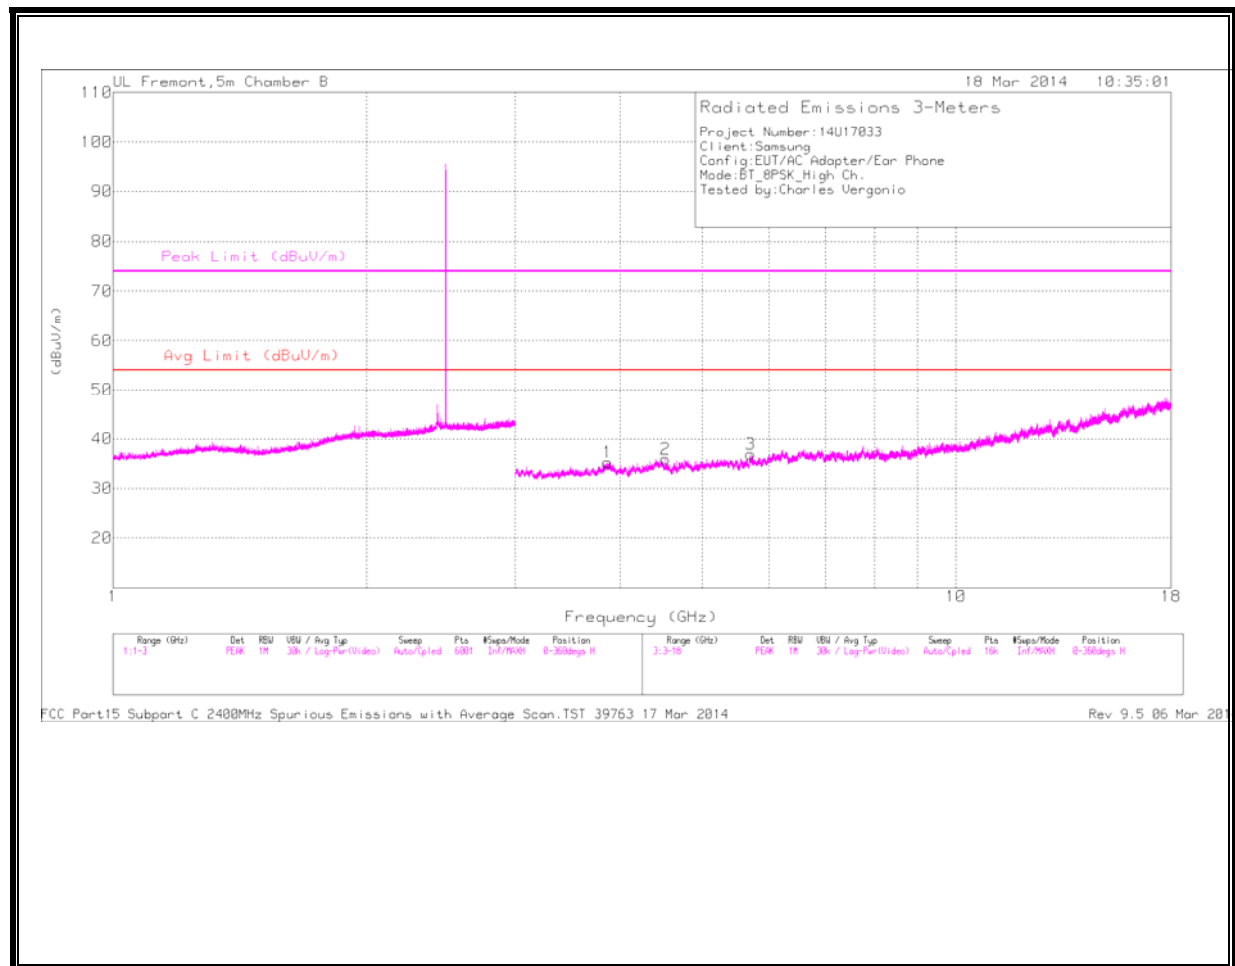

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

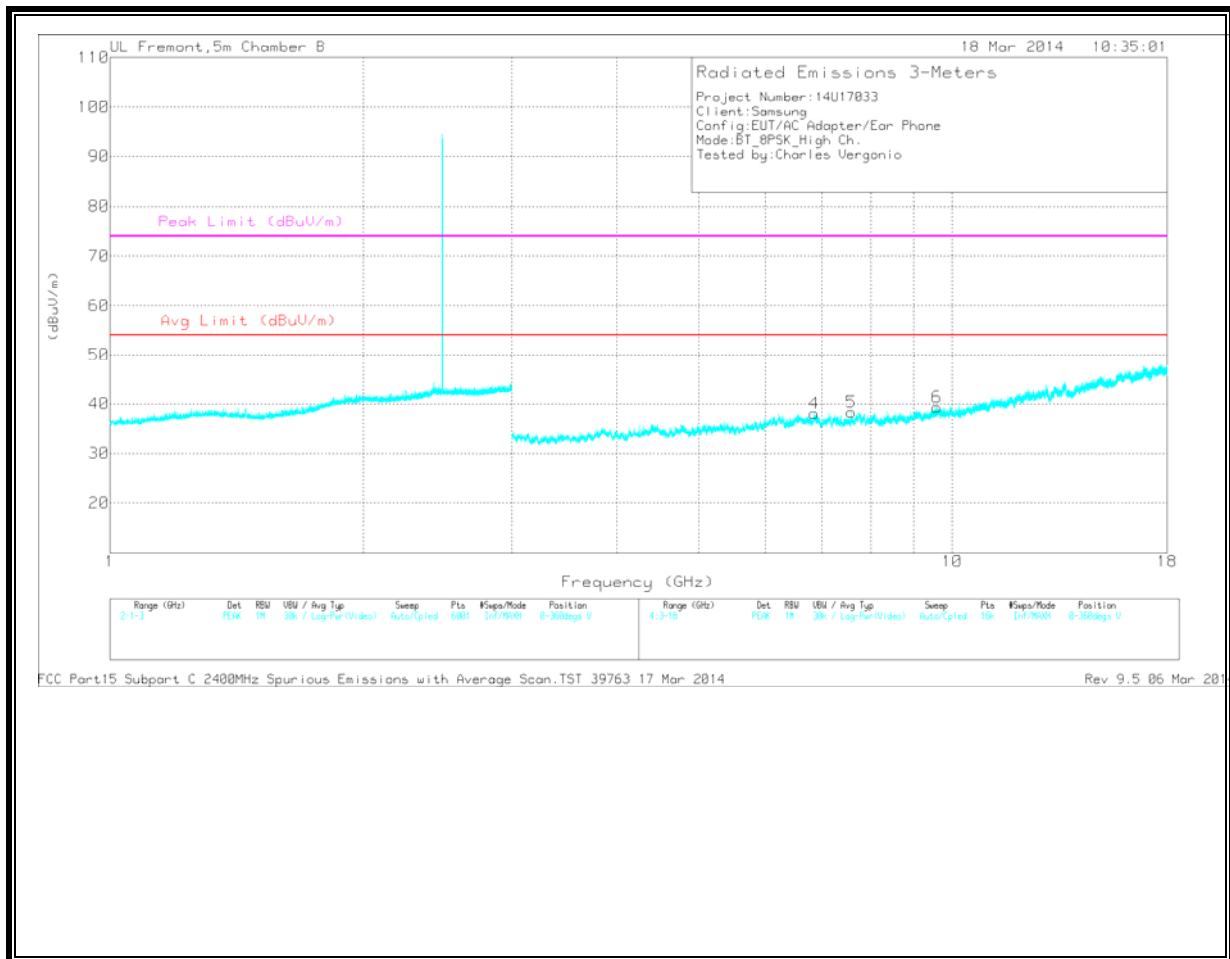

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Avg Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.862	31.71	PK	33.7	-30.2	0	35.21	54	-18.79	74	-38.79	0-360	99	H
2	* 4.521	31.16	PK	34	-29.3	0	35.86	54	-18.14	74	-38.14	0-360	99	H
5	* 7.591	30.07	PK	35.7	-27.4	0	38.37	54	-15.63	74	-35.63	0-360	202	V
3	5.702	31.3	PK	34.5	-28.9	0	36.9	54	-17.1	74	-37.1	0-360	202	H
4	6.856	29.91	PK	35.6	-27.5	0	38.01	54	-15.99	74	-35.99	0-360	99	V
6	9.598	26.76	PK	36.8	-24.2	0	39.36	54	-14.64	74	-34.64	0-360	99	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtri/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Avg Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.864	39.74	PK2	33.7	-30.2	0	43.24	54	-10.76	74	-30.76	1	100	H
* 4.524	38.39	PK2	34	-29.3	0	43.09	54	-10.91	74	-30.91	1	100	H
* 7.592	38.14	PK2	35.7	-27.4	0	46.44	54	-7.56	74	-27.56	1	100	V
2.426	45.56	PK2	32.2	-22.5	0	55.26			74	-18.74	1	100	H
5.704	39.18	PK2	34.5	-28.9	0	44.78	54	-9.22	74	-29.22	1	100	H
6.856	38.19	PK2	35.6	-27.5	0	46.29	54	-7.71	74	-27.71	1	100	V
9.597	34.33	PK2	36.8	-24.2	0	46.93	54	-7.07	74	-27.07	1	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

9.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

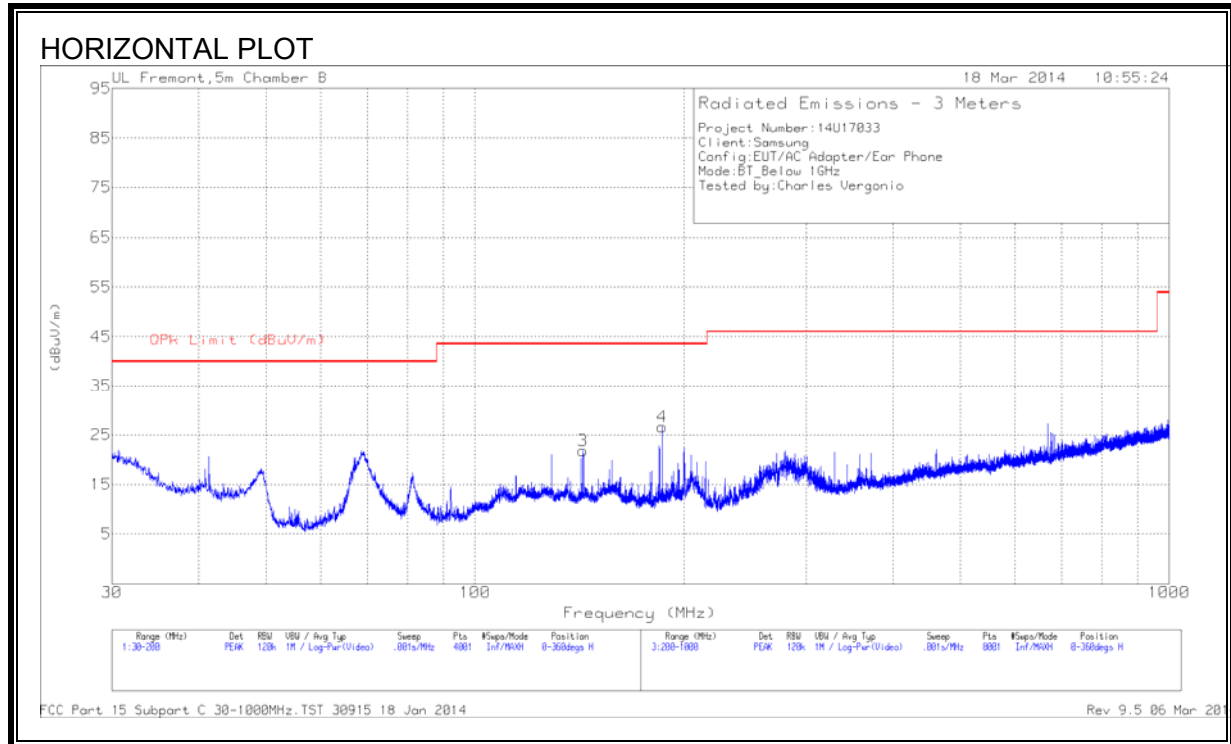

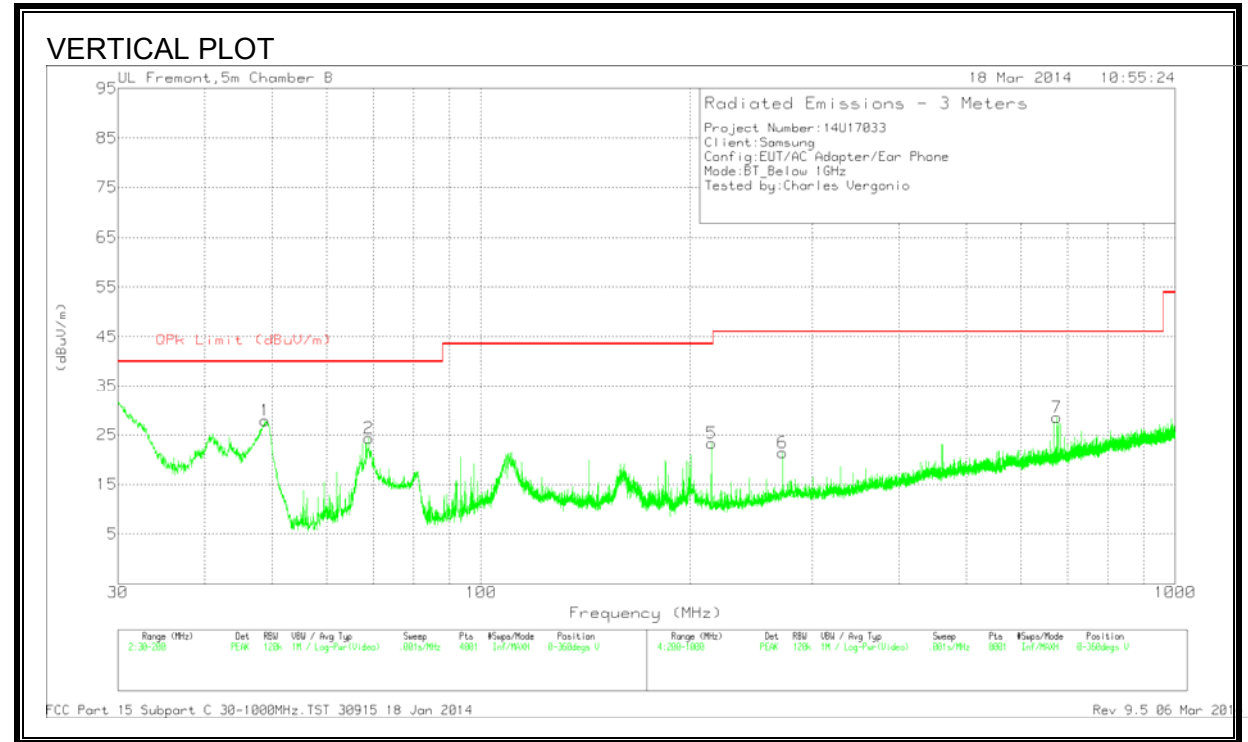

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 272	34.76	PK	13	-26.3	0	21.46	-	-	0-360	101	V
1	48.9125	48.28	PK	8.2	-28.6	0	27.88	-	-	0-360	101	V
2	68.93	44.6	PK	8.1	-28.4	0	24.3	-	-	0-360	101	V
3	143.1775	36.84	PK	12.6	-27.6	0	21.84	-	-	0-360	200	H
4	186.145	42.44	PK	11.3	-27.1	0	26.64	-	-	0-360	101	H
5	214.8	39.75	PK	10.4	-26.8	0	23.35	-	-	0-360	200	V
7	676	34.37	PK	19.2	-25	0	28.57	-	-	0-360	101	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band
PK - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
1	.1545	43.37	PK	1.3	0	44.67	65.8	-21.13	-	-
2	.1545	23.67	Av	1.3	0	24.97	-	-	55.8	-30.83
3	.2535	39.12	PK	.7	0	39.82	61.6	-21.78	-	-
4	.2535	20.52	Av	.7	0	21.22	-	-	51.6	-30.38
5	.555	37.19	PK	.3	0	37.49	56	-18.51	-	-
6	.555	27.28	Av	.3	0	27.58	-	-	46	-18.42
7	1.1445	27.64	PK	.2	0	27.84	56	-28.16	-	-
8	1.1445	20.55	Av	.2	0	20.75	-	-	46	-25.25
9	1.4775	22.49	PK	.2	.1	22.79	56	-33.21	-	-
10	1.4775	11.05	Av	.2	.1	11.35	-	-	46	-34.65
11	3.9525	20.14	PK	.2	.1	20.44	56	-35.56	-	-
12	3.9525	11.56	Av	.2	.1	11.86	-	-	46	-34.14
13	5.082	19.97	PK	.2	.1	20.27	60	-39.73	-	-
14	5.082	10.25	Av	.2	.1	10.55	-	-	50	-39.45
15	7.548	20.36	PK	.2	.1	20.66	60	-39.34	-	-
16	7.548	8.17	Av	.2	.1	8.47	-	-	50	-41.53
17	9.2805	19.54	PK	.2	.1	19.84	60	-40.16	-	-
18	9.2805	6.6	Av	.2	.1	6.9	-	-	50	-43.1
19	18.24	20.24	PK	.3	.2	20.74	60	-39.26	-	-
20	18.24	15.3	Av	.3	.2	15.8	-	-	50	-34.2
21	19.797	18.8	PK	.3	.2	19.3	60	-40.7	-	-
22	19.797	10.6	Av	.3	.2	11.1	-	-	50	-38.9
23	21.7365	18.42	PK	.3	.2	18.92	60	-41.08	-	-
24	21.7365	8.16	Av	.3	.2	8.66	-	-	50	-41.34


Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
25	.1635	39.08	PK	1.3	0	40.38	65.3	-24.92	-	-
26	.1635	11.75	Av	1.3	0	13.05	-	-	55.3	-42.25
27	.2805	30.79	PK	.6	0	31.39	60.8	-29.41	-	-
28	.2805	15.42	Av	.6	0	16.02	-	-	50.8	-34.78
29	.375	30.42	PK	.5	0	30.92	58.4	-27.48	-	-
30	.375	7.16	Av	.5	0	7.66	-	-	48.4	-40.74
31	.555	33.22	PK	.3	0	33.52	56	-22.48	-	-
32	.555	21.52	Av	.3	0	21.82	-	-	46	-24.18
33	.9645	15.55	PK	.3	0	15.85	56	-40.15	-	-
34	.9645	1.94	Av	.3	0	2.24	-	-	46	-43.76
35	1.3155	15.29	PK	.2	.1	15.59	56	-40.41	-	-
36	1.3155	8	Av	.2	.1	8.3	-	-	46	-37.7
37	1.626	13.89	PK	.2	.1	14.19	56	-41.81	-	-
38	1.626	-3.2	Av	.2	.1	-2.9	-	-	46	-48.9
39	1.9275	15.01	PK	.2	.1	15.31	56	-40.69	-	-
40	1.9275	.76	Av	.2	.1	1.06	-	-	46	-44.94
41	2.3955	14.72	PK	.2	.1	15.02	56	-40.98	-	-
42	2.3955	-4.11	Av	.2	.1	-3.81	-	-	46	-49.81
43	8.925	20.41	PK	.2	.1	20.71	60	-39.29	-	-
44	8.925	11.09	Av	.2	.1	11.39	-	-	50	-38.61
45	19.5	21.59	PK	.3	.2	22.09	60	-37.91	-	-
46	19.5	10.01	Av	.3	.2	10.51	-	-	50	-39.49
47	24.972	27.93	PK	.3	.3	28.53	60	-31.47	-	-
48	24.972	7.1	Av	.3	.3	7.7	-	-	50	-42.3

PK - Peak detector
Av - average detection

LINE 1 RESULTS

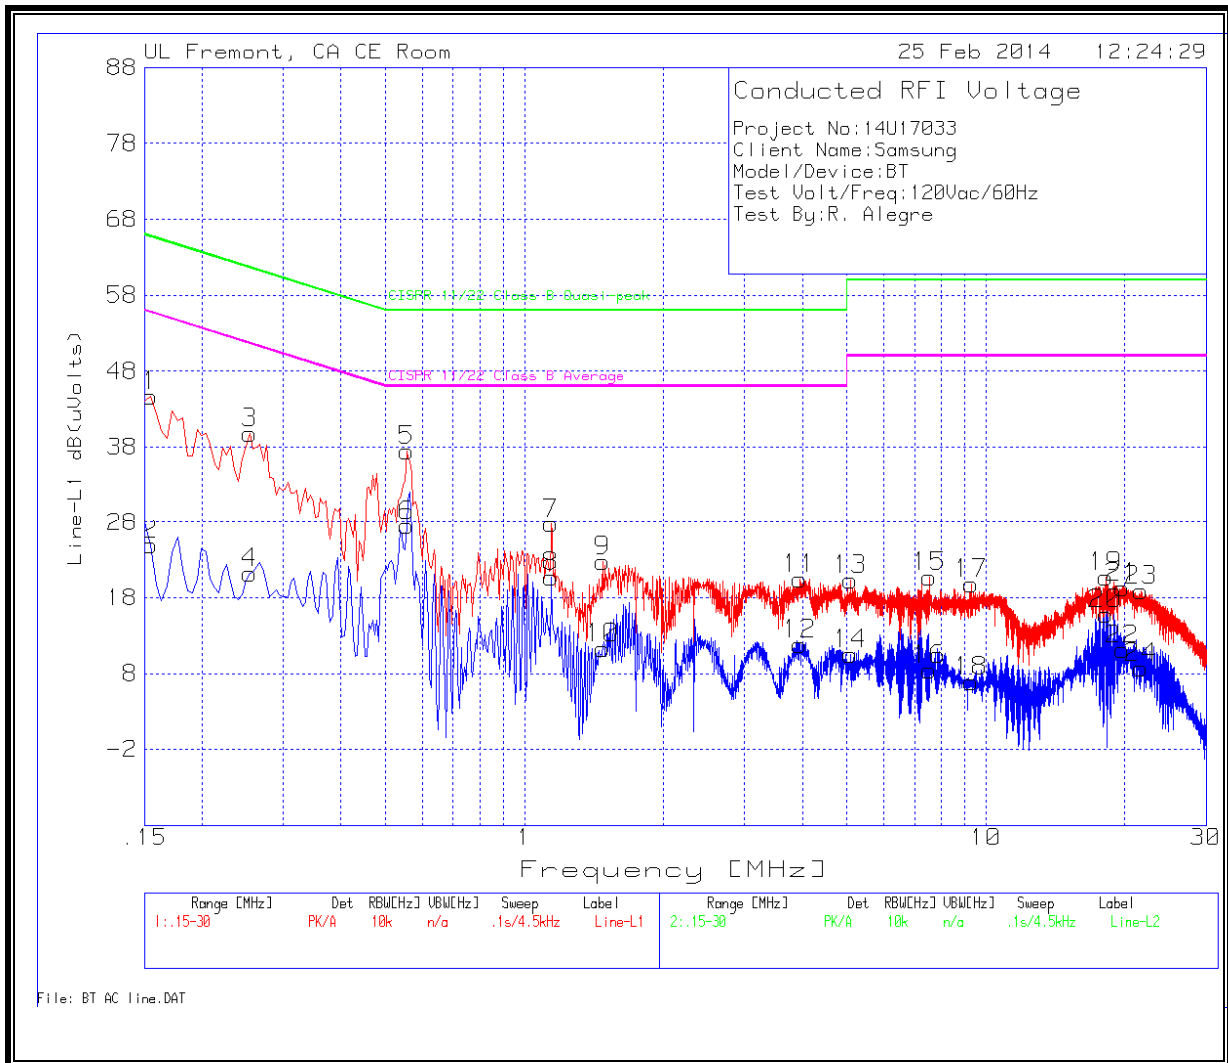

LINE 2 RESULTS

