

PART 24 MEASUREMENT REPORT

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea


Date of Testing:
 05/26/2021 - 06/04/2021
Test Site/Location:
 PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
 1M2105250057-01.A3L

FCC ID:	A3LSMF707U
Applicant Name:	Samsung Electronics Co., Ltd.

Application Type: Class II Permissive Change
Model: SM-F707U
Additional Model(s): SM-F707U1
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: 24
Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01
Class II Permissive Change: Adding n2+B14 as additional EN-DC combination
Original Grant Date: 07/20/2020

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


 Randy Ortanez
 President







FCC ID: A3LSMF707U	 PART 24 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset
		Page 1 of 16

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	PCTEST Test Location.....	3
1.3	Test Facility / Accreditations.....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description	4
2.2	Device Capabilities.....	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications	4
3.0	DESCRIPTION OF TESTS	5
3.1	Evaluation Procedure	5
3.2	PCS - Base Frequency Blocks	5
3.3	PCS - Mobile Frequency Blocks.....	5
3.4	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	10
7.1	Summary	10
7.2	Radiated Spurious Emissions Measurements.....	11
8.0	CONCLUSION.....	16

FCC ID: A3LSMF707U	 PCTEST <small>Proud to be part of element</small>	PART 24 MEASUREMENT REPORT	 Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset	Page 2 of 16

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMF707U	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset	Page 3 of 16

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID:A3LSMF707U**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

Test Device Serial No.: 1053M

2.2 Device Capabilities

This device contains the following capabilities:



800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (n71, n5, n66, n25, n2, n41), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 3.4 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF707U	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset		Page 4 of 16


3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure


The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.



Deviation from Measurement Procedure.....None

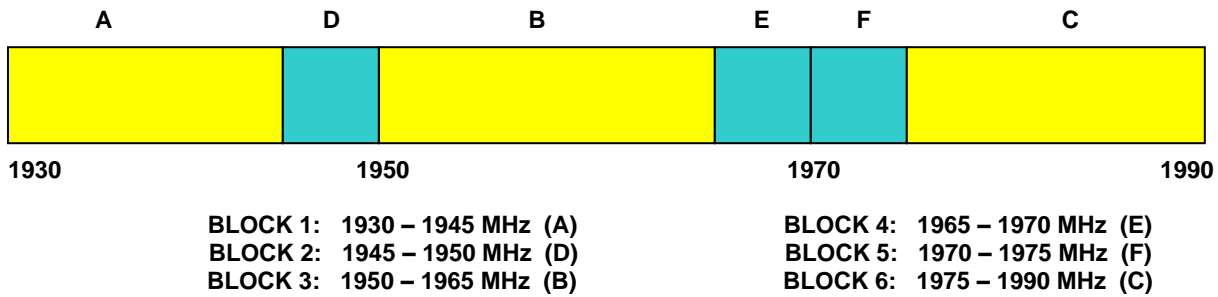3.2 PCS - Base Frequency Blocks

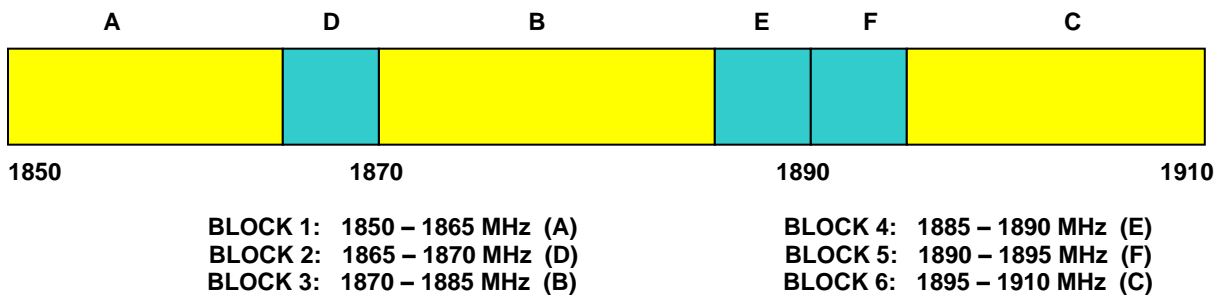

3.3 PCS - Mobile Frequency Blocks



FCC ID: A3LSMF707U	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset	Page 5 of 16

3.4 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:



$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01.



Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: A3LSMF707U	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset	Page 6 of 16	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF707U	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset	Page 7 of 16	

5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP1	EMC Cable and Switch System	3/9/2021	Annual	3/9/2022	AP1
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and Spectrum Analyzer	2/10/2021	Annual	2/10/2022	103187

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.



FCC ID: A3LSMF707U	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset	Page 8 of 16	

6.0 SAMPLE CALCULATIONS

Spurious Radiated Emission – LTE Band

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMF707U	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset	Page 9 of 16

7.0 TEST RESULTS

7.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF707U
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): NR

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
RADIATED	Radiated Spurious Emissions	2.1053, 24.238(a)	RSS-133(6.5)	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions	PASS	Section 7.2

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

FCC ID: A3LSMF707U	 PART 24 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset
Page 10 of 16		

7.2 Radiated Spurious Emissions Measurements

Test Overview



Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMF707U	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset		Page 11 of 16

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

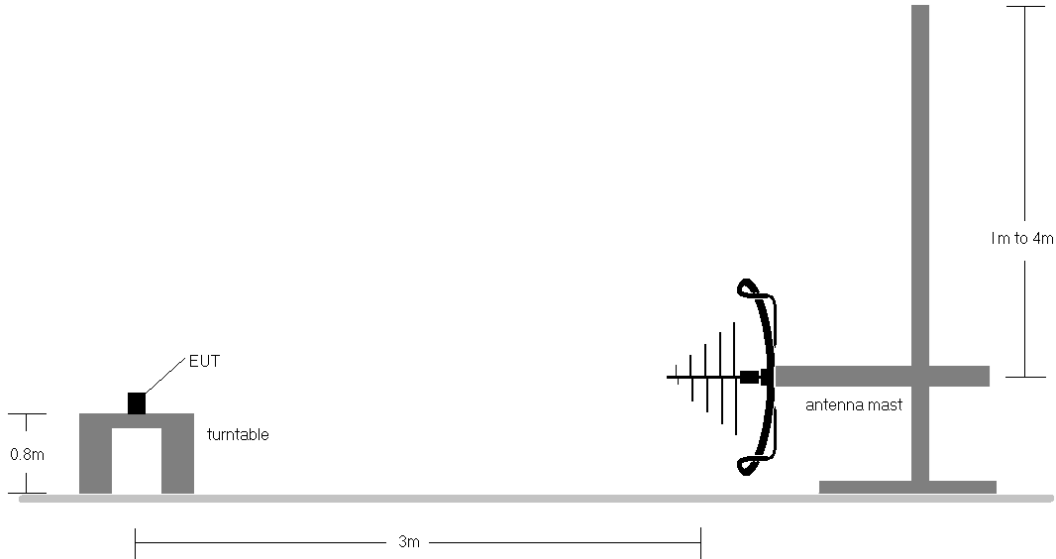


Figure 7-1. Test Instrument & Measurement Setup < 1GHz

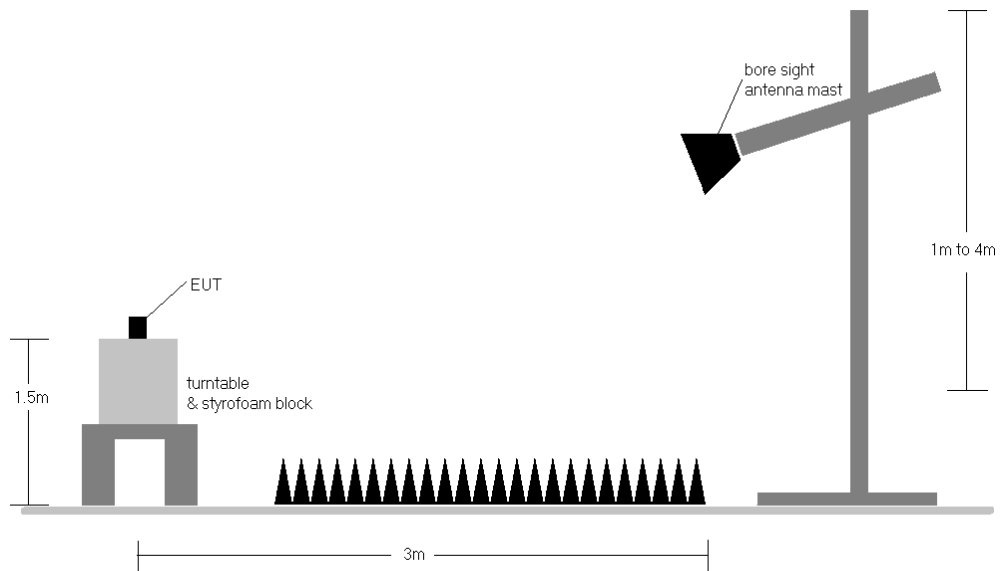




Figure 7-2. Test Instrument & Measurement Setup >1 GHz


FCC ID: A3LSMF707U	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset	Page 12 of 16

Test Notes


- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - b) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - d) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 5) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 6) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 7) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 8) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
- 9) Spurious emissions shown in this section are measured while operating in EN-DC mode with Sub 6GHz NR carrier as well as an LTE carrier (anchor). Spurious emissions from the NR carrier device, is subject to the rules under which the NR carrier operates. Spurious emission caused by the LTE carrier must meet the requirements of the rules under which the LTE carrier operates.

FCC ID: A3LSMF707U	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset	Page 13 of 16

NR Band n2 - B14

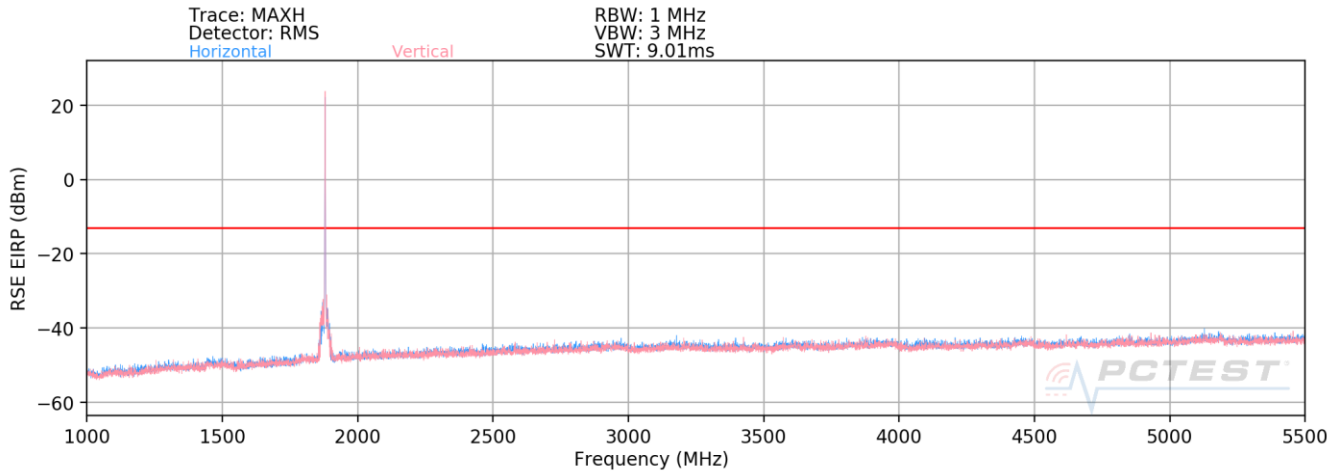


Plot 7-1. Radiated Spurious Plot (NR Band n2-B14 - Open)

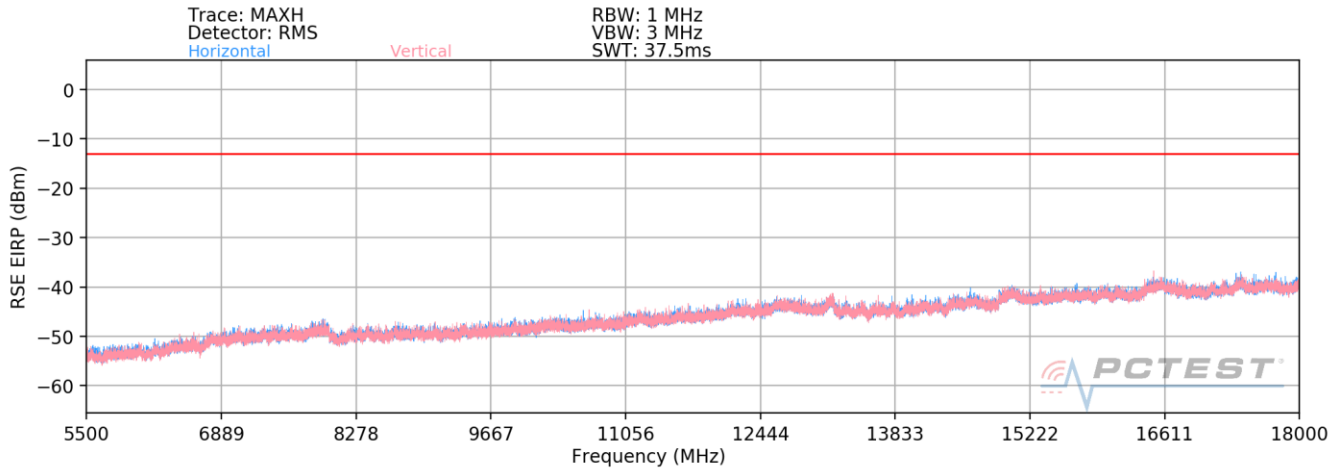


Plot 7-2. Radiated Spurious Plot (NR Band n2-B14 - Open)

FCC ID: A3LSMF707U	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset		Page 14 of 16

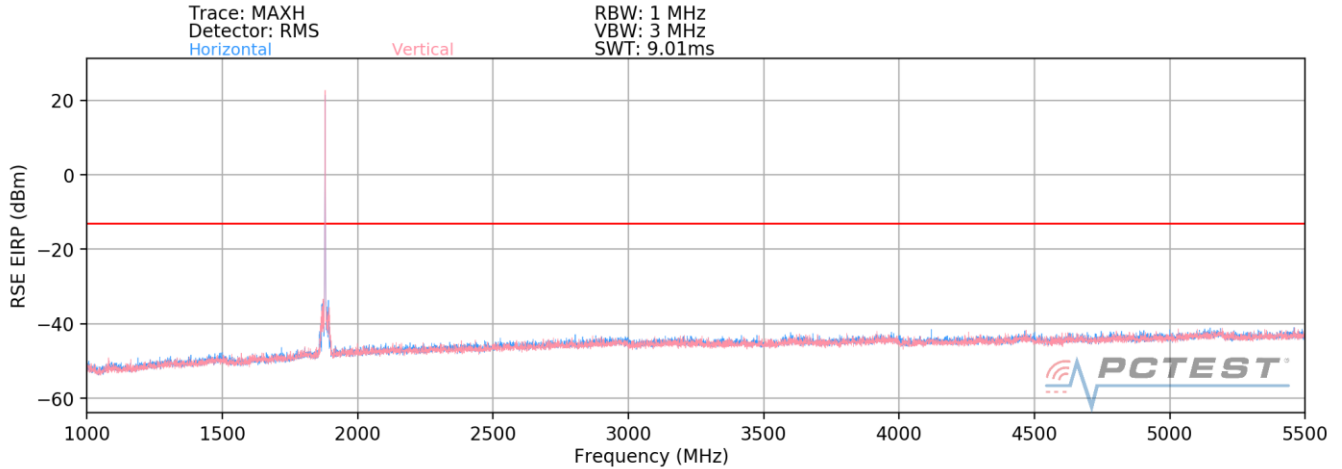

Plot 7-3. Radiated Spurious Plot (NR Band n2-B14 - Closed)

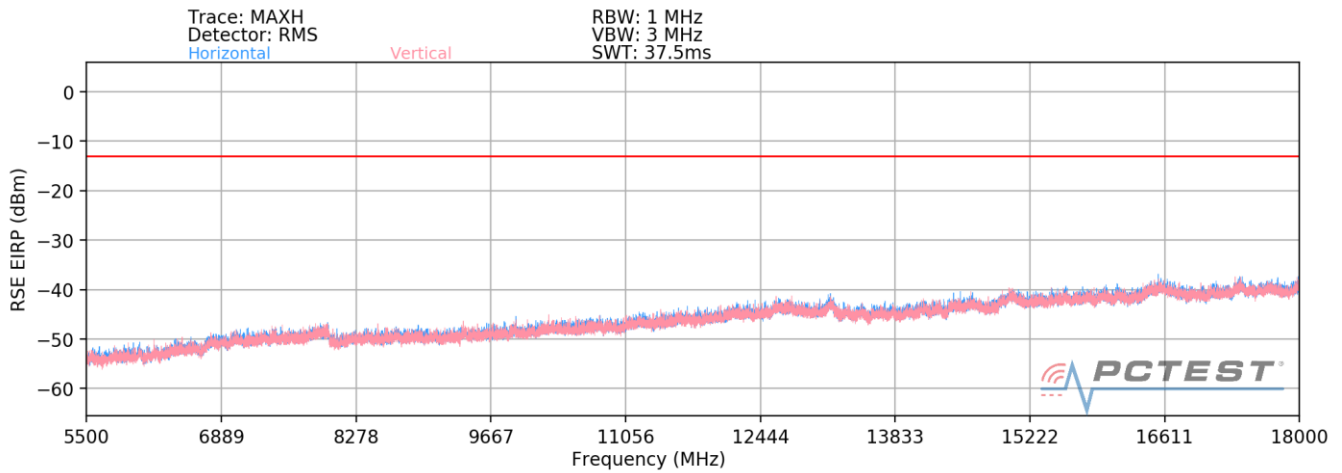



Plot 7-4. Radiated Spurious Plot (NR Band n2-B14 - Closed)

Bandwidth (MHz):	20 & 10
Frequency (MHz):	1880 & 793
RB / Offset:	1/53 & 1/25
Mode:	EN-DC
Anchor Band:	Band 14



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
2967.0	V	-	-	-78.16	13.33	42.17	-53.09	-13.00	-40.09
3425.5	V	-	-	-78.60	14.30	42.70	-52.56	-13.00	-39.56
4054.0	V	-	-	-78.61	14.64	43.03	-52.23	-13.00	-39.23
5141.0	V	-	-	-79.23	16.79	44.56	-50.70	-13.00	-37.70

Table 7-2. Radiated Spurious Data (NR Band n2-B14 - Open)

FCC ID: A3LSMF707U	 PART 24 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset
		Page 15 of 16

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Samsung **Portable Handset** **FCC ID: A3LSMF707U** complies with the applicable requirements of Part 24 of the FCC Rules with the additional EN-DC combination of n2+B14.

FCC ID: A3LSMF707U	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2105250057-01.A3L	Test Dates: 05/26/2021 - 06/04/2021	EUT Type: Portable Handset	Page 16 of 16