

PART 22 MEASUREMENT REPORT

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
08/21 - 09/07/2021
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2108160097-02.A3L

FCC ID:	A3LSMF711B1
Applicant Name:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-F711B
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: 22
Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President








FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset
		Page 1 of 79


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	11
7.1	Summary	11
7.2	Occupied Bandwidth	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal	26
7.4	Band Edge Emissions at Antenna Terminal	47
7.5	Radiated Power (ERP)	60
7.6	Radiated Spurious Emissions Measurements	63
7.7	Frequency Stability / Temperature Variation	74
8.0	CONCLUSION.....	79

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 2 of 79





PART 22 MEASUREMENT REPORT



Mode	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
			Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	GMSK	824.2 - 848.8	0.345	25.38	0.566	27.53	245KGXW
EDGE	8-PSK	824.2 - 848.8	0.094	19.73	0.154	21.88	245KG7W
WCDMA	Spread Spectrum	826.4 - 846.6	0.064	18.05	0.105	20.20	4M14F9W

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	ERP		EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	Max. Power [W]	Max. Power [dBm]	
LTE Band 26/5	15MHz (Band 26 only)	QPSK	831.5 - 841.5	0.046	16.63	0.075	18.78	13M5G7D
		16QAM	831.5 - 841.5	0.040	16.04	0.066	18.19	13M5W7D
	10 MHz	QPSK	829.0 - 844.0	0.048	16.83	0.079	18.98	9M00G7D
		16QAM	829.0 - 844.0	0.040	15.99	0.065	18.14	8M94W7D
	5 MHz	QPSK	826.5 - 846.5	0.049	16.90	0.080	19.05	4M51G7D
		16QAM	826.5 - 846.5	0.039	15.96	0.065	18.11	4M49W7D
	3 MHz	QPSK	825.5 - 847.5	0.045	16.55	0.074	18.70	2M70G7D
		16QAM	825.5 - 847.5	0.038	15.84	0.063	17.99	2M71W7D
1.4 MHz	QPSK	824.7 - 848.3	0.046	16.61	0.075	18.76	1M09G7D	
	16QAM	824.7 - 848.3	0.038	15.79	0.062	17.94	1M10W7D	
NR Band n5	20 MHz	$\pi/2$ BPSK	834.0 - 839.0	0.051	17.06	0.083	19.21	17M9G7D
		QPSK	834.0 - 839.0	0.050	16.98	0.082	19.13	18M9G7D
		16QAM	834.0 - 839.0	0.036	15.50	0.058	17.65	18M9W7D
	15 MHz	$\pi/2$ BPSK	831.5 - 841.5	0.052	17.14	0.085	19.29	13M4G7D
		QPSK	831.5 - 841.5	0.051	17.06	0.083	19.21	14M0G7D
		16QAM	831.5 - 841.5	0.035	15.44	0.057	17.59	14M0W7D
	10 MHz	$\pi/2$ BPSK	829.0 - 844.0	0.051	17.10	0.084	19.25	8M96G7D
		QPSK	829.0 - 844.0	0.049	16.94	0.081	19.09	9M32G7D
		16QAM	829.0 - 844.0	0.036	15.52	0.058	17.67	9M32W7D
	5 MHz	$\pi/2$ BPSK	826.5 - 846.5	0.051	17.05	0.083	19.20	4M52G7D
		QPSK	826.5 - 846.5	0.050	17.01	0.082	19.16	4M49G7D
		16QAM	826.5 - 846.5	0.035	15.47	0.058	17.62	4M53W7D

FCC ID: A3LSMF711B1		PART 22 MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 3 of 79	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 4 of 79

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF711B1**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 22.

The Equipment Under Test (EUT) can operate in one of three physical configurations – “Open”, “Half open” and “Closed”. All emissions are investigated in three modes for compliance.

Test Device Serial No.: 2637M, 1633M, 1629M, 2616M, 1255M, 2634M, 2635M, 1262M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (n5, n66), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer



2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad(WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 5 of 79

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi];$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:



$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01.



Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 6 of 79

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 7 of 79

5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2	EMC Cable and Switch System	3/4/2021	Annual	3/4/2022	AP2
-	AP1	EMC Cable and Switch System	3/9/2021	Annual	3/9/2022	AP1
-	ETS	EMC Cable and Switch System	3/4/2021	Annual	3/4/2022	ETS
-	LTX2	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTX2
-	LTX5	Licensed Transmitter Cable Set	3/3/2021	Annual	3/3/2022	LTX5
Agilent	E5515C	Wireless Communications Test Set	N/A			GB46310798
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6200901190
Com-Power	AL-130R	Active Loop Antenna	8/22/2019	Biennial	8/22/2021	121085
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/20/2021	Biennial	4/20/2023	00125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
ETS Lindgren	3816/2NM	LISN	7/9/2020	Biennial	7/9/2022	00114451
Keysight Technologies	N9030A	PXA Signal Analyzer	10/16/2020	Annual	10/16/2021	MY54490576
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/9/2020	Annual	9/9/2021	100348
Rohde & Schwarz	ESW44	EMI Test Receiver 2Hz to 44 GHz	1/21/2021	Annual	1/21/2022	101716
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and Spectrum Analyzer	2/10/2021	Annual	2/10/2022	103187
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 8 of 79

6.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation



Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info



D = Data transmission, telemetry, telecommand

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 9 of 79

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 10 of 79

7.0 TEST RESULTS

7.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF711B1
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM/GPRS/EDGE/WCDMA/NR/LTE

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power	2.1046	RSS-132(5.4)	N/A	PASS	See RF Exposure Report
	Occupied Bandwidth	2.1049	RSS-Gen(6.7)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 22.917(a)	RSS-132(5.5)	> 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Frequency Stability	2.1055, 22.355	RSS-132(5.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power	22.913(a)(5)	RSS-132(5.4)	< 7 Watts max. ERP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 22.917(a)	RSS-132(5.5)	> 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool v1.0.

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 11 of 79

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

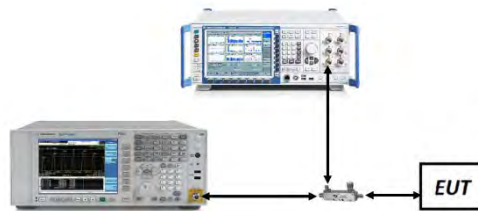





Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 12 of 79

LTE Band 26/5

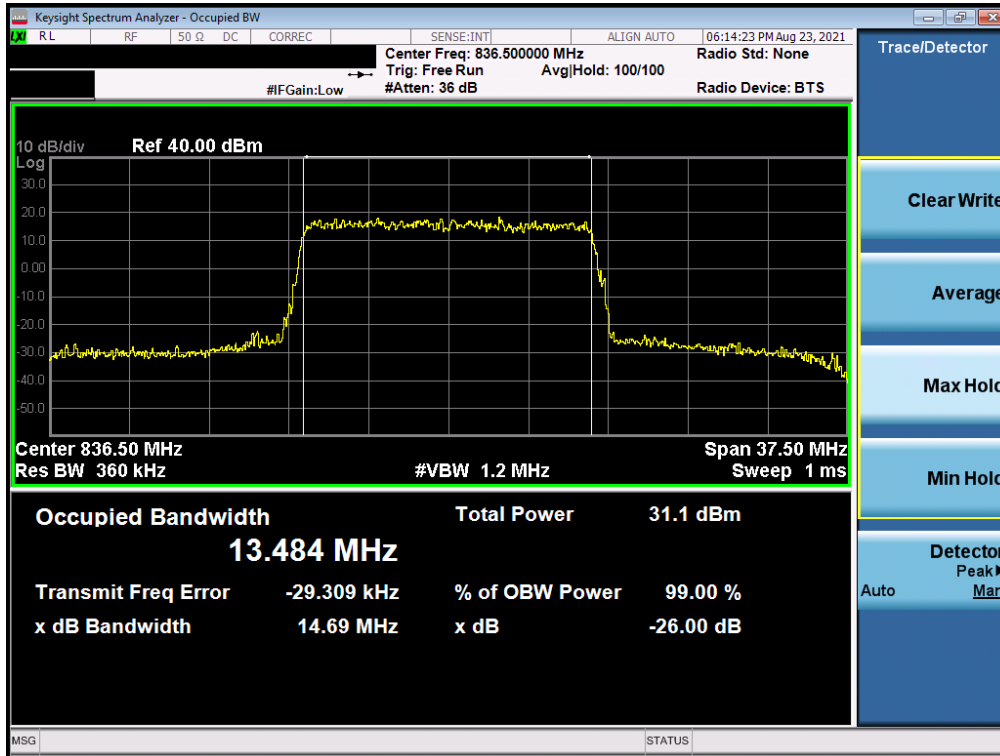


Plot 7-1. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB)

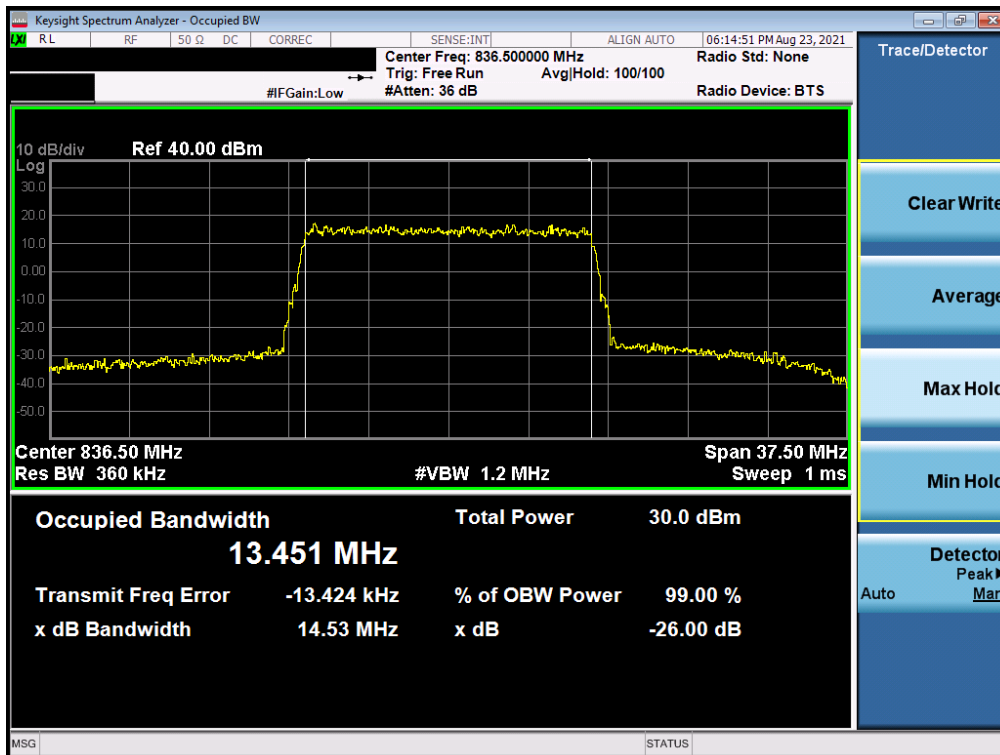


Plot 7-2. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB)

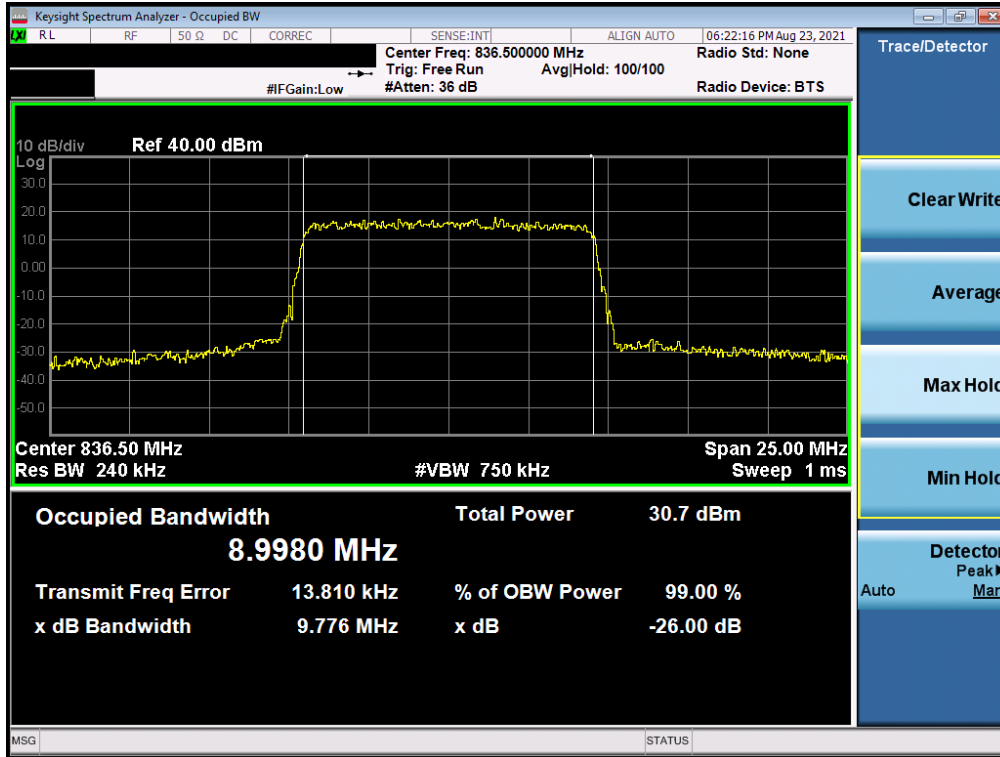

FCC ID: A3LSMF711B1	PCTEST <small>Provided to be part of</small>	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 13 of 79

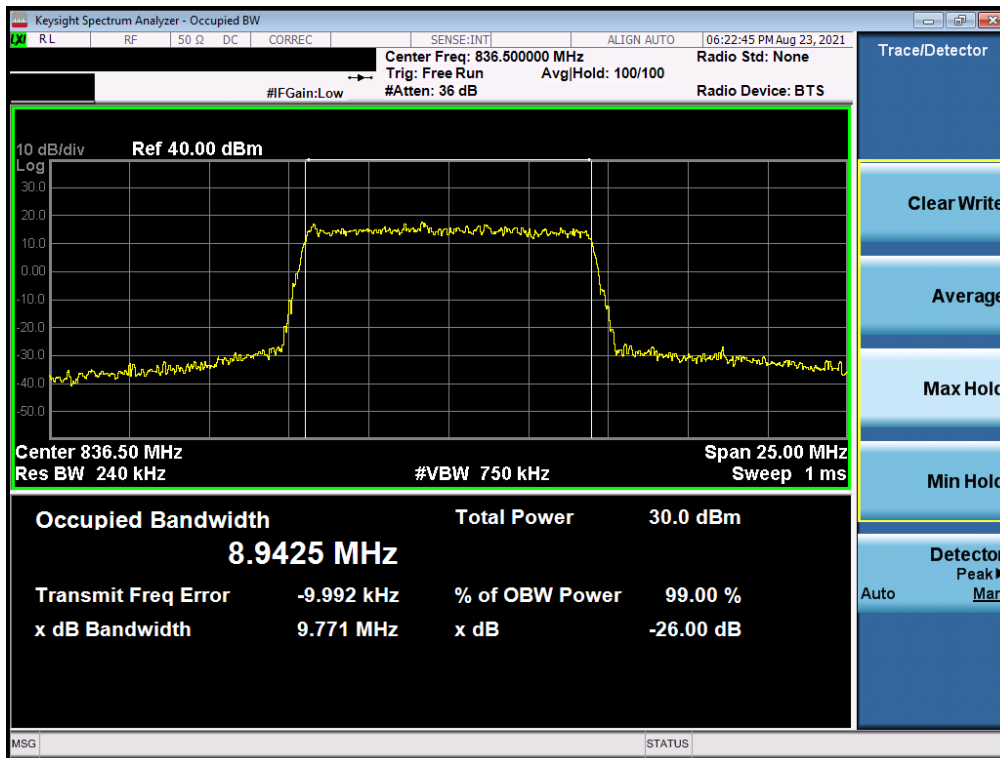


Plot 7-3. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz QPSK - Full RB)




Plot 7-4. Occupied Bandwidth Plot (LTE Band 26/5 - 10MHz 16-QAM - Full RB)

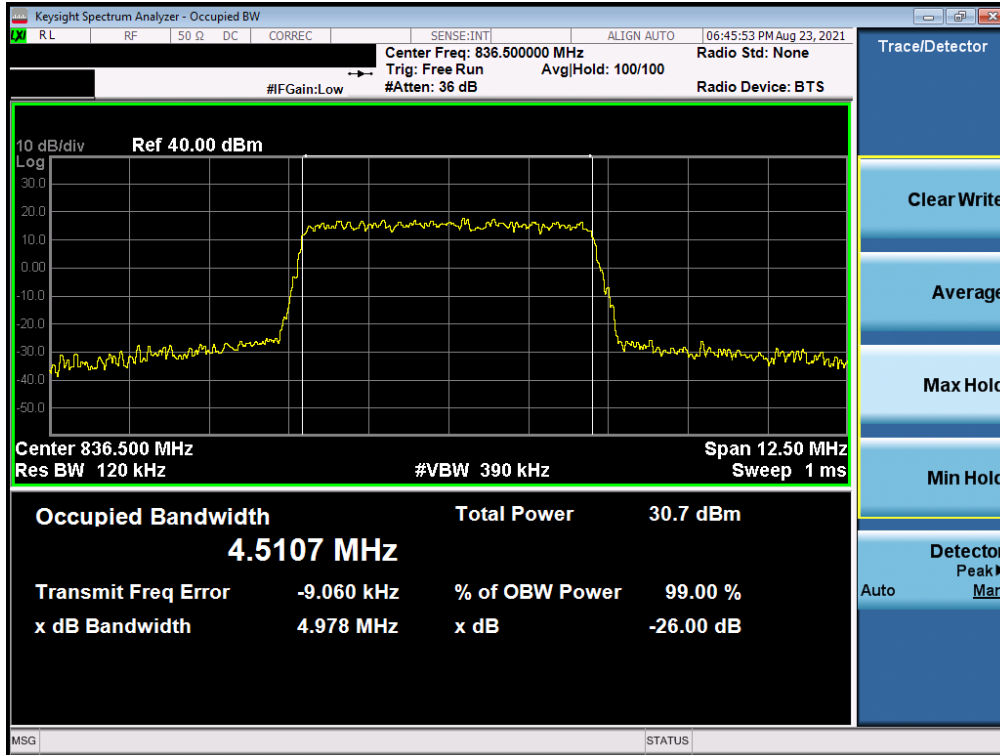

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 14 of 79

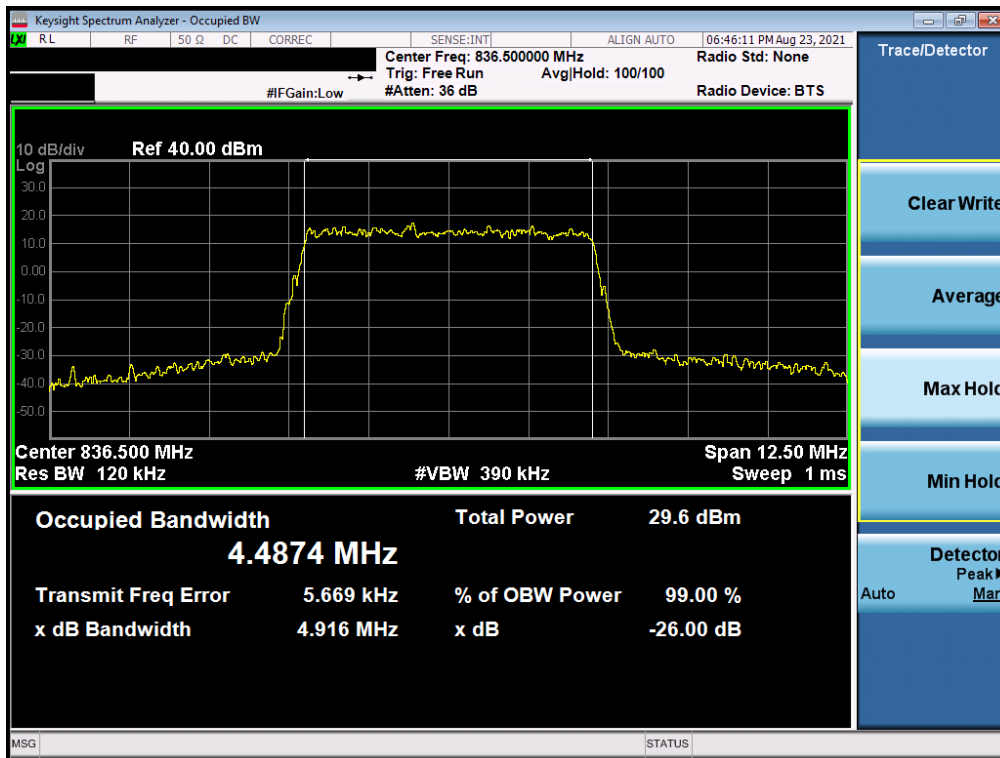


Plot 7-5. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz QPSK - Full RB)




Plot 7-6. Occupied Bandwidth Plot (LTE Band 26/5 - 5MHz 16-QAM - Full RB)

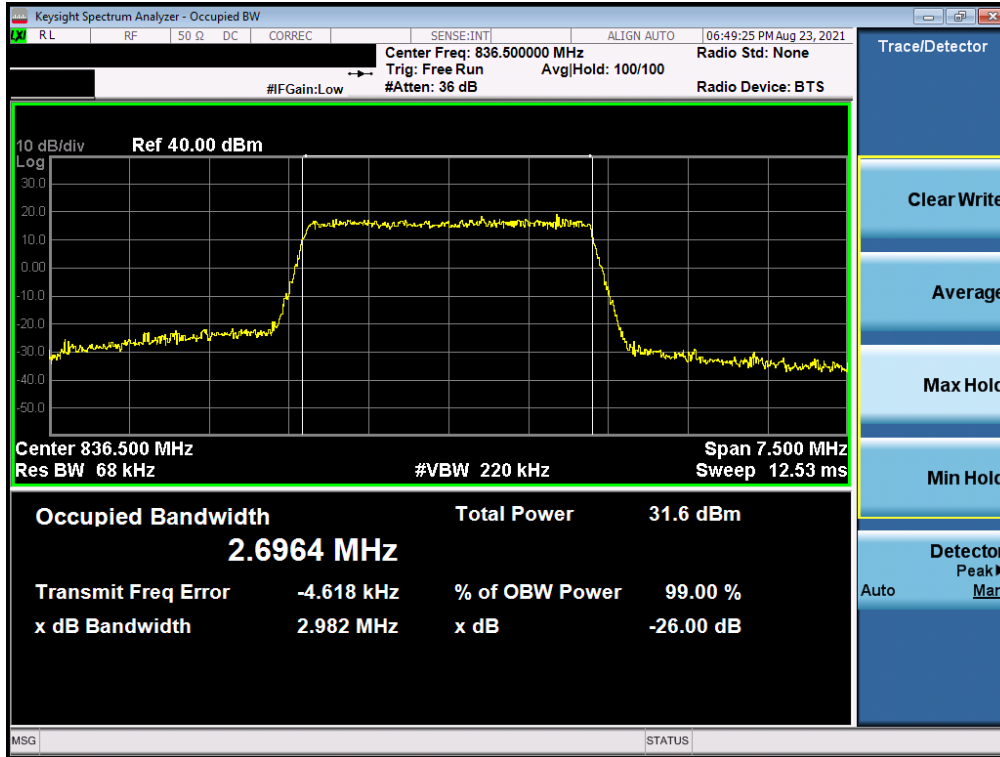


FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 15 of 79

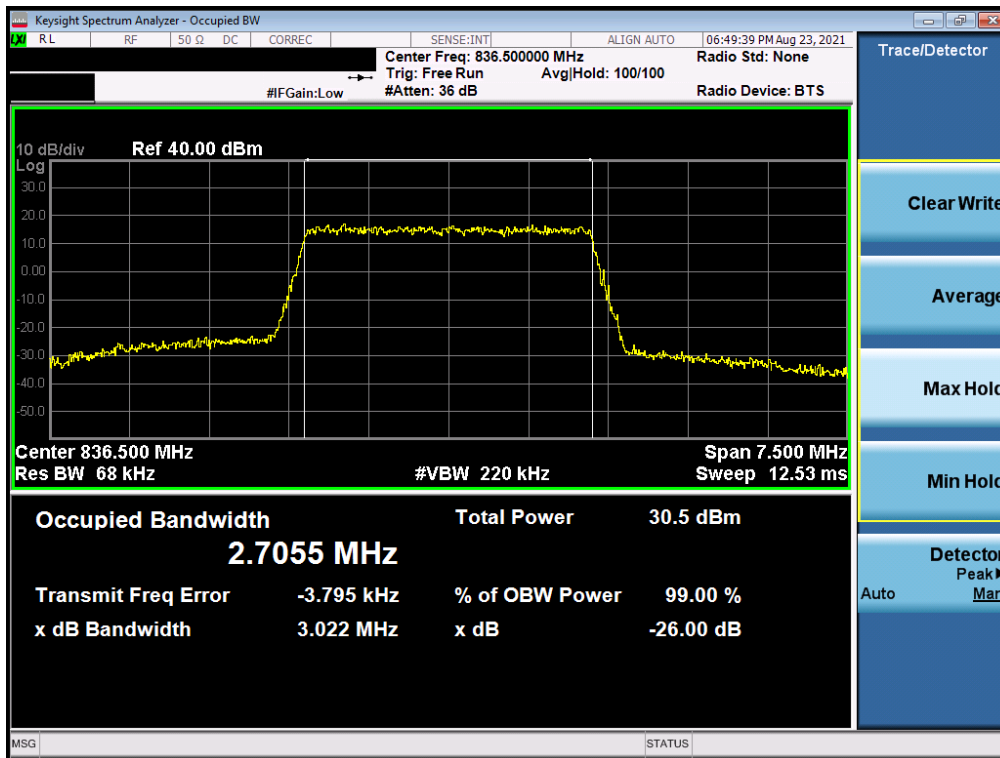


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz QPSK - Full RB)




Plot 7-8. Occupied Bandwidth Plot (LTE Band 26/5 - 3MHz 16-QAM - Full RB)

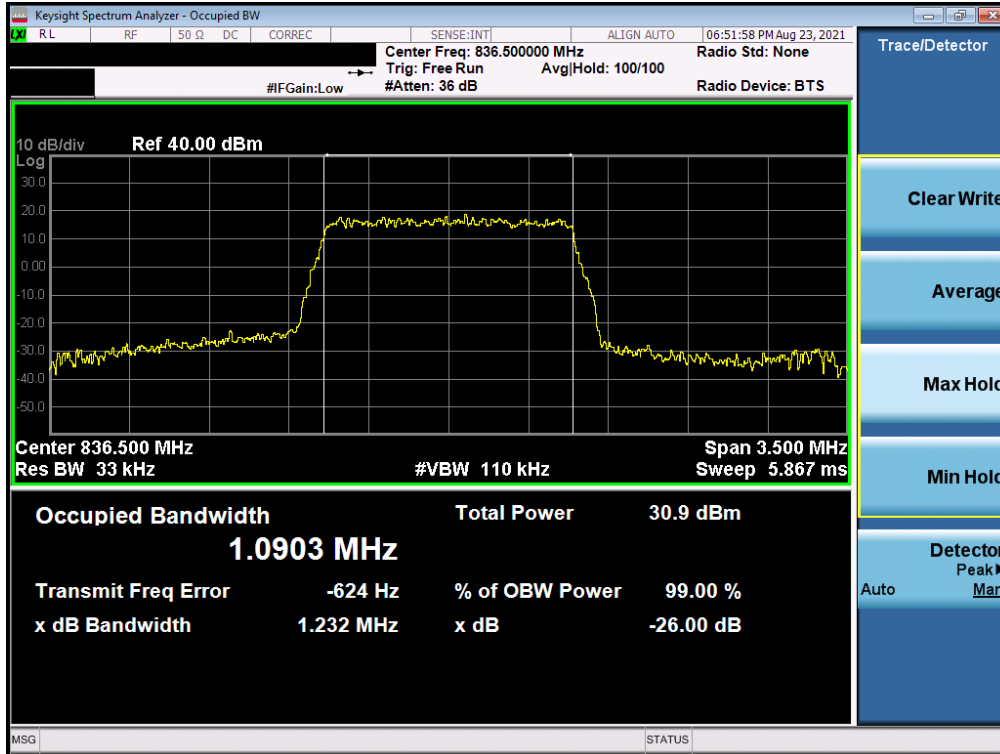

FCC ID: A3LSMF711B1	 PCTEST Proud to be part of 	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 16 of 79

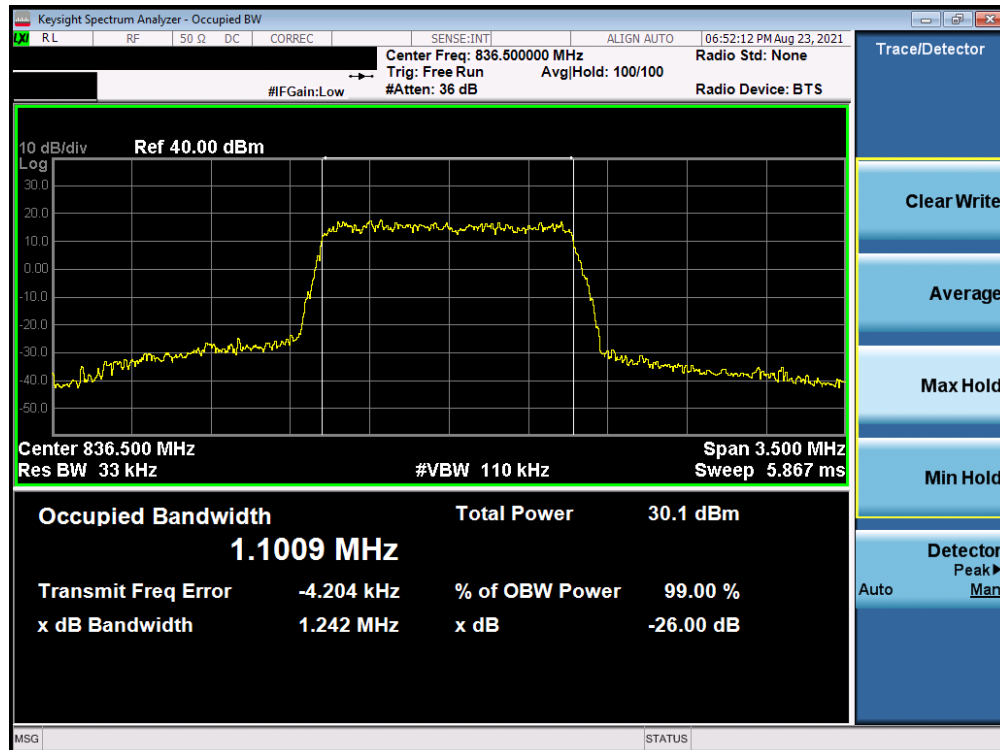


Plot 7-9. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz QPSK - Full RB)




Plot 7-10. Occupied Bandwidth Plot (LTE Band 26/5 - 1.4MHz 16-QAM - Full RB)

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 17 of 79

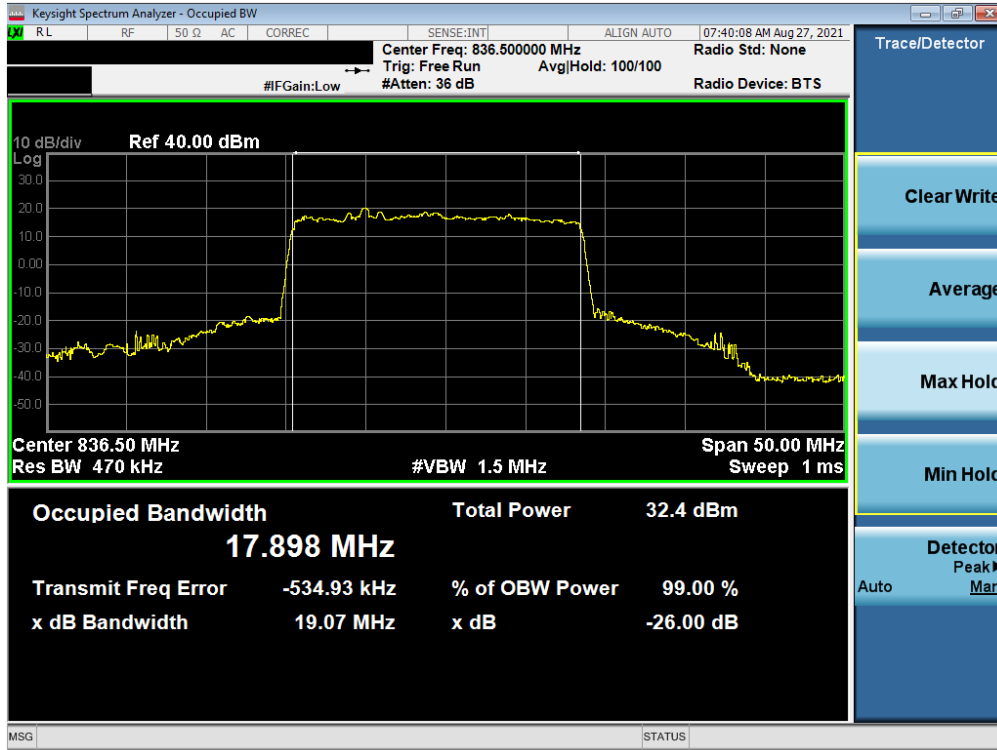

NR Band n5

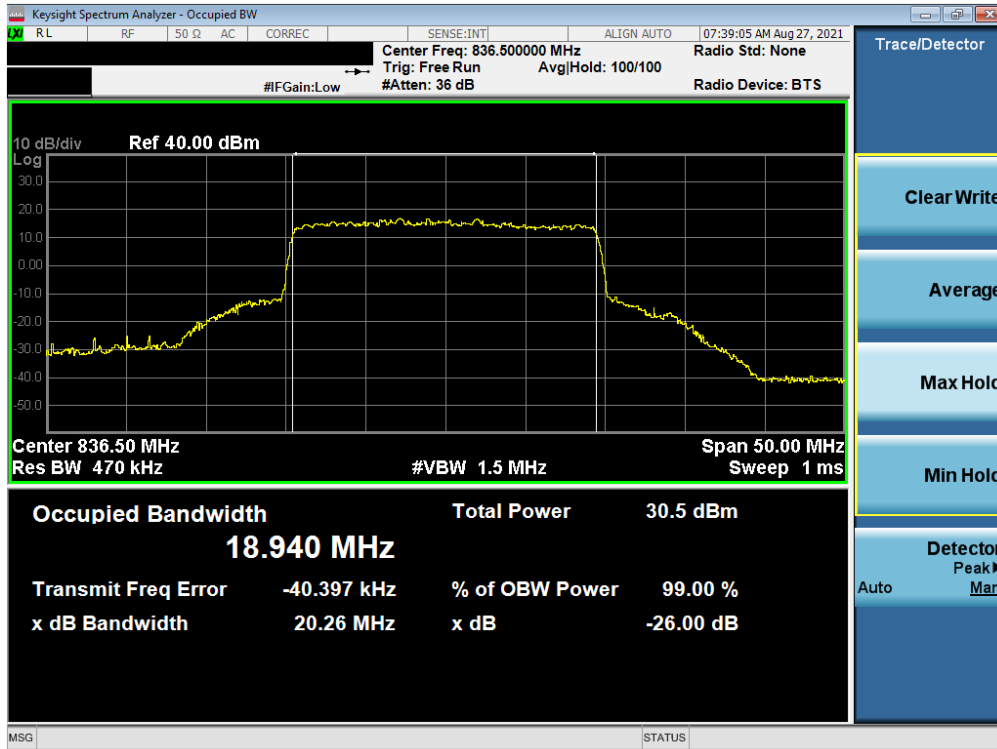


Plot 7-11. Occupied Bandwidth Plot (NR Band n5 - 20MHz $\pi/2$ BPSK - Full RB)




Plot 7-12. Occupied Bandwidth Plot (NR Band n5 - 20MHz QPSK - Full RB)

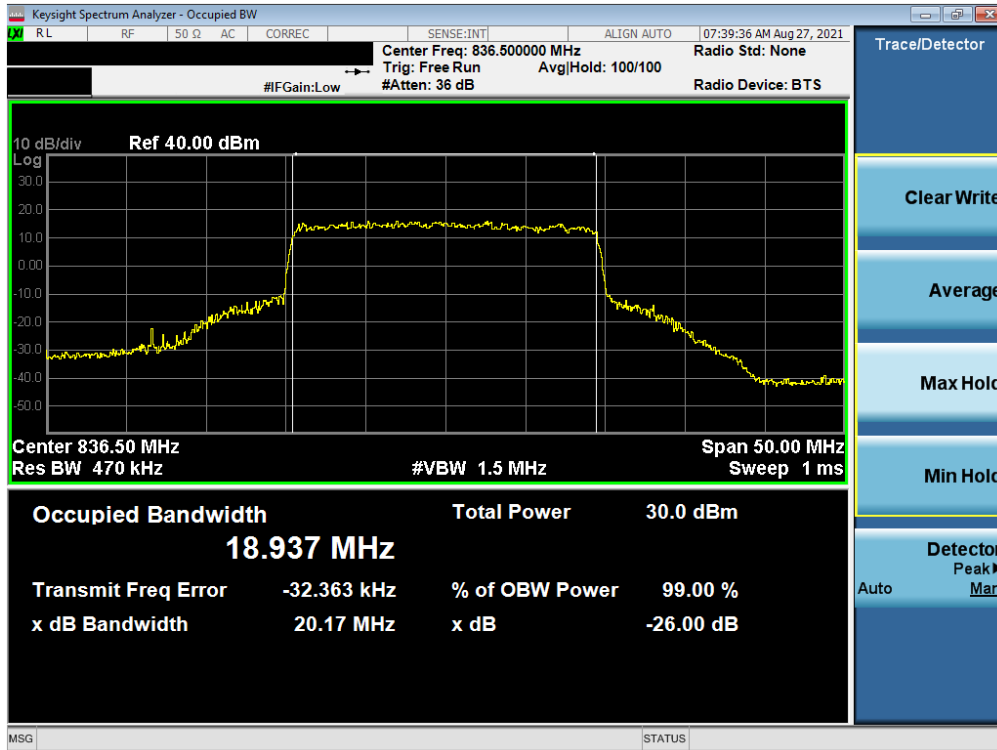

FCC ID: A3LSMF711B1		PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 18 of 79

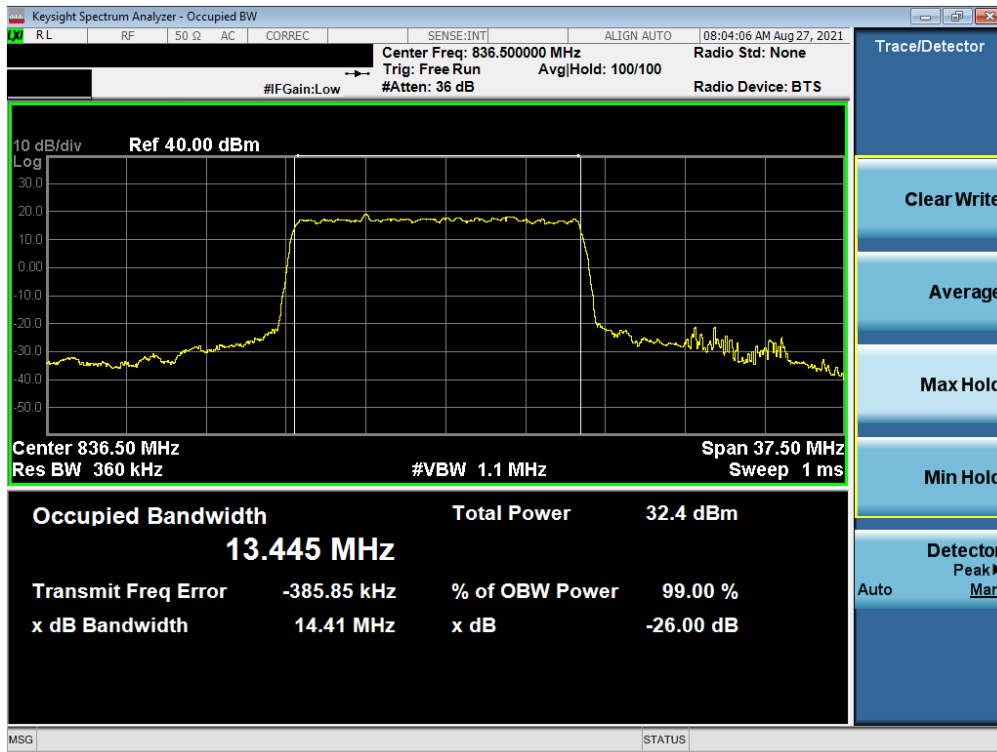


Plot 7-13. Occupied Bandwidth Plot (NR Band n5 - 20MHz 16-QAM - Full RB)




Plot 7-14. Occupied Bandwidth Plot (NR Band n5 - 15MHz $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 19 of 79

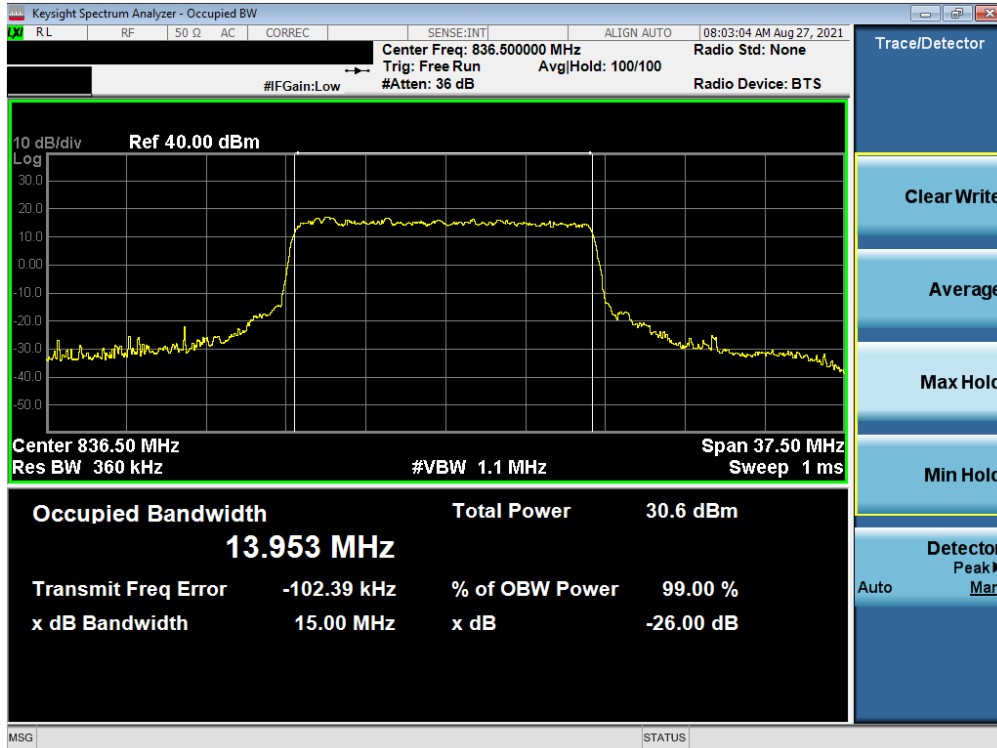


Plot 7-15. Occupied Bandwidth Plot (NR Band n5 - 15MHz QPSK - Full RB)

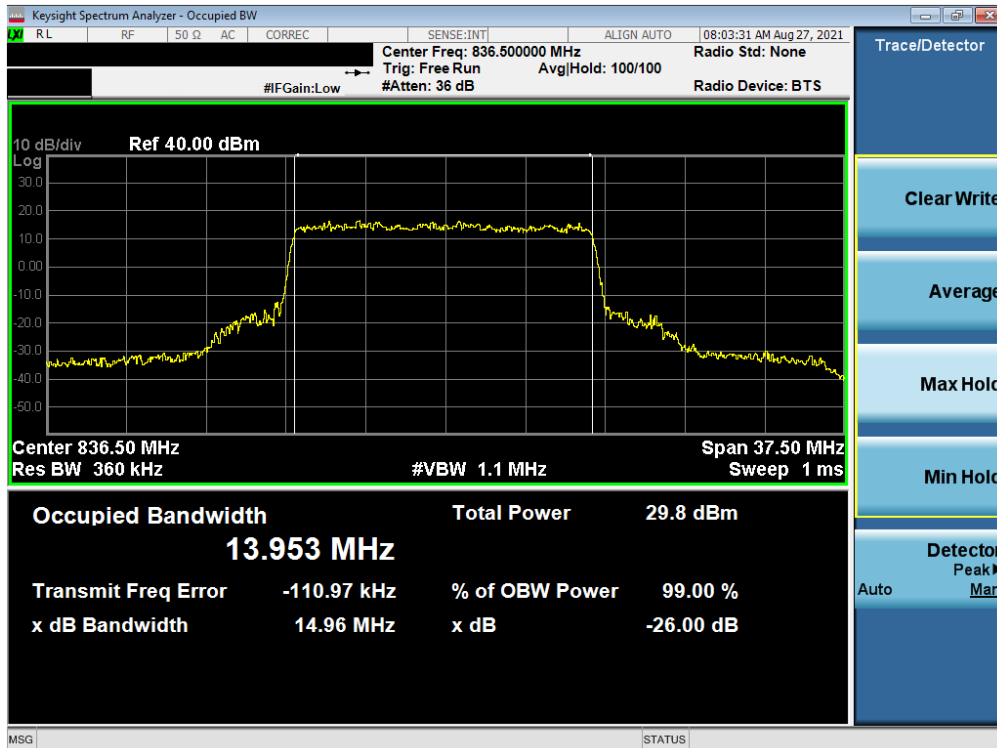


Plot 7-16. Occupied Bandwidth Plot (NR Band n5 - 15MHz 16-QAM - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of Element	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 20 of 79

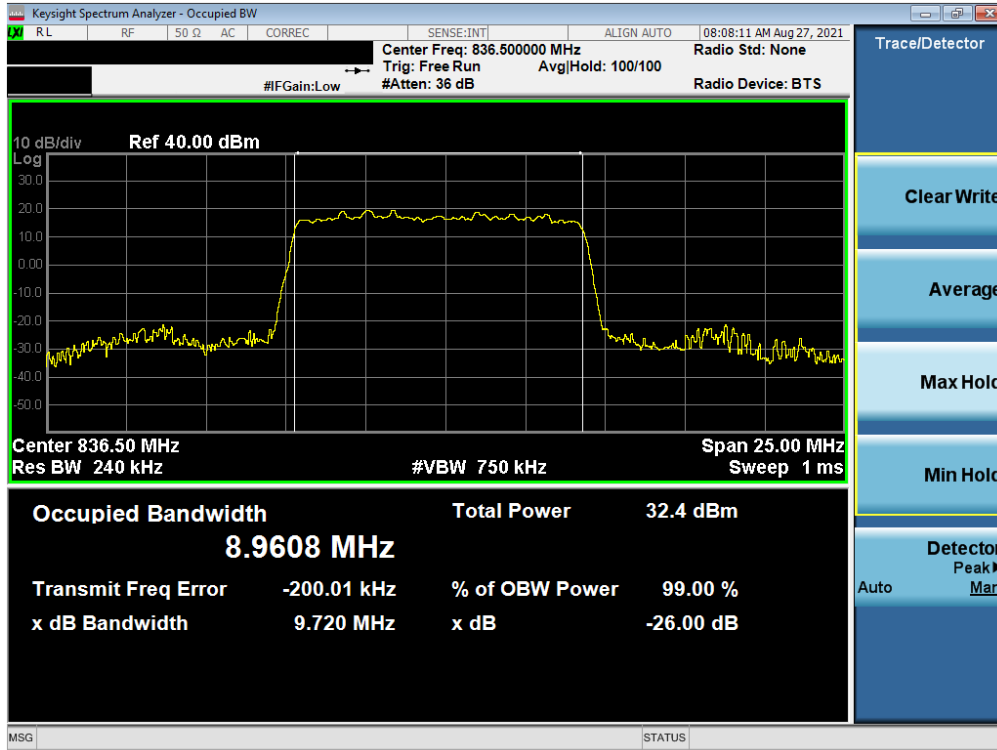


Plot 7-17. Occupied Bandwidth Plot (NR Band n5 - 10MHz $\pi/2$ BPSK - Full RB)

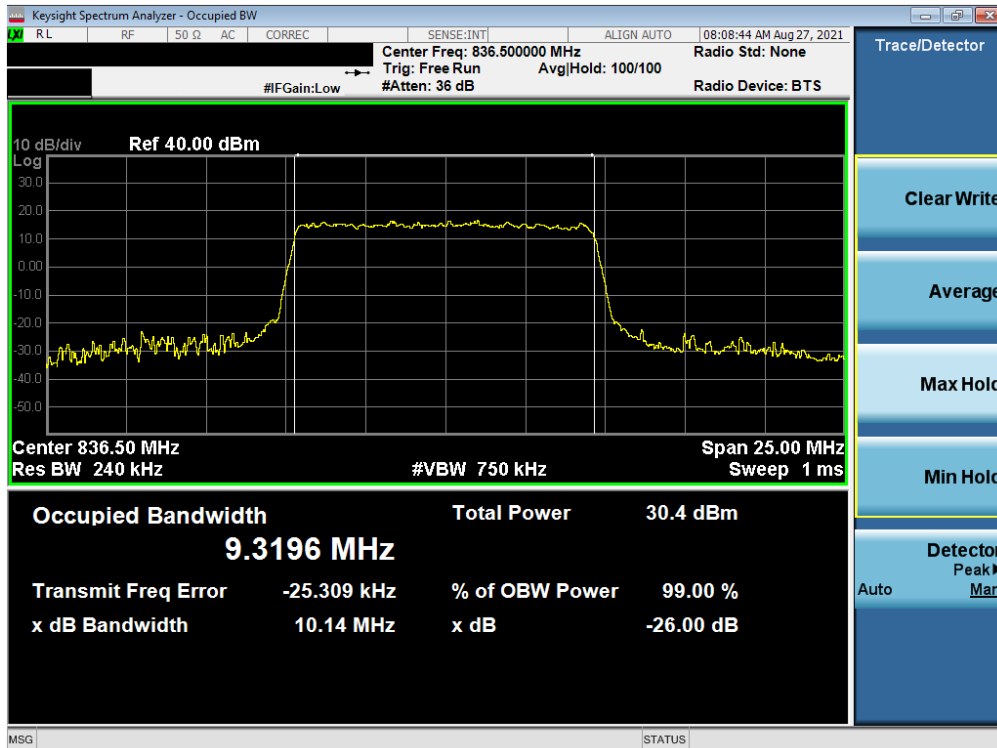

Plot 7-18. Occupied Bandwidth Plot (NR Band n5 - 10MHz QPSK - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of Element	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 21 of 79

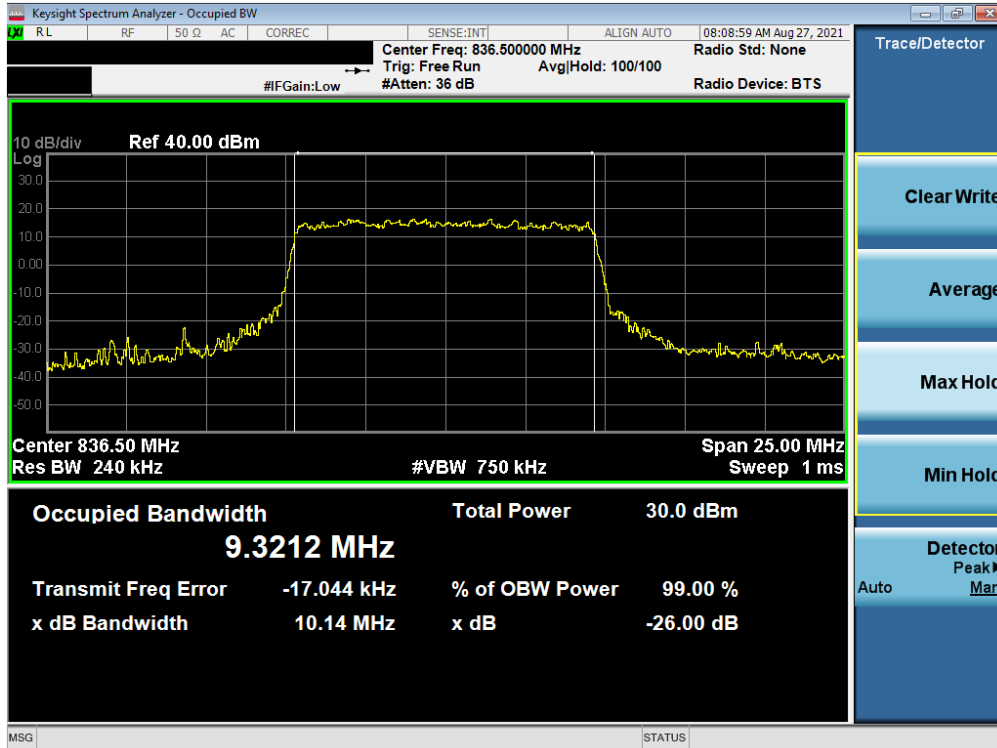


Plot 7-19. Occupied Bandwidth Plot (NR Band n5 - 10MHz 16-QAM - Full RB)




Plot 7-20. Occupied Bandwidth Plot (NR Band n5 - 5MHz $\pi/2$ BPSK - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of Element	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 22 of 79

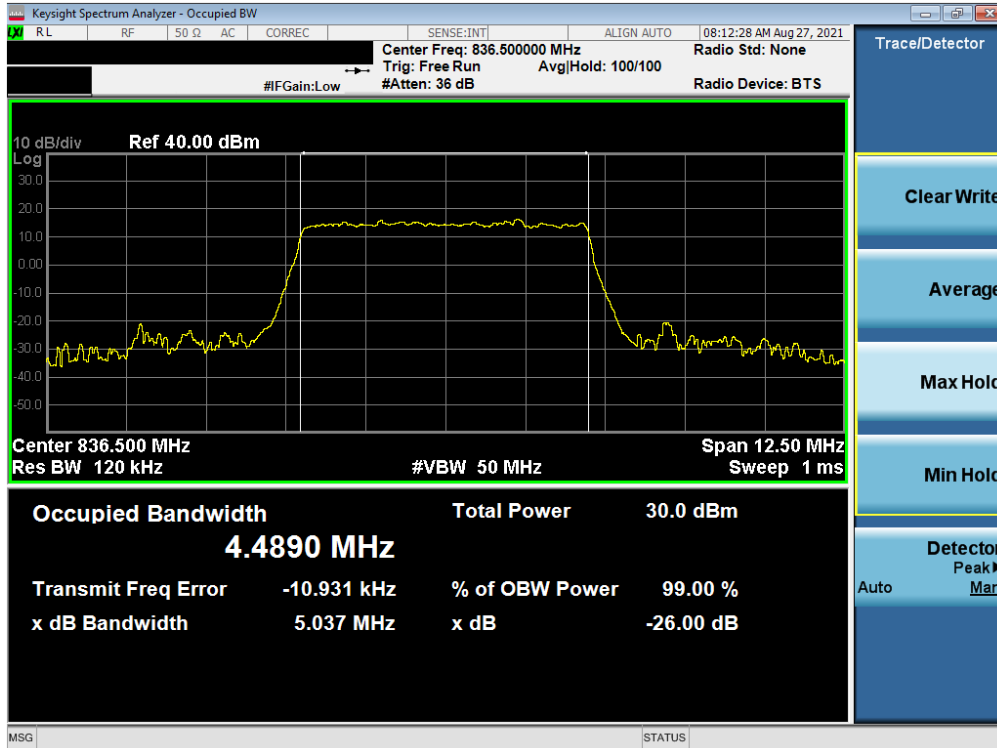

Plot 7-21. Occupied Bandwidth Plot (NR Band n5 - 5MHz QPSK - Full RB)

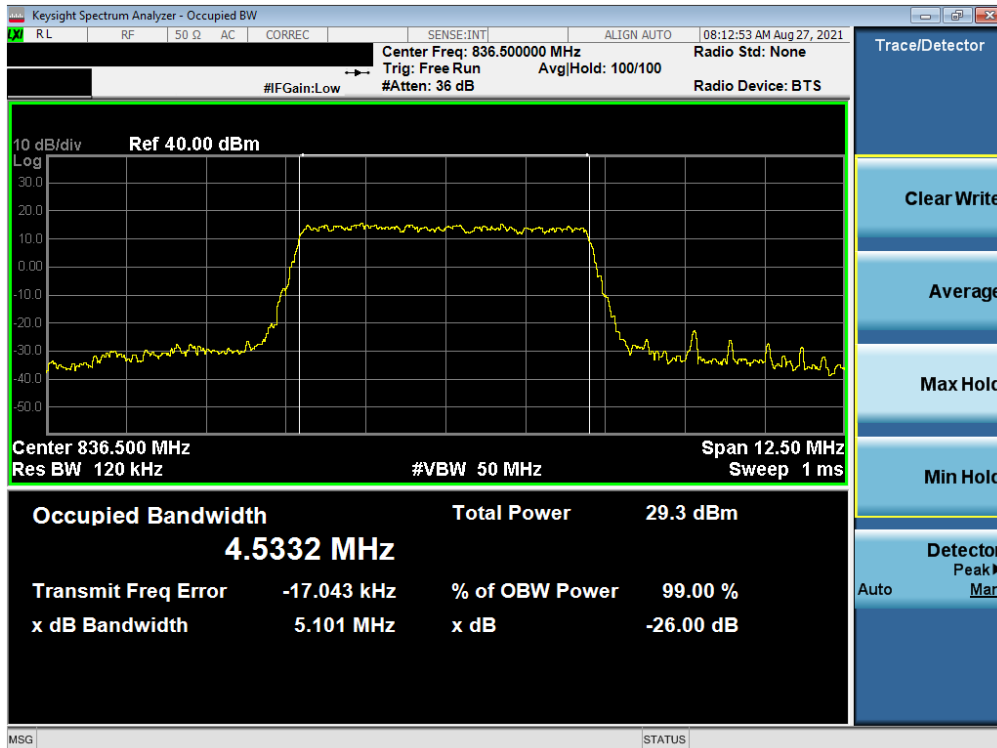


Plot 7-22. Occupied Bandwidth Plot (NR Band n5 - 5MHz 16-QAM - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of Samsung	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 23 of 79

GPRS Cell




Plot 7-23. Occupied Bandwidth Plot (GPRS, Ch. 190)

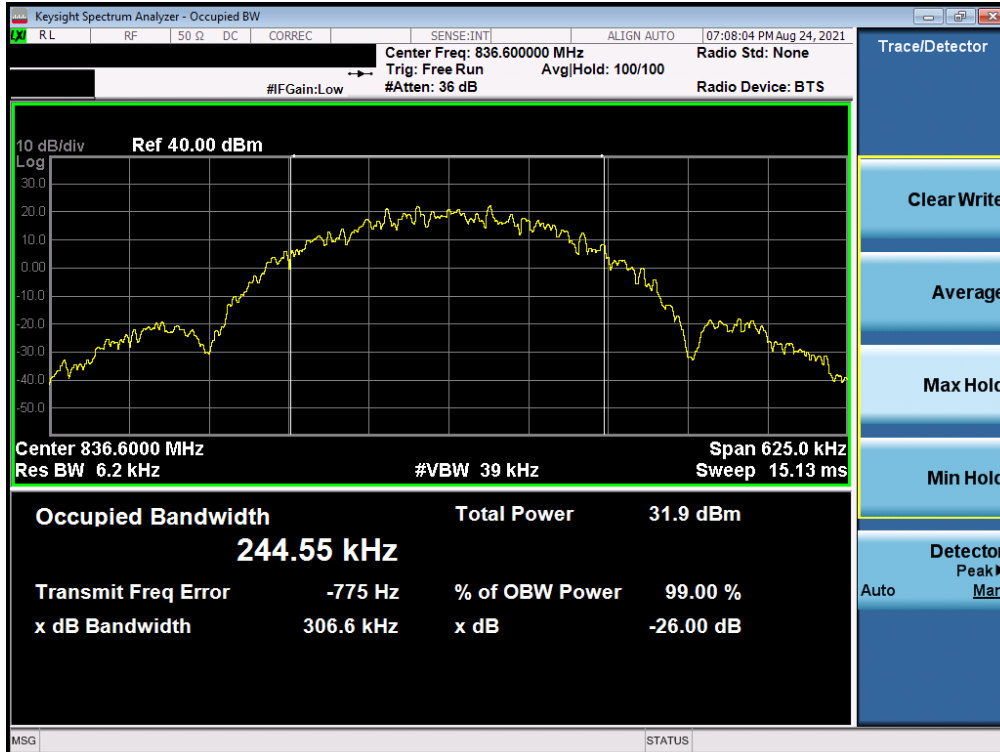



Plot 7-24. Occupied Bandwidth Plot (EDGE, Ch. 190)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of Element	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 24 of 79

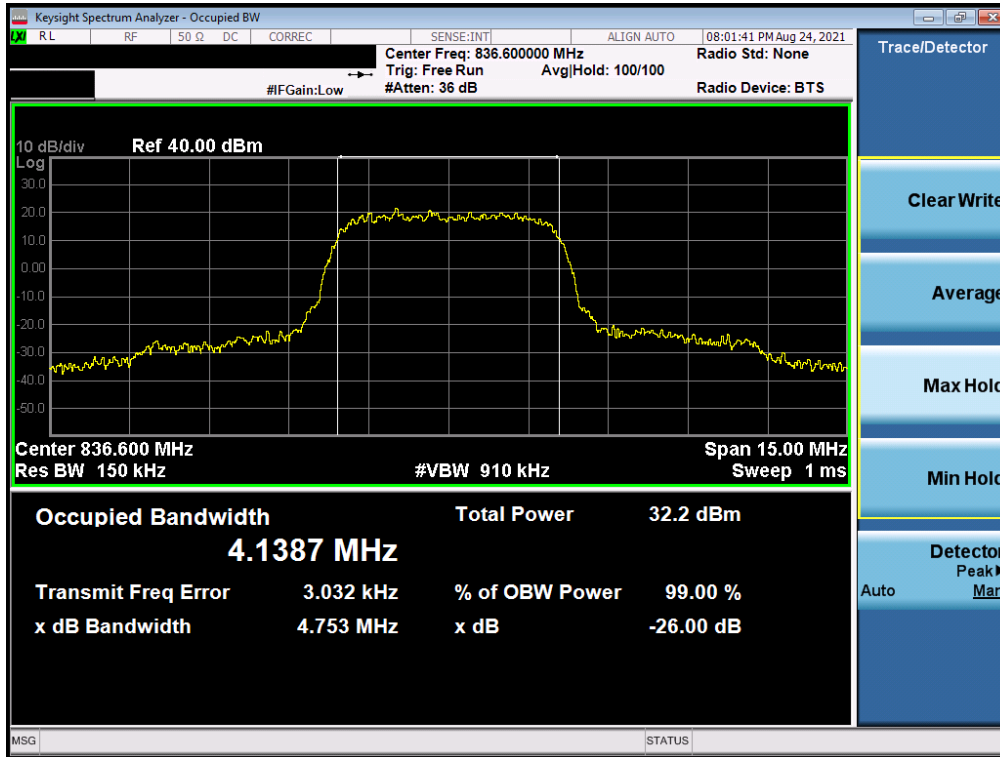WCDMA Cell



Plot 7-25. Occupied Bandwidth Plot (WCDMA, Ch. 4183)

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 25 of 79

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-2. Test Instrument & Measurement Setup

Test Notes


1. Per Part 22 and RSS-132, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 26 of 79

LTE Band 26/5

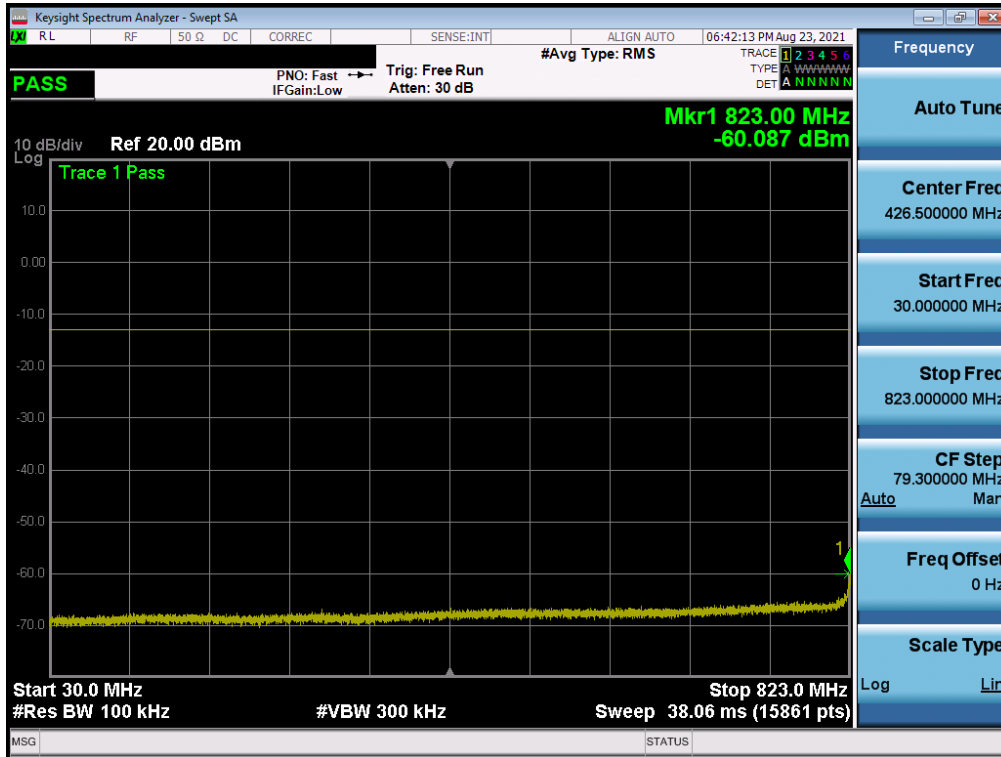


Plot 7-26. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK – 1 RB - Low Channel)

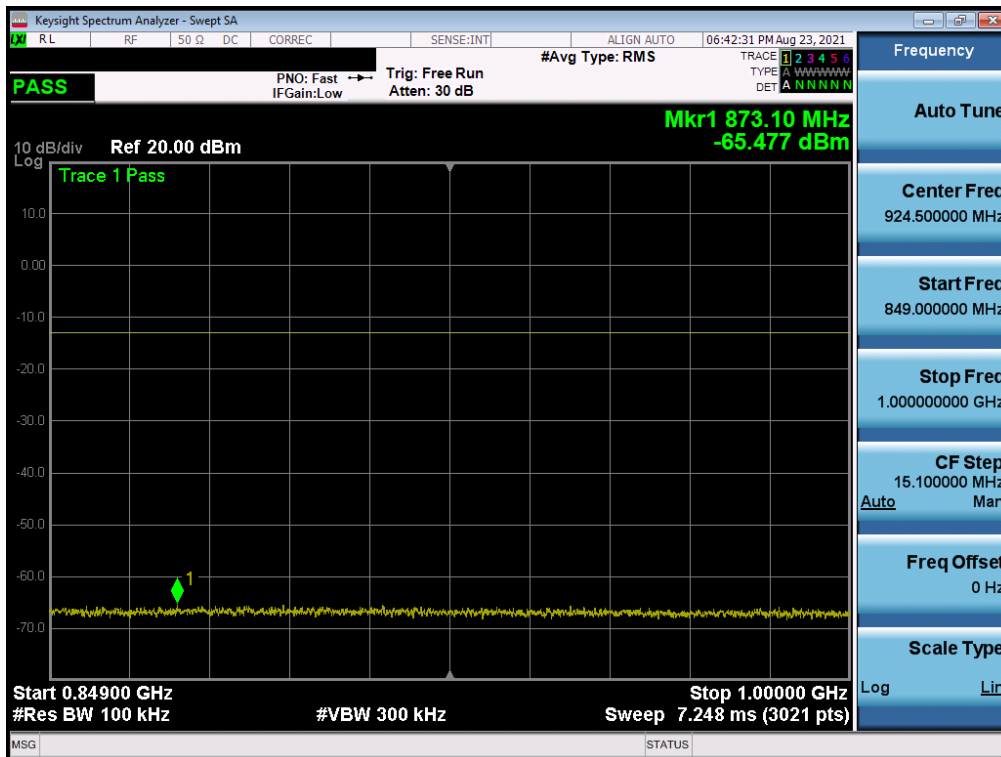


Plot 7-27. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Low Channel)

FCC ID: A3LSMF711B1	PCTEST <small>Proved to be part of Element</small>	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 27 of 79

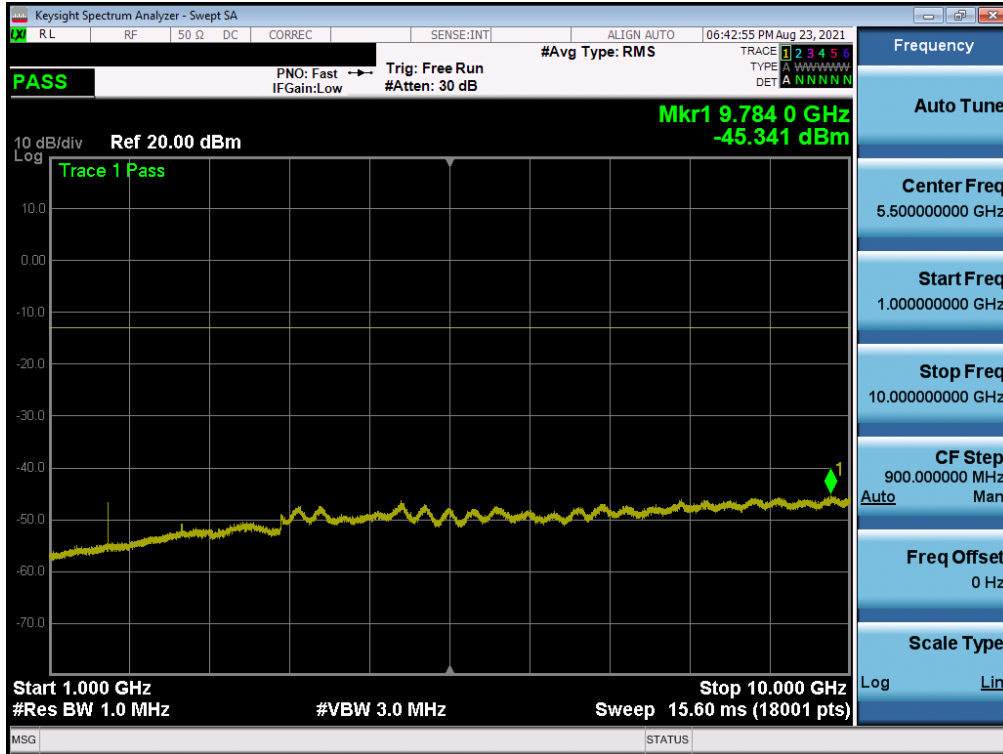


Plot 7-28. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Low Channel)

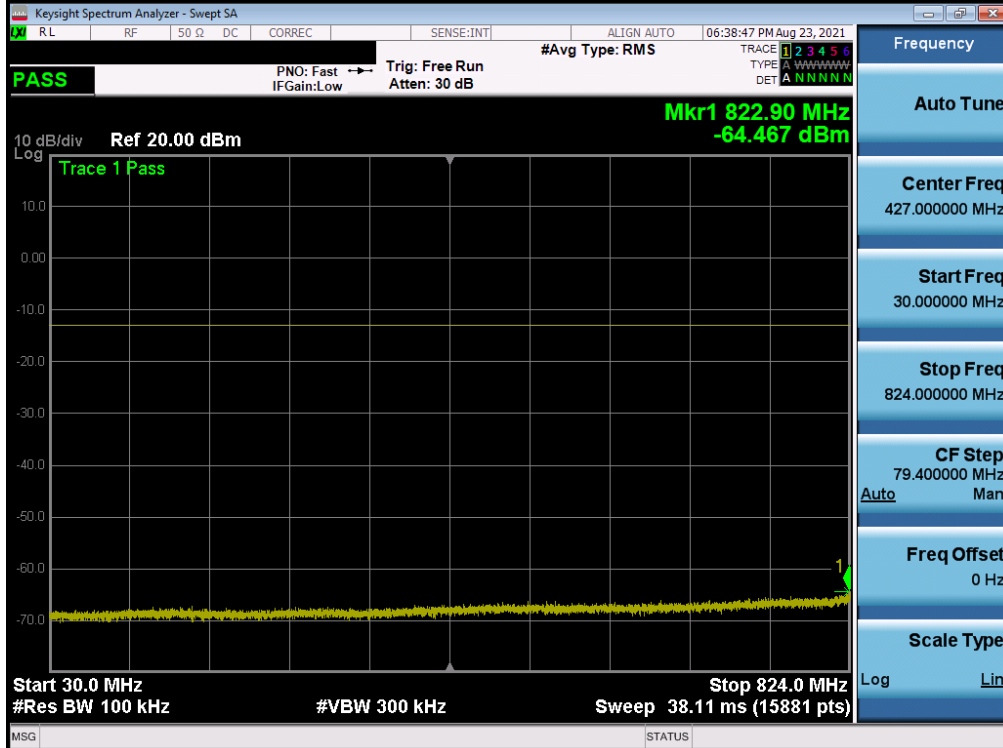


Plot 7-29. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - Mid Channel)

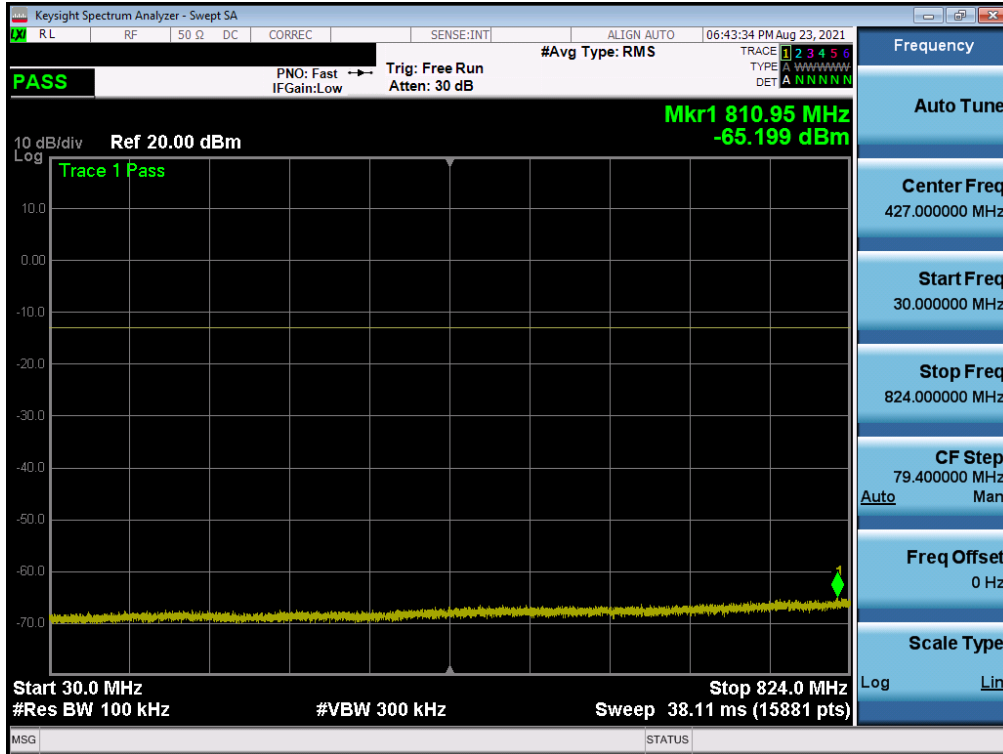

FCC ID: A3LSMF711B1	PCTEST Proud to be part of Samsung	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 28 of 79

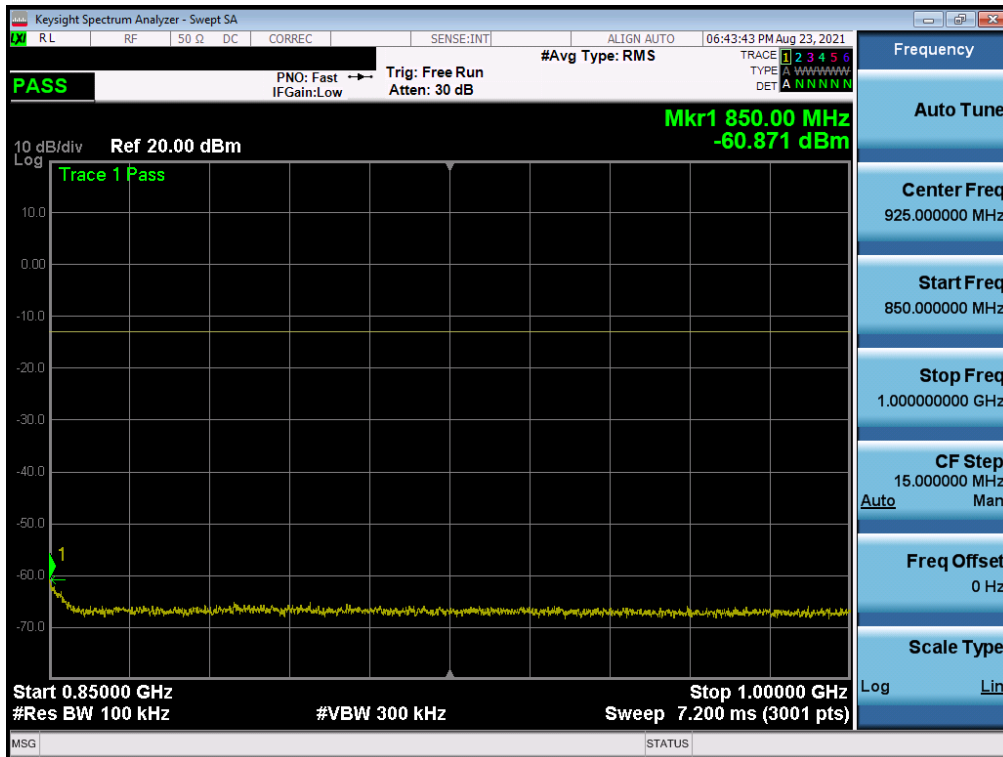


Plot 7-32. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - High Channel)





Plot 7-33. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - High Channel)

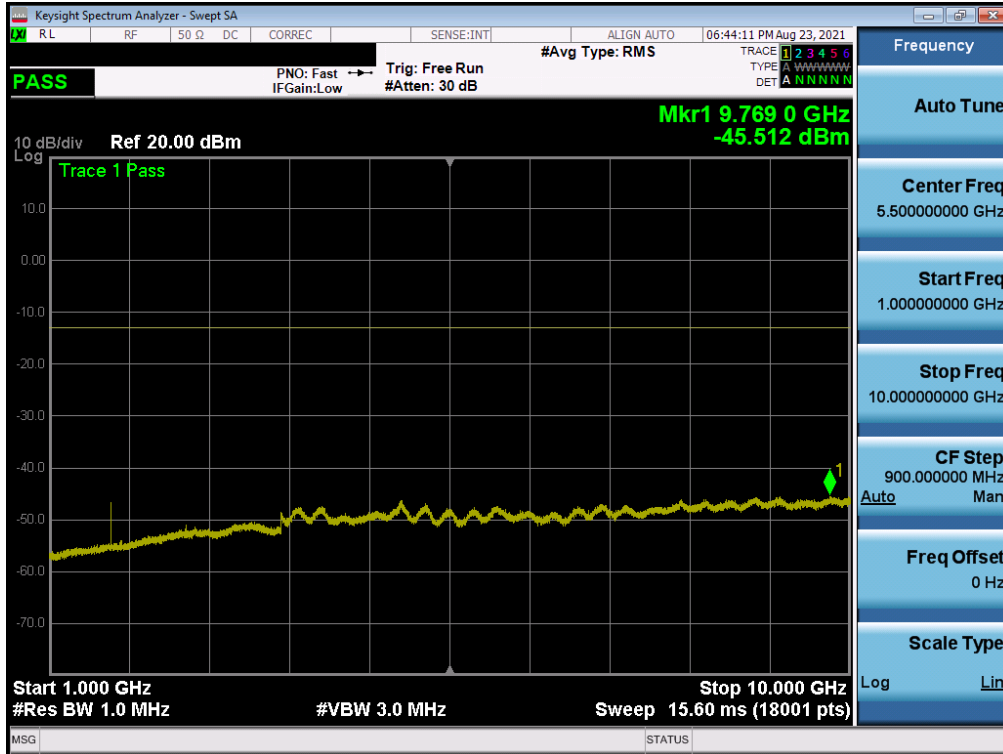
FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 30 of 79




Plot 7-34. Conducted Spurious Plot (LTE Band 26/5 - 10MHz QPSK - 1 RB - High Channel)

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 31 of 79

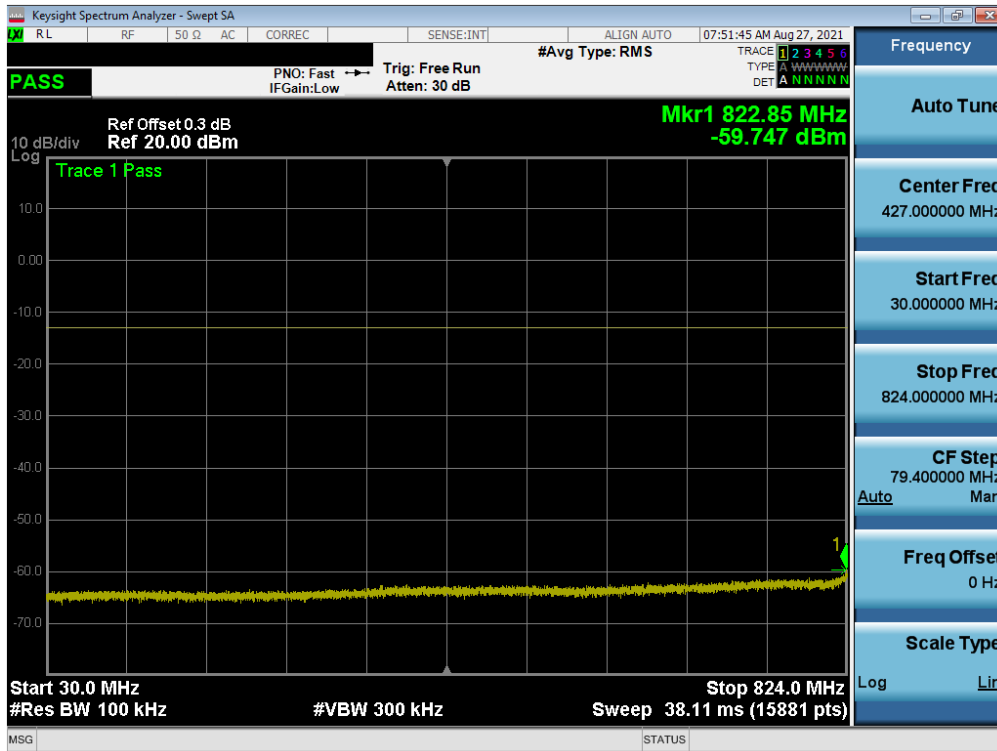

NR Band n5

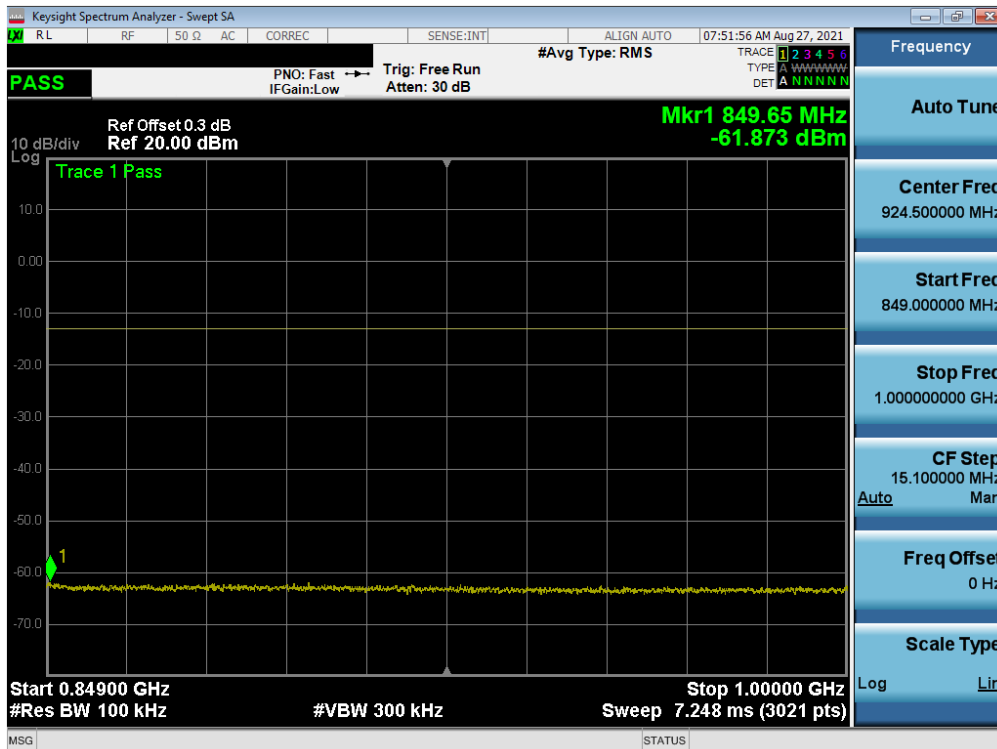


Plot 7-35. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Low Channel)




Plot 7-36. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Low Channel)

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 32 of 79

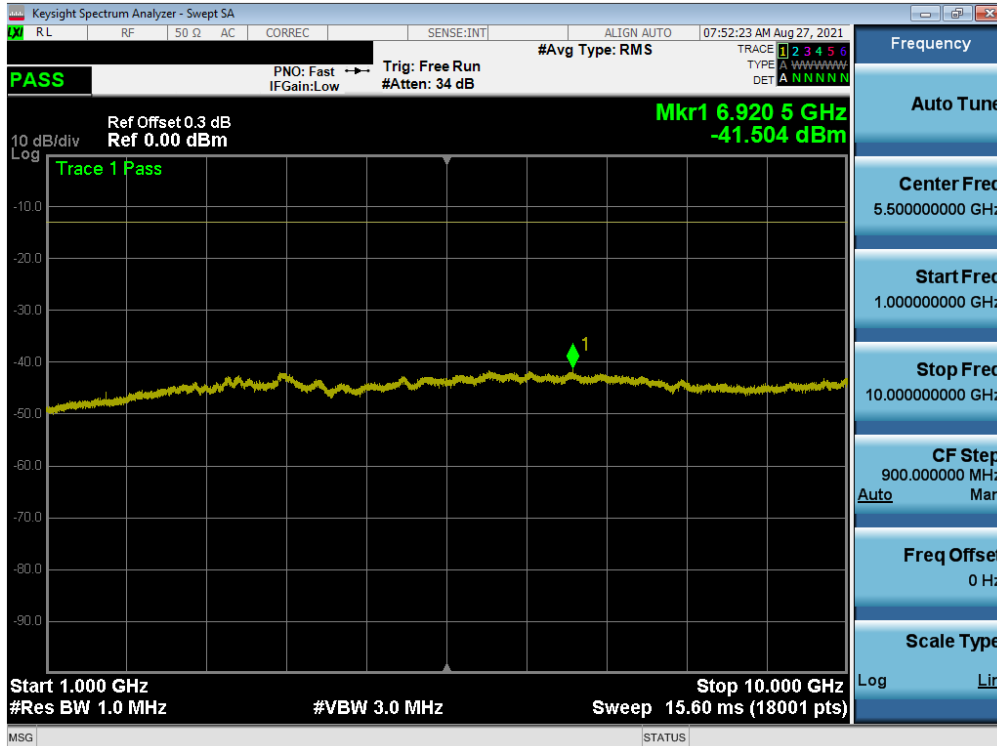


Plot 7-37. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Low Channel)

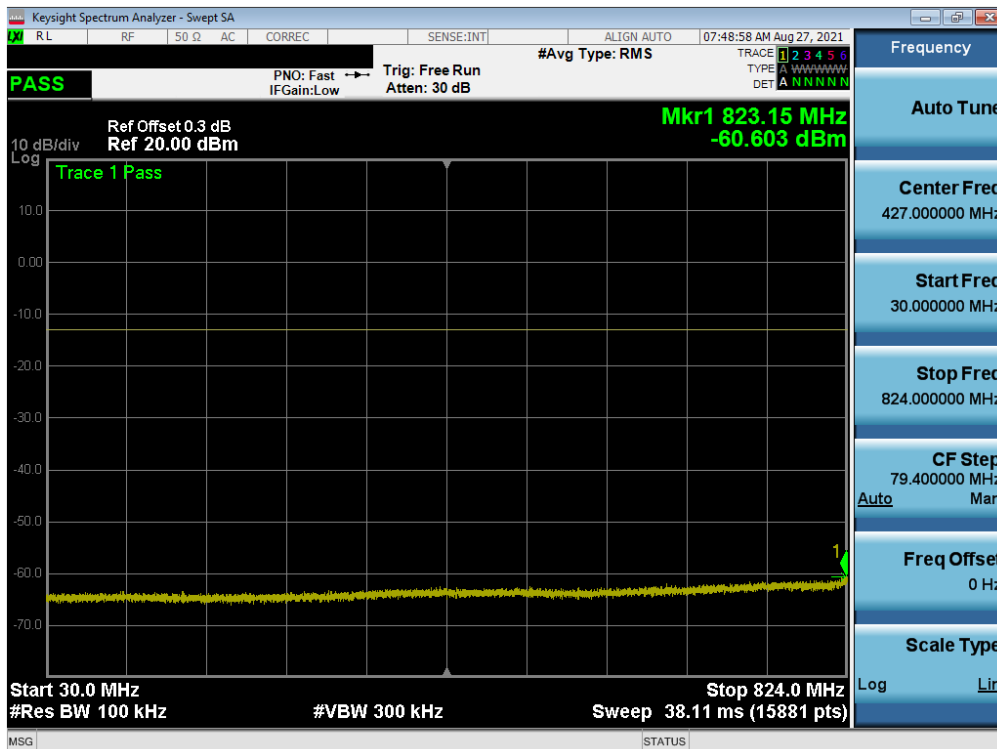


Plot 7-38. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Mid Channel)

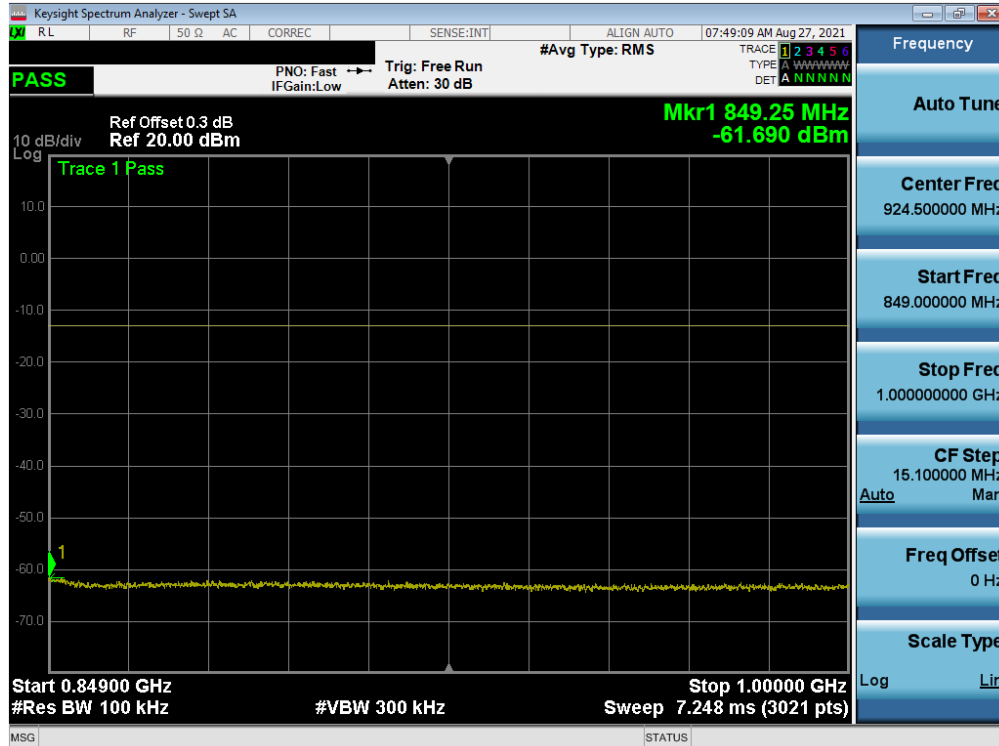


FCC ID: A3LSMF711B1	PCTEST Proud to be part of Samsung	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 33 of 79

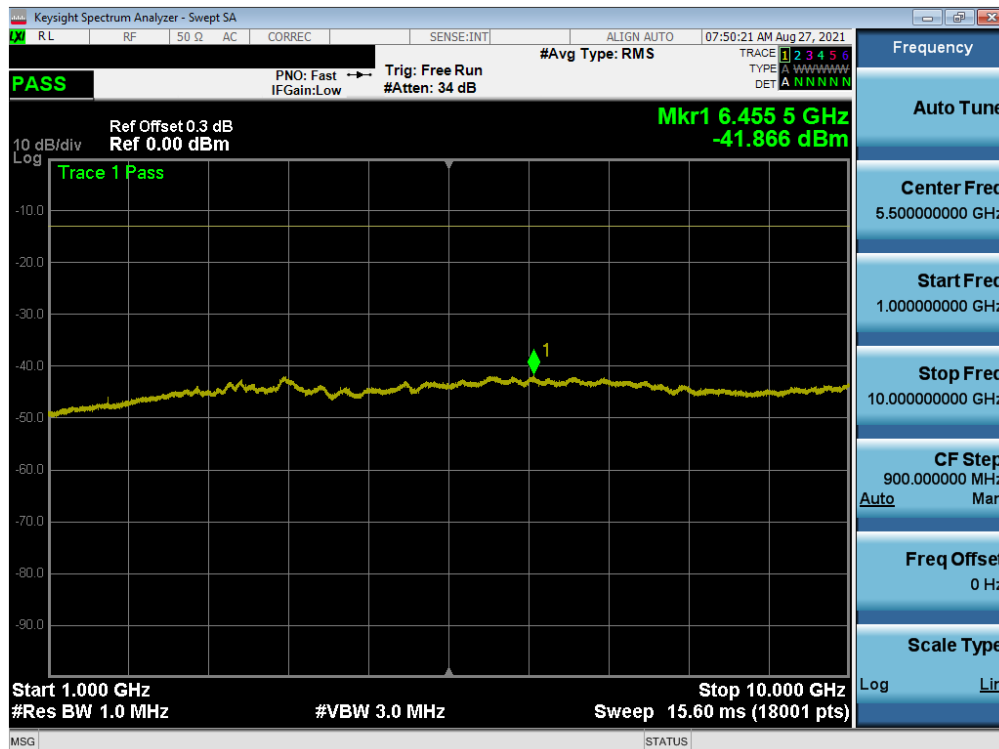


Plot 7-39. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Mid Channel)




Plot 7-40. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - Mid Channel)

FCC ID: A3LSMF711B1	 PCTEST Proud to be part of 	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 34 of 79

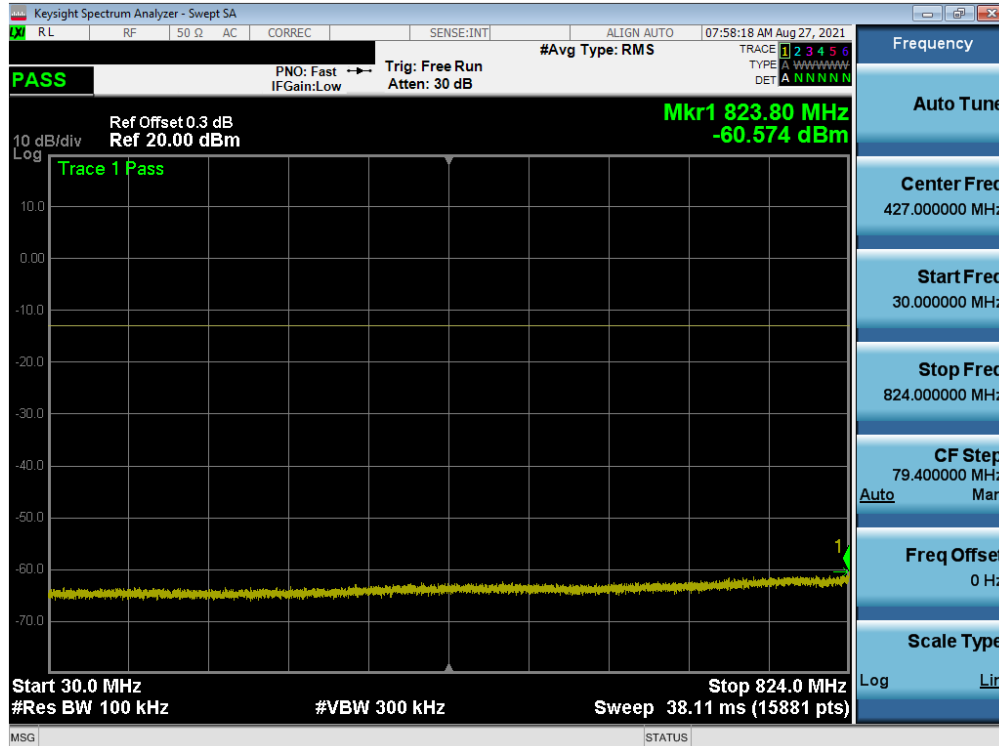


Plot 7-41. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - High Channel)

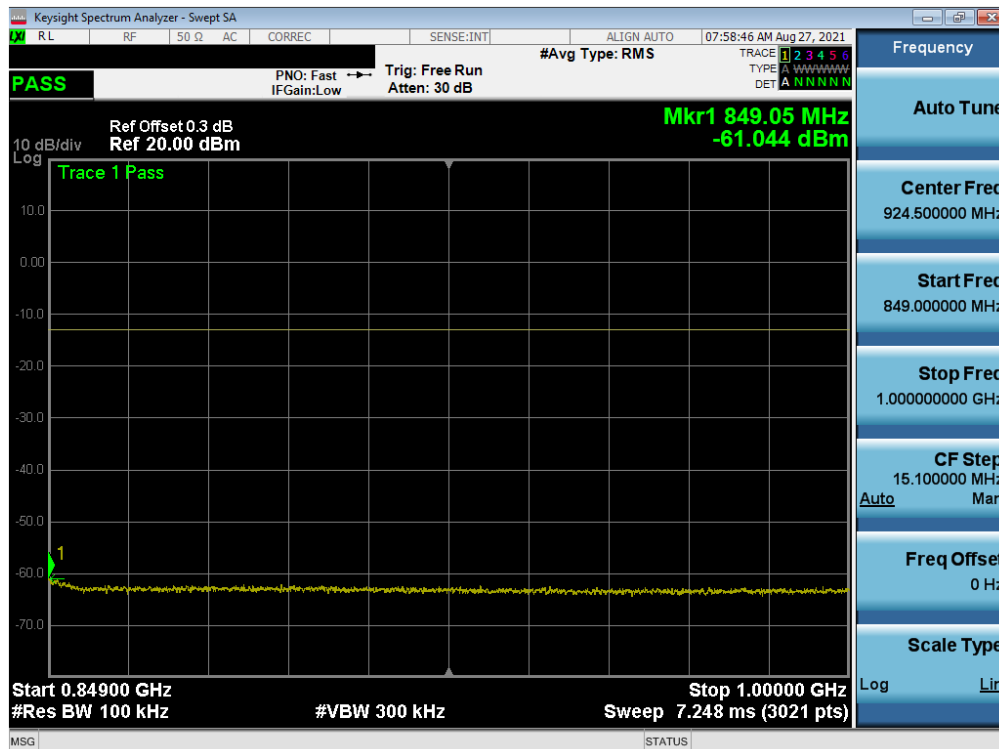




Plot 7-42. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - High Channel)

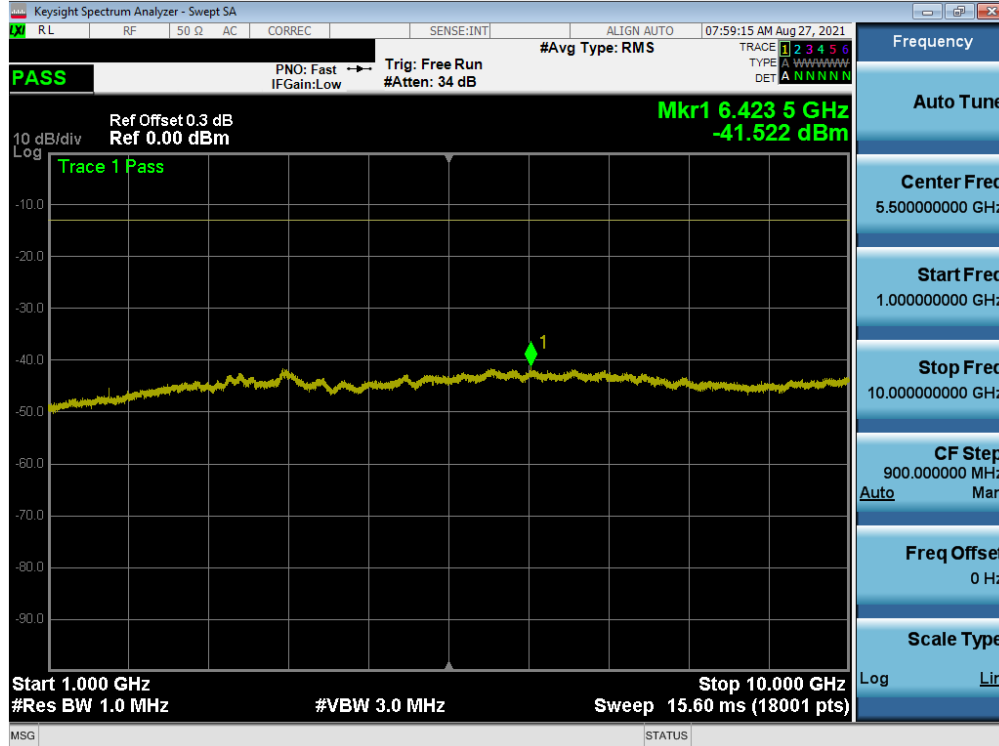FCC ID: A3LSMF711B1	PCTEST Proud to be part of Samsung	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 35 of 79




Plot 7-43. Conducted Spurious Plot (NR Band n5 - 20.0MHz - 1 RB - High Channel)

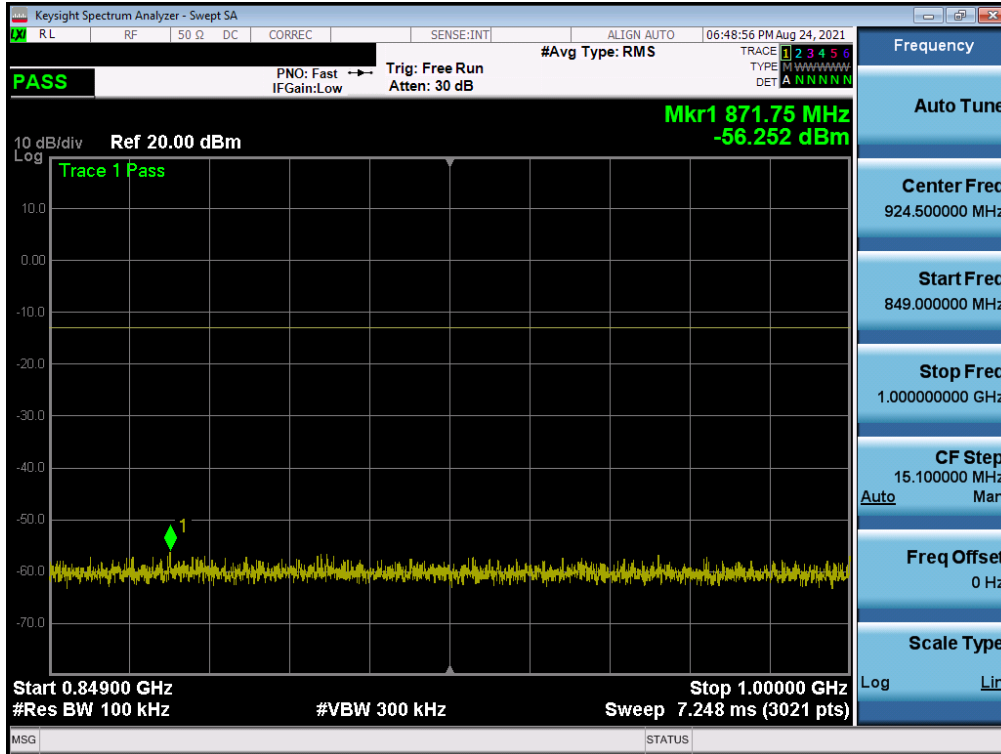

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 36 of 79

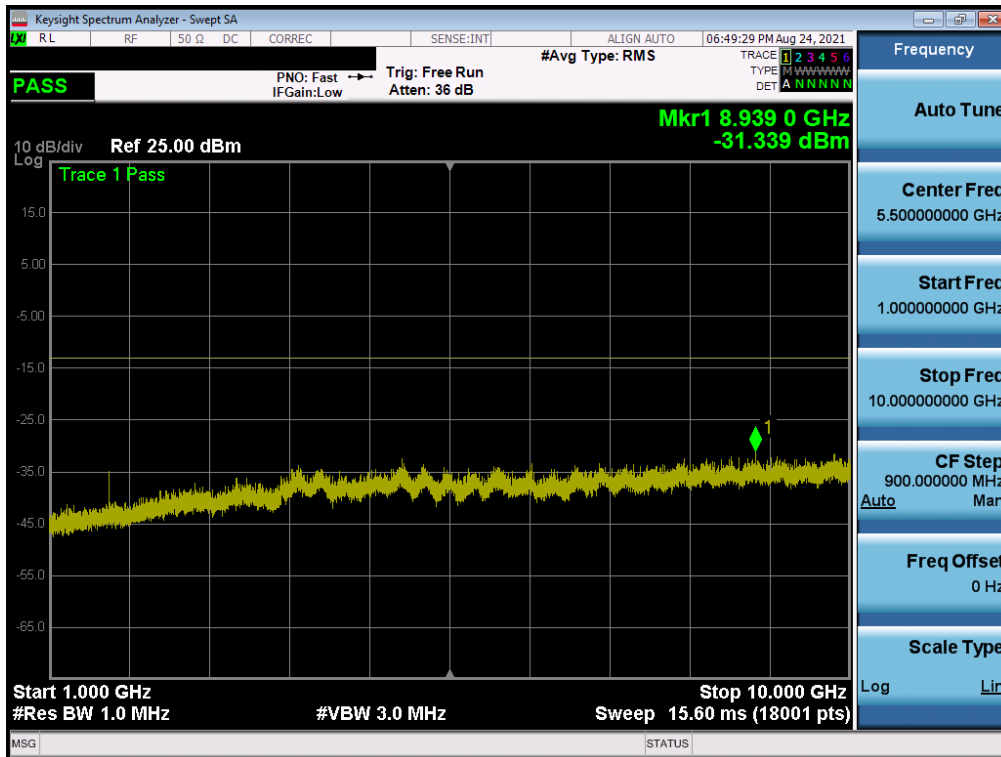


Plot 7-48. Conducted Spurious Plot (GPRS Ch. 190)




Plot 7-49. Conducted Spurious Plot (GPRS Ch. 190)

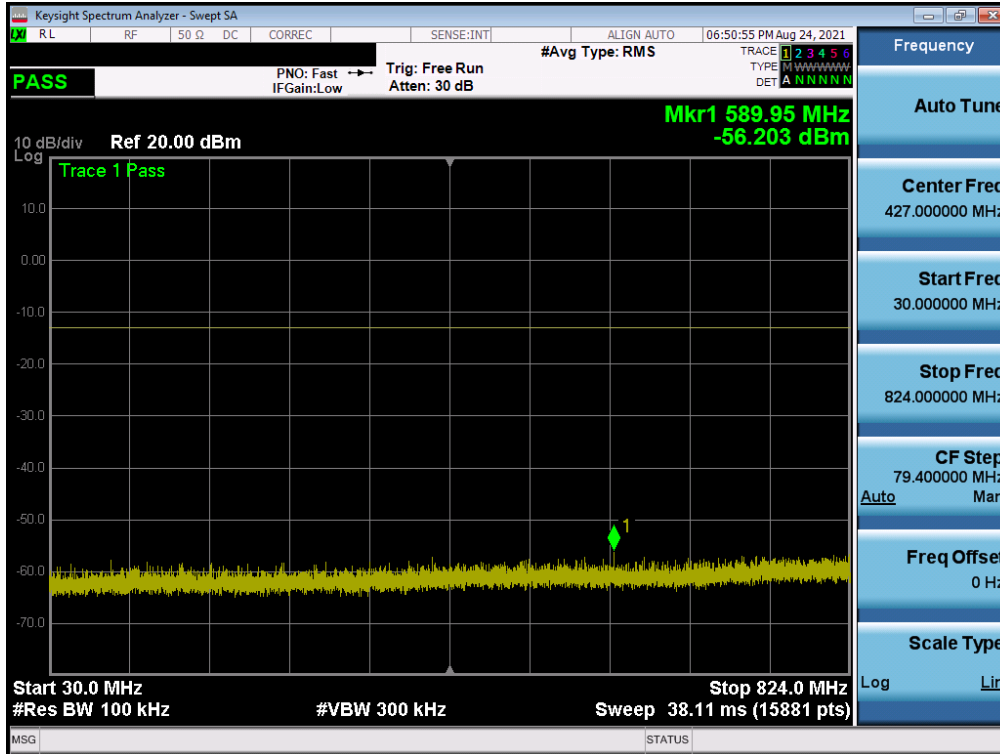

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 39 of 79

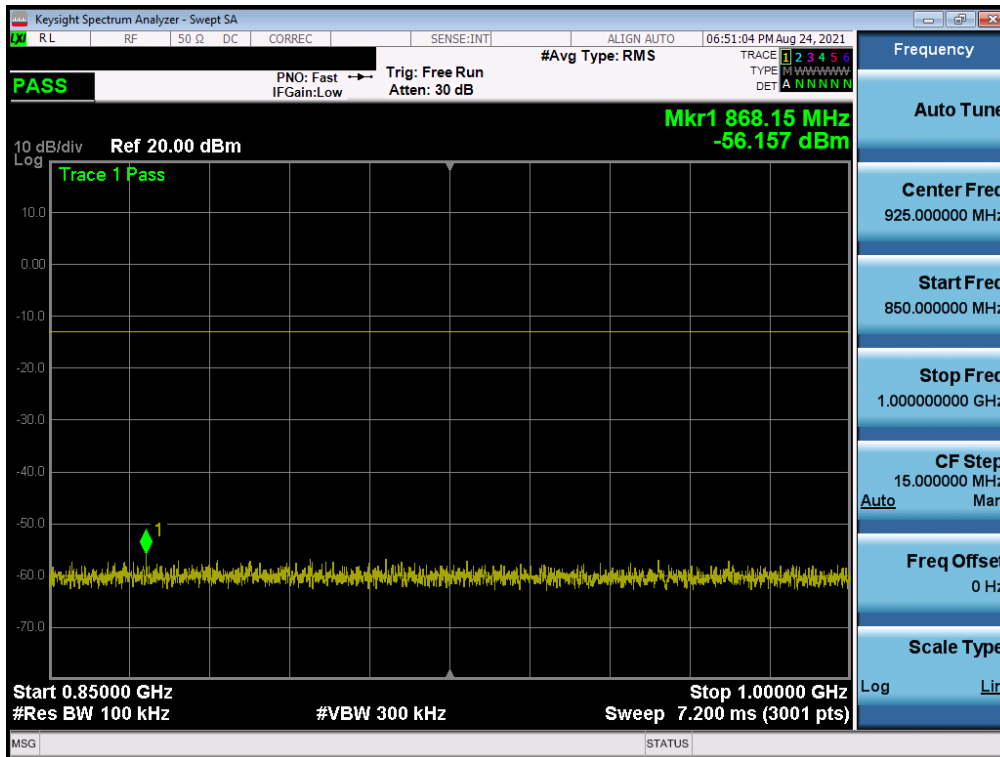


Plot 7-50. Conducted Spurious Plot (GPRS Ch. 251)



Plot 7-51. Conducted Spurious Plot (GPRS Ch. 251)


FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 40 of 79

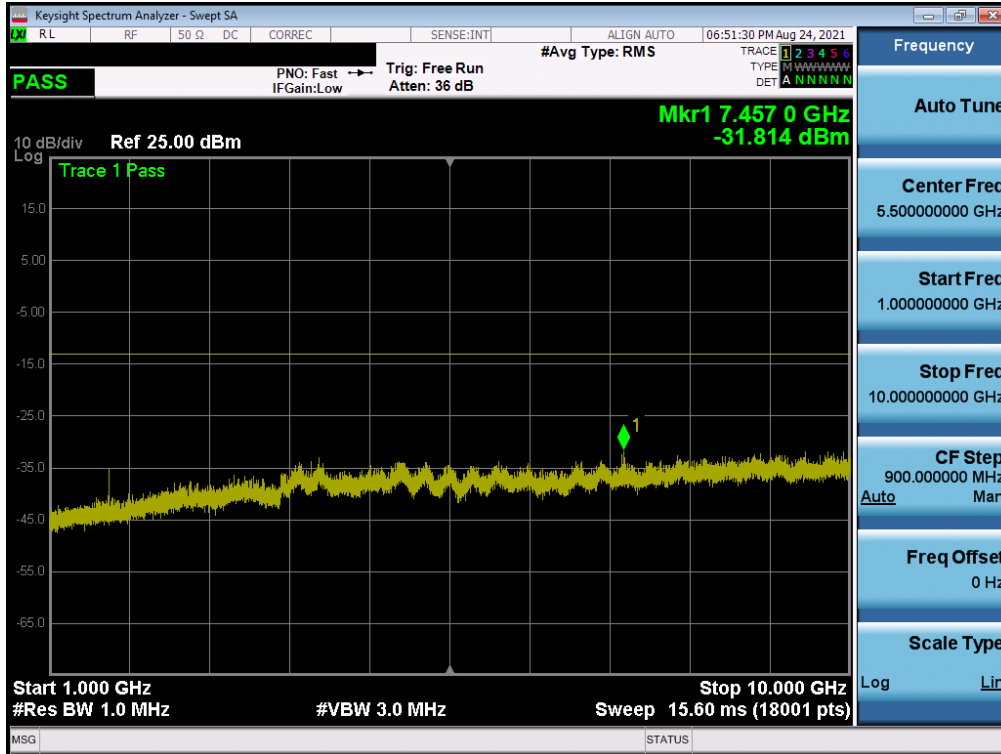


Plot 7-52. Conducted Spurious Plot (GPRS Ch. 251)

FCC ID: A3LSMF711B1		PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 41 of 79	

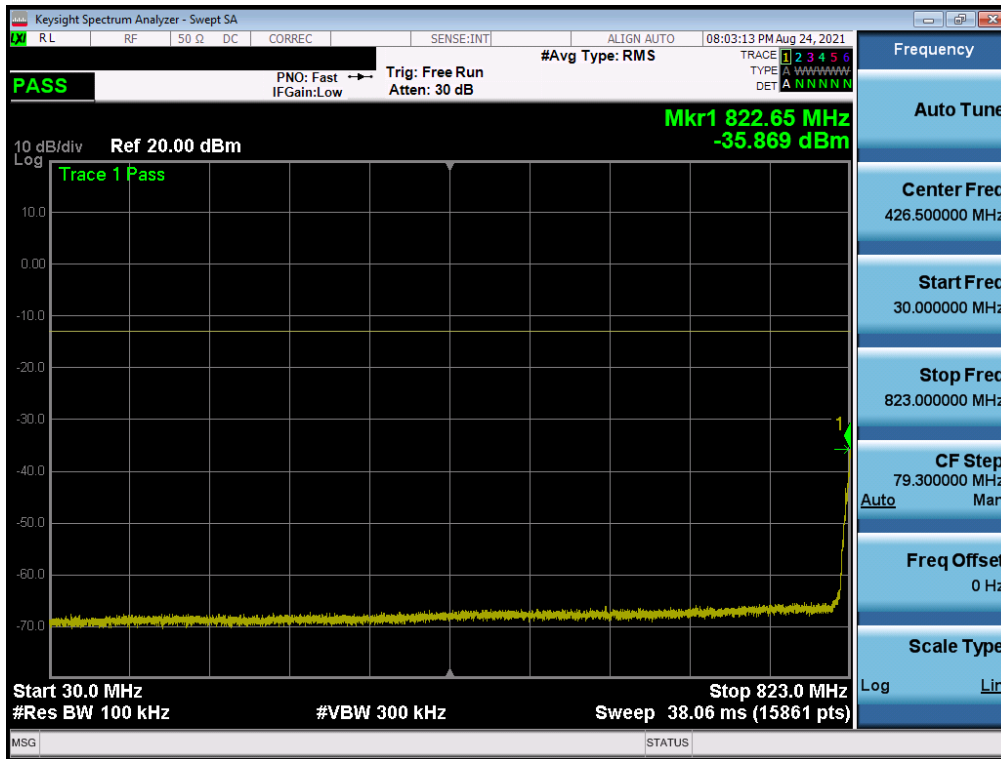


WCDMA Cell

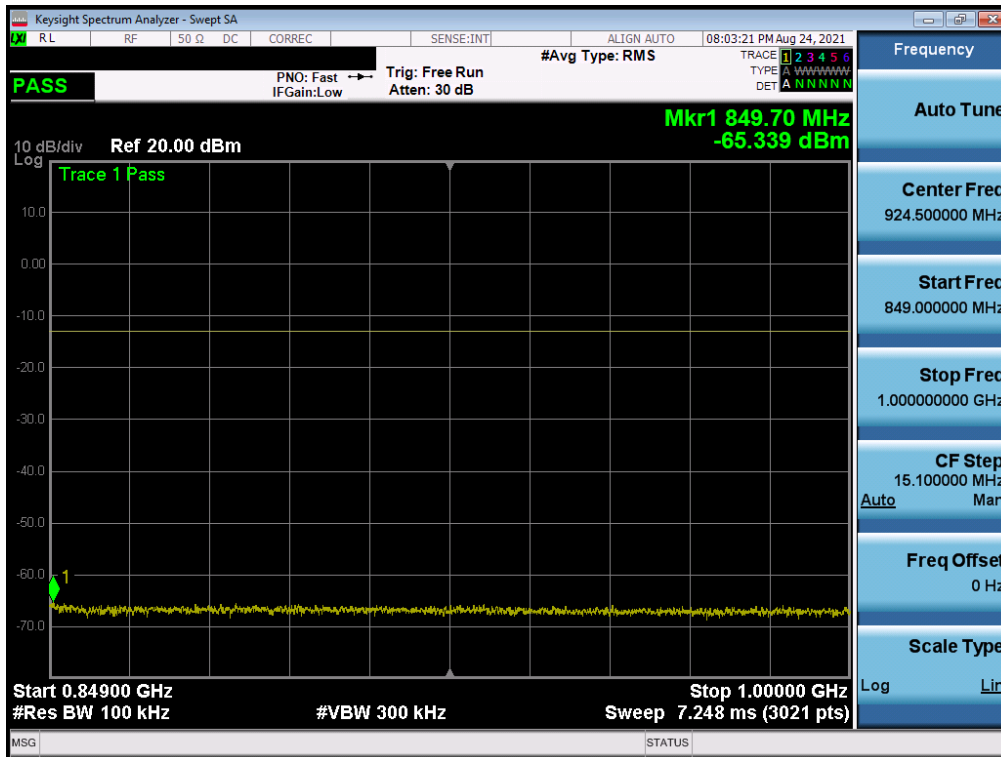


Plot 7-53. Conducted Spurious Plot (WCDMA Ch. 4132)




Plot 7-54. Conducted Spurious Plot (WCDMA Ch. 4132)

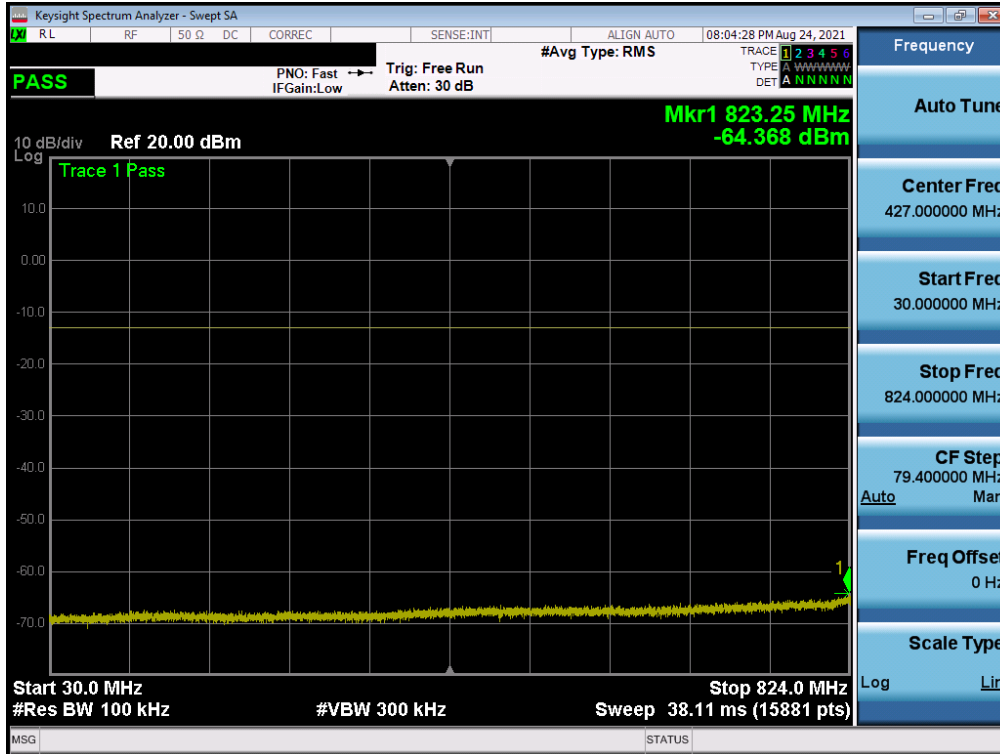

FCC ID: A3LSMF711B1	 PCTEST Proud to be part of 	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 42 of 79

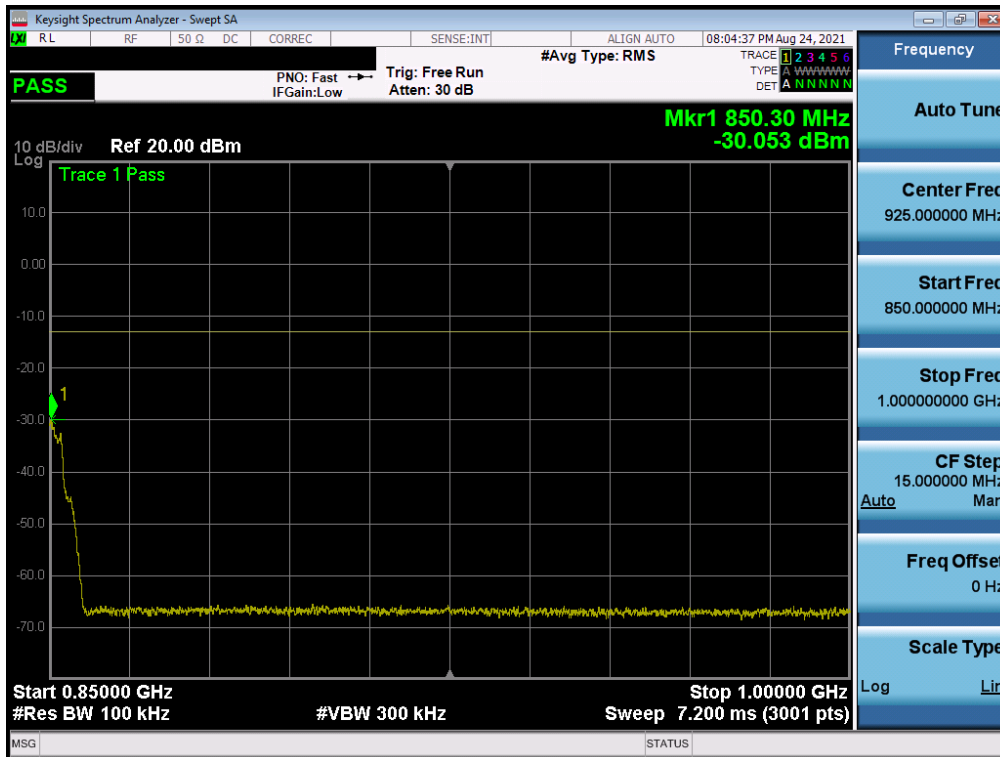

Plot 7-59. Conducted Spurious Plot (WCDMA Ch. 4233)





Plot 7-60. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 45 of 79



Plot 7-61. Conducted Spurious Plot (WCDMA Ch. 4233)

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 46 of 79

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. $RBW \geq 1\%$ of the emission bandwidth
4. $VBW \geq 3 \times RBW$
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/RBW$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

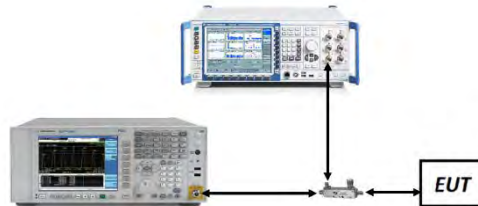






Figure 7-3. Test Instrument & Measurement Setup

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 47 of 79


Test Notes

1. Per 22.917(b) and RSS-132(5.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


2. For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 48 of 79

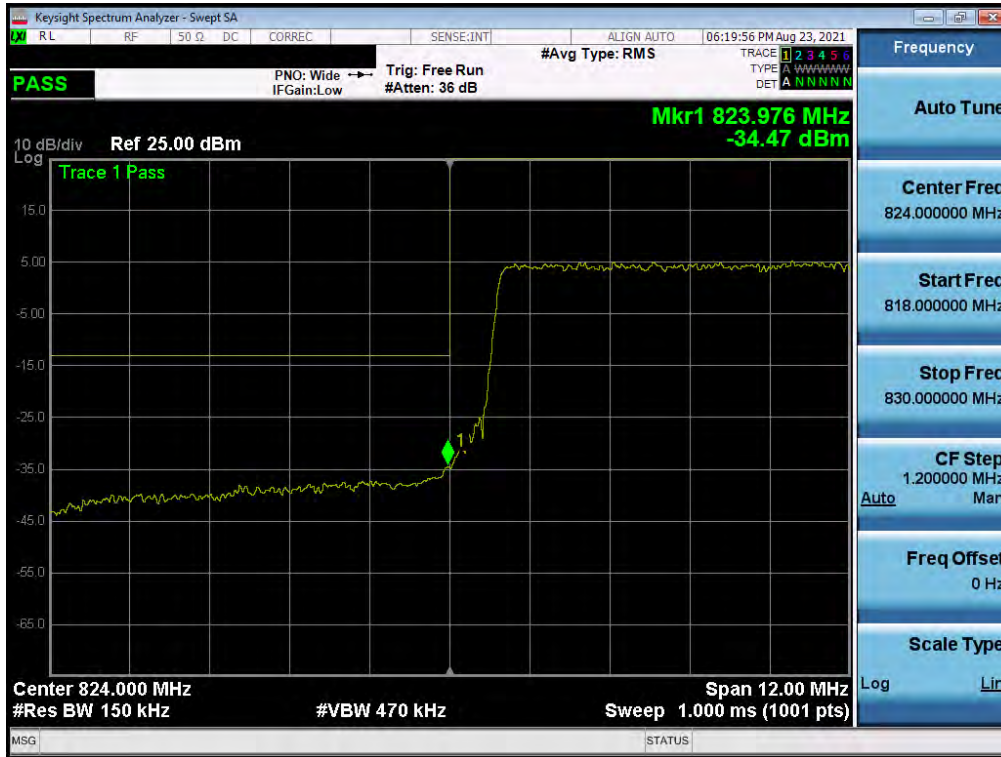

LTE Band 26/5

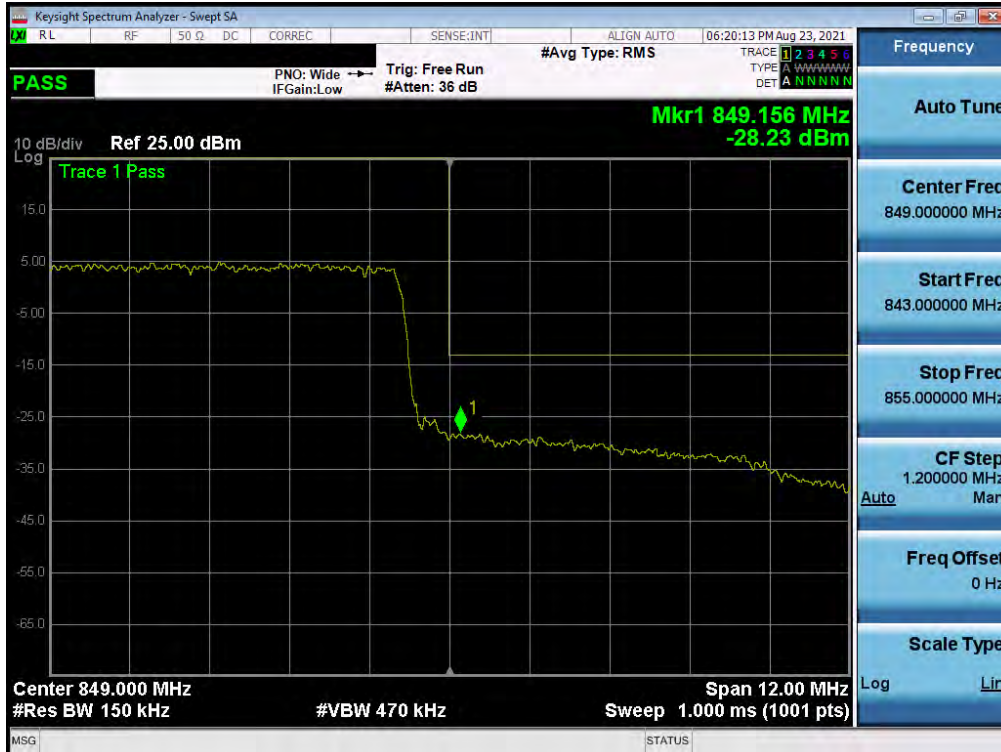


Plot 7-62. Lower Band Edge Plot (LTE Band 26 - 15MHz QPSK – Full RB)



Plot 7-63. Upper Band Edge Plot (LTE Band 26 - 15MHz QPSK – Full RB)

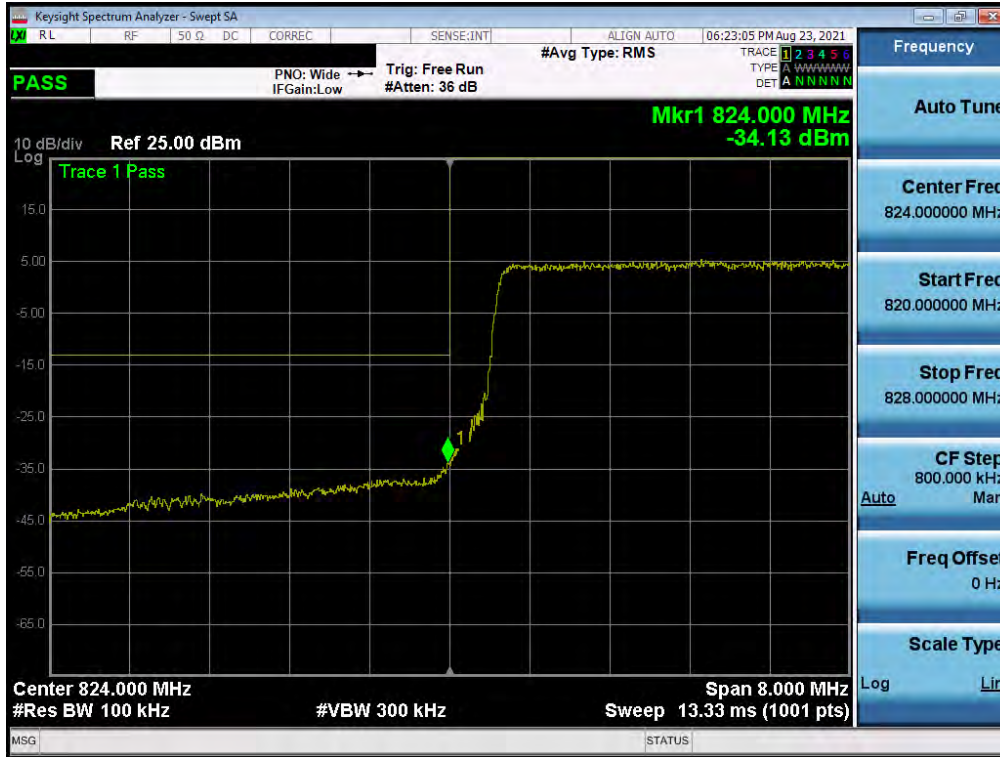

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 49 of 79




Plot 7-64. Lower Band Edge Plot (LTE Band 26/5 - 10MHz QPSK – Full RB)




Plot 7-65. Upper Band Edge Plot (LTE Band 26/5 - 10MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 50 of 79

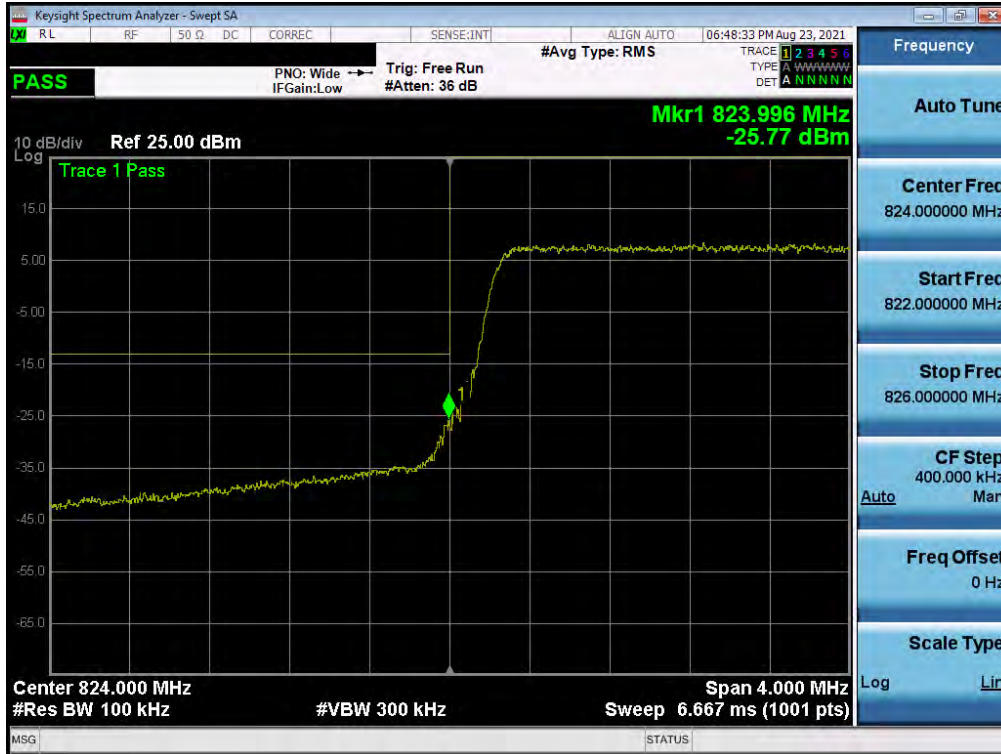


Plot 7-66. Lower Band Edge Plot (LTE Band 26/5 - 5MHz QPSK – Full RB)

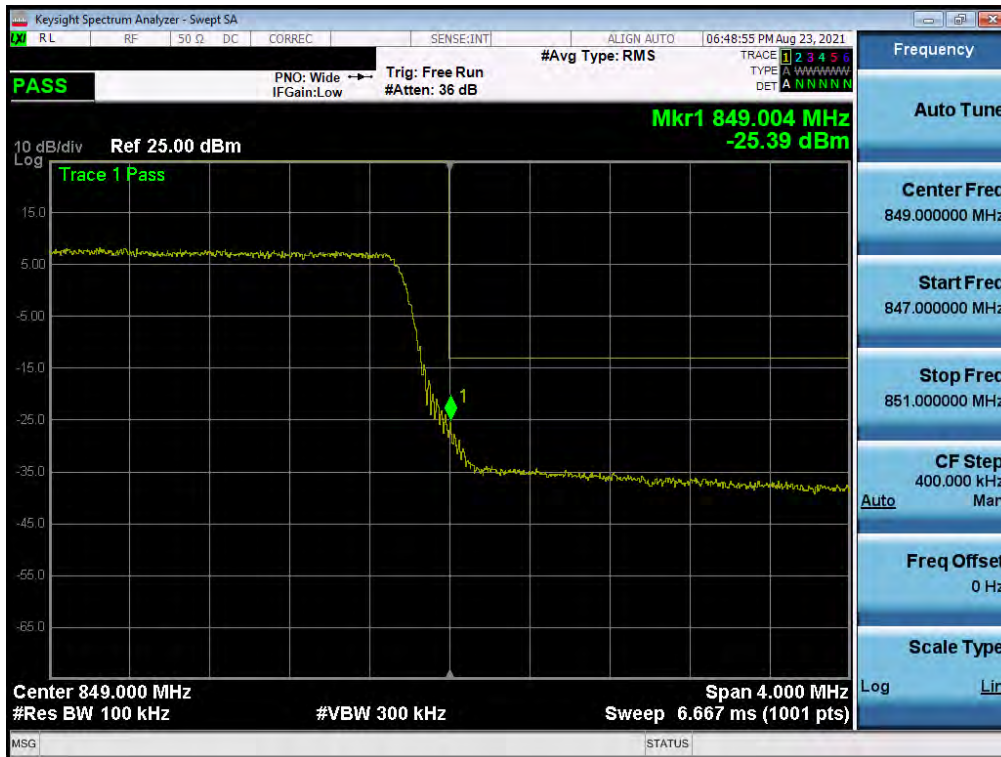

Plot 7-67. Upper Band Edge Plot (LTE Band 26/5 - 5MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of Samsung	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 51 of 79

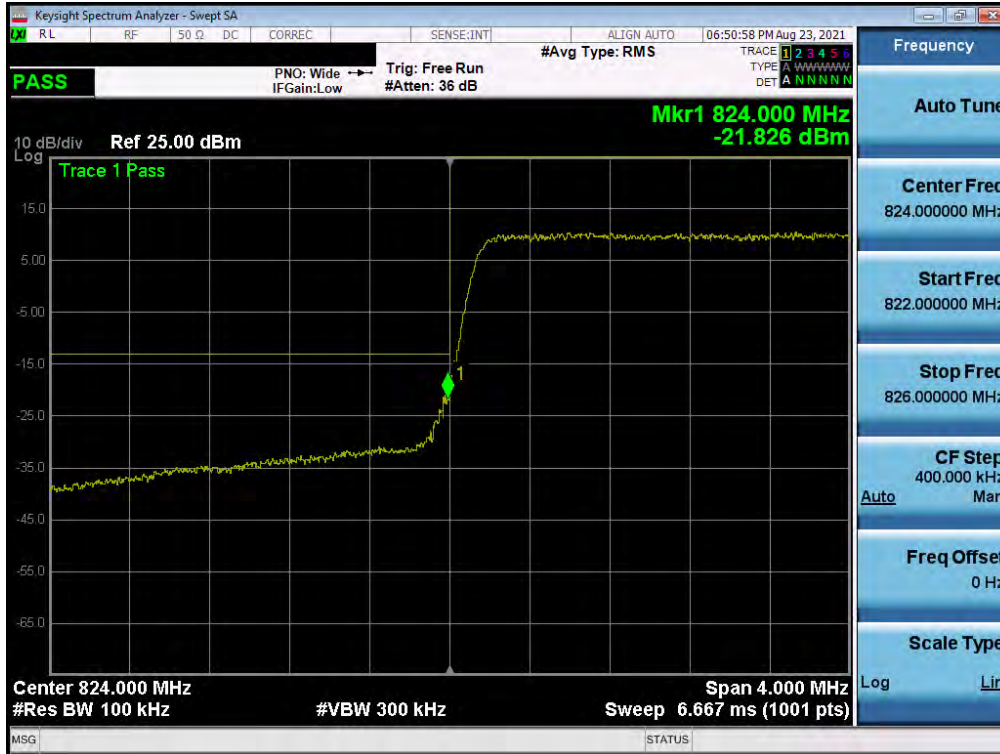


Plot 7-68. Lower Band Edge Plot (LTE Band 26/5 - 3MHz QPSK – Full RB)




Plot 7-69. Upper Band Edge Plot (LTE Band 26/5 - 3MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of Samsung	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 52 of 79

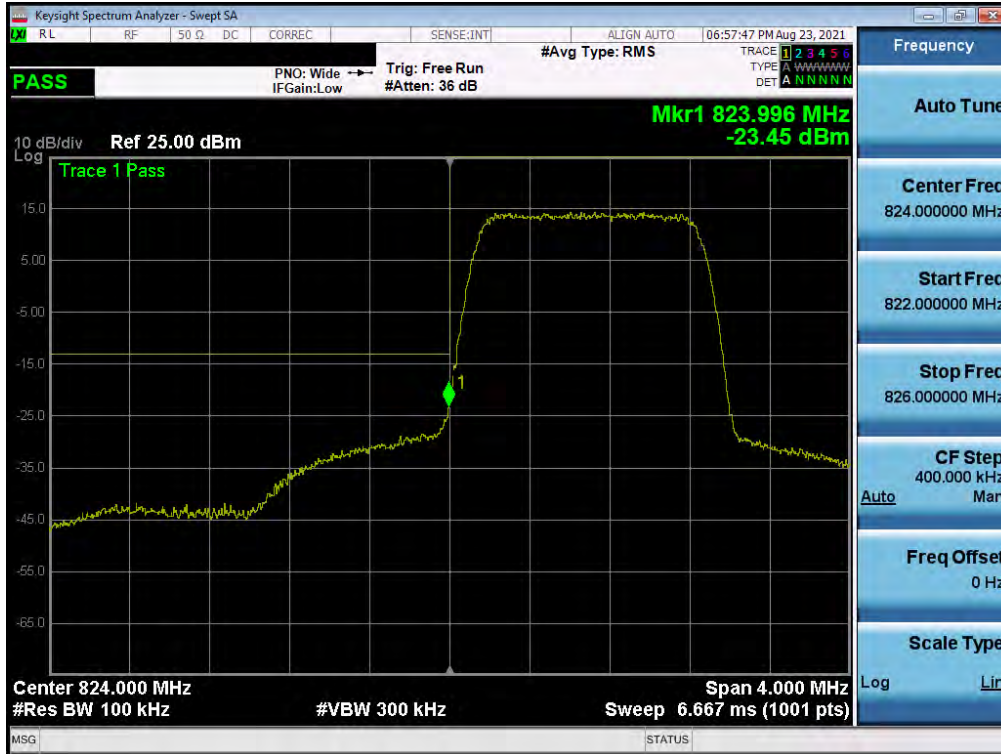


Plot 7-70. Lower Band Edge Plot (LTE Band 26/5 – 1.4MHz QPSK – Full RB)

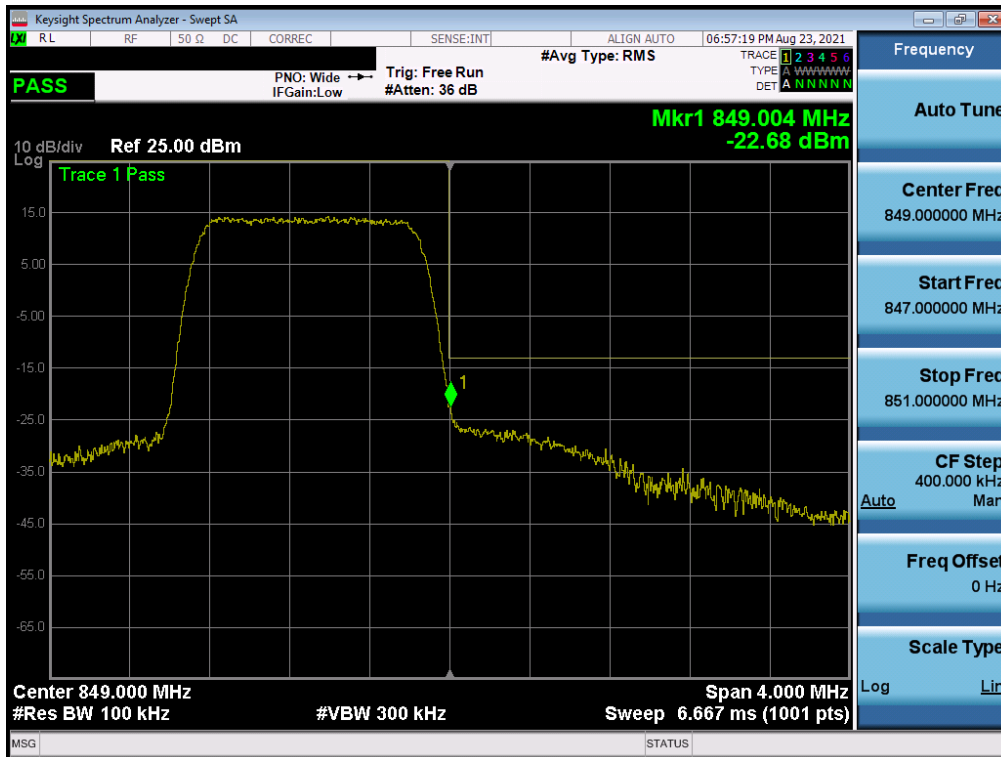


Plot 7-71. Upper Band Edge Plot (LTE Band 26/5 – 1.4MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of Samsung	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 53 of 79

NR Band n5

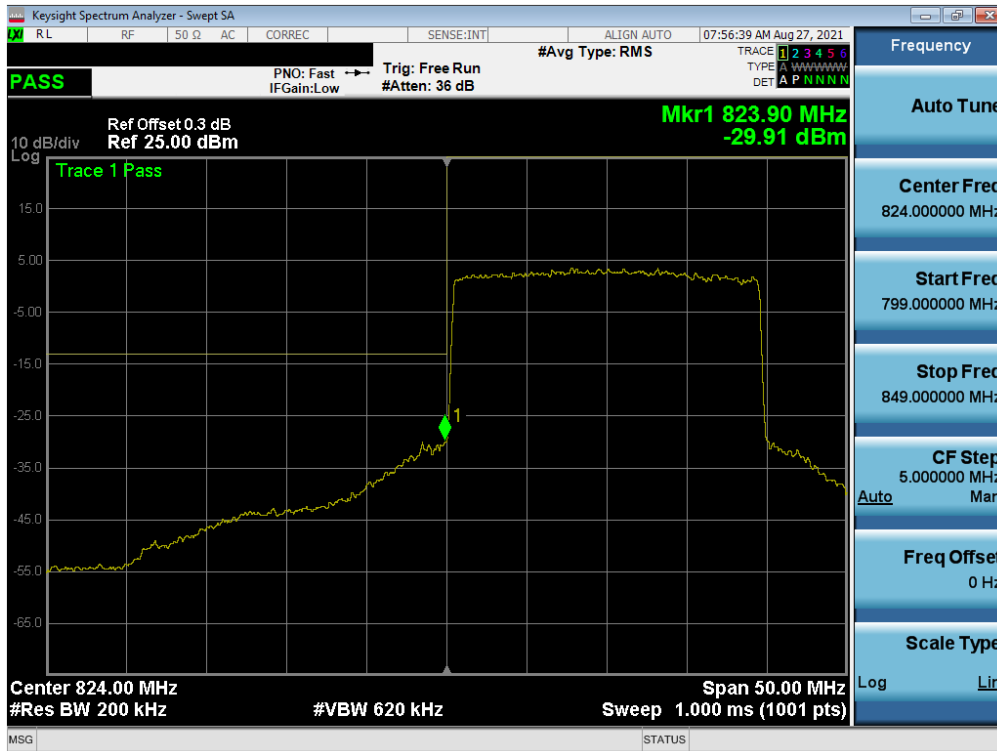

Plot 7-72. Lower Band Edge Plot (NR Band n5 – 20.0MHz - Full RB)

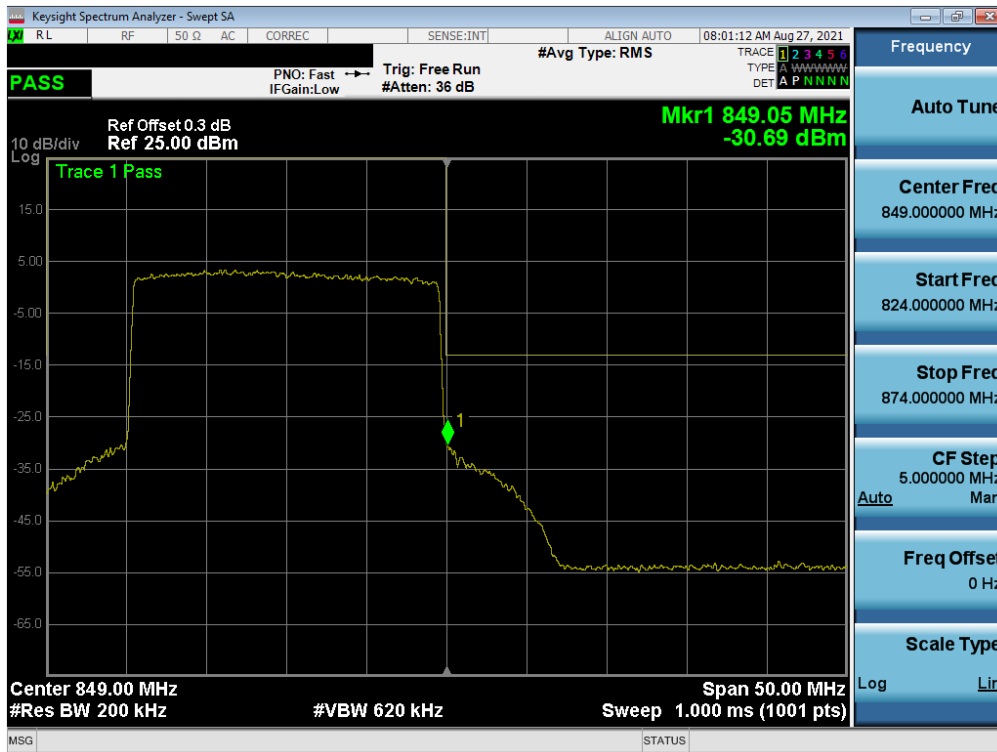

Plot 7-73. Upper Band Edge Plot (NR Band n5 – 20.0MHz - Full RB)

FCC ID: A3LSMF711B1	PCTEST <small>Proved to be part of Samsung</small>	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 54 of 79



Plot 7-74. Lower Band Edge Plot (NR Band n5 – 15.0MHz - Full RB)



Plot 7-75. Upper Band Edge Plot (NR Band n5 – 15.0MHz - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of Samsung	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 55 of 79




Plot 7-78. Lower Band Edge Plot (NR Band n5 – 5.0MHz - Full RB)




Plot 7-79. Upper Band Edge Plot (NR Band n5 – 5.0MHz - Full RB)

FCC ID: A3LSMF711B1	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 57 of 79

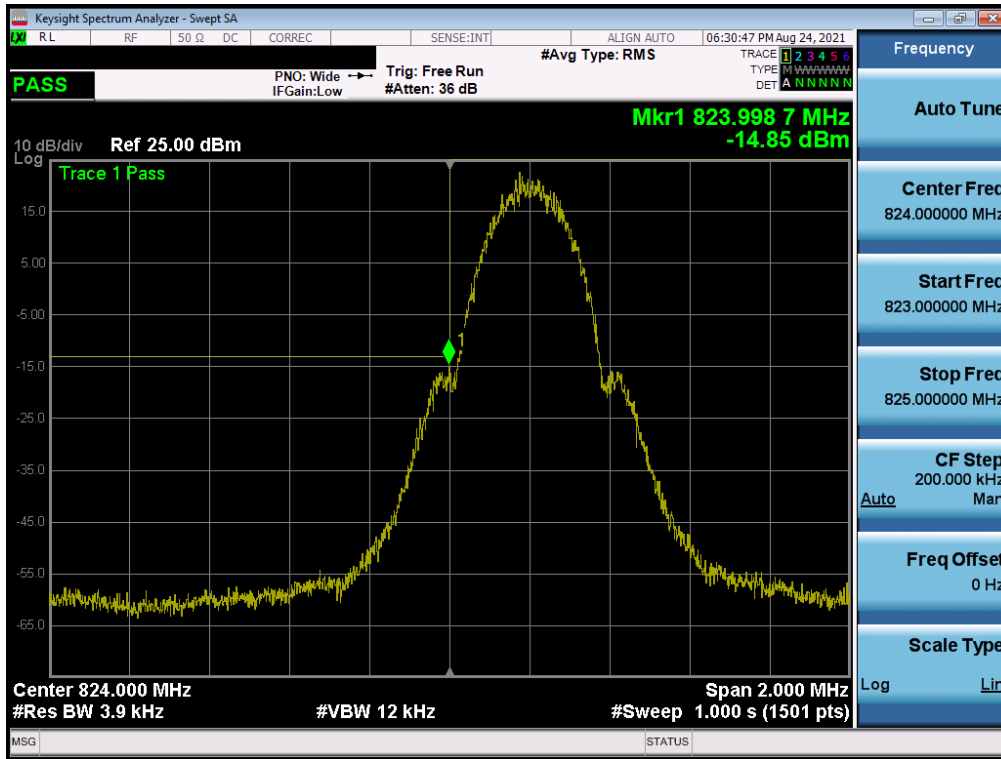

GSM/GPRS Cell

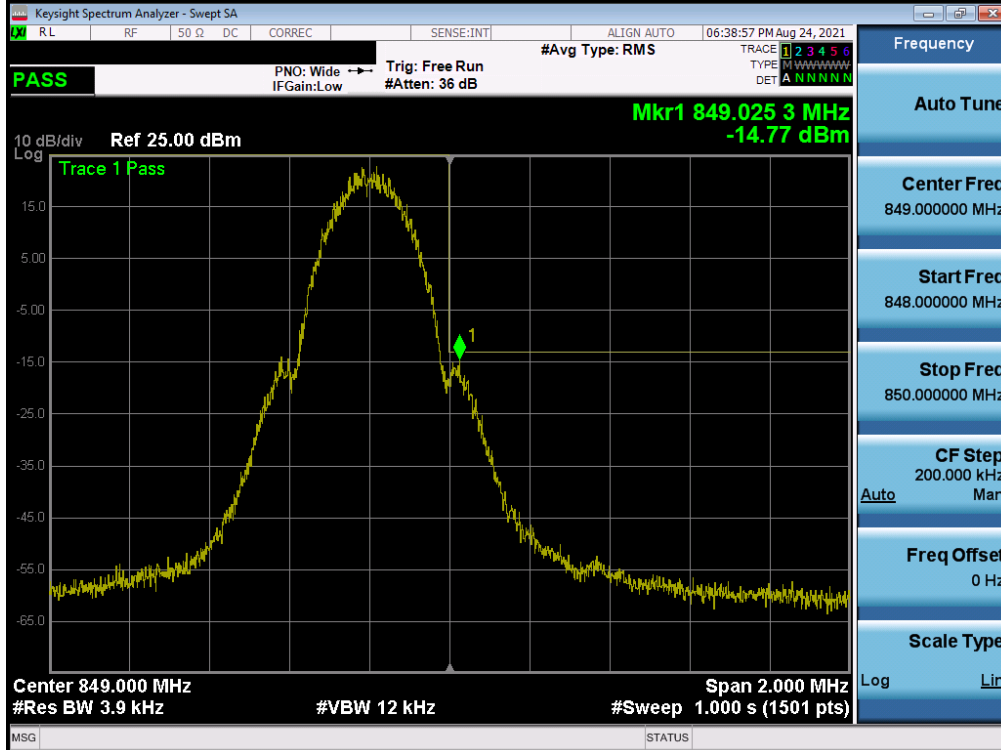

Plot 7-80. Lower Band Edge Plot (GPRS Cell – Ch. 128)



Plot 7-81. Upper Band Edge Plot (GPRS Cell – Ch. 251)

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 58 of 79




WCDMA Cell



Plot 7-82. Lower Band Edge Plot (WCDMA Cell – Ch. 4132)



Plot 7-83. Upper Band Edge Plot (WCDMA Cell – Ch. 4233)

FCC ID: A3LSMF711B1	 PCTEST Proud to be part of 	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 59 of 79

7.5 Radiated Power (ERP)

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 60 of 79

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

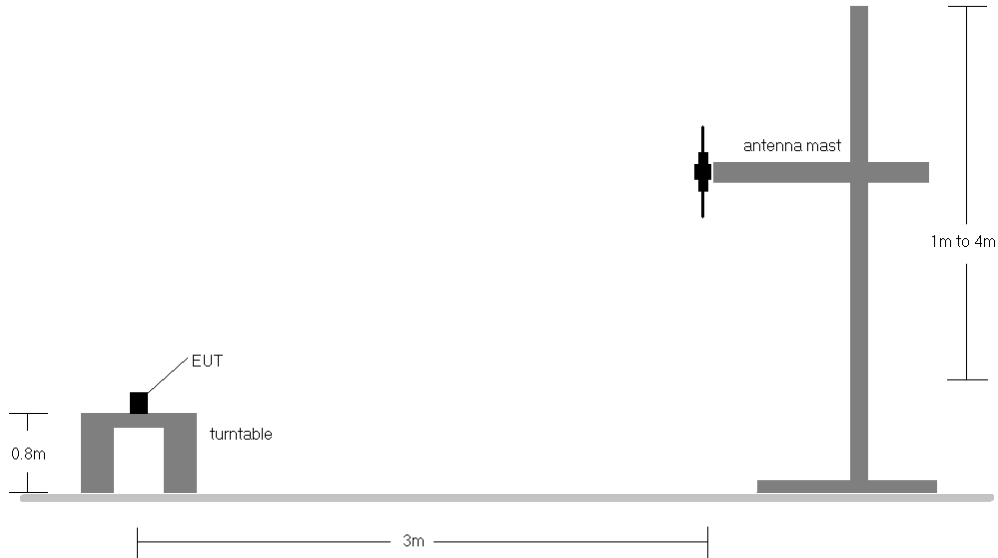




Figure 7-4. Radiated Test Setup <1GHz

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 4) This unit was tested with its standard battery.
- 5) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset
		Page 61 of 79

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
15MHz (Band 26 only)	QPSK	831.5	H	120	288	6.73	1 / 0	11.87	16.45	0.044	38.45	-22.00	18.60	0.072	40.61	-22.01
	QPSK	836.5	H	123	290	6.73	1 / 0	12.05	16.63	0.046	38.45	-21.82	18.78	0.075	40.61	-21.83
	QPSK	841.5	H	123	311	6.73	1 / 0	10.79	15.37	0.034	38.45	-23.08	17.52	0.056	40.61	-23.09
	16-QAM	836.5	H	123	290	6.73	1 / 0	11.46	16.04	0.040	38.45	-22.41	18.19	0.066	40.61	-22.42
10 MHz	QPSK	829.0	H	120	288	6.70	1 / 49	12.22	16.78	0.048	38.45	-21.68	18.93	0.078	40.61	-21.68
	QPSK	836.5	H	123	290	6.73	1 / 0	12.25	16.83	0.048	38.45	-21.62	18.98	0.079	40.61	-21.62
	QPSK	844.0	H	123	311	6.76	1 / 25	10.96	15.56	0.036	38.45	-22.89	17.71	0.059	40.61	-22.89
	16-QAM	829.0	H	120	288	6.70	1 / 25	11.44	15.99	0.040	38.45	-22.46	18.14	0.065	40.61	-22.46
5 MHz	QPSK	826.5	H	120	288	6.67	1 / 0	12.08	16.60	0.046	38.45	-21.85	18.75	0.075	40.61	-21.85
	QPSK	836.5	H	123	290	6.73	1 / 0	12.33	16.90	0.049	38.45	-21.55	19.05	0.080	40.61	-21.55
	QPSK	846.5	H	123	311	6.78	1 / 0	10.89	15.52	0.036	38.45	-22.93	17.67	0.058	40.61	-22.94
	16-QAM	836.5	H	123	290	6.73	1 / 12	11.38	15.96	0.039	38.45	-22.49	18.11	0.065	40.61	-22.50
3 MHz	QPSK	825.5	H	120	288	6.66	1 / 14	12.02	16.53	0.045	38.45	-21.92	18.68	0.074	40.61	-21.93
	QPSK	836.5	H	123	290	6.73	1 / 0	11.97	16.55	0.045	38.45	-21.90	18.70	0.074	40.61	-21.91
	QPSK	847.5	H	123	311	6.79	1 / 7	10.89	15.53	0.036	38.45	-22.92	17.68	0.059	40.61	-22.92
	16-QAM	836.5	H	123	290	6.73	1 / 0	11.26	15.84	0.038	38.45	-22.61	17.99	0.063	40.61	-22.61
1.4 MHz	QPSK	824.7	H	120	288	6.66	1 / 0	11.86	16.36	0.043	38.45	-22.09	18.51	0.071	40.61	-22.09
	QPSK	836.5	H	123	290	6.73	1 / 0	12.03	16.61	0.046	38.45	-21.84	18.76	0.075	40.61	-21.84
	QPSK	848.3	H	123	311	6.77	1 / 5	10.78	15.40	0.035	38.45	-23.05	17.55	0.057	40.61	-23.06
	16-QAM	836.5	H	123	290	6.73	1 / 0	11.21	15.79	0.038	38.45	-22.66	17.94	0.062	40.61	-22.67
15MHz	QPSK (Opposite Pol.)	836.5	V	165	269	6.18	0.00	11.13	15.16	0.033	38.45	-23.29	17.31	0.054	40.61	-23.30
	QPSK (Half Open)	836.5	H	123	322	6.73	0.00	10.37	14.95	0.031	38.45	-23.50	17.10	0.051	40.61	-23.51
	QPSK (WCP)	836.5	H	120	288	6.73	0.00	6.66	11.24	0.013	38.45	-27.21	13.39	0.022	40.61	-27.22

Table 7-2. ERP Data (LTE Band 26/5)

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	π/2 BPSK	834.0	H	218	290	6.65	1 / 26	12.56	17.06	0.051	38.45	-21.39	19.21	0.083	40.61	-21.39
	π/2 BPSK	836.5	H	221	285	6.73	1 / 26	11.62	16.20	0.042	38.45	-22.25	18.35	0.068	40.61	-22.26
	π/2 BPSK	839.0	H	208	285	6.80	1 / 53	11.37	16.02	0.040	38.45	-22.43	18.17	0.066	40.61	-22.43
	QPSK	834.0	H	218	290	6.65	1 / 26	12.48	16.98	0.050	38.45	-21.47	19.13	0.082	40.61	-21.47
15 MHz	16-QAM	834.0	H	218	290	6.65	1 / 26	11.00	15.50	0.036	38.45	-22.95	17.65	0.058	40.61	-22.95
	π/2 BPSK	831.5	H	218	290	6.73	1 / 39	12.56	17.14	0.052	38.45	-21.31	19.29	0.085	40.61	-21.32
	π/2 BPSK	836.5	H	221	285	6.73	1 / 20	11.57	16.15	0.041	38.45	-22.30	18.30	0.068	40.61	-22.31
	π/2 BPSK	841.5	H	208	285	6.73	1 / 39	11.28	15.86	0.039	38.45	-22.59	18.01	0.063	40.61	-22.60
10 MHz	QPSK	831.5	H	218	290	6.73	1 / 39	12.49	17.06	0.051	38.45	-21.39	19.21	0.083	40.61	-21.39
	QPSK	836.5	H	221	285	6.73	1 / 20	11.61	16.18	0.042	38.45	-22.27	18.33	0.068	40.61	-22.27
	QPSK	841.5	H	208	285	6.73	1 / 39	11.11	15.69	0.037	38.45	-22.76	17.84	0.061	40.61	-22.77
	16-QAM	836.5	H	221	285	6.73	1 / 20	10.86	15.44	0.035	38.45	-23.01	17.59	0.057	40.61	-23.02
5 MHz	π/2 BPSK	829.0	H	218	290	6.70	1 / 26	12.55	17.10	0.051	38.45	-21.35	19.25	0.084	40.61	-21.35
	π/2 BPSK	836.5	H	221	285	6.73	1 / 26	11.56	16.14	0.041	38.45	-22.31	18.29	0.067	40.61	-22.32
	π/2 BPSK	844.0	H	208	285	6.76	1 / 26	11.23	15.84	0.038	38.45	-22.61	17.99	0.063	40.61	-22.62
	QPSK	829.0	H	218	290	6.70	1 / 26	12.39	16.94	0.049	38.45	-21.51	19.09	0.081	40.61	-21.51
20 MHz	16-QAM	836.5	H	221	285	6.73	1 / 26	10.94	15.52	0.036	38.45	-22.93	17.67	0.058	40.61	-22.94
	π/2 BPSK	829.0	H	218	290	6.67	1 / 12	12.53	17.05	0.051	38.45	-21.40	19.20	0.083	40.61	-21.40
	π/2 BPSK	836.5	H	221	285	6.73	1 / 12	11.51	16.09	0.041	38.45	-22.36	18.24	0.067	40.61	-22.36
	π/2 BPSK	844.0	H	208	285	6.78	1 / 12	11.19	15.82	0.038	38.45	-22.63	17.97	0.063	40.61	-22.64
20 MHz	QPSK	829.0	H	218	290	6.67	1 / 12	12.49	17.01	0.050	38.45	-21.44	19.16	0.082	40.61	-21.44
	16-QAM	836.5	H	221	285	6.73	1 / 12	10.89	15.47	0.035	38.45	-22.98	17.62	0.058	40.61	-22.98
	QPSK (CP-OFDM)	834.0	H	221	287	6.65	1 / 26	11.14	15.64	0.037	38.45	-22.81	17.79	0.060	40.61	-22.81
	QPSK (Opposite Pol.)	834.0	V	139	257	6.15	1 / 26	12.00	16.00	0.040	38.45	-22.45	18.15	0.065	40.61	-22.45
20 MHz	QPSK (Half Open)	834.0	H	197	249	6.65	1 / 26	8.09	12.59	0.018	38.45	-25.86	14.74	0.030	40.61	-25.86
	QPSK (WCP)	834.0	H	169	298	6.65	1 / 26	5.05	9.55	0.009	38.45	-28.90	11.70	0.015	40.61	-28.90



Table 7-3. ERP Data (NR Band n5)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.20	GSM850	V	136.00	272.00	21.40	6.13	25.38	0.345	38.45	-13.07	27.53	0.566	40.61	-13.08
836.60	GSM850	V	100.00	236.00	20.59	6.18	24.62	0.290	38.45	-13.83	26.77	0.475	40.61	-13.84
848.80	GSM850	V	125.00	240.00	19.89	6.41	24.15	0.260	38.45	-14.31	26.30	0.426	40.61	-14.31
824.20	GSM850	H	389.00	284.00	20.34	6.85	24.84	0.305	38.45	-13.61	26.99	0.500	40.61	-13.62
824.20	EDGE850	V	136.00	272.00	15.75	6.13	19.73	0.094	38.45	-18.72	21.88	0.154	40.61	-18.73
824.20	GSM850 (WCP)	V	137.00	299.00	17.33	6.13	21.31	0.135	38.45	-17.14	23.46	0.222	40.61	-17.15
824.20	GSM850 (Half Open)	H	200.00	68.00	18.68	6.65	23.18	0.208	38.45	-15.27	25.33	0.341	40.61	-15.28

Table 7-4. ERP Data (GPRS Cell)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	V	136.00	272.00	14.13	6.07	18.05	0.064	38.45	-20.40	20.20	0.105	40.61	-20.40
836.60	WCDMA850	V	103.00	241.00	12.88	6.18	16.91	0.049	38.45	-21.54	19.06	0.081	40.61	-21.55
846.60	WCDMA850	V	101.00	278.00	13.74	6.38	17.97	0.063	38.45	-20.48	20.12	0.103	40.61	-20.48
826.40	WCDMA850	H	387.00	284.00	13.39	6.67	17.91	0.062	38.45	-20.54	20.06	0.101	40.61	-20.54
826.40	WCDMA850 (WCP)	V	143.00	279.00	8.09	6.07	12.01	0.016	38.45	-26.44	14.16	0.026	40.61	-26.44
826.40	WCDMA850 (Half Open)	H	372.00	47.00	12.17	6.07	16.09	0.041	38.45	-22.36	18.24	0.067	40.61	-22.36

Table 7-5. ERP Data (WCDMA Cell)

FCC ID: A3LSMF711B1		PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 62 of 79

7.6 Radiated Spurious Emissions Measurements

Test Overview



Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 63 of 79

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

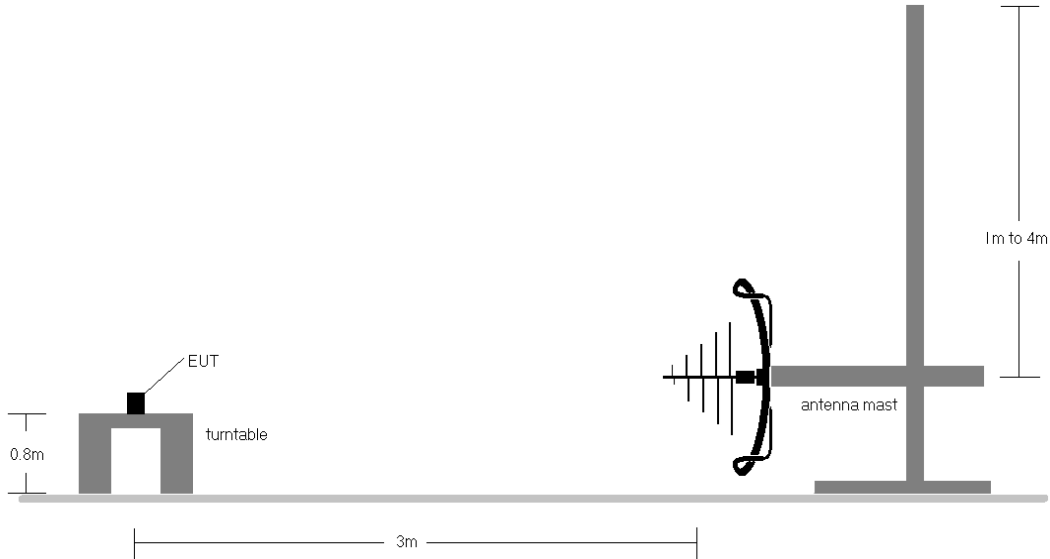


Figure 7-5. Test Instrument & Measurement Setup < 1GHz

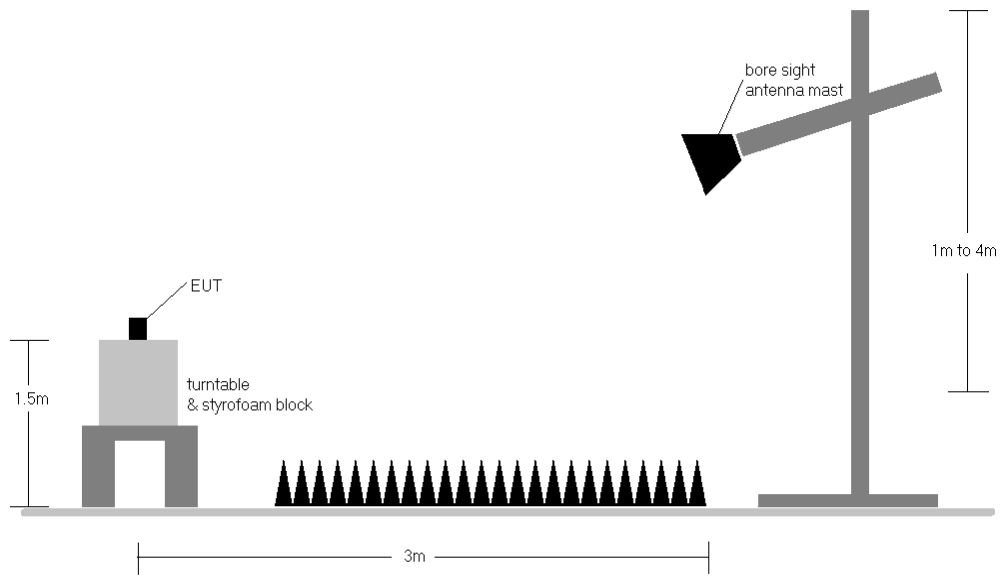






Figure 7-6. Test Instrument & Measurement Setup >1 GHz


<p>FCC ID: A3LSMF711B1</p>		<p>PART 22 MEASUREMENT REPORT</p> 	<p>Approved by: Technical Manager</p>
<p>Test Report S/N: 1M2108160097-02.A3L</p>	<p>Test Dates: 08/21 - 09/07/2021</p>	<p>EUT Type: Portable Handset</p>	<p>Page 64 of 79</p>

Test Notes


- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - a) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 3) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 5) This unit was tested with its standard battery.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 9) ULCA spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
- 10) For NR operation, all subcarrier spacings (SCS) and transmission schemes (e.g. CP-OFDM and DFT-s-OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.
- 11) Spurious emissions shown in this section are measured while operating in EN-DC mode with Sub 6GHz NR carrier as well as an LTE carrier (anchor). Spurious emissions from the NR carrier device, is subject to the rules under which the NR carrier operates. Spurious emission caused by the LTE carrier must meet the requirements of the rules under which the LTE carrier operates.

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 65 of 79

LTE Band 26/5

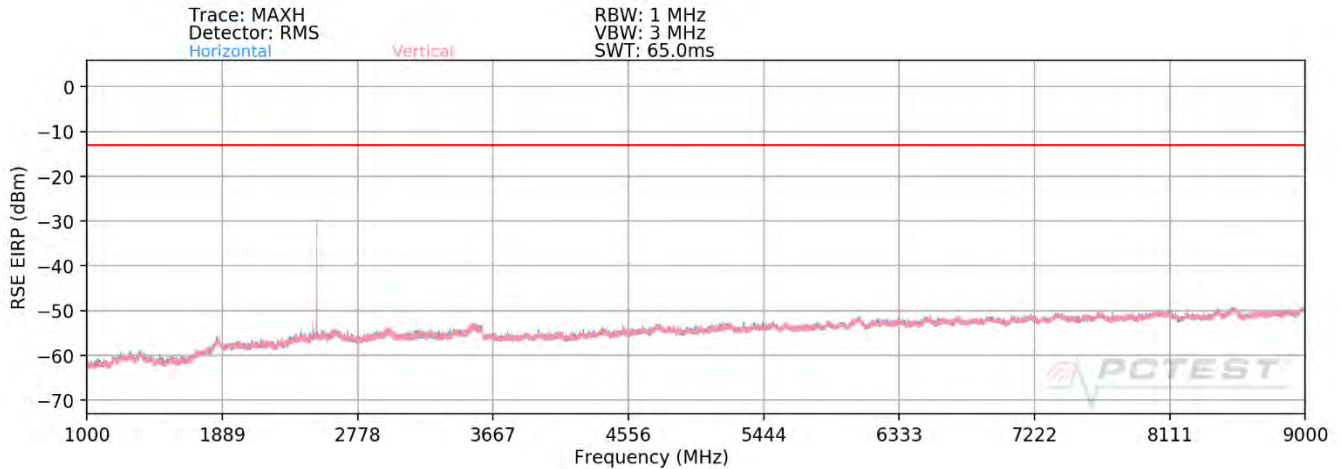

Plot 7-84. Radiated Spurious Plot (LTE Band 26/5) – Closed

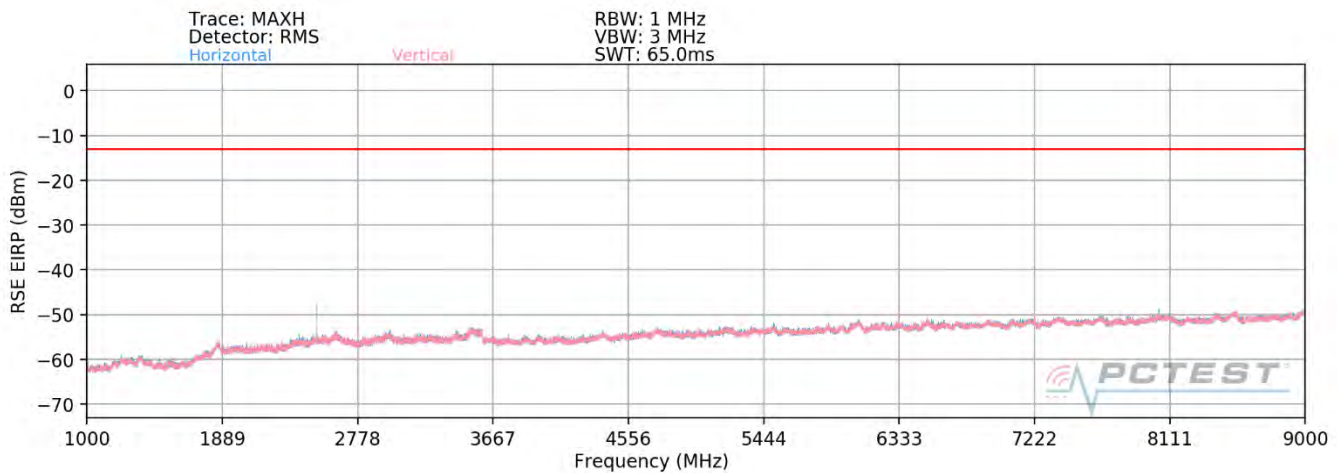



Plot 7-85. Radiated Spurious Plot (LTE Band 26/5) - Half

Bandwidth (MHz):	15
Frequency (MHz):	831.5
RB / Offset:	1 / 37

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1663.00	H	-	-	-76.27	-2.41	28.32	-66.94	-13.00	-53.94
2494.50	H	131	199	-46.07	2.13	63.06	-32.20	-13.00	-19.20
3326.00	H	-	-	-77.24	2.41	32.17	-63.09	-13.00	-50.09
4157.50	H	-	-	-77.58	3.28	32.70	-62.56	-13.00	-49.56
4989.00	H	-	-	-78.32	4.68	33.36	-61.90	-13.00	-48.90
5820.50	H	-	-	-78.85	6.17	34.32	-60.94	-13.00	-47.94

Table 7-6. Radiated Spurious Data (LTE Band 26/5 – Low Channel) – Closed

FCC ID: A3LSMF711B1		PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 66 of 79	

Bandwidth (MHz):	15
Frequency (MHz):	836.5
RB / Offset:	1 / 37



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.00	H	238	13	-76.36	-2.27	28.37	-66.89	-13.00	-53.89
2509.50	H	156	206	-47.38	2.22	61.84	-33.42	-13.00	-20.42
3346.00	H	120	329	-77.08	2.42	32.34	-62.92	-13.00	-49.92
4182.50	H	-	-	-77.80	3.46	32.66	-62.59	-13.00	-49.59
5019.00	H	-	-	-78.57	5.31	33.74	-61.52	-13.00	-48.52
5855.50	H	-	-	-79.19	6.64	34.45	-60.80	-13.00	-47.80

Table 7-7. Radiated Spurious Data (LTE Band 26/5 – Mid Channel) – Closed


Bandwidth (MHz):	15
Frequency (MHz):	841.5
RB / Offset:	1 / 37

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1683.00	H	167	3	-75.64	-2.06	29.30	-65.95	-13.00	-52.95
2524.50	H	164	203	-45.82	2.22	63.40	-31.86	-13.00	-18.86
3366.00	H	-	-	-77.24	2.32	32.08	-63.18	-13.00	-50.18
4207.50	H	-	-	-77.40	3.23	32.83	-62.42	-13.00	-49.42
5049.00	H	-	-	-78.87	5.29	33.42	-61.84	-13.00	-48.84
5890.50	H	-	-	-79.05	6.48	34.43	-60.83	-13.00	-47.83


Table 7-8. Radiated Spurious Data (LTE Band 26/5 – High Channel) – Closed

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset
		Page 67 of 79

NR Band n5

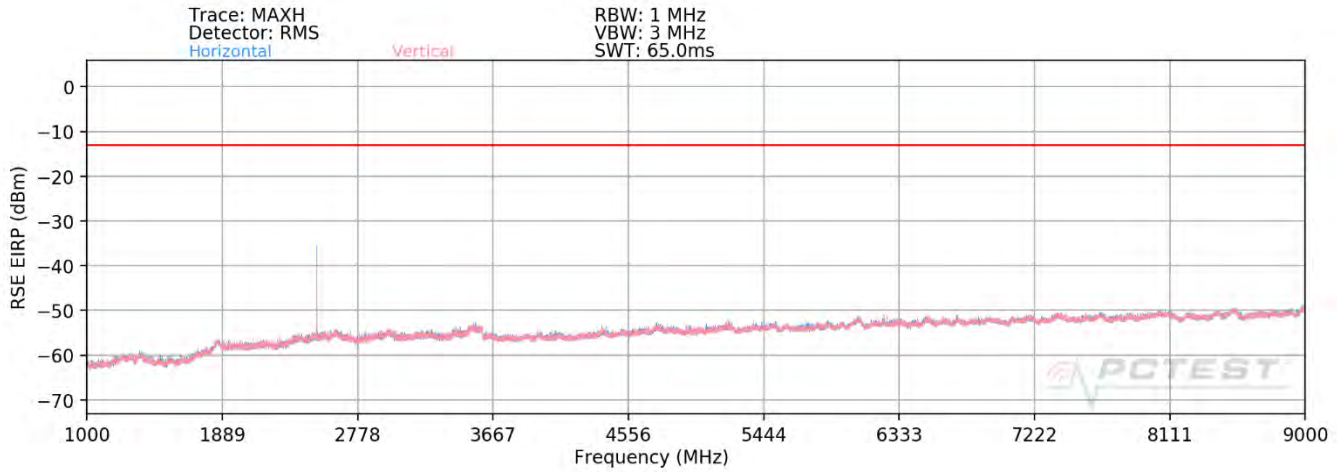

Plot 7-86. Radiated Spurious Plot (NR Band n5) – Closed

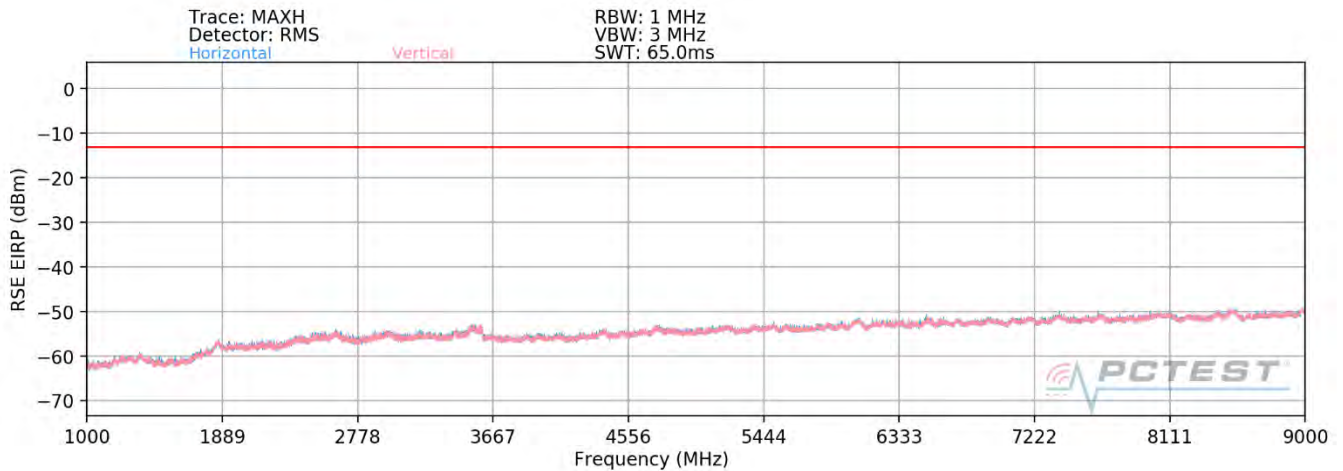

Plot 7-87. Radiated Spurious Plot (NR Band n5) – Half

Bandwidth (MHz):	20
Frequency (MHz):	834
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1668.00	H	-	-	-77.23	-2.36	27.41	-67.84	-13.00	-54.84
2502.00	H	130	203	-56.12	2.20	53.08	-42.18	-13.00	-29.18
3336.00	H	-	-	-78.31	2.41	31.10	-64.16	-13.00	-51.16
4170.00	H	-	-	-78.54	3.40	31.86	-63.40	-13.00	-50.40

Table 7-9. Radiated Spurious Data (NR Band n5 – Low Channel) – Closed

FCC ID: A3LSMF711B1	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 68 of 79

Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.00	H	-	-	-76.98	-2.27	27.75	-67.51	-13.00	-54.51
2509.50	H	143	206	-53.16	2.22	56.06	-39.20	-13.00	-26.20
3346.00	H	-	-	-78.12	2.42	31.30	-63.96	-13.00	-50.96
4182.50	H	-	-	-78.49	3.46	31.97	-63.28	-13.00	-50.28

Table 7-10. Radiated Spurious Data (NR Band n5 – Mid Channel) – Closed

Bandwidth (MHz):	20
Frequency (MHz):	839
RB / Offset:	1 / 53
Mode:	Stand Alone



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1678.00	H	-	-	-77.41	-2.17	27.42	-67.83	-13.00	-54.83
2517.00	H	132	215	-57.42	2.26	51.84	-43.42	-13.00	-30.42
3356.00	H	-	-	-78.32	2.40	31.08	-64.18	-13.00	-51.18
4195.00	H	-	-	-78.34	3.37	32.03	-63.23	-13.00	-50.23

Table 7-11. Radiated Spurious Data (NR Band n5 – High Channel) – Closed


Case:	EN-DC
Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1 / 53
Mode:	EN-DC
Anchor Band:	B2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1250.50	V	-	-	-76.77	6.79	37.02	-58.23	-13.00	-45.23
2294.00	V	-	-	-77.75	9.80	39.05	-56.21	-13.00	-43.21
2923.50	V	-	-	-77.96	11.64	40.68	-54.57	-13.00	-41.57


Table 7-12. Radiated Spurious Data with WCP (NR Band n5)

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 69 of 79

GSM/GPRS Cell

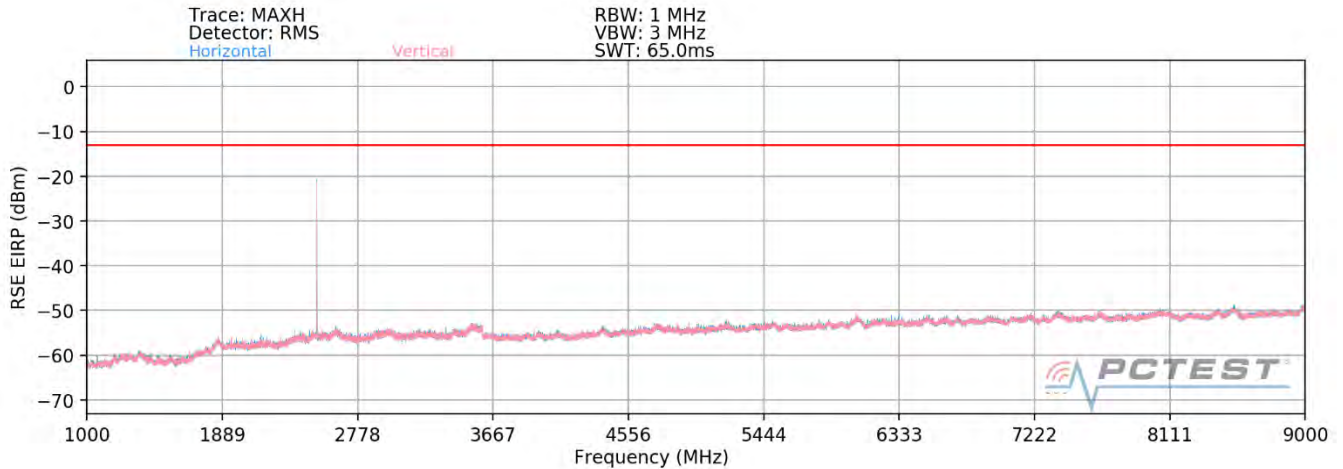

Plot 7-88. Radiated Spurious Plot (GPRS Cell) – Closed

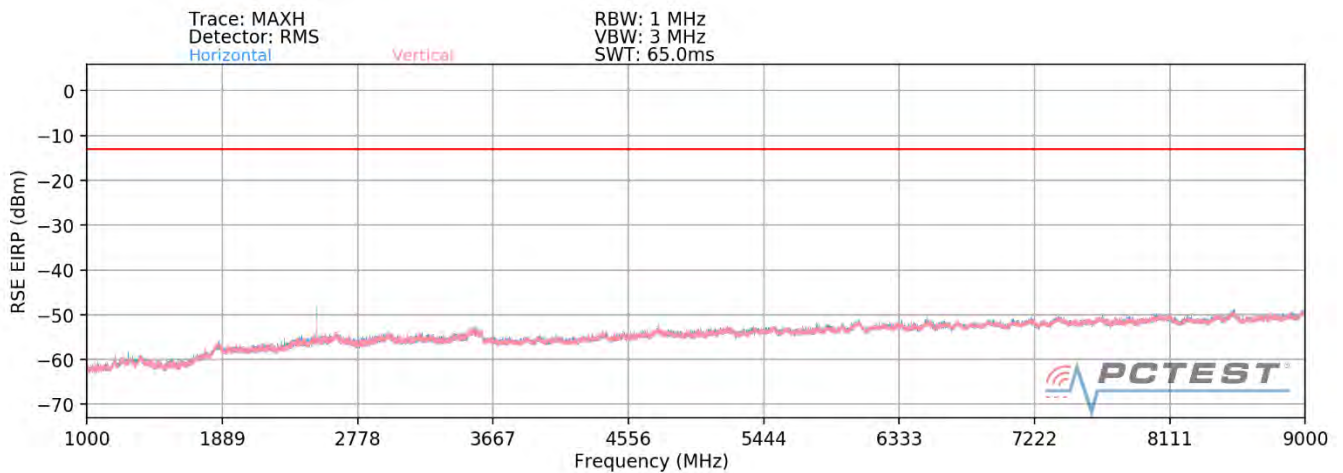



Plot 7-89. Radiated Spurious Plot (GPRS Cell) – Open

Mode:	GPRS 1 Tx Slot
Channel:	128
Frequency (MHz):	824.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.40	H	152	267	-62.78	-2.58	41.64	-53.61	-13.00	-40.61
2472.60	H	127	168	-30.22	1.99	78.77	-16.49	-13.00	-3.49
3296.80	H	-	-	-72.52	2.47	36.95	-58.30	-13.00	-45.30
4121.00	H	-	-	-75.71	3.44	34.73	-60.53	-13.00	-47.53

Table 7-13. Radiated Spurious Data (GPRS Cell – Low Channel) – Closed



FCC ID: A3LSMF711B1		PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 70 of 79	

Mode:	GPRS 1 Tx Slot								
Channel:	190								
Frequency (MHz):	836.6								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.20	H	147	346	-64.19	-2.27	40.54	-54.71	-13.00	-41.71
2509.80	H	115	182	-32.34	2.22	76.88	-18.37	-13.00	-5.37
3346.40	H	-	-	-71.63	2.42	37.79	-57.47	-13.00	-44.47
4183.00	H	-	-	-75.79	3.46	34.67	-60.59	-13.00	-47.59


Table 7-14. Radiated Spurious Data (GPRS Cell – Mid Channel) – Closed

Mode:	GPRS 1 Tx Slot								
Channel:	251								
Frequency (MHz):	848.8								
Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1697.60	H	134	344	-65.69	-1.68	39.63	-55.63	-13.00	-42.63
2546.40	H	140	183	-37.23	2.45	72.22	-23.04	-13.00	-10.04
3395.20	H	-	-	-71.66	2.39	37.73	-57.53	-13.00	-44.53
4244.00	H	-	-	-75.23	3.67	35.44	-59.81	-13.00	-46.81


Table 7-15. Radiated Spurious Data (GPRS Cell – High Channel) – Closed

FCC ID: A3LSMF711B1		PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 71 of 79	

WCDMA Cell

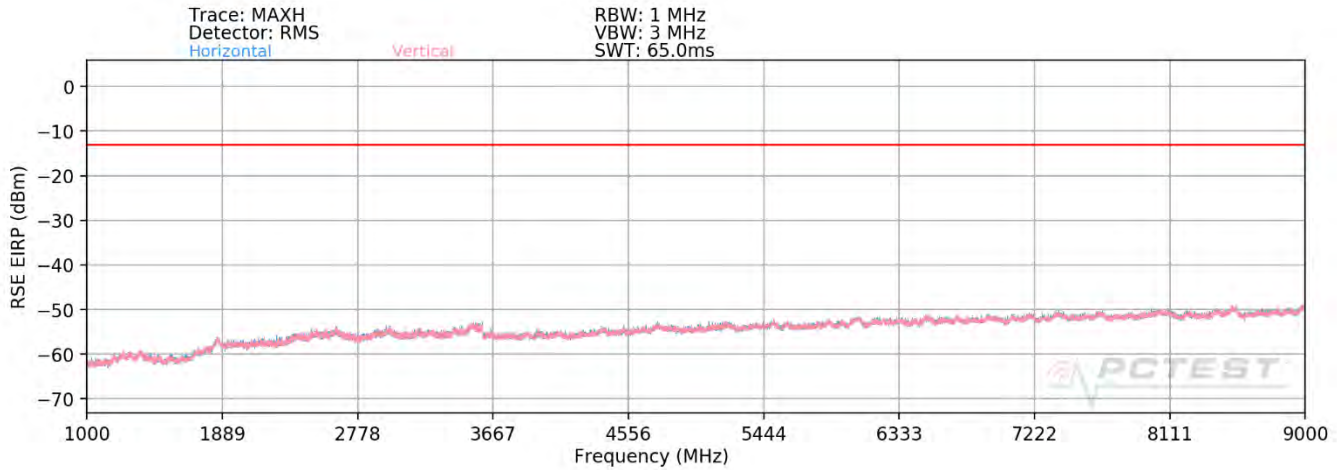

Plot 7-90. Radiated Spurious Plot (WCDMA Cell) – Closed

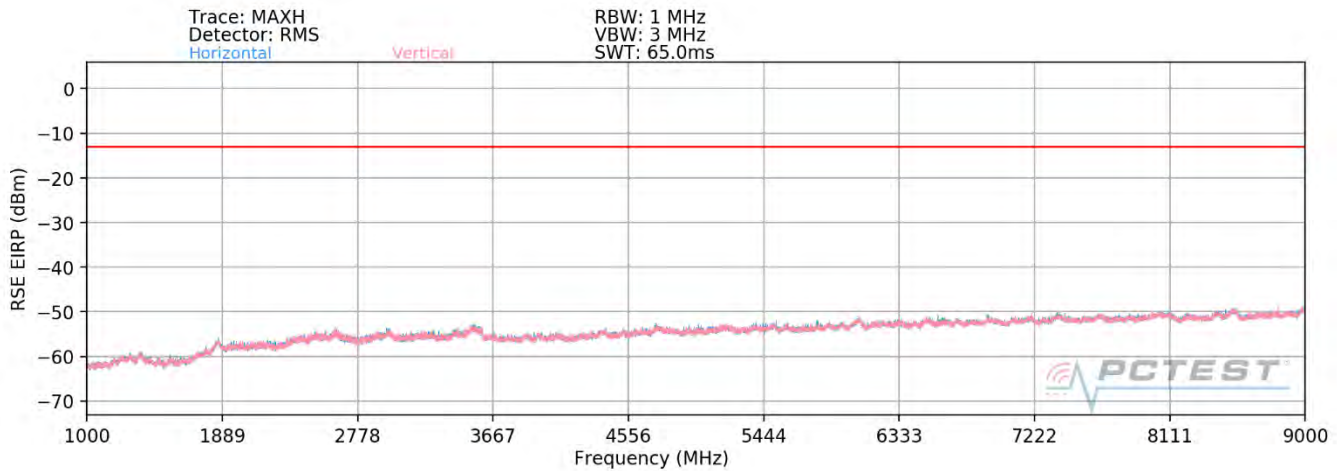



Plot 7-91. Radiated Spurious Plot (WCDMA Cell) – Half

Mode:	WCDMA RMC
Channel:	4132
Frequency (MHz):	826.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1652.80	H	181	328	-75.94	-2.52	28.54	-66.72	-13.00	-53.72
2479.20	H	198	175	-71.71	2.03	37.32	-57.94	-13.00	-44.94
3305.60	H	-	-	-77.96	2.42	31.46	-63.80	-13.00	-50.80
4132.00	H	-	-	-78.15	3.25	32.10	-63.16	-13.00	-50.16

Table 7-16. Radiated Spurious Data (WCDMA Cell – Low Channel) - Closed

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset
		Page 72 of 79

Mode:	WCDMA RMC
Channel:	4183
Frequency (MHz):	836.6



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.20	H	201	15	-76.88	-2.27	27.85	-67.40	-13.00	-54.40
2509.80	H	116	171	-72.03	2.22	37.19	-58.06	-13.00	-45.06
3346.40	H	-	-	-77.80	2.42	31.62	-63.64	-13.00	-50.64
4183.00	H	-	-	-78.27	3.46	32.19	-63.07	-13.00	-50.07

Table 7-17. Radiated Spurious Data (WCDMA Cell – Mid Channel) - Closed

Mode:	WCDMA RMC
Channel:	4233
Frequency (MHz):	846.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1693.20	H	-	-	-77.18	-1.82	28.00	-67.25	-13.00	-54.25
2539.80	H	112	43	-76.58	2.33	32.75	-62.51	-13.00	-49.51
3386.40	H	-	-	-77.76	2.32	31.56	-63.69	-13.00	-50.69
4233.00	H	-	-	-77.96	3.38	32.42	-62.84	-13.00	-49.84

Table 7-18. Radiated Spurious Data (WCDMA Cell – High Channel) - Closed

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset
		Page 73 of 79

7.7 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22 and RSS-132, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.


Test Notes

None

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 74 of 79

LTE Band 26/5					
Operating Frequency (Hz):		836,500,000			
Ref. Voltage (VDC):		4.43			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.43	- 30	836,861,159	-671	-0.0000802
		- 20	836,861,632	-198	-0.0000237
		- 10	836,861,190	-640	-0.0000765
		0	836,861,661	-169	-0.0000202
		+ 10	836,860,381	-1,449	-0.0001731
		+ 20 (Ref)	836,861,830	0	0.0000000
		+ 30	836,861,753	-77	-0.0000092
		+ 40	836,861,239	-591	-0.0000706
		+ 50	836,861,553	-277	-0.0000331
Battery Endpoint	3.06	+ 20	836,860,881	-949	-0.0001134

Table 7-19. LTE Band 26/5 Frequency Stability Data

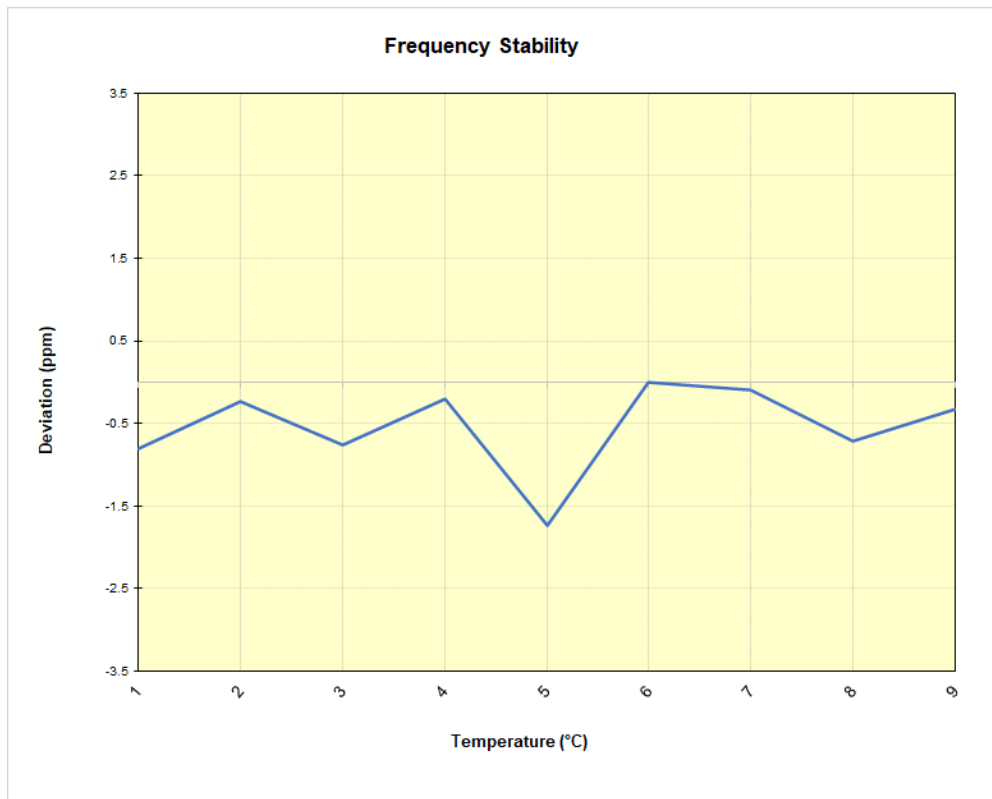


Plot 7-92. LTE Band 26/5 Frequency Stability Chart

FCC ID: A3LSMF711B1	PCTEST Proud to be part of Element	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 75 of 79

NR Band n5					
Operating Frequency (Hz):		836,500,000			
Ref. Voltage (VDC):		4.43			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.43	- 30	836,408,055	-1,317	-0.0001575
		- 20	836,408,675	-697	-0.0000833
		- 10	836,408,719	-653	-0.0000781
		0	836,408,906	-466	-0.0000557
		+ 10	836,409,342	-30	-0.0000036
		+ 20 (Ref)	836,409,372	0	0.0000000
		+ 30	836,409,817	445	0.0000532
		+ 40	836,408,708	-664	-0.0000794
		+ 50	836,409,244	-128	-0.0000153
Battery Endpoint	3.06	+ 20	836,409,752	380	0.0000454

Table 7-20. NR Band n5 Frequency Stability Data

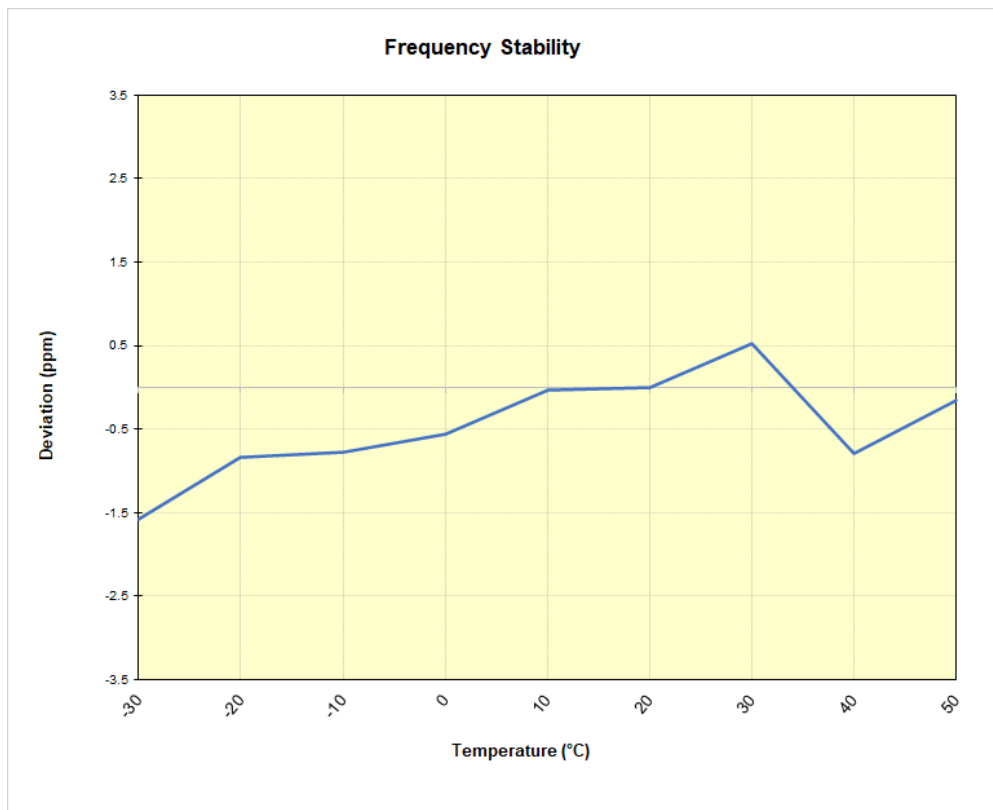


Plot 7-93. NR Band n5 Frequency Stability Chart



FCC ID: A3LSMF711B1	PCTEST <small>Proud to be part of Samsung</small>	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset		Page 76 of 79

GSM/GPRS Cellular					
Operating Frequency (Hz):		836,600,000			
Ref. Voltage (VDC):		4.43			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.43	- 30	836,405,574	1,399	0.0001673
		- 20	836,405,536	1,361	0.0001627
		- 10	836,405,875	1,700	0.0002033
		0	836,405,029	854	0.0001021
		+ 10	836,405,166	991	0.0001185
		+ 20 (Ref)	836,404,175	0	0.0000000
		+ 30	836,404,955	780	0.0000933
		+ 40	836,405,701	1,526	0.0001824
Battery Endpoint	3.06	+ 20	836,406,100	1,925	0.0002302

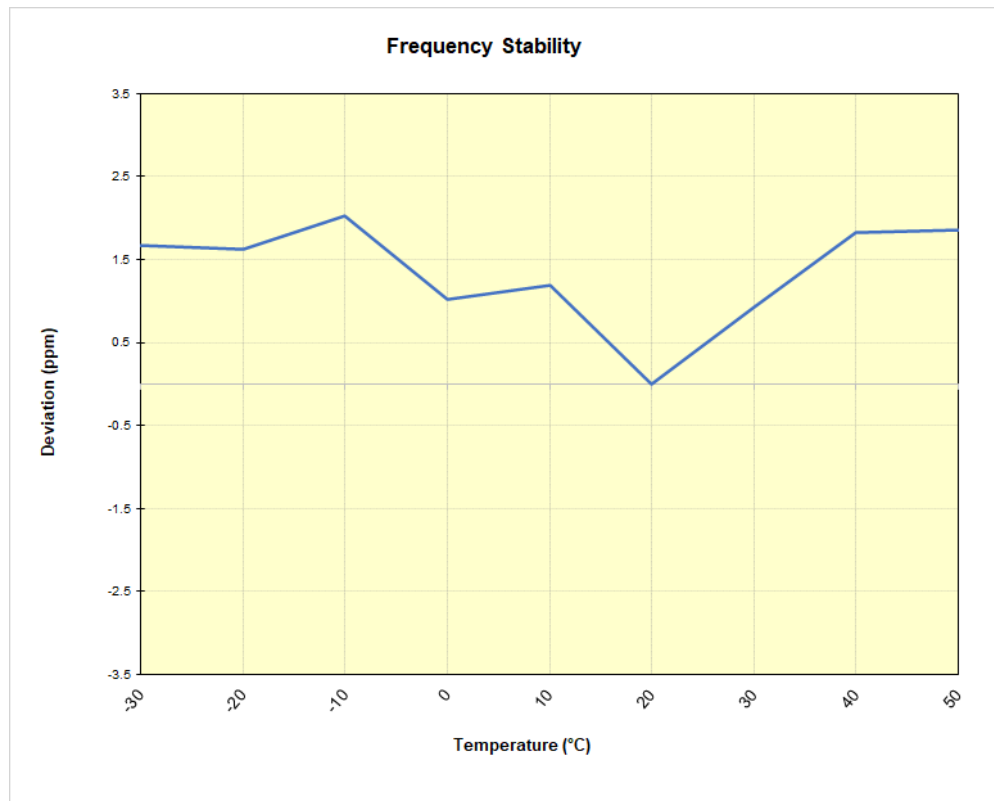Table 7-21. GSM/GPRS Cell Frequency Stability Data




Plot 7-94. GSM/GPRS Cell Frequency Stability Chart

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 77 of 79

WCDMA Cellular					
Operating Frequency (Hz):		836,600,000			
Ref. Voltage (VDC):		4.43			
Deviation Limit:		± 0.00025% or 2.5 ppm			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.43	- 30	836,427,392	980	0.0001172
		- 20	836,427,457	1,045	0.0001249
		- 10	836,427,636	1,224	0.0001463
		0	836,427,117	705	0.0000843
		+ 10	836,427,920	1,508	0.0001803
		+ 20 (Ref)	836,426,412	0	0.0000000
		+ 30	836,426,642	230	0.0000275
		+ 40	836,426,361	-51	-0.0000061
Battery Endpoint	3.06	+ 20	836,427,097	685	0.0000819

Table 7-22. WCDMA Cell Frequency Stability Data

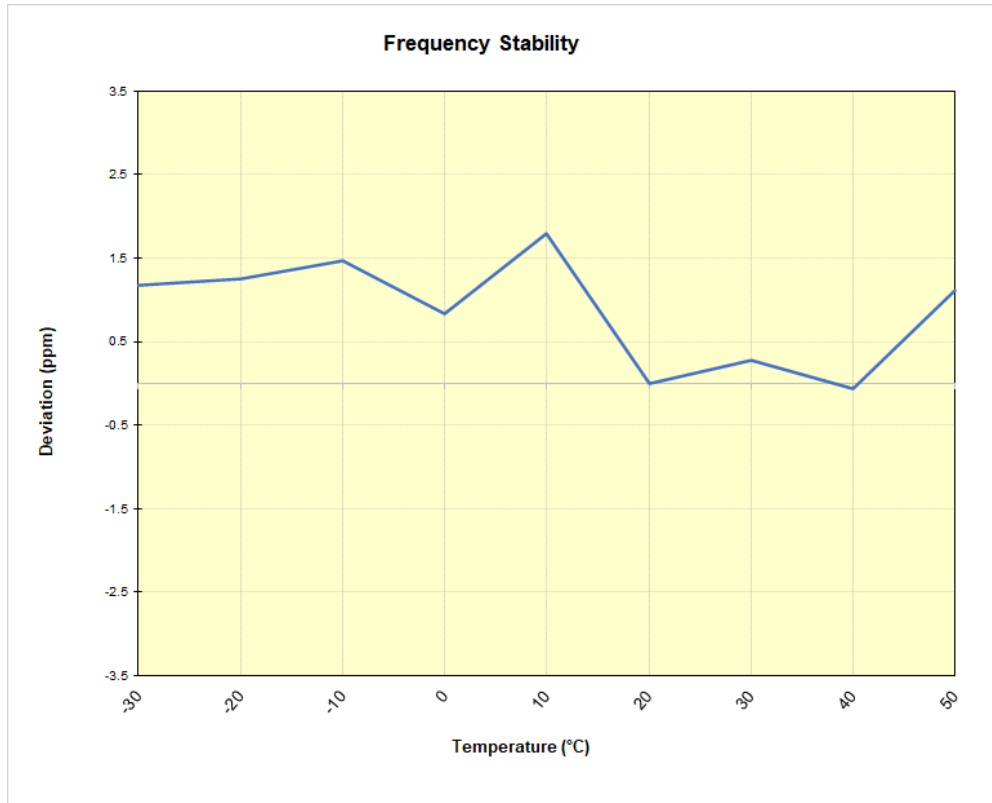



Plot 7-95. WCDMA Cell Frequency Stability Chart

FCC ID: A3LSMF711B1	PCTEST <small>Proved to be part of Samsung</small>	PART 22 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 78 of 79	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Samsung **Portable Handset** **FCC ID: A3LSMF711B1** complies with all the requirements of Part 22 of the FCC rules.

FCC ID: A3LSMF711B1	 PART 22 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-02.A3L	Test Dates: 08/21 - 09/07/2021	EUT Type: Portable Handset	Page 79 of 79