

PART 24 MEASUREMENT REPORT

Applicant Name:
 Samsung Electronics Co., Ltd.
 129, Samsung-ro,
 Yeongtong-gu, Suwon-si
 Gyeonggi-do, 16677, Korea


Date of Testing:
 4/12/2021 - 6/11/2021
Test Site/Location:
 PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
 1M2108160097-03.A3L

FCC ID:	A3LSMF711B1
Applicant Name:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-F711B
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: 24
Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


 Randy Ortanez
 President








FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset
		Page 1 of 85


TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	11
7.1	Summary	11
7.2	Occupied Bandwidth	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal	21
7.4	Band Edge Emissions at Antenna Terminal	37
7.5	Peak-Average Ratio	59
7.6	Radiated Power (ERP/EIRP).....	68
7.7	Radiated Spurious Emissions Measurements.....	72
7.8	Frequency Stability / Temperature Variation	81
8.0	CONCLUSION.....	85

FCC ID: A3LSMF711B1	 PCTEST <small>Proud to be part of element</small>	PART 24 MEASUREMENT REPORT	 Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 2 of 85





PART 24 MEASUREMENT REPORT



Mode	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
			Max. Power [W]	Max. Power [dBm]	
GSM/GPRS	GMSK	1850.2 - 1909.8	0.812	29.10	241KGXW
EDGE	8-PSK	1850.2 - 1909.8	0.307	24.87	242KG7W
WCDMA	Spread Spectrum	1852.4 - 1907.6	0.248	23.94	4M18F9W

Mode	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
			Max. Power [W]	Max. Power [dBm]	
LTE Band 25/2	QPSK	1860 - 1905	0.249	23.96	18M0G7D
	16QAM	1860 - 1905	0.214	23.30	18M0W7D
	QPSK	1857.5 - 1907.5	0.250	23.98	13M5G7D
	16QAM	1857.5 - 1907.5	0.207	23.16	13M5W7D
	QPSK	1855 - 1910	0.246	23.92	9M02G7D
	16QAM	1855 - 1910	0.212	23.26	8M99W7D
	QPSK	1852.5 - 1912.5	0.248	23.95	4M52G7D
	16QAM	1852.5 - 1912.5	0.212	23.26	4M50W7D
	QPSK	1851.5 - 1913.5	0.250	23.98	2M71G7D
	16QAM	1851.5 - 1913.5	0.200	23.02	2M71W7D
	QPSK	1850.7 - 1914.3	0.248	23.94	1M10G7D
	16QAM	1850.7 - 1914.3	0.204	23.09	1M10W7D

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 3 of 85

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.



1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 4 of 85

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF711B1**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

Test Device Serial No.: 0089M, 0050M, 0069M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (n5, n66), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

2.3 Test Configuration



The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad(WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

The Equipment Under Test (EUT) can operate in one of three physical configurations – “Open”, “Half open” and “Closed”. All emissions are investigated in three modes for compliance.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 5 of 85

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI/TIA-603-E-2016. A half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss} [dB] + \text{antenna gain} [dBd/dBi];$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss} [dB]$.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:



$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$

And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.



Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: A3LSMF711B1		PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 6 of 85	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 7 of 85

5.0 TEST EQUIPMENT CALIBRATION DATA



Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP1	EMC Cable and Switch System	3/9/2021	Annual	3/9/2022	AP1
-	LTx1	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx1
-	LTx2	Licensed Transmitter Cable Set	3/12/2021	Annual	3/12/2022	LTx2
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6200901190
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Espec	ESX-2CA	Environmental Chamber	8/27/2020	Annual	8/27/2022	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Keysight Technologies	N9038A	MXE EMI Receiver	8/11/2020	Annual	8/11/2021	MY51210133
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/9/2020	Annual	9/9/2021	100348
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107
Sunol	JB6	LB6 Antenna	11/13/2020	Biennial	11/13/2022	A082816

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset
		Page 8 of 85

6.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation



Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info



D = Data transmission, telemetry, telecommand

FCC ID: A3LSMF711B1	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 9 of 85

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 10 of 85

7.0 TEST RESULTS

7.1 Summary



Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF711B1
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM/GPRS/EDGE/LTE

Test Condition	Test Description	FCC Part Section(s)	RSS Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	RSS-Gen(6.7)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	RSS-133(6.5)	> 43 + 10log10(P[Watts]) at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	RSS-133(4.1)	N/A	PASS	See RF Exposure Report
	Frequency Stability	2.1055, 24.235	RSS-133(6.3)	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power	24.232(c)	RSS-132(5.4)	< 7 Watts max. ERP	PASS	Section 7.6
	Radiated Spurious Emissions	2.1053, 24.238(a)	RSS-133(6.5)	> 43 + 10 log10 (P[Watts]) for all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST EMC Software Tool v1.0.

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset
Page 11 of 85		

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

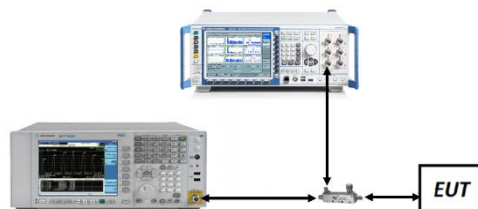





Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 12 of 85

LTE Band 25/2

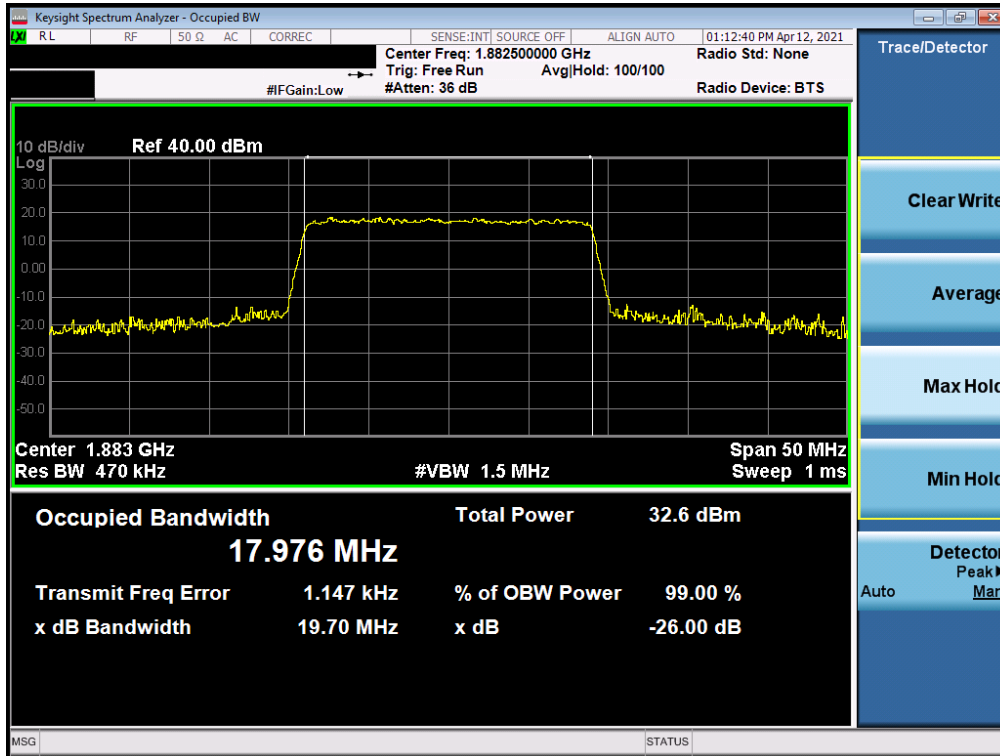


Plot 7-1. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz QPSK - Full RB)

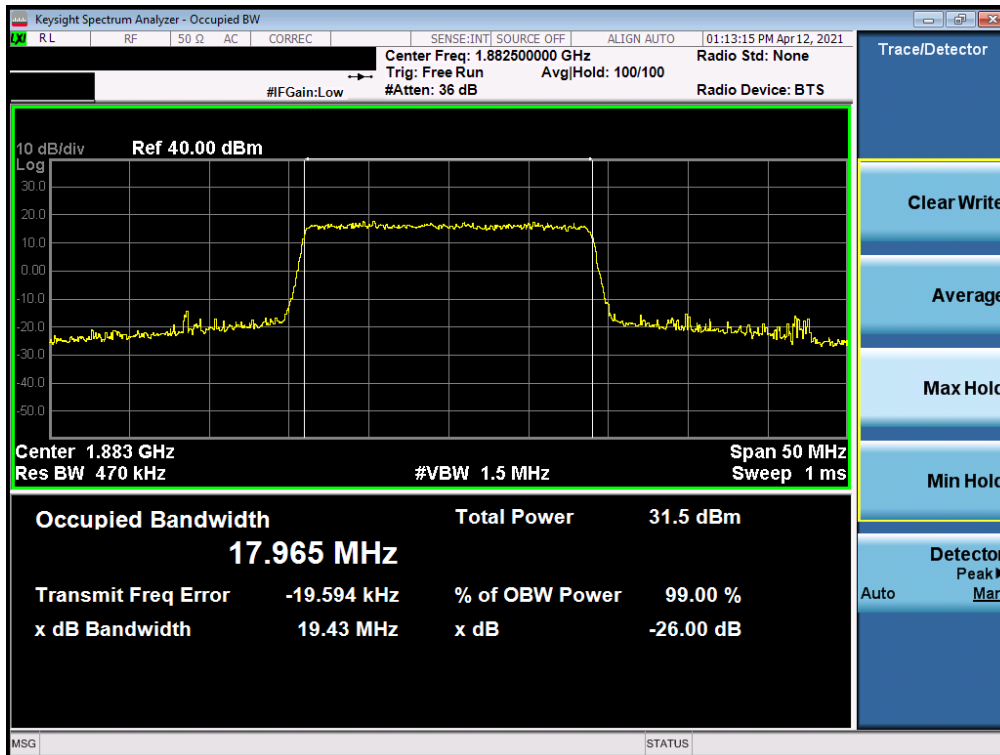


Plot 7-2. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 16-QAM - Full RB)

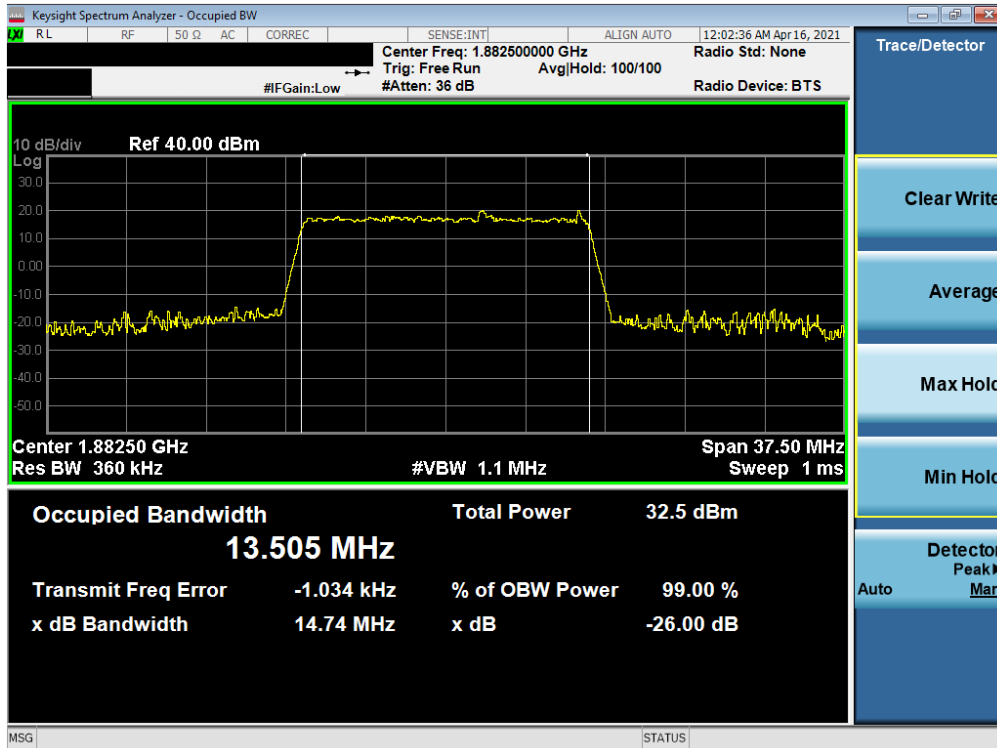

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 13 of 85

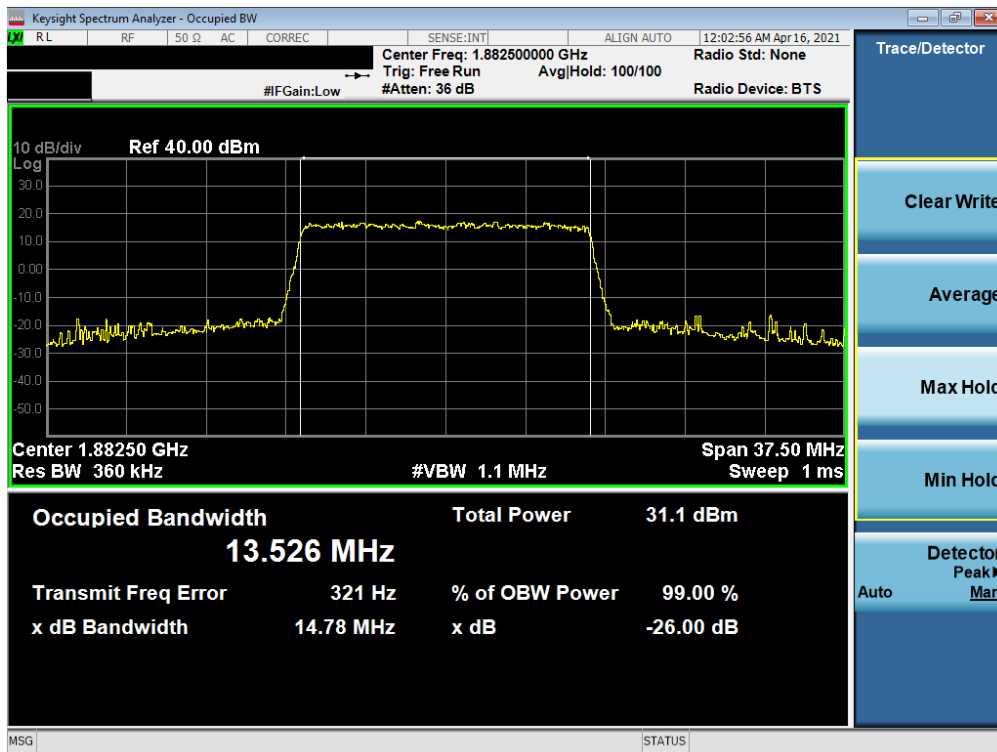


Plot 7-3. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz QPSK - Full RB)




Plot 7-4. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 16-QAM - Full RB)

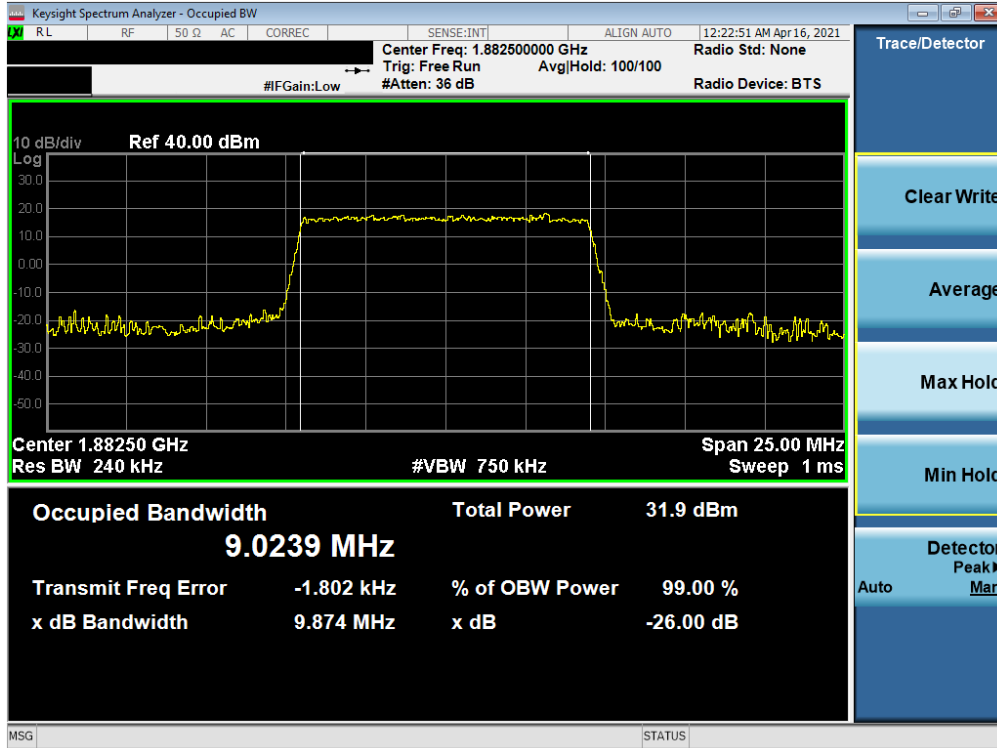


FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 14 of 85

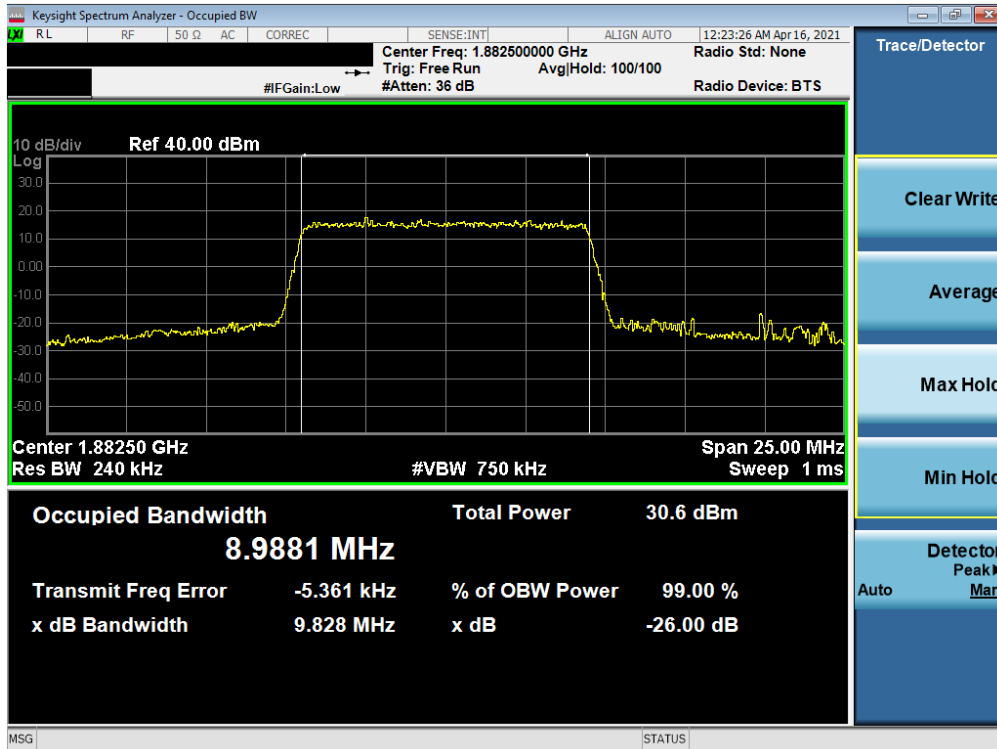


Plot 7-5. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz QPSK - Full RB)




Plot 7-6. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 16-QAM - Full RB)

FCC ID: A3LSMF711B1	 PCTEST Proud to be part of 	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 15 of 85

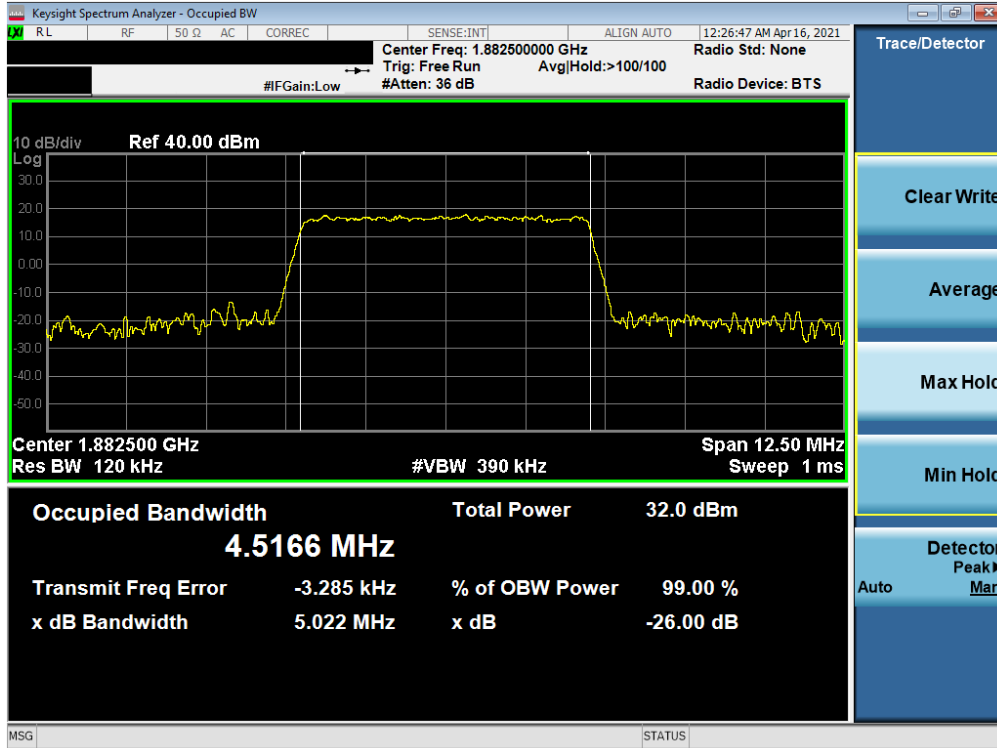


Plot 7-7. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz QPSK - Full RB)

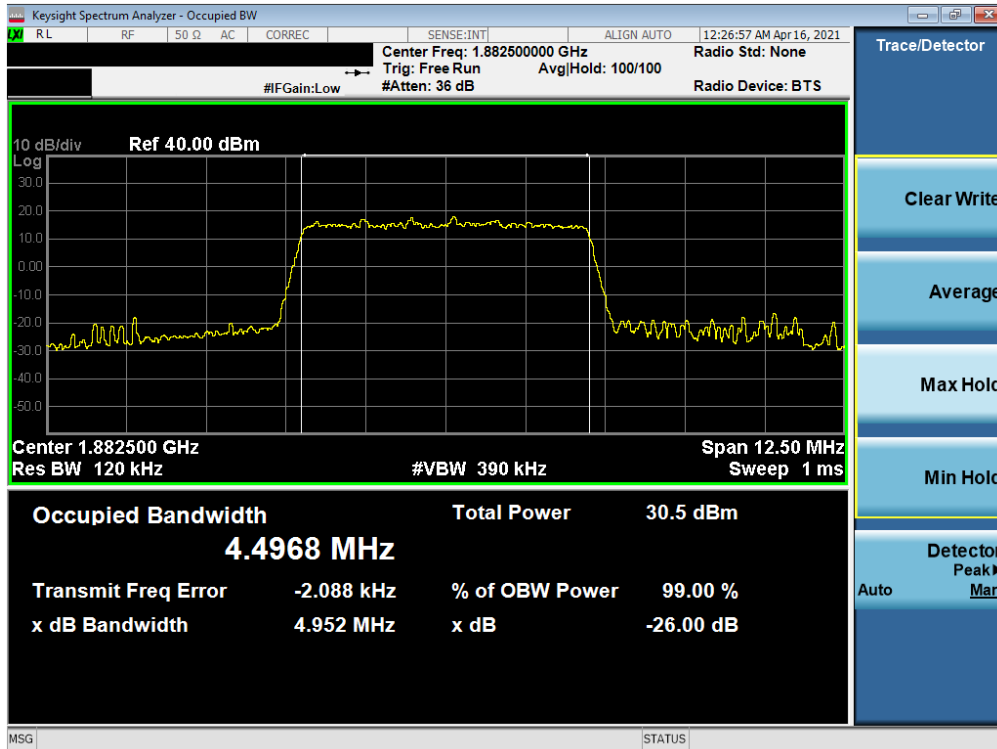


Plot 7-8. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 16-QAM - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 16 of 85

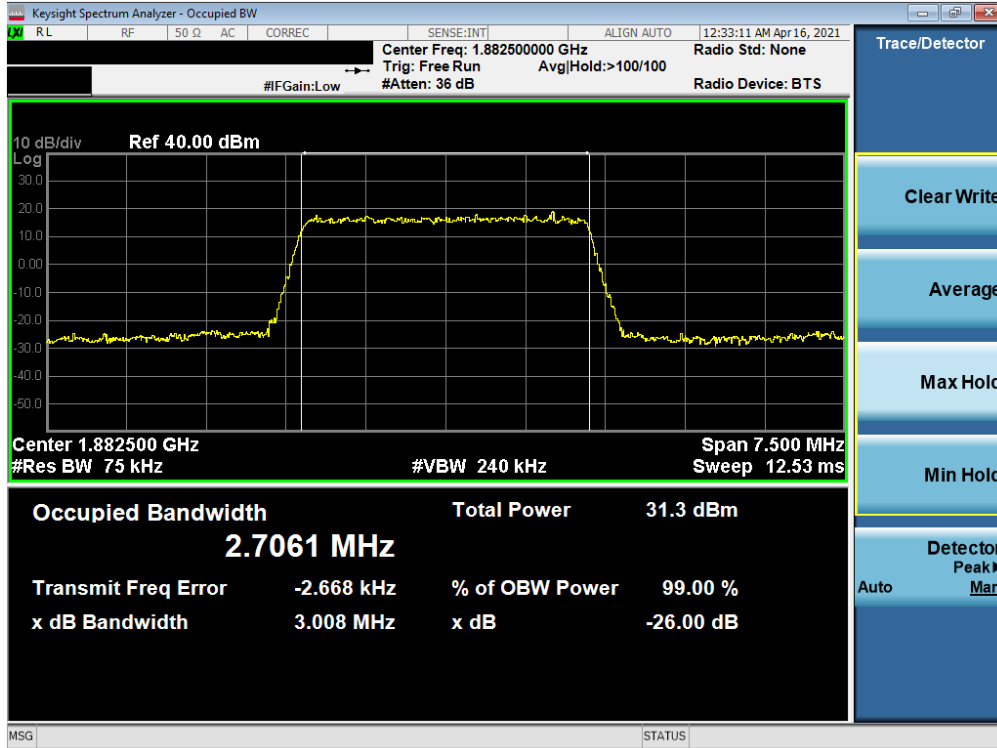


Plot 7-9. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz QPSK - Full RB)

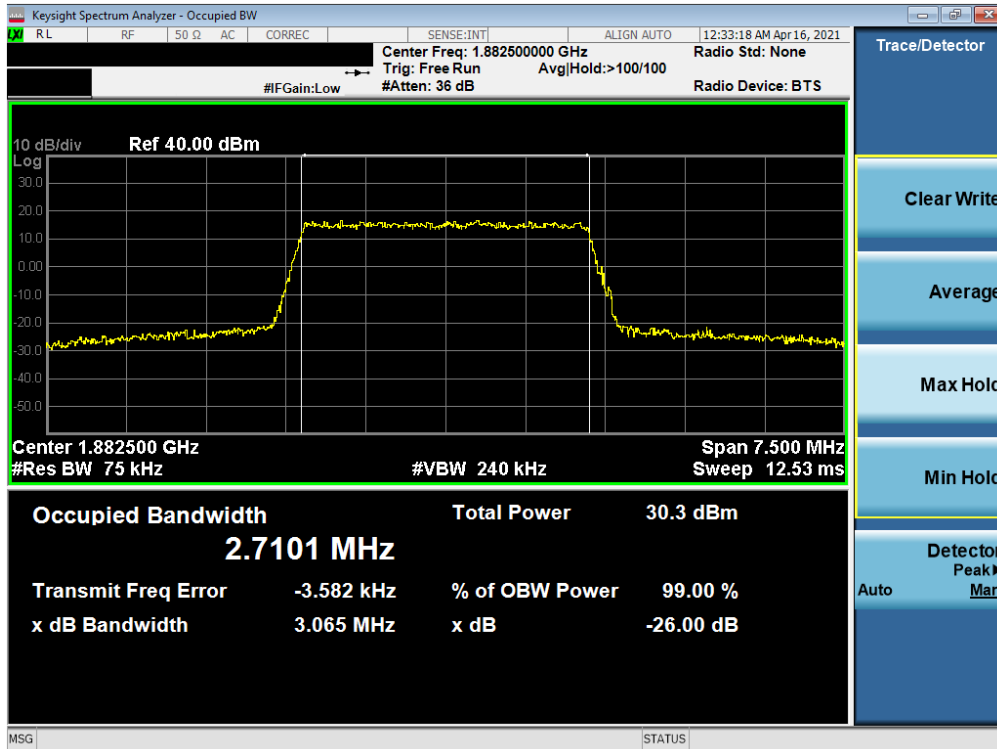


Plot 7-10. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 16-QAM - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 17 of 85

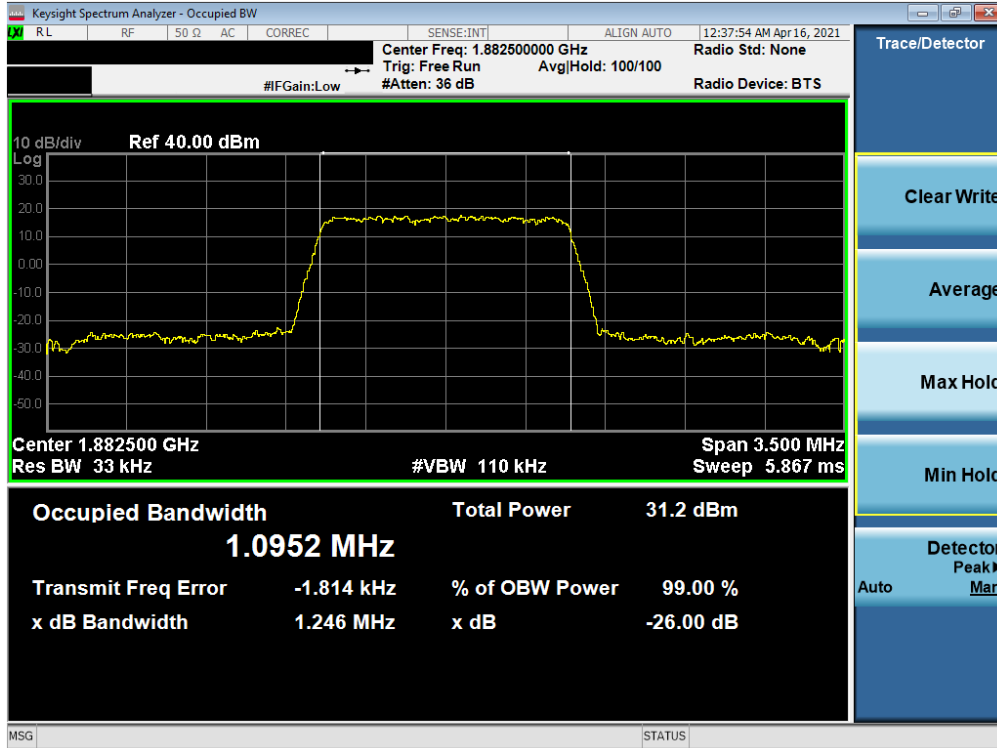

Plot 7-11. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB)

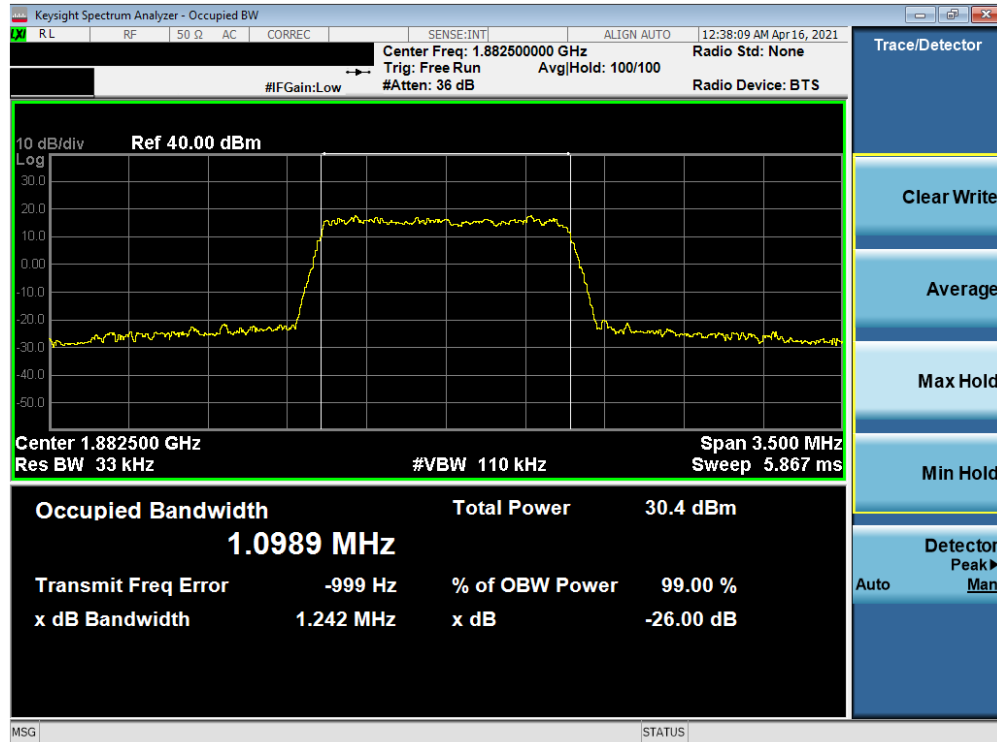


Plot 7-12. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 16-QAM - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 18 of 85

GSM/GPRS PCS




Plot 7-13. Occupied Bandwidth Plot (GPRS, Ch. 661)

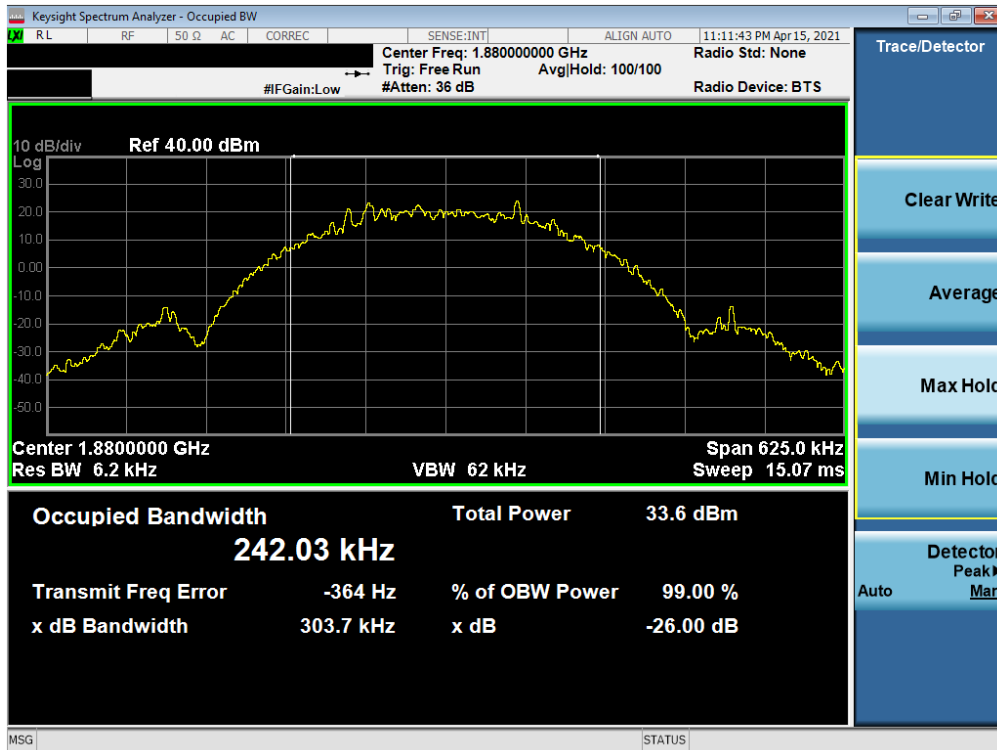

Plot 7-14. Occupied Bandwidth Plot (EDGE, Ch. 661)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 19 of 85

WCDMA PCS

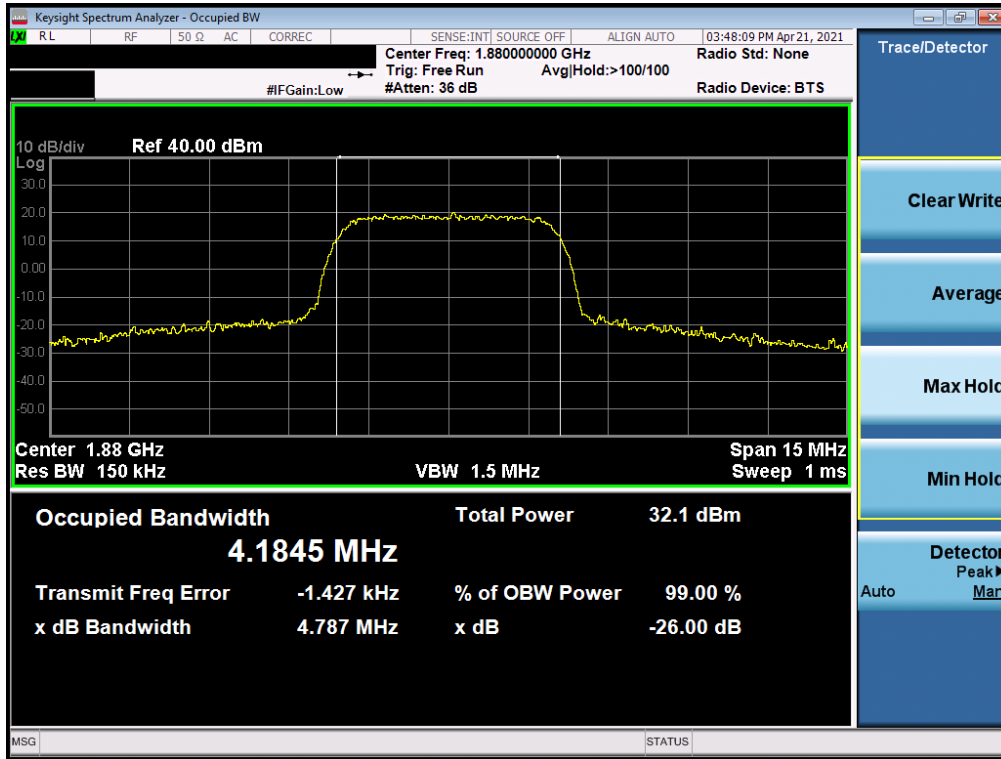

Plot 7-15. Occupied Bandwidth Plot (WCDMA, Ch. 9400)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 20 of 85

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

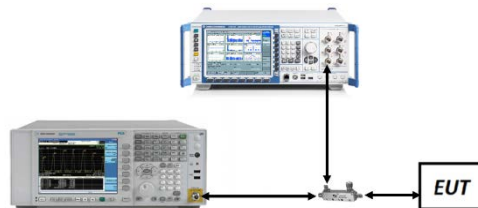





Figure 7-2. Test Instrument & Measurement Setup

Test Notes


1. Per Part 24 and RSS-133, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMF711B1	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 21 of 85

LTE Band 25/2

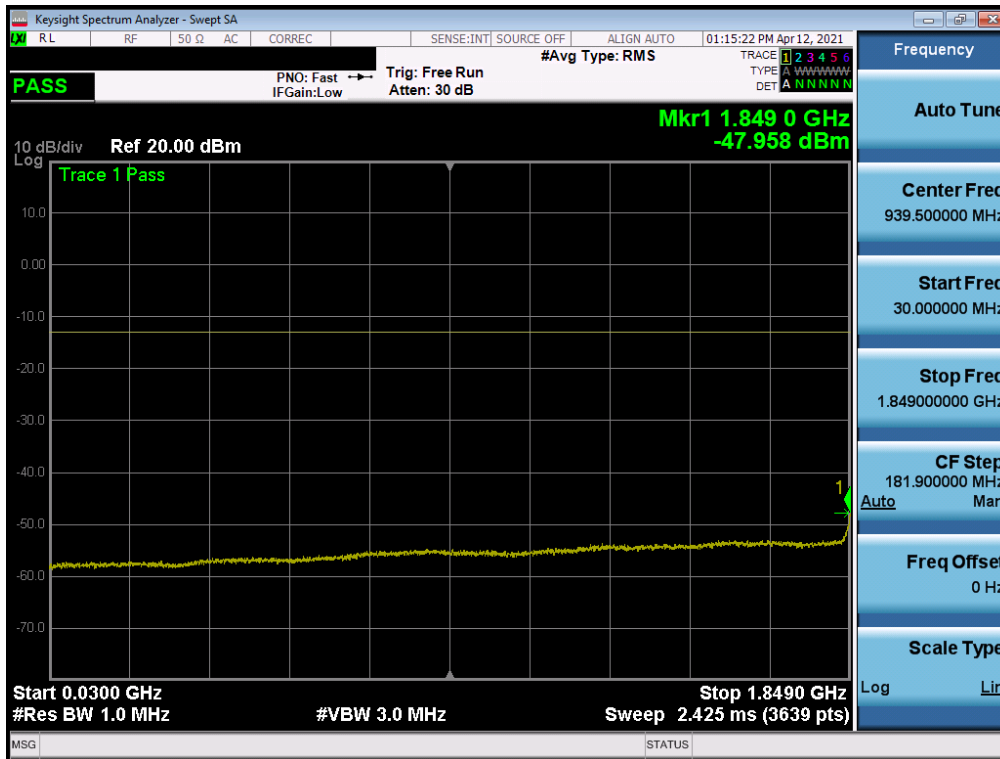


Plot 7-16. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Low Channel)

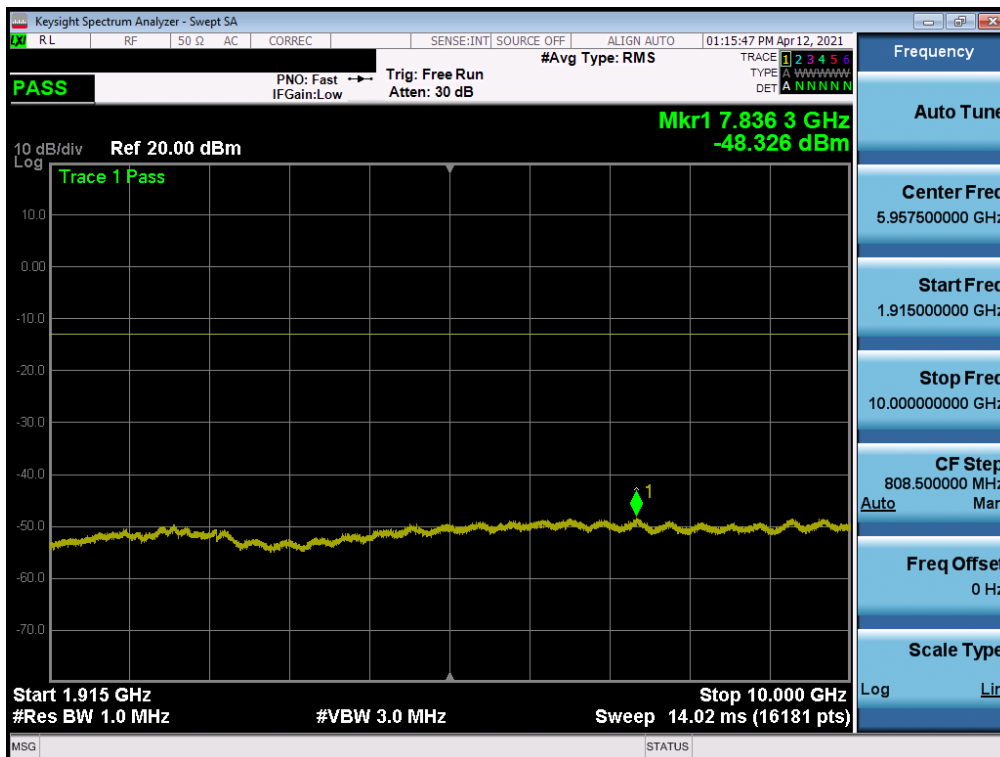


Plot 7-17. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Low Channel)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 22 of 85

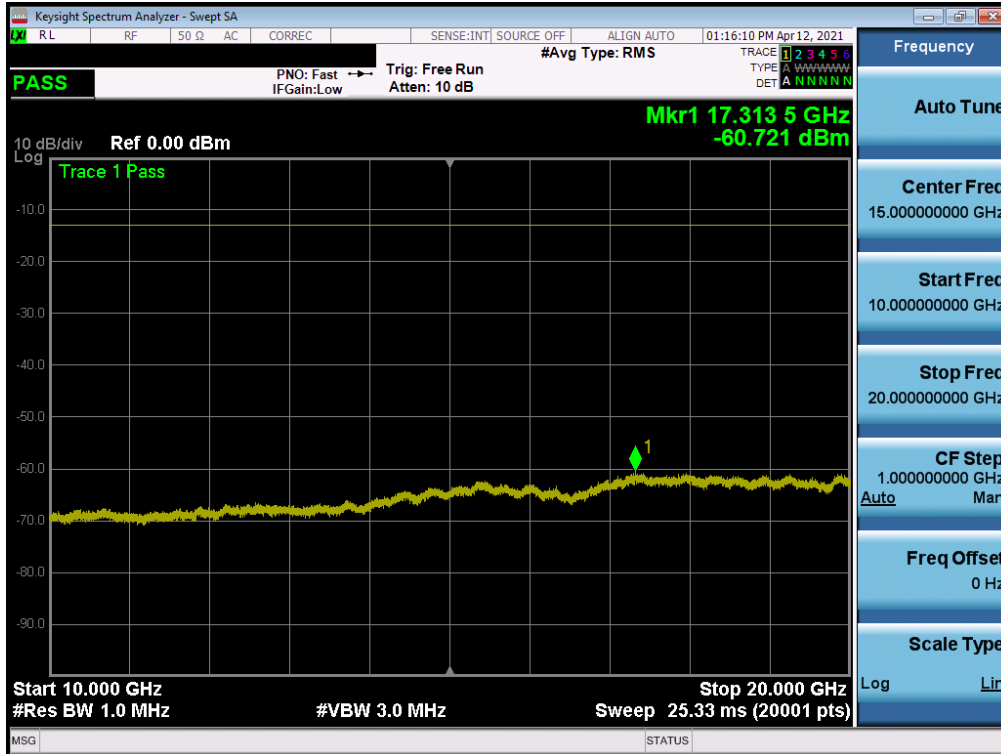


Plot 7-18. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Low Channel)

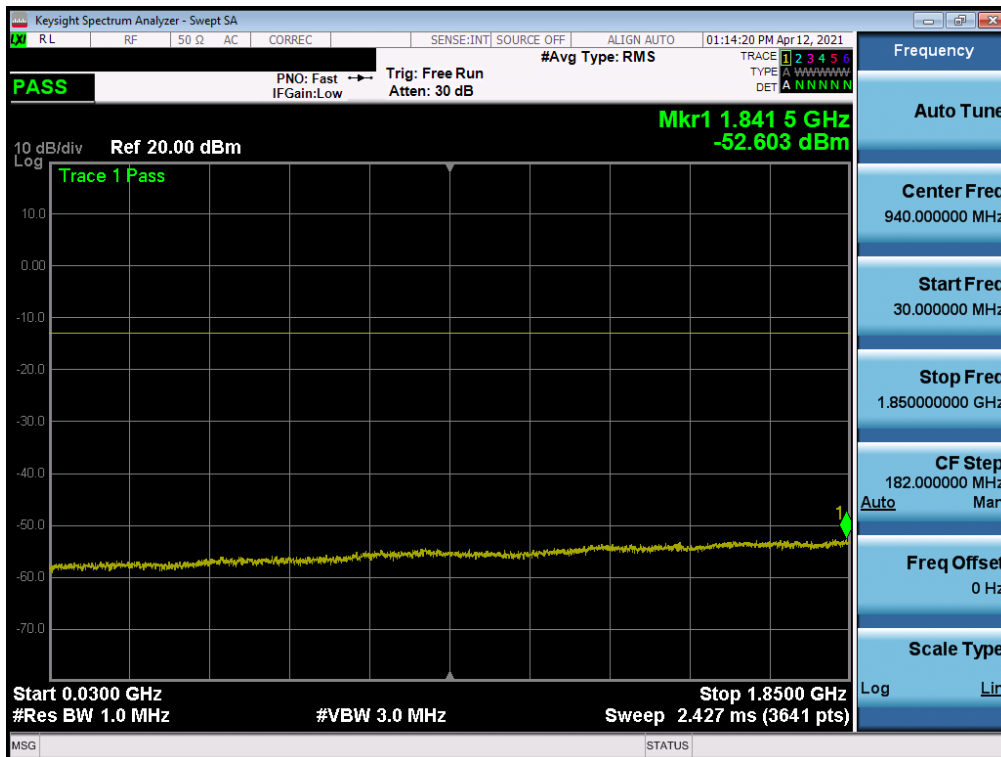


Plot 7-19. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Mid Channel)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 23 of 85

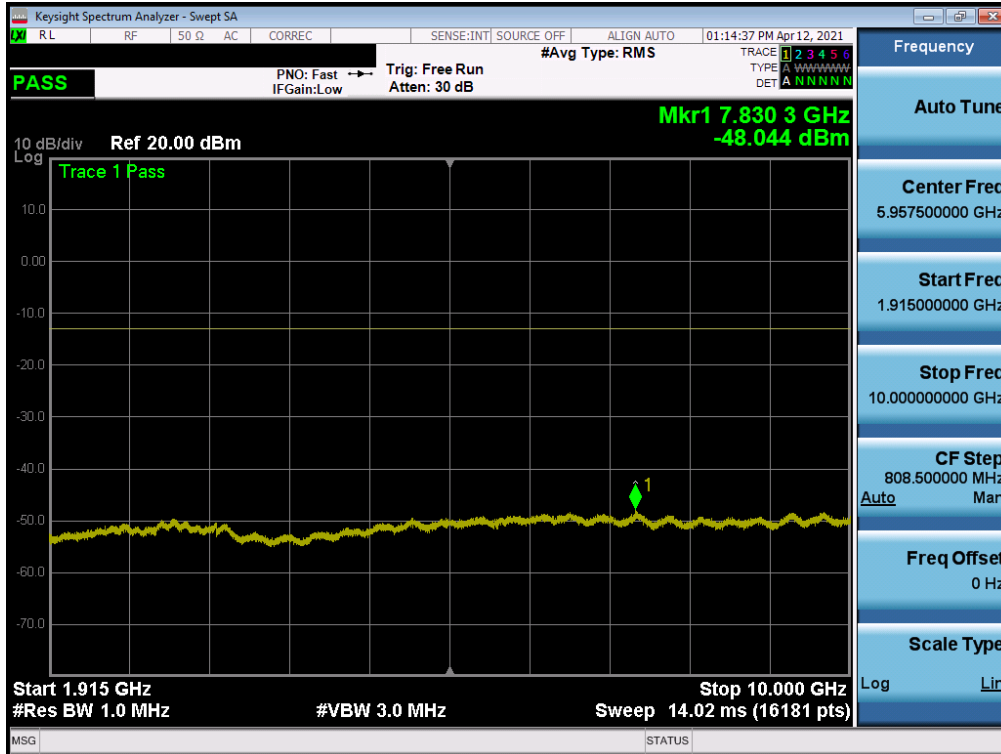


Plot 7-20. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Mid Channel)

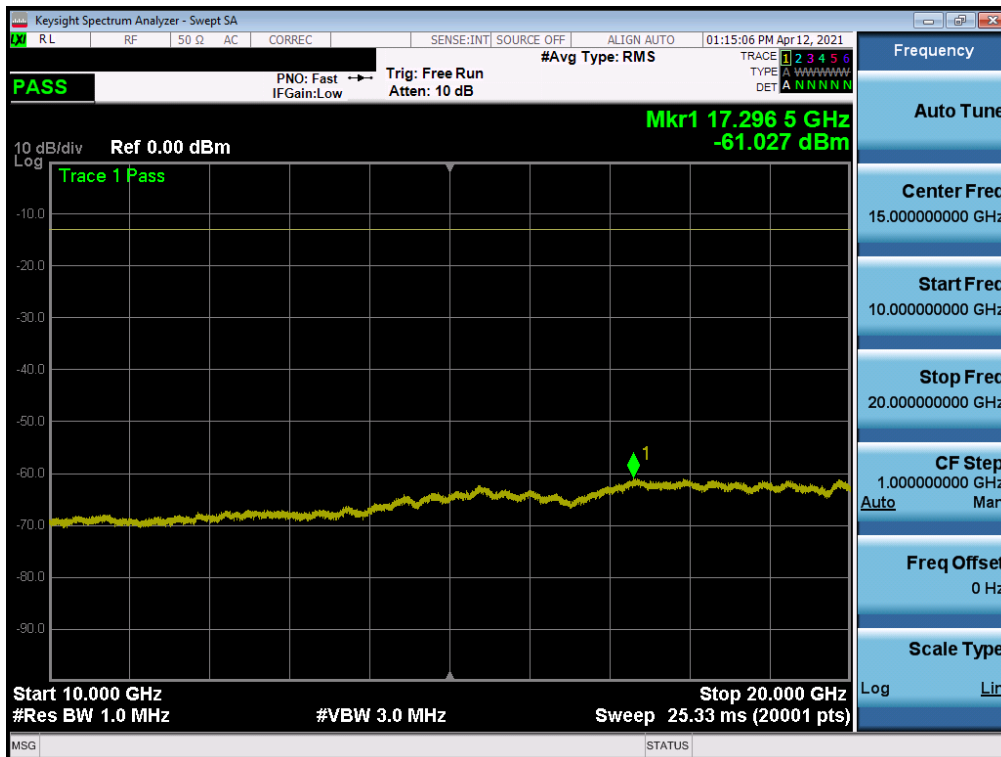


Plot 7-21. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - Mid Channel)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 24 of 85

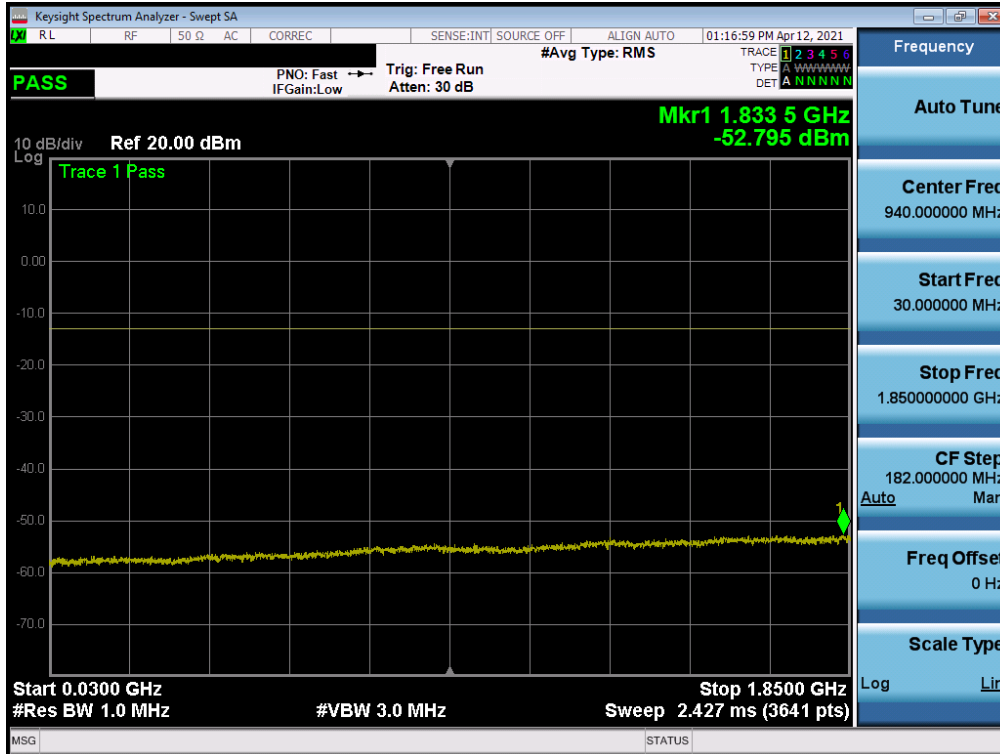


Plot 7-22. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - High Channel)

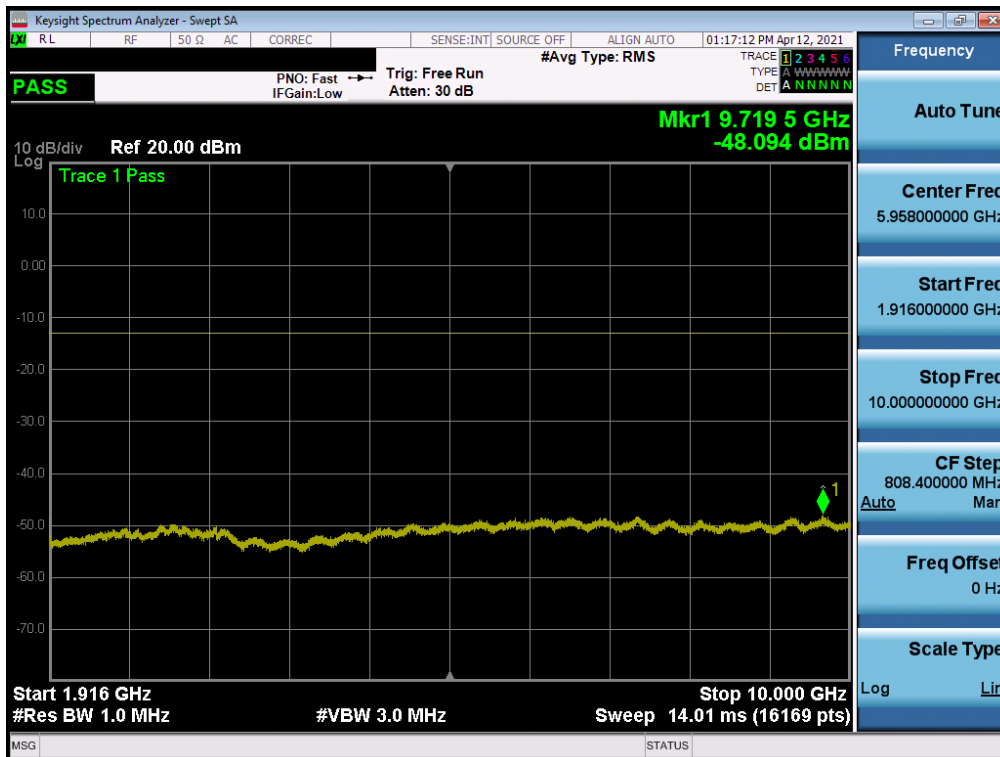

Plot 7-23. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - High Channel)


FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 25 of 85

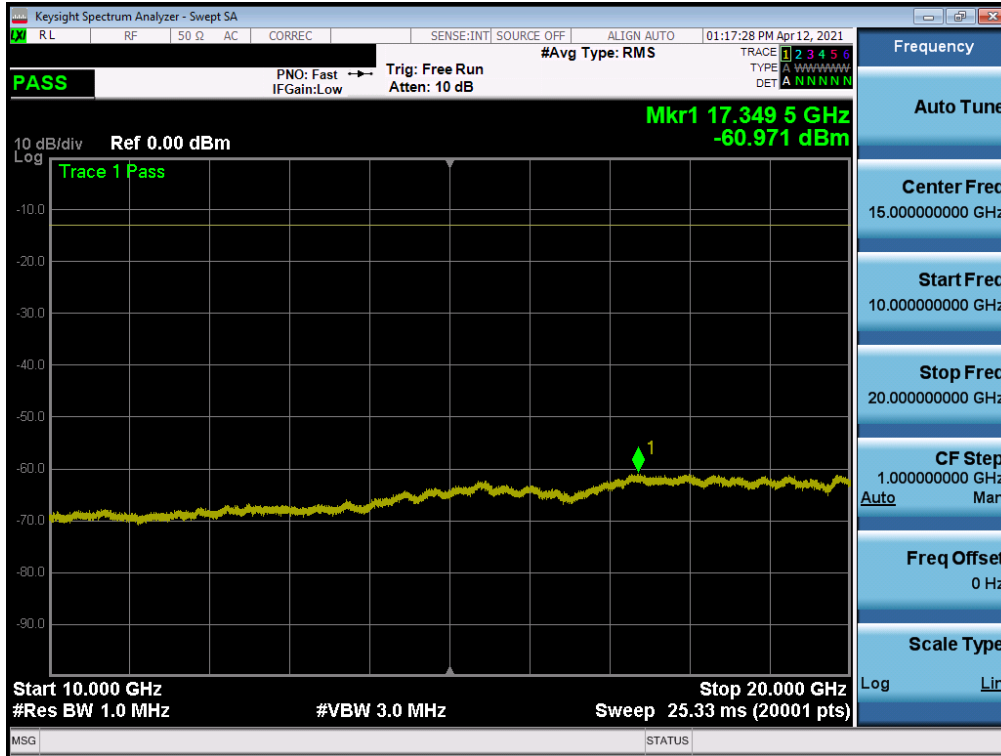


Plot 7-24. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - 1RB - High Channel)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 26 of 85

GSM/GPRS PCS

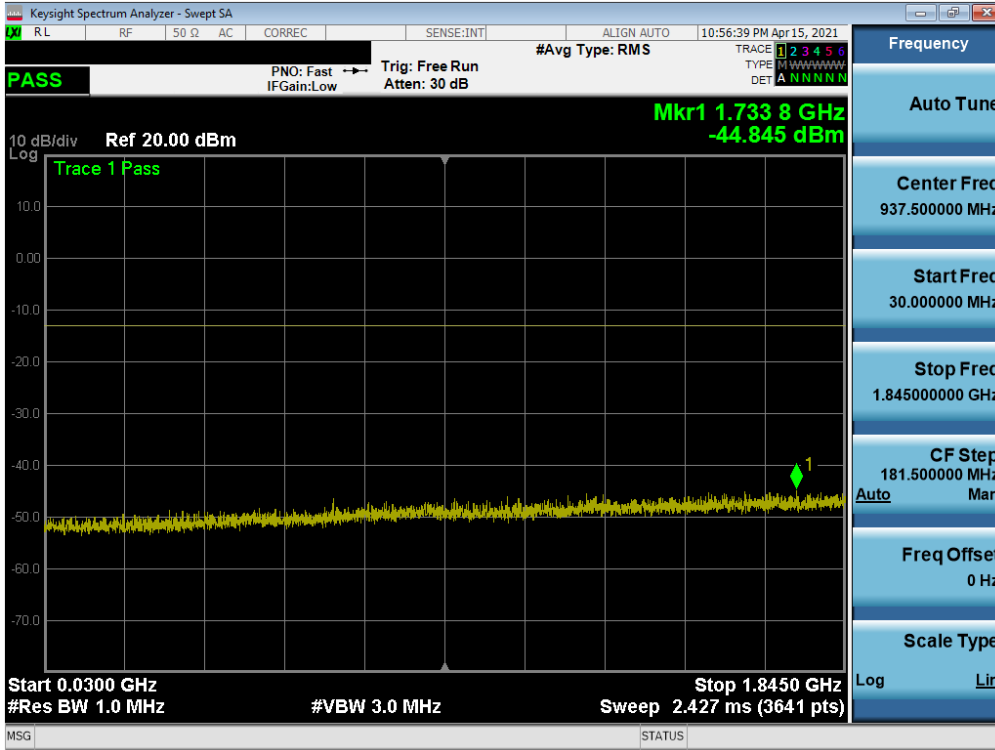


Plot 7-25. Conducted Spurious Plot (GPRS Ch. 512)

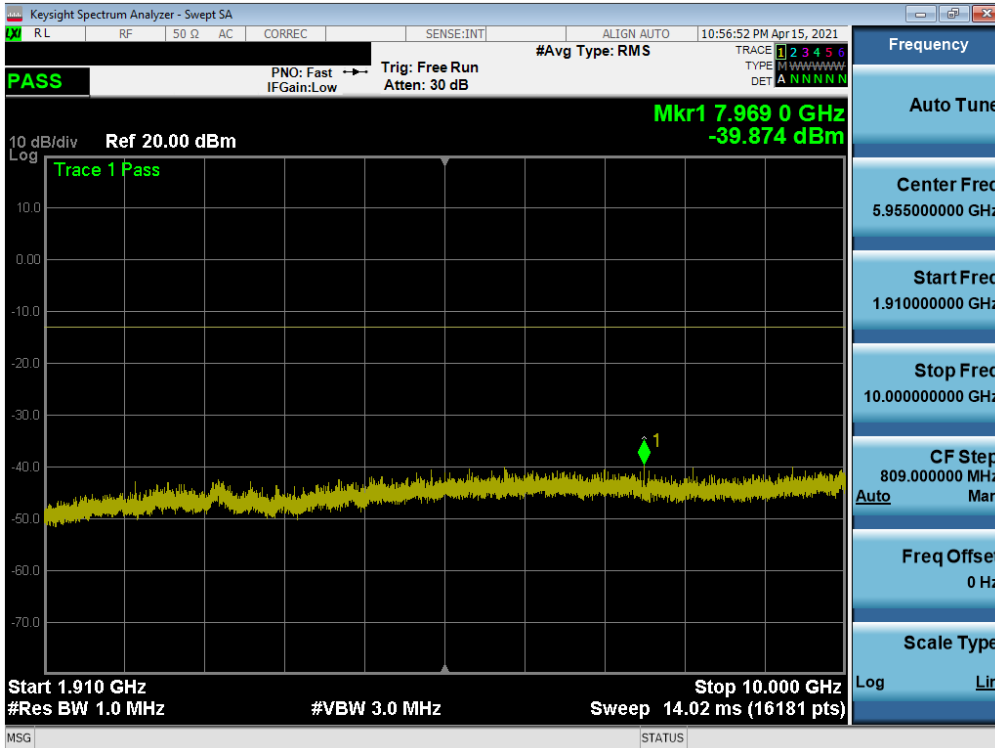


Plot 7-26. Conducted Spurious Plot (GPRS Ch. 512)

FCC ID: A3LSMF711B1	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 27 of 85

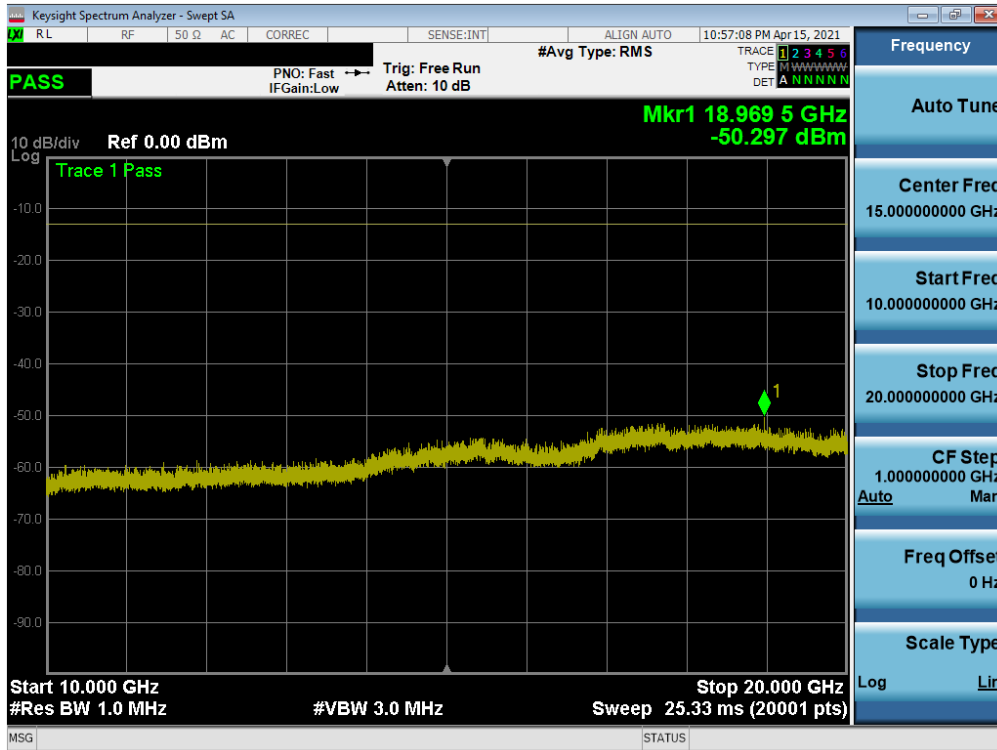


Plot 7-27. Conducted Spurious Plot (GPRS Ch. 512)

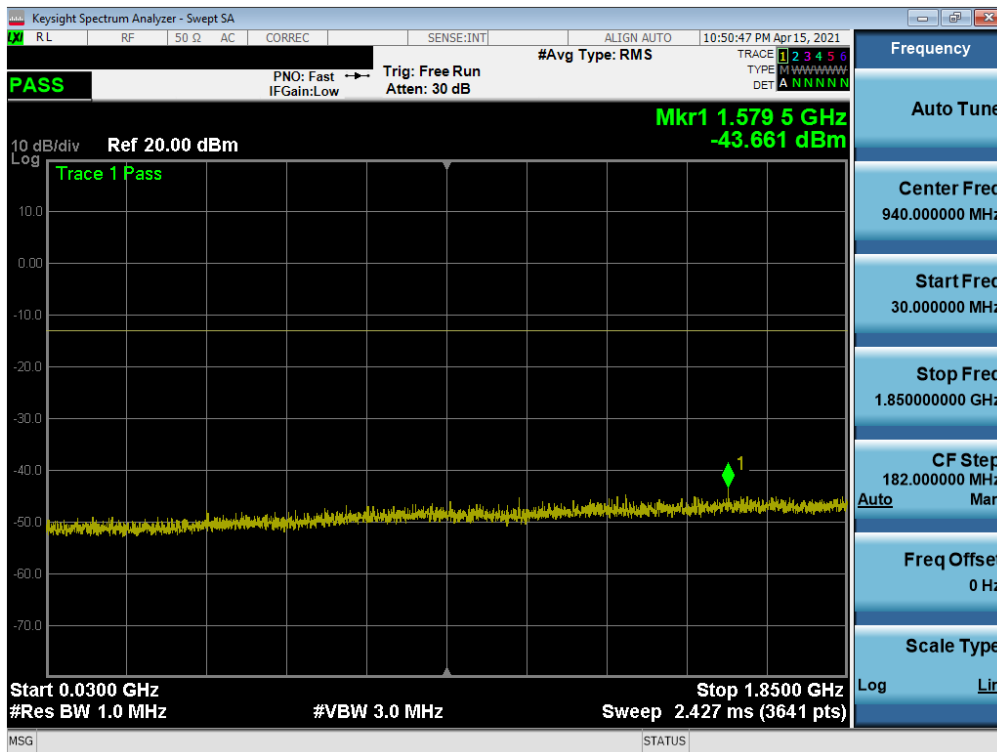


Plot 7-28. Conducted Spurious Plot (GPRS Ch. 661)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 28 of 85

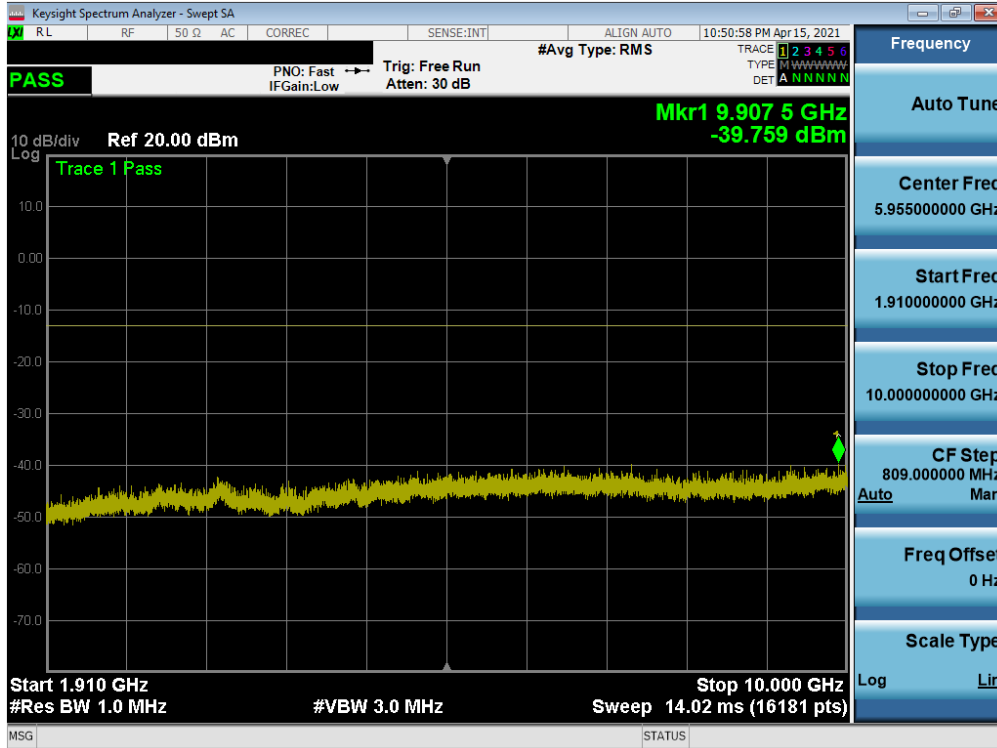


Plot 7-29. Conducted Spurious Plot (GPRS Ch. 661)

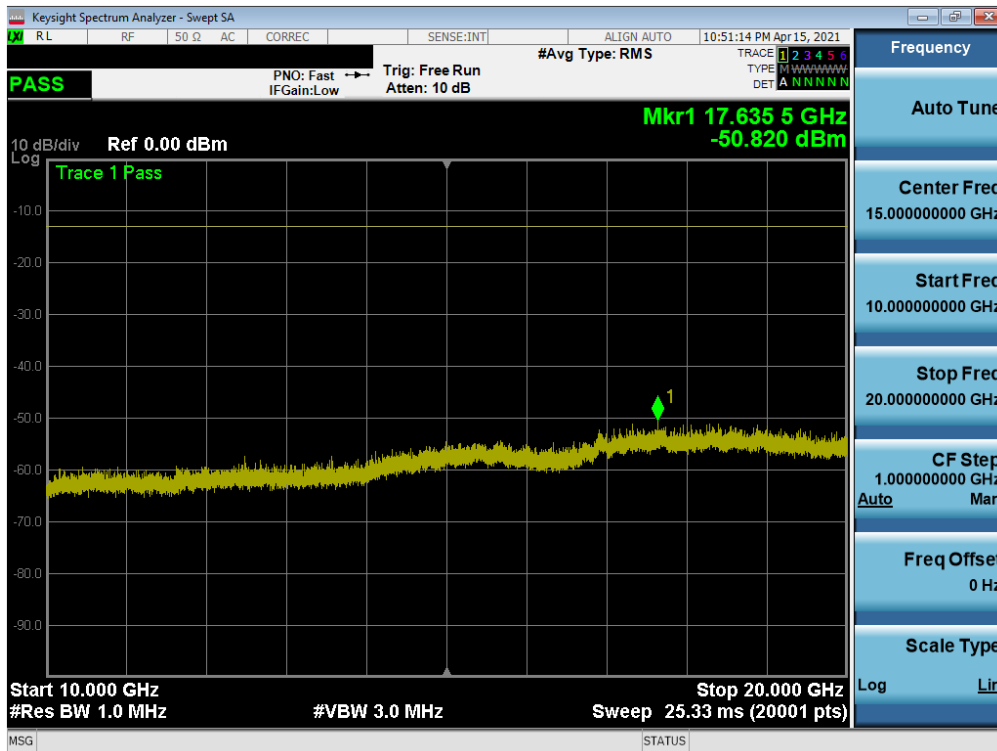


Plot 7-30. Conducted Spurious Plot (GPRS Ch. 661)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 29 of 85

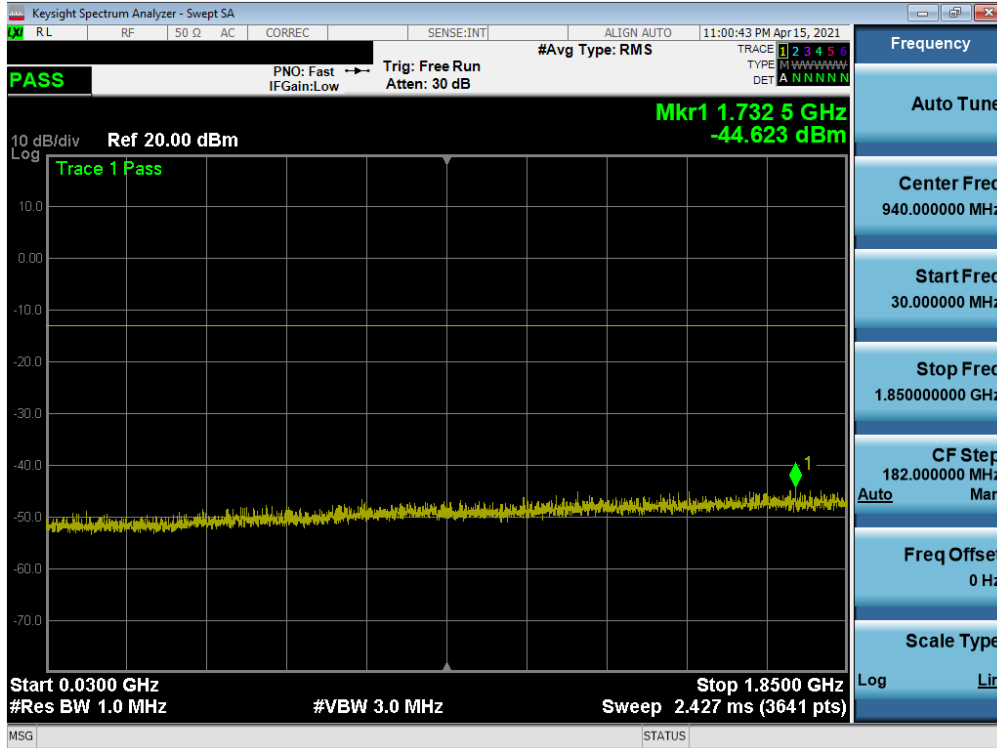


Plot 7-31. Conducted Spurious Plot (GPRS Ch. 810)

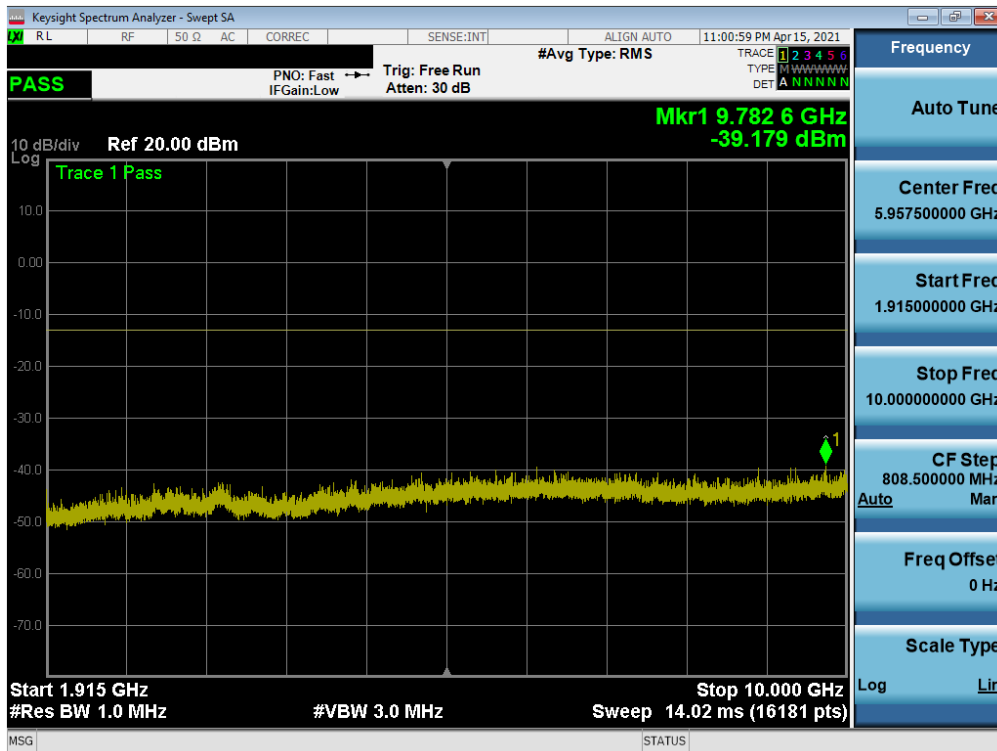

Plot 7-32. Conducted Spurious Plot (GPRS Ch. 810)


FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 30 of 85

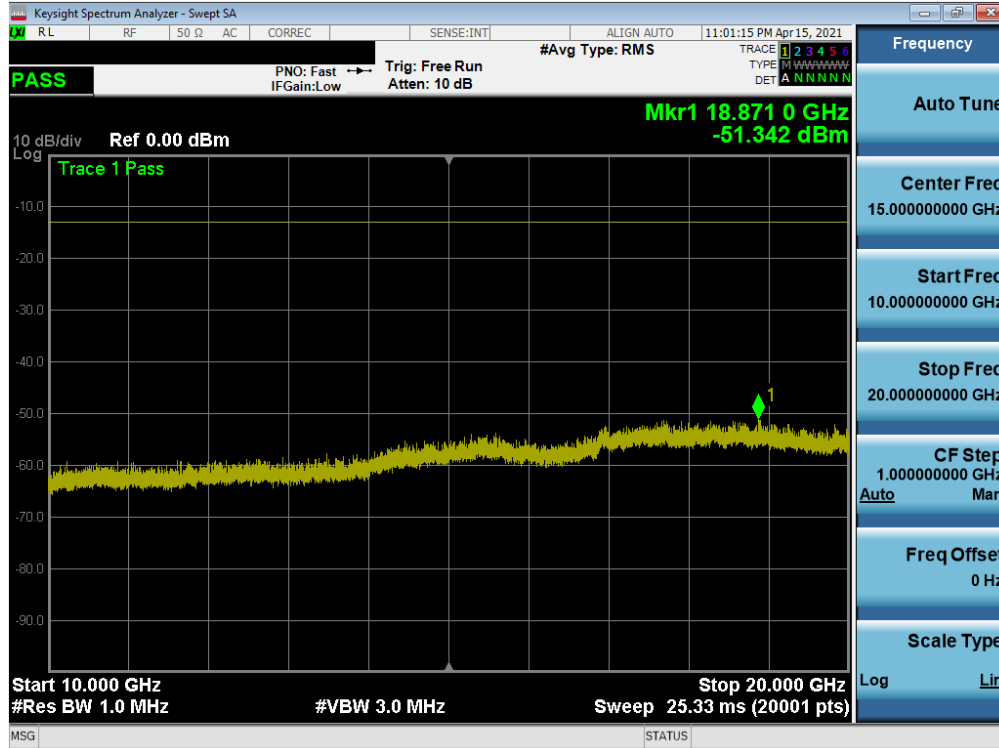


Plot 7-33. Conducted Spurious Plot (GPRS Ch. 810)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 31 of 85

WCDMA PCS

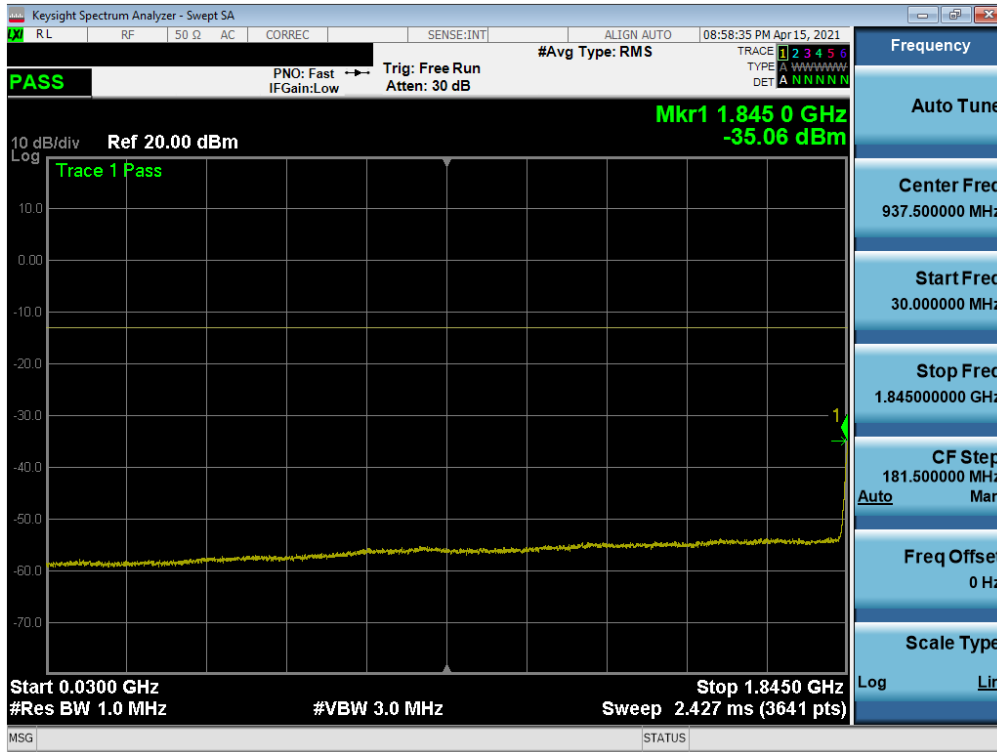


Plot 7-34. Conducted Spurious Plot (WCDMA Ch. 9262)

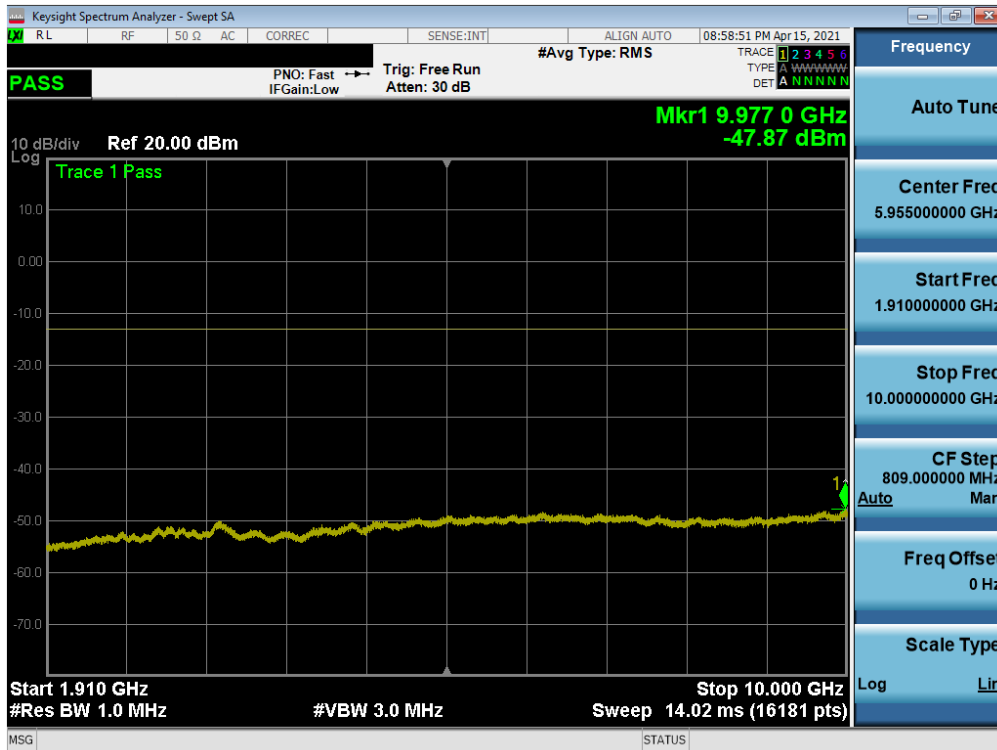


Plot 7-35. Conducted Spurious Plot (WCDMA Ch. 9262)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 32 of 85

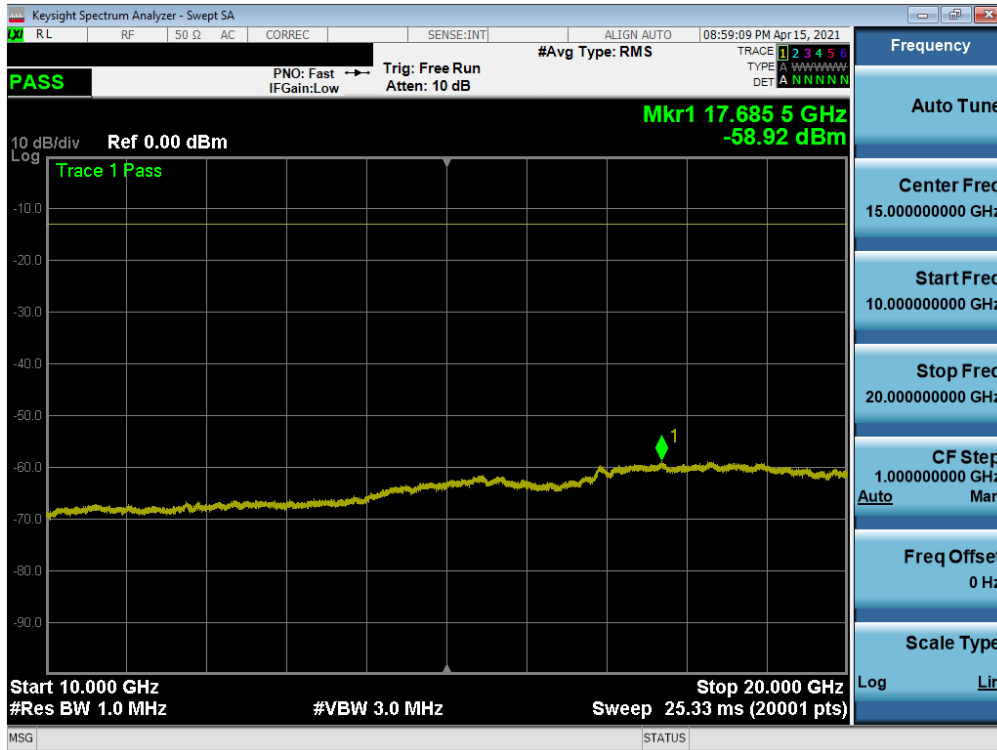


Plot 7-36. Conducted Spurious Plot (WCDMA Ch. 9262)

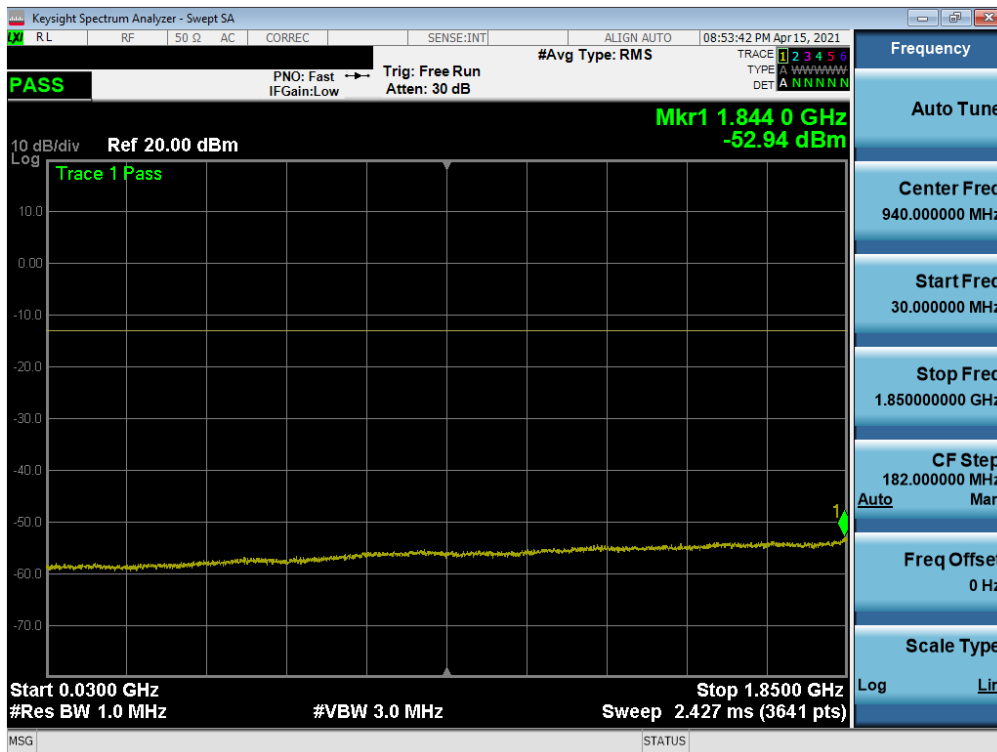


Plot 7-37. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 33 of 85

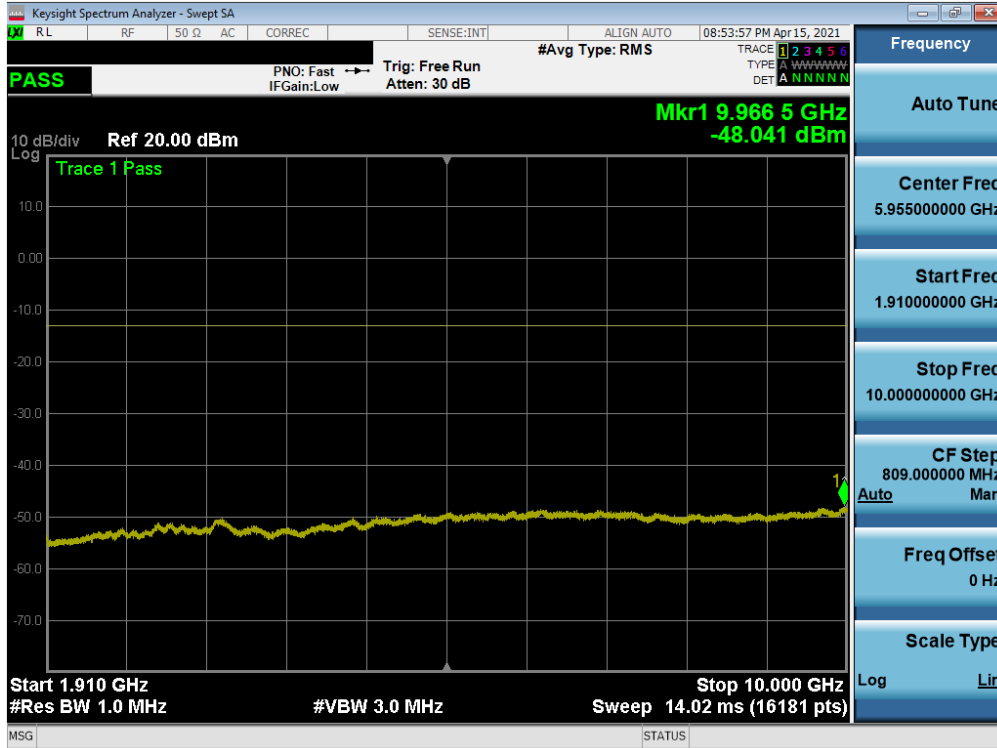


Plot 7-38. Conducted Spurious Plot (WCDMA Ch. 9400)

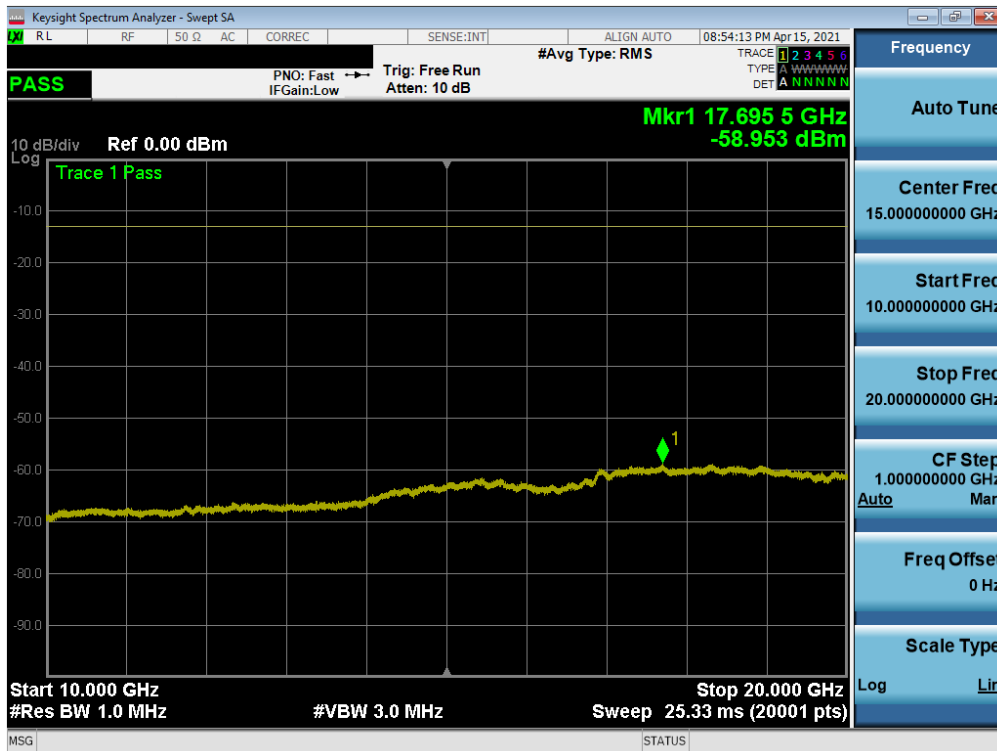


Plot 7-39. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 34 of 85

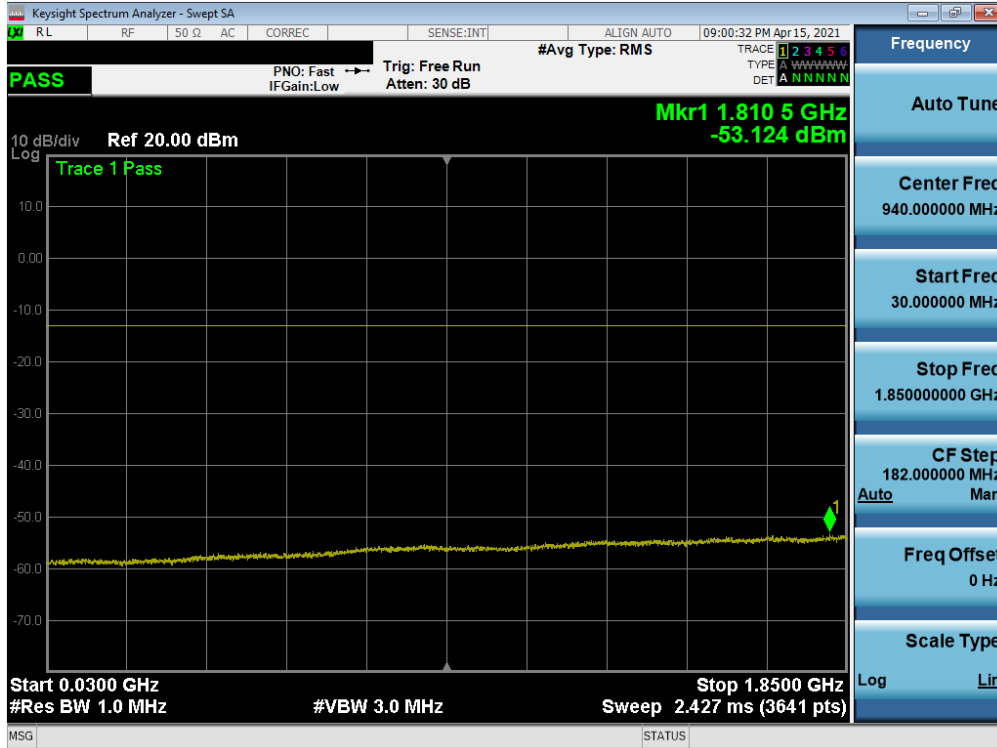


Plot 7-40. Conducted Spurious Plot (WCDMA Ch. 9538)

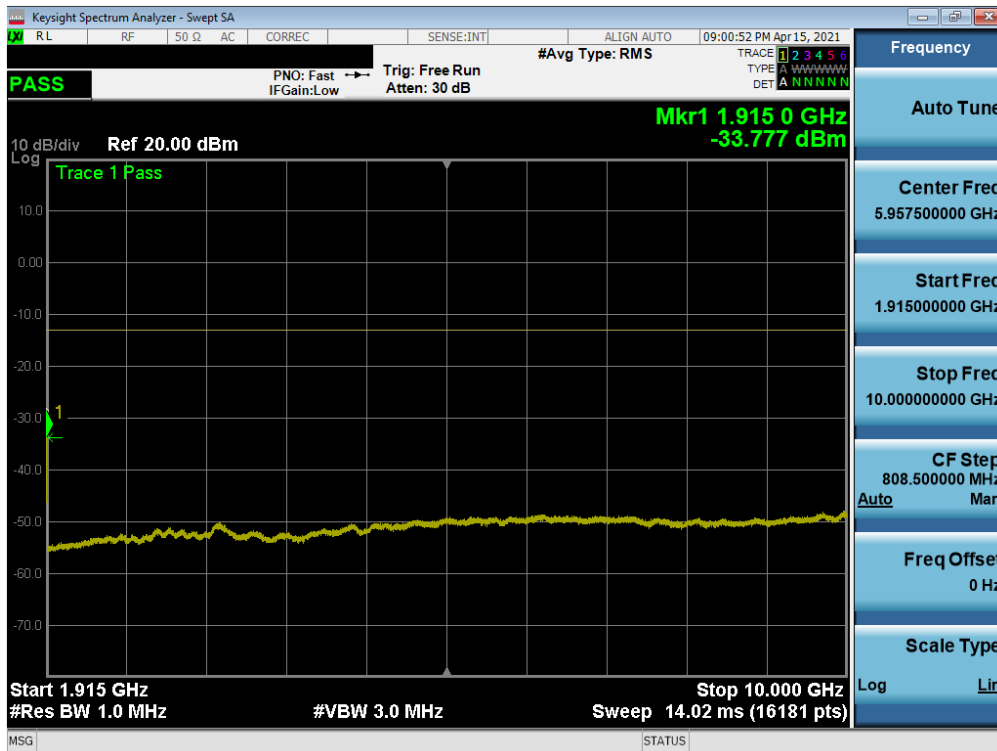

Plot 7-41. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 35 of 85

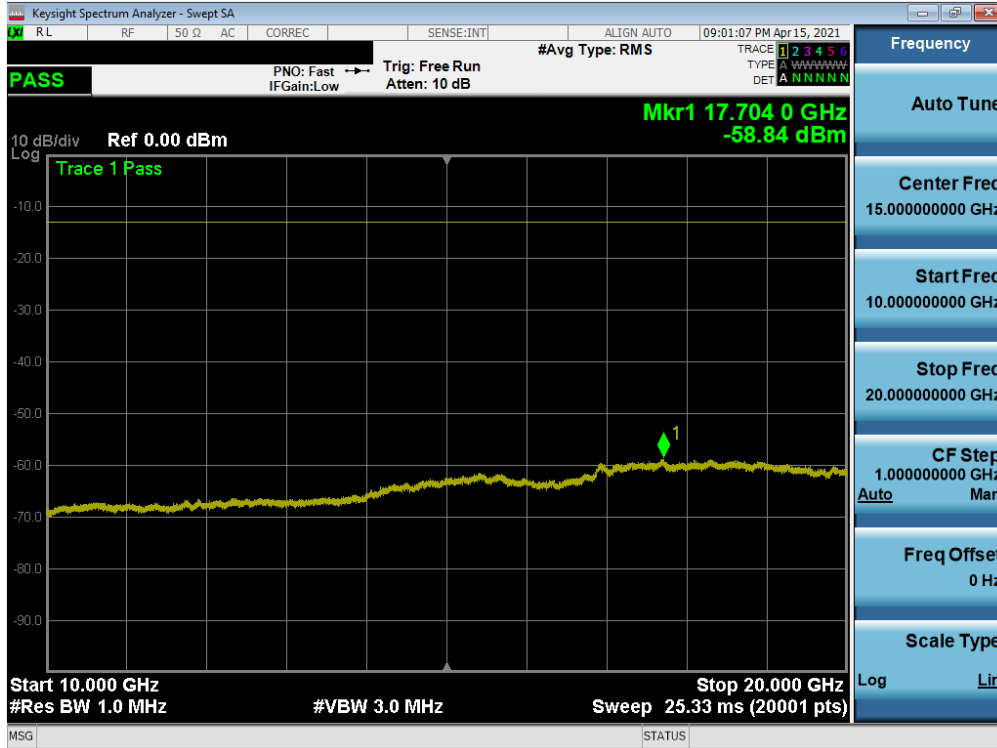

Plot 7-42. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 36 of 85

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

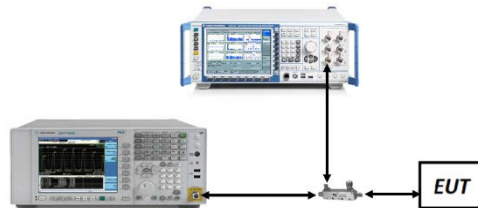





Figure 7-3. Test Instrument & Measurement Setup

Test Notes


1. Per 24.238(a) and RSS-133(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMF711B1	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 37 of 85

LTE Band 25/2

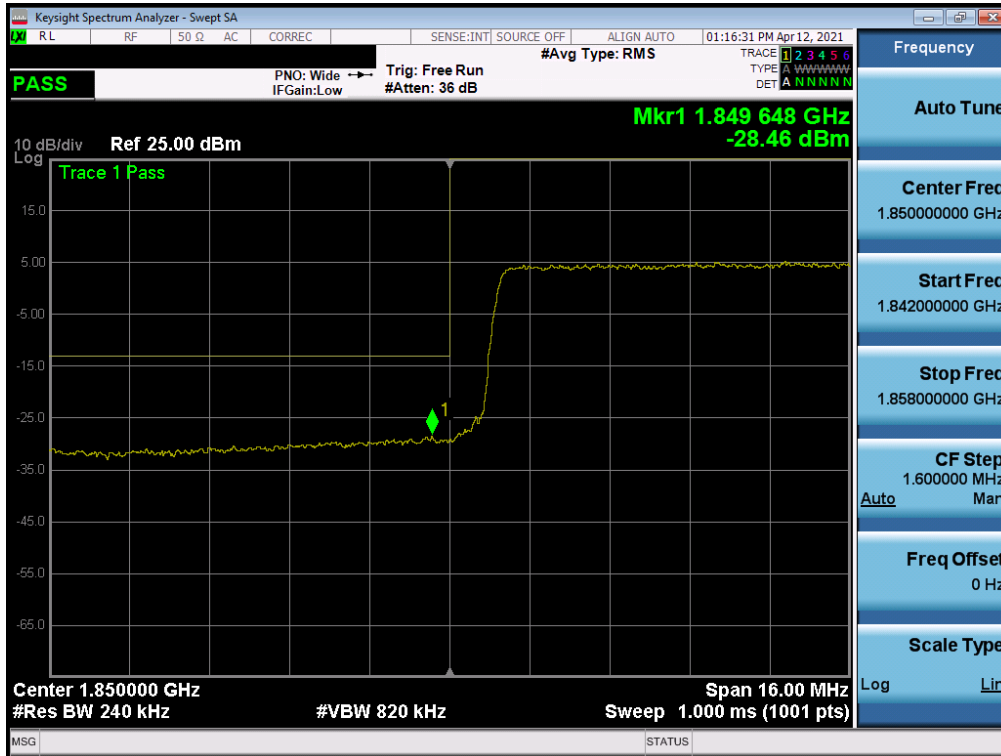

Plot 7-43. Lower Band Edge Plot (LTE Band 25/2 - 20MHz QPSK – Full RB)

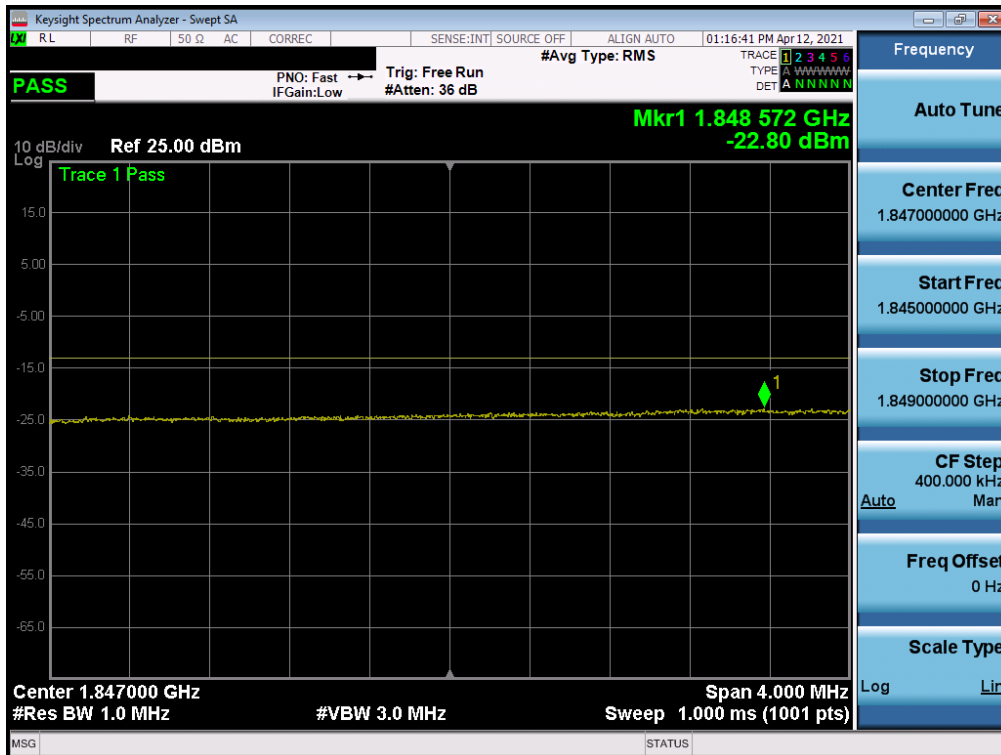


Plot 7-44. Extended Lower Band Edge Plot (LTE Band 25/2 - 20MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 38 of 85



Plot 7-45. Upper Band Edge Plot (LTE Band 2 - 20MHz QPSK – Full RB)

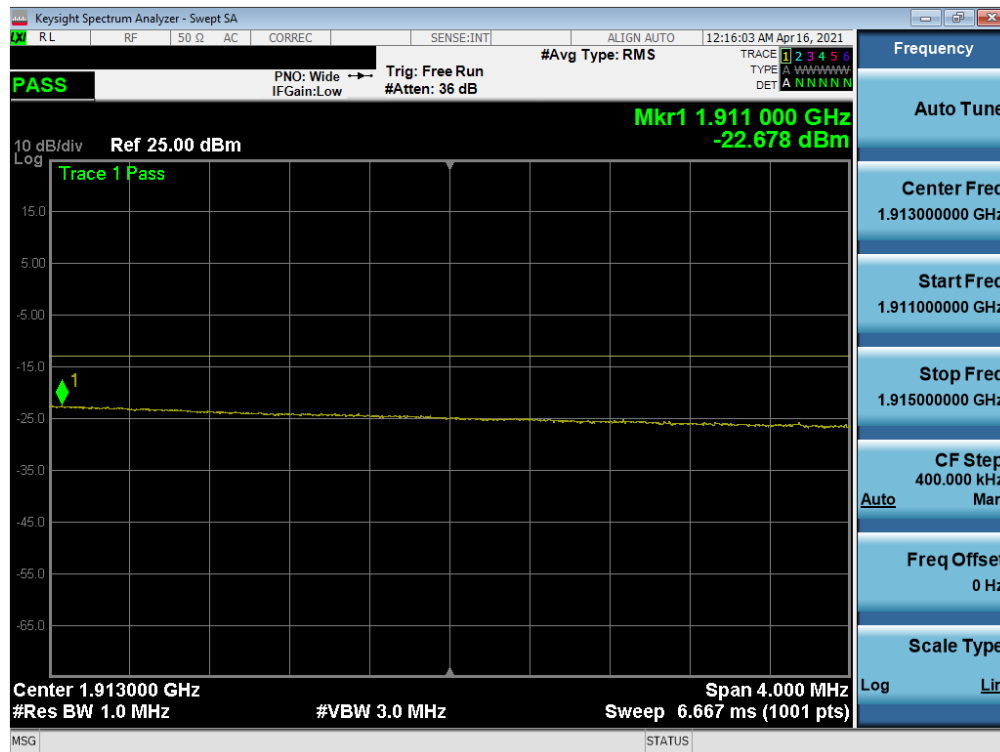

Plot 7-46. Extended Upper Band Edge Plot (LTE Band 2 - 20MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 39 of 85




Plot 7-47. Upper Band Edge Plot (LTE Band 25 - 20MHz QPSK – Full RB)




Plot 7-48. Extended Upper Band Edge Plot (LTE Band 25 - 20MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 40 of 85

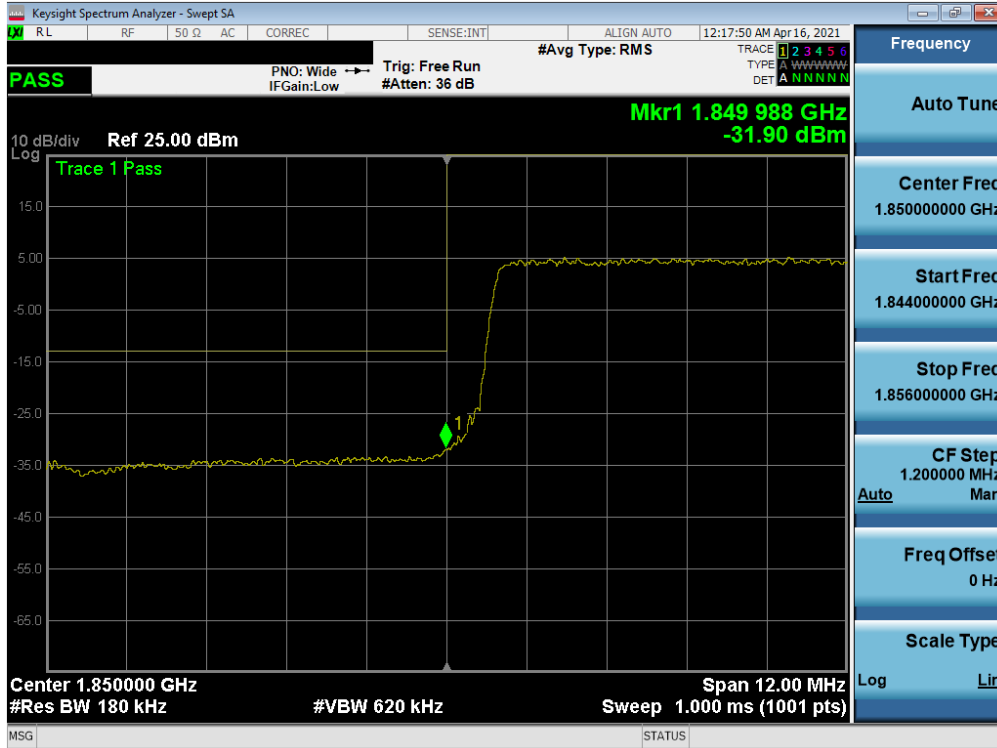


Plot 7-49. Lower Band Edge Plot (LTE Band 25/2 - 15MHz QPSK – Full RB)

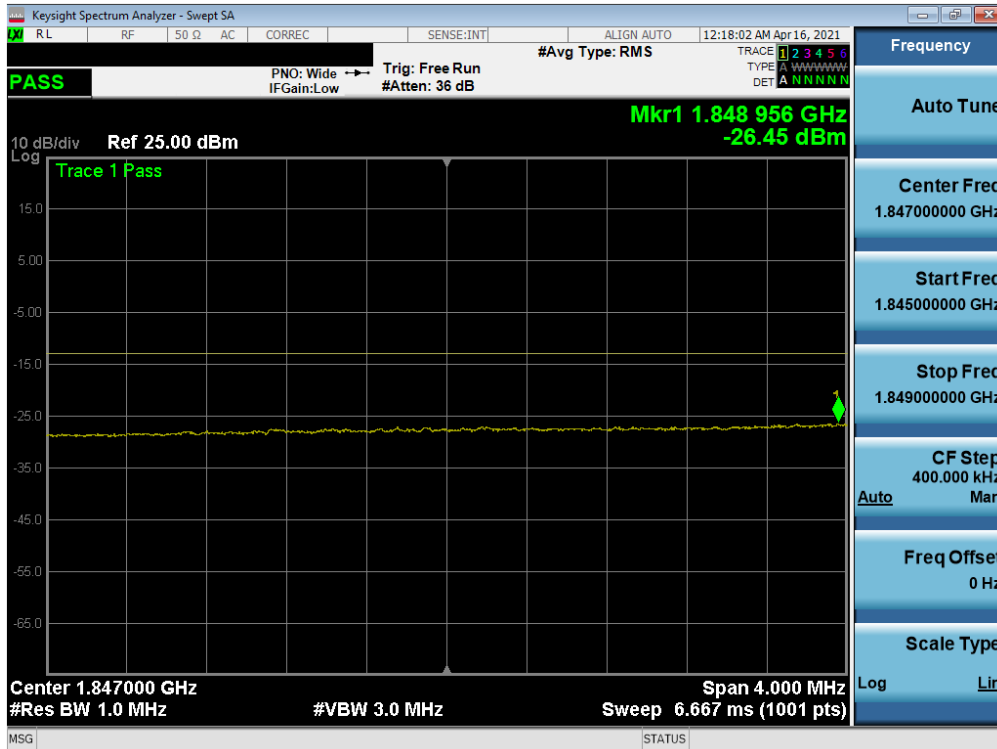


Plot 7-50. Extended Lower Band Edge Plot (LTE Band 25/2 - 15MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 41 of 85

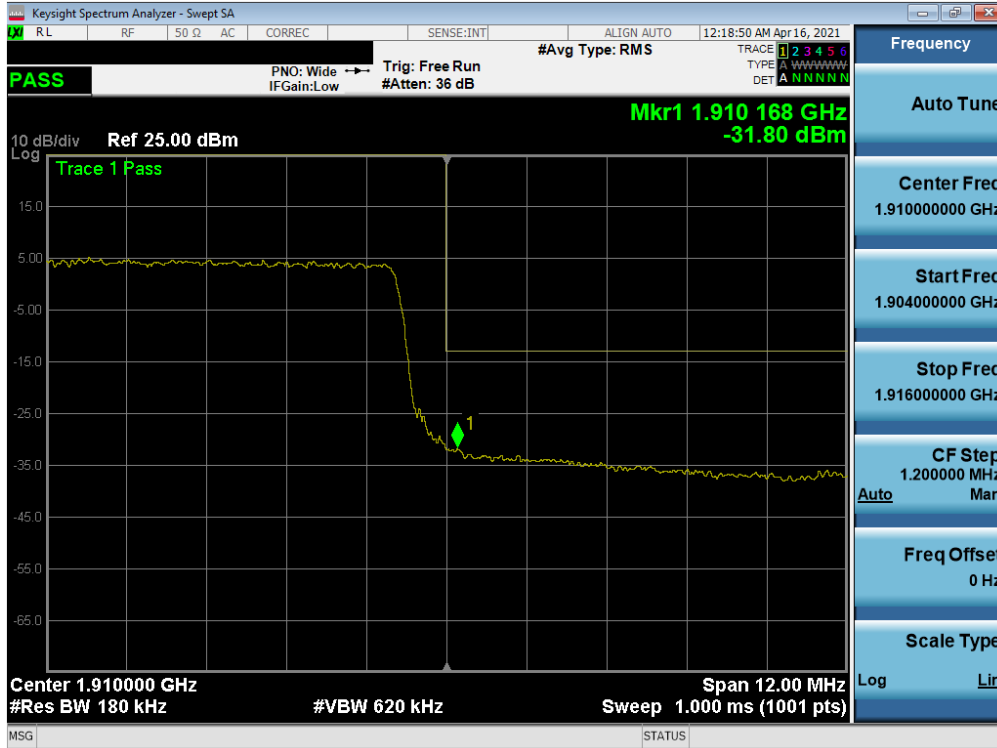


Plot 7-51. Upper Band Edge Plot (LTE Band 2 - 15MHz QPSK – Full RB)

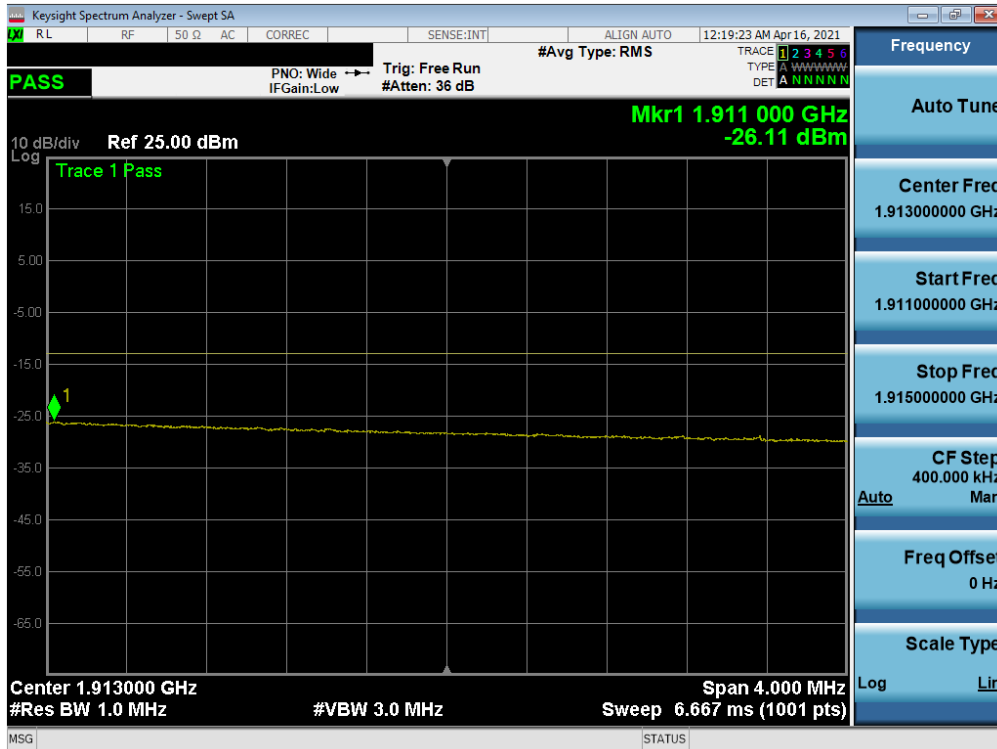

Plot 7-52. Extended Upper Band Edge Plot (LTE Band 2 - 15MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 42 of 85

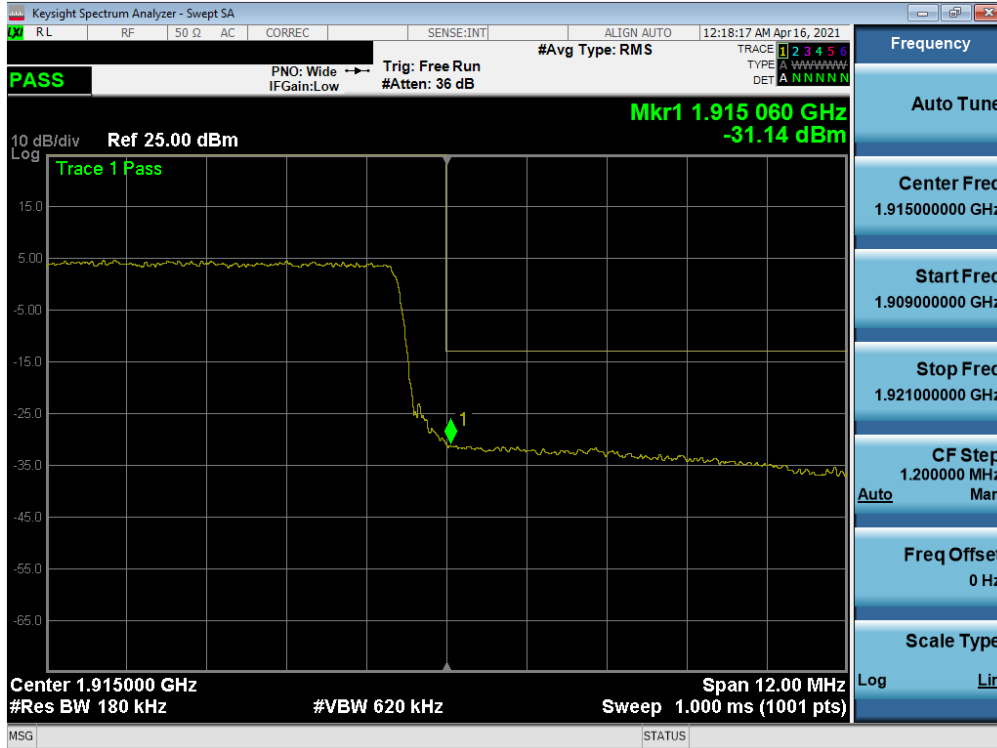


Plot 7-53. Upper Band Edge Plot (LTE Band 25 - 15MHz QPSK – Full RB)




Plot 7-54. Extended Upper Band Edge Plot (LTE Band 25 - 15MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 43 of 85

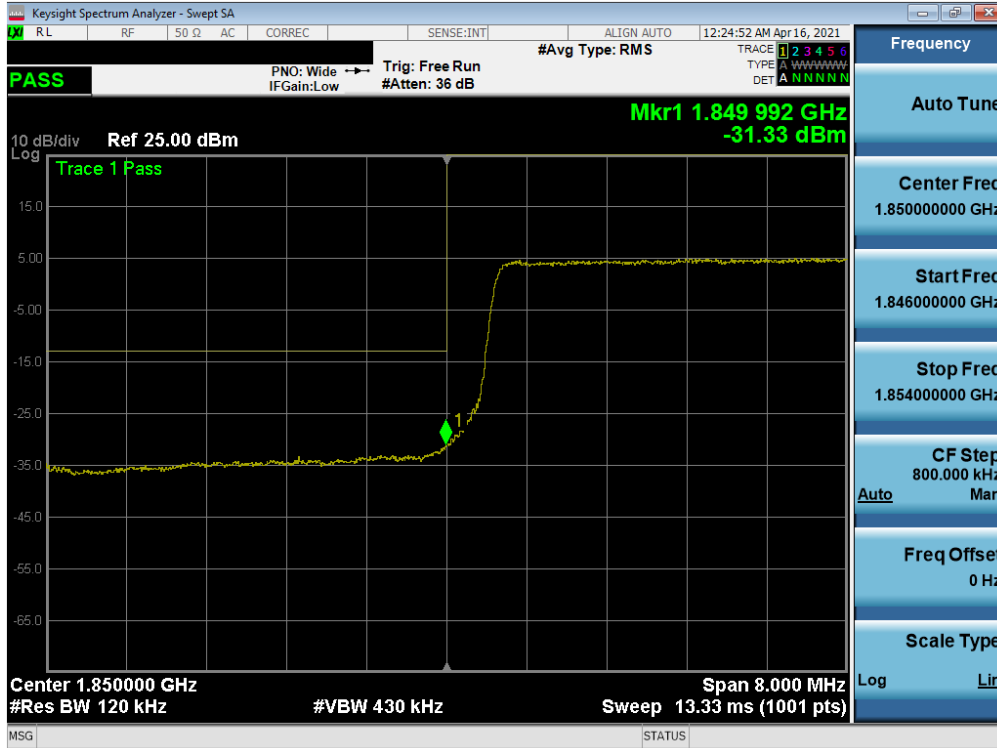


Plot 7-55. Lower Band Edge Plot (LTE Band 25/2 - 10MHz QPSK – Full RB)

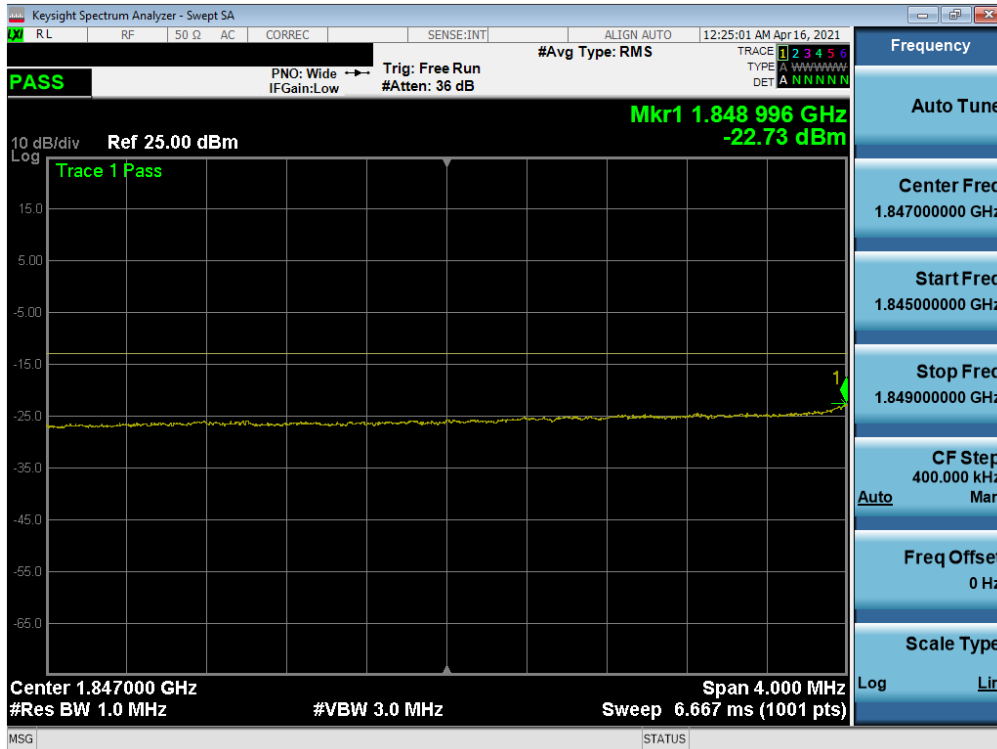


Plot 7-56. Extended Lower Band Edge Plot (LTE Band 25/2 - 10MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 44 of 85

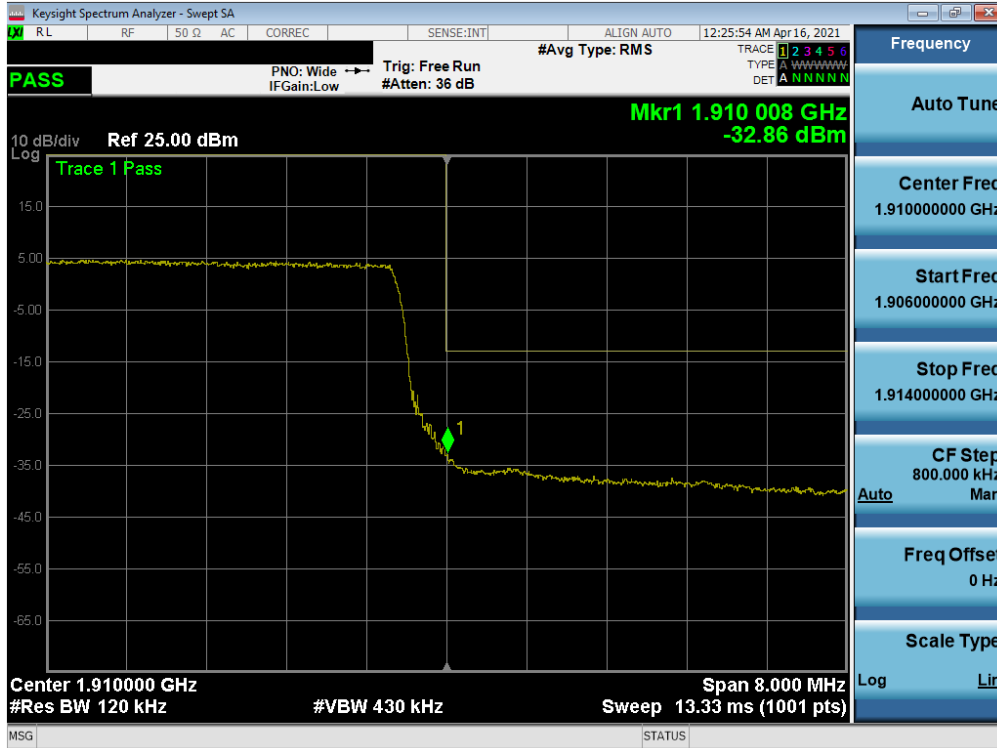


Plot 7-57. Upper Band Edge Plot (LTE Band 2 - 10MHz QPSK – Full RB)

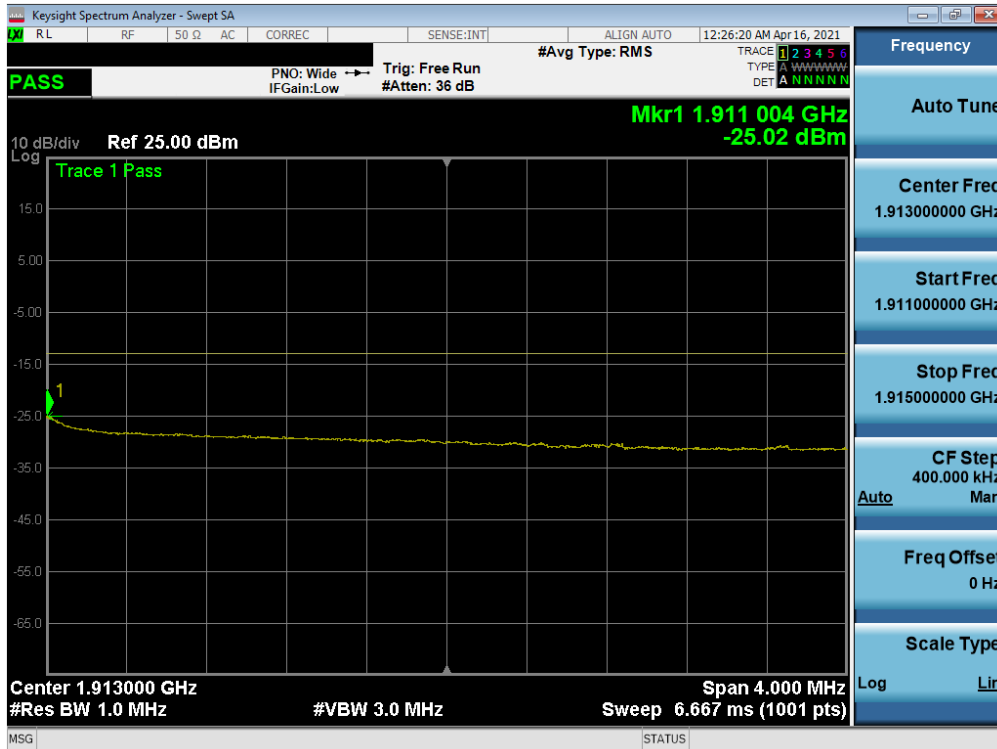


Plot 7-58. Extended Upper Band Edge Plot (LTE Band 2 - 10MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 45 of 85

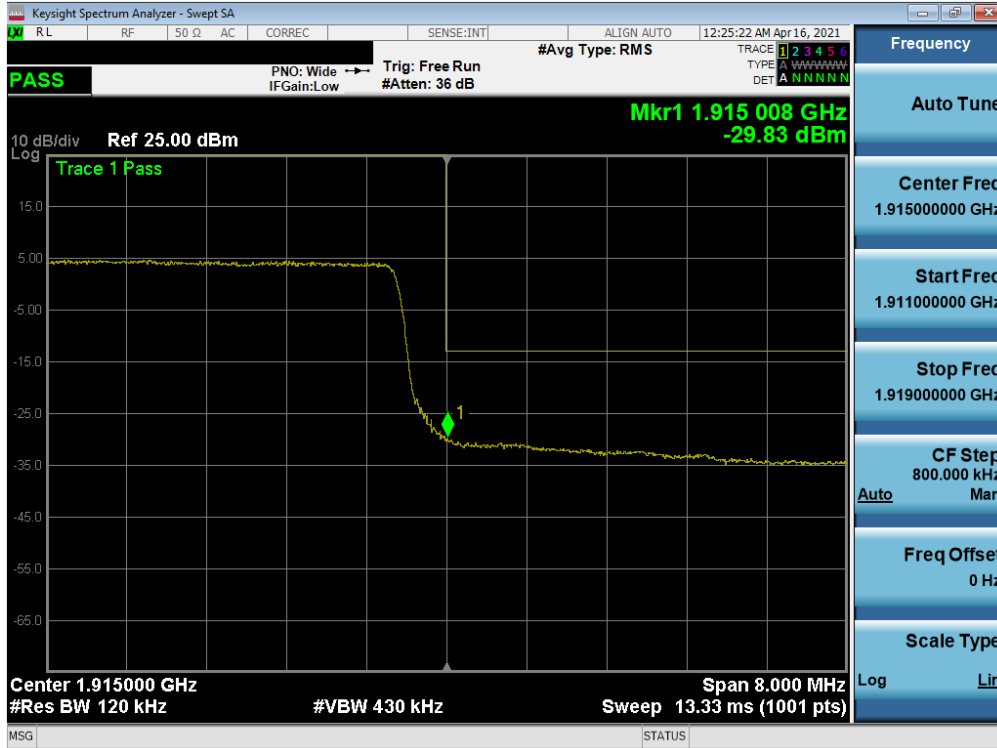


Plot 7-59. Upper Band Edge Plot (LTE Band 25 - 10MHz QPSK – Full RB)

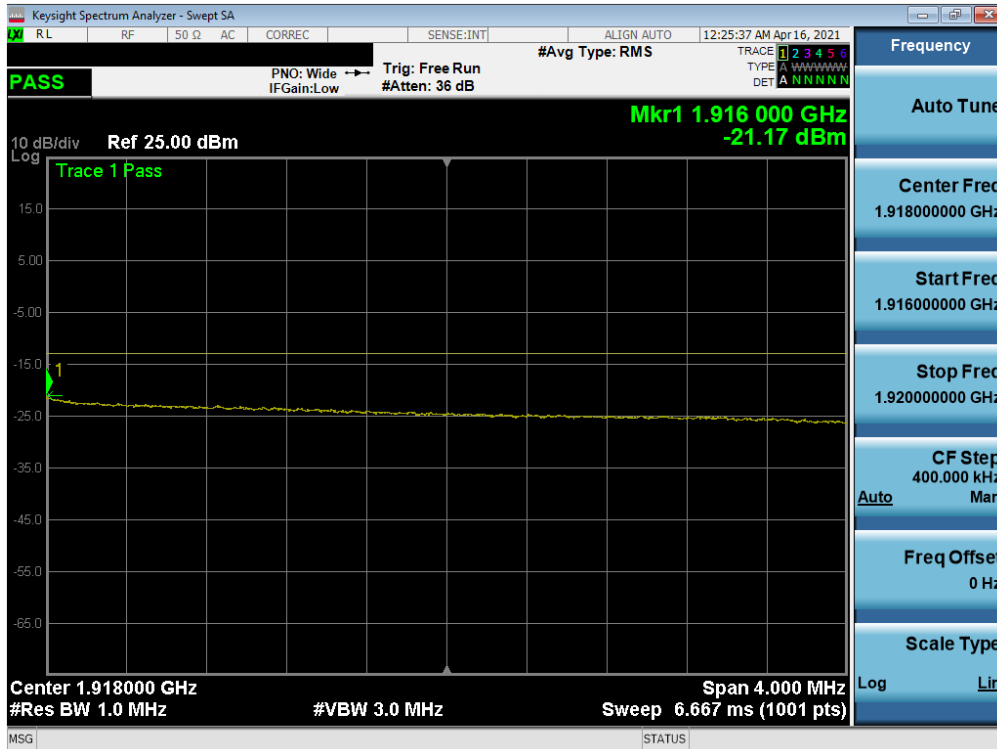


Plot 7-60. Extended Upper Band Edge Plot (LTE Band 25 - 10MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 46 of 85

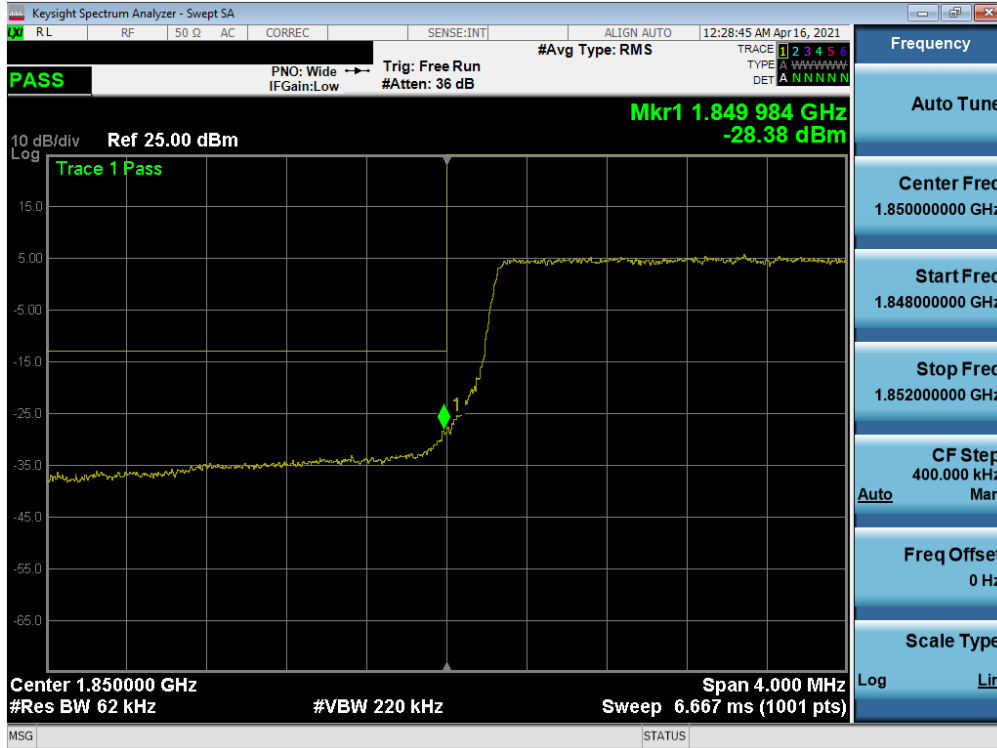


Plot 7-61. Lower Band Edge Plot (LTE Band 25/2 - 5MHz QPSK – Full RB)

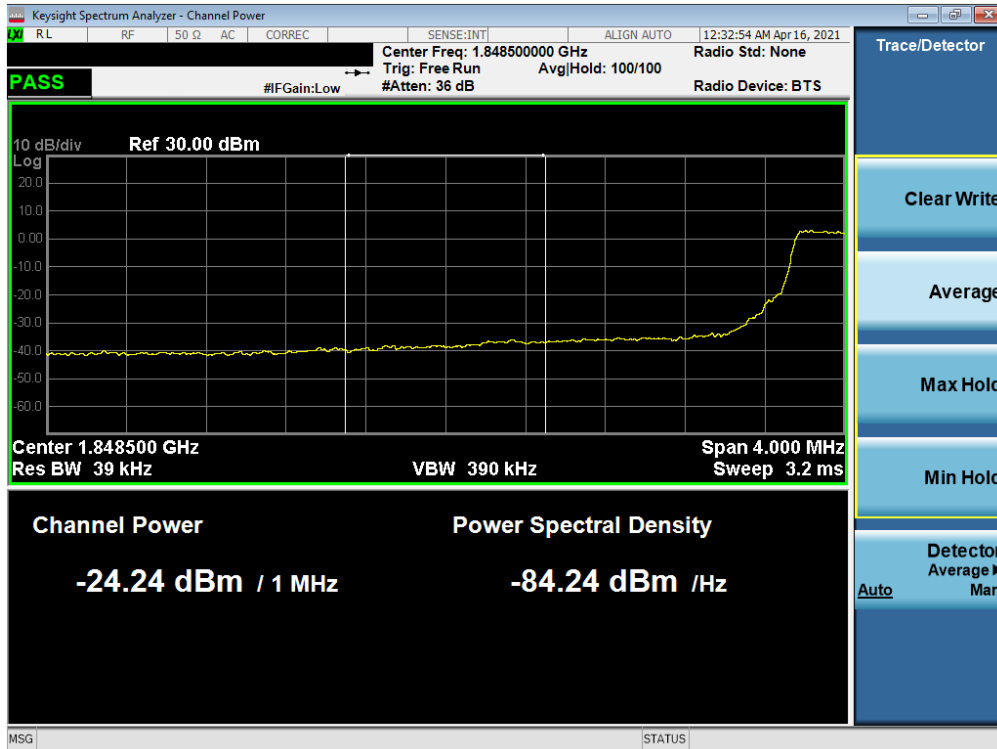


Plot 7-62. Extended Lower Band Edge Plot (LTE Band 25/2 - 5MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 47 of 85

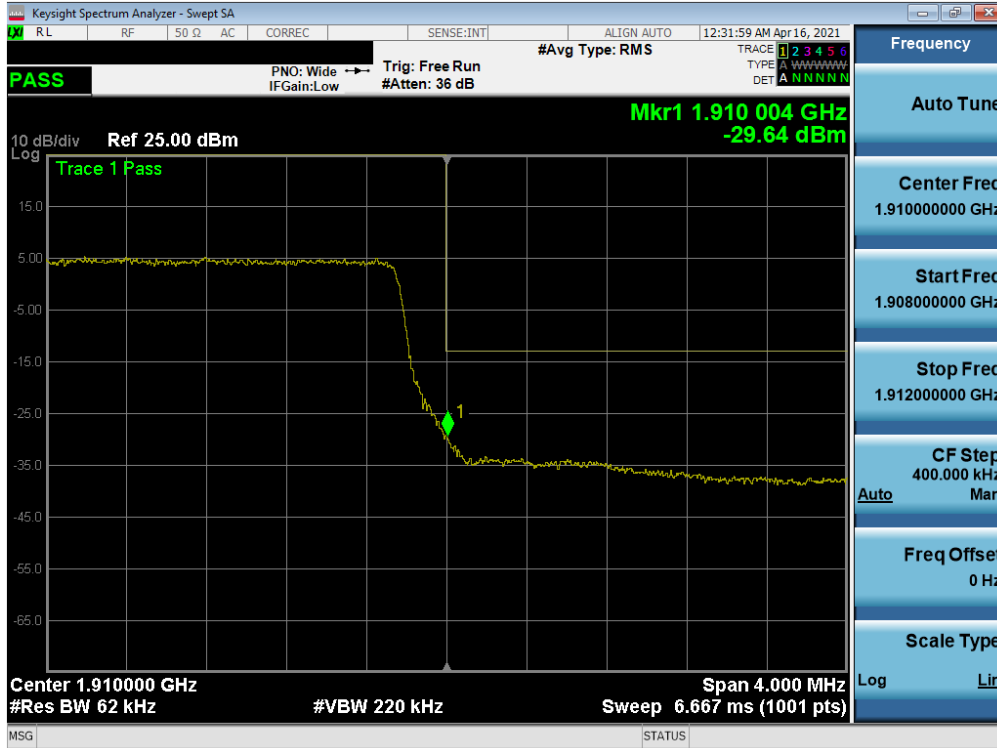

Plot 7-63. Upper Band Edge Plot (LTE Band 2 - 5MHz QPSK – Full RB)

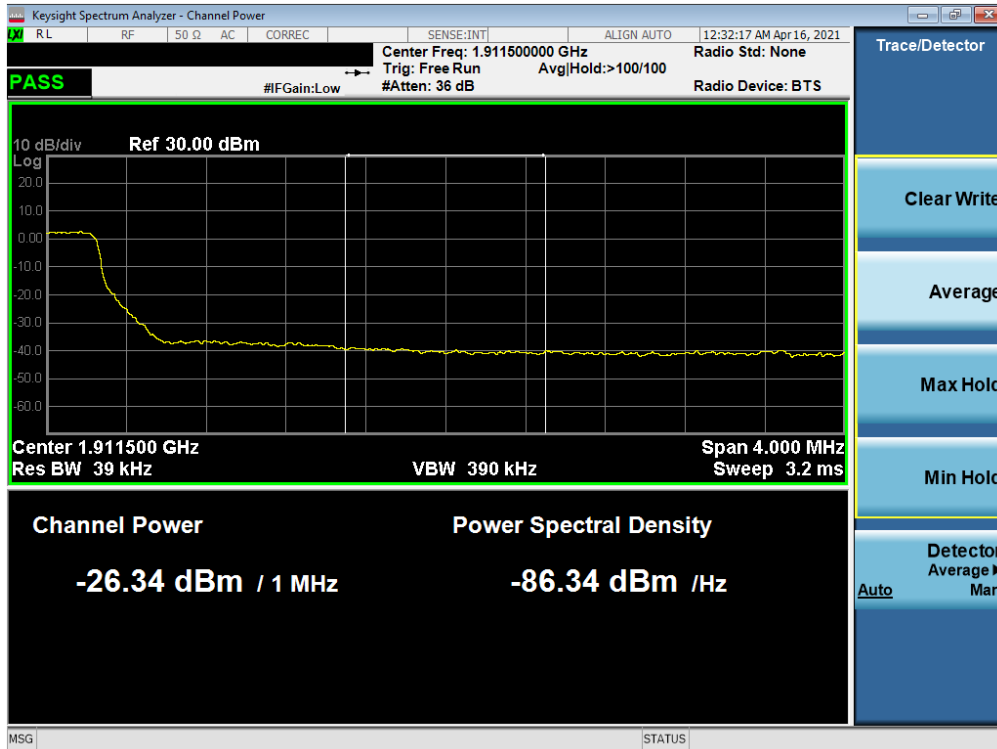


Plot 7-64. Extended Upper Band Edge Plot (LTE Band 2 - 5MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 48 of 85




Plot 7-65. Upper Band Edge Plot (LTE Band 25 - 5MHz QPSK – Full RB)

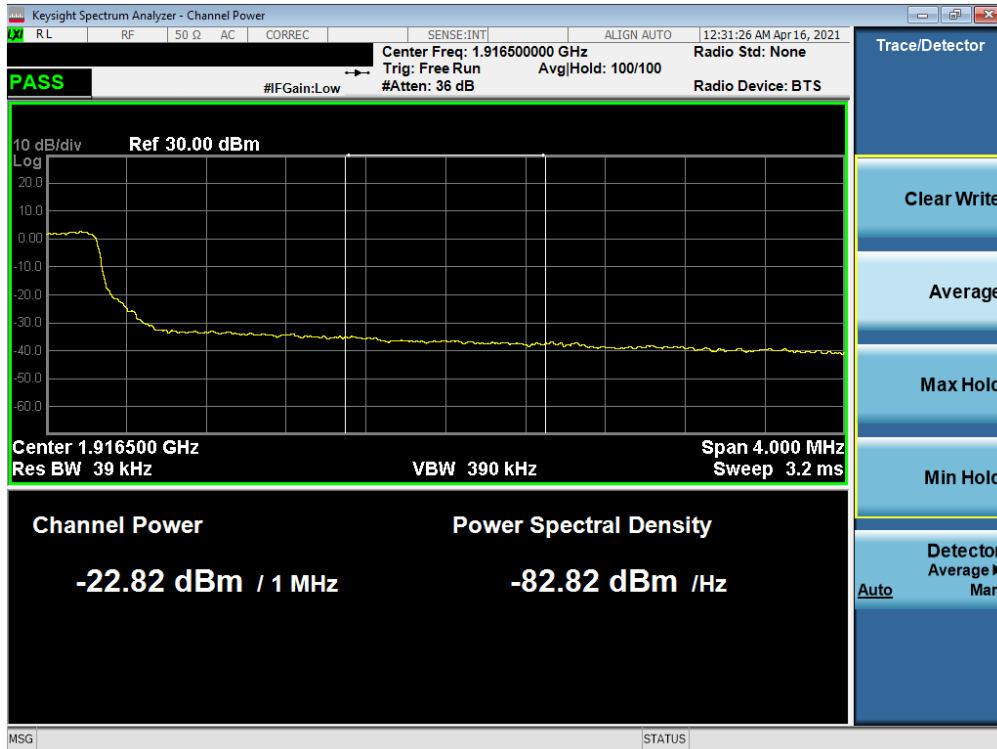


Plot 7-66. Extended Upper Band Edge Plot (LTE Band 25 - 5MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 49 of 85

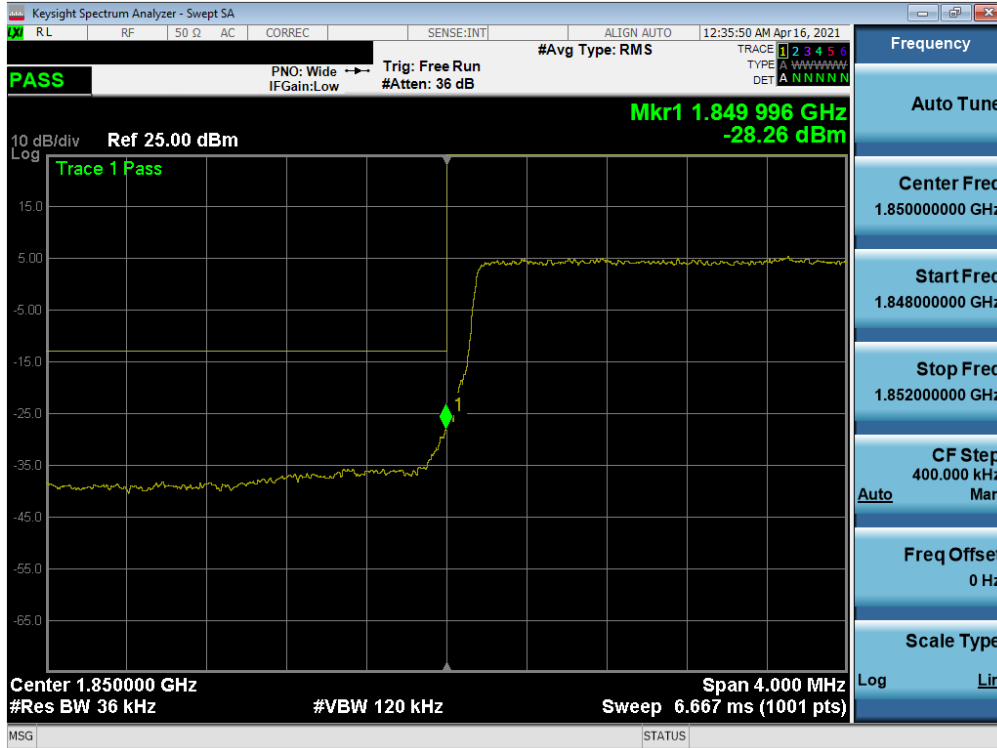


Plot 7-67. Lower Band Edge Plot (LTE Band 25/2 - 3MHz QPSK – Full RB)

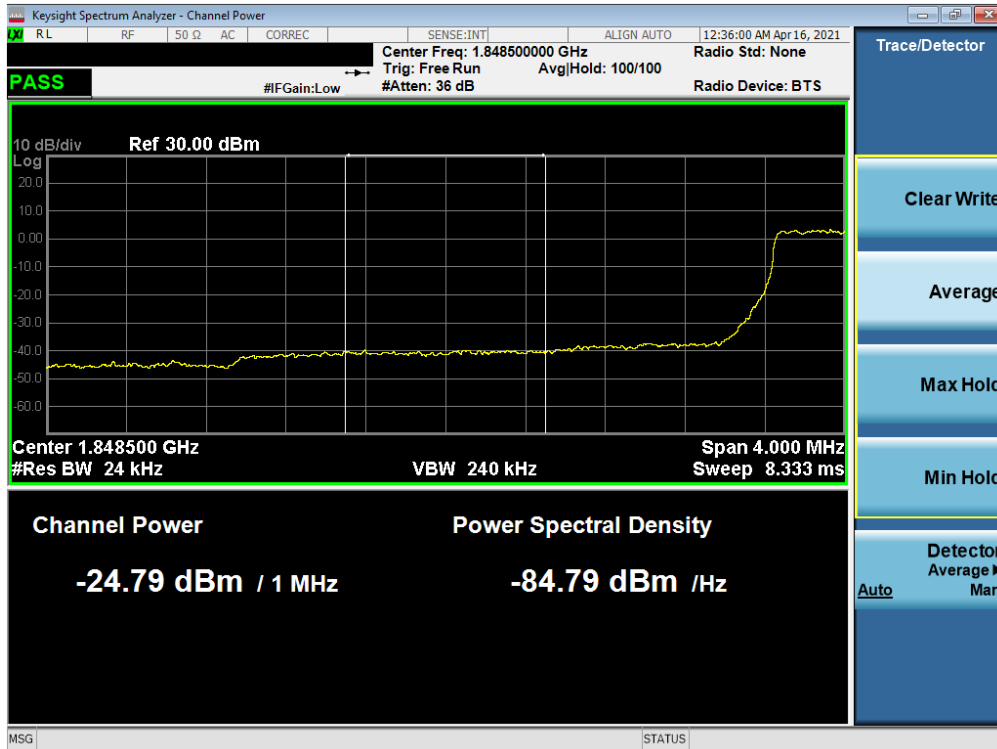


Plot 7-68. Extended Lower Band Edge Plot (LTE Band 25/2 - 3MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 50 of 85

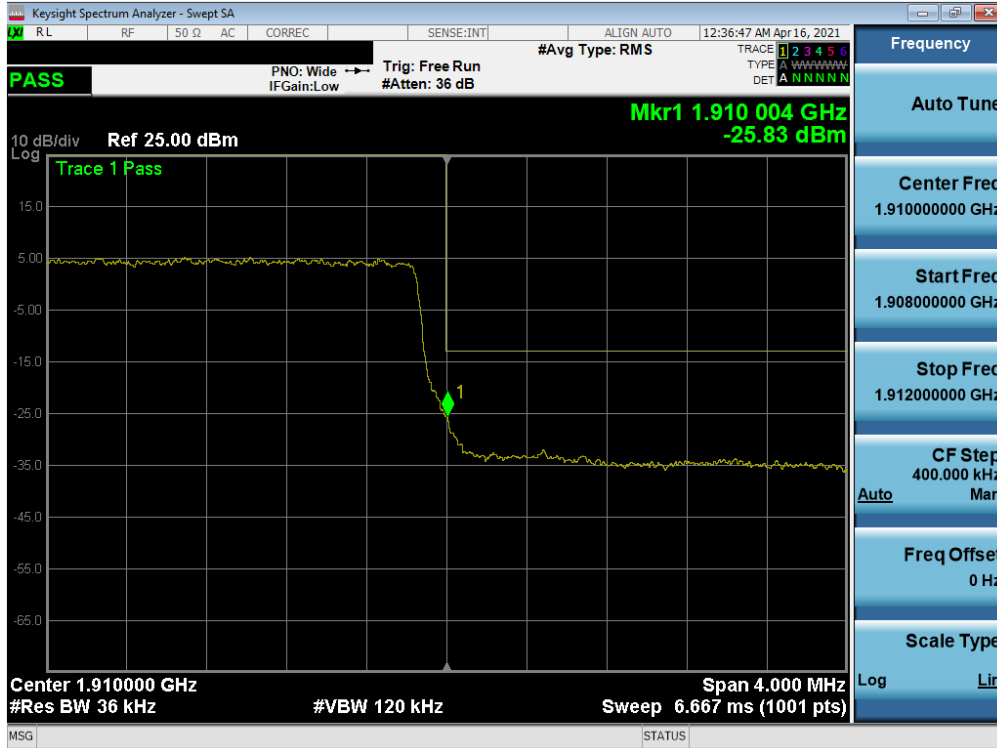

Plot 7-69. Upper Band Edge Plot (LTE Band 2 - 3MHz QPSK – Full RB)

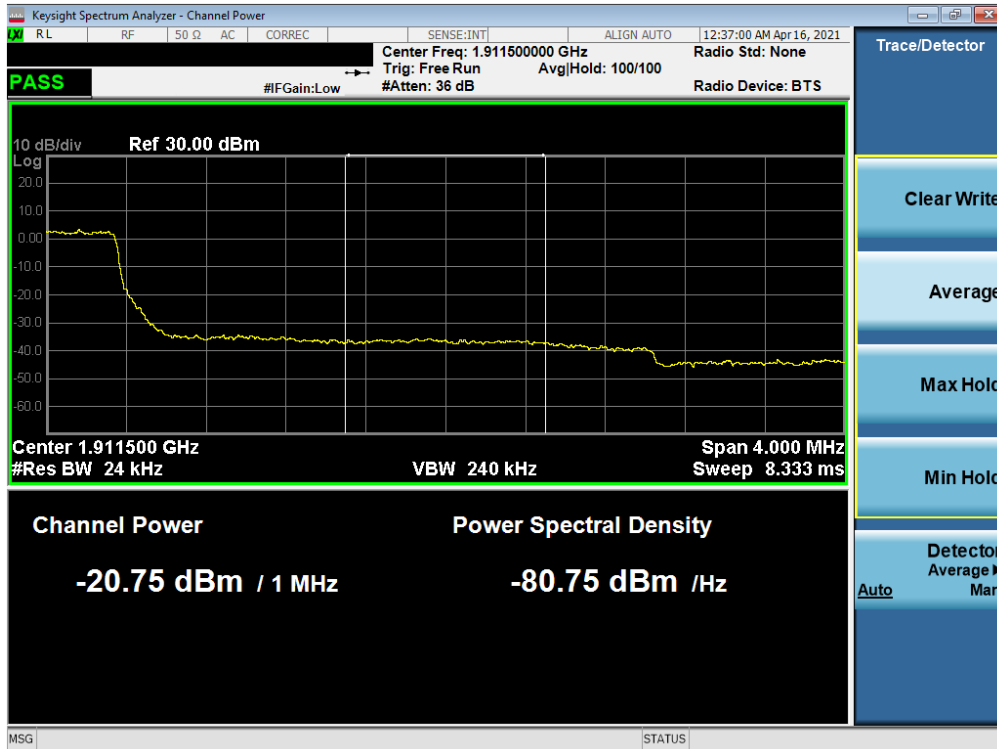


Plot 7-70. Extended Upper Band Edge Plot (LTE Band 2 - 3MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 51 of 85




Plot 7-71. Upper Band Edge Plot (LTE Band 25 - 3MHz QPSK – Full RB)

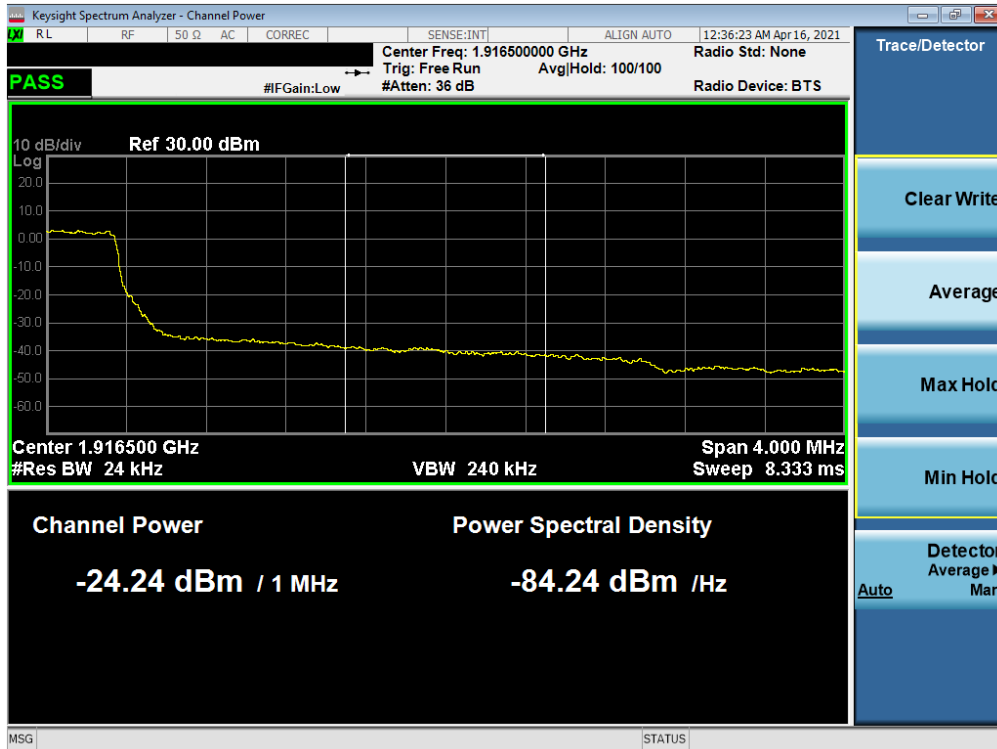


Plot 7-72. Extended Upper Band Edge Plot (LTE Band 25 - 3MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 52 of 85

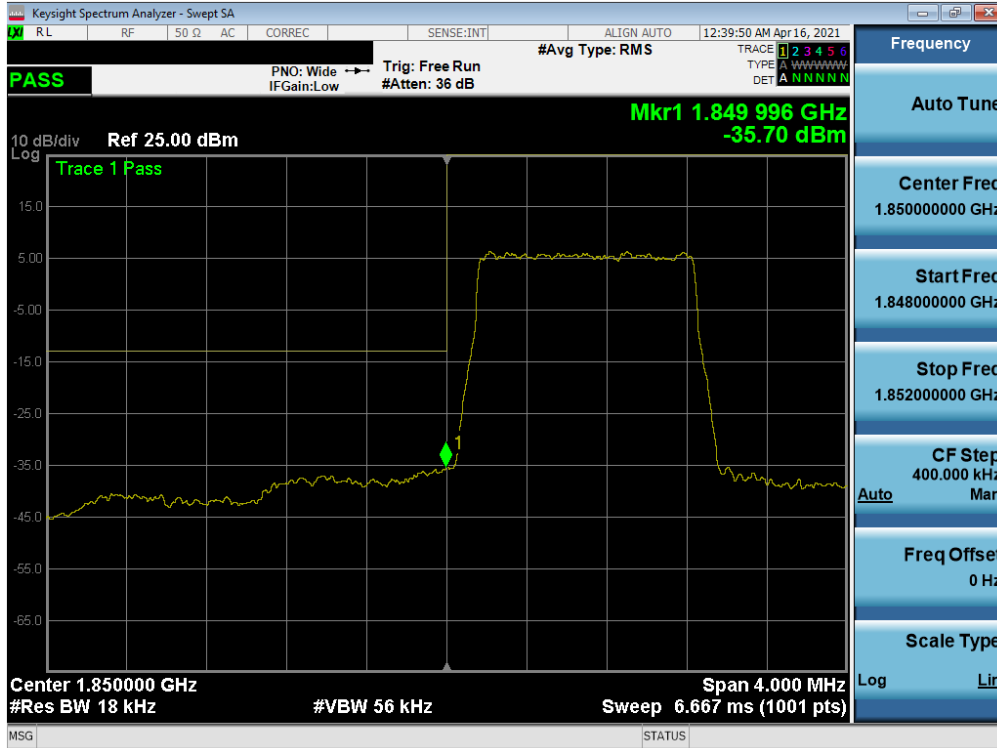


Plot 7-73. Lower Band Edge Plot (LTE Band 25/2 – 1.4MHz QPSK – Full RB)

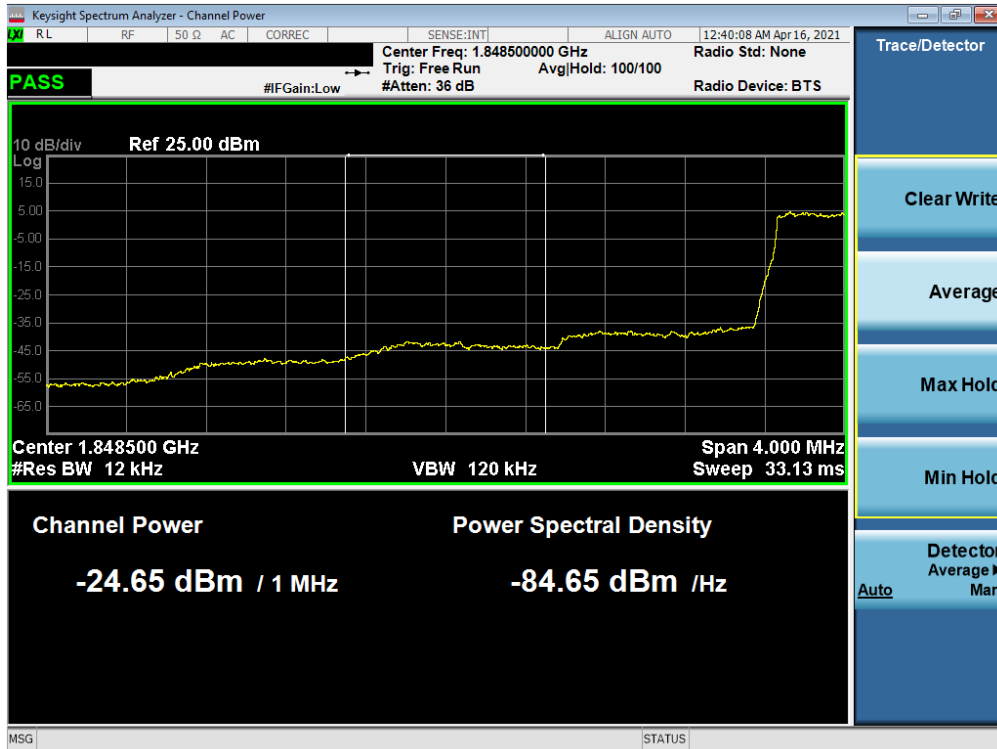


Plot 7-74. Extended Lower Band Edge Plot (LTE Band 25/2 – 1.4MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 53 of 85

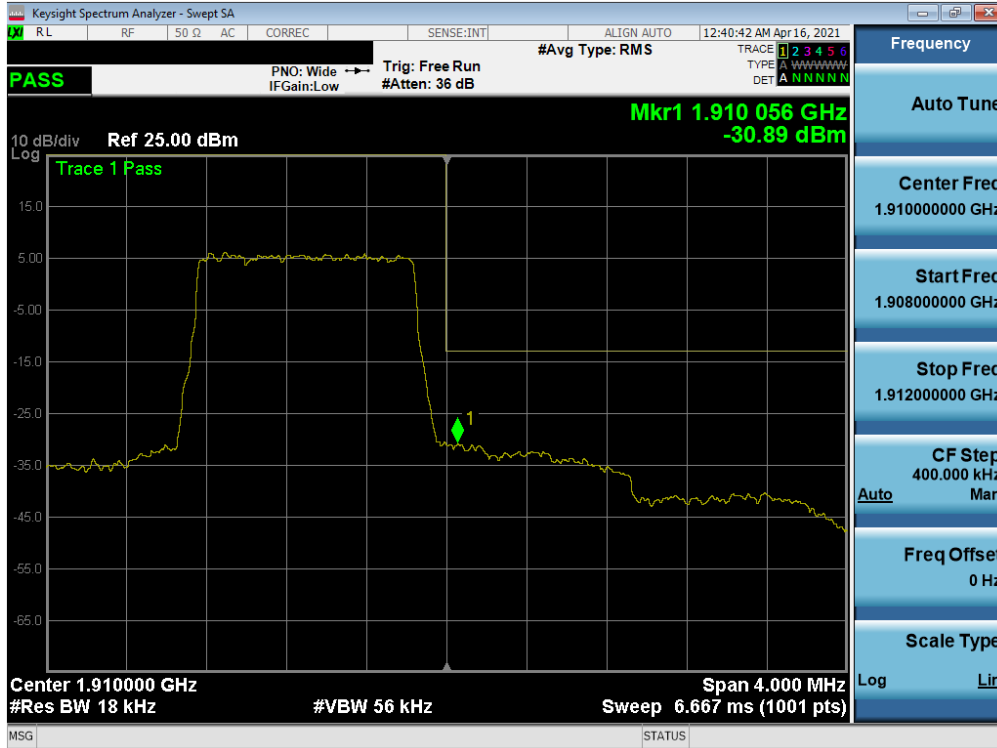


Plot 7-75. Upper Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB)

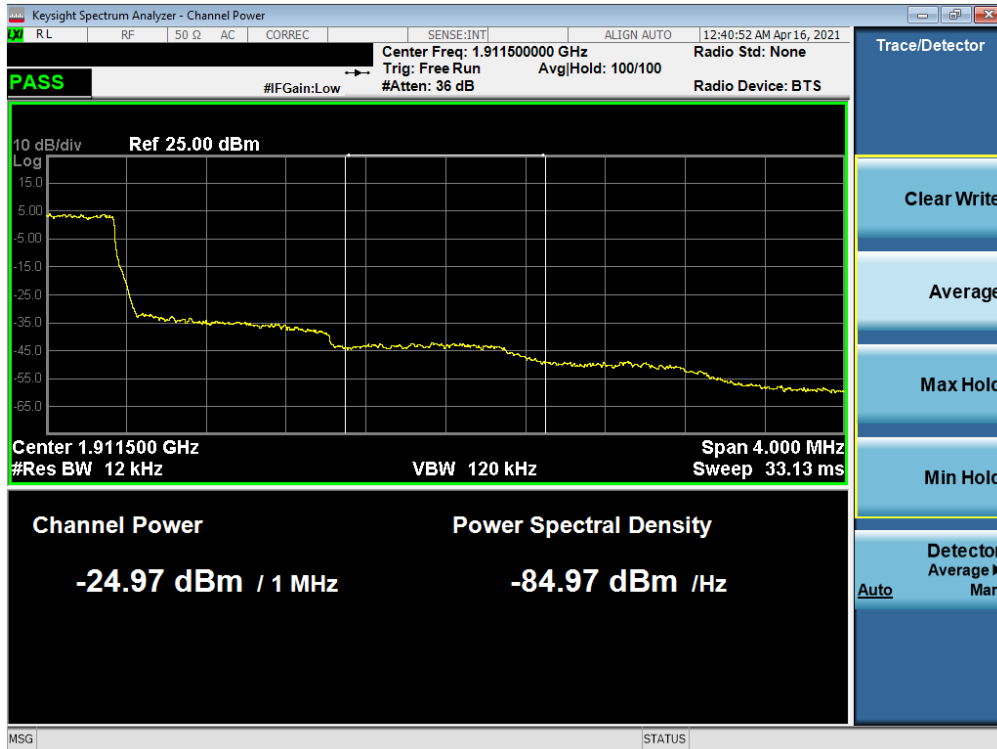


Plot 7-76. Extended Upper Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 54 of 85

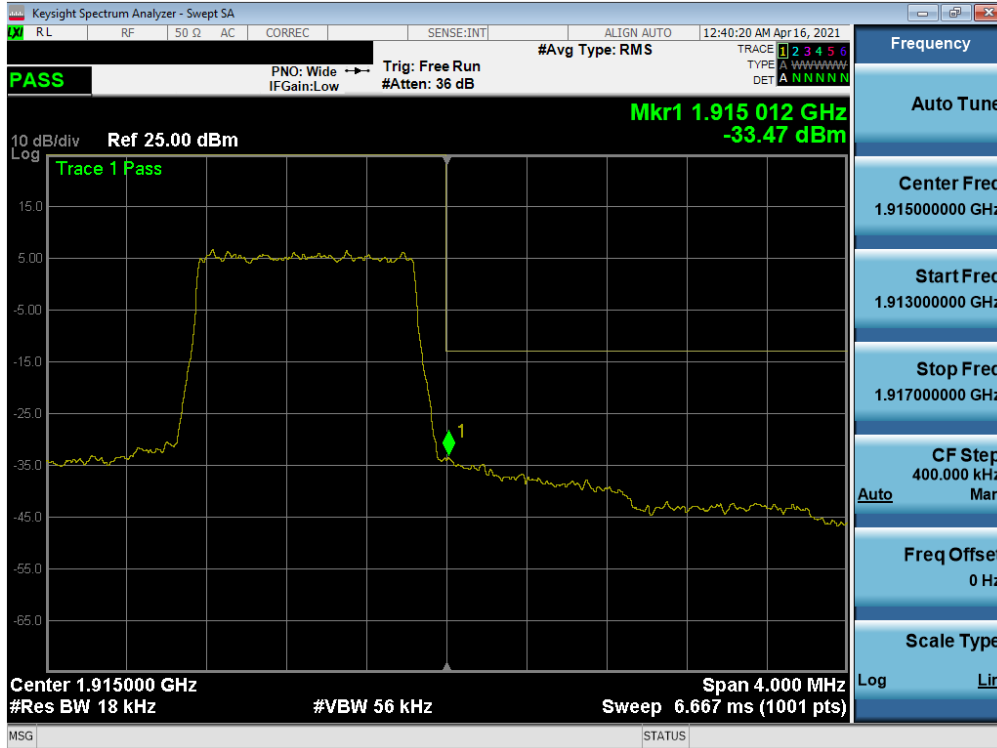


Plot 7-77. Upper Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB)

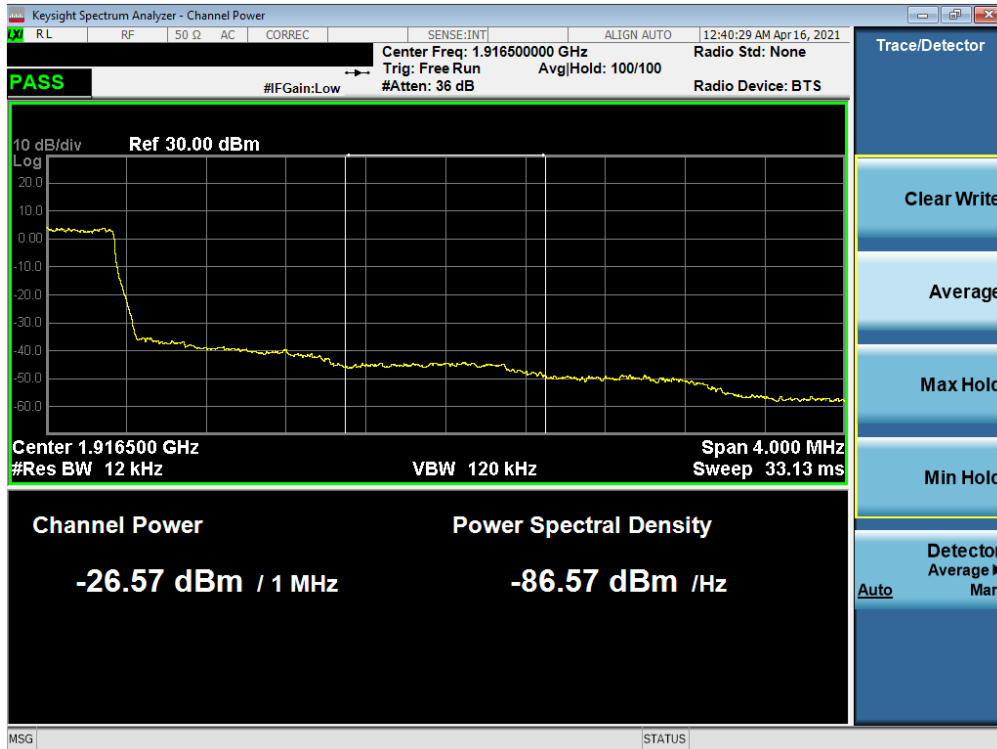


Plot 7-78. Extended Upper Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 55 of 85

GSM/GPRS PCS

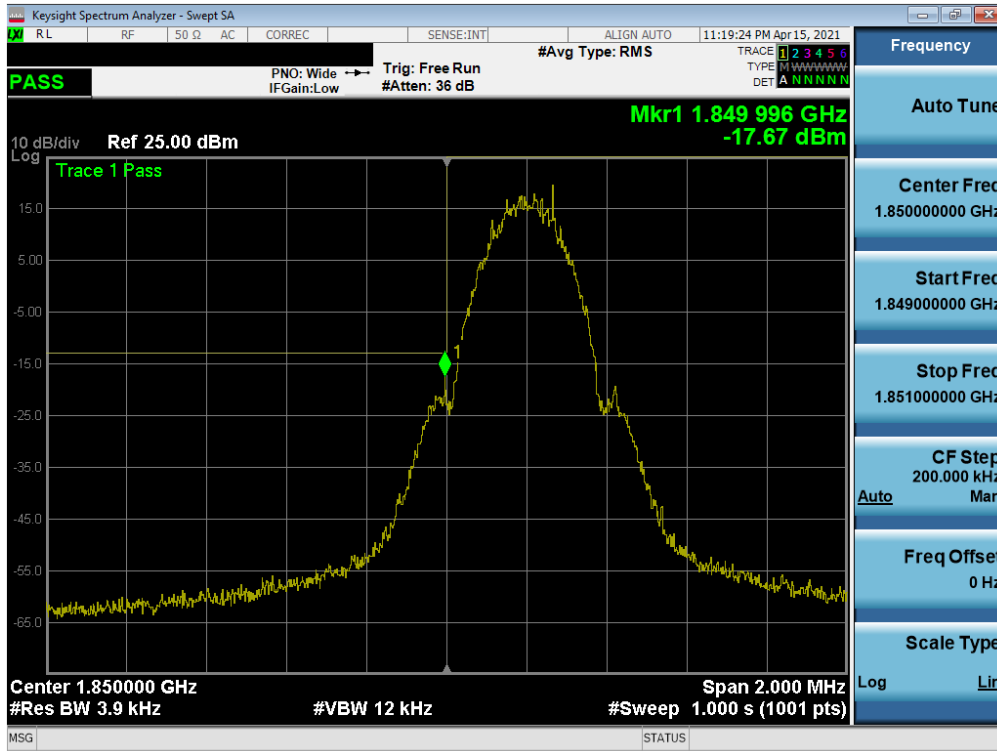


Plot 7-79. Lower Band Edge Plot (GPRS PCS – Ch. 512)

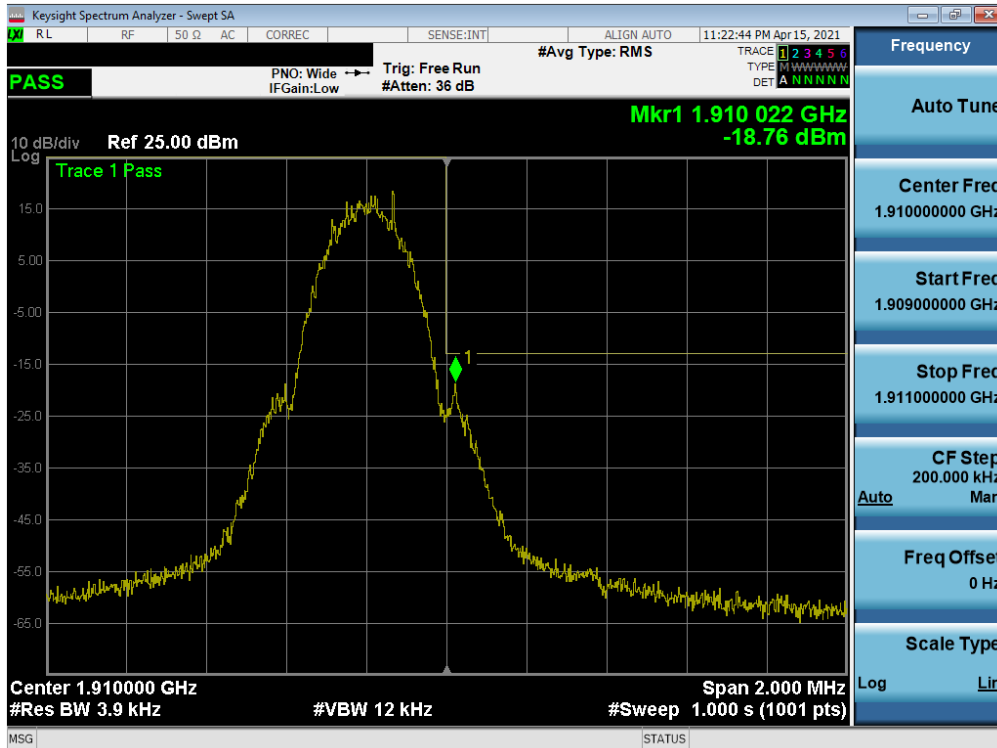


Plot 7-80. Upper Band Edge Plot (GPRS PCS – Ch. 810)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 56 of 85

WCDMA PCS

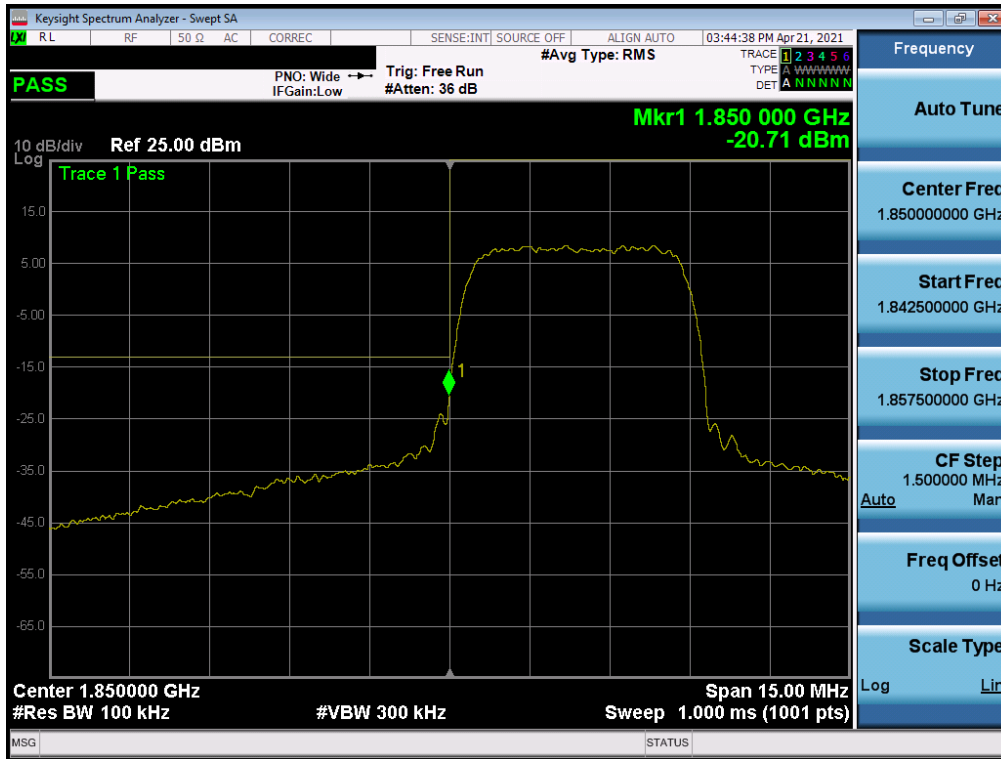

Plot 7-81. Lower Band Edge Plot (WCDMA PCS – Ch. 9262)

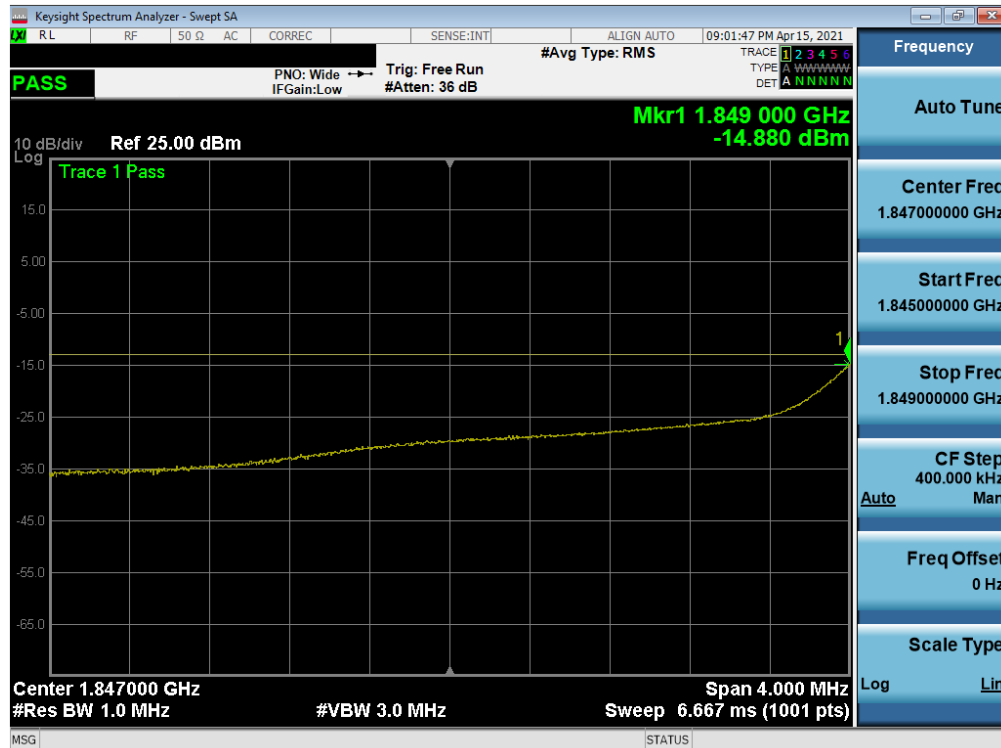


Plot 7-82. Extended Lower Band Edge Plot (WCDMA PCS – Ch. 9262)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 57 of 85



Plot 7-83. Upper Band Edge Plot (WCDMA PCS – Ch. 9538)

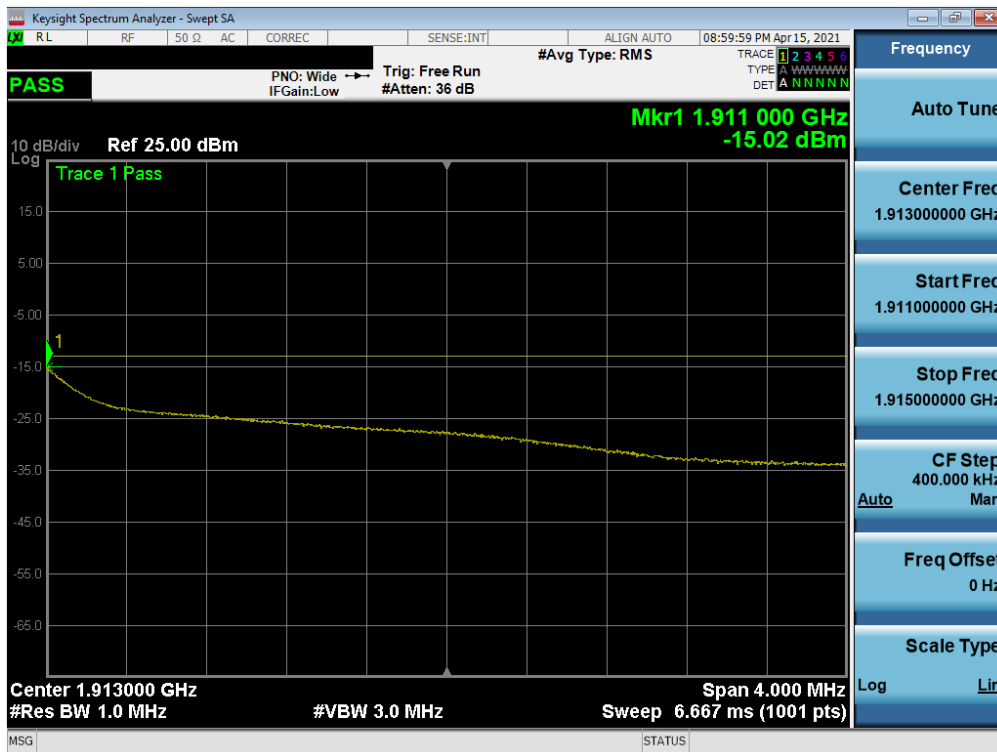

Plot 7-84. Extended Upper Band Edge Plot (WCDMA PCS – Ch. 9538)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 58 of 85

7.5 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW \geq OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

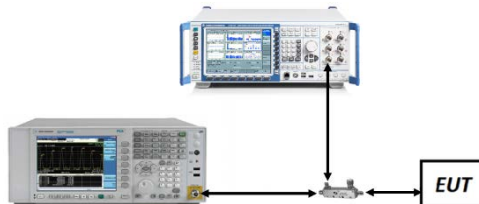





Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 59 of 85

LTE Band 25/2

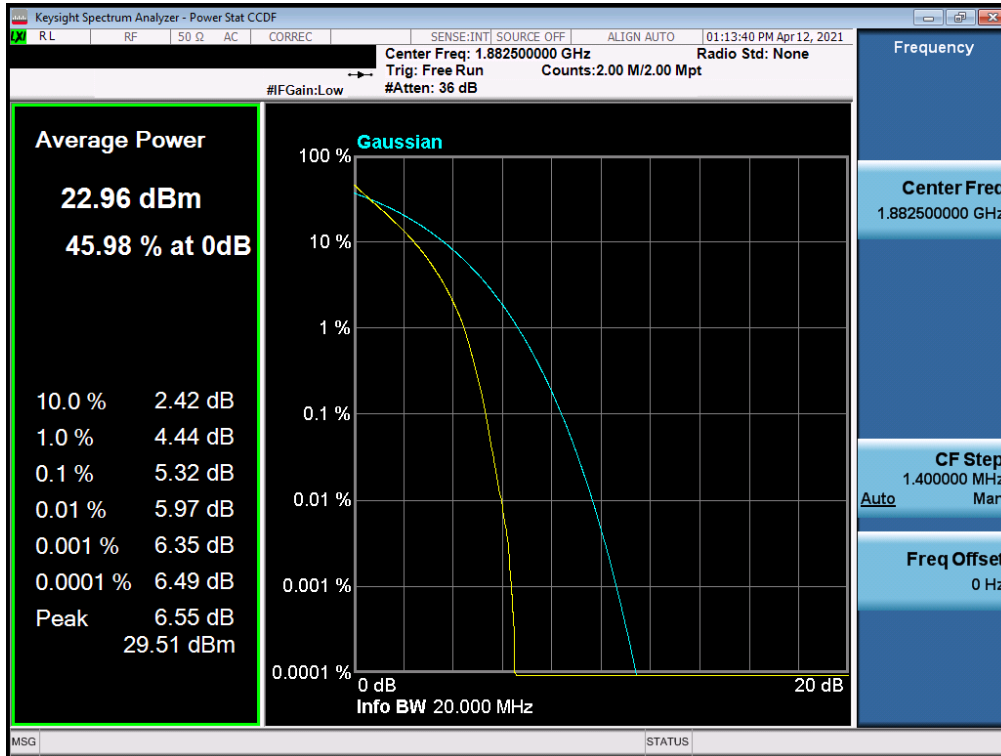


Plot 7-85. PAR Plot (LTE Band 25/2 - 20MHz QPSK - Full RB)

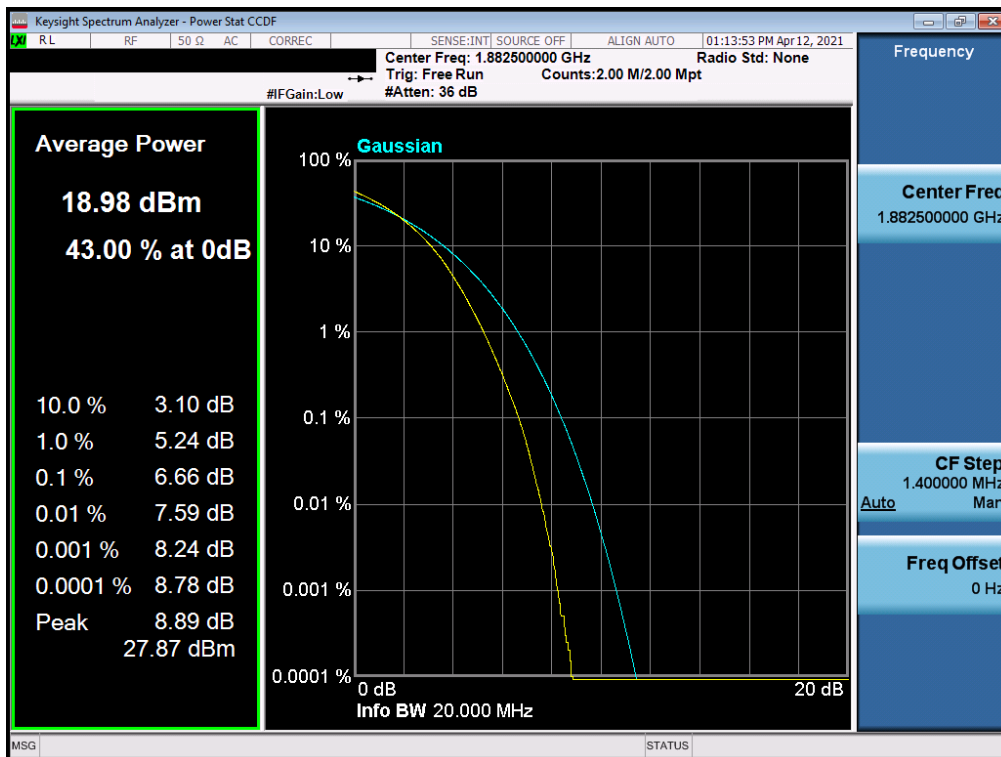


Plot 7-86. PAR Plot (LTE Band 25/2 - 20MHz 256-QAM - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 60 of 85

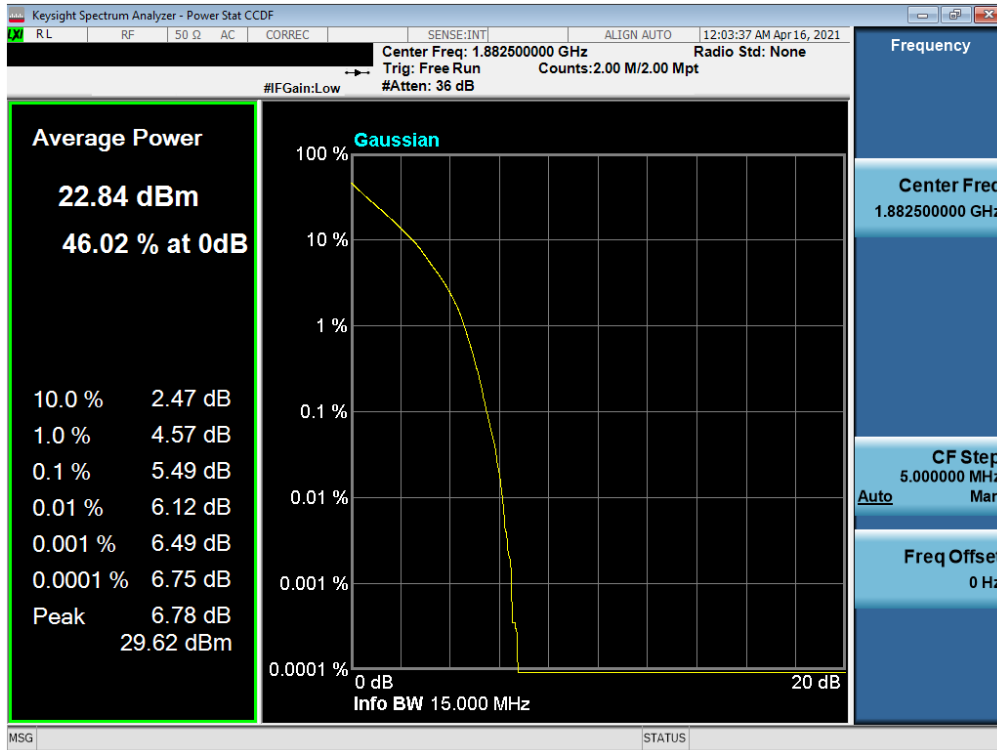


Plot 7-87. PAR Plot (LTE Band 25/2 - 15MHz QPSK - Full RB)

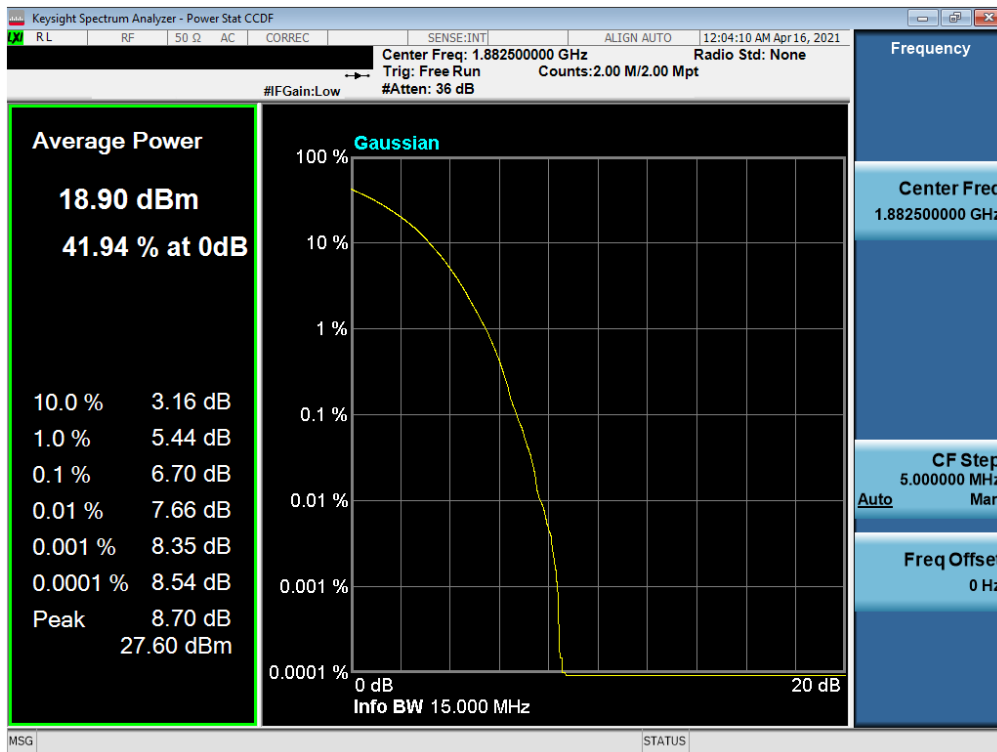


Plot 7-88. PAR Plot (LTE Band 25/2 - 15MHz 256-QAM - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 61 of 85

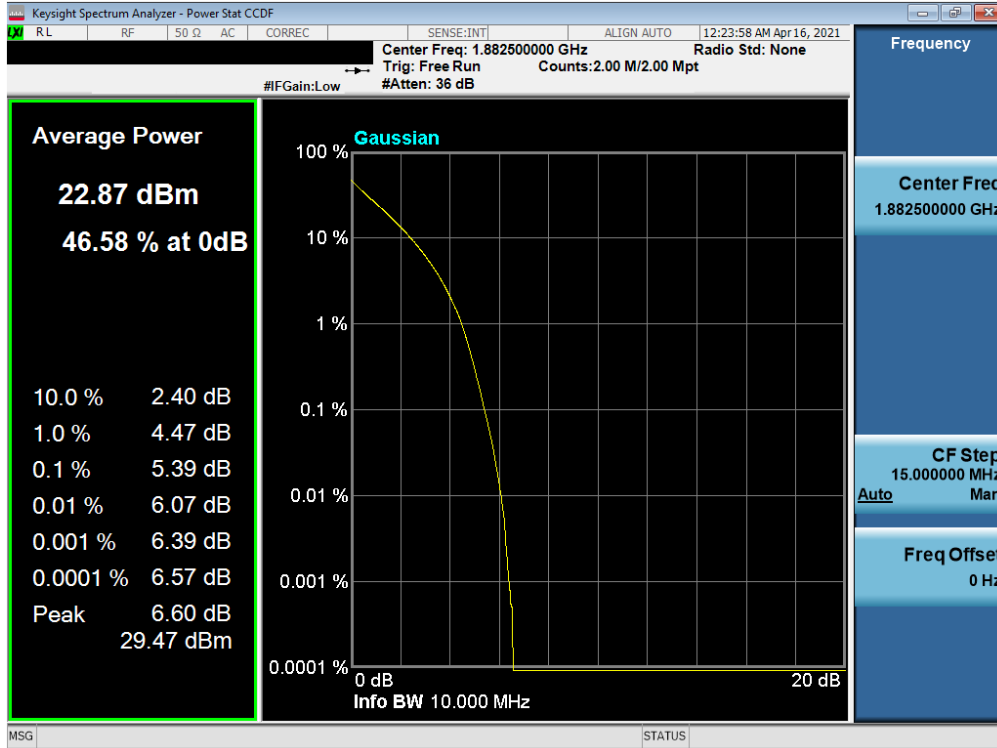


Plot 7-89. PAR Plot (LTE Band 25/2 - 10MHz QPSK - Full RB)

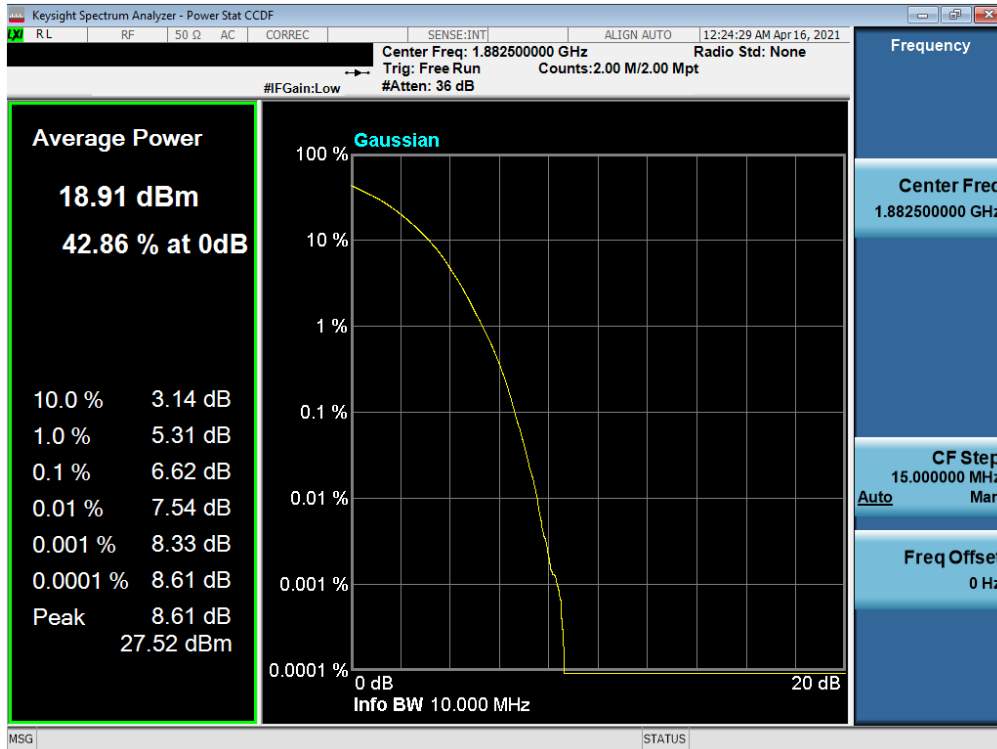


Plot 7-90. PAR Plot (LTE Band 25/2 - 10MHz 256-QAM - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 62 of 85

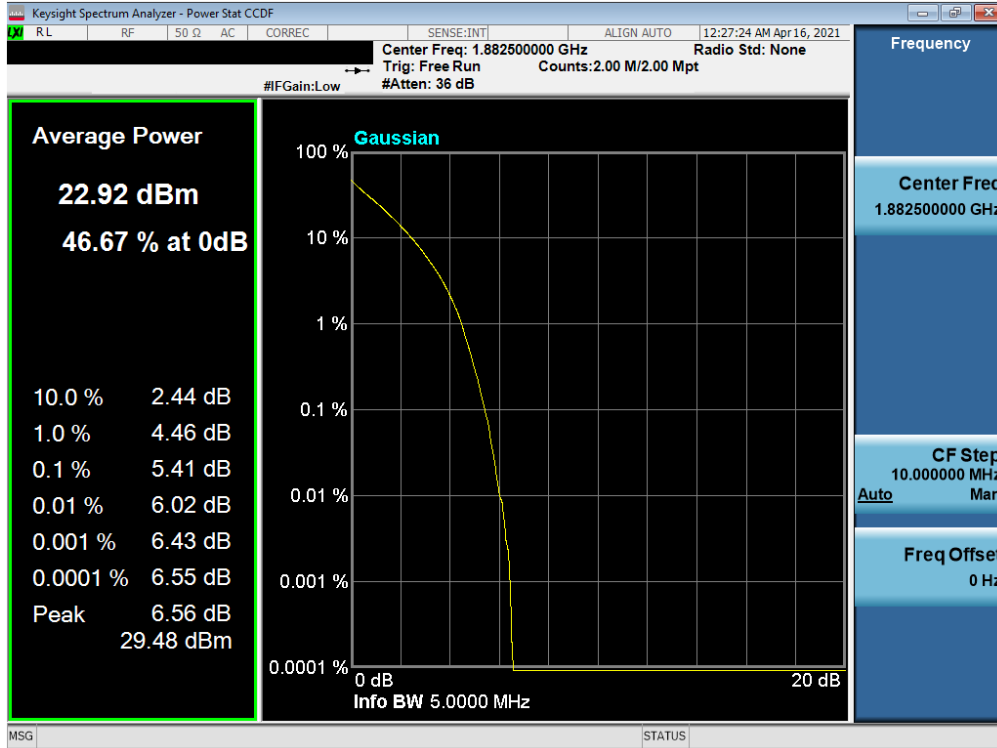


Plot 7-91. PAR Plot (LTE Band 25/2 - 5MHz QPSK - Full RB)

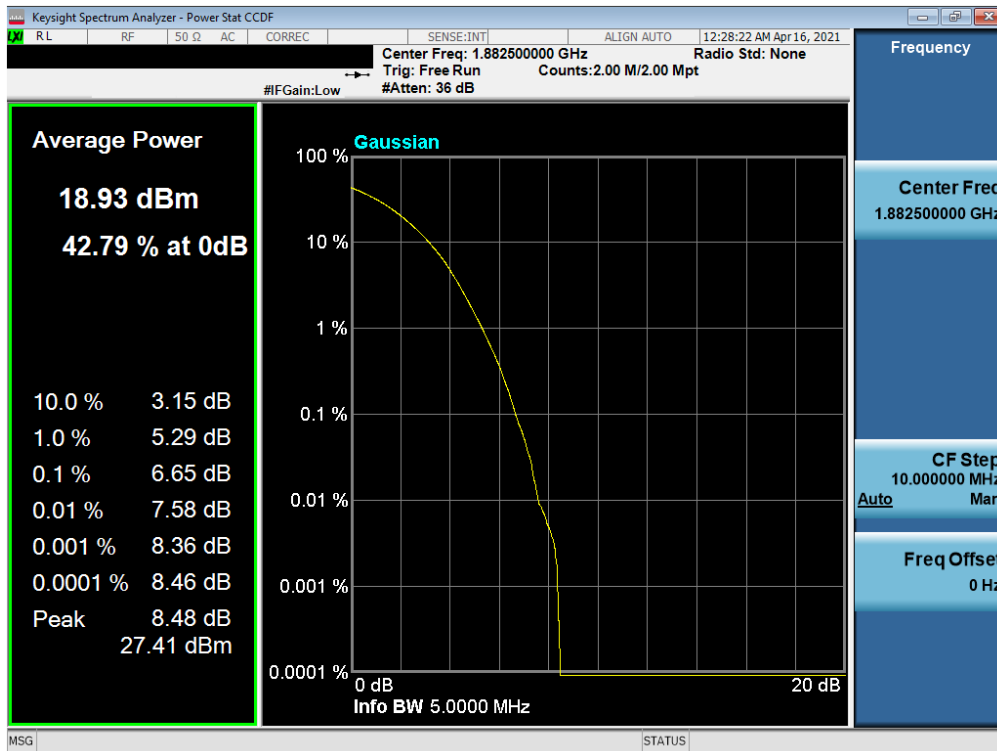


Plot 7-92. PAR Plot (LTE Band 25/2 - 5MHz 256-QAM - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 63 of 85

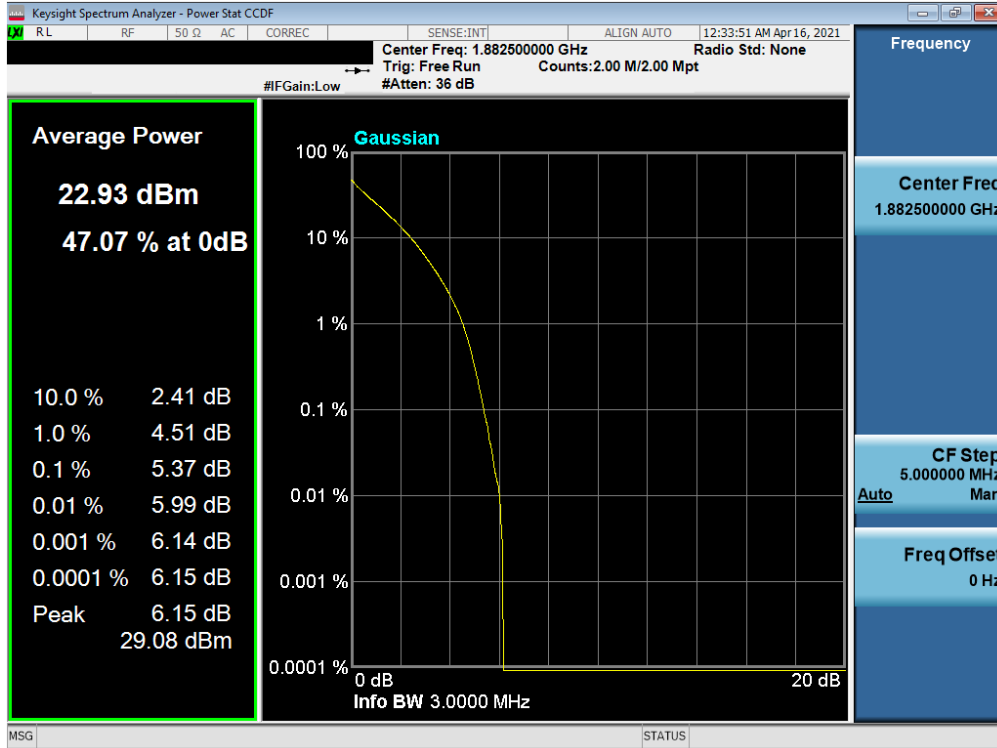


Plot 7-93. PAR Plot (LTE Band 25/2 - 3MHz QPSK - Full RB)

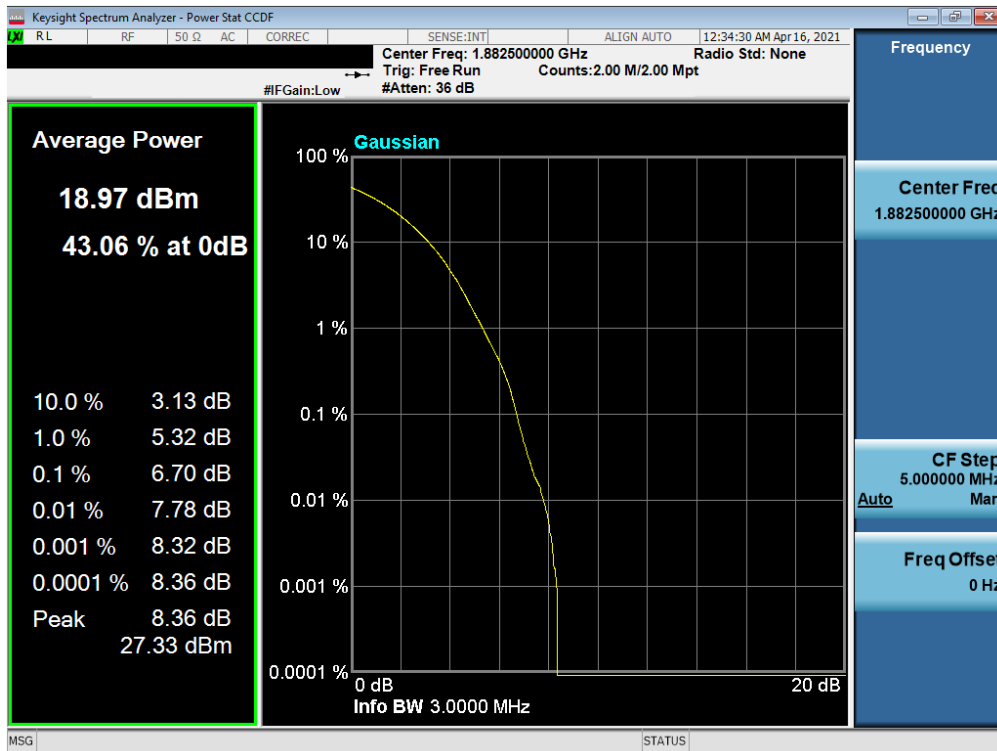


Plot 7-94. PAR Plot (LTE Band 25/2 - 3MHz 256-QAM - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 64 of 85

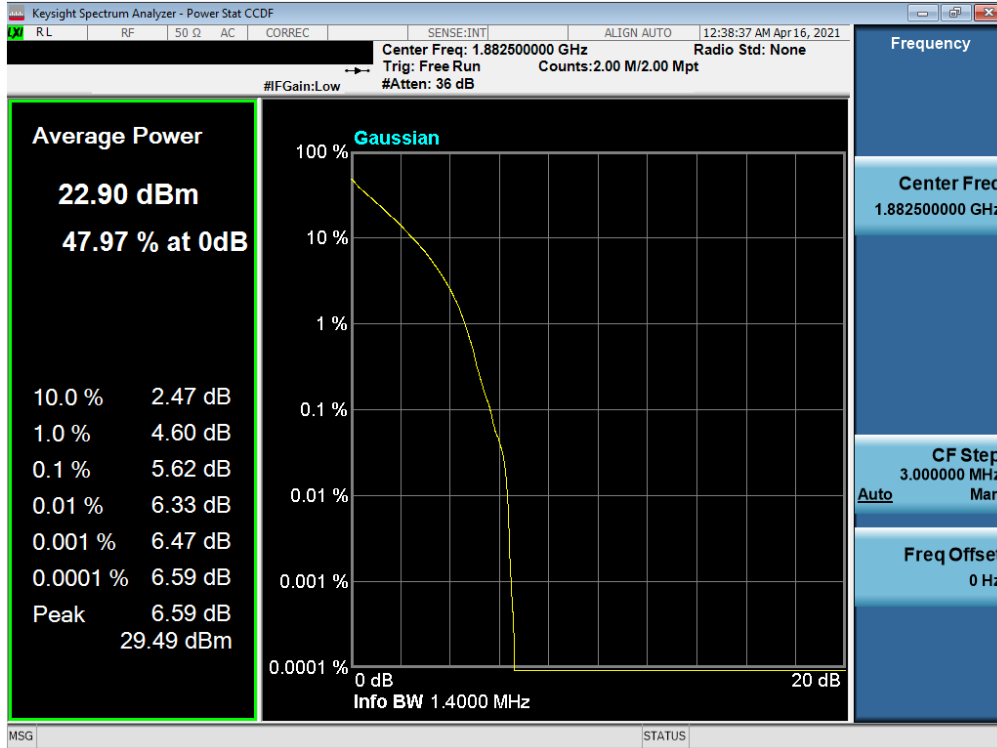


Plot 7-95. PAR Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB)

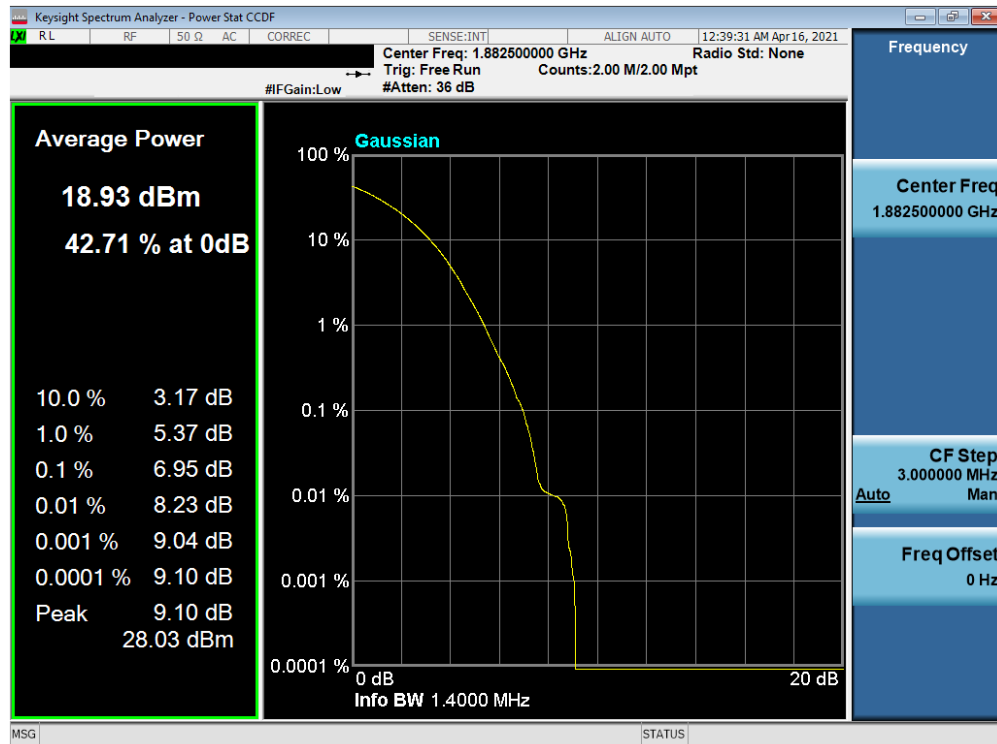


Plot 7-96. PAR Plot (LTE Band 25/2 - 1.4MHz 256-QAM - Full RB)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 65 of 85

GSM/GPRS PCS

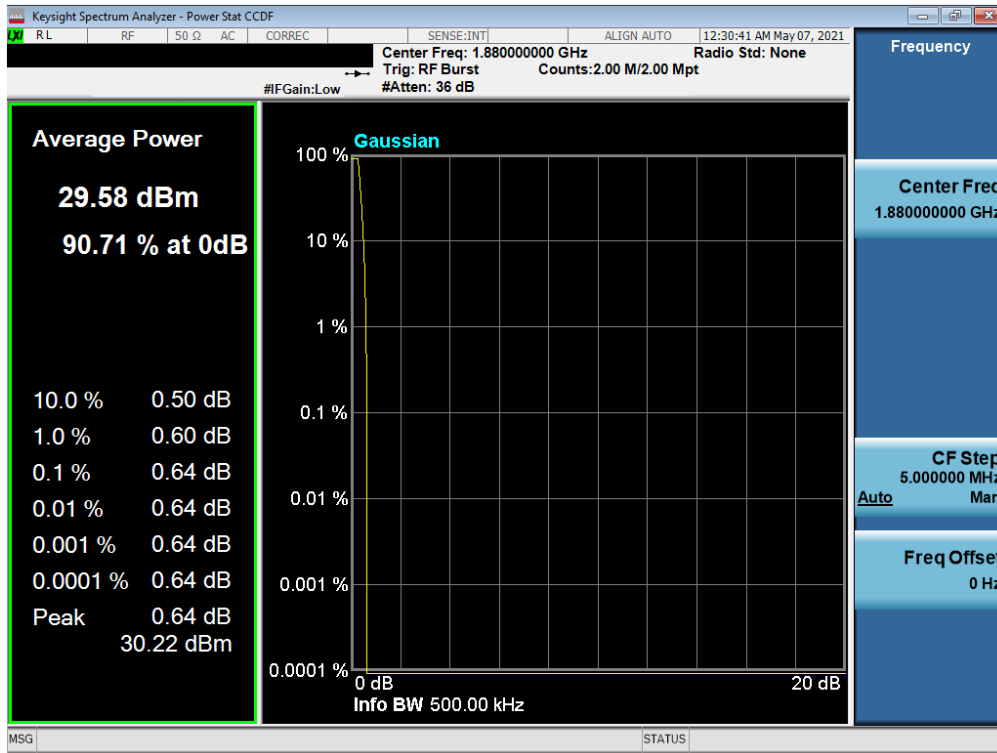


Plot 7-97. PAR Plot (GPRS, Ch. 661)

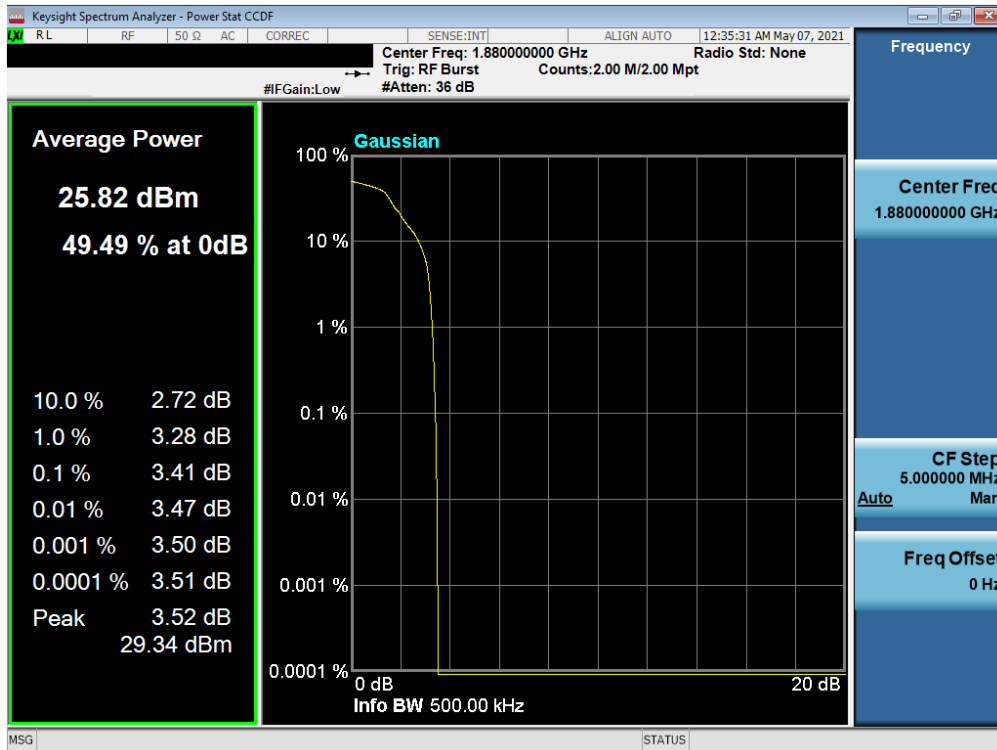

Plot 7-98. PAR Plot (EDGE, Ch. 661)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 66 of 85

WCDMA PCS

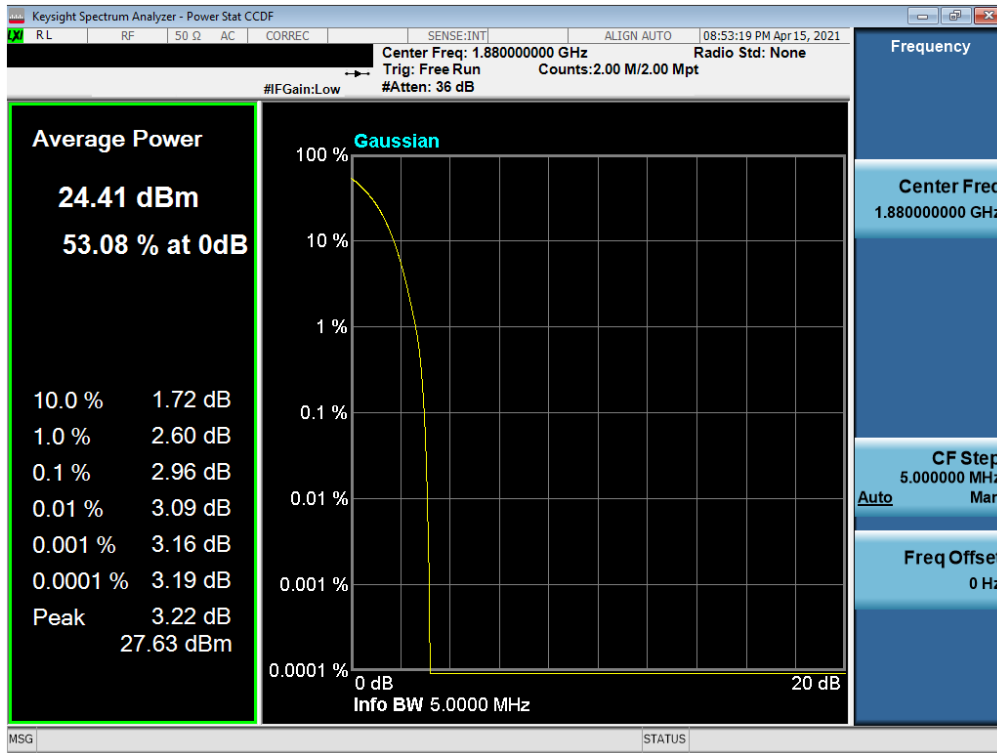

Plot 7-99. PAR Plot (WCDMA, Ch. 9400)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 67 of 85

7.6 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.



Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMF711B1	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 68 of 85

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

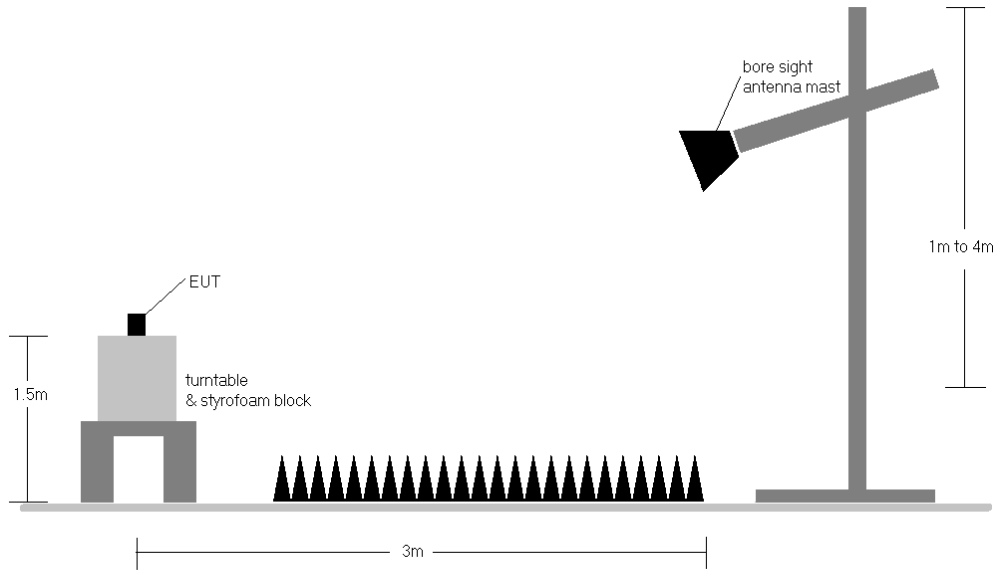





Figure 7-5. Radiated Test Setup >1GHz

<p>FCC ID: A3LSMF711B1</p>	<p>PCTEST PART 24 MEASUREMENT REPORT </p>		<p>Approved by: Technical Manager</p>
<p>Test Report S/N: 1M2108160097-03.A3L</p>	<p>Test Dates: 4/12/2021 - 6/11/2021</p>	<p>EUT Type: Portable Handset</p>	<p>Page 69 of 85</p>

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 3) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 4) This unit was tested with its standard battery.

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 70 of 85

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]	
20 MHz	QPSK	1860.0	H	107.0	176.0	9.64	1 / 0	13.94	23.58	0.228	33.01	-9.43	
		1882.5	H	188.0	179.0	9.96	1 / 50	14.00	23.96	0.249	33.01	-9.05	
		1905.0	H	147.0	184.0	10.24	1 / 50	13.34	23.58	0.228	33.01	-9.43	
15 MHz	QPSK	1882.5	H	188.0	179.0	9.96	1 / 50	13.34	23.30	0.214	33.01	-9.71	
		1857.5	H	107.0	176.0	9.61	1 / 37	13.91	23.52	0.225	33.01	-9.49	
		1882.5	H	188.0	179.0	9.96	1 / 37	14.02	23.98	0.250	33.01	-9.03	
10 MHz	QPSK	1907.5	H	147.0	184.0	10.26	1 / 37	13.46	23.72	0.236	33.01	-9.29	
		1882.5	H	188.0	179.0	9.96	1 / 37	13.20	23.16	0.207	33.01	-9.85	
		1855.0	H	107.0	176.0	9.57	1 / 25	14.06	23.64	0.231	33.01	-9.37	
5 MHz	QPSK	1882.5	H	188.0	179.0	9.96	1 / 25	13.96	23.92	0.246	33.01	-9.09	
		1910.0	H	147.0	184.0	10.28	1 / 25	13.29	23.57	0.228	33.01	-9.44	
		1882.5	H	188.0	179.0	9.96	1 / 25	13.30	23.26	0.212	33.01	-9.75	
3 MHz	QPSK	1852.5	H	107.0	176.0	9.54	1 / 12	14.00	23.54	0.226	33.01	-9.48	
		1882.5	H	188.0	179.0	9.96	1 / 12	13.99	23.95	0.248	33.01	-9.06	
		1912.5	H	147.0	184.0	10.30	1 / 12	13.31	23.62	0.230	33.01	-9.39	
1.4 MHz	QPSK	1882.5	H	188.0	179.0	9.96	1 / 12	13.30	23.26	0.212	33.01	-9.75	
		1851.5	H	107.0	176.0	9.52	1 / 7	14.03	23.55	0.227	33.01	-9.46	
		1882.5	H	188.0	179.0	9.96	1 / 7	14.02	23.98	0.250	33.01	-9.03	
20 MHz	16-QAM	1913.5	H	147.0	184.0	10.31	1 / 7	13.35	23.66	0.232	33.01	-9.35	
		1882.5	H	188.0	179.0	9.96	1 / 7	13.06	23.02	0.200	33.01	-9.99	
		1850.7	H	107.0	176.0	9.51	1 / 3	13.40	23.71	0.235	33.01	-9.30	
20 MHz	16-QAM	1850.7	H	107.0	176.0	9.51	1 / 3	13.58	23.09	0.204	33.01	-9.92	
		Opposite Pol.	1882.5	V	125.0	313.0	10.15	1 / 0	13.38	23.53	0.226	33.01	-9.48
		Open	1882.5	V	142.0	341.0	9.96	1 / 0	13.06	23.02	0.200	33.01	-9.99
20 MHz	WCP	1882.5	H	210.0	141.0	9.96	1 / 50	11.92	21.88	0.154	33.01	-11.13	



Table 7-2. EIRP Data (LTE Band 25/2)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	H	148	187	19.39	9.51	28.90	0.775	33.01	-4.11
1880.00	GPRS1900	H	188	190	19.17	9.93	29.10	0.812	33.01	-3.91
1909.80	GPRS1900	H	185	184	18.77	10.28	29.05	0.804	33.01	-3.96
1880.00	GPRS1900	V	149	330	17.70	10.13	27.83	0.607	33.01	-5.18
1880.00	EDGE1900	H	104	165	14.94	9.93	24.87	0.307	33.01	-8.14
1880.00	GPRS1900 (Open)	V	128	275	18.00	10.13	28.13	0.651	33.01	-4.88
1880.00	GPRS1900 (WCP)	H	159	211	15.81	9.93	25.74	0.375	33.01	-7.27

Table 7-3. EIRP Data (GPRS PCS)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	H	202	180	14.32	9.54	23.86	0.243	33.01	-9.15
1880.00	WCDMA1900	H	150	193	14.01	9.93	23.94	0.248	33.01	-9.07
1907.60	WCDMA1900	H	102	187	13.62	10.26	23.88	0.245	33.01	-9.13
1880.00	WCDMA1900	V	153	261	13.44	10.13	23.57	0.228	33.01	-9.44
1880.00	WCDMA1900 (Open)	V	104	285	12.49	10.13	22.62	0.183	33.01	-10.39
1880.00	WCDMA1900 (WCP)	H	171	177	12.68	9.93	22.61	0.182	33.01	-10.40

Table 7-4. EIRP Data (WCDMA PCS)

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 71 of 85

7.7 Radiated Spurious Emissions Measurements

Test Overview



Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 72 of 85

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

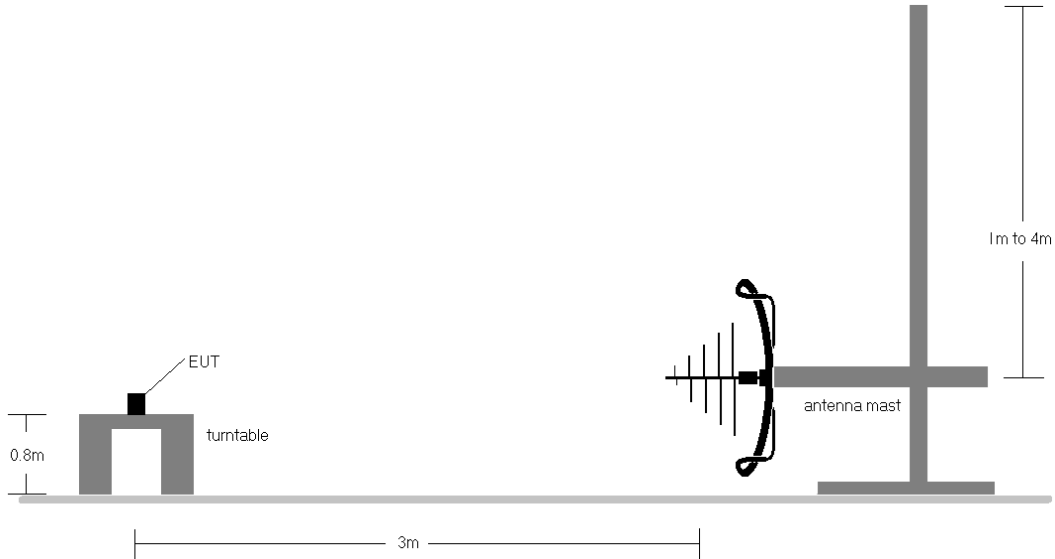


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

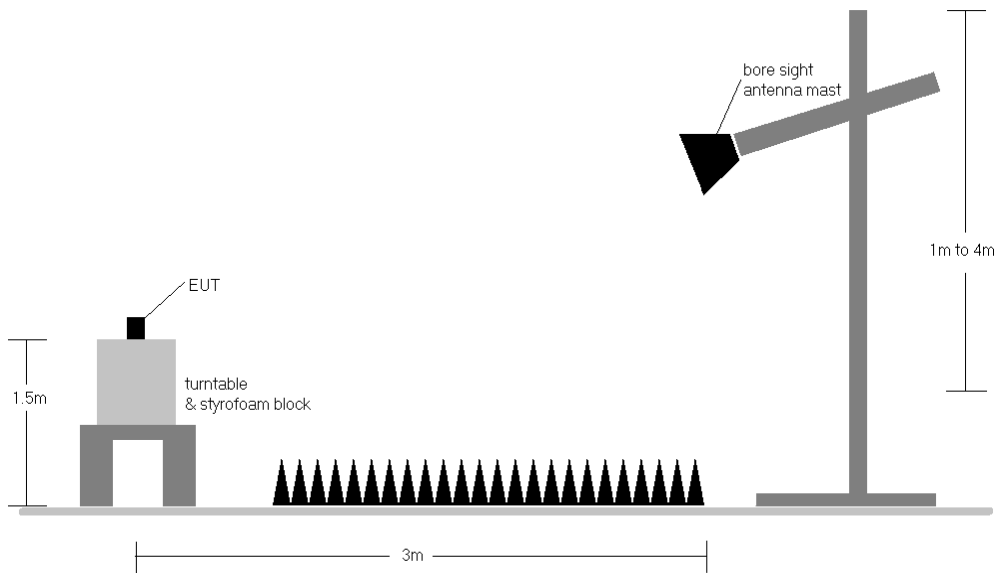




Figure 7-7. Test Instrument & Measurement Setup >1 GHz


FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 73 of 85

Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
 - b) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - d) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest powers is reported in GPRS mode while transmitting with one slot active.
- 3) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1".
- 4) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 5) This unit was tested with its standard battery.
- 6) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 7) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 8) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 74 of 85

LTE Band 25/2

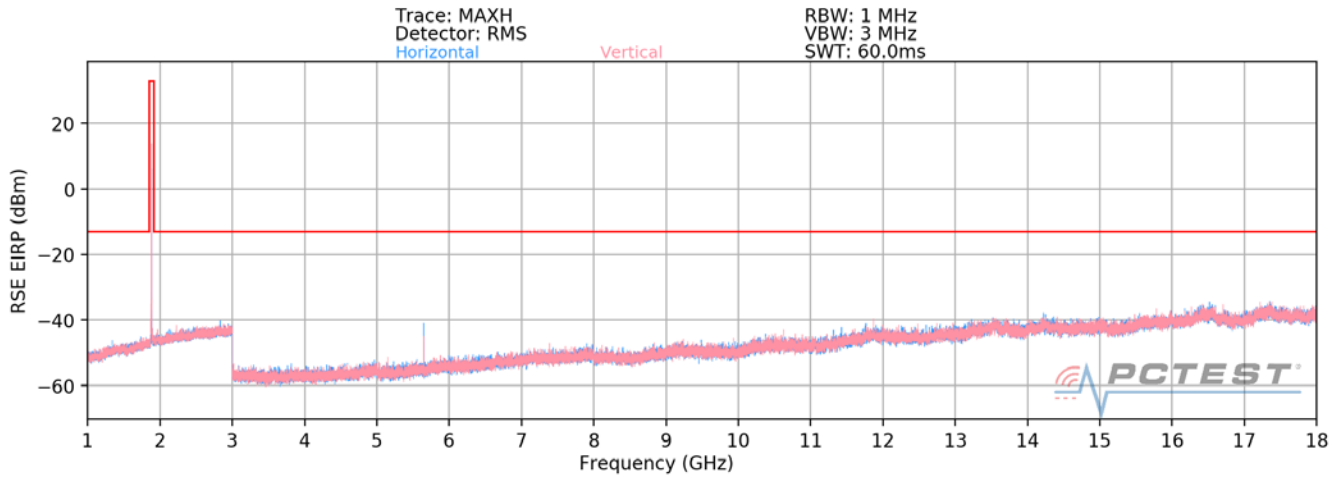

Plot 7-100. Radiated Spurious Plot (LTE Band 25/2)

Bandwidth (MHz):	20
Frequency (MHz):	1860.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3720.0	H	151	162	-80.22	7.90	34.68	-60.58	-13.00	-47.58
5580.0	H	101	173	-63.68	12.13	55.45	-39.81	-13.00	-26.81
7440.0	H	-	-	-82.77	16.09	40.32	-54.94	-13.00	-41.94
9300.0	H	113	165	-80.28	19.16	45.88	-49.38	-13.00	-36.38
11160.0	H	-	-	-84.28	21.14	43.86	-51.39	-13.00	-38.39
13020.0	H	-	-	-84.70	25.80	48.10	-47.16	-13.00	-34.16
14880.0	H	-	-	-85.45	27.85	49.40	-45.86	-13.00	-32.86

Table 7-5. Radiated Spurious Data (LTE Band 25/2 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3765.0	H	-	-	-80.38	8.46	35.08	-60.18	-13.00	-47.18
5647.5	H	112	176	-63.58	11.38	54.80	-40.46	-13.00	-27.46
7530.0	H	-	-	-82.92	16.15	40.23	-55.02	-13.00	-42.02
9412.5	H	124	163	-80.76	19.14	45.38	-49.87	-13.00	-36.87
11295.0	H	-	-	-84.81	21.18	43.37	-51.89	-13.00	-38.89
13177.5	H	-	-	-84.90	25.36	47.46	-47.80	-13.00	-34.80
15060.0	H	-	-	-85.34	27.96	49.62	-45.64	-13.00	-32.64



Table 7-6. Radiated Spurious Data (LTE Band 25/2 – Mid Channel)

FCC ID: A3LSMF711B1	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 75 of 85


Bandwidth (MHz):	20
Frequency (MHz):	1905.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3810.00	H	-	-	-80.72	8.72	35.00	-60.25	-13.00	-47.25
5715.00	H	100	182	-66.79	12.06	52.27	-42.99	-13.00	-29.99
7620.00	H	-	-	-82.98	16.57	40.59	-54.66	-13.00	-41.66
9525.00	H	107	163	-81.83	18.61	43.78	-51.48	-13.00	-38.48
11430.00	H	-	-	-84.58	22.91	45.33	-49.93	-13.00	-36.93
13335.00	H	-	-	-85.01	25.85	47.84	-47.42	-13.00	-34.42
15240.00	H	-	-	-85.82	27.77	48.95	-46.31	-13.00	-33.31

Table 7-7. Radiated Spurious Data (LTE Band 25/2 – High Channel)

FCC ID: A3LSMF711B1	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 76 of 85

GSM/GPRS PCS

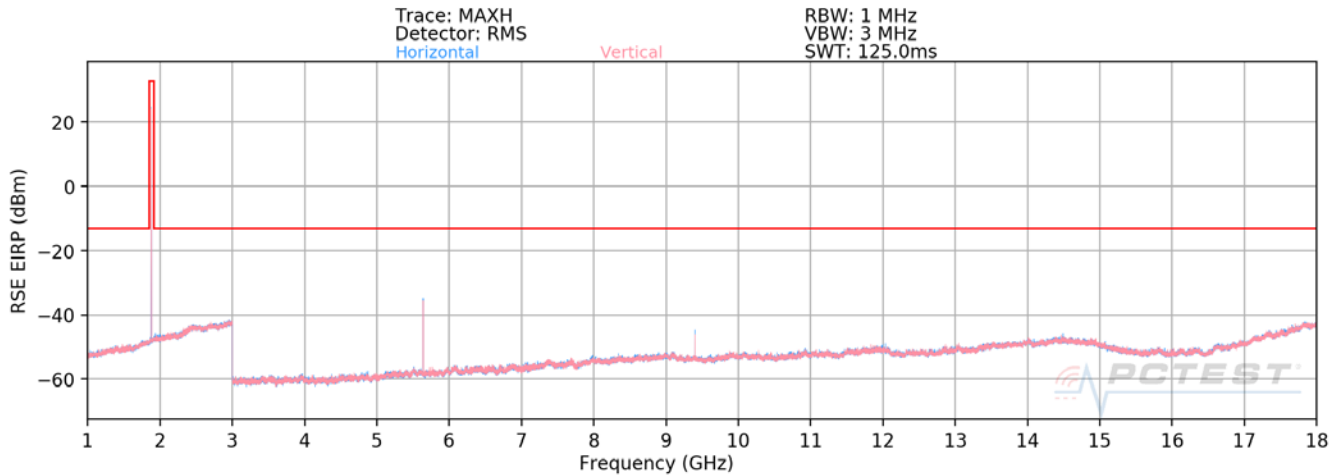

Plot 7-101. Radiated Spurious Plot (GPRS PCS)

Mode:	GPRS 1 Tx Slot
Channel:	512
Frequency (MHz):	1850.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3700.4	H	116	216	-75.47	2.42	33.95	-61.31	-13.00	-48.31
5550.6	H	113	231	-45.91	5.17	66.26	-29.00	-13.00	-16.00
7400.8	H	-	-	-76.60	9.26	39.66	-55.60	-13.00	-42.60
9251.0	H	259	53	-63.64	10.41	53.77	-41.49	-13.00	-28.49
11101.2	H	256	121	-77.50	12.71	42.21	-53.05	-13.00	-40.05
12951.4	H	-	-	-77.64	13.94	43.30	-51.96	-13.00	-38.96
14801.6	H	-	-	-78.54	16.89	45.35	-49.91	-13.00	-36.91
16651.8	H	233	236	-76.23	15.69	46.46	-48.79	-13.00	-35.79

Table 7-8. Radiated Spurious Data (GPRS PCS – Low Channel)

Mode:	GPRS 1 Tx Slot
Channel:	661
Frequency (MHz):	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.0	H	-	-	-75.69	2.86	34.17	-61.09	-13.00	-48.09
5640.0	H	117	177	-48.71	5.65	63.94	-31.32	-13.00	-18.32
7520.0	H	-	-	-76.74	8.87	39.13	-56.13	-13.00	-43.13
9400.0	H	266	49	-63.76	11.83	55.07	-40.19	-13.00	-27.19
11280.0	H	-	-	-77.86	12.67	41.81	-53.44	-13.00	-40.44
13160.0	H	385	78	-77.62	14.23	43.61	-51.65	-13.00	-38.65
15040.0	H	-	-	-78.16	15.61	44.45	-50.80	-13.00	-37.80
16920.0	H	221	228	-77.50	16.35	45.85	-49.41	-13.00	-36.41



Table 7-9. Radiated Spurious Data (GPRS PCS – Mid Channel)

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 77 of 85	


Mode:	GPRS 1 Tx Slot
Channel:	810
Frequency (MHz):	1909.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3819.6	H	357	38	-73.69	2.35	35.66	-59.60	-13.00	-46.60
5729.4	H	114	308	-47.68	5.37	64.69	-30.57	-13.00	-17.57
7639.2	H	-	-	-76.72	9.30	39.58	-55.67	-13.00	-42.67
9549.0	H	178	133	-65.42	11.11	52.69	-42.57	-13.00	-29.57
11458.8	H	-	-	-78.12	13.37	42.25	-53.01	-13.00	-40.01
13368.6	H	220	315	-75.78	14.89	46.11	-49.15	-13.00	-36.15
15278.4	H	-	-	-78.23	14.29	43.06	-52.19	-13.00	-39.19
17188.2	H	-	-	-78.11	17.76	46.65	-48.61	-13.00	-35.61

Table 7-10. Radiated Spurious Data (GPRS PCS – High Channel)

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 78 of 85

WCDMA PCS

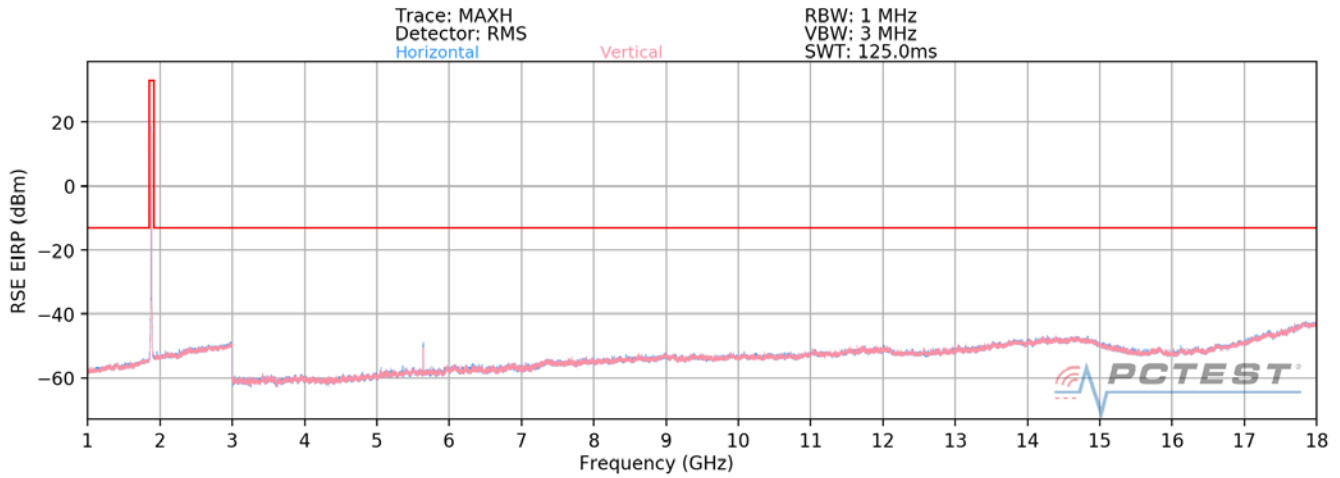

Plot 7-102. Radiated Spurious Plot (WCDMA PCS)

Mode:	WCDMA RMC
Channel:	9262
Frequency (MHz):	1852.4



Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3704.8	H	296	124	-77.66	2.41	31.75	-63.51	-13.00	-50.51
5557.2	H	299	177	-66.98	5.13	45.15	-50.11	-13.00	-37.11
7409.6	H	-	-	-79.73	9.01	36.28	-58.97	-13.00	-45.97
9262.0	H	-	-	-80.30	10.48	37.18	-58.08	-13.00	-45.08
11114.4	H	-	-	-81.18	12.94	38.76	-56.50	-13.00	-43.50

Table 7-11. Radiated Spurious Data (WCDMA PCS – Low Channel)

Mode:	WCDMA RMC
Channel:	9400
Frequency (MHz):	1880

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3760.0	H	-	-	-78.47	2.86	31.39	-63.87	-13.00	-50.87
5640.0	H	115	306	-67.03	5.65	45.62	-49.64	-13.00	-36.64
7520.0	H	-	-	-79.94	8.87	35.93	-59.33	-13.00	-46.33
9400.0	H	-	-	-80.25	11.83	38.58	-56.68	-13.00	-43.68
11280.0	H	-	-	-81.00	12.67	38.67	-56.58	-13.00	-43.58



Table 7-12. Radiated Spurious Data (WCDMA PCS – Mid Channel)

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 79 of 85

Mode:	WCDMA RMC
Channel:	9538
Frequency (MHz):	1907.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3815.2	H	-	-	-78.00	2.33	31.33	-63.93	-13.00	-50.93
5722.8	H	116	308	-68.62	5.43	43.81	-51.45	-13.00	-38.45
7630.4	H	-	-	-79.83	9.06	36.23	-59.03	-13.00	-46.03
9538.0	H	-	-	-80.14	11.00	37.86	-57.40	-13.00	-44.40
11445.6	H	-	-	-81.16	13.29	39.13	-56.13	-13.00	-43.13

Table 7-13. Radiated Spurious Data (WCDMA PCS – High Channel)

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset
© 2021 PCTEST		V2.0 3/15/2021

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes


None

FCC ID: A3LSMF711B1	 PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 81 of 85

LTE Band 25/2

LTE Band 25/2					
		Operating Frequency (Hz):		1,882,500,000	
		Ref. Voltage (VDC):		4.32	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.32	- 30	1,882,497,588	-2,291	-0.0001217
		- 20	1,882,498,741	-1,137	-0.0000604
		- 10	1,882,499,238	-641	-0.0000340
		0	1,882,499,697	-182	-0.0000097
		+ 10	1,882,501,201	1,323	0.0000703
		+ 20 (Ref)	1,882,499,879	0	0.0000000
		+ 30	1,882,499,920	41	0.0000022
		+ 40	1,882,500,635	757	0.0000402
Battery Endpoint	2.51	+ 20	1,882,499,006	-873	-0.0000464

Table 7-14. LTE Band 25/2 Frequency Stability Data

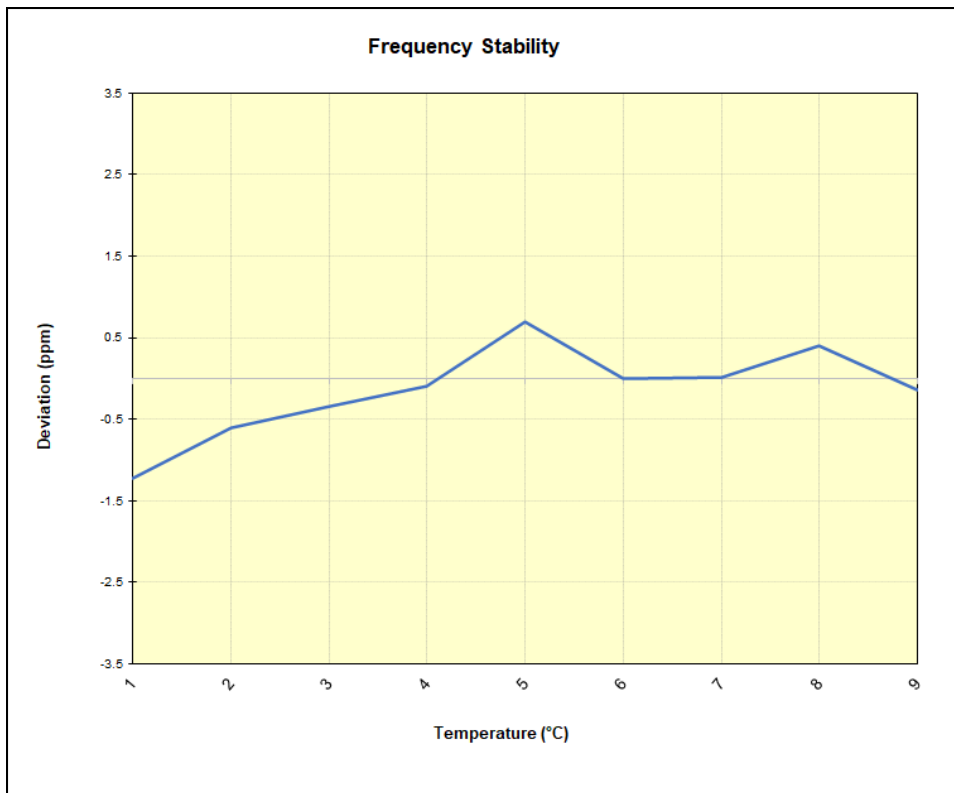


Plot 7-103. LTE Band 25/2 Frequency Stability Chart

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 82 of 85

GSM/GPRS PCS

GSM/GPRS PCS					
Operating Frequency (Hz):		1,880,000,000			
Ref. Voltage (VDC):		4.32			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.32	- 30	1,880,001,612	2,402	0.0001278
		- 20	1,880,000,831	1,622	0.0000863
		- 10	1,879,999,943	733	0.0000390
		0	1,879,998,982	-227	-0.0000121
		+ 10	1,880,001,058	1,849	0.0000983
		+ 20 (Ref)	1,879,999,209	0	0.0000000
		+ 30	1,880,000,676	1,466	0.0000780
		+ 40	1,879,999,850	641	0.0000341
Battery Endpoint	2.51	+ 20	1,880,000,272	1,062	0.0000565

Table 7-15. GSM/GPRS PCS Frequency Stability Data

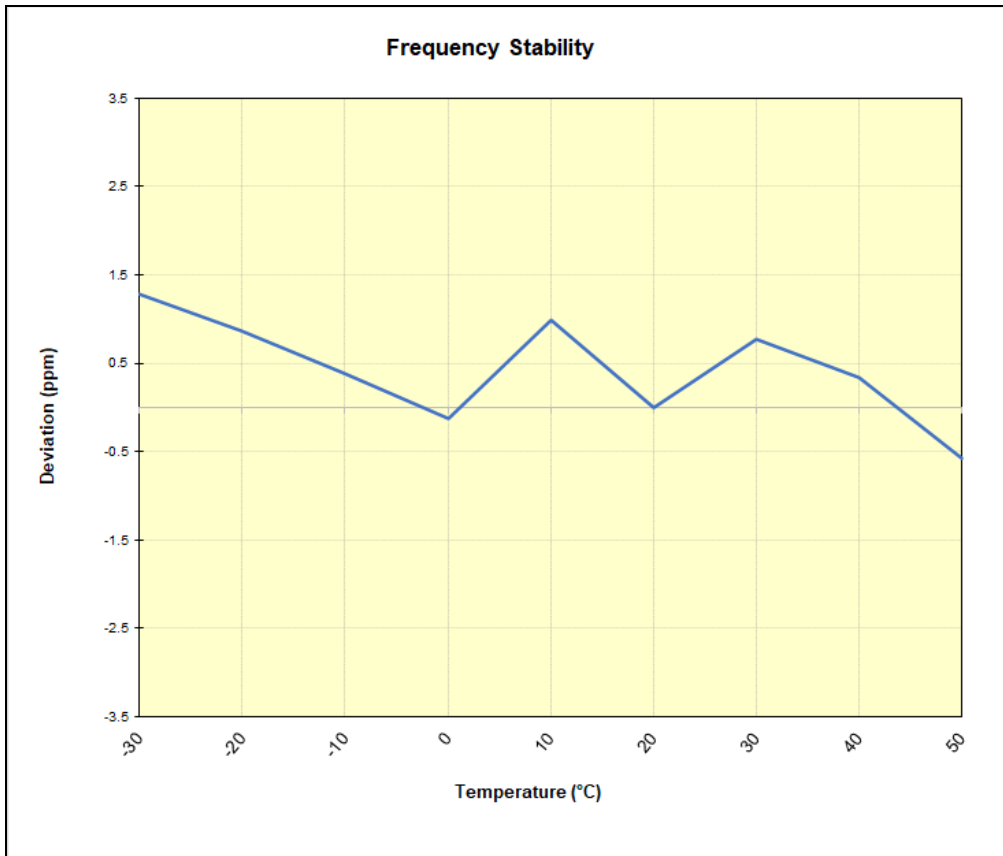


Plot 7-104. GSM/GPRS PCS Frequency Stability Chart

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 83 of 85

WCDMA PCS

WCDMA PCS					
Operating Frequency (Hz):		1,880,000,000			
Ref. Voltage (VDC):		4.32			
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.32	- 30	1,879,996,152	-1,594	-0.0000848
		- 20	1,879,996,962	-784	-0.0000417
		- 10	1,880,000,374	2,627	0.0001397
		0	1,879,998,184	437	0.0000233
		+ 10	1,879,997,064	-682	-0.0000363
		+ 20 (Ref)	1,879,997,746	0	0.0000000
		+ 30	1,879,999,351	1,604	0.0000853
		+ 40	1,879,998,378	632	0.0000336
Battery Endpoint	2.51	+ 20	1,879,999,081	1,334	0.0000710

Table 7-16. WCDMA PCS Frequency Stability Data

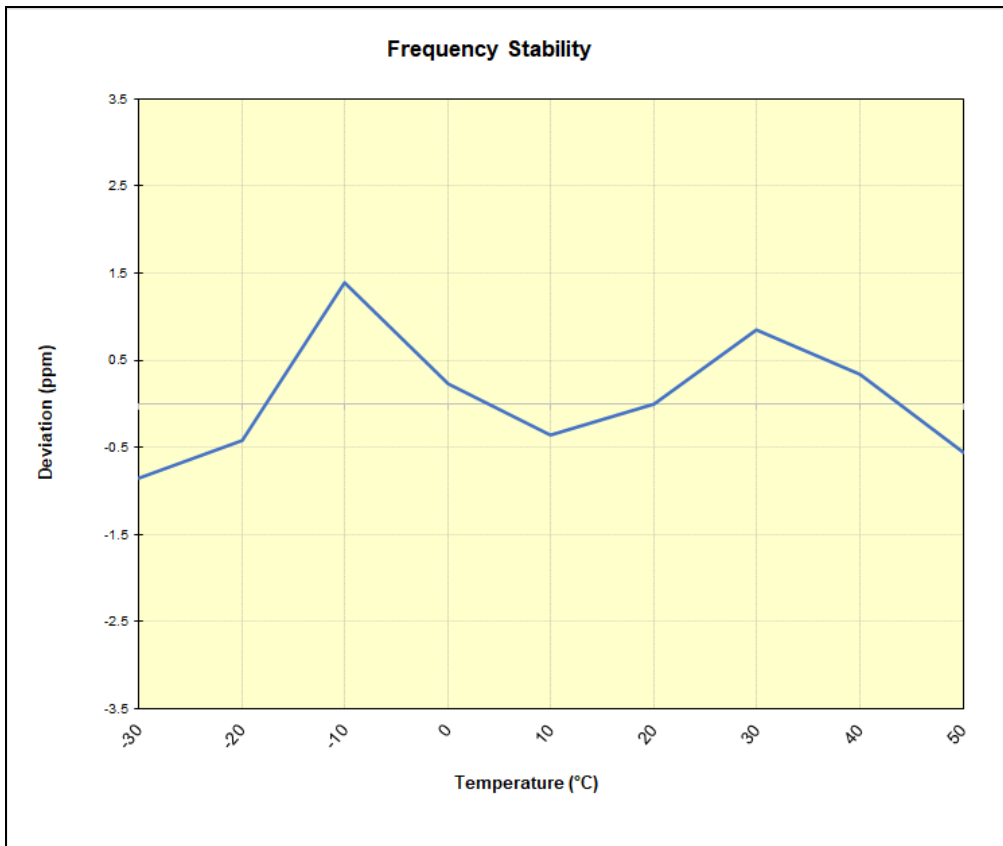



Plot 7-105. WCDMA PCS Frequency Stability Chart

FCC ID: A3LSMF711B1	PCTEST Proud to be part of element	PART 24 MEASUREMENT REPORT	SAMSUNG	Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset		Page 84 of 85

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Samsung **Portable Handset** **FCC ID: A3LSMF711B1** complies with all the requirements of Part 24 of the FCC rules.

FCC ID: A3LSMF711B1	 PART 24 MEASUREMENT REPORT 		Approved by: Technical Manager
Test Report S/N: 1M2108160097-03.A3L	Test Dates: 4/12/2021 - 6/11/2021	EUT Type: Portable Handset	Page 85 of 85