



PART 27 MEASUREMENT REPORT

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

06/24 – 07/08/2022

Test Report Issue Date:

07/22/2022

Test Site/Location:

Element Lab., Yongin-Si, Gyeonggi-do, South Korea

Test Report Serial No.:

1M2206140073-04.A3L

FCC ID:

A3LSMF721JPN

Applicant Name:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SC-54C

Additional Model(s):

SCG17

EUT Type:

Portable Handset

FCC Classification:

PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part:

27

Test Procedure(s):

ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168
D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Prepared by



Reviewed by

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 1 of 50

V2.0 3/28/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	Software and Firmware	5
2.5	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	10
7.1	Summary.....	10
7.2	Conducted Output Power Data	11
7.3	Occupied Bandwidth	13
7.4	Spurious and Harmonic Emissions at Antenna Terminal	18
7.5	Band Edge Emissions at Antenna Terminal	29
7.6	Radiated Power (EIRP).....	35
7.7	Radiated Spurious Emissions Measurements	38
7.8	Frequency Stability / Temperature Variation	48
8.0	CONCLUSION.....	50

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 2 of 50

V2.0 3/28/2021

PART 27 MEASUREMENT REPORT

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 41(PC3)	20 MHz	QPSK	2506.0 - 2680.0	0.367	25.65	18M1G7D
		16QAM	2506.0 - 2680.0	0.326	25.14	18M0W7D
	15 MHz	QPSK	2503.5 - 2682.5	0.382	25.82	13M6G7D
		16QAM	2503.5 - 2682.5	0.307	24.87	13M6W7D
	10 MHz	QPSK	2501.0 - 2685.0	0.364	25.62	9M05G7D
		16QAM	2501.0 - 2685.0	0.314	24.98	9M09W7D
	5 MHz	QPSK	2498.5 - 2687.5	0.354	25.50	4M56G7D
		16QAM	2498.5 - 2687.5	0.292	24.66	4M55W7D

EUT Overview

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 3 of 50

V2.0 3/28/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element Suwon Laboratory located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology Suwon, Ltd. located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- Element Materials Technology Suwon, Ltd. is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation(A2LA) with Certificate number 2041.04 for Specific Absorption Rate (SAR), and Electromagnetic Compatibility (EMC) & Telecommunications testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology Suwon, Ltd. facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISSED: 26168

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 4 of 50

V2.0 3/28/2021

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF721JPN**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

Test Device Serial No.: 1171M, 1172M, 1185M, 1186M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

This device supports two configurations: one is with screen open and one is with screen closed. Open, half opened and closed configurations are tested, and the worst case radiated emissions data is shown in this report.

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version SC54COMU0AVFF installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 5 of 50

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 6 of 50

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.60
Radiated Disturbance (<1GHz)	3.94
Radiated Disturbance (>1GHz)	4.75
Radiated Disturbance (>18GHz)	3.08

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 7 of 50

V2.0 3/28/2021

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9030A	PXA Signal Analyzer	2022-07-04	Annual	2023-07-03	MY49432391
Anritsu	S820E	Cable and Antenna Analyzer	2022-07-06	Annual	2023-07-05	1839097
Anritsu	MA24106A	USB Power Sensor	2022-07-06	Annual	2023-07-05	1244512
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	2020-10-29	Biennial	2022-10-28	10160045
Com-Power	PAM-118A	Preamplifier	2022-07-06	Annual	2023-07-05	551042
Espec	SH-242	Environmental Chamber	2021-09-15	Annual	2022-09-14	93011064
Fairview Microwave	FM2CPC1122-10	Coupler	2022-07-06	Annual	2023-07-05	1946
Keysight Technologies	N9030B	MXA Signal Analyzer	2022-05-10	Annual	2023-05-19	MY57142018
Mini Circuits	ZUDC10-83-S+	Coupler	2021-09-15	Annual	2022-09-14	2111
Mini-Circuits	BW-N10W5+	Attenuator	2022-05-09	Annual	2023-05-08	1607
Mini-Circuits	BW-N10W5+	Attenuator	2022-05-09	Annual	2023-05-08	1607
Rohde & Schwarz	TS-PR18	Preamplifier	2022-07-06	Annual	2023-07-05	102141
Rohde & Schwarz	SMBV100B	Signal Generator	2021-11-04	Annual	2022-11-03	101568
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2022-02-18	Annual	2023-02-17	131453
Rohde & Schwarz	ESW	EMI Test Receiver	2022-07-04	Annual	2023-07-03	101761
Rohde & Schwarz	FSW43	Signal & Spectrum Analyzer	2021-09-15	Annual	2022-09-14	101250
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2022-02-18	Annual	2023-02-17	102131
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2022-03-28	Annual	2023-03-27	102151
Schwarzbeck	VULB9162	Broadband TRILOG Antenna	2021-07-13	Biennial	2023-07-12	9162-217
Schwarzbeck	UHA9105	Dipole Antenna	2020-07-09	Biennial	2022-07-08	91052522
Sunol	DRH-118	Horn Antenna	2021-07-14	Biennial	2023-07-13	A102416-1
Sunol	DRH-118	Horn Antenna	2021-01-12	Biennial	2023-01-11	A060215

Table 5-1. Test Equipment

Notes:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 8 of 50

6.0 SAMPLE CALCULATIONS

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 9 of 50

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF721JPN
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE/ULCA

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power	2.1046(a), 2.1046(c)	N/A	PASS	Section 7.2
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (LTE Band 41)	2.1051, 27.53(m)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Sections 7.4, 7.5
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
RADIATED	Equivalent Isotropic Radiated Power (LTE Band 41)	27.50(h)(2)	≤ 2 Watts max. EIRP	PASS	Section 7.6
	Radiated Spurious Emissions (LTE Band 41)	2.1053, 27.53(m)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Section 7.7

Table 7-1. Summary of Test Results (FCC)

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.0.

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 10 of 50

V2.0 3/28/2021

7.2 Conducted Output Power Data

Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Settings

1. Span = 2 x OBW to 3 x OBW
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. Uplink carrier aggregation is only supported in this EUT while operating in Power Class 3.
2. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
3. All other conducted power measurements are contained in the RF exposure report for this filing.

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 11 of 50

V2.0 3/28/2021

Power State	Band	Bandwidth (PCC + SCC)	PCC					SCC					ULCA Tx. Power [dBm]
			Modulation	UL Channel	UL Frequency	UL # RB	UL RB Offset	Modulation	UL Channel	UL Frequency	UL # RB	UL RB Offset	
Max	LTE B41 (PC3)	20MHz + 20MHz	QPSK	39750	2506.0	1	99	QPSK	39948	2525.8	1	0	23.96
				40620	2593.0	1	99		40818	2612.8	1	0	24.26
				41490	2680.0	1	0		41292	2660.2	1	99	24.36
			QPSK	41490	2680	100	0	QPSK	41292	2660.2	100	0	24.32
			16-QAM	41490	2680	100	0	16-QAM	41292	2660.2	100	0	22.85
			64-QAM	41490	2680	100	0	64-QAM	41292	2660.2	100	0	21.73

Table 7-1. Conducted Power Data (ULCA LTE B41(PC3))

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 12 of 50

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

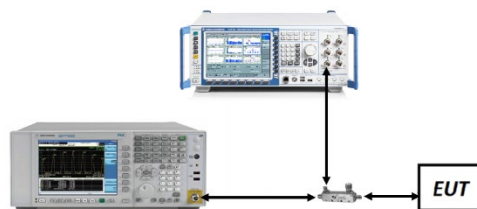


Figure 7-2. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 13 of 50

V2.0 3/28/2021

LTE Band 41(PC3)

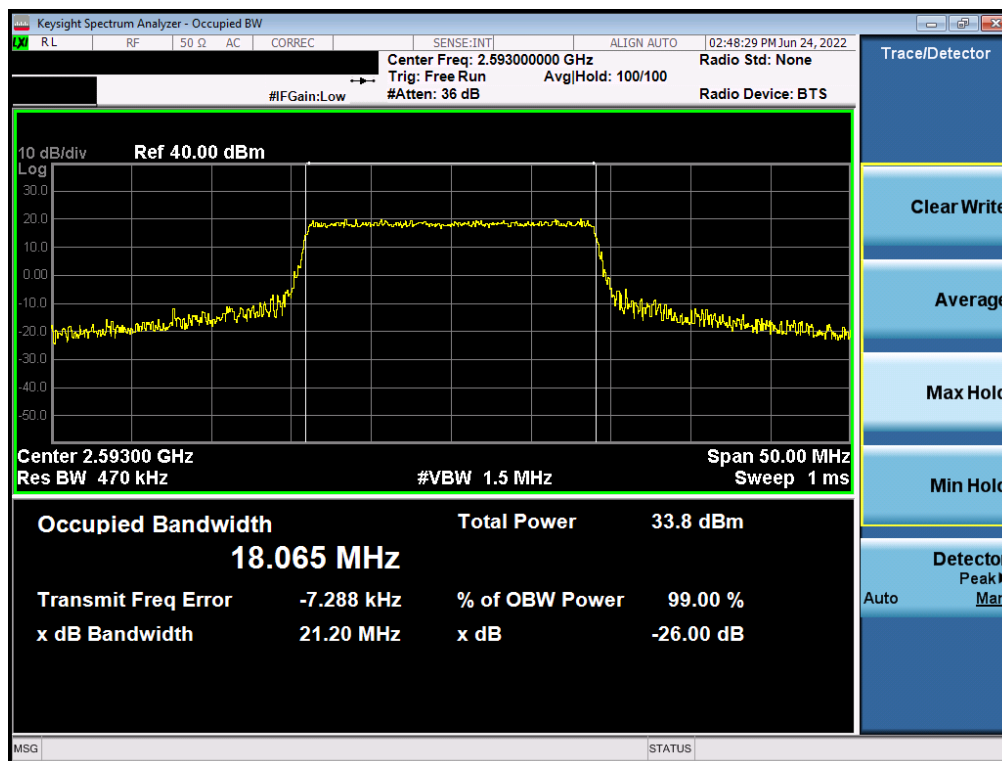


Plot 7-2. Occupied Bandwidth Plot (LTE Band 41(PC3) - 20MHz QPSK - Full RB)




Plot 7-3. Occupied Bandwidth Plot (LTE Band 41(PC3) - 20MHz 16-QAM - Full RB)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 - 07/08/2022	EUT Type: Portable Handset	Page 14 of 50

V2.0 3/28/2021

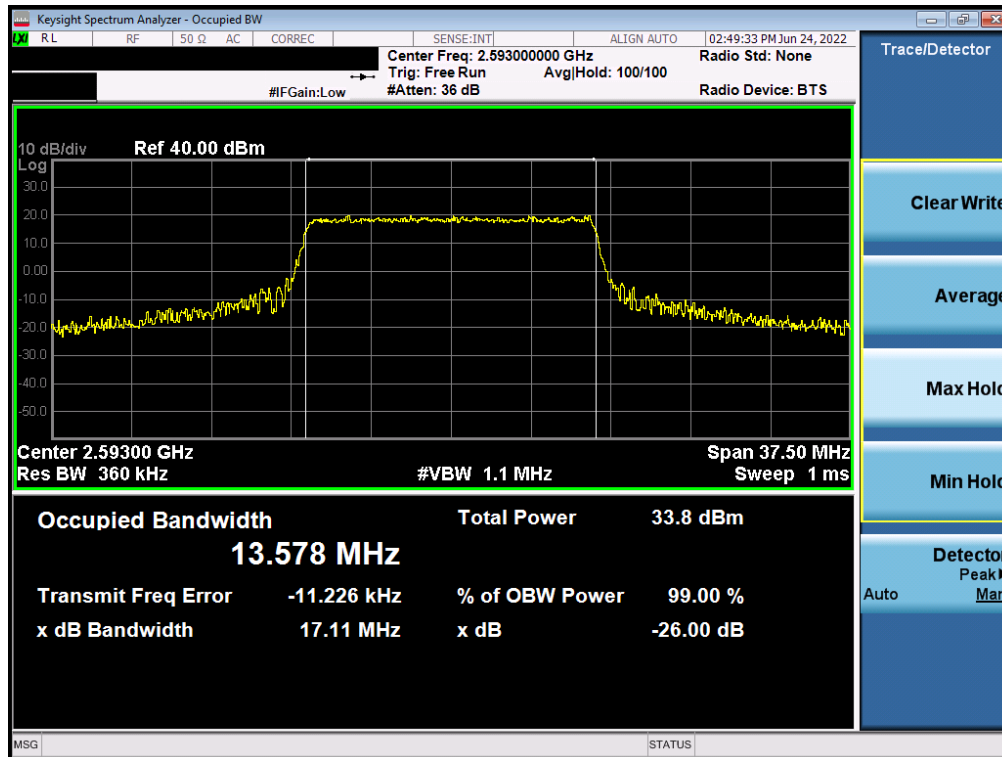


Plot 7-4. Occupied Bandwidth Plot (LTE Band 41(PC3) - 15MHz QPSK - Full RB)

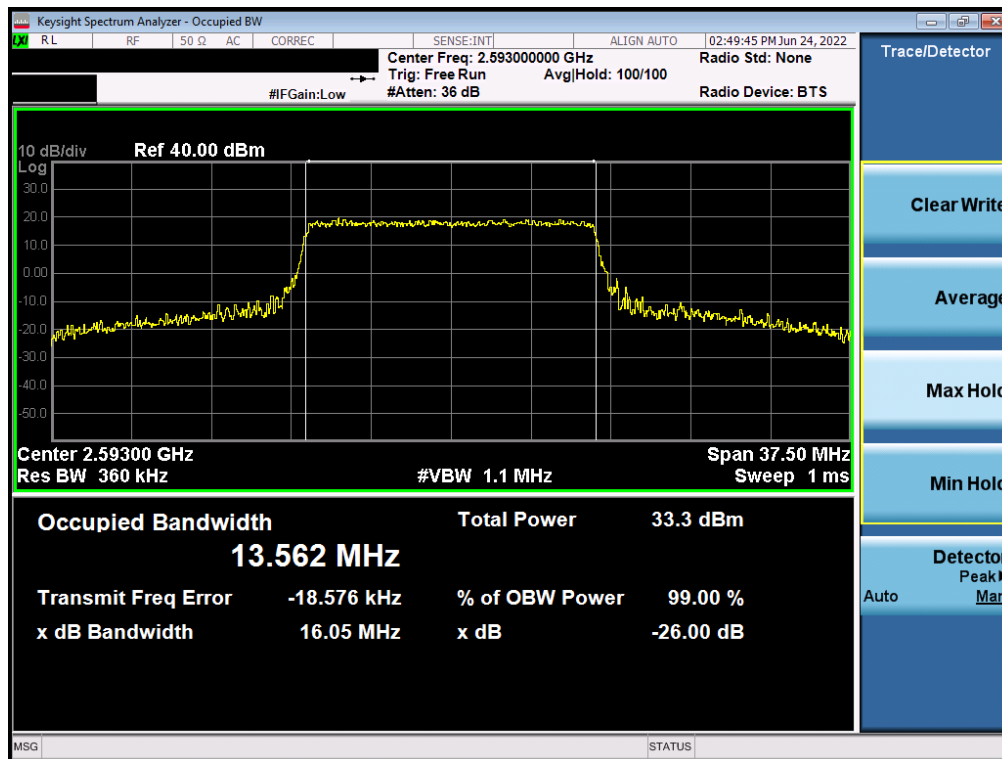

Plot 7-5. Occupied Bandwidth Plot (LTE Band 41(PC3) - 15MHz 16-QAM - Full RB)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 - 07/08/2022	EUT Type: Portable Handset	Page 15 of 50

V2.0 3/28/2021

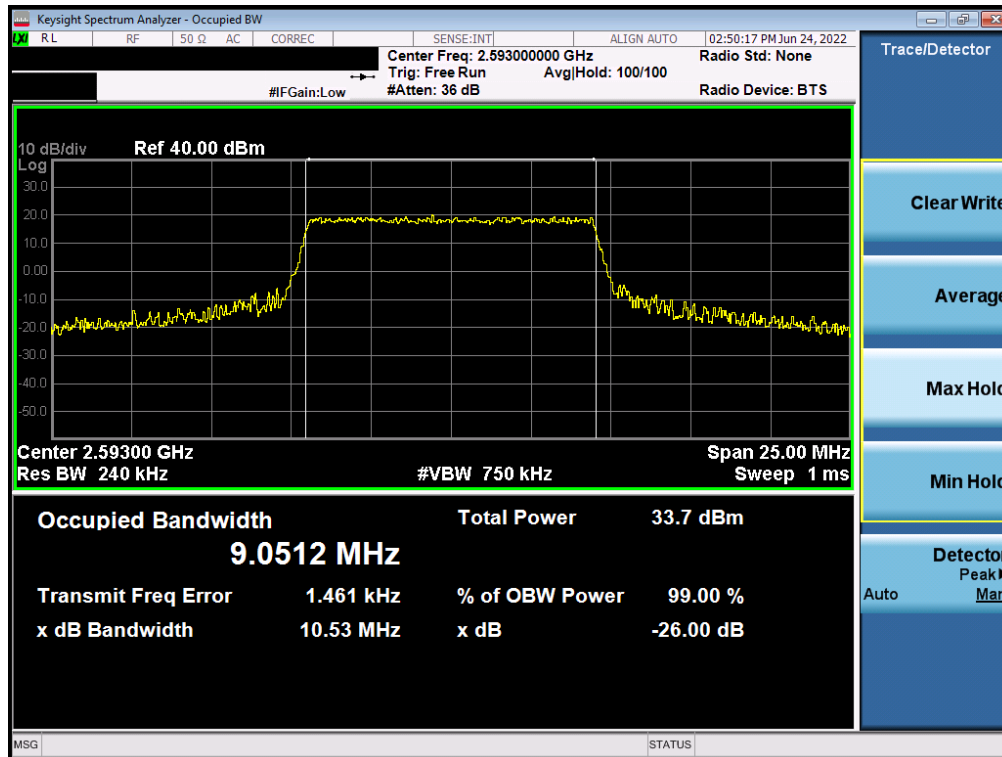


Plot 7-6. Occupied Bandwidth Plot (LTE Band 41(PC3) - 10MHz QPSK - Full RB)



Plot 7-7. Occupied Bandwidth Plot (LTE Band 41(PC3) - 10MHz 16-QAM - Full RB)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 - 07/08/2022	EUT Type: Portable Handset	Page 16 of 50

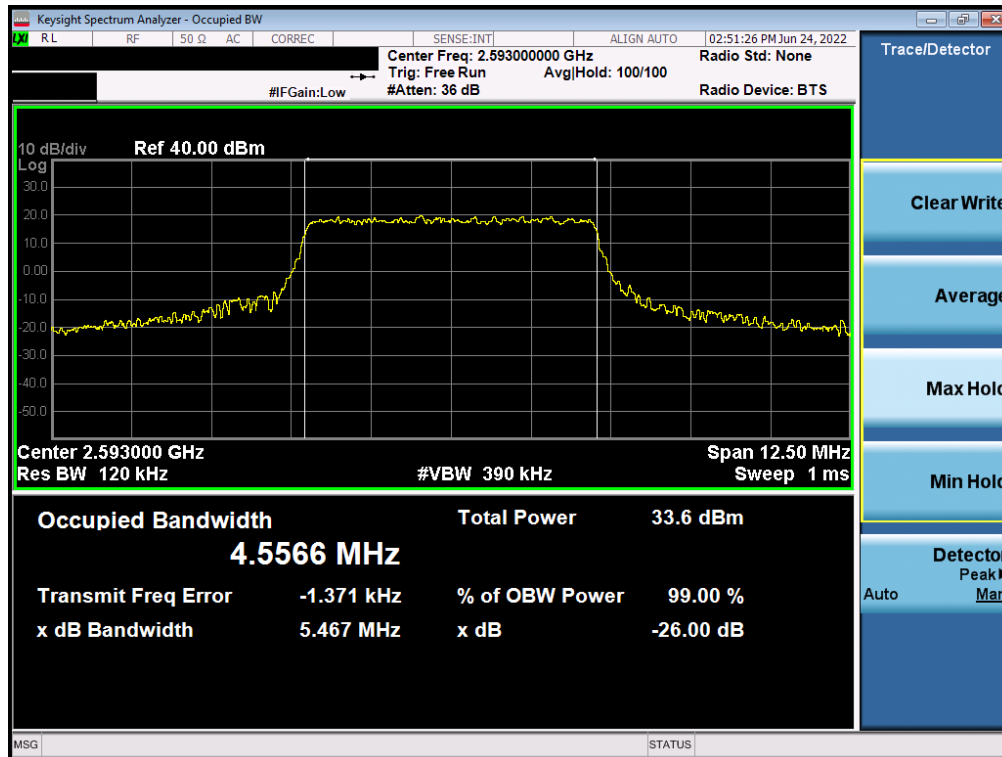

Plot 7-8. Occupied Bandwidth Plot (LTE Band 41(PC3) - 5MHz QPSK - Full RB)



Plot 7-9. Occupied Bandwidth Plot (LTE Band 41(PC3) - 5MHz 16-QAM - Full RB)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 - 07/08/2022	EUT Type: Portable Handset	Page 17 of 50

V2.0 3/28/2021

7.4 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

For Band 41, the minimum permissible attenuation level of any spurious emission is $55 + 10 \log_{10}(P_{\text{Watts}})$.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.4

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

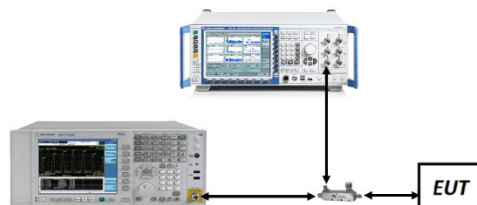


Figure 7-3. Test Instrument & Measurement Setup


Test Notes

Per Part 27, RSS-195 and RSS-199, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz.


FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 18 of 50

V2.0 3/28/2021

LTE Band 41(PC3)

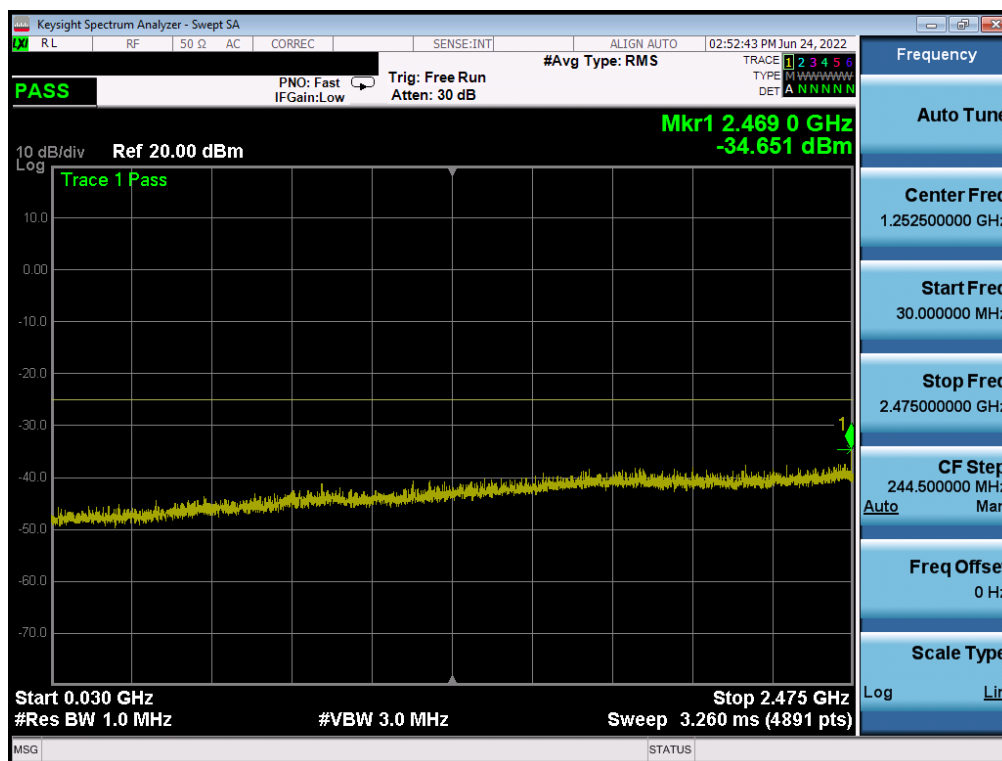


Plot 7-10. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

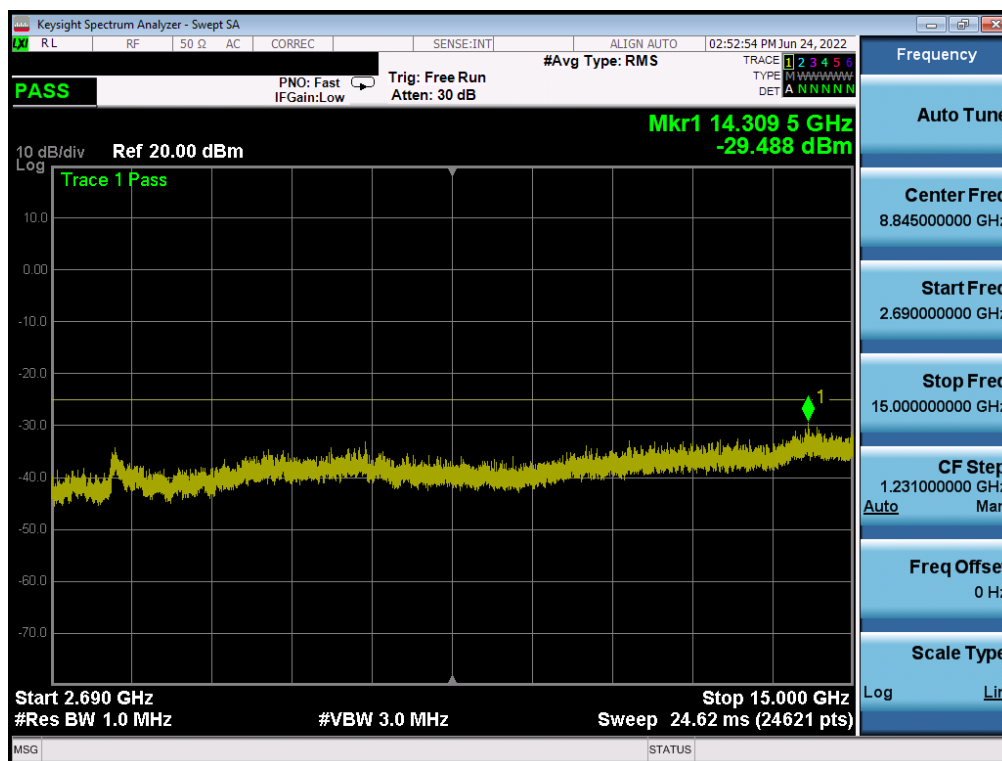


Plot 7-11. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 19 of 50

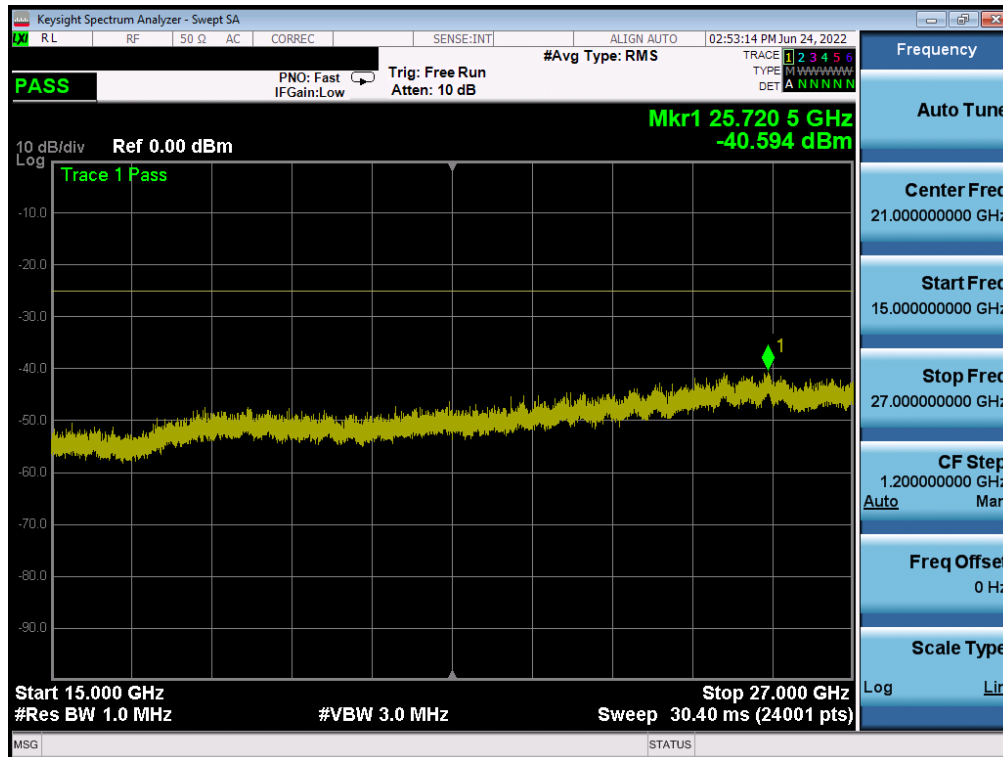


Plot 7-12. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

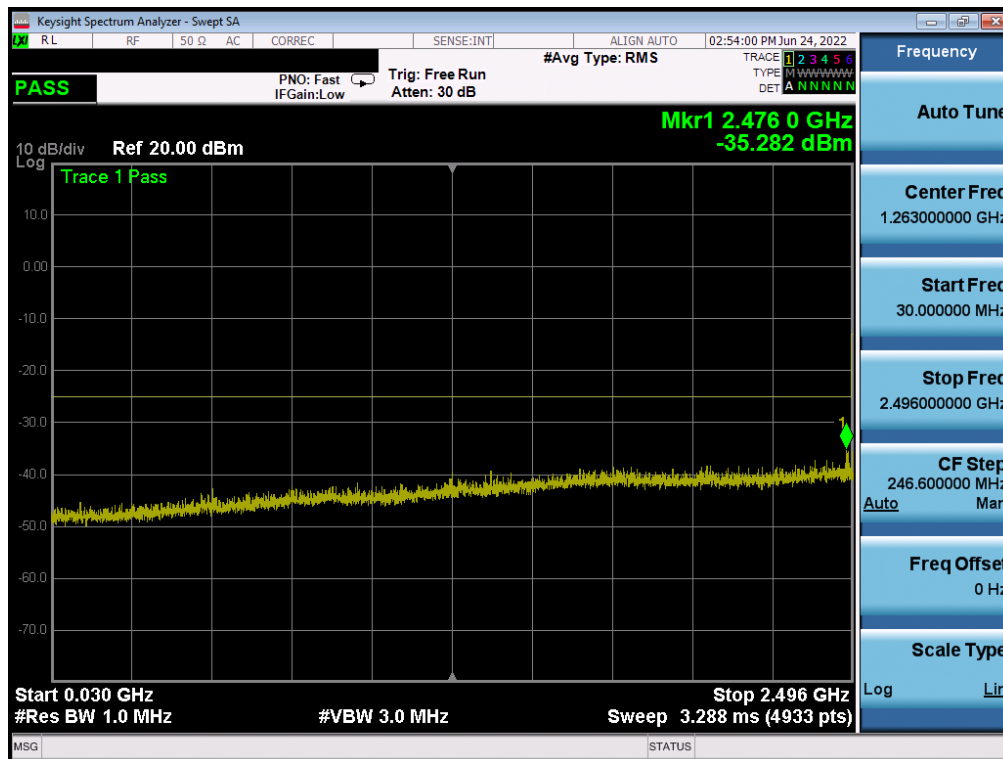


Plot 7-13. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 - 07/08/2022	EUT Type: Portable Handset	Page 20 of 50

V2.0 3/28/2021

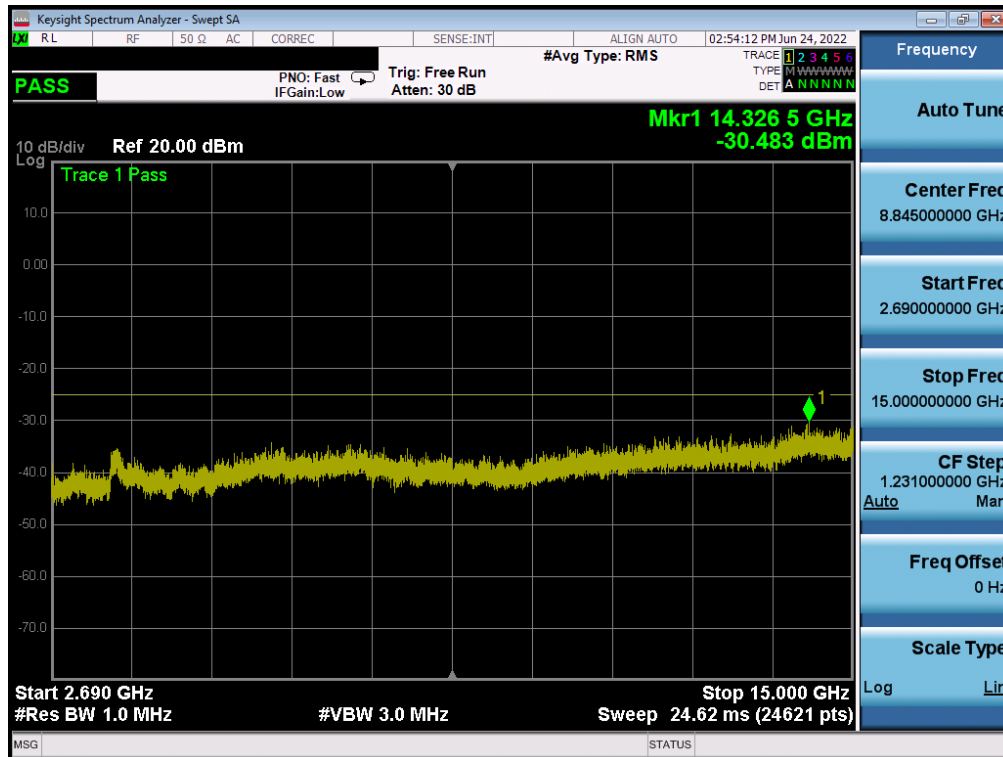


Plot 7-14. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

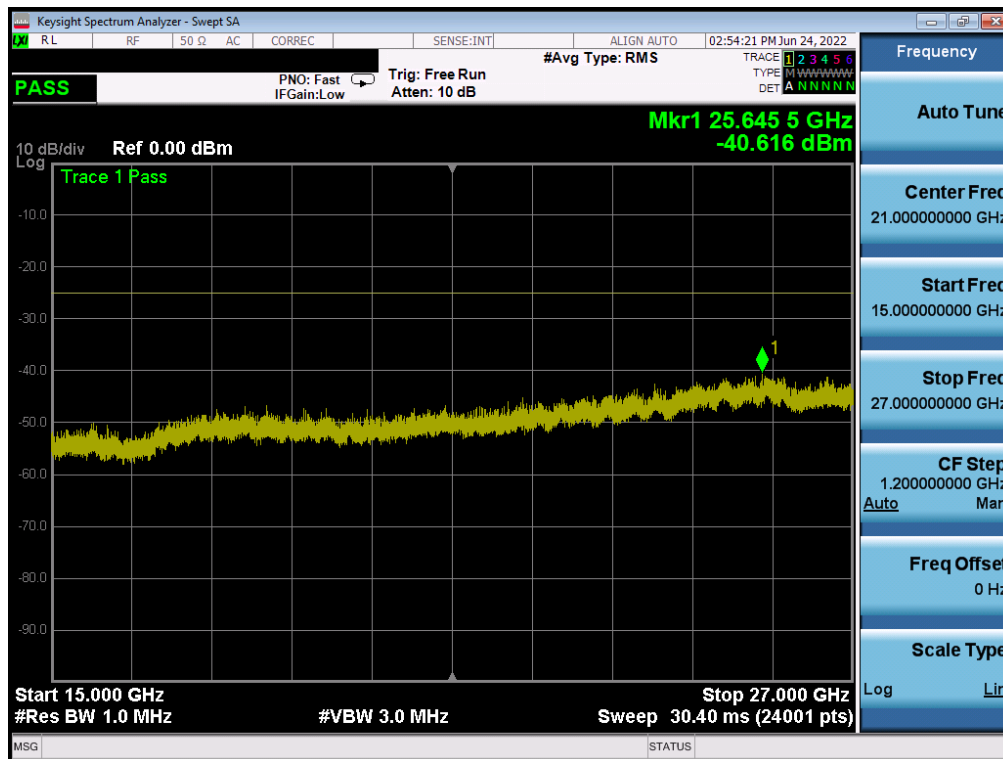


Plot 7-15. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 - 07/08/2022	EUT Type: Portable Handset	Page 21 of 50


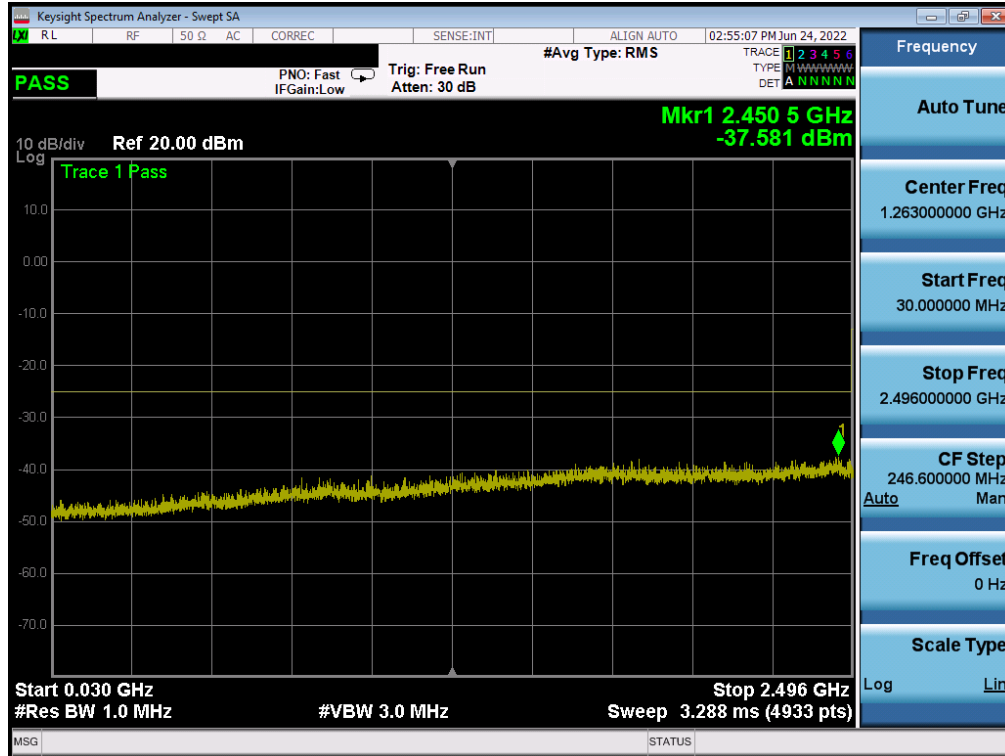


Plot 7-16. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

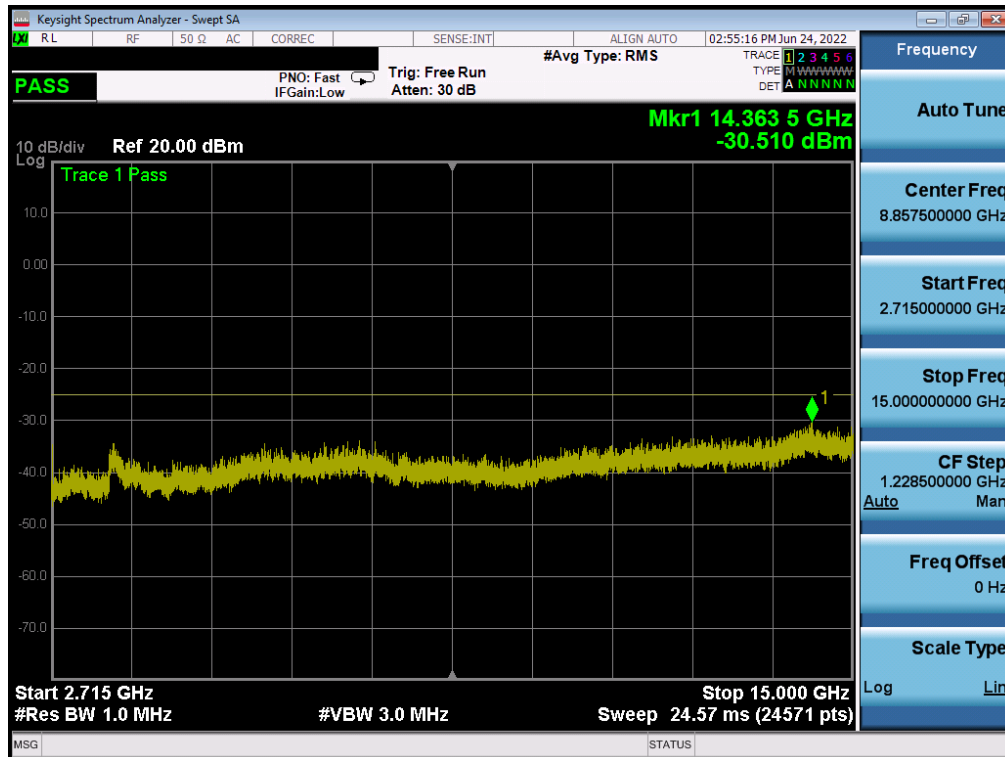


Plot 7-17. Conducted Spurious Plot (LTE Band 41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 - 07/08/2022	EUT Type: Portable Handset	Page 22 of 50



FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 24 of 50

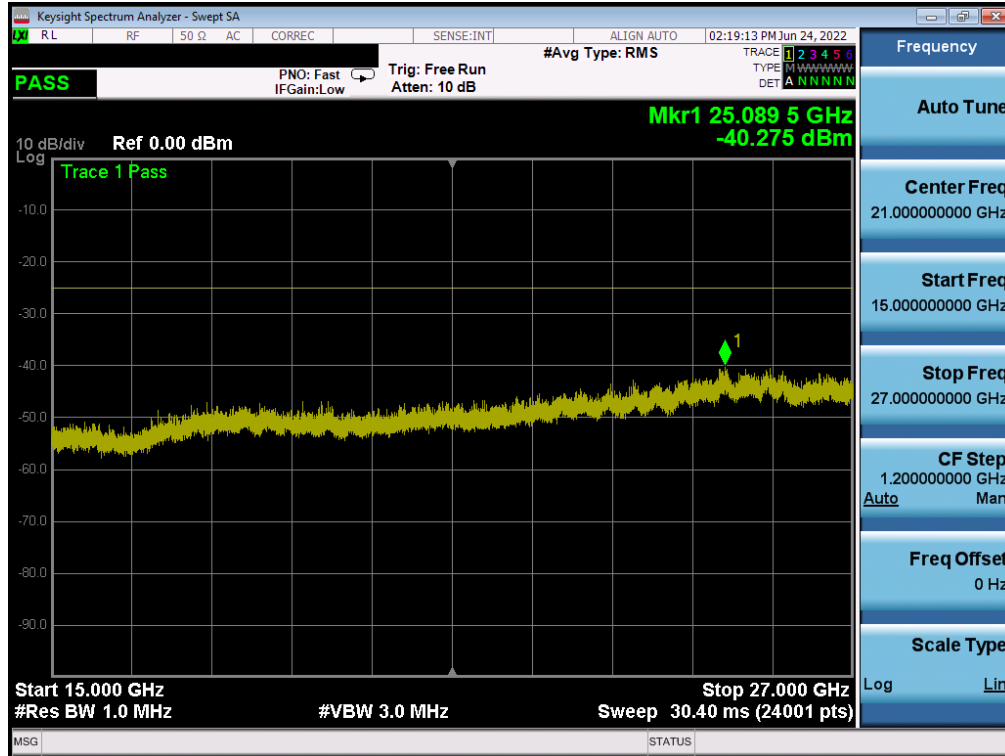


Plot 7-21. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

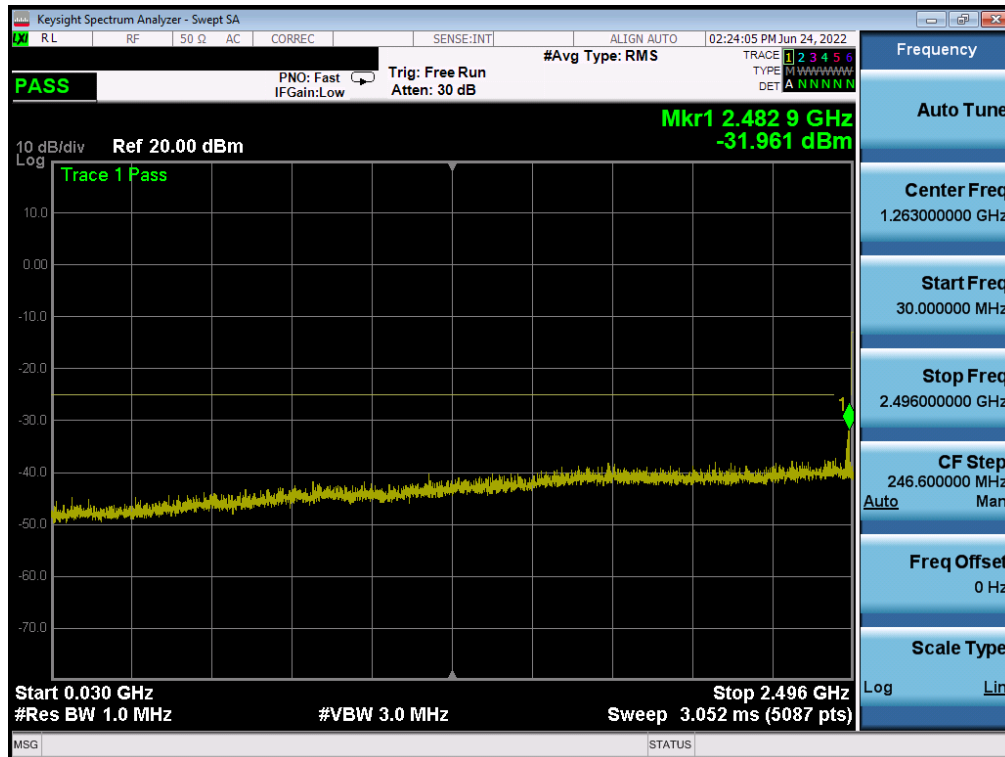


Plot 7-22. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 - 07/08/2022	EUT Type: Portable Handset	Page 25 of 50

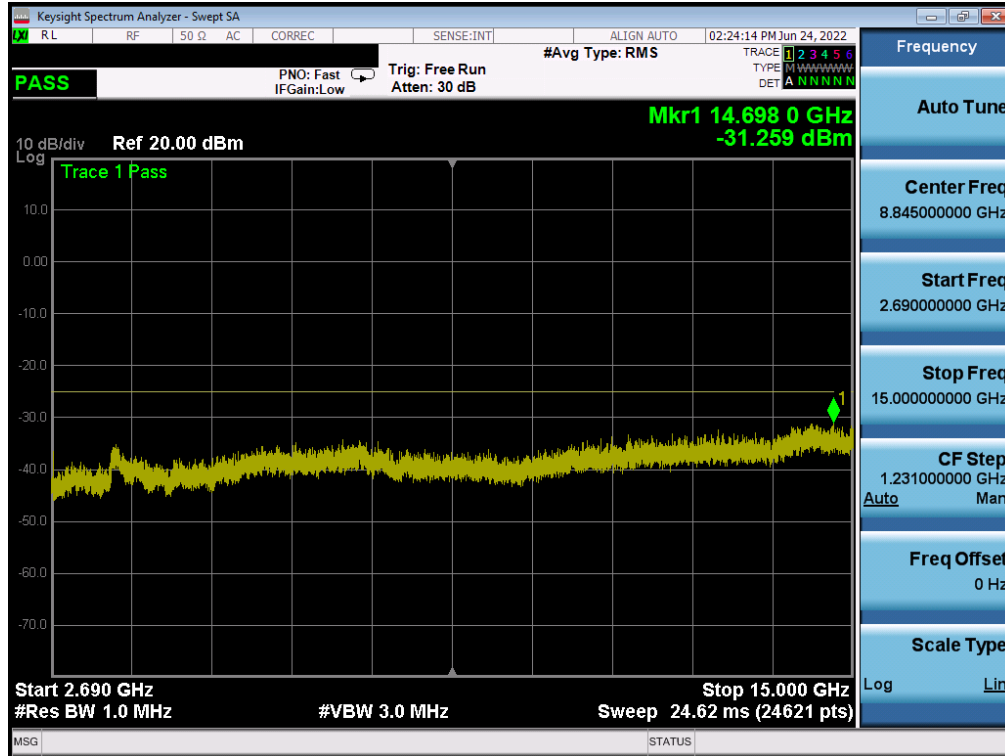


Plot 7-23. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

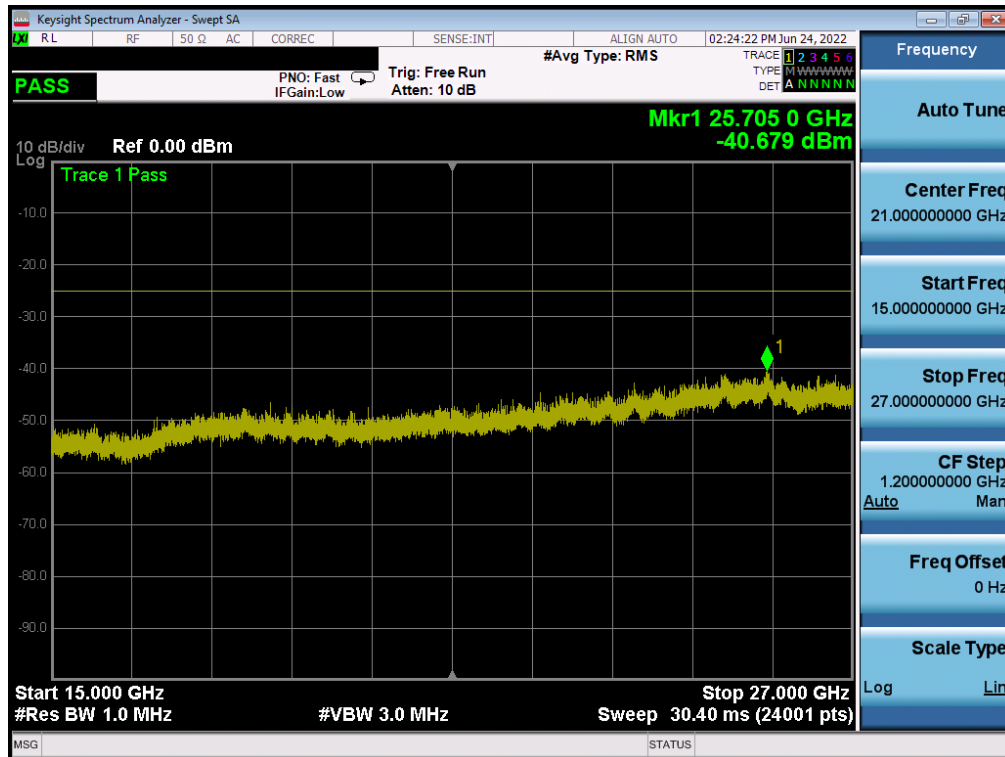


Plot 7-24. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 - 07/08/2022	EUT Type: Portable Handset	Page 26 of 50

V2.0 3/28/2021

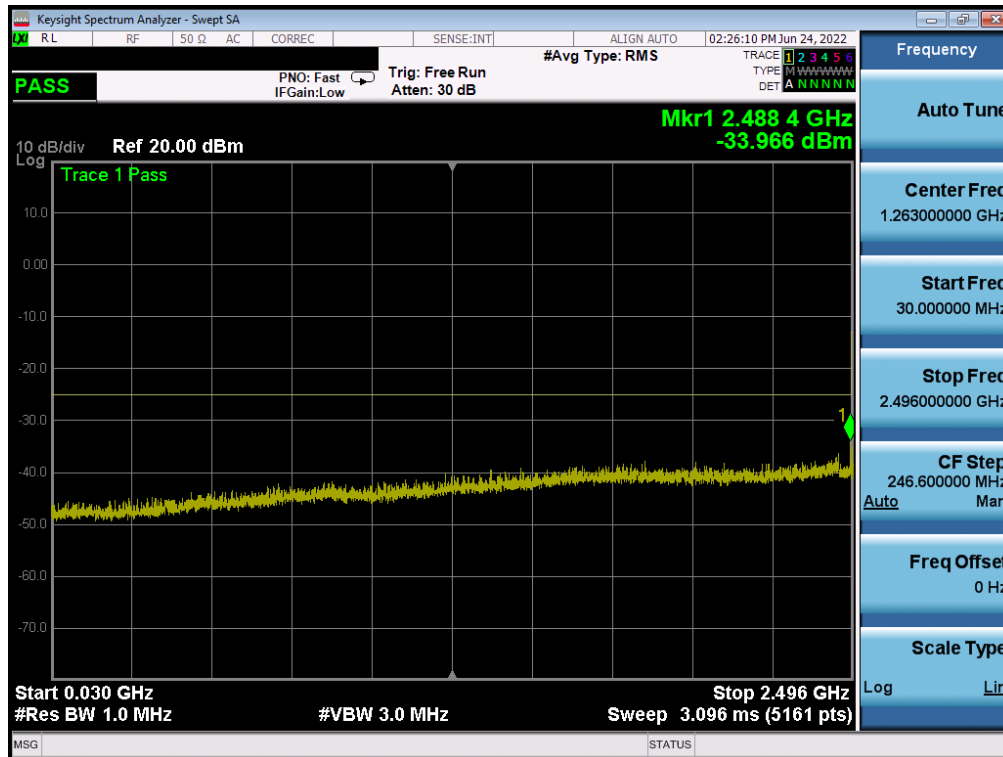


Plot 7-25. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

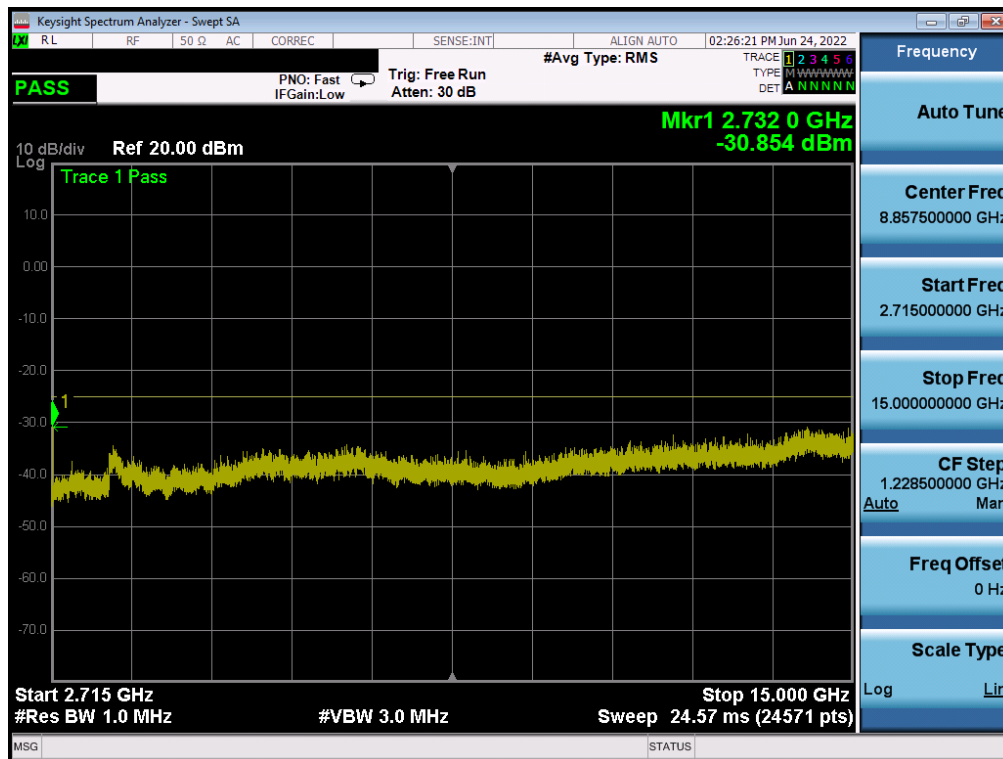

Plot 7-26. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 - 07/08/2022	EUT Type: Portable Handset	Page 27 of 50

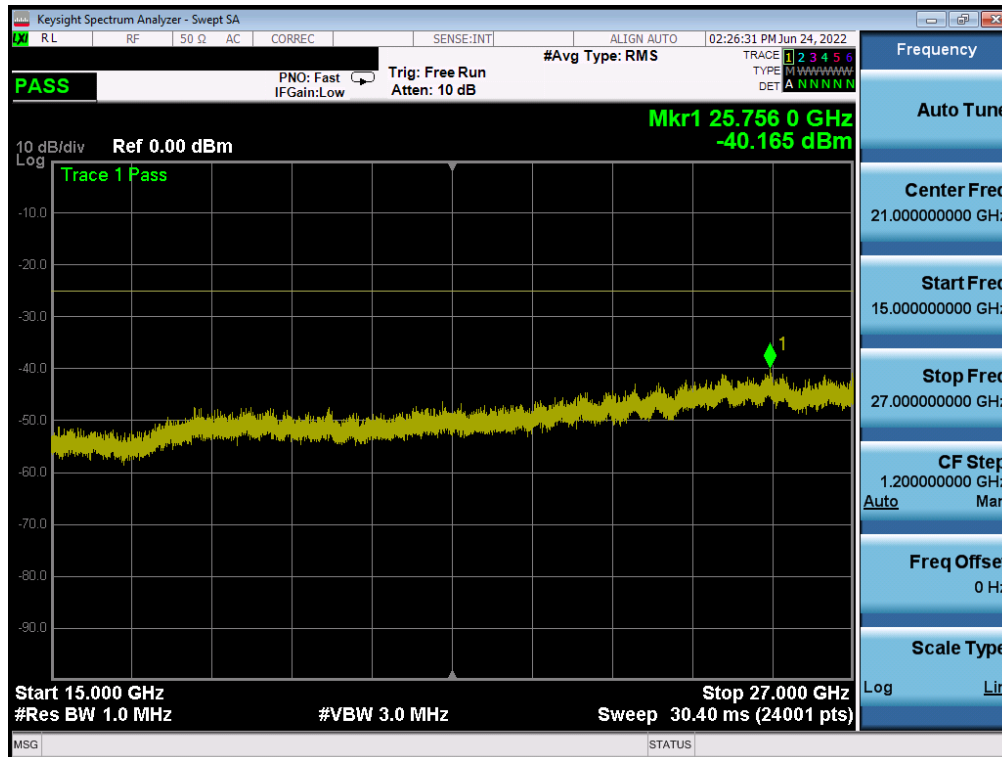

Plot 7-27. Conducted Spurious Plot (ULCA LTE B41(PC3) - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 28 of 50

V2.0 3/28/2021

7.5 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The minimum permissible attenuation level for Band 41 is as noted in the Test Notes on the following page.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

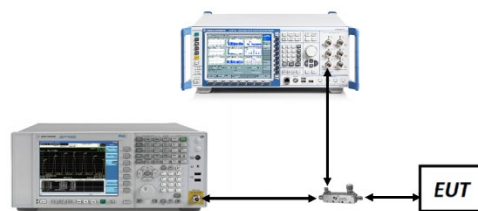


Figure 7-4. Test Instrument & Measurement Setup

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 29 of 50


V2.0 3/28/2021

Test Notes


1. Per 27.53(a)(5) in the 1 MHz bands immediately outside and adjacent to the channel blocks at 2305, 2310, 2315, 2320, 2345, 2350, 2355, and 2360 MHz, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
2. Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz.

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 30 of 50

LTE Band 41(PC3)

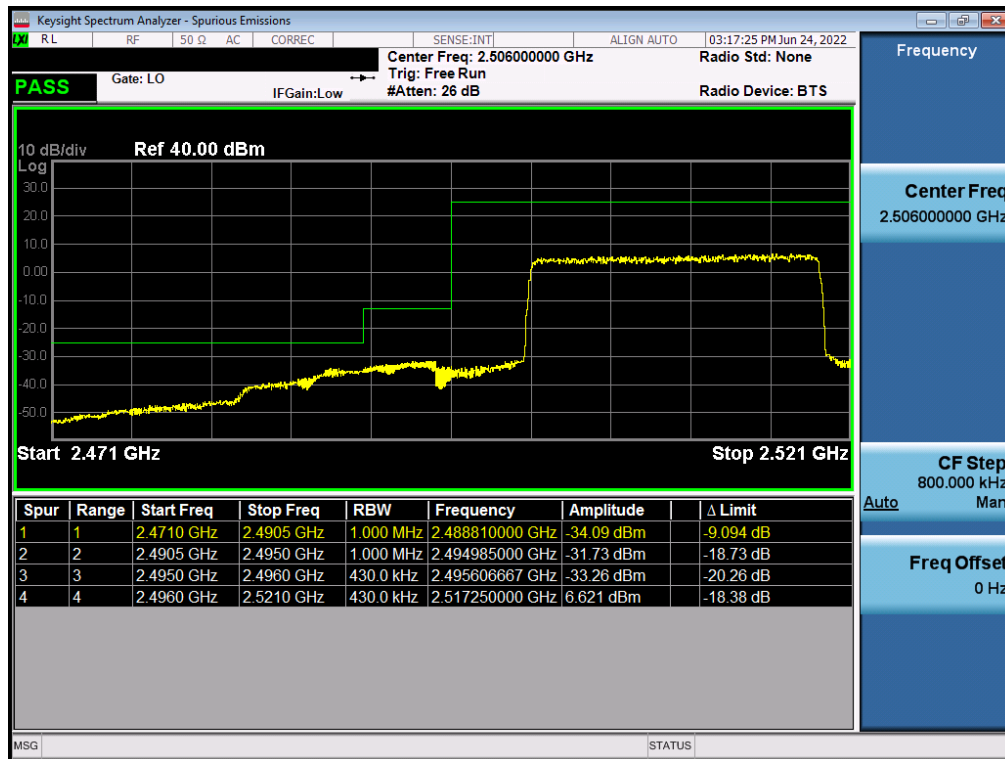


Plot 7-28. Lower ACP Plot (LTE Band 41(PC3) - 20MHz QPSK – Full RB)

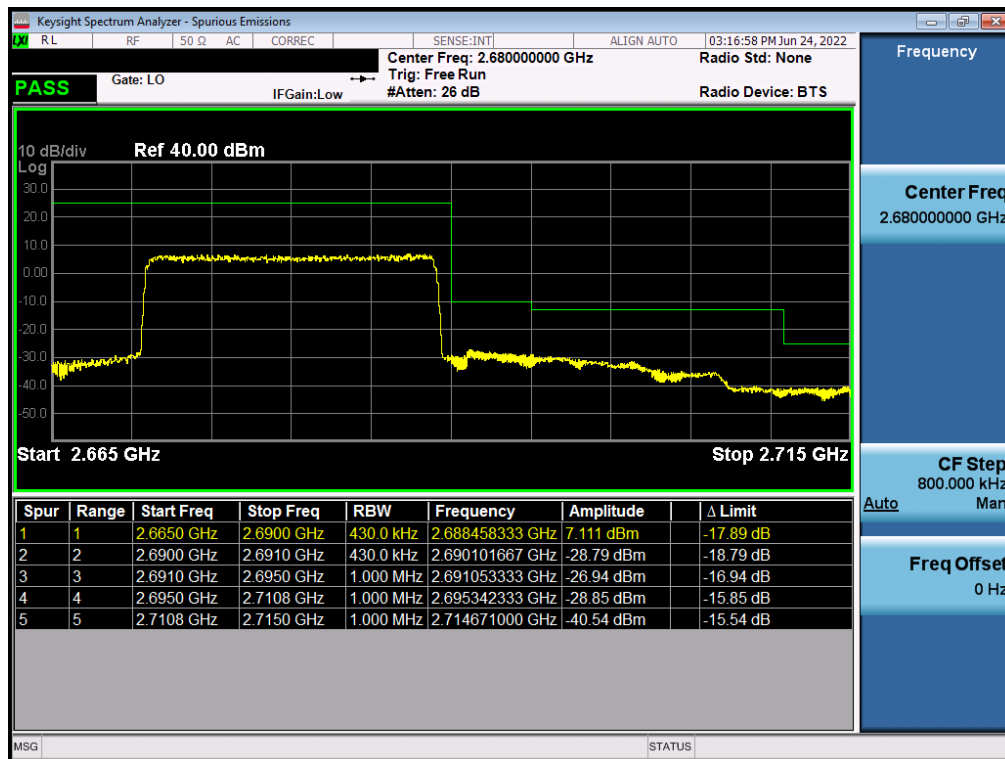


Plot 7-29. Upper ACP Plot (LTE Band 41(PC3) - 20MHz QPSK – Full RB)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 31 of 50

V2.0 3/28/2021

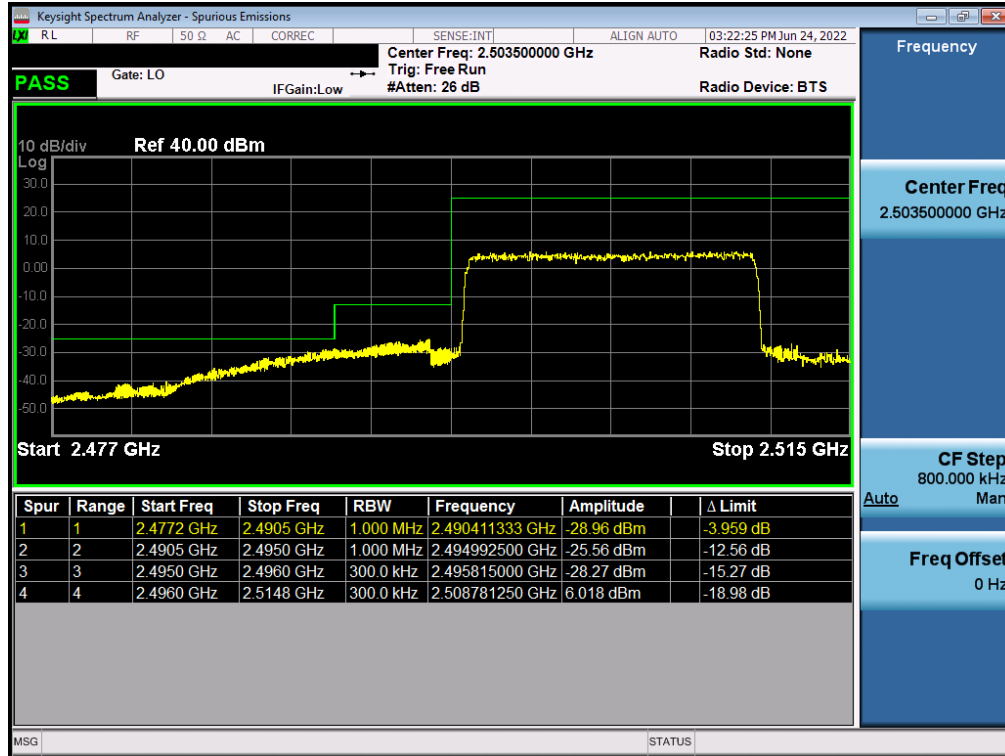


Plot 7-30. Lower ACP Plot (LTE Band 41(PC3) - 15MHz QPSK – Full RB)

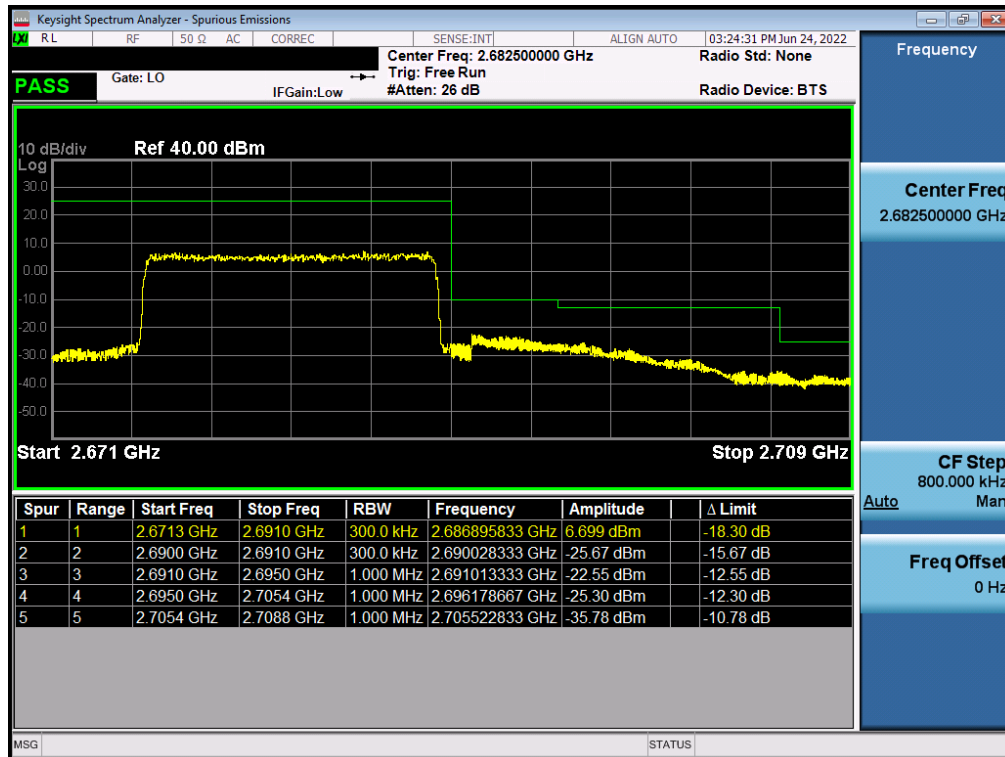


Plot 7-31. Upper ACP Plot (LTE Band 41(PC3) - 15MHz QPSK – Full RB)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 32 of 50

V2.0 3/28/2021

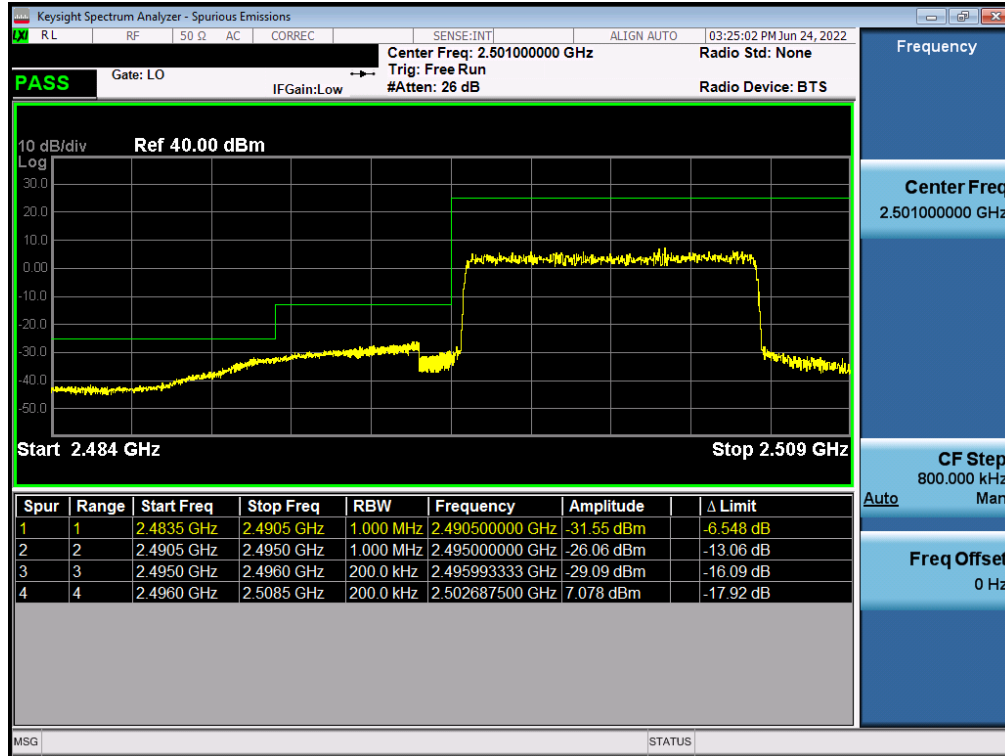


Plot 7-32. Lower ACP Plot (LTE Band 41(PC3) - 10MHz QPSK – Full RB)

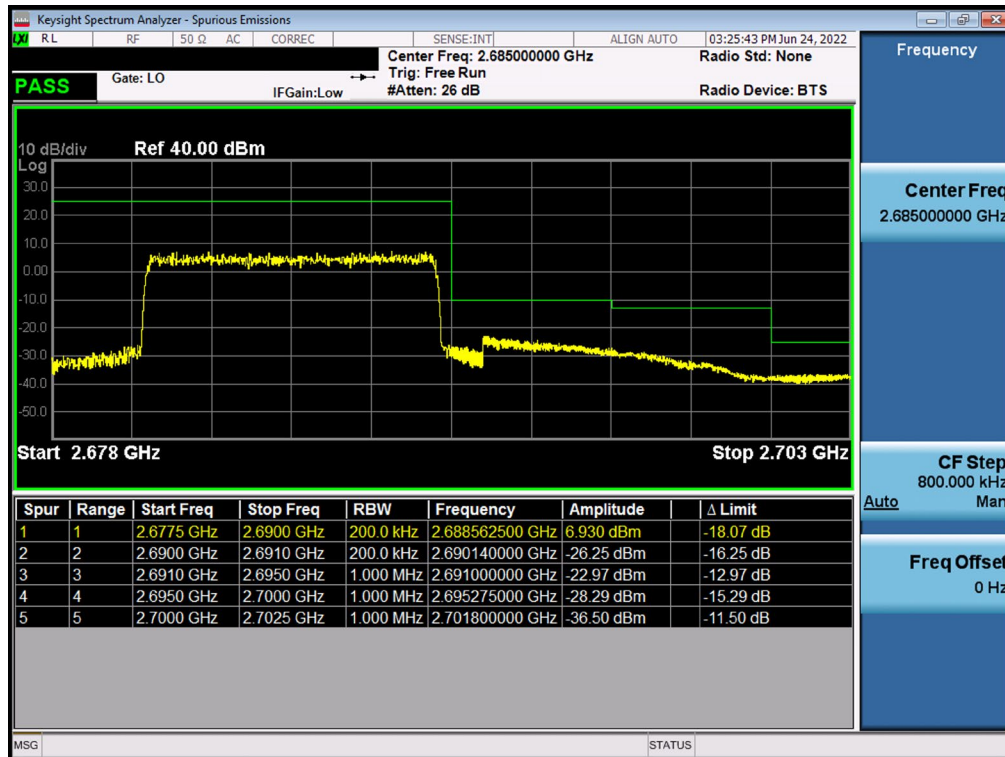

Plot 7-33. Upper ACP Plot (LTE Band 41(PC3) - 10MHz QPSK – Full RB)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 33 of 50

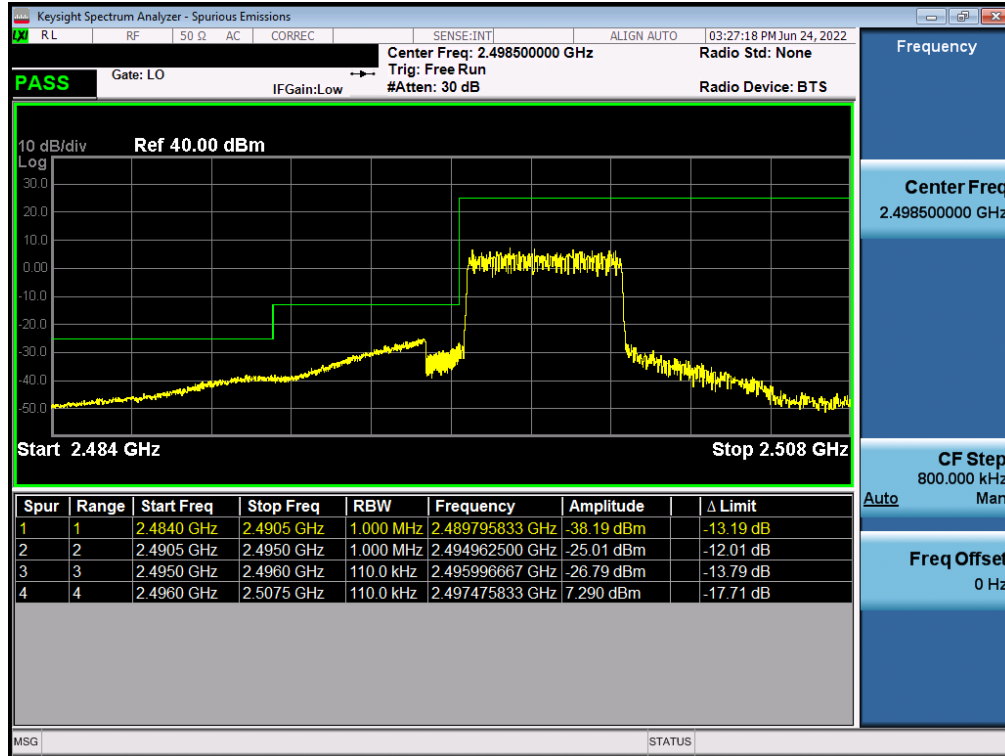

Plot 7-34. Lower ACP Plot (LTE Band 41(PC3) - 5MHz QPSK – Full RB)



Plot 7-35. Upper ACP Plot (LTE Band 41(PC3) - 5MHz QPSK – Full RB)

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 34 of 50

7.6 Radiated Power (EIRP)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 – Section 5.2.4.4

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize.

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 35 of 50

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

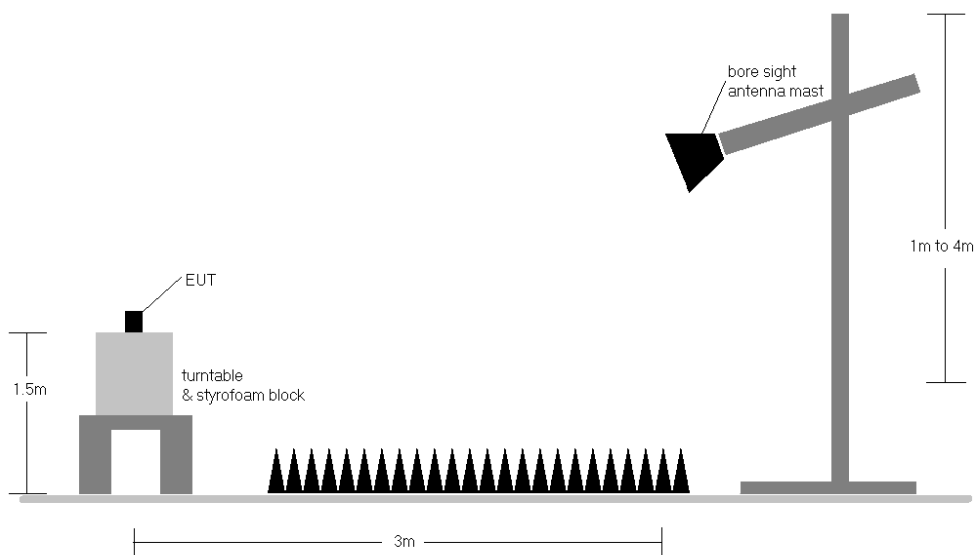


Figure 7-5. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 36 of 50

V2.0 3/28/2021

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	2506.0	H	150	201	9.40	1 / 50	15.40	24.80	0.302	33.01	-8.21
	QPSK	2593.0	H	160	202	9.53	1 / 50	16.12	25.65	0.367	33.01	-7.37
	QPSK	2680.0	H	157	215	9.65	1 / 99	14.87	24.52	0.283	33.01	-8.49
	16-QAM	2593.0	H	160	202	9.53	1 / 50	15.61	25.14	0.326	33.01	-7.88
15 MHz	QPSK	2503.5	H	150	201	9.39	1 / 37	15.26	24.66	0.292	33.01	-8.35
	QPSK	2593.0	H	160	202	9.53	1 / 0	16.29	25.82	0.382	33.01	-7.20
	QPSK	2682.5	H	157	215	9.65	1 / 37	14.76	24.41	0.276	33.01	-8.60
	16-QAM	2593.0	H	160	202	9.53	1 / 0	15.34	24.87	0.307	33.01	-8.15
10 MHz	QPSK	2501.0	H	150	201	9.39	1 / 25	14.70	24.09	0.256	33.01	-8.92
	QPSK	2593.0	H	160	202	9.53	1 / 25	16.09	25.62	0.364	33.01	-7.40
	QPSK	2685.0	H	157	215	9.66	1 / 25	14.78	24.44	0.278	33.01	-8.57
	16-QAM	2593.0	H	160	202	9.53	1 / 25	15.45	24.98	0.314	33.01	-8.04
5 MHz	QPSK	2498.5	H	150	201	9.39	1 / 12	15.20	24.59	0.288	33.01	-8.42
	QPSK	2593.0	H	160	202	9.53	1 / 12	15.97	25.50	0.354	33.01	-7.52
	QPSK	2687.5	H	157	215	9.66	1 / 0	14.44	24.10	0.257	33.01	-8.91
	16-QAM	2593.0	H	160	202	9.53	1 / 12	15.13	24.66	0.292	33.01	-8.36
15 MHz	QPSK (Opposite Pol.)	2593.0	V	197	284	9.53	1 / 0	14.31	23.84	0.242	33.01	-9.18
	QPSK (WCP)	2593.0	H	103	195	9.53	1 / 0	15.41	24.94	0.312	33.01	-8.08
20 MHz	QPSK (Half Open)	2506.0	H	126	199	9.40	1 / 99	16.08	25.48	0.353	33.01	-7.53

Table 7-2. EIRP Data (LTE Band 41(PC3)) – OPEN

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 37 of 50

V2.0 3/28/2021

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 38 of 50

V2.0 3/28/2021

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

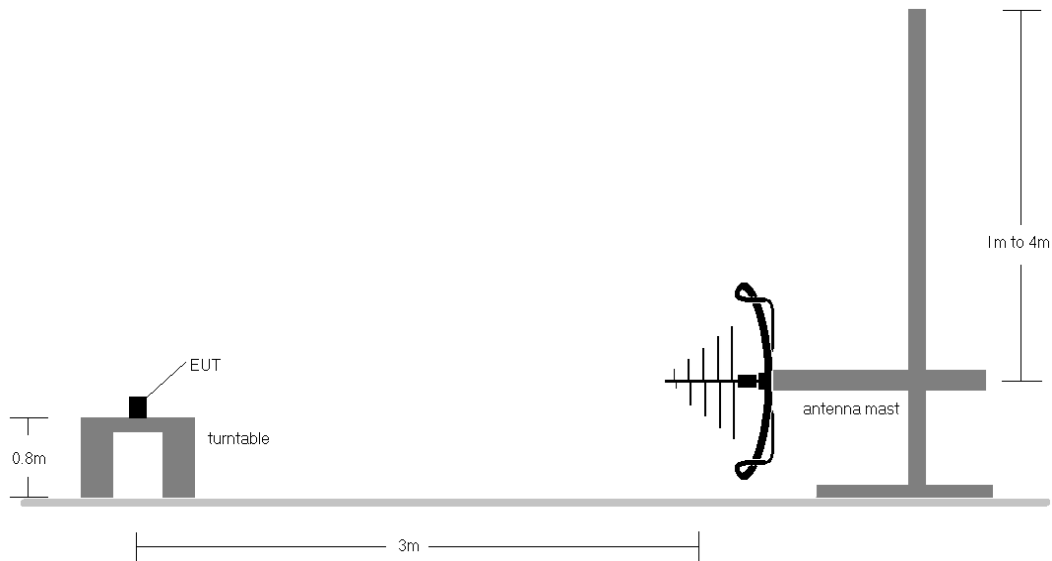


Figure 7-6. Test Instrument & Measurement Setup < 1GHz

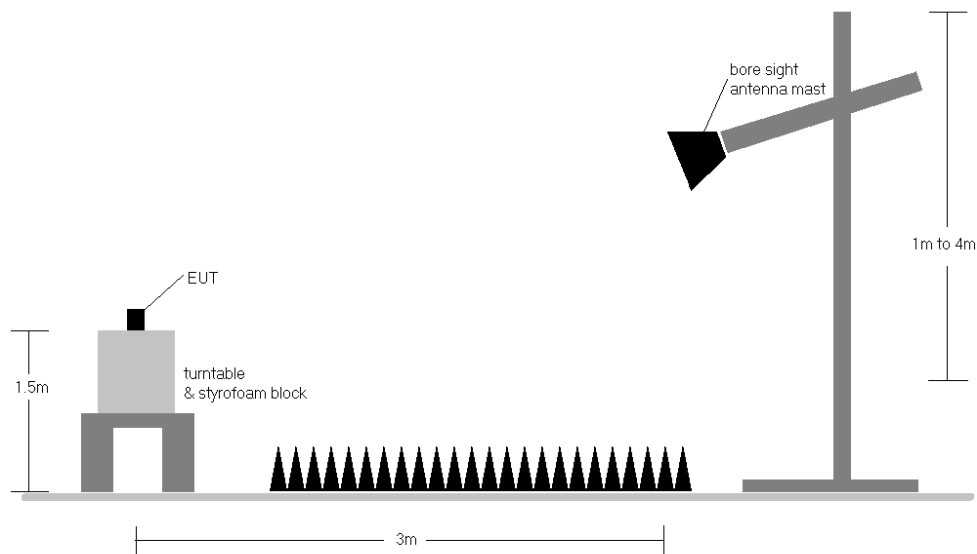


Figure 7-7. Test Instrument & Measurement Setup >1 GHz

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 39 of 50

V2.0 3/28/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
 - a) $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst-case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.
- 7) ULCA spurious emissions measurements were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 40 of 50

LTE Band 41(PC3)

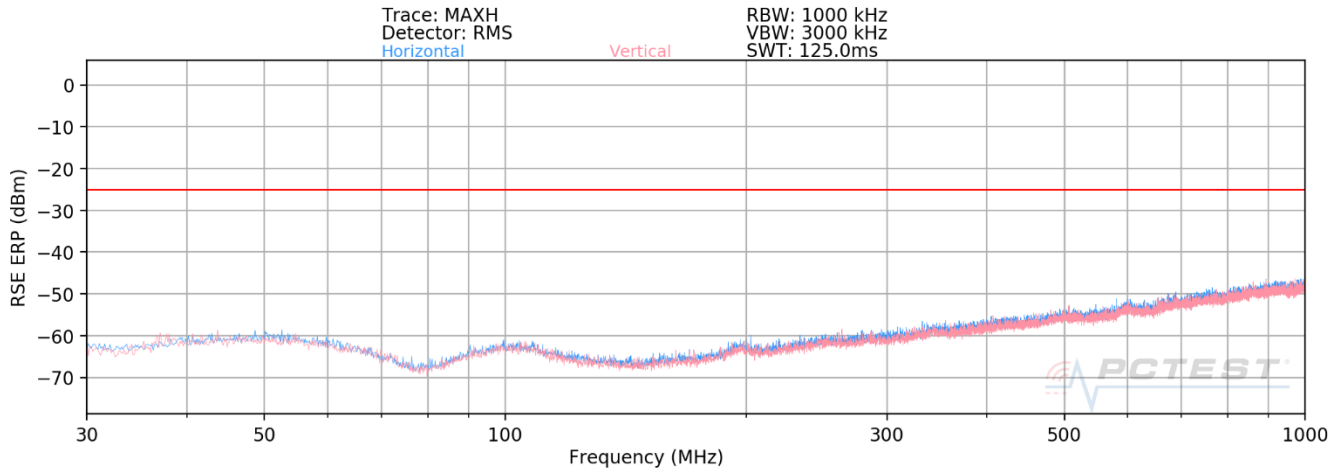


Plot 7-36. Radiated Spurious Plot Below 1GHz (LTE Band 41(PC3)) – CLOSE

Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
832.87	V	-	-	-74.14	24.14	57.00	-38.25	-25.00	-13.25


Table 7-3. Radiated Spurious Data (LTE Band 41(PC3)) – CLOSE

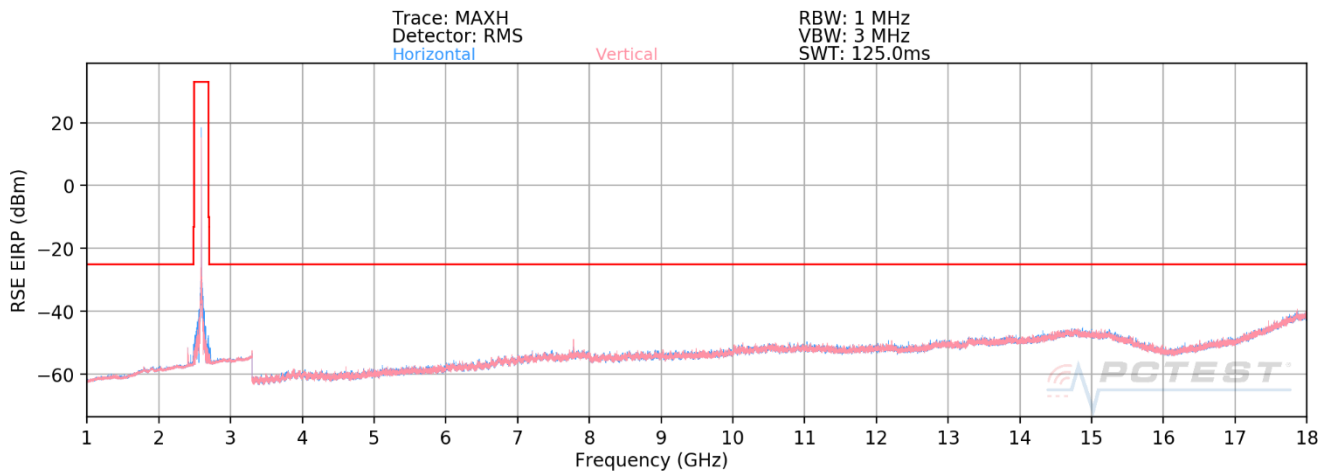


Plot 7-37. Radiated Spurious Plot Above 1GHz (LTE Band 41(PC3)) – CLOSE

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 41 of 50

V2.0 3/28/2021

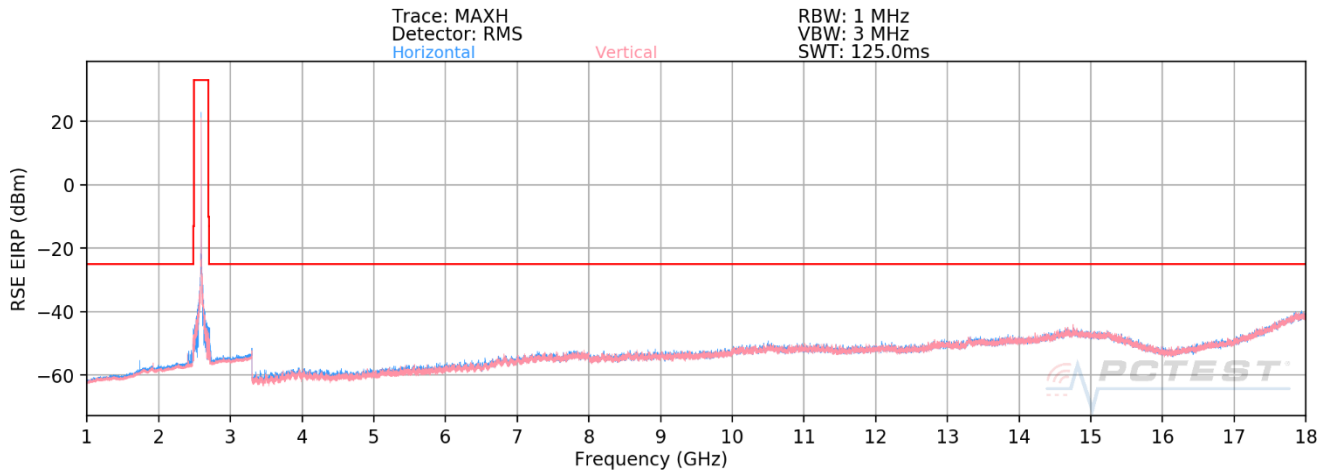


Plot 7-38. Radiated Spurious Plot Above 1GHz (LTE Band 41(PC3)) – OPEN

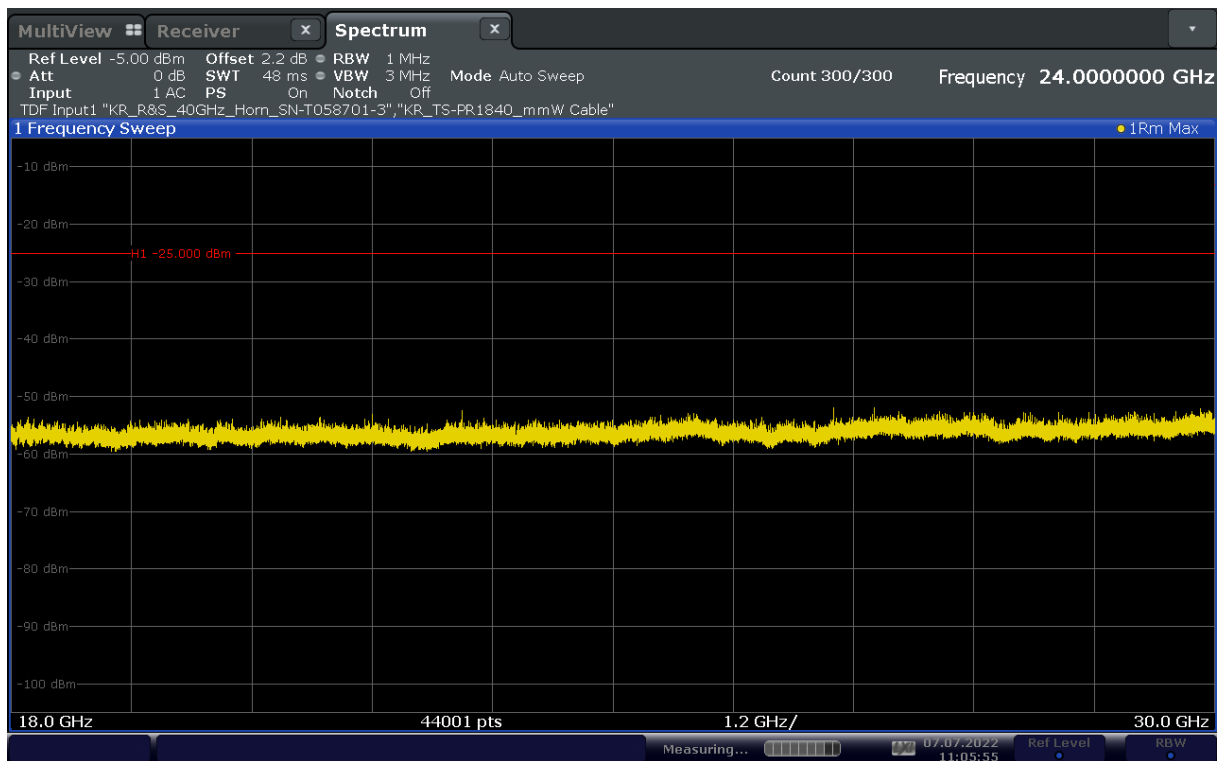

Plot 7-39. Radiated Spurious Plot Above 1GHz (LTE Band 41(PC3)) – H Pol. – CLOSE

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 42 of 50

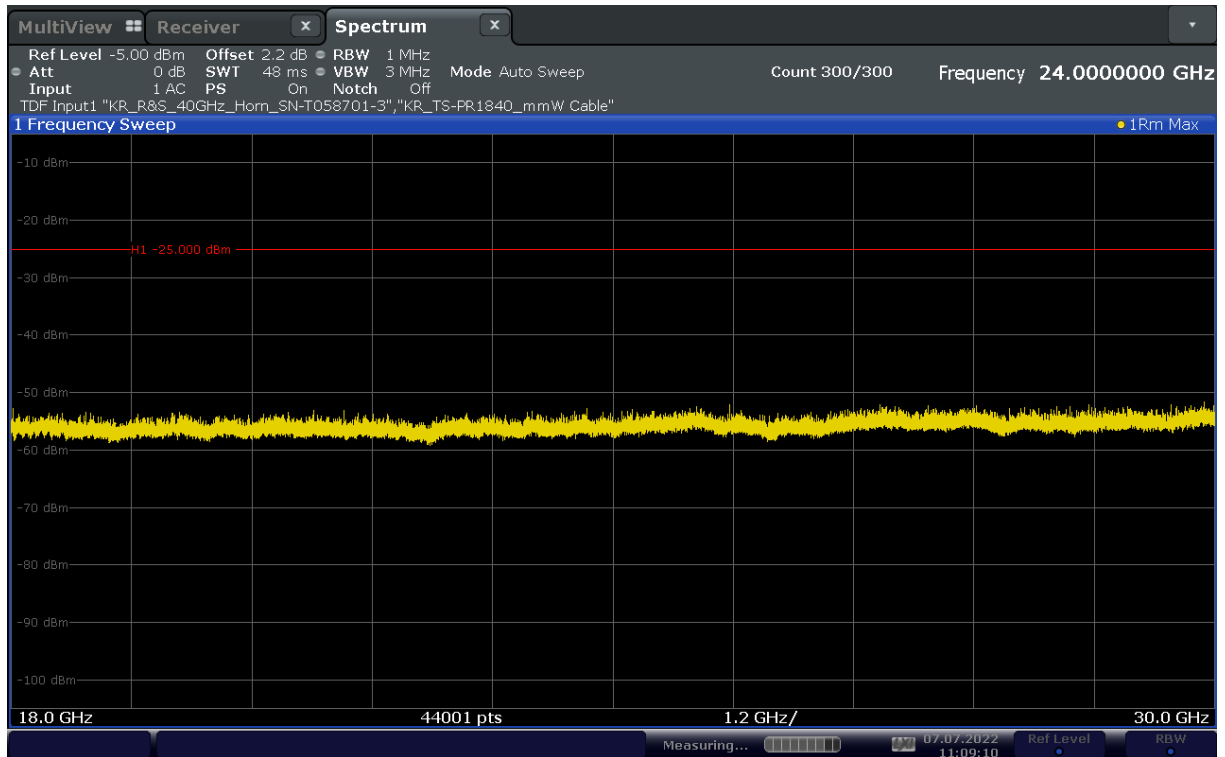

Plot 7-40. Radiated Spurious Plot Above 1GHz (LTE Band 41(PC3)) – V Pol. – CLOSE

Bandwidth (MHz):	20
Frequency (MHz):	2506.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.00	V	-	-	-68.67	2.48	40.81	-54.45	-25.00	-29.45
7518.00	V	101	195	-65.33	9.00	50.67	-44.59	-25.00	-19.59
10024.00	V	-	-	-74.29	13.00	45.71	-49.55	-25.00	-24.55
12530.00	V	-	-	-76.06	15.77	46.71	-48.55	-25.00	-23.55
15036.00	V	-	-	-76.12	19.82	50.70	-44.56	-25.00	-19.56
17542.00	V	-	-	-76.58	22.53	52.95	-42.31	-25.00	-17.31
20048.00	V	-	-	-53.85	-3.54	49.61	-55.19	-25.00	-30.19
22554.00	V	-	-	-53.00	-3.83	50.17	-54.63	-25.00	-29.63

Table 7-4. Radiated Spurious Data (LTE Band 41(PC3) – Low Channel) – CLOSE

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 43 of 50

V2.0 3/28/2021

Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.00	V	110	218	-68.42	3.11	41.69	-53.57	-25.00	-28.57
7779.00	V	106	234	-65.34	10.42	52.08	-43.18	-25.00	-18.18
10372.00	V	-	-	-75.85	14.15	45.30	-49.96	-25.00	-24.96
12965.00	V	-	-	-76.60	17.05	47.45	-47.81	-25.00	-22.81
15558.00	V	-	-	-75.81	16.65	47.84	-47.42	-25.00	-22.42
18151.00	V	-	-	-53.53	-3.19	50.28	-54.52	-25.00	-29.52
20744.00	V	-	-	-53.79	-3.62	49.59	-55.21	-25.00	-30.21
23337.00	V	-	-	-53.35	-3.83	49.82	-54.98	-25.00	-29.98

Table 7-5. Radiated Spurious Data (LTE Band 41(PC3) – Mid Channel) – CLOSE

Bandwidth (MHz):	20
Frequency (MHz):	2680.0
RB / Offset:	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.00	V	111	291	-69.59	3.72	41.13	-54.13	-25.00	-29.13
8040.00	V	103	262	-66.33	10.03	50.70	-44.56	-25.00	-19.56
10720.00	V	-	-	-75.20	14.42	46.22	-49.04	-25.00	-24.04
13400.00	V	-	-	-77.36	17.90	47.54	-47.72	-25.00	-22.72
16080.00	V	-	-	-76.88	14.73	44.85	-50.41	-25.00	-25.41
18760.00	V	-	-	-54.31	-3.61	49.08	-55.72	-25.00	-30.72
21440.00	V	-	-	-53.95	-3.71	49.34	-55.46	-25.00	-30.46
24120.00	V	-	-	-53.39	-3.55	50.06	-54.74	-25.00	-29.74

Table 7-6. Radiated Spurious Data (LTE Band 41(PC3) – High Channel) – CLOSE

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 44 of 50

V2.0 3/28/2021

ULCA – LTE Band 41(PC3)

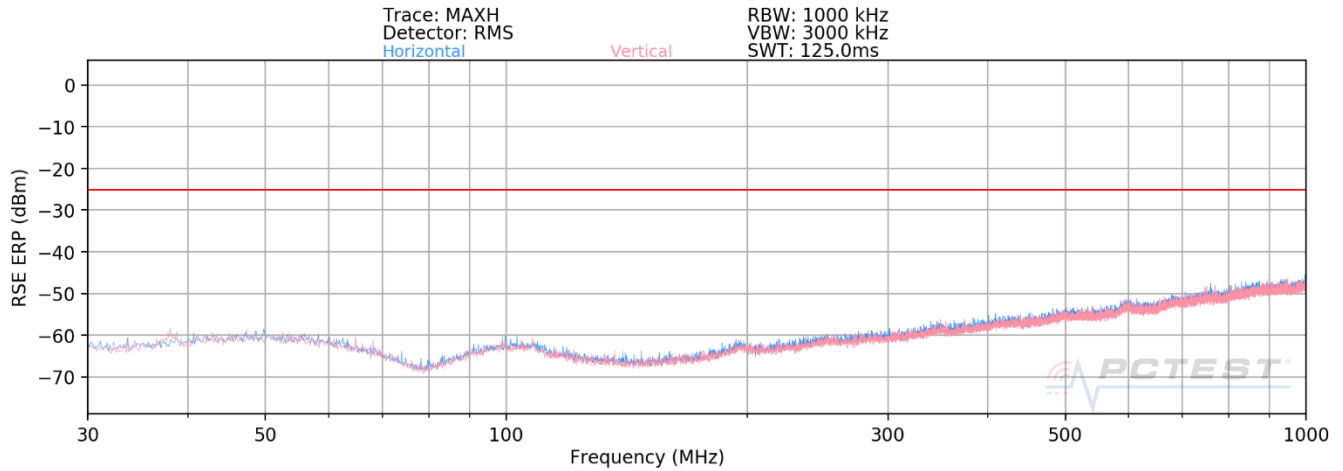


Plot 7-41. Radiated Spurious Plot Below 1GHz (ULCA LTE Band 41(PC3)) – CLOSE

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2593.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2612.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
940.43	H	-	-	-74.57	25.27	57.70	-37.56	-25.00	-12.56


Table 7-7. Radiated Spurious Data (ULCA LTE Band 41(PC3)) – CLOSE

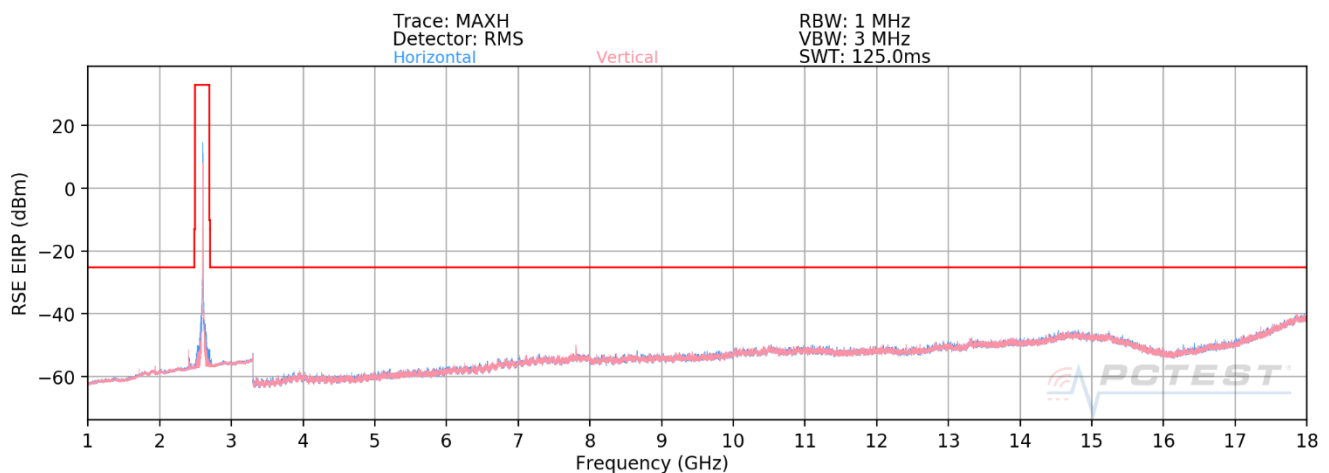

Plot 7-42. Radiated Spurious Plot Above 1GHz (ULCA LTE Band 41(PC3)) – CLOSE

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 45 of 50

V2.0 3/28/2021

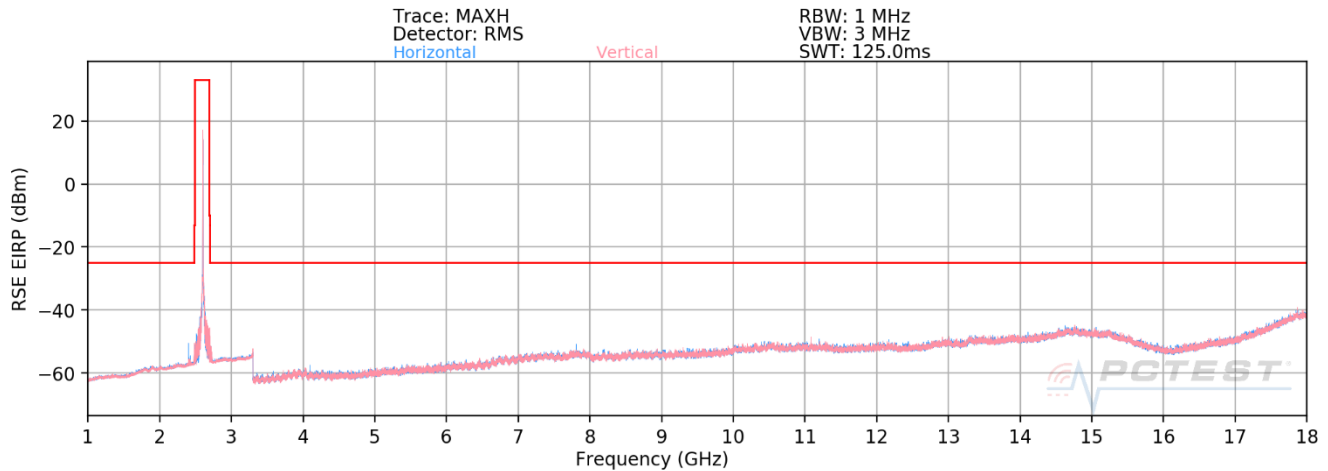

Plot 7-43. Radiated Spurious Plot Above 1GHz (ULCA LTE Band 41(PC3)) – OPEN

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2506.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2525.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.00	H	143	184	-69.38	2.45	40.07	-55.19	-25.00	-30.19
7518.00	H	127	158	-61.42	9.06	54.64	-40.62	-25.00	-15.62
10024.00	H	-	-	-75.47	13.85	45.38	-49.88	-25.00	-24.88
12530.00	H	-	-	-77.10	15.70	45.60	-49.66	-25.00	-24.66
15036.00	H	-	-	-77.19	19.74	49.55	-45.71	-25.00	-20.71

Table 7-8. Radiated Spurious Data (ULCA LTE Band 41(PC3) – Low Channel) – CLOSE

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2593.0
PCC RB / Offset:	1 / 99
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2612.8
SCC RB / Offset:	1 / 0

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.00	H	109	128	-69.66	3.11	40.45	-54.81	-25.00	-29.81
7779.00	H	103	135	-68.35	10.42	49.07	-46.19	-25.00	-21.19
10372.00	H	-	-	-76.92	14.15	44.23	-51.03	-25.00	-26.03
12965.00	H	-	-	-78.27	17.05	45.78	-49.48	-25.00	-24.48
15558.00	H	-	-	-76.99	16.65	46.66	-48.60	-25.00	-23.60

Table 7-9. Radiated Spurious Data (ULCA LTE Band 41(PC3) – Mid Channel) – CLOSE

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 46 of 50

PCC Bandwidth (MHz):	20
PCC Frequency (MHz):	2680.0
PCC RB / Offset:	1 / 0
SCC Bandwidth (MHz):	20
SCC Frequency (MHz):	2660.2
SCC RB / Offset:	1 / 99

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.00	H	136	127	-69.84	3.72	40.88	-54.38	-25.00	-29.38
8040.00	H	106	139	-73.28	10.03	43.75	-51.51	-25.00	-26.51
10720.00	H	-	-	-76.56	14.42	44.86	-50.40	-25.00	-25.40
13400.00	H	-	-	-77.16	17.90	47.74	-47.52	-25.00	-22.52
16080.00	H	-	-	-76.60	14.73	45.13	-50.13	-25.00	-25.13

Table 7-10. Radiated Spurious Data (ULCA LTE Band 41(PC3) – High Channel) – CLOSE

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 47 of 50

V2.0 3/28/2021

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015 – Section 5.6

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes


None

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 48 of 50

LTE Band 41(PC3)

LTE Band 41					
Operating Frequency (Hz):			2,593,000,000		
Ref. Voltage (VDC):			4.25		
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.25	- 30	2,592,999,984	-3	-0.0000001
		- 20	2,592,999,959	-28	-0.0000011
		- 10	2,592,999,981	-6	-0.0000002
		0	2,592,999,986	-1	0.0000000
		+ 10	2,592,999,984	-4	-0.0000001
		+ 20 (Ref)	2,592,999,987	0	0.0000000
		+ 30	2,592,999,984	-3	-0.0000001
		+ 40	2,592,999,980	-7	-0.0000003
		+ 50	2,592,999,974	-13	-0.0000005
Battery Endpoint	3.58	+ 20	2,592,999,983	-4	-0.0000001

Table 7-17. LTE Band 41(PC3) Frequency Stability Data

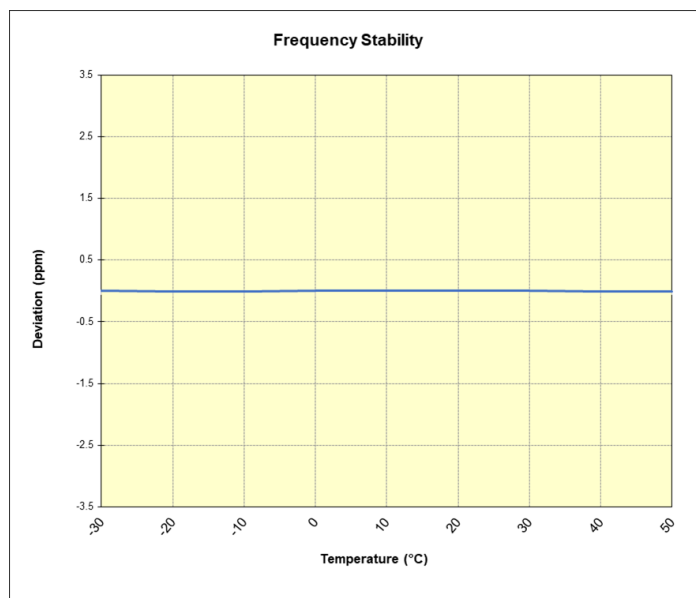

Plot 7-64. LTE Band 41(PC3) Frequency Stability Chart

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 49 of 50

V2.0 3/28/2021

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF721JPN** complies with all the requirements of Part 27 of the FCC rules.

FCC ID: A3LSMF721JPN	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2206140073-04.A3L	Test Dates: 06/24 – 07/08/2022	EUT Type: Portable Handset	Page 50 of 50

V2.0 3/28/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.