



	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm/MHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Antenna Gain [dBi]	EIRP Power Density [dBm/MHz]	Max EIRP Power Density [dBm/MHz]	Margin [dB]
Band 3/4	5845	169	ax (20MHz)	242T	MCS0	4.30	30.00	-25.70	-6.00	-1.70	14.00	-15.70
Band 4	5865	173	ax (20MHz)	242T	MCS0	4.21			-6.00	-1.79	14.00	-15.79
Band 3/4	5885	177	ax (20MHz)	242T	MCS0	4.32			-6.00	-1.68	14.00	-15.68
Band 3/4	5835	167	ax (40MHz)	484T	MCS0	1.51	30.00	-28.49	-6.00	-4.49	14.00	-18.49
Band 4	5875	175	ax (40MHz)	484T	MCS0	1.61			-6.00	-4.39	14.00	-18.39
Band 4	5855	171	ax (80MHz)	996T	MCS0	-1.43	30.00	-31.43	-6.00	-7.43	14.00	-21.43
Band 3/4	5815	163	ax (160MHz L)	996T	MCS0	-1.46	30.00	-31.46	-6.00	-7.46	14.00	-21.46
Band 3/4	5815	163	ax (160MHz U)	996T	MCS0	-0.75	30.00	-30.75	-6.00	-6.75	14.00	-20.75

**Table 7-91. Band 4 Conducted Power Spectral Density Measurements ANT2 (Full Tones)**

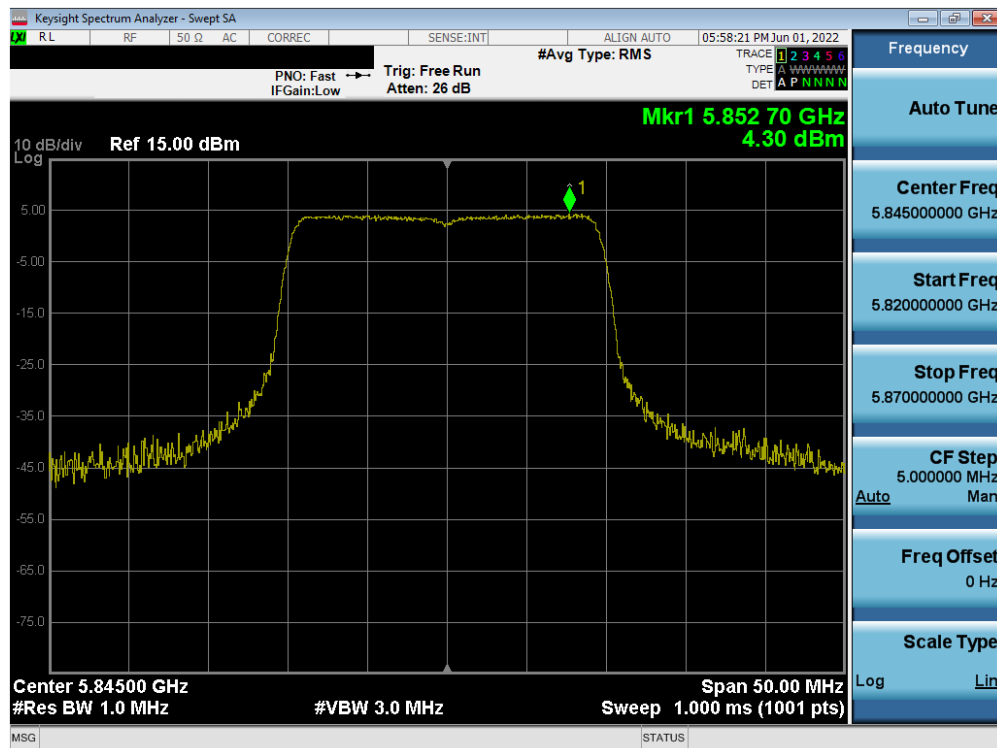


**Plot 7-305. Power Spectral Density Plot ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 169)**

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 219 of 313

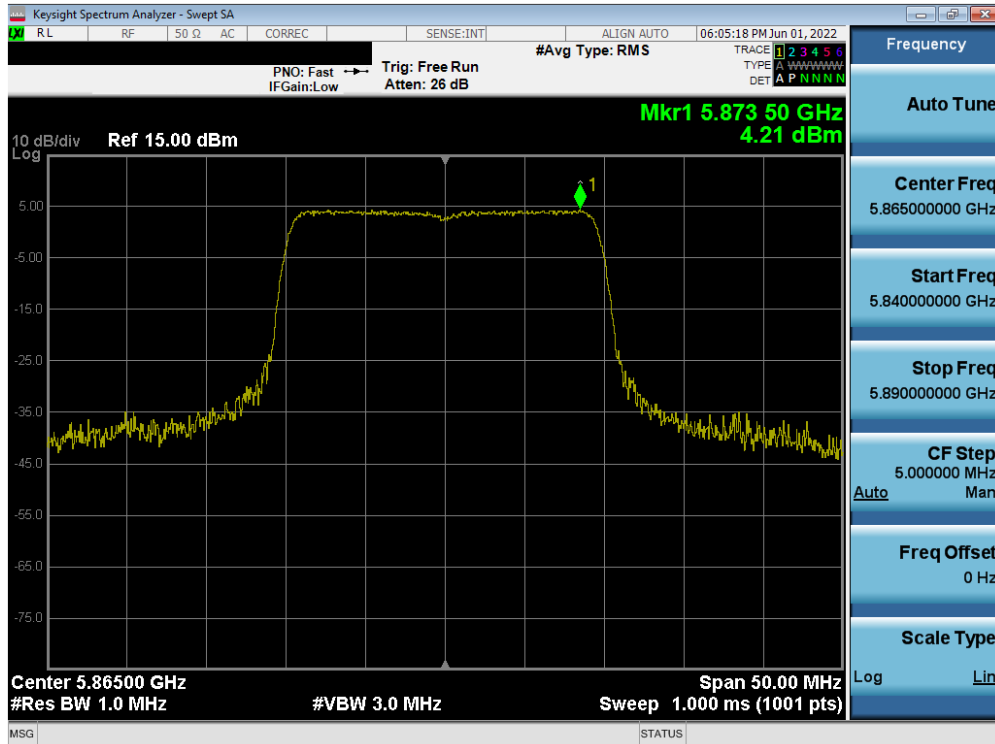


Plot 7-306. Power Spectral Density Plot ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 4) – Ch. 173)

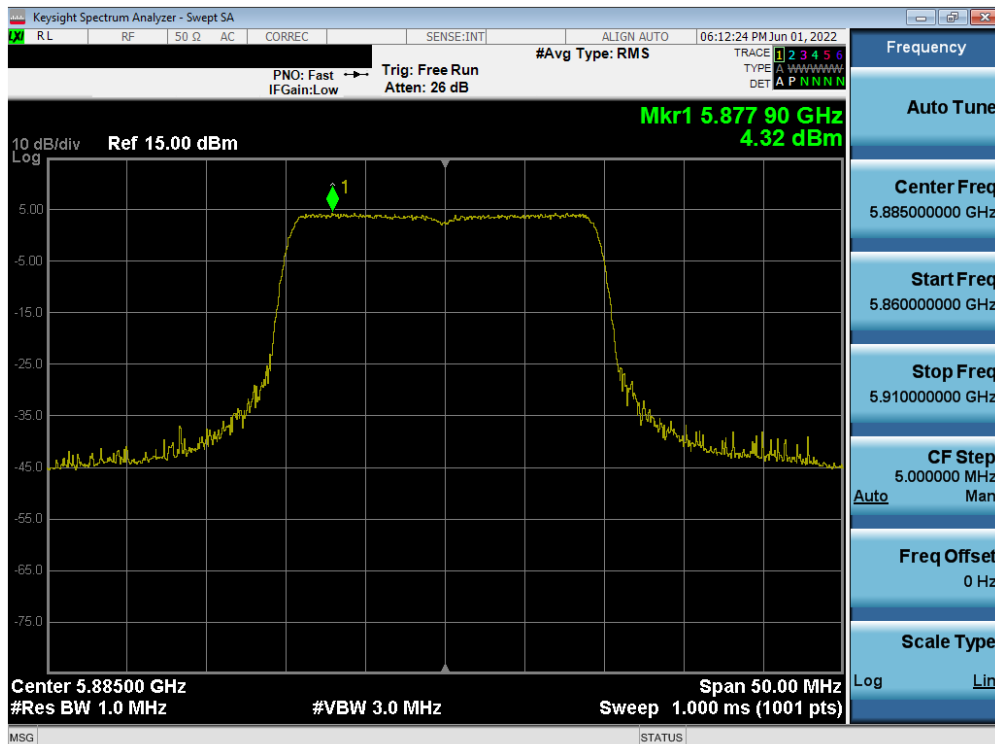


Plot 7-307. Power Spectral Density Plot ANT2 (20MHz BW 802.11ax – Full Tones (UNII Band 4) – Ch. 177)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1-A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 220 of 313

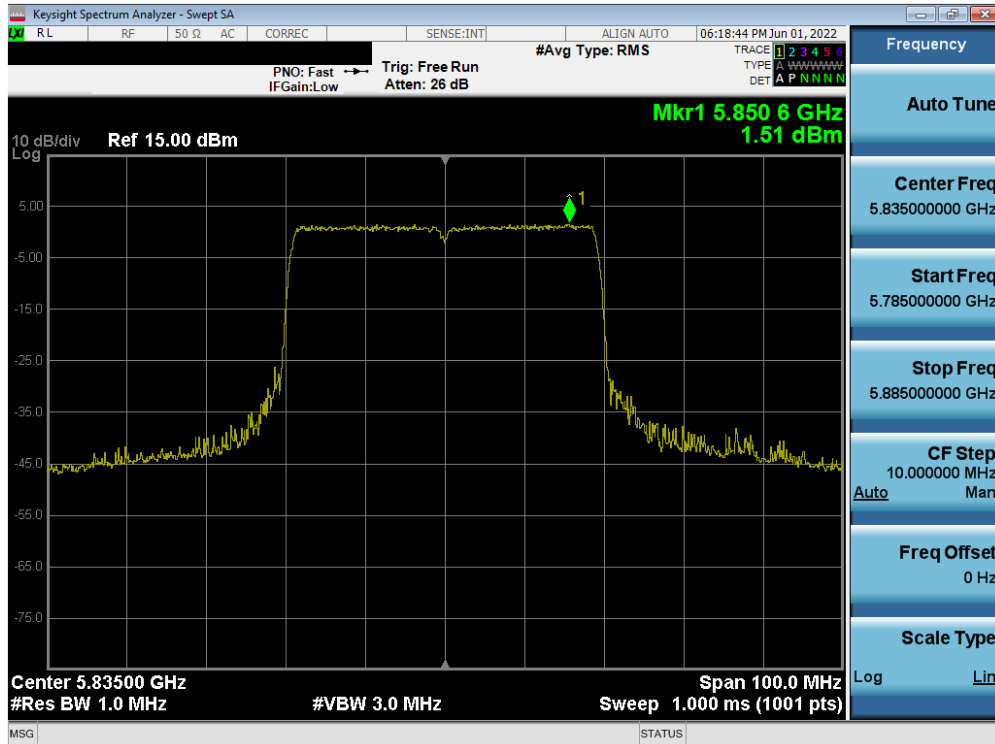


Plot 7-308. Power Spectral Density Plot ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 167)

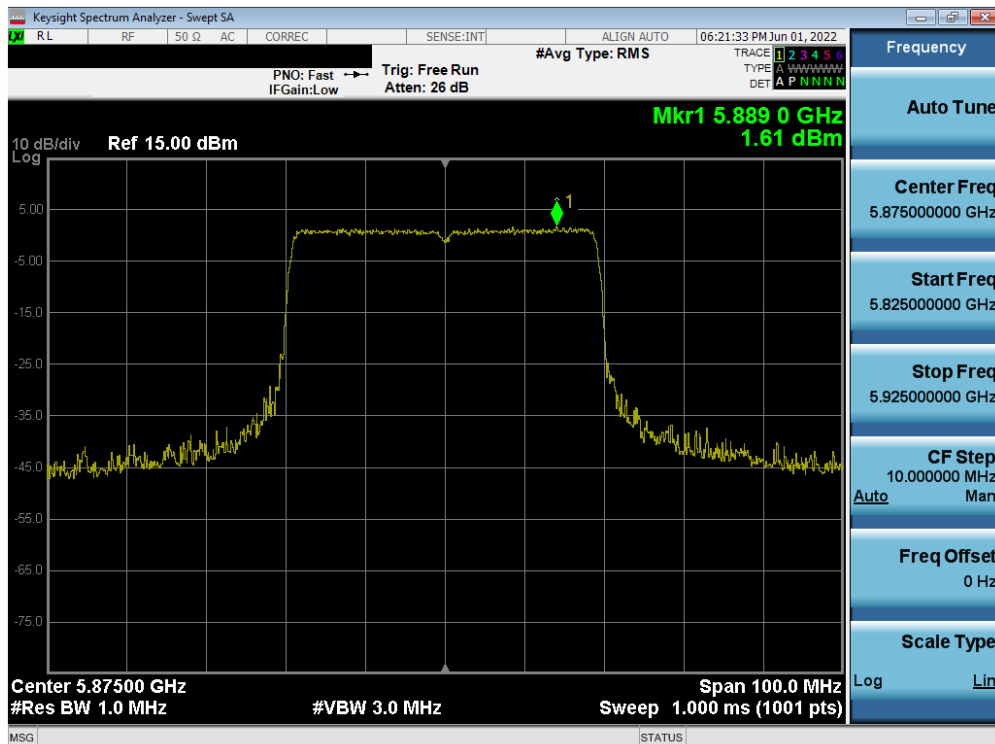


Plot 7-309. Power Spectral Density Plot ANT2 (40MHz BW 802.11ax – Full Tones (UNII Band 4) – Ch. 175)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 221 of 313

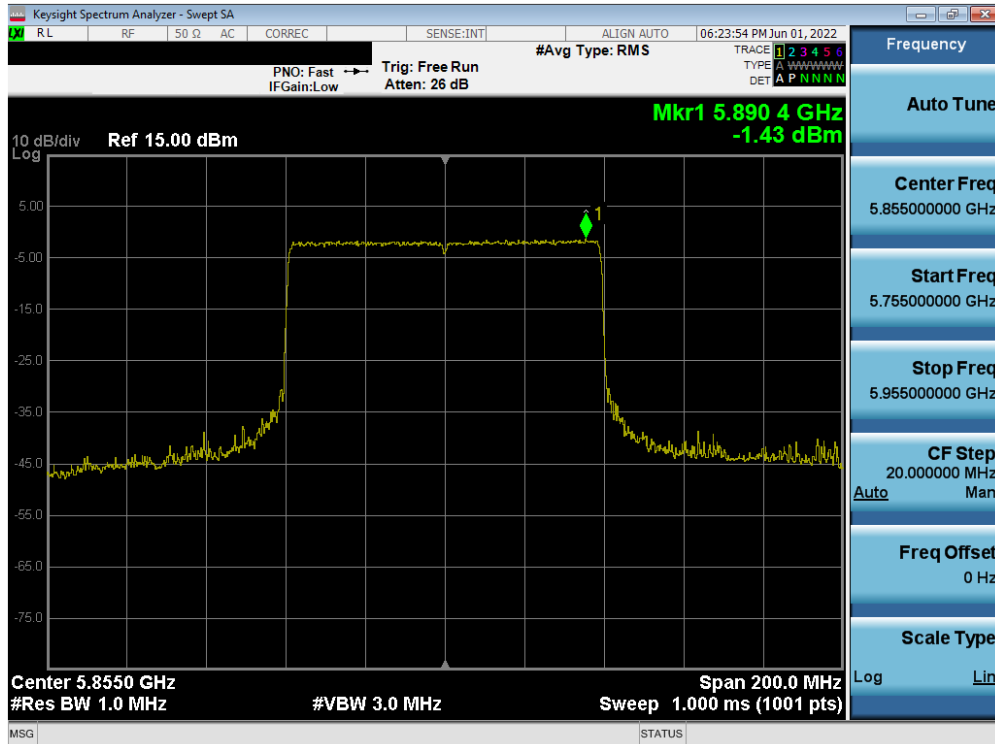


Plot 7-310. Power Spectral Density Plot ANT2 (80MHz BW 802.11ax – Full Tones (UNII Band 3/4) – Ch. 171)

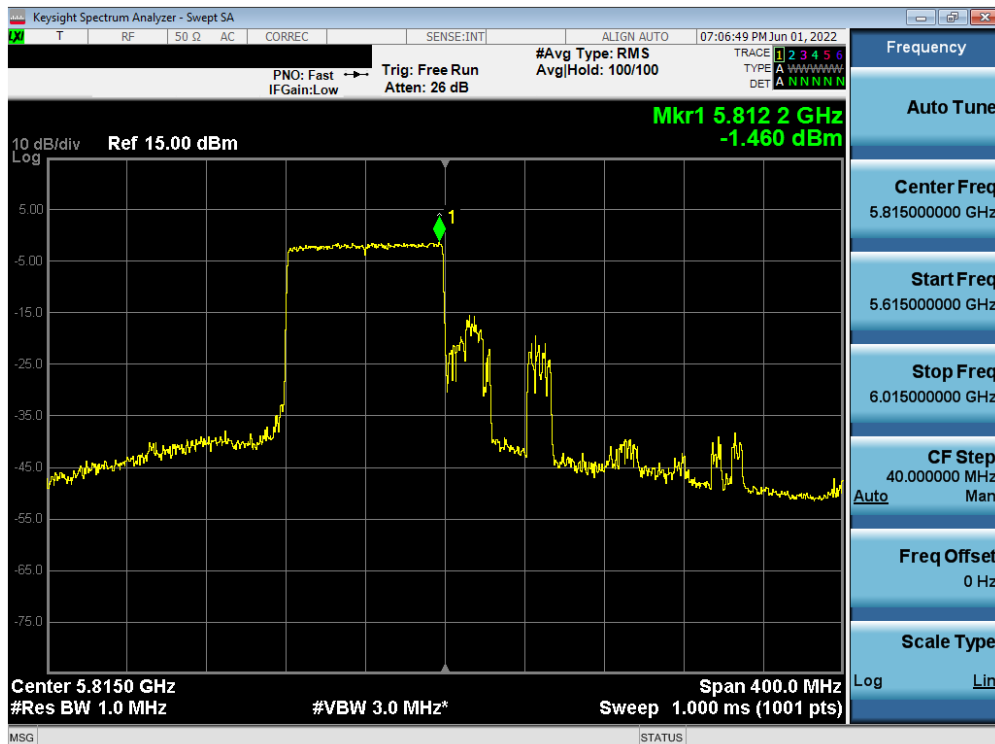

Plot 7-311. Power Spectral Density Plot ANT2 (160MHz BW (L) 802.11ax – Full Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1-A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 222 of 313

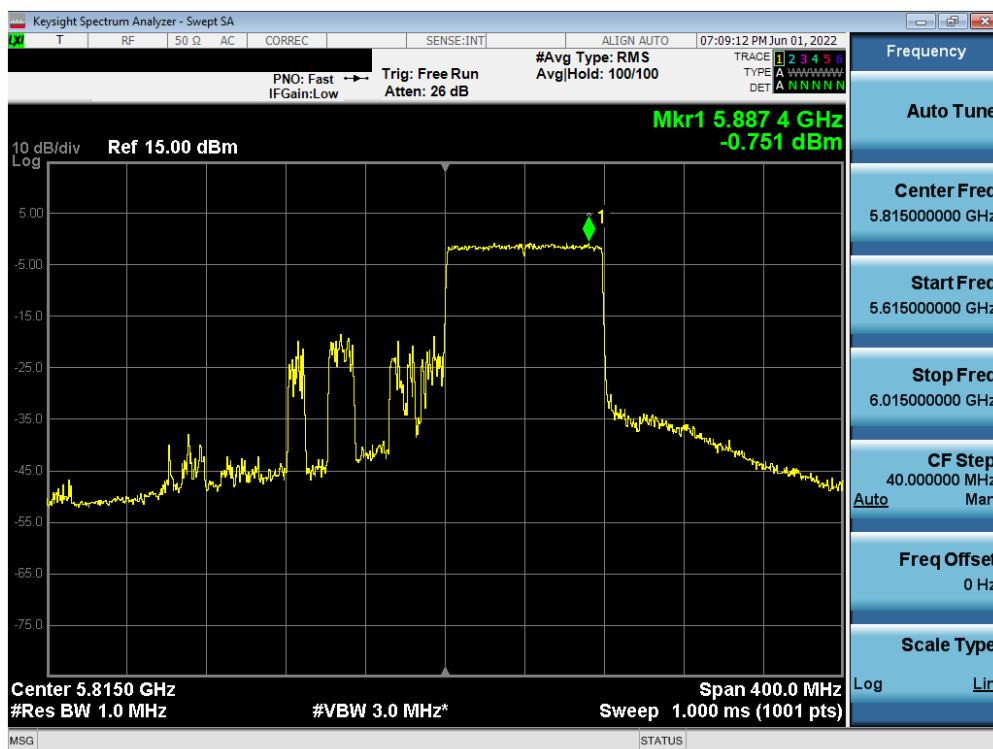

Plot 7-312. Power Spectral Density Plot ANT2 (160MHz BW (U) 802.11ax – Full Tones (UNII Band 3/4) – Ch. 163)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 223 of 313

V 9.0 02/01/2019

## Summed MIMO Power Spectral Density Measurements (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26T	MCS0	7.65	7.85	10.76	11.00	-0.24
	5200	40	ax (20MHz)	26T	MCS0	7.84	7.22	10.55	11.00	-0.45
	5240	48	ax (20MHz)	26T	MCS0	7.97	7.54	10.77	11.00	-0.23
	5190	38	ax (40MHz)	26T	MCS0	7.54	7.87	10.72	11.00	-0.28
	5230	46	ax (40MHz)	26T	MCS0	5.65	7.49	9.68	11.00	-1.32
	5210	42	ax (80MHz)	26T	MCS0	7.75	7.25	10.52	11.00	-0.48
Band 1/2A	5250	50	ax (160MHz L)	26T	MCS0	8.45	6.50	10.59	11.00	-0.41
	5250	50	ax (160MHz U)	26T	MCS0	7.96	7.70	10.84	11.00	-0.16
Band 2A	5260	52	ax (20MHz)	26T	MCS0	7.73	7.32	10.54	11.00	-0.46
	5280	56	ax (20MHz)	26T	MCS0	7.45	7.86	10.67	11.00	-0.33
	5320	64	ax (20MHz)	26T	MCS0	7.86	7.54	10.71	11.00	-0.29
	5270	54	ax (40MHz)	26T	MCS0	8.08	7.86	10.98	11.00	-0.02
	5310	62	ax (40MHz)	26T	MCS0	7.92	7.93	10.93	11.00	-0.07
	5290	58	ax (80MHz)	26T	MCS0	8.48	6.70	10.69	11.00	-0.31
Band 2C	5500	100	ax (20MHz)	26T	MCS0	7.48	7.76	10.63	11.00	-0.37
	5600	120	ax (20MHz)	26T	MCS0	7.41	7.89	10.66	11.00	-0.34
	5720	144	ax (20MHz)	26T	MCS0	7.73	7.88	10.81	11.00	-0.19
	5510	102	ax (40MHz)	26T	MCS0	7.81	7.71	10.77	11.00	-0.23
	5590	118	ax (40MHz)	26T	MCS0	7.95	7.96	10.97	11.00	-0.03
	5710	142	ax (40MHz)	26T	MCS0	7.95	7.97	10.97	11.00	-0.03
	5530	106	ax (80MHz)	26T	MCS0	7.87	6.98	10.46	11.00	-0.54
	5610	122	ax (80MHz)	26T	MCS0	7.92	7.16	10.57	11.00	-0.43
	5690	138	ax (80MHz)	26T	MCS0	7.99	7.74	10.88	11.00	-0.12
	5570	114	ax (160MHz L)	26T	MCS0	7.88	7.94	10.92	11.00	-0.08
	5570	114	ax (160MHz U)	26T	MCS0	7.61	7.43	10.53	11.00	-0.47

Table 7-92. Bands 1, 2A, 2C MIMO Conducted Power Spectral Density Measurements MIMO (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Permissible Power Density	Margin [dB]
Band 3	5745	149	ax (20MHz)	26T	MCS0	5.84	5.17	8.53	30.00	-21.47
	5785	157	ax (20MHz)	26T	MCS0	5.20	5.26	8.24	30.00	-21.76
	5825	165	ax (20MHz)	26T	MCS0	5.94	5.19	8.59	30.00	-21.41
	5755	151	ax (40MHz)	26T	MCS0	6.42	5.41	8.95	30.00	-21.05
	5795	159	ax (40MHz)	26T	MCS0	6.28	5.35	8.85	30.00	-21.15
	5775	155	ax (80MHz)	26T	MCS0	6.56	5.39	9.02	30.00	-20.98

Table 7-93. Band 3 MIMO Conducted Power Spectral Density Measurements MIMO (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Antenna-1 Power Density [dBm/MHz]	Antenna-2 Power Density [dBm/MHz]	MIMO Summed Power Density [dBm/MHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Directional Antenna Gain [dBi]	EIRP Power Density [dBm/MHz]	Max EIRP Power Density [dBm/MHz]	Margin [dB]
Band 3/4	5845	169	ax (20MHz)	26T	MCS0	7.37	6.68	10.05	30.00	-19.95	-2.48	7.57	14.00	-6.43
Band 4	5865	173	ax (20MHz)	26T	MCS0	8.22	7.25	10.77			-2.48	8.30	14.00	-5.70
	5885	177	ax (20MHz)	26T	MCS0	8.15	6.29	10.33			-2.48	7.85	14.00	-6.15
Band 3/4	5835	167	ax (40MHz)	26T	MCS0	8.67	7.12	10.97	30.00	-19.03	-2.48	8.50	14.00	-5.50
Band 4	5875	175	ax (40MHz)	26T	MCS0	8.92	6.92	11.04			-2.48	8.56	14.00	-5.44
Band 3/4	5855	171	ax (80MHz)	26T	MCS0	7.40	7.08	10.25	30.00	-19.75	-2.48	7.78	14.00	-6.22
	5815	163	ax (160MHz L)	26T	MCS0	7.78	7.82	10.81	30.00	-19.19	-2.48	8.33	14.00	-5.67
	5815	163	ax (160MHz U)	26T	MCS0	9.57	7.82	11.79	30.00	-18.21	-2.48	9.32	14.00	-4.68

Table 7-94. Band 4 MIMO Conducted Power Spectral Density Measurements MIMO (26 Tones)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)				Approved by: Technical Manager	
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset			Page 224 of 313	

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	242T	MCS0	6.42	4.21	8.47	11.00	-2.53
	5200	40	ax (20MHz)	242T	MCS0	5.81	5.11	8.49	11.00	-2.51
	5240	48	ax (20MHz)	242T	MCS0	5.52	4.73	8.15	11.00	-2.85
	5190	38	ax (40MHz)	484T	MCS0	3.35	1.71	5.62	11.00	-5.38
	5230	46	ax (40MHz)	484T	MCS0	3.38	1.90	5.71	11.00	-5.29
	5210	42	ax (80MHz)	996T	MCS0	-0.81	-0.54	2.34	11.00	-8.66
Band 1/2A	5250	50	ax (160MHz L)	996T	MCS0	-0.06	-1.29	2.38	11.00	-8.62
	5250	50	ax (160MHz U)	996T	MCS0	0.35	-0.79	2.83	11.00	-8.17
Band 2A	5260	52	ax (20MHz)	242T	MCS0	5.63	4.71	8.20	11.00	-2.80
	5280	56	ax (20MHz)	242T	MCS0	5.69	4.41	8.11	11.00	-2.89
	5320	64	ax (20MHz)	242T	MCS0	6.12	4.54	8.41	11.00	-2.59
	5270	54	ax (40MHz)	484T	MCS0	2.67	1.66	5.21	11.00	-5.79
	5310	62	ax (40MHz)	484T	MCS0	2.97	1.40	5.27	11.00	-5.73
	5290	58	ax (80MHz)	996T	MCS0	-0.54	-0.91	2.29	11.00	-8.71
Band 2C	5500	100	ax (20MHz)	242T	MCS0	6.82	4.79	8.94	11.00	-2.06
	5600	120	ax (20MHz)	242T	MCS0	5.84	4.58	8.26	11.00	-2.74
	5720	144	ax (20MHz)	242T	MCS0	5.47	4.66	8.09	11.00	-2.91
	5510	102	ax (40MHz)	484T	MCS0	3.68	1.50	5.73	11.00	-5.27
	5590	118	ax (40MHz)	484T	MCS0	3.13	2.71	5.93	11.00	-5.07
	5710	142	ax (40MHz)	484T	MCS0	2.86	2.59	5.74	11.00	-5.26
	5530	106	ax (80MHz)	996T	MCS0	-0.37	-1.40	2.16	11.00	-8.84
	5610	122	ax (80MHz)	996T	MCS0	-0.56	0.07	2.78	11.00	-8.22
	5690	138	ax (80MHz)	996T	MCS0	-0.87	-0.05	2.57	11.00	-8.43
	5570	114	ax (160MHz L)	996T	MCS0	0.55	-1.79	2.55	11.00	-8.45
	5570	114	ax (160MHz U)	996T	MCS0	0.46	-1.58	2.57	11.00	-8.43

Table 7-95. Bands 1, 2A, 2C MIMO Conducted Power Spectral Density Measurements MIMO (Full Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Summed MIMO Power Density [dBm]	Max Permissible Power Density	Margin [dB]
Band 3	5745	149	ax (20MHz)	242T	MCS0	3.04	1.68	5.43	30.00	-24.57
	5785	157	ax (20MHz)	242T	MCS0	2.67	1.94	5.33	30.00	-24.67
	5825	165	ax (20MHz)	242T	MCS0	3.34	1.65	5.59	30.00	-24.41
	5755	151	ax (40MHz)	484T	MCS0	-0.10	-0.49	2.72	30.00	-27.28
	5795	159	ax (40MHz)	484T	MCS0	-0.43	0.03	2.81	30.00	-27.19
	5775	155	ax (80MHz)	996T	MCS0	-4.13	-2.79	-0.40	30.00	-30.40

Table 7-96. Band 3 MIMO Conducted Power Spectral Density Measurements MIMO (Full Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Antenna-1 Power Density [dBm/MHz]	Antenna-2 Power Density [dBm/MHz]	MIMO Summed Power Density [dBm/MHz]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]	Directional Antenna Gain [dBi]	EIRP Power Density [dBm/MHz]	Max EIRP Power Density [dBm/MHz]	Margin [dB]
Band 3/4	5845	169	ax (20MHz)	242T	MCS0	5.44	4.30	7.92	30.00	-22.08	-2.48	5.44	14.00	-8.56
Band 4	5865	173	ax (20MHz)	242T	MCS0	5.29	4.21	7.79			-2.48	5.32	14.00	-8.68
	5885	177	ax (20MHz)	242T	MCS0	5.39	4.32	7.90			-2.48	5.42	14.00	-8.58
Band 3/4	5835	167	ax (40MHz)	484T	MCS0	1.77	1.51	4.65	30.00	-25.35	-2.48	2.18	14.00	-11.82
Band 4	5875	175	ax (40MHz)	484T	MCS0	1.94	1.61	4.79			-2.48	2.31	14.00	-11.69
Band 3/4	5855	171	ax (80MHz)	996T	MCS0	-0.87	-1.43	1.87	30.00	-28.13	-2.48	-0.61	14.00	-14.61
	5815	163	ax (160MHz L)	996T	MCS0	0.13	-1.46	2.42	30.00	-27.58	-2.48	-0.06	14.00	-14.06
	5815	163	ax (160MHz U)	996T	MCS0	0.32	-0.75	2.83	30.00	-27.17	-2.48	0.35	14.00	-13.65

Table 7-97. Band 4 MIMO Conducted Power Spectral Density Measurements MIMO (Full Tones)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)										Approved by: Technical Manager			
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022			EUT Type: Portable Handset							Page 225 of 313			

**Note:**

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 v02r01 Section E)2), the power spectral density at Antenna-1 and Antenna-2 were first measured separately with reduced Antenna-1 and Antenna-2 powers per manufacture's tune-up document. The measured values were then summed in linear power units then converted back to dBm.

**Sample Directional Gain Calculation:**

Assuming the antenna gain is -8.61 dBi for Antenna-1 and -7.68 dBi for Antenna-2.

$$\begin{aligned} \text{Directional gain} &= 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi} \\ &= 10 \log[(10^{-8.61/20} + 10^{-7.68/20} / 2] \text{ dBi} \\ &= (-5.12) \text{ dBi} \end{aligned}$$

**Sample MIMO Calculation:**

Assuming the average conducted power spectral density was measured to be 5.88 dBm for Antenna-1 and 6.27 dBm for Antenna-2.

$$\text{Antenna-1} + \text{Antenna-2} = \text{MIMO}$$

$$(5.88 \text{ dBm} + 6.27 \text{ dBm}) = (3.87 \text{ mW} + 4.24 \text{ mW}) = 8.11 \text{ mW} = 9.09 \text{ dBm}$$

**Sample e.i.r.p Power Spectral Density Calculation:**

Assuming the average MIMO power density was calculated to be 9.09 dBm with directional gain of -5.12 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{directional gain (dBi)}$$

$$9.09 \text{ dBm} + (-5.12) \text{ dBi} = 3.97 \text{ dBm}$$

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 226 of 313

## 7.6 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 26 Tones, 52 Tones, 106 Tones, 242 Tones, 484 Tones and 996 Tones), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.***

***For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.***

***For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.***

***For transmitters operating in the 5.850 – 5.895 GHz band: all emissions at or above 5.895GHz shall not exceed an e.i.r.p. of -5dBm/MHz and shall decrease linearly up to an e.i.r.p. of -27dBm/MHz at or above 5.925GHz, and all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27dBm/MHz at 5.65 GHz increasing linearly to 10dBm/MHz at 5.7GHz and from 5.7GHz increasing linearly to a level of 15.6dBm/MHz at 5.72GHz, and from 5.72GHz increasing linearly to a level of 27dBm/MHz at 5.725GHz.***

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-47 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-98. Radiated Limits

### Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5  
KDB 789033 D02 v02r01 – Section G

### Test Settings

#### Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 227 of 313

V 9.0 02/01/2019

5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

#### **Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

#### **Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

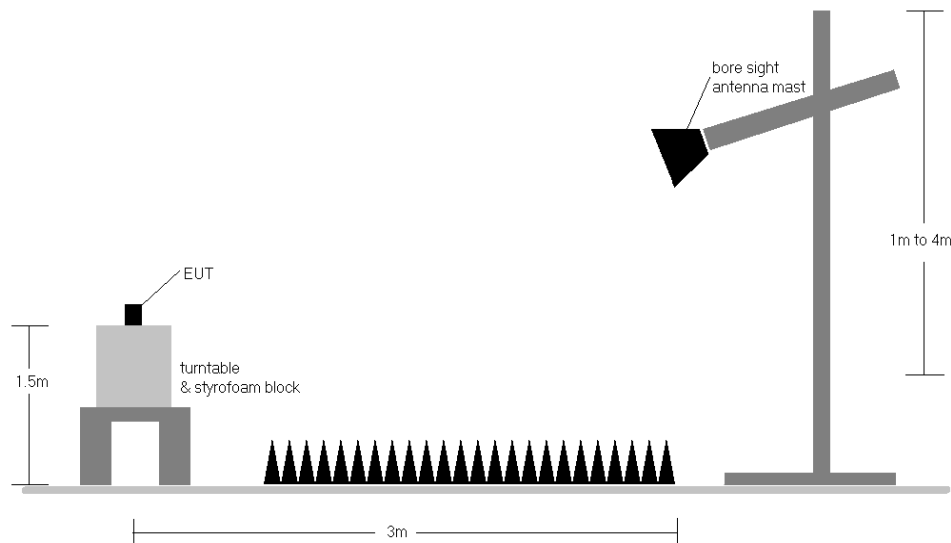

**Figure 7-5. Test Instrument & Measurement Setup**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 228 of 313

V 9.0 02/01/2019

## Test Notes

1. All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-73.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-73. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB $\mu$ V/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
9. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level [dB $\mu$ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]

### Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section Radiated Spurious Emission Measurements – Above 1GHz was calculated using the formula:  
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1-A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 229 of 313


V 9.0 02/01/2019

## 7.6.1 SISO Antenna-1 Radiated Spurious Emission Measurements


### 26 Tones

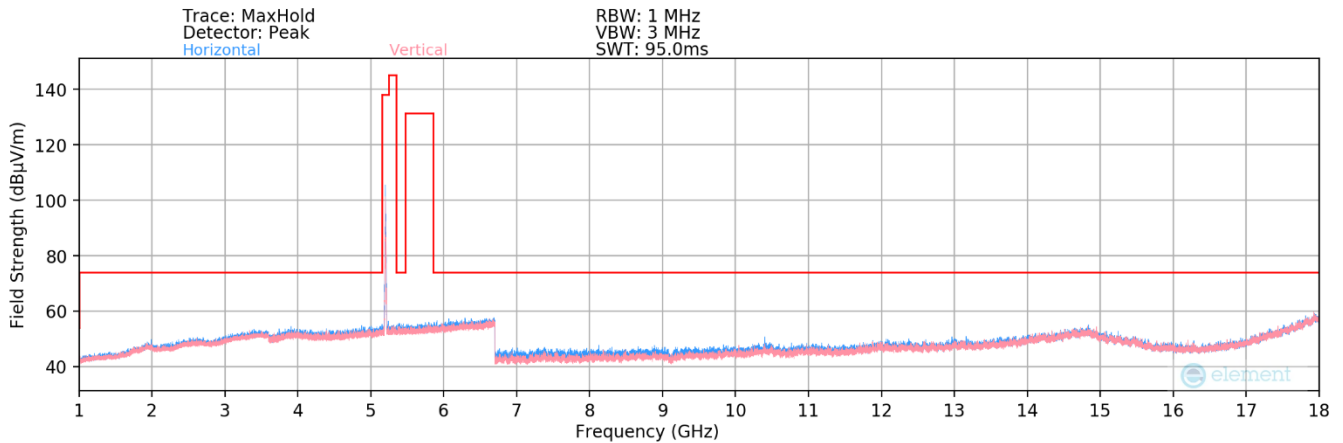

**Plot 7-313. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U1 Ch. 40 – 26 Tones) – Closed**

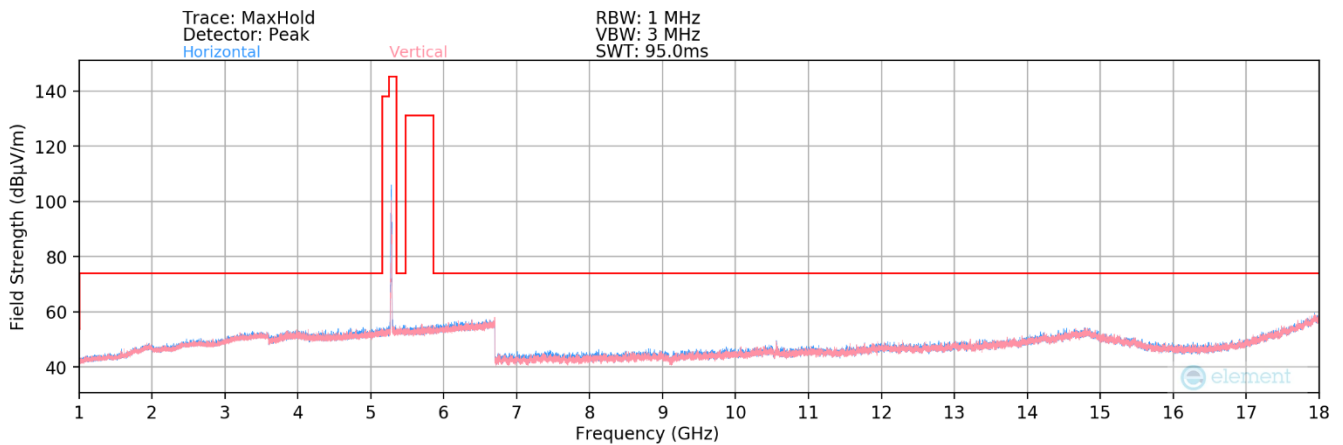


**Plot 7-314. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U2A Ch. 56 – 26 Tones) – Closed**

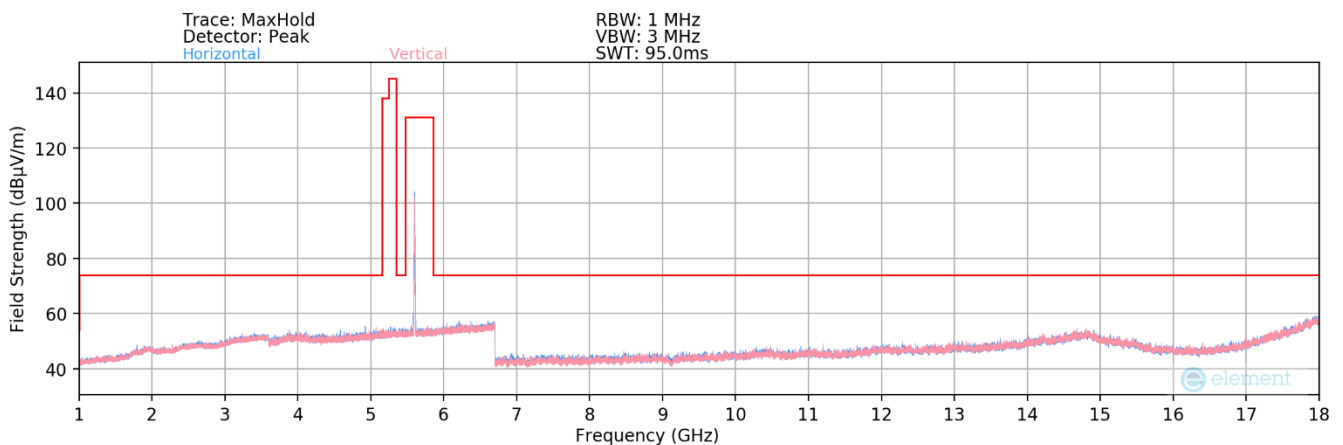


**Plot 7-315. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U2C Ch. 120 – 26 Tones) – Closed**

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 230 of 313

V 9.0 02/01/2019

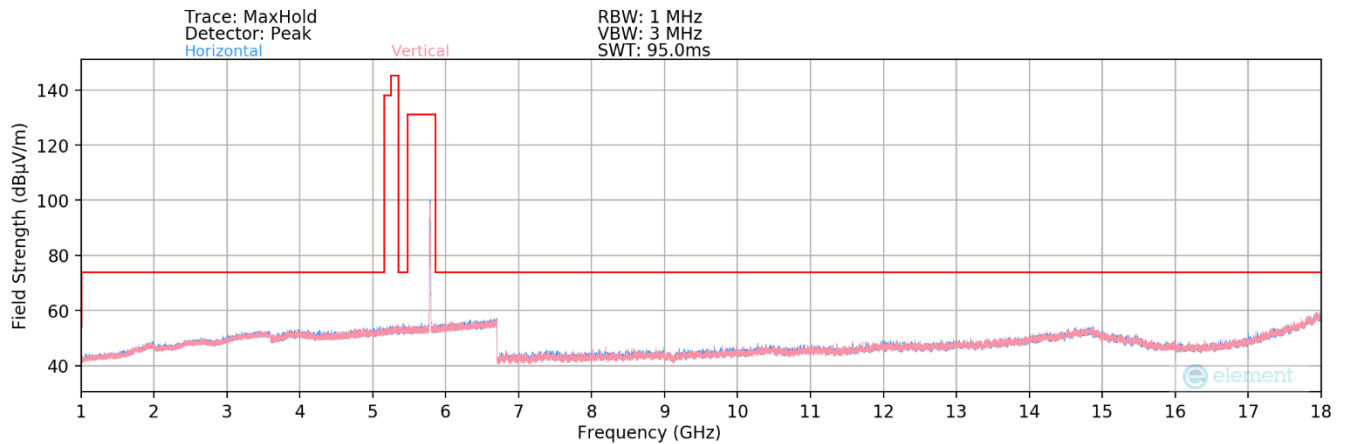


**Plot 7-316. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U3 Ch. 157 – 26 Tones) – Closed**

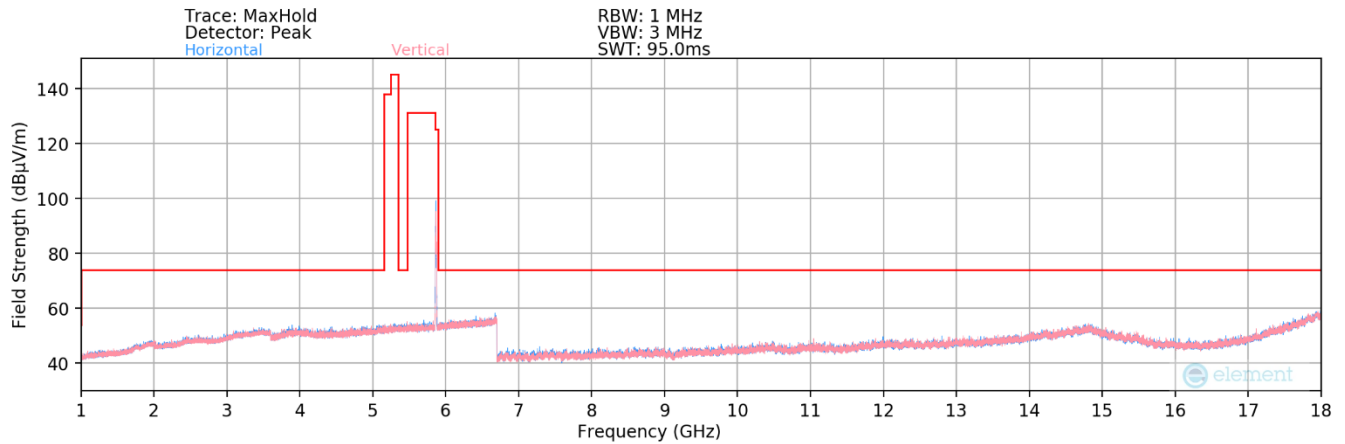


**Plot 7-317. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U4 Ch.173 – 26 Tones) – Closed**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 231 of 313


V 9.0 02/01/2019

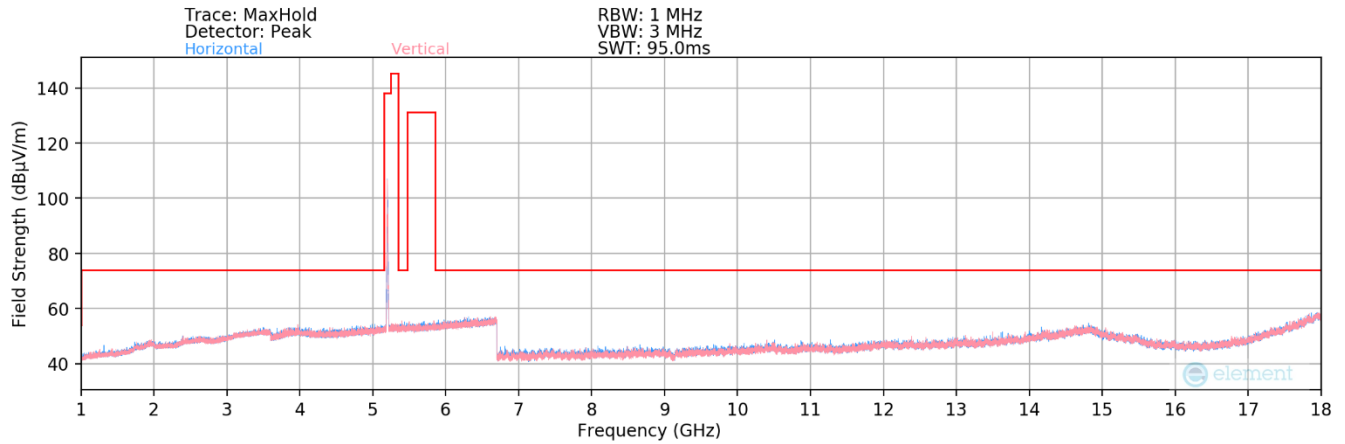

**Plot 7-318. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U1 Ch. 40 – 26 Tones) – Half Open**

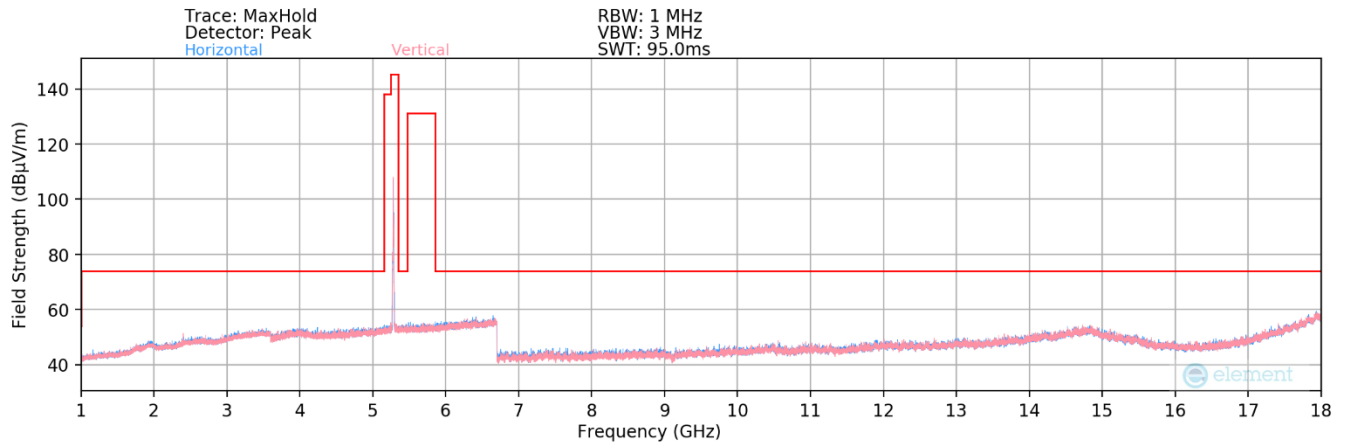


**Plot 7-319. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U2A Ch. 56 – 26 Tones) – Half Open**

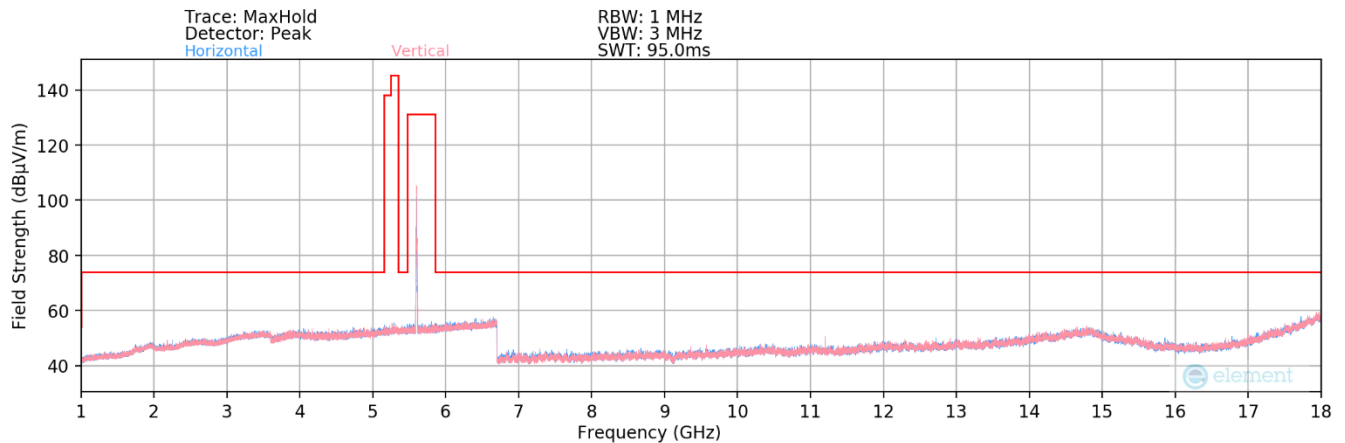


**Plot 7-320. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U2C Ch. 120 – 26 Tones) – Half Open**

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 232 of 313

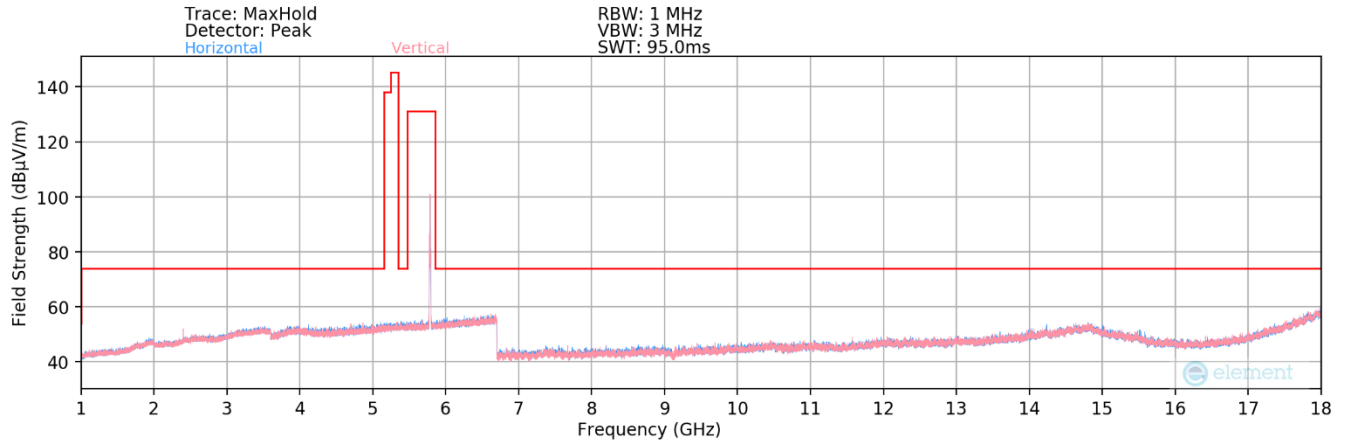

**Plot 7-321. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U3 Ch. 157 – 26 Tones) – Half Open**

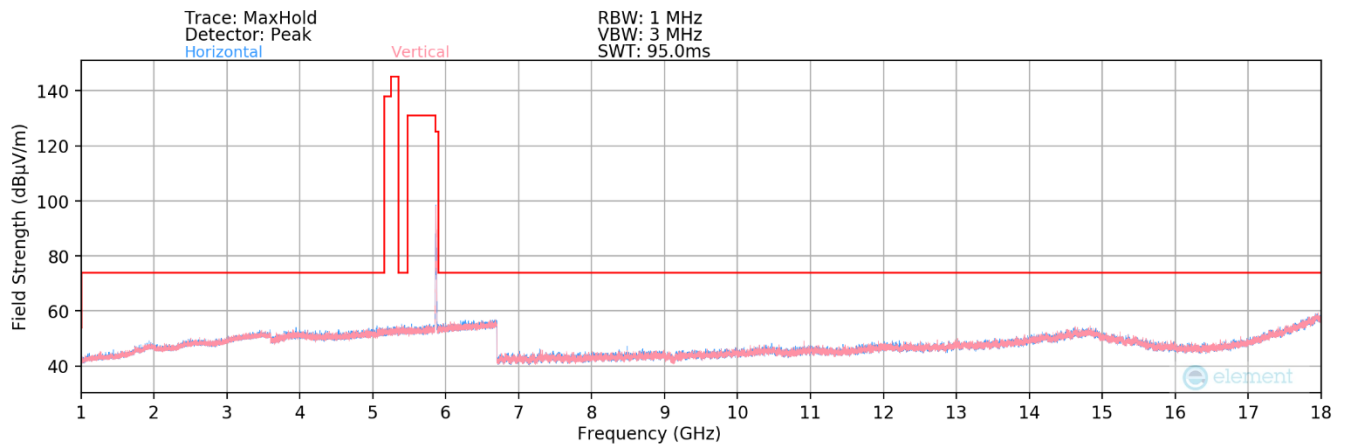


**Plot 7-322. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U4 Ch.173 – 26 Tones) – Half Open**


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 233 of 313

V 9.0 02/01/2019

## SISO Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

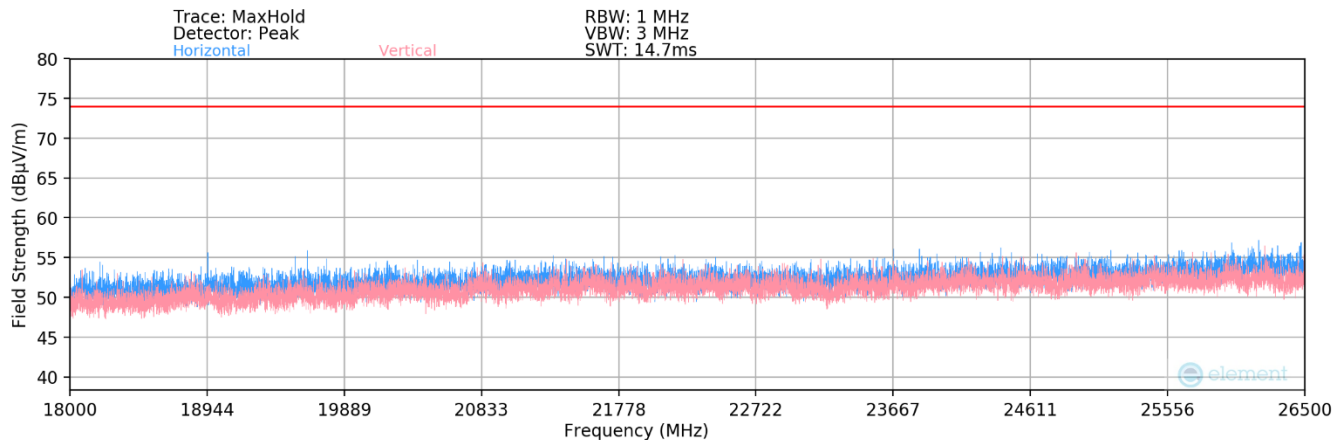


**Plot 7-323. Radiated Spurious Plot 18GHz - 26.5GHz SISO ANT1 (802.11ax – 26 Tones) – Closed**

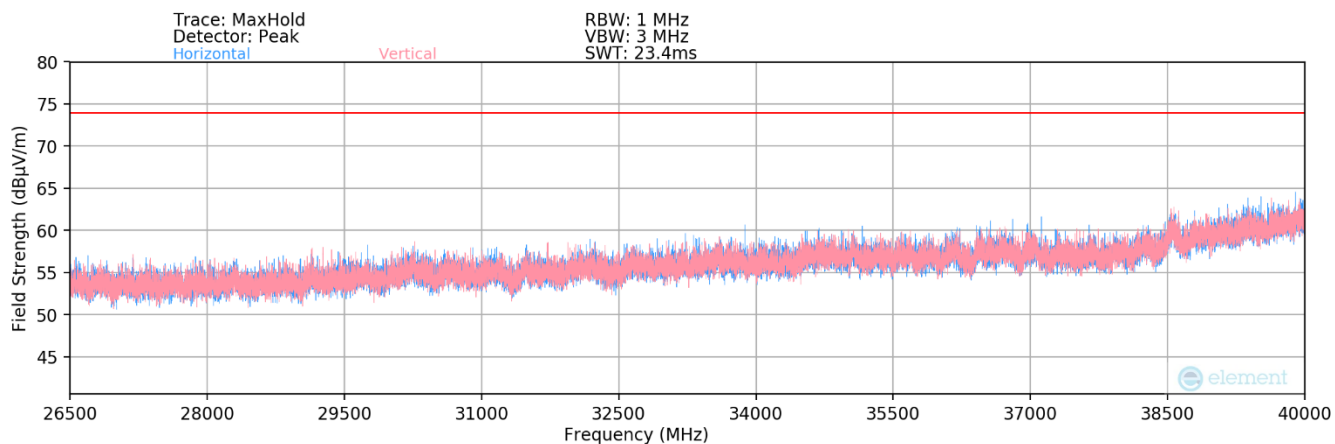


**Plot 7-324. Radiated Spurious Plot 26.5GHz - 40GHz SISO ANT1 (802.11ax – 26 Tones) – Closed**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 234 of 313

V 9.0 02/01/2019

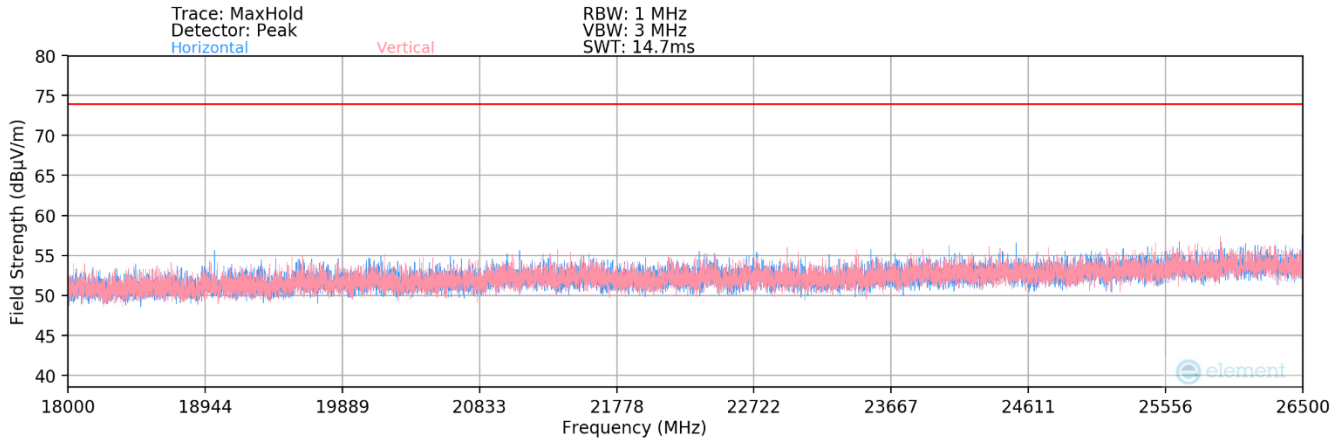

**Plot 7-325. Radiated Spurious Plot 18GHz - 26.5GHz SISO ANT1 (802.11ax – 26 Tones) – Half Open**

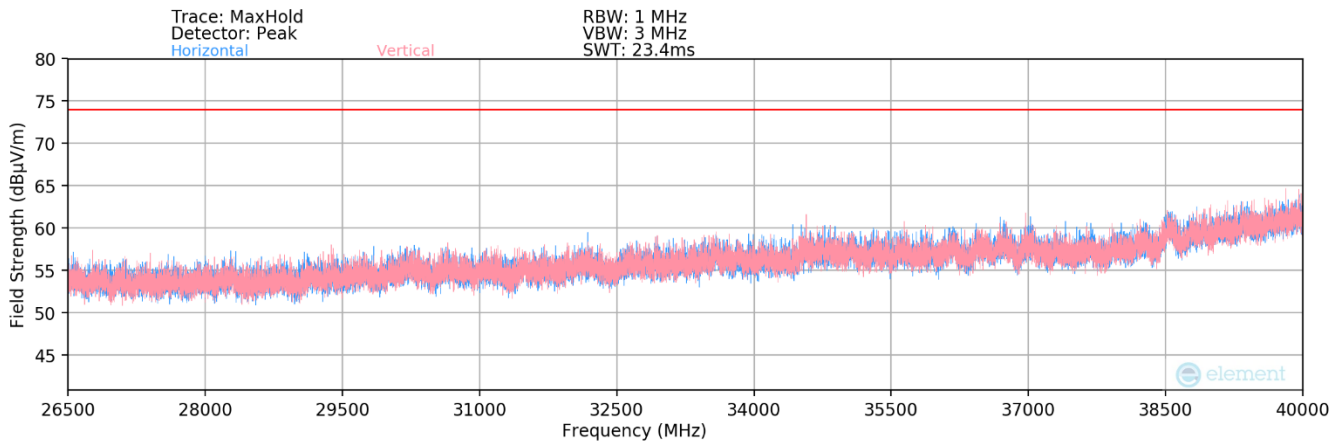

**Plot 7-326. Radiated Spurious Plot 26.5GHz - 40GHz SISO ANT1 (802.11ax – 26 Tones) – Half Open**

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 235 of 313

V 9.0 02/01/2019

## SISO Antenna-1 Radiated Spurious Emission Measurements (26 Tones)

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ax (20MHz BW)
Worst Case Transfer Rate:	MCS0
RU Index:	8
Distance of Measurements:	1 & 3 Meters
Operating Frequency:	5180MHz
Channel:	36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	V	279	39	-65.78	11.85	0.00	53.07	68.20	-15.13
* 15540.00	Average	V	-	-	-80.41	16.63	0.00	43.22	53.98	-10.76
* 15540.00	Peak	V	-	-	-68.41	16.63	0.00	55.22	73.98	-18.76
* 20720.00	Average	V	-	-	-67.92	3.15	-9.54	32.69	53.98	-21.29
* 20720.00	Peak	V	-	-	-57.61	3.15	-9.54	42.99	73.98	-30.99
25900.00	Peak	V	-	-	-57.84	4.77	-9.54	44.39	68.20	-23.81

Table 7-99. Radiated Measurements SISO ANT1 (26 Tones)

Worst Case Mode:	802.11ax (20MHz BW)
Worst Case Transfer Rate:	MCS0
RU Index:	0
Distance of Measurements:	1 & 3 Meters
Operating Frequency:	5200MHz
Channel:	40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	V	296	366	-67.31	11.49	0.00	51.18	68.20	-17.02
* 15600.00	Average	V	-	-	-80.22	16.85	0.00	43.63	53.98	-10.35
* 15600.00	Peak	V	-	-	-68.53	16.85	0.00	55.32	73.98	-18.66
* 20800.00	Average	V	-	-	-66.98	3.48	-9.54	33.96	53.98	-20.02
* 20800.00	Peak	V	-	-	-59.65	3.48	-9.54	41.28	73.98	-32.69
26000.00	Peak	V	-	-	-57.27	5.15	-9.54	45.34	68.20	-22.86

Table 7-100. Radiated Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 236 of 313

V 9.0 02/01/2019

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 0  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	308	241	-68.24	12.01	0.00	50.77	68.20	-17.43
* 15720.00	Average	V	-	-	-80.30	17.21	0.00	43.91	53.98	-10.07
* 15720.00	Peak	V	-	-	-68.58	17.21	0.00	55.63	73.98	-18.35
* 20960.00	Average	V	-	-	-67.93	3.48	-9.54	33.00	53.98	-20.97
* 20960.00	Peak	V	-	-	-57.75	3.48	-9.54	43.19	73.98	-30.79
26200.00	Peak	V	-	-	-56.91	4.78	-9.54	45.32	68.20	-22.88

**Table 7-101. Radiated Measurements SISO ANT1 (26 Tones)**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 8  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5260MHz  
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	346	332	-67.60	12.54	0.00	51.94	68.20	-16.26
* 15780.00	Average	V	-	-	-80.47	17.03	0.00	43.56	53.98	-10.42
* 15780.00	Peak	V	-	-	-68.35	17.03	0.00	55.68	73.98	-18.30
* 21040.00	Average	V	-	-	-66.84	3.53	-9.54	34.14	53.98	-19.83
* 21040.00	Peak	V	-	-	-57.25	3.53	-9.54	43.74	73.98	-30.24
26300.00	Peak	V	-	-	-57.38	4.64	-9.54	44.72	68.20	-23.48

**Table 7-102. Radiated Measurements SISO ANT1 (26 Tones)**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 237 of 313

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5280MHz  
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	292	136	-66.12	12.39	0.00	53.27	68.20	-14.93
* 15840.00	Average	V	-	-	-80.55	16.71	0.00	43.16	53.98	-10.82
* 15840.00	Peak	V	-	-	-69.10	16.71	0.00	54.61	73.98	-19.37
* 21120.00	Average	V	-	-	-67.54	3.68	-9.54	33.60	53.98	-20.38
* 21120.00	Peak	V	-	-	-57.23	3.68	-9.54	43.91	73.98	-30.07
26400.00	Peak	V	-	-	-67.21	4.78	-9.54	35.03	68.20	-33.17

**Table 7-103. Radiated Measurements SISO ANT1 (26 Tones)**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 0  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	284	220	-77.74	12.36	0.00	41.62	53.98	-12.36
* 10640.00	Peak	V	284	220	-63.53	12.36	0.00	55.83	73.98	-18.15
* 15960.00	Average	V	-	-	-80.80	18.25	0.00	44.45	53.98	-9.53
* 15960.00	Peak	V	-	-	-68.70	18.25	0.00	56.55	73.98	-17.43
* 21280.00	Average	V	-	-	-67.30	3.72	-9.54	33.88	53.98	-20.10
* 21280.00	Peak	V	-	-	-57.48	3.72	-9.54	43.70	73.98	-30.28
26600.00	Peak	V	-	-	-57.03	4.72	-9.54	45.15	68.20	-23.05

**Table 7-104. Radiated Measurements SISO ANT1 (26 Tones)**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 238 of 313

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 0  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	283	66	-78.24	12.61	0.00	41.37	53.98	-12.61
* 11000.00	Peak	V	283	66	-65.30	12.61	0.00	54.31	73.98	-19.67
16500.00	Peak	V	-	-	-68.78	18.00	0.00	56.22	68.20	-11.98
22000.00	Peak	V	-	-	-57.80	3.83	-9.54	43.48	68.20	-24.72
27500.00	Peak	V	-	-	-56.41	4.96	-9.54	46.01	68.20	-22.19

**Table 7-105. Radiated Measurements SISO ANT1 (26 Tones)**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5600MHz  
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	Average	V	286	224	-77.70	12.49	0.00	41.79	53.98	-12.19
* 11200.00	Peak	V	286	224	-64.53	12.49	0.00	54.96	73.98	-19.02
16800.00	Peak	V	-	-	-68.86	18.32	0.00	56.46	68.20	-11.74
* 22400.00	Average	V	-	-	-66.88	3.79	-9.54	34.37	53.98	-19.61
* 22400.00	Peak	V	-	-	-57.02	3.79	-9.54	44.23	73.98	-29.75
28000.00	Peak	V	-	-	-57.42	4.94	-9.54	44.98	68.20	-23.22

**Table 7-106. Radiated Measurements SISO ANT1 (26 Tones)**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 239 of 313

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 0  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5720MHz  
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	V	321	96	-78.78	12.91	0.00	41.13	53.98	-12.84
* 11440.00	Peak	V	321	96	-65.45	12.91	0.00	54.46	73.98	-19.51
17160.00	Peak	V	-	-	-68.43	17.87	0.00	56.44	68.20	-11.76
* 22880.00	Average	V	-	-	-67.22	3.79	-9.54	34.02	53.98	-19.96
* 22880.00	Peak	V	-	-	-57.32	3.79	-9.54	43.93	73.98	-30.05
28600.00	Peak	V	-	-	-56.74	5.27	-9.54	45.99	68.20	-22.21

**Table 7-107. Radiated Measurements SISO ANT1 (26 Tones)**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 0  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	V	317	271	-79.82	13.32	0.00	40.50	53.98	-13.47
* 11490.00	Peak	V	317	271	-67.62	13.32	0.00	52.70	73.98	-21.27
17235.00	Peak	V	-	-	-68.73	17.85	0.00	56.12	68.20	-12.08
* 22980.00	Average	V	-	-	-68.12	3.79	-9.54	33.13	53.98	-20.85
* 22980.00	Peak	V	-	-	-57.41	3.79	-9.54	43.84	73.98	-30.14
28725.00	Peak	V	-	-	-58.51	5.41	-9.54	44.35	68.20	-23.85

**Table 7-108. Radiated Measurements SISO ANT1 (26 Tones)**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 240 of 313

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	V	299	175	-78.70	12.93	0.00	41.23	53.98	-12.75
* 11570.00	Peak	V	299	175	-65.31	12.93	0.00	54.62	73.98	-19.36
17355.00	Peak	V	-	-	-68.70	18.36	0.00	56.66	68.20	-11.54
23140.00	Peak	V	-	-	-56.78	3.75	-9.54	44.42	68.20	-23.78
28925.00	Peak	V	-	-	-57.27	5.46	-9.54	45.65	68.20	-22.55

**Table 7-109. Radiated Measurements SISO ANT1 (26 Tones)**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 0  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	279	370	-79.90	13.82	0.00	40.92	53.98	-13.06
* 11650.00	Peak	V	279	370	-67.63	13.82	0.00	53.19	73.98	-20.79
17475.00	Peak	V	-	-	-68.47	17.74	0.00	56.27	68.20	-11.93
23300.00	Peak	V	-	-	-57.13	3.76	-9.54	44.09	68.20	-24.11
29125.00	Peak	V	-	-	-56.94	5.54	-9.54	46.06	68.20	-22.14

**Table 7-110. Radiated Measurements SISO ANT1 (26 Tones)**

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 241 of 313

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5845MHz  
 Channel: 169

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11690.00	Average	V	-	-	-80.87	13.95	0.00	40.08	53.98	-13.90
* 11690.00	Peak	V	-	-	-68.80	13.95	0.00	52.15	73.98	-21.83
17535.00	Peak	V	-	-	-67.83	18.12	0.00	57.29	68.20	-10.91
23380.00	Peak	V	-	-	-55.96	3.85	-9.54	54.88	68.20	-13.32
29225.00	Peak	V	-	-	-56.27	5.60	-9.54	56.33	68.20	-11.87
35070.00	Peak	V	-	-	-54.85	8.11	-9.54	60.26	68.20	-7.94

Table 7-111. Radiated Measurements SISO ANT1 (26 Tones)

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5865MHz  
 Channel: 173

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11730.00	Average	V	-	-	-80.67	14.16	0.00	40.49	53.98	-13.49
* 11730.00	Peak	V	-	-	-67.92	14.16	0.00	53.24	73.98	-20.74
17595.00	Peak	V	-	-	67.98	18.19	0.00	193.17	68.20	124.97
23460.00	Peak	V	-	-	-55.79	3.85	-9.54	55.07	68.20	-13.13
29325.00	Peak	V	-	-	-55.50	5.85	-9.54	57.36	68.20	-10.84
35190.00	Peak	V	-	-	-55.10	8.16	-9.54	60.07	68.20	-8.13

Table 7-112. Radiated Measurements SISO ANT1 (26 Tones)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset		Page 242 of 313


Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 4  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5885MHz  
 Channel: 177

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11770.00	Average	V	-	-	-80.24	14.19	0.00	40.95	53.98	-13.03
* 11770.00	Peak	V	-	-	-68.48	14.19	0.00	52.71	73.98	-21.27
17655.00	Peak	V	-	-	-68.06	18.07	0.00	57.01	68.20	-11.19
23540.00	Peak	V	-	-	-56.18	3.84	-9.54	54.67	68.20	-13.53
29425.00	Peak	V	-	-	-55.50	5.87	-9.54	57.37	68.20	-10.83
35310.00	Peak	V	-	-	-54.13	8.04	-9.54	60.91	68.20	-7.29


**Table 7-113. Radiated Measurements SISO ANT1 (26 Tones)**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 243 of 313


## 242 Tones

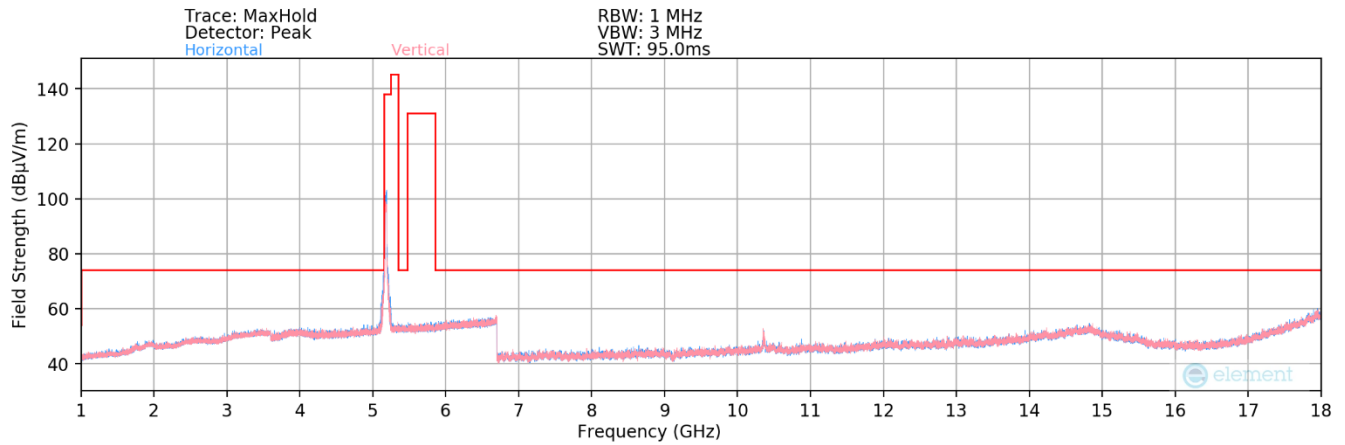

**Plot 7-327. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U1 Ch. 40 – 242 Tones) – Closed**

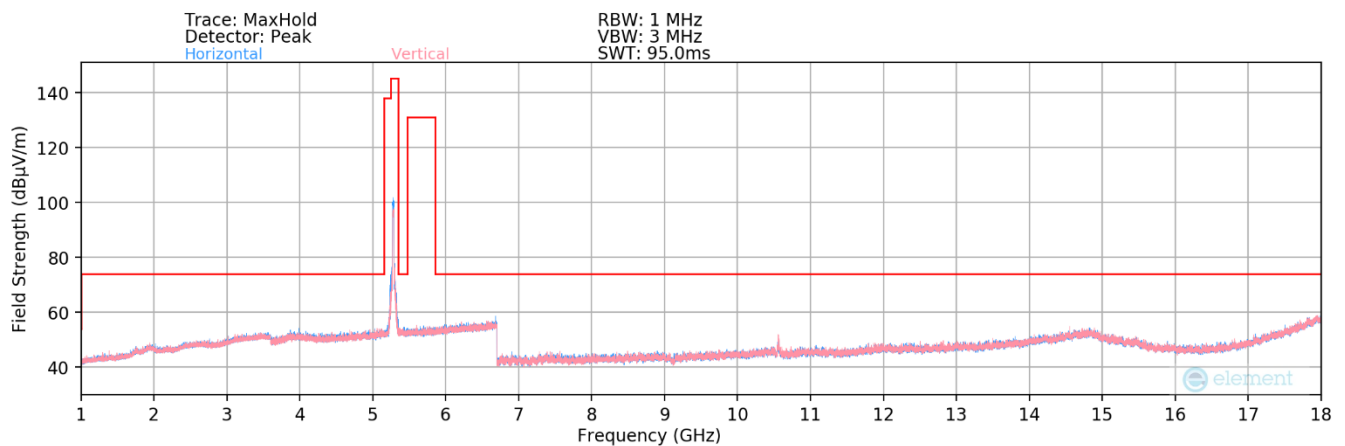

**Plot 7-328. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U2A Ch. 56 – 242 Tones) – Closed**

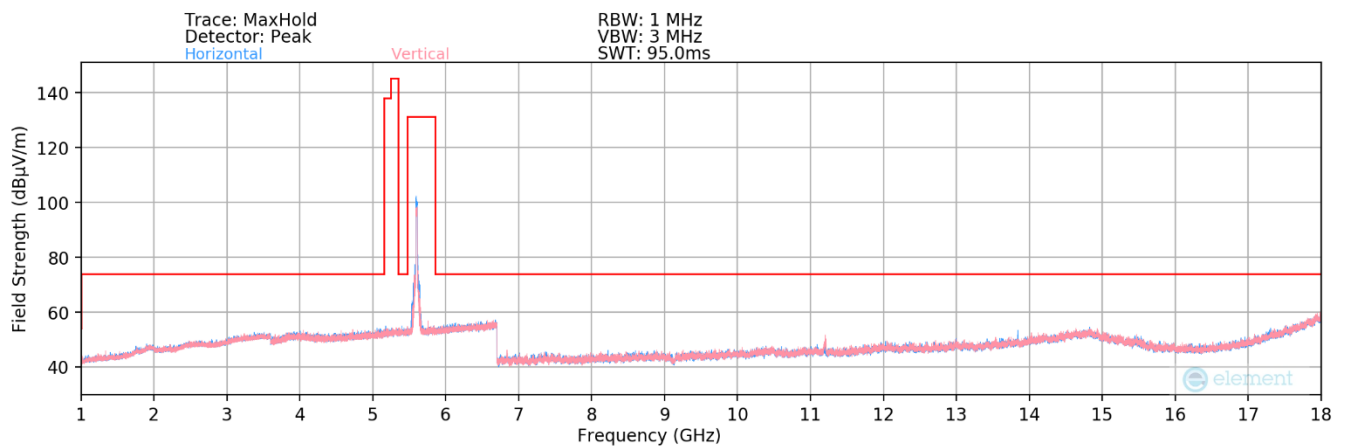


**Plot 7-329. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U2C Ch. 120 – 242 Tones) – Closed**


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 244 of 313

V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

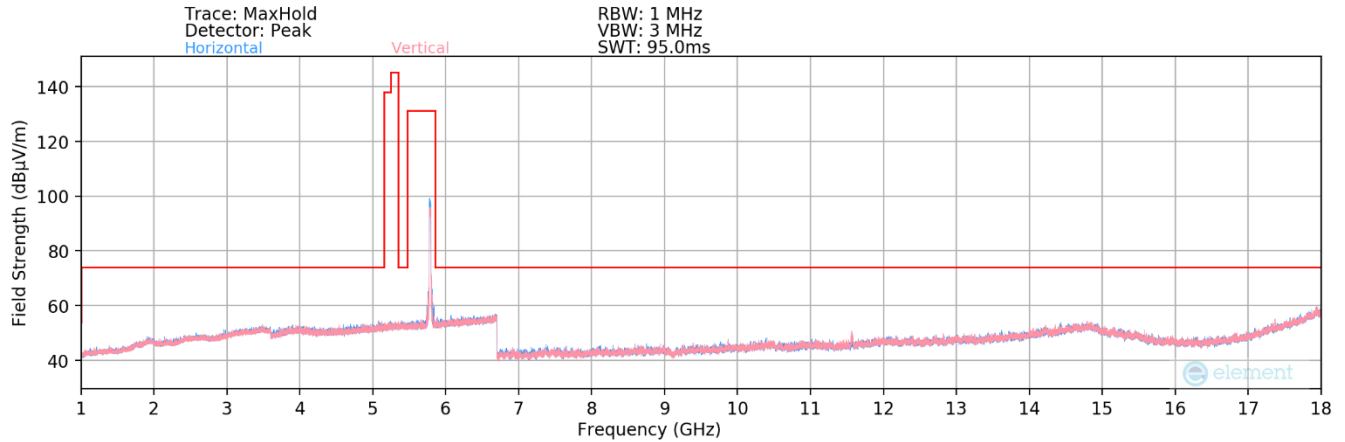


**Plot 7-330. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U3 Ch. 157 – 242 Tones) – Closed**

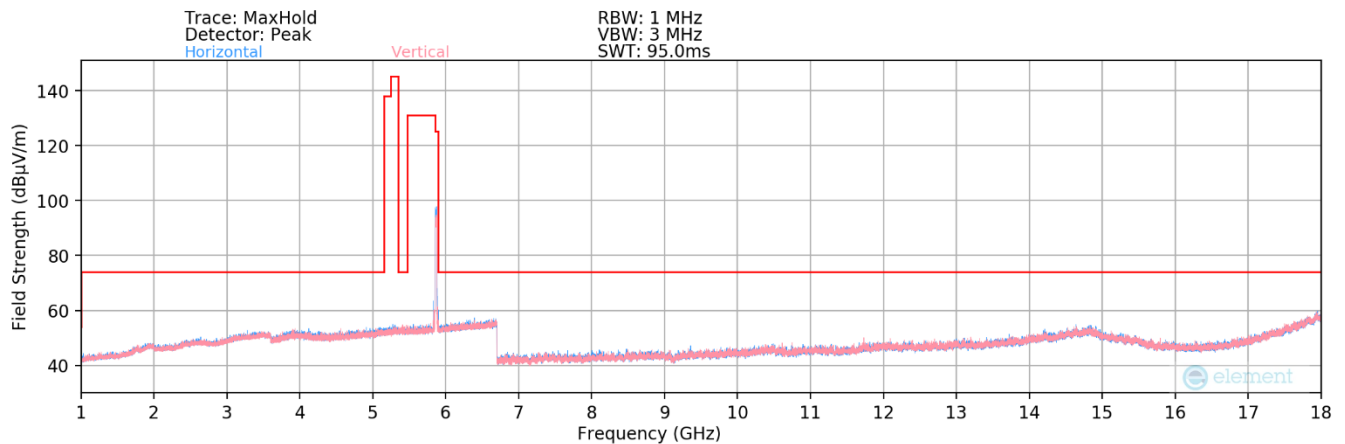


**Plot 7-331. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U4 Ch. 173 – 242 Tones) – Closed**


FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 245 of 313

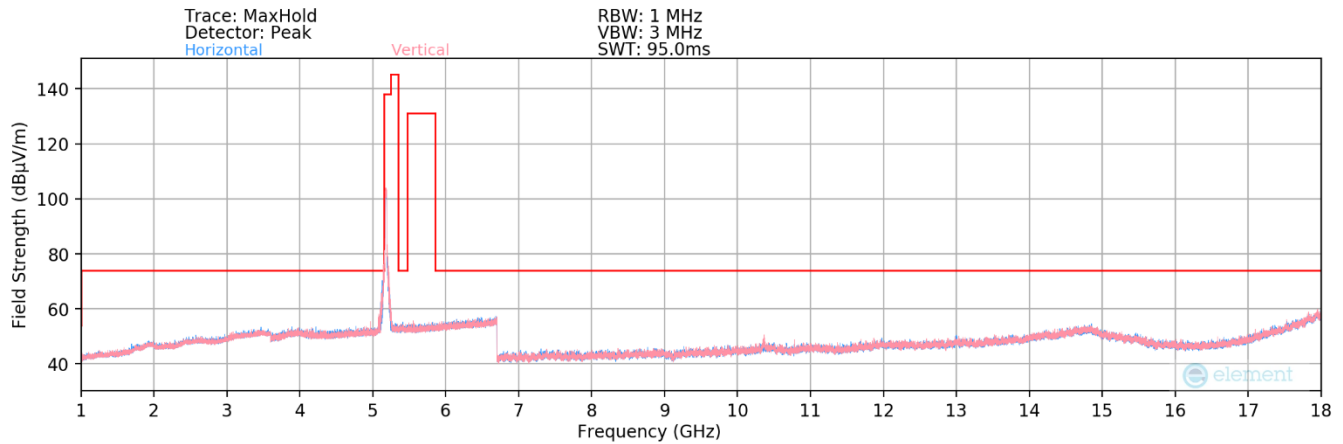

**Plot 7-332. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U1 Ch. 40 – 242 Tones) – Half Open**

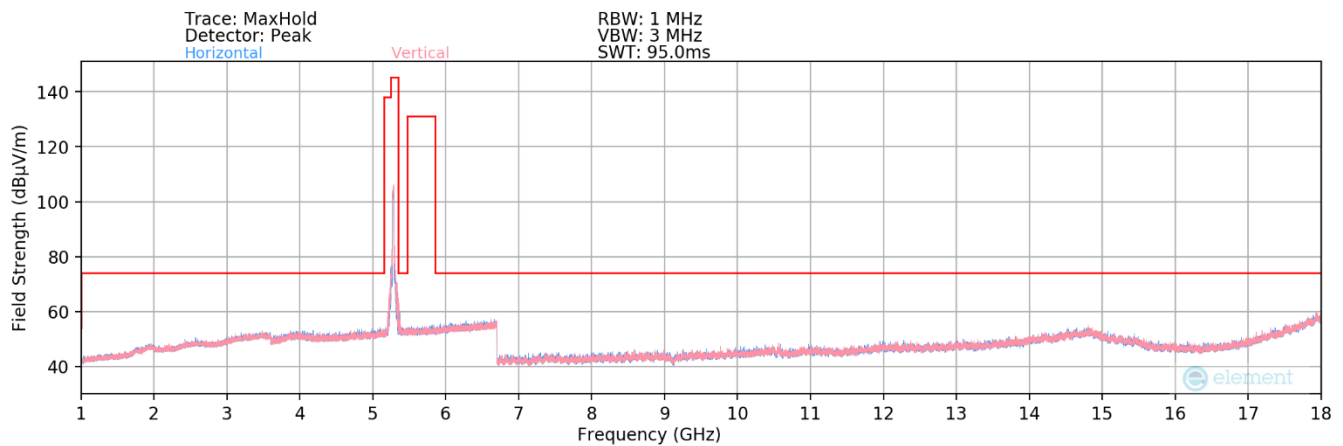


**Plot 7-333. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U2A Ch. 56 – 242 Tones) – Half Open**

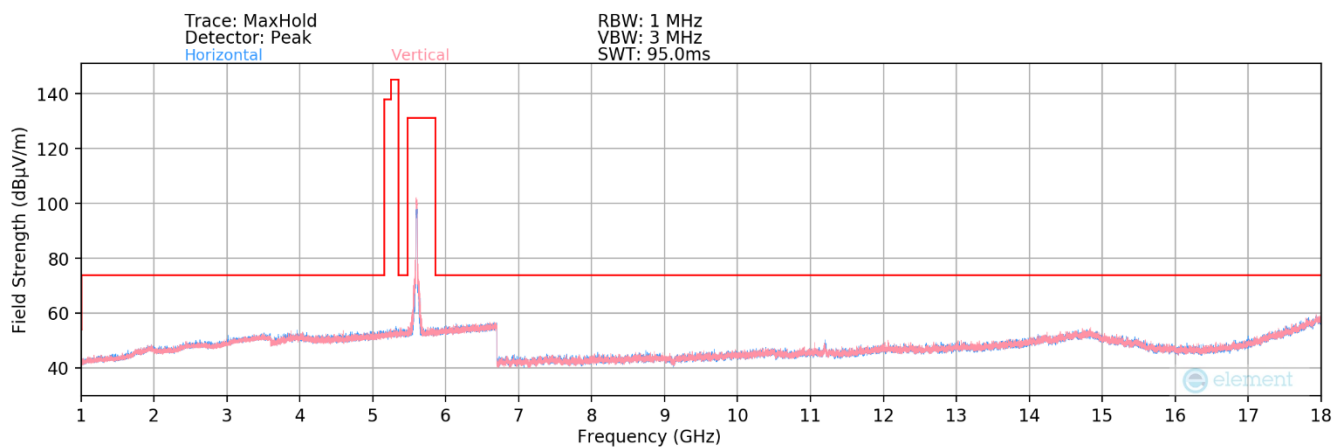


**Plot 7-334. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U2C Ch. 120 – 242 Tones) – Half Open**

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 246 of 313

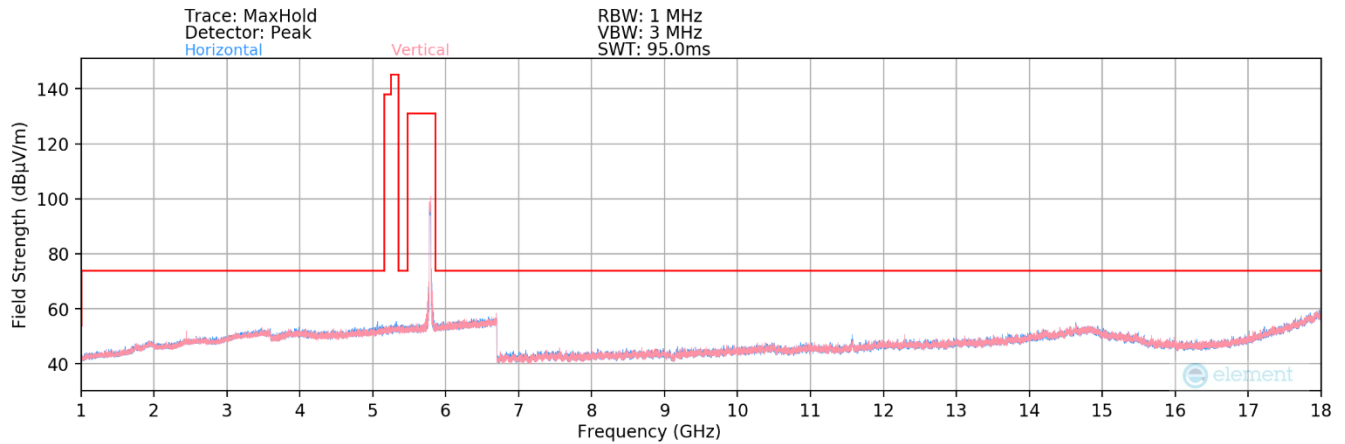


**Plot 7-335. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U3 Ch. 157 – 242 Tones) – Half Open**

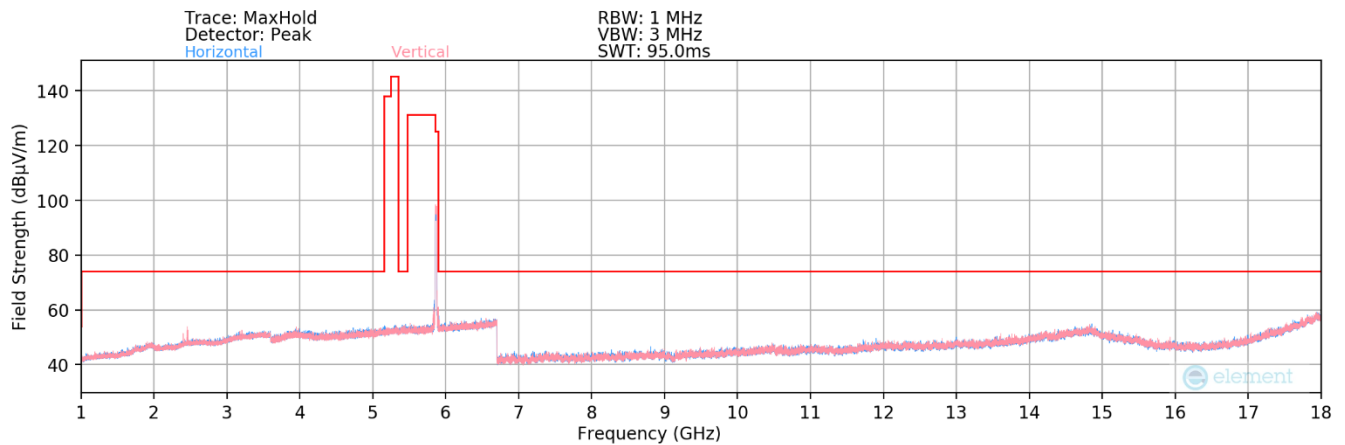


**Plot 7-336. Radiated Spurious Plot above 1GHz SISO ANT1 (802.11ax – U4 Ch. 173 – 242 Tones) – Half Open**

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 247 of 313

## SISO Antenna-1 Radiated Spurious Emissions Measurements (Above 18GHz)

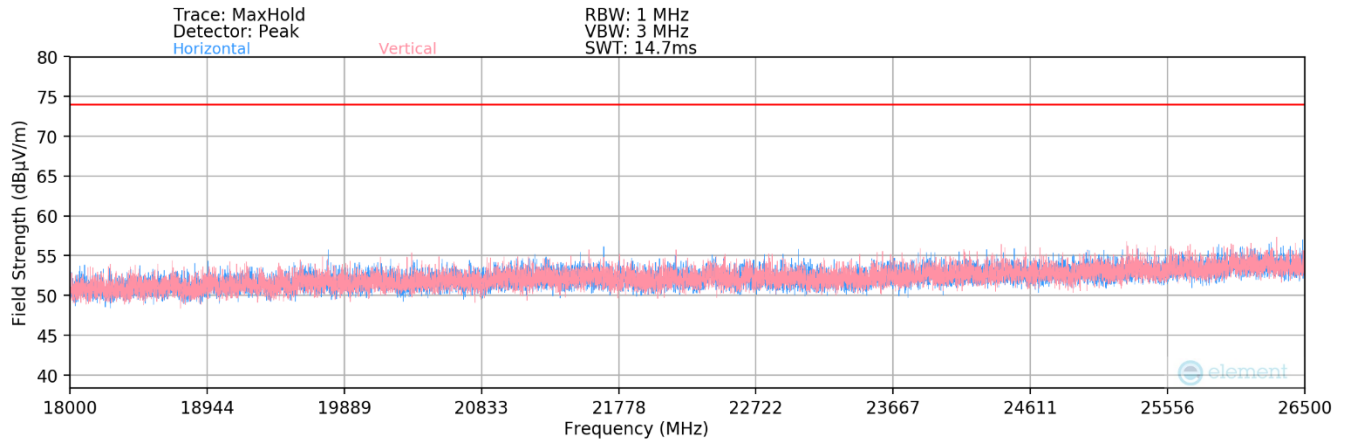


**Plot 7-337. Radiated Spurious Plot 18GHz - 26.5GHz SISO ANT1 (802.11ax – 242 Tones) – Closed**

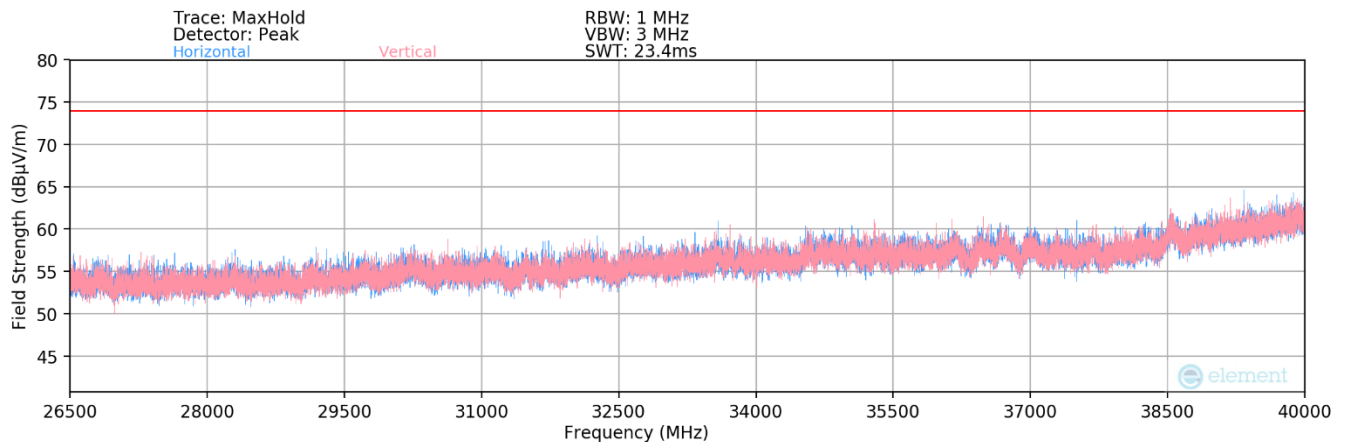


**Plot 7-338. Radiated Spurious Plot 26.5GHz - 40GHz SISO ANT1 (802.11ax – 242 Tones) – Closed**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 248 of 313

V 9.0 02/01/2019

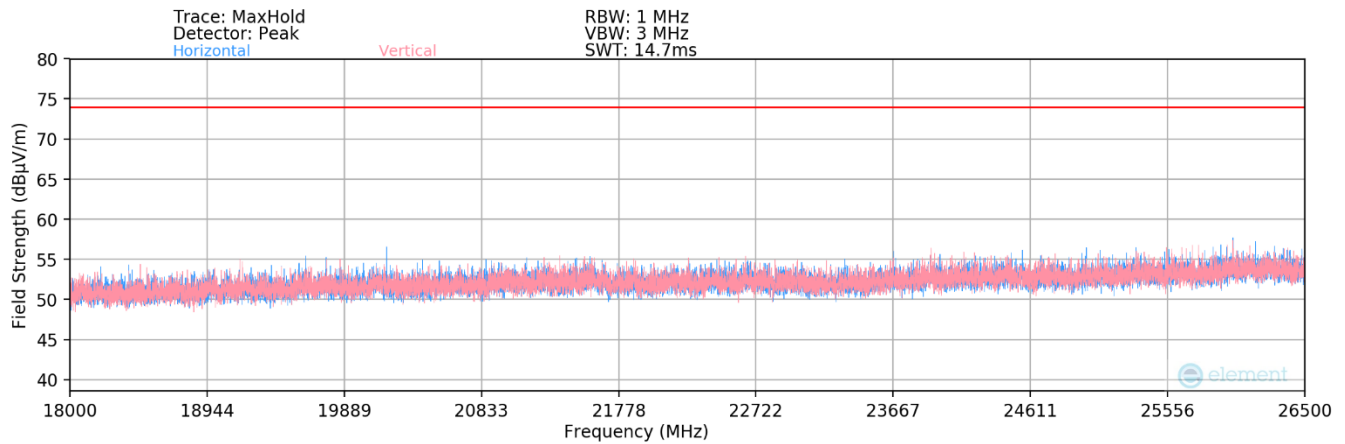

**Plot 7-339. Radiated Spurious Plot 18GHz - 26.5GHz SISO ANT1 (802.11ax – 242 Tones) – Half Open**

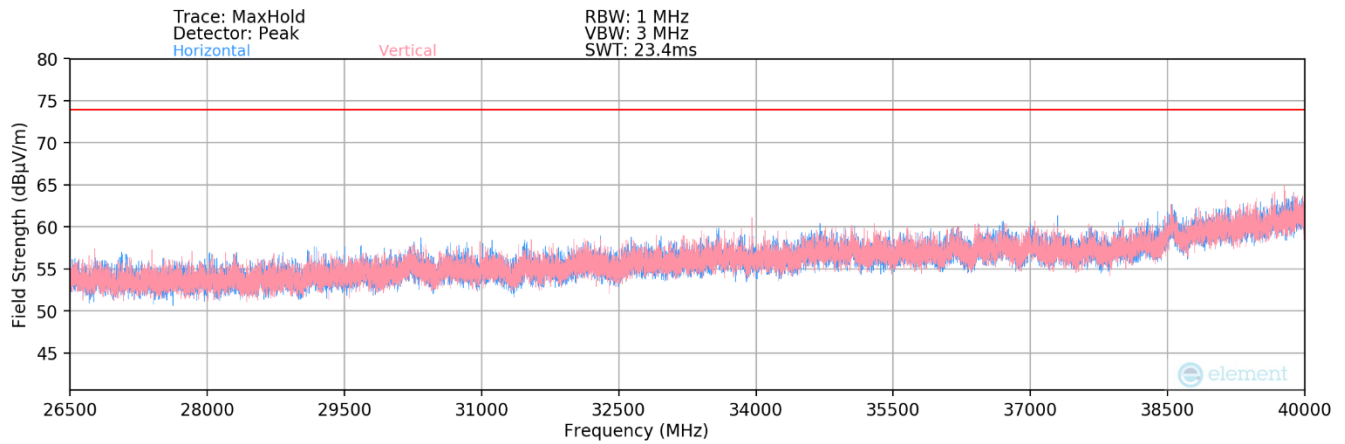

**Plot 7-340. Radiated Spurious Plot 26.5GHz - 40GHz SISO ANT1 (802.11ax – 242 Tones) – Half Open**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 249 of 313

V 9.0 02/01/2019

## SISO Antenna-1 Radiated Spurious Emission Measurements (242 Tones)

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode:	802.11ax (20MHz BW)
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	1 & 3 Meters
Operating Frequency:	5180MHz
Channel:	36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	Peak	V	288	224	-67.12	11.85	0.00	51.73	68.20	-16.47
* 15540.00	Average	V	-	-	-80.39	16.63	0.00	43.24	53.98	-10.74
* 15540.00	Peak	V	-	-	-68.70	16.63	0.00	54.93	73.98	-19.05
* 20720.00	Average	V	-	-	-67.15	3.15	-9.54	33.46	53.98	-20.52
* 20720.00	Peak	V	-	-	-59.43	3.15	-9.54	41.18	73.98	-32.80
25900.00	Peak	V	-	-	-57.01	4.77	-9.54	45.22	68.20	-22.98

Table 7-114. Radiated Measurements SISO ANT1 (242 Tones)

Worst Case Mode:	802.11ax (20MHz BW)
Worst Case Transfer Rate:	MCS0
RU Index:	61
Distance of Measurements:	1 & 3 Meters
Operating Frequency:	5200MHz
Channel:	40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	Peak	V	288	242	-65.91	11.49	0.00	52.58	68.20	-15.62
* 15600.00	Average	V	-	-	-80.50	16.85	0.00	43.35	53.98	-10.63
* 15600.00	Peak	V	-	-	-68.66	16.85	0.00	55.19	73.98	-18.79
* 20800.00	Average	V	-	-	-66.55	3.48	-9.54	34.38	53.98	-19.60
* 20800.00	Peak	V	-	-	-57.28	3.48	-9.54	43.66	73.98	-30.32
26000.00	Peak	V	-	-	-57.66	5.15	-9.54	44.94	68.20	-23.26

Table 7-115. Radiated Measurements SISO ANT1 (242 Tones)

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset	Page 250 of 313

V 9.0 02/01/2019

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	Peak	V	281	220	-66.11	12.01	0.00	52.90	68.20	-15.30
* 15720.00	Average	V	-	-	-80.39	17.21	0.00	43.82	53.98	-10.16
* 15720.00	Peak	V	-	-	-68.67	17.21	0.00	55.54	73.98	-18.44
* 20960.00	Average	V	-	-	-67.08	3.48	-9.54	33.85	53.98	-20.13
* 20960.00	Peak	V	-	-	-57.97	3.48	-9.54	42.97	73.98	-31.01
26200.00	Peak	V	-	-	-56.81	4.78	-9.54	45.43	68.20	-22.77

**Table 7-116. Radiated Measurements SISO ANT1 (242 Tones)**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5260MHz  
 Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	Peak	V	318	59	-67.00	12.54	0.00	52.54	68.20	-15.66
* 15780.00	Average	V	-	-	-80.50	17.03	0.00	43.53	53.98	-10.45
* 15780.00	Peak	V	-	-	-68.81	17.03	0.00	55.22	73.98	-18.76
* 21040.00	Average	V	-	-	-67.23	3.53	-9.54	33.76	53.98	-20.22
* 21040.00	Peak	V	-	-	-58.14	3.53	-9.54	42.84	73.98	-31.14
26300.00	Peak	V	-	-	-57.61	4.64	-9.54	44.49	68.20	-23.71

**Table 7-117. Radiated Measurements SISO ANT1 (242 Tones)**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 251 of 313

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5280MHz  
 Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	Peak	V	316	43	-64.97	12.39	0.00	54.42	68.20	-13.78
* 15840.00	Average	V	-	-	-80.53	16.71	0.00	43.18	53.98	-10.80
* 15840.00	Peak	V	-	-	-68.74	16.71	0.00	54.97	73.98	-19.01
* 21120.00	Average	V	-	-	-66.89	3.68	-9.54	34.25	53.98	-19.73
* 21120.00	Peak	V	-	-	-56.93	3.68	-9.54	44.21	73.98	-29.77
26400.00	Peak	V	-	-	-56.83	4.78	-9.54	45.41	68.20	-22.79

**Table 7-118. Radiated Measurements SISO ANT1 (242 Tones)**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	Average	V	339	48	-76.81	12.36	0.00	42.55	53.98	-11.43
* 10640.00	Peak	V	339	48	-64.77	12.36	0.00	54.59	73.98	-19.39
* 15960.00	Average	V	-	-	-79.87	18.25	0.00	45.38	53.98	-8.60
* 15960.00	Peak	V	-	-	-68.10	18.25	0.00	57.15	73.98	-16.83
* 21280.00	Average	V	-	-	-67.23	3.72	-9.54	33.94	53.98	-20.04
* 21280.00	Peak	V	-	-	-58.29	3.72	-9.54	42.89	73.98	-31.09
26600.00	Peak	V	-	-	-57.03	4.72	-9.54	45.14	68.20	-23.06

**Table 7-119. Radiated Measurements SISO ANT1 (242 Tones)**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 252 of 313

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11000.00	Average	V	305	350	-78.34	12.61	0.00	41.27	53.98	-12.71
* 11000.00	Peak	V	305	350	-66.06	12.61	0.00	53.55	73.98	-20.43
16500.00	Peak	V	-	-	-67.74	18.00	0.00	57.26	68.20	-10.94
22000.00	Peak	V	-	-	-57.36	3.83	-9.54	43.93	68.20	-24.27
27500.00	Peak	V	-	-	-55.62	4.96	-9.54	46.80	68.20	-21.40

**Table 7-120. Radiated Measurements SISO ANT1 (242 Tones)**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5600MHz  
 Channel: 120

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11200.00	Average	V	316	171	-77.18	12.49	0.00	42.31	53.98	-11.67
* 11200.00	Peak	V	316	171	-64.45	12.49	0.00	55.04	73.98	-18.94
16800.00	Peak	V	-	-	-68.90	18.32	0.00	56.42	68.20	-11.78
* 22400.00	Average	V	-	-	-66.77	3.79	-9.54	34.48	53.98	-19.50
* 22400.00	Peak	V	-	-	-56.80	3.79	-9.54	44.45	73.98	-29.53
28000.00	Peak	V	-	-	-56.77	4.94	-9.54	45.63	68.20	-22.57

**Table 7-121. Radiated Measurements SISO ANT1 (242 Tones)**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 253 of 313

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5720MHz  
 Channel: 144

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11440.00	Average	V	278	170	-77.67	12.91	0.00	42.24	53.98	-11.73
* 11440.00	Peak	V	278	170	-65.48	12.91	0.00	54.43	73.98	-19.54
17160.00	Peak	V	-	-	-68.06	17.87	0.00	56.81	68.20	-11.39
* 22880.00	Average	V	-	-	-66.78	3.79	-9.54	34.47	53.98	-19.51
* 22880.00	Peak	V	-	-	-57.38	3.79	-9.54	43.86	73.98	-30.12
28600.00	Peak	V	-	-	-56.99	5.27	-9.54	45.74	68.20	-22.46

**Table 7-122. Radiated Measurements SISO ANT1 (242 Tones)**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	Average	V	297	179	-77.77	13.32	0.00	42.55	53.98	-11.42
* 11490.00	Peak	V	297	179	-63.89	13.32	0.00	56.43	73.98	-17.54
17235.00	Peak	V	-	-	-67.98	17.85	0.00	56.87	68.20	-11.33
* 22980.00	Average	V	-	-	-68.01	3.79	-9.54	33.23	53.98	-20.74
* 22980.00	Peak	V	-	-	-57.59	3.79	-9.54	43.66	73.98	-30.32
28725.00	Peak	V	-	-	-57.38	5.41	-9.54	45.49	68.20	-22.71

**Table 7-123. Radiated Measurements SISO ANT1 (242 Tones)**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 254 of 313

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	Average	V	281	178	-77.37	12.93	0.00	42.56	53.98	-11.42
* 11570.00	Peak	V	281	178	-63.93	12.93	0.00	56.00	73.98	-17.98
17355.00	Peak	V	-	-	-68.75	18.36	0.00	56.61	68.20	-11.59
23140.00	Peak	V	-	-	-57.77	3.75	-9.54	43.44	68.20	-24.76
28925.00	Peak	V	-	-	-57.53	5.46	-9.54	45.38	68.20	-22.82

**Table 7-124. Radiated Measurements SISO ANT1 (242 Tones)**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11650.00	Average	V	287	181	-78.44	13.82	0.00	42.38	53.98	-11.60
* 11650.00	Peak	V	287	181	-65.62	13.82	0.00	55.20	73.98	-18.78
17475.00	Peak	V	-	-	-68.34	17.74	0.00	56.40	68.20	-11.80
23300.00	Peak	V	-	-	-59.10	3.76	-9.54	42.12	68.20	-26.08
29125.00	Peak	V	-	-	-57.71	5.54	-9.54	45.29	68.20	-22.91

**Table 7-125. Radiated Measurements SISO ANT1 (242 Tones)**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 255 of 313

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5845MHz  
 Channel: 169

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11690.00	Average	V	304	182	-78.24	13.65	0.00	42.41	53.98	-11.57
* 11690.00	Peak	V	304	182	-65.38	13.65	0.00	55.27	73.98	-18.71
17535.00	Peak	V	-	-	-68.67	17.82	0.00	56.15	68.20	-12.05
23380.00	Peak	V	-	-	-56.10	3.85	-9.54	54.75	68.20	-13.45
29225.00	Peak	V	-	-	-55.58	5.60	-9.54	57.02	68.20	-11.18
35070.00	Peak	V	-	-	-55.14	8.11	-9.54	59.97	68.20	-8.23

**Table 7-126. Radiated Measurements SISO ANT1 (242 Tones)**

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5865MHz  
 Channel: 173

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11730.00	Average	V	333	194	-79.45	13.70	0.00	41.25	53.98	-12.73
* 11730.00	Peak	V	333	194	-66.89	13.70	0.00	53.81	73.98	-20.17
17595.00	Peak	V	-	-	-67.65	17.70	0.00	57.05	68.20	-11.15
23460.00	Peak	V	-	-	-56.79	3.85	-9.54	54.06	68.20	-14.14
29325.00	Peak	V	-	-	-55.40	5.85	-9.54	57.45	68.20	-10.75
35190.00	Peak	V	-	-	-56.63	8.16	-9.54	58.53	68.20	-9.67

**Table 7-127. Radiated Measurements SISO ANT1 (242 Tones)**

FCC ID: A3LSMF721JPN	MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
Test Report S/N: 1M2206140073-12-R1.A3L	Test Dates: 4/8/2022 – 7/30/2022	EUT Type: Portable Handset		Page 256 of 313

Worst Case Mode: 802.11ax (20MHz BW)  
 Worst Case Transfer Rate: MCS0  
 RU Index: 61  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5885MHz  
 Channel: 177


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11770.00	Average	V	299	199	-79.20	13.81	0.00	41.61	53.98	-12.37
* 11770.00	Peak	V	299	199	-66.89	13.81	0.00	53.92	73.98	-20.06
17655.00	Peak	V	-	-	-68.43	17.52	0.00	56.09	68.20	-12.11
23540.00	Peak	V	-	-	-55.96	3.84	-9.54	54.89	68.20	-13.31
29425.00	Peak	V	-	-	-56.13	5.87	-9.54	56.74	68.20	-11.46
35310.00	Peak	V	-	-	-55.29	8.04	-9.54	59.74	68.20	-8.46

**Table 7-128. Radiated Measurements SISO ANT1 (242 Tones)**


<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 257 of 313

## 7.6.2 MIMO Radiated Spurious Emission Measurements


### 26 Tones

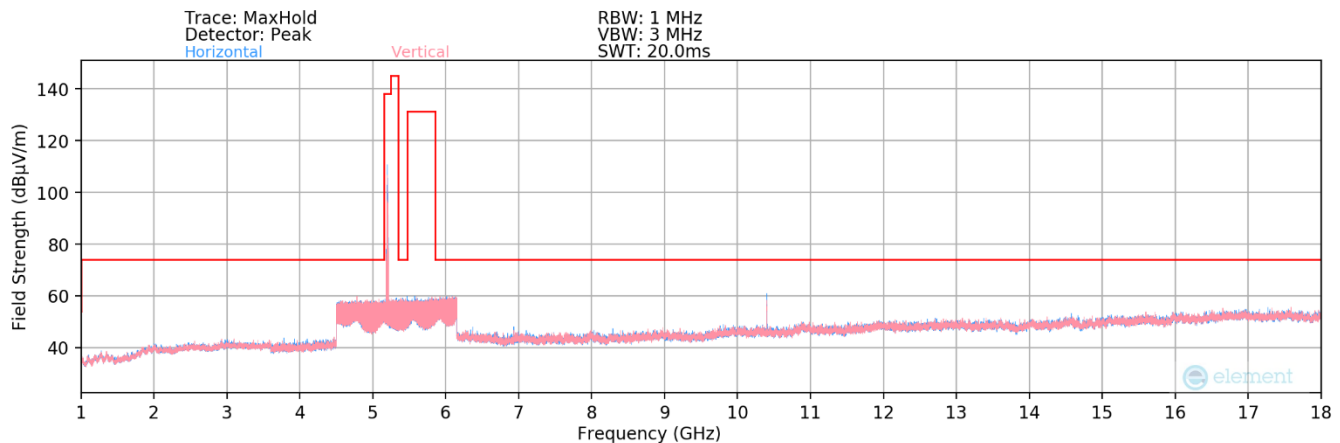

**Plot 7-341. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U1 Ch. 40 – 26 Tones) – Open**

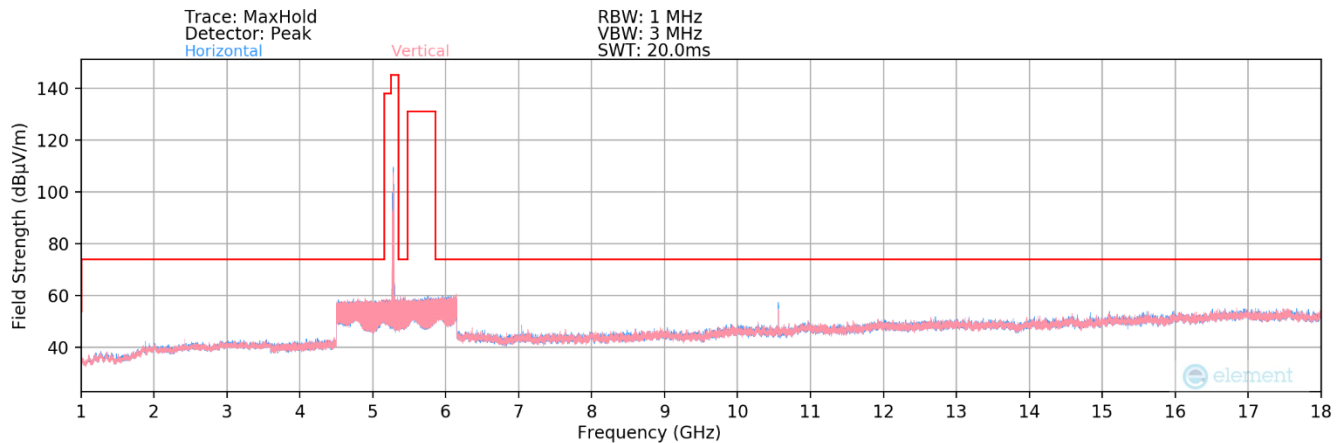

**Plot 7-342. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U2A Ch. 56 – 26 Tones) – Open**

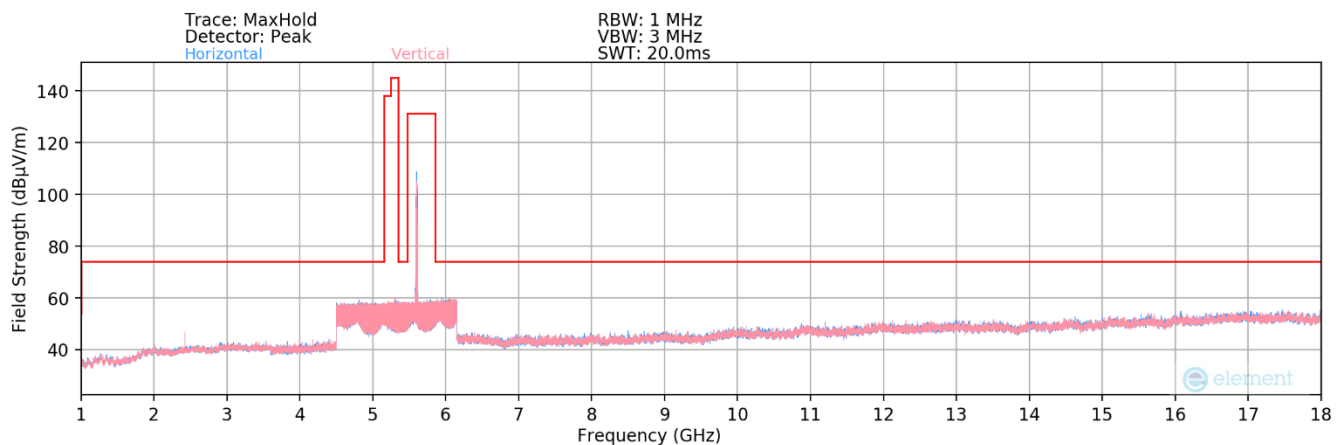

**Plot 7-343. Radiated Spurious Plot above 1GHz MIMO (802.11ax – U2C Ch. 120 – 26 Tones) – Open**

<b>FCC ID:</b> A3LSMF721JPN	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1M2206140073-12-R1.A3L	<b>Test Dates:</b> 4/8/2022 – 7/30/2022	<b>EUT Type:</b> Portable Handset	Page 258 of 313

V 9.0 02/01/2019

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without written permission from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).