




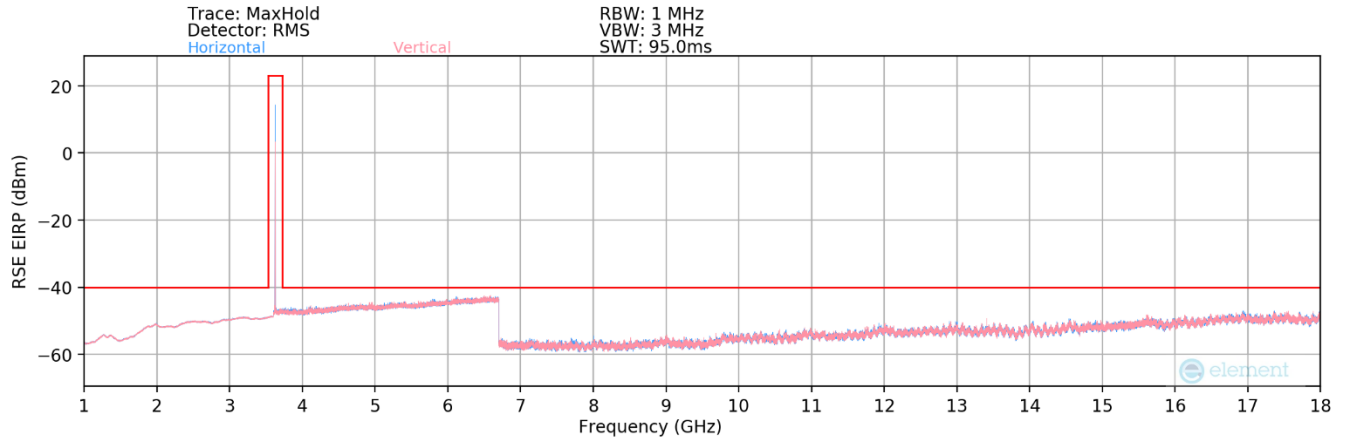

Plot 7-175. Radiated Spurious Plot 1-18 GHz (NR Band n48- Ant C) – Open

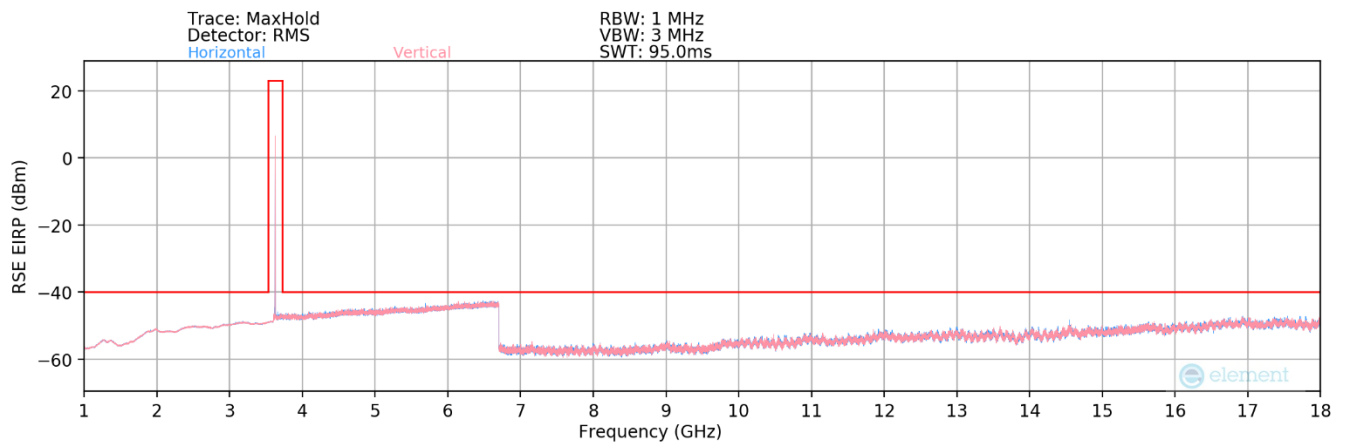


Plot 7-176. Radiated Spurious Plot 1-18 GHz (NR Band n48- Ant C) – Closed

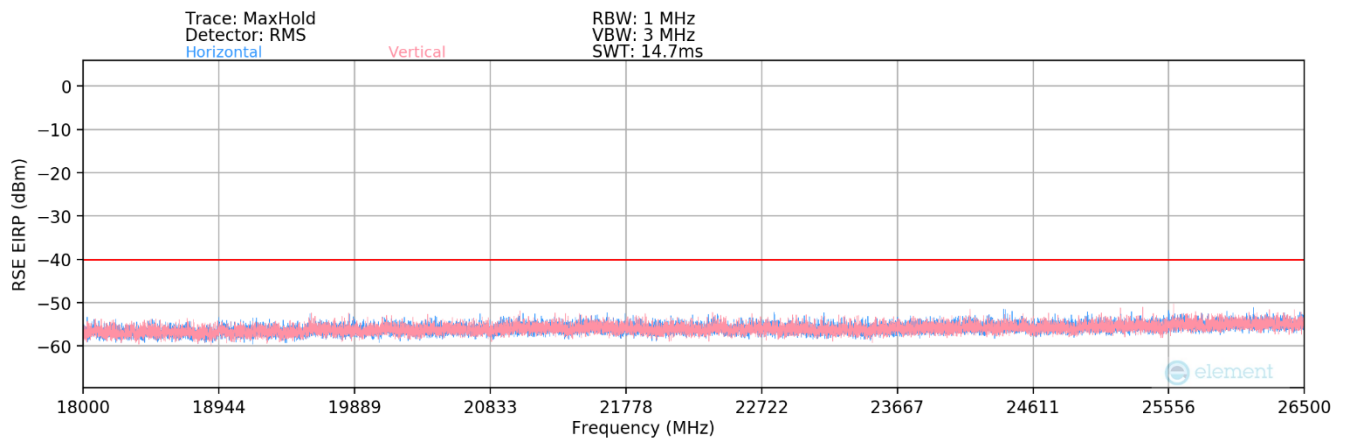


Plot 7-177. Radiated Spurious Plot 18-26.5 GHz (NR Band n48- Ant C) – Open


FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 124 of 138

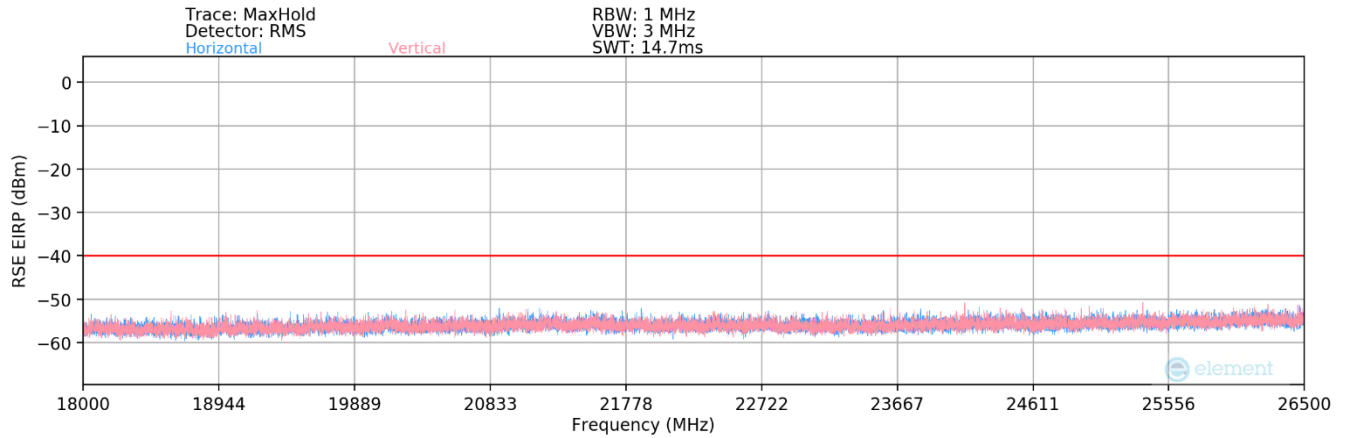

Plot 7-178. Radiated Spurious Plot 18-26.5 GHz (NR Band n48- Ant C) – Closed

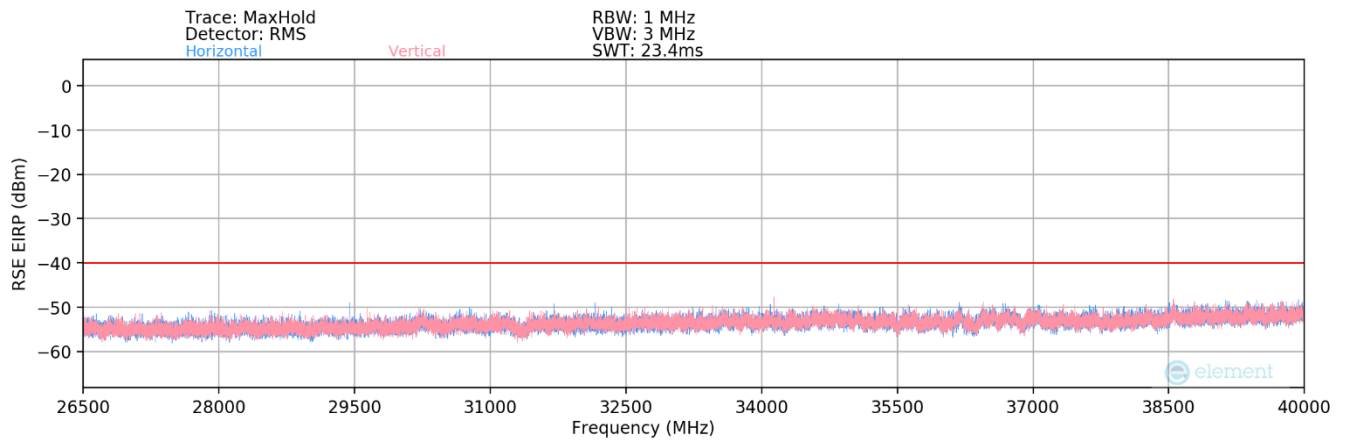

Plot 7-179. Radiated Spurious Plot 26.5-40 GHz (NR Band n48- Ant C) – Open

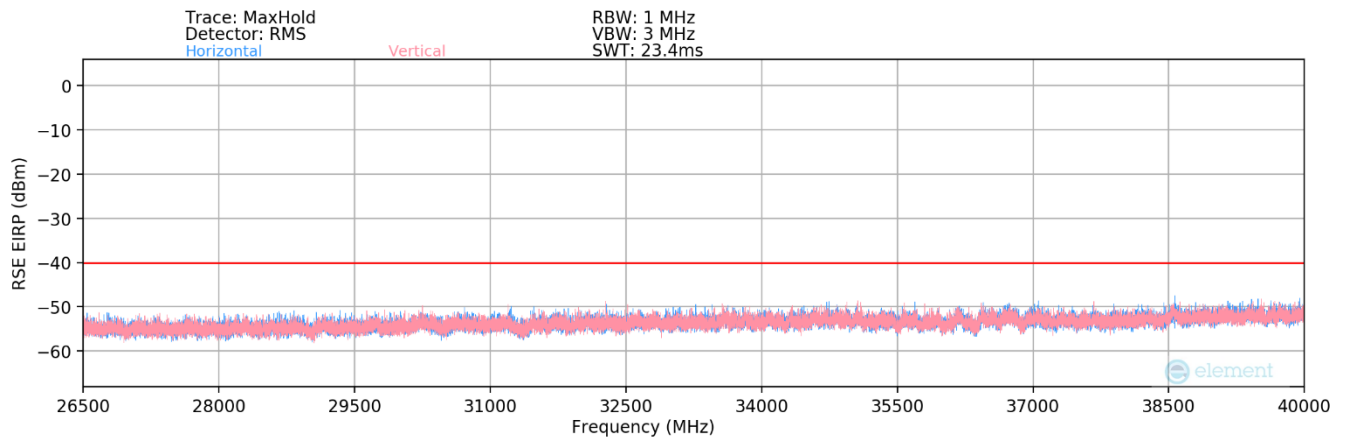

Plot 7-180. Radiated Spurious Plot 26.5-40 GHz (NR Band n48- Ant C) – Closed

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 125 of 138

Bandwidth (MHz):	40
Frequency (MHz):	3570.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7140.00	H	292.00	69.00	-74.39	8.53	41.14	-54.12	-40.00	-14.12
10710.00	H	-	-	-78.42	12.30	40.88	-54.38	-40.00	-14.38
14280.00	H	-	-	-79.06	14.66	42.60	-52.66	-40.00	-12.66
17850.00	H	-	-	-79.77	18.17	45.40	-49.85	-40.00	-9.85

Table 7-40. Radiated Spurious Data (NR Band n48 – Low Channel – Ant C) – Open

Bandwidth (MHz):	40
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	H	262.00	70.00	-73.70	7.61	40.91	-54.35	-40.00	-14.35
10875.00	H	-	-	-78.20	12.18	40.98	-54.27	-40.00	-14.27
14500.00	H	-	-	-79.76	15.49	42.73	-52.53	-40.00	-12.53

Table 7-41. Radiated Spurious Data (NR Band n48 – Mid Channel – Ant C) – Open


Bandwidth (MHz):	40
Frequency (MHz):	3680.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7360.00	H	328.00	303.00	-75.33	8.16	39.83	-55.43	-40.00	-15.43
11040.00	H	-	-	-78.06	12.33	41.27	-53.98	-40.00	-13.98
14720.00	H	-	-	-79.02	16.13	44.11	-51.15	-40.00	-11.15


Table 7-42. Radiated Spurious Data (NR Band n48 – High Channel – Ant C) – Open

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 126 of 138


EN-DC n48 - B66

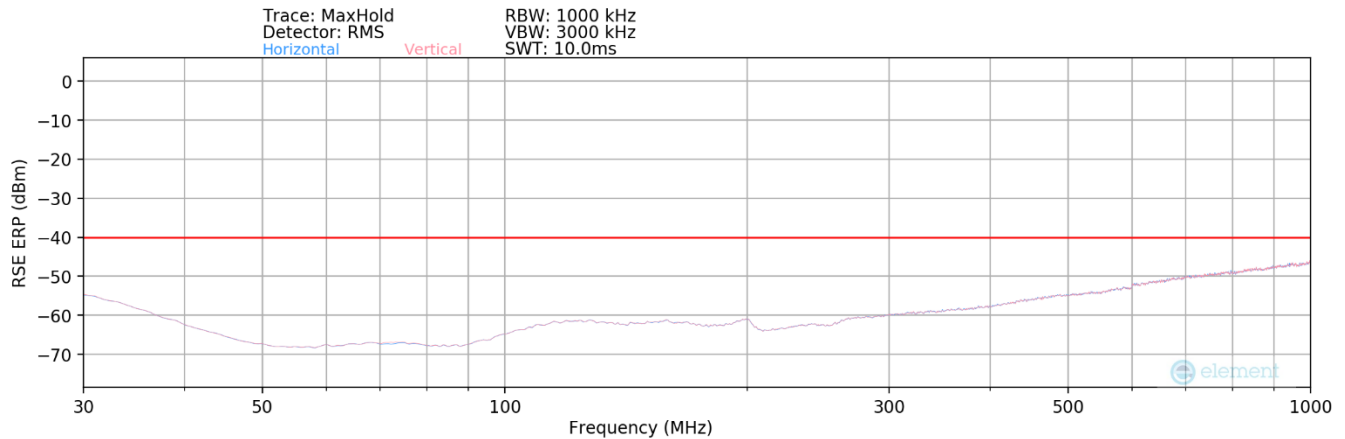

Plot 7-181. Radiated Spurious Plot 30 MHz-1 GHz (EN-DC n48-B66) – Open

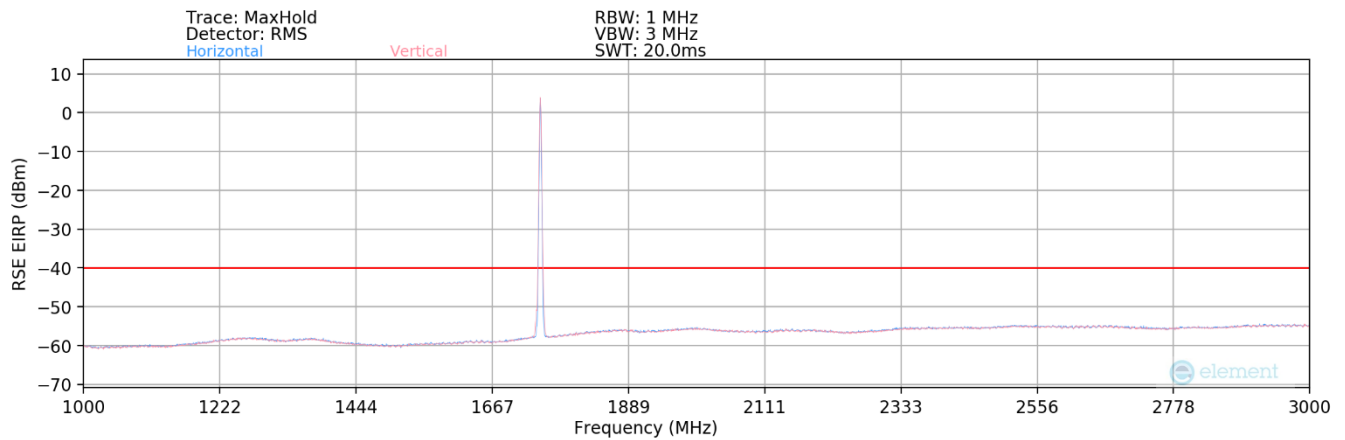


Plot 7-182. Radiated Spurious Plot 1-3 GHz (EN-DC n48-B66) – Open

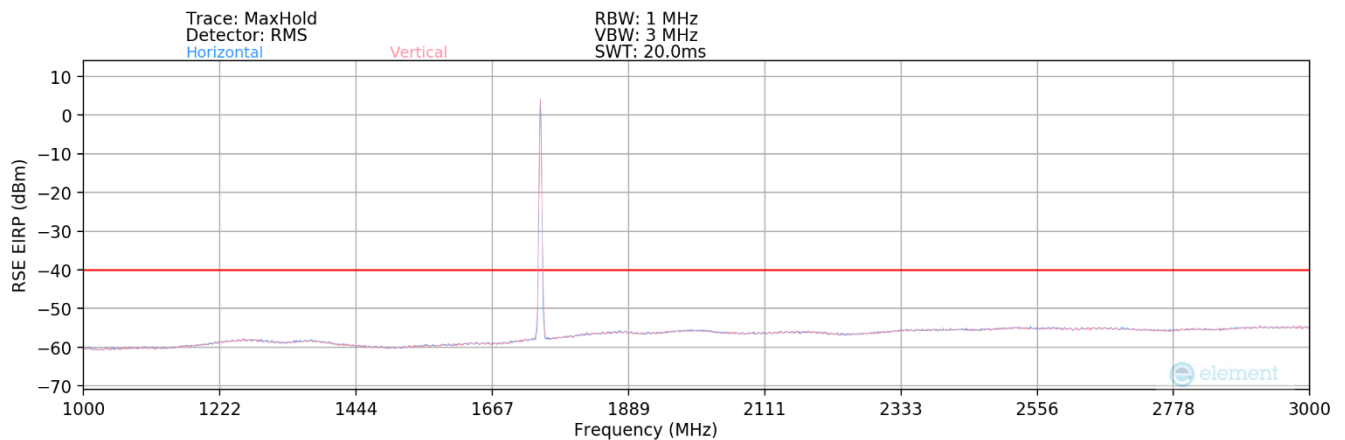


Plot 7-183. Radiated Spurious Plot 1-3GHz (EN-DC n48-B66) – Closed

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 127 of 138


V3.0 1/6/2022

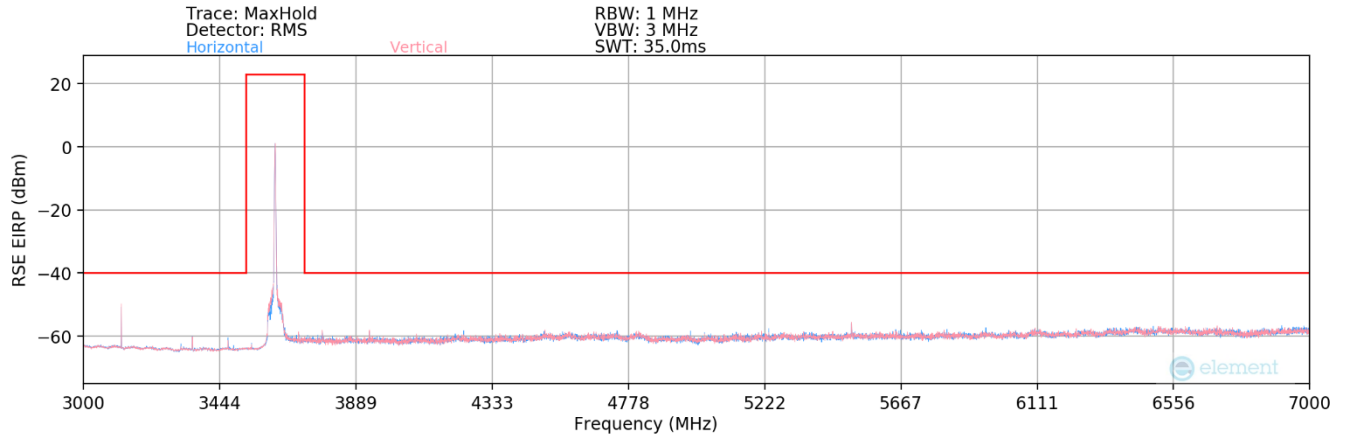

Plot 7-184. Radiated Spurious Plot 3-7 GHz (EN-DC n48-B66) – Open

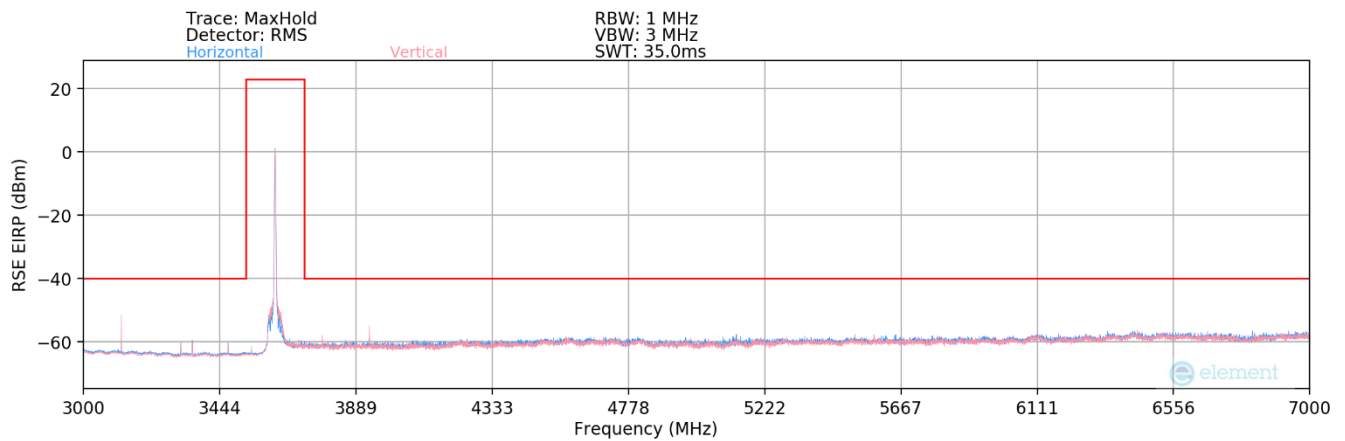


Plot 7-185. Radiated Spurious Plot 3-7 GHz (EN-DC n48-B66) – Closed

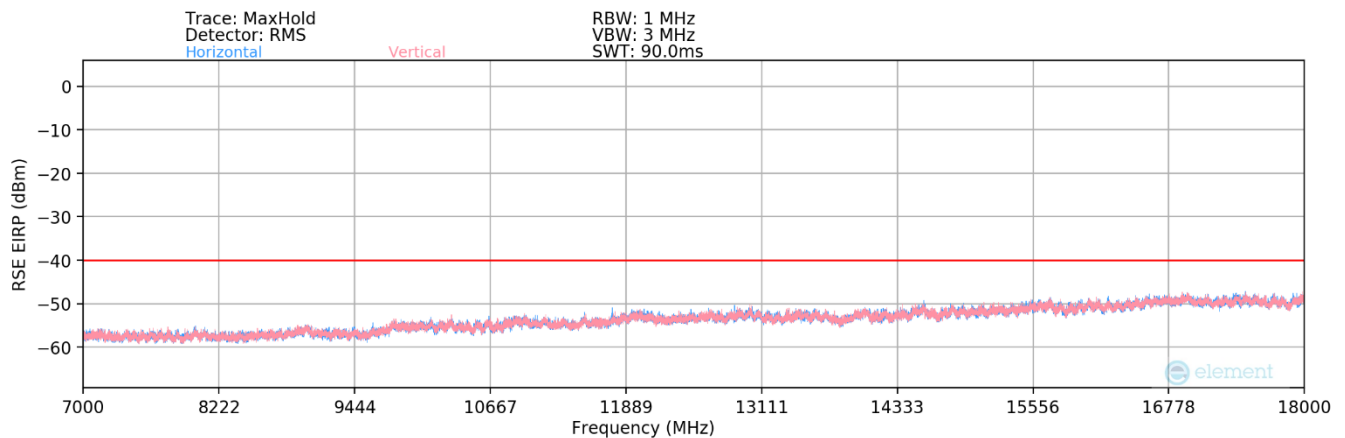

Plot 7-186. Radiated Spurious Plot 7-18 GHz (EN-DC n48-B66) – Open

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 128 of 138

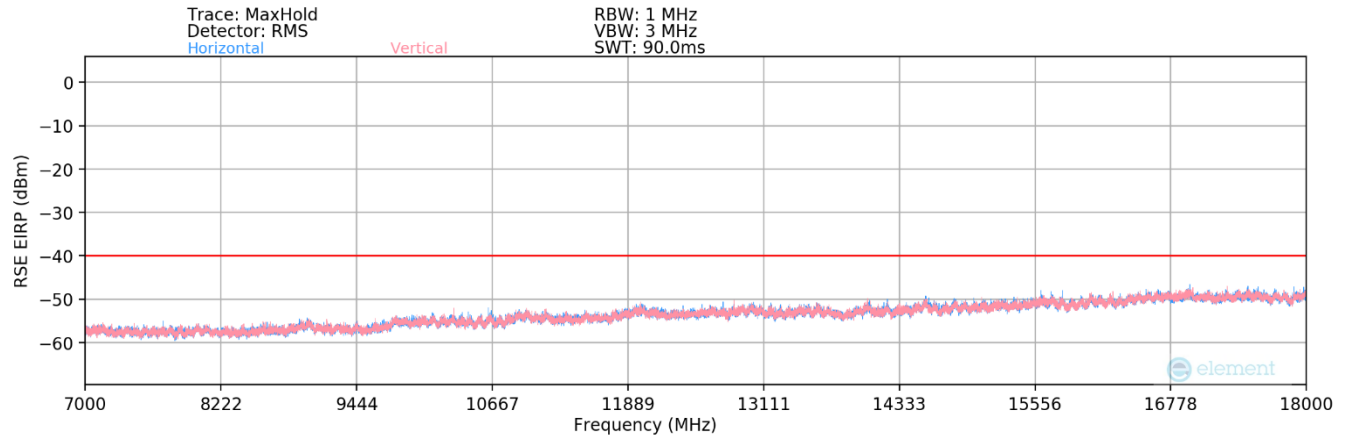

Plot 7-187. Radiated Spurious Plot 7-18 GHz (EN-DC n48-B66) – Closed

Bandwidth (MHz):	40 & 20
Frequency (MHz):	3625 & 1745
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 53 & 1 / 50
Anchor Band	LTE Band 66

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
135.0	H	-	-	-91.15	20.09	35.94	-59.32	-40.00	-19.32
3123.5	H	148	320	-70.83	3.17	39.34	-55.92	-40.00	-15.92
3317.9	H	146	316	-75.28	2.44	34.16	-61.10	-40.00	-21.10
3471.5	H	160	327	-76.74	2.76	33.02	-62.24	-40.00	-22.24
3932.5	H	155	335	-73.93	3.06	36.13	-59.13	-40.00	-19.13
5505.0	H	-	-	-78.84	5.18	33.34	-61.92	-40.00	-21.92

Table 7-43. Radiated Spurious Data (EN-DC n48-B66) – Open

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 129 of 138

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 96, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015 – Section 5.6

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes


None

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 130 of 138

Frequency Stability / Temperature Variation

LTE Band 48					
		Operating Frequency (Hz):		3,625,000,000	
		Ref. Voltage (VDC):		4.39	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.39	- 30	3,625,093,112	-164	-0.0000045
		- 20	3,625,095,991	2,715	0.0000749
		- 10	3,625,092,108	-1,167	-0.0000322
		0	3,625,091,282	-1,994	-0.0000550
		+ 10	3,625,089,435	-3,841	-0.0001059
		+ 20 (Ref)	3,625,093,275	0	0.0000000
		+ 30	3,625,093,036	-239	-0.0000066
		+ 40	3,625,096,589	3,314	0.0000914
		+ 50	3,625,099,613	6,338	0.0001748
Battery Endpoint	3.54	+ 20	3,625,093,371	95	0.0000026

Table 7-44. LTE Band 48 Frequency Stability Data

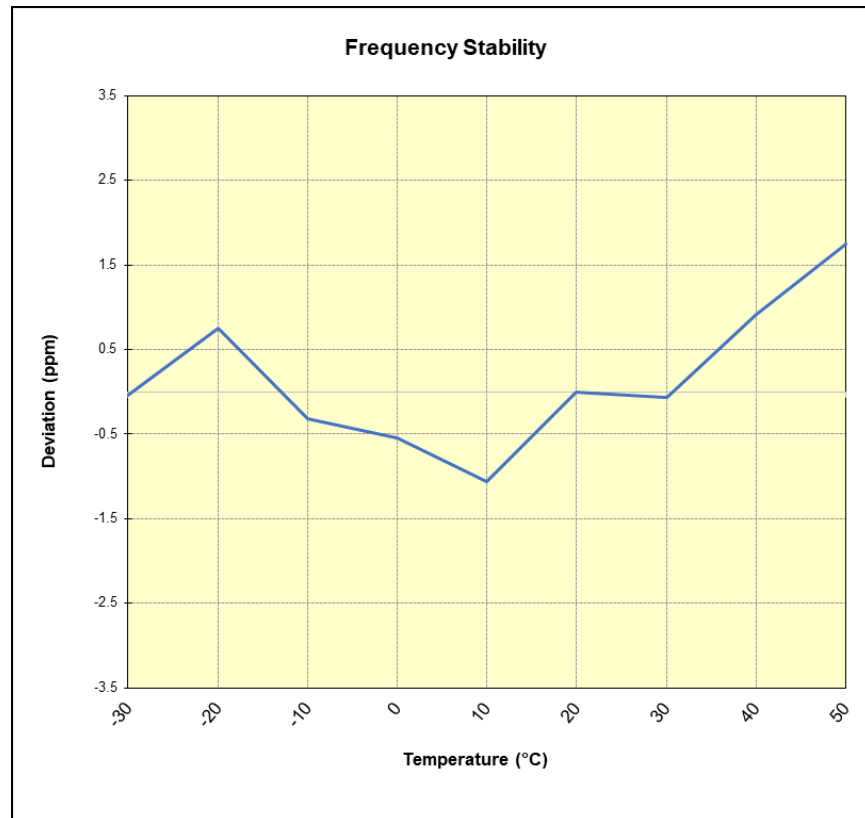

Plot 7-188. LTE Band 48 Frequency Stability Chart


FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 131 of 138

V3.0 1/6/2022

Frequency Stability / Temperature Variation

NR Band n48					
		Operating Frequency (Hz):		3,625,000,000	
		Ref. Voltage (VDC):		4.39	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.39	- 30	-	-	-
		- 20	3,625,074,785	3,495	0.0000964
		- 10	3,625,074,230	2,940	0.0000811
		0	3,625,071,053	-237	-0.0000065
		+ 10	3,625,063,745	-7,545	-0.0002081
		+ 20 (Ref)	3,625,071,290	0	0.0000000
		+ 30	3,625,076,510	5,220	0.0001440
		+ 40	3,625,072,019	729	0.0000201
		+ 50	3,625,078,307	7,016	0.0001935
Battery Endpoint	3.54	+ 20	3,625,077,018	5,727	0.0001580

Table 7-45. NR Band n48 Frequency Stability Data

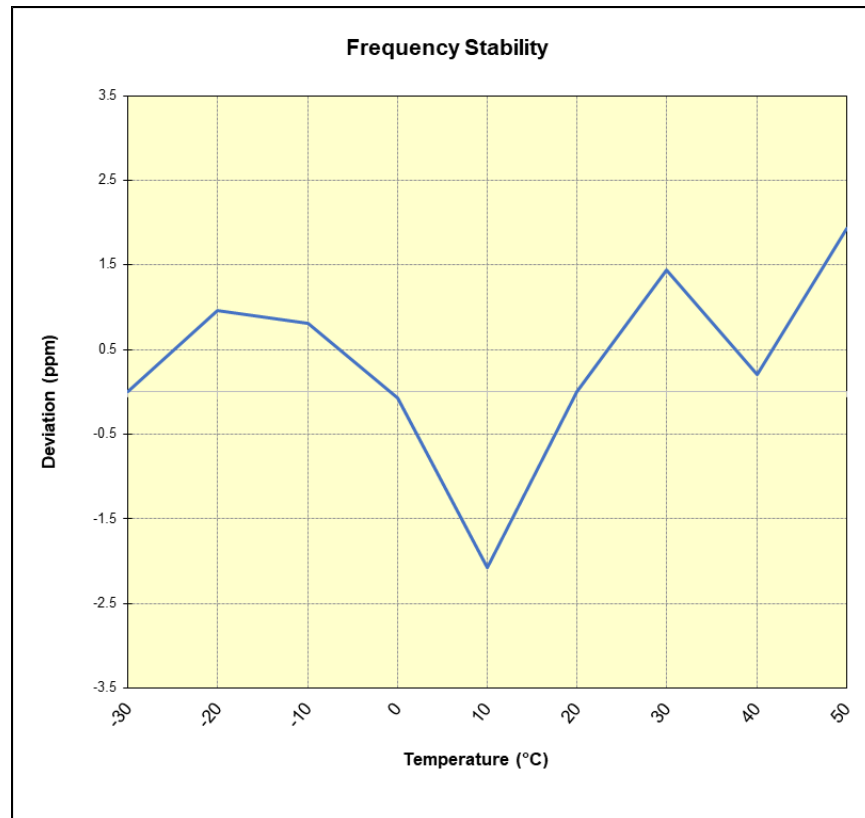

Plot 7-189. NR Band n48 Frequency Stability Chart

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 132 of 138

V3.0 1/6/2022

7.9 End User Device Additional Requirement (CBSD Protocol)

Test Overview and Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified CBSD (Ruckus FCC ID: S9GQ910US00) as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

Test Procedure Used

KDB 940660 D01 v03, WINNF-TS-0122 V1.0.2

Test Setup/Method

The EUT was connected via an RF cable to a certified CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRS CBSD Test Specification.


1. Run#1:
 - a. Setup WINNF.PT.C.HBT.1 with 3615MHz – 3635MHz.
 - b. Enable AP service from Ruckus Cloud management.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.
2. Run#2:
 - a. Setup WINNF.PT.C.HBT.1 with 3660MHz – 3680MHz.
 - b. Enable AP service from Ruckus Cloud management.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.

Test Notes


The EUT is an End User Device.

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 133 of 138

LTE Band 48 Run#1:

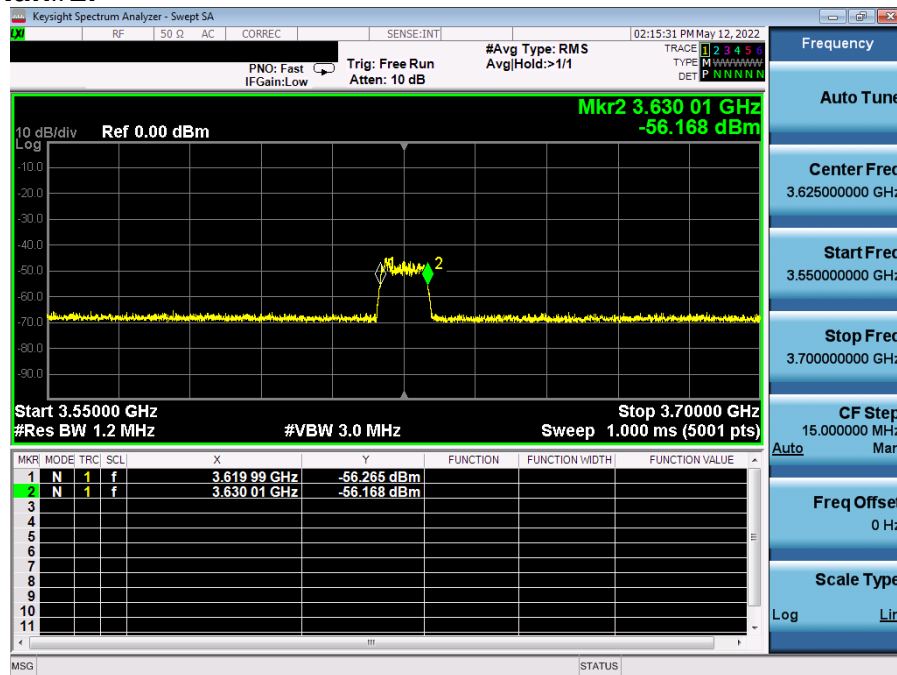

Plot 7-190. Run#1 End User Device Frequency of Operations

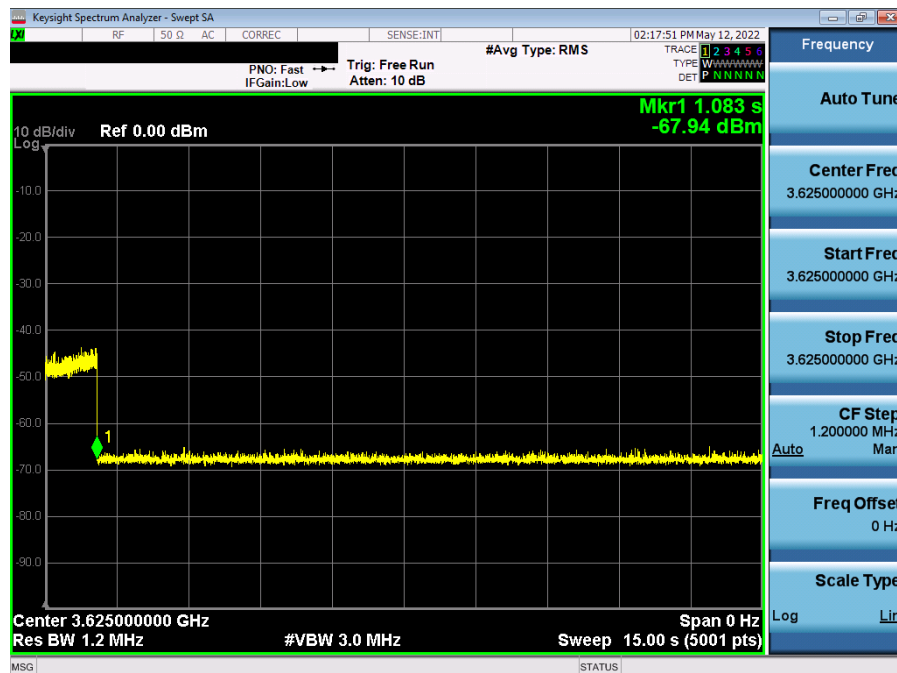

Plot 7-191. Run#1 End User Device Discontinues Operations within 10s

Note:


Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation.


Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 134 of 138

LTE Band 48 Run#2:

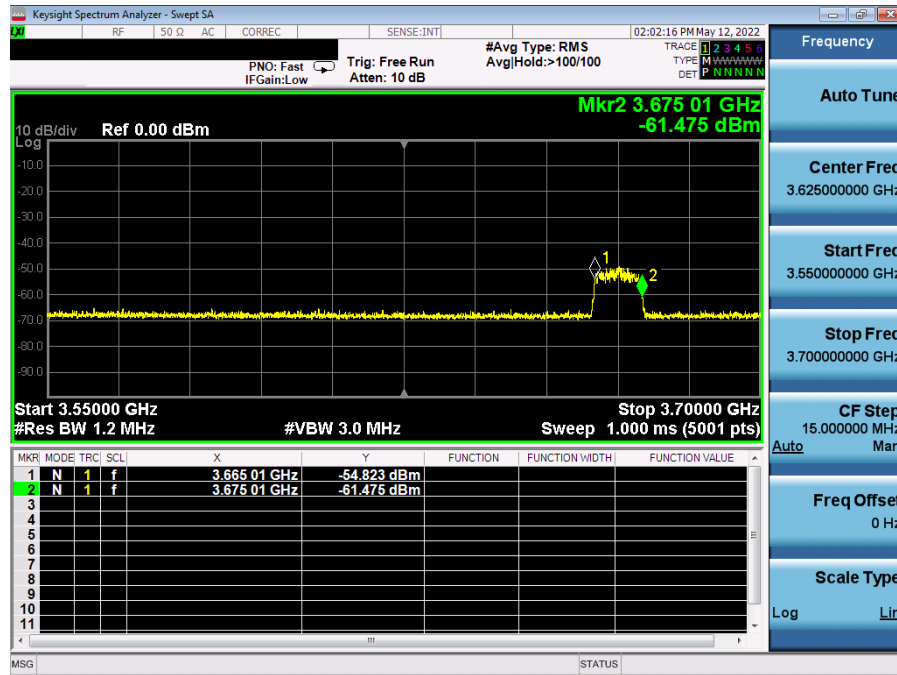

Plot 7-192. Run#2 End User Device Frequency of Operations

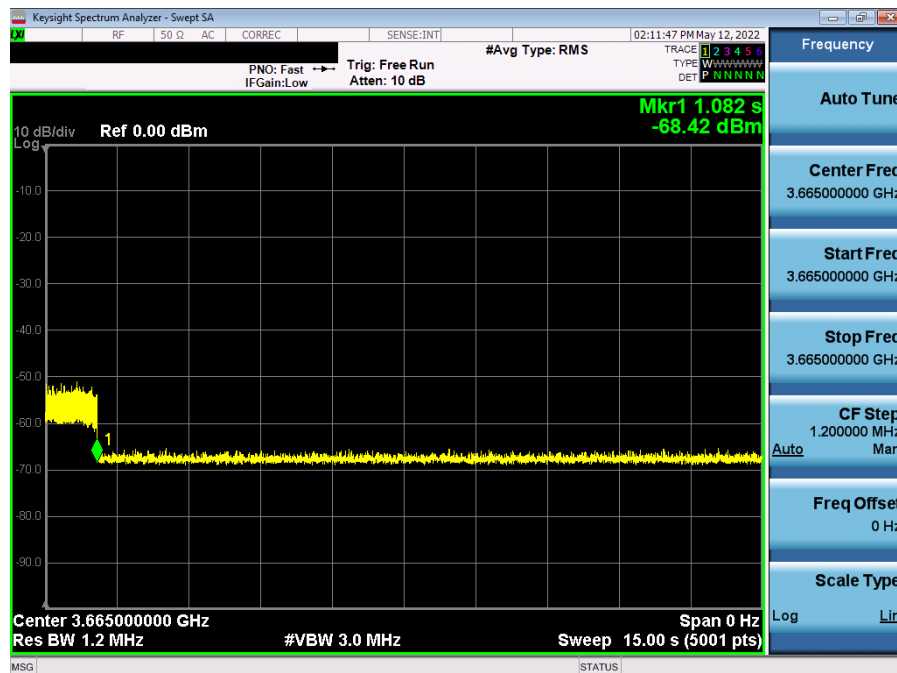

Plot 7-193. Run#2 End User Device Discontinues Operations within 10s

Note:


Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation.


Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 135 of 138

NR Band n48 Run#1:

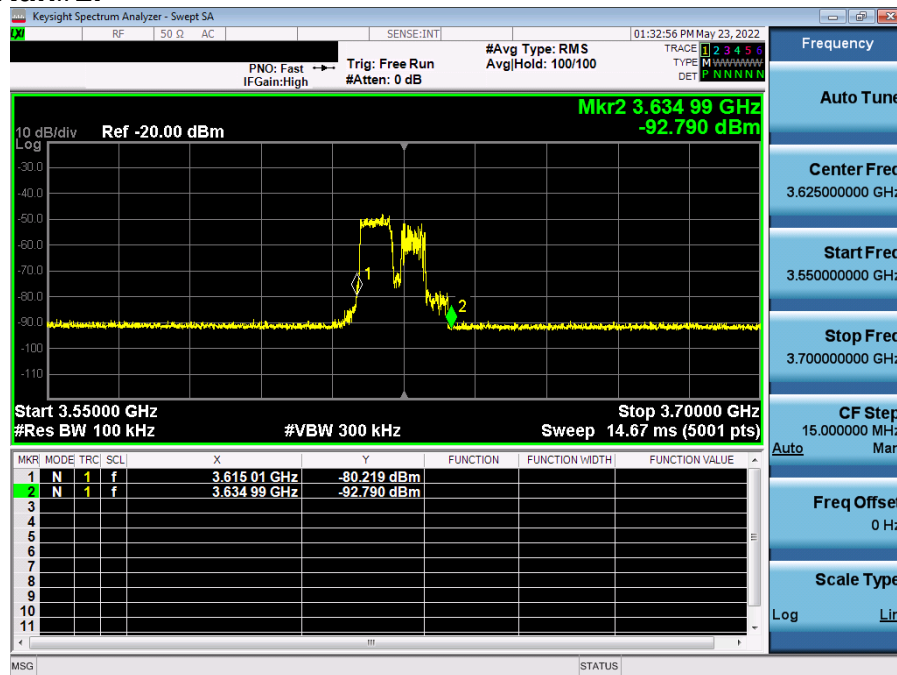

Plot 7-194. Run#1 End User Device Frequency of Operations

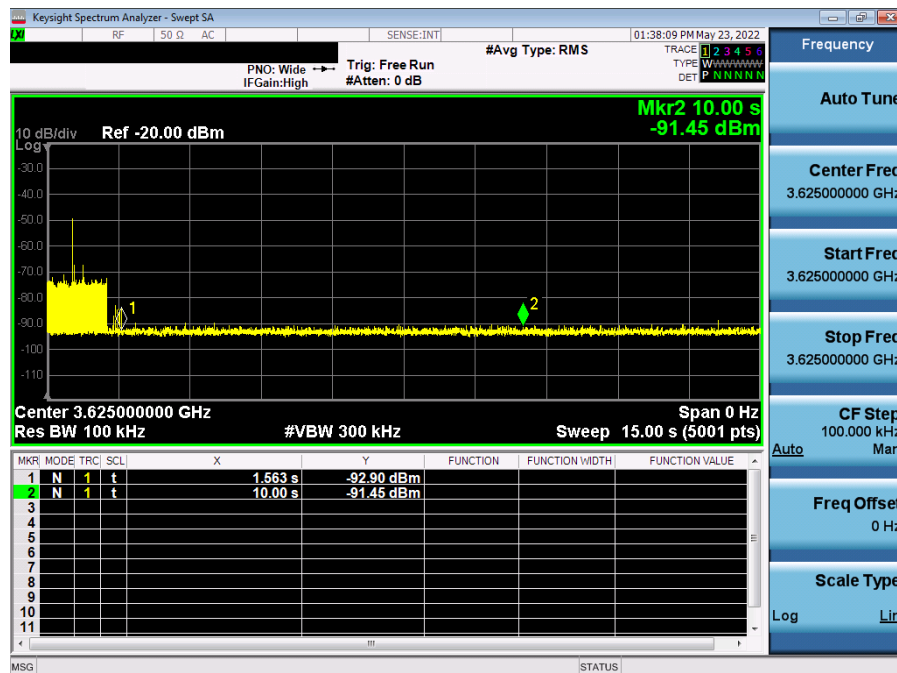

Plot 7-195. Run#1 End User Device Discontinues Operations within 10s

Note:


Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation.


Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 136 of 138

NR Band n48 Run#2:

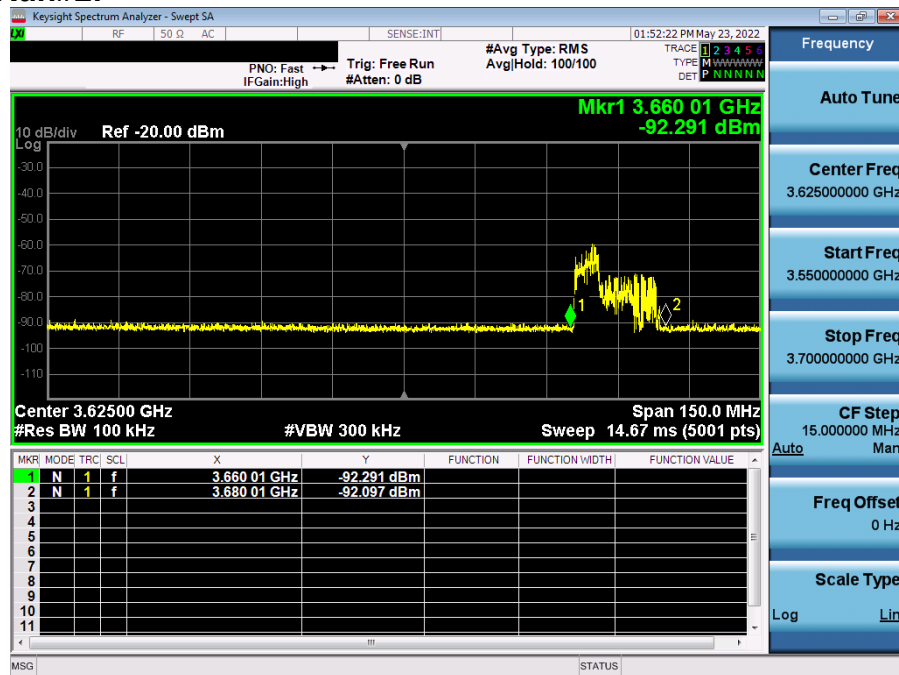

Plot 7-196. Run#2 End User Device Frequency of Operations

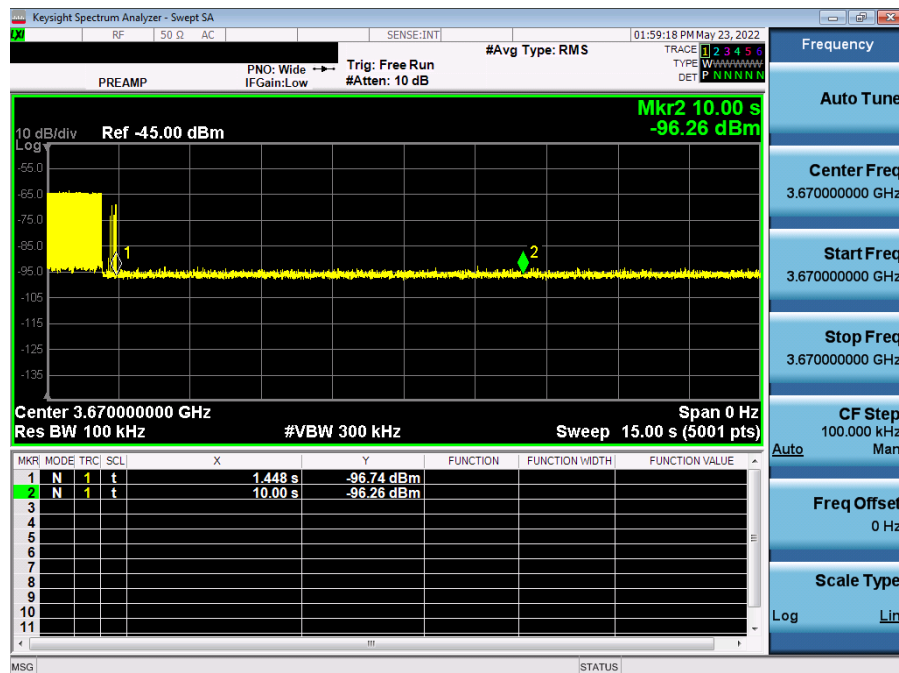

Plot 7-197. Run#2 End User Device Discontinues Operations within 10s

Note:

Marker 1: CBSD sends instructions to discontinue LTE operations.

Marker 2: EUT discontinues operation.

Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 137 of 138

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF721U** complies with all of the End User Device requirements of Part 96 of the FCC Rules for LTE operation only.

FCC ID: A3LSMF721U	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-08.A3L	Test Dates: 4/8/2022 - 6/23/2022	EUT Type: Portable Handset	Page 138 of 138

V3.0 1/6/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.