

### **ELEMENT WASHINGTON DC LLC**

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.element.com

# **PART 27 MEASUREMENT REPORT**

**Applicant Name:** 

Samsung Electronics Co., Ltd. 129, Samsung-ro, Yeongtong-gu, Suwon-si Gyeonggi-do, 16677, Korea **Dates of Testing:** 

04/20/2022 - 06/23/2022

**Test Report Issue Date:** 

07/01/22

Test Site/Location:

Element Lab., Columbia, MD, USA

**Test Report Serial No.:** 1M2204080051-06. A3L

FCC ID: A3LSMF721U

Applicant Name: Samsung Electronics Co., Ltd.

Application Type: Certification

Model: SM-F721U

Additional Model(s): SM-F721U1

FUT Towns

**EUT Type**: Portable Handset

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part: 27

**Test Procedure(s):** ANSI C63.26-2015, ANSI/TIA-603-E-2016,

KDB 971168 D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President





FCC ID: A3LSMF721U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 1 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	raye i ui 203



# TABLE OF CONTENTS

1.0	INTF	RODUCTION	5
	1.1	Scope	5
	1.2	Element Test Location	5
	1.3	Test Facility / Accreditations	5
2.0	PRC	DDUCT INFORMATION	6
	2.1	Equipment Description	6
	2.2	Device Capabilities	6
	2.3	Test Configuration	6
	2.4	Software and Firmware	6
	2.5	EMI Suppression Device(s)/Modifications	7
3.0	DES	SCRIPTION OF TESTS	8
	3.1	Evaluation Procedure	8
	3.2	Radiated Power and Radiated Spurious Emissions	8
4.0	MEA	ASUREMENT UNCERTAINTY	9
5.0	TES	T EQUIPMENT CALIBRATION DATA	10
6.0	SAM	IPLE CALCULATIONS	11
7.0	TES	T RESULTS	12
	7.1	Summary	12
	7.2	Conducted Output Power Data	13
	7.3	Occupied Bandwidth	22
	7.4	Spurious and Harmonic Emissions at Antenna Terminal	57
	7.5	Band Edge Emissions at Antenna Terminal	86
	7.6	Peak-Average Ratio	116
	7.7	Radiated Power (EIRP)	151
	7.8	Radiated Spurious Emissions Measurements	158
	7.9	Frequency Stability / Temperature Variation	201
8.0	CON	NCLUSION	203

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 2 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Faye 2 01 203



# **PART 27 MEASUREMENT REPORT**

				Ell	RP	
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	Max. Power [W]	Max. Power [dBm]	Emission Designator
		π/2 BPSK	3500.0	0.108	20.32	96M7G7D
	100 MHz	QPSK	3500.0	0.120	20.80	97M9G7D
		16QAM	3500.0	0.088	19.46	97M9W7D
		π/2 BPSK	3495.0 - 3505.0	0.081	19.08	86M9G7D
	90 MHz	QPSK	3495.0 - 3505.0	0.093	19.66	87M9G7D
		16QAM	3495.0 - 3505.0	0.068	18.32	87M9W7D
		π/2 BPSK	3490.0 - 3510.0	0.088	19.45	77M6G7D
	80 MHz	QPSK	3490.0 - 3510.0	0.100	19.99	77M9G7D
		16QAM	3490.0 - 3510.0	0.073	18.66	77M8W7D
		π/2 BPSK	3485.0 - 3515.0	0.092	19.64	64M7G7D
	70 MHz	QPSK	3485.0 - 3515.0	0.101	20.03	67M9G7D
		16QAM	3485.0 - 3515.0	0.076	18.81	67M5W7D
	60 MHz	π/2 BPSK	3480.0 - 3520.0	0.091	19.57	58M2G7D
		QPSK	3480.0 - 3520.0	0.096	19.81	58M3G7D
		16QAM	3480.0 - 3520.0	0.074	18.67	58M1W7D
ND D 1 DO0	50 MHz	π/2 BPSK	3475.0 - 3525.0	0.098	19.92	45M9G7D
NR Band n77 PC2		QPSK	3475.0 - 3525.0	0.112	20.50	47M8G7D
(3450 - 3550MHz)		16QAM	3475.0 - 3525.0	0.079	18.99	47M8W7D
	40 MHz	π/2 BPSK	3470.0 - 3530.0	0.095	19.79	36M1G7D
		QPSK	3470.0 - 3530.0	0.100	19.98	38M1G7D
		16QAM	3470.0 - 3530.0	0.077	18.85	38M0W7D
	30 MHz	π/2 BPSK	3465.0 - 3535.0	0.102	20.08	27M1G7D
		QPSK	3465.0 - 3535.0	0.115	20.61	28M1G7D
		16QAM	3465.0 - 3535.0	0.082	19.12	28M1W7D
		π/2 BPSK	3460.0 - 3540.0	0.094	19.73	18M0G7D
	20 MHz	QPSK	3460.0 - 3540.0	0.107	20.30	18M3G7D
		16QAM	3460.0 - 3540.0	0.077	18.86	18M4W7D
		π/2 BPSK	3457.5 - 3542.5	0.095	19.79	13M0G7D
	15 MHz	QPSK	3457.5 - 3542.5	0.106	20.26	13M8G7D
	10 1011 12	16QAM	3457.5 - 3542.5	0.079	18.97	13M7W7D
		π/2 BPSK	3455.0 - 3545.0	0.090	19.56	8M70G7D
	10 MHz	QPSK	3455.0 - 3545.0	0.103	20.11	8M69G7D
		16QAM	3455.0 - 3545.0	0.074	18.71	8M73W7D

**EUT Overview (n77 PC2 - DoD Band)** 

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 3 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 3 01 203



				EI	RP	
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	Max. Power [W]	Max. Power [dBm]	Emission Designator
		π/2 BPSK	3750.0 - 3930.0	0.250	23.99	96M9G7D
	100 MHz	QPSK	3750.0 - 3930.0	0.200	23.01	97M9G7D
		16QAM	3750.0 - 3930.0	0.152	21.83	97M8W7D
		Π/2 BPSK	3745.0 - 3935.0	0.287	24.58	87M1G7D
	90 MHz	QPSK	3745.0 - 3935.0	0.224	23.50	88M0G7D
		16QAM	3745.0 - 3935.0	0.166	22.20	87M9W7D
		π/2 BPSK	3740.0 - 3940.0	0.324	25.11	77M4G7D
	80 MHz	QPSK	3740.0 - 3940.0	0.225	23.51	77M7G7D
		16QAM	3740.0 - 3940.0	0.189	22.76	77M9W7D
		π/2 BPSK	3735.0 - 3945.0	0.315	24.98	76M6G7D
	70 MHz	QPSK	3735.0 - 3945.0	0.206	23.13	67M9G7D
		16QAM	3735.0 - 3945.0	0.183	22.62	67M8W7D
	60 MHz	π/2 BPSK	3730.0 - 3950.0	0.326	25.13	58M1G7D
		QPSK	3730.0 - 3950.0	0.225	23.51	58M2G7D
		16QAM	3730.0 - 3950.0	0.190	22.78	58M2W7D
ND D 1 77 D00	50 MHz	π/2 BPSK	3725.0 - 3955.0	0.325	25.12	46M0G7D
NR Band n77 PC2		QPSK	3725.0 - 3955.0	0.221	23.44	47M7G7D
(3700 - 3980MHz)		16QAM	3725.0 - 3955.0	0.191	22.82	47M8W7D
		Π/2 BPSK	3720.0 - 3960.0	0.327	25.14	35M9G7D
	40 MHz	QPSK	3720.0 - 3960.0	0.229	23.59	38M1G7D
		16QAM	3720.0 - 3960.0	0.194	22.87	38M0W7D
	30 MHz	Π/2 BPSK	3715.0 - 3965.0	0.325	25.12	27M1G7D
		QPSK	3715.0 - 3965.0	0.228	23.58	28M1G7D
		16QAM	3715.0 - 3965.0	0.194	22.87	28M1W7D
		Π/2 BPSK	3710.0 - 3970.0	0.325	25.12	18M0G7D
	20 MHz	QPSK	3710.0 - 3970.0	0.226	23.54	18M4G7D
		16QAM	3710.0 - 3970.0	0.190	22.79	18M3W7D
		π/2 BPSK	3707.5 - 3972.5	0.314	24.97	13M0G7D
	15 MHz	QPSK	3707.5 - 3972.5	0.224	23.49	13M7G7D
		16QAM	3707.5 - 3972.5	0.192	22.84	13M6W7D
		π/2 BPSK	3705.0 - 3975.0	0.325	25.12	8M64G7D
	10 MHz	QPSK	3705.0 - 3975.0	0.222	23.46	8M67G7D
		16QAM	3705.0 - 3975.0	0.192	22.84	8M71W7D

EUT Overview (n77 PC2 - C-Band)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 4 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 4 01 203



#### 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

#### 1.2 Element Test Location

These measurement tests were conducted at the Element Laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

## 1.3 Test Facility / Accreditations

Measurements were performed at Element Lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 5 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	rage 3 01 203



# 2.0 PRODUCT INFORMATION

## 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF721U**. This device has n77 operation over four total antennas in both the DoD Band (3.45 – 3.55GHz) and the C-Band (3.7 – 3.98GHz). The test data contained in this report pertains to both supported n77 bands and all four antennas.

Test Device Serial No.: 0209M, 0270M, 0294M, 0660M, 0666M, 0670M, 0868M

# 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1 and FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

This device can transmit in the 5G NR Band n77 over four separate antennas labelled SRS-1, SRS-2, SRS-3, and SRS-4. With SRS operations, any of these four antennas can transmit an SRS signal to check the channel quality for transmission in the n77 Band. However, these antennas cannot simultaneously transmit and only the SRS-1 antenna is capable of data transmission. The test data is marked to indicate the specific antenna transmitting in the n77 band.

Each of the transmission antennas investigated in this report may have an alternate labelling in other exhibits and filings. The correlation between these labelling schemes is displayed in the following table.

Antenna SRS-label	Alternate Label
SRS-1	Ant F
SRS-2	Ant I
SRS-3	Ant E
SRS-4	Ant C

Table 2-1. Antenna Labelling Scheme Correlation

## 2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports two configurations: one is with screen open and one is with screen closed. Open, half-opened, and closed configurations are tested, and the worst case radiated emissions data is shown in this report.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

#### 2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version F721USQU0AVED installed on the EUT.

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 6 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	raye o oi 203



# 2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 7 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	rage / 0/ 203



#### 3.0 DESCRIPTION OF TESTS

#### 3.1 Evaluation Procedure

The measurement procedures described in the "American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services" (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure......None

### 3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_{d [dBm]} = P_{g [dBm]} - cable loss [dB] + antenna gain [dBd/dBi];$$

where  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_{g \, [dBm]}$  – cable loss  $_{[dB]}$ .

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = Measured \ amplitude \ level_{[dBm]} + 107 + Cable \ Loss_{[dB]} + Antenna \ Factor_{[dB/m]} \ And$$
 $EIRP_{[dBm]} = E_{[dB\mu V/m]} + 20logD - 104.8$ ; where D is the measurement distance in meters.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	s: EUT Type:	
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 8 of 203



# 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of k=2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF721U		PART 27 MEASUREMENT REPORT		
Test Report S/N:	Test Dates:	es: EUT Type:		
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 9 of 203	



# 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP2-001	EMC Cable and Switch System	1/4/2022	Annual	1/4/2023	AP2-001
-	AP2-002	EMC Cable and Switch System	3/11/2022	Annual	3/11/2023	AP2-002
-	ETS-001	EMC Cable and Switch System	12/9/2021	Annual	12/9/2022	ETS-001
- ETS-002		EMC Cable and Switch System	3/10/2022	Annual	3/10/2023	ETS-002
-	AP1-002	EMC Cable and Switch System	3/9/2022	Annual	3/9/2023	AP1-002
-	MVG-001	EMC Cable and Switch System	3/10/2022	Annual	3/10/2023	MVG-001
-	MVG-002	EMC Cable and Switch System	3/10/2022	Annual	3/10/2023	MVG-002
-	LTx3	LIcensed Transmitter Cable Set	8/18/2021	Annual	8/18/2022	LTx3
-	LTx4	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx4
-	LTx5	LIcensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx5
-	LTx6-40	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx6-40
Agilent	E5515C	Wireless Communications Test Set		N/A		GB45360985
Anritsu	MT8820C	Radio Communication Analyzer		N/A		6201300731
Anritsu	MT8821C	Radio Communication Analyzer		N/A		6201381794
Rohde & Schwarz	CMW500	Wideband Radio Communication	7/19/2021	Annual	7/19/2022	109366
Agilent	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Com-Power AL-130		9kHz - 30MHz Loop Antenna	4/13/2022	Biennial	4/13/2024	121034
Sunol Sciences	DRH-118	1-18GHz Horn (Small)	2/14/2022	Biennial	2/14/2024	A050307
Emco	3116	Horn Antenna (18-40GHz)	7/20/2021	Biennial	7/20/2022	9203-2178
ETS-Lindgren	3115	Double Ridged Guide Horn	4/12/2022	Biennial	4/12/2024	150693
ETS-Lindgren	3116C	DRG Horn Antenna	5/11/2021	Biennial	5/11/2023	218893
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/20/2021	Biennial	4/20/2023	00125518
ETS-Lindgren 3816/2NM		Line Impedence Stabilization Network	7/9/2020	Biennial	7/9/2022	114451
Pastermack	NMLC-2	Line Conducted Emission Cable (NM)	12/19/2021	Biennial	12/19/2022	NMLC-2
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	7/21/2021	Annual	7/21/2022	MY49430494
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	2/14/2022	Annual	2/14/2023	MY52350166
Keysight Technologies	N9030B	PXA Signal Analyzer, Multi-touch	1/7/2022	Annual	1/7/2023	MY57141001
Keysight Technologies	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal/spectrum analyzer	4/14/2022	Annual	4/14/2023	103187
Agilent	N9020A	MXA Signal Analyzer	3/4/2022	Annual	3/4/2023	US46470561
Rohde & Schwarz ESU40		EMI Test Receiver (40GHz)	5/25/2021	Annual	5/25/2022	100348
Rohde & Schwarz ESW44		EMI Test Receiver 2Hz to 44 GHz	3/28/2022	Annual	3/28/2023	101716
Rohde & Schwarz ESU26		EMI Test Receiver (26.5GHz)	8/3/2021	Annual	8/3/2022	100342
Rohde & Schwarz TC-TA18		Cross Polarized Vivaldi Test Antenna	8/13/2020	Biennial	8/13/2022	101073
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107
Sunol	JB6	LB6 Antenna	11/13/2020	Biennial	11/13/2022	A082816
Espec	SCP-220	Temperature Chamber	5/25/2022	Biennial	5/25/2024	OCPS5H0612K05

**Table 5-1. Test Equipment** 

#### Notes:

- 1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- 2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMF721U		PART 27 MEASUREMENT REPORT			
Test Report S/N:	Test Dates:	EUT Type:	Page 10 of 203		
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	raye 10 01 203		



# 6.0 SAMPLE CALCULATIONS

## **QPSK Modulation**

**Emission Designator = 8M62G7D** 

LTE BW = 8.62 MHz G = Phase Modulation 7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

## **QAM Modulation**

**Emission Designator = 8M45W7D** 

LTE BW = 8.45 MHz W = Amplitude/Angle Modulated 7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

## **Spurious Radiated Emission**

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

FCC ID: A3LSMF721U		PART 27 MEASUREMENT REPORT		
Test Report S/N:	Test Dates:	EUT Type:	Page 11 of 202	
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 11 of 203	



#### 7.0 TEST RESULTS

## 7.1 Summary

Company Name: <u>Samsung Electronics Co., Ltd.</u>

FCC ID: A3LSMF721U

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

Mode(s): 5G NR - FR1

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
	Transmitter Conducted Output Power	2.1046(a), 2.1046(c)	N/A	PASS	Section 7.2
Ü	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3
CONDUCTED	Conducted Band Edge / Spurious Emissions (NR Band n77)	2.1051, 27.53(l), 27.53(n)	≤ 13 dBm / MHz	PASS	Sections 7.4, 7.5
8	Peak-to-Average Ratio (NR Band n77)	27.53(j)(4), 27.53(k)(4)	≤ 13 dB	PASS	Section 7.6
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block.	PASS	Section 7.9
ADIATEI	Effective Radiated Power / Equivalent Isotropic Radiated Power (NR Band n77)	27.53(j)(3), 27.53(k)(3)	≤ 1 Watt EIRP	PASS	Section 7.7
	Radiated Spurious Emissions (NR Band n77)	2.1053, 27.53(I), 27.53(n)	≤ 13 dBm / MHz	PASS	Section 7.8

<sup>\*</sup> The only transmitter output conducted powers included in this report are those where the Pmax value, per the tune-up document, is higher than any of the DSI power levels. For the remaining conducted power measurements, see the **RF Exposure Report**.

#### Table 7-1. Summary of Test Results

#### Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.1.
- 5) This device operates in the n77 band on four different transmission antennas. The main antenna (label: SRS-1) operates at the highest transmit power. The three additional antennas each operate at a lower power compared to the main antenna. Therefore, to demonstrate compliance for each antenna, a complete set of test data is shown for antenna SRS-1 and only a subset of test data is included for the additional three antennas.

FCC ID: A3LSMF721U		PART 27 MEASUREMENT REPORT		
Test Report S/N:	Test Dates:	EUT Type:		
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 12 of 203	



## 7.2 Conducted Output Power Data

#### **Test Overview**

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated, and the worst-case configuration results are reported in this section.

#### **Test Procedure Used**

ANSI C63.26-2015 - Section 5.2

#### **Test Settings**

- 1. Span =  $2 \times OBW$  to  $3 \times OBW$
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

#### **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

#### **Test Notes**

- 1) Standalone NR conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. For each supported combination of channel bandwidth/modulation, the worst case data is displayed in this section.
- 2) For transmission in EN-DC mode, conducted power measurements were investigated with the NR carrier set to transmit from the worst case antenna in standalone mode (SRS-1).

FCC ID: A3LSMF721U		PART 27 MEASUREMENT REPORT		
Test Report S/N:	Test Dates:	EUT Type:	Page 13 of 203	
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 13 of 203	



# NR Band n77 (PC2) - DoD Band

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
	π/2 BPSK	633334	3500.01	1 / 136	26.75
100 MHz	QPSK	633334	3500.01	1 / 136	26.60
	16-QAM	633334	3500.01	1 / 136	25.87
		633000	3495.00	1 / 61	25.51
	π/2 BPSK	633334	3500.01	1 / 183	25.23
¥		633666	3504.99	1 / 61	25.48
90 MHz		633000	3495.00	1 / 61	25.47
06	QPSK	633334	3500.01	1 / 183	25.09
		633666	3504.99	1 / 61	25.43
	16-QAM	633666	3504.99	1 / 61	24.73
		632668	3490.02	1 / 54	25.83
	π/2 BPSK	633334	3500.01	1 / 54	25.88
붓		634000	3510.00	1 / 54	25.46
80 MHz		632668	3490.02	1 / 54	25.80
80	QPSK	633334	3500.01	1 / 54	25.66
		634000	3510.00	1 / 54	25.44
	16-QAM	632668	3490.02	1 / 54	25.07
		632334	3485.01	1 / 47	26.01
	π/2 BPSK	633334	3500.01	1 / 47	26.07
붓		634332	3514.98	1 / 47	25.92
70 MHz		632334	3485.01	1 / 47	25.83
70	QPSK	633334	3500.01	1 / 47	25.70
		634332	3514.98	1 / 47	25.74
	16-QAM	632334	3485.01	1 / 47	25.22
		632000	3480.00	1 / 81	26.00
	π/2 BPSK	633334	3500.01	1 / 121	25.82
도		634666	3519.99	1 / 40	25.60
E0 MHz		632000	3480.00	1 / 81	25.61
09	QPSK	633334	3500.01	1 / 121	25.53
		634666	3519.99	1 / 40	25.37
	16-QAM	633334	3500.01	1 / 121	25.07
		631668	3475.02	1 / 33	26.35
	π/2 BPSK	633334	3500.01	1 / 33	26.08
		635000	3525.00	1 / 33	25.56
50 MHz		631668	3475.02	1 / 33	26.31
50	QPSK	633334	3500.01	1 / 33	25.89
		635000	3525.00	1 / 33	25.38
	16-QAM	631668	3475.02	1 / 33	25.40

Table 7-2. Conducted Power Data (NR Band n77 - DoD Band – 50MHz-100MHz Bandwidths – SRS-1)

FCC ID: A3LSMF721U		PART 27 MEASUREMENT REPORT		
Test Report S/N:	Test Dates:	EUT Type:	Page 14 of 203	
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Faye 14 01 203	



Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
		631334	3470.01	1 / 53	25.80
	π/2 BPSK	633334	3500.01	1 / 79	25.72
붓		635332	3529.98	1 / 53	26.22
40 MHz		631334	3470.01	1 / 53	25.79
40	QPSK	633334	3500.01	1 / 79	25.61
		635332	3529.98	1 / 53	25.56
	16-QAM	635332	3529.98	1 / 53	25.26
		631000	3465.00	1 / 19	26.15
	π/2 BPSK	633334	3500.01	1 / 19	26.51
¥		635666	3534.99	1 / 19	26.39
30 MHz		631000	3465.00	1 / 19	25.86
30	QPSK	633334	3500.01	1 / 19	26.41
		635666	3534.99	1 / 19	26.41
	16-QAM	633334	3500.01	1 / 19	25.53
	π/2 BPSK	630668	3460.02	1 / 13	26.16
		633334	3500.01	1 / 37	26.10
Ž.		636000	3540.00	1 / 25	26.06
20 MHz	QPSK	630668	3460.02	1 / 13	26.11
20		633334	3500.01	1 / 37	25.73
		636000	3540.00	1 / 25	25.66
	16-QAM	636000	3540.00	1 / 25	25.27
		630500	3457.50	1/9	26.08
	π/2 BPSK	633334	3500.01	1/9	26.22
£		636166	3542.49	1 / 28	26.17
15 MHz		630500	3457.50	1/9	25.93
15	QPSK	633334	3500.01	1/9	26.07
		636166	3542.49	1 / 28	25.96
	16-QAM	630500	3457.50	1/9	25.38
		630334	3455.01	1/6	25.92
	π/2 BPSK	633334	3500.01	1 / 12	25.46
¥		636332	3544.98	1/6	25.99
10 MHz		630334	3455.01	1/6	25.31
10	QPSK	633334	3500.01	1 / 12	25.43
		636332	3544.98	1/6	25.92
	16-QAM	636332	3544.98	1/6	25.12
	Data (NI	Dond 1977	DoD Dond	408411- 4084	Le Danduide

Table 7-3. Conducted Power Data (NR Band n77 - DoD Band – 10MHz-40MHz Bandwidths – SRS-1)

FCC ID: A3LSMF721U		PART 27 MEASUREMENT REPORT		
Test Report S/N:	Test Dates:	EUT Type:	Page 15 of 203	
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Faye 13 01 203	



	Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
	100 MHz	π/2 BPSK	633334	3500.01	1 / 68	22.77
ı		QPSK	633334	3500.01	1 / 136	22.68

Table 7-4. Conducted Power Data (NR Band n77 - DoD Band - SRS-2)

	Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
	100 MHz	π/2 BPSK	633334	3500.01	1 / 136	22.92
		QPSK	633334	3500.01	1 / 204	22.87

Table 7-5. Conducted Power Data (NR Band n77 - DoD Band - SRS-3)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	π/2 BPSK	633334	3500.01	1 / 68	20.57
100 MINZ	QPSK	633334	3500.01	1 / 68	20.58

Table 7-6. Conducted Power Data (NR Band n77 - DoD Band – SRS-4)

FCC ID: A3LSMF721U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 16 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 10 01 203



# NR Band n77 (PC2) - C-Band

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
		650000	3750.00	1 / 204	26.30
	π/2 BPSK	656000	3840.00	1 / 136	25.86
£		662000	3930.00	1 / 204	25.82
100 MHz		650000	3750.00	1 / 204	26.97
	QPSK	656000	3840.00	1 / 136	26.37
		662000	3930.00	1 / 204	26.49
	16-QAM	656000	3840.00	1 / 136	26.10
		649668	3745.02	1 / 61	26.82
	π/2 BPSK	656000	3840.00	1 / 61	26.92
보		662332	3934.98	1 / 61	26.41
90 MHz		649668	3745.02	1 / 122	26.76
06	QPSK	656000	3840.00	1 / 61	26.86
		662332	3934.98	1 / 61	26.31
	16-QAM	656000	3840.00	1 / 61	25.81
		649334	3740.01	1 / 54	26.85
	π/2 BPSK	656000	3840.00	1 / 54	26.90
¥		662666	3939.99	1 / 162	26.94
80 MHz	QPSK	649334	3740.01	1 / 162	26.90
80		656000	3840.00	1 / 54	26.87
		662666	3939.99	1 / 162	26.87
	16-QAM	662666	3939.99	1 / 162	25.84
		649000	3735.00	1 / 47	26.87
	π/2 BPSK	656000	3840.00	1 / 141	26.55
붓		663000	3945.00	1 / 141	26.81
70 MHz	QPSK	649000	3735.00	1 / 47	26.81
20		656000	3840.00	1 / 141	26.49
		663000	3945.00	1 / 141	26.77
	16-QAM	649000	3735.00	1 / 47	25.83
		648668	3730.02	1 / 40	26.84
	π/2 BPSK	656000	3840.00	1 / 40	26.93
붓		663332	3949.98	1 / 121	26.96
60 MI		648668	3730.02	1 / 40	26.77
09	QPSK	656000	3840.00	1 / 40	26.87
		663332	3949.98	1 / 121	26.90
	16-QAM	656000	3840.00	1 / 40	25.87
		648334	3725.01	1 / 99	26.98
	π/2 BPSK	656000	3840.00	1 / 99	26.85
¥		663666	3954.99	1 / 33	26.95
50 MHz		648334	3725.01	1 / 99	26.91
50	QPSK	656000	3840.00	1 / 99	26.80
		663666	3954.99	1 / 33	26.91
	16-QAM	648334	3725.01	1 / 99	25.91

Table 7-7. Conducted Power Data (NR Band n77 - C-Band – 50MHz-100MHz Bandwidths – SRS-1)

FCC ID: A3LSMF721U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 17 of 202
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 17 of 203



Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
		648000	3720.00	1 / 79	26.84
	π/2 BPSK	656000	3840.00	1 / 26	26.95
붓		664000	3960.00	1 / 26	26.97
40 MHz		648000	3720.00	1 / 79	26.76
40	QPSK	656000	3840.00	1 / 26	26.95
		664000	3960.00	1 / 26	26.96
	16-QAM	656000	3840.00	1 / 26	25.98
		647668	3715.02	1 / 58	26.89
	π/2 BPSK	656000	3840.00	1 / 19	26.95
보		664332	3964.98	1 / 58	26.95
30 MHz		647668	3715.02	1 / 58	26.81
30	QPSK	656000	3840.00	1 / 19	26.94
		664332	3964.98	1 / 58	26.95
	16-QAM	656000	3840.00	1 / 19	25.96
	π/2 BPSK	647334	3710.01	1 / 37	26.95
		656000	3840.00	1 / 37	26.94
¥		664666	3969.99	1 / 13	26.95
20 MHz	QPSK	647334	3710.01	1 / 37	26.90
20		656000	3840.00	1 / 37	26.90
		664666	3969.99	1 / 13	26.86
	16-QAM	647334	3710.01	1 / 37	25.92
	π/2 BPSK	647168	3707.52	1 / 28	26.77
		656000	3840.00	1/9	26.90
¥		664832	3972.48	1 / 28	26.80
15 MHz		647168	3707.52	1 / 28	26.66
15	QPSK	656000	3840.00	1/9	26.85
		664832	3972.48	1 / 28	26.94
	16-QAM	664832	3972.48	1 / 28	25.92
		647000	3705.00	1 / 17	26.64
	π/2 BPSK	656000	3840.00	1/6	26.86
7		665000	3975.00	1 / 12	26.95
10 MHz		647000	3705.00	1 / 17	26.58
10	QPSK	656000	3840.00	1/6	26.82
		665000	3975.00	1 / 12	26.93
	16-QAM	665000	3975.00	1 / 12	25.92

Table 7-8. Conducted Power Data (NR Band n77 - C-Band – 10MHz-40MHz Bandwidths – SRS-1)

FCC ID: A3LSMF721U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 18 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 10 01 203



Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
	π/2 BPSK	650000	3750.00	1 / 136	22.96
z		656000	3840.00	1 / 68	22.58
100 MHz		662000	3930.00	1 / 68	22.36
00	QPSK	650000	3750.00	1 / 136	22.89
=		656000	3840.00	1 / 136	22.41
		662000	3930.00	1 / 136	22.23

Table 7-9. Conducted Power Data (NR Band n77 - C-Band - SRS-2)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
	π/2 BPSK	650000	3750.00	1 / 68	22.98
<u>N</u>		656000	3840.00	1 / 68	22.76
MHz		662000	3930.00	1 / 136	22.98
100	QPSK	650000	3750.00	1 / 136	22.70
		656000	3840.00	1 / 136	22.60
		662000	3930.00	1 / 68	22.79

Table 7-10. Conducted Power Data (NR Band n77 - C-Band – SRS-3)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
	π/2 BPSK	650000	3750.00	1 / 68	22.98
<u> </u>		656000	3840.00	1 / 68	22.76
MHz		662000	3930.00	1 / 136	22.98
100	QPSK	650000	3750.00	1 / 136	22.70
		656000	3840.00	1 / 136	22.60
		662000	3930.00	1 / 68	22.79

Table 7-11. Conducted Power Data (NR Band n77 - C-Band – SRS-4)

FCC ID: A3LSMF721U		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 19 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 19 01 203



# EN-DC - n77 (PC2) - DoD Band + LTE

	NR (SCS 30kHz)						LTE						LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
	100			QPSK	270/0		10	Mid		QPSK	50/0	22.14	20.90	24.57
				QPSK	270/0				836.5	QPSK	1/25	22.46	21.04	24.82
n77		Mid	3500.01	QPSK	1/136	B5				QPSK	50/0	22.70	20.80	24.86
				QPSK	1/136	1				QPSK	1/25	22.78	20.99	24.99
				16-QAM	1/136				16-QAM	1/25	22.69	20.54	24.76	

Table 7-12. Conducted Power Data (NR Band n77 - DoD Band + EN-DC Anchor B5)

	NR (SCS 30kHz)						LTE						LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
	100			QPSK	270/0	B66		Mid		QPSK	100/0	22.84	21.10	25.07
				QPSK	270/0		20		1745	QPSK	1/50	22.87	21.02	25.05
n77		Mid	3500.01	QPSK	1/136					QPSK	100/0	22.75	21.13	25.03
				QPSK	1/136					QPSK	1/50	22.89	21.22	25.15
				16-QAM	1/136					16-QAM	100/0	22.77	20.65	24.85

Table 7-13. Conducted Power Data (NR Band n77 - DoD Band + EN-DC Anchor B66)

	NR (SCS 30kHz)						LTE						LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
	100			QPSK	270/0	B30		Mid		QPSK	50/0	22.22	20.27	24.36
			3500.01 C	QPSK	270/0		10		2310	QPSK	1/25	22.40	21.25	24.87
n77		Mid		QPSK	1/136					QPSK	50/0	22.53	20.31	24.57
				QPSK	1/136					QPSK	1/25	22.49	21.47	25.02
				16-QAM	270/0			-	16-QAM	50/0	22.48	20.76	24.71	

Table 7-14. Conducted Power Data (NR Band n77 - DoD Band + EN-DC Anchor B30)

FCC ID: A3LSMF721U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 20 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 20 01 203



# EN-DC - n77 (PC2) - C-Band + LTE

	NR (SCS 30kHz)						LTE						LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
	100	Mid		QPSK	270/0		10	Mid	836.5	QPSK	50/0	17.96	22.77	24.01
				QPSK	270/0					QPSK	1/25	17.96	22.78	24.02
n77			3840	QPSK	1/136	B5				QPSK	50/0	17.97	22.80	24.03
				QPSK	1/136					QPSK	1/25	17.86	22.89	24.08
				16-QAM	1/136				16-QAM	1/25	18.05	22.79	24.05	

Table 7-15. Conducted Power Data (NR Band n77 - C-Band + EN-DC Anchor B5)

		NR (	SCS 30kHz)			LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
				QPSK	270/0					QPSK	100/0	21.44	21.39	24.43
	100	l		QPSK	270/0	1	20	Mid	1745	QPSK	1/50	18.47	23.08	24.37
n77		Mid	3840	QPSK	1/136 B66	B66				QPSK	100/0	21.67	21.46	24.58
				QPSK	1/136					QPSK	1/50	18.45	22.91	24.24
				16-QAM	1/136					16-QAM	100/0	21.62	21.47	24.56

Table 7-16. Conducted Power Data (NR Band n77 - C-Band + EN-DC Anchor B66)

	NR (SCS 30kHz)						LTE						LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
				QPSK	270/0					QPSK	50/0	22.64	19.74	24.44
	100	1		QPSK	270/0	1	10	Mid	2310	QPSK	1/25	20.59	21.77	24.23
n77		Mid	3840	QPSK	1/136	B30				QPSK	50/0	22.58	19.71	24.39
				QPSK	1/136					QPSK	1/25	20.56	21.85	24.26
				16-QAM	270/0					16-QAM	50/0	22.69	19.59	24.42

Table 7-17. Conducted Power Data (NR Band n77 - C-Band + EN-DC Anchor B30)

FCC ID: A3LSMF721U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 21 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	rage 21 01 203



## 7.3 Occupied Bandwidth

#### **Test Overview**

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Procedure Used**

ANSI C63.26-2015 - Section 5.4.4

#### **Test Settings**

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7

## **Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

#### **Test Notes**

- 1) Occupied Bandwidth was only measured on the antenna (SRS-1) with the highest power for each band.
- 2) Only the worst case data for each Modulation/Channel Bandwidth combination is displayed in the following plots.


FCC ID: A3LSMF721U		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 22 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 22 01 203



## NR Band n77 (PC2) - DoD Band




Plot 7-1. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 100MHz –  $\pi$ /2 BPSK - Full RB)

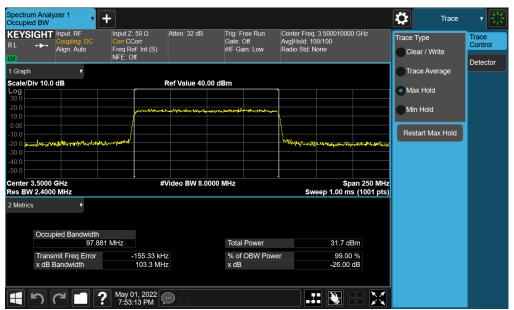


Plot 7-2. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 100MHz - QPSK - Full RB)

FCC ID: A3LSMF721U		PART 27 MEASUREMENT REPORT			
Test Report S/N:	Test Dates:	EUT Type:	Page 23 of 203		
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	raye 23 01 203		



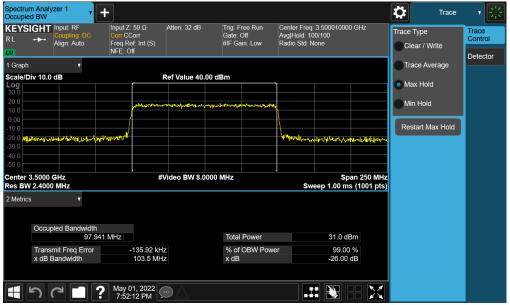


Plot 7-3. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 100MHz - 16-QAM - Full RB)

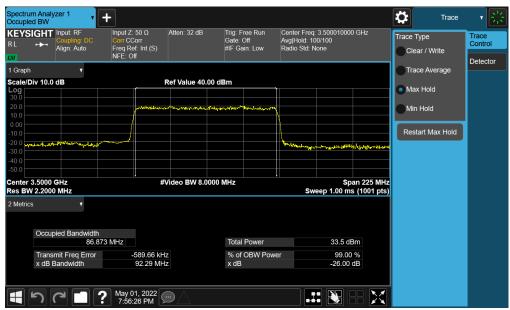


Plot 7-4. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 90MHz – π/2 BPSK - Full RB)

FCC ID: A3LSMF721U		Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 24 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	rage 24 01 203



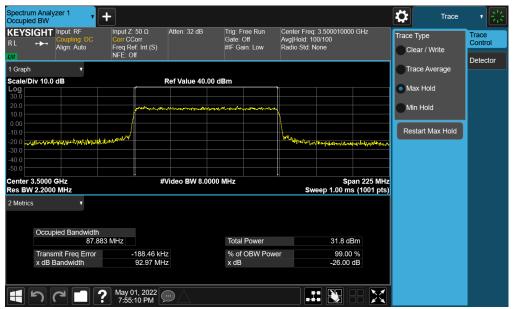


Plot 7-5. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 90MHz - QPSK - Full RB)

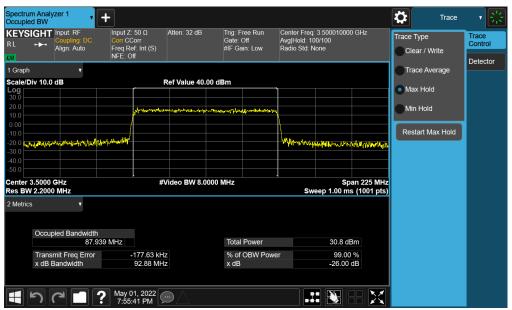


Plot 7-6. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 90MHz - 16-QAM - Full RB)

FCC ID: A3LSMF721U		PART 27 MEASUREMENT REPORT			
Test Report S/N:	Test Dates:	EUT Type:	Page 25 of 203		
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Faye 20 01 200		



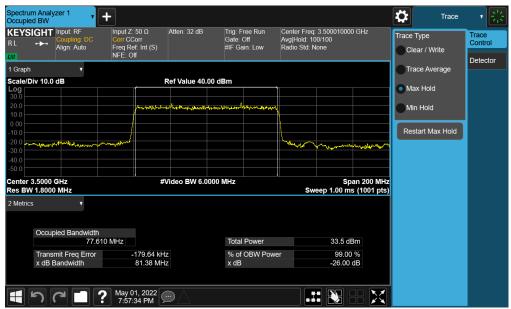


Plot 7-7. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 80MHz – π/2 BPSK - Full RB)

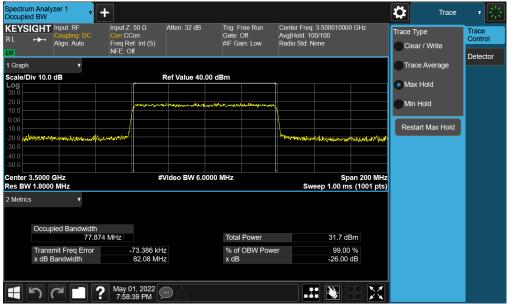


Plot 7-8. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 80MHz - QPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 26 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Faye 20 01 203



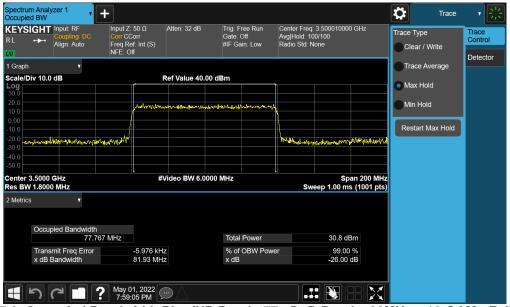

Plot 7-9. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 80MHz - 16-QAM - Full RB)

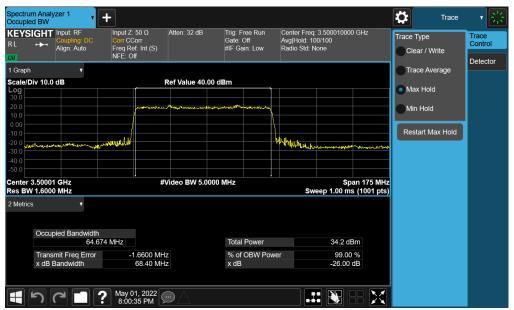


Plot 7-10. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 70MHz – π/2 BPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 27 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 27 01 203






Plot 7-11. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 70MHz - QPSK - Full RB)

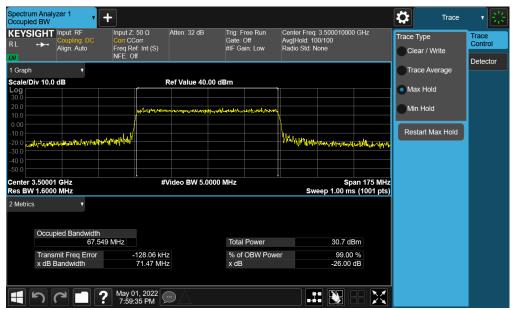


Plot 7-12. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 70MHz - 16-QAM - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 28 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 20 01 203



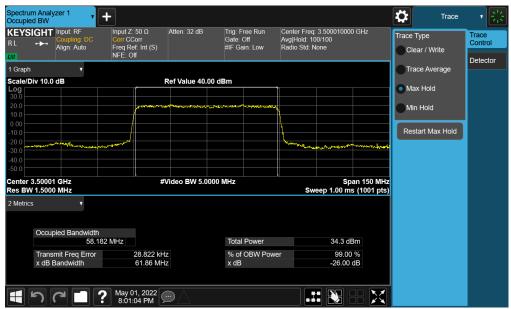


Plot 7-13. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 60MHz – π/2 BPSK - Full RB)

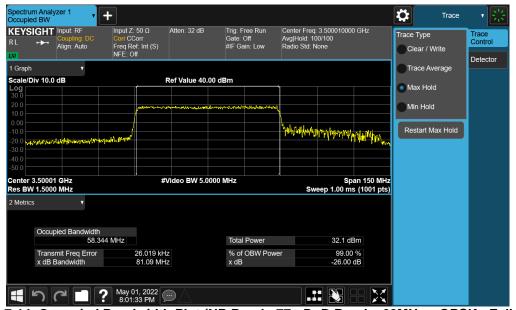


Plot 7-14. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 60MHz - QPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 29 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 29 01 203



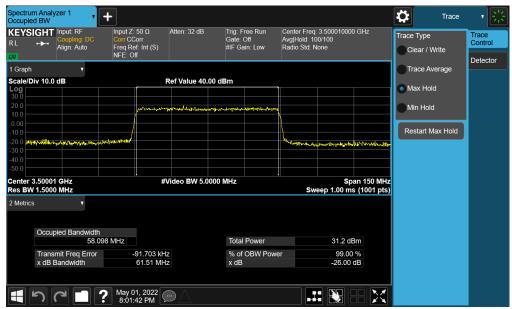

Plot 7-15. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 60MHz - 16-QAM - Full RB)

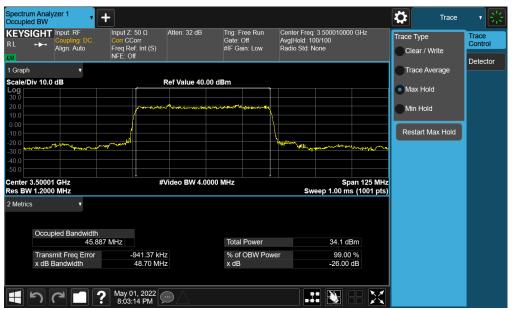


Plot 7-16. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 50MHz – π/2 BPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 30 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 30 01 203





Plot 7-17. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 50MHz - QPSK - Full RB)

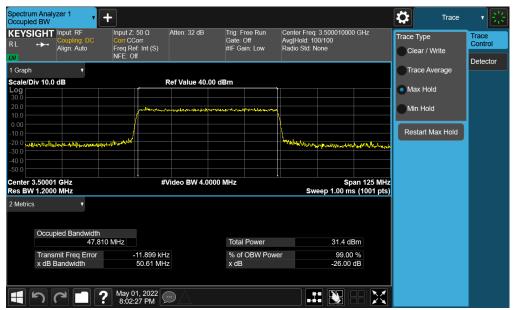


Plot 7-18. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 50MHz - 16-QAM - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 31 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 31 01 203






Plot 7-19. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 40MHz – π/2 BPSK - Full RB)

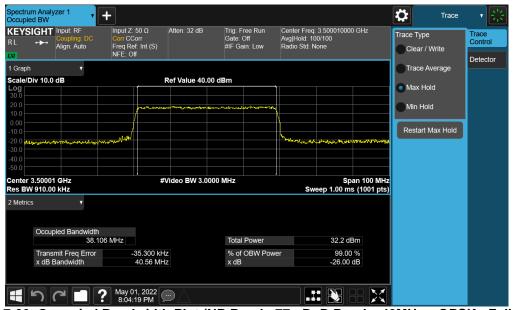


Plot 7-20. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 40MHz - QPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 32 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 32 01 203



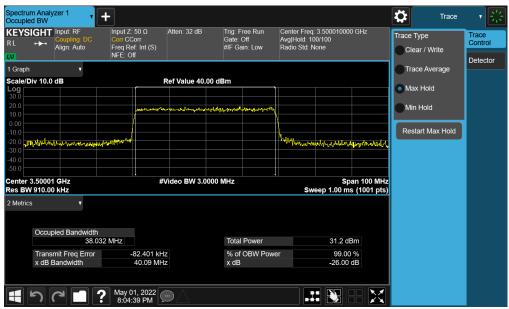


Plot 7-21. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 40MHz - 16-QAM - Full RB)

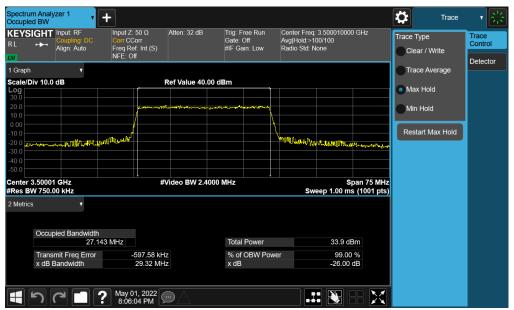


Plot 7-22. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 30MHz –  $\pi$ /2 BPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 33 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	rage 33 01 203



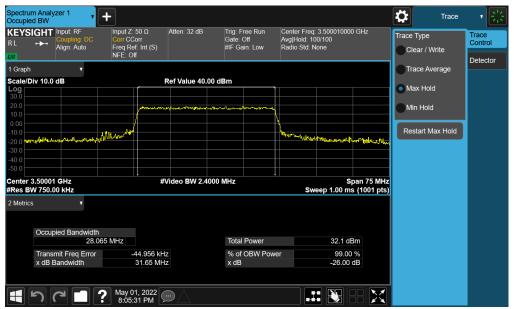


Plot 7-23. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 30MHz - QPSK - Full RB)

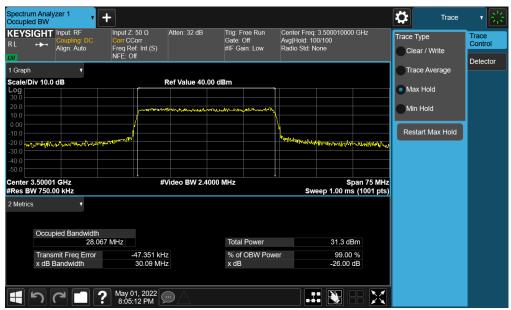

Plot 7-24. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 30MHz - 16-QAM - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 34 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 34 01 203



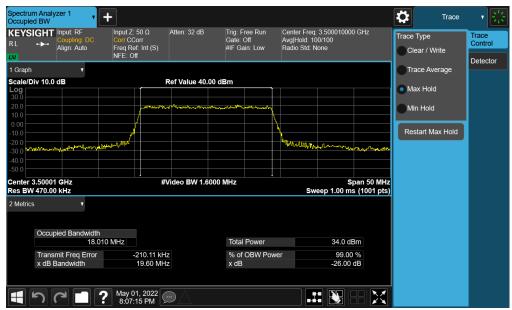


Plot 7-25. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 20MHz - π/2 BPSK - Full RB)



Plot 7-26. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 20MHz - QPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 35 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 33 01 203



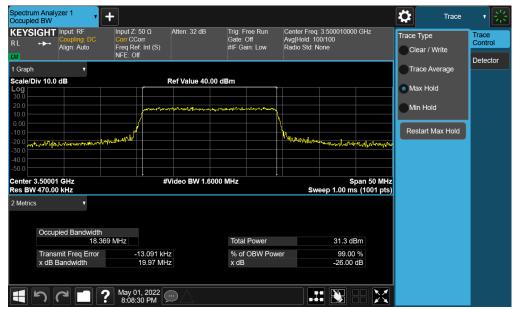


Plot 7-27. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 20MHz - 16-QAM - Full RB)




Plot 7-28. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 15MHz – π/2 BPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 36 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	raye 30 01 203



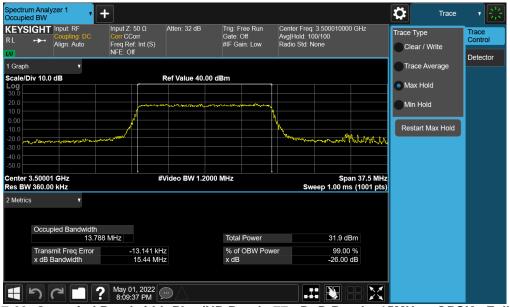

Plot 7-29. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 15MHz - QPSK - Full RB)

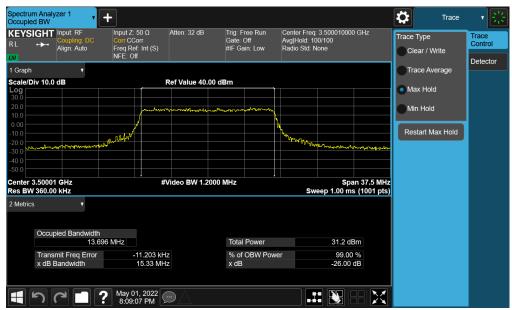


Plot 7-30. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 15MHz - 16-QAM - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 27 of 202
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 37 of 203





Plot 7-31. Occupied Bandwidth Plot (NR Band n77 - DoD Band – 10MHz – π/2 BPSK - Full RB)

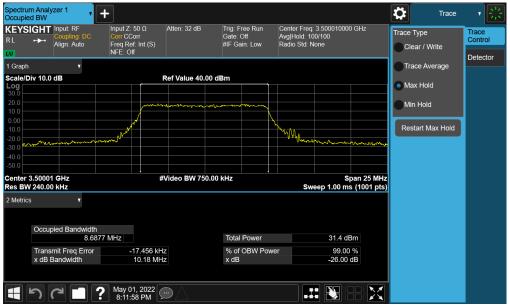

Plot 7-32. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 10MHz - QPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 38 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Faye 30 01 203






Plot 7-33. Occupied Bandwidth Plot (NR Band n77 - DoD Band - 10MHz - 16-QAM - Full RB)


FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 39 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	raye 39 01 203



## NR Band n77 (PC2) - C-Band

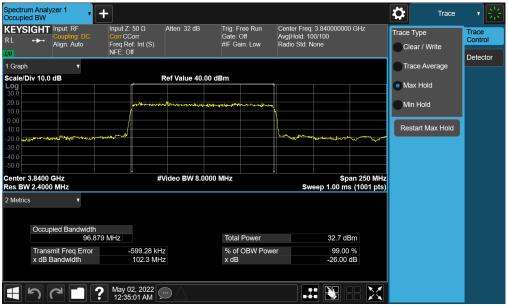


Plot 7-34. Occupied Bandwidth Plot (NR Band n77 - C-Band – 100MHz – π/2 BPSK - Full RB)

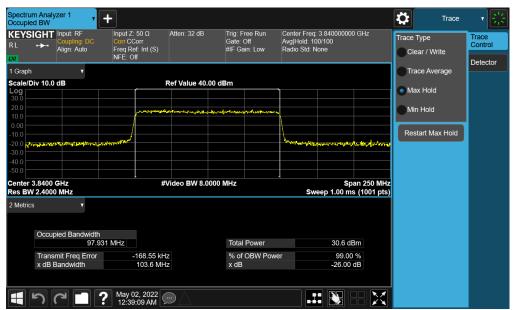

Plot 7-35. Occupied Bandwidth Plot (NR Band n77 - C-Band - 100MHz - QPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 40 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	raye 40 01 203



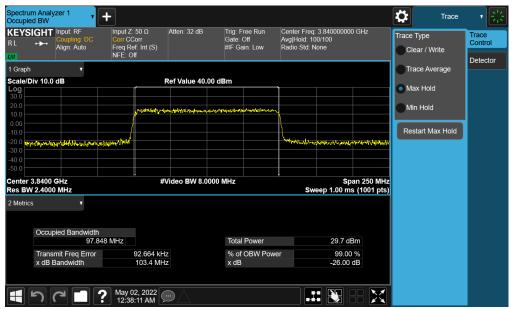


Plot 7-36. Occupied Bandwidth Plot (NR Band n77 - C-Band - 100MHz - 16-QAM - Full RB)




Plot 7-37. Occupied Bandwidth Plot (NR Band n77 - C-Band – 90MHz – π/2 BPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 41 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 41 01 203



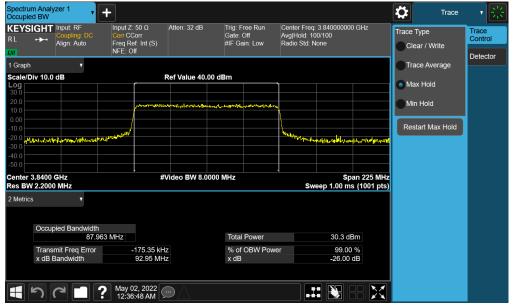

Plot 7-38. Occupied Bandwidth Plot (NR Band n77 - C-Band - 90MHz - QPSK - Full RB)

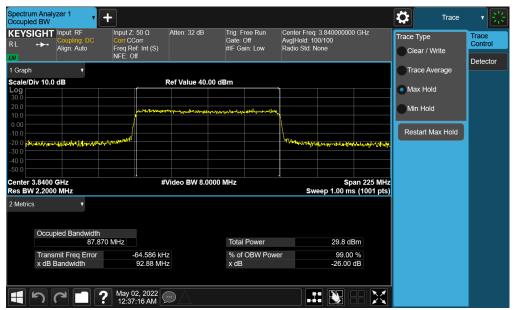


Plot 7-39. Occupied Bandwidth Plot (NR Band n77 - C-Band - 90MHz - 16-QAM - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 42 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	raye 42 01 203






Plot 7-40. Occupied Bandwidth Plot (NR Band n77 - C-Band – 80MHz – π/2 BPSK - Full RB)

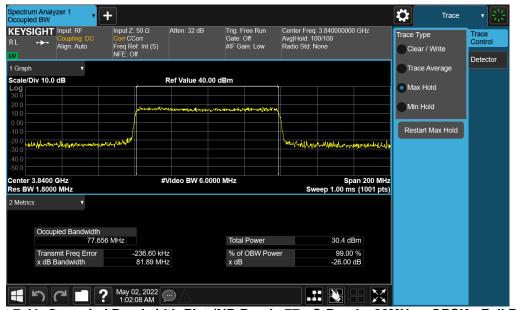

Plot 7-41. Occupied Bandwidth Plot (NR Band n77 - C-Band - 80MHz - QPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 43 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 43 01 203



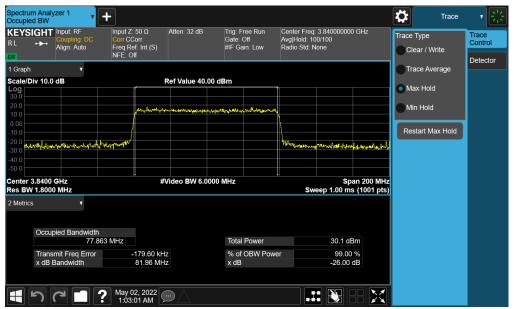


Plot 7-42. Occupied Bandwidth Plot (NR Band n77 - C-Band - 80MHz - 16-QAM - Full RB)




Plot 7-43. Occupied Bandwidth Plot (NR Band n77 - C-Band – 70MHz – π/2 BPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 44 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 44 01 203



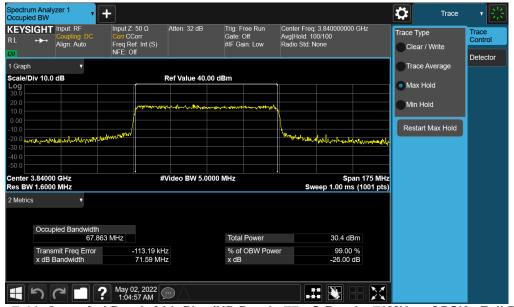


Plot 7-44. Occupied Bandwidth Plot (NR Band n77 - C-Band - 70MHz - QPSK - Full RB)

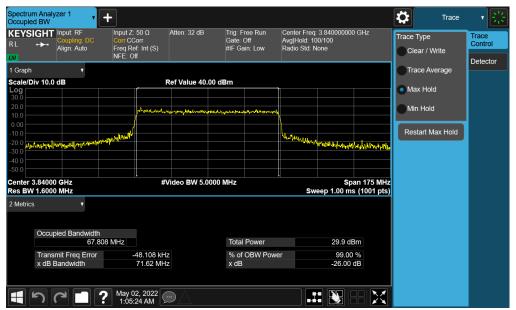


Plot 7-45. Occupied Bandwidth Plot (NR Band n77 - C-Band - 70MHz - 16-QAM - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 45 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 45 01 205



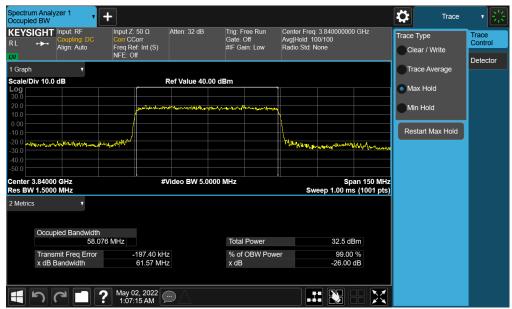

Plot 7-46. Occupied Bandwidth Plot (NR Band n77 - C-Band – 60MHz – π/2 BPSK - Full RB)

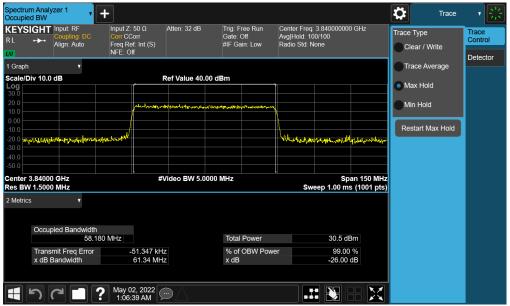


Plot 7-47. Occupied Bandwidth Plot (NR Band n77 - C-Band - 60MHz - QPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 46 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Faye 40 01 203






Plot 7-48. Occupied Bandwidth Plot (NR Band n77 - C-Band - 60MHz - 16-QAM - Full RB)

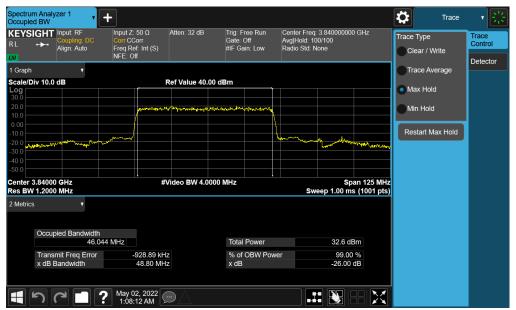


Plot 7-49. Occupied Bandwidth Plot (NR Band n77 - C-Band – 50MHz – π/2 BPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 47 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Faye 41 01 203



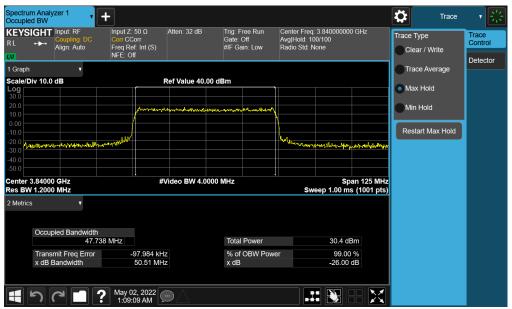


Plot 7-50. Occupied Bandwidth Plot (NR Band n77 - C-Band - 50MHz - QPSK - Full RB)

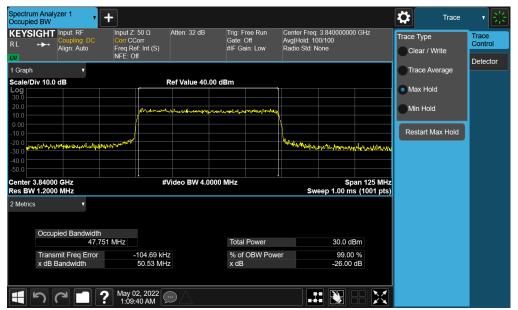


Plot 7-51. Occupied Bandwidth Plot (NR Band n77 - C-Band - 50MHz - 16-QAM - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 49 of 202
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 48 of 203



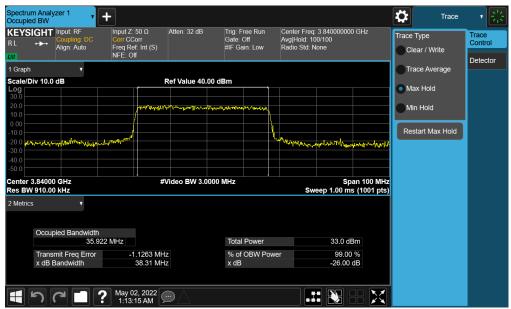


Plot 7-52. Occupied Bandwidth Plot (NR Band n77 - C-Band – 40MHz –  $\pi$ /2 BPSK - Full RB)

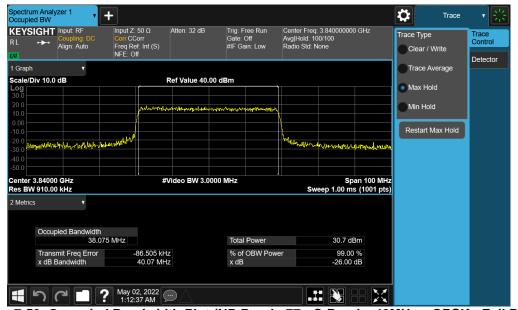

Plot 7-53. Occupied Bandwidth Plot (NR Band n77 - C-Band - 40MHz - QPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 40 of 202
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 49 of 203



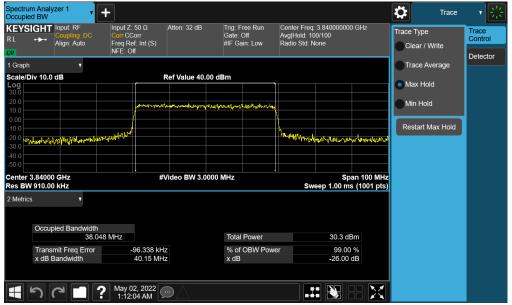


Plot 7-54. Occupied Bandwidth Plot (NR Band n77 - C-Band - 40MHz - 16-QAM - Full RB)




Plot 7-55. Occupied Bandwidth Plot (NR Band n77 - C-Band – 30MHz – π/2 BPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 50 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 50 01 205



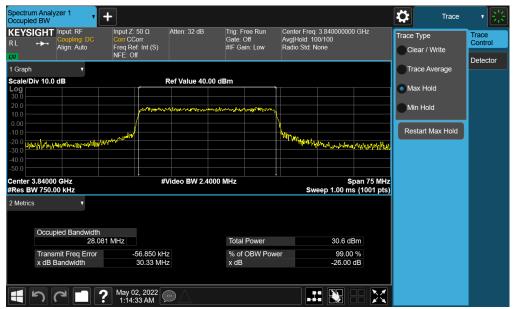


Plot 7-56. Occupied Bandwidth Plot (NR Band n77 - C-Band - 30MHz - QPSK - Full RB)

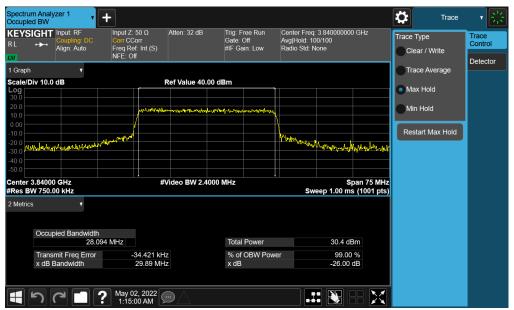


Plot 7-57. Occupied Bandwidth Plot (NR Band n77 - C-Band - 30MHz - 16-QAM - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 51 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Fage 51 01 203



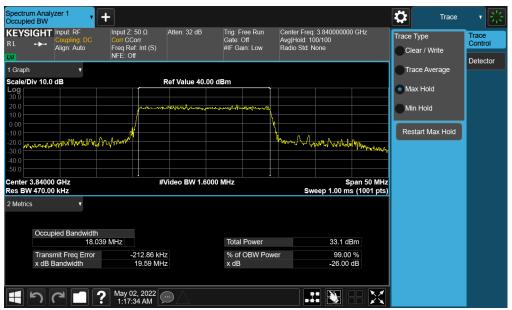

Plot 7-58. Occupied Bandwidth Plot (NR Band n77 - C-Band – 20MHz – π/2 BPSK - Full RB)

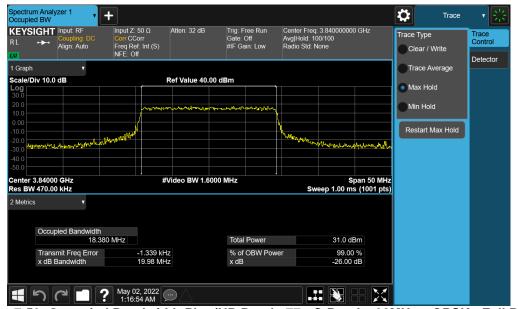


Plot 7-59. Occupied Bandwidth Plot (NR Band n77 - C-Band – 20MHz – QPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 52 of 202
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 52 of 203





Plot 7-60. Occupied Bandwidth Plot (NR Band n77 - C-Band - 20MHz - 16-QAM - Full RB)

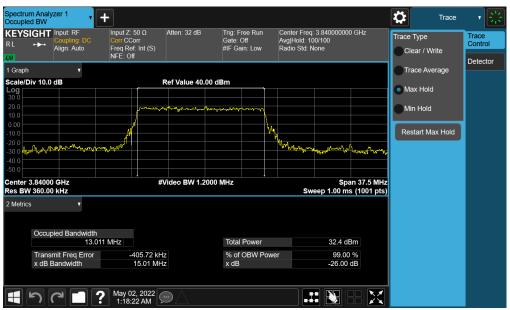


Plot 7-61. Occupied Bandwidth Plot (NR Band n77 - C-Band – 15MHz – π/2 BPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 53 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 53 0f 203





Plot 7-62. Occupied Bandwidth Plot (NR Band n77 - C-Band - 15MHz - QPSK - Full RB)

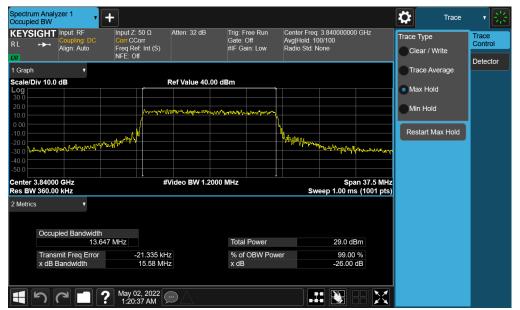

Plot 7-63. Occupied Bandwidth Plot (NR Band n77 - C-Band - 15MHz - 16-QAM - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 54 of 202
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 54 of 203






Plot 7-64. Occupied Bandwidth Plot (NR Band n77 - C-Band – 10MHz – π/2 BPSK - Full RB)



Plot 7-65. Occupied Bandwidth Plot (NR Band n77 - C-Band - 10MHz - QPSK - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 55 of 202
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	Page 55 of 203



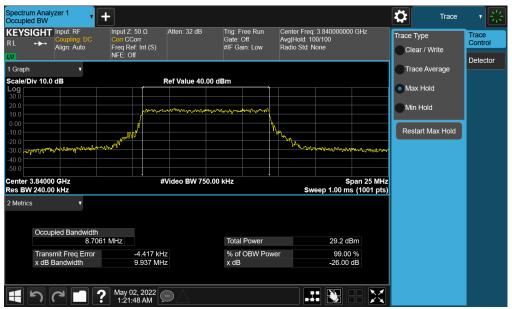

Plot 7-66. Occupied Bandwidth Plot (NR Band n77 - C-Band - 10MHz - 16-QAM - Full RB)

FCC ID: A3LSMF721U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 56 of 203
1M2204080051-06.A3L	04/20/2022 - 06/23/2022	Portable Handset	rage 30 01 203