


NR Band n5

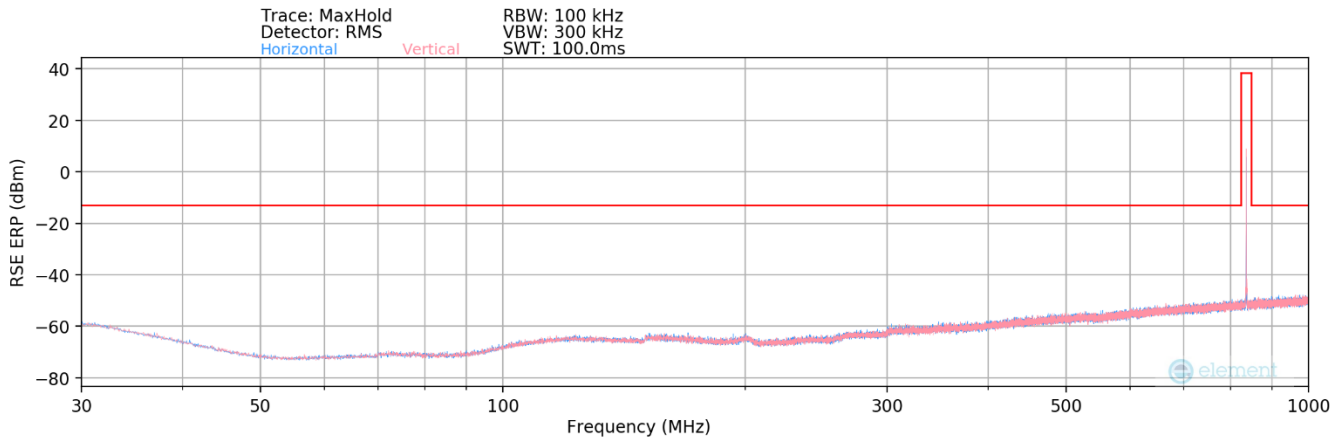


Plot 7-104. Radiated Spurious Plot Below 1GHz (NR Band n5) – CLOSE

Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
111.89	V	-	-	-99.09	19.48	27.39	-67.87	-13.00	-54.87
212.33	V	-	-	-98.72	17.42	25.70	-69.56	-13.00	-56.56
310.25	V	-	-	-98.74	21.17	29.43	-65.83	-13.00	-52.83


Table 7-18. Radiated Spurious Data (NR Band n5) – CLOSE

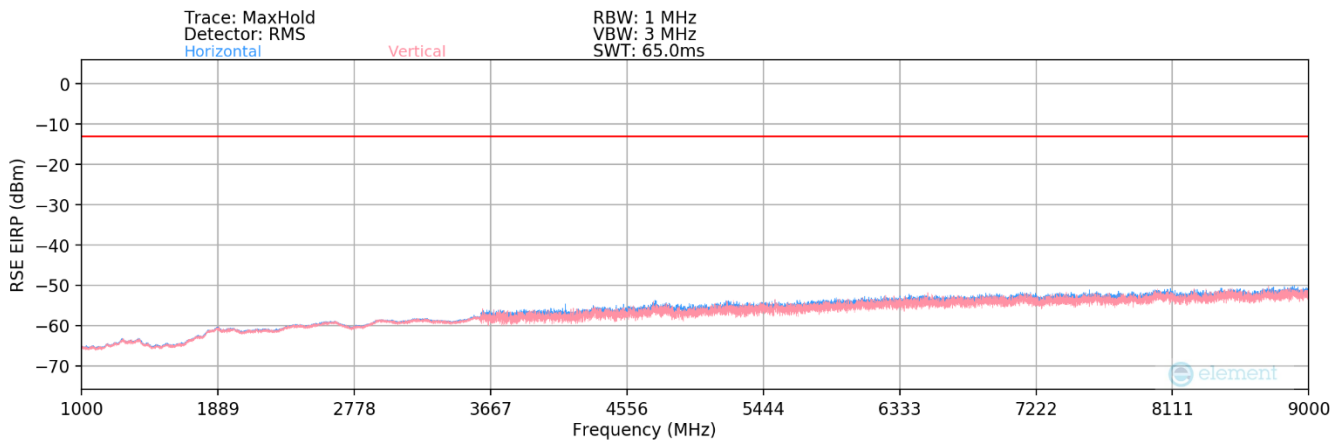

Plot 7-105. Radiated Spurious Plot Above 1GHz (NR Band n5) – CLOSE

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 83 of 101

V3.0 1/4/2022

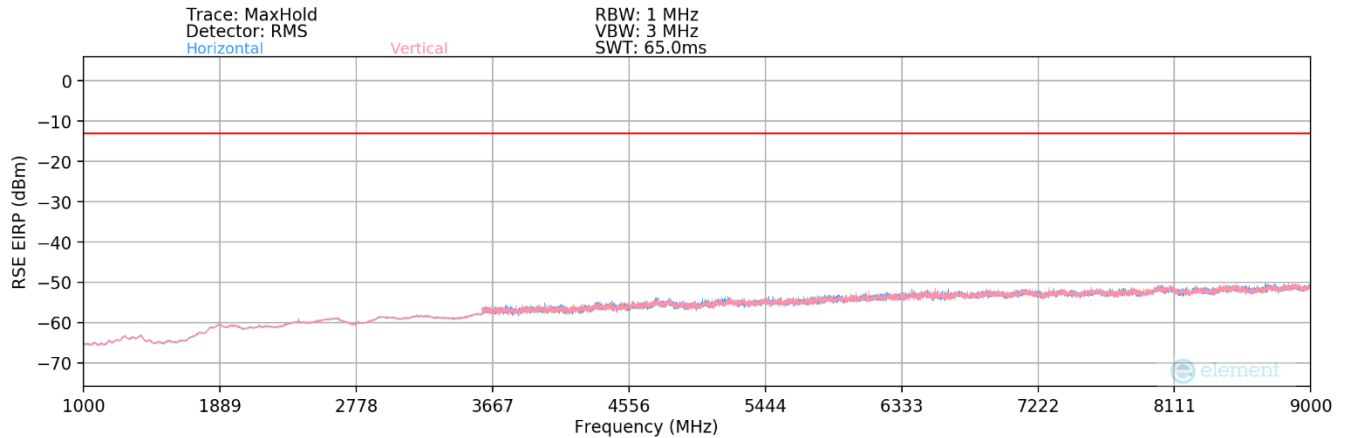

Plot 7-106. Radiated Spurious Plot Above 1GHz (NR Band n5) – OPEN

Bandwidth (MHz):	20
Frequency (MHz):	834
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1668.00	V	-	-	-76.74	-3.66	26.60	-68.66	-13.00	-55.66
2502.00	V	-	-	-76.81	0.75	30.94	-64.32	-13.00	-51.32
3336.00	V	-	-	-77.68	1.93	31.25	-64.01	-13.00	-51.01

Table 7-19. Radiated Spurious Data (NR Band n5 – Low Channel) – CLOSE

Bandwidth (MHz):	20
Frequency (MHz):	836.5
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.00	V	-	-	-76.51	-3.55	26.94	-68.31	-13.00	-55.31
2509.50	V	-	-	-76.99	0.80	30.81	-64.45	-13.00	-51.45
3346.00	V	-	-	-77.74	1.95	31.21	-64.05	-13.00	-51.05

Table 7-20. Radiated Spurious Data (NR Band n5 – Mid Channel) – CLOSE


Bandwidth (MHz):	20
Frequency (MHz):	839
RB / Offset:	1 / 53
Mode:	Stand Alone

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1678.00	V	-	-	-76.64	-3.42	26.94	-68.31	-13.00	-55.31
2517.00	V	-	-	-77.06	1.00	30.94	-64.32	-13.00	-51.32
3356.00	V	-	-	-77.54	1.94	31.40	-63.86	-13.00	-50.86

Table 7-21. Radiated Spurious Data (NR Band n5 – High Channel) – CLOSE

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT				Approved by: Technical Manager	
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset			Page 84 of 101	

NR Band n5 – B66

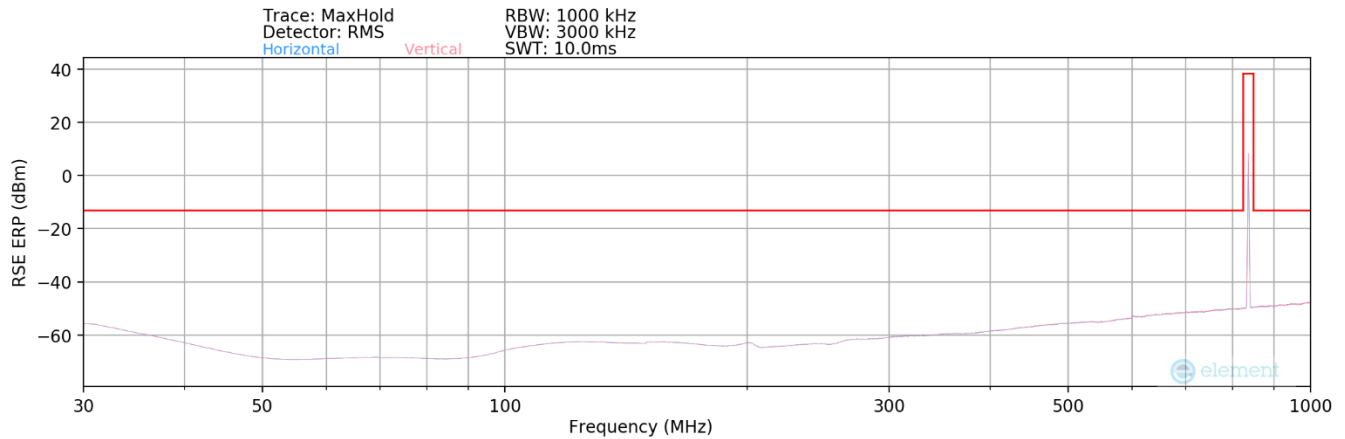


Plot 7-107. Radiated Spurious Plot Below 1GHz (NR Band n5 – B66) – HALF OPEN

Bandwidth (MHz):	20 / 20
Frequency (MHz):	836.5 / 1745
RB / Offset:	1/53 / 1/50
Mode:	EN-DC
Anchor Band:	LTE Band 66

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
72.0	H	-	-	-92.39	14.42	29.03	-66.23	-13.00	-53.23
908.5	H	-	-	-90.46	30.77	47.31	-47.95	-13.00	-34.95


Table 7-22. Radiated Spurious Data (NR Band n5 – B66) – HALF OPEN

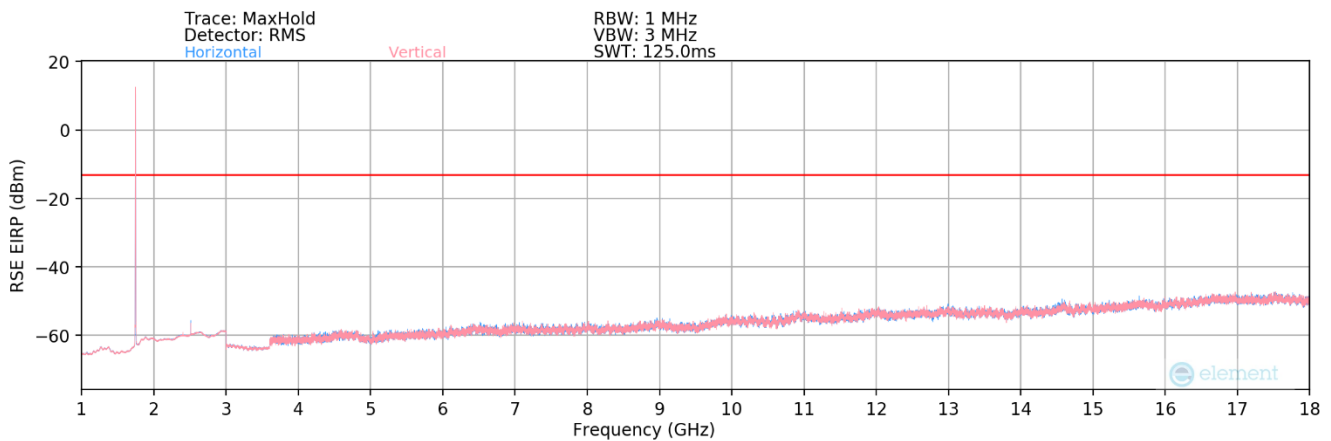

Plot 7-108. Radiated Spurious Plot Above 1GHz (NR Band n5 – B66) – HALF OPEN

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 85 of 101

V3.0 1/4/2022

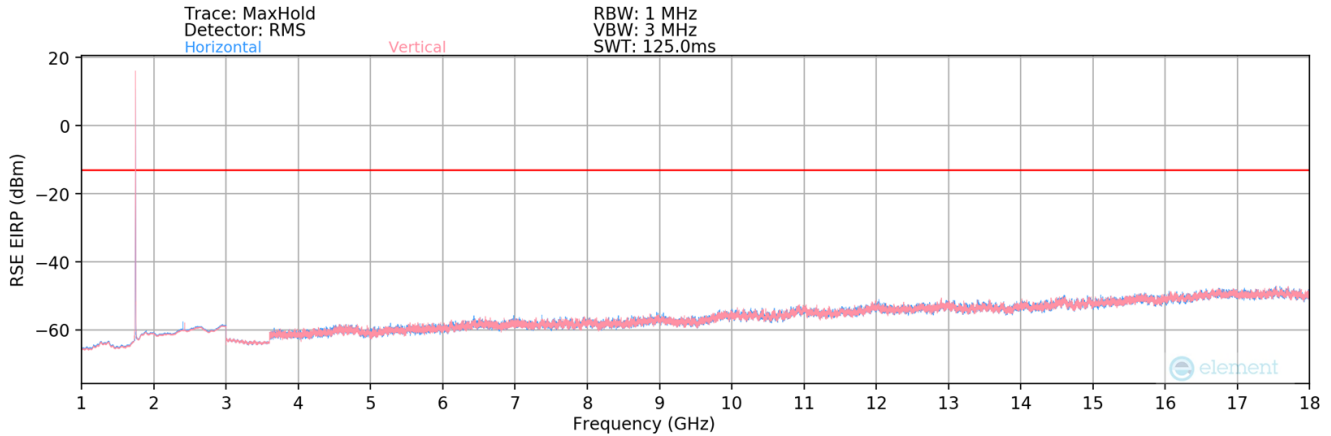

Plot 7-109. Radiated Spurious Plot Above 1GHz (NR Band n5 – B66) – OPEN

Bandwidth (MHz):	20 / 20
Frequency (MHz):	836.5 / 1745
RB / Offset:	1/53 / 1/50
Mode:	EN-DC
Anchor Band:	LTE Band 66


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
2581.5	H	-	-	-67.30	-3.76	35.94	-59.32	-13.00	-46.32
6980.0	H	114	323	-77.46	6.85	36.39	-58.86	-13.00	-45.86
7052.0	H	-	-	-80.54	6.46	32.92	-62.34	-13.00	-49.34
8653.0	H	-	-	-80.81	9.09	35.28	-59.98	-13.00	-46.98
9561.5	H	-	-	-81.52	9.73	35.21	-60.05	-13.00	-47.05

Table 7-23. Radiated Spurious Data (NR Band n5 – B66) – HALF OPEN

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 86 of 101

V3.0 1/4/2022

NR Band n5 – B30

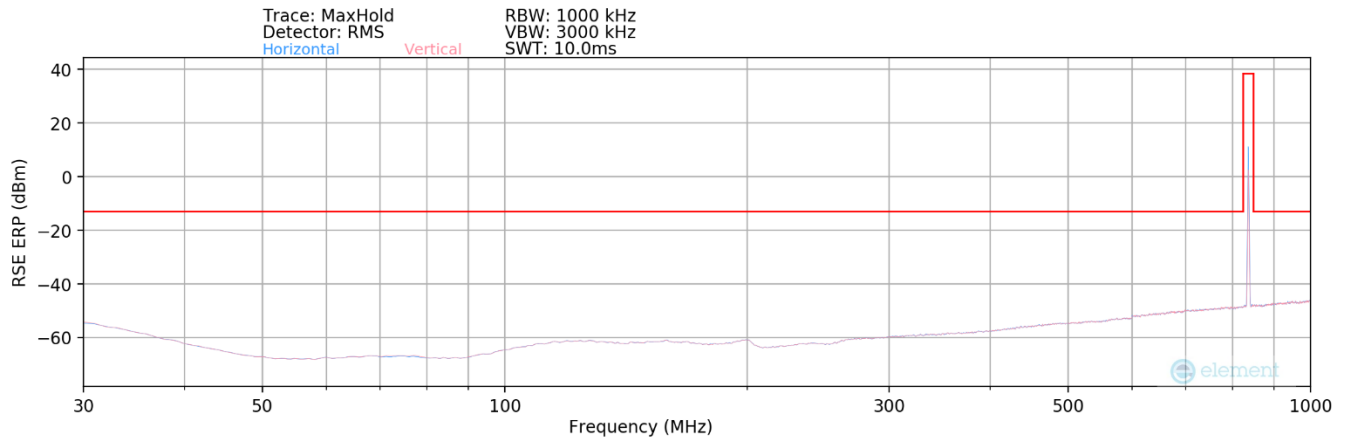


Plot 7-110. Radiated Spurious Plot Below 1GHz (NR Band n5 – B30) – OPEN

Bandwidth (MHz):	20 / 10
Frequency (MHz):	836.5 / 2310
RB / Offset:	1/53 / 1/25
Mode:	EN-DC
Anchor Band:	LTE Band 30

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
637.0	V	-	-	-89.54	27.93	45.39	-49.86	-13.00	-36.86


Table 7-24. Radiated Spurious Data (NR Band n5 – B30) – OPEN

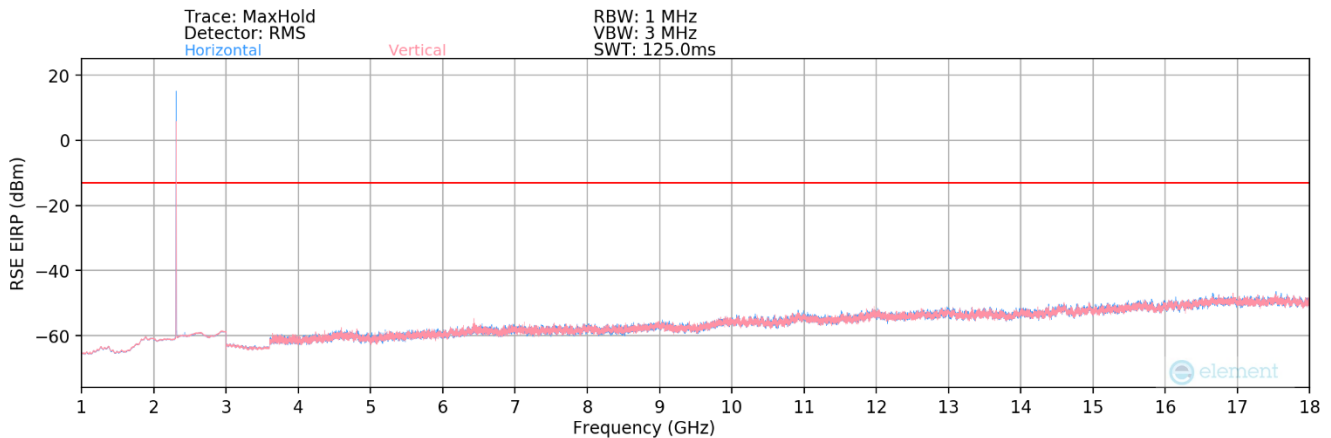

Plot 7-111. Radiated Spurious Plot Above 1GHz (NR Band n5 – B30) – OPEN

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 87 of 101

V3.0 1/4/2022

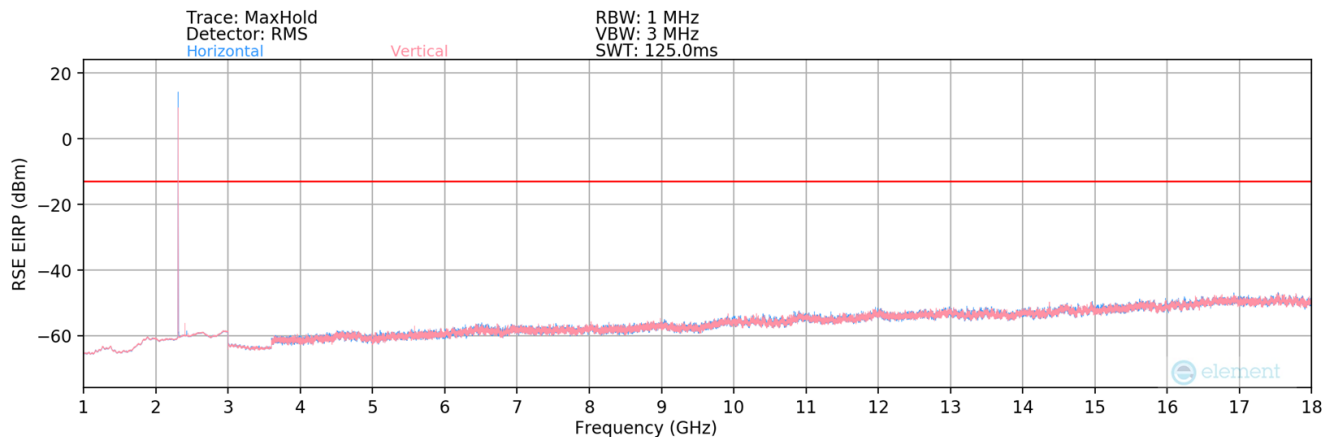

Plot 7-112. Radiated Spurious Plot Above 1GHz (NR Band n5 – B30) – CLOSE

Bandwidth (MHz):	20 / 10
Frequency (MHz):	836.5 / 2310
RB / Offset:	1/53 / 1/25
Mode:	EN-DC
Anchor Band:	LTE Band 30


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1473.5	V	-	-	-76.27	-4.24	26.49	-68.77	-13.00	-55.77
3753.5	V	256	281	-69.52	3.16	40.64	-54.62	-13.00	-41.62
6492.5	V	245	321	-75.68	7.27	38.59	-56.66	-13.00	-43.66
7766.5	V	-	-	-78.63	7.38	35.75	-59.51	-13.00	-46.51
8204.0	V	-	-	-79.18	7.99	35.81	-59.44	-13.00	-46.44

Table 7-25. Radiated Spurious Data (NR Band n5 – B30) – OPEN

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 88 of 101

V3.0 1/4/2022

NR Band n5 – B48

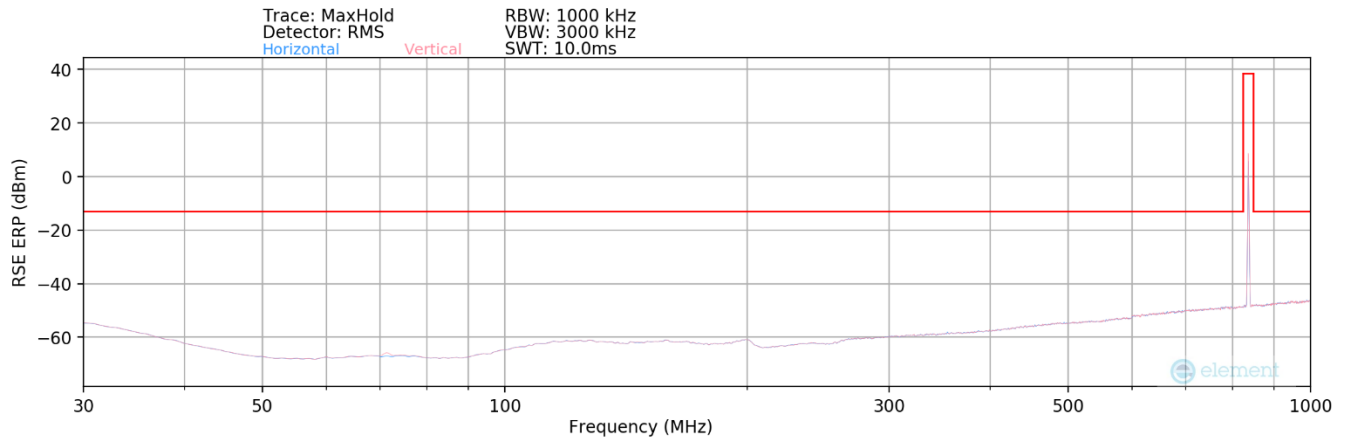


Plot 7-113. Radiated Spurious Plot Below 1GHz (NR Band n5 – B48) – CLOSE

Bandwidth (MHz):	20 / 20
Frequency (MHz):	836.5 / 3625
RB / Offset:	1/53 / 1/50
Mode:	EN-DC
Anchor Band:	LTE Band 48

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
557.5	H	-	-	-89.98	26.65	43.67	-51.59	-13.00	-38.59


Table 7-26. Radiated Spurious Data (NR Band n5 – B48) – CLOSE

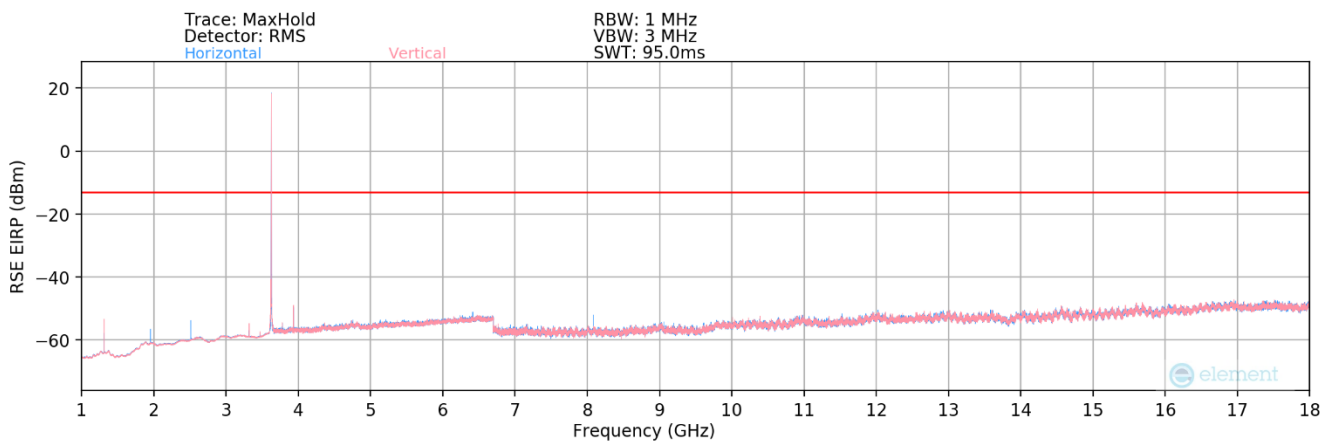

Plot 7-114. Radiated Spurious Plot Above 1GHz (NR Band n5 – B48) – CLOSE

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 89 of 101

V3.0 1/4/2022

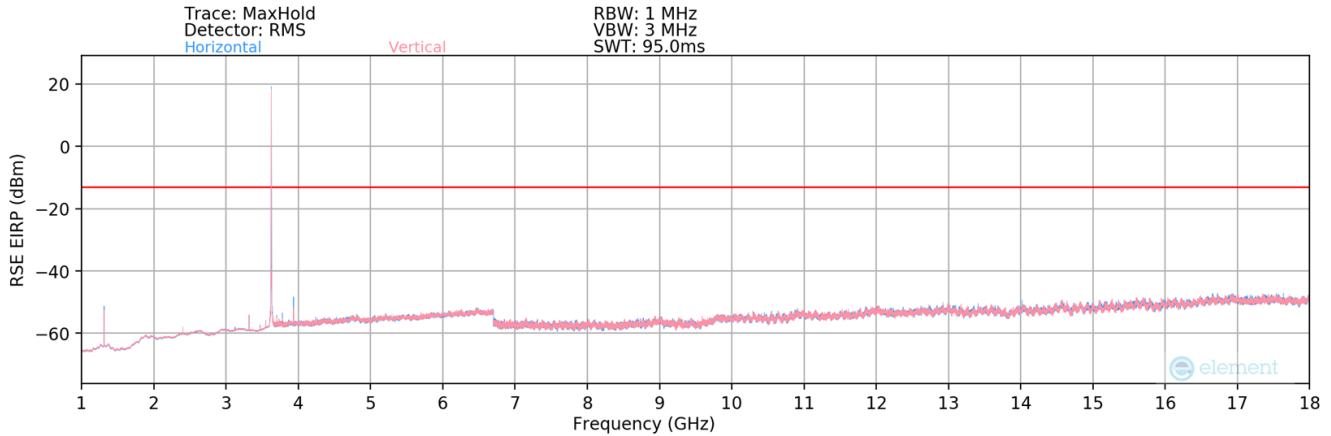

Plot 7-115. Radiated Spurious Plot Above 1GHz (NR Band n5 – B48) – HALF OPEN

Bandwidth (MHz):	20 / 20
Frequency (MHz):	836.5 / 3625
RB / Offset:	1/53 / 1/50
Mode:	EN-DC
Anchor Band:	LTE Band 48


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1394.0	V	398	150	-57.67	-3.35	45.98	-49.28	-13.00	-36.28
1952.0	H	-	-	-76.86	-0.47	29.67	-65.59	-13.00	-52.59
3346.0	H	161	241	-67.06	1.95	41.89	-53.37	-13.00	-40.37
3904.0	V	383	235	-64.72	3.15	45.43	-49.83	-13.00	-36.83
5298.0	H	-	-	-78.49	4.99	33.50	-61.76	-13.00	-48.76
6971.0	H	-	-	-79.02	8.34	36.32	-58.94	-13.00	-45.94
8086.5	H	-	-	-79.35	8.74	36.39	-58.87	-13.00	-45.87

Table 7-27. Radiated Spurious Data (NR Band n5 – B48) – CLOSE

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 90 of 101

V3.0 1/4/2022

GSM/GPRS Cell

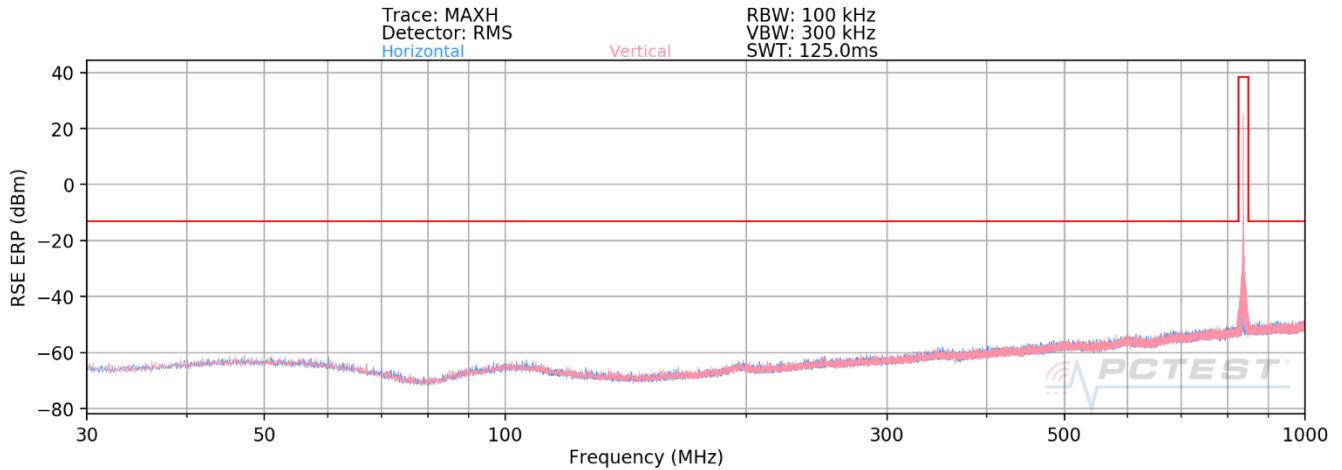


Plot 7-116. Radiated Spurious Plot Below 1GHz (GPRS Cell) – OPEN

Mode:	GPRS 1 Tx Slot
Channel:	190
Frequency (MHz):	848.8

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
850.48	V	-	-	-73.75	24.45	57.70	-37.56	-13.00	-24.56


Table 7-28. Radiated Spurious Data (GPRS Cell) – OPEN

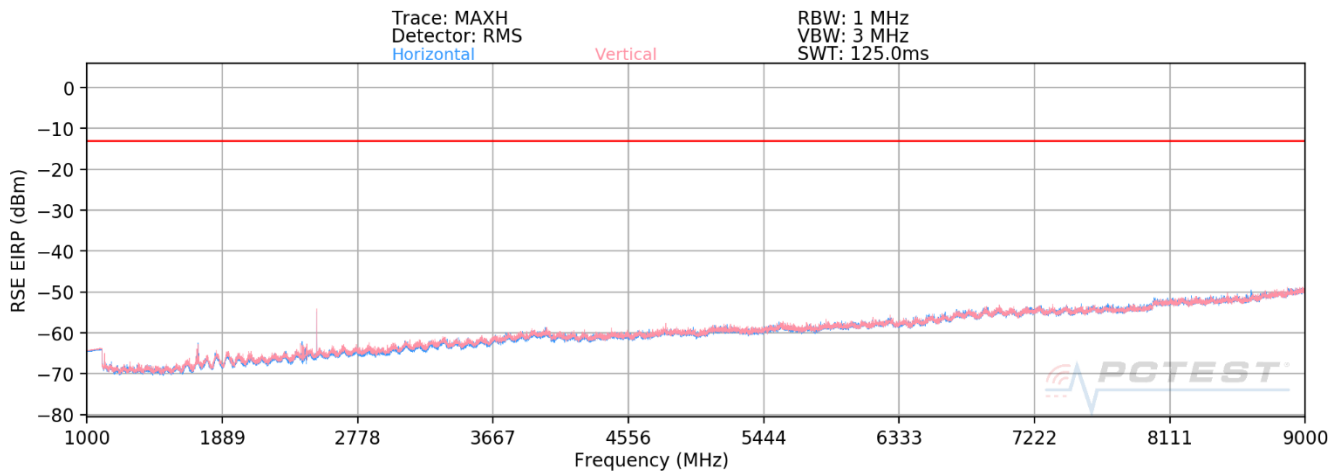

Plot 7-117. Radiated Spurious Plot Above 1GHz (GPRS Cell) – OPEN

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 91 of 101

V3.0 1/4/2022

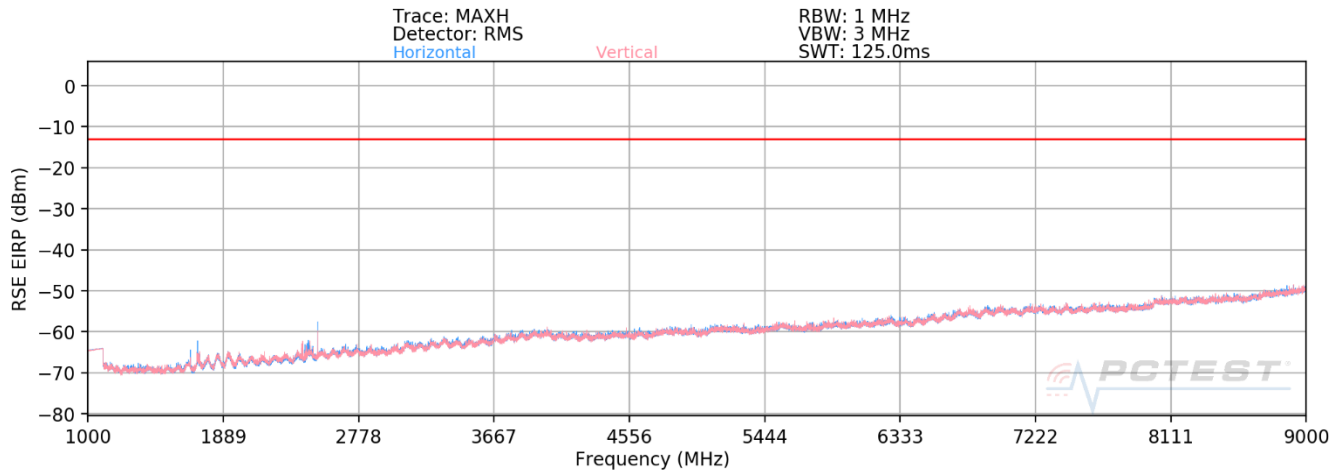

Plot 7-118. Radiated Spurious Plot Above 1GHz (GPRS Cell) – CLOSE

Mode:	GPRS 1 Tx Slot
Channel:	128
Frequency (MHz):	824.2

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1648.40	H	-	-	-73.12	-6.92	26.96	-68.30	-13.00	-55.30
2472.60	H	189	196	-60.18	-4.10	42.72	-52.54	-13.00	-39.54
3296.80	H	169	208	-70.10	-1.06	35.84	-59.42	-13.00	-46.42
4121.00	H	-	-	-72.98	1.33	35.35	-59.90	-13.00	-46.90
4945.20	H	-	-	-74.45	2.28	34.83	-60.43	-13.00	-47.43
5769.40	H	-	-	-74.61	4.54	36.93	-58.33	-13.00	-45.33

Table 7-29. Radiated Spurious Data (GPRS Cell – Low Channel) – OPEN

Mode:	GPRS 1 Tx Slot
Channel:	190
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.20	H	-	-	-73.57	-6.94	26.49	-68.77	-13.00	-55.77
2509.80	H	163	197	-58.15	-4.25	44.60	-50.66	-13.00	-37.66
3346.40	H	159	236	-68.00	-0.84	38.16	-57.10	-13.00	-44.10
4183.00	H	-	-	-71.49	0.99	36.50	-58.76	-13.00	-45.76
5019.60	H	-	-	-74.17	1.92	34.75	-60.51	-13.00	-47.51
5856.20	H	-	-	-74.42	5.18	37.76	-57.49	-13.00	-44.49

Table 7-30. Radiated Spurious Data (GPRS Cell – Mid Channel) – OPEN

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 92 of 101

Mode:	GPRS 1 Tx Slot
Channel:	251
Frequency (MHz):	848.8


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1697.60	H	-	-	-73.43	-7.73	25.84	-69.42	-13.00	-56.42
2546.40	H	155	198	-58.61	-4.07	44.32	-50.94	-13.00	-37.94
3395.20	H	-	-	-74.27	-0.71	32.02	-63.24	-13.00	-50.24
4244.00	H	-	-	-73.44	0.79	34.35	-60.91	-13.00	-47.91
5092.80	H	-	-	-73.97	2.86	35.89	-59.37	-13.00	-46.37
5941.60	H	-	-	-73.61	5.02	38.41	-56.85	-13.00	-43.85

Table 7-31. Radiated Spurious Data (GPRS Cell – High Channel) – OPEN

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 93 of 101

V3.0 1/4/2022

WCDMA Cell

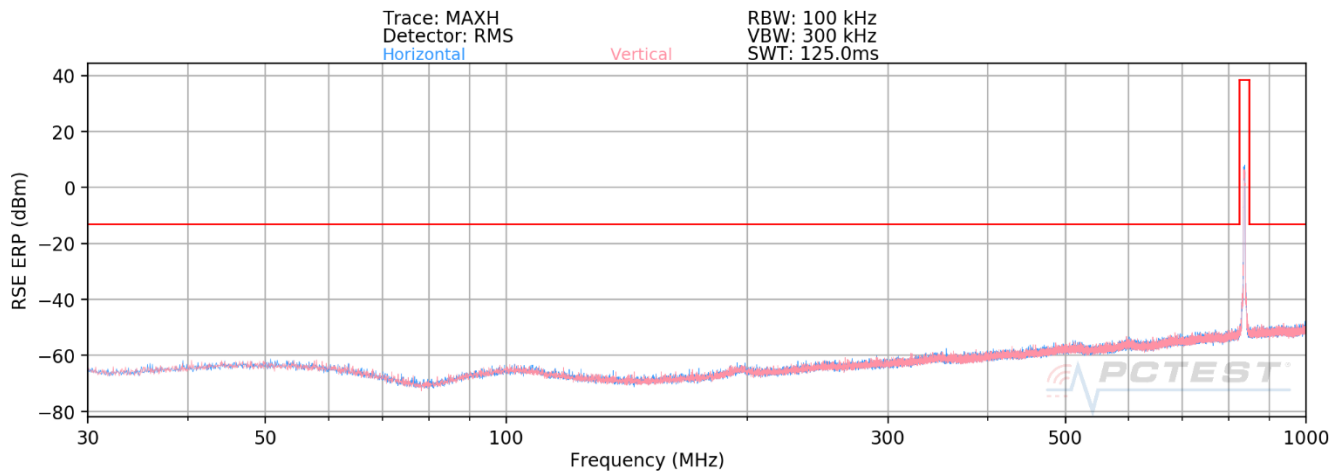


Plot 7-119. Radiated Spurious Plot Below 1GHz (WCDMA Cell) – CLOSE

Mode:	WCDMA RMC
Channel:	4183
Frequency (MHz):	846.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
850.22	H	-	-	-74.71	24.44	56.73	-38.53	-13.00	-25.53


Table 7-32. Radiated Spurious Data (WCDMA Cell) – CLOSE

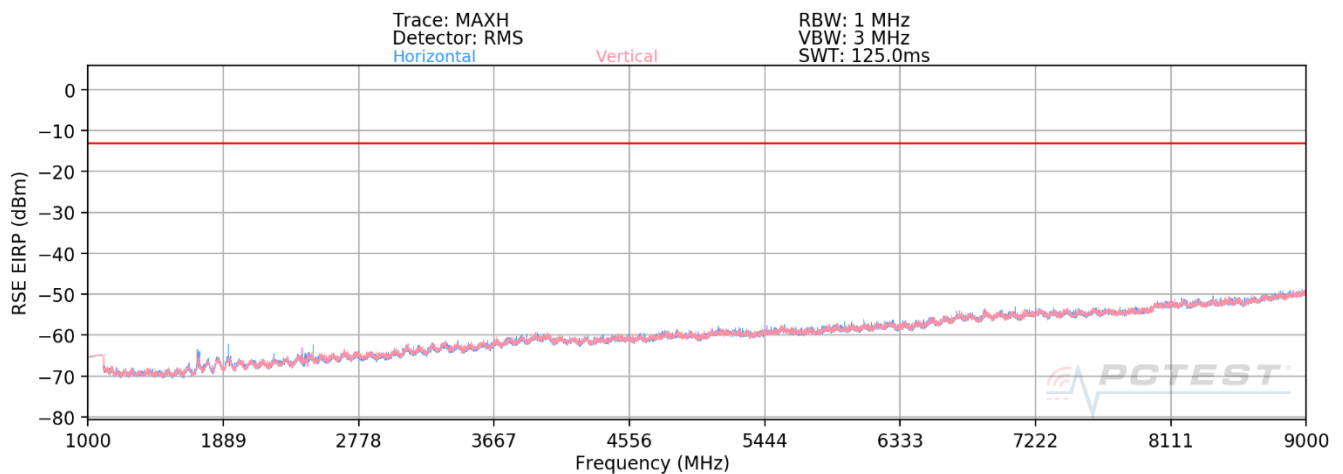

Plot 7-120. Radiated Spurious Plot Above 1GHz (WCDMA Cell) – CLOSE

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 94 of 101

V3.0 1/4/2022

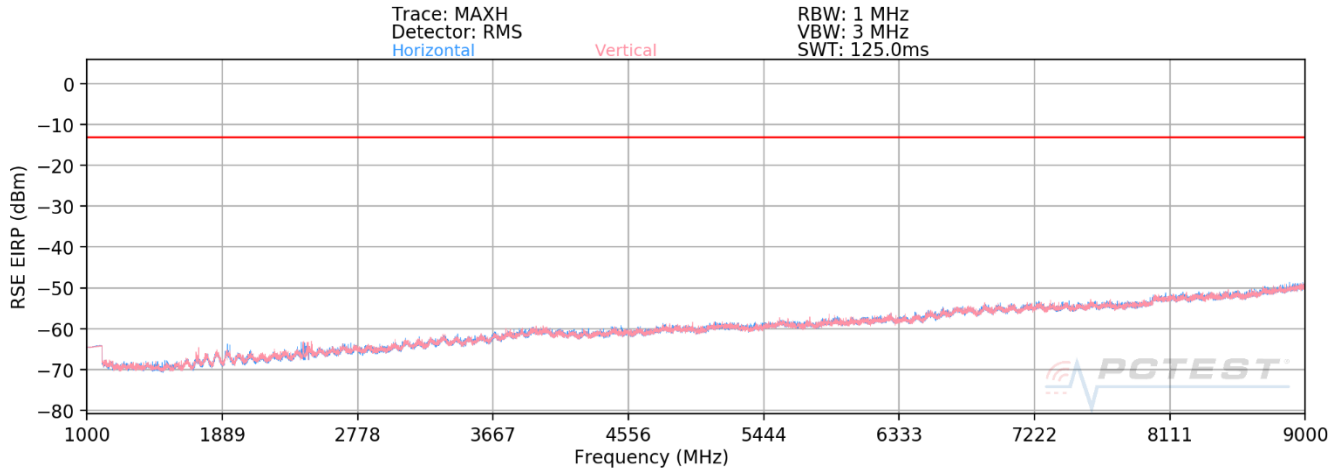

Plot 7-121. Radiated Spurious Plot Above 1GHz (WCDMA Cell) – HALF OPEN

Mode:	WCDMA RMC
Channel:	4132
Frequency (MHz):	826.4

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1652.80	H	-	-	-74.98	-6.84	25.18	-70.08	-13.00	-57.08
2479.20	H	-	-	-76.63	-4.08	26.29	-68.97	-13.00	-55.97
3305.60	H	-	-	-77.57	-0.92	28.51	-66.75	-13.00	-53.75

Table 7-33. Radiated Spurious Data (WCDMA Cell – Low Channel) – CLOSE

Mode:	WCDMA RMC
Channel:	4183
Frequency (MHz):	836.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1673.20	H	-	-	-76.63	-6.94	23.43	-71.83	-13.00	-58.83
2509.80	H	-	-	-76.54	-4.25	26.21	-69.05	-13.00	-56.05
3346.40	H	-	-	-76.27	-0.84	29.89	-65.37	-13.00	-52.37

Table 7-34. Radiated Spurious Data (WCDMA Cell – Mid Channel) – CLOSE

Mode:	WCDMA RMC
Channel:	4233
Frequency (MHz):	846.6

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1693.20	H	-	-	-75.82	-7.62	23.56	-71.69	-13.00	-58.69
2539.80	H	-	-	-75.23	-4.12	27.65	-67.61	-13.00	-54.61
3386.40	H	-	-	-76.78	-0.70	29.52	-65.73	-13.00	-52.73

Table 7-35. Radiated Spurious Data (WCDMA Cell – High Channel) – CLOSE

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 95 of 101

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22 and RSS-132, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Test Procedure Used

ANSI C63.26-2015 – Section 5.6

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes


None

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 96 of 101

LTE Band 26/5

LTE Band 26/5					
Operating Frequency (Hz):			836,500,000		
Ref. Voltage (VDC):			4.25		
Deviation Limit:			± 0.00025% or 2.5 ppm		
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.25	- 30	836,500,972	-829	-0.0000991
		- 20	836,500,277	-1,524	-0.0001822
		- 10	836,502,371	570	0.0000681
		0	836,503,122	1,321	0.0001579
		+ 10	836,501,111	-690	-0.0000825
		+ 20 (Ref)	836,501,801	0	0.0000000
		+ 30	836,500,143	-1,658	-0.0001982
		+ 40	836,499,916	-1,885	-0.0002253
		+ 50	836,502,078	277	0.0000331
Battery Endpoint	3.58	+ 20	836,503,497	1,696	0.0002027

Table 7-36. LTE Band 26/5 Frequency Stability Data

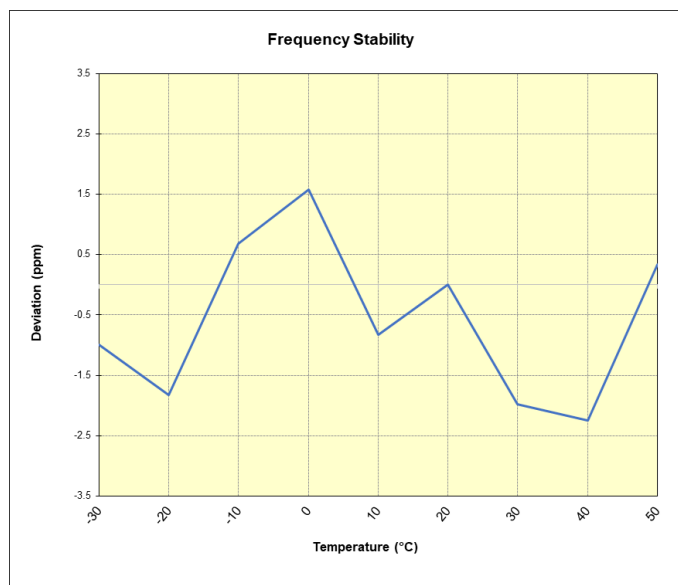


Plot 7-122. LTE Band 26/5 Frequency Stability Chart

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 97 of 101

NR Band n5

NR Band n5					
		Operating Frequency (Hz):		836,500,000	
		Ref. Voltage (VDC):		4.25	
		Deviation Limit:		± 0.00025% or 2.5 ppm	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.25	- 30	836,483,992	1,096	0.0001310
		- 20	836,481,823	-1,074	-0.0001283
		- 10	836,482,377	-519	-0.0000620
		0	836,481,991	-905	-0.0001082
		+ 10	836,483,789	893	0.0001068
		+ 20 (Ref)	836,482,896	0	0.0000000
		+ 30	836,483,716	820	0.0000980
		+ 40	836,483,446	550	0.0000658
		+ 50	836,480,990	-1,907	-0.0002279
Battery Endpoint	3.58	+ 20	836,482,085	-811	-0.0000970

Table 7-37. NR Band n5 Frequency Stability Data

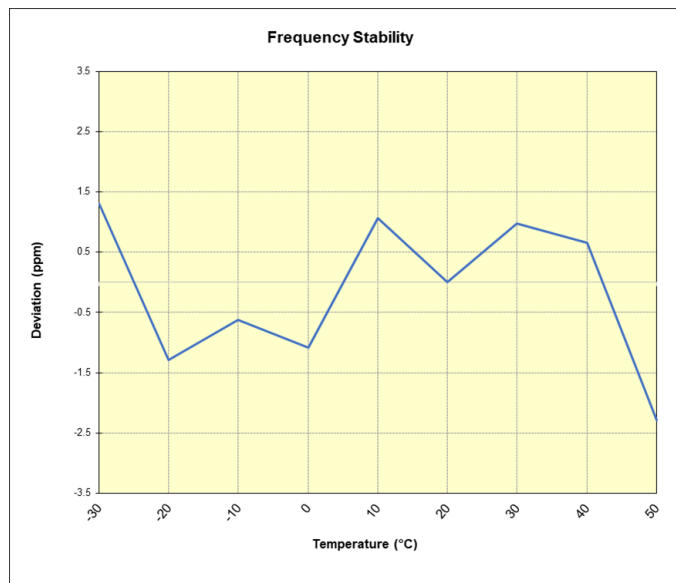


Plot 7-123. NR Band n5 Frequency Stability Chart

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 98 of 101

GSM/GPRS Cell

GSM/GPRS Cellular					
Operating Frequency (Hz):			836,600,000		
Ref. Voltage (VDC):			4.25		
Deviation Limit:			± 0.00025% or 2.5 ppm		
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.25	- 30	836,600,175	-756	-0.0000904
		- 20	836,600,780	-151	-0.0000180
		- 10	836,600,183	-748	-0.0000894
		0	836,601,181	250	0.0000299
		+ 10	836,602,111	1,180	0.0001410
		+ 20 (Ref)	836,600,931	0	0.0000000
		+ 30	836,600,167	-764	-0.0000913
		+ 40	836,601,662	731	0.0000874
		+ 50	836,601,573	642	0.0000767
Battery Endpoint	3.58	+ 20	836,599,890	-1,041	-0.0001244

Table 7-38. GSM/GPRS Cell Frequency Stability Data

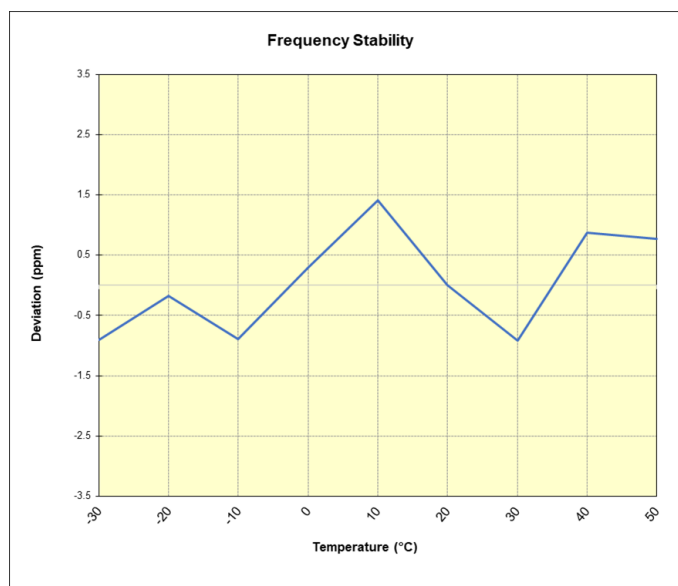

Plot 7-124. GSM/GPRS Cell Frequency Stability Chart


FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 99 of 101

V3.0 1/4/2022

WCDMA Cell

WCDMA Cellular					
		Operating Frequency (Hz):		836,600,000	
		Ref. Voltage (VDC):		4.25	
		Deviation Limit:		± 0.00025% or 2.5 ppm	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.25	- 30	836,602,611	1,056	0.0001262
		- 20	836,600,323	-1,232	-0.0001473
		- 10	836,602,548	993	0.0001187
		0	836,602,893	1,338	0.0001599
		+ 10	836,600,048	-1,507	-0.0001801
		+ 20 (Ref)	836,601,555	0	0.0000000
		+ 30	836,599,976	-1,579	-0.0001887
		+ 40	836,603,141	1,586	0.0001896
		+ 50	836,601,213	-342	-0.0000409
Battery Endpoint	3.58	+ 20	836,605,055	3,500	0.0004184

Table 7-39. WCDMA Cell Frequency Stability Data

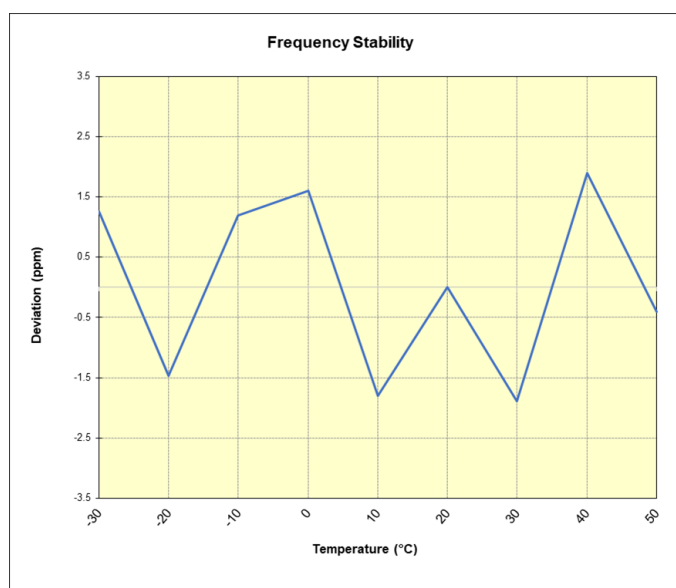

Plot 7-125. WCDMA Cell Frequency Stability Chart

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 100 of 101

V3.0 1/4/2022

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF721U** complies with all the requirements of Part 22 of the FCC rules.

FCC ID: A3LSMF721U	PART 22 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204080051-02.A3L	Test Dates: 04/01 - 06/02/2022	EUT Type: Portable Handset	Page 101 of 101

V3.0 1/4/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.