

# TEST REPORT

FCC LTE B4 Test for SM-F741B  
Certification

**APPLICANT**  
SAMSUNG Electronics Co., Ltd.

**REPORT NO.**  
HCT-RF-2405-FC007

**DATE OF ISSUE**  
May 3, 2024

**Tested by**  
Jae Mun Do



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**  
*Bongjai Huh*  
BongJai Huh / CEO



**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

**TEST  
REPORT**

**REPORT NO.**  
HCT-RF-2405-FC007

**DATE OF ISSUE**  
May 03, 2024

**Additional Model**  
-

**Applicant**      **SAMSUNG Electronics Co., Ltd.**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Product Name**      Mobile Phone  
**Model Name**      SM-F741B

**Date of Test**      March 12, 2024 ~ April 29, 2024

**FCC ID**      A3LSMF741B

**Location of Test**       Permanent Testing Lab     On Site Testing  
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 Republic of Korea)

**FCC Classification:**      PCS Licensed Transmitter Held to Ear (PCE)

**FCC Rule Part(s):**      § 27

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	May 03, 2024	Initial Release

## Notice

---

### Content

---

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S.C.853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked \*.

Information provided by the applicant is marked \*\*.

Test results provided by external providers are marked \*\*\*.

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

---

## CONTENTS

1. GENERAL INFORMATION .....	5
1.1. MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION .....	8
2.1. DESCRIPTION OF EUT .....	8
2.2. MEASURING INSTRUMENT CALIBRATION.....	8
2.3. TEST FACILITY .....	8
3. DESCRIPTION OF TESTS.....	9
3.1 TEST PROCEDURE.....	9
3.2 RADIATED POWER .....	10
3.3 RADIATED SPURIOUS EMISSIONS .....	11
3.4 PEAK- TO- AVERAGE RATIO.....	12
3.5 OCCUPIED BANDWIDTH. ....	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	15
3.7 BAND EDGE .....	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	18
3.9 WORST CASE(RADIATED TEST).....	19
3.10 WORST CASE(CONDUCTED TEST) .....	20
4. LIST OF TEST EQUIPMENT .....	21
5. MEASUREMENT UNCERTAINTY .....	22
6. SUMMARY OF TEST RESULTS.....	23
7. SAMPLE CALCULATION .....	24
8. TEST DATA (Main 1 Ant).....	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER .....	26
8.2 RADIATED SPURIOUS EMISSIONS .....	29
8.3 PEAK-TO-AVERAGE RATIO.....	30
8.4 OCCUPIED BANDWIDTH .....	31
8.5 CONDUCTED SPURIOUS EMISSIONS.....	32
8.6 BAND EDGE .....	32
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	33
9. TEST DATA (Sub 5 Ant) .....	51
9.1 EQUIVALENT ISOTROPIC RADIATED POWER .....	51
9.2 RADIATED SPURIOUS EMISSIONS .....	54
9.3 PEAK-TO-AVERAGE RATIO.....	55
9.4 OCCUPIED BANDWIDTH .....	56
9.5 CONDUCTED SPURIOUS EMISSIONS.....	57
9.6 BAND EDGE .....	57
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	58
10. TEST DATA.....	76
10.1. UPLINK CARRIER AGGREGATION .....	76
10.1.1. RADIATED SPURIOUS EMISSIONS .....	77
11. TEST PLOTS(Main 1 Ant) .....	78
12. TEST PLOTS(Sub 5 Ant).....	199
13. ANNEX A_ TEST SETUP PHOTO .....	320

## MEASUREMENT REPORT

### 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMF741B
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§ 27
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-F741B
<b>Additional Model(s)</b>	-
<b>Tx Frequency:</b>	1710.7 MHz – 1754.3 MHz (LTE – Band 4 (1.4 MHz)) 1711.5 MHz – 1753.5 MHz (LTE – Band 4 (3 MHz)) 1712.5 MHz – 1752.5 MHz (LTE – Band 4 (5 MHz)) 1715.0 MHz – 1750.0 MHz (LTE – Band 4 (10 MHz)) 1717.5 MHz – 1747.5 MHz (LTE – Band 4 (15 MHz)) 1720.0 MHz – 1745.0 MHz (LTE – Band 4 (20 MHz))
<b>Date(s) of Tests:</b>	March 12, 2024 ~ April 29, 2024
<b>Serial number:</b>	Radiated : R3CX30N98SV Conducted : R3CX30N96FZ

### 1.1. MAXIMUM OUTPUT POWER

#### Main 1 Ant

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	1M10G7D	QPSK	0.179	22.52
		1M10W7D	16QAM	0.148	21.70
		1M10W7D	64QAM	0.117	20.70
		1M10W7D	256QAM	0.059	17.69
LTE – Band4 (3)	1711.5 – 1753.5	2M71G7D	QPSK	0.178	22.51
		2M71W7D	16QAM	0.149	21.72
		2M71W7D	64QAM	0.116	20.65
		2M71W7D	256QAM	0.057	17.57
LTE – Band4 (5)	1712.5 – 1752.5	4M52G7D	QPSK	0.177	22.47
		4M51W7D	16QAM	0.148	21.71
		4M50W7D	64QAM	0.115	20.61
		4M52W7D	256QAM	0.056	17.49
LTE – Band4 (10)	1715.0 – 1750.0	8M99G7D	QPSK	0.175	22.43
		9M02W7D	16QAM	0.146	21.63
		8M97W7D	64QAM	0.115	20.60
		9M00W7D	256QAM	0.057	17.56
LTE – Band4 (15)	1717.5 – 1747.5	13M5G7D	QPSK	0.188	22.74
		13M5W7D	16QAM	0.153	21.86
		13M5W7D	64QAM	0.122	20.87
		13M5W7D	256QAM	0.060	17.76
LTE – Band4 (20)	1720.0 – 1745.0	18M0G7D	QPSK	0.180	22.56
		18M0W7D	16QAM	0.149	21.72
		18M0W7D	64QAM	0.117	20.69
		18M0W7D	256QAM	0.058	17.62

**Sub 5 Ant**

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	1M10G7D	QPSK	0.163	22.13
		1M10W7D	16QAM	0.135	21.30
		1M10W7D	64QAM	0.107	20.29
		1M10W7D	256QAM	0.053	17.26
LTE – Band4 (3)	1711.5 – 1753.5	2M71G7D	QPSK	0.163	22.13
		2M72W7D	16QAM	0.136	21.35
		2M71W7D	64QAM	0.107	20.30
		2M71W7D	256QAM	0.053	17.24
LTE – Band4 (5)	1712.5 – 1752.5	4M52G7D	QPSK	0.166	22.19
		4M52W7D	16QAM	0.140	21.45
		4M51W7D	64QAM	0.109	20.39
		4M51W7D	256QAM	0.053	17.27
LTE – Band4 (10)	1715.0 – 1750.0	9M03G7D	QPSK	0.165	22.18
		8M99W7D	16QAM	0.139	21.42
		9M01W7D	64QAM	0.108	20.34
		9M02W7D	256QAM	0.053	17.25
LTE – Band4 (15)	1717.5 – 1747.5	13M5G7D	QPSK	0.167	22.22
		13M5W7D	16QAM	0.136	21.35
		13M5W7D	64QAM	0.107	20.31
		13M5W7D	256QAM	0.054	17.31
LTE – Band4 (20)	1720.0 – 1745.0	18M0G7D	QPSK	0.163	22.11
		18M0W7D	16QAM	0.134	21.26
		18M0W7D	64QAM	0.106	20.24
		18M0W7D	256QAM	0.052	17.15

## 2. INTRODUCTION

### 2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6. It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), Bluetooth(iPA, ePA), BT LE(iPA, ePA), NFC, WPT, WIFI 6E.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $>$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{cable loss}(\text{dB}) + \text{antenna gain}(\text{dB})$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.  
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $>$  2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $>$  20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15 \text{ dB}$$

### 3.4 PEAK- TO- AVERAGE RATIO

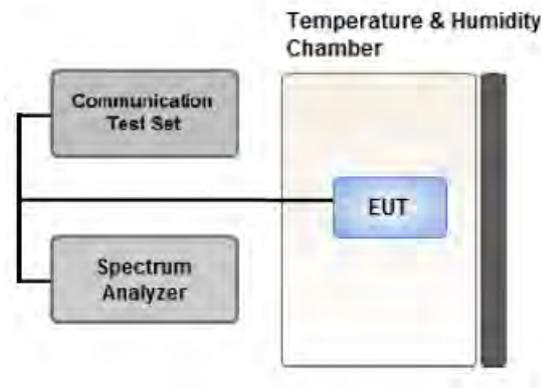

Test setup

#### ① CCDF Procedure for PAPR

##### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - for continuous transmissions, set to 1 ms,
  - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

#### ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

### **Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

### **Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times$  (number of points in sweep)  $\times$  (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6$  dB if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

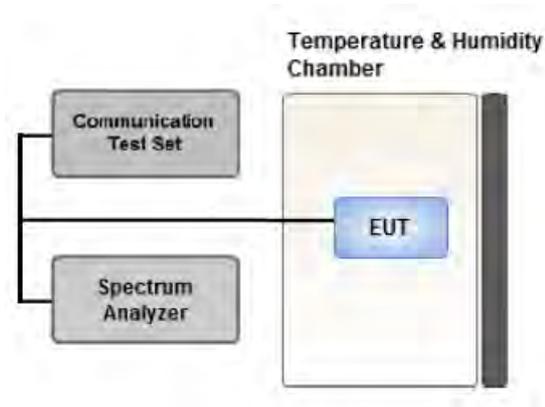

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 - 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 - 7 were repeated after changing the RBW such that it would be within 1 - 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

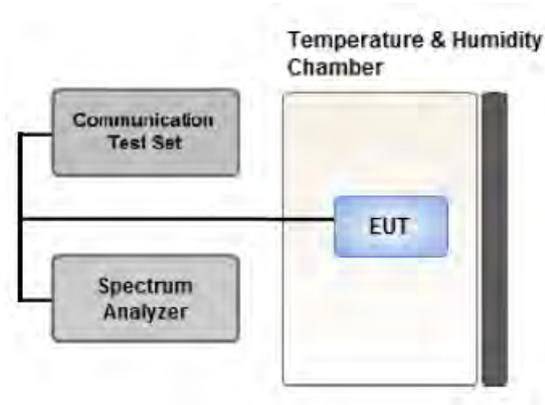

Test setup


#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 \* Span / RBW

### 3.7 BAND EDGE

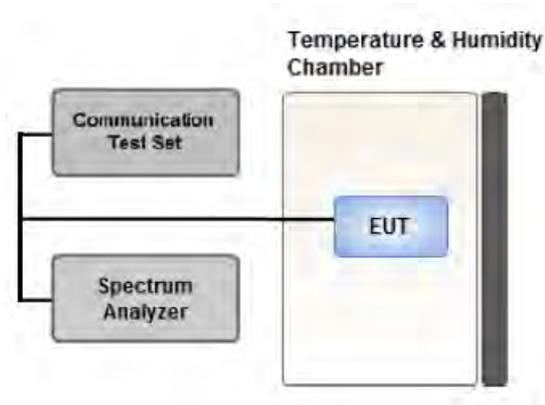

#### Test setup

##### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

##### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Notes


According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz} / \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

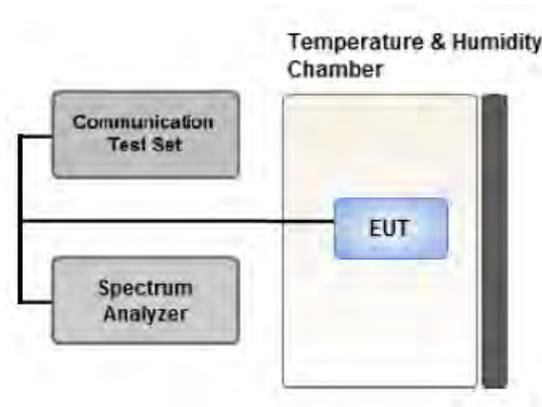

#### Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.  
Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc.)  
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.  
 Mode : Stand alone, Simultaneous transmission scenarios  
 Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation was investigated and the worst case bandwidth results are reported. (Worst case : 15 MHz(Main 1 Ant), 15 MHz(Sub 5 Ant))
- The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.  
 Worst case: Main 1 Ant, Sub 5 Ant: Half-open.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.

[ Main 1 Ant Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		Z
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		X

[ Sub 5 Ant Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 9.1		Y
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		Y

### 3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[ Worst case ]

Test Description	Modulation	Bandwidth h (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
20	Low	1	0		
	High	1	99		
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	12/11/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	12/11/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/17/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	09/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	09/16/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/17/2024	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	12/11/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§ 27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

**Note:**

1. See SAR Report

### 6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA (Main 1 Ant)

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1710.7		QPSK	-19.65	14.08	9.94	2.24	V	< 1.00	0.151	21.78	1	0
		16-QAM	-20.44	13.29	9.94	2.24	V		0.126	20.99		
		64-QAM	-21.49	12.24	9.94	2.24	V		0.099	19.94		
		256-QAM	-24.47	9.26	9.94	2.24	V		0.050	16.96		
1732.5	LTE B4 1.4 MHz	QPSK	-19.07	14.62	10.07	2.17	V		0.179	22.52	1	5
		16-QAM	-19.89	13.80	10.07	2.17	V		0.148	21.70		
		64-QAM	-20.89	12.80	10.07	2.17	V		0.117	20.70		
		256-QAM	-23.90	9.79	10.07	2.17	V		0.059	17.69		
1754.3		QPSK	-19.35	14.33	10.18	2.17	V		0.172	22.34	1	0
		16-QAM	-20.15	13.53	10.18	2.17	V		0.143	21.54		
		64-QAM	-21.19	12.49	10.18	2.17	V		0.112	20.50		
		256-QAM	-24.23	9.45	10.18	2.17	V		0.056	17.46		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1711.5		QPSK	-19.71	14.02	9.94	2.24	V	< 1.00	0.149	21.72	1	0
		16-QAM	-20.47	13.26	9.94	2.24	V		0.125	20.96		
		64-QAM	-21.52	12.21	9.94	2.24	V		0.098	19.91		
		256-QAM	-24.62	9.11	9.94	2.24	V		0.048	16.81		
1732.5	LTE B4 3 MHz	QPSK	-19.08	14.61	10.07	2.17	V		0.178	22.51	1	14
		16-QAM	-19.87	13.82	10.07	2.17	V		0.149	21.72		
		64-QAM	-20.94	12.75	10.07	2.17	V		0.116	20.65		
		256-QAM	-24.02	9.67	10.07	2.17	V		0.057	17.57		
1753.5		QPSK	-19.30	14.38	10.18	2.17	V		0.174	22.39	1	0
		16-QAM	-20.11	13.57	10.18	2.17	V		0.144	21.58		
		64-QAM	-21.14	12.54	10.18	2.17	V		0.114	20.55		
		256-QAM	-24.24	9.44	10.18	2.17	V		0.056	17.45		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1712.5		QPSK	-19.76	13.97	9.94	2.24	V	< 1.00	0.147	21.67	1	0
		16-QAM	-20.44	13.29	9.94	2.24	V		0.126	20.99		
		64-QAM	-21.54	12.19	9.94	2.24	V		0.097	19.89		
		256-QAM	-24.68	9.05	9.94	2.24	V		0.047	16.75		
1732.5	LTE B4 5 MHz	QPSK	-19.12	14.57	10.07	2.17	V		0.177	22.47	1	24
		16-QAM	-19.88	13.81	10.07	2.17	V		0.148	21.71		
		64-QAM	-20.98	12.71	10.07	2.17	V		0.115	20.61		
		256-QAM	-24.10	9.59	10.07	2.17	V		0.056	17.49		
1752.5		QPSK	-19.61	14.10	10.17	2.15	V		0.163	22.12	1	0
		16-QAM	-20.43	13.28	10.17	2.15	V		0.135	21.30		
		64-QAM	-21.56	12.15	10.17	2.15	V		0.104	20.17		
		256-QAM	-24.71	9.00	10.17	2.15	V		0.050	17.02		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1715.0		QPSK	-19.74	13.90	9.98	2.23	V	< 1.00	0.146	21.64	1	0
		16-QAM	-20.53	13.11	9.98	2.23	V		0.122	20.85		
		64-QAM	-21.58	12.06	9.98	2.23	V		0.096	19.80		
		256-QAM	-24.63	9.01	9.98	2.23	V		0.047	16.75		
1732.5	LTE B4 10 MHz	QPSK	-19.16	14.53	10.07	2.17	V		0.175	22.43	1	49
		16-QAM	-19.96	13.73	10.07	2.17	V		0.146	21.63		
		64-QAM	-20.99	12.70	10.07	2.17	V		0.115	20.60		
		256-QAM	-24.03	9.66	10.07	2.17	V		0.057	17.56		
1750.0		QPSK	-19.33	14.38	10.17	2.15	V		0.174	22.40	1	0
		16-QAM	-20.12	13.59	10.17	2.15	V		0.145	21.61		
		64-QAM	-21.22	12.49	10.17	2.15	V		0.112	20.51		
		256-QAM	-24.37	9.34	10.17	2.15	V		0.054	17.36		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1717.5		QPSK	-19.63	14.01	10.01	2.22	V	< 1.00	0.151	21.80	1	0
		16-QAM	-20.51	13.13	10.01	2.22	V		0.124	20.92		
		64-QAM	-21.51	12.13	10.01	2.22	V		0.098	19.92		
		256-QAM	-24.61	9.03	10.01	2.22	V		0.048	16.82		
1732.5	LTE B4 15 MHz	QPSK	-19.07	14.62	10.07	2.17	V		0.179	22.52	1	74
		16-QAM	-19.91	13.78	10.07	2.17	V		0.147	21.68		
		64-QAM	-20.96	12.73	10.07	2.17	V		0.116	20.63		
		256-QAM	-23.98	9.71	10.07	2.17	V		0.058	17.61		
1747.5		QPSK	-18.99	14.72	10.17	2.15	V		0.188	22.74	1	0
		16-QAM	-19.87	13.84	10.17	2.15	V		0.153	21.86		
		64-QAM	-20.86	12.85	10.17	2.15	V		0.122	20.87		
		256-QAM	-23.97	9.74	10.17	2.15	V		0.060	17.76		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1720.0		QPSK	-19.81	13.70	10.01	2.22	V	< 1.00	0.141	21.49	1	0
		16-QAM	-20.65	12.86	10.01	2.22	V		0.116	20.65		
		64-QAM	-21.65	11.86	10.01	2.22	V		0.092	19.65		
		256-QAM	-24.70	8.81	10.01	2.22	V		0.046	16.60		
1732.5	LTE B4 20 MHz	QPSK	-19.19	14.50	10.07	2.17	V		0.174	22.40	1	99
		16-QAM	-19.97	13.72	10.07	2.17	V		0.145	21.62		
		64-QAM	-21.03	12.66	10.07	2.17	V		0.114	20.56		
		256-QAM	-24.07	9.62	10.07	2.17	V		0.057	17.52		
1745.0		QPSK	-19.12	14.56	10.15	2.15	V		0.180	22.56	1	0
		16-QAM	-19.96	13.72	10.15	2.15	V		0.149	21.72		
		64-QAM	-20.99	12.69	10.15	2.15	V		0.117	20.69		
		256-QAM	-24.06	9.62	10.15	2.15	V		0.058	17.62		

## 8.2 RADIATED SPURIOUS EMISSIONS

▣ OPERATING FREQUENCY:	<u>1747.5 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>22.74 dBm = 0.188 W</u>
▣ MODE:	<u>LTE B4</u>
▣ MODULATION SIGNAL:	<u>15 MHz QPSK</u>
▣ DISTANCE:	<u>3 meters</u>
▣ LIMIT: $43 + 10 \log_{10}(W) =$	<u>35.74 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
20025 (1717.5)	3 435.00	-54.59	12.41	-60.87	3.12	H	-51.58	74.31	1	0
	5 152.50	-57.90	12.39	-55.88	3.84	H	-47.33	70.07		
	6 870.00	-57.50	11.85	-50.44	4.50	H	-43.09	65.83		
20175 (1732.5)	3 465.00	-53.04	12.35	-59.68	3.11	V	-50.44	73.18	1	74
	5 197.50	-57.65	12.63	-56.57	3.86	V	-47.80	70.54		
	6 930.00	-56.10	11.65	-48.97	4.52	H	-41.84	64.57		
20325 (1747.5)	3 495.00	-54.91	12.34	-60.98	3.09	V	-51.73	74.47	1	0
	5 242.50	-57.16	12.87	-56.31	3.95	H	-47.39	70.12		
	6 990.00	-56.42	11.36	-48.21	4.58	H	-41.43	64.16		

### 8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
4	1.4 MHz	1732.5	QPSK	6	0	4.48
			16-QAM			5.59
			64-QAM			6.54
			256-QAM			7.05
	3 MHz		QPSK	15		4.43
			16-QAM			5.43
			64-QAM			6.47
			256-QAM			6.89
	5 MHz		QPSK	25		4.46
			16-QAM			5.56
			64-QAM			6.45
			256-QAM			6.90
	10 MHz		QPSK	50		4.53
			16-QAM			5.61
			64-QAM			6.46
			256-QAM			6.90
	15 MHz		QPSK	75		4.45
			16-QAM			5.50
			64-QAM			6.43
			256-QAM			6.85
20 MHz	QPSK	100	4.52			
	16-QAM		5.60			
	64-QAM		6.43			
	256-QAM		6.92			

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 79 ~ 102.

#### 8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
4	1.4 MHz	1732.5	QPSK	6	0	1.0987
			16-QAM			1.0960
			64-QAM			1.1015
			256-QAM			1.0965
	3 MHz		QPSK	15		2.7132
			16-QAM			2.7097
			64-QAM			2.7102
			256-QAM			2.7099
	5 MHz		QPSK	25		4.5163
			16-QAM			4.5087
			64-QAM			4.5031
			256-QAM			4.5180
	10 MHz		QPSK	50		8.9867
			16-QAM			9.0170
			64-QAM			8.9713
			256-QAM			8.9989
	15 MHz		QPSK	75		13.523
			16-QAM			13.518
			64-QAM			13.511
			256-QAM			13.496
20 MHz	QPSK	100	17.954			
	16-QAM		17.949			
	64-QAM		17.965			
	256-QAM		17.971			

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 103 ~ 126.

### 8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
4	1.4	1710.7	5.4582	28.591	-80.694	-52.103	-13.00
		1732.5	8.0464	28.591	-80.477	-51.886	
		1754.3	3.5095	27.976	-80.094	-52.118	
	3	1711.5	4.0025	27.976	-80.392	-52.416	
		1732.5	8.0234	28.591	-80.182	-51.591	
		1753.5	3.8081	27.976	-80.803	-52.827	
	5	1712.5	8.8380	28.591	-80.446	-51.855	
		1732.5	9.1291	28.591	-79.799	-51.208	
		1752.5	9.9885	28.591	-80.708	-52.117	
	10	1715.0	3.7623	27.976	-80.229	-52.253	
		1732.5	4.0813	27.976	-80.163	-52.187	
		1750.0	4.0310	27.976	-80.723	-52.747	
	15	1717.5	4.0973	27.976	-80.022	-52.046	
		1732.5	4.0305	27.976	-80.259	-52.283	
		1747.5	9.9915	28.591	-81.019	-52.428	
	20	1720.0	8.0359	28.591	-80.406	-51.815	
		1732.5	8.8694	28.591	-80.486	-51.895	
		1745.0	5.2064	28.591	-80.644	-52.053	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 127 ~ 162.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 - 1	25.270
1 - 5	27.976
5 - 10	28.591
10 - 15	29.116
15 - 20	29.489
Above 20(26.5)	30.131


### 8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 163 ~ 198.

### 8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1710,700,000 Hz
- ▣ CHANNEL: 19957 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1710 699 998	0.0	0.000 000	0.000
100 %		-30	1710 700 001	3.1	0.000 000	0.002
100 %		-20	1710 700 000	2.3	0.000 000	0.001
100 %		-10	1710 700 003	4.5	0.000 000	0.003
100 %		0	1710 700 005	7.2	0.000 000	0.004
100 %		+10	1710 700 006	7.7	0.000 000	0.005
100 %		+30	1710 700 000	2.4	0.000 000	0.001
100 %		+40	1710 700 002	3.8	0.000 000	0.002
100 %		+50	1710 700 001	3.1	0.000 000	0.002
Batt. Endpoint		3.300	+20	1710 700 002	4.1	0.000 000

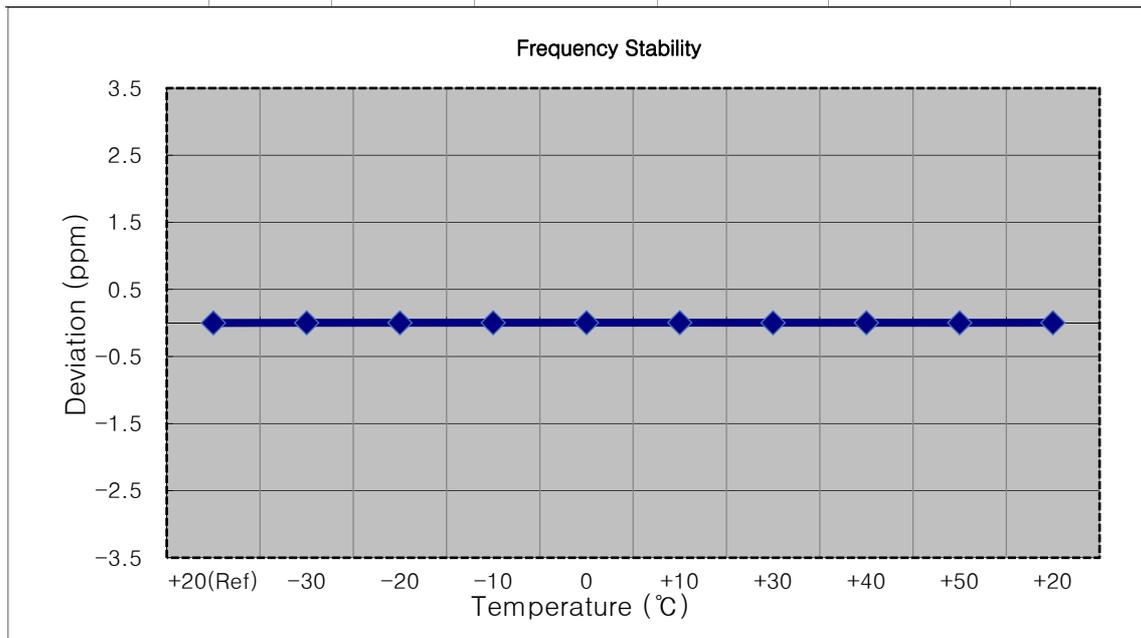


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 19965 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1711 500 005	0.0	0.000 000	0.000
100 %		-30	1711 500 000	-5.3	0.000 000	-0.003
100 %		-20	1711 499 997	-7.4	0.000 000	-0.004
100 %		-10	1711 500 007	1.8	0.000 000	0.001
100 %		0	1711 500 006	1.5	0.000 000	0.001
100 %		+10	1711 500 008	2.9	0.000 000	0.002
100 %		+30	1711 499 998	-6.4	0.000 000	-0.004
100 %		+40	1711 500 009	4.4	0.000 000	0.003
100 %		+50	1711 499 997	-7.5	0.000 000	-0.004
Batt. Endpoint		3.300	+20	1711 500 007	2.1	0.000 000

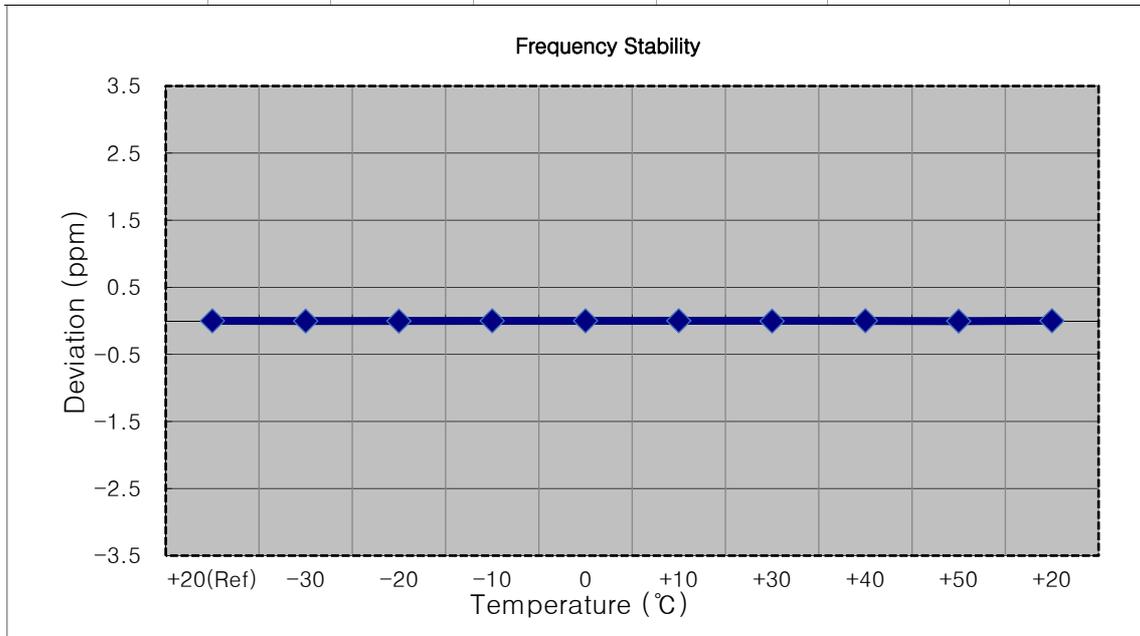


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1712,500,000 Hz
- ▣ CHANNEL: 19975 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1712 499 995	0.0	0.000 000	0.000
100 %		-30	1712 499 999	3.5	0.000 000	0.002
100 %		-20	1712 499 990	-5.5	0.000 000	-0.003
100 %		-10	1712 499 992	-3.3	0.000 000	-0.002
100 %		0	1712 499 999	3.4	0.000 000	0.002
100 %		+10	1712 499 991	-3.7	0.000 000	-0.002
100 %		+30	1712 499 990	-4.9	0.000 000	-0.003
100 %		+40	1712 499 991	-4.1	0.000 000	-0.002
100 %		+50	1712 499 993	-2.5	0.000 000	-0.001
Batt. Endpoint		3.300	+20	1712 499 993	-2.2	0.000 000

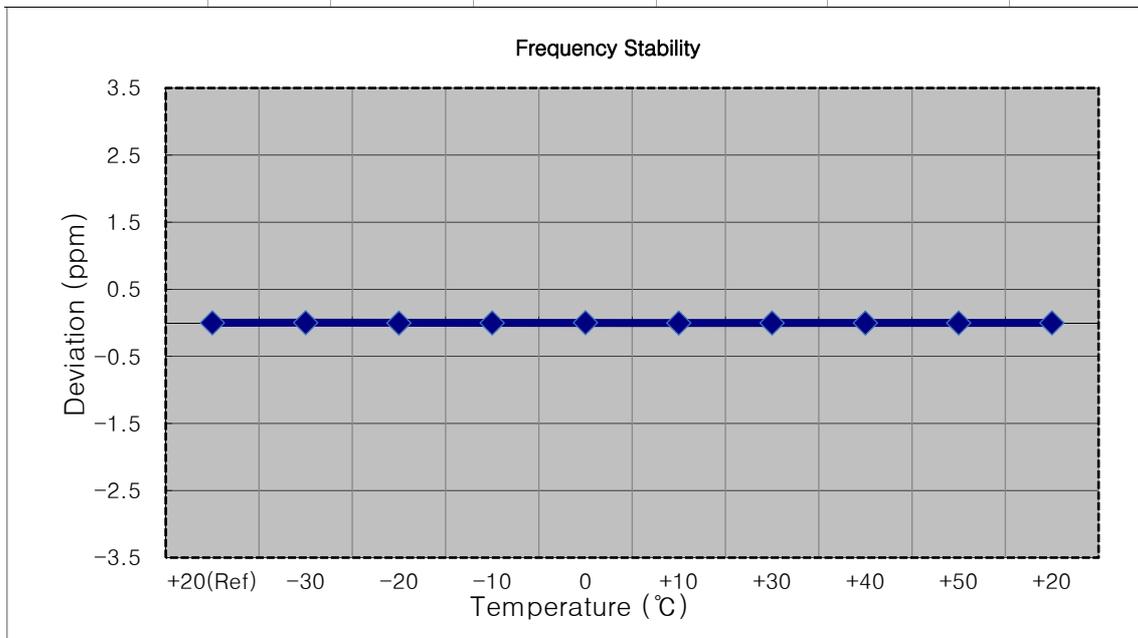


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 20000 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1715 000 003	0.0	0.000 000	0.000
100 %		-30	1714 999 999	-3.7	0.000 000	-0.002
100 %		-20	1715 000 001	-1.7	0.000 000	-0.001
100 %		-10	1715 000 007	3.6	0.000 000	0.002
100 %		0	1715 000 002	-1.2	0.000 000	-0.001
100 %		+10	1714 999 999	-4.0	0.000 000	-0.002
100 %		+30	1715 000 001	-2.6	0.000 000	-0.002
100 %		+40	1715 000 006	2.8	0.000 000	0.002
100 %		+50	1715 000 008	4.8	0.000 000	0.003
Batt. Endpoint		3.300	+20	1715 000 000	-3.4	0.000 000

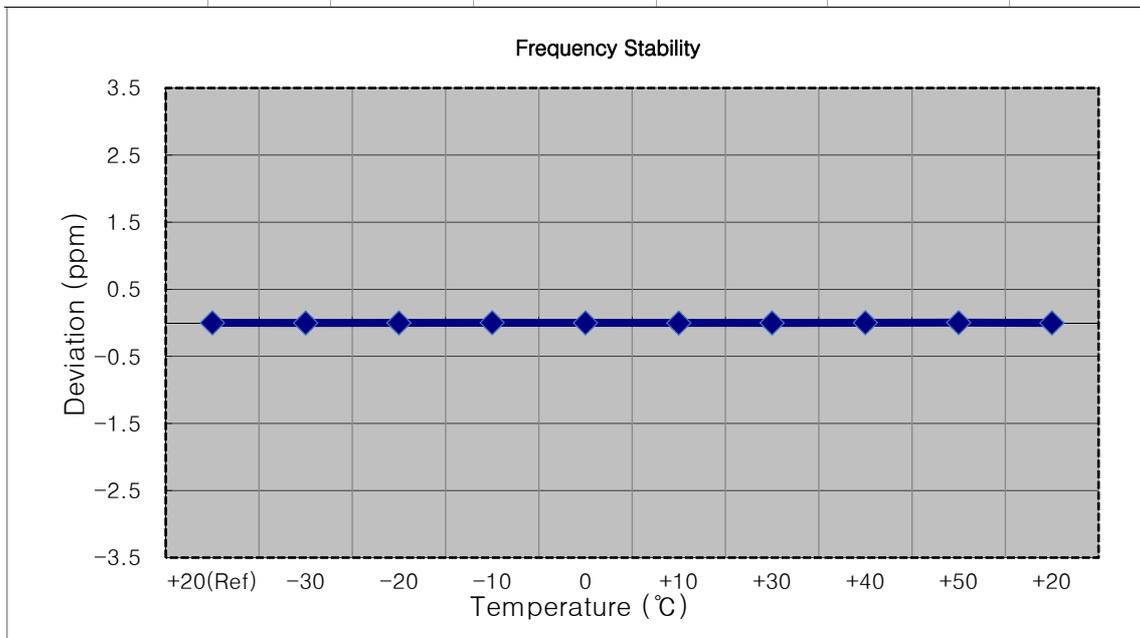


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 20025 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1717 500 003	0.0	0.000 000	0.000
100 %		-30	1717 500 000	-3.0	0.000 000	-0.002
100 %		-20	1717 500 001	-1.7	0.000 000	-0.001
100 %		-10	1717 500 007	3.6	0.000 000	0.002
100 %		0	1717 500 002	-1.1	0.000 000	-0.001
100 %		+10	1717 500 005	2.4	0.000 000	0.001
100 %		+30	1717 500 002	-1.2	0.000 000	-0.001
100 %		+40	1717 499 999	-4.1	0.000 000	-0.002
100 %		+50	1717 500 005	2.1	0.000 000	0.001
Batt. Endpoint		3.300	+20	1717 500 006	3.2	0.000 000

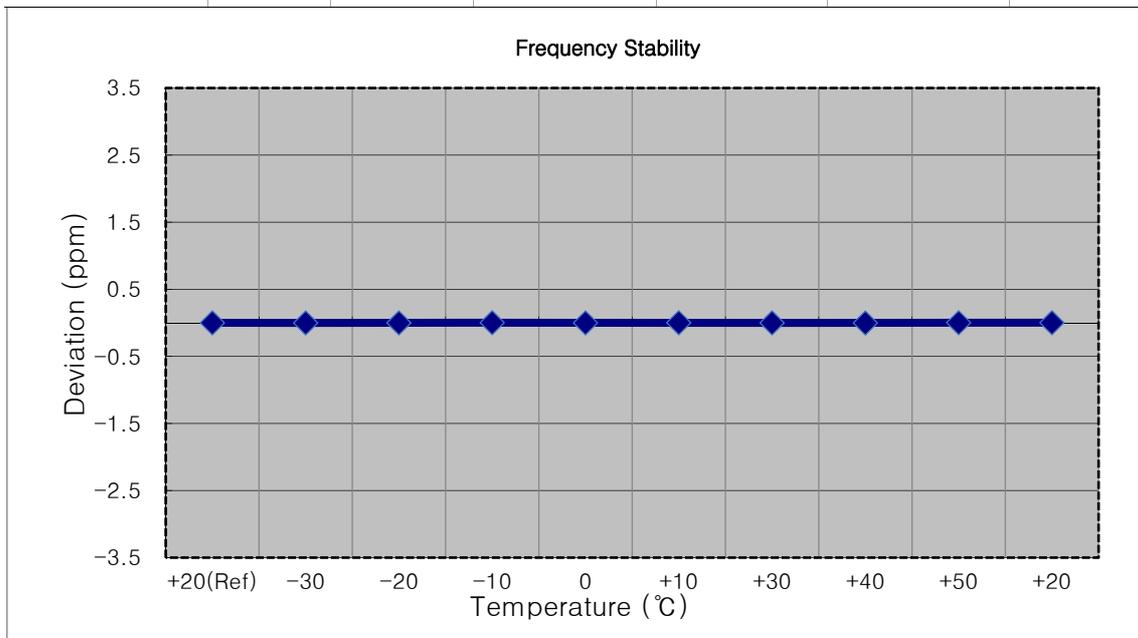


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 20050 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1719 999 996	0.0	0.000 000	0.000
100 %		-30	1719 999 993	-3.1	0.000 000	-0.002
100 %		-20	1719 999 999	2.5	0.000 000	0.001
100 %		-10	1719 999 993	-2.7	0.000 000	-0.002
100 %		0	1719 999 991	-5.3	0.000 000	-0.003
100 %		+10	1719 999 995	-1.4	0.000 000	-0.001
100 %		+30	1719 999 999	2.6	0.000 000	0.002
100 %		+40	1719 999 994	-2.5	0.000 000	-0.001
100 %		+50	1719 999 992	-4.4	0.000 000	-0.003
Batt. Endpoint		3.300	+20	1719 999 992	-3.8	0.000 000

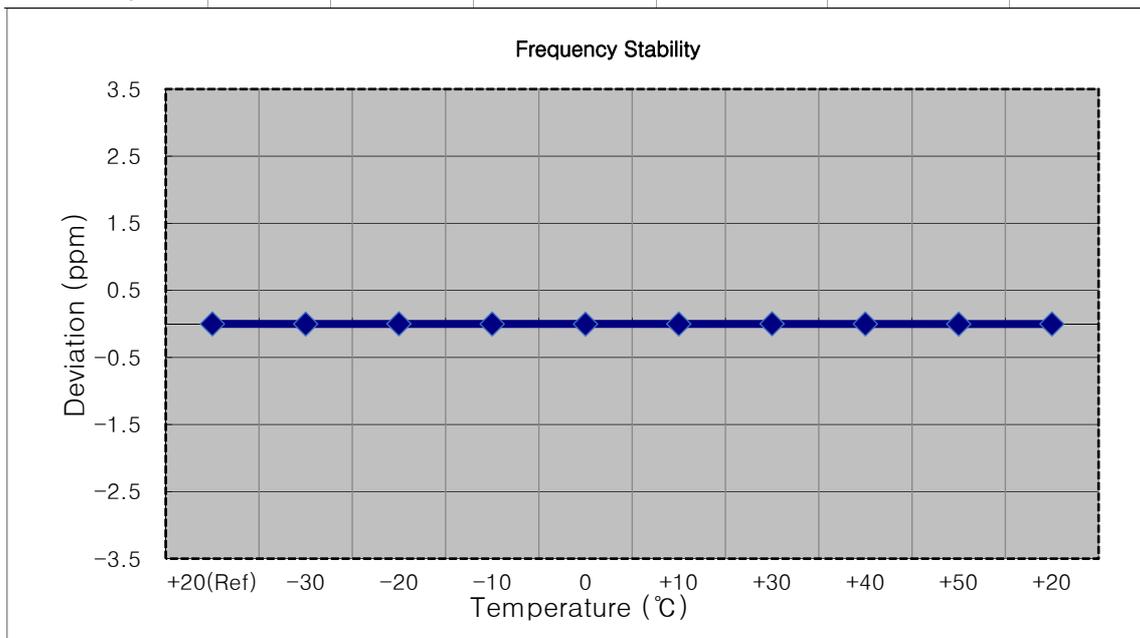


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 500 002	0.0	0.000 000	0.000
100 %		-30	1732 500 005	3.6	0.000 000	0.002
100 %		-20	1732 500 001	-1.3	0.000 000	-0.001
100 %		-10	1732 500 000	-2.2	0.000 000	-0.001
100 %		0	1732 500 005	3.3	0.000 000	0.002
100 %		+10	1732 500 004	2.0	0.000 000	0.001
100 %		+30	1732 500 004	1.8	0.000 000	0.001
100 %		+40	1732 500 005	2.8	0.000 000	0.002
100 %		+50	1732 500 004	2.6	0.000 000	0.002
Batt. Endpoint		3.300	+20	1732 500 006	3.8	0.000 000

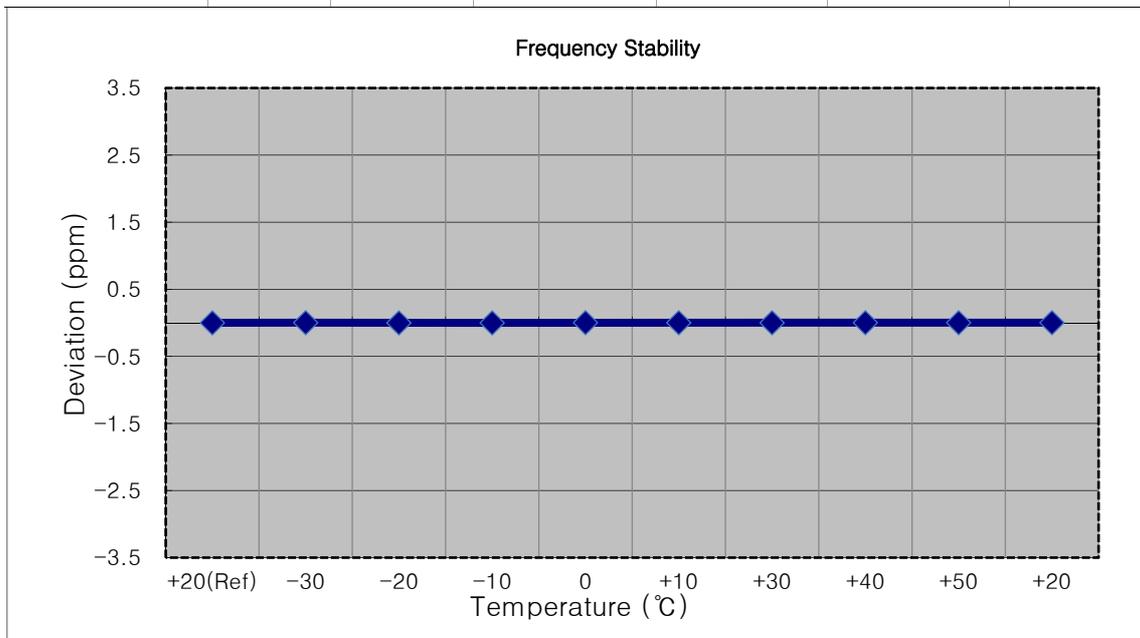


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 500 005	0.0	0.000 000	0.000
100 %		-30	1732 500 010	5.0	0.000 000	0.003
100 %		-20	1732 500 008	3.0	0.000 000	0.002
100 %		-10	1732 500 008	3.4	0.000 000	0.002
100 %		0	1732 500 008	2.9	0.000 000	0.002
100 %		+10	1732 500 010	5.6	0.000 000	0.003
100 %		+30	1732 500 008	2.8	0.000 000	0.002
100 %		+40	1732 500 009	3.7	0.000 000	0.002
100 %		+50	1732 500 009	4.6	0.000 000	0.003
Batt. Endpoint		3.300	+20	1732 500 010	4.7	0.000 000

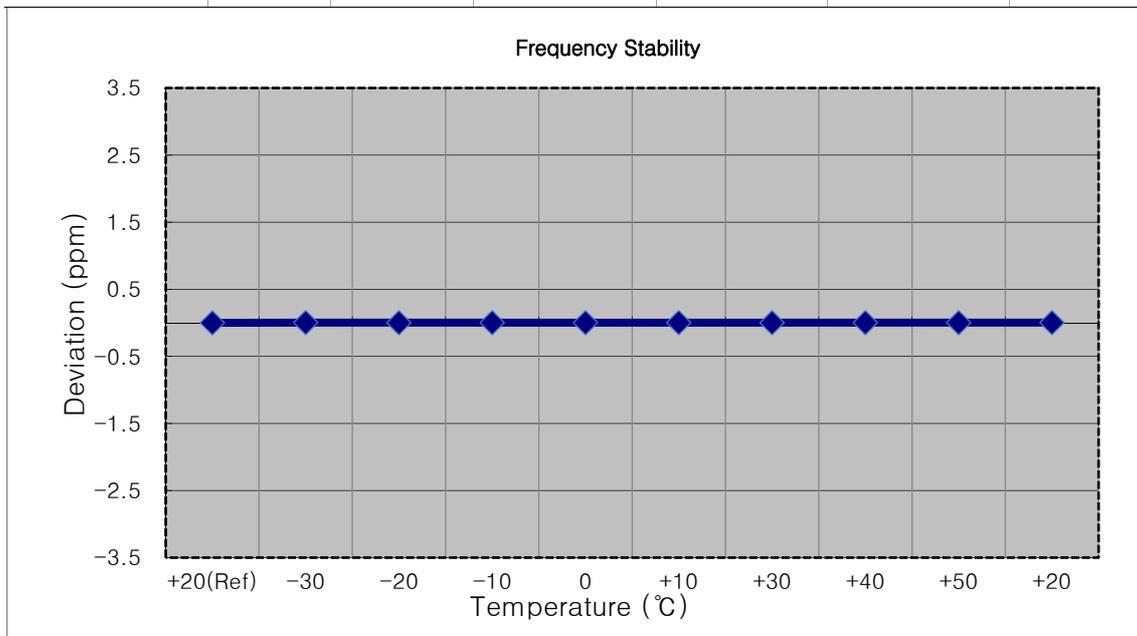


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 500 003	0.0	0.000 000	0.000
100 %		-30	1732 500 006	3.2	0.000 000	0.002
100 %		-20	1732 500 000	-3.1	0.000 000	-0.002
100 %		-10	1732 499 999	-3.3	0.000 000	-0.002
100 %		0	1732 499 999	-3.3	0.000 000	-0.002
100 %		+10	1732 500 004	1.4	0.000 000	0.001
100 %		+30	1732 500 006	3.0	0.000 000	0.002
100 %		+40	1732 500 000	-3.0	0.000 000	-0.002
100 %		+50	1732 500 000	-3.1	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1732 500 001	-1.6	0.000 000

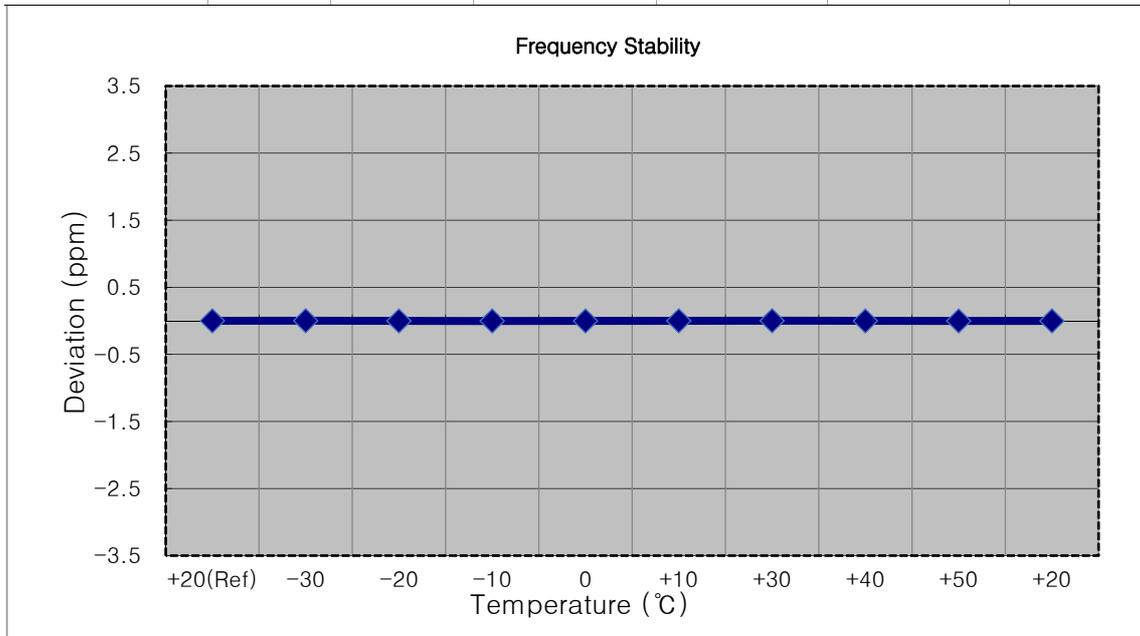


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 500 003	0.0	0.000 000	0.000
100 %		-30	1732 500 008	4.5	0.000 000	0.003
100 %		-20	1732 500 008	4.4	0.000 000	0.003
100 %		-10	1732 500 001	-2.2	0.000 000	-0.001
100 %		0	1732 500 005	1.3	0.000 000	0.001
100 %		+10	1732 500 007	3.9	0.000 000	0.002
100 %		+30	1732 500 006	2.7	0.000 000	0.002
100 %		+40	1732 500 006	3.0	0.000 000	0.002
100 %		+50	1732 500 007	3.6	0.000 000	0.002
Batt. Endpoint		3.300	+20	1732 500 007	4.0	0.000 000

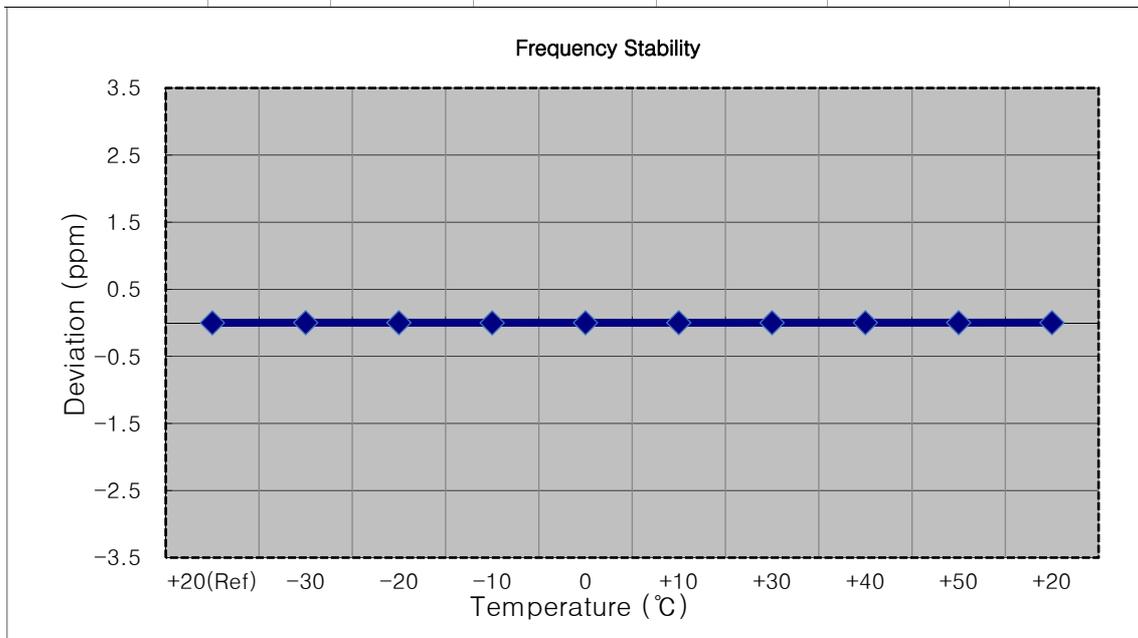


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 499 998	0.0	0.000 000	0.000
100 %		-30	1732 500 000	1.7	0.000 000	0.001
100 %		-20	1732 500 000	1.8	0.000 000	0.001
100 %		-10	1732 500 001	3.0	0.000 000	0.002
100 %		0	1732 500 002	3.5	0.000 000	0.002
100 %		+10	1732 500 004	5.6	0.000 000	0.003
100 %		+30	1732 500 002	3.5	0.000 000	0.002
100 %		+40	1732 500 003	4.6	0.000 000	0.003
100 %		+50	1732 500 002	3.8	0.000 000	0.002
Batt. Endpoint		3.300	+20	1732 499 995	-3.6	0.000 000

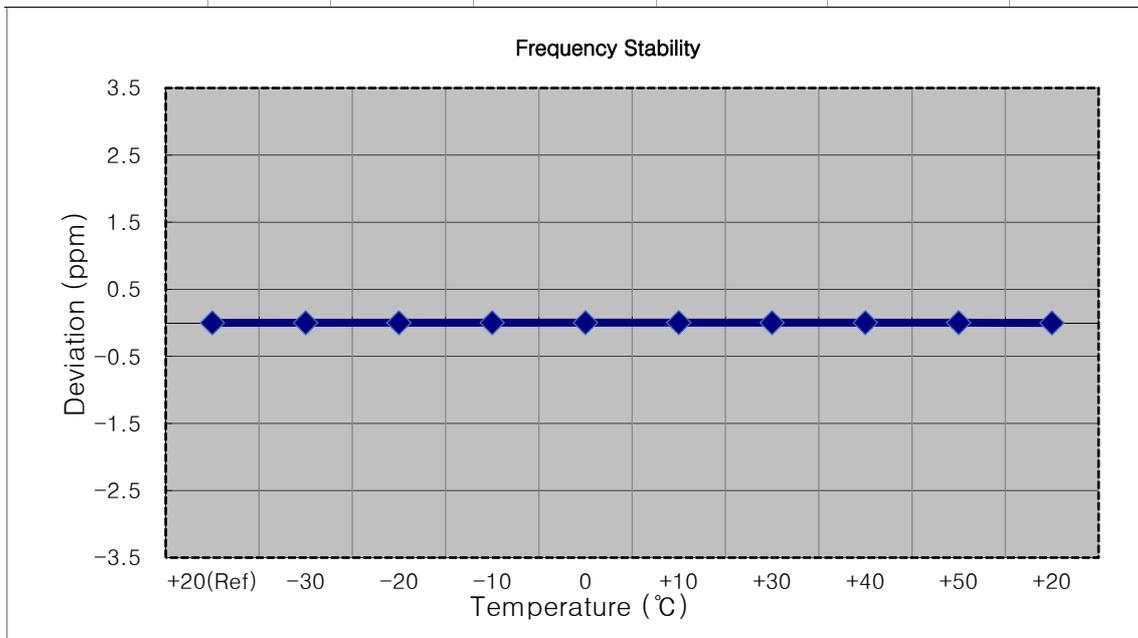


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 500 003	0.0	0.000 000	0.000
100 %		-30	1732 500 002	-1.2	0.000 000	-0.001
100 %		-20	1732 500 001	-1.6	0.000 000	-0.001
100 %		-10	1732 500 002	-1.4	0.000 000	-0.001
100 %		0	1732 500 005	1.6	0.000 000	0.001
100 %		+10	1732 500 006	2.7	0.000 000	0.002
100 %		+30	1732 500 001	-1.9	0.000 000	-0.001
100 %		+40	1732 500 005	1.7	0.000 000	0.001
100 %		+50	1732 500 008	4.5	0.000 000	0.003
Batt. Endpoint		3.300	+20	1732 500 008	4.5	0.000 000

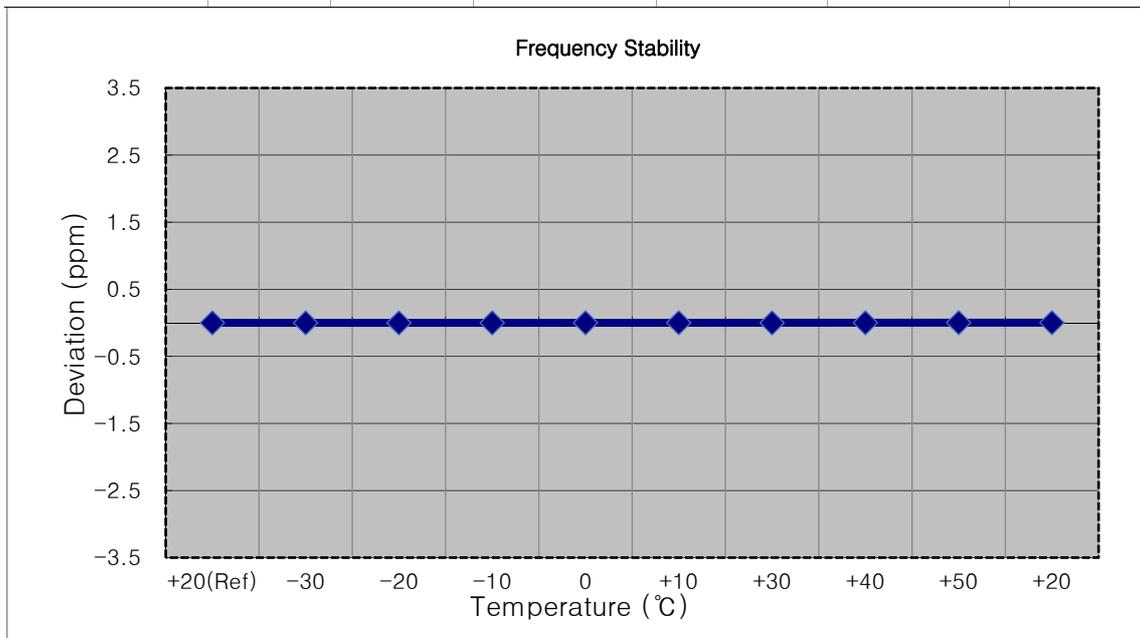


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1754,300,000 Hz
- ▣ CHANNEL: 20393 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1754 300 003	0.0	0.000 000	0.000
100 %		-30	1754 300 006	2.7	0.000 000	0.002
100 %		-20	1754 300 007	3.8	0.000 000	0.002
100 %		-10	1754 300 010	7.0	0.000 000	0.004
100 %		0	1754 300 009	6.1	0.000 000	0.003
100 %		+10	1754 300 008	4.2	0.000 000	0.002
100 %		+30	1754 300 008	4.7	0.000 000	0.003
100 %		+40	1754 300 008	4.2	0.000 000	0.002
100 %		+50	1754 300 000	-3.1	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1754 299 995	-8.1	0.000 000

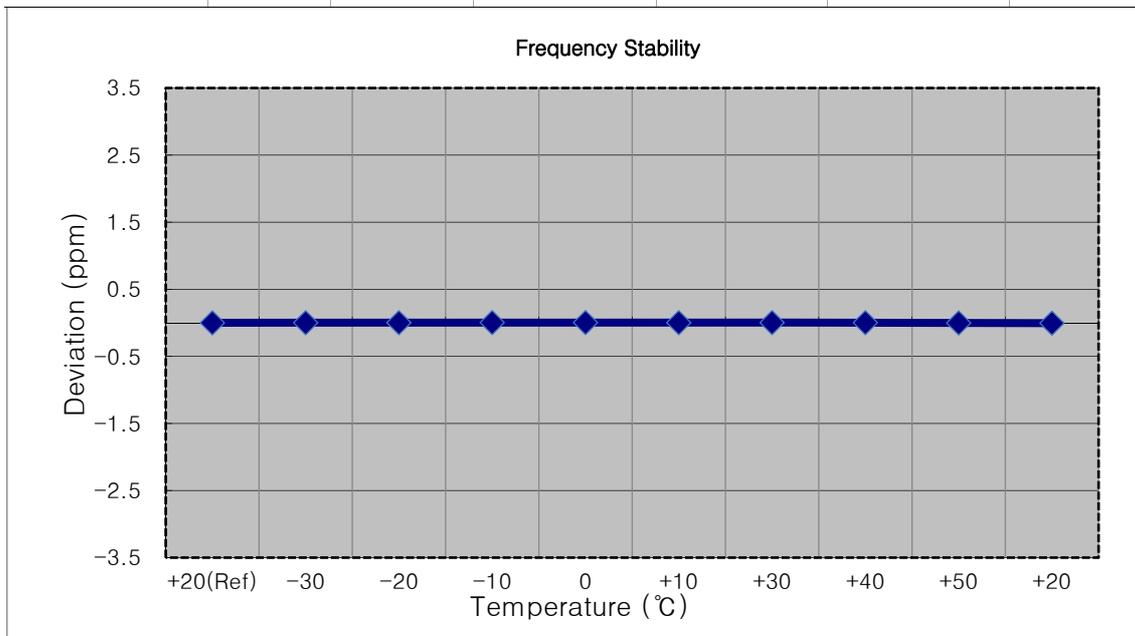


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1753,500,000 Hz
- ▣ CHANNEL: 20385 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1753 500 005	0.0	0.000 000	0.000
100 %		-30	1753 499 996	-9.1	-0.000 001	-0.005
100 %		-20	1753 500 013	7.5	0.000 000	0.004
100 %		-10	1753 500 001	-4.5	0.000 000	-0.003
100 %		0	1753 500 016	11.2	0.000 001	0.006
100 %		+10	1753 500 013	8.4	0.000 000	0.005
100 %		+30	1753 499 998	-7.2	0.000 000	-0.004
100 %		+40	1753 500 014	9.3	0.000 001	0.005
100 %		+50	1753 500 014	9.2	0.000 001	0.005
Batt. Endpoint		3.300	+20	1753 500 014	9.1	0.000 001

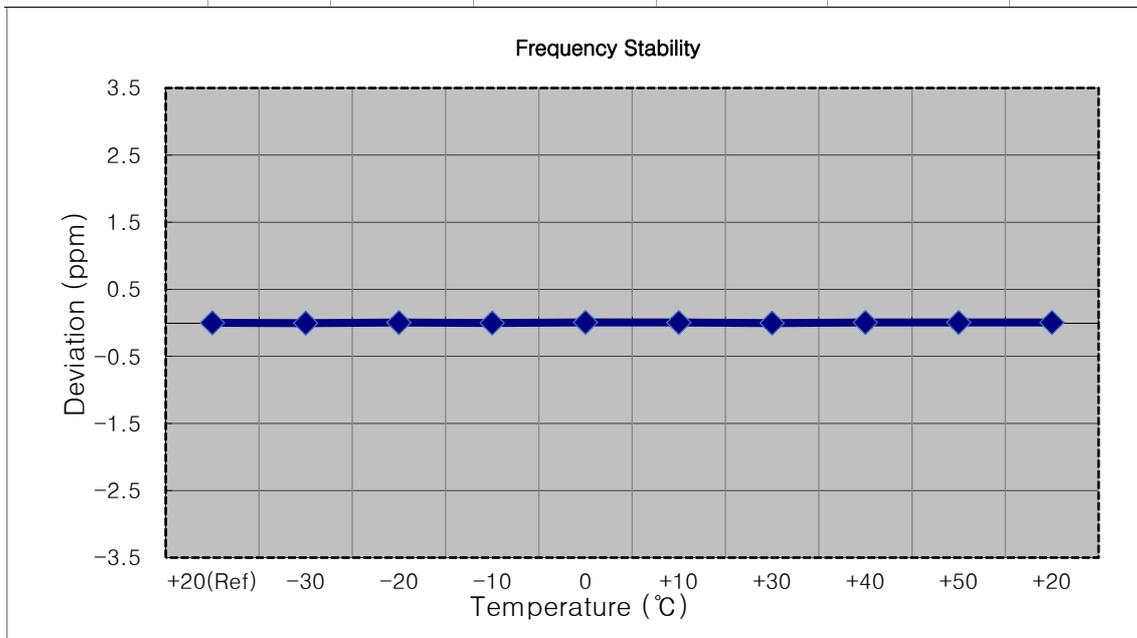


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1752,500,000 Hz
- ▣ CHANNEL: 20375 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1752 500 006	0.0	0.000 000	0.000
100 %		-30	1752 500 009	3.0	0.000 000	0.002
100 %		-20	1752 500 011	5.1	0.000 000	0.003
100 %		-10	1752 500 010	4.5	0.000 000	0.003
100 %		0	1752 500 008	2.4	0.000 000	0.001
100 %		+10	1752 500 010	3.9	0.000 000	0.002
100 %		+30	1752 500 008	1.7	0.000 000	0.001
100 %		+40	1752 500 008	2.0	0.000 000	0.001
100 %		+50	1752 500 009	2.8	0.000 000	0.002
Batt. Endpoint		3.300	+20	1752 500 004	-2.0	0.000 000

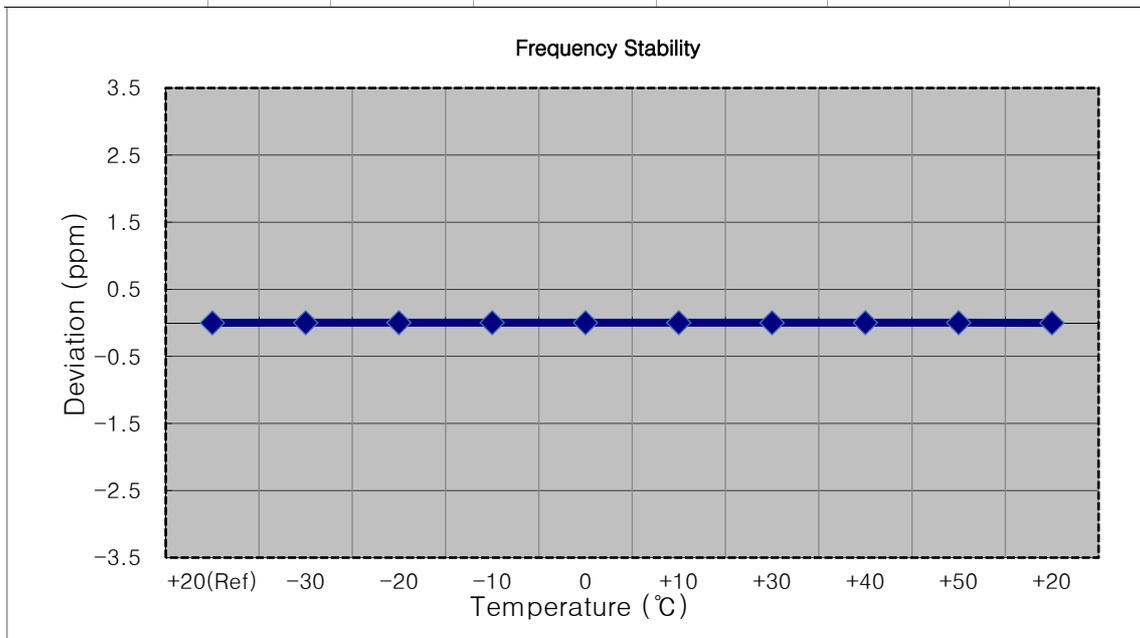


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1750,000,000 Hz
- ▣ CHANNEL: 20350 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1749 999 998	0.0	0.000 000	0.000
100 %		-30	1749 999 996	-1.9	0.000 000	-0.001
100 %		-20	1749 999 995	-2.9	0.000 000	-0.002
100 %		-10	1750 000 001	2.8	0.000 000	0.002
100 %		0	1749 999 997	-1.3	0.000 000	-0.001
100 %		+10	1749 999 995	-3.5	0.000 000	-0.002
100 %		+30	1749 999 994	-3.8	0.000 000	-0.002
100 %		+40	1749 999 995	-2.9	0.000 000	-0.002
100 %		+50	1749 999 994	-4.2	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1749 999 996	-2.0	0.000 000

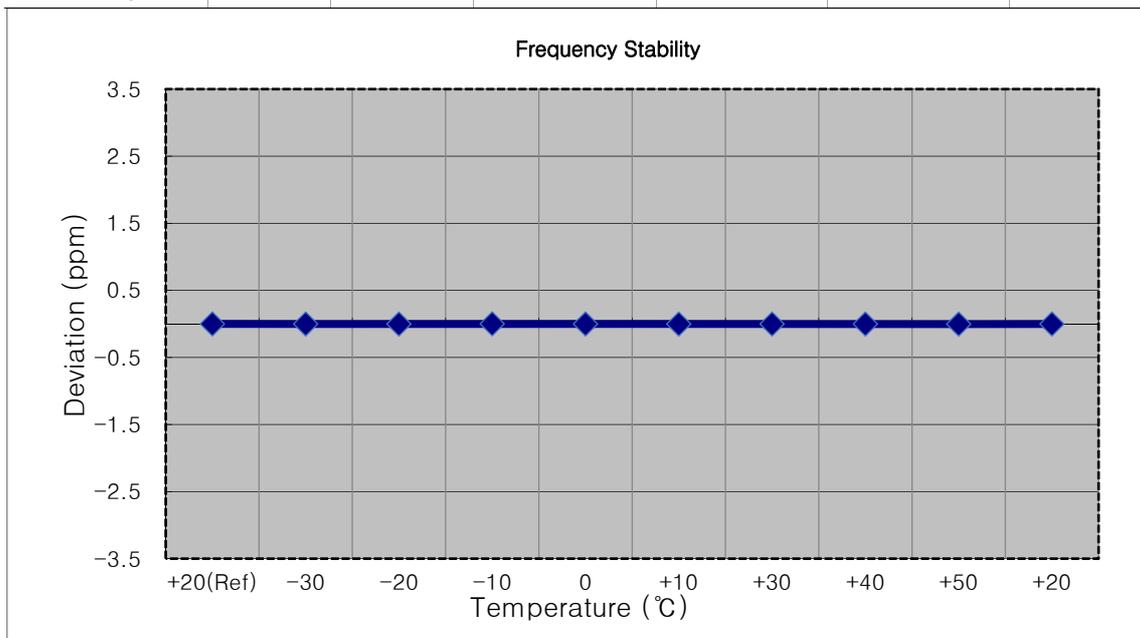


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1747,500,000 Hz
- ▣ CHANNEL: 20325 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1747 500 003	0.0	0.000 000	0.000
100 %		-30	1747 500 008	4.2	0.000 000	0.002
100 %		-20	1747 500 009	5.3	0.000 000	0.003
100 %		-10	1747 500 007	4.0	0.000 000	0.002
100 %		0	1747 500 000	-3.0	0.000 000	-0.002
100 %		+10	1747 500 002	-1.7	0.000 000	-0.001
100 %		+30	1747 500 002	-1.8	0.000 000	-0.001
100 %		+40	1747 500 008	4.2	0.000 000	0.002
100 %		+50	1747 500 006	2.2	0.000 000	0.001
Batt. Endpoint		3.300	+20	1747 500 006	2.6	0.000 000

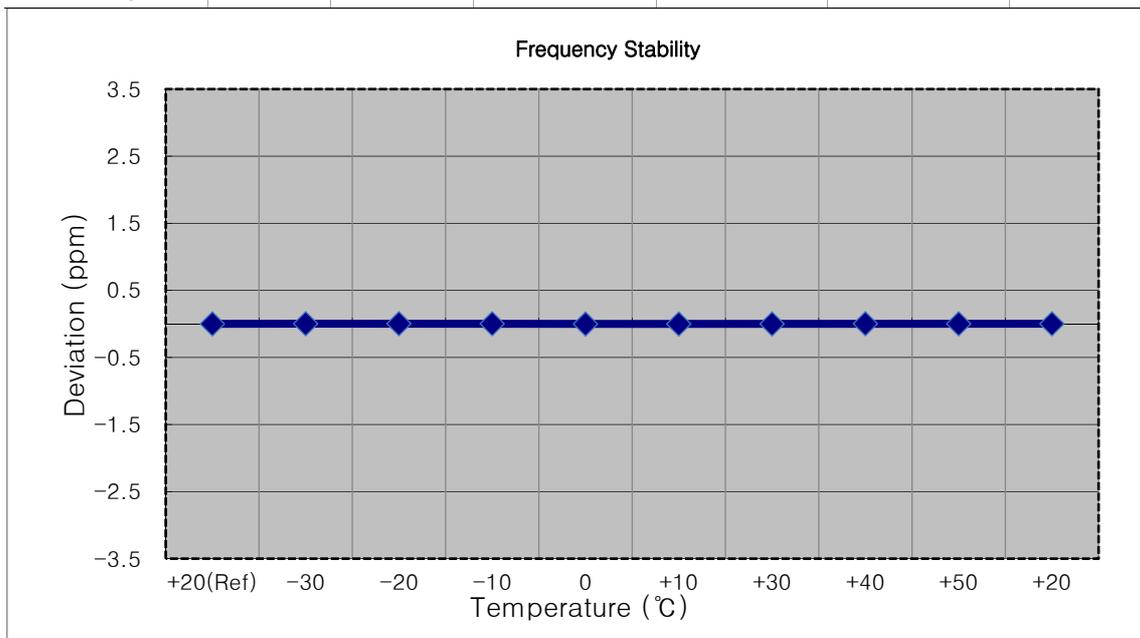

- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 20300 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 997	0.0	0.000 000	0.000
100 %		-30	1744 999 995	-2.5	0.000 000	-0.001
100 %		-20	1744 999 995	-2.4	0.000 000	-0.001
100 %		-10	1744 999 995	-2.2	0.000 000	-0.001
100 %		0	1744 999 993	-3.9	0.000 000	-0.002
100 %		+10	1744 999 994	-3.2	0.000 000	-0.002
100 %		+30	1744 999 994	-2.6	0.000 000	-0.001
100 %		+40	1745 000 001	3.5	0.000 000	0.002
100 %		+50	1744 999 994	-3.4	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1744 999 996	-1.3	0.000 000

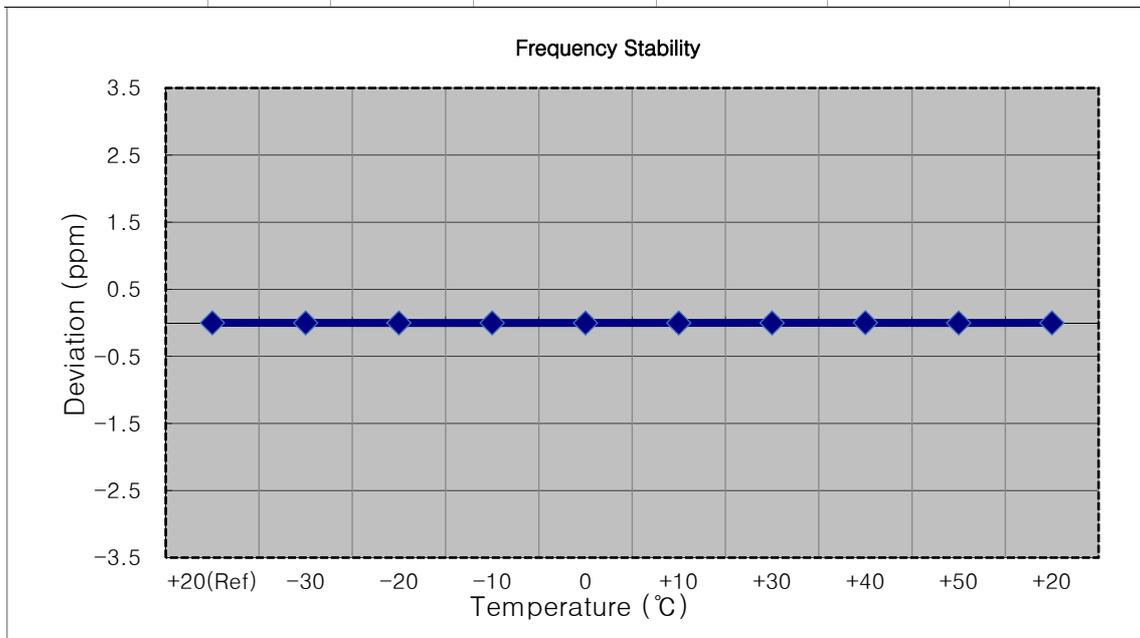

## 9. TEST DATA (Sub 5 Ant)

### 9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1710.7	LTE B4 1.4 MHz	QPSK	-19.78	13.95	9.94	2.24	H	< 1.00	0.146	21.65	1	0
		16-QAM	-20.62	13.11	9.94	2.24	H		0.120	20.81		
		64-QAM	-21.63	12.10	9.94	2.24	H		0.095	19.80		
		256-QAM	-24.68	9.05	9.94	2.24	H		0.047	16.75		
1732.5		QPSK	-19.46	14.23	10.07	2.17	H		0.163	22.13	1	0
		16-QAM	-20.29	13.40	10.07	2.17	H		0.135	21.30		
		64-QAM	-21.30	12.39	10.07	2.17	H		0.107	20.29		
		256-QAM	-24.33	9.36	10.07	2.17	H		0.053	17.26		
1754.3		QPSK	-19.69	13.99	10.18	2.17	H		0.159	22.00	1	0
		16-QAM	-20.51	13.17	10.18	2.17	H		0.131	21.18		
		64-QAM	-21.57	12.11	10.18	2.17	H		0.103	20.12		
		256-QAM	-24.60	9.08	10.18	2.17	H		0.051	17.09		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1711.5	LTE B4 3 MHz	QPSK	-19.91	13.82	9.94	2.24	H	< 1.00	0.142	21.52	1	0
		16-QAM	-20.68	13.05	9.94	2.24	H		0.119	20.75		
		64-QAM	-21.73	12.00	9.94	2.24	H		0.093	19.70		
		256-QAM	-24.82	8.91	9.94	2.24	H		0.046	16.61		
1732.5		QPSK	-19.46	14.23	10.07	2.17	H		0.163	22.13	1	0
		16-QAM	-20.24	13.45	10.07	2.17	H		0.136	21.35		
		64-QAM	-21.29	12.40	10.07	2.17	H		0.107	20.30		
		256-QAM	-24.35	9.34	10.07	2.17	H		0.053	17.24		
1753.5		QPSK	-19.61	14.07	10.18	2.17	H		0.162	22.08	1	0
		16-QAM	-20.37	13.31	10.18	2.17	H		0.136	21.32		
		64-QAM	-21.41	12.27	10.18	2.17	H		0.107	20.28		
		256-QAM	-24.50	9.18	10.18	2.17	H		0.052	17.19		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1712.5	LTE B4 5 MHz	QPSK	-19.89	13.84	9.94	2.24	H	< 1.00	0.142	21.54	1	0
		16-QAM	-20.61	13.12	9.94	2.24	H		0.121	20.82		
		64-QAM	-21.69	12.04	9.94	2.24	H		0.094	19.74		
		256-QAM	-24.78	8.95	9.94	2.24	H		0.046	16.65		
1732.5		QPSK	-19.49	14.20	10.07	2.17	H		0.162	22.10	1	0
		16-QAM	-20.23	13.46	10.07	2.17	H		0.137	21.36		
		64-QAM	-21.31	12.38	10.07	2.17	H		0.107	20.28		
		256-QAM	-24.41	9.28	10.07	2.17	H		0.052	17.18		
1752.5		QPSK	-19.54	14.17	10.17	2.15	H		0.166	22.19	1	0
		16-QAM	-20.28	13.43	10.17	2.15	H		0.140	21.45		
		64-QAM	-21.34	12.37	10.17	2.15	H		0.109	20.39		
		256-QAM	-24.46	9.25	10.17	2.15	H		0.053	17.27		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1715.0	LTE B4 10 MHz	QPSK	-19.95	13.69	9.98	2.23	H	< 1.00	0.139	21.43	1	0
		16-QAM	-20.74	12.90	9.98	2.23	H		0.116	20.64		
		64-QAM	-21.77	11.87	9.98	2.23	H		0.091	19.61		
		256-QAM	-24.88	8.76	9.98	2.23	H		0.045	16.50		
1732.5		QPSK	-19.48	14.21	10.07	2.17	H		0.163	22.11	1	0
		16-QAM	-20.26	13.43	10.07	2.17	H		0.136	21.33		
		64-QAM	-21.31	12.38	10.07	2.17	H		0.107	20.28		
		256-QAM	-24.41	9.28	10.07	2.17	H		0.052	17.18		
1750.0		QPSK	-19.55	14.16	10.17	2.15	H		0.165	22.18	1	0
		16-QAM	-20.31	13.40	10.17	2.15	H		0.139	21.42		
		64-QAM	-21.39	12.32	10.17	2.15	H		0.108	20.34		
		256-QAM	-24.48	9.23	10.17	2.15	H		0.053	17.25		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1717.5	LTE B4 15 MHz	QPSK	-19.99	13.65	10.01	2.22	H	< 1.00	0.139	21.44	1	0
		16-QAM	-20.85	12.79	10.01	2.22	H		0.114	20.58		
		64-QAM	-21.89	11.75	10.01	2.22	H		0.090	19.54		
		256-QAM	-24.99	8.65	10.01	2.22	H		0.044	16.44		
1732.5		QPSK	-19.54	14.15	10.07	2.17	H		0.160	22.05	1	0
		16-QAM	-20.39	13.30	10.07	2.17	H		0.132	21.20		
		64-QAM	-21.44	12.25	10.07	2.17	H		0.104	20.15		
		256-QAM	-24.55	9.14	10.07	2.17	H		0.051	17.04		
1747.5		QPSK	-19.51	14.20	10.17	2.15	H		0.167	22.22	1	0
		16-QAM	-20.38	13.33	10.17	2.15	H		0.136	21.35		
		64-QAM	-21.42	12.29	10.17	2.15	H		0.107	20.31		
		256-QAM	-24.42	9.29	10.17	2.15	H		0.054	17.31		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1720.0	LTE B4 20 MHz	QPSK	-19.76	13.75	10.01	2.22	H	< 1.00	0.143	21.54	1	0
		16-QAM	-20.60	12.91	10.01	2.22	H		0.118	20.70		
		64-QAM	-21.67	11.84	10.01	2.22	H		0.092	19.63		
		256-QAM	-24.78	8.73	10.01	2.22	H		0.045	16.52		
1732.5		QPSK	-19.49	14.20	10.07	2.17	H		0.162	22.10	1	0
		16-QAM	-20.35	13.34	10.07	2.17	H		0.133	21.24		
		64-QAM	-21.39	12.30	10.07	2.17	H		0.105	20.20		
		256-QAM	-24.49	9.20	10.07	2.17	H		0.051	17.10		
1745.0		QPSK	-19.57	14.11	10.15	2.15	H		0.163	22.11	1	0
		16-QAM	-20.42	13.26	10.15	2.15	H		0.134	21.26		
		64-QAM	-21.44	12.24	10.15	2.15	H		0.106	20.24		
		256-QAM	-24.53	9.15	10.15	2.15	H		0.052	17.15		

## 9.2 RADIATED SPURIOUS EMISSIONS

▣ OPERATING FREQUENCY:	<u>1747.5 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>22.22 dBm = 0.167 W</u>
▣ MODE:	<u>LTE B4</u>
▣ MODULATION SIGNAL:	<u>15 MHz QPSK</u>
▣ DISTANCE:	<u>3 meters</u>
▣ LIMIT: $43 + 10 \log_{10}(W) =$	<u>35.22 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
20025 (1717.5)	3 435.00	-50.30	12.41	-56.58	3.12	H	-47.29	69.50	1	0
	5 152.50	-52.68	12.39	-50.66	3.84	V	-42.11	64.33		
	6 870.00	-53.41	11.85	-46.35	4.50	H	-39.00	61.22		
20175 (1732.5)	3 465.00	-50.33	12.35	-56.97	3.11	H	-47.73	69.95	1	0
	5 197.50	-52.47	12.63	-51.39	3.86	V	-42.62	64.84		
	6 930.00	-51.99	11.65	-44.86	4.52	H	-37.73	59.94		
20325 (1747.5)	3 495.00	-50.46	12.34	-56.53	3.09	H	-47.28	69.50	1	0
	5 242.50	-52.93	12.87	-52.08	3.95	V	-43.16	65.37		
	6 990.00	-52.78	11.36	-44.57	4.58	V	-37.79	60.00		

### 9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
4	1.4 MHz	1732.5	QPSK	6	0	4.73
			16-QAM			6.04
			64-QAM			6.46
			256-QAM			6.62
	3 MHz		QPSK	15		4.66
			16-QAM			6.03
			64-QAM			6.50
			256-QAM			6.59
	5 MHz		QPSK	25		4.79
			16-QAM			5.81
			64-QAM			6.45
			256-QAM			6.51
	10 MHz		QPSK	50		4.82
			16-QAM			5.83
			64-QAM			6.37
			256-QAM			6.57
	15 MHz		QPSK	75		4.79
			16-QAM			5.97
			64-QAM			6.46
			256-QAM			6.55
20 MHz	QPSK	100	4.81			
	16-QAM		5.81			
	64-QAM		6.37			
	256-QAM		6.53			

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 200 ~ 223.

#### 9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
4	1.4 MHz	1732.5	QPSK	6	0	1.0945
			16-QAM			1.0945
			64-QAM			1.0963
			256-QAM			1.0971
	3 MHz		QPSK	15		2.7065
			16-QAM			2.7175
			64-QAM			2.7081
			256-QAM			2.7117
	5 MHz		QPSK	25		4.5171
			16-QAM			4.5231
			64-QAM			4.5118
			256-QAM			4.5085
	10 MHz		QPSK	50		9.0249
			16-QAM			8.9909
			64-QAM			9.0107
			256-QAM			9.0236
	15 MHz		QPSK	75		13.514
			16-QAM			13.489
			64-QAM			13.474
			256-QAM			13.470
20 MHz	QPSK	100	17.948			
	16-QAM		17.960			
	64-QAM		18.000			
	256-QAM		17.951			

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 224 ~ 247.

### 9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
4	1.4	1710.7	3.4203	27.976	-77.970	-49.994	-13.00
		1732.5	3.4642	27.976	-78.442	-50.466	
		1754.3	3.5095	27.976	-77.681	-49.705	
	3	1711.5	3.4203	27.976	-79.558	-51.582	
		1732.5	3.4622	27.976	-78.992	-51.016	
		1753.5	3.5095	27.976	-78.387	-50.411	
	5	1712.5	3.4208	27.976	-78.902	-50.926	
		1732.5	3.4607	27.976	-79.104	-51.128	
		1752.5	3.5090	27.976	-77.696	-49.720	
	10	1715.0	3.4213	27.976	-77.878	-49.902	
		1732.5	3.4562	27.976	-78.798	-50.822	
		1750.0	3.5085	27.976	-77.988	-50.012	
	15	1717.5	3.4218	27.976	-78.627	-50.651	
		1732.5	3.4517	27.976	-78.763	-50.787	
		1747.5	3.5080	27.976	-78.374	-50.398	
	20	1720.0	3.4223	27.976	-79.076	-51.100	
		1732.5	3.4472	27.976	-79.162	-51.186	
		1745.0	3.5075	27.976	-79.358	-51.382	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 248 ~ 283.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 - 1	25.270
1 - 5	27.976
5 - 10	28.591
10 - 15	29.116
15 - 20	29.489
Above 20(26.5)	30.131


### 9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 284 ~ 319.

### 9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1710,700,000 Hz
- ▣ CHANNEL: 19957 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1710 700 005	0.0	0.000 000	0.000
100 %		-30	1710 700 011	6.3	0.000 000	0.004
100 %		-20	1710 700 009	4.4	0.000 000	0.003
100 %		-10	1710 700 010	5.1	0.000 000	0.003
100 %		0	1710 700 008	2.9	0.000 000	0.002
100 %		+10	1710 700 004	-1.1	0.000 000	-0.001
100 %		+30	1710 700 002	-2.9	0.000 000	-0.002
100 %		+40	1710 700 009	4.4	0.000 000	0.003
100 %		+50	1710 700 009	4.1	0.000 000	0.002
Batt. Endpoint		3.300	+20	1710 700 002	-2.7	0.000 000

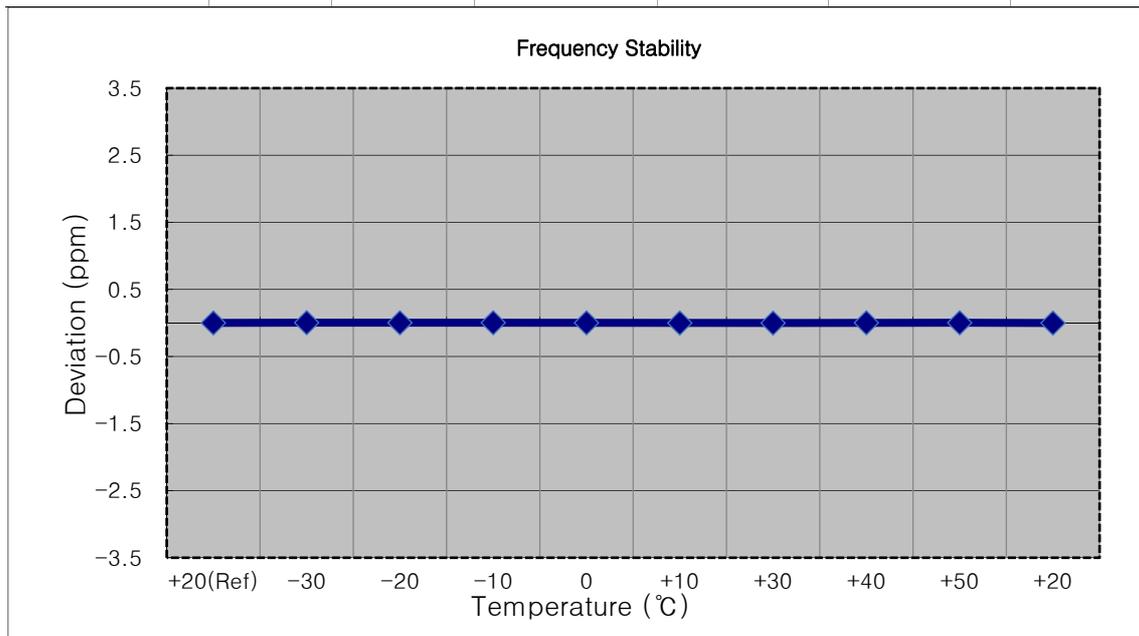


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 19965 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1711 500 003	0.0	0.000 000	0.000
100 %		-30	1711 500 000	-3.4	0.000 000	-0.002
100 %		-20	1711 500 007	4.2	0.000 000	0.002
100 %		-10	1711 500 006	2.4	0.000 000	0.001
100 %		0	1711 500 007	3.5	0.000 000	0.002
100 %		+10	1711 500 006	2.9	0.000 000	0.002
100 %		+30	1711 500 001	-2.2	0.000 000	-0.001
100 %		+40	1711 499 999	-3.7	0.000 000	-0.002
100 %		+50	1711 500 006	2.9	0.000 000	0.002
Batt. Endpoint		3.300	+20	1711 500 000	-3.1	0.000 000

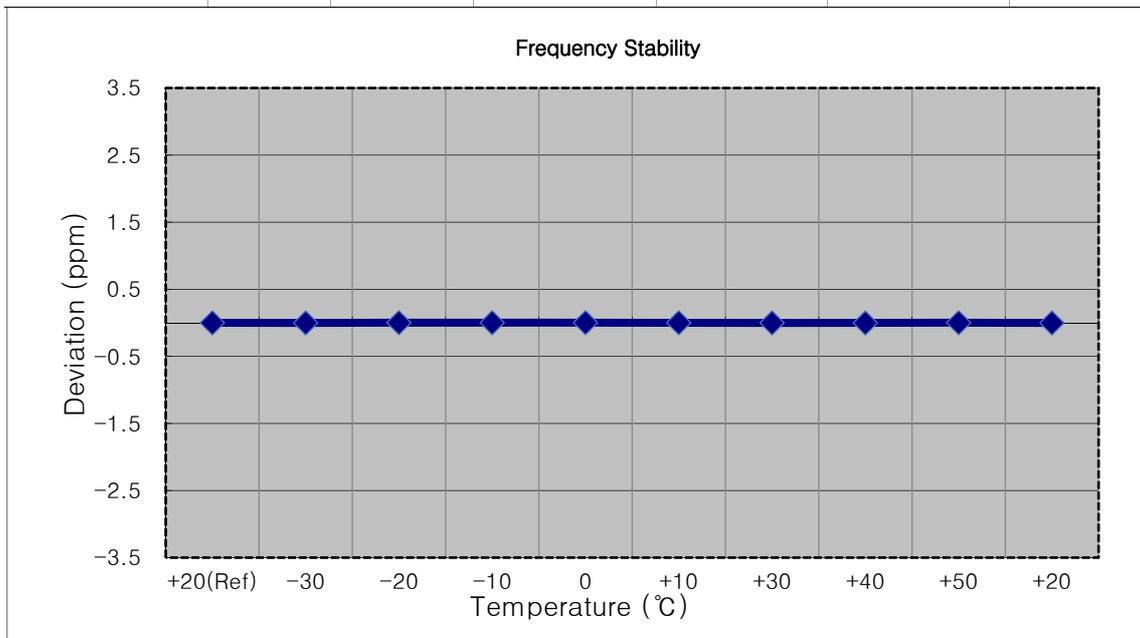


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1712,500,000 Hz
- ▣ CHANNEL: 19975 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1712 499 997	0.0	0.000 000	0.000
100 %		-30	1712 499 992	-5.6	0.000 000	-0.003
100 %		-20	1712 499 993	-4.5	0.000 000	-0.003
100 %		-10	1712 499 999	2.1	0.000 000	0.001
100 %		0	1712 499 993	-3.9	0.000 000	-0.002
100 %		+10	1712 499 993	-3.8	0.000 000	-0.002
100 %		+30	1712 499 995	-2.5	0.000 000	-0.001
100 %		+40	1712 499 994	-3.0	0.000 000	-0.002
100 %		+50	1712 499 994	-3.1	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1712 499 993	-4.2	0.000 000

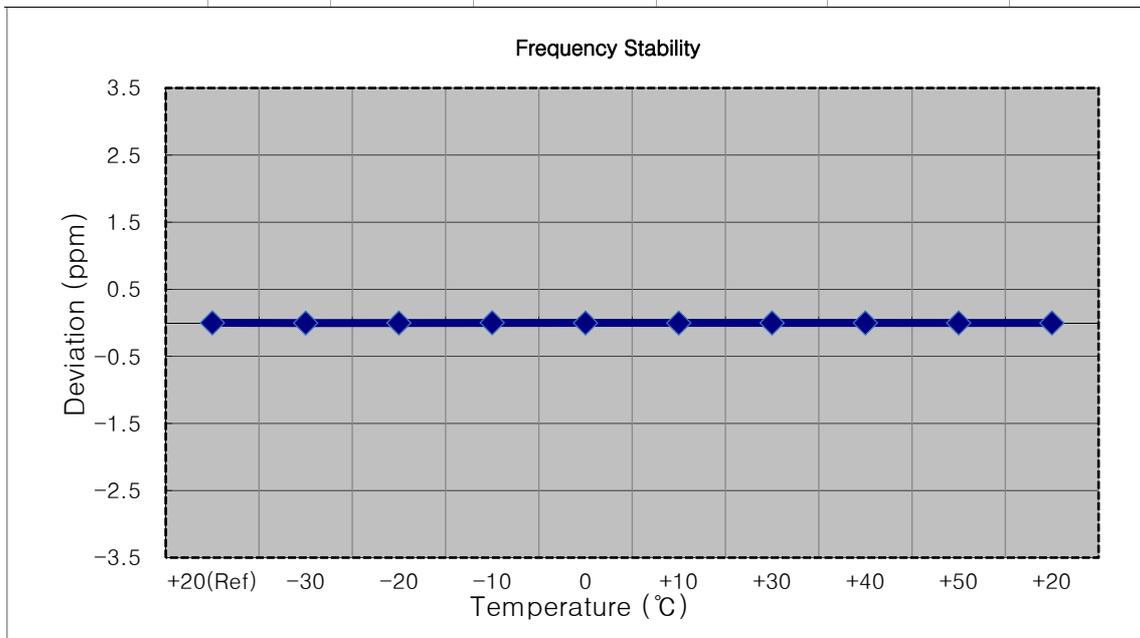


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 20000 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1715 000 001	0.0	0.000 000	0.000
100 %		-30	1715 000 005	3.8	0.000 000	0.002
100 %		-20	1715 000 003	2.1	0.000 000	0.001
100 %		-10	1715 000 006	5.0	0.000 000	0.003
100 %		0	1714 999 999	-2.0	0.000 000	-0.001
100 %		+10	1715 000 004	3.0	0.000 000	0.002
100 %		+30	1714 999 999	-1.6	0.000 000	-0.001
100 %		+40	1715 000 003	2.3	0.000 000	0.001
100 %		+50	1715 000 002	1.1	0.000 000	0.001
Batt. Endpoint		3.300	+20	1715 000 004	2.5	0.000 000

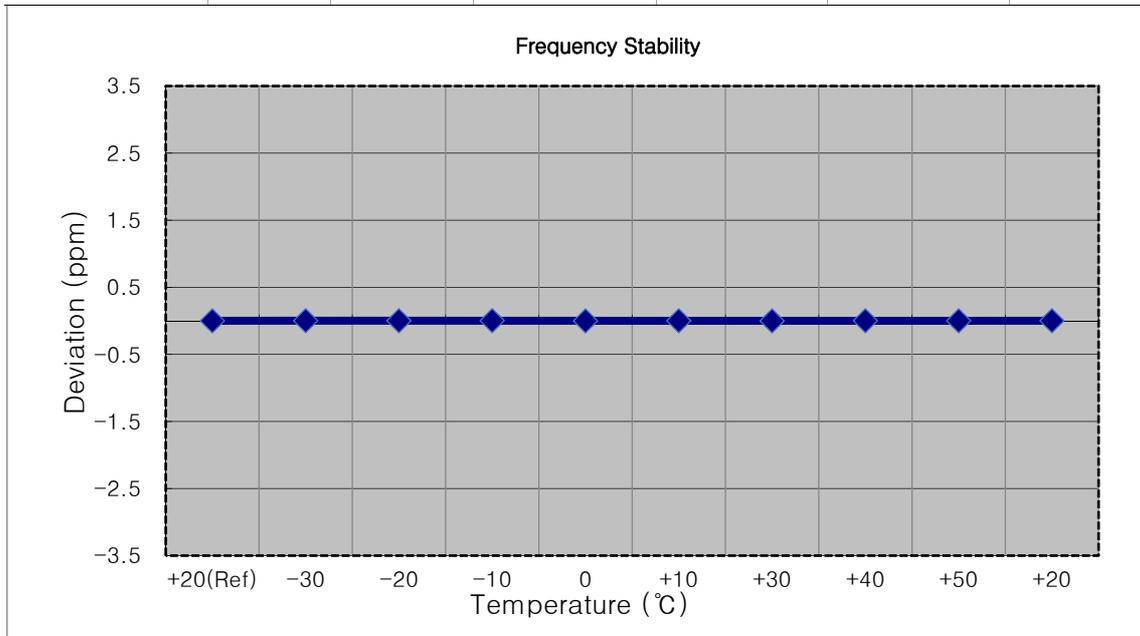


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 20025 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1717 500 005	0.0	0.000 000	0.000
100 %		-30	1717 500 010	5.4	0.000 000	0.003
100 %		-20	1717 500 008	3.0	0.000 000	0.002
100 %		-10	1717 500 007	1.8	0.000 000	0.001
100 %		0	1717 500 007	1.9	0.000 000	0.001
100 %		+10	1717 500 009	3.8	0.000 000	0.002
100 %		+30	1717 500 008	3.4	0.000 000	0.002
100 %		+40	1717 500 007	2.2	0.000 000	0.001
100 %		+50	1717 500 007	1.8	0.000 000	0.001
Batt. Endpoint		3.300	+20	1717 500 007	1.6	0.000 000

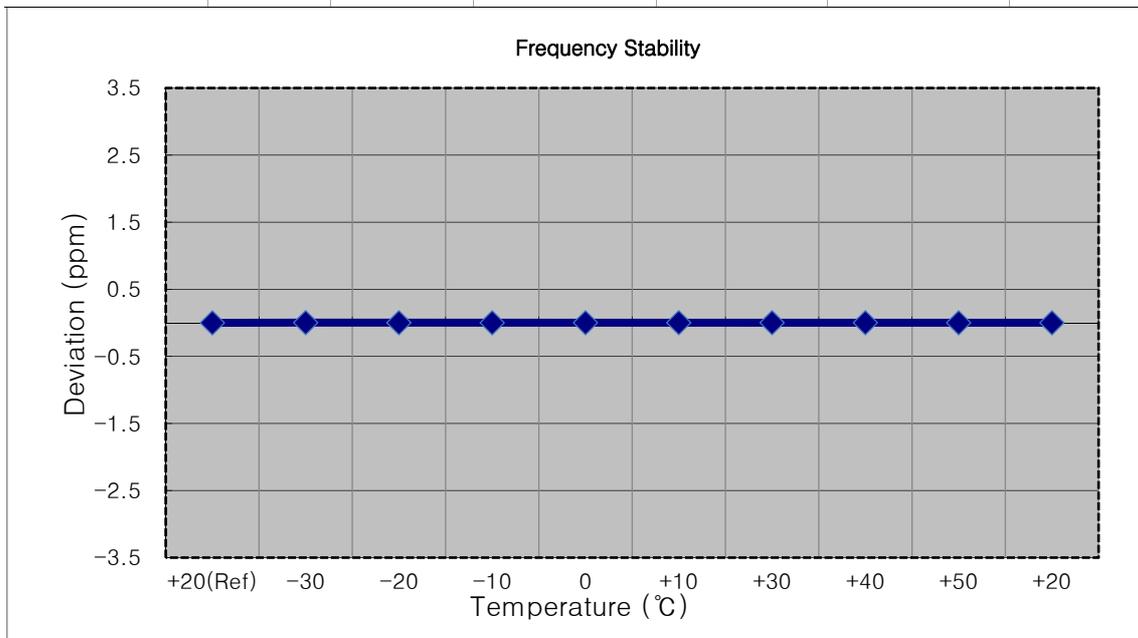


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 20050 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1719 999 997	0.0	0.000 000	0.000
100 %		-30	1719 999 999	1.3	0.000 000	0.001
100 %		-20	1719 999 999	1.8	0.000 000	0.001
100 %		-10	1719 999 995	-1.9	0.000 000	-0.001
100 %		0	1719 999 999	1.8	0.000 000	0.001
100 %		+10	1719 999 995	-2.5	0.000 000	-0.001
100 %		+30	1719 999 993	-4.7	0.000 000	-0.003
100 %		+40	1719 999 994	-3.3	0.000 000	-0.002
100 %		+50	1719 999 994	-3.3	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1719 999 994	-3.1	0.000 000

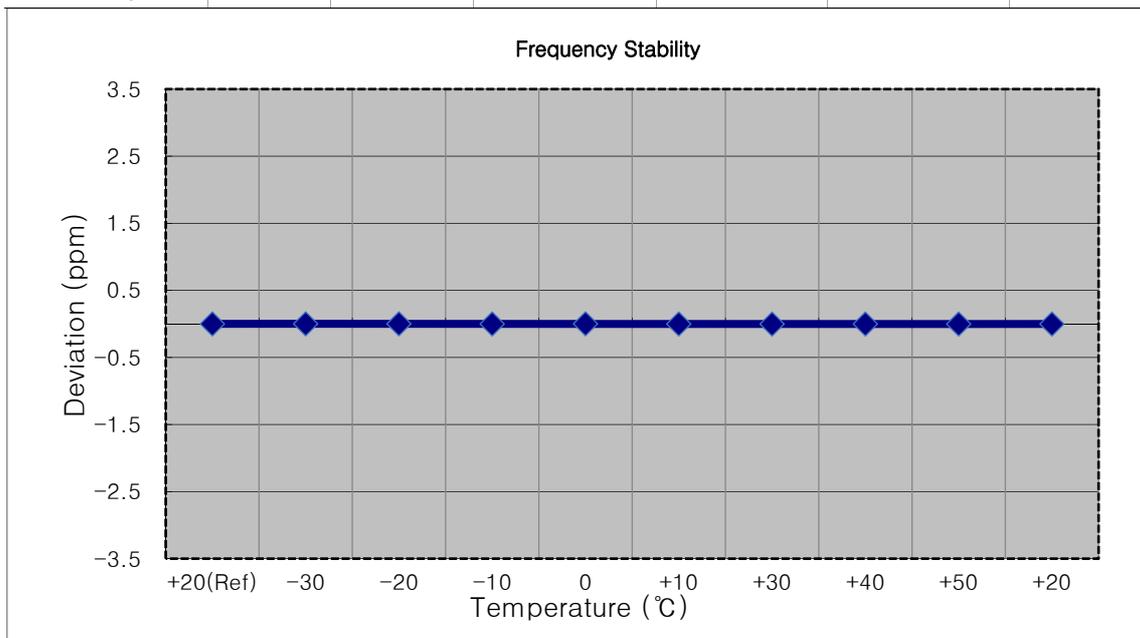


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 500 003	0.0	0.000 000	0.000
100 %		-30	1732 500 007	4.6	0.000 000	0.003
100 %		-20	1732 500 006	2.9	0.000 000	0.002
100 %		-10	1732 500 004	1.5	0.000 000	0.001
100 %		0	1732 500 009	6.1	0.000 000	0.004
100 %		+10	1732 500 004	1.8	0.000 000	0.001
100 %		+30	1732 499 999	-3.8	0.000 000	-0.002
100 %		+40	1732 500 005	2.2	0.000 000	0.001
100 %		+50	1732 500 006	2.9	0.000 000	0.002
Batt. Endpoint		3.300	+20	1732 500 000	-2.4	0.000 000

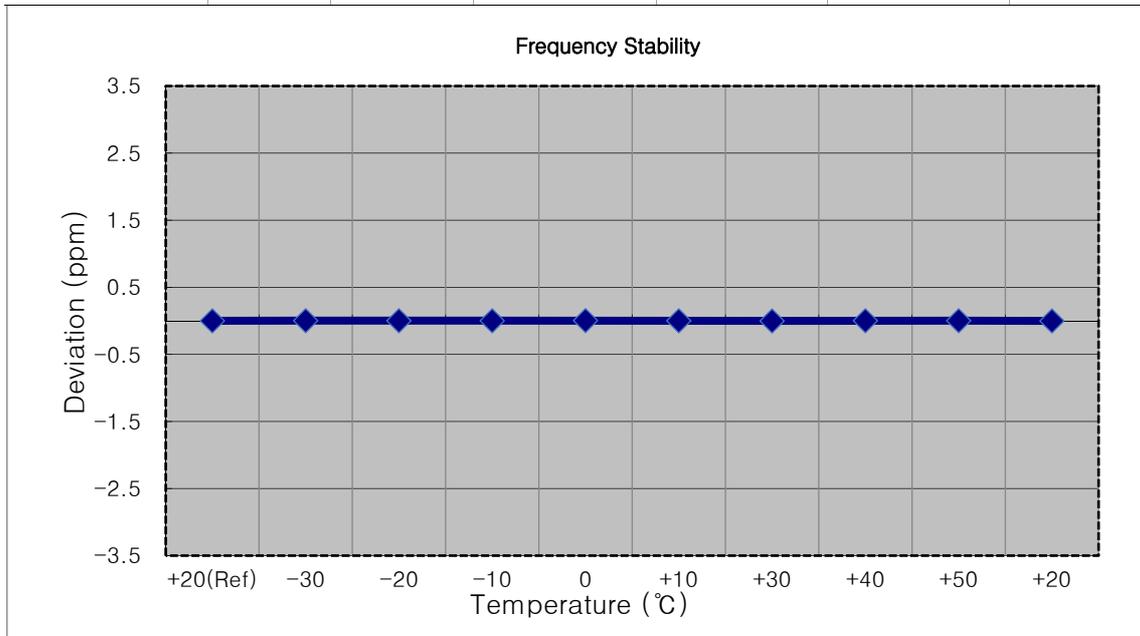


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 499 997	0.0	0.000 000	0.000
100 %		-30	1732 500 002	5.3	0.000 000	0.003
100 %		-20	1732 500 000	3.6	0.000 000	0.002
100 %		-10	1732 500 001	4.3	0.000 000	0.002
100 %		0	1732 499 999	2.6	0.000 000	0.002
100 %		+10	1732 500 003	6.4	0.000 000	0.004
100 %		+30	1732 499 993	-3.8	0.000 000	-0.002
100 %		+40	1732 500 000	3.2	0.000 000	0.002
100 %		+50	1732 499 993	-3.3	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1732 499 992	-4.1	0.000 000

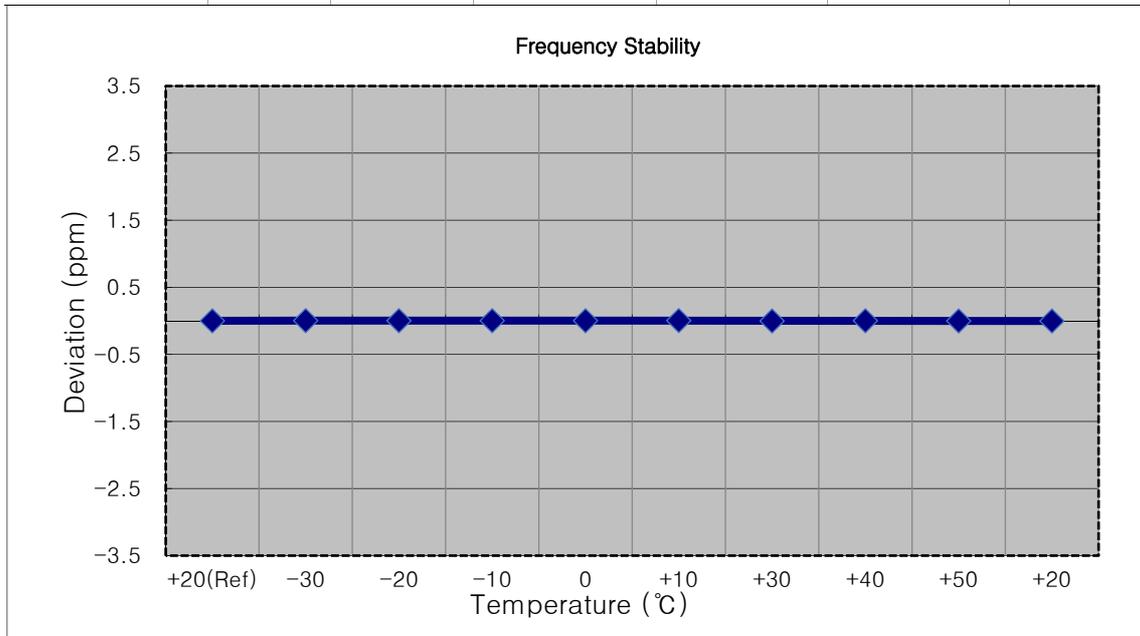


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 500 003	0.0	0.000 000	0.000
100 %		-30	1732 500 006	3.1	0.000 000	0.002
100 %		-20	1732 500 008	4.7	0.000 000	0.003
100 %		-10	1732 500 001	-1.7	0.000 000	-0.001
100 %		0	1732 500 006	3.5	0.000 000	0.002
100 %		+10	1732 500 006	2.8	0.000 000	0.002
100 %		+30	1732 500 006	3.0	0.000 000	0.002
100 %		+40	1732 500 004	1.3	0.000 000	0.001
100 %		+50	1732 500 008	5.3	0.000 000	0.003
Batt. Endpoint		3.300	+20	1732 500 006	3.2	0.000 000

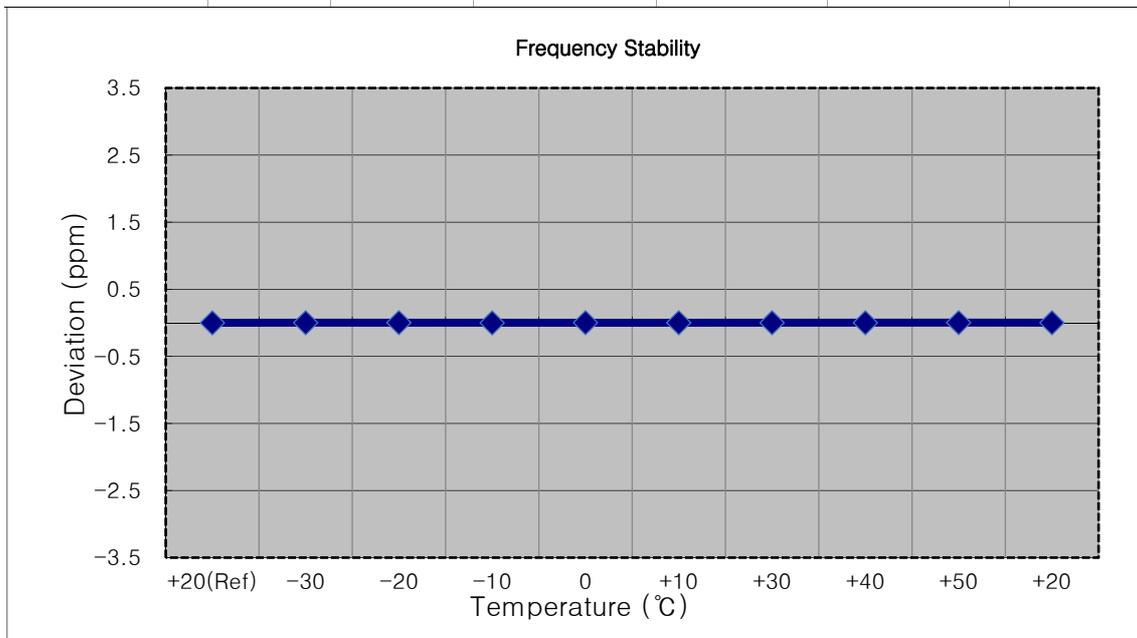


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 500 004	0.0	0.000 000	0.000
100 %		-30	1732 500 001	-2.1	0.000 000	-0.001
100 %		-20	1732 500 006	2.7	0.000 000	0.002
100 %		-10	1732 500 006	2.6	0.000 000	0.002
100 %		0	1732 500 001	-2.1	0.000 000	-0.001
100 %		+10	1732 500 005	1.7	0.000 000	0.001
100 %		+30	1732 500 006	2.2	0.000 000	0.001
100 %		+40	1732 500 005	1.7	0.000 000	0.001
100 %		+50	1732 500 002	-1.7	0.000 000	-0.001
Batt. Endpoint		3.300	+20	1732 500 001	-2.1	0.000 000

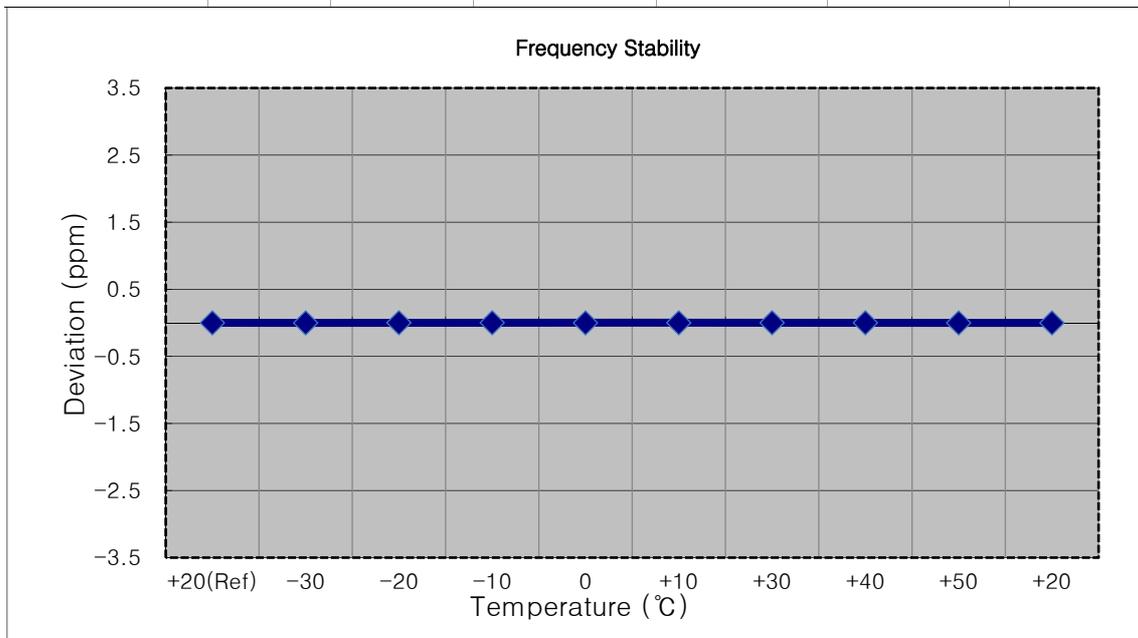


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 500 002	0.0	0.000 000	0.000
100 %		-30	1732 500 001	-1.2	0.000 000	-0.001
100 %		-20	1732 500 004	2.3	0.000 000	0.001
100 %		-10	1732 500 000	-2.3	0.000 000	-0.001
100 %		0	1732 500 000	-2.1	0.000 000	-0.001
100 %		+10	1732 500 004	1.6	0.000 000	0.001
100 %		+30	1732 500 003	1.2	0.000 000	0.001
100 %		+40	1732 500 004	1.6	0.000 000	0.001
100 %		+50	1732 500 005	3.1	0.000 000	0.002
Batt. Endpoint		3.300	+20	1732 500 004	1.9	0.000 000

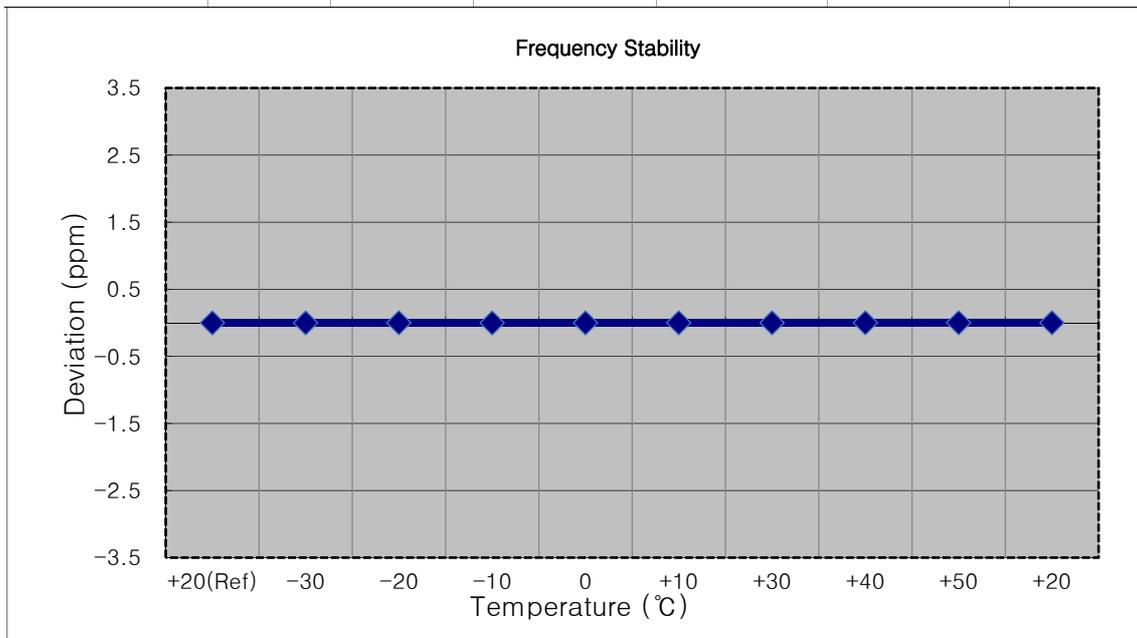


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1732 499 998	0.0	0.000 000	0.000
100 %		-30	1732 499 997	-1.3	0.000 000	-0.001
100 %		-20	1732 500 001	2.5	0.000 000	0.001
100 %		-10	1732 500 001	2.7	0.000 000	0.002
100 %		0	1732 500 002	3.6	0.000 000	0.002
100 %		+10	1732 500 000	1.8	0.000 000	0.001
100 %		+30	1732 500 001	3.0	0.000 000	0.002
100 %		+40	1732 500 001	2.9	0.000 000	0.002
100 %		+50	1732 500 000	1.6	0.000 000	0.001
Batt. Endpoint		3.300	+20	1732 500 000	1.3	0.000 000

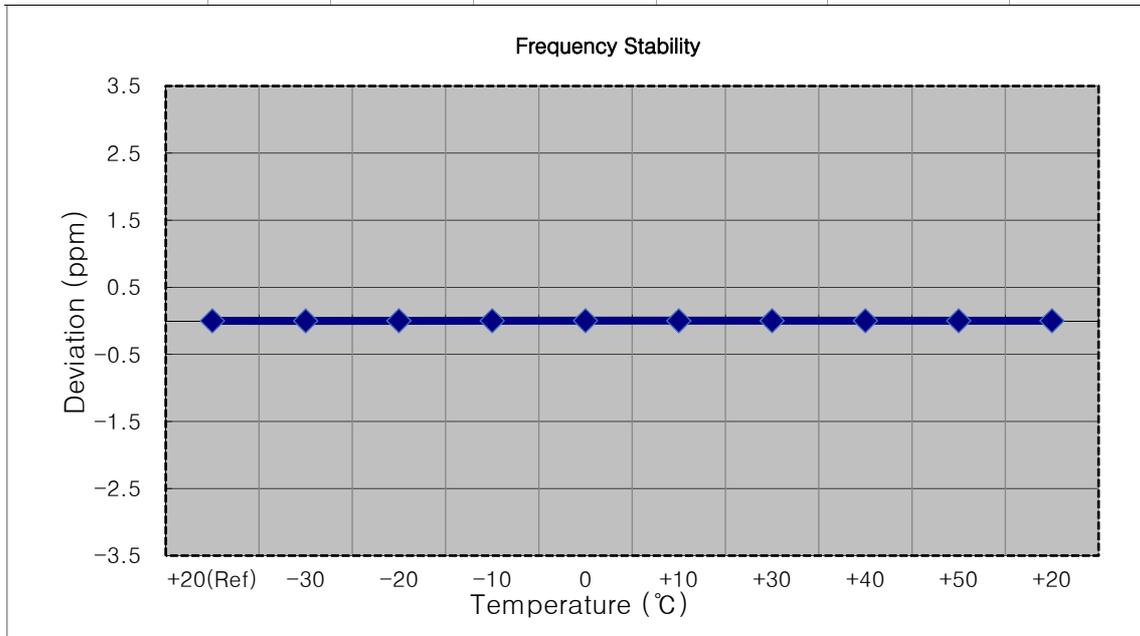


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1754,300,000 Hz
- ▣ CHANNEL: 20393 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1754 299 996	0.0	0.000 000	0.000
100 %		-30	1754 300 002	6.1	0.000 000	0.003
100 %		-20	1754 300 000	4.2	0.000 000	0.002
100 %		-10	1754 299 992	-3.9	0.000 000	-0.002
100 %		0	1754 299 994	-2.3	0.000 000	-0.001
100 %		+10	1754 299 999	3.3	0.000 000	0.002
100 %		+30	1754 299 994	-1.8	0.000 000	-0.001
100 %		+40	1754 300 001	5.2	0.000 000	0.003
100 %		+50	1754 299 998	2.6	0.000 000	0.001
Batt. Endpoint		3.300	+20	1754 299 992	-4.2	0.000 000

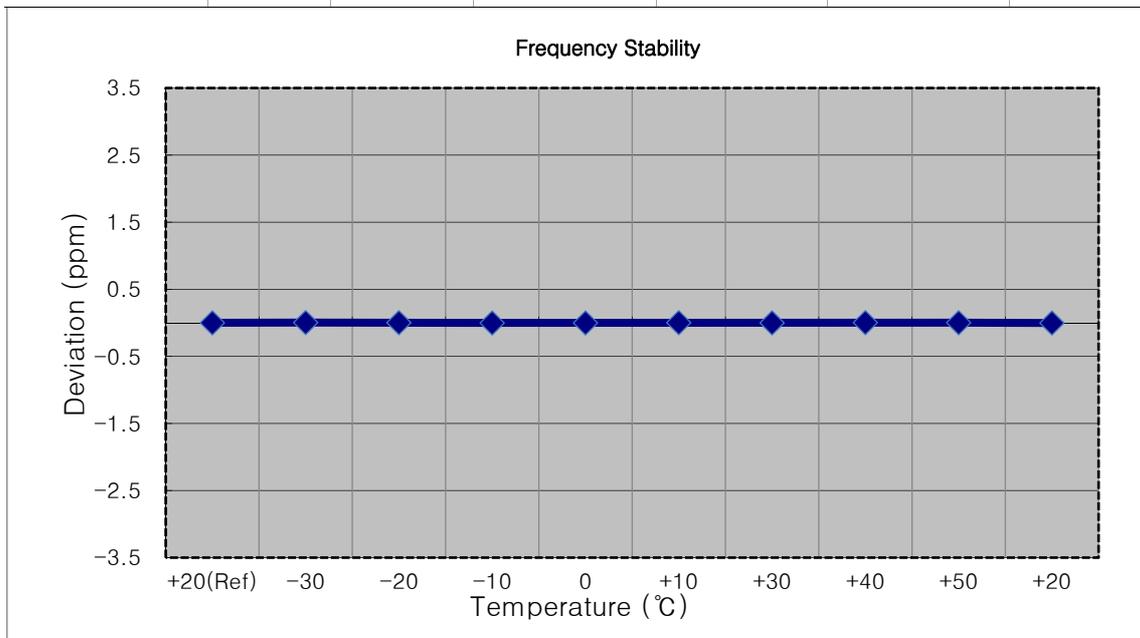


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1753,500,000 Hz
- ▣ CHANNEL: 20385 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1753 500 006	0.0	0.000 000	0.000
100 %		-30	1753 500 010	3.8	0.000 000	0.002
100 %		-20	1753 500 000	-5.7	0.000 000	-0.003
100 %		-10	1753 500 010	4.3	0.000 000	0.002
100 %		0	1753 500 013	6.8	0.000 000	0.004
100 %		+10	1753 500 012	6.2	0.000 000	0.004
100 %		+30	1753 500 015	8.8	0.000 001	0.005
100 %		+40	1753 500 016	9.8	0.000 001	0.006
100 %		+50	1753 500 012	5.8	0.000 000	0.003
Batt. Endpoint		3.300	+20	1753 500 013	7.0	0.000 000

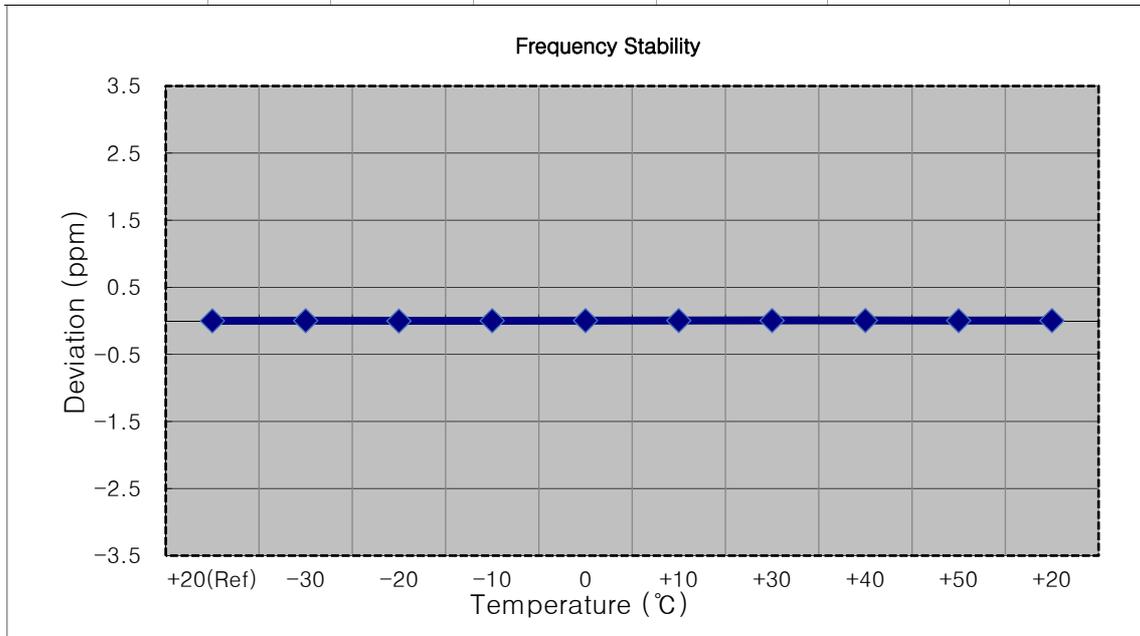


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1752,500,000 Hz
- ▣ CHANNEL: 20375 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1752 499 996	0.0	0.000 000	0.000
100 %		-30	1752 499 998	2.1	0.000 000	0.001
100 %		-20	1752 499 994	-2.2	0.000 000	-0.001
100 %		-10	1752 499 998	1.8	0.000 000	0.001
100 %		0	1752 499 999	2.8	0.000 000	0.002
100 %		+10	1752 500 000	3.3	0.000 000	0.002
100 %		+30	1752 499 993	-3.3	0.000 000	-0.002
100 %		+40	1752 499 993	-3.0	0.000 000	-0.002
100 %		+50	1752 499 994	-2.7	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1752 499 999	2.9	0.000 000

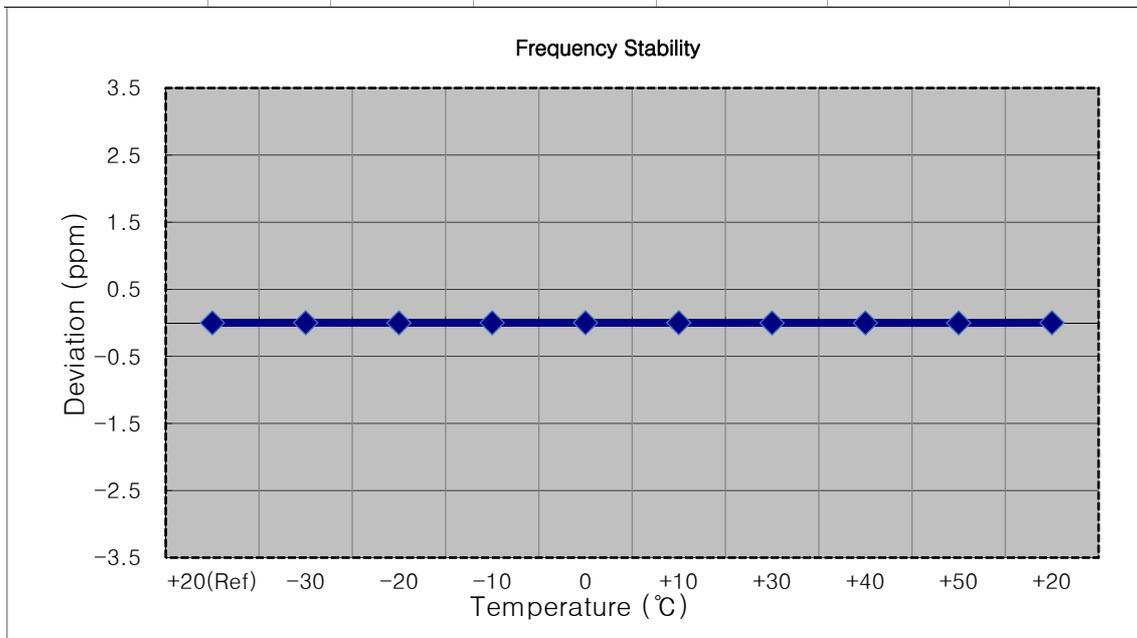


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1750,000,000 Hz
- ▣ CHANNEL: 20350 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1749 999 998	0.0	0.000 000	0.000
100 %		-30	1749 999 997	-1.4	0.000 000	-0.001
100 %		-20	1750 000 000	1.2	0.000 000	0.001
100 %		-10	1749 999 995	-3.1	0.000 000	-0.002
100 %		0	1749 999 994	-4.8	0.000 000	-0.003
100 %		+10	1749 999 995	-2.9	0.000 000	-0.002
100 %		+30	1749 999 996	-2.8	0.000 000	-0.002
100 %		+40	1749 999 996	-2.3	0.000 000	-0.001
100 %		+50	1749 999 994	-4.1	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1749 999 995	-3.3	0.000 000

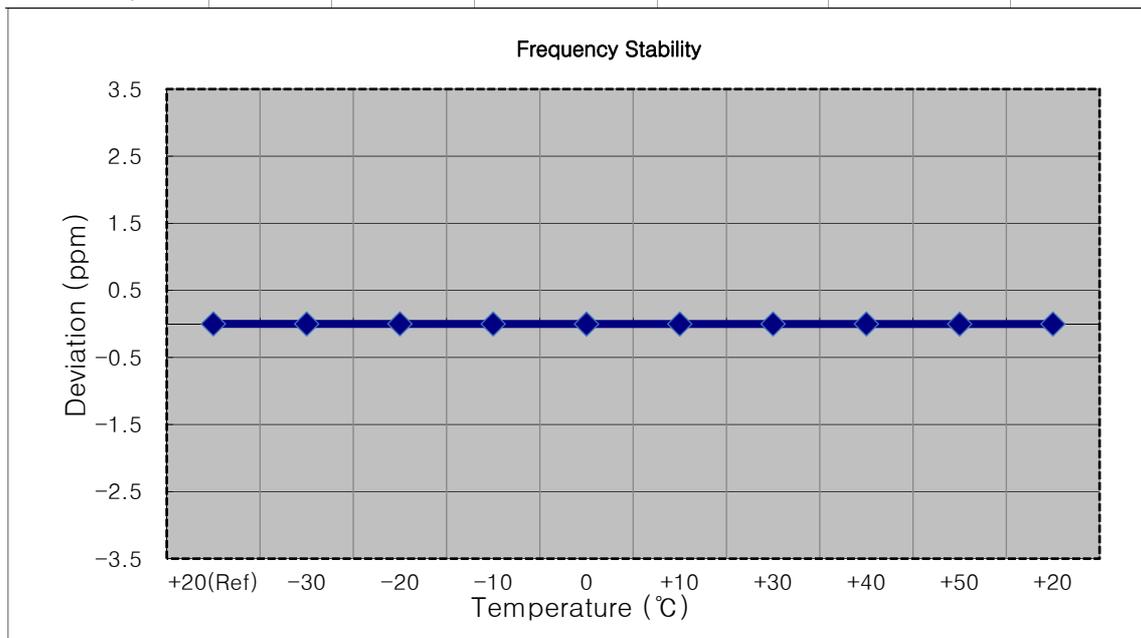


- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1747,500,000 Hz
- ▣ CHANNEL: 20325 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1747 500 004	0.0	0.000 000	0.000
100 %		-30	1747 500 007	2.5	0.000 000	0.001
100 %		-20	1747 500 006	2.1	0.000 000	0.001
100 %		-10	1747 500 008	3.9	0.000 000	0.002
100 %		0	1747 500 008	3.3	0.000 000	0.002
100 %		+10	1747 500 009	5.2	0.000 000	0.003
100 %		+30	1747 500 009	4.6	0.000 000	0.003
100 %		+40	1747 500 007	2.8	0.000 000	0.002
100 %		+50	1747 500 007	2.4	0.000 000	0.001
Batt. Endpoint		3.300	+20	1747 500 002	-2.3	0.000 000

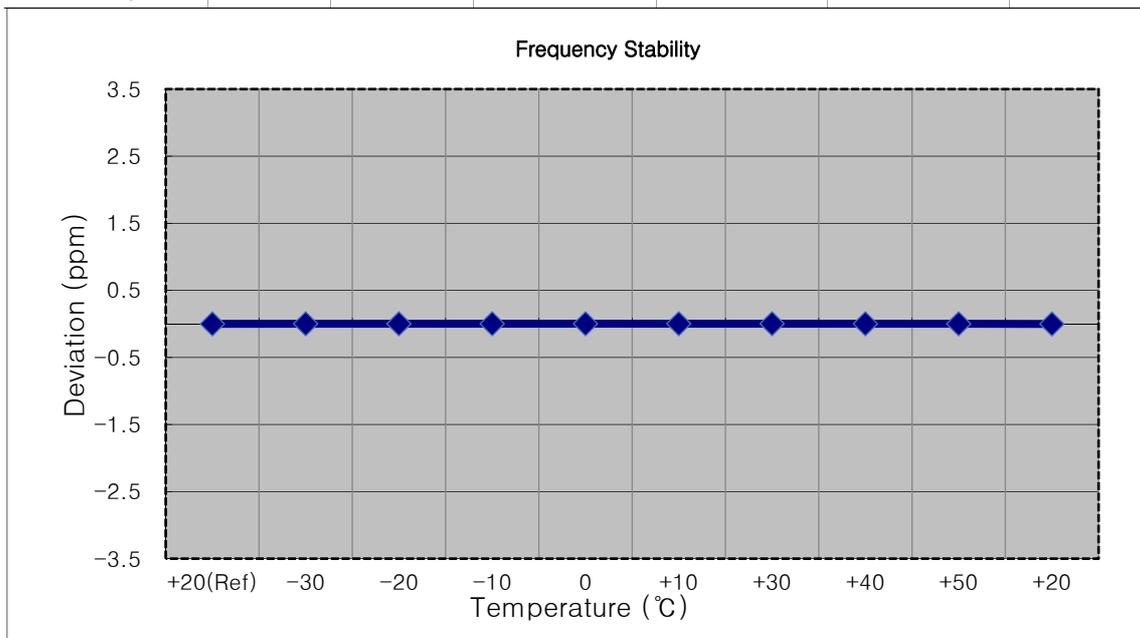

- ▣ MODE: LTE 4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 20300 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 997	0.0	0.000 000	0.000
100 %		-30	1744 999 996	-1.5	0.000 000	-0.001
100 %		-20	1744 999 995	-2.3	0.000 000	-0.001
100 %		-10	1744 999 994	-3.4	0.000 000	-0.002
100 %		0	1744 999 994	-3.2	0.000 000	-0.002
100 %		+10	1744 999 995	-2.5	0.000 000	-0.001
100 %		+30	1744 999 994	-3.1	0.000 000	-0.002
100 %		+40	1744 999 994	-3.5	0.000 000	-0.002
100 %		+50	1744 999 995	-2.5	0.000 000	-0.001
Batt. Endpoint		3.300	+20	1744 999 999	1.9	0.000 000

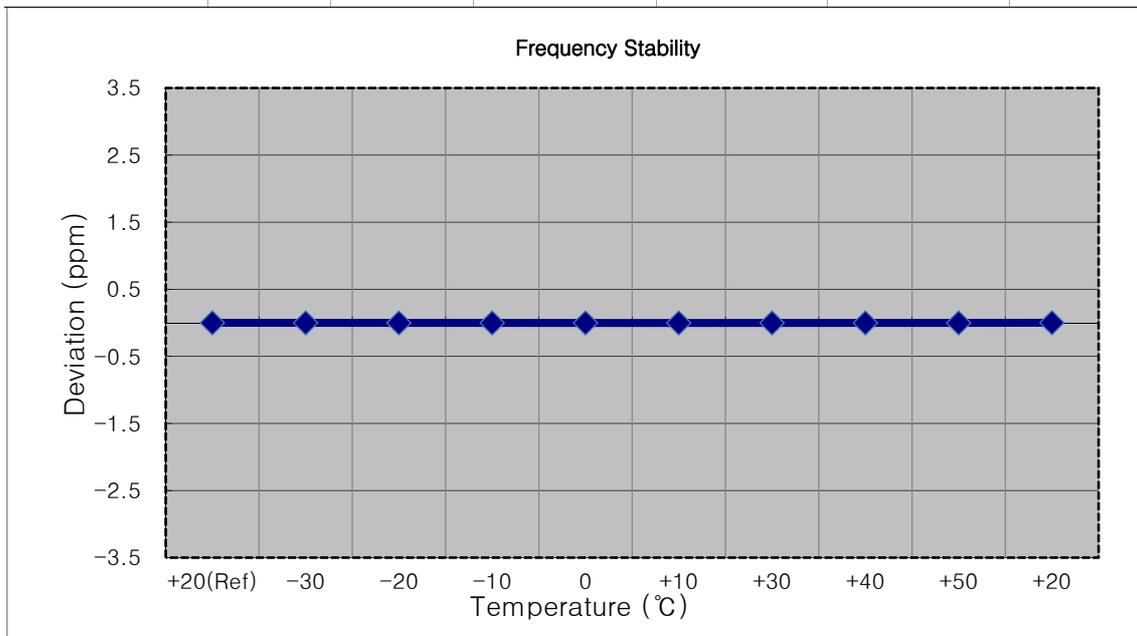

## 10. TEST DATA

### 10.1. UPLINK CARRIER AGGREGATION

Test Note

1. All tests were evaluated for the two bands using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. All modes of operation were investigated and the worst case configuration results are reported in this section.

Please refer to the table below.

3. The worst case is reported with the modulations, RB sizes and offsets.

- 4A(ANT A)-5A(ANT A)

(PCC - Modulation: QPSK, RB: 1, RB Offset: 74, SCC - Modulation: QPSK, RB: 1, RB Offset: 0)

- 4A(ANT A)-12A(ANT A)

(PCC - Modulation: QPSK, RB: 1, RB Offset: 74, SCC - Modulation: QPSK, RB: 1, RB Offset: 0)

Radiated Spurious Emissions

PCC	SCC	PCC		SCC	
		BW(MHz)	Channel	BW(MHz)	Channel
4A(ANT A)	5A(ANT A)	15	20325	5	20625
4A(ANT A)	12A(ANT A)	15	20325	10	23060

### 10.1.1. RADIATED SPURIOUS EMISSIONS

4A(ANT A)(PCC)- 5A(ANT A)(SCC)

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 495.00	-56.30	12.34	-62.37	3.09	V	-53.12	-13.00
5 242.50	-57.44	12.87	-56.59	3.95	V	-47.67	-13.00
6 990.00	-59.34	11.36	-51.13	4.58	V	-44.35	-13.00

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
1 693.00	-55.47	9.82	-65.73	2.18	V	-58.09	-13.00
2 539.50	-57.49	10.67	-60.92	2.63	V	-52.88	-13.00
3 386.00	-60.39	3.05	-42.56	12.53	V	-52.04	-13.00

4A(ANT A)(PCC)- 12A(ANT A)(SCC)

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 495.00	-56.75	12.34	-62.82	3.09	V	-53.57	-13.00
5 242.50	-57.62	12.87	-56.77	3.95	V	-47.85	-13.00
6 990.00	-58.05	11.36	-49.84	4.58	V	-43.06	-13.00

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
1 408.00	-52.71	7.68	-61.96	2.00	V	-56.28	-13.00
2 112.00	-57.16	9.45	-61.75	2.44	V	-54.74	-13.00
2 816.00	-58.00	10.80	-59.30	2.80	V	-51.30	-13.00

## 11. TEST PLOTS(Main 1 Ant)

LTE B4\_1.4M\_PAR\_Mid\_QPSK\_FullRB



LTE B4\_1.4M\_PAR\_Mid\_16QAM\_FullRB



LTE B4\_1.4M\_PAR\_Mid\_64QAM\_FullRB



LTE B4\_1.4M\_PAR\_Mid\_256QAM\_FullRB



LTE B4\_3 M\_PAR\_Mid\_QPSK\_FullRB



LTE B4\_3 M\_PAR\_Mid\_16QAM\_FullRB




LTE B4\_3 M\_PAR\_Mid\_64QAM\_FullRB



LTE B4\_3 M\_PAR\_Mid\_256QAM\_FullRB



LTE B4\_5 M\_PAR\_Mid\_QPSK\_FullRB

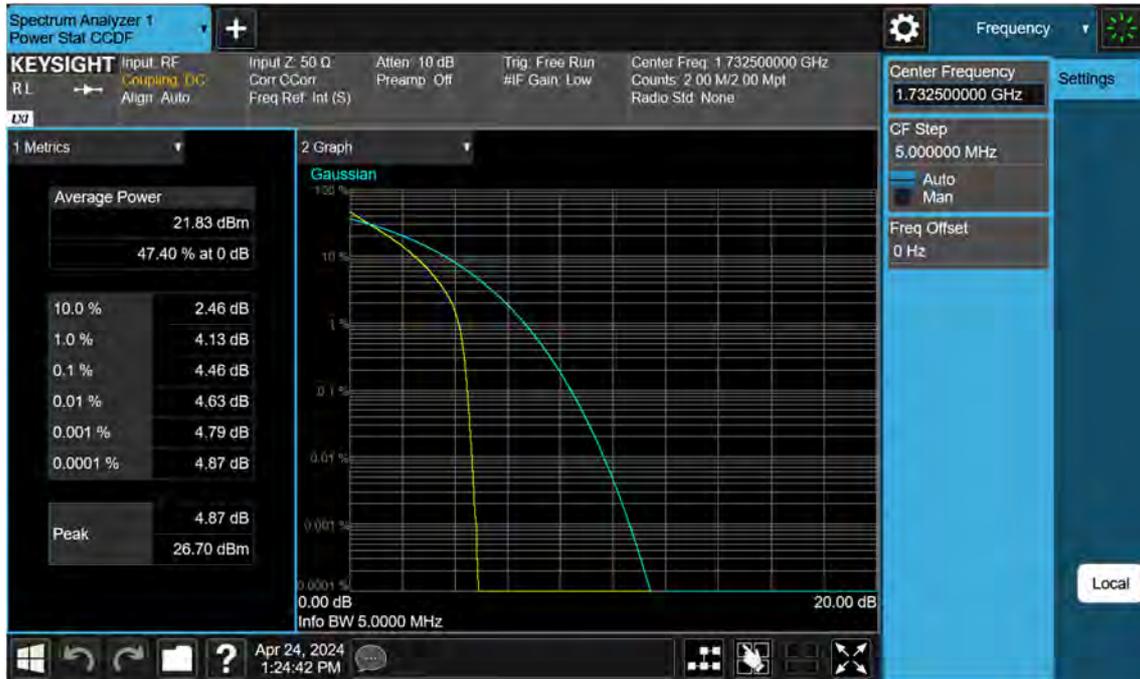

LTE B4\_5 M\_PAR\_Mid\_16QAM\_FullRB



LTE B4\_5 M\_PAR\_Mid\_64QAM\_FullRB



LTE B4\_5 M\_PAR\_Mid\_256QAM\_FullRB



LTE B4\_10 M\_PAR\_Mid\_QPSK\_FullRB



LTE B4\_10 M\_PAR\_Mid\_16QAM\_FullRB



LTE B4\_10 M\_PAR\_Mid\_64QAM\_FullRB



LTE B4\_10 M\_PAR\_Mid\_256QAM\_FullRB



LTE B4\_15 M\_PAR\_Mid\_QPSK\_FullRB



LTE B4\_15 M\_PAR\_Mid\_16QAM\_FullRB




LTE B4\_15 M\_PAR\_Mid\_64QAM\_FullRB



LTE B4\_15 M\_PAR\_Mid\_256QAM\_FullRB



LTE B4\_20 M\_PAR\_Mid\_QPSK\_FullRB

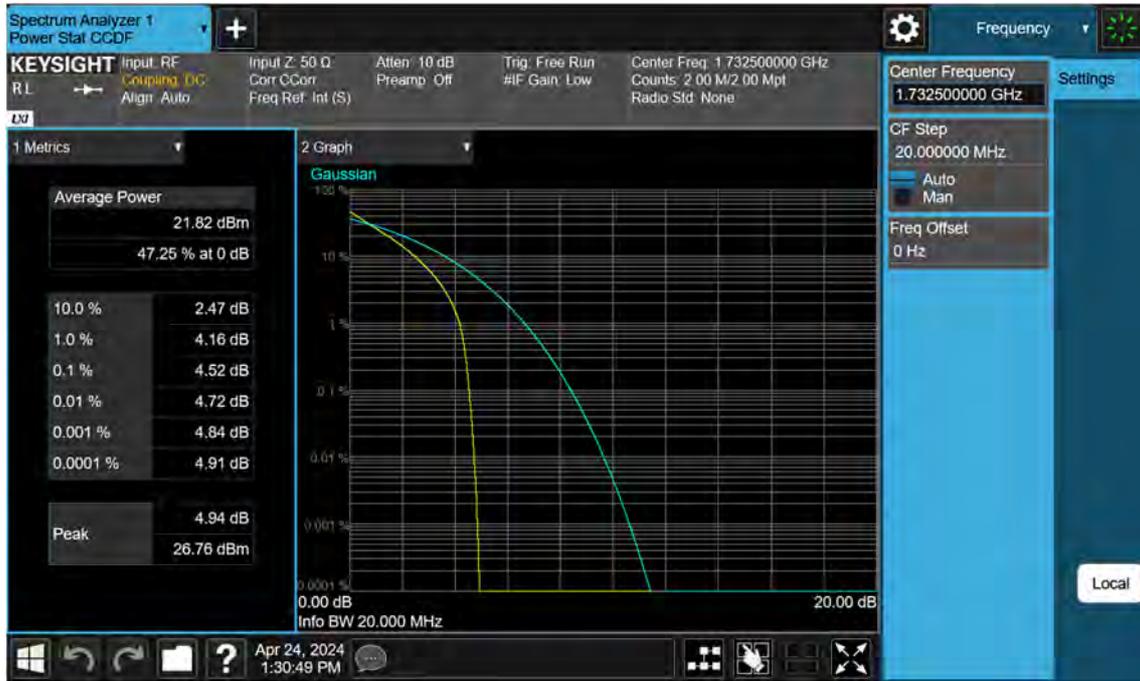

LTE B4\_20 M\_PAR\_Mid\_16QAM\_FullRB




LTE B4\_20 M\_PAR\_Mid\_64QAM\_FullRB




LTE B4\_20 M\_PAR\_Mid\_256QAM\_FullRB




LTE B4\_1.4M\_OBW\_Mid\_QPSK\_FullRB

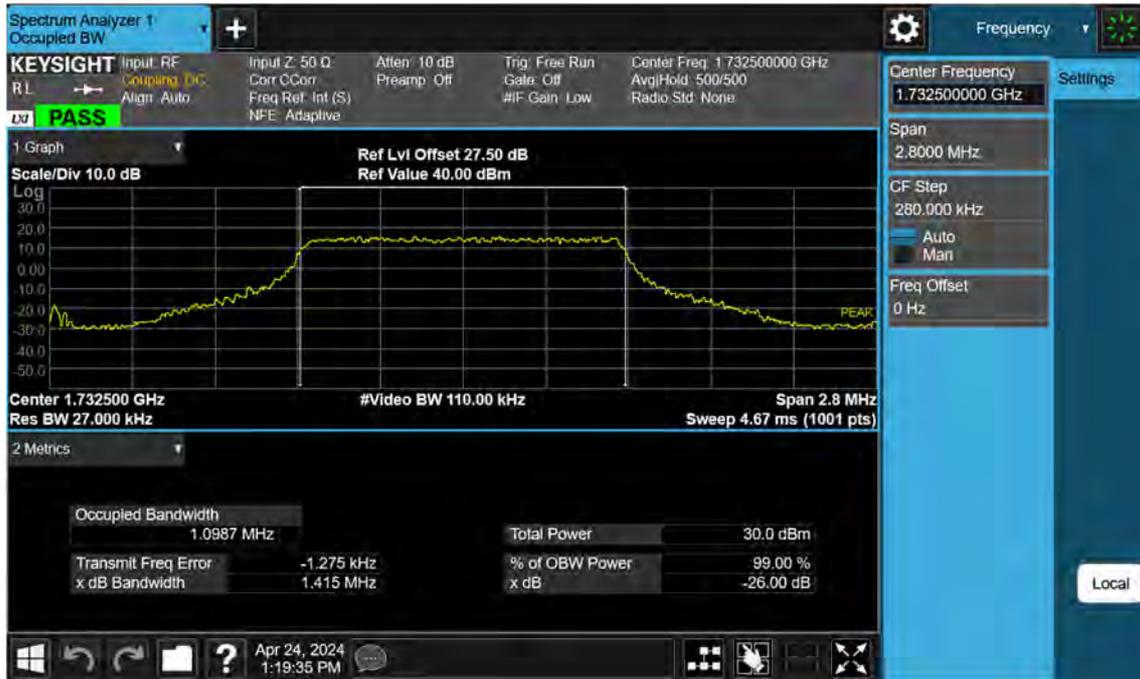


LTE B4\_1.4M\_OBW\_Mid\_16QAM\_FullRB

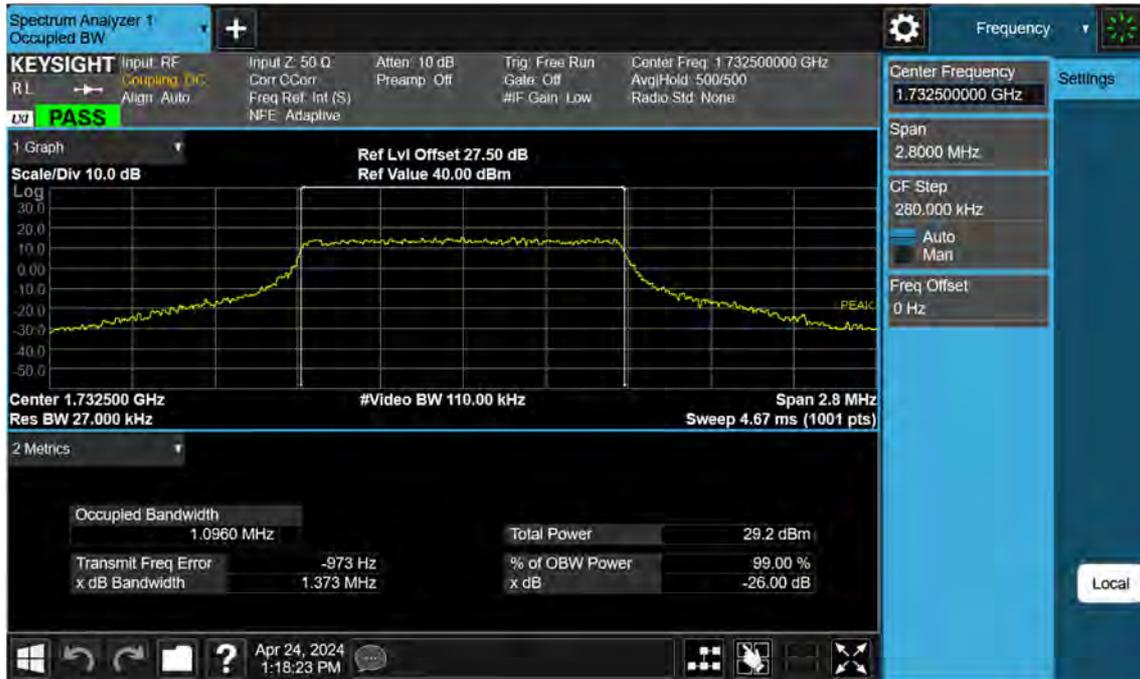


LTE B4\_1.4M\_OBW\_Mid\_64QAM\_FullRB

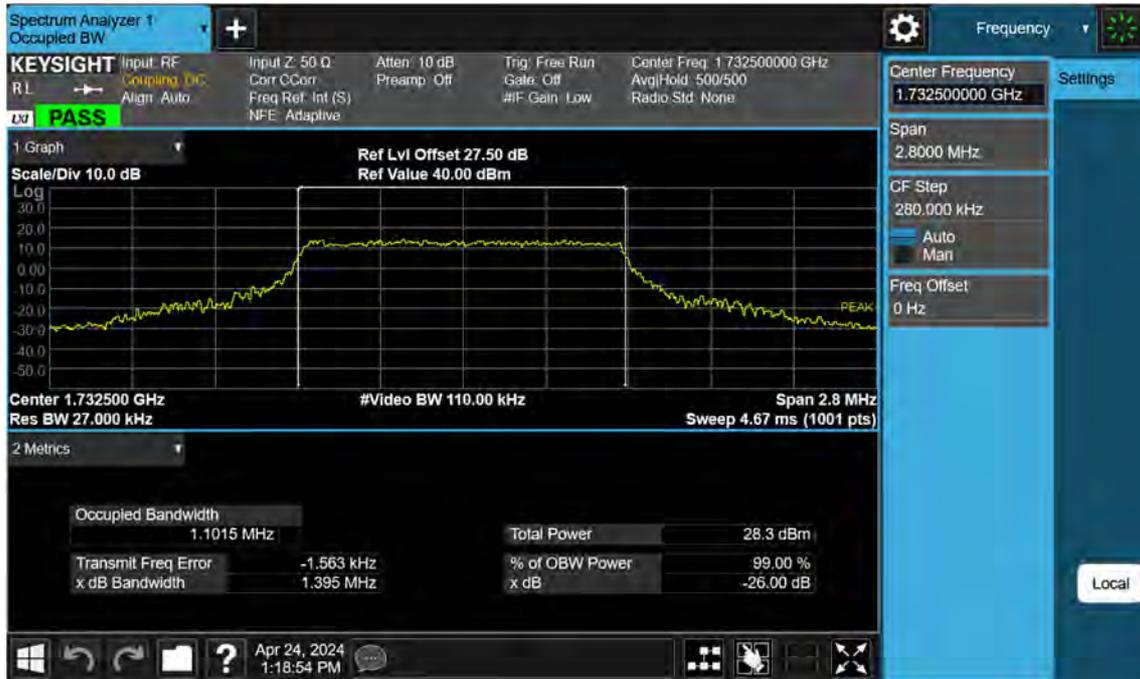


LTE B4\_1.4M\_OBW\_Mid\_256QAM\_FullIRB

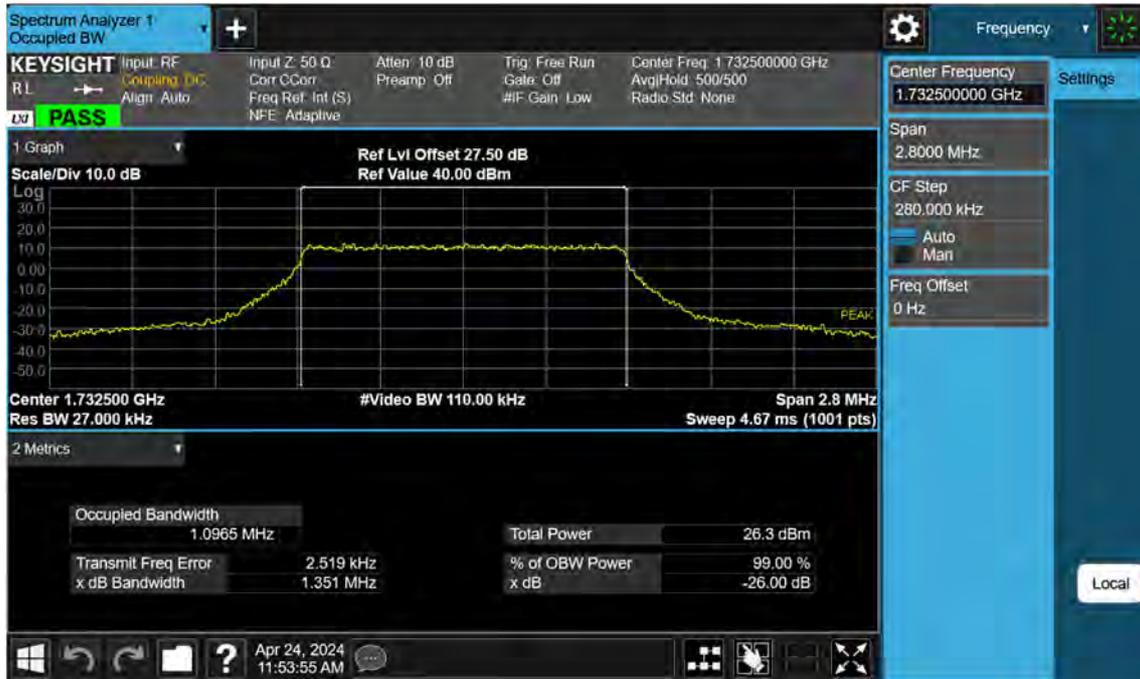


LTE B4\_3 M\_OBW\_Mid\_QPSK\_FullRB

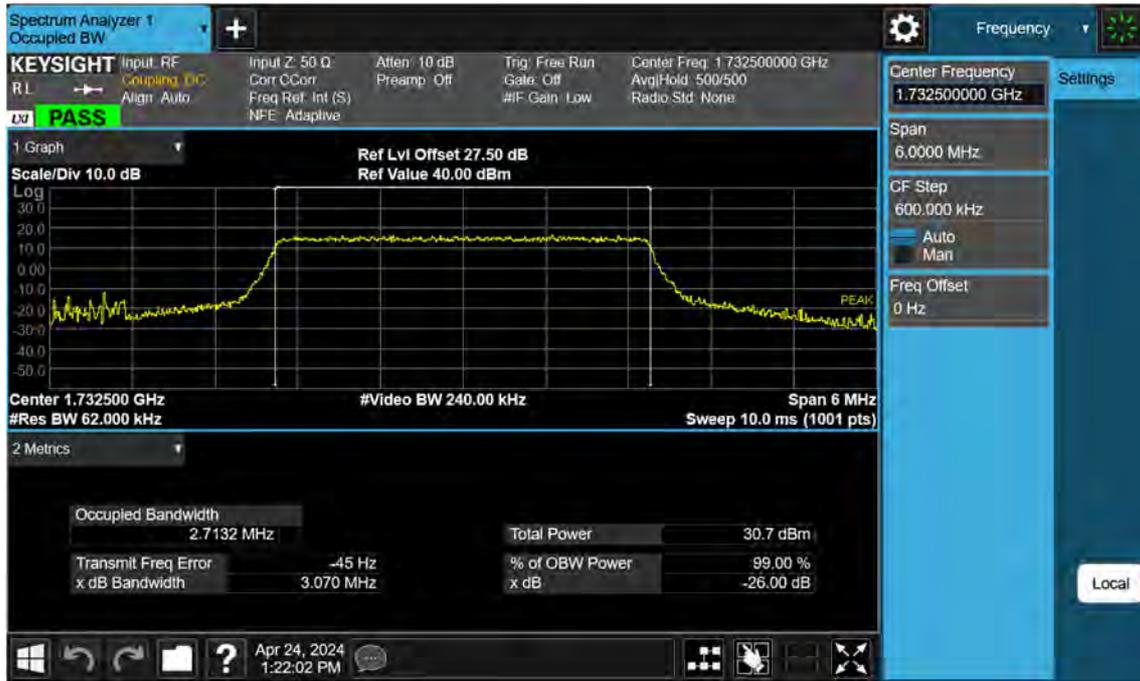


LTE B4\_3 M\_OBW\_Mid\_16QAM\_FullRB

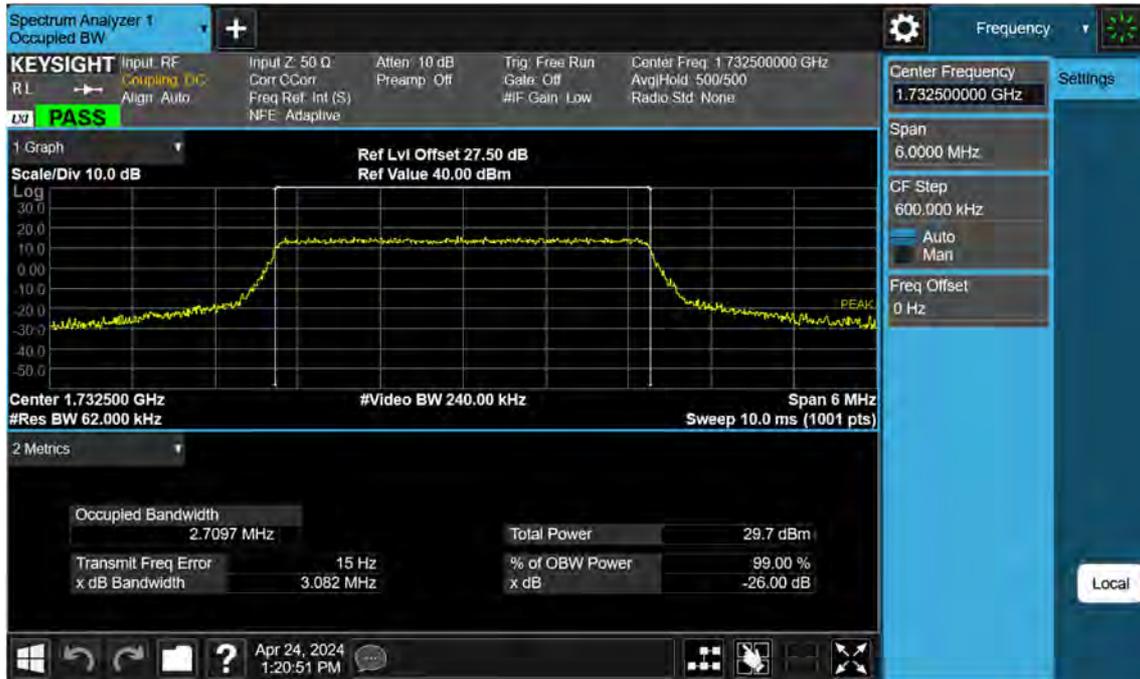


LTE B4\_3 M\_OBW\_Mid\_64QAM\_FullRB

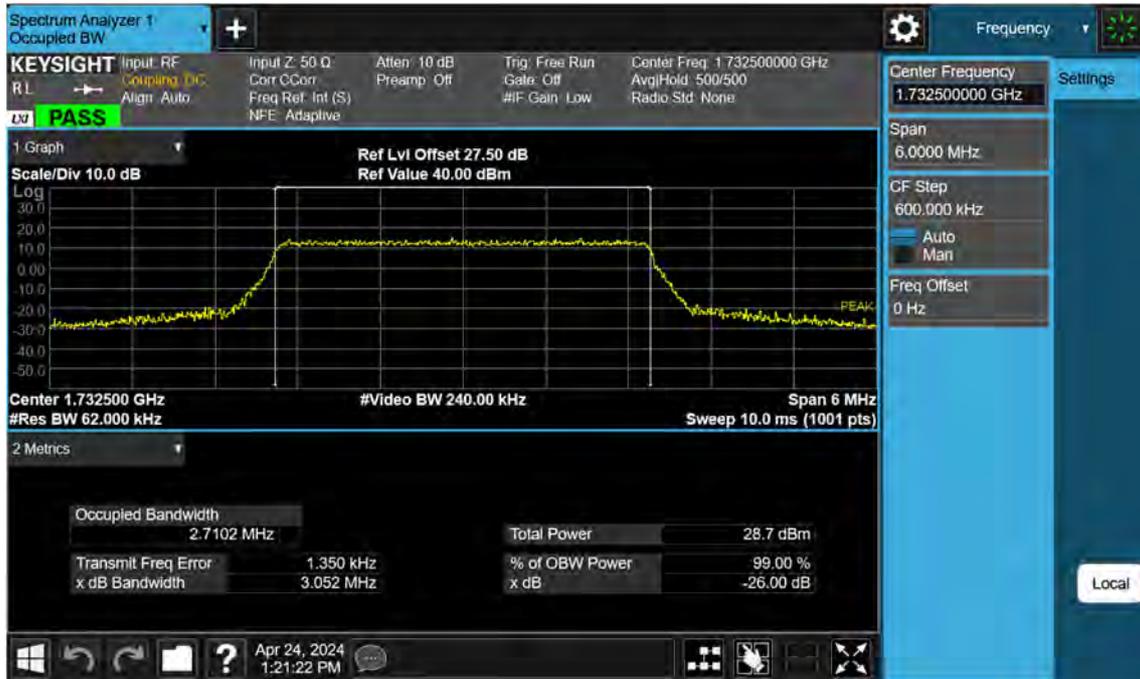

LTE B4\_3 M\_OBW\_Mid\_256QAM\_FullRB

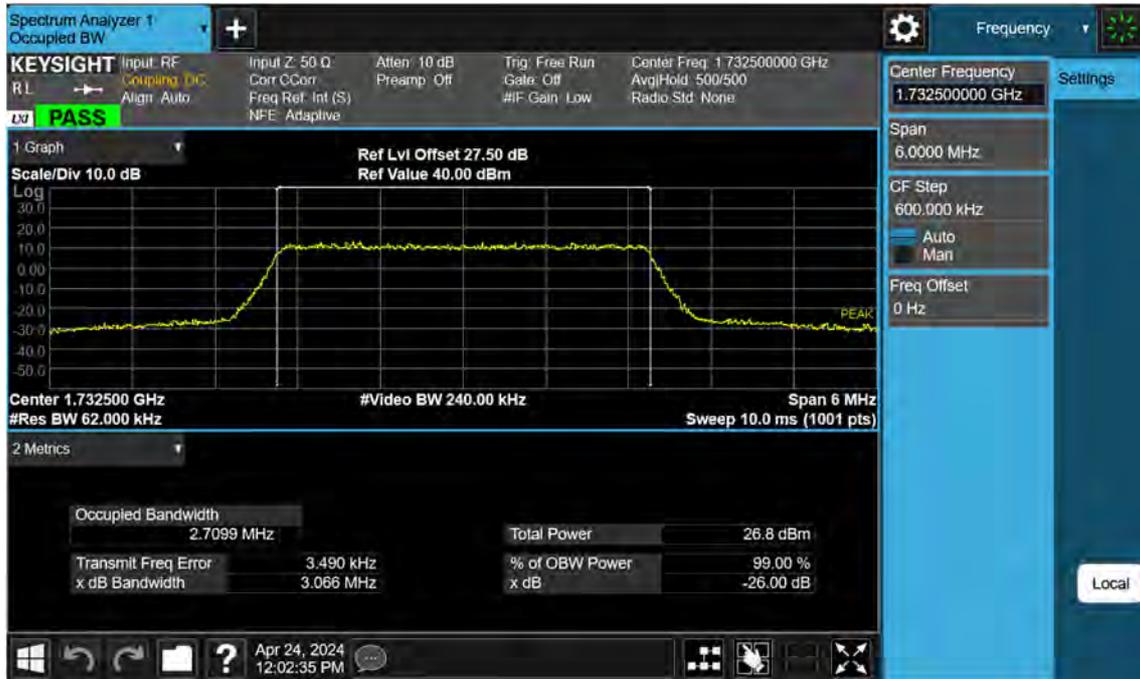


LTE B4\_5 M\_OBW\_Mid\_QPSK\_FullRB

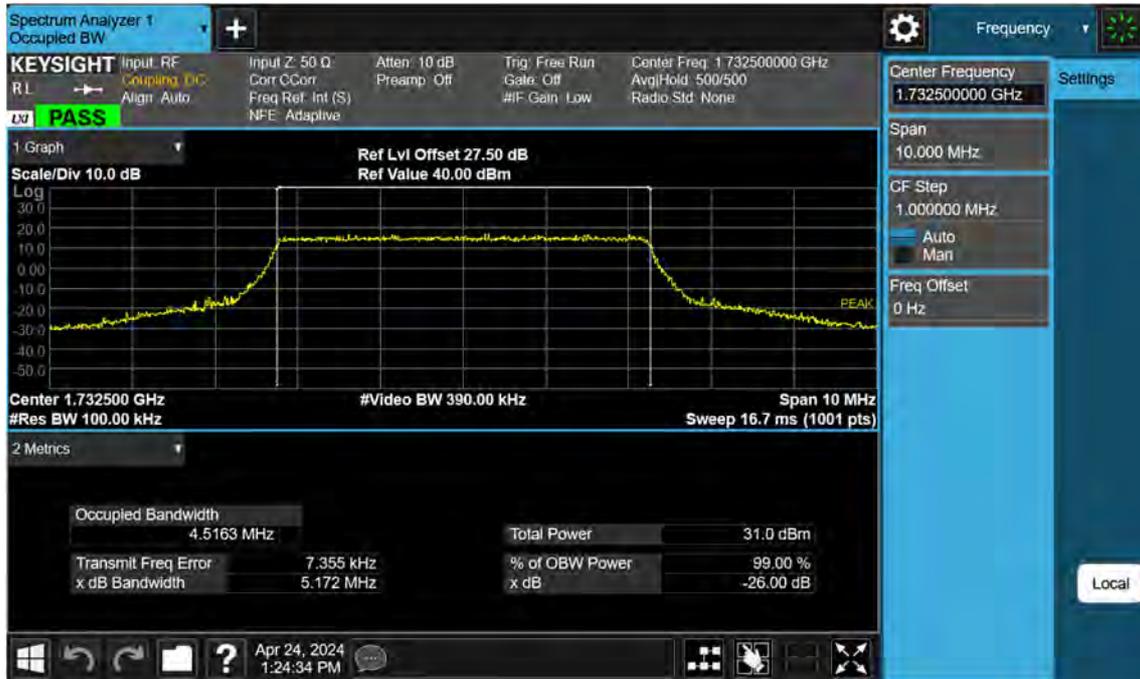

LTE B4\_5 M\_OBW\_Mid\_16QAM\_FullRB



LTE B4\_5 M\_OBW\_Mid\_64QAM\_FullRB

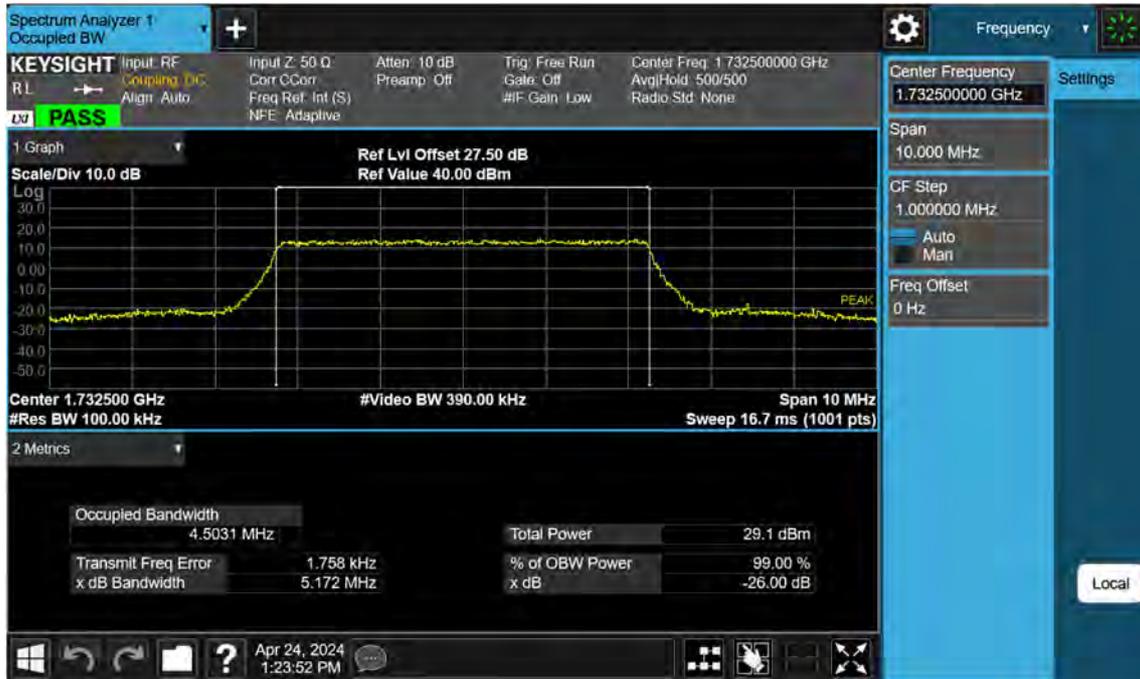


LTE B4\_5 M\_OBW\_Mid\_256QAM\_FullRB




LTE B4\_10 M\_OBW\_Mid\_QPSK\_FullRB



LTE B4\_10 M\_OBW\_Mid\_16QAM\_FullRB

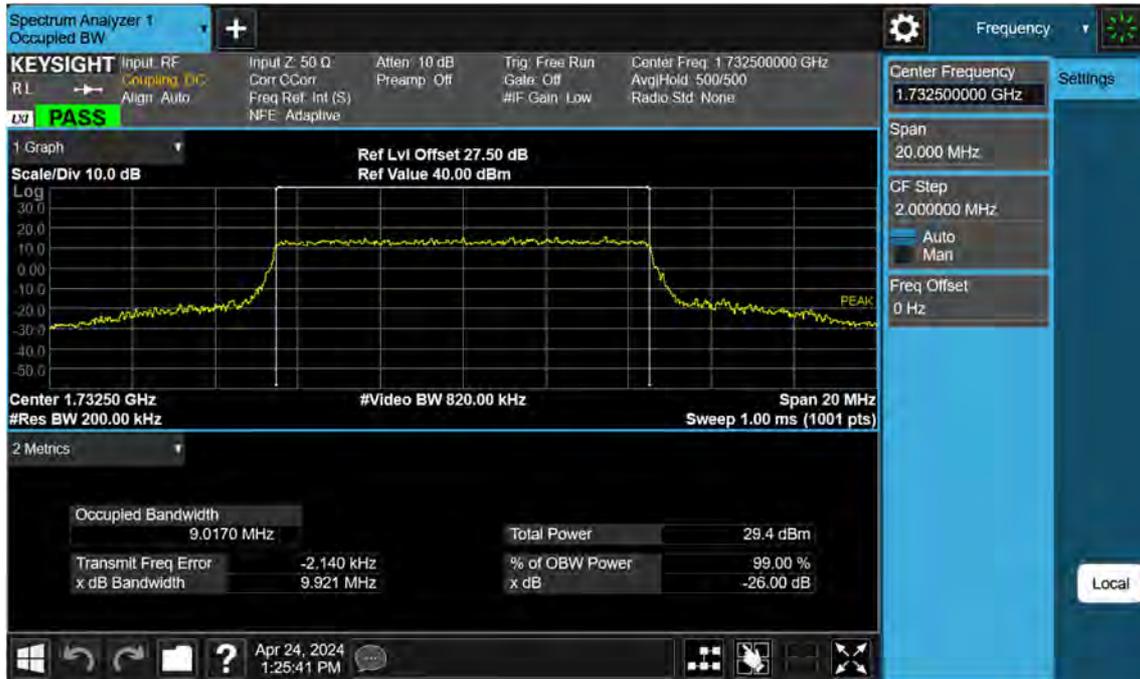


LTE B4\_10 M\_OBW\_Mid\_64QAM\_FullRB

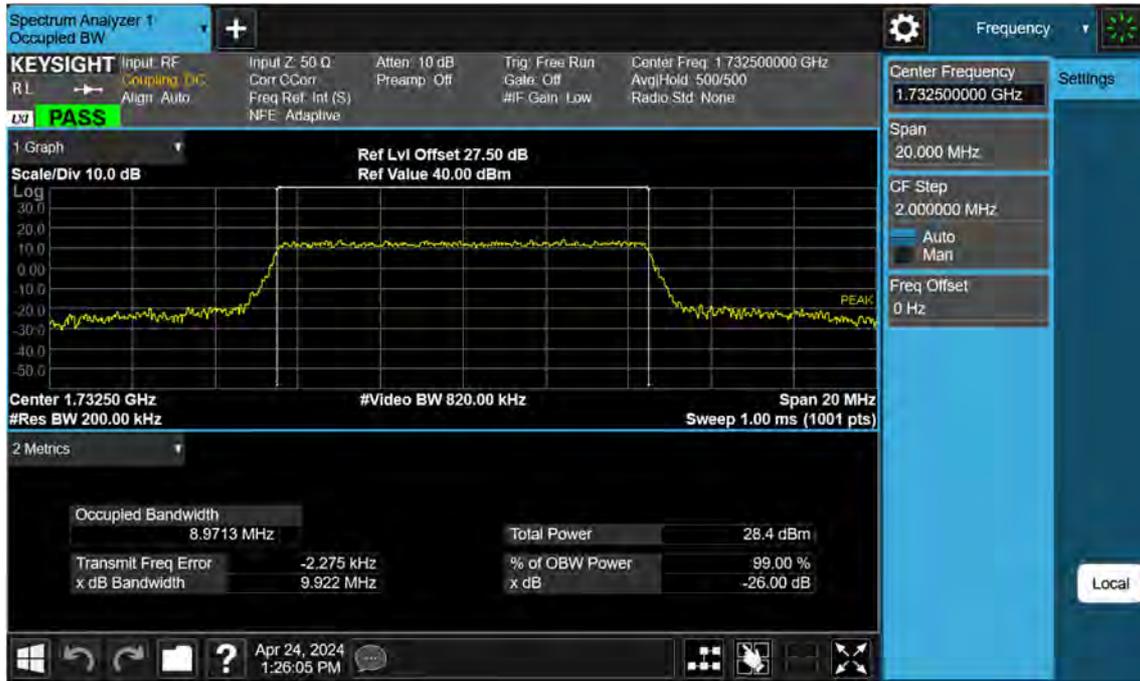


LTE B4\_10 M\_OBW\_Mid\_256QAM\_FullRB




LTE B4\_15 M\_OBW\_Mid\_QPSK\_FullRB

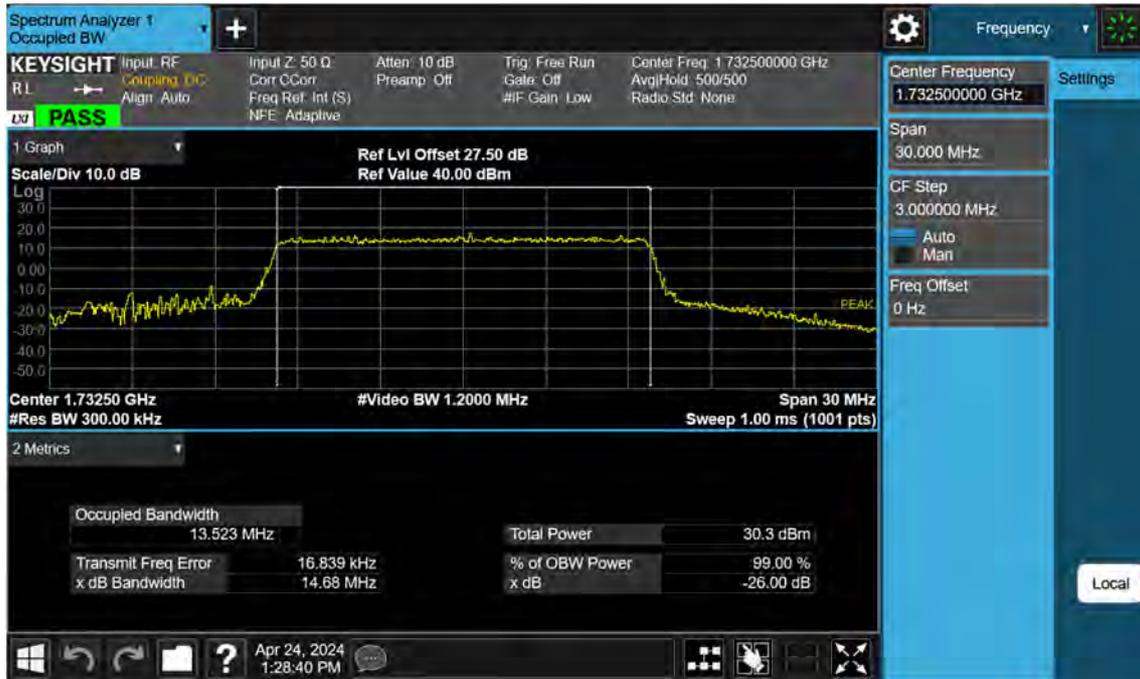


LTE B4\_15 M\_OBW\_Mid\_16QAM\_FullRB

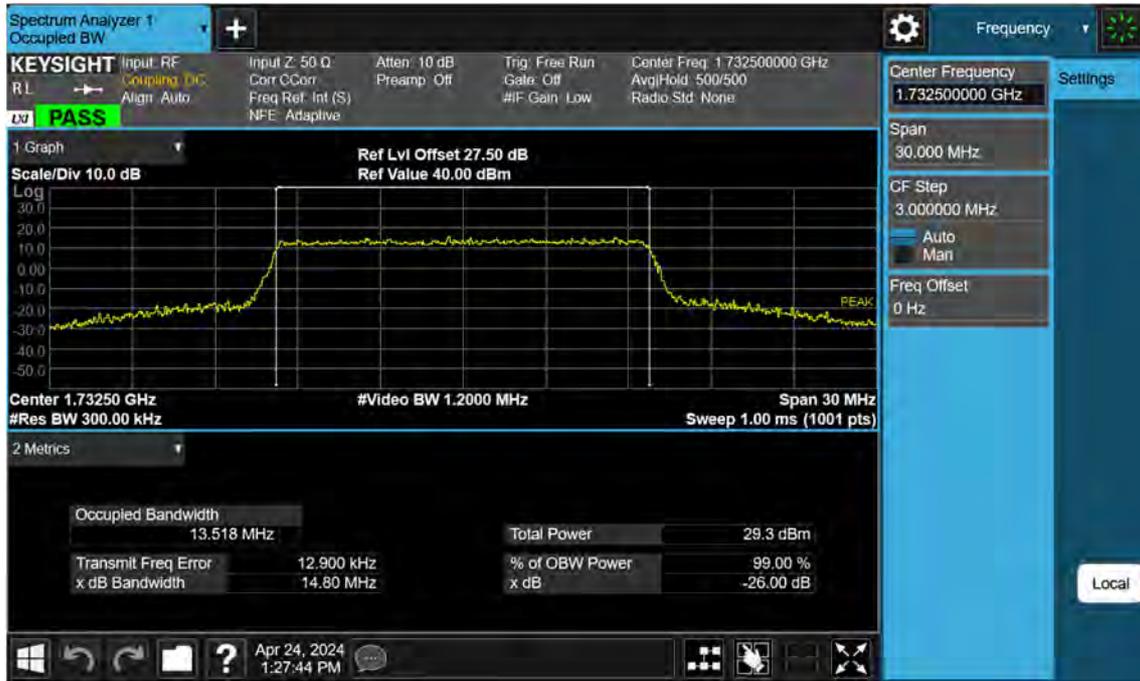


LTE B4\_15 M\_OBW\_Mid\_64QAM\_FullRB

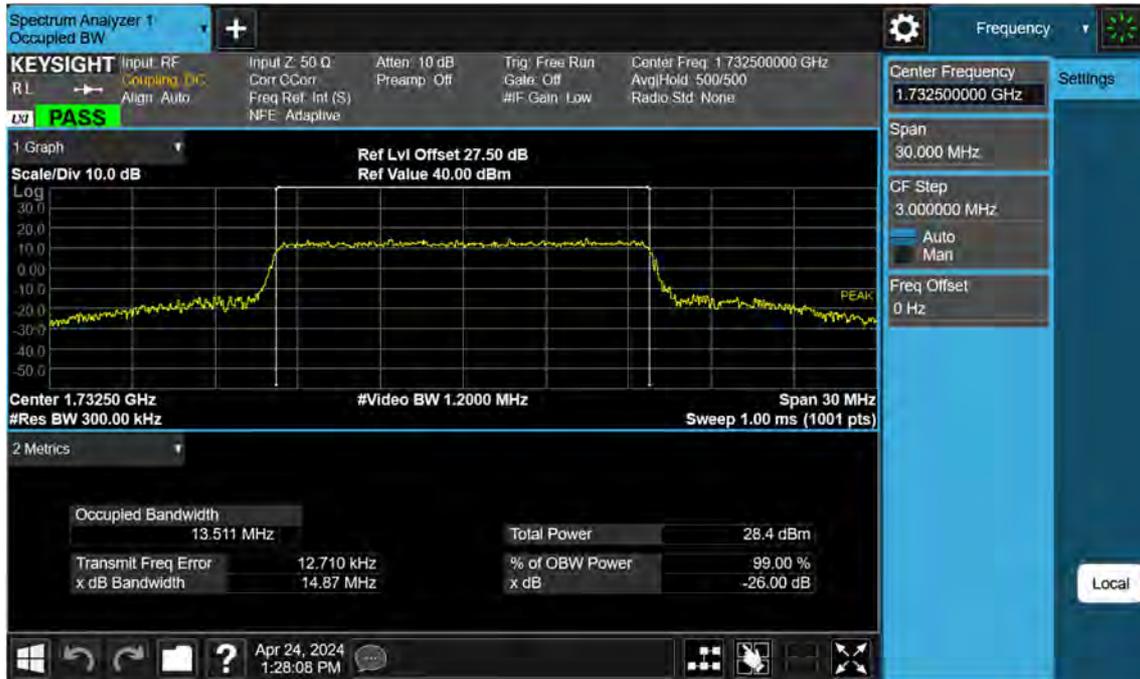


LTE B4\_15 M\_OBW\_Mid\_256QAM\_FullRB

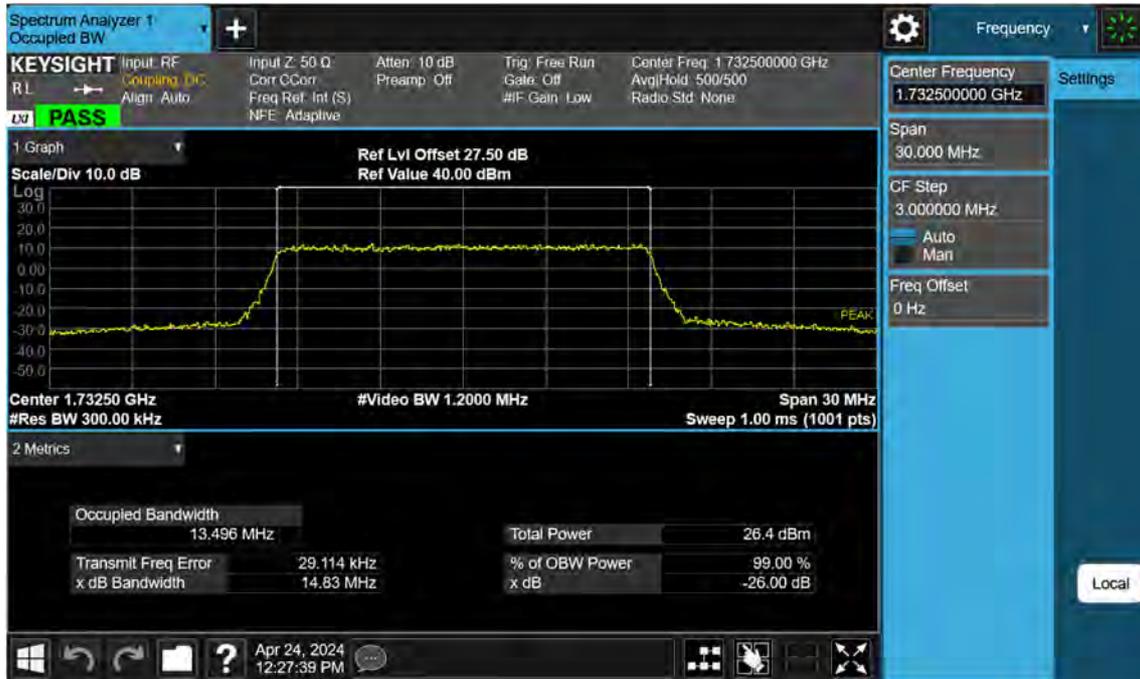


LTE B4\_20 M\_OBW\_Mid\_QPSK\_FullRB

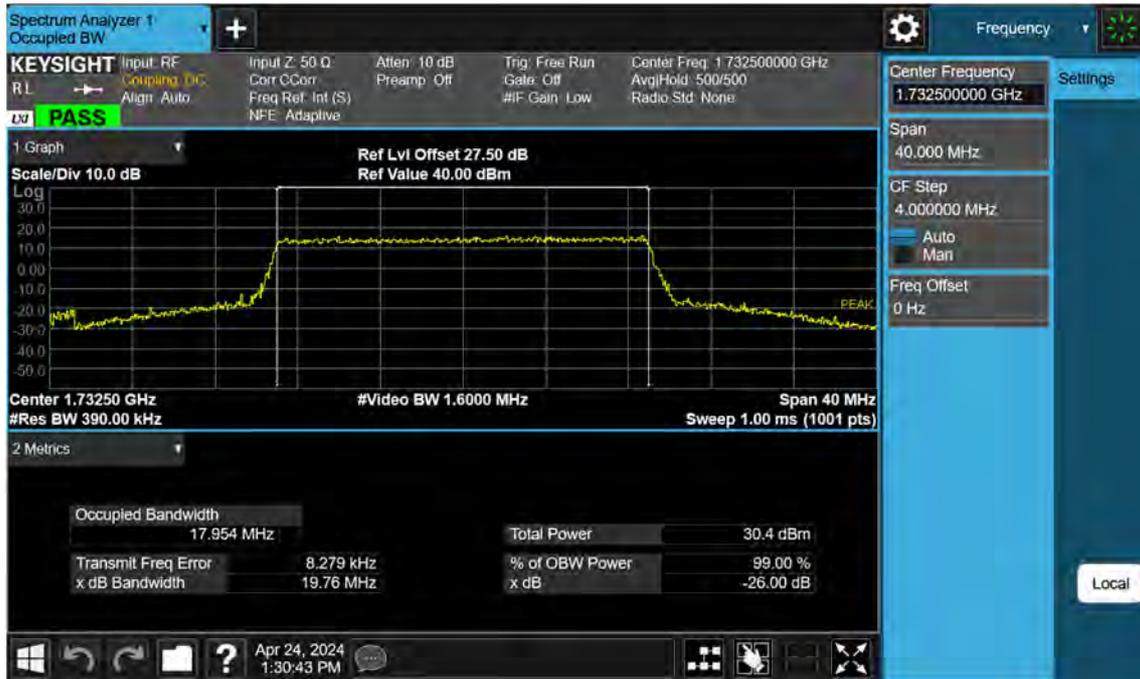

LTE B4\_20 M\_OBW\_Mid\_16QAM\_FullRB

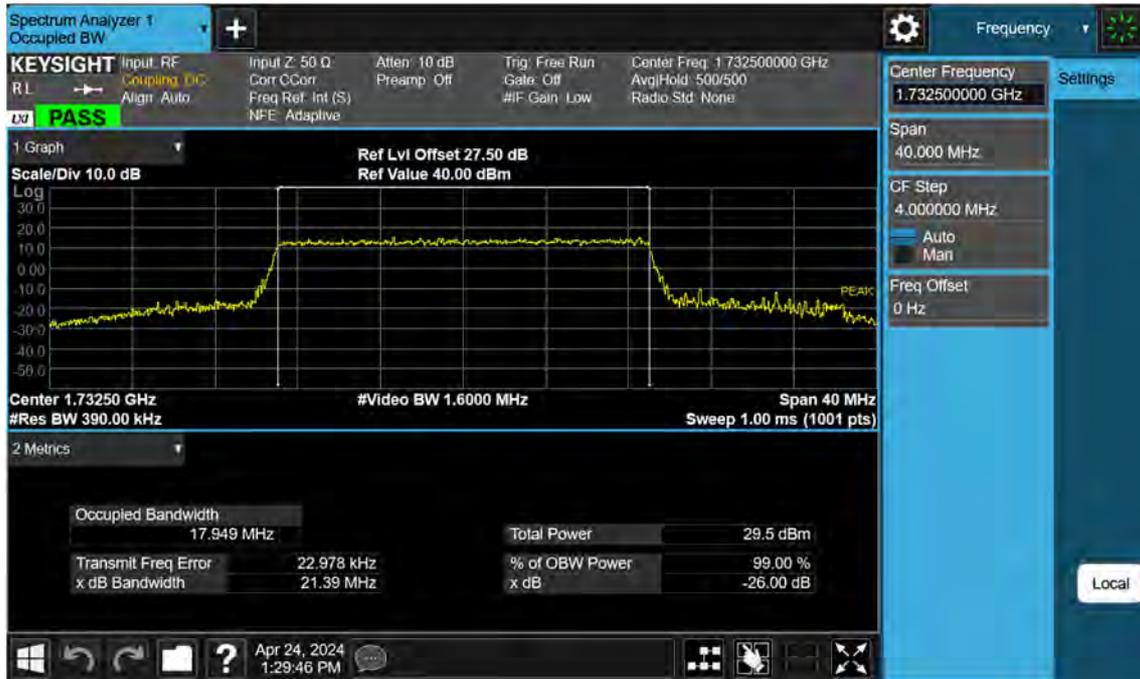

LTE B4\_20 M\_OBW\_Mid\_64QAM\_FullRB

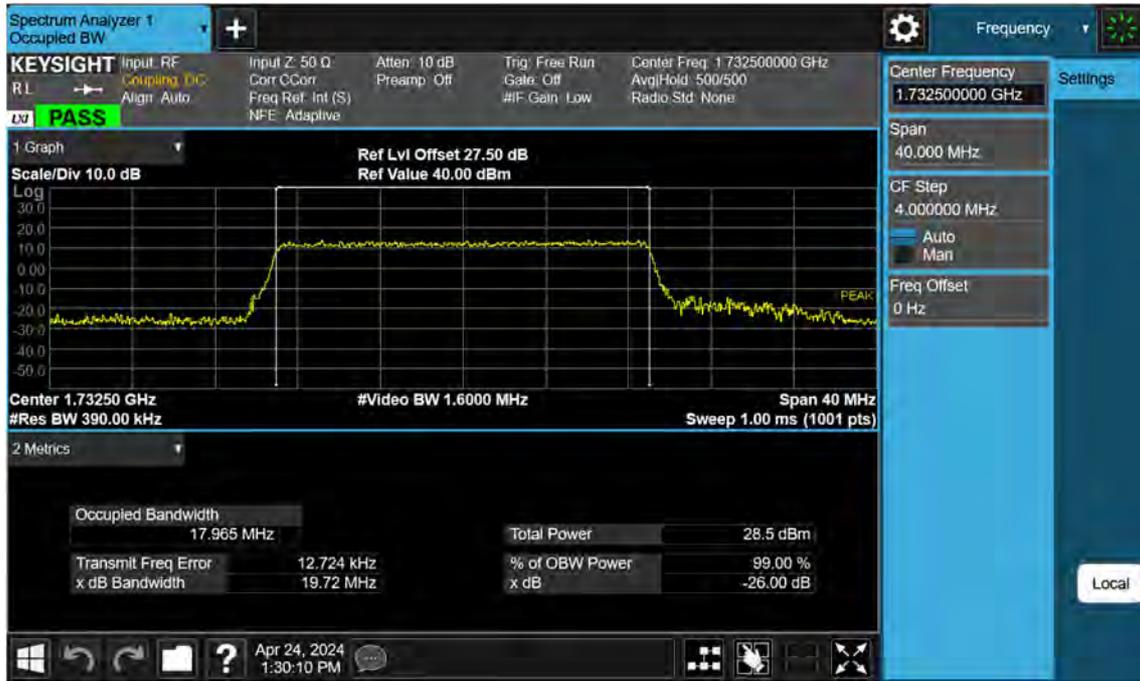

LTE B4\_20 M\_OBW\_Mid\_256QAM\_FullRB



LTE B4\_1.4M\_Conducted Spurious(30 M-10 G)\_Low\_QPSK\_1RB



LTE B4\_1.4M\_Conducted Spurious(30 M-10 G)\_Mid\_QPSK\_1RB



LTE B4\_1.4M\_Conducted Spurious(30 M-10 G)\_High\_QPSK\_1RB



LTE B4\_3 M\_Conducted Spurious(30 M-10 G)\_Low\_QPSK\_1RB



LTE B4\_3 M\_Conducted Spurious(30 M-10 G)\_Mid\_QPSK\_1RB



LTE B4\_3 M\_Conducted Spurious(30 M-10 G)\_High\_QPSK\_1RB



LTE B4\_5 M\_Conducted Spurious(30 M-10 G)\_Low\_QPSK\_1RB



LTE B4\_5 M\_Conducted Spurious(30 M-10 G)\_Mid\_QPSK\_1RB



LTE B4\_5 M\_Conducted Spurious(30 M-10 G)\_High\_QPSK\_1RB



LTE B4\_10 M\_Conducted Spurious(30 M-10 G)\_Low\_QPSK\_1RB



LTE B4\_10 M\_Conducted Spurious(30 M-10 G)\_Mid\_QPSK\_1RB



LTE B4\_10 M\_Conducted Spurious(30 M-10 G)\_High\_QPSK\_1RB



LTE B4\_15 M\_Conducted Spurious(30 M-10 G)\_Low\_QPSK\_1RB



LTE B4\_15 M\_Conducted Spurious(30 M-10 G)\_Mid\_QPSK\_1RB



LTE B4\_15 M\_Conducted Spurious(30 M-10 G)\_High\_QPSK\_1RB



LTE B4\_20 M\_Conducted Spurious(30 M-10 G)\_Low\_QPSK\_1RB




LTE B4\_20 M\_Conducted Spurious(30 M-10 G)\_Mid\_QPSK\_1RB




LTE B4\_20 M\_Conducted Spurious(30 M-10 G)\_High\_QPSK\_1RB




LTE B4\_1.4M\_Conducted Spurious(10 G-26.5 G)\_Low\_QPSK\_1RB

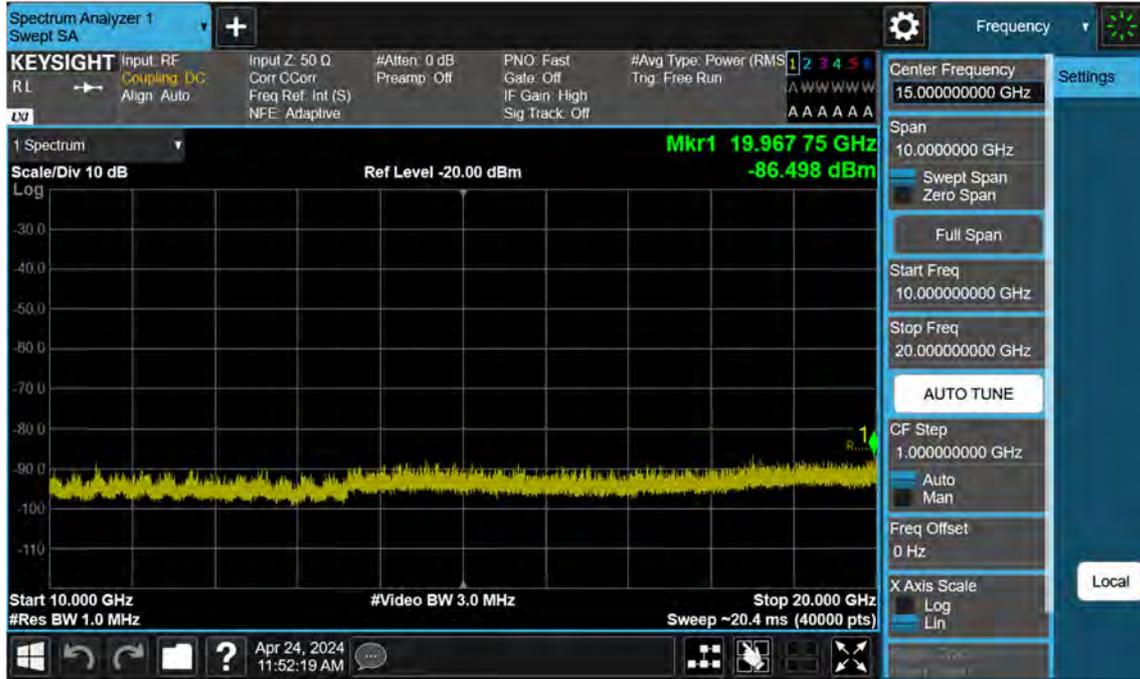


LTE B4\_1.4M\_Conducted Spurious(10 G-26.5 G)\_Mid\_QPSK\_1RB

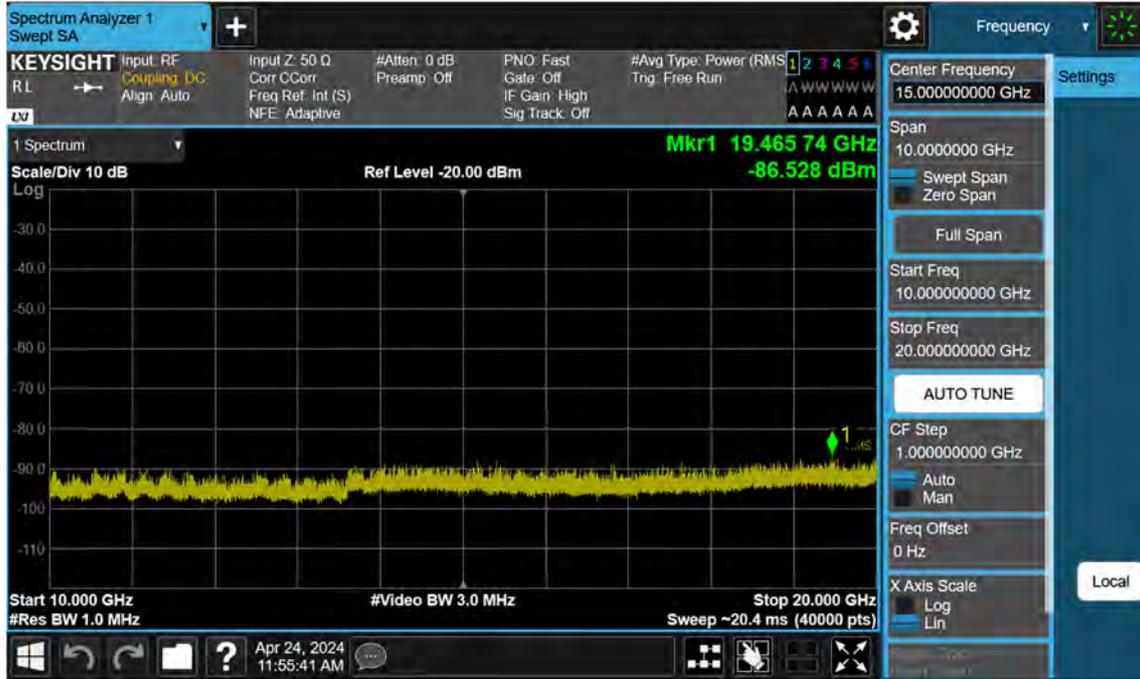


LTE B4\_1.4M\_Conducted Spurious(10 G-26.5 G)\_High\_QPSK\_1RB

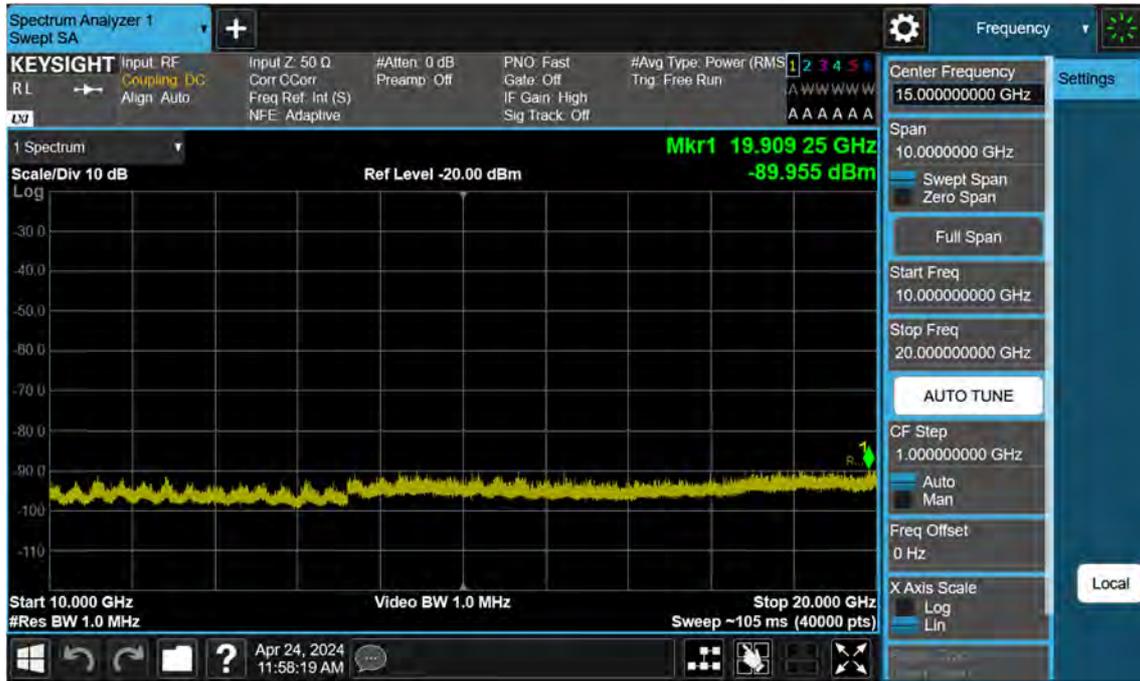


LTE B4\_3 M\_Conducted Spurious(10 G-26.5 G)\_Low\_QPSK\_1RB

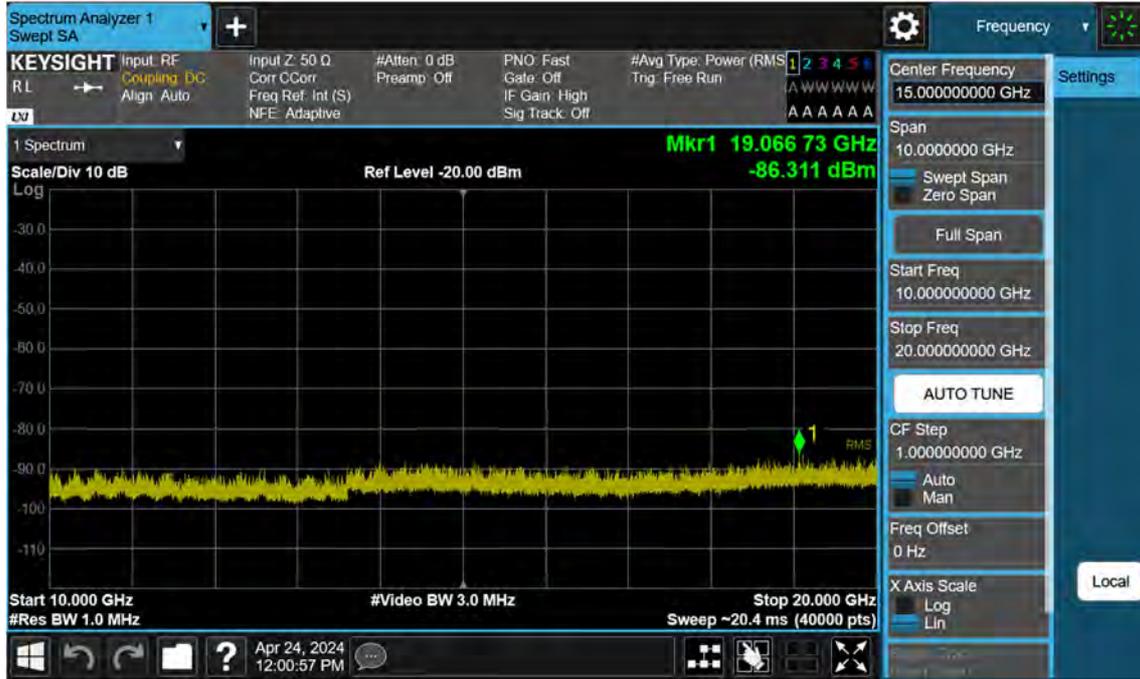


LTE B4\_3 M\_Conducted Spurious(10 G-26.5 G)\_Mid\_QPSK\_1RB

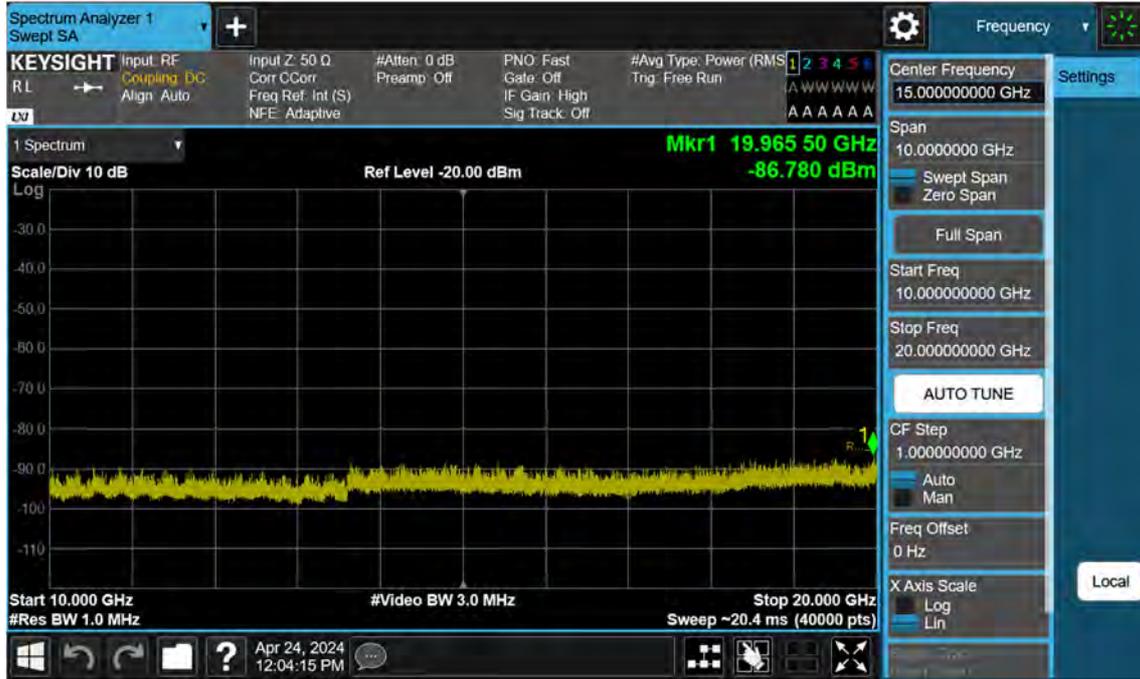


LTE B4\_3 M\_Conducted Spurious(10 G-26.5 G)\_High\_QPSK\_1RB

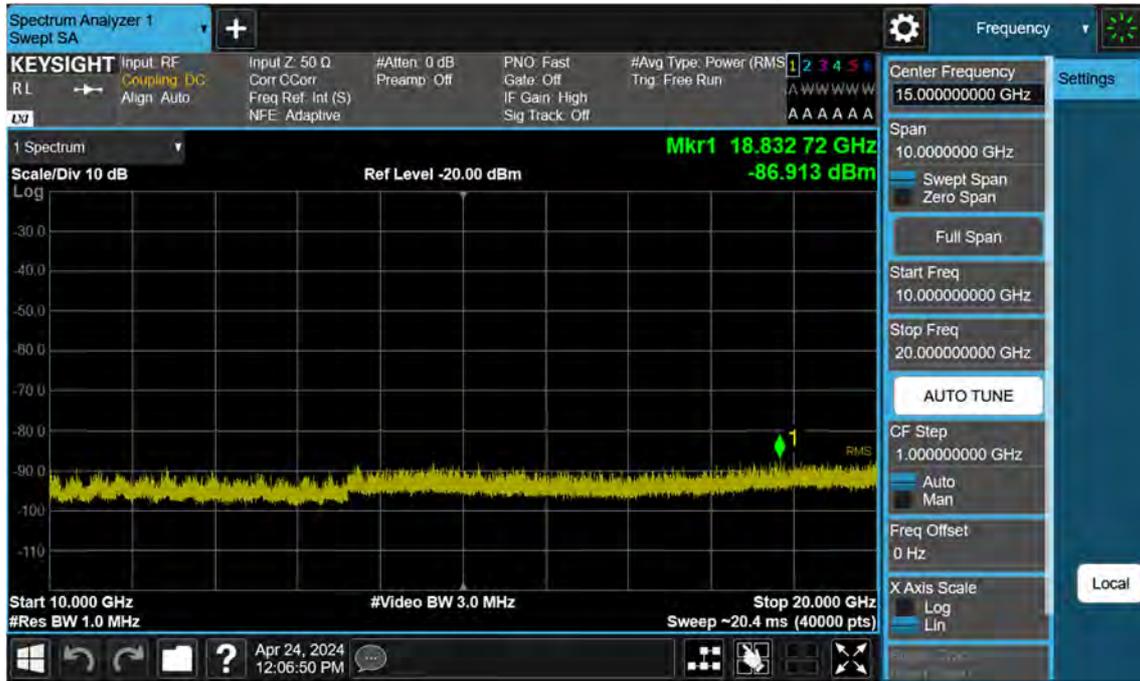


LTE B4\_5 M\_Conducted Spurious(10 G-26.5 G)\_Low\_QPSK\_1RB

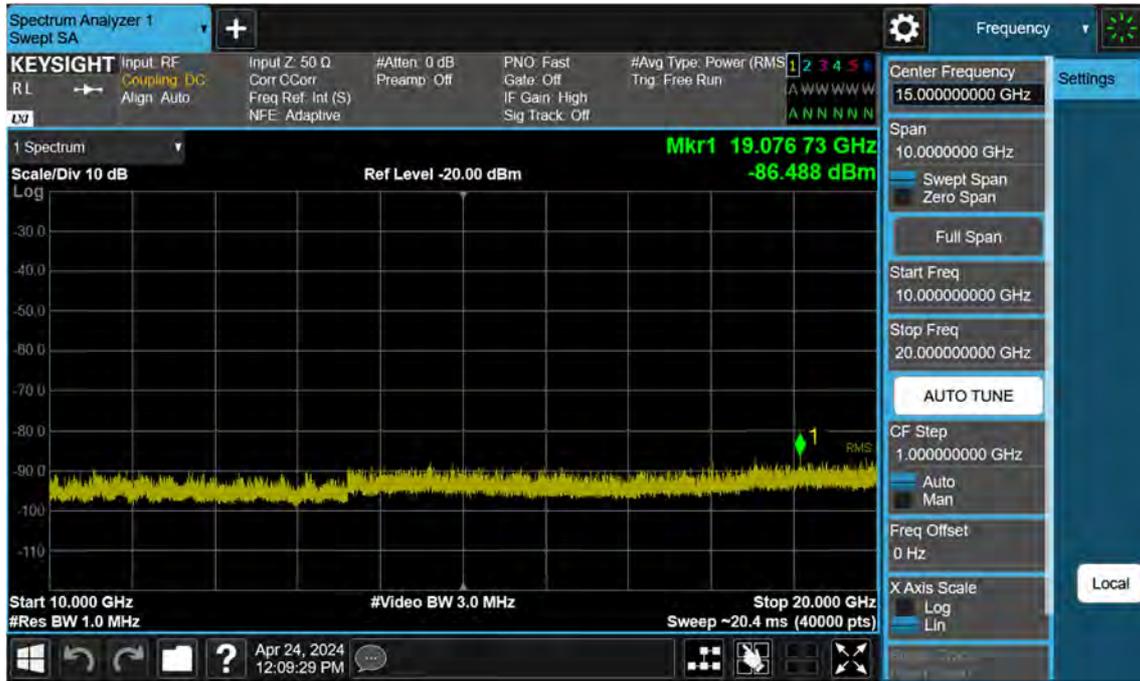


LTE B4\_5 M\_Conducted Spurious(10 G-26.5 G)\_Mid\_QPSK\_1RB

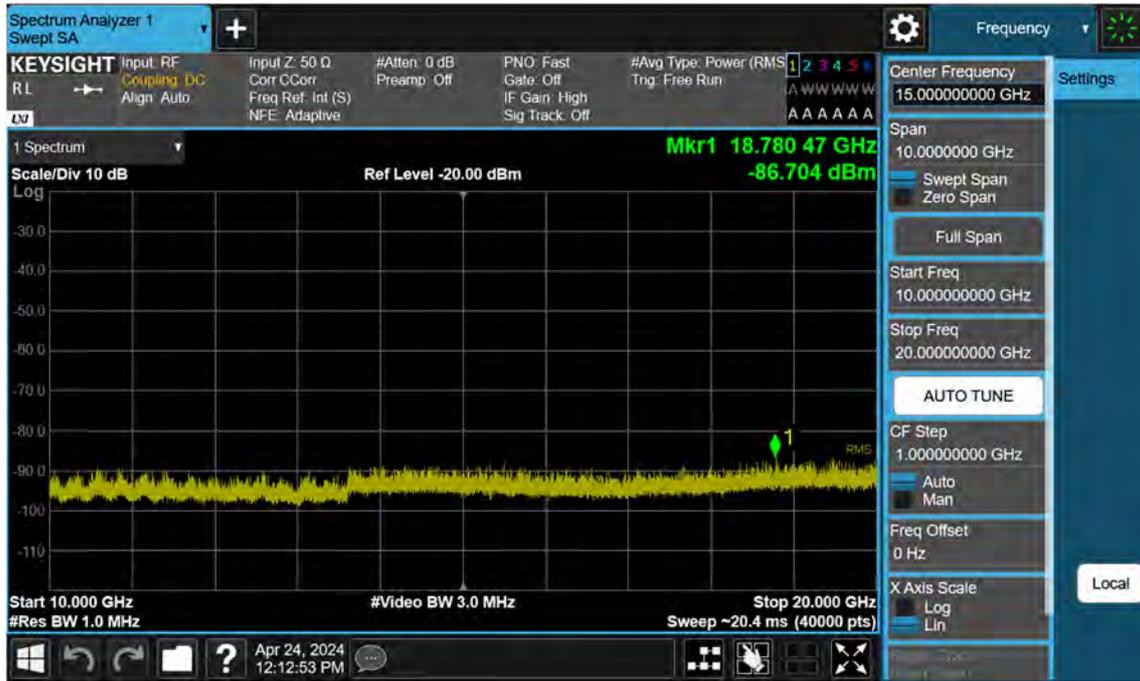


LTE B4\_5 M\_Conducted Spurious(10 G-26.5 G)\_High\_QPSK\_1RB

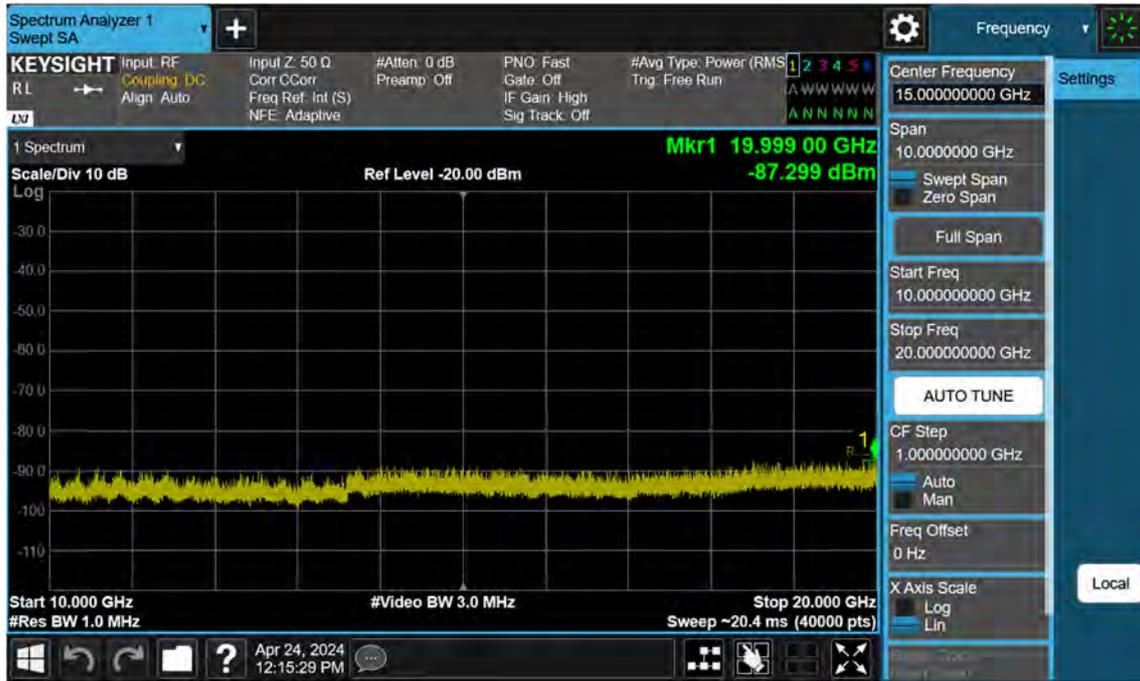


LTE B4\_10 M\_Conducted Spurious(10 G-26.5 G)\_Low\_QPSK\_1RB

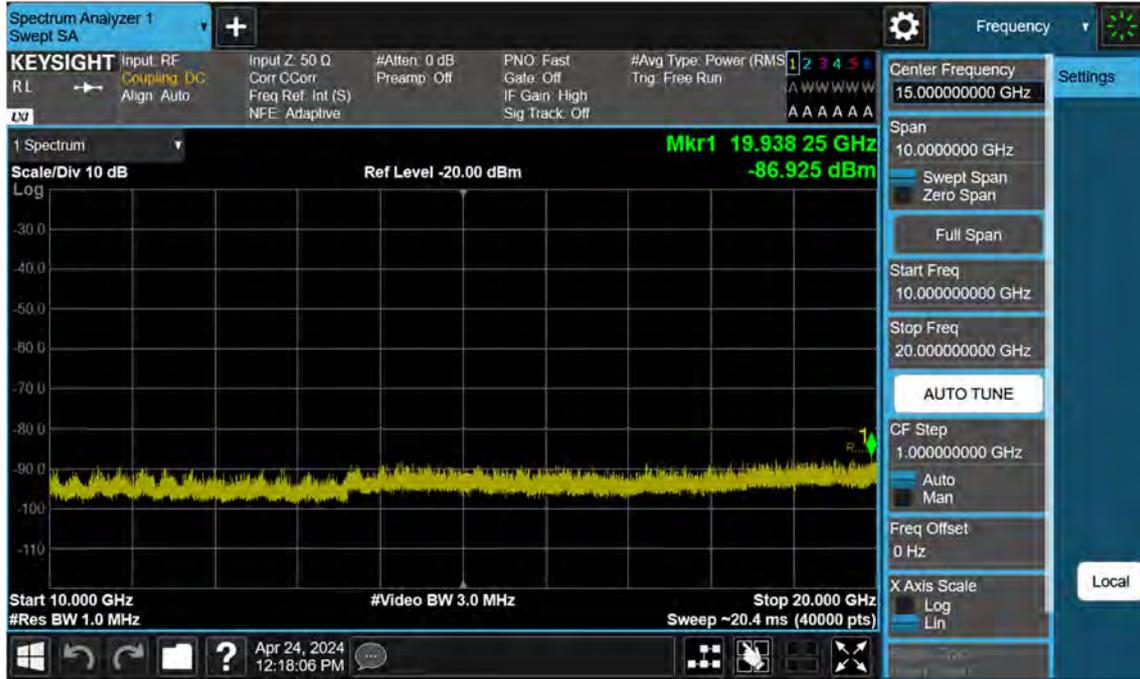


LTE B4\_10 M\_Conducted Spurious(10 G-26.5 G)\_Mid\_QPSK\_1RB

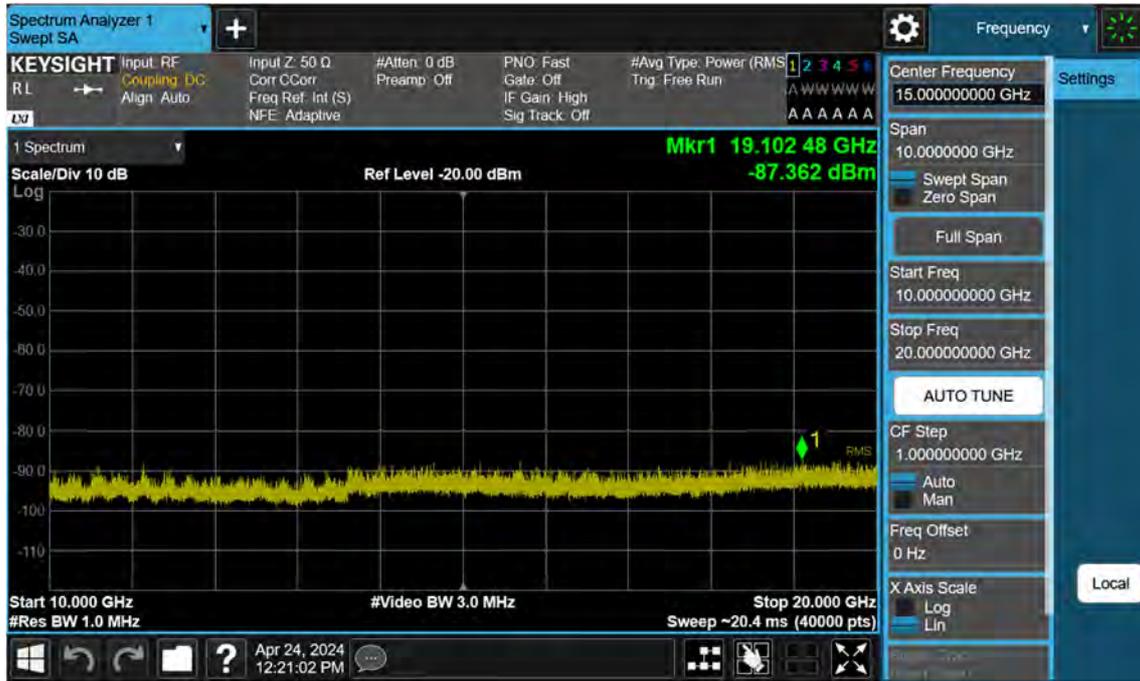


LTE B4\_10 M\_Conducted Spurious(10 G-26.5 G)\_High\_QPSK\_1RB

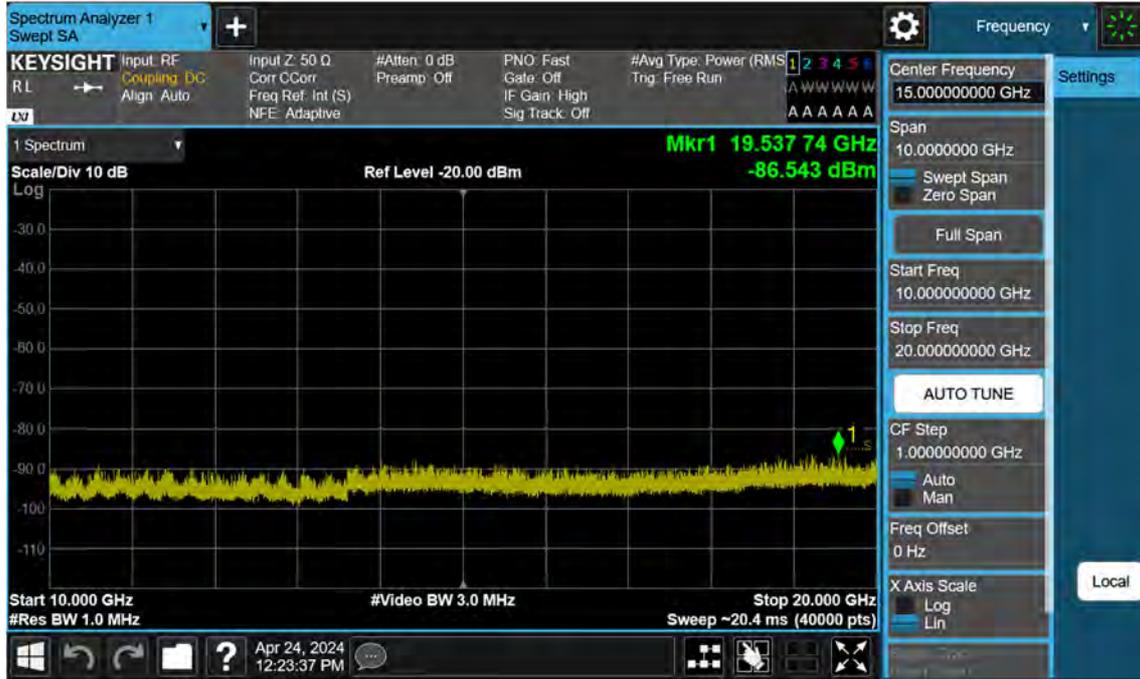

LTE B4\_15 M\_Conducted Spurious(10 G-26.5 G)\_Low\_QPSK\_1RB

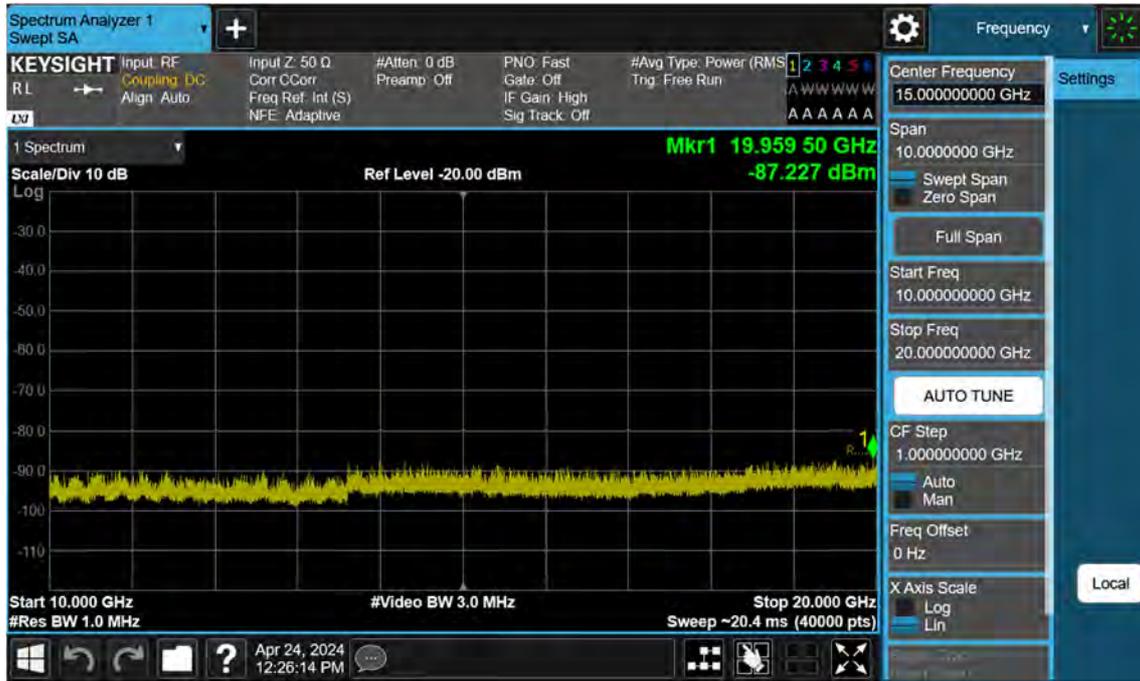


LTE B4\_15 M\_Conducted Spurious(10 G-26.5 G)\_Mid\_QPSK\_1RB

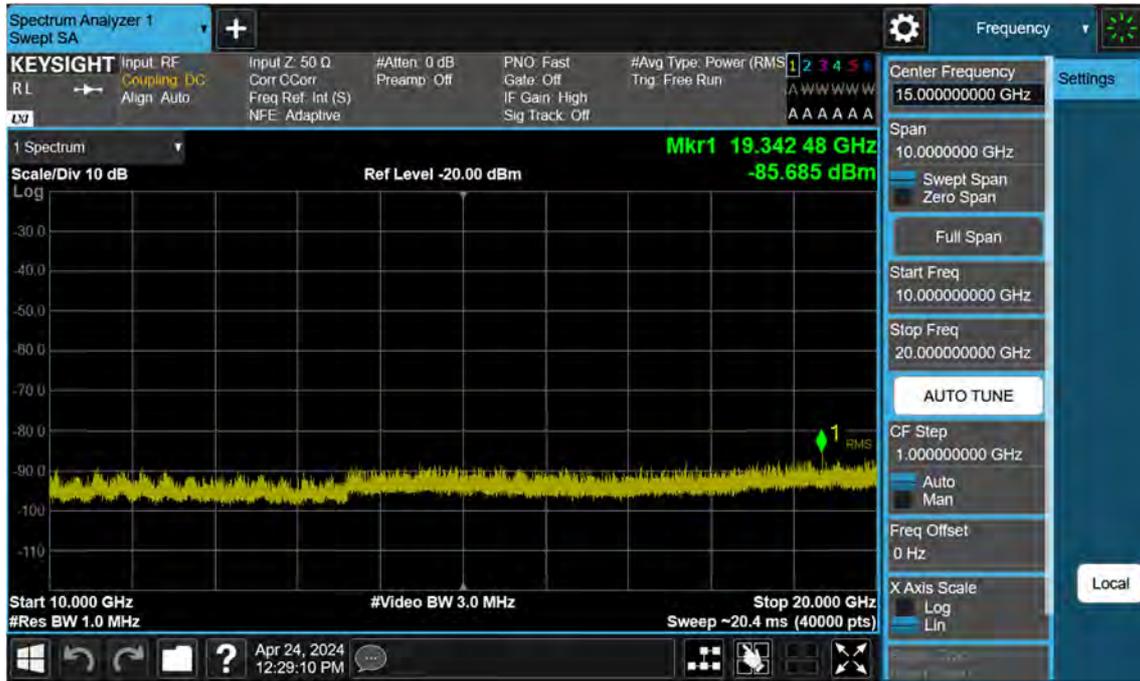

LTE B4\_15 M\_Conducted Spurious(10 G-26.5 G)\_High\_QPSK\_1RB



LTE B4\_20 M\_Conducted Spurious(10 G-26.5 G)\_Low\_QPSK\_1RB

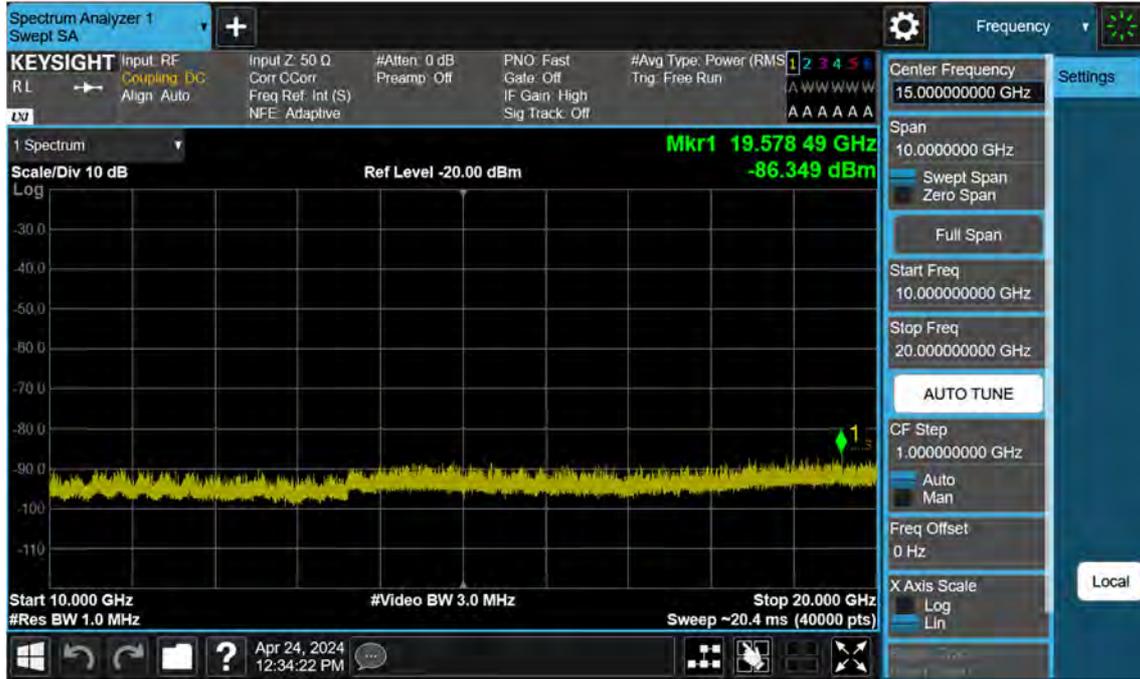


LTE B4\_20 M\_Conducted Spurious(10 G-26.5 G)\_Mid\_QPSK\_1RB



LTE B4\_20 M\_Conducted Spurious(10 G-26.5 G)\_High\_QPSK\_1RB



LTE B4\_1.4M\_Band Edge\_Low\_QPSK\_1RB

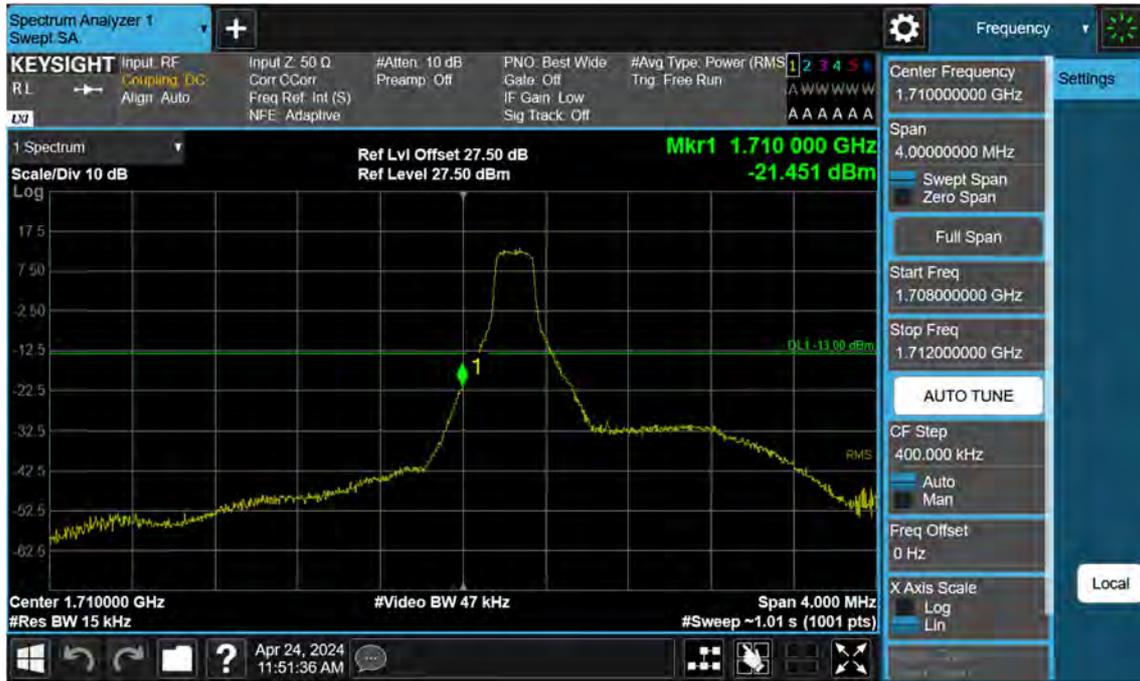

LTE B4\_1.4M\_Band Edge\_Low\_QPSK\_FullRB



LTE B4\_1.4M\_Extended Band Edge\_Low\_QPSK\_FullRB




LTE B4\_1.4M\_Band Edge\_High\_QPSK\_1RB




LTE B4\_1.4M\_Band Edge\_High\_QPSK\_FullRB



LTE B4\_1.4M\_Extended Band Edge\_High\_QPSK\_FullRB

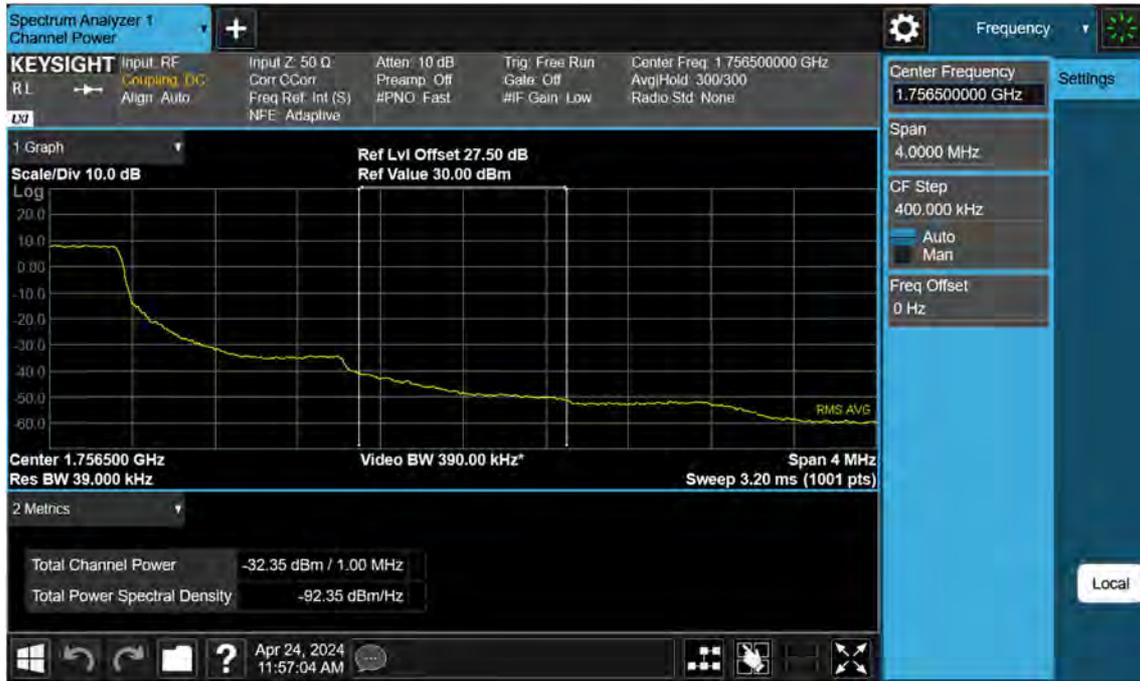


LTE B4\_3 M\_Band Edge\_Low\_QPSK\_1RB

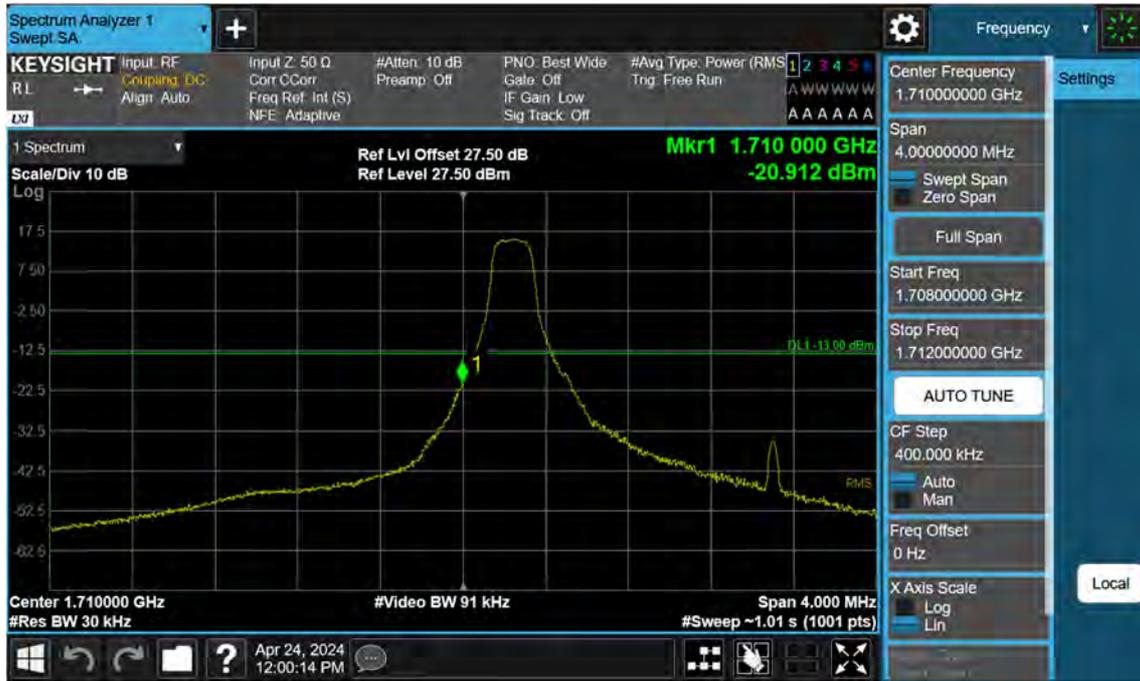


LTE B4\_3 M\_Band Edge\_Low\_QPSK\_FullRB



LTE B4\_3 M\_Extended Band Edge\_Low\_QPSK\_FullRB

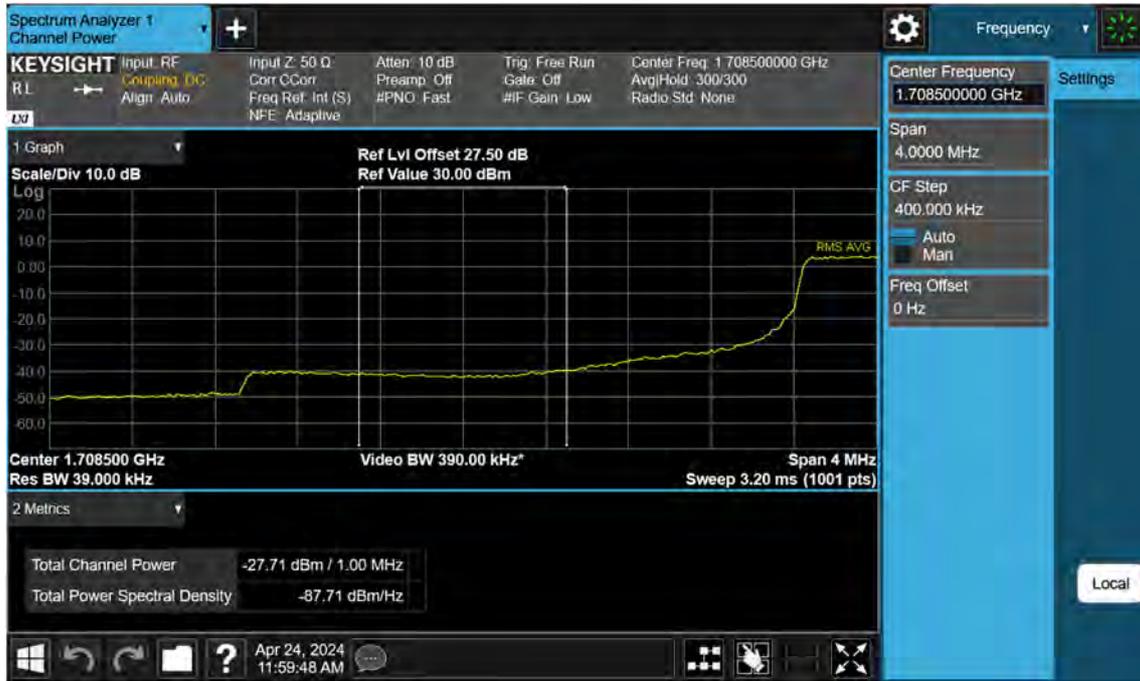

LTE B4\_3 M\_Band Edge\_High\_QPSK\_1RB

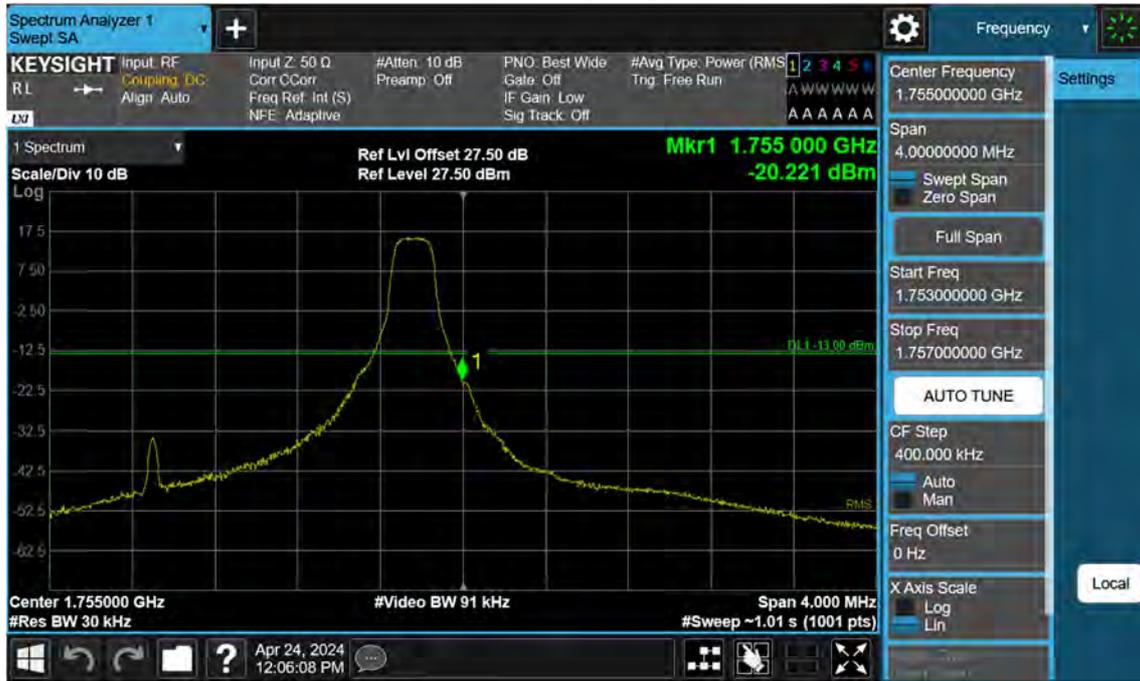


LTE B4\_3 M\_Band Edge\_High\_QPSK\_FullRB



LTE B4\_3 M\_Extended Band Edge\_High\_QPSK\_FullIRB



LTE B4\_5 M\_Band Edge\_Low\_QPSK\_1RB

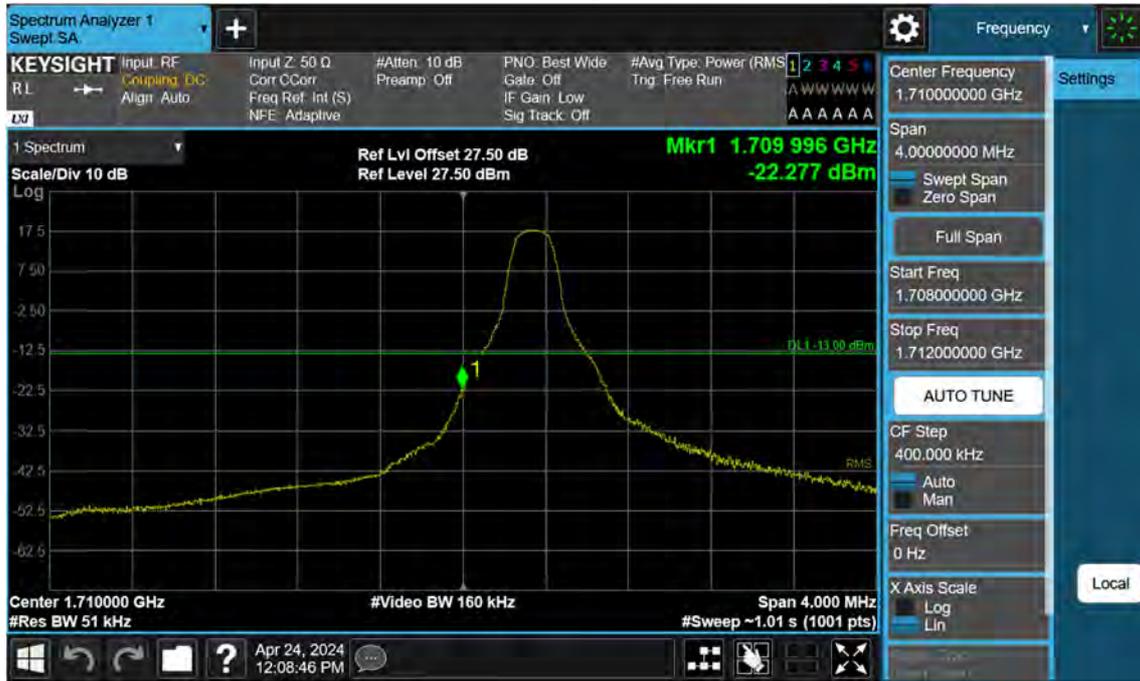


LTE B4\_5 M\_Band Edge\_Low\_QPSK\_FullRB



LTE B4\_5 M\_Extended Band Edge\_Low\_QPSK\_FullRB




LTE B4\_5 M\_Band Edge\_High\_QPSK\_1RB

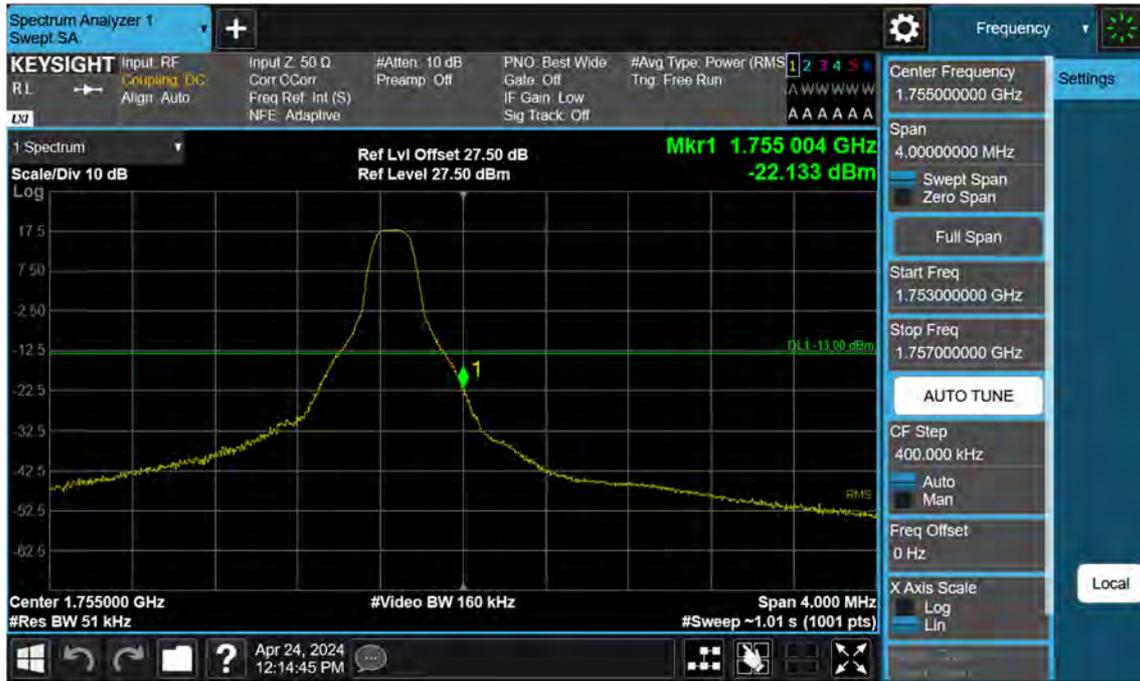


LTE B4\_5 M\_Band Edge\_High\_QPSK\_FullRB



LTE B4\_5 M\_Extended Band Edge\_High\_QPSK\_FullRB

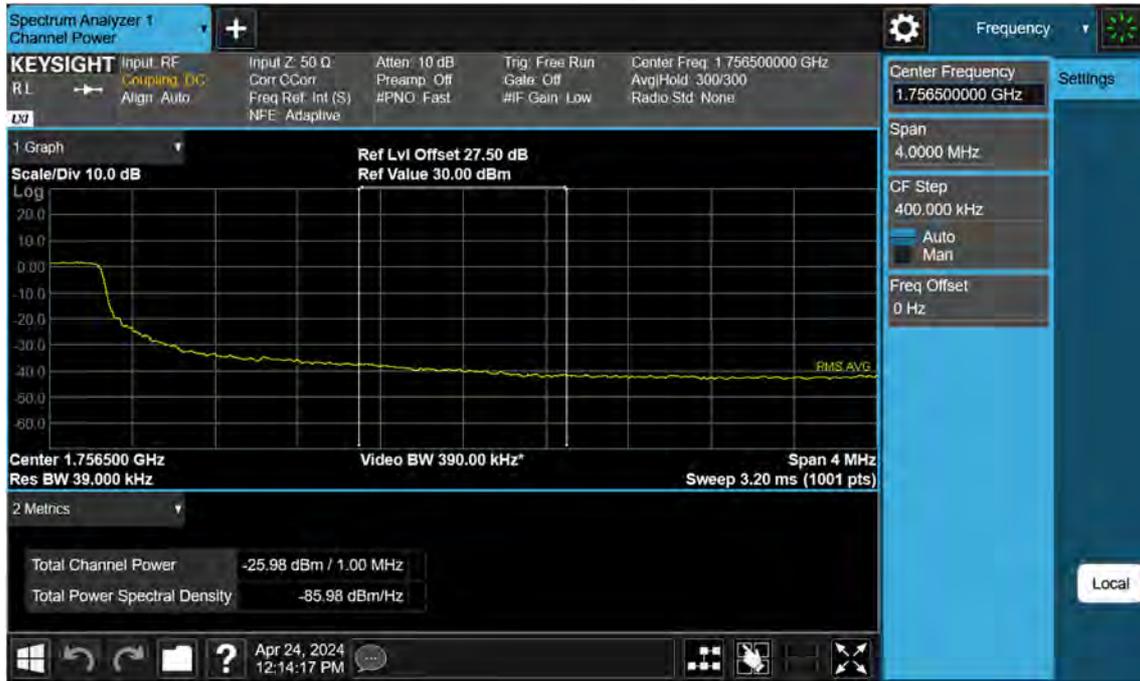


LTE B4\_10\_M\_Band Edge\_Low\_QPSK\_1RB

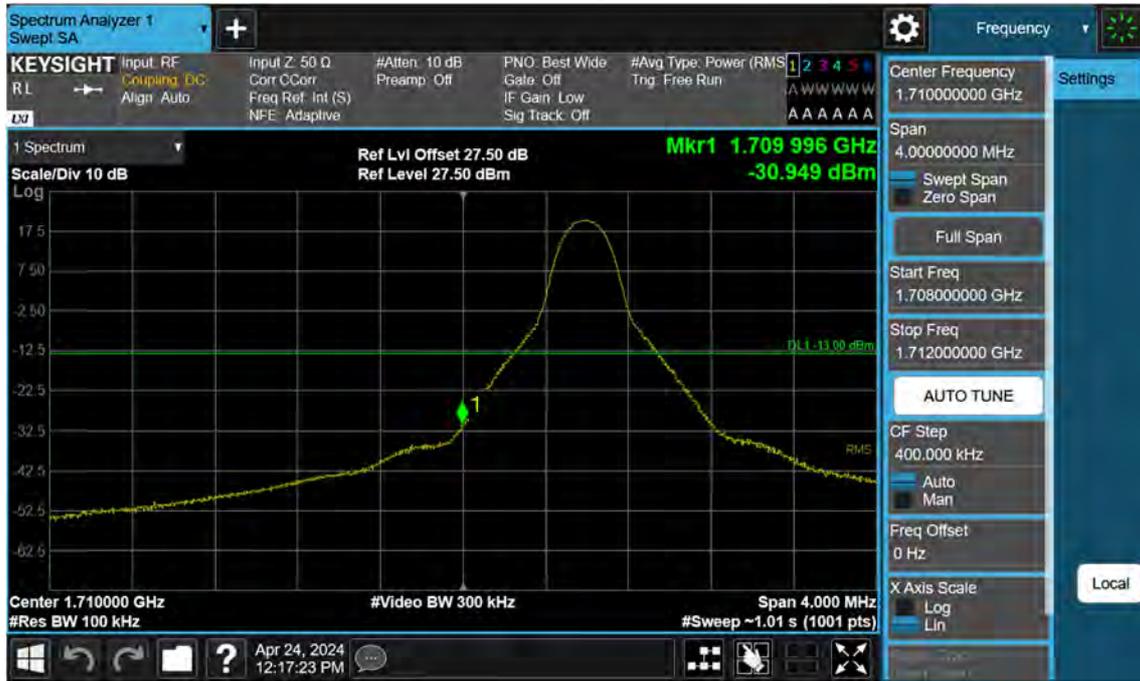

LTE B4\_10 M\_Band Edge\_Low\_QPSK\_FullRB



LTE B4\_10 M\_Extended Band Edge\_Low\_QPSK\_FullRB

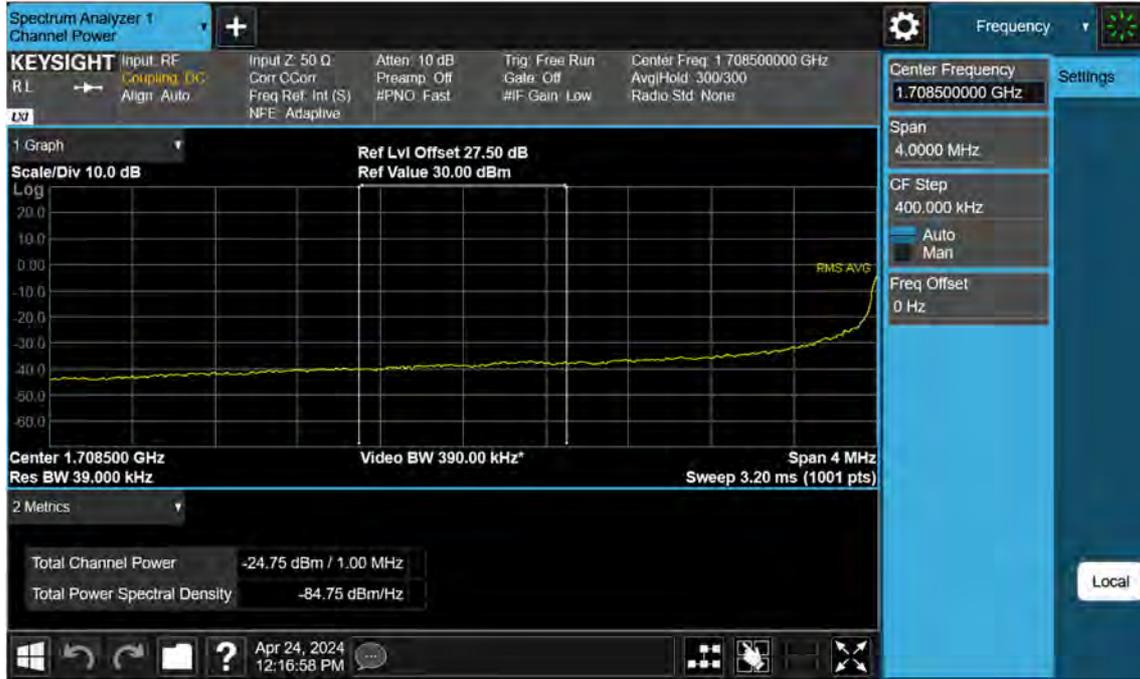


LTE B4\_10 M\_Band Edge\_High\_QPSK\_1RB



LTE B4\_10 M\_Band Edge\_High\_QPSK\_FullRB



LTE B4\_10 M\_Extended Band Edge\_High\_QPSK\_FullRB

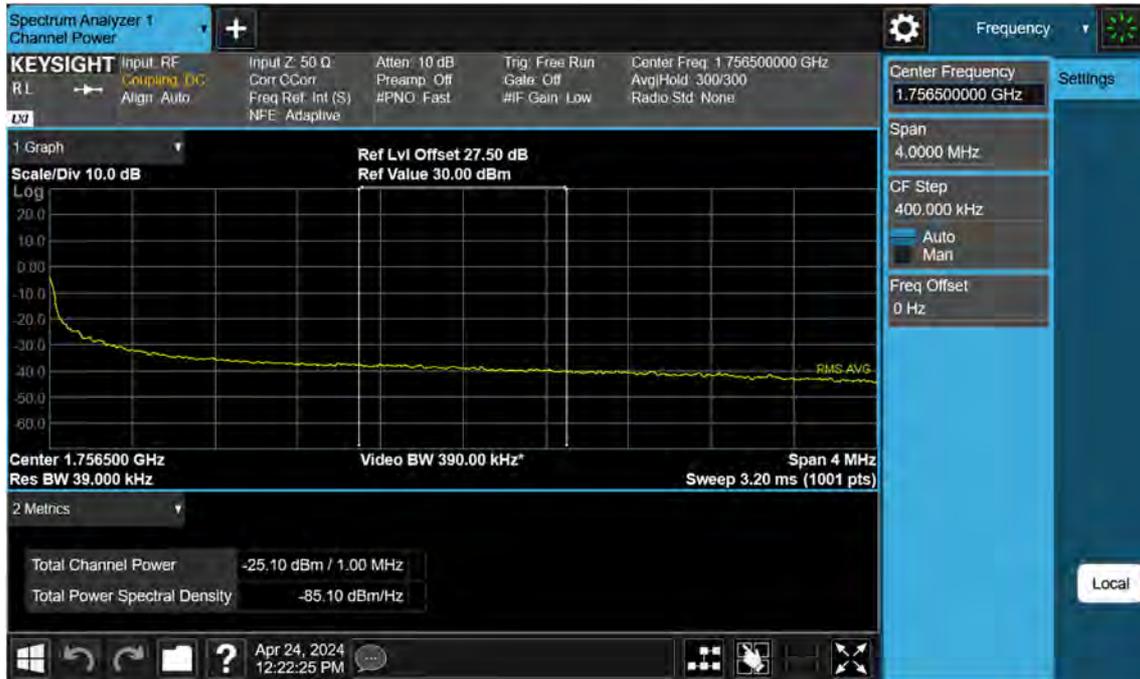

LTE B4\_15 M\_Band Edge\_Low\_QPSK\_1RB



LTE B4\_15 M\_Band Edge\_Low\_QPSK\_FullRB



LTE B4\_15 M\_Extended Band Edge\_Low\_QPSK\_FullIRB




LTE B4\_15 M\_Band Edge\_High\_QPSK\_1RB



LTE B4\_15 M\_Band Edge\_High\_QPSK\_FullRB



LTE B4\_15 M\_Extended Band Edge\_High\_QPSK\_FullRB

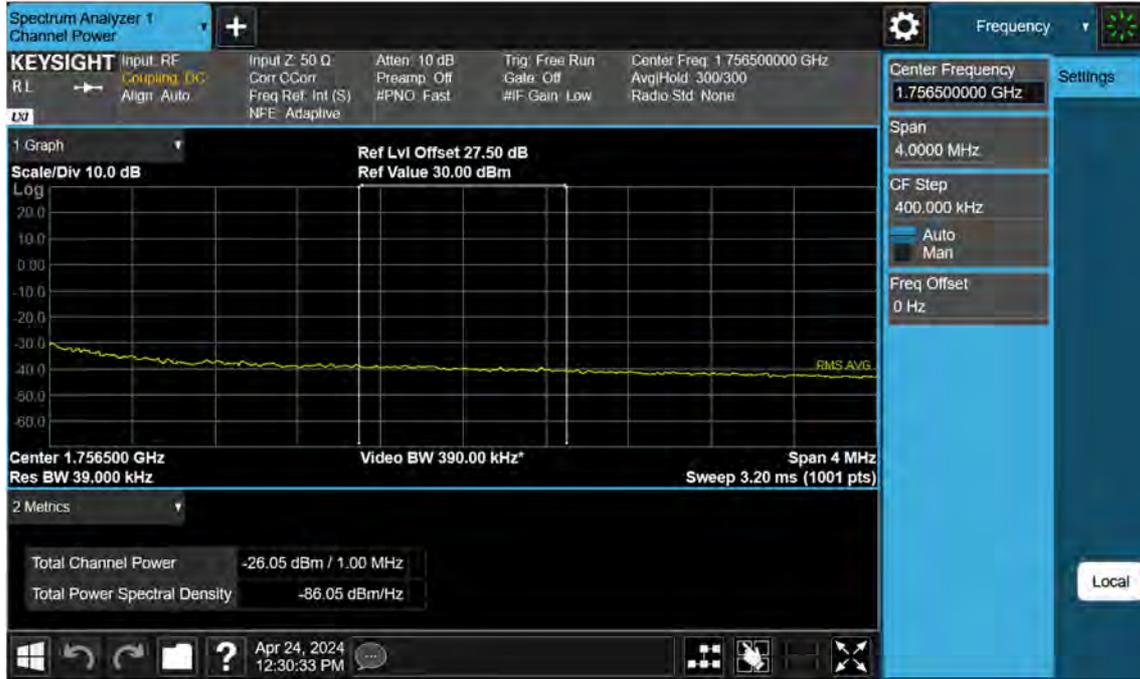


LTE B4\_20 M\_Band Edge\_Low\_QPSK\_1RB



LTE B4\_20 M\_Band Edge\_Low\_QPSK\_FullRB



LTE B4\_20 M\_Extended Band Edge\_Low\_QPSK\_FullRB

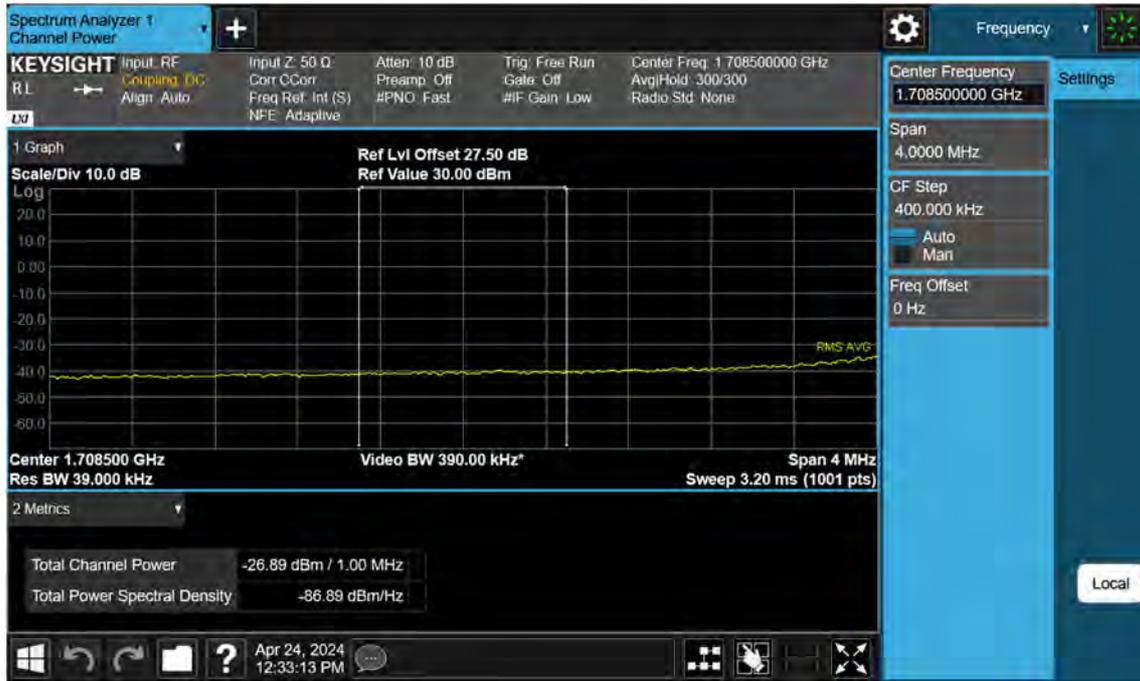


LTE B4\_20 M\_Band Edge\_High\_QPSK\_1RB



LTE B4\_20 M\_Band Edge\_High\_QPSK\_FullRB




LTE B4\_20 M\_Extended Band Edge\_High\_QPSK\_FullRB

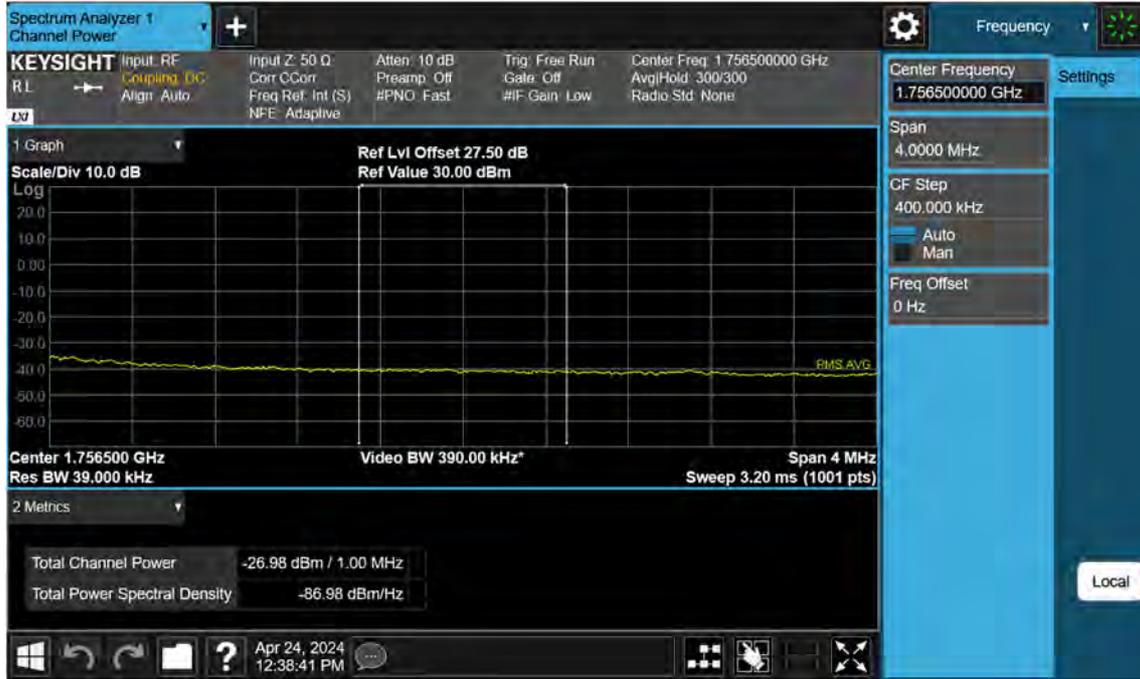

## 12. TEST PLOTS(Sub 5 Ant)

LTE B4\_1.4M\_PAR\_Mid\_QPSK\_FullRB

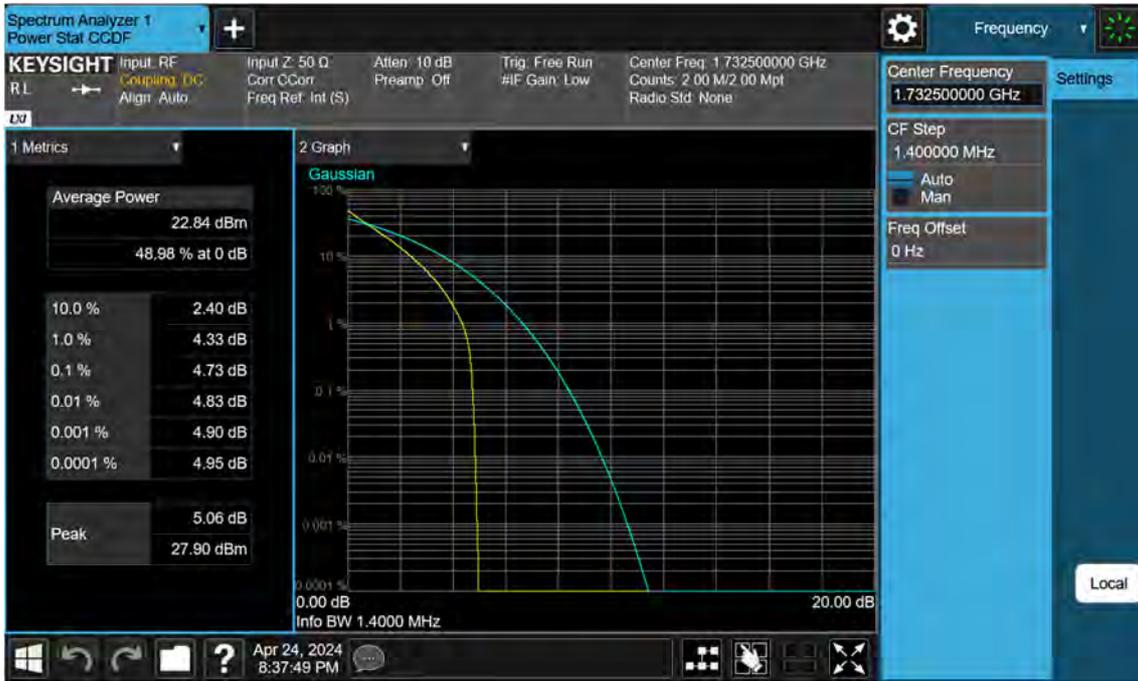

LTE B4\_1.4M\_PAR\_Mid\_16QAM\_FullRB



LTE B4\_1.4M\_PAR\_Mid\_64QAM\_FullRB



LTE B4\_1.4M\_PAR\_Mid\_256QAM\_FullRB



LTE B4\_3 M\_PAR\_Mid\_QPSK\_FullRB



LTE B4\_3 M\_PAR\_Mid\_16QAM\_FullRB



LTE B4\_3 M\_PAR\_Mid\_64QAM\_FullRB



LTE B4\_3 M\_PAR\_Mid\_256QAM\_FullRB



LTE B4\_5 M\_PAR\_Mid\_QPSK\_FullRB



LTE B4\_5 M\_PAR\_Mid\_16QAM\_FullRB



LTE B4\_5 M\_PAR\_Mid\_64QAM\_FullRB



LTE B4\_5 M\_PAR\_Mid\_256QAM\_FullRB



LTE B4\_10 M\_PAR\_Mid\_QPSK\_FullRB



LTE B4\_10 M\_PAR\_Mid\_16QAM\_FullRB



LTE B4\_10 M\_PAR\_Mid\_64QAM\_FullRB



LTE B4\_10 M\_PAR\_Mid\_256QAM\_FullRB




LTE B4\_15 M\_PAR\_Mid\_QPSK\_FullRB



LTE B4\_15 M\_PAR\_Mid\_16QAM\_FullRB




LTE B4\_15 M\_PAR\_Mid\_64QAM\_FullRB

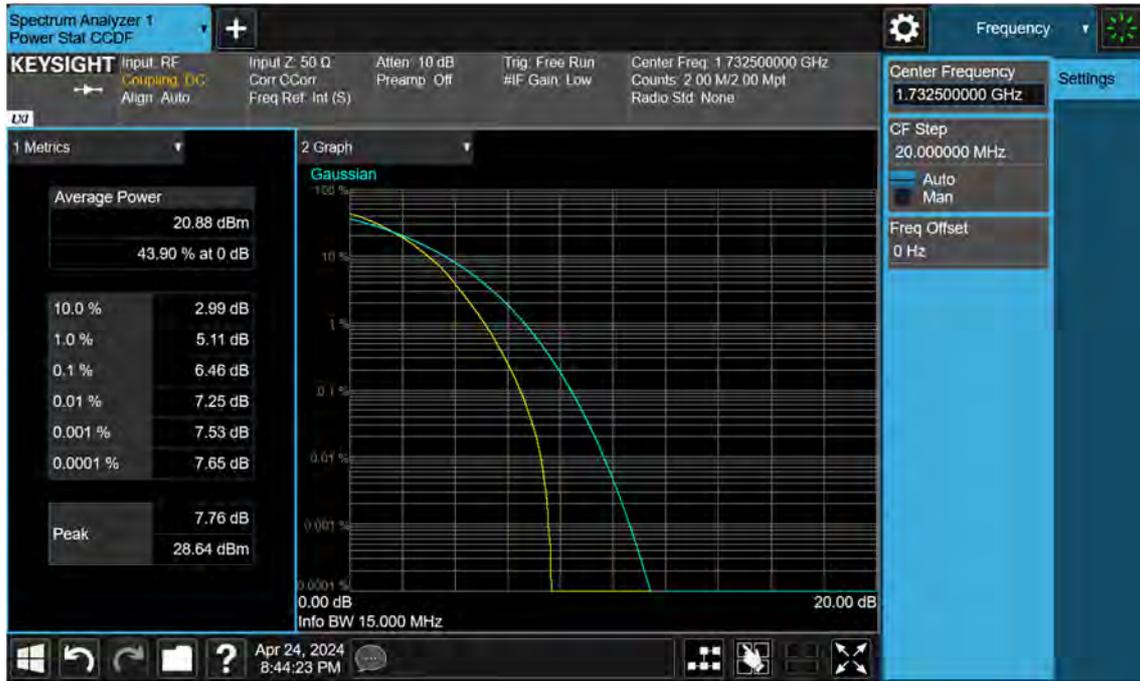

LTE B4\_15 M\_PAR\_Mid\_256QAM\_FullRB



LTE B4\_20 M\_PAR\_Mid\_QPSK\_FullRB

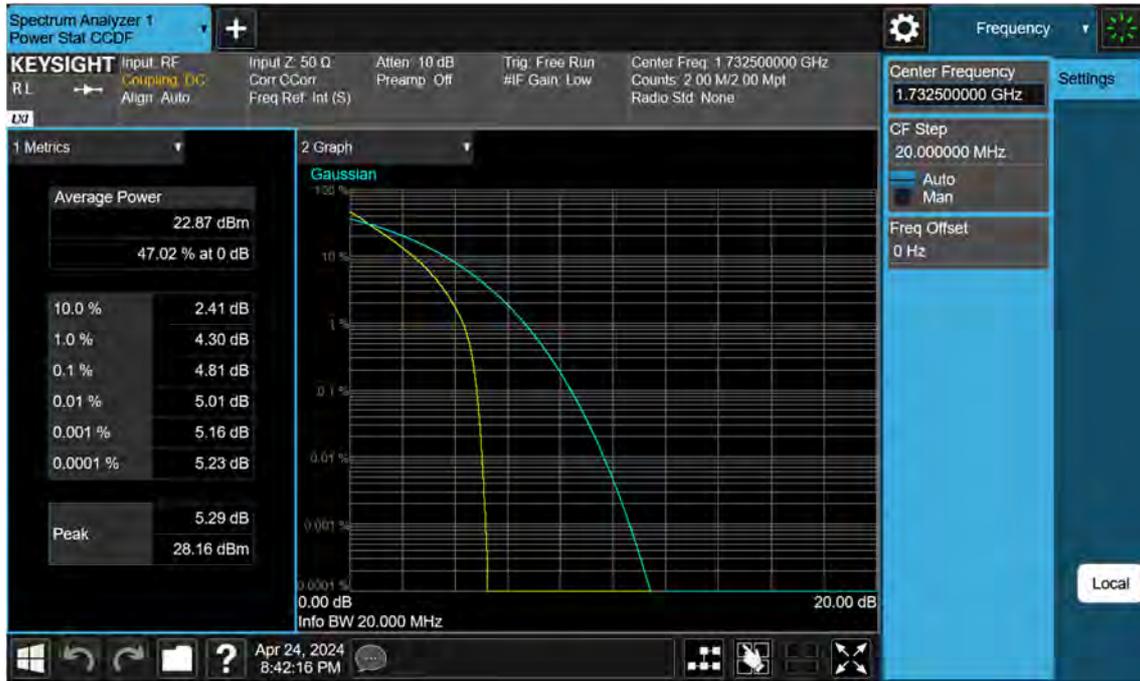

LTE B4\_20 M\_PAR\_Mid\_16QAM\_FullRB




LTE B4\_20 M\_PAR\_Mid\_64QAM\_FullRB



LTE B4\_20 M\_PAR\_Mid\_256QAM\_FullRB




LTE B4\_1.4M\_OBW\_Mid\_QPSK\_FullRB

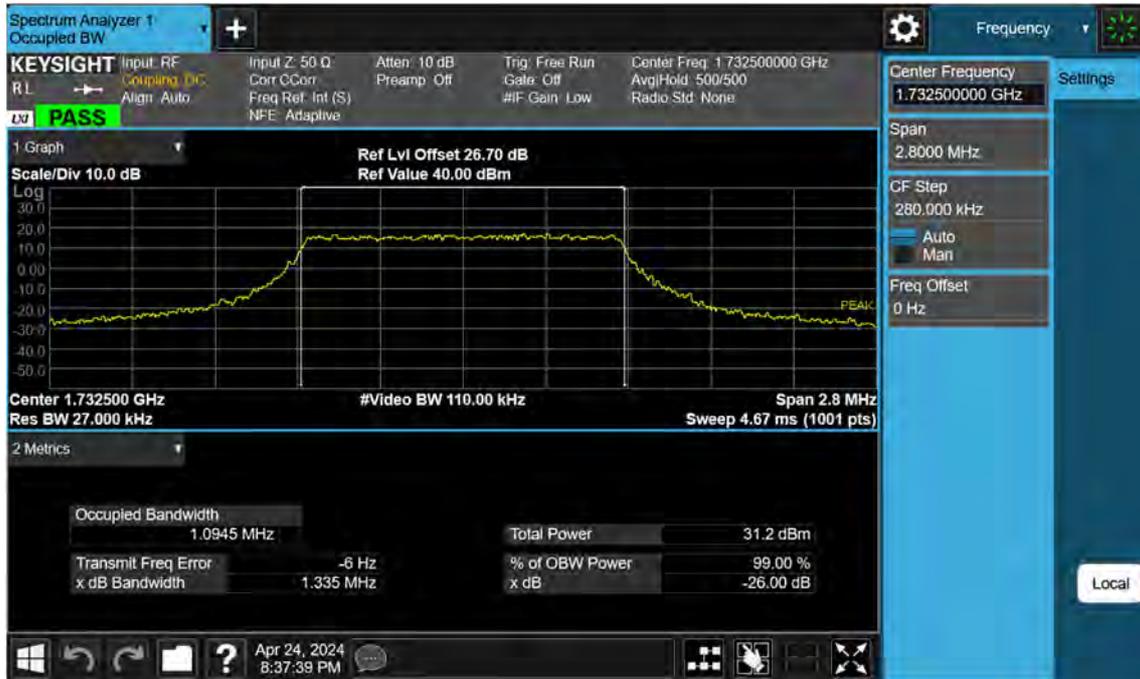


LTE B4\_1.4M\_OBW\_Mid\_16QAM\_FullRB




LTE B4\_1.4M\_OBW\_Mid\_64QAM\_FullRB

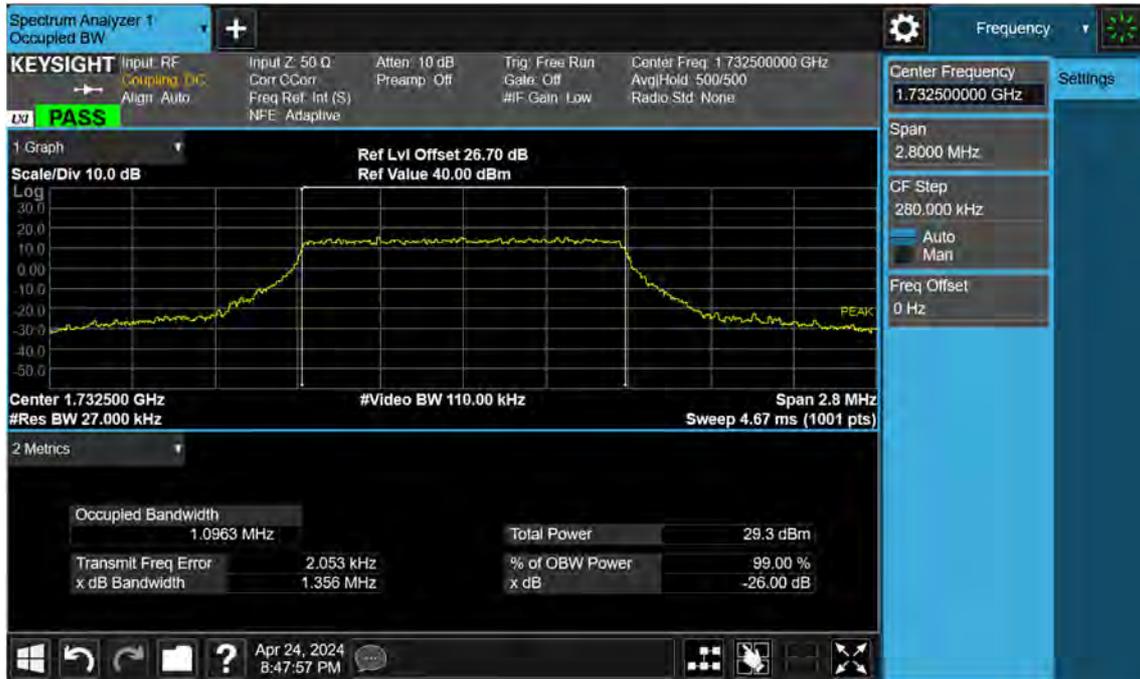

LTE B4\_1.4M\_OBW\_Mid\_256QAM\_FullIRB

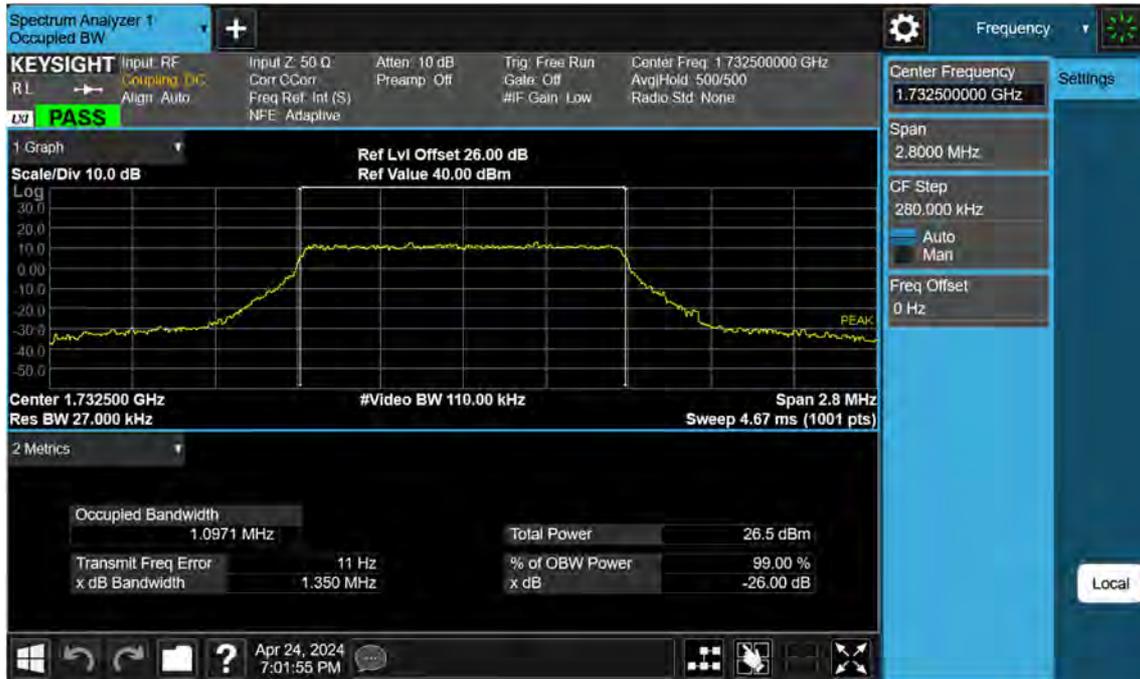

LTE B4\_3 M\_OBW\_Mid\_QPSK\_FullRB

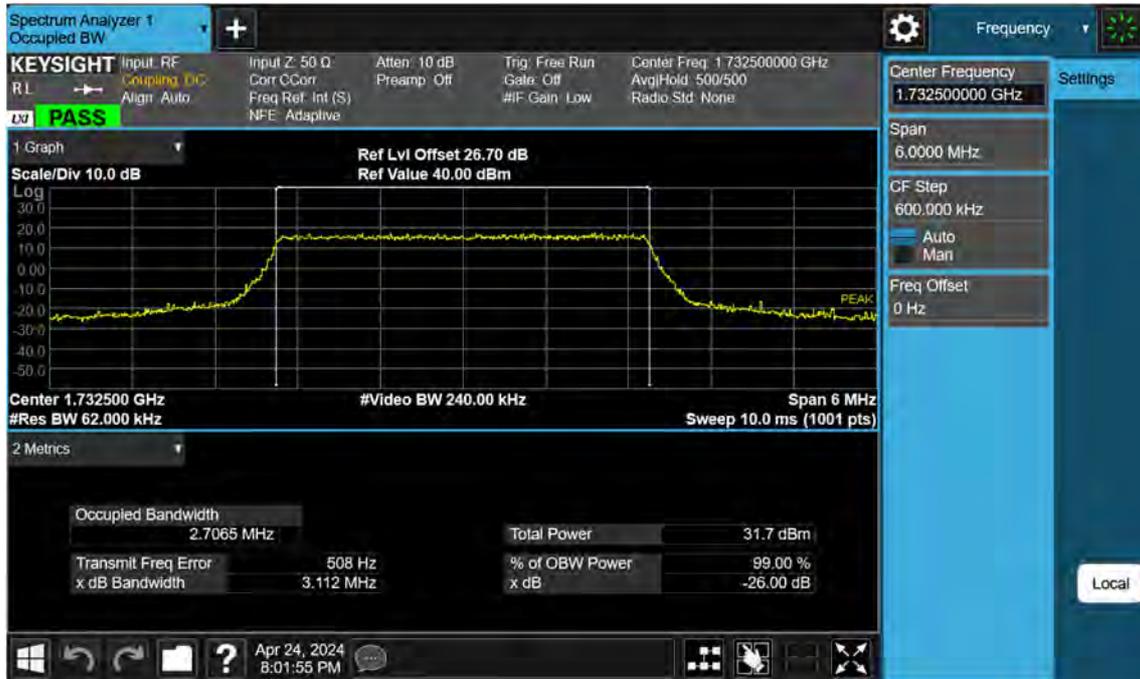

LTE B4\_3 M\_OBW\_Mid\_16QAM\_FullRB

